

TEST REPORT

FCC ID: 2ADYY-KN4N

Product: Mobile Phone

Model No.: KN4n

Trade Mark: TECNO

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2

Issued Date: 25 May 2026

Issued for:

TECNO MOBILE LIMITED

FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET
FOTAN NT HONGKONG

Issued By:

World Standardization Certification & Testing Group(Shenzhen) Co., Ltd.

Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyan
Street, Bao'an District, Shenzhen City, Guangdong Province, China

TEL: +86-755-26996192

FAX: +86-755-86376605



Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1 TEST CERTIFICATION	3
2 EUT DESCRIPTION	4
3 TEST DESCRIPTION	5
3.1 MEASUREMENT UNCERTAINTY	5
3.2 TEST ENVIRONMENT AND MODE	6
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	7
3.4 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)	8
4 SUMMARY OF TEST RESULTS	9
5 MEASUREMENT INSTRUMENTS	10
6 FACILITIES AND ACCREDITATIONS	11
6.1 FACILITIES	11
6.2 ACCREDITATIONS	11
7 TEST RESULTS AND MEASUREMENT DATA	12
7.1 CONDUCTED EMISSION MEASUREMENT	12
7.2 DEVIATION FROM TEST STANDARD	13
7.3 RADIATED EMISSION MEASUREMENT	16
7.4 ANTENNA REQUIREMENT	40
7.5 EMISSION BANDWIDTH	41
7.6 MAXIMUM CONDUCTED OUTPUT POWER	69
7.7 POWER SPECTRAL DENSITY	93
7.8 FREQUENCY STABILITY	117
7.9 BAND EDGE EMISSIONS	141
7.10 DYNAMIC FREQUENCY SELECTION (DFS)	167
8 TEST SETUP PHOTOGRAPHS	179

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

1 Test Certification

Product: Mobile Phone

Model No.: KN4n

Trade Mark: TECNO

Applicant: **TECNO MOBILE LIMITED**
FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN
MEI STREET FOTAN NT HONGKONG

Manufacturer: **TECNO MOBILE LIMITED**
FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN
MEI STREET FOTAN NT HONGKONG

Date of receipt: 13 May 2026

Date of Test: 13 May 2026 to 22 May 2026

Applicable Standards: FCC CFR Title 47 FCC Part 15 Subpart E

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen)Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Wang Xiang
(Wang Xiang)

Checked By:

Qin Shuiquan
(Qin Shuiquan)

Approved By:

Li Huaibi
(Li Huaibi)

Date:

25 May 2026



2 EUT Description

Product:	Mobile Phone
Model No.:	KN4n
Trade Mark:	TECNO
Software version:	KN4n-16.2.0
Hardware version:	V1.3
Operation Frequency	Band 1: 5180-5240 MHz Band 2: 5260-5320 MHz Band 3: 5500-5700 MHz Band 4: 5745-5825 MHz
Modulation type:	IEEE 802.11a/n/ac: OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)
Antenna Type:	Integral Antenna
Antenna Gain	-0.86dBi
Operating Voltage:	Adapter1: U180TSA(CY) Input/Entrada: 100-240V~50/60Hz 0.6A Output/Salida: 5.0V~2.4A or 7.5V~2.4A 18.0W Max Adapter2: U180TSB(BJ) Input/Entrada: 180-240V~50/60Hz 2.2A Output/Salida: 5.0V~2.4A 12.0W or 7.5V~2.4A 18.0W Max Rechargeable Li-ion Polymer Battery Model: BL-65AT Rated Voltage: 3.91V Rated Capacity: 6500mAh/25.42Wh Typical Capacity: 5700mAh/26.20Wh Limited Charge Voltage: 4.5V
Remark:	N/A.

Note: 1. N/A stands for no applicable.

2. The antenna gain is provided by the customer. For any reported data issues caused by the antenna gain, World Standardization Certification&Testing Group (Shenzhen) Co., Ltd assumes no responsibility.

3 TEST DESCRIPTION

3.1 MEASUREMENT UNCERTAINTY

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1GHz)	$\pm 4.7\text{dB}$
5	All emissions, radiated(>1GHz)	$\pm 4.7\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$
8	Receiver Spurious Emissions	$\pm 2.5\%$
9	Transmitter Unwanted Emissions in the Spurious Domain	$\pm 2.5\%$
10	Transmitter Unwanted Emission in the out-of Band	$\pm 1.3\%$
11	Occupied Channel Bandwidth	$\pm 2.4\%$

Note:1.The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

2. The U_{lab} is less than U_{cispr} , compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

3. For conducted emission test of laboratory have a measurement uncertainty greater than that specified in harmonized standard, this equipment can still be used provided that an adjustment is made follows : any additional uncertainty in the test system over and above that specified in harmonized standard should be used to tighten the test requirements-making the test harder to pass. This procedure will ensure that a test system not compliant with harmonized standard does not increase the probability of passing a EUT that would otherwise have failed a test if a test system compliant with harmonized standard had been used.

3.2 TEST ENVIRONMENT AND MODE**Operating Environment:**

Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar

Test Mode:

Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%)
-------------------	--

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. For the full battery state and The output power to the maximum state.

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Mode	Description
Mode 1	802.11a
Mode 2	802.11n20
Mode 3	802.11n40
Mode 4	802.11ac20
Mode 5	802.11ac40
Mode 6	802.11ac80

Note:

- (1) The measurements are performed at the highest, lowest available channels.
- (2) The EUT use new battery.
- (3) Record the worst case of each test item in this report.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

Test program	QRCT							
Mode	Test Frequency (MHz)							
	NCB: 20MHz							
802.11a	5180	5240	5260	5320	5500	5700	5745	5825
802.11n	5180	5240	5260	5320	5500	5700	5745	5825
802.11ac	5180	5240	5260	5320	5500	5700	5745	5825
	NCB: 40MHz							
802.11n	5190	5230	5270	5310	5510	5670	5755	5795
802.11ac	5190	5230	5270	5310	5510	5670	5755	5795
	NCB: 80MHz							
802.11ac	5210	5290	5530	5610	5775			

CONFIGURATION OF SYSTEM UNDER TEST



(EUT: Mobile Phone)

3.4 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	/	U600TSA/U180TSB	/	/
2	Router	ASUS	GT-AXE11000 (FCCID:MSQ-RTAXJF00)	M6LAJF201230	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.
- (4) The adapter supply by the applicant.

4 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 Subpart C&E			
Standard Section	Test Item	Judgment	Remark
2.1049 15.403(i)	26dB & 99% Bandwidth	PASS	Complies
15.407(e)	6dB Spectrum Bandwidth	PASS	Complies
15.407(a)	Maximum Conducted Output Power	PASS	Complies
15.407(a)	Power Spectral Density	PASS	Complies
15.407(b)	Unwanted Emissions	PASS	Complies
15.207	AC Conducted Emission	PASS	Complies
15.407(g)	Frequency Stability	PASS	Complies
15.407(c)	Automatically Discontinue Transmission	PASS	Complies
15.203 & 15.407(a)	Antenna Requirement	PASS	Complies
15.407(h)	Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS)	PASS	Complies

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

5 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
Test software	--	EZ-EMC	CON-03A	-	-
Test software	--	MTS8310	-	-	-
EMI Test Receiver	R&S	ESCI	100005	11/05/2025	11/04/2026
LISN	AFJ	LS16	16010222119	11/05/2025	11/04/2026
LISN(EUT)	Mestec	AN3016	04/10040	11/05/2025	11/04/2026
Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	11/05/2025	11/04/2026
Coaxial cable	Megalon	LMR400	N/A	11/05/2025	11/04/2026
GPIO cable	Megalon	GPIO	N/A	11/05/2025	11/04/2026
Spectrum Analyzer	R&S	FSU	100114	11/05/2025	11/04/2026
Pre Amplifier	H.P.	HP8447E	2945A02715	11/05/2025	11/04/2026
Pre-Amplifier	CDSI	PAP-1G18-38	--	11/05/2025	11/04/2026
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	7/29/2025	7/28/2026
9*6*6 Anechoic	--	--	--	11/05/2025	11/04/2026
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	--	11/05/2025	11/04/2026
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	11/05/2025	11/04/2026
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	11/05/2025	11/04/2026
System-Controller	CCS	N/A	N/A	N.C.R	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R	N.C.R
RF cable	Murata	MXHQ87WA3000	-	11/05/2025	11/04/2026
Loop Antenna	EMCO	6502	00042960	11/05/2025	11/04/2026
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	11/05/2025	11/04/2026
Power meter	Anritsu	ML2487A	6K00003613	11/05/2025	11/04/2026
Power sensor	Anritsu	MX248XD	--	11/05/2025	11/04/2026
Spectrum Analyzer	Keysight	N9010B	MY60241089	11/05/2025	11/04/2026

6 Facilities and Accreditations

6.1 FACILITIES

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyan Street, Bao'an District, Shenzhen City, Guangdong Province, China** of the World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:2017.

USA	ANAB - Certificate Number: AT-3951
China	CNAS (Registration Number: L3732)
Canada	ISED(CAB identifier:CN0178)

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.wsct-cert.com>

7 Test Results and Measurement Data

7.1 CONDUCTED EMISSION MEASUREMENT

POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


7.1.1 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

7.2 DEVIATION FROM TEST STANDARD

No deviation

TEST SETUP

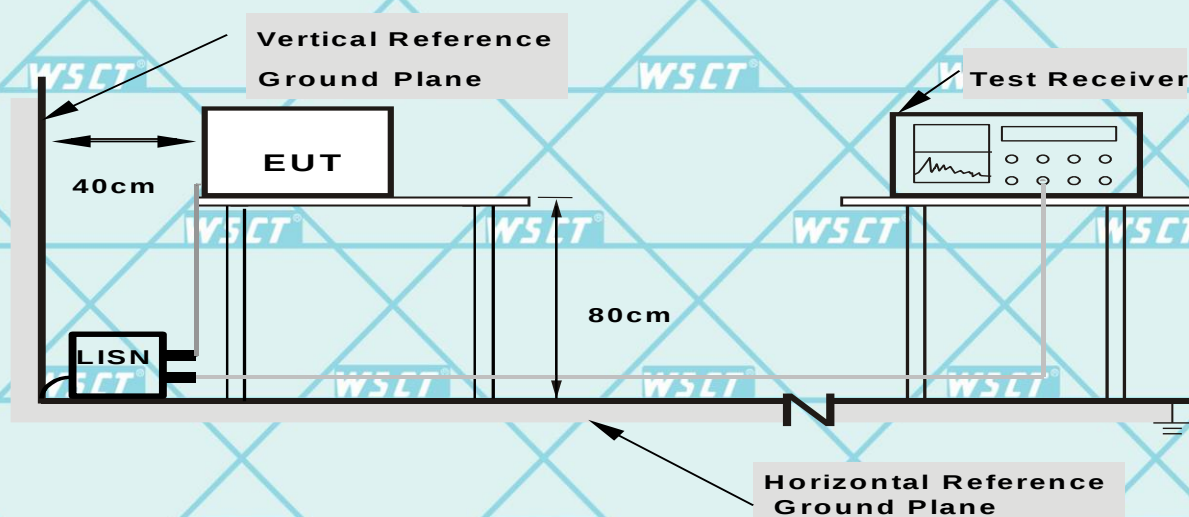

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

7.2.1 EUT OPERATING CONDITIONS

The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

7.2.2 TEST RESULTS

(Worst-case scenario only: 802.11a Channel 5180 MHz)


Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)-worst

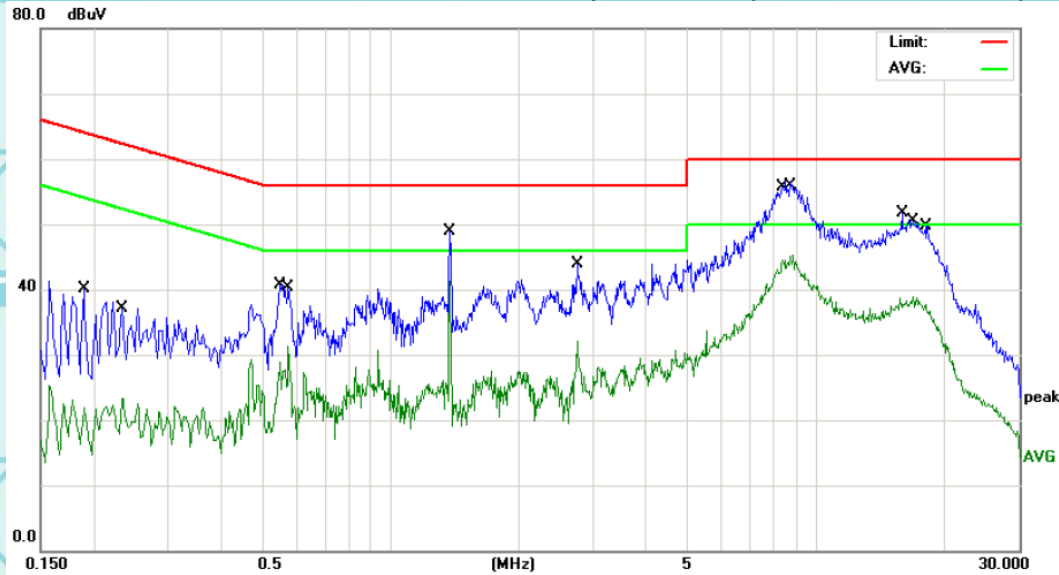

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1900	28.05	12.12	40.17	64.03	-23.86	QP
2		0.2340	11.26	12.12	23.38	52.30	-28.92	AVG
3		0.5500	28.49	12.14	40.63	56.00	-15.37	QP
4		0.5740	19.23	12.14	31.37	46.00	-14.63	AVG
5		1.3779	36.49	12.35	48.84	56.00	-7.16	QP
6	*	1.3779	28.99	12.35	41.34	46.00	-4.66	AVG
7		2.7500	19.70	12.44	32.14	46.00	-13.86	AVG
8		8.3020	41.85	13.33	55.18	60.00	-4.82	QP
9		8.8540	31.91	13.41	45.32	50.00	-4.68	AVG
10		15.9340	36.57	15.19	51.76	60.00	-8.24	QP
11		16.9140	23.52	15.45	38.97	50.00	-11.03	AVG
12		18.2860	33.90	15.82	49.72	60.00	-10.28	QP

Remark: All the modes have been investigated, and only worst mode is presented in this report.

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

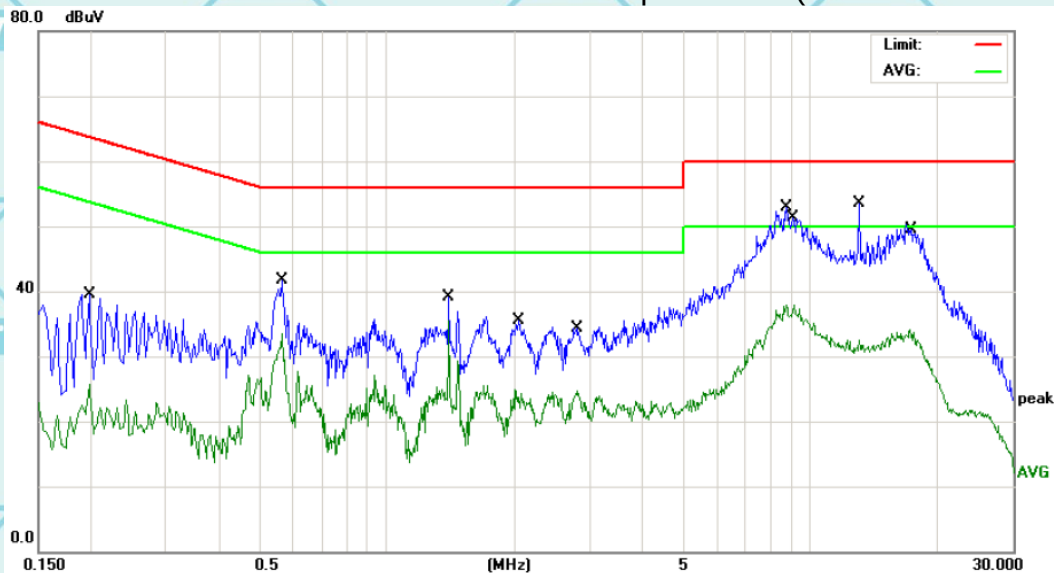

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV	Limit dBμV	Over dB	Detector
1		0.1980	27.47	12.12	39.59	63.69	-24.10	QP
2		0.1980	13.63	12.12	25.75	53.69	-27.94	AVG
3		0.5660	29.56	12.14	41.70	56.00	-14.30	QP
4		0.5660	21.33	12.14	33.47	46.00	-12.53	AVG
5		1.3980	26.67	12.35	39.02	56.00	-16.98	QP
6		1.3980	23.08	12.35	35.43	46.00	-10.57	AVG
7		2.0540	23.24	12.33	35.57	56.00	-20.43	QP
8		2.8260	11.82	12.46	24.28	46.00	-21.72	AVG
9		8.7380	39.42	13.39	52.81	60.00	-7.19	QP
10		9.1540	24.44	13.46	37.90	50.00	-12.10	AVG
11	*	13.0020	39.19	14.39	53.58	60.00	-6.42	QP
12		17.1540	18.48	15.52	34.00	50.00	-16.00	AVG

Note1:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. = Quasi-Peak AVG = average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

7.3 RADIATED EMISSION MEASUREMENT

Radiated Emission Limits (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micromvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 1Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

7.3.1 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


7.3.2 DEVIATION FROM TEST STANDARD

No deviation


Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

7.3.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

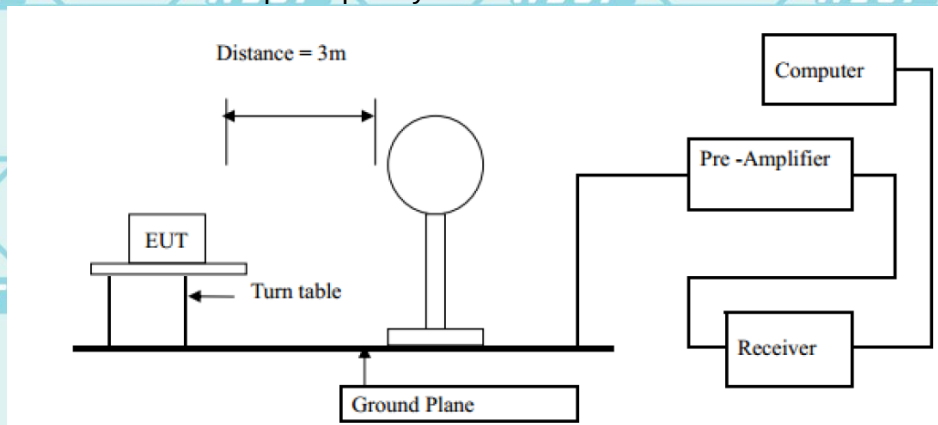

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

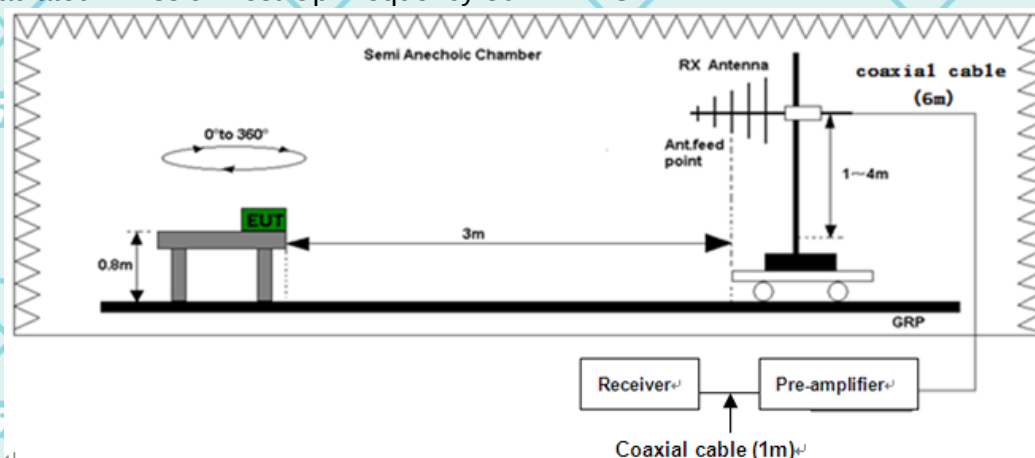

(C) Radiated Emission Test-Up Frequency Above 1GHz

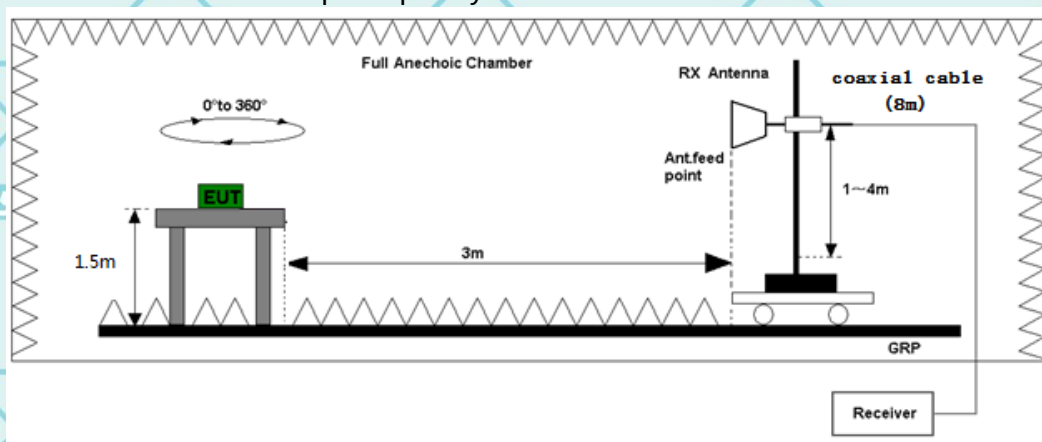

7.3.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.3.5 RESULTS (BELOW 30 MHz)

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

7.3.6 TEST RESULTS (BETWEEN 30M – 1000 MHZ)

Please refer to following diagram for individual
Below 1GHz

Horizontal:




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		111.4800	32.57	-9.81	22.76	43.50	-20.74	QP
2		249.2200	38.14	-8.42	29.72	46.00	-16.28	QP
3		368.5300	32.17	-4.62	27.55	46.00	-18.45	QP
4		662.4400	25.40	2.45	27.85	46.00	-18.15	QP
5		812.7900	26.03	5.17	31.20	46.00	-14.80	QP
6	*	955.3800	25.06	7.42	32.48	46.00	-13.52	QP

Remark: All the modes have been investigated, and only worst mode is presented in this report.

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

Vertical:

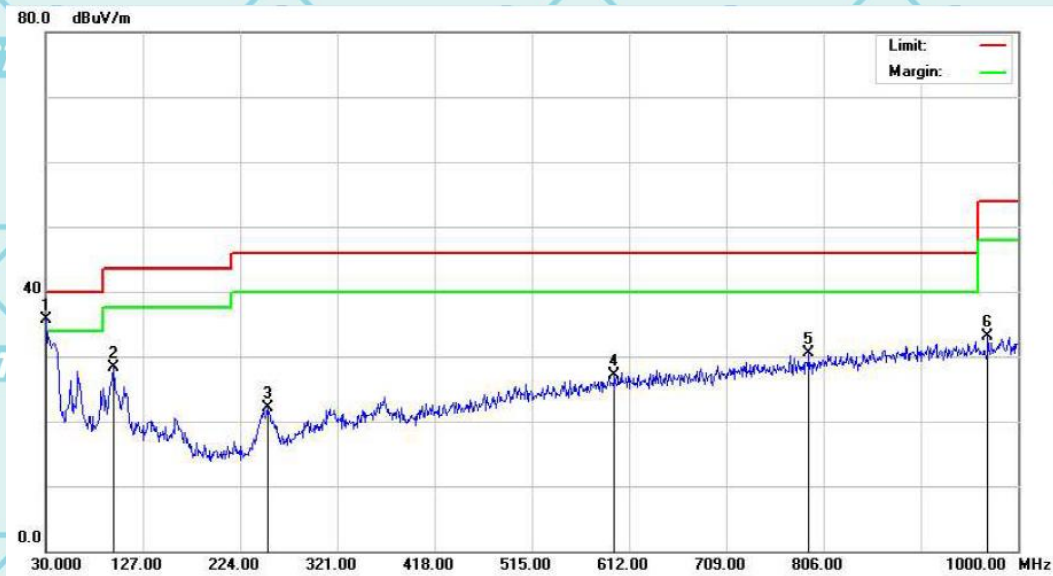

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	30.9700	56.17	-20.52	35.65	40.00	-4.35	QP
2		97.9000	48.51	-20.21	28.30	43.50	-15.20	QP
3		251.1600	41.50	-19.47	22.03	46.00	-23.97	QP
4		597.4500	44.77	-17.74	27.03	46.00	-18.97	QP
5		791.4500	47.23	-16.71	30.52	46.00	-15.48	QP
6		969.9300	48.51	-15.48	33.03	54.00	-20.97	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)


Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

7.3.7 TEST RESULTS (ABOVE 1GHZ)

Note: 1.The spurious above 18G is noise only, do not show on the report.


2. Report and only recorded the worst-case scenario 802.11a.

11a, 1 GHz to 18 GHz, Channel (5180 MHz), ANT H

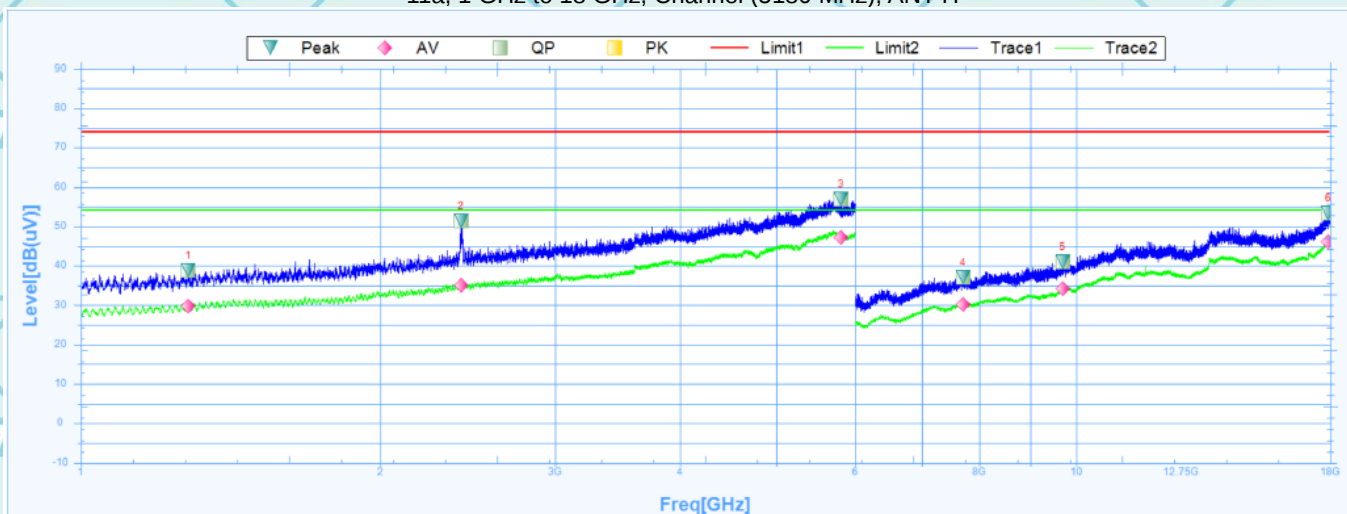**Susputed Data List**

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1283.1250	38.82	-1.49	40.31	74	-35.18	243.7	Horizontal	PK	Pass
1	1283.1250	29.78	-1.49	31.27	54	-24.22	243.7	Horizontal	AV	Pass
2	2410.6250	51.43	5.27	46.16	74	-22.57	304.6	Horizontal	PK	Pass
2	2410.6250	35.01	5.27	29.74	54	-18.99	304.6	Horizontal	AV	Pass
3	5808.1250	56.89	20.19	36.7	74	-17.11	314.2	Horizontal	PK	Pass
3	5808.1250	47.3	20.19	27.11	54	-6.7	314.2	Horizontal	AV	Pass
4	7701.0000	36.97	36.55	0.42	74	-37.03	132.4	Horizontal	PK	Pass
4	7701.0000	30.3	36.55	-6.25	54	-23.7	132.4	Horizontal	AV	Pass
5	9697.5000	41.11	37.89	3.22	74	-32.89	207.7	Horizontal	PK	Pass
5	9697.5000	34.28	37.89	-3.61	54	-19.72	207.7	Horizontal	AV	Pass
6	17932.5000	53.37	46.05	7.32	74	-20.63	122.9	Horizontal	PK	Pass
6	17932.5000	46.03	46.05	-0.02	54	-7.97	122.9	Horizontal	AV	Pass

11a, 1 GHz to 18 GHz, Channel (5180 MHz), ANT V

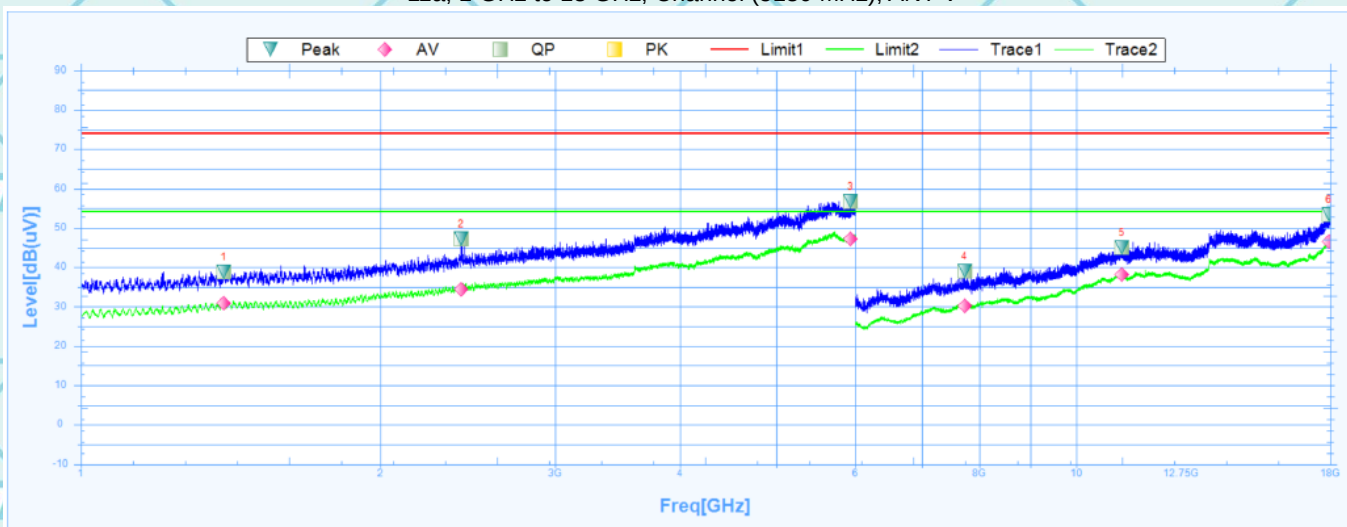


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1391.8750	38.89	-0.55	39.44	74	-35.11	194.2	Vertical	PK	Pass
1	1391.8750	30.84	-0.55	31.39	54	-23.16	194.2	Vertical	AV	Pass
2	2411.2500	47.15	5.28	41.87	74	-26.85	0.5	Vertical	PK	Pass
2	2411.2500	34.51	5.28	29.23	54	-19.49	0.5	Vertical	AV	Pass
3	5938.7500	56.72	20.7	36.02	74	-17.28	128.4	Vertical	PK	Pass
3	5938.7500	47.27	20.7	26.57	54	-6.73	128.4	Vertical	AV	Pass
4	7726.5000	38.97	36.59	2.38	74	-35.03	82.2	Vertical	PK	Pass
4	7726.5000	30.15	36.59	-6.44	54	-23.85	82.2	Vertical	AV	Pass
5	11119.5000	44.99	39.39	5.6	74	-29.01	140.7	Vertical	PK	Pass
5	11119.5000	38.21	39.39	-1.18	54	-15.79	140.7	Vertical	AV	Pass
6	17949.0000	53.48	46.16	7.32	74	-20.52	182.6	Vertical	PK	Pass
6	17949.0000	46.48	46.16	0.32	54	-7.52	182.6	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

11a, 1 GHz to 18 GHz, Channel (5240 MHz), ANT H

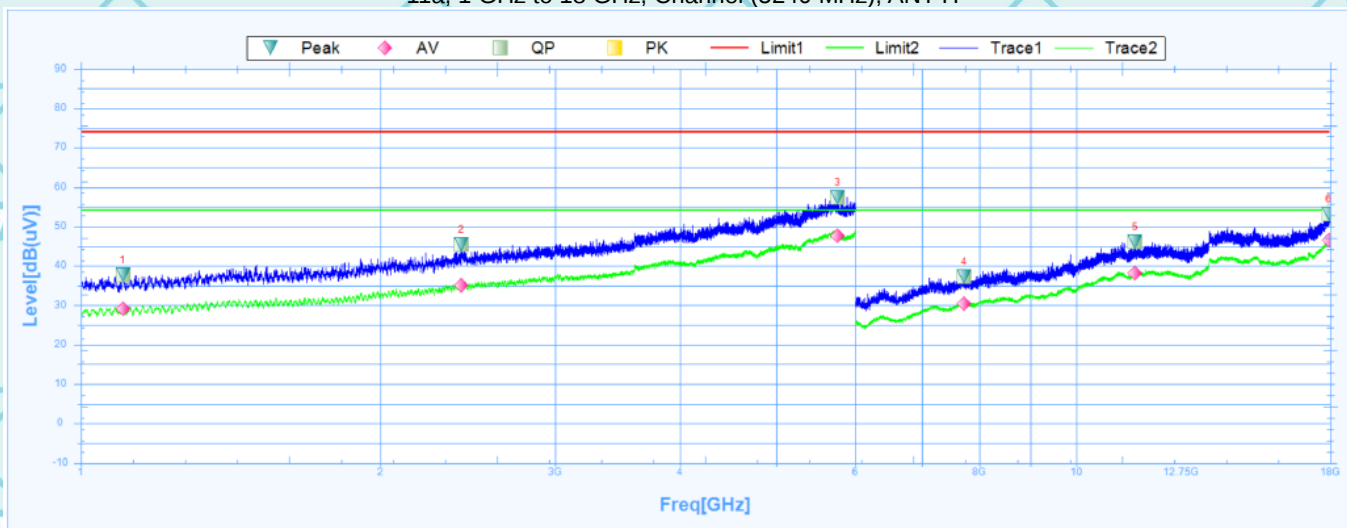


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1101.8750	37.73	-2.48	40.21	74	-36.27	203.7	Horizontal	PK	Pass
1	1101.8750	29.1	-2.48	31.58	54	-24.9	203.7	Horizontal	AV	Pass
2	2413.1250	45.53	5.28	40.25	74	-28.47	2.7	Horizontal	PK	Pass
2	2413.1250	35.16	5.28	29.88	54	-18.84	2.7	Horizontal	AV	Pass
3	5763.1250	57.39	20.68	36.71	74	-16.61	98.6	Horizontal	PK	Pass
3	5763.1250	47.7	20.68	27.02	54	-6.3	98.6	Horizontal	AV	Pass
4	7722.0000	37.34	36.58	0.76	74	-36.66	44.7	Horizontal	PK	Pass
4	7722.0000	30.38	36.58	-6.2	54	-23.62	44.7	Horizontal	AV	Pass
5	11467.5000	46.02	39.08	6.94	74	-27.98	203.7	Horizontal	PK	Pass
5	11467.5000	38.27	39.08	-0.81	54	-15.73	203.7	Horizontal	AV	Pass
6	17946.0000	53.25	46.14	7.11	74	-20.75	330.5	Horizontal	PK	Pass
6	17946.0000	46.53	46.14	0.39	54	-7.47	330.5	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

11a, 1 GHz to 18 GHz, Channel (5240 MHz), ANT V

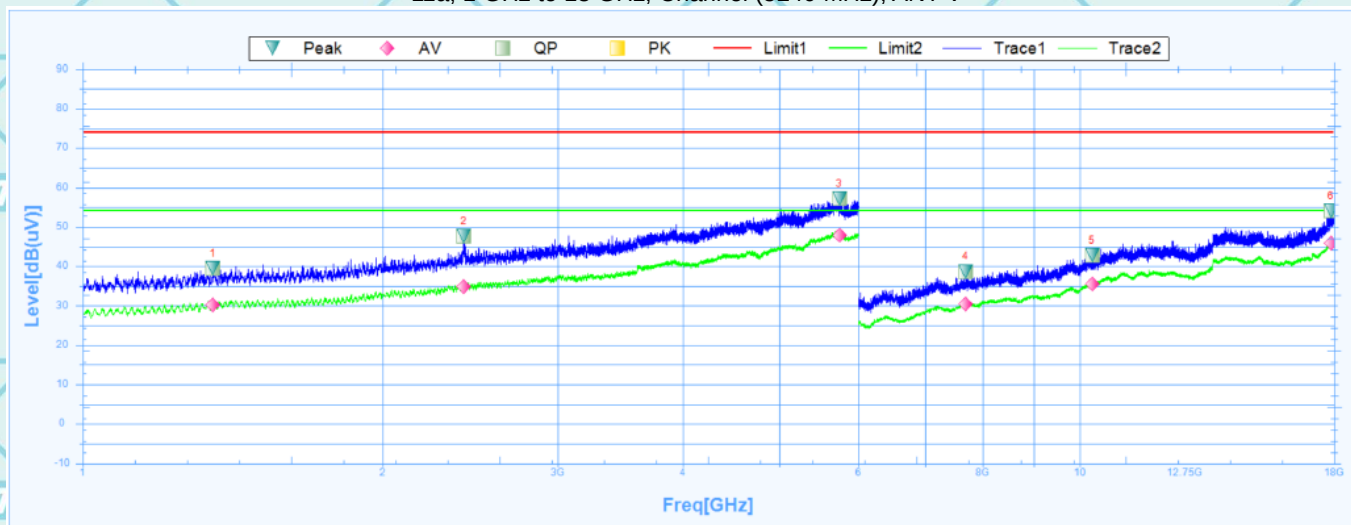


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1350.6250	39.43	-0.92	40.35	74	-34.57	-0.1	Vertical	PK	Pass
1	1350.6250	30.16	-0.92	31.08	54	-23.84	-0.1	Vertical	AV	Pass
2	2413.1250	47.66	5.28	42.38	74	-26.34	359.1	Vertical	PK	Pass
2	2413.1250	34.78	5.28	29.5	54	-19.22	359.1	Vertical	AV	Pass
3	5741.8750	57.22	20.91	36.31	74	-16.78	358.2	Vertical	PK	Pass
3	5741.8750	47.92	20.91	27.01	54	-6.08	358.2	Vertical	AV	Pass
4	7686.0000	38.72	36.53	2.19	74	-35.28	8	Vertical	PK	Pass
4	7686.0000	30.35	36.53	-6.18	54	-23.65	8	Vertical	AV	Pass
5	10291.5000	42.78	38.51	4.27	74	-31.22	236	Vertical	PK	Pass
5	10291.5000	35.58	38.51	-2.93	54	-18.42	236	Vertical	AV	Pass
6	17866.5000	54.02	45.61	8.41	74	-19.98	338.8	Vertical	PK	Pass
6	17866.5000	45.98	45.61	0.37	54	-8.02	338.8	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

11a, 1 GHz to 18 GHz, Channel (5260 MHz), ANT H

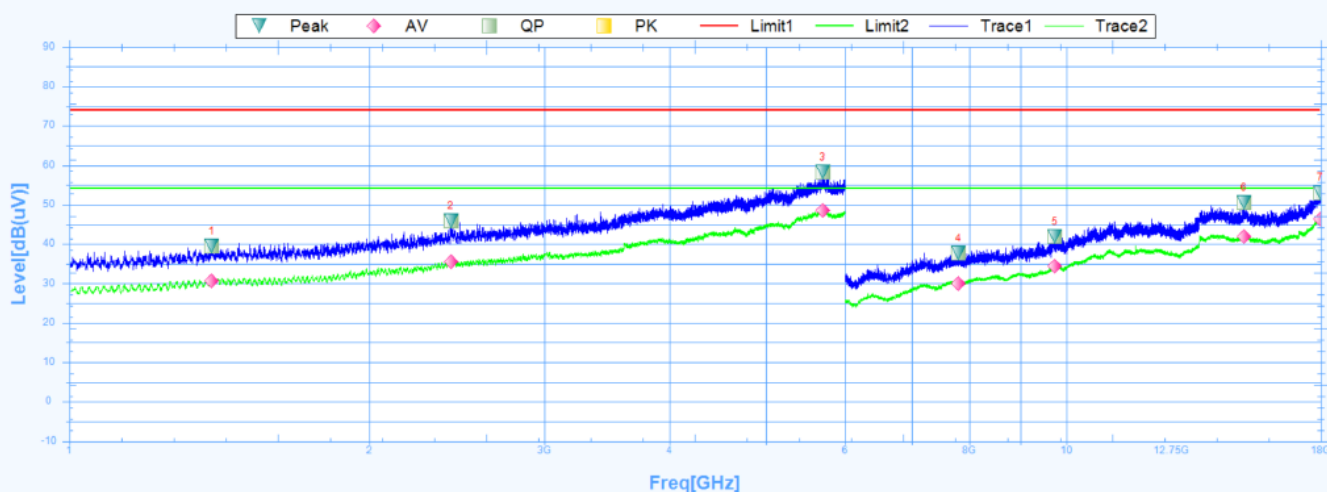


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1389.3750	39.42	-0.57	39.99	74	-34.58	194.6	Horizontal	PK	Pass
1	1389.3750	30.67	-0.57	31.24	54	-23.33	194.6	Horizontal	AV	Pass
2	2413.7500	45.85	5.29	40.56	74	-28.15	250.7	Horizontal	PK	Pass
2	2413.7500	35.5	5.29	30.21	54	-18.5	250.7	Horizontal	AV	Pass
3	5701.2500	58.35	21.12	37.23	74	-15.65	27.2	Horizontal	PK	Pass
3	5701.2500	48.59	21.12	27.47	54	-5.41	27.2	Horizontal	AV	Pass
4	7800.0000	37.76	36.7	1.06	74	-36.24	209.7	Horizontal	PK	Pass
4	7800.0000	30.03	36.7	-6.67	54	-23.97	209.7	Horizontal	AV	Pass
5	9745.5000	41.98	37.92	4.06	74	-32.02	250.4	Horizontal	PK	Pass
5	9745.5000	34.44	37.92	-3.48	54	-19.56	250.4	Horizontal	AV	Pass
6	15075.0000	50.6	39.97	10.63	74	-23.4	107	Horizontal	PK	Pass
6	15075.0000	41.9	39.97	1.93	54	-12.1	107	Horizontal	AV	Pass
7	17983.5000	53.07	46.39	6.68	74	-20.93	360.1	Horizontal	PK	Pass
7	17983.5000	46.4	46.39	0.01	54	-7.6	360.1	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

11a, 1 GHz to 18 GHz, Channel (5260 MHz), ANT V

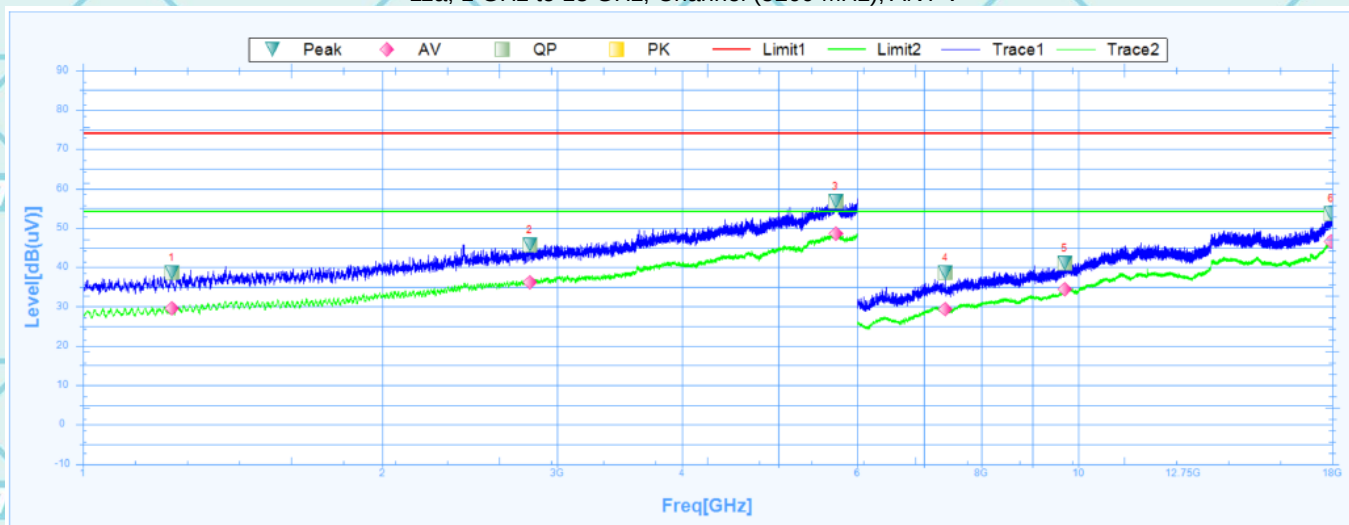


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1228.1250	38.55	-1.85	40.4	74	-35.45	34.4	Vertical	PK	Pass
1	1228.1250	29.6	-1.85	31.45	54	-24.4	34.4	Vertical	AV	Pass
2	2811.8750	45.65	7	38.65	74	-28.35	247.1	Vertical	PK	Pass
2	2811.8750	36.29	7	29.29	54	-17.71	247.1	Vertical	AV	Pass
3	5706.8750	56.66	21.17	35.49	74	-17.34	266.2	Vertical	PK	Pass
3	5706.8750	48.47	21.17	27.3	54	-5.53	266.2	Vertical	AV	Pass
4	7357.5000	38.54	36.04	2.5	74	-35.46	6.6	Vertical	PK	Pass
4	7357.5000	29.33	36.04	-6.71	54	-24.67	6.6	Vertical	AV	Pass
5	9694.5000	41.01	37.89	3.12	74	-32.99	306.6	Vertical	PK	Pass
5	9694.5000	34.51	37.89	-3.38	54	-19.49	306.6	Vertical	AV	Pass
6	17958.0000	53.66	46.22	7.44	74	-20.34	360.1	Vertical	PK	Pass
6	17958.0000	46.62	46.22	0.4	54	-7.38	360.1	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

11a, 1 GHz to 18 GHz, Channel (5320 MHz), ANT H

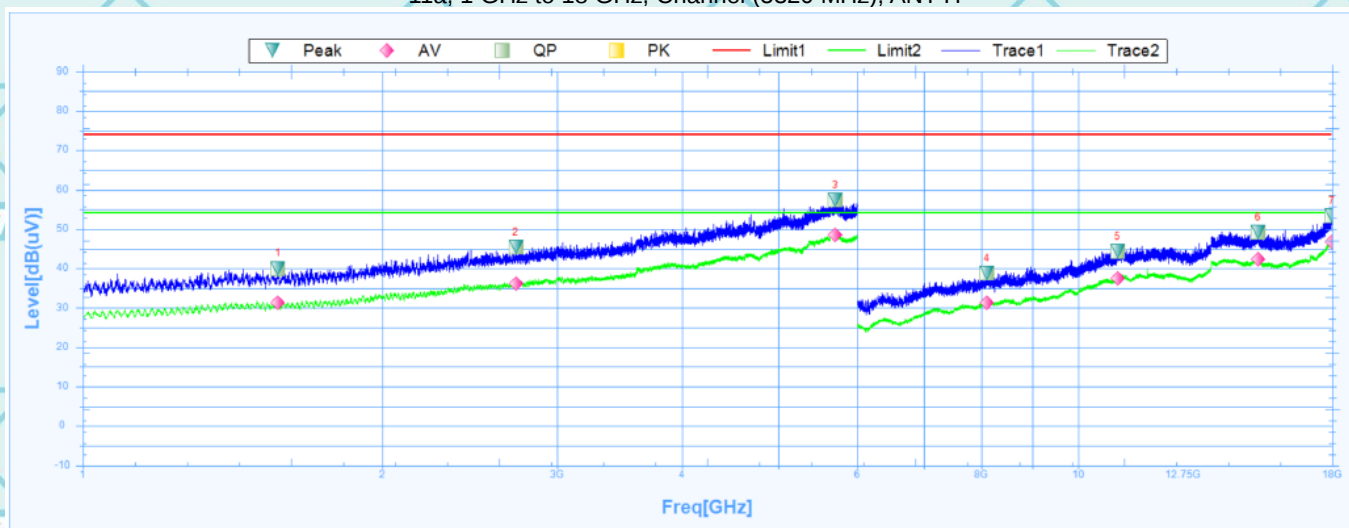


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1571.2500	40.03	-0.04	40.07	74	-33.97	359.4	Horizontal	PK	Pass
1	1571.2500	31.4	-0.04	31.44	54	-22.6	359.4	Horizontal	AV	Pass
2	2723.1250	45.41	6.43	38.98	74	-28.59	10.9	Horizontal	PK	Pass
2	2723.1250	36.18	6.43	29.75	54	-17.82	10.9	Horizontal	AV	Pass
3	5706.2500	57.29	21.17	36.12	74	-16.71	7.1	Horizontal	PK	Pass
3	5706.2500	48.51	21.17	27.34	54	-5.49	7.1	Horizontal	AV	Pass
4	8100.0000	38.81	37.04	1.77	74	-35.19	307.8	Horizontal	PK	Pass
4	8100.0000	31.26	37.04	-5.78	54	-22.74	307.8	Horizontal	AV	Pass
5	10957.5000	44.39	39.44	4.95	74	-29.61	128.4	Horizontal	PK	Pass
5	10957.5000	37.46	39.44	-1.98	54	-16.54	128.4	Horizontal	AV	Pass
6	15165.0000	49.27	39.69	9.58	74	-24.73	216.9	Horizontal	PK	Pass
6	15165.0000	42.47	39.69	2.78	54	-11.53	216.9	Horizontal	AV	Pass
7	17997.0000	53.46	46.48	6.98	74	-20.54	57.8	Horizontal	PK	Pass
7	17997.0000	46.77	46.48	0.29	54	-7.23	57.8	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

11a, 1 GHz to 18 GHz, Channel (5320 MHz), ANT V

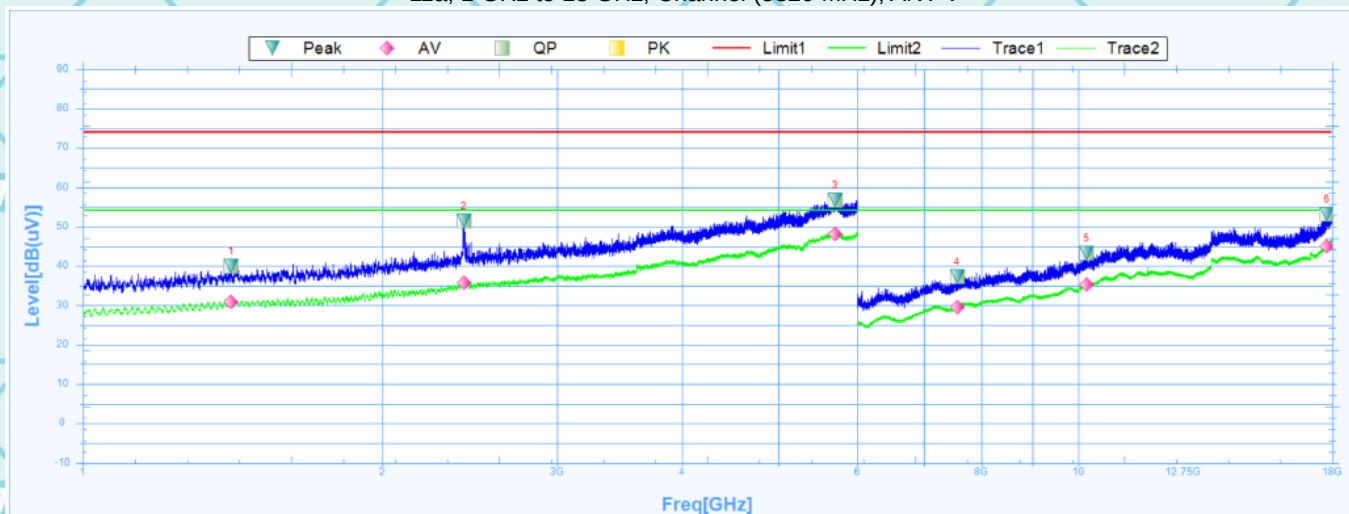


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1410.0000	39.88	-0.49	40.37	74	-34.12	210.2	Vertical	PK	Pass
1	1410.0000	30.81	-0.49	31.3	54	-23.19	210.2	Vertical	AV	Pass
2	2415.6250	51.37	5.3	46.07	74	-22.63	285.5	Vertical	PK	Pass
2	2415.6250	35.76	5.3	30.46	54	-18.24	285.5	Vertical	AV	Pass
3	5701.8750	56.74	21.12	35.62	74	-17.26	23.8	Vertical	PK	Pass
3	5701.8750	48.17	21.12	27.05	54	-5.83	23.8	Vertical	AV	Pass
4	7560.0000	37.34	36.34	1	74	-36.66	226.5	Vertical	PK	Pass
4	7560.0000	29.59	36.34	-6.75	54	-24.41	226.5	Vertical	AV	Pass
5	10201.5000	43.26	38.38	4.88	74	-30.74	3.4	Vertical	PK	Pass
5	10201.5000	35.4	38.38	-2.98	54	-18.6	3.4	Vertical	AV	Pass
6	17787.0000	53.27	45.07	8.2	74	-20.73	322.2	Vertical	PK	Pass
6	17787.0000	45	45.07	-0.07	54	-9	322.2	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

11a, 1 GHz to 18 GHz, Channel (5500 MHz), ANT H

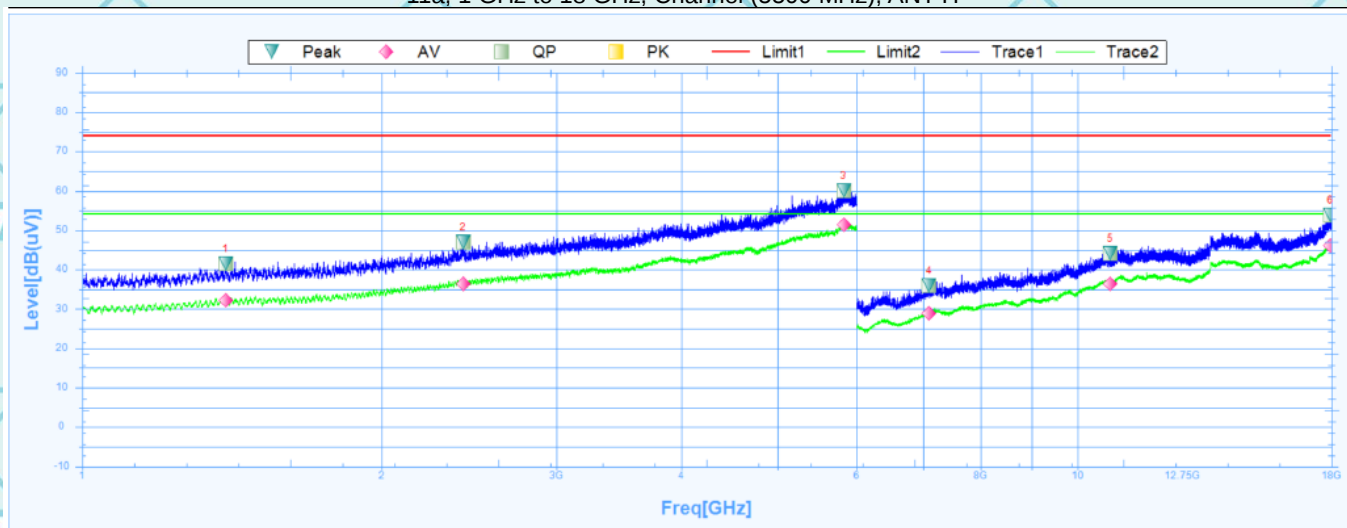


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1393.7500	41.46	-0.53	41.99	74	-32.54	39.2	Horizontal	PK	Pass
1	1393.7500	32.22	-0.53	32.75	54	-21.78	39.2	Horizontal	AV	Pass
2	2414.3750	47.04	5.3	41.74	74	-26.96	226.9	Horizontal	PK	Pass
2	2414.3750	36.4	5.3	31.1	54	-17.6	226.9	Horizontal	AV	Pass
3	5824.3750	60.06	20.02	40.04	74	-13.94	81	Horizontal	PK	Pass
3	5824.3750	51.33	20.02	31.31	54	-2.67	81	Horizontal	AV	Pass
4	7098.0000	36.04	35.65	0.39	74	-37.96	69.7	Horizontal	PK	Pass
4	7098.0000	28.96	35.65	-6.69	54	-25.04	69.7	Horizontal	AV	Pass
5	10792.5000	44.13	39.21	4.92	74	-29.87	31.5	Horizontal	PK	Pass
5	10792.5000	36.5	39.21	-2.71	54	-17.5	31.5	Horizontal	AV	Pass
6	17955.0000	53.94	46.2	7.74	74	-20.06	8.1	Horizontal	PK	Pass
6	17955.0000	46.22	46.2	0.02	54	-7.78	8.1	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

11a, 1 GHz to 18 GHz, Channel (5500 MHz), ANT V

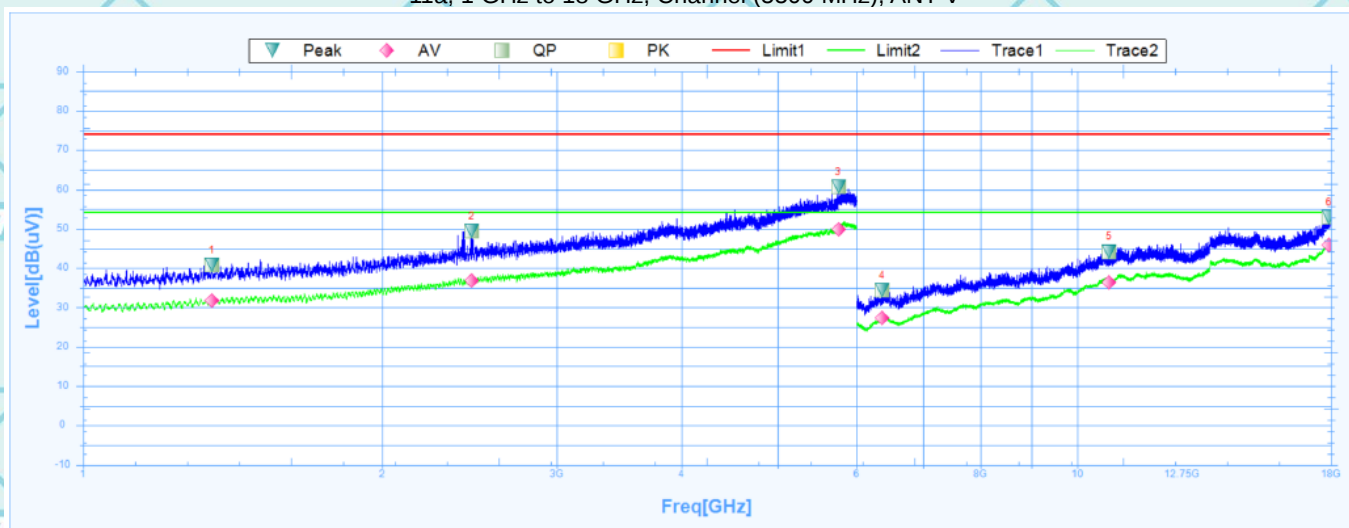


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1347.5000	40.78	-0.94	41.72	74	-33.22	150.2	Vertical	PK	Pass
1	1347.5000	31.81	-0.94	32.75	54	-22.19	150.2	Vertical	AV	Pass
2	2461.8750	49.33	5.42	43.91	74	-24.67	140.7	Vertical	PK	Pass
2	2461.8750	36.75	5.42	31.33	54	-17.25	140.7	Vertical	AV	Pass
3	5754.3750	60.75	20.78	39.97	74	-13.25	-0.1	Vertical	PK	Pass
3	5754.3750	49.78	20.78	29	54	-4.22	-0.1	Vertical	AV	Pass
4	6367.5000	34.37	33.79	0.58	74	-39.63	360.1	Vertical	PK	Pass
4	6367.5000	27.24	33.79	-6.55	54	-26.76	360.1	Vertical	AV	Pass
5	10774.5000	44.23	39.18	5.05	74	-29.77	126	Vertical	PK	Pass
5	10774.5000	36.36	39.18	-2.82	54	-17.64	126	Vertical	AV	Pass
6	17925.0000	52.94	46	6.94	74	-21.06	112.9	Vertical	PK	Pass
6	17925.0000	45.88	46	-0.12	54	-8.12	112.9	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

11a, 1 GHz to 18 GHz, Channel (5700 MHz), ANT H

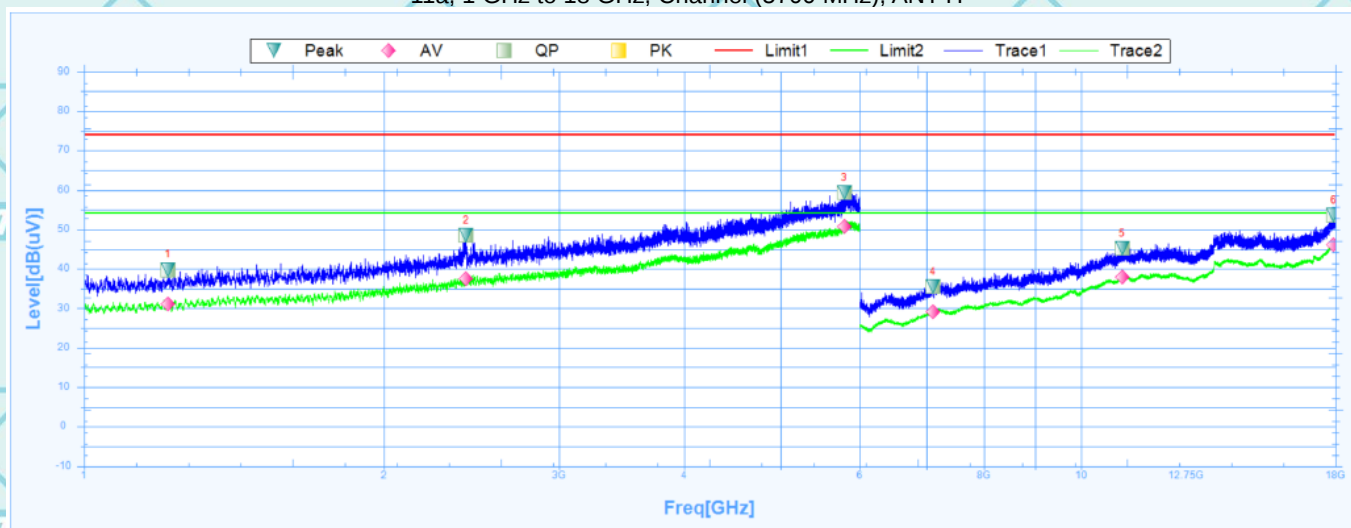


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1213.7500	39.81	-1.95	41.76	74	-34.19	32	Horizontal	PK	Pass
1	1213.7500	31.12	-1.95	33.07	54	-22.88	32	Horizontal	AV	Pass
2	2418.1250	48.48	5.32	43.16	74	-25.52	29.6	Horizontal	PK	Pass
2	2418.1250	37.44	5.32	32.12	54	-16.56	29.6	Horizontal	AV	Pass
3	5790.6250	59.31	20.38	38.93	74	-14.69	32	Horizontal	PK	Pass
3	5790.6250	50.82	20.38	30.44	54	-3.18	32	Horizontal	AV	Pass
4	7108.5000	35.54	35.66	-0.12	74	-38.46	-0.1	Horizontal	PK	Pass
4	7108.5000	29.12	35.66	-6.54	54	-24.88	-0.1	Horizontal	AV	Pass
5	10999.5000	45.19	39.5	5.69	74	-28.81	316.5	Horizontal	PK	Pass
5	10999.5000	38.03	39.5	-1.47	54	-15.97	316.5	Horizontal	AV	Pass
6	17935.5000	53.71	46.07	7.64	74	-20.29	297.3	Horizontal	PK	Pass
6	17935.5000	46.13	46.07	0.06	54	-7.87	297.3	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

11a, 1 GHz to 18 GHz, Channel (5700 MHz), ANT V

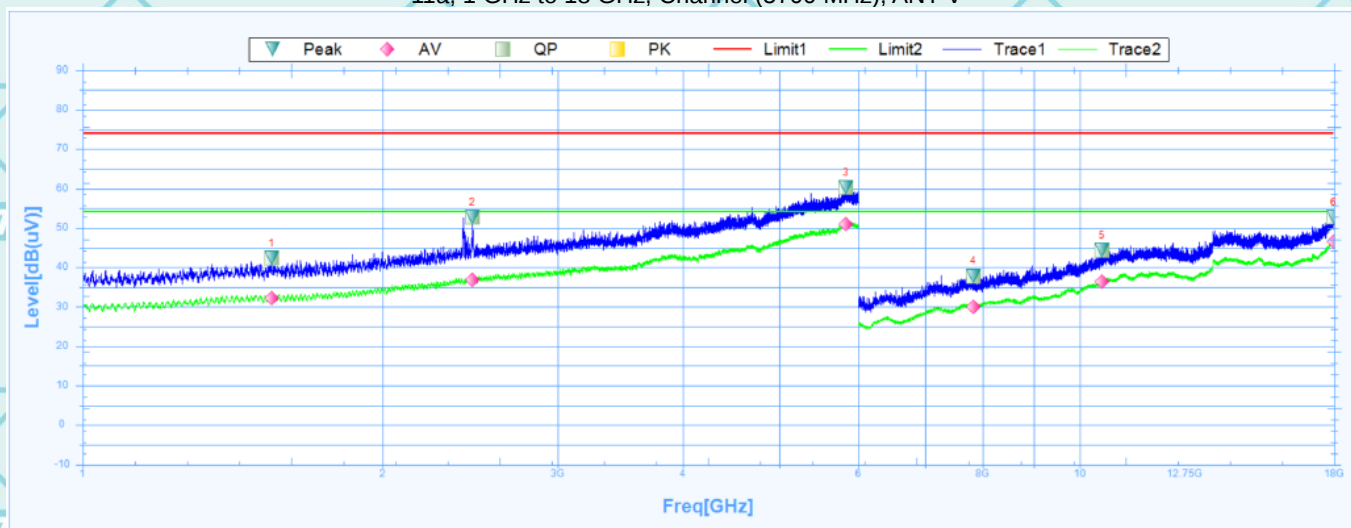


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1547.5000	42.35	-0.16	42.51	74	-31.65	360.1	Vertical	PK	Pass
1	1547.5000	32.14	-0.16	32.3	54	-21.86	360.1	Vertical	AV	Pass
2	2461.2500	52.65	5.42	47.23	74	-21.35	221.7	Vertical	PK	Pass
2	2461.2500	36.77	5.42	31.35	54	-17.23	221.7	Vertical	AV	Pass
3	5832.5000	60.22	20.03	40.19	74	-13.78	360.1	Vertical	PK	Pass
3	5832.5000	50.99	20.03	30.96	54	-3.01	360.1	Vertical	AV	Pass
4	7827.0000	37.82	36.74	1.08	74	-36.18	42.7	Vertical	PK	Pass
4	7827.0000	30.01	36.74	-6.73	54	-23.99	42.7	Vertical	AV	Pass
5	10534.5000	44.3	38.85	5.45	74	-29.7	159.9	Vertical	PK	Pass
5	10534.5000	36.47	38.85	-2.38	54	-17.53	159.9	Vertical	AV	Pass
6	17982.0000	52.75	46.38	6.37	74	-21.25	222.1	Vertical	PK	Pass
6	17982.0000	46.54	46.38	0.16	54	-7.46	222.1	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

11a, 1 GHz to 18 GHz, Channel (5745 MHz), ANT H

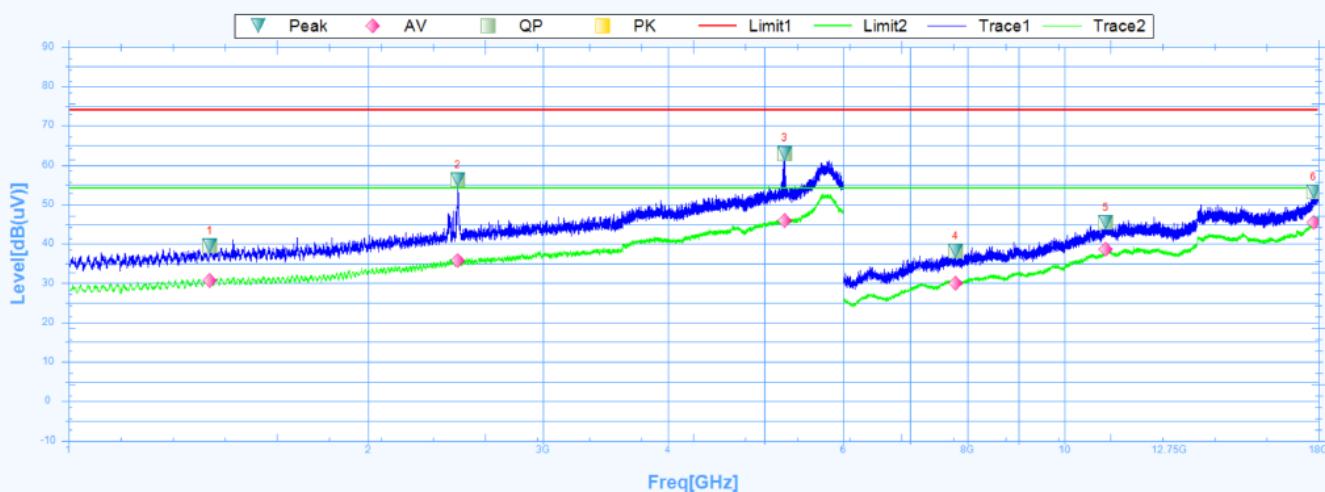


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1386.2500	39.45	-0.6	40.05	74	-34.55	32.9	Horizontal	PK	Pass
1	1386.2500	30.71	-0.6	31.31	54	-23.29	32.9	Horizontal	AV	Pass
2	2461.2500	56.19	5.42	50.77	74	-17.81	197.8	Horizontal	PK	Pass
2	2461.2500	35.71	5.42	30.29	54	-18.29	197.8	Horizontal	AV	Pass
3	5240.6250	63.02	17.12	45.9	74	-10.98	261.2	Horizontal	PK	Pass
3	5240.6250	46	17.12	28.88	54	-8	261.2	Horizontal	AV	Pass
4	7776.0000	38.18	36.66	1.52	74	-35.82	78.6	Horizontal	PK	Pass
4	7776.0000	29.96	36.66	-6.7	54	-24.04	78.6	Horizontal	AV	Pass
5	11010.0000	45.51	39.49	6.02	74	-28.49	26.1	Horizontal	PK	Pass
5	11010.0000	38.51	39.49	-0.98	54	-15.49	26.1	Horizontal	AV	Pass
6	17794.5000	53.2	45.12	8.08	74	-20.8	60.7	Horizontal	PK	Pass
6	17794.5000	45.4	45.12	0.28	54	-8.6	60.7	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

11a, 1 GHz to 18 GHz, Channel (5745 MHz), ANT V

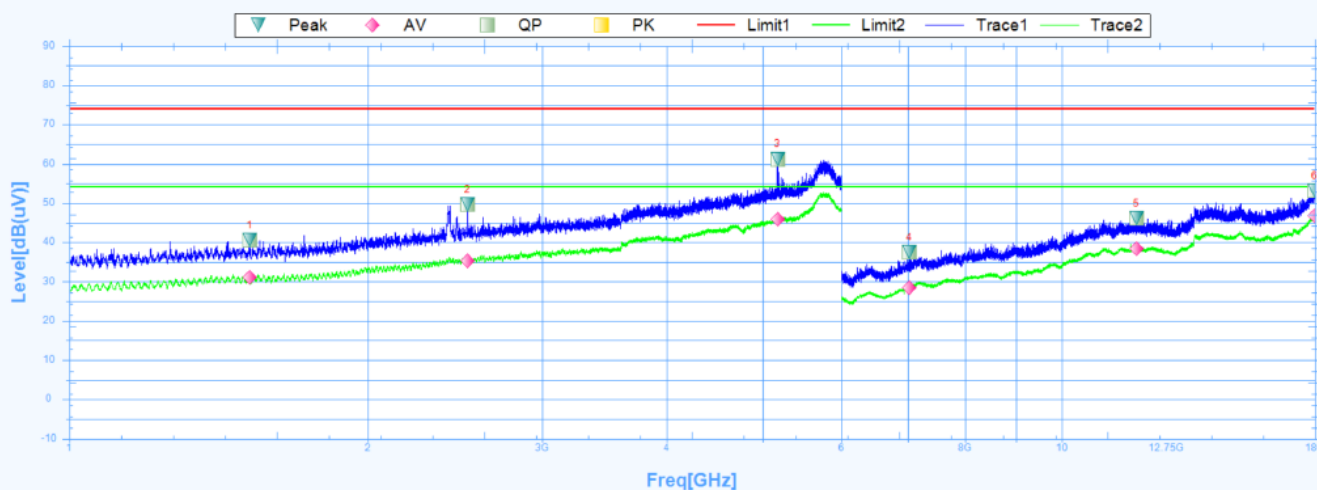


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1520.0000	40.58	-0.29	40.87	74	-33.42	133.1	Vertical	PK	Pass
1	1520.0000	31.1	-0.29	31.39	54	-22.9	133.1	Vertical	AV	Pass
2	2520.0000	49.73	5.75	43.98	74	-24.27	111.7	Vertical	PK	Pass
2	2520.0000	35.4	5.75	29.65	54	-18.6	111.7	Vertical	AV	Pass
3	5174.3750	61.24	17.07	44.17	74	-12.76	114.1	Vertical	PK	Pass
3	5174.3750	45.89	17.07	28.82	54	-8.11	114.1	Vertical	AV	Pass
4	7024.5000	37.58	35.54	2.04	74	-36.42	356.1	Vertical	PK	Pass
4	7024.5000	28.56	35.54	-6.98	54	-25.44	356.1	Vertical	AV	Pass
5	11899.5000	46.12	38.69	7.43	74	-27.88	126.4	Vertical	PK	Pass
5	11899.5000	38.43	38.69	-0.26	54	-15.57	126.4	Vertical	AV	Pass
6	17986.5000	53.23	46.41	6.82	74	-20.77	108.5	Vertical	PK	Pass
6	17986.5000	46.82	46.41	0.41	54	-7.18	108.5	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

11a, 1 GHz to 18 GHz, Channel (5825 MHz), ANT H

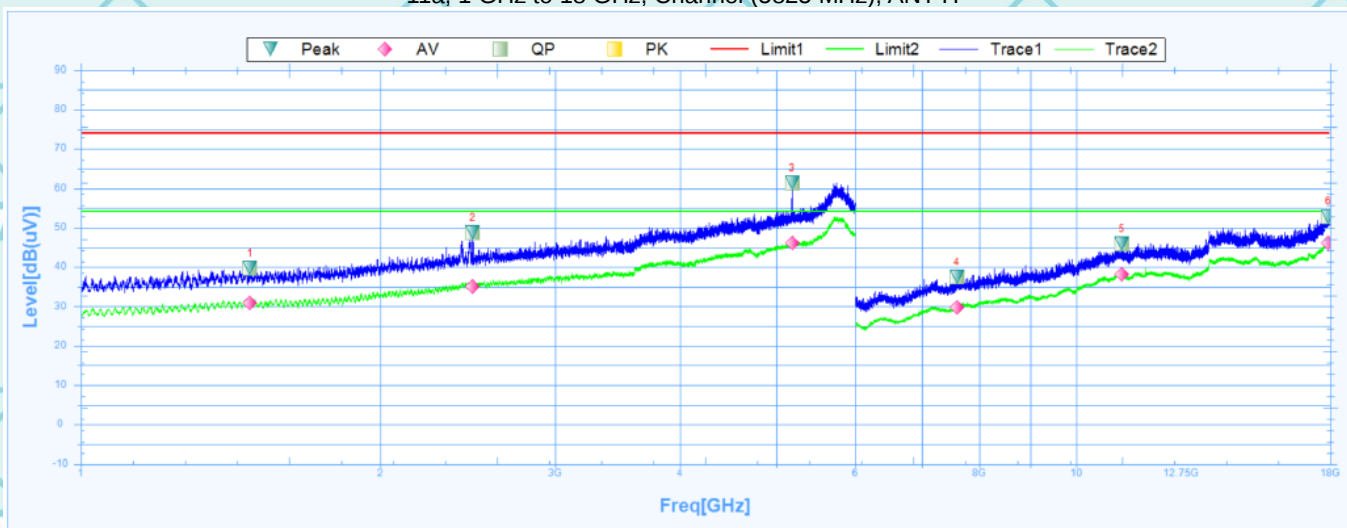


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1479.3750	39.74	-0.39	40.13	74	-34.26	289.8	Horizontal	PK	Pass
1	1479.3750	30.94	-0.39	31.33	54	-23.06	289.8	Horizontal	AV	Pass
2	2476.2500	48.75	5.4	43.35	74	-25.25	4.6	Horizontal	PK	Pass
2	2476.2500	35.1	5.4	29.7	54	-18.9	4.6	Horizontal	AV	Pass
3	5186.2500	61.43	17.08	44.35	74	-12.57	121.3	Horizontal	PK	Pass
3	5186.2500	46.06	17.08	28.98	54	-7.94	121.3	Horizontal	AV	Pass
4	7591.5000	37.44	36.39	1.05	74	-36.56	89.4	Horizontal	PK	Pass
4	7591.5000	29.75	36.39	-6.64	54	-24.25	89.4	Horizontal	AV	Pass
5	11121.0000	45.8	39.39	6.41	74	-28.2	176.6	Horizontal	PK	Pass
5	11121.0000	38.12	39.39	-1.27	54	-15.88	176.6	Horizontal	AV	Pass
6	17932.5000	52.85	46.05	6.8	74	-21.15	236.3	Horizontal	PK	Pass
6	17932.5000	46.09	46.05	0.04	54	-7.91	236.3	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

11a, 1 GHz to 18 GHz, Channel (5825 MHz), ANT V

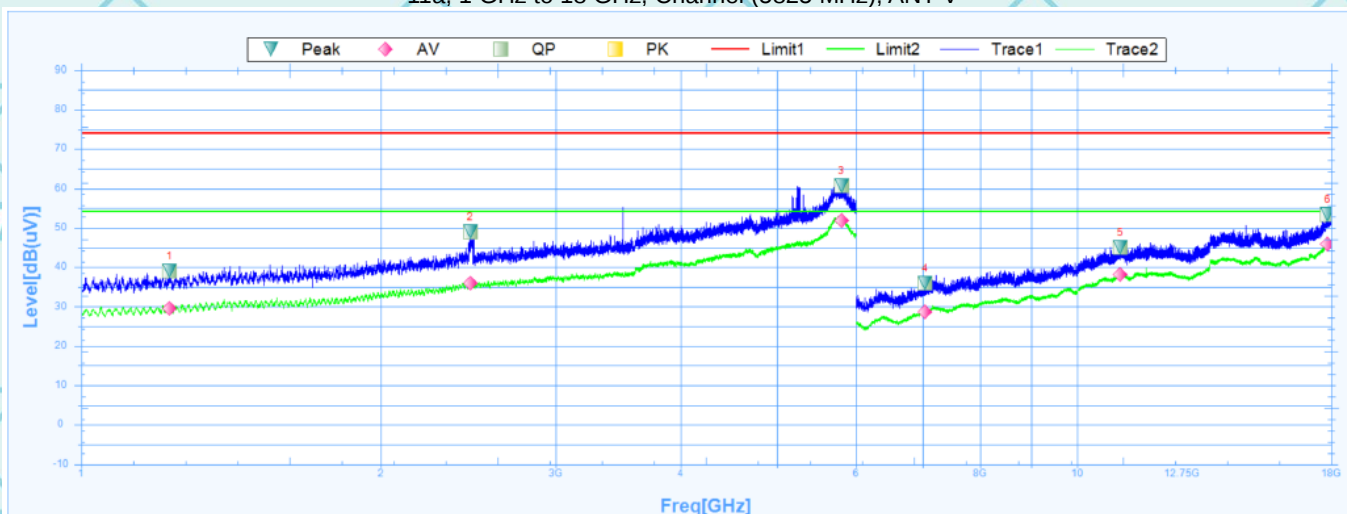

Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1226.8750	39	-1.86	40.86	74	-35	185.8	Vertical	PK	Pass
1	1226.8750	29.54	-1.86	31.4	54	-24.46	185.8	Vertical	AV	Pass
2	2460.0000	48.96	5.42	43.54	74	-25.04	360.1	Vertical	PK	Pass
2	2460.0000	36	5.42	30.58	54	-18	360.1	Vertical	AV	Pass
3	5803.1250	60.77	20.24	40.53	74	-13.23	203.7	Vertical	PK	Pass
3	5803.1250	51.8	20.24	31.56	54	-2.2	203.7	Vertical	AV	Pass
4	7044.0000	36.02	35.57	0.45	74	-37.98	104.8	Vertical	PK	Pass
4	7044.0000	28.69	35.57	-6.88	54	-25.31	104.8	Vertical	AV	Pass
5	11061.0000	45.1	39.45	5.65	74	-28.9	41.5	Vertical	PK	Pass
5	11061.0000	38.25	39.45	-1.2	54	-15.75	41.5	Vertical	AV	Pass
6	17859.0000	53.43	45.56	7.87	74	-20.57	356.6	Vertical	PK	Pass
6	17859.0000	45.92	45.56	0.36	54	-8.08	356.6	Vertical	AV	Pass

Note:

1. All emissions not reported were more than 20dB below the specified limit or in the noise floor.
2. Emission Level= Reading Level+ Probe Factor +Cable Loss.
3. Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) – Limits (dBμV)


Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

7.3.8 RESTRICTED BANDS REQUIREMENTS**Test Result(Only recorded the worst case in the report):**

11a (and the worst result 11a model was report as below)


Low channel

Horizontal:

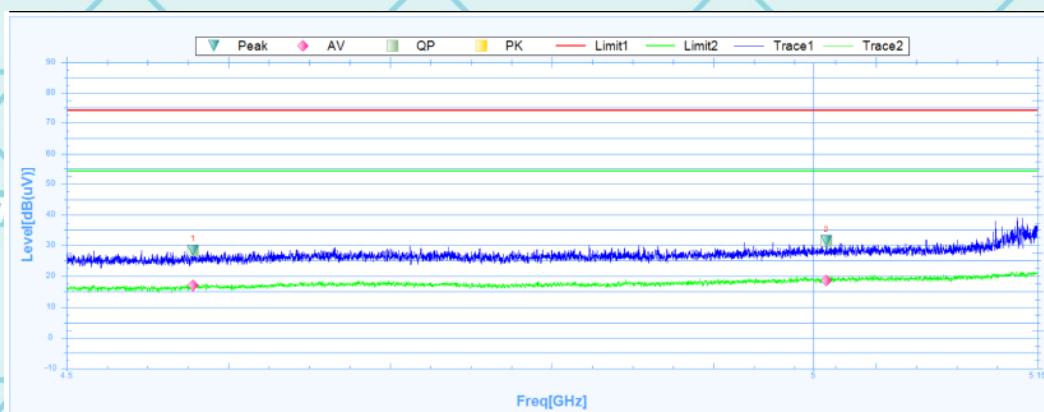**Susputed Data List**

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	4584.7438	28.28	-1.45	29.73	74	-45.72	359.5	Horizontal	PK	Pass
1	4584.7438	16.9	-1.45	18.35	54	-37.1	359.5	Horizontal	AV	Pass
2	5008.7875	31.32	0.19	31.13	74	-42.68	205.2	Horizontal	PK	Pass
2	5008.7875	18.46	0.19	18.27	54	-35.54	205.2	Horizontal	AV	Pass


Vertical:

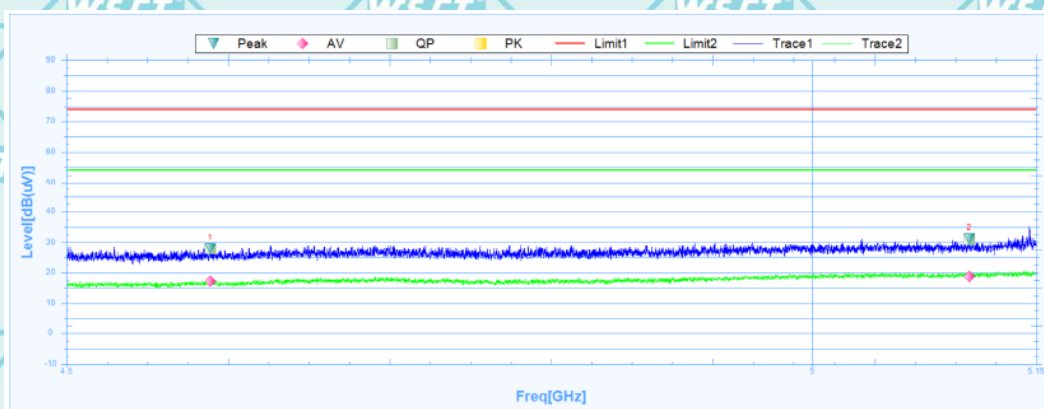**Susputed Data List**

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	4596.3625	27.81	-1.39	29.2	74	-46.19	232.4	Vertical	PK	Pass
1	4596.3625	17.15	-1.39	18.54	54	-36.85	232.4	Vertical	AV	Pass
2	5105.1500	31.17	0.22	30.95	74	-42.83	97.4	Vertical	PK	Pass
2	5105.1500	18.67	0.22	18.45	54	-35.33	97.4	Vertical	AV	Pass


Report No.: WSCT-ANAB-R&E260500039A-Wi-Fi2 Issued Date: 25 May 2026

High channel
Horizontal:

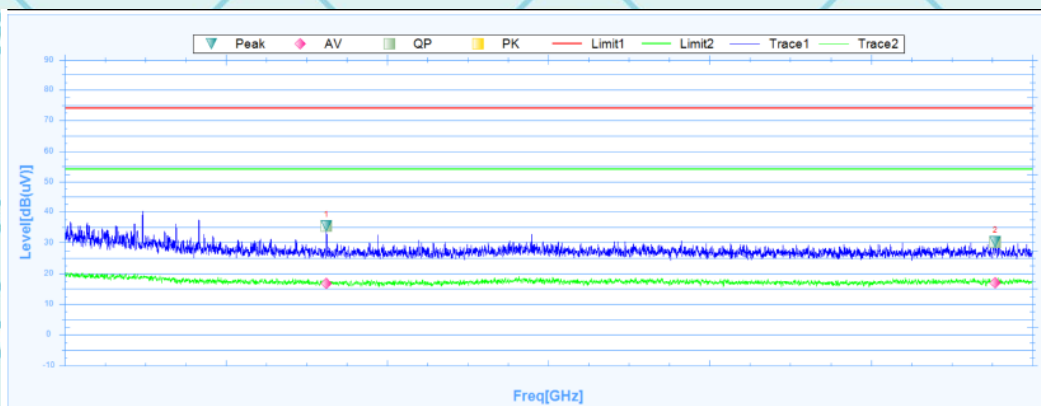

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	5379.5488	35.38	0.73	34.65	74	-38.62	208.3	Horizontal	PK	Pass
1	5379.5488	16.71	0.73	15.98	54	-37.29	208.3	Horizontal	AV	Pass
2	5455.7650	30.22	1	29.22	74	-43.78	3.5	Horizontal	PK	Pass
2	5455.7650	16.99	1	15.99	54	-37.01	3.5	Horizontal	AV	Pass

Vertical:

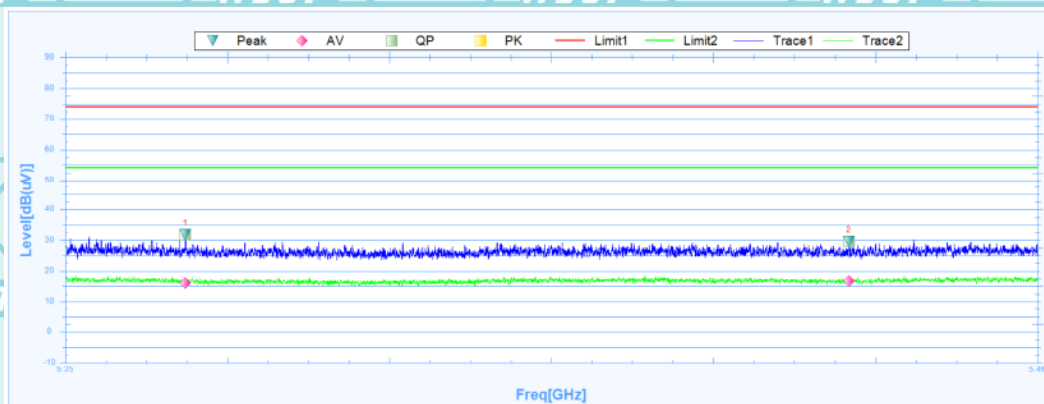

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	5363.5850	31.71	0.68	31.03	74	-42.29	243.8	Vertical	PK	Pass
1	5363.5850	16.12	0.68	15.44	54	-37.88	243.8	Vertical	AV	Pass
2	5438.6738	29.58	0.95	28.63	74	-44.42	0.1	Vertical	PK	Pass
2	5438.6738	16.81	0.95	15.86	54	-37.19	0.1	Vertical	AV	Pass

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) – Limits (dBμV)

7.4 ANTENNA REQUIREMENT

Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

Antenna Gain

The Wi-Fi antenna is a Integral Antenna. it meets the standards, and the best case gain of the antenna is" -0.32".

Please refer to the attached "KN4n Internal Photo" for the antenna location