

System Check 750

Date: 2025/12/18

Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.873 \text{ S/m}$; $\epsilon_r = 42.783$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW750/Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.09 W/kg

CW750/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 36.38 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.576 W/kg

Smallest distance from peaks to all points 3 dB below = 23.8 mm

Ratio of SAR at M2 to SAR at M1 = 66.2%

Maximum value of SAR (measured) = 1.11 W/kg

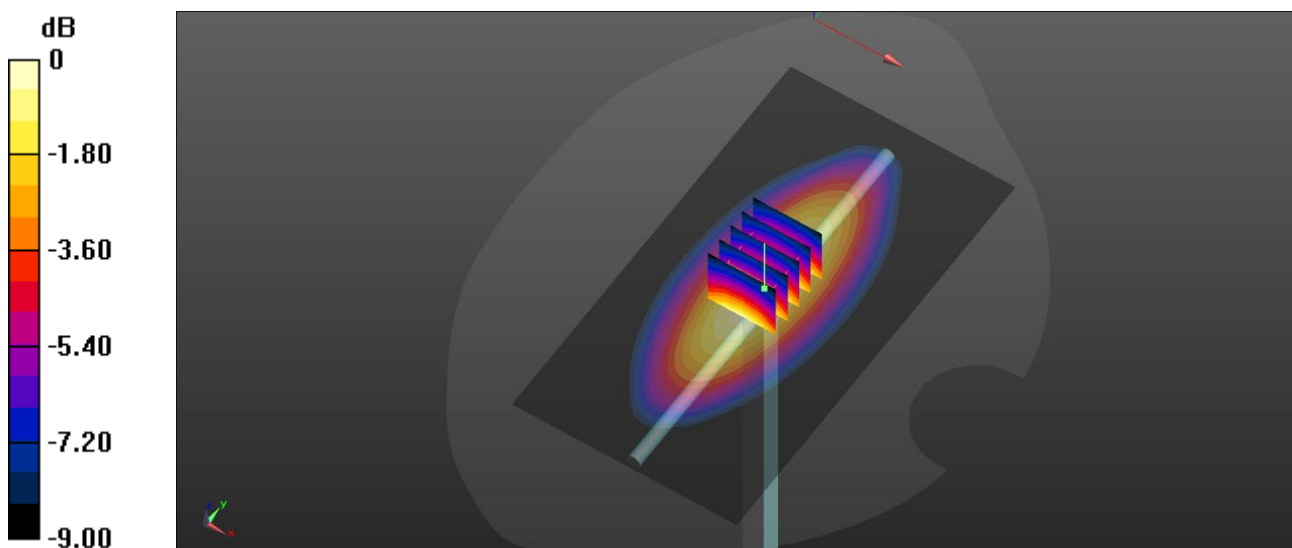

0 dB = 1.11 W/kg

System Check 750

Date: 2026/1/2

Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 41.508$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.14, 9.14, 9.14); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW750/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.58 W/kg

CW750/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 42.68 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.85 W/kg; SAR(10 g) = 0.572 W/kg

Smallest distance from peaks to all points 3 dB below = 22.6 mm

Ratio of SAR at M2 to SAR at M1 = 65.2%

Maximum value of SAR (measured) = 1.60 W/kg

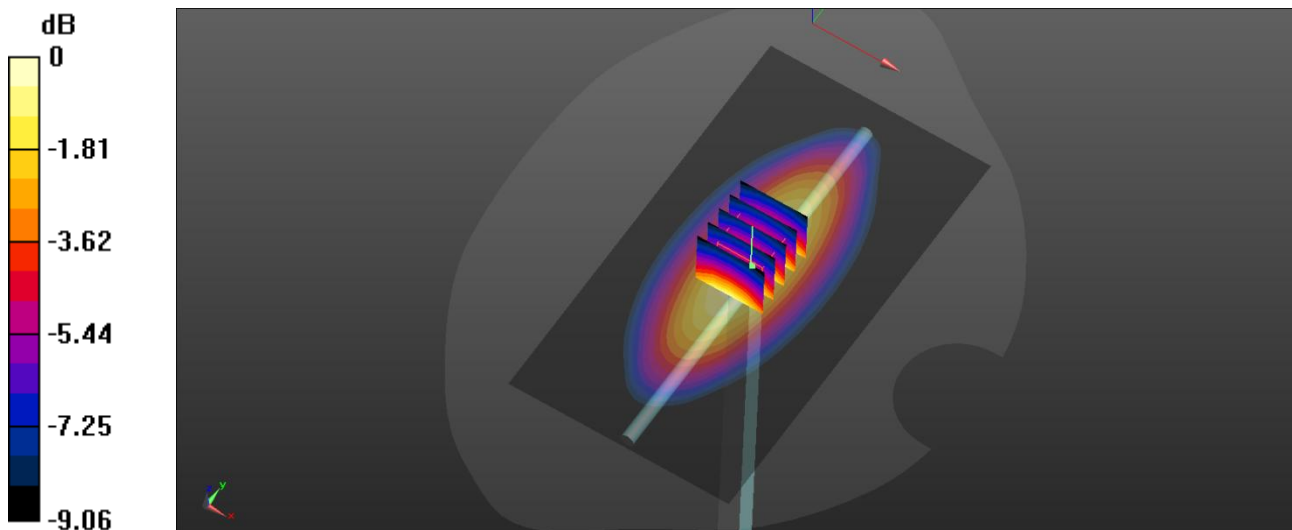

0 dB = 1.60 W/kg

System Check 750

Date: 2026/1/19

Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 41.032$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW750/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.20 W/kg

CW750/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.37 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.905 W/kg; SAR(10 g) = 0.623 W/kg

Smallest distance from peaks to all points 3 dB below = 22.6 mm

Ratio of SAR at M2 to SAR at M1 = 66.3%

Maximum value of SAR (measured) = 1.20 W/kg

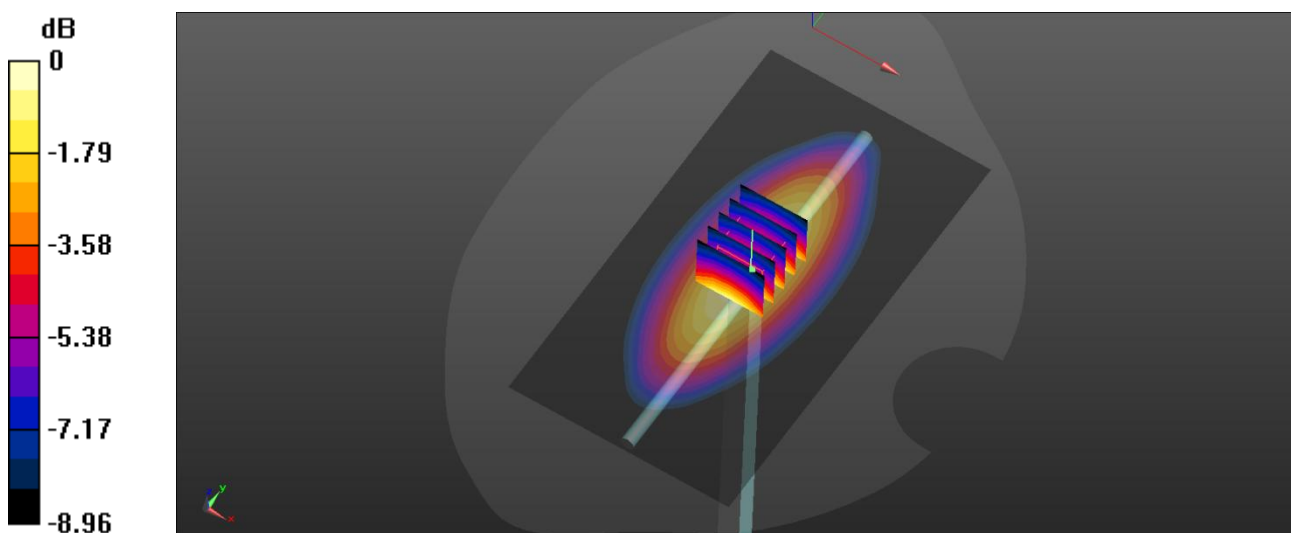

0 dB = 1.20 W/kg

System Check 835

Date: 2025/12/19

Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 41.203$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW835/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.995 W/kg

CW835/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.22 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.919 W/kg; SAR(10 g) = 0.597 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 63.1%

Maximum value of SAR (measured) = 0.989 W/kg

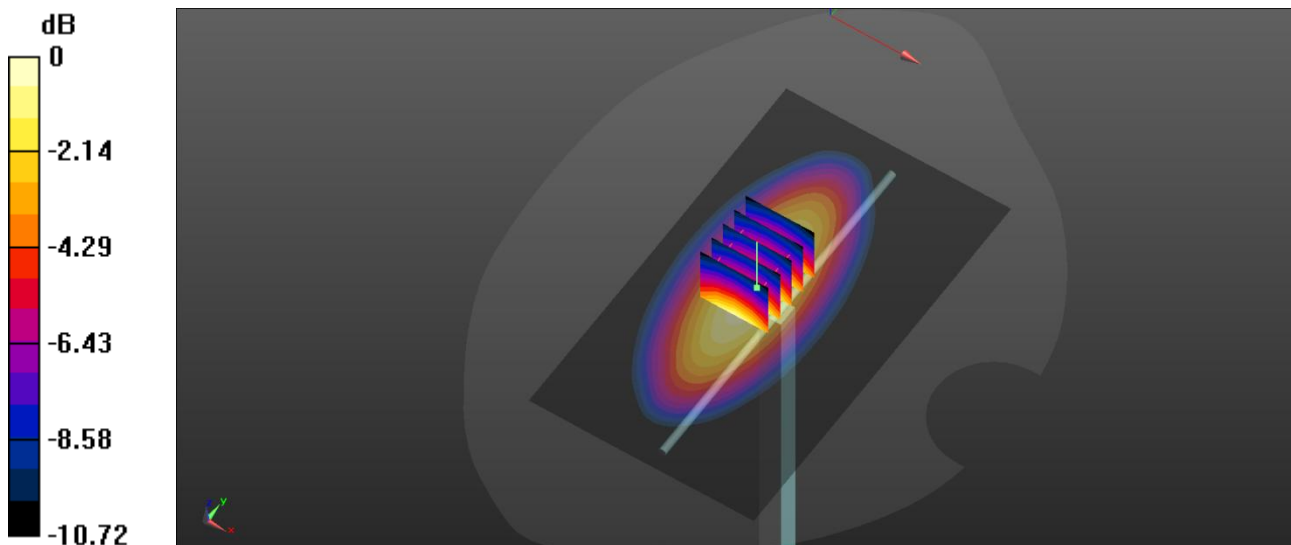

0 dB = 0.989 W/kg

System Check 835

Date: 2025/12/20

Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.916 \text{ S/m}$; $\epsilon_r = 40.92$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW835/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.26 W/kg

CW835/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 33.91 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.971 W/kg; SAR(10 g) = 0.626 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 60.9%

Maximum value of SAR (measured) = 1.38 W/kg

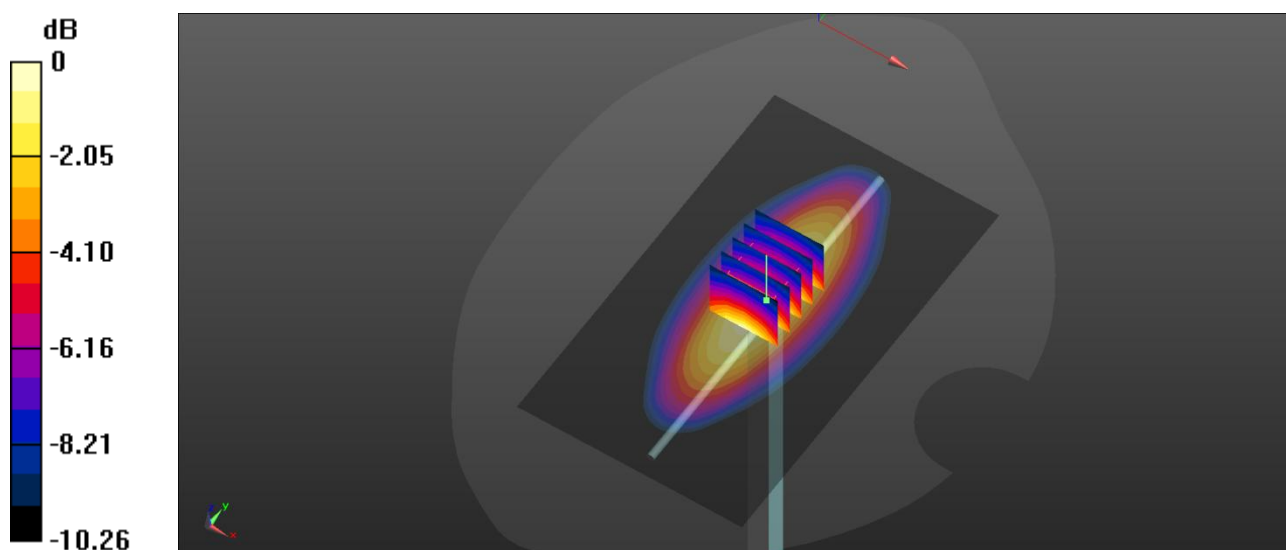

0 dB = 1.38 W/kg

System Check 835

Date: 2026/2/3

Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 42.323$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW835/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.27 W/kg

CW835/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.58 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.922 W/kg; SAR(10 g) = 0.603 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 62.9%

Maximum value of SAR (measured) = 1.27 W/kg

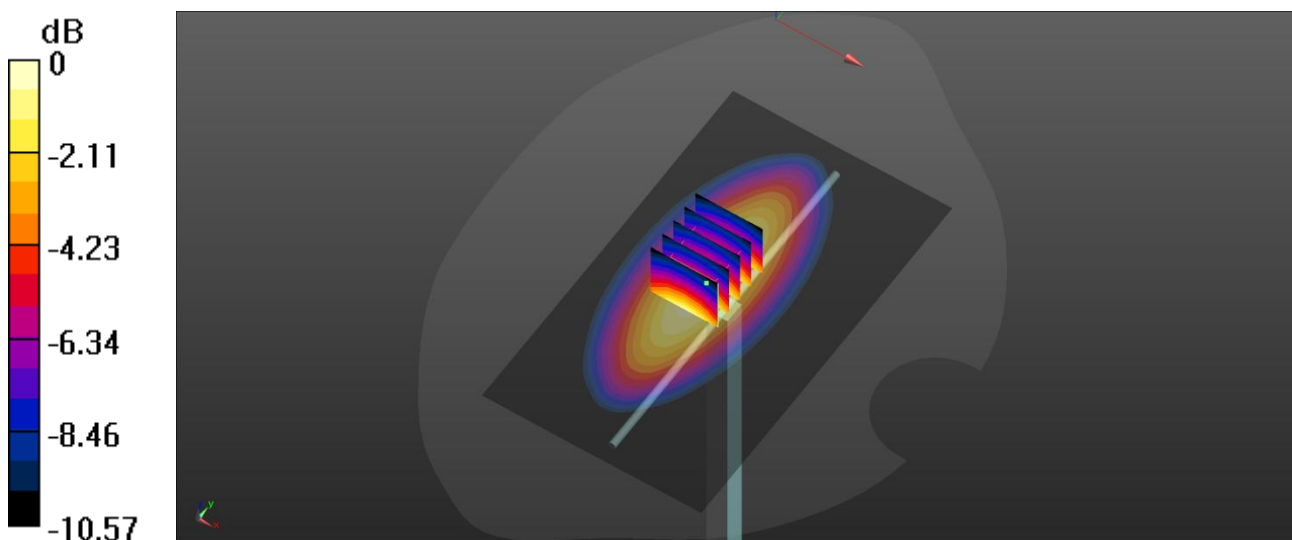

0 dB = 1.27 W/kg

System Check 1750

Date: 2026/1/5

Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.317$ S/m; $\epsilon_r = 39.331$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW1750/Area Scan (51x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.97 W/kg

CW1750/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 77.13 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 8.19 W/kg

SAR(1 g) = 3.62 W/kg; SAR(10 g) = 1.95 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 59.2%

Maximum value of SAR (measured) = 6.99 W/kg

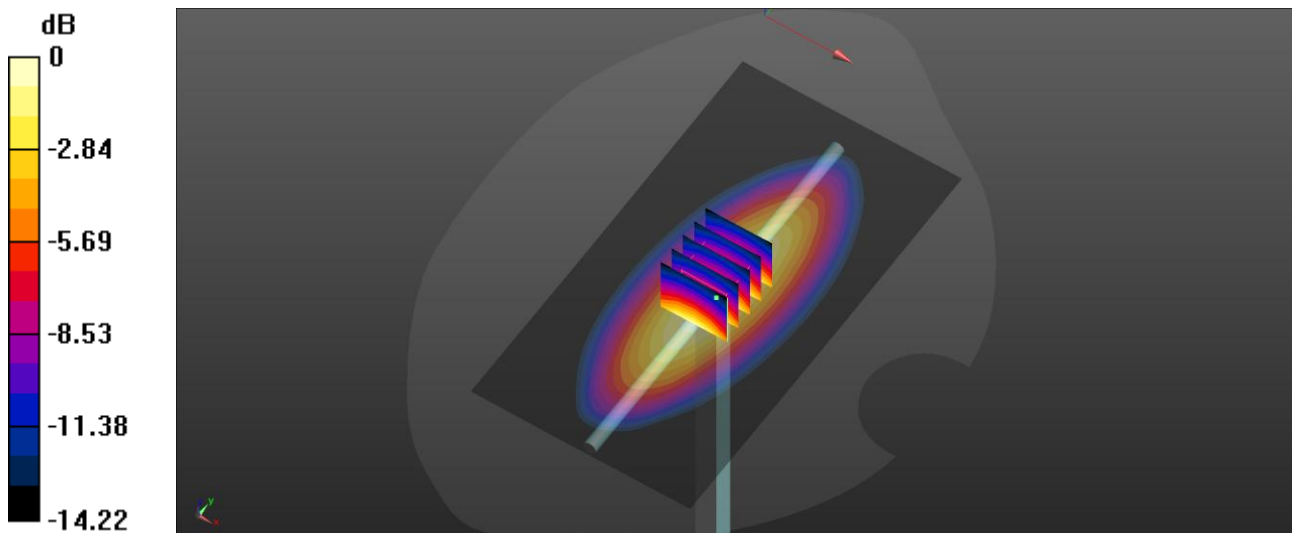

0 dB = 6.99 W/kg

System Check 1750

Date: 2026/1/21

Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.355$ S/m; $\epsilon_r = 39.257$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW1750/Area Scan (51x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 6.18 W/kg

CW1750/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.77 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 7.29 W/kg

SAR(1 g) = 3.83 W/kg; SAR(10 g) = 2.02 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 6.01 W/kg

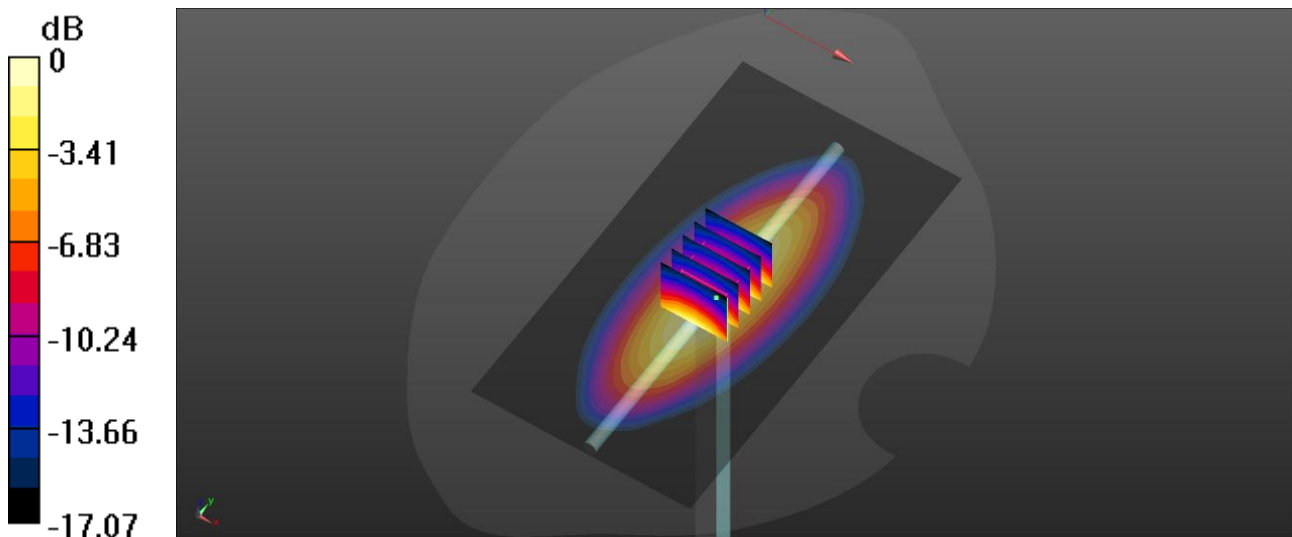

0 dB = 6.01 W/kg

System Check 1750

Date: 2026/2/2

Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 39.211$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.8°C Liquid Temperature: 21°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW1750/Area Scan (51x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 6.30 W/kg

CW1750/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 52.50 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 7.43 W/kg

SAR(1 g) = 3.91 W/kg; SAR(10 g) = 2.06 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 53.1%

Maximum value of SAR (measured) = 6.13 W/kg

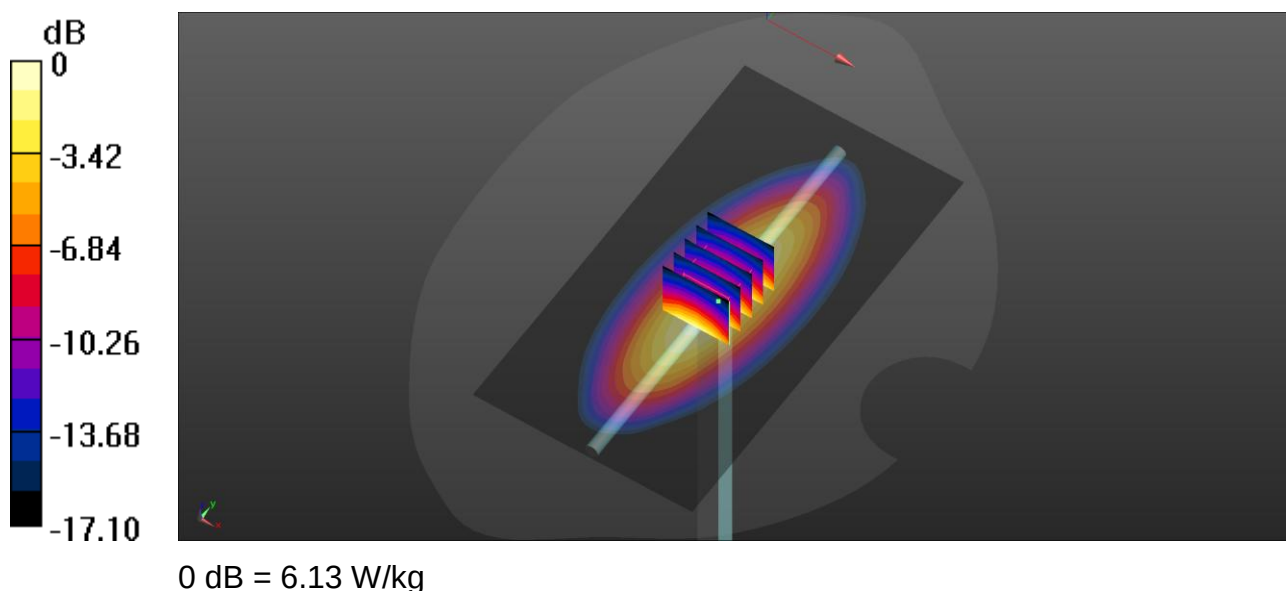

System Check 1900

Date: 2025/12/24

Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.425$ S/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.53, 8.53, 8.53); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW1900/Area Scan (61x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 5.48 W/kg

CW1900/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 53.72 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 6.44 W/kg

SAR(1 g) = 3.72 W/kg; SAR(10 g) = 2.08 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 58.8%

Maximum value of SAR (measured) = 5.51 W/kg

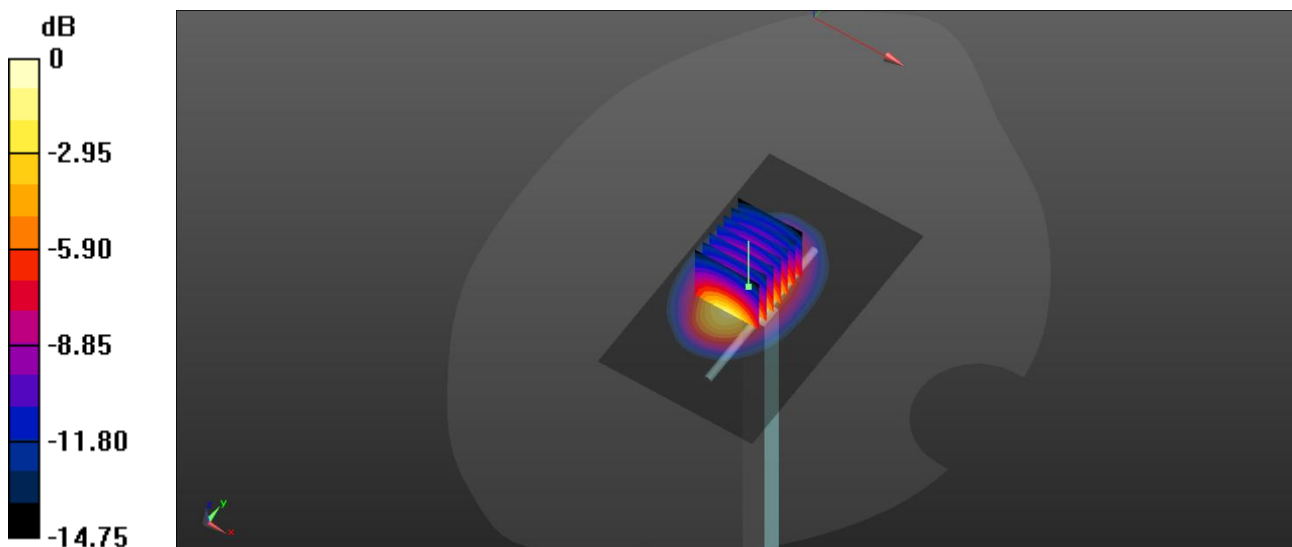

0 dB = 5.51 W/kg

System Check 1900

Date: 2026/1/19

Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 38.858$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.53, 8.53, 8.53); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW1900/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 5.38 W/kg

CW1900/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.72 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 6.32 W/kg

SAR(1 g) = 3.65 W/kg; SAR(10 g) = 1.98 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 58.8%

Maximum value of SAR (measured) = 5.41 W/kg

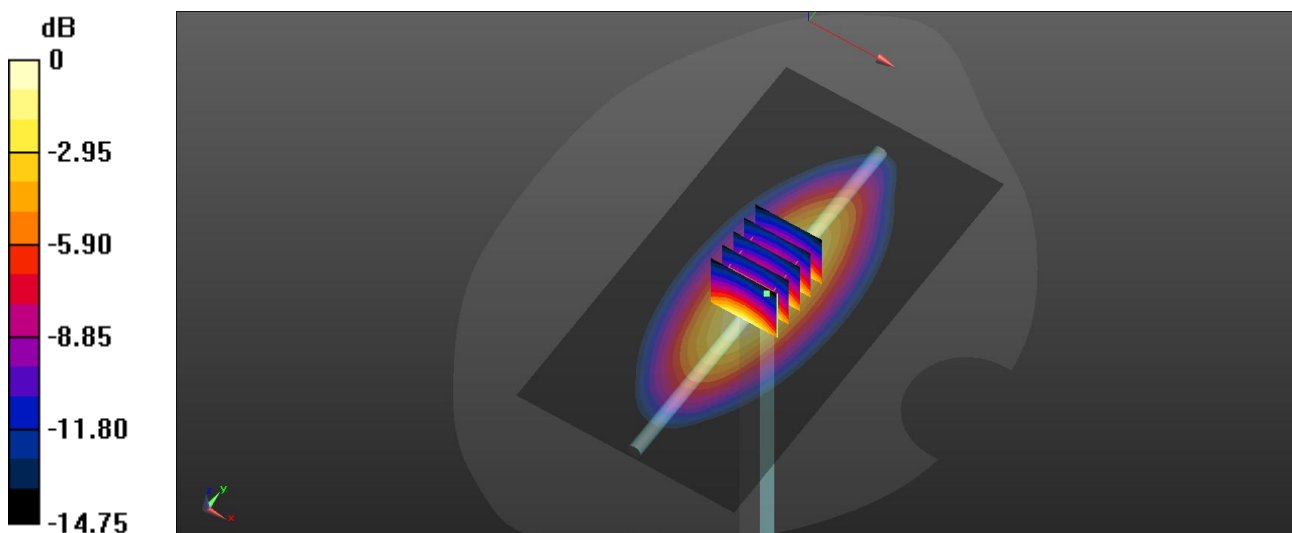

0 dB = 5.41 W/kg

System Check 1900

Date: 2026/2/2

Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.443$ S/m; $\epsilon_r = 38.928$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.8°C Liquid Temperature: 20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW1900/Area Scan (61x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 6.98 W/kg

CW1900/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 57.22 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 8.25 W/kg

SAR(1 g) = 4.32 W/kg; SAR(10 g) = 2.22 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.7%

Maximum value of SAR (measured) = 6.78 W/kg

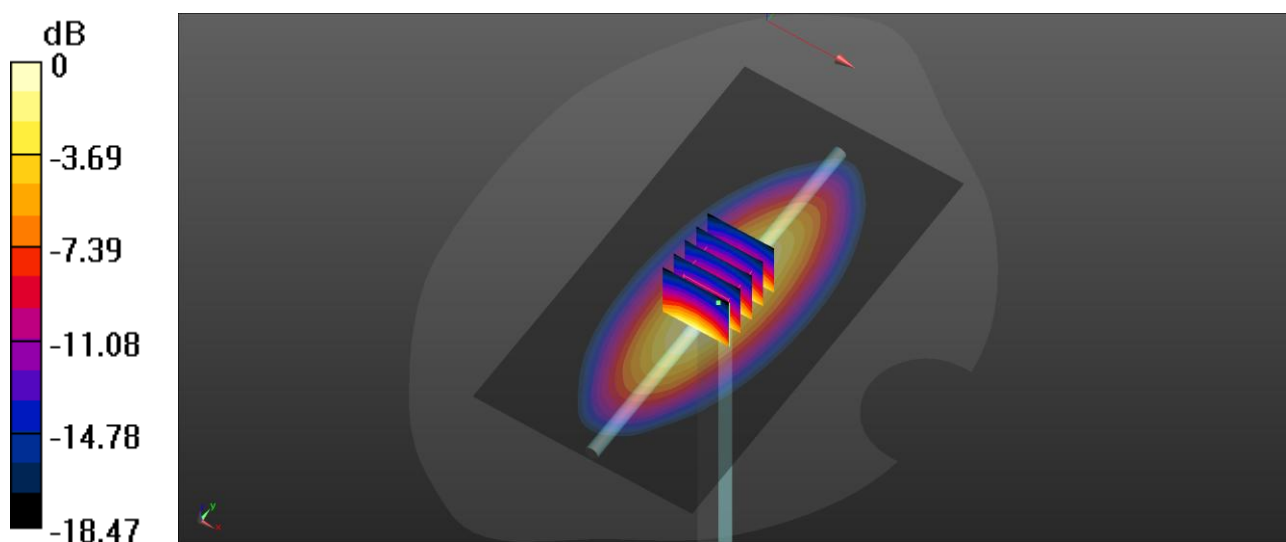

0 dB = 6.78 W/kg

System Check 2300

Date: 2026/2/4

Communication System Band: D2300 (2300.0 MHz); Frequency: 2300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.70$ S/m; $\epsilon_r = 38.653$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.15, 7.15, 7.15); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW2300/Area Scan (71x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 8.66 W/kg

CW2300/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.37 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 10.5 W/kg

SAR(1 g) = 5.17 W/kg; SAR(10 g) = 2.45 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 8.51 W/kg

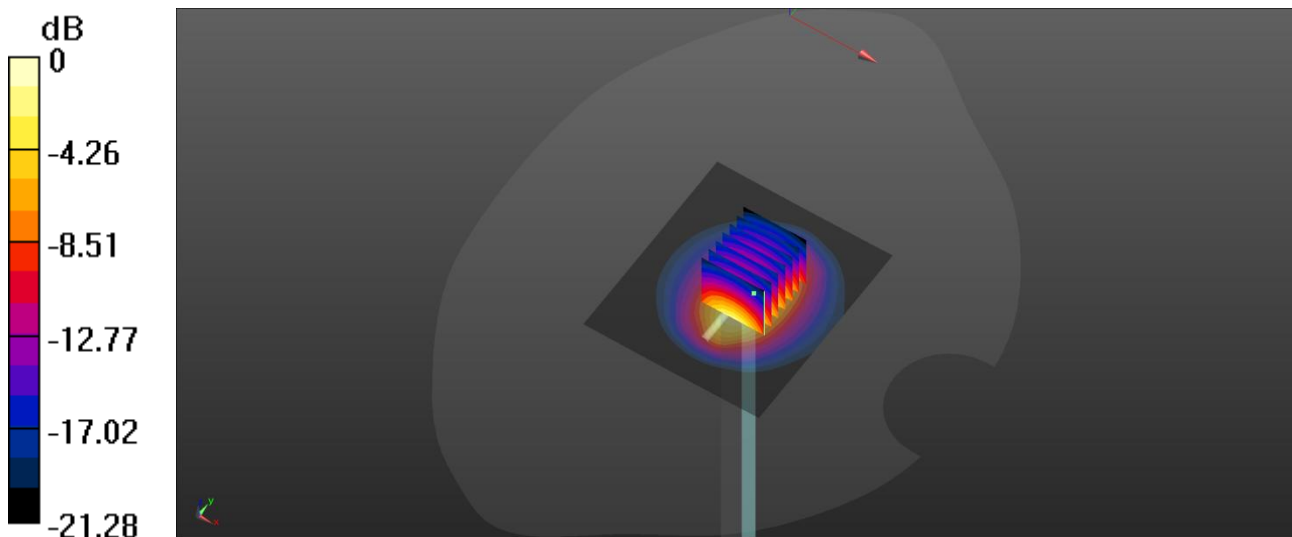

0 dB = 8.51 W/kg

System Check 2450

Date: 2026/1/15

Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.784$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8, 8, 8) Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW2450/Area Scan (71x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 8.66 W/kg

CW2450/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 68.46 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 9.99 W/kg

SAR(1 g) = 5.41 W/kg; SAR(10 g) = 2.57 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 8.43 W/kg

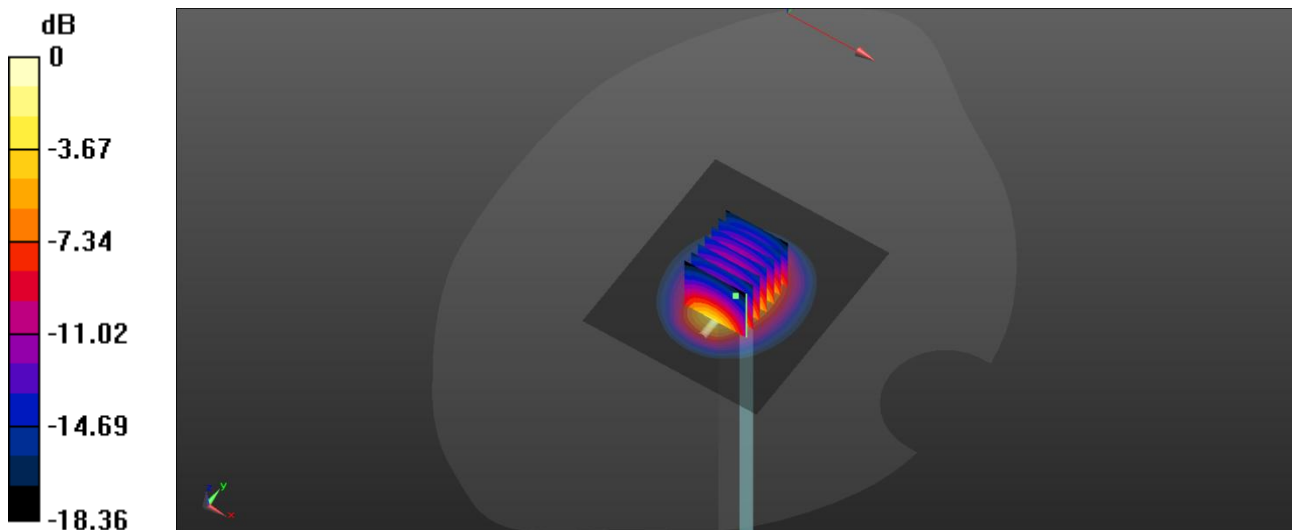

0 dB = 8.43 W/kg

System Check 2600

Date: 2025/12/27

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.011$ S/m; $\epsilon_r = 38.004$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW2600/Area Scan (71x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 10.2 W/kg

CW2600/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.47 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 12.6 W/kg

SAR(1 g) = 5.8 W/kg; SAR(10 g) = 2.58 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 47.2%

Maximum value of SAR (measured) = 10.0 W/kg

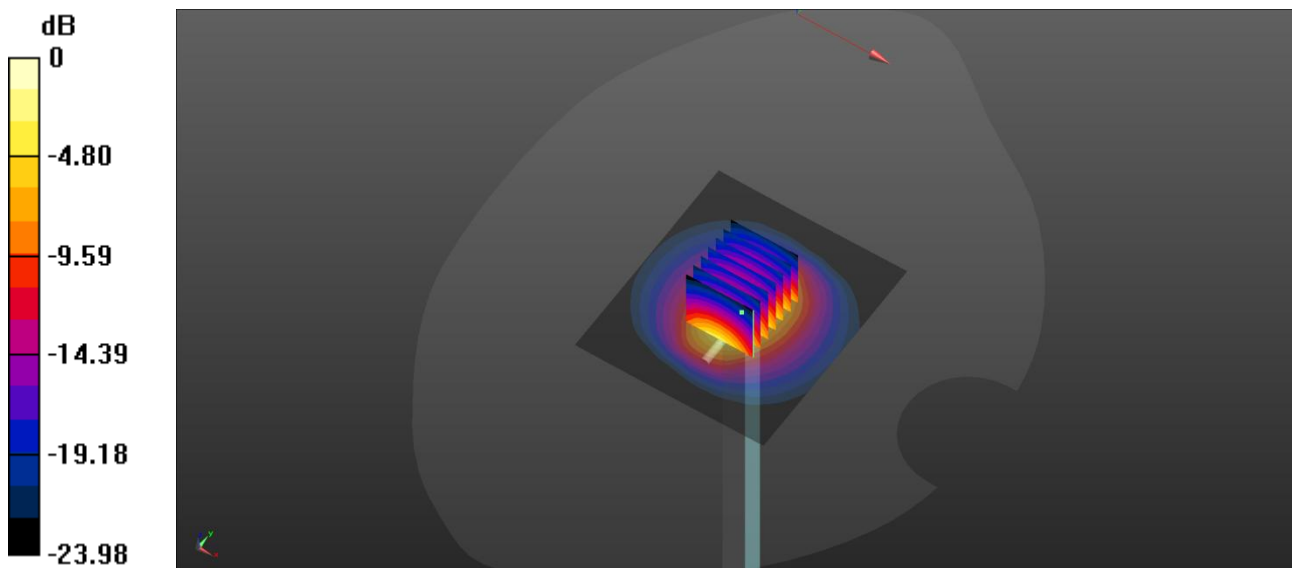

0 dB = 10.0 W/kg

System Check 2600

Date: 2025/12/27

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 37.567$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.83, 7.83, 7.83); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW2600/Area Scan (71x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 9.84 W/kg

CW2600/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 73.55 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 11.4 W/kg

SAR(1 g) = 5.78 W/kg; SAR(10 g) = 2.74 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 51.9%

Maximum value of SAR (measured) = 9.42 W/kg

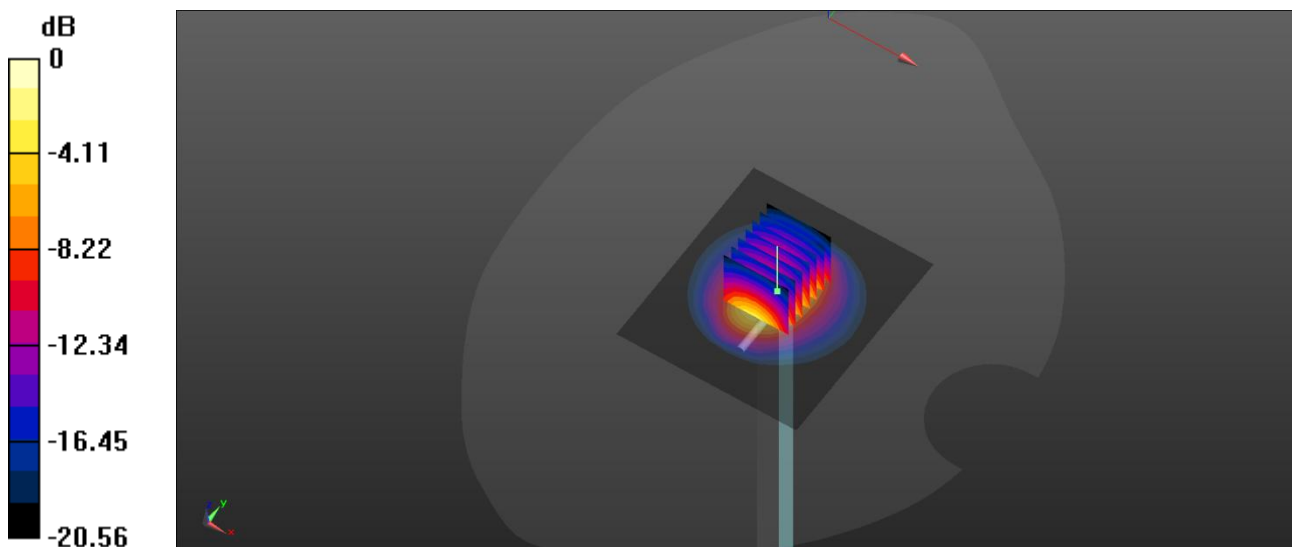

0 dB = 9.42 W/kg

System Check 2600

Date: 2025/12/28

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.989$ S/m; $\epsilon_r = 38.727$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.83, 7.83, 7.83); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW2600/Area Scan (71x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 9.79 W/kg

CW2600/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 71.19 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 11.3 W/kg

SAR(1 g) = 5.72 W/kg; SAR(10 g) = 2.73 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 51.9%

Maximum value of SAR (measured) = 9.31 W/kg

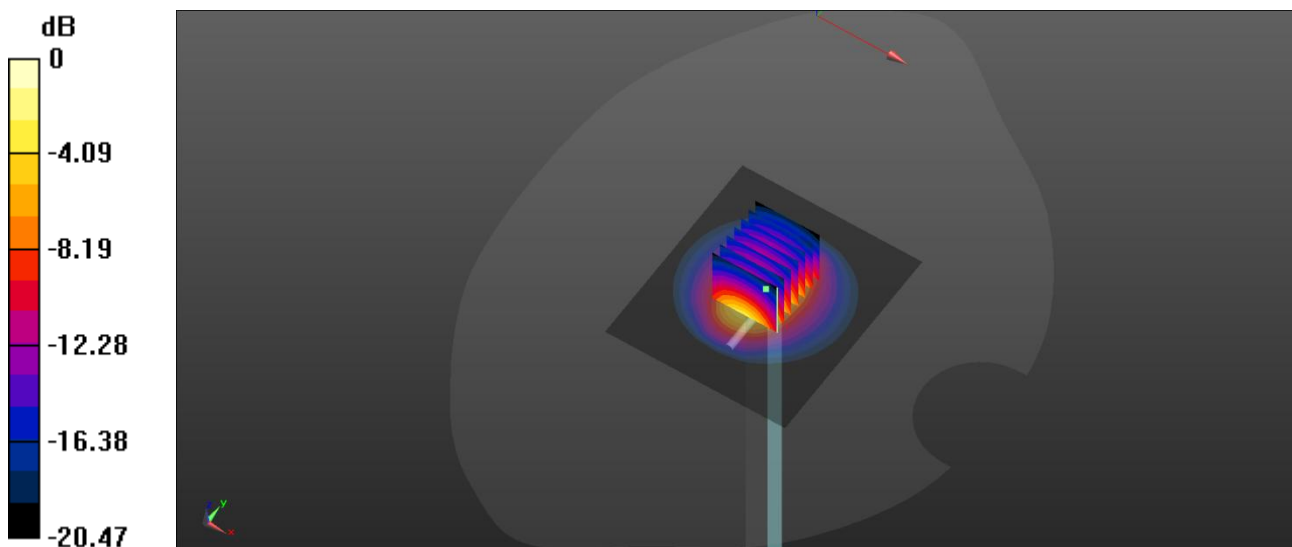

0 dB = 9.31 W/kg

System Check 2600

Date: 2026/2/5

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 38.067$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

2600/Area Scan (71x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 9.72 W/kg

2600/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.40 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 12.0 W/kg

SAR(1 g) = 5.51 W/kg; SAR(10 g) = 2.45 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.2%

Maximum value of SAR (measured) = 9.55 W/kg

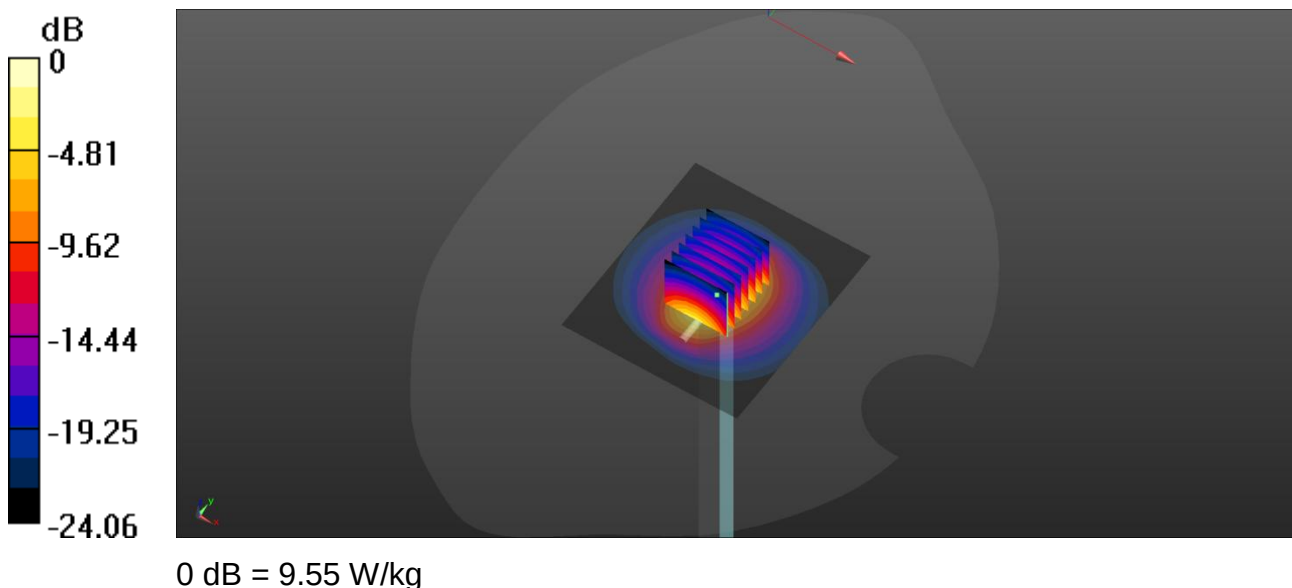

System Check 2600

Date: 2026/2/5

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.991$ S/m; $\epsilon_r = 38.654$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration: S

- Probe: EX3DV4 - SN3974; ConvF(7.83, 7.83, 7.83); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW2600/Area Scan (71x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 8.29 W/kg

CW2600/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 66.99 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 9.71 W/kg

SAR(1 g) = 5.15 W/kg; SAR(10 g) = 2.53 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 55.1%

Maximum value of SAR (measured) = 8.07 W/kg

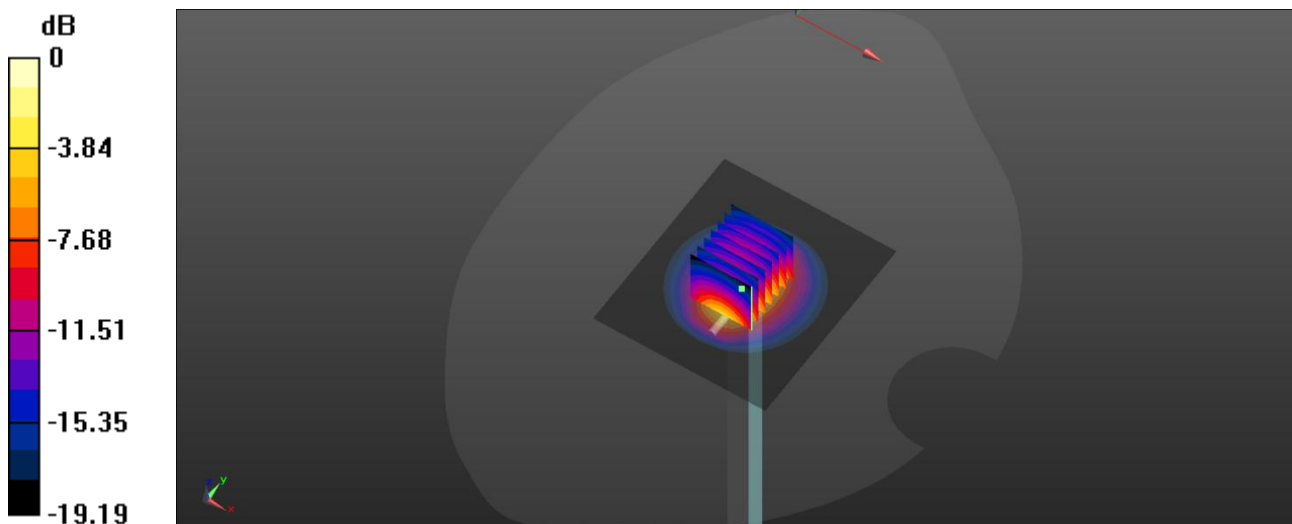

0 dB = 8.07 W/kg

System Check 3500

Date: 2025/12/21

Communication System Band: D3500 (3500.0 MHz); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.872$ S/m; $\epsilon_r = 38.634$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3500/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.30 W/kg

CW3500/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 45.41 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 6.66 W/kg; SAR(10 g) = 2.52 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 45.6%

Maximum value of SAR (measured) = 11.5 W/kg

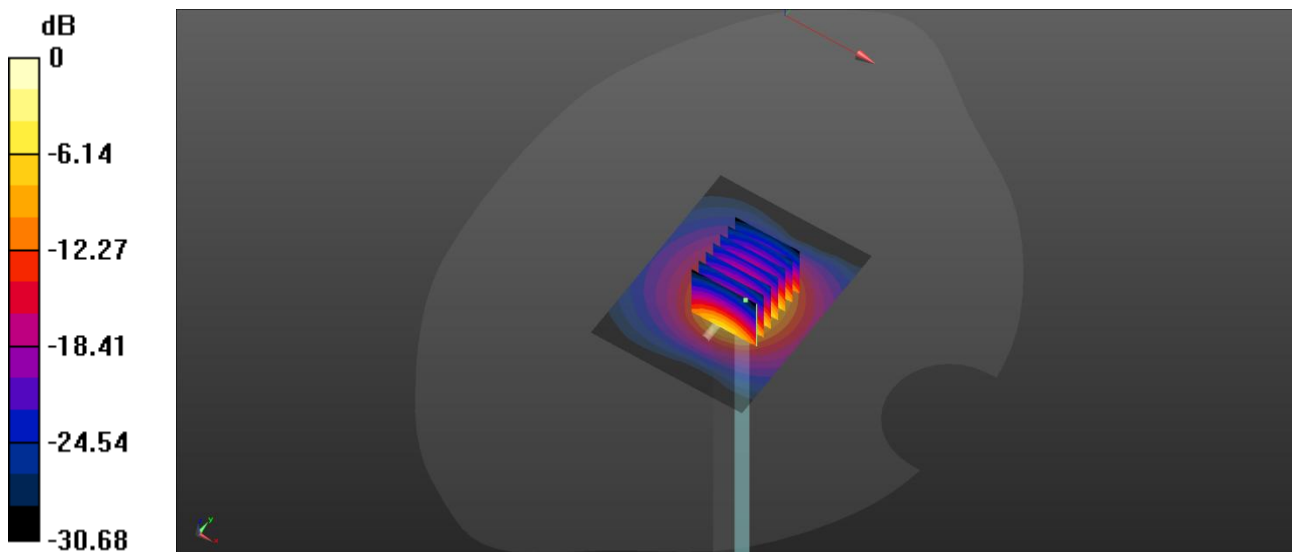

0 dB = 11.5 W/kg

System Check 3500

Date: 2025/12/28

Communication System Band: D3500 (3500.0 MHz); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.852$ S/m; $\epsilon_r = 38.313$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3500/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.69 W/kg

CW3500/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 21.05 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 18.1 W/kg

SAR(1 g) = 6.98 W/kg; SAR(10 g) = 2.64 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 45.7%

Maximum value of SAR (measured) = 12.1 W/kg

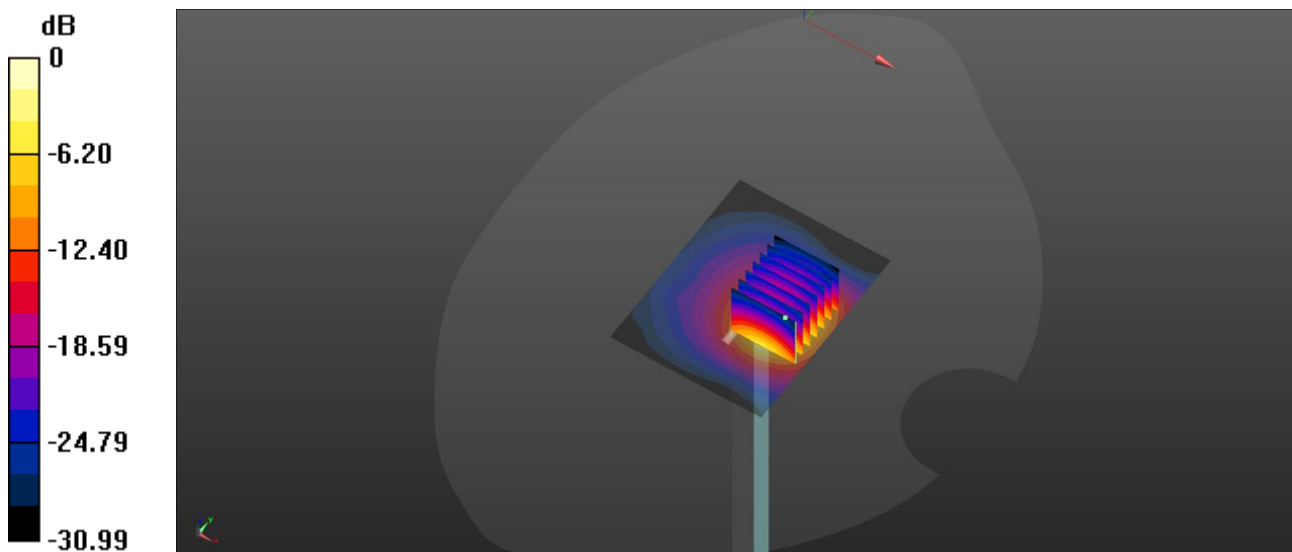

0 dB = 12.1 W/kg

System Check 3500

Date: 2025/12/29

Communication System Band: D3500 (3500.0 MHz); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.856$ S/m; $\epsilon_r = 38.217$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3500/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.90 W/kg

CW3500/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 21.19 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 18.7 W/kg

SAR(1 g) = 6.97 W/kg; SAR(10 g) = 2.74 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 45.7%

Maximum value of SAR (measured) = 12.5 W/kg

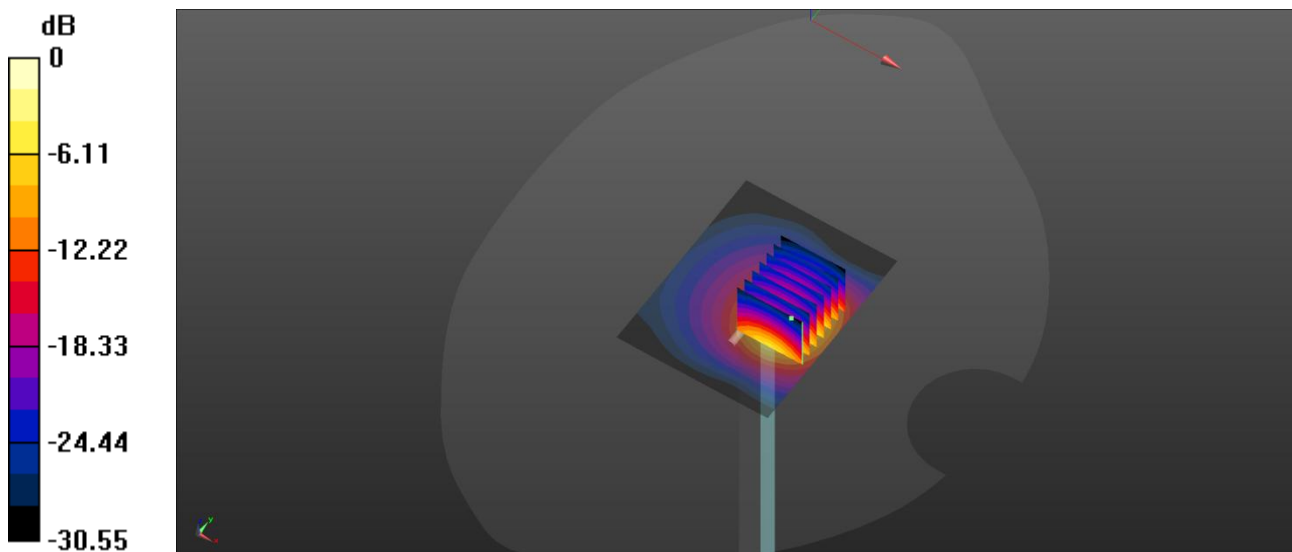

0 dB = 12.5 W/kg

System Check 3500

Date: 2025/12/31

Communication System Band: D3500 (3500.0 MHz); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.872$ S/m; $\epsilon_r = 38.634$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.7°C Liquid Temperature: 20.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3500/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.30 W/kg

CW3500/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 45.41 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 6.66 W/kg; SAR(10 g) = 2.52 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 45.6%

Maximum value of SAR (measured) = 11.5 W/kg

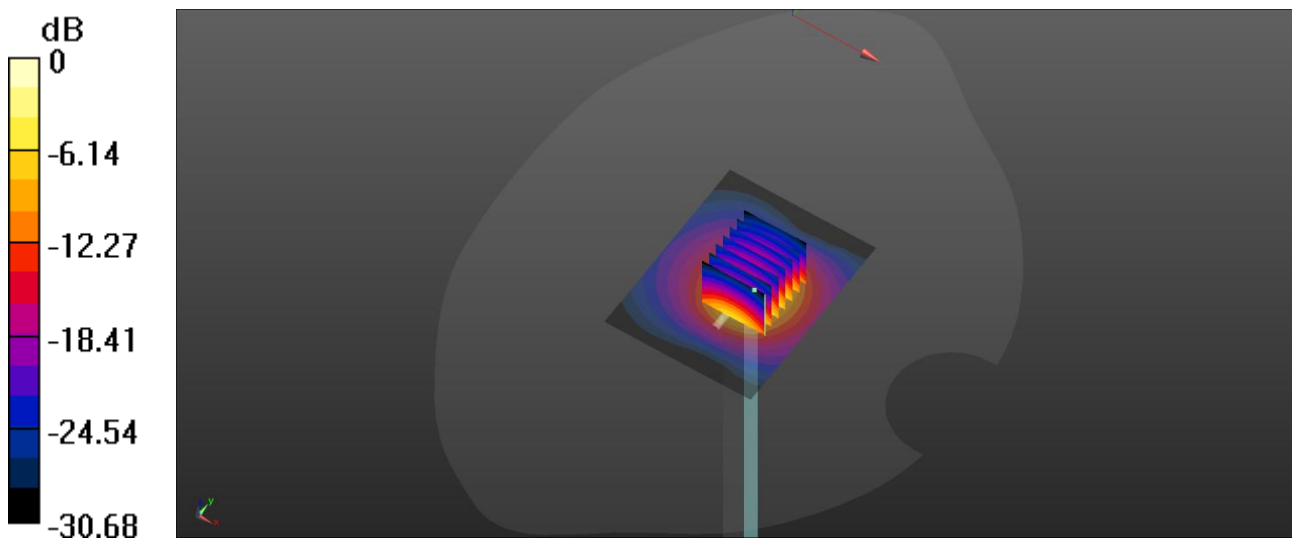

0 dB = 11.5 W/kg

System Check 3500

Date: 2026/1/3

Communication System Band: D3500 (3500.0 MHz); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.899$ S/m; $\epsilon_r = 37.711$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3500/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.15 W/kg

CW3500/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 65.75 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 14.2 W/kg

SAR(1 g) = 6.51 W/kg; SAR(10 g) = 2.72 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 54.4%

Maximum value of SAR (measured) = 10.4 W/kg

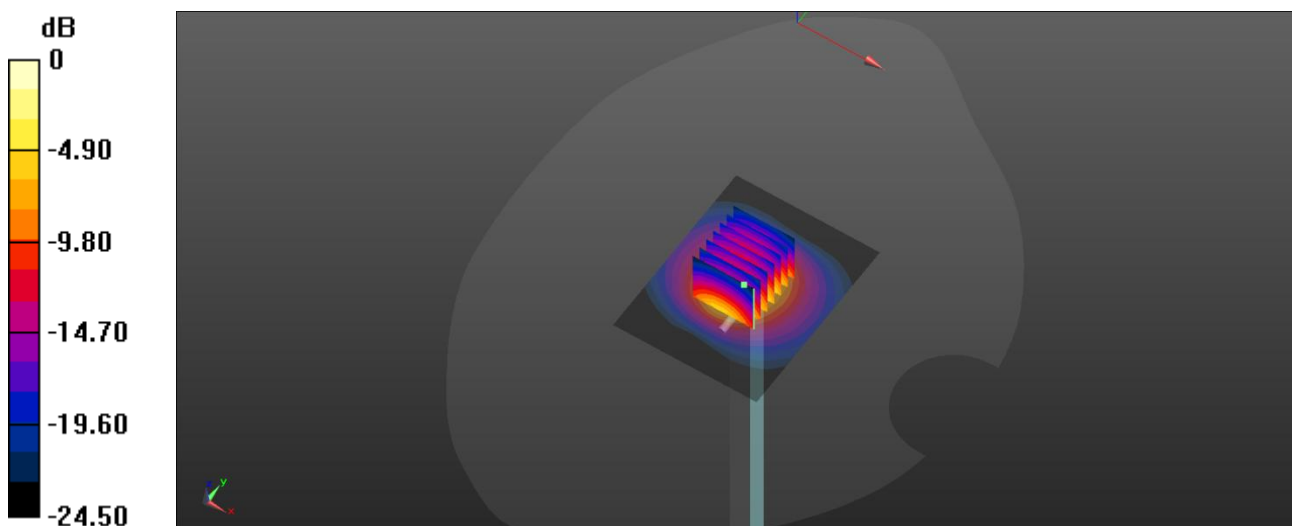

0 dB = 8.15 W/kg

System Check 3500

Date: 2026/1/5

Communication System Band: D3500 (3500.0 MHz); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.806$ S/m; $\epsilon_r = 36.829$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3500/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.28 W/kg

CW3500/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 65.68 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 14.4 W/kg

SAR(1 g) = 6.62 W/kg; SAR(10 g) = 2.76 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 54.5%

Maximum value of SAR (measured) = 10.6 W/kg

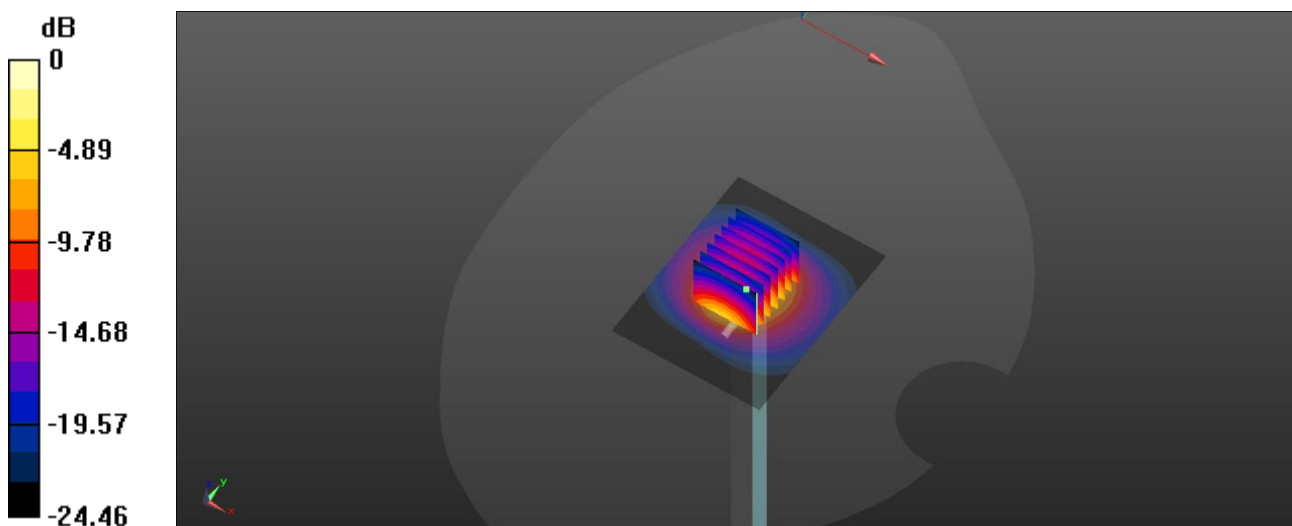

0 dB = 8.28 W/kg

System Check 3500

Date: 2026/1/14

Communication System Band: D3500 (3500.0 MHz); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.806$ S/m; $\epsilon_r = 36.829$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3500/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 11.2 W/kg

CW3500/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 77.07 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 19.2 W/kg

SAR(1 g) = 6.71 W/kg; SAR(10 g) = 2.66 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 54.5%

Maximum value of SAR (measured) = 14.1 W/kg

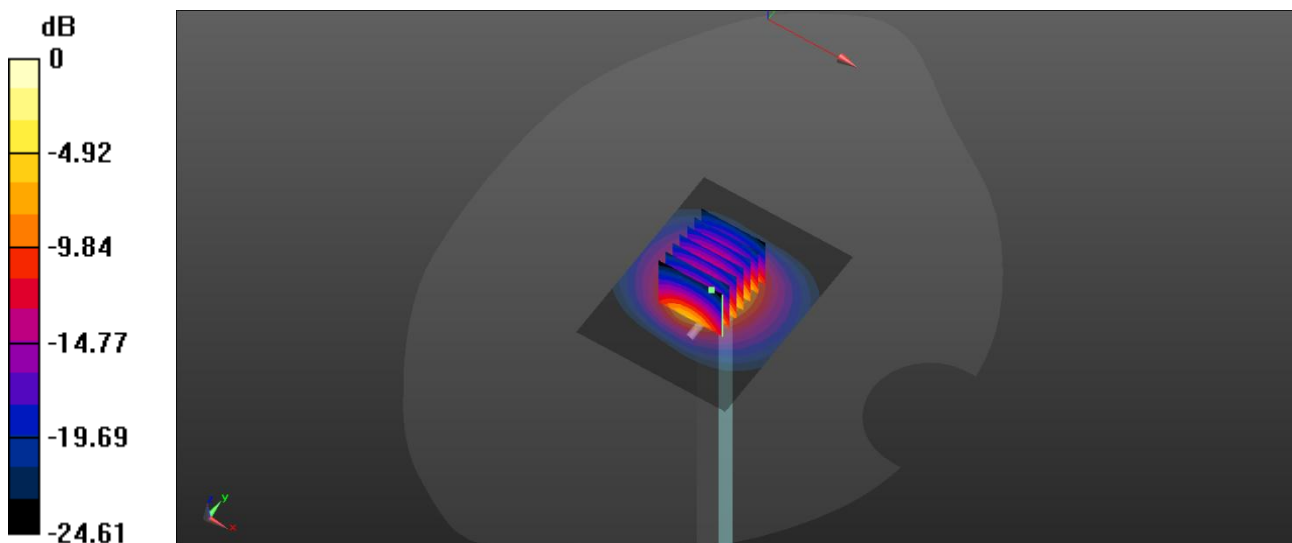

0 dB = 14.1 W/kg

System Check 3500

Date: 2026/1/16

Communication System Band: D3500 (3500.0 MHz); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.872$ S/m; $\epsilon_r = 38.634$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.8°C Liquid Temperature: 20.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3500/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.75 W/kg

CW3500/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 21.05 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 7.03 W/kg; SAR(10 g) = 2.66 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 45.7%

Maximum value of SAR (measured) = 12.2 W/kg

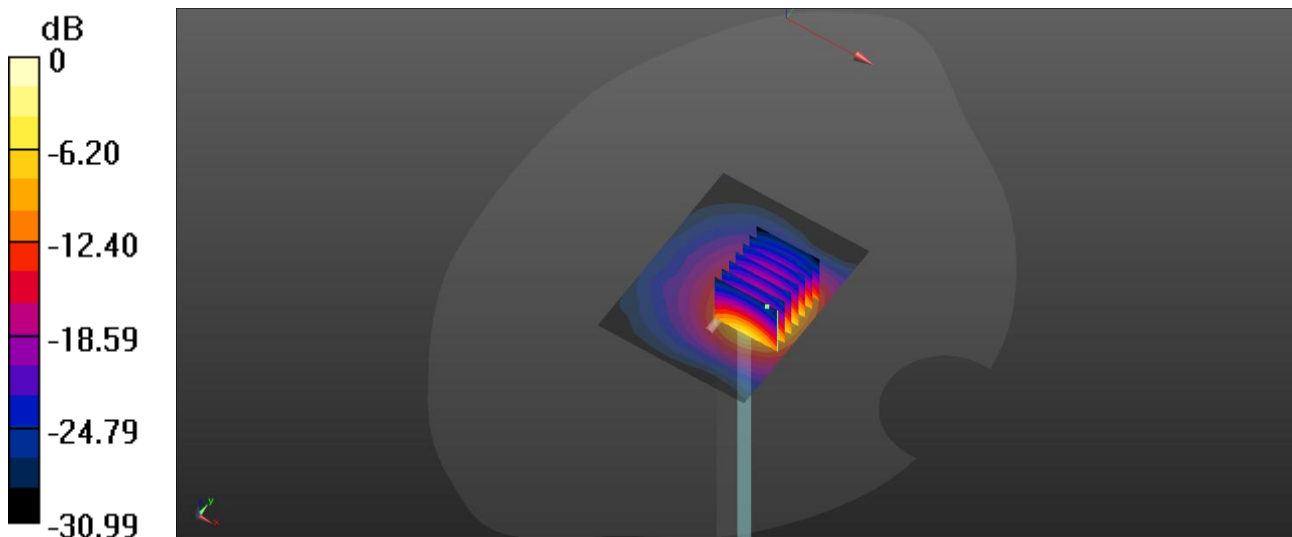

0 dB = 12.2 W/kg

System Check 3700

Date: 2025/12/29

Communication System Band: D3700 (3700.0 MHz); Frequency: 3700 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3700$ MHz; $\sigma = 3.055$ S/m; $\epsilon_r = 38.271$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3700/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.25 W/kg

CW3700/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 38.76 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 17.6 W/kg

SAR(1 g) = 6.56 W/kg; SAR(10 g) = 2.41 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 43.9%

Maximum value of SAR (measured) = 11.5 W/kg

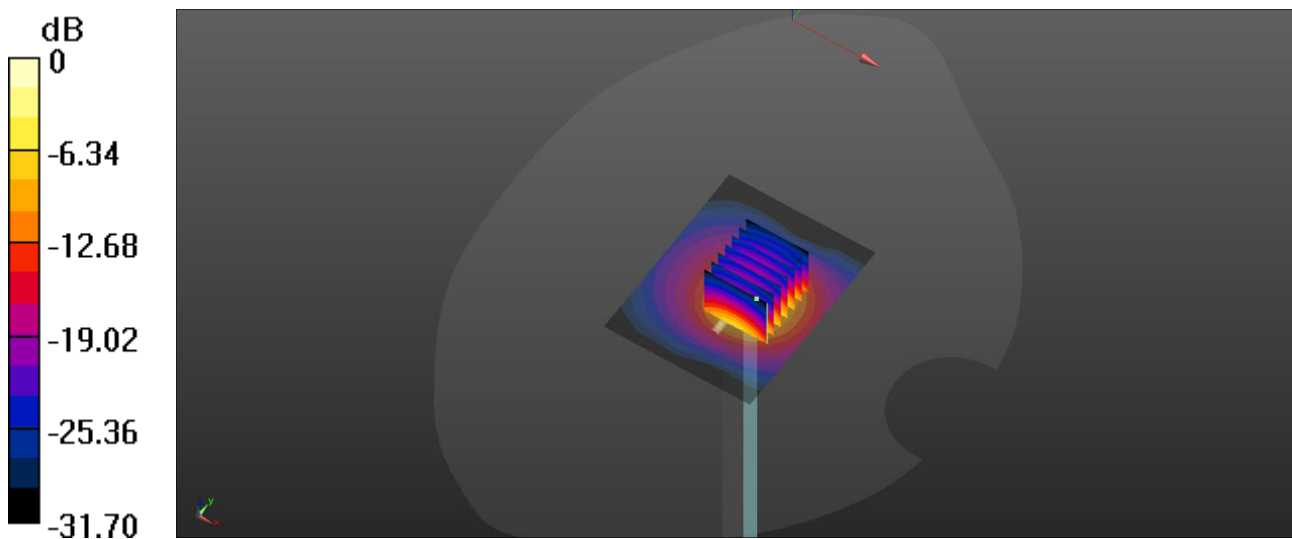

0 dB = 11.5 W/kg

System Check 3700

Date: 2025/12/31

Communication System Band: D3700 (3700.0 MHz); Frequency: 3700 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3700$ MHz; $\sigma = 3.055$ S/m; $\epsilon_r = 38.271$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.7°C Liquid Temperature: 20.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3700/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.64 W/kg

CW3700/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 40.27 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 6.87 W/kg; SAR(10 g) = 2.53 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 43.8%

Maximum value of SAR (measured) = 12.1 W/kg

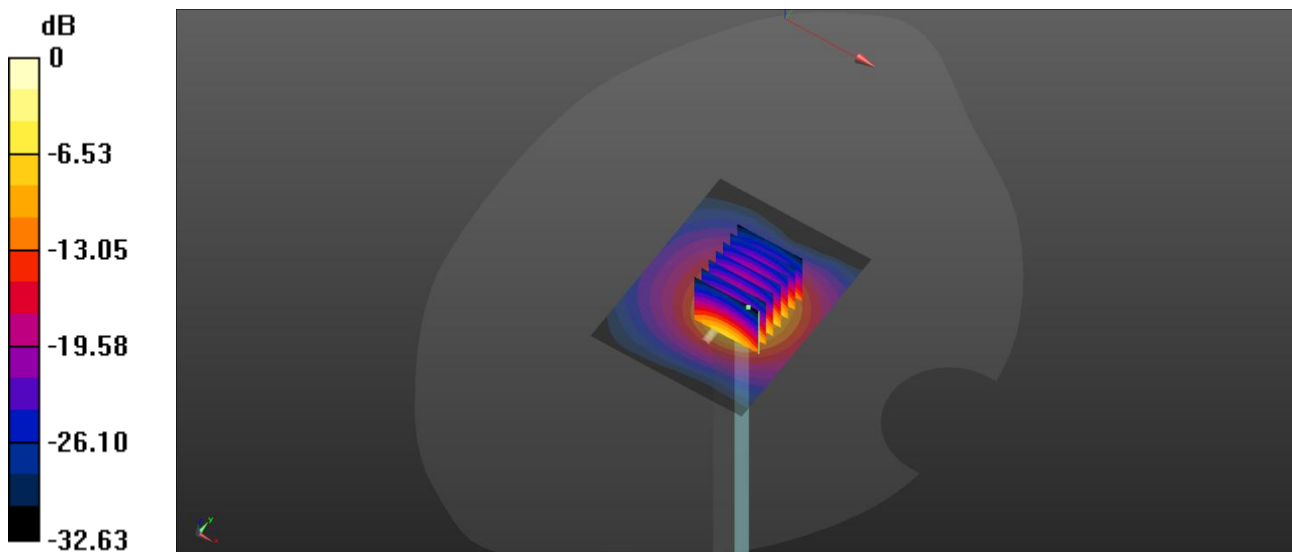

0 dB = 12.1 W/kg

System Check 3700

Date: 2026/1/1

Communication System Band: D3700 (3700.0 MHz); Frequency: 3700 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3700$ MHz; $\sigma = 3.021$ S/m; $\epsilon_r = 36.751$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.11, 7.11, 7.11); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3700/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.51 W/kg

CW3700/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 69.94 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 15.3 W/kg

SAR(1 g) = 6.62 W/kg; SAR(10 g) = 2.59 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 51.6%

Maximum value of SAR (measured) = 10.9 W/kg

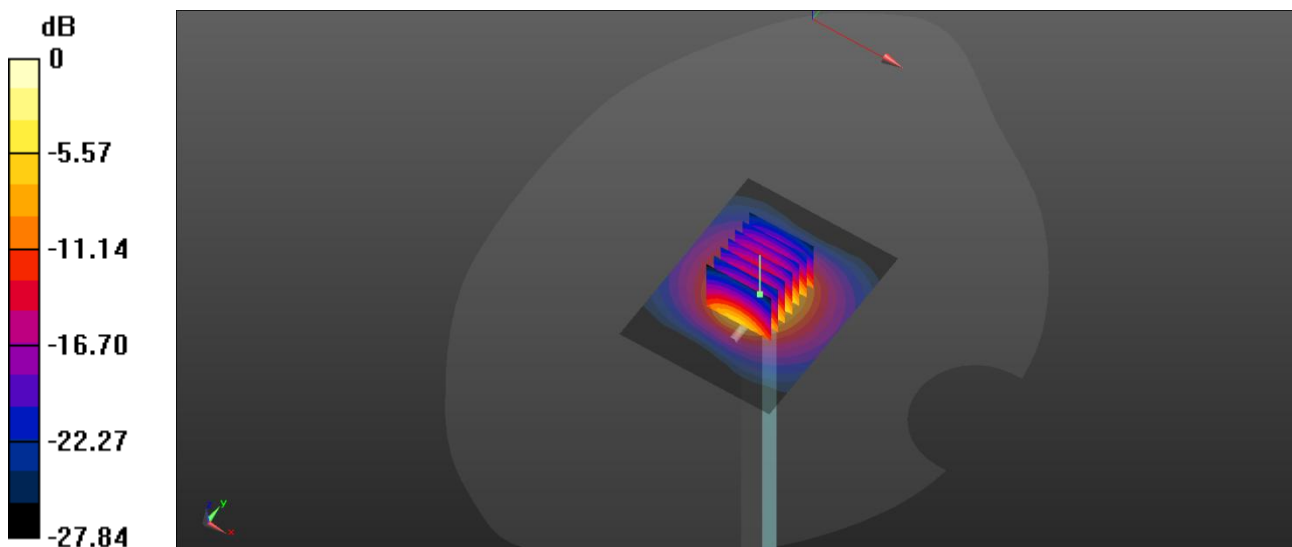

0 dB = 10.9 W/kg

System Check 3700

Date: 2026/1/2

Communication System Band: D3700 (3700.0 MHz); Frequency: 3700 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3700$ MHz; $\sigma = 3.069$ S/m; $\epsilon_r = 36.624$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.11, 7.11, 7.11); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3700/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.37 W/kg

CW3700/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 66.66 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 15.4 W/kg

SAR(1 g) = 6.59 W/kg; SAR(10 g) = 2.57 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 11.0 W/kg

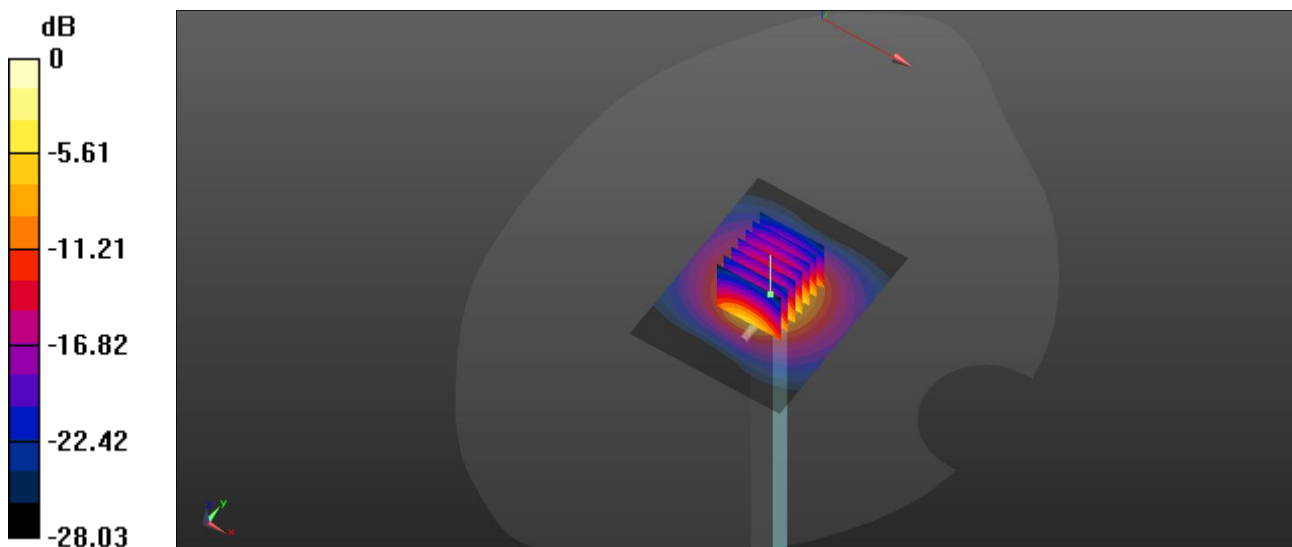

0 dB = 11.0 W/kg

System Check 3700

Date: 2026/1/14

Communication System Band: D3700 (3700.0 MHz); Frequency: 3700 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3700$ MHz; $\sigma = 2.992$ S/m; $\epsilon_r = 36.449$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.11, 7.11, 7.11); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3700/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.68 W/kg

CW3700/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 69.94 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 15.6 W/kg

SAR(1 g) = 6.75 W/kg; SAR(10 g) = 2.64 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 51.6%

Maximum value of SAR (measured) = 11.2 W/kg

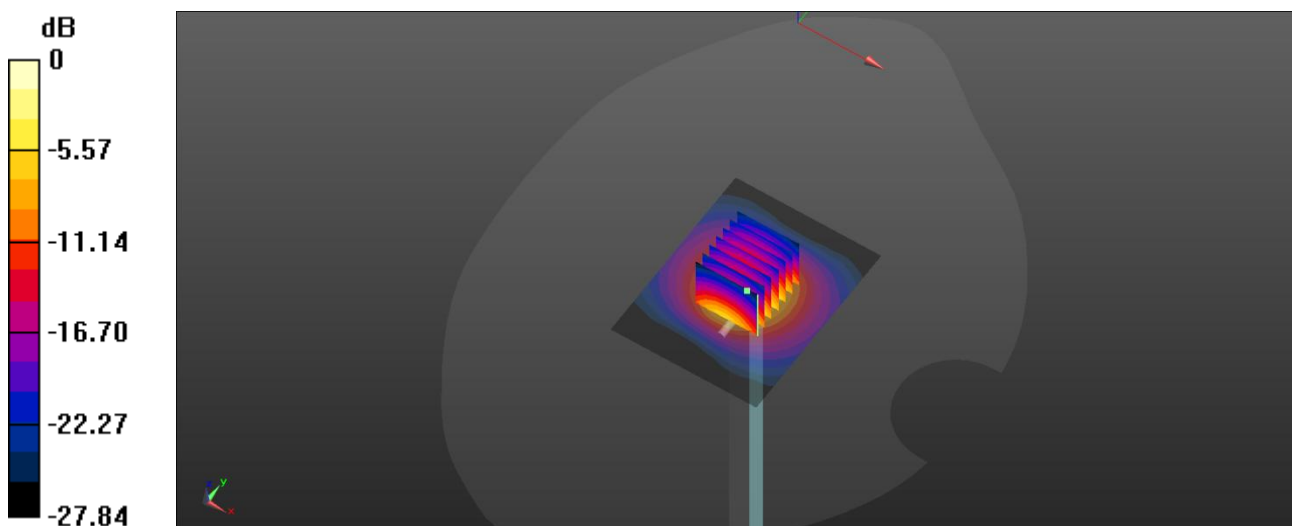

0 dB = 8.68 W/kg

System Check 3700

Date: 2026/1/16

Communication System Band: D3700 (3700.0 MHz); Frequency: 3700 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3700$ MHz; $\sigma = 3.055$ S/m; $\epsilon_r = 38.271$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.8°C Liquid Temperature: 20.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3700/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.25 W/kg

CW3700/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 38.76 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 17.6 W/kg

SAR(1 g) = 6.56 W/kg; SAR(10 g) = 2.41 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 43.9%

Maximum value of SAR (measured) = 11.5 W/kg

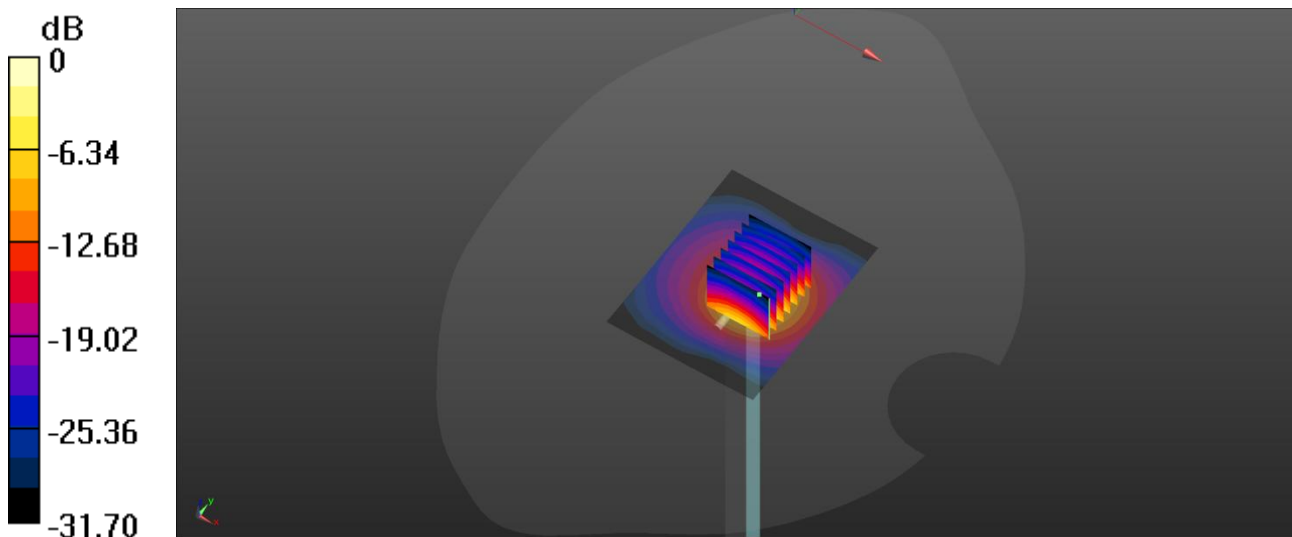

0 dB = 11.5 W/kg

System Check 3700

Date: 2026/2/2

Communication System Band: D3700 (3700.0 MHz); Frequency: 3700 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3700$ MHz; $\sigma = 2.998$ S/m; $\epsilon_r = 36.816$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.8°C Liquid Temperature: 21°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3700/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 7.69 W/kg

CW3700/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 38.65 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 6.15 W/kg; SAR(10 g) = 2.27 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 43.8%

Maximum value of SAR (measured) = 10.8 W/kg

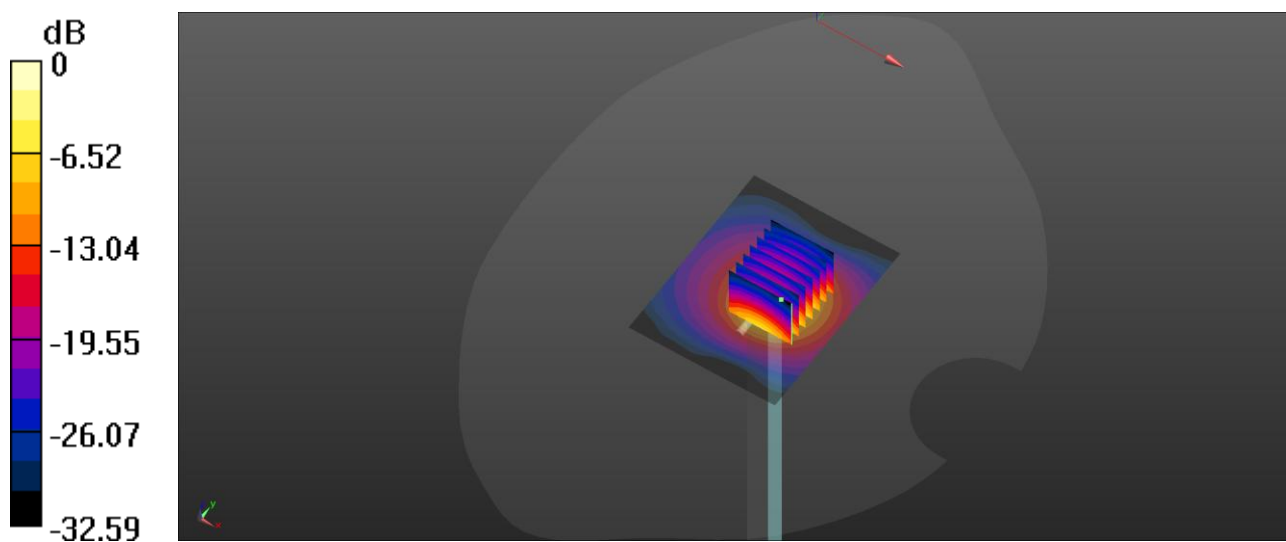

0 dB = 10.8 W/kg

System Check 3700

Date: 2026/2/3

Communication System Band: D3700 (3700.0 MHz); Frequency: 3700 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3700$ MHz; $\sigma = 3.034$ S/m; $\epsilon_r = 38.772$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3700/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.58 W/kg

CW3700/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 40.27 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 18.4 W/kg

SAR(1 g) = 6.83 W/kg; SAR(10 g) = 2.52 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 43.8%

Maximum value of SAR (measured) = 12.0 W/kg

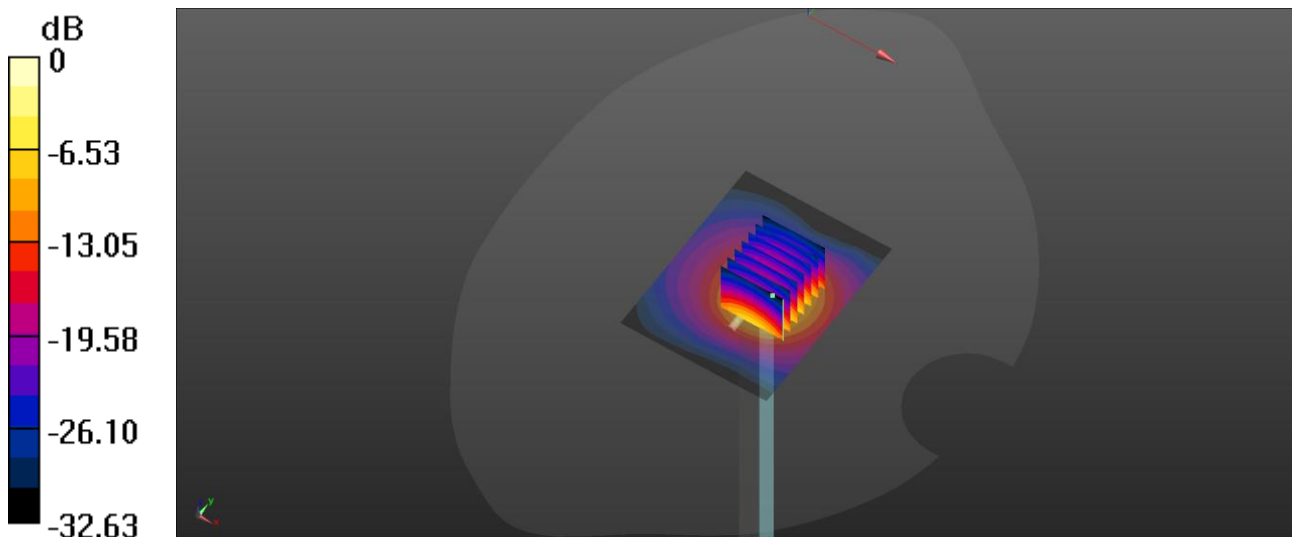

0 dB = 12.0 W/kg

System Check 3900

Date: 2026/1/14

Communication System Band: D3900 (3900.0 MHz); Frequency: 3900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3900$ MHz; $\sigma = 3.313$ S/m; $\epsilon_r = 36.579$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(6.97, 6.97, 6.97); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3900/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.93 W/kg

CW3900/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 67.73 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 16.2 W/kg

SAR(1 g) = 6.85 W/kg; SAR(10 g) = 2.6 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 50.9%

Maximum value of SAR (measured) = 11.5 W/kg

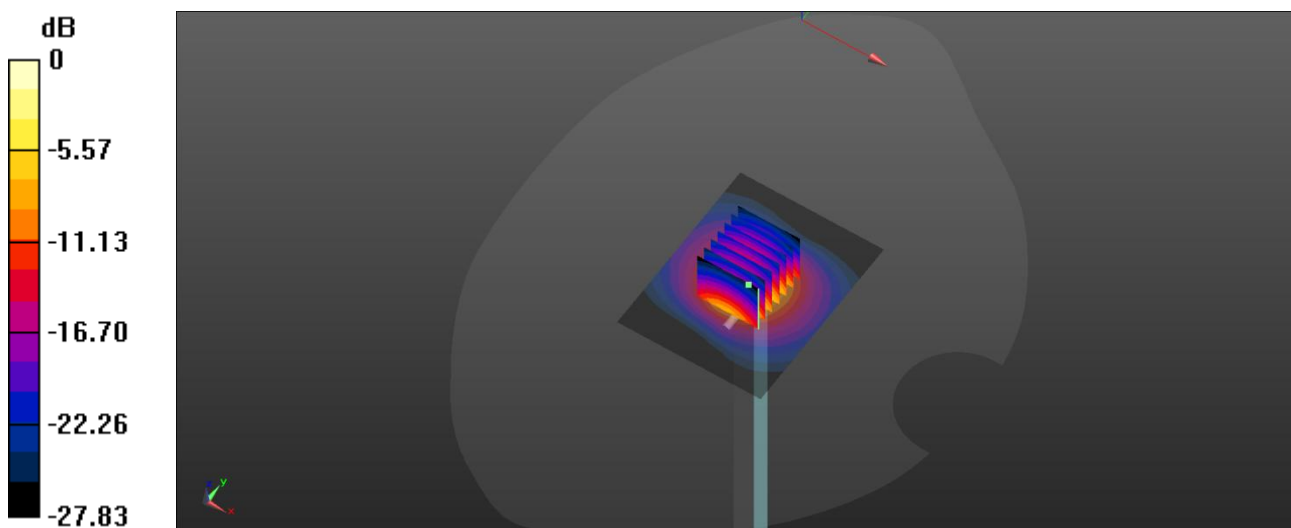

0 dB = 11.5 W/kg

System Check 3900

Date: 2026/1/16

Communication System Band: D3900 (3900.0 MHz); Frequency: 3900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3900$ MHz; $\sigma = 3.245$ S/m; $\epsilon_r = 37.948$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.8°C Liquid Temperature: 20.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(5.98, 5.98, 5.98); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW3900/Area Scan (71x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 7.84 W/kg

CW3900/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 38.63 V/m; Power Drift = -0.17 dB


Peak SAR (extrapolated) = 17.9 W/kg

SAR(1 g) = 6.26 W/kg; SAR(10 g) = 2.19 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 41.8%

Maximum value of SAR (measured) = 11.3 W/kg

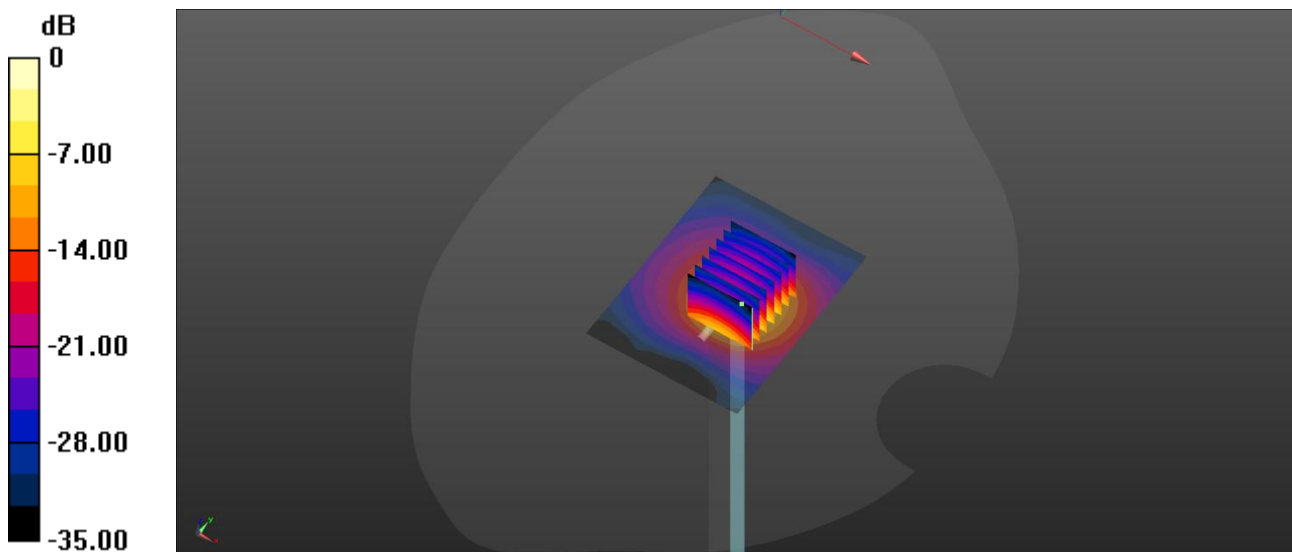

0 dB = 11.3 W/kg

System Check 5200

Date: 2025/12/26

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.542$ S/m; $\epsilon_r = 35.204$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(5, 5, 5); Calibrated: 2025/4/24
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW 5200/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 15.3 W/kg


CW 5200/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 29.03 V/m; Power Drift = -0.20 dB
Peak SAR (extrapolated) = 30.3 W/kg

SAR(1 g) = 7.23 W/kg; SAR(10 g) = 2.07 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 15.1 W/kg

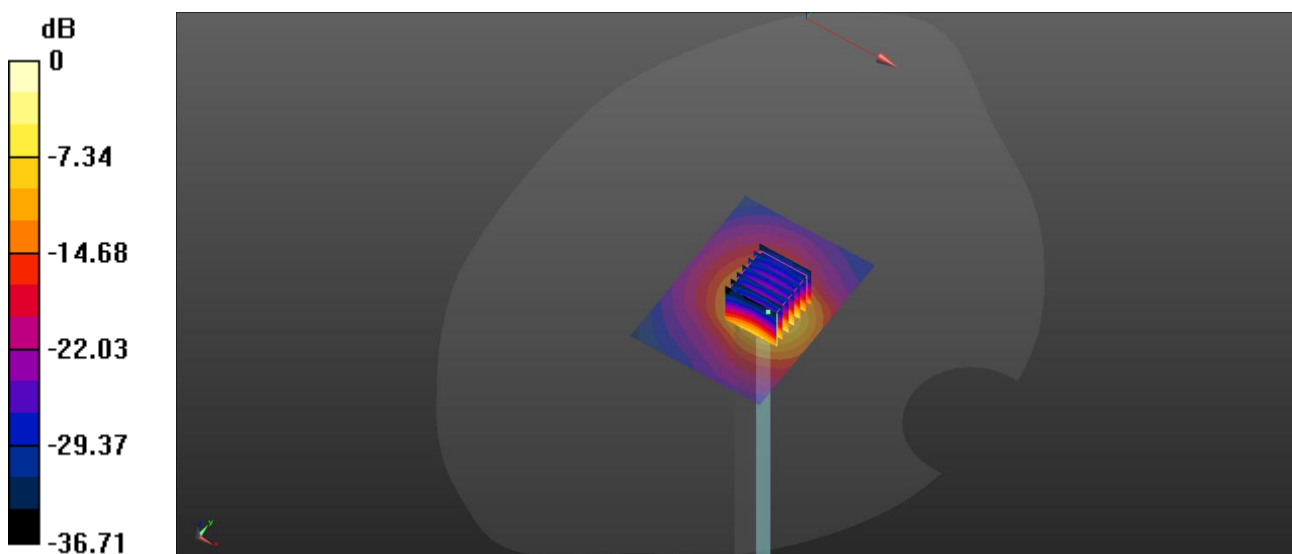

0 dB = 15.1 W/kg

System Check 5300

Date: 2026/1/17

Communication System Band: D5GHz; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.873$ S/m; $\epsilon_r = 34.986$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.56, 5.56, 5.56); Calibrated: 2025/6/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW5300/Area Scan (61x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.8 W/kg

CW5300/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 70.69 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 30.8 W/kg

SAR(1 g) = 7.51 W/kg; SAR(10 g) = 2.15 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 15.1 W/kg

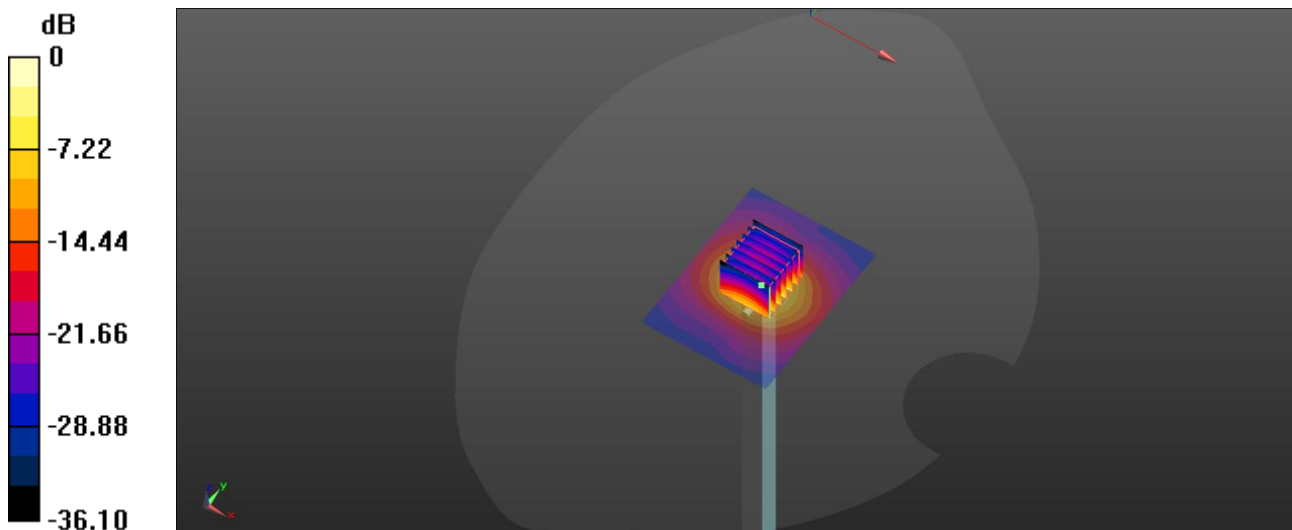

0 dB = 15.1 W/kg

System Check 5600

Date: 2026/1/18

Communication System Band: D5GHz; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.255$ S/m; $\epsilon_r = 34.513$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.05, 5.05, 5.05); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW5600/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 21.4 W/kg

CW5600/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 66.88 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 31.4 W/kg

SAR(1 g) = 9.09 W/kg; SAR(10 g) = 2.62 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 59.8%

Maximum value of SAR (measured) = 18.1 W/kg

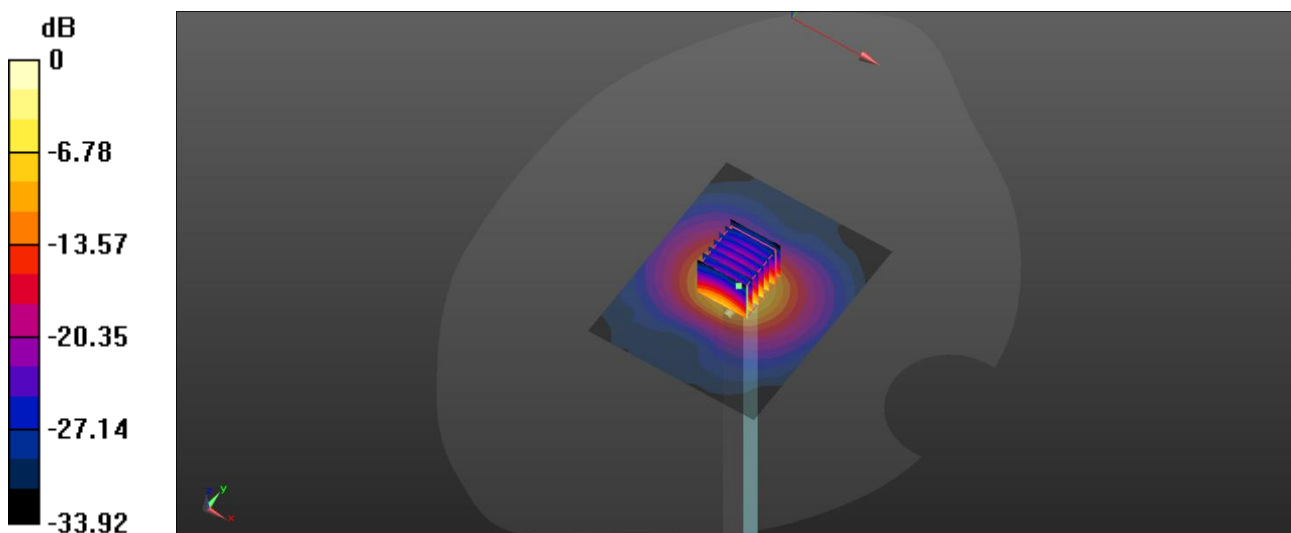

0 dB = 18.1 W/kg

System Check 5800

Date: 2026/1/13

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.453$ S/m; $\epsilon_r = 34.164$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.14, 5.14, 5.14); Calibrated: 2025/6/5
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

CW5800/Area Scan (81x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 15.0 W/kg

CW5800/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 14.84 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 32.1 W/kg

SAR(1 g) = 7.87 W/kg; SAR(10 g) = 2.29 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 50.2%

Maximum value of SAR (measured) = 15.3 W/kg

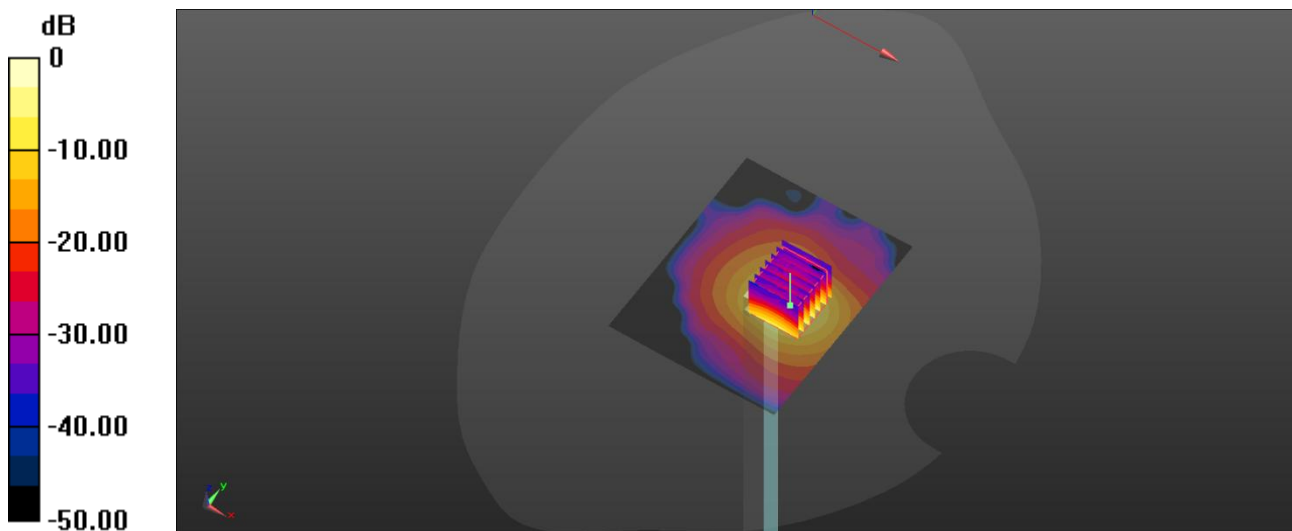

0 dB = 15.3 W/kg