

Meas1.Head Left cheek GSM 850 Ch190 ANT5

Date: 2025/12/20

Communication System Band: GPRS850; Frequency: 836.6 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 40.918$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch190/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.618 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.64 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.793 W/kg

SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.315 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 0.636 W/kg

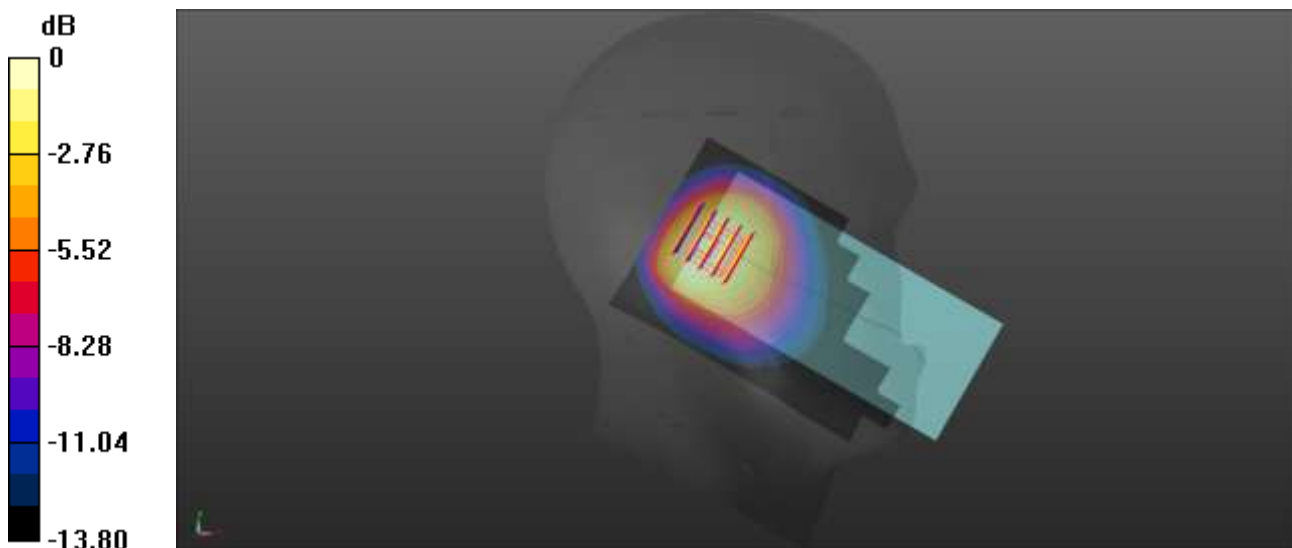

0 dB = 0.636 W/kg

Meas2.Body-worn&Hotspot Top side 10mm GSM 850 Ch190 ANT5

Date: 2025/12/20

Communication System Band: GPRS850; Frequency: 836.6 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 40.918$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch190/Area Scan (51x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.243 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.58 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.301 W/kg

SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.066 W/kg

Smallest distance from peaks to all points 3 dB below = 15.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.9%

Maximum value of SAR (measured) = 0.239 W/kg

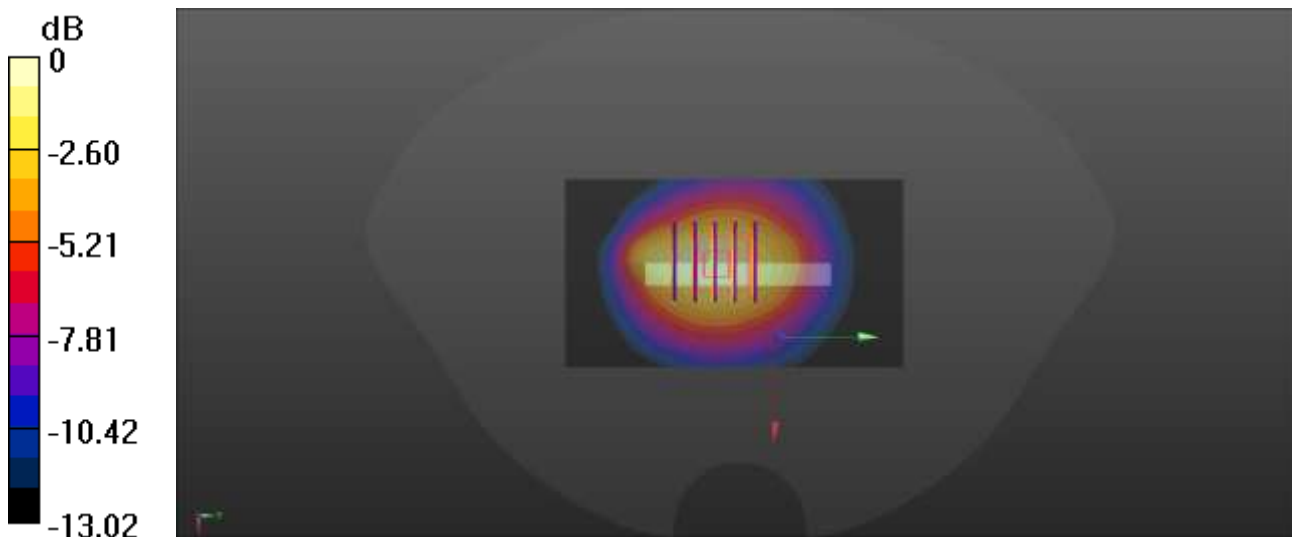

0 dB = 0.239 W/kg

Meas3.Head Right cheek GSM 1900 Ch661 ANT5

Date: 2025/12/24

Communication System Band: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 38.133$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.53, 8.53, 8.53); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.353 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.212 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.532 W/kg

SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.117 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 49.3%

Maximum value of SAR (measured) = 0.442 W/kg

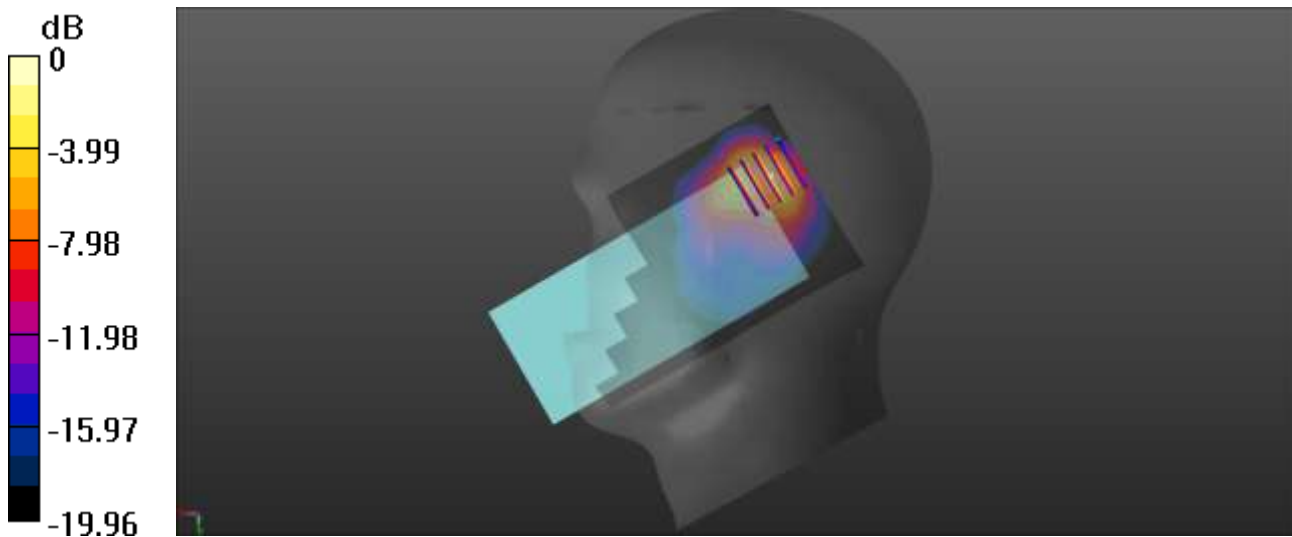

0 dB = 0.442 W/kg

Meas4.Body-worn&Hotspot Top side 10mm GSM 1900 Ch661 ANT5

Date: 2025/12/24

Communication System Band: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 38.133$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.53, 8.53, 8.53); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Area Scan (51x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.285 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.154 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.350 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.084 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.4%

Maximum value of SAR (measured) = 0.284 W/kg

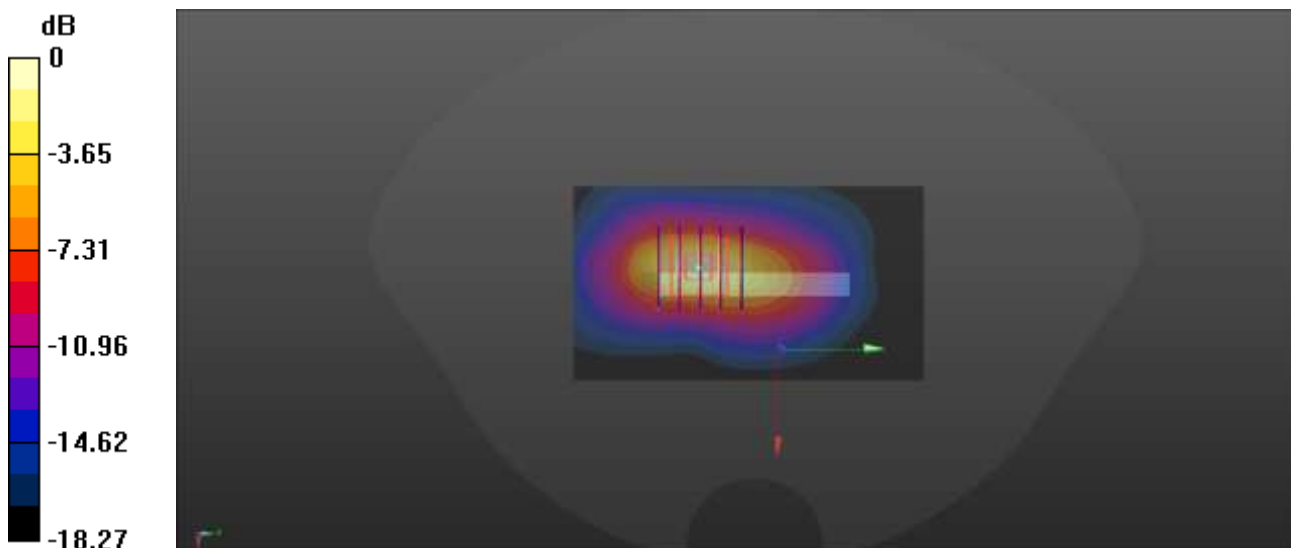

0 dB = 0.284 W/kg

Meas5.Head Right cheek WCDMA B2 Ch9400 ANT5

Date: 2026/1/19

Communication System Band: II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.176$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.53, 8.53, 8.53); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9400/Area Scan (81x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.888 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.463 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.536 W/kg; SAR(10 g) = 0.245 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 48.7%

Maximum value of SAR (measured) = 0.940 W/kg

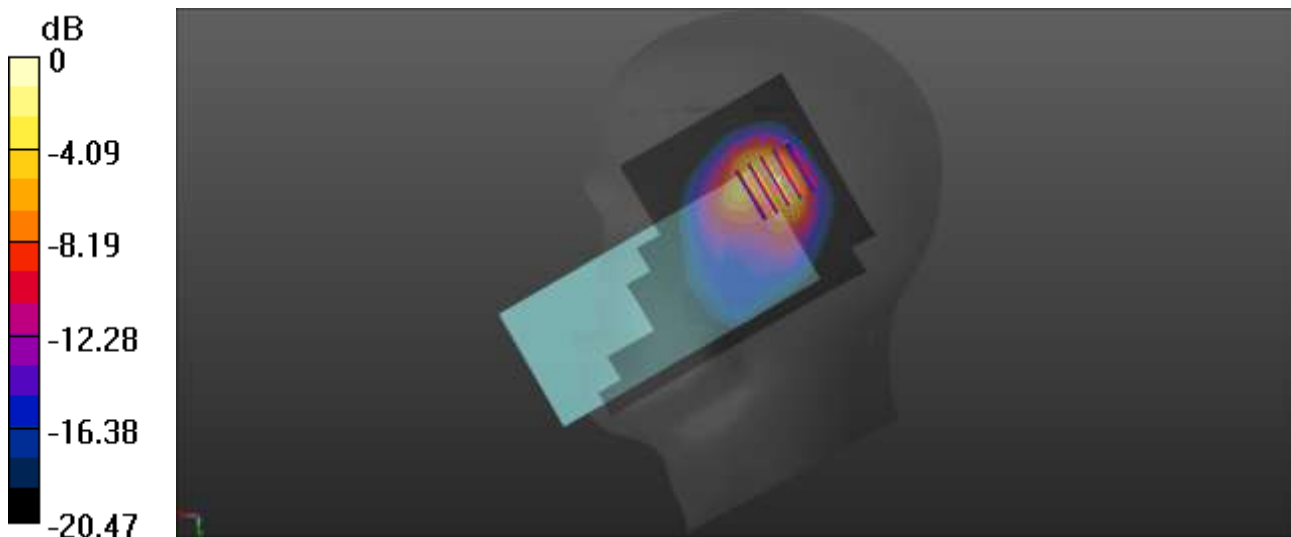

0 dB = 0.940 W/kg

Meas6.Body-worn&Hotspot Top side 10mm WCDMA B2 Ch9400 ANT5

Date: 2026/1/19

Communication System Band: II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.434$ S/m; $\epsilon_r = 39.176$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.53, 8.53, 8.53); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9400/Area Scan (51x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.485 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.151 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.607 W/kg

SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.144 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 0.492 W/kg

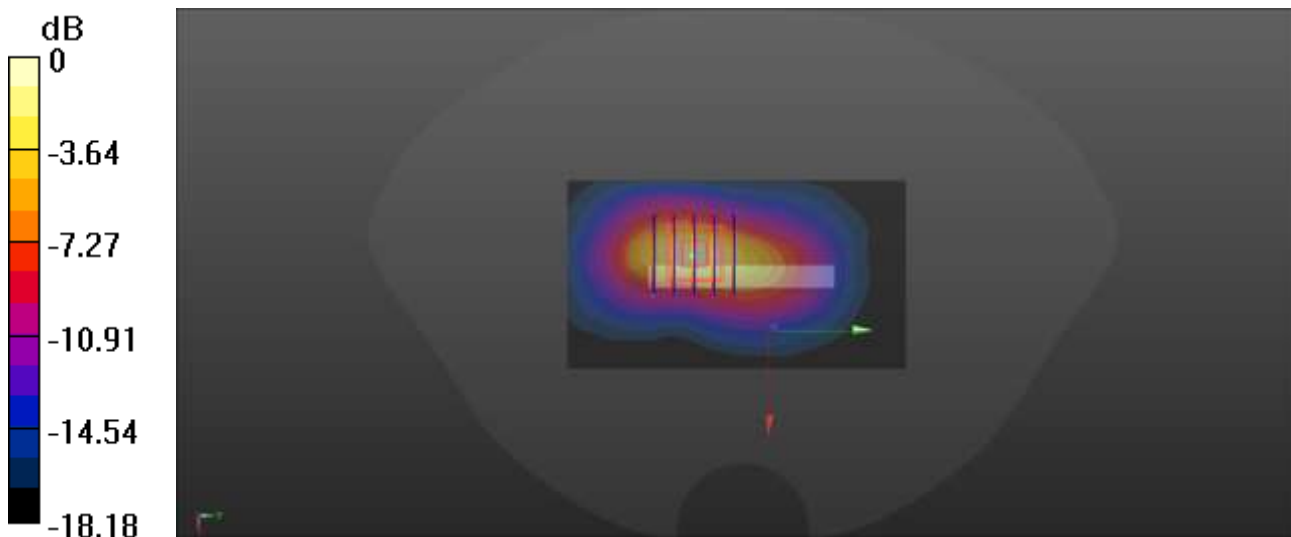

0 dB = 0.492 W/kg

Meas7.Head Right cheek WCDMA B4 Ch1413 ANT5

Date: 2026/1/5

Communication System Band: IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.322$ S/m; $\epsilon_r = 39.948$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1413/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.847 W/kg

Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 10.82 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.674 W/kg; SAR(10 g) = 0.312 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 1.11 W/kg

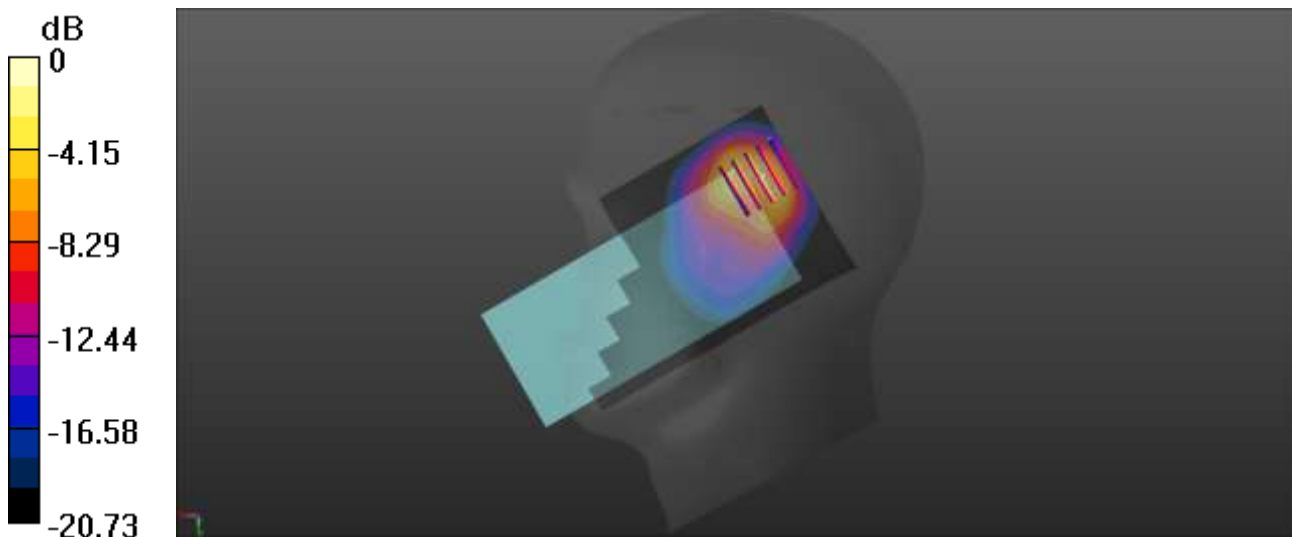

0 dB = 1.11 W/kg

Meas8.Body-worn&Hotspot Top side 10mm WCDMA B4 Ch1413 ANT5

Date: 2026/1/5

Communication System Band: Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.322$ S/m; $\epsilon_r = 39.948$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8.87, 8.87, 8.87); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1413/Area Scan (51x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.447 W/kg

Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.627 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.282 W/kg; SAR(10 g) = 0.137 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 0.450 W/kg

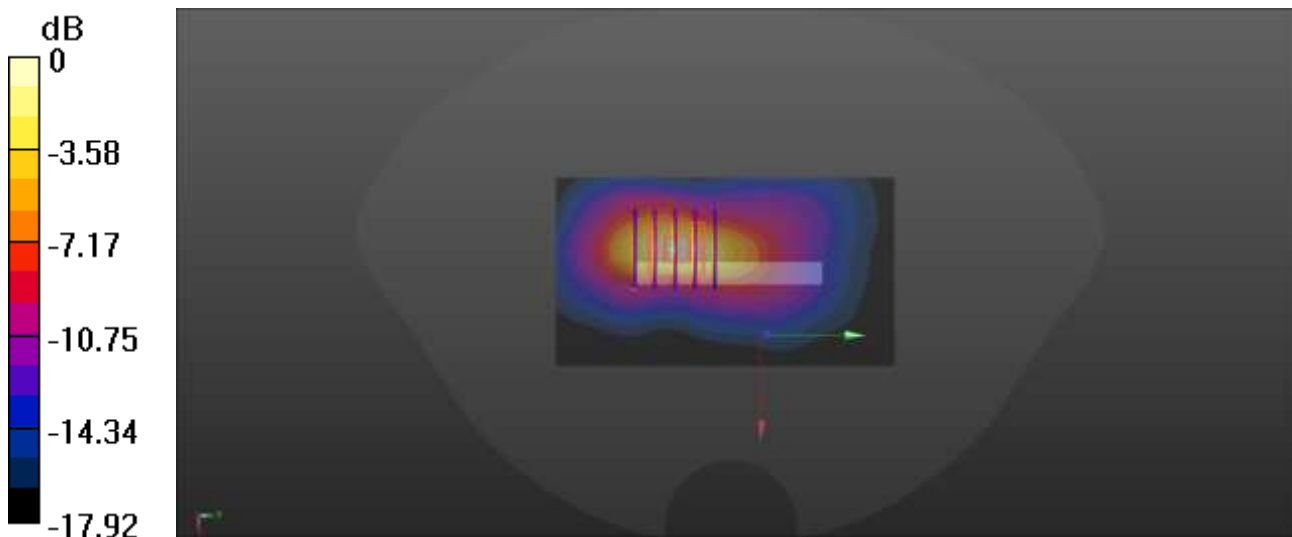

0 dB = 0.450 W/kg

Meas9.Head Right cheek WCDMA B5 Ch4182 ANT5

Date: 2026/2/3

Communication System Band: V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.322$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4182/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.36 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 21.41 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.775 W/kg; SAR(10 g) = 0.490 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 42.9%

Maximum value of SAR (measured) = 1.25 W/kg

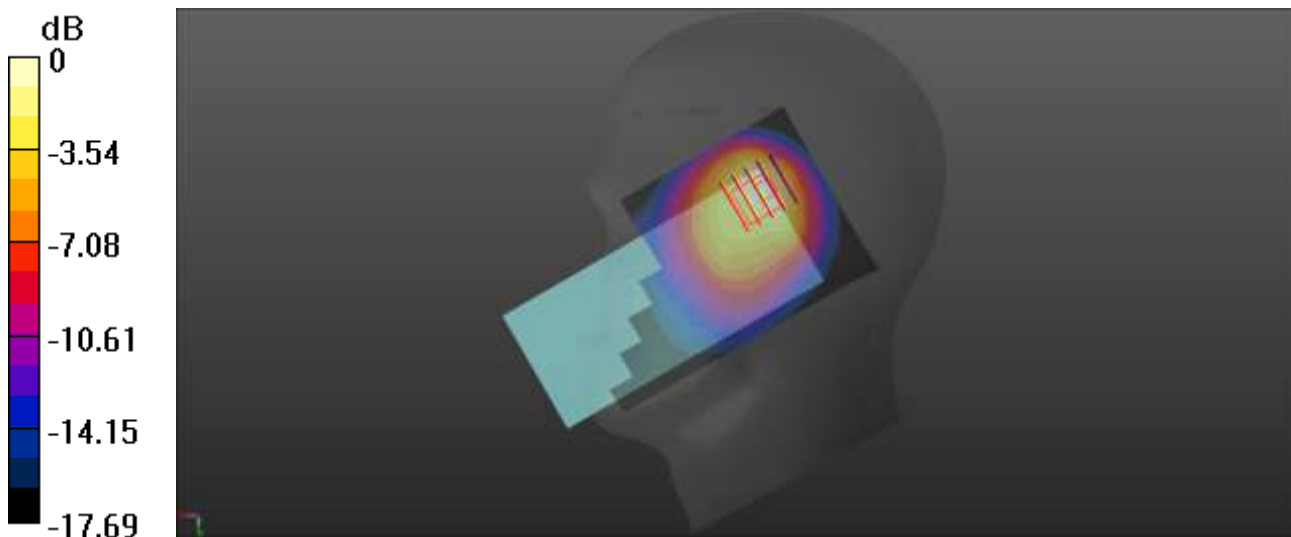

0 dB = 1.25 W/kg

Meas10.Body-worn&Hotspot Top side 10mm WCDMA B5 Ch4182 ANT5

Date: 2026/2/3

Communication System Band: Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 42.611$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4182/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.246 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.21 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.8%

Maximum value of SAR (measured) = 0.247 W/kg

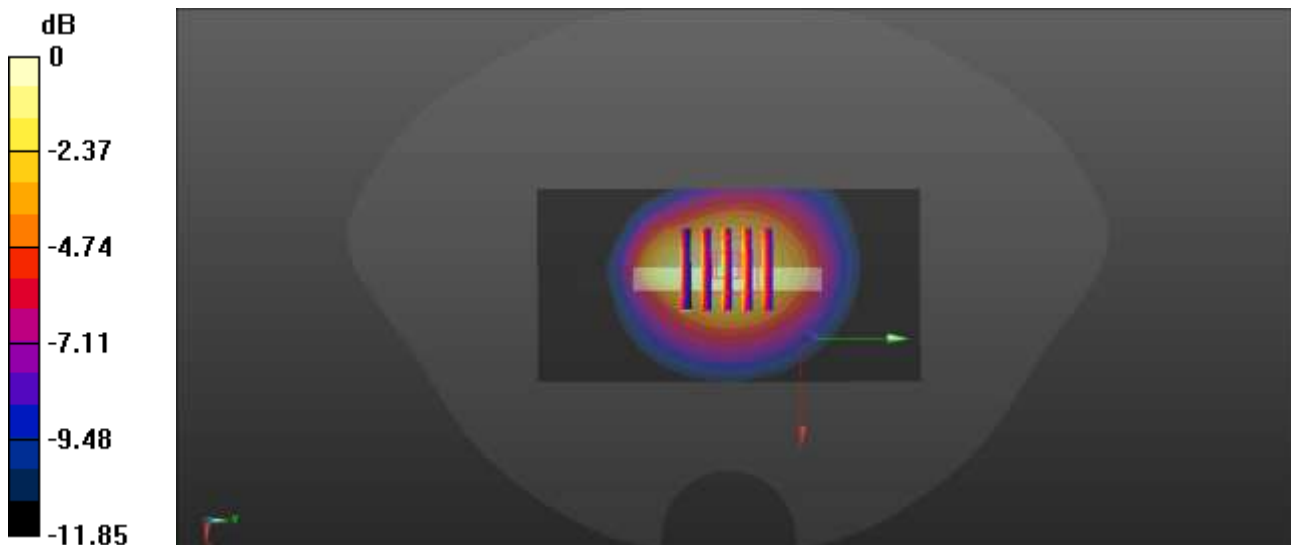

0 dB = 0.246 W/kg

Meas11.Head Right cheek LTE B2 Ch18900 ANT5

Date: 2026/2/2

Communication System Band: Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.431$ S/m; $\epsilon_r = 38.93$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 21.8°C Liquid Temperature: 20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch18900/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.926 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.412 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.600 W/kg; SAR(10 g) = 0.278 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 49.3%

Maximum value of SAR (measured) = 1.04 W/kg

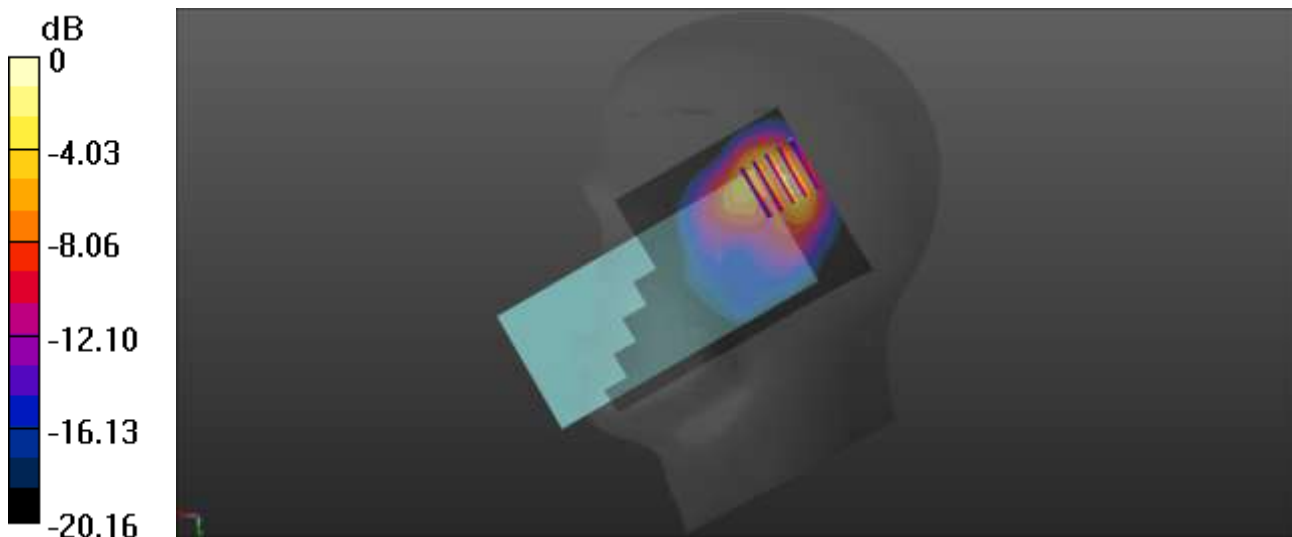

0 dB = 1.04 W/kg

Meas12.Body-worn&Hotspot Top side 10mm LTE B2 Ch18900 ANT5

Date: 2026/2/2

Communication System Band: Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.431$ S/m; $\epsilon_r = 38.93$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.8°C Liquid Temperature: 20.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch18900/Area Scan (51x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.529 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.563 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.652 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.169 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

Maximum value of SAR (measured) = 0.538 W/kg

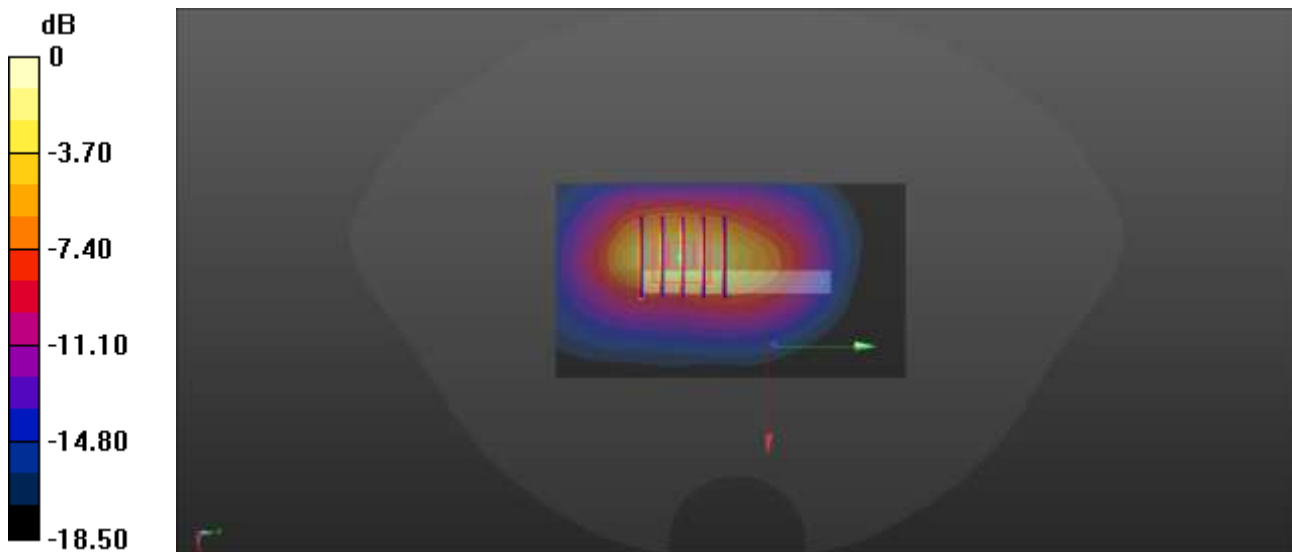

0 dB = 0.538 W/kg

Meas13.Head Right cheek LTE B5 Ch20525 ANT5

Date: 2025/12/19

Communication System Band: Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.177$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch20525/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.671 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.91 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.840 W/kg

SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.224 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 41.9%

Maximum value of SAR (measured) = 0.600 W/kg

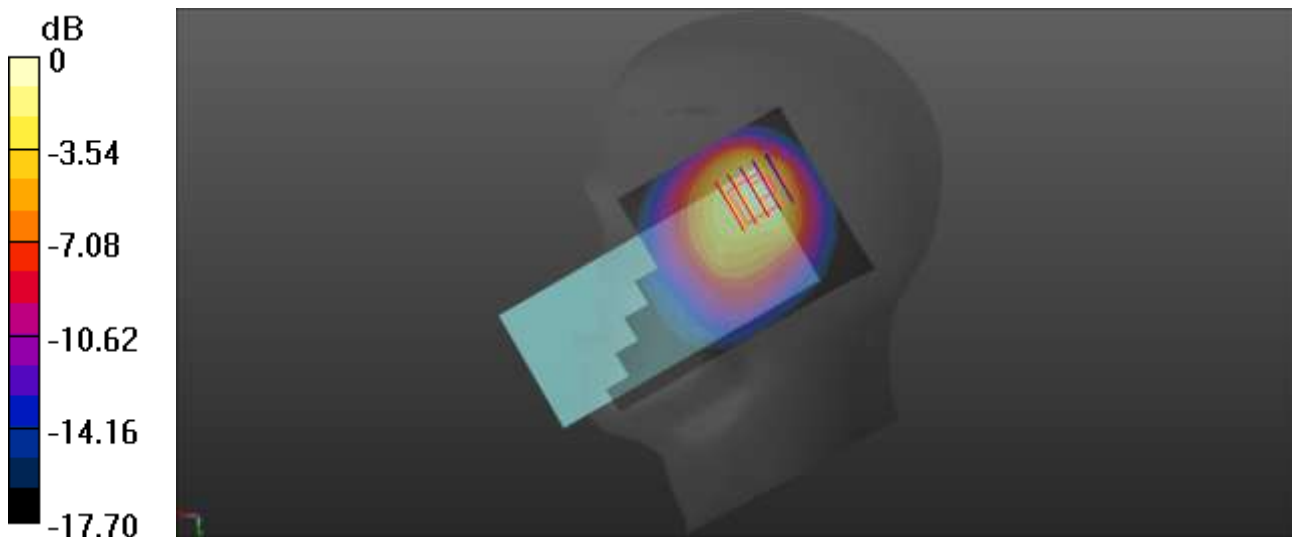

0 dB = 0.600 W/kg

Meas14.Body-worn&Hotspot Top side 10mm LTE B5 Ch20525 ANT5

Date: 2025/12/19

Communication System Band: Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.177$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch20525/Area Scan (51x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.145 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.140 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.5%

Maximum value of SAR (measured) = 0.144 W/kg

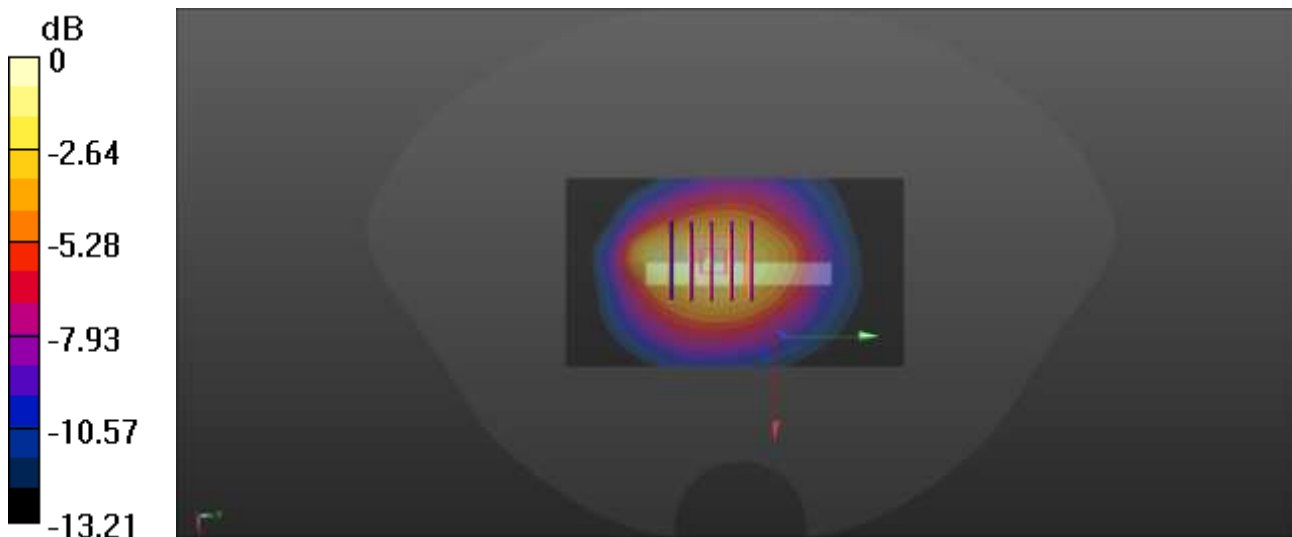

0 dB = 0.144 W/kg

Meas15.Head Left tilt LTE B7 Ch21100 ANT5

Date: 2025/12/27

Communication System Band: Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 38.201$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 21.9°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21100/Area Scan (91x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.243 W/kg

Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.388 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 0.260 W/kg

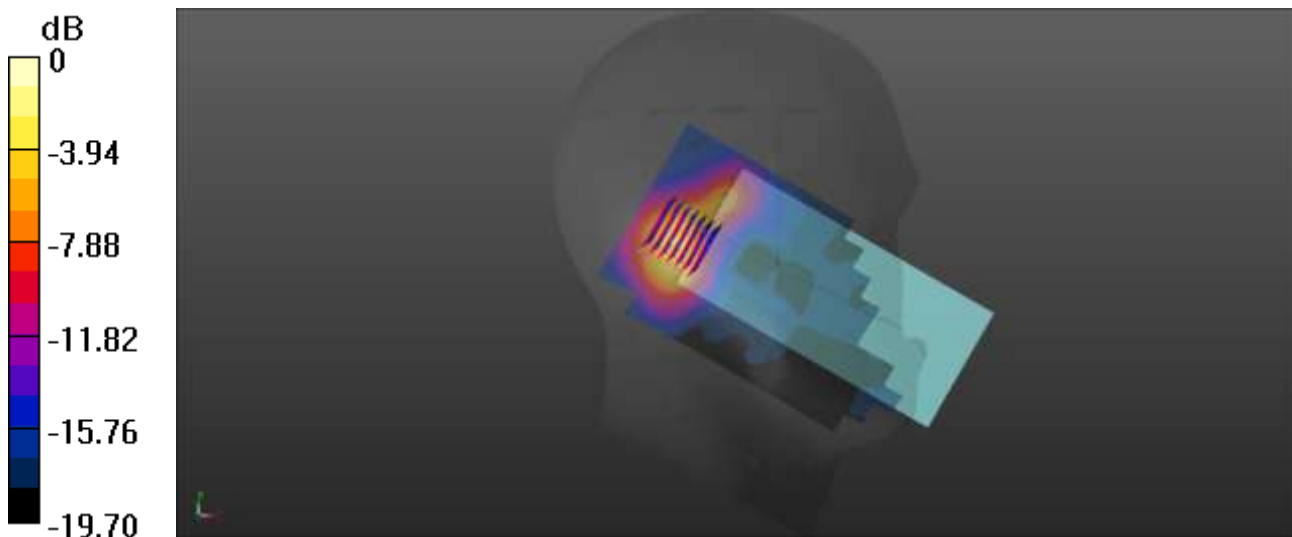

0 dB = 0.260 W/kg

Meas16.Body-worn&Hotspot Top side 10mm LTE B7 Ch21100 ANT5

Date: 2025/12/27

Communication System Band: Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 38.201$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21100/Area Scan (61x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.512 W/kg

Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.492 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.584 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.111 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 45.7%

Maximum value of SAR (measured) = 0.458 W/kg

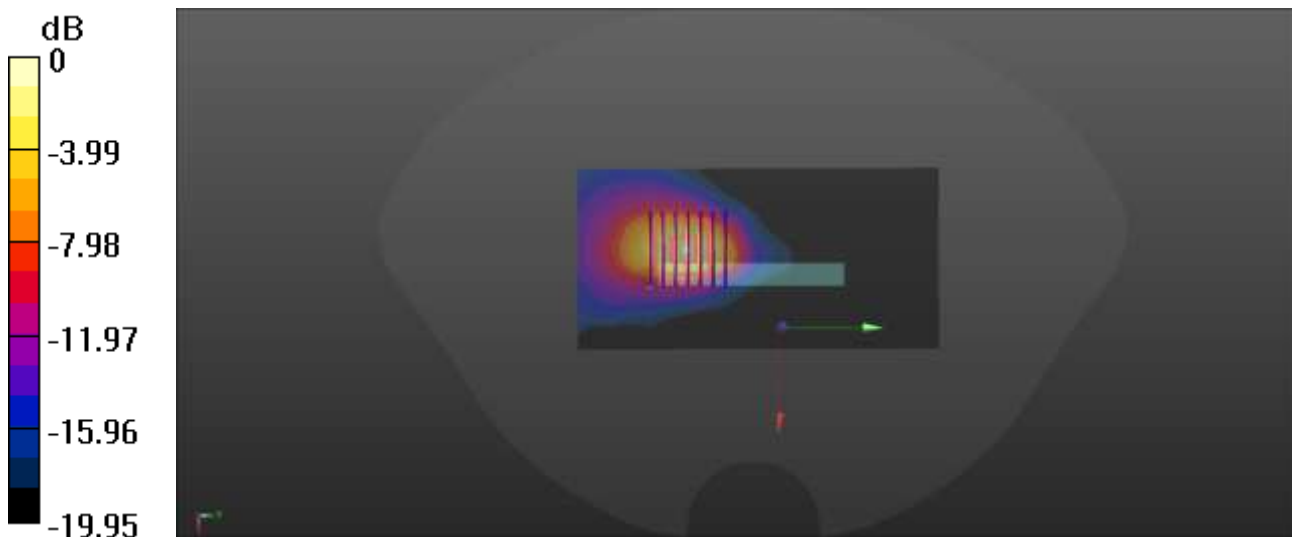

0 dB = 0.458 W/kg

Meas17.Head Right tilt LTE B12 Ch23095 ANT5

Date: 2025/12/18

Communication System Band: Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23095/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.491 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.66 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.877 W/kg

SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.170 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 36.1%

Maximum value of SAR (measured) = 0.575 W/kg

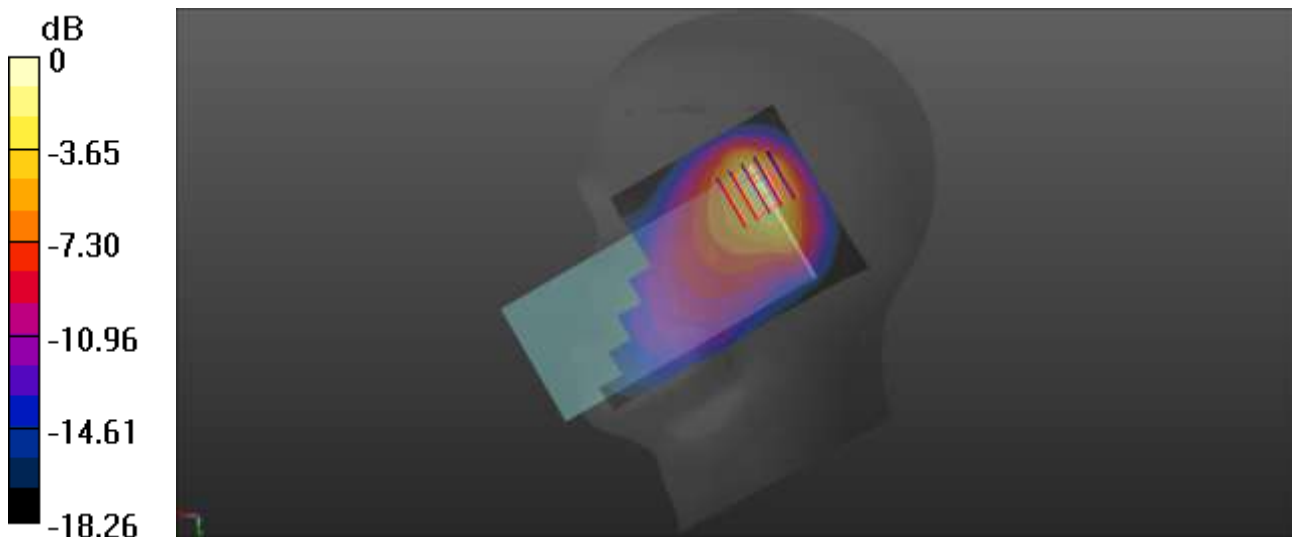

0 dB = 0.575 W/kg

Meas18.Body-worn&Hotspot Top side 10mm LTE B12 Ch23095 ANT5

Date: 2025/12/18

Communication System Band: Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23095/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.163 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.03 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.208 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.052 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 44.4%

Maximum value of SAR (measured) = 0.155 W/kg

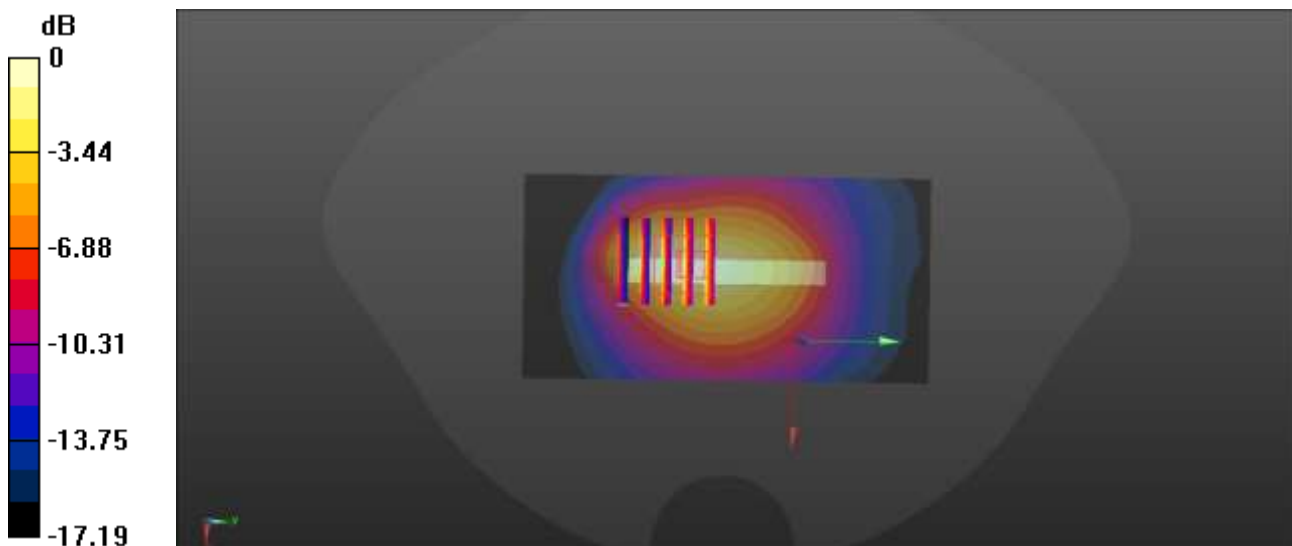

0 dB = 0.163 W/kg

Meas19.Head Right tilt LTE B13 Ch23230 ANT5

Date: 2026/1/19

Communication System Band: Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.918 \text{ S/m}$; $\epsilon_r = 39.579$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23230/Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.452 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.43 V/m ; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.869 W/kg

SAR(1 g) = 0.342 W/kg ; SAR(10 g) = 0.180 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 45.6%

Maximum value of SAR (measured) = 0.547 W/kg

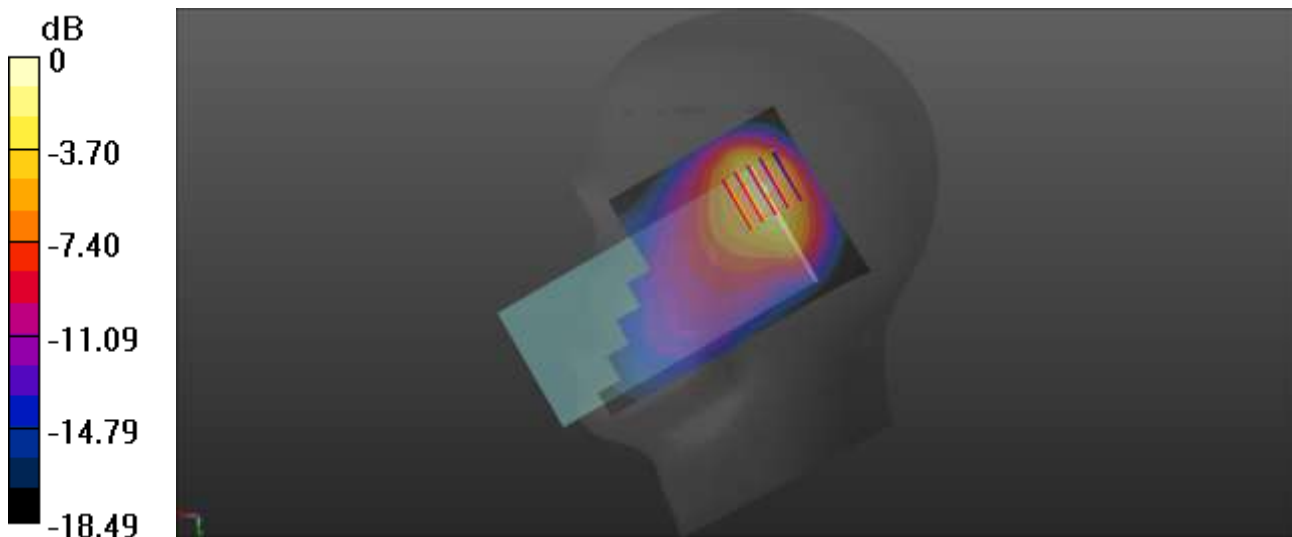

0 dB = 0.547 W/kg

Meas20.Body-worn&Hotspot Top side 10mm LTE B13 Ch23230 ANT5

Date: 2026/1/19

Communication System Band: Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.918 \text{ S/m}$; $\epsilon_r = 39.579$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(10.7, 10.7, 10.7); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23230/Area Scan (51x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.254 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.19 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.088 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 0.242 W/kg

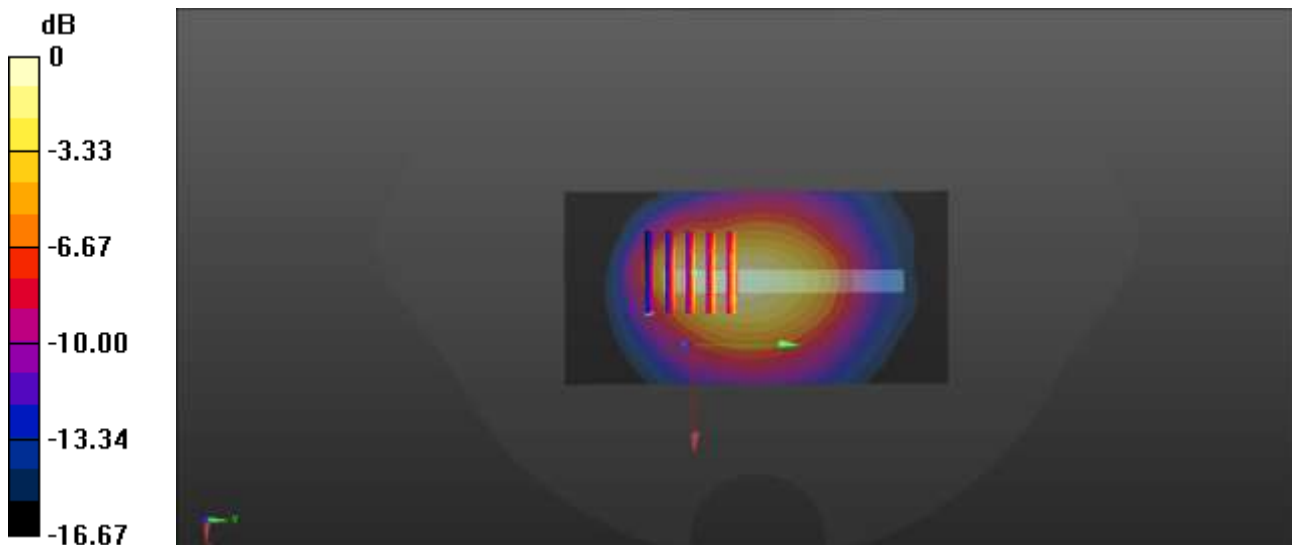

0 dB = 0.254 W/kg

Meas21.Head Left tilt LTE B66 Ch132322 ANT5

Date: 2026/2/2

Communication System Band: Band 66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 39.225$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 21.8°C Liquid Temperature: 21°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132322/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.295 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.483 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.088 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 50.6%

Maximum value of SAR (measured) = 0.285 W/kg

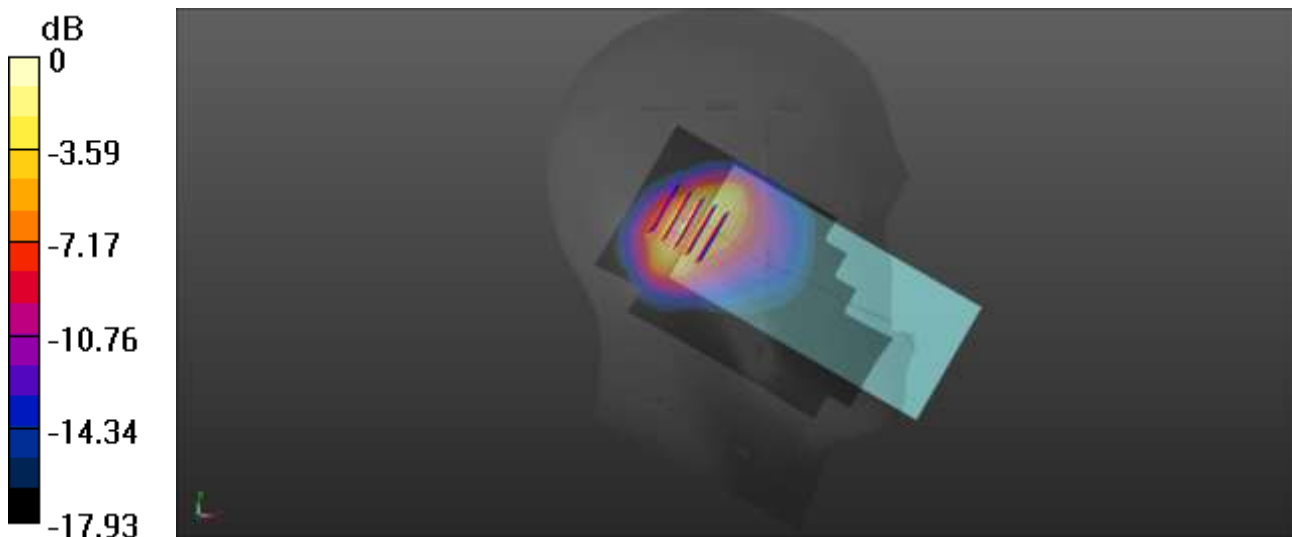

0 dB = 0.285 W/kg

Meas22.Body-worn&Hotspot Top side 10mm LTE B66 Ch132322 ANT5

Date: 2026/2/2

Communication System Band: Band 66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 39.225$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.8°C Liquid Temperature: 21°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132322/Area Scan (51x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.219 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.176 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.272 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.064 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.6%

Maximum value of SAR (measured) = 0.219 W/kg

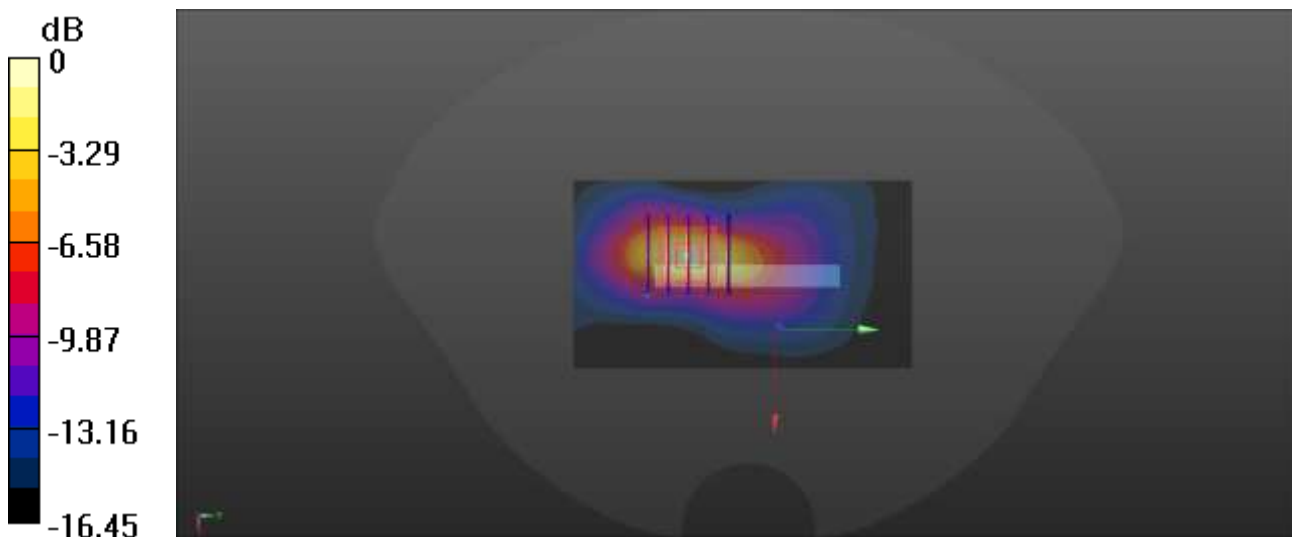

0 dB = 0.219 W/kg

Meas23.Head Right cheek LTE B41 Ch40620 ANT5

Date: 2026/2/5

Communication System Band: Band 41; Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 38.091$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40620/Area Scan (91x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.495 W/kg

Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.169 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.790 W/kg

SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.133 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 43.8%

Maximum value of SAR (measured) = 0.594 W/kg

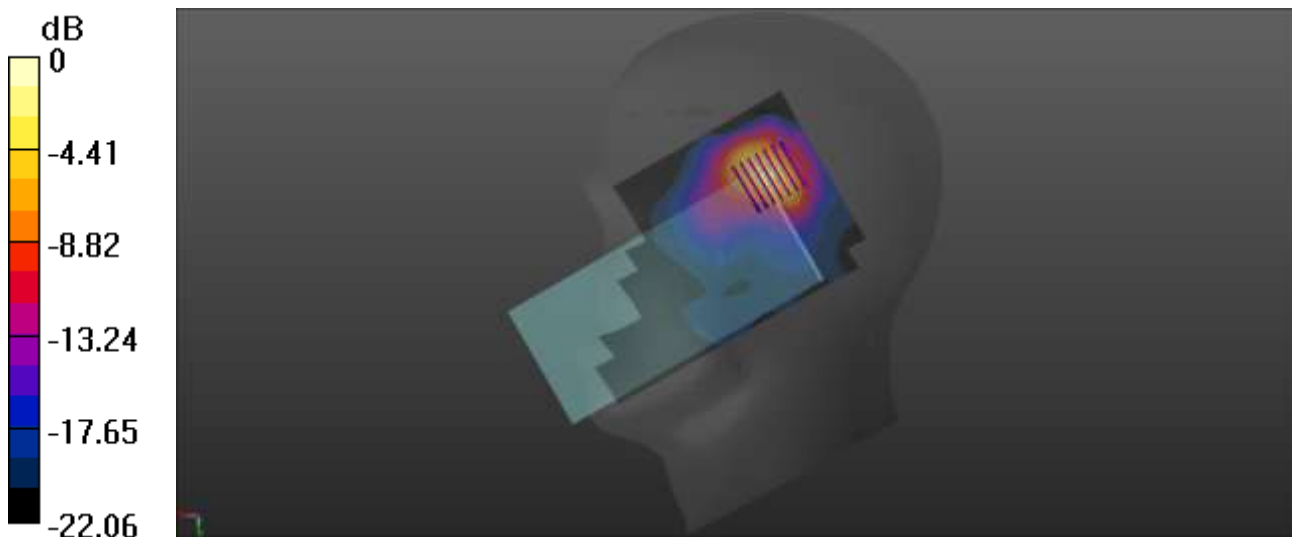

0 dB = 0.594 W/kg

Meas24.Body-worn&Hotspot Top side 10mm LTE B41 Ch40620 ANT5

Date: 2026/2/5

Communication System Band: Band 41; Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 38.091$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40620/Area Scan (61x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.376 W/kg

Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.517 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.445 W/kg

SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.084 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 45.3%

Maximum value of SAR (measured) = 0.347 W/kg

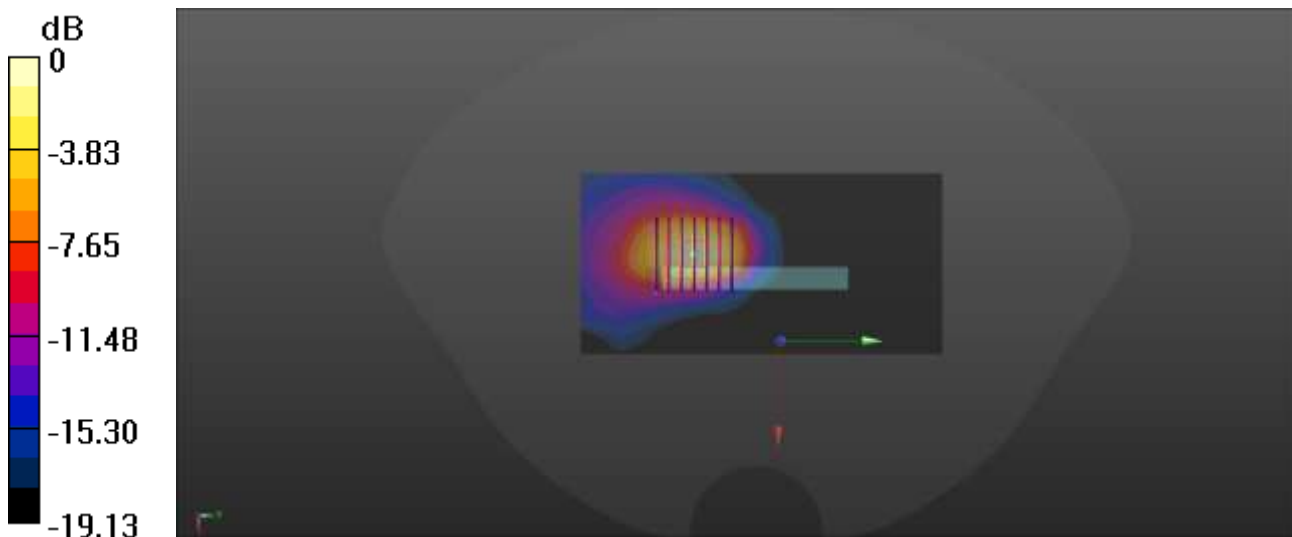

0 dB = 0.347 W/kg

Meas25.Head Left tilt LTE B42 Ch42590 ANT0

Date: 2025/12/21

Communication System Band: Band 42; Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.872$ S/m; $\epsilon_r = 38.634$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch42590/Area Scan (91x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.868 W/kg

Ch42590/Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 2.004 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.469 W/kg; SAR(10 g) = 0.163 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 46%

Maximum value of SAR (measured) = 0.934 W/kg

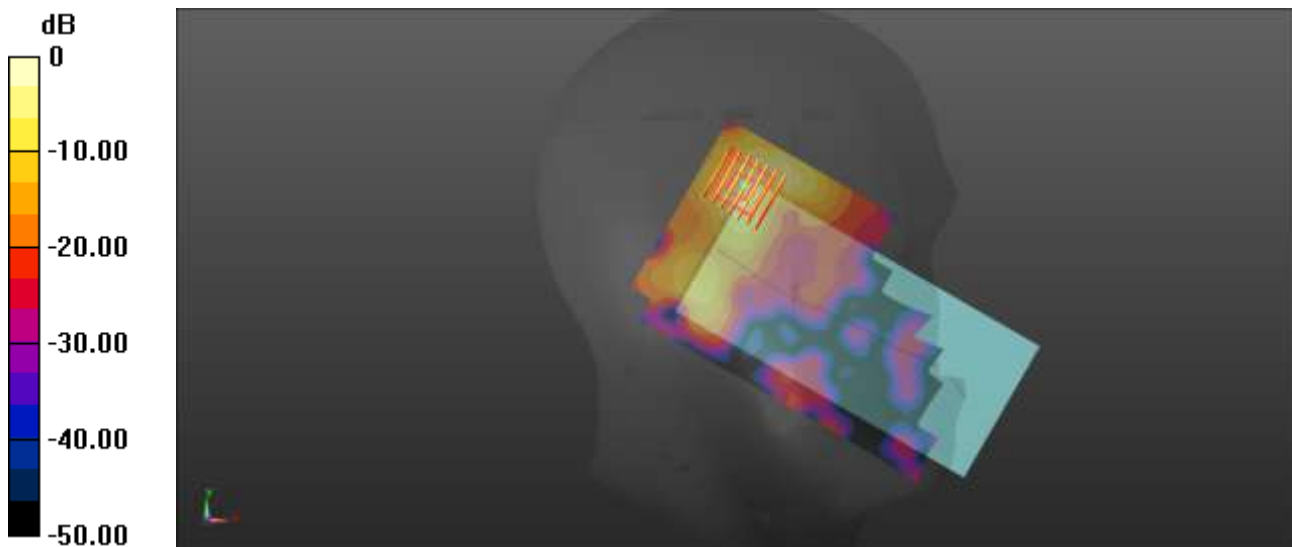

0 dB = 0.934 W/kg

Meas26.Body-worn&Hotspot Right side 10mm LTE B42 Ch42590 ANT0

Date: 2025/12/21

Communication System Band: Band 42; Frequency: 3500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.872$ S/m; $\epsilon_r = 38.634$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22°C Liquid Temperature: 20.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.26, 6.26, 6.26); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch42590/Area Scan (71x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.957 W/kg

Ch42590/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 5.901 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.534 W/kg; SAR(10 g) = 0.219 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 52.8%

Maximum value of SAR (measured) = 0.959 W/kg

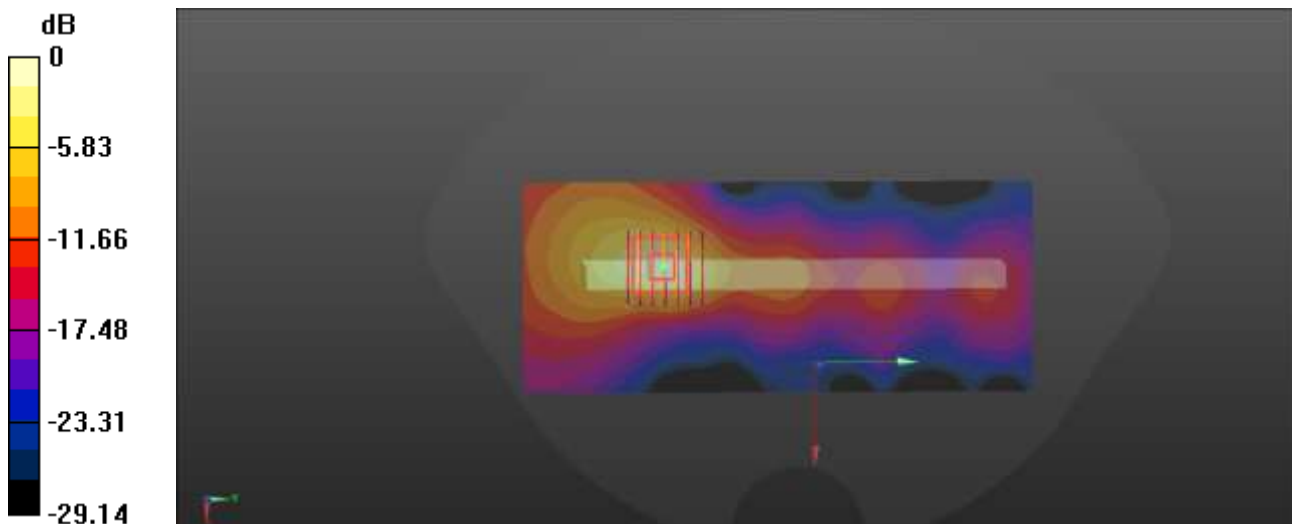

0 dB = 0.959 W/kg

Meas27.Head Left tilt LTE B43 Ch44590 ANT0

Date: 2026/1/1

Communication System Band: Band 43; Frequency: 3700 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3700$ MHz; $\sigma = 3.021$ S/m; $\epsilon_r = 36.751$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.11, 7.11, 7.11); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch44590/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.955 W/kg

Ch44590/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 3.085 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.581 W/kg; SAR(10 g) = 0.200 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.3%

Maximum value of SAR (measured) = 1.14 W/kg

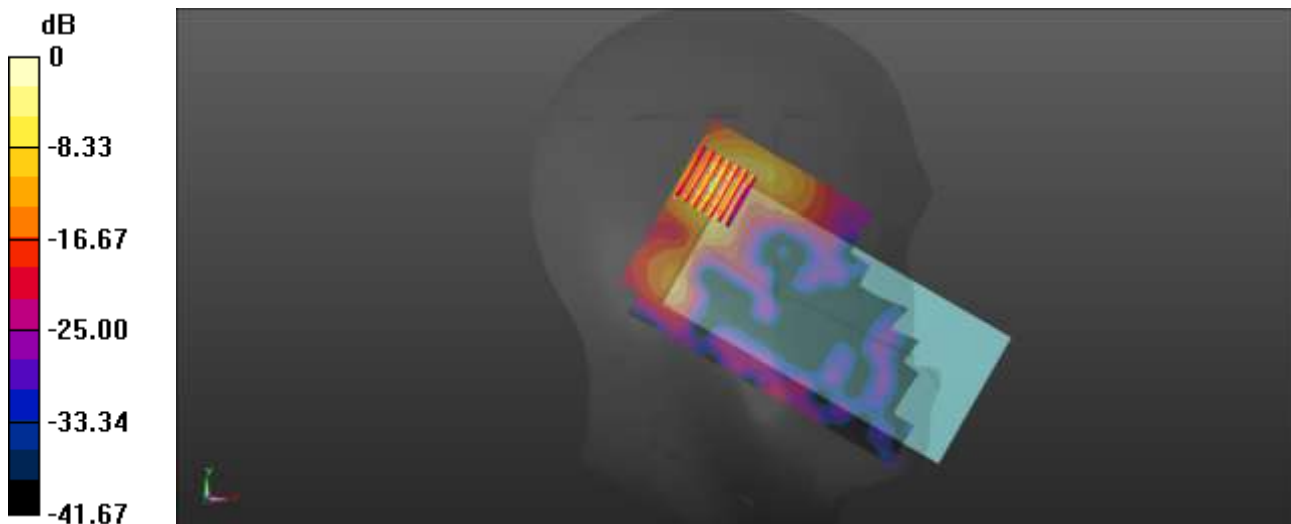

0 dB = 1.14 W/kg

Meas28.Body-worn&Hotspot Back side 10mm LTE B43 Ch44590 ANT0

Date: 2026/1/1

Communication System Band: Band 43; Frequency: 3700 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3700$ MHz; $\sigma = 3.021$ S/m; $\epsilon_r = 36.751$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.11, 7.11, 7.11); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch44590/Area Scan (81x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.763 W/kg

Ch44590/Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 1.977 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.164 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 0.806 W/kg

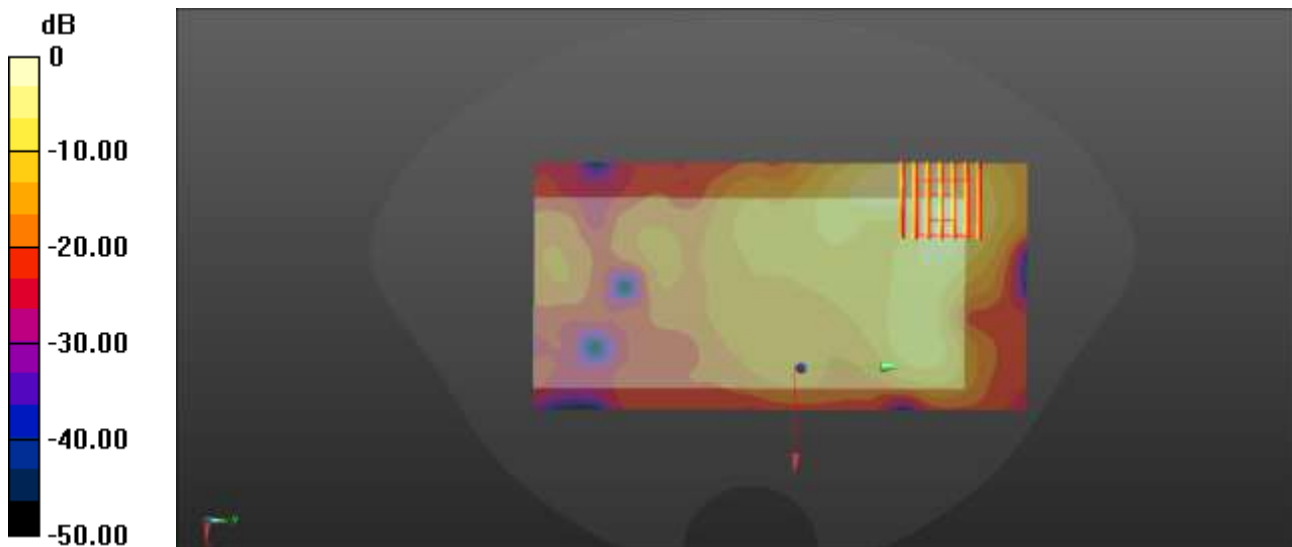

0 dB = 0.806 W/kg

Meas29.Head Left tilt LTE B48 Ch55990 ANT0

Date: 2026/1/3

Communication System Band: Band 48; Frequency: 3625 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3625$ MHz; $\sigma = 3.02$ S/m; $\epsilon_r = 37.486$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.11, 7.11, 7.11); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch55990/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.937 W/kg

Ch55990/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 2.211 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.567 W/kg; SAR(10 g) = 0.194 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 43.5%

Maximum value of SAR (measured) = 1.19 W/kg



0 dB = 1.19 W/kg

Meas30.Body-worn&Hotspot Back side 10mm LTE B48 Ch55990 ANT0

Date: 2026/1/3

Communication System Band: Band 48; Frequency: 3625 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 3625$ MHz; $\sigma = 3.02$ S/m; $\epsilon_r = 37.486$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.11, 7.11, 7.11); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch55990/Area Scan (81x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.904 W/kg

Ch55990/Zoom Scan (7x7x8)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm

Reference Value = 3.145 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.196 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 47%

Maximum value of SAR (measured) = 0.916 W/kg

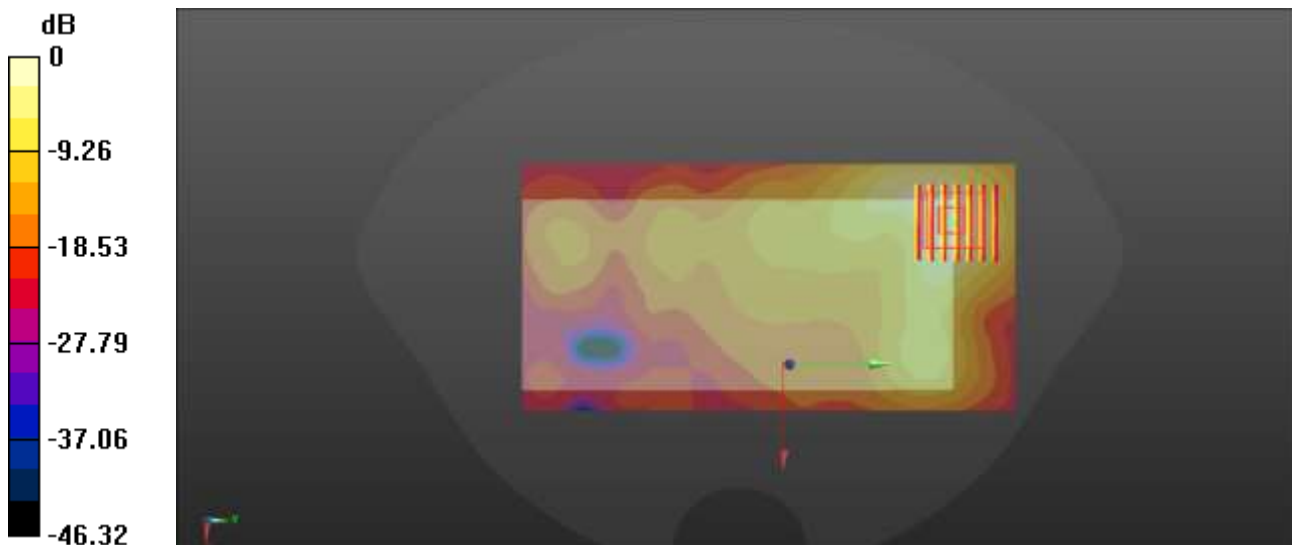

0 dB = 0.916 W/kg

Meas31.Head Right cheek NR n5 Ch166800 ANT5

Date: 2026/2/3

Communication System Band: n5; Frequency: 834 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 834$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 42.323$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch166800/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.50 W/kg

Ch166800/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.77 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.711 W/kg; SAR(10 g) = 0.507 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 40.4%

Maximum value of SAR (measured) = 1.36 W/kg

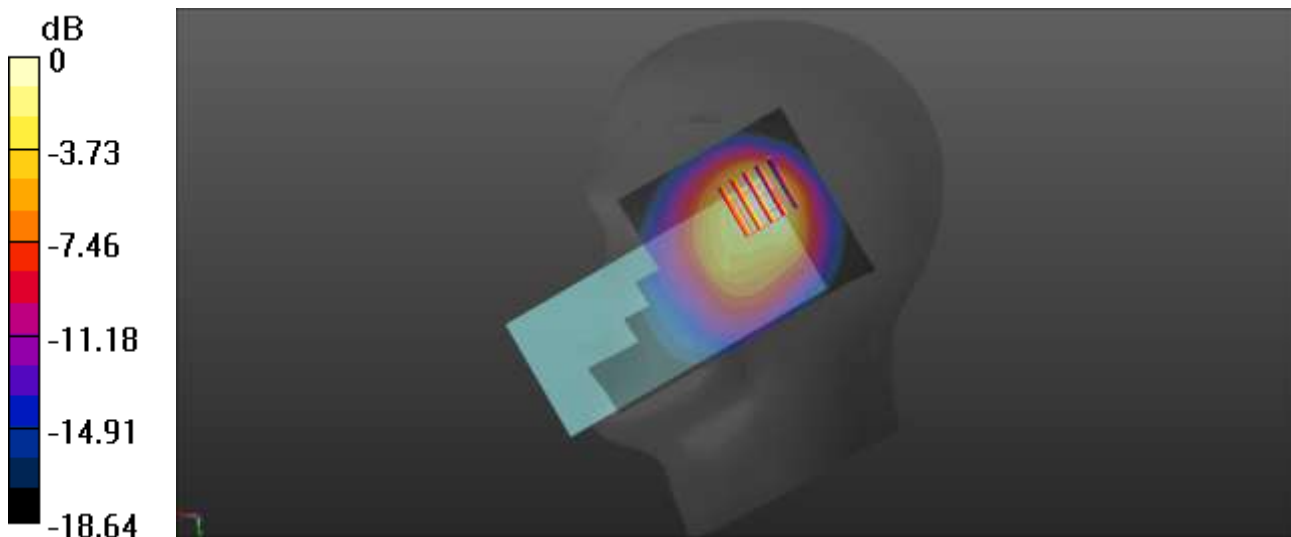

0 dB = 1.36 W/kg

Meas32.Body-worn&Hotspot Top side 10mm NR n5 Ch167300 ANT5

Date: 2026/2/3

Communication System Band: n5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.322$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch167300/Area Scan (51x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.319 W/kg

Ch167300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.37 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.385 W/kg

SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.125 W/kg

Smallest distance from peaks to all points 3 dB below = 15.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.5%

Maximum value of SAR (measured) = 0.305 W/kg

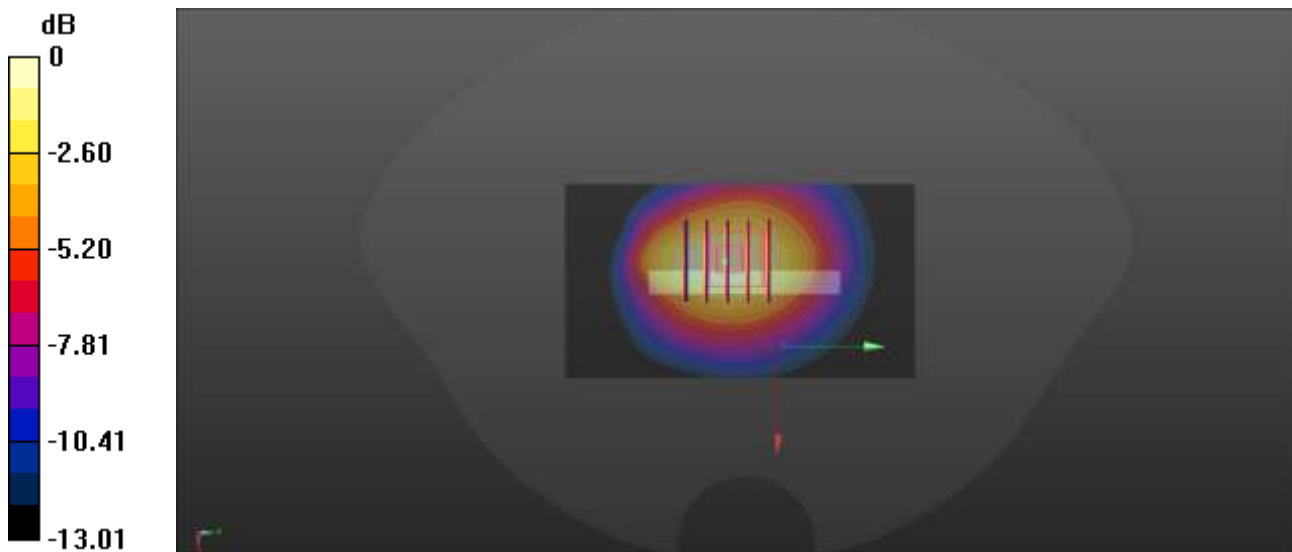

0 dB = 0.305 W/kg

Meas33.Head Right tilt NR N7 Ch507000 ANT5

Date: 2025/12/27

Communication System Band: Band n7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.993$ S/m; $\epsilon_r = 38.696$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.83, 7.83, 7.83); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch507000/Area Scan (81x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.52 W/kg

Ch507000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.236 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.794 W/kg; SAR(10 g) = 0.345 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 50.2%

Maximum value of SAR (measured) = 1.31 W/kg

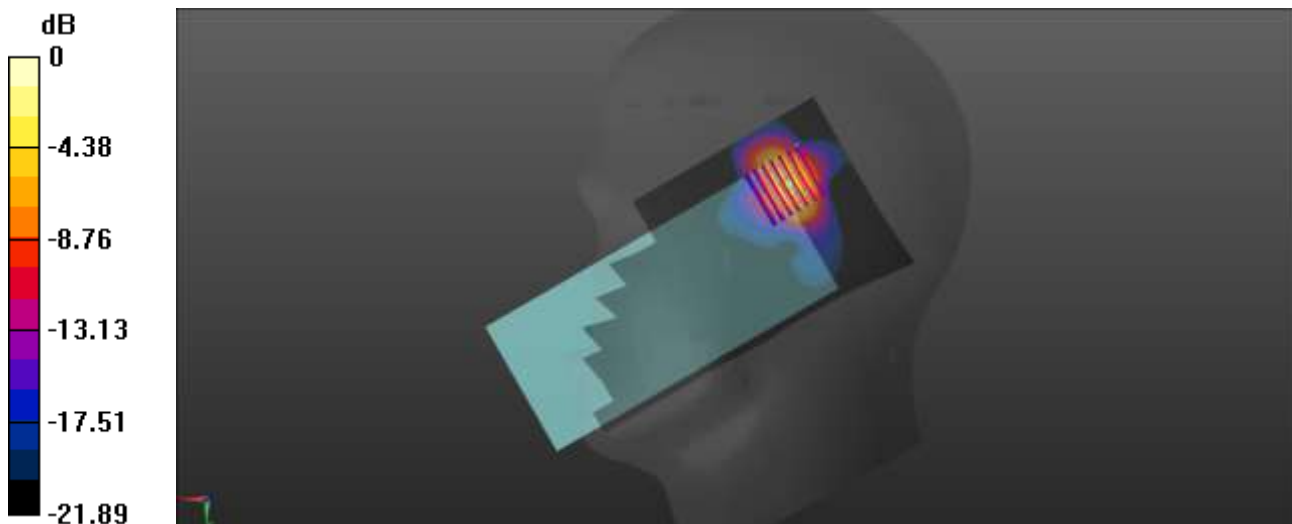

0 dB = 1.31 W/kg

Meas34.Body-worn&Hotspot Top side 10mm NR n7 Ch507000 ANT5

Date: 2025/12/27

Communication System Band: n7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.993$ S/m; $\epsilon_r = 38.696$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.9°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch507000/Area Scan (61x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.788 W/kg

Ch507000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.684 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.912 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.143 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 43.6%

Maximum value of SAR (measured) = 0.701 W/kg

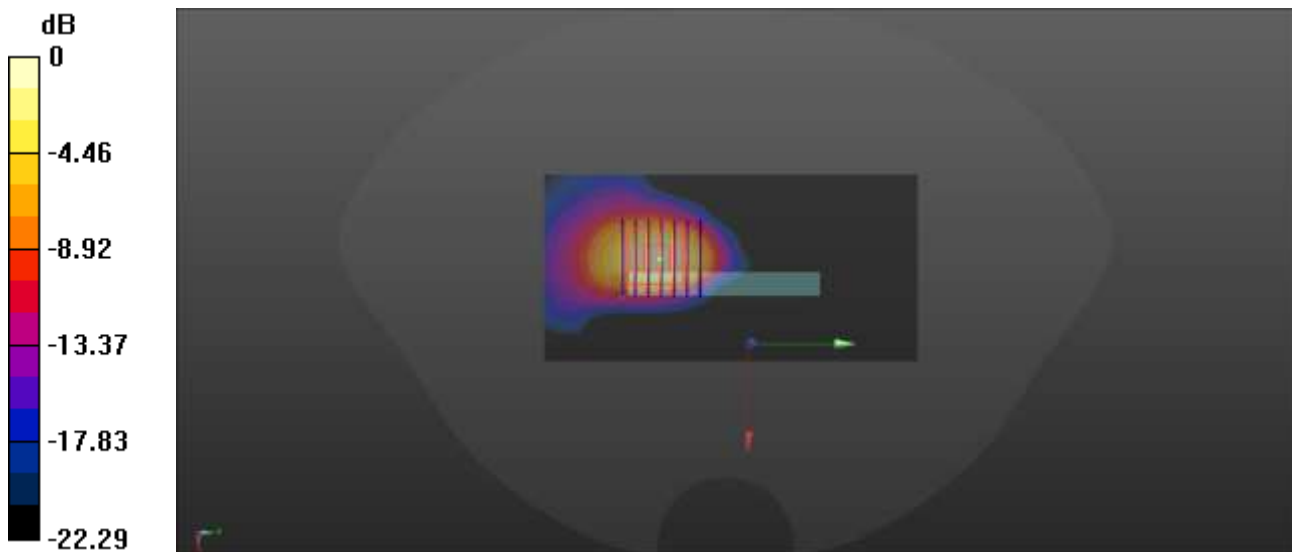

0 dB = 0.701 W/kg

Meas35.Head Right cheek NR n12 Ch141500 ANT5

Date: 2026/1/2

Communication System Band: N12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 41.523$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.14, 9.14, 9.14); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch141500/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.874 W/kg

Ch141500/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.46 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.969 W/kg

SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.249 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 48%

Maximum value of SAR (measured) = 0.668 W/kg

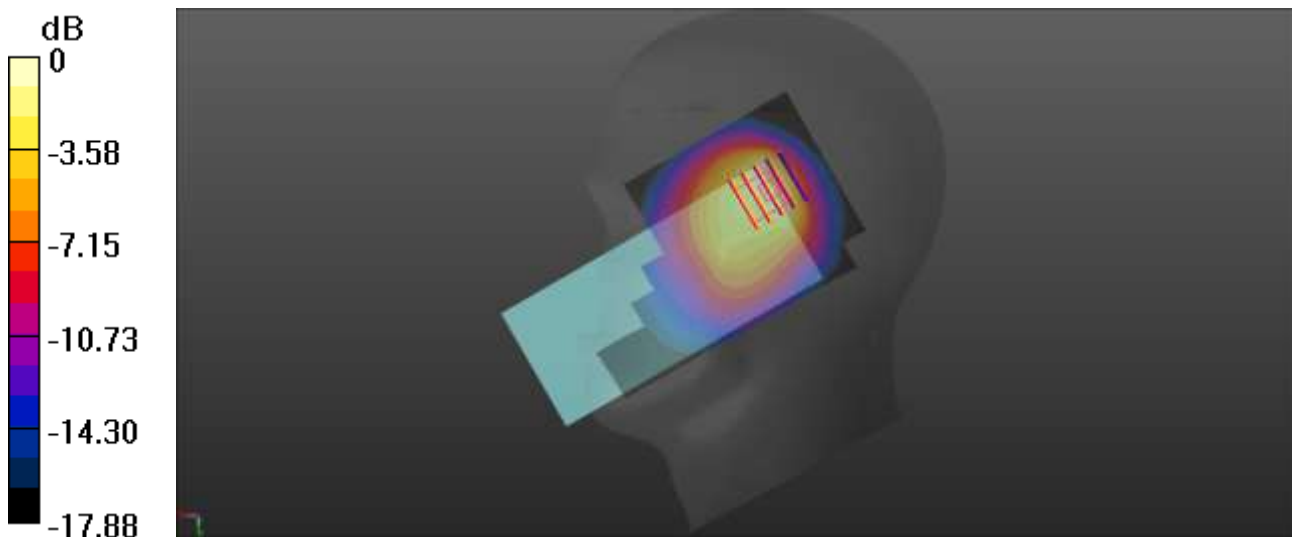

0 dB = 0.668 W/kg

Meas36.Body-worn&Hotspot Back side 10mm NR n12 Ch141500 ANT5

Date: 2026/1/2

Communication System Band: n12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 41.523$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.2°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.14, 9.14, 9.14); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch141500/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.211 W/kg

Ch141500/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.87 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 52.9%

Maximum value of SAR (measured) = 0.168 W/kg

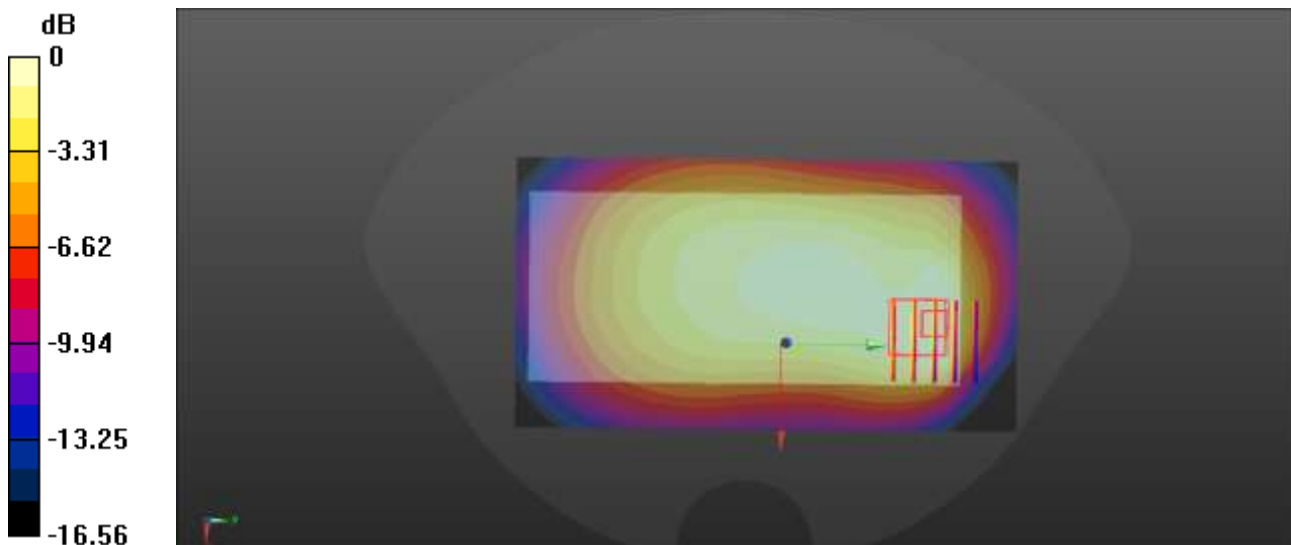

0 dB = 0.168 W/kg

Meas37.Head Right tilt NR n66 Ch349000 ANT5

Date: 2026/1/21

Communication System Band: n66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.281$ S/m; $\epsilon_r = 39.577$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch349000/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.18 W/kg

Ch349000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.69 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.795 W/kg; SAR(10 g) = 0.349 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 44.7%

Maximum value of SAR (measured) = 1.32 W/kg

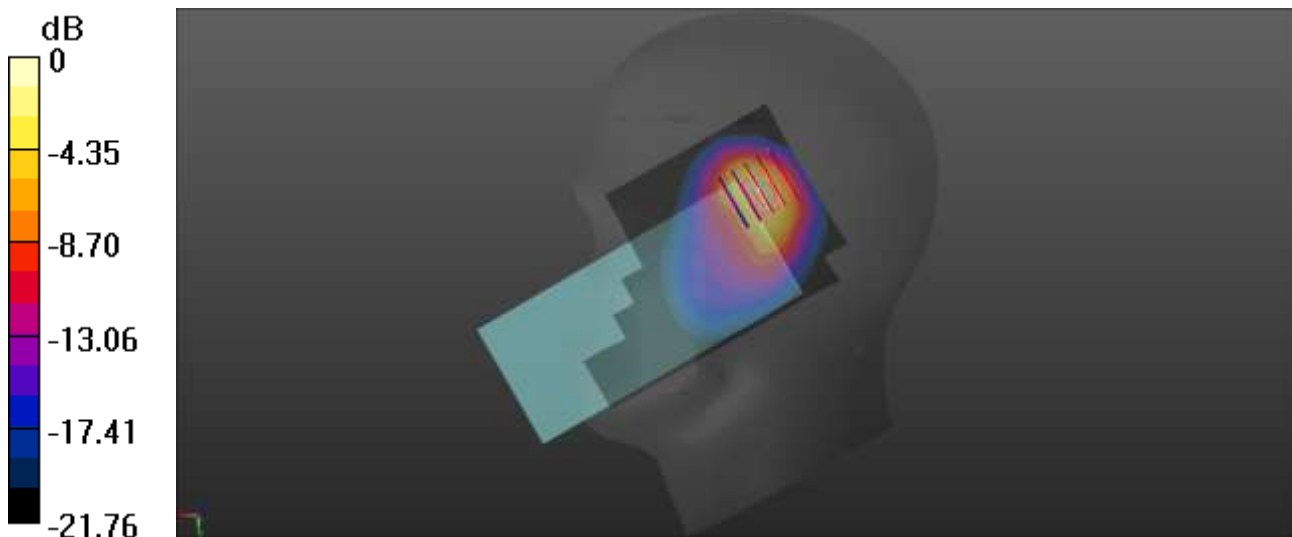

0 dB = 1.32 W/kg

Meas38.Body-worn&Hotspot Top side 10mm NR n66 Ch349000 ANT5

Date: 2026/1/21

Communication System Band: n66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.281$ S/m; $\epsilon_r = 39.577$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch349000/Area Scan (51x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.537 W/kg

Ch349000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.040 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.662 W/kg

SAR(1 g) = 0.346 W/kg; SAR(10 g) = 0.167 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%

Maximum value of SAR (measured) = 0.533 W/kg

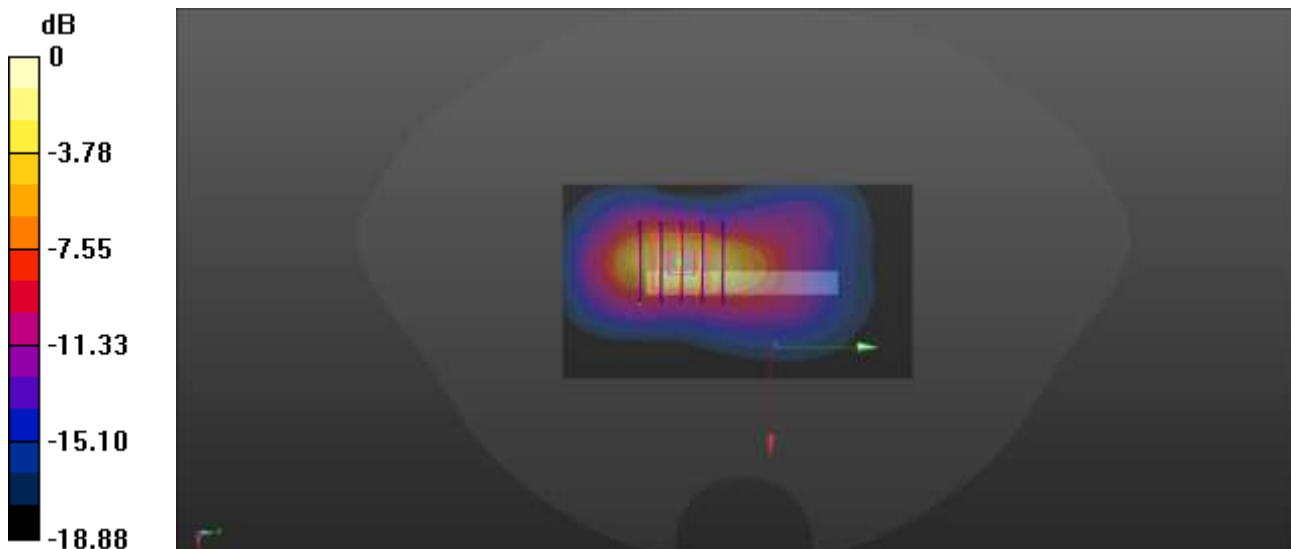

0 dB = 0.533 W/kg

Meas39.Head Right tilt NR n38 Ch519000 ANT5

Date: 2025/12/28

Communication System Band: Band n38; Frequency: 2595 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.572$ S/m; $\epsilon_r = 43.315$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.83, 7.83, 7.83); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch519000/Area Scan (81x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.46 W/kg

Ch519000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.997 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.798 W/kg; SAR(10 g) = 0.354 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 47.8%

Maximum value of SAR (measured) = 1.35 W/kg

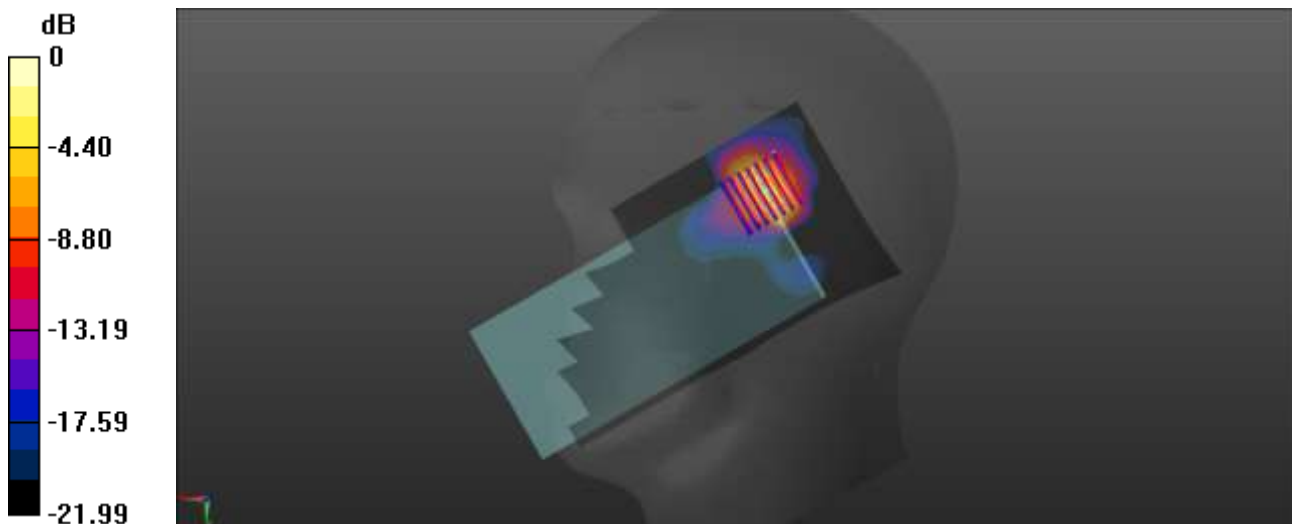

0 dB = 1.46 W/kg

Meas40.Body-worn&Hotspot Top side 10mm NR n38 Ch519000 ANT5

Date: 2025/12/28

Communication System Band: n38; Frequency: 2595 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2595$ MHz; $\sigma = 2.572$ S/m; $\epsilon_r = 43.315$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch519000/Area Scan (61x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.481 W/kg

Ch519000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.448 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.570 W/kg

SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.105 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 44.4%

Maximum value of SAR (measured) = 0.439 W/kg

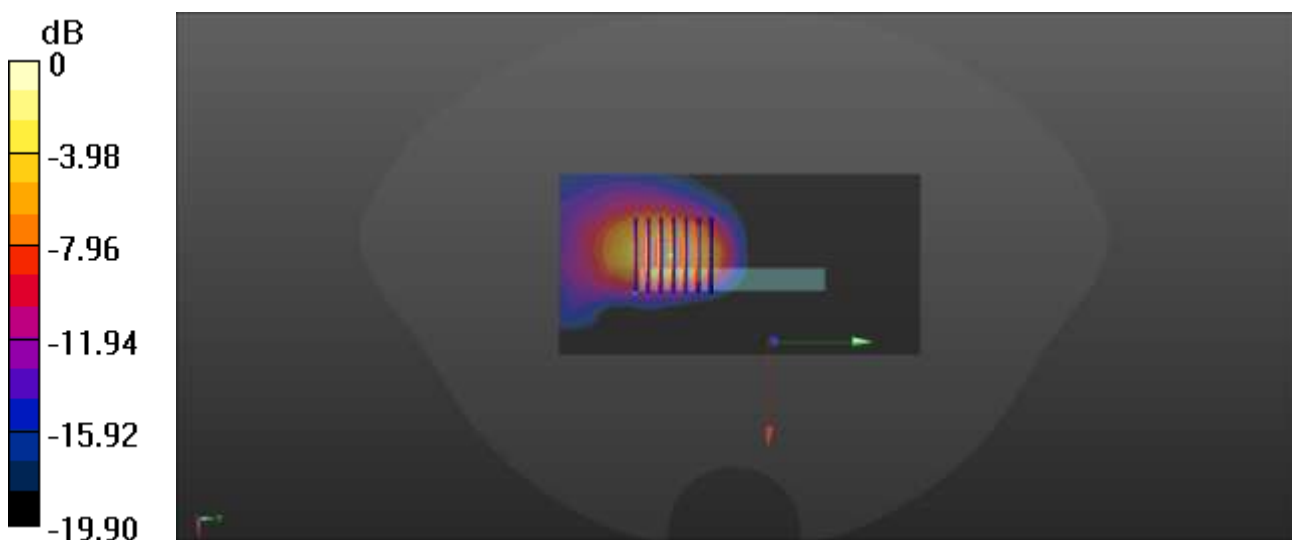

0 dB = 0.439 W/kg

Meas41.Head Right tilt NR n41 Ch518598 ANT5

Date: 2026/2/5

Communication System Band: Band n41; Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.983$ S/m; $\epsilon_r = 38.662$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 21.5°C Liquid Temperature: 20.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.83, 7.83, 7.83); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch518598/Area Scan (81x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.807 W/kg

Ch518598/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.800 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.808 W/kg

SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.174 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 50.2%

Maximum value of SAR (measured) = 0.653 W/kg

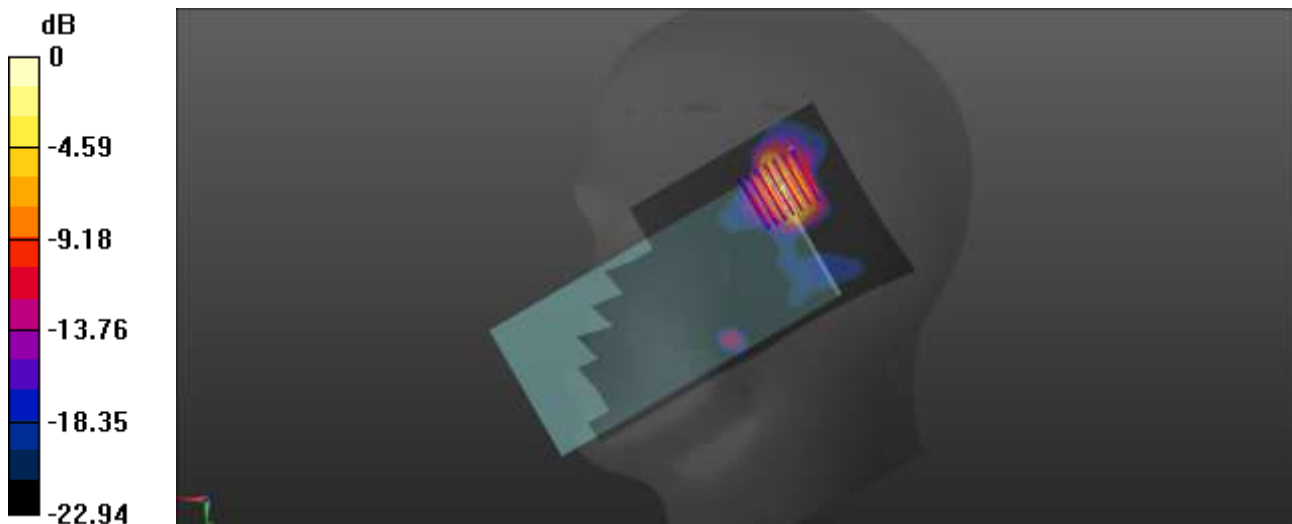

0 dB = 0.807 W/kg

Meas42.Body-worn&Hotspot Top side 10mm NR n41 Ch518598 ANT5

Date: 2026/2/5

Communication System Band: n41; Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 38.091$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.5°C Liquid Temperature: 20.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(7.83, 7.83, 7.83); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch518598/Area Scan (61x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.360 W/kg

Ch518598/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.716 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.446 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.081 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 45.1%

Maximum value of SAR (measured) = 0.342 W/kg

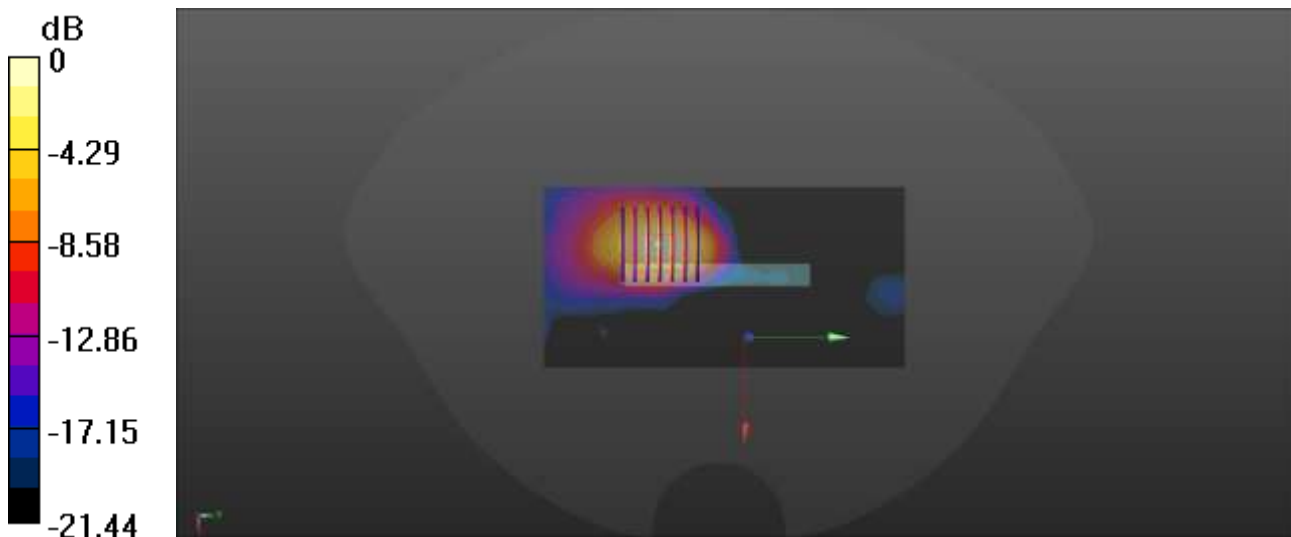

0 dB = 0.342 W/kg

Meas43.Head Left tilt NR n48 Ch641666 ANT0

Date: 2026/2/2

Communication System Band: n48; Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3624.99$ MHz; $\sigma = 2.953$ S/m; $\epsilon_r = 36.993$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 21.8°C Liquid Temperature: 21°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch641666/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.21 W/kg

Ch641666/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 2.937 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.593 W/kg; SAR(10 g) = 0.210 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 44.8%

Maximum value of SAR (measured) = 1.21 W/kg

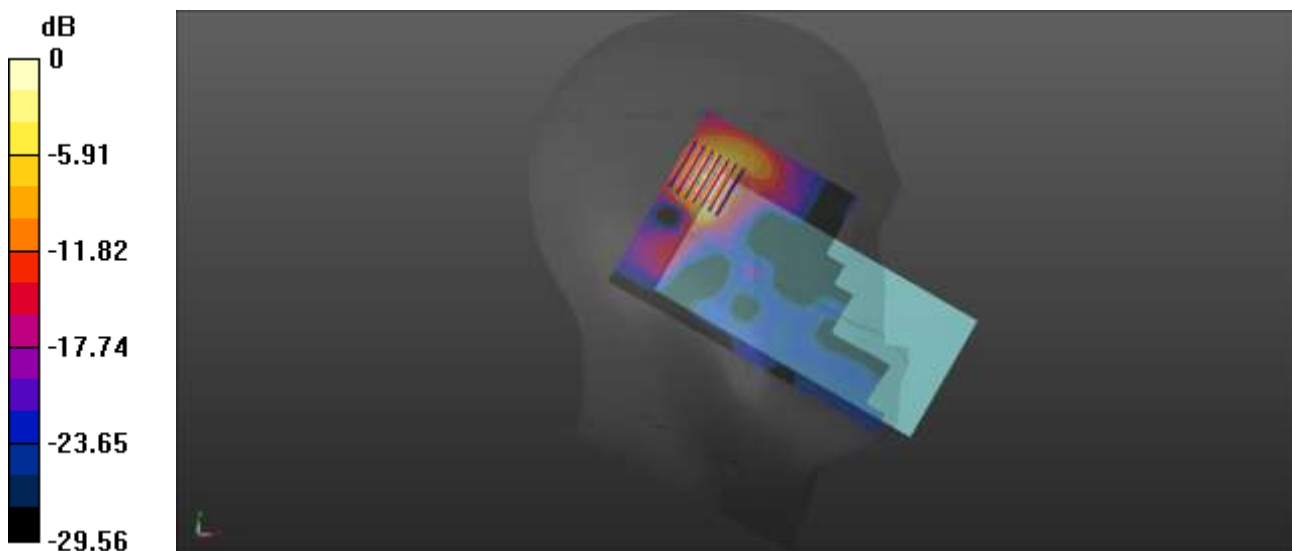

0 dB = 1.21 W/kg

Meas44.Body-worn&Hotspot Back side 10mm NR n48 Ch641666 ANT0

Date: 2026/2/2

Communication System Band: n48; Frequency: 3624.99 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3624.99$ MHz; $\sigma = 2.953$ S/m; $\epsilon_r = 36.993$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.8°C Liquid Temperature: 21°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch641666/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.992 W/kg

Ch641666/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 1.326 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.521 W/kg; SAR(10 g) = 0.212 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 43.8%

Maximum value of SAR (measured) = 1.01 W/kg

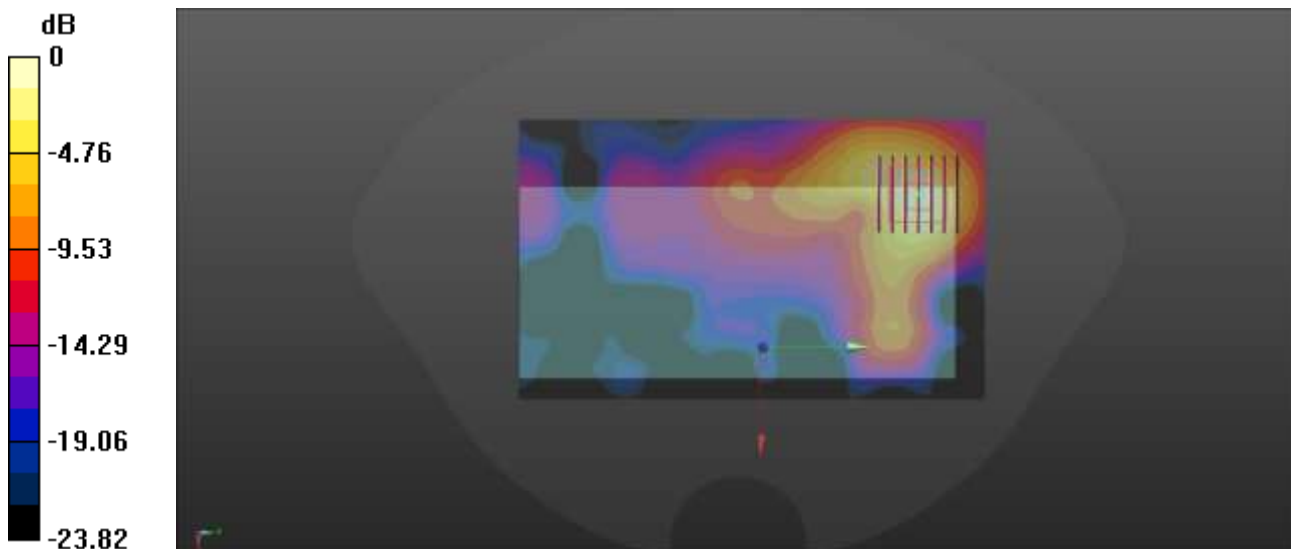

0 dB = 1.01 W/kg

Meas45.Head Left tilt NR n77 Ch647666 ANT0

Date: 2026/1/16

Communication System Band: n77; Frequency: 3714.99 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3714.99$ MHz; $\sigma = 3.117$ S/m; $\epsilon_r = 36.417$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 21.8°C Liquid Temperature: 20.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch647666/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.610 W/kg

Ch647666/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 0.5850 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.828 W/kg

SAR(1 g) = 0.279 W/kg; SAR(10 g) = 0.088 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 41.9%

Maximum value of SAR (measured) = 0.609 W/kg



0 dB = 0.609 W/kg

Meas46.Body-worn&Hotspot Back side 10mm NR n77 Ch647666 ANT0

Date: 2026/1/16

Communication System Band: n77; Frequency: 3714.99 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3714.99$ MHz; $\sigma = 3.117$ S/m; $\epsilon_r = 36.417$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.8°C Liquid Temperature: 20.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch647666/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.307 W/kg

Ch647666/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 0.5830 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.429 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.067 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 44.4%

Maximum value of SAR (measured) = 0.310 W/kg



0 dB = 0.310 W/kg

Meas47.Head Left tilt NR n78 Ch641666 ANT0

Date: 2025/12/31

Communication System Band: n78; Frequency: 3644.99 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3644.99$ MHz; $\sigma = 3.01$ S/m; $\epsilon_r = 38.28$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 21.7°C Liquid Temperature: 20.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch641666/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.495 W/kg

Ch641666/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 0 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.826 W/kg

SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.091 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 42%

Maximum value of SAR (measured) = 0.589 W/kg

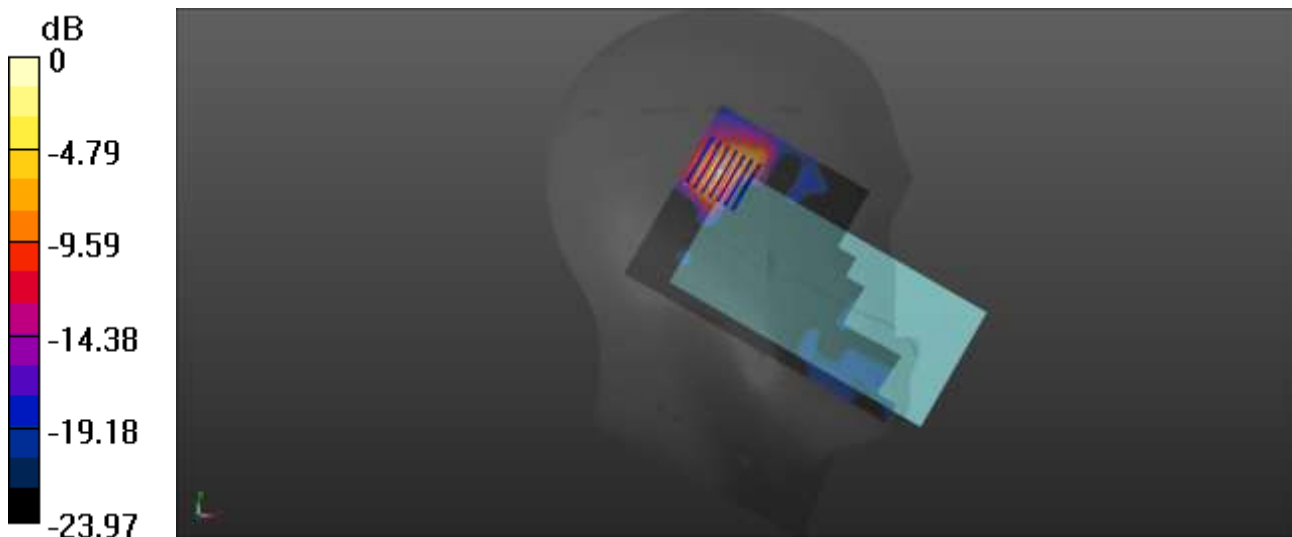

0 dB = 0.589 W/kg

Meas48.Body-worn&Hotspot Back side 10mm NR n78 Ch641666 ANT0

Date: 2025/12/31

Communication System Band: n78; Frequency: 3644.99 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3644.99$ MHz; $\sigma = 3.01$ S/m; $\epsilon_r = 38.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.7°C Liquid Temperature: 20.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.05, 6.05, 6.05); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch641666/Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.316 W/kg

Ch641666/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 0.8950 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.440 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 45.3%

Maximum value of SAR (measured) = 0.320 W/kg

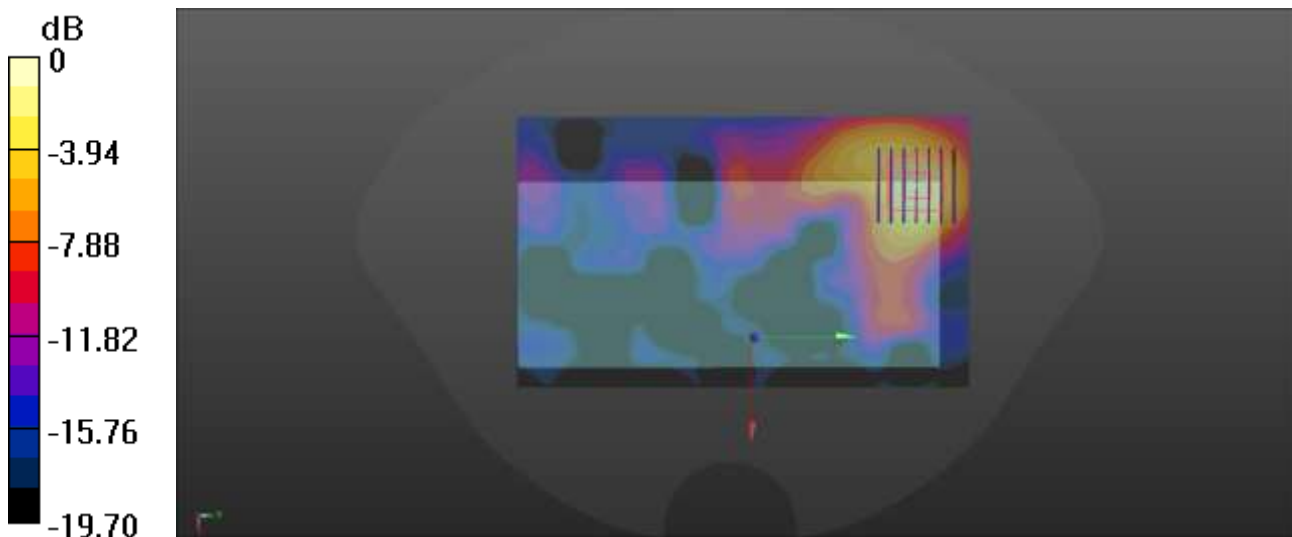

0 dB = 0.320 W/kg

Meas49.Head Left Cheek WLAN 2.4G Ch6 ANT12

Date: 2026/1/15

Communication System Band: WLAN 2.4GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.825$ S/m; $\epsilon_r = 38.943$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8, 8, 8); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch6/Area Scan (91x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.749 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.018 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.761 W/kg

SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.283 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 56.5%

Maximum value of SAR (measured) = 0.654 W/kg

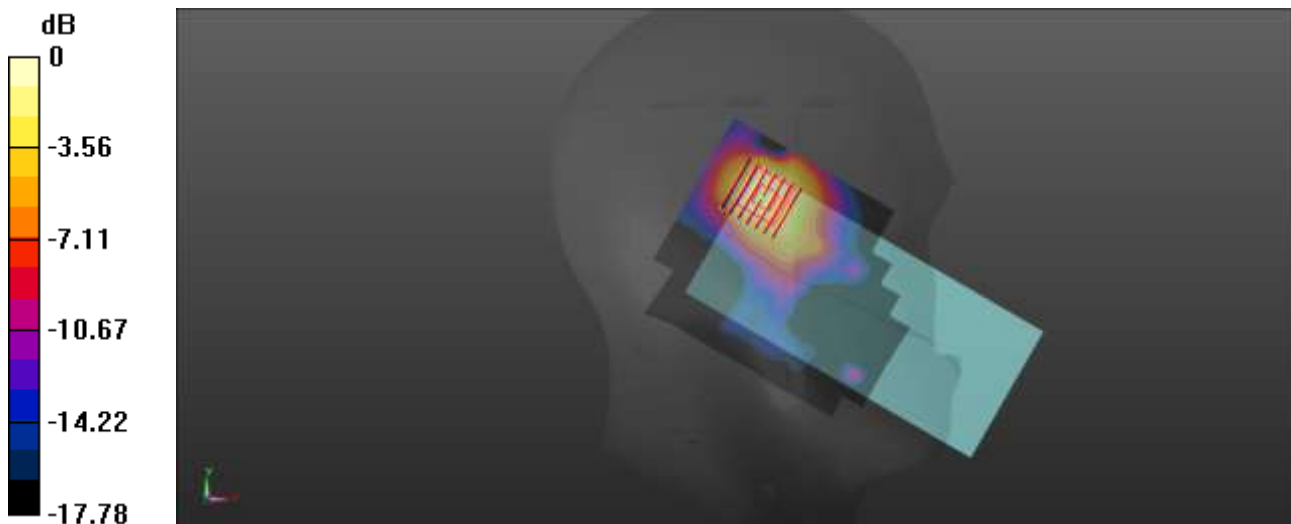

0 dB = 0.654 W/kg

Meas50.Body-worn&Hotspot Right side 10mm WLAN 2.4G Ch6 ANT2

Date: 2026/1/15

Communication System Band: WLAN 2.4GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.825$ S/m; $\epsilon_r = 38.943$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8, 8, 8); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch6/Area Scan (51x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.240 W/kg

Ch6/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.328 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.271 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.085 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.4%

Maximum value of SAR (measured) = 0.231 W/kg

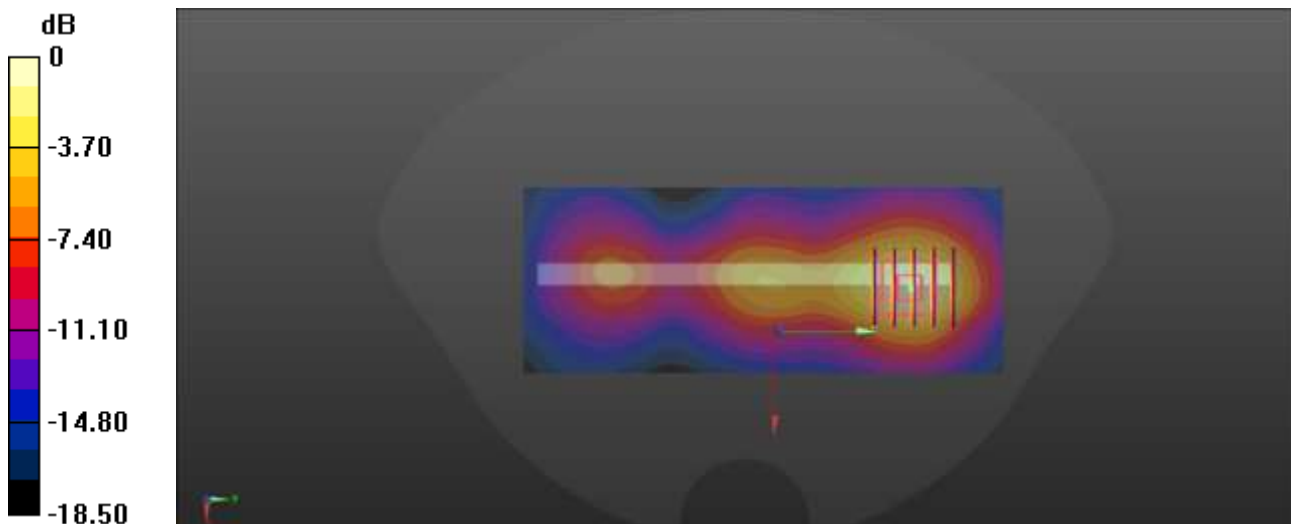

0 dB = 0.231 W/kg

Meas51.Head Left tilt WLAN 5.2G Ch44 ANT6

Date: 2025/12/26

Communication System Band: Band 1; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5220$ MHz; $\sigma = 4.542$ S/m; $\epsilon_r = 35.204$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(5, 5, 5); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch44/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.617 W/kg

Ch44/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.984 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 10.9 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.104 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 0.8%

Maximum value of SAR (measured) = 10.9 W/kg

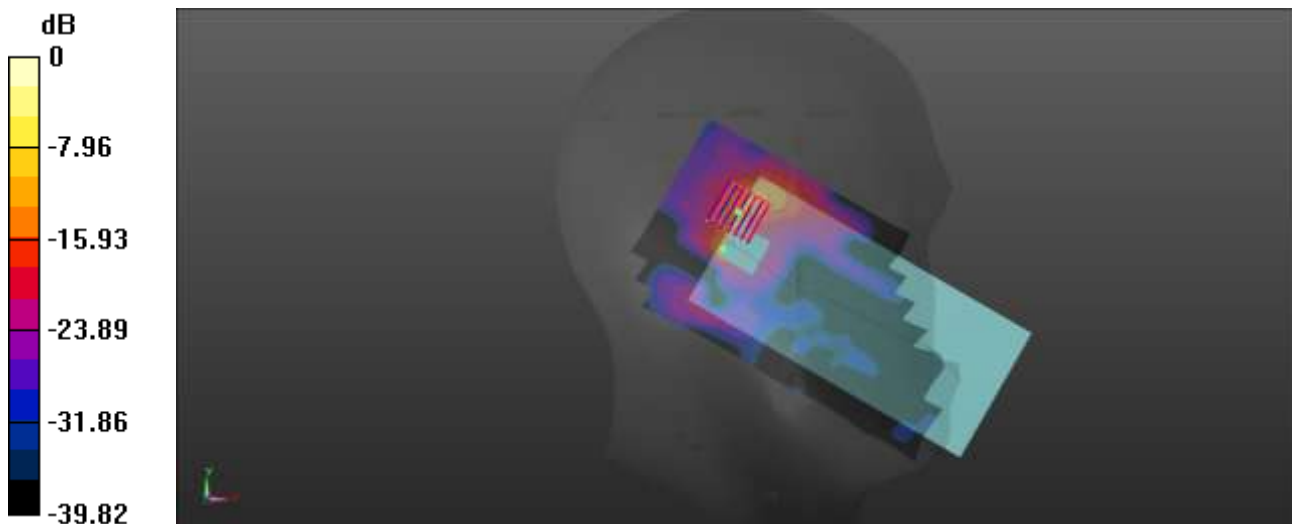

0 dB = 10.9 W/kg

Meas52.Head Left tilt WLAN 5.3G Ch60 ANT6

Date: 2026/1/17

Communication System Band: Band 2; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.399$ S/m; $\epsilon_r = 35.244$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.56, 5.56, 5.56); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch60/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.604 W/kg

Ch60/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.209 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 2.70 W/kg

SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.082 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 6%

Maximum value of SAR (measured) = 2.70 W/kg

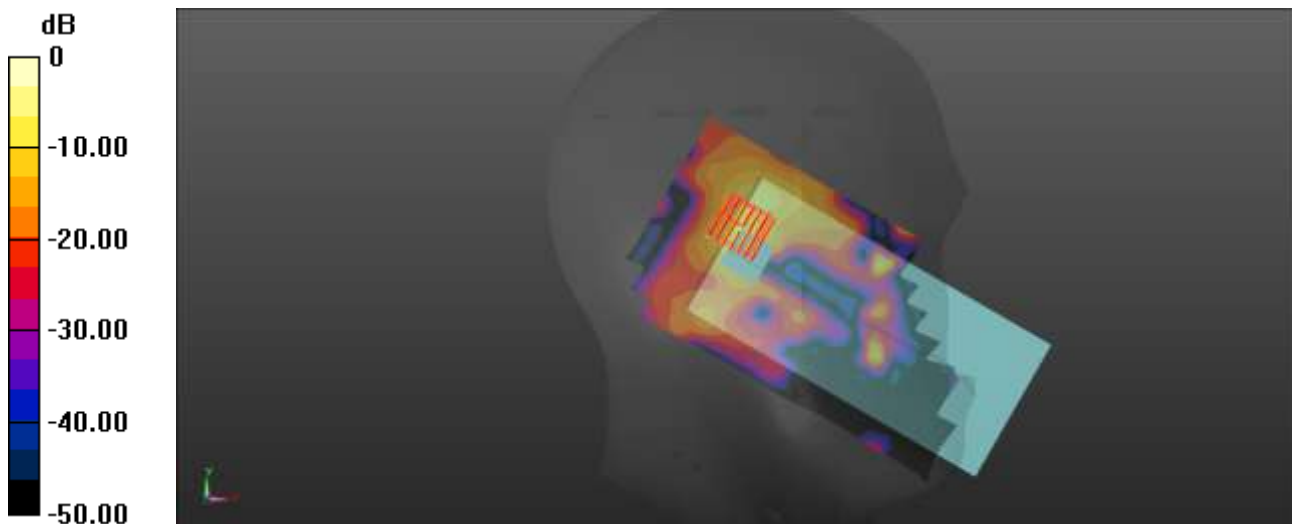

0 dB = 2.70 W/kg

Meas53.Head Left tilt WLAN 5.6G Ch116 ANT6

Date: 2026/1/18

Communication System Band: Band 3; Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5580$ MHz; $\sigma = 5.245$ S/m; $\epsilon_r = 35.137$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.05, 5.05, 5.05); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch116/Area Scan (101x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.51 W/kg

Ch116/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.48 V/m; Power Drift = - 0.03 dB


Peak SAR (extrapolated) = 4.22 W/kg

SAR(1 g) = 0.546 W/kg; SAR(10 g) = 0.167 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.5%

Maximum value of SAR (measured) = 1.34 W/kg

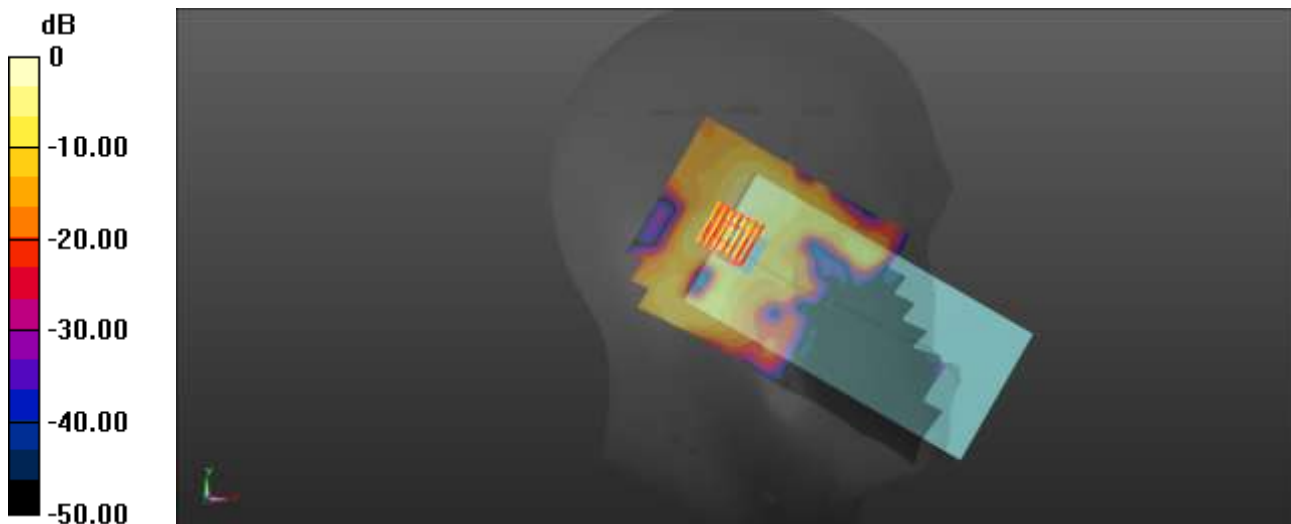

0 dB = 1.34 W/kg

Meas54.Head Left tilt WLAN 5.8G Ch157 ANT6

Date: 2026/1/13

Communication System Band: Band 4; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.349$ S/m; $\epsilon_r = 34.261$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.14, 5.14, 5.14); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch157/Area Scan (101x151x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.21 W/kg

Ch157/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 10.50 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.552 W/kg; SAR(10 g) = 0.171 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 1.33 W/kg

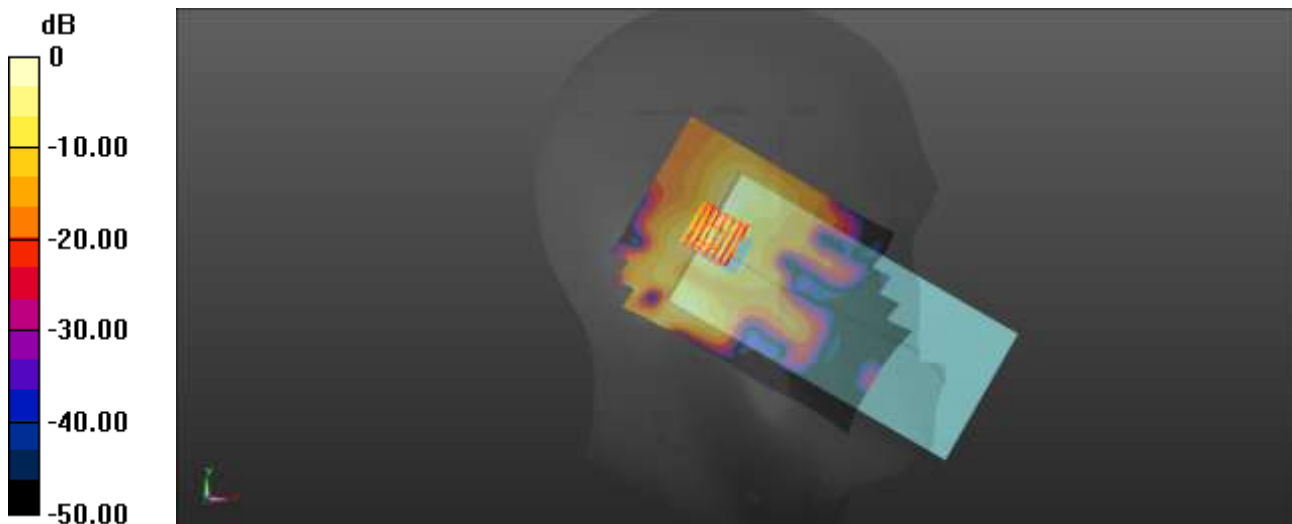

0 dB = 1.33 W/kg

Meas55.Body-worn&Hotspot Top side 10mm WLAN 5.2G Ch44 ANT6

Date: 2025/12/26

Communication System Band: Band 1; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5220$ MHz; $\sigma = 4.542$ S/m; $\epsilon_r = 35.204$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(5, 5, 5); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: Twin-SAM Right V5.0 (20deg probe tilt); Type: QD 000 P40 CD; Serial: 1857
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch44/Area Scan (61x111x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.547 W/kg

Ch44/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.696 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.931 W/kg

SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.068 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.5%

Maximum value of SAR (measured) = 0.504 W/kg

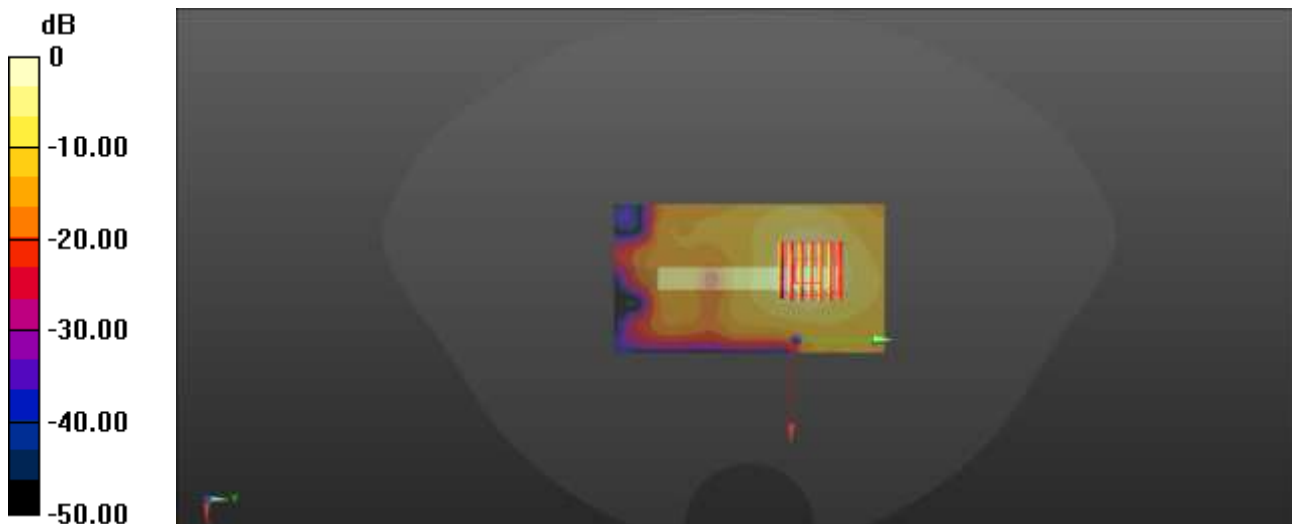

0 dB = 0.504 W/kg

Meas56.Body-worn&Hotspot Top side 10mm WLAN 5.3G Ch60 ANT6

Date: 2026/1/17

Communication System Band: Band 2; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.399$ S/m; $\epsilon_r = 35.244$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.56, 5.56, 5.56); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch60/Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.536 W/kg

Ch60/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.275 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.904 W/kg

SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.9%

Maximum value of SAR (measured) = 0.489 W/kg

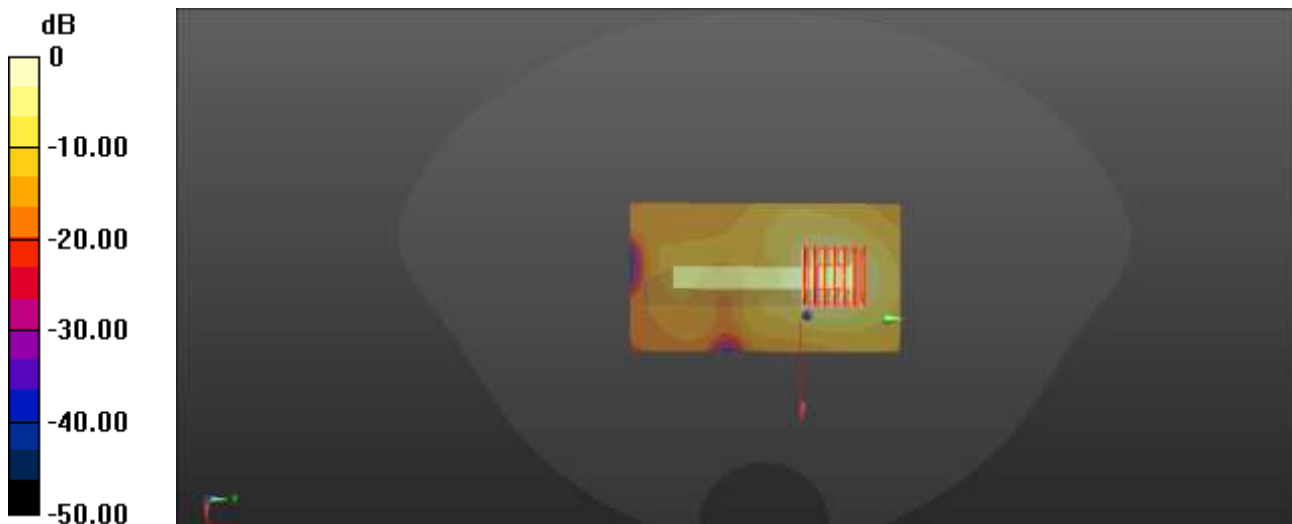

0 dB = 0.489 W/kg

Meas57.Body-worn&Hotspot Top side 10mm WLAN 5.6G Ch116 ANT6

Date: 2026/1/18

Communication System Band: Band 3; Frequency: 5580 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5580$ MHz; $\sigma = 5.245$ S/m; $\epsilon_r = 35.137$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.05, 5.05, 5.05); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch116/Area Scan (61x111x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.450 W/kg

Ch116/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 8.328 V/m; Power Drift = -0.18 dB


Peak SAR (extrapolated) = 0.827 W/kg

SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.066 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 45.3%

Maximum value of SAR (measured) = 0.411 W/kg

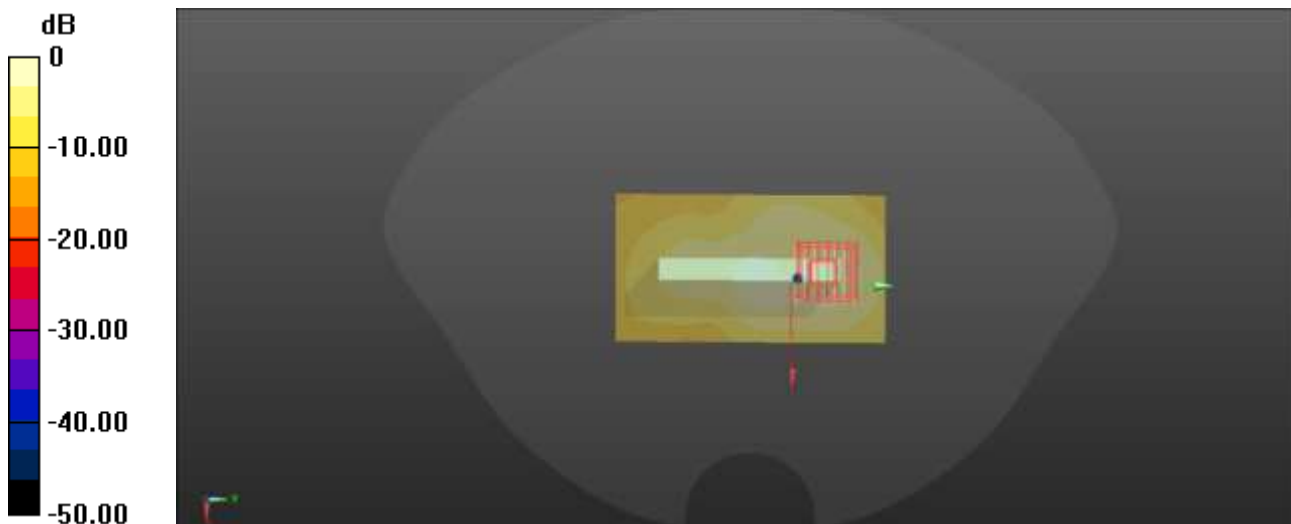

0 dB = 0.411 W/kg

Meas58.Body-worn&Hotspot Top side 10mm WLAN 5.8G Ch157 ANT6

Date: 2026/1/13

Communication System Band: Band 4; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.349$ S/m; $\epsilon_r = 34.261$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(5.14, 5.14, 5.14); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch157/Area Scan (61x111x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.365 W/kg

Ch157/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 8.756 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.704 W/kg

SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.049 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 43.7%

Maximum value of SAR (measured) = 0.353 W/kg

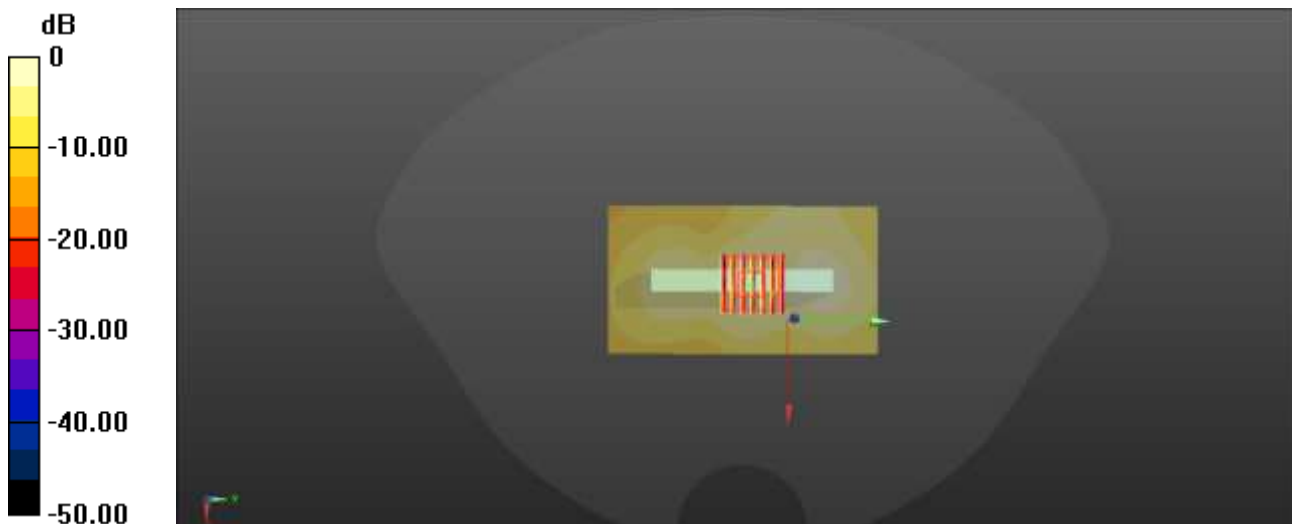

0 dB = 0.353 W/kg

Meas59.Head Left Cheek BT Ch78 ANT12

Date: 2026/1/15

Communication System Band: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:3.1492

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.873$ S/m; $\epsilon_r = 38.241$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8, 8, 8); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch78/Area Scan (81x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.360 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.052 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 50%

Maximum value of SAR (measured) = 1.15 W/kg

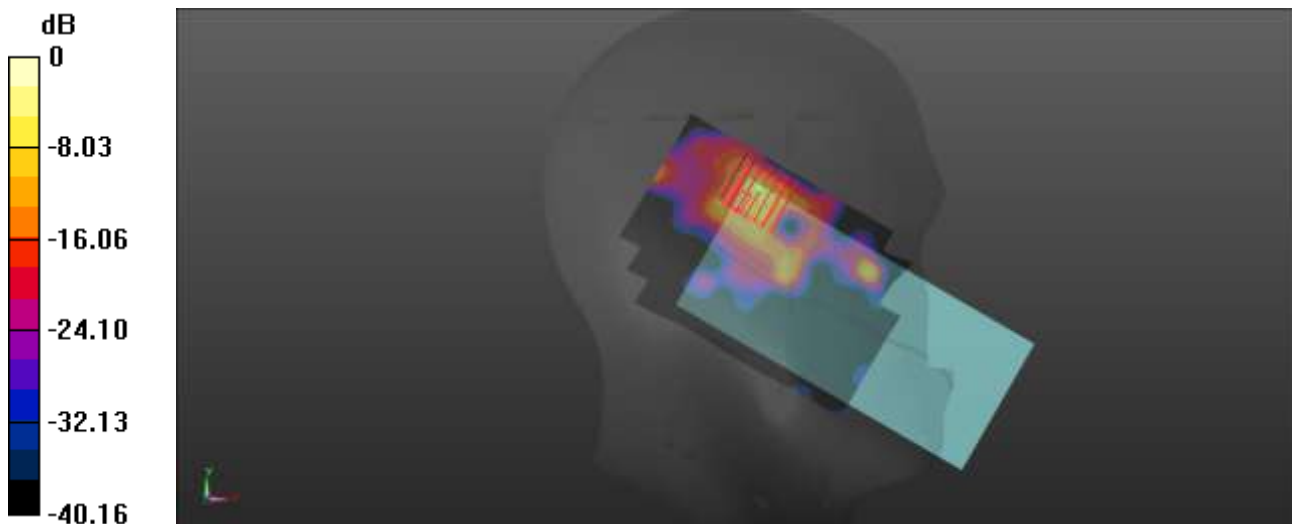

0 dB = 1.15 W/kg

Meas60.Body-worn&Hotspot Right side 10mm BT Ch78 ANT12

Date: 2026/1/15

Communication System Band: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:3.1492

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.873$ S/m; $\epsilon_r = 38.241$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3974; ConvF(8, 8, 8); Calibrated: 2025/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1423; Calibrated: 2025/6/5
- Phantom: SAM2; Type: QD 000 P40 CC; Serial: 1473
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch78/Area Scan (81x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0511 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.184 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.0630 W/kg

SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.019 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 54.4%

Maximum value of SAR (measured) = 0.0518 W/kg

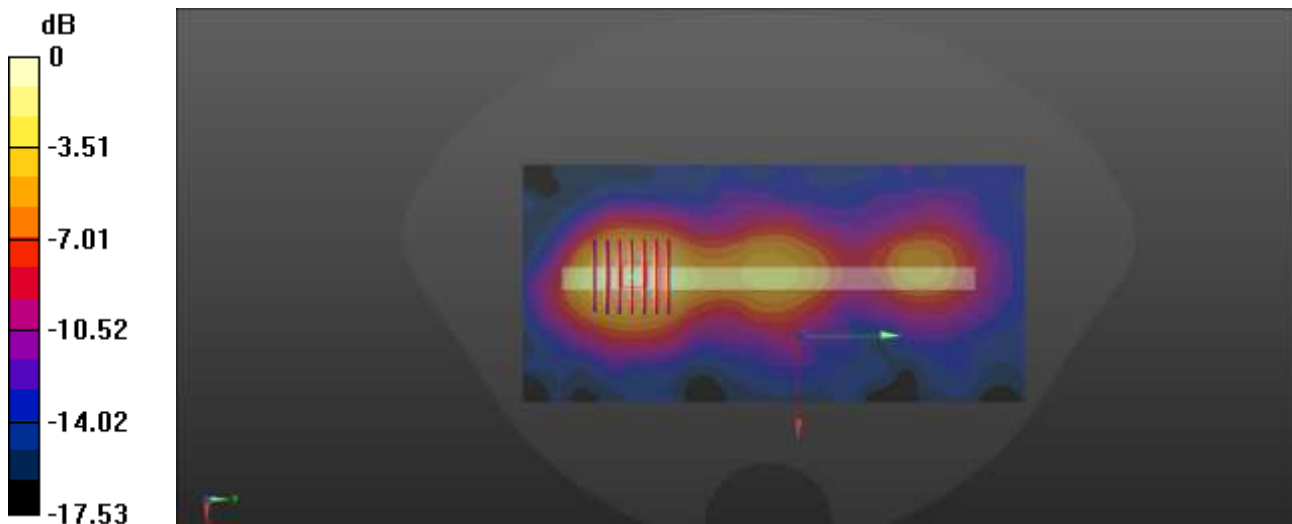

0 dB = 0.0518 W/kg