




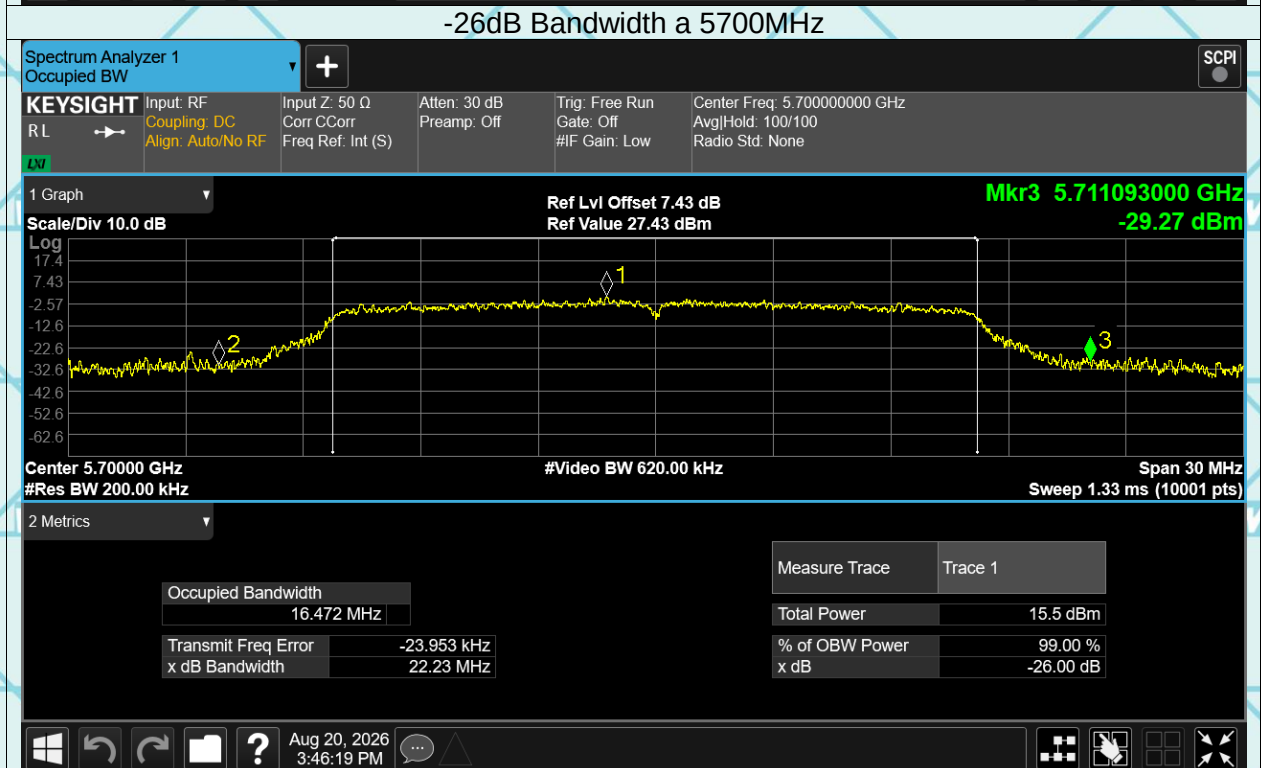
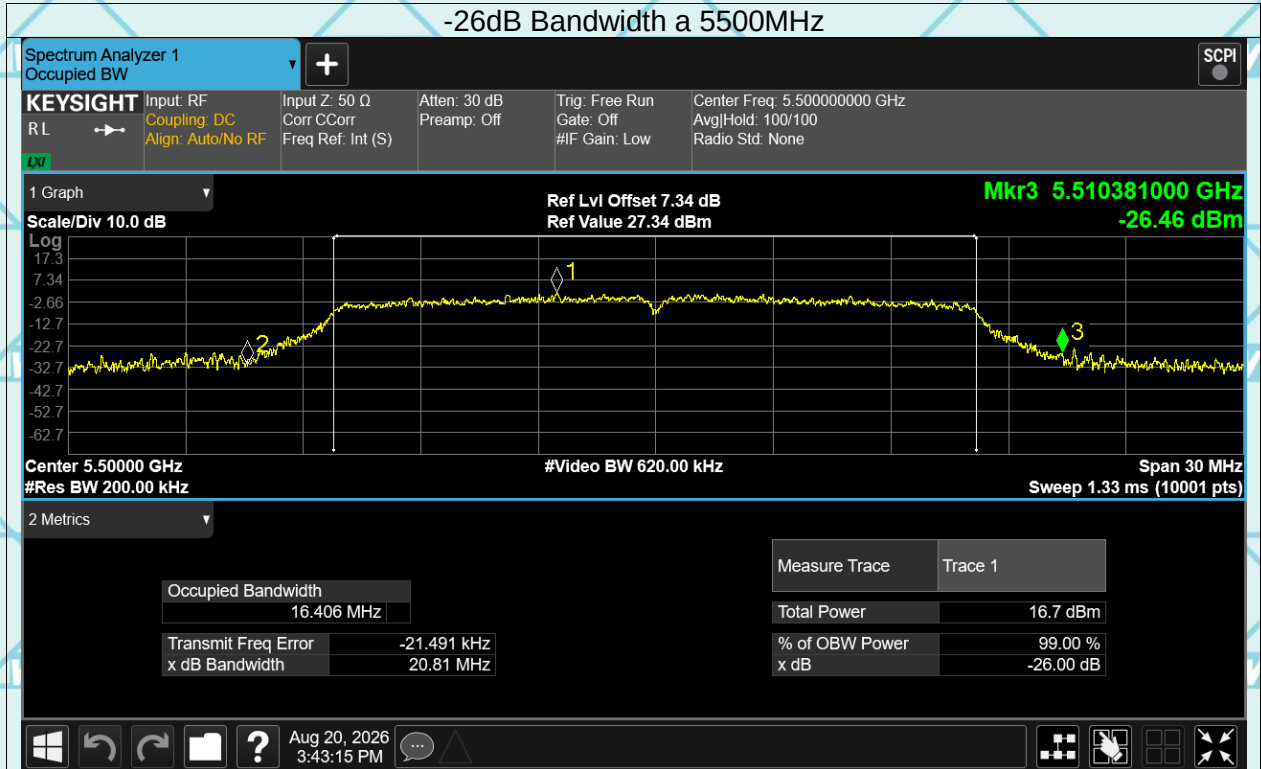
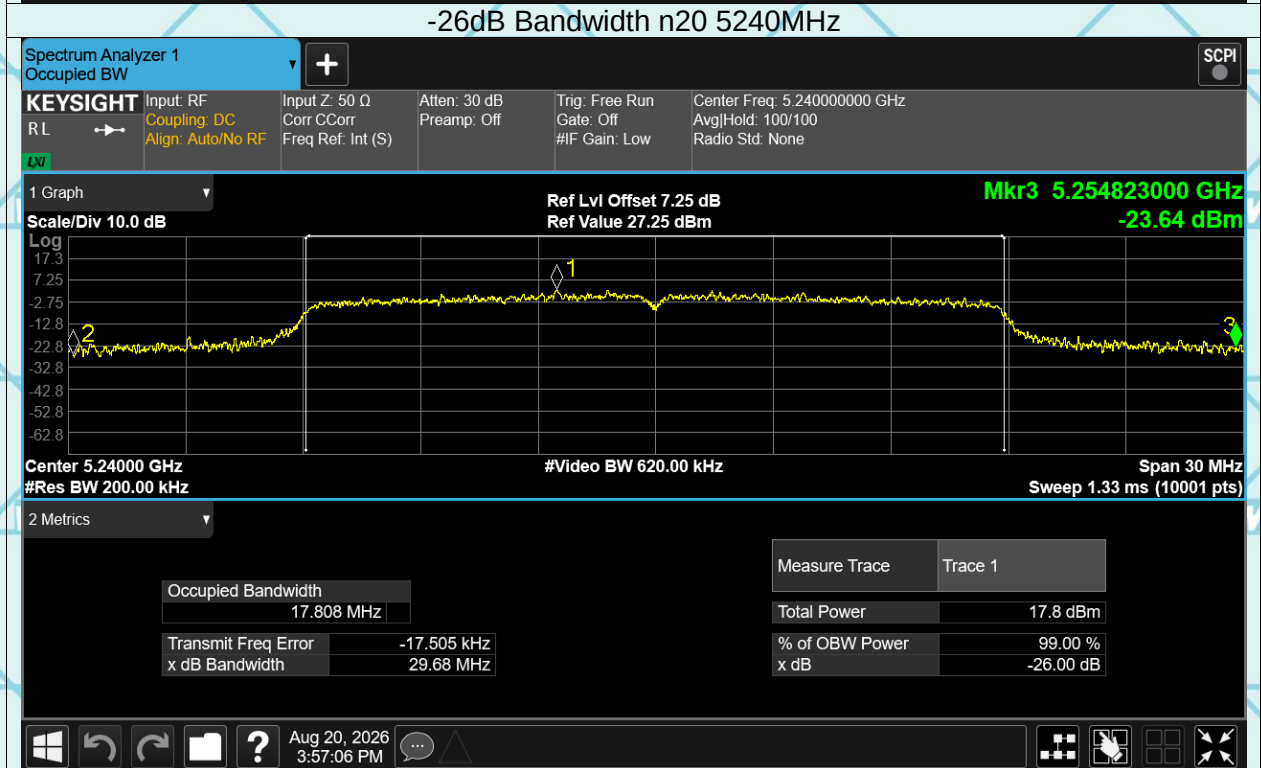
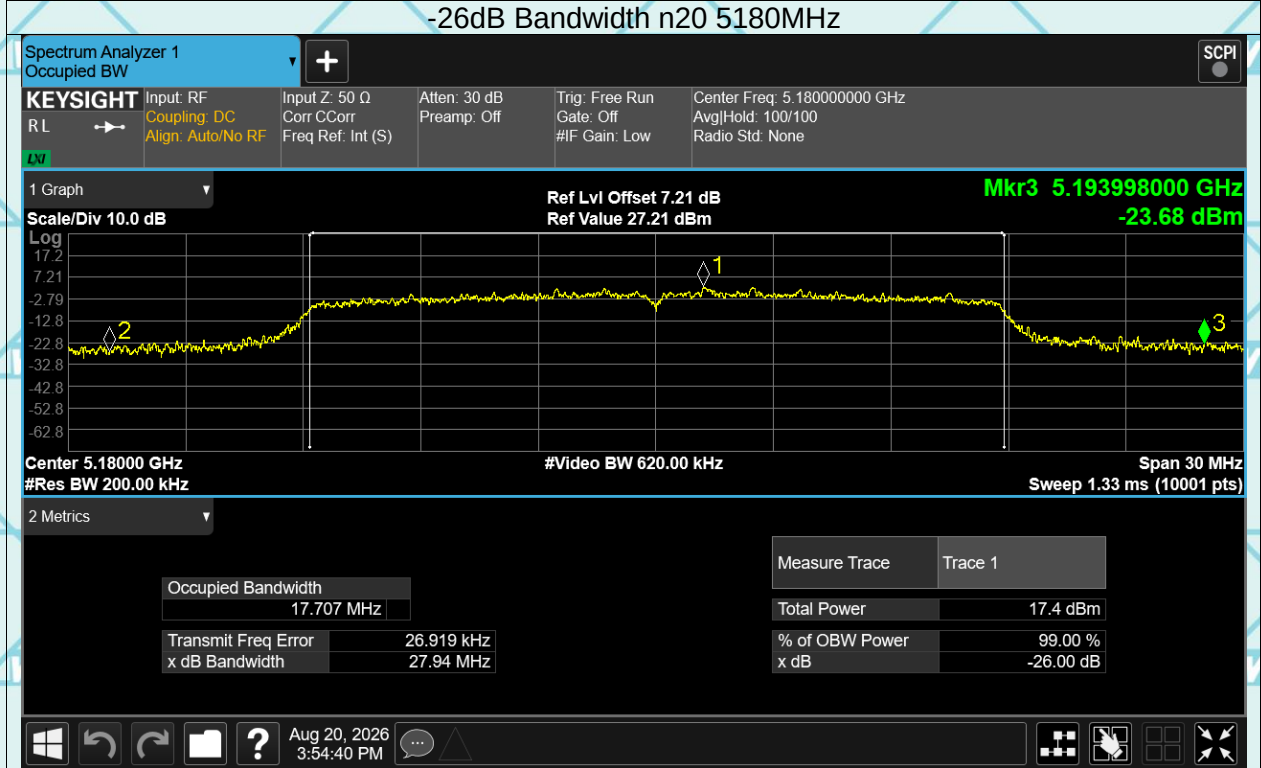
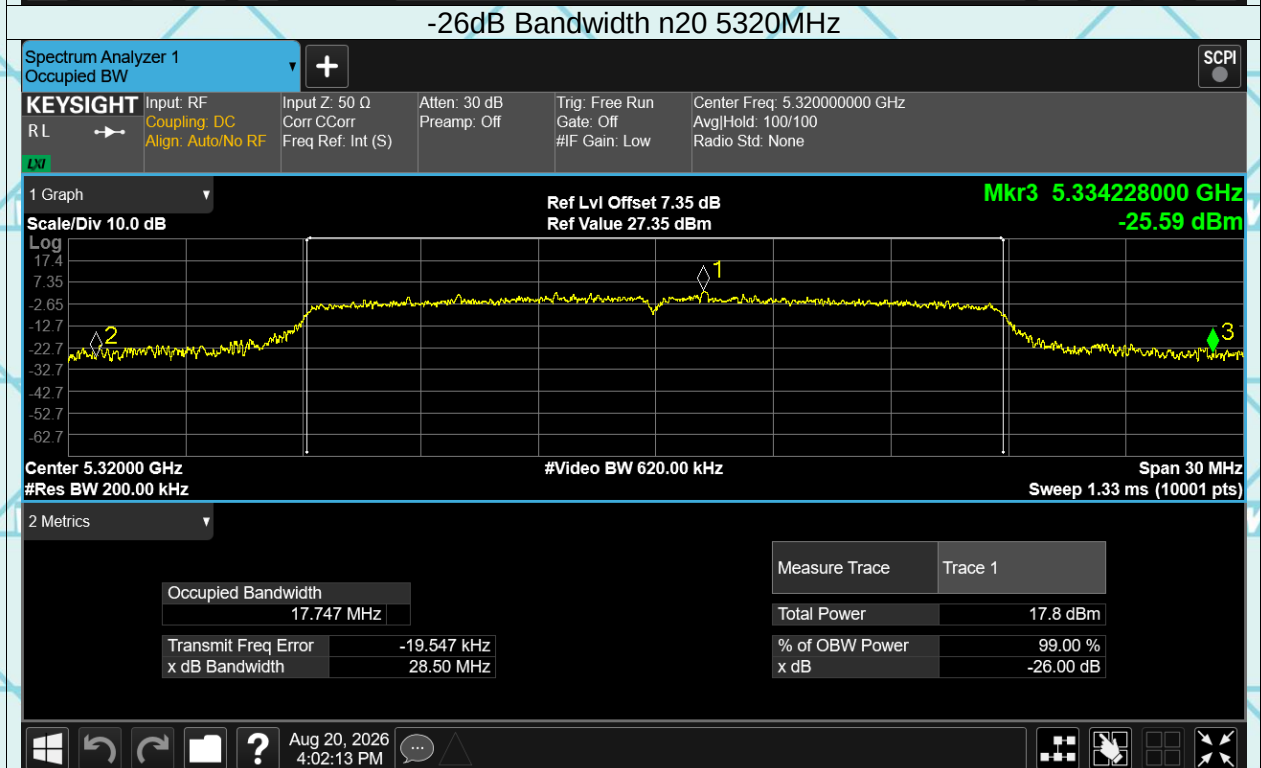



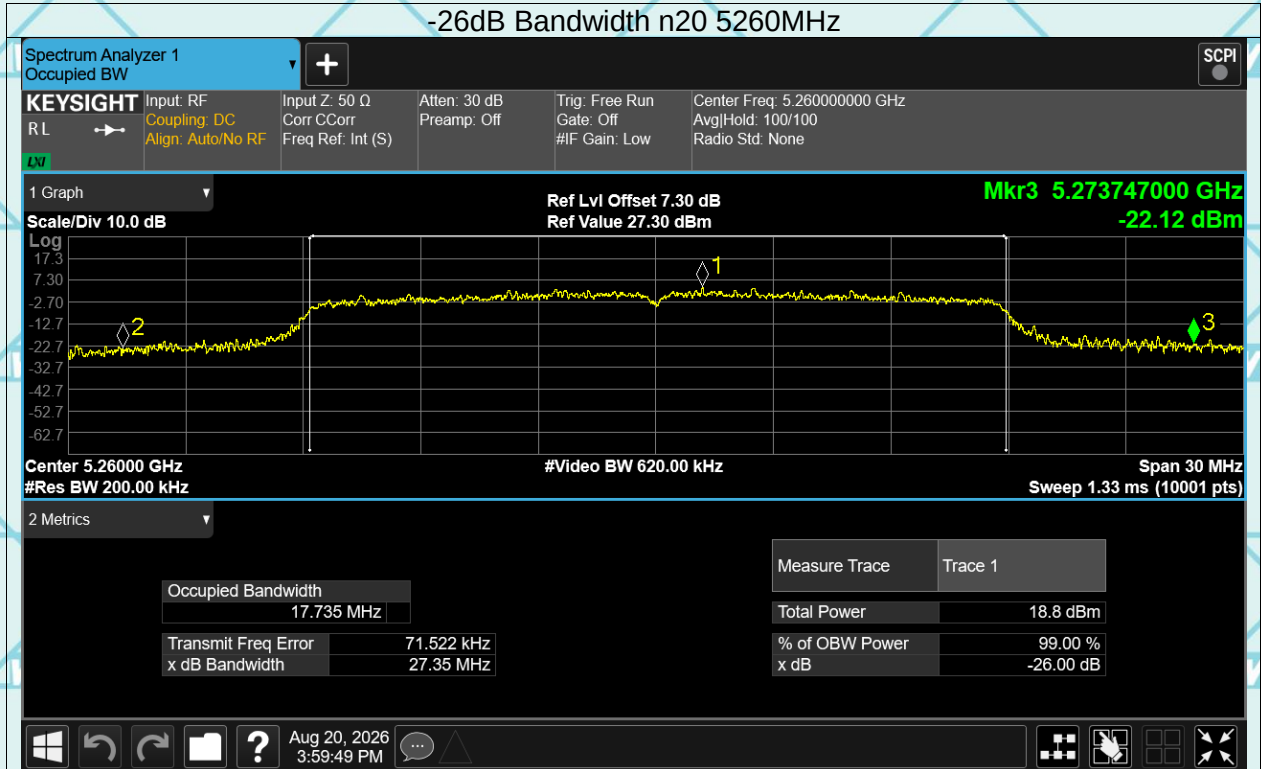



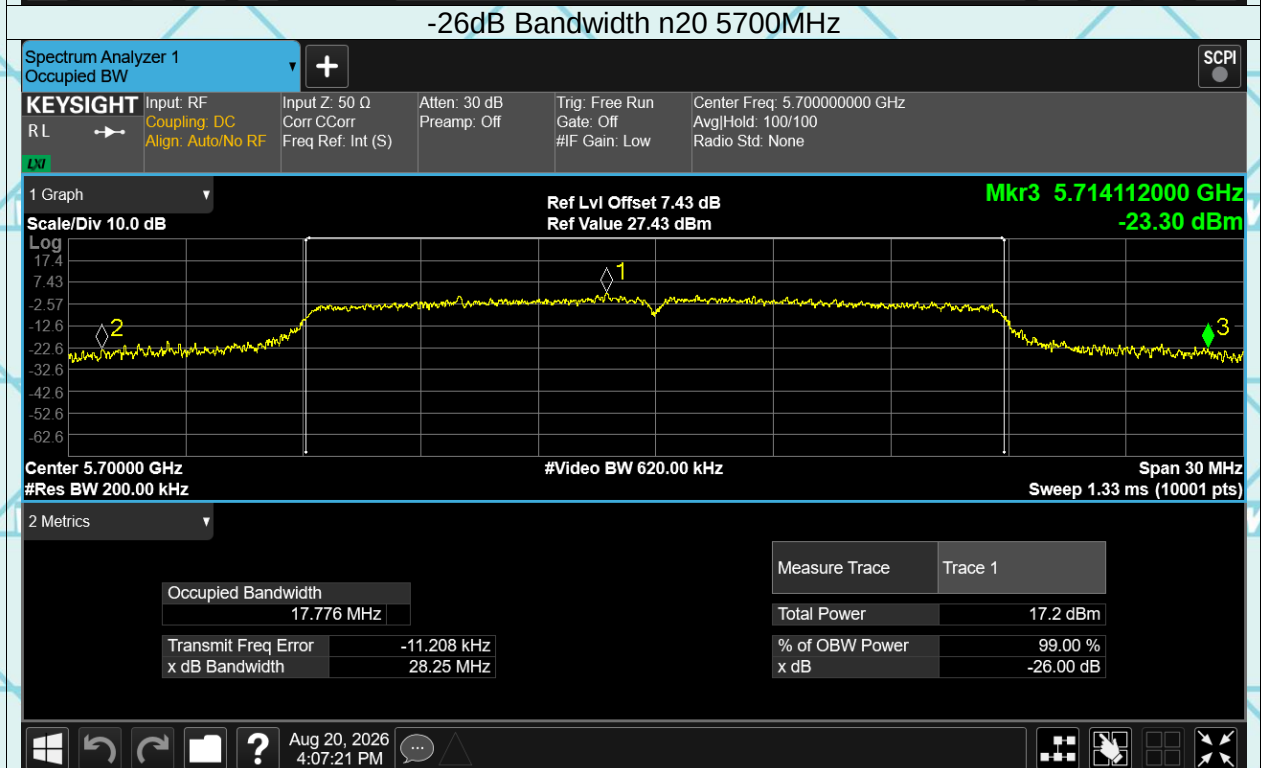



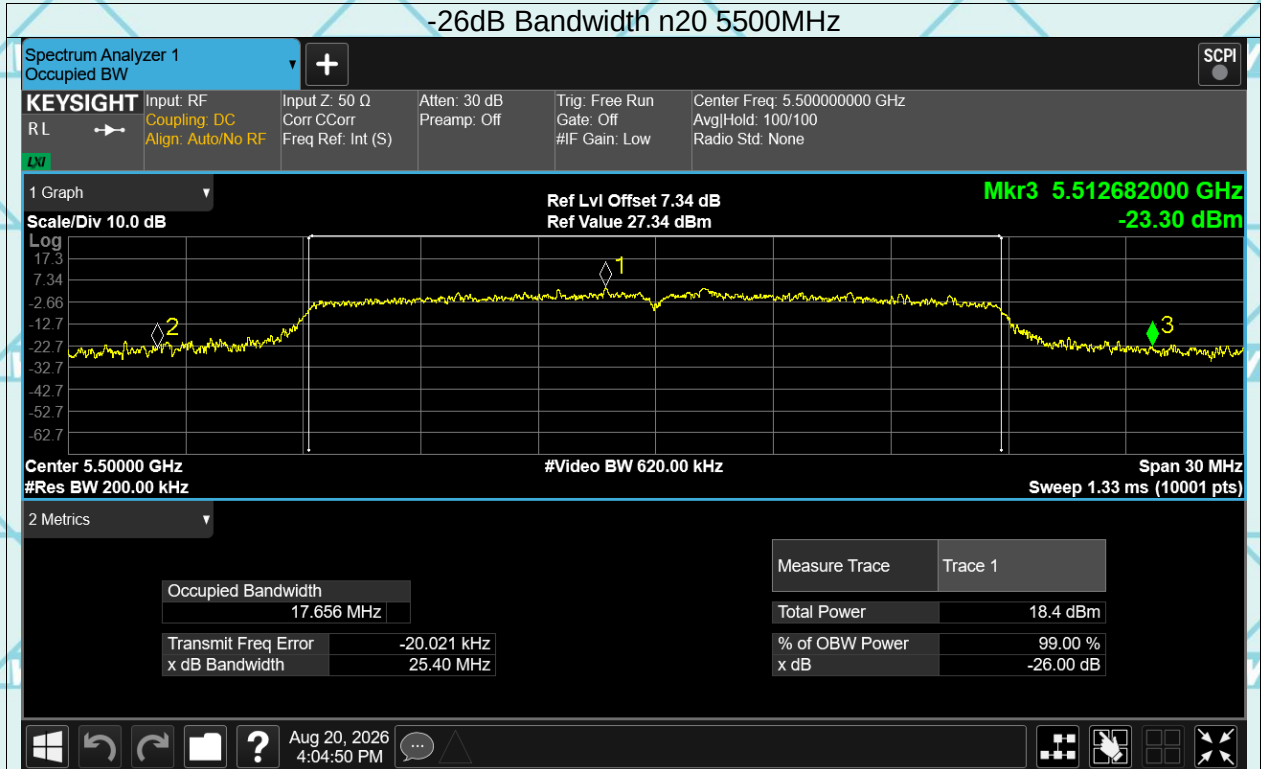



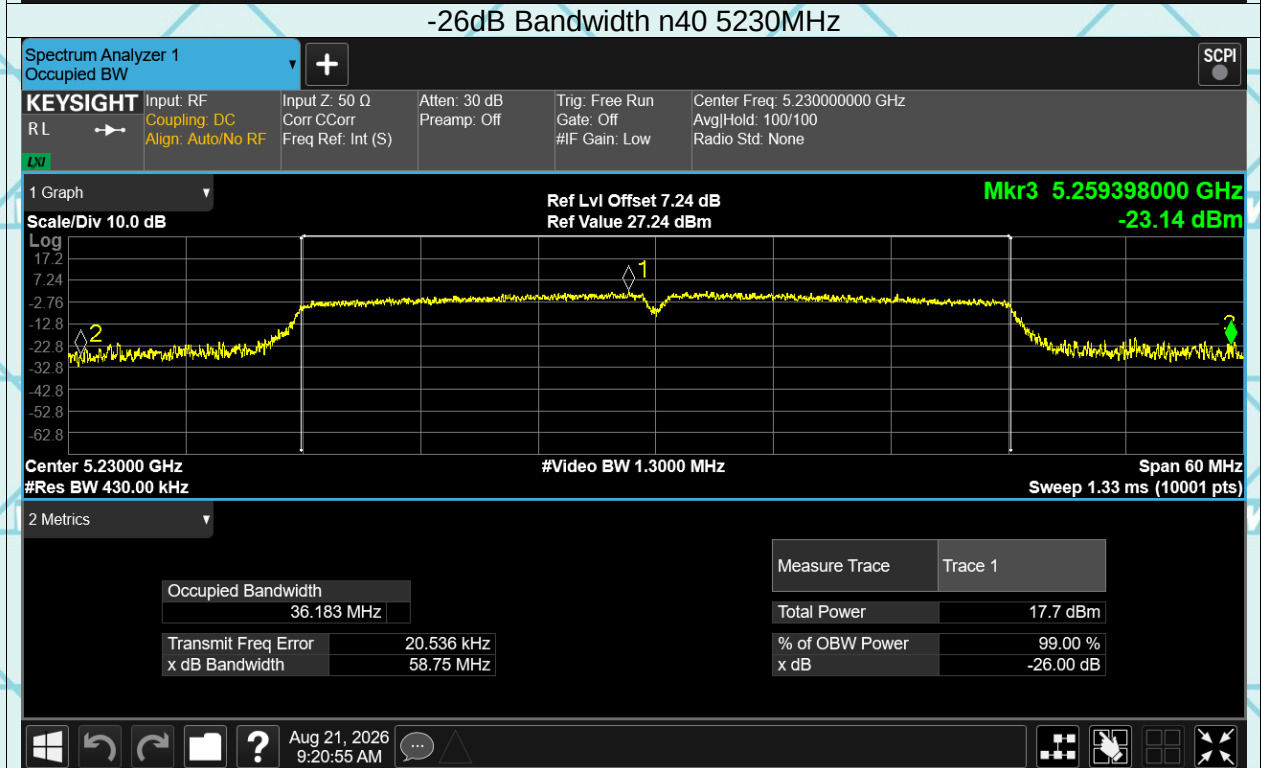



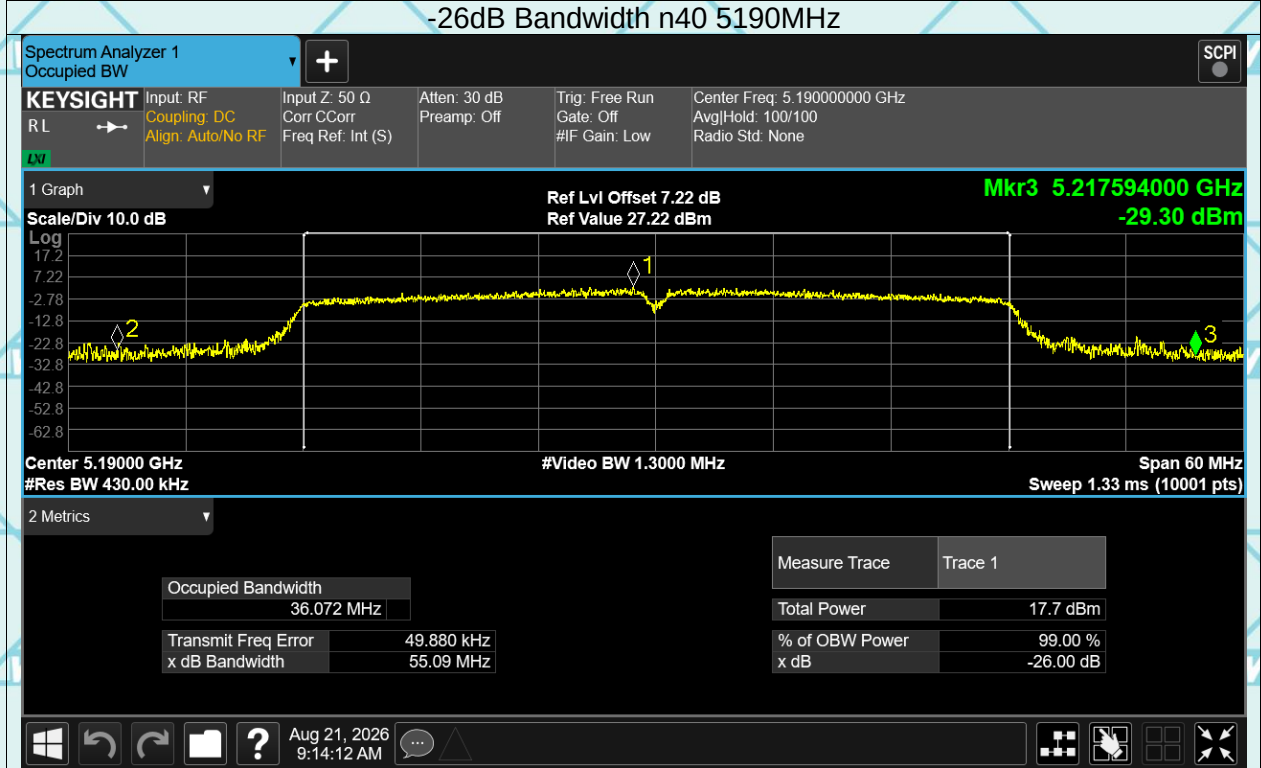


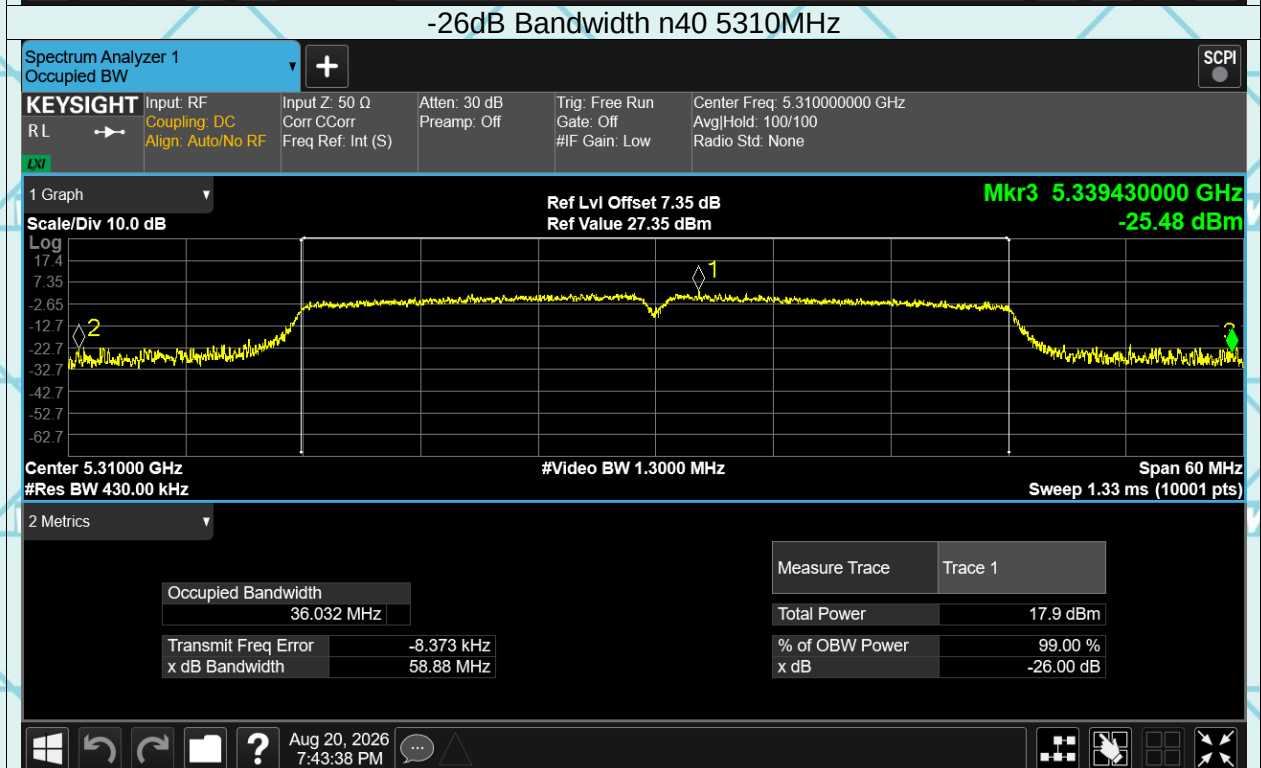
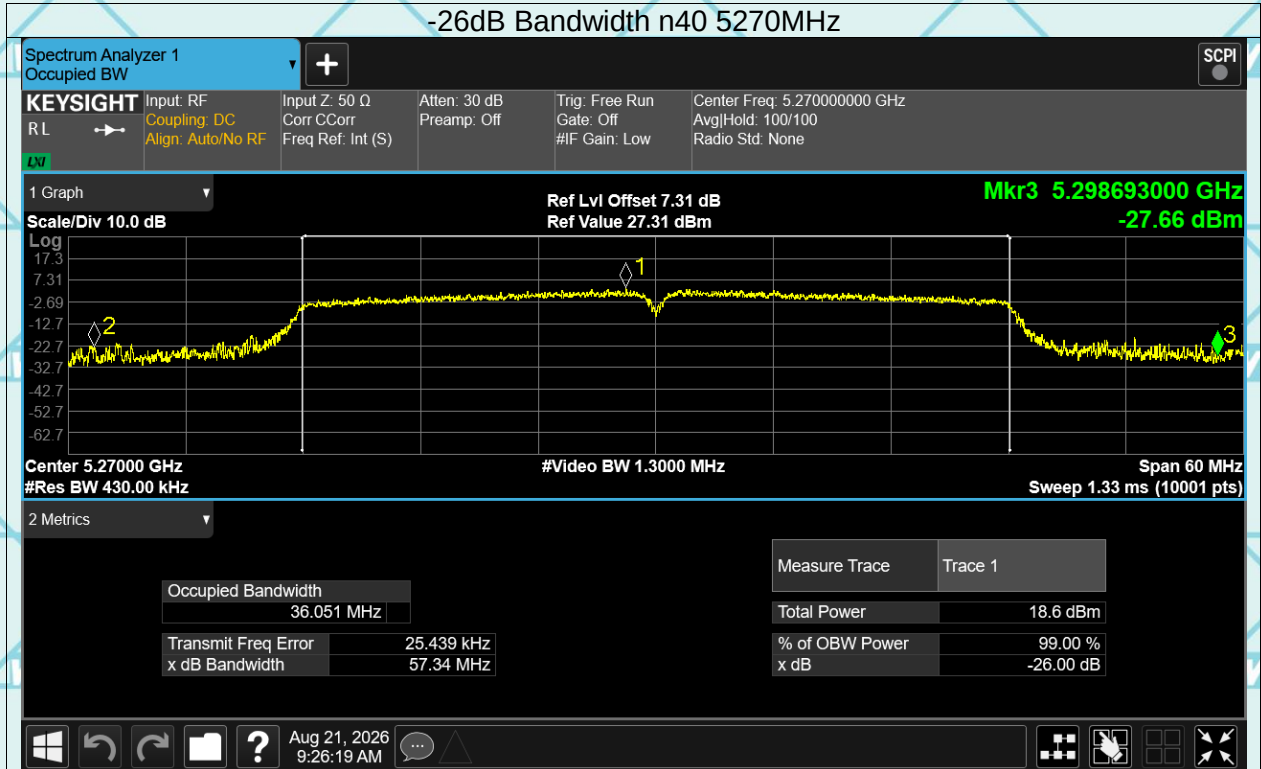


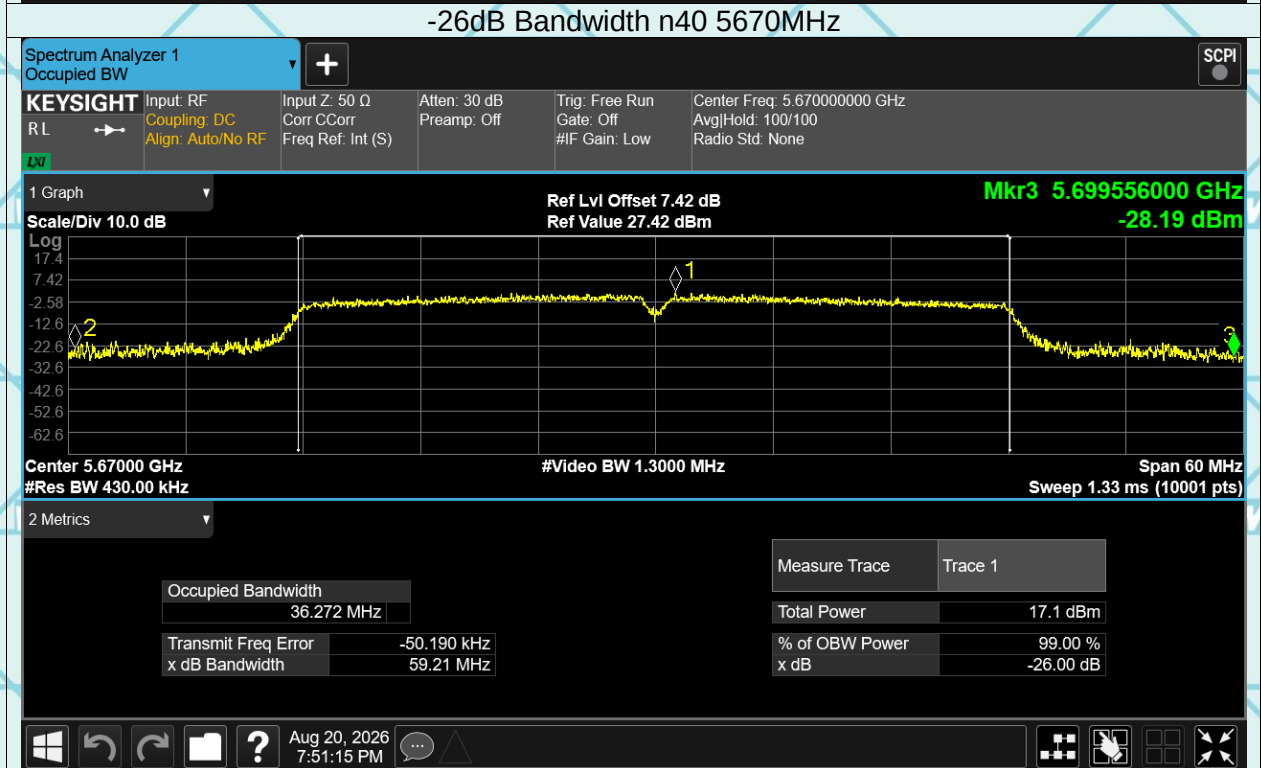
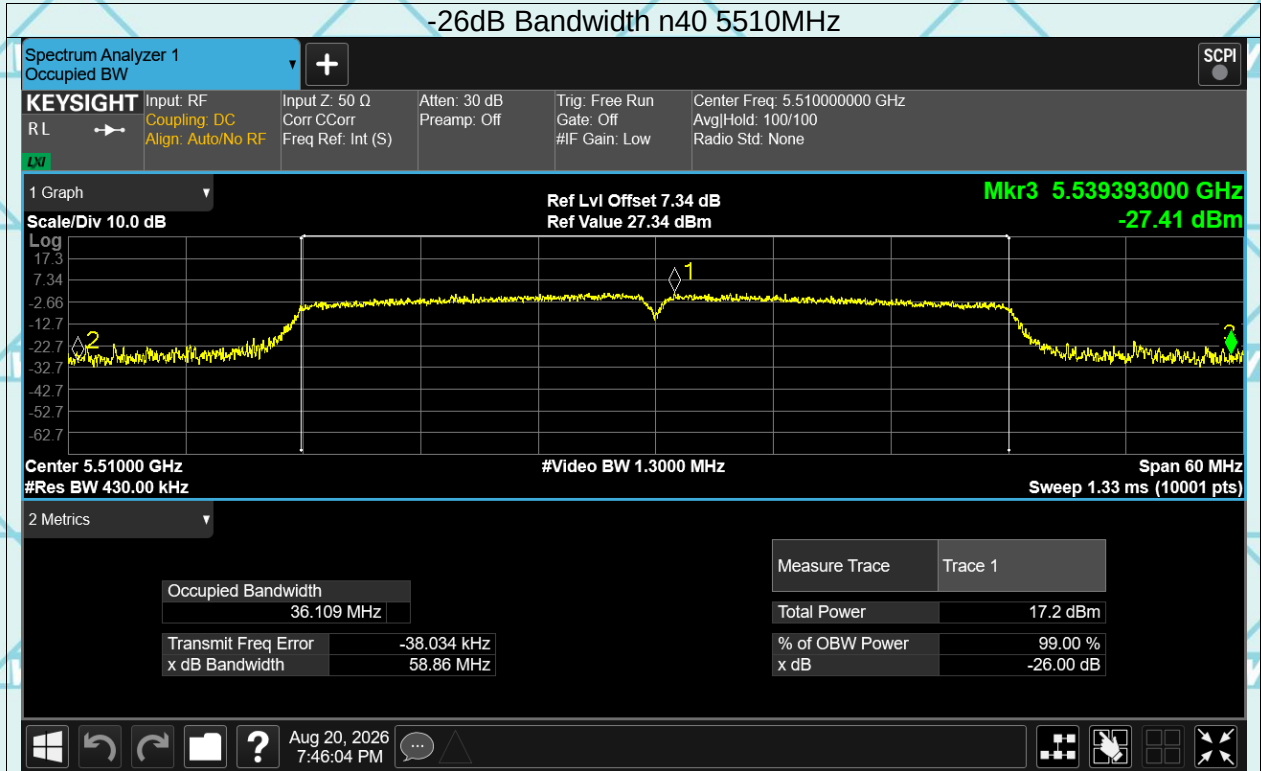


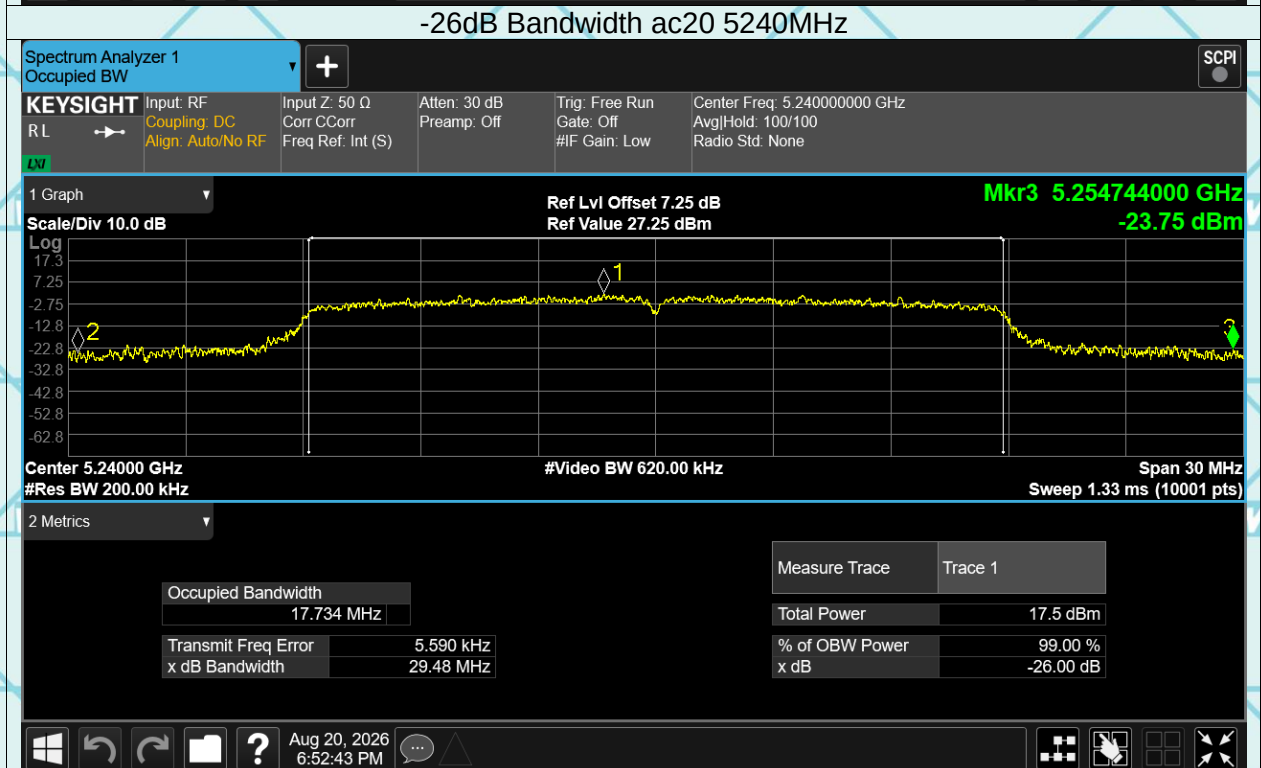
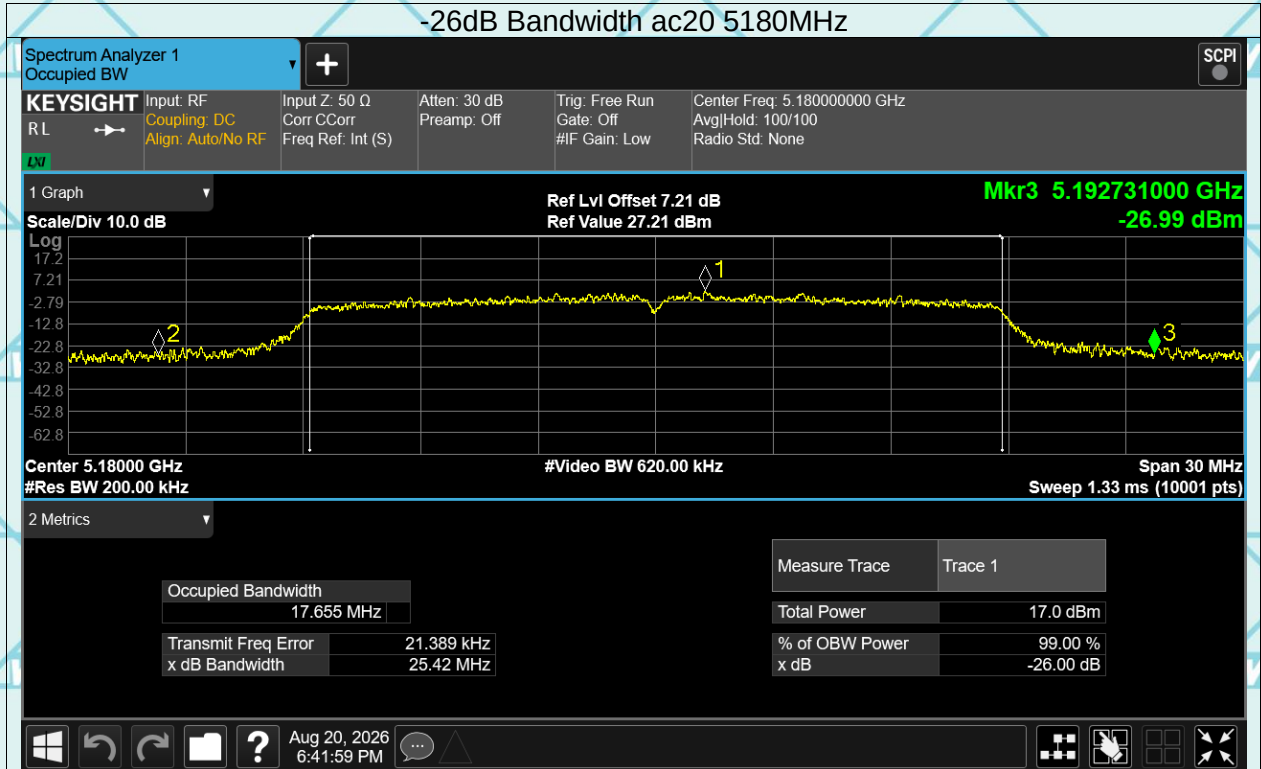


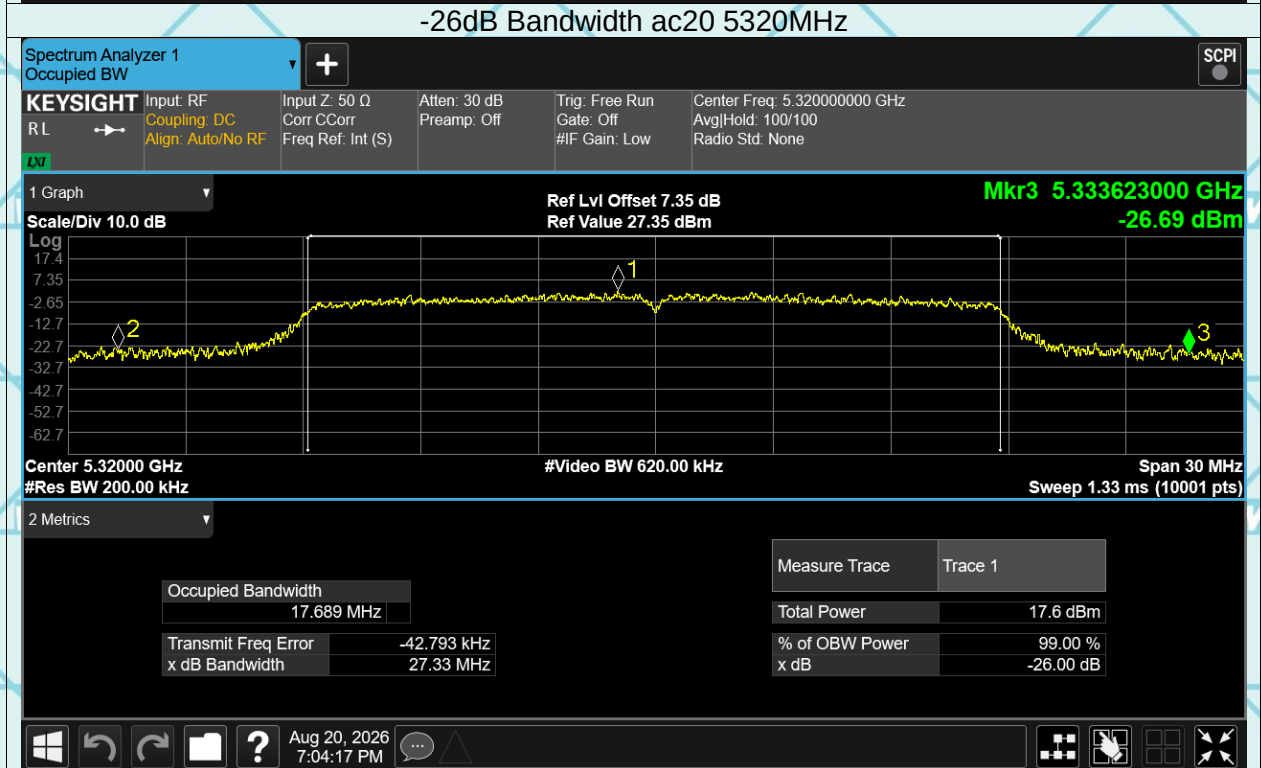
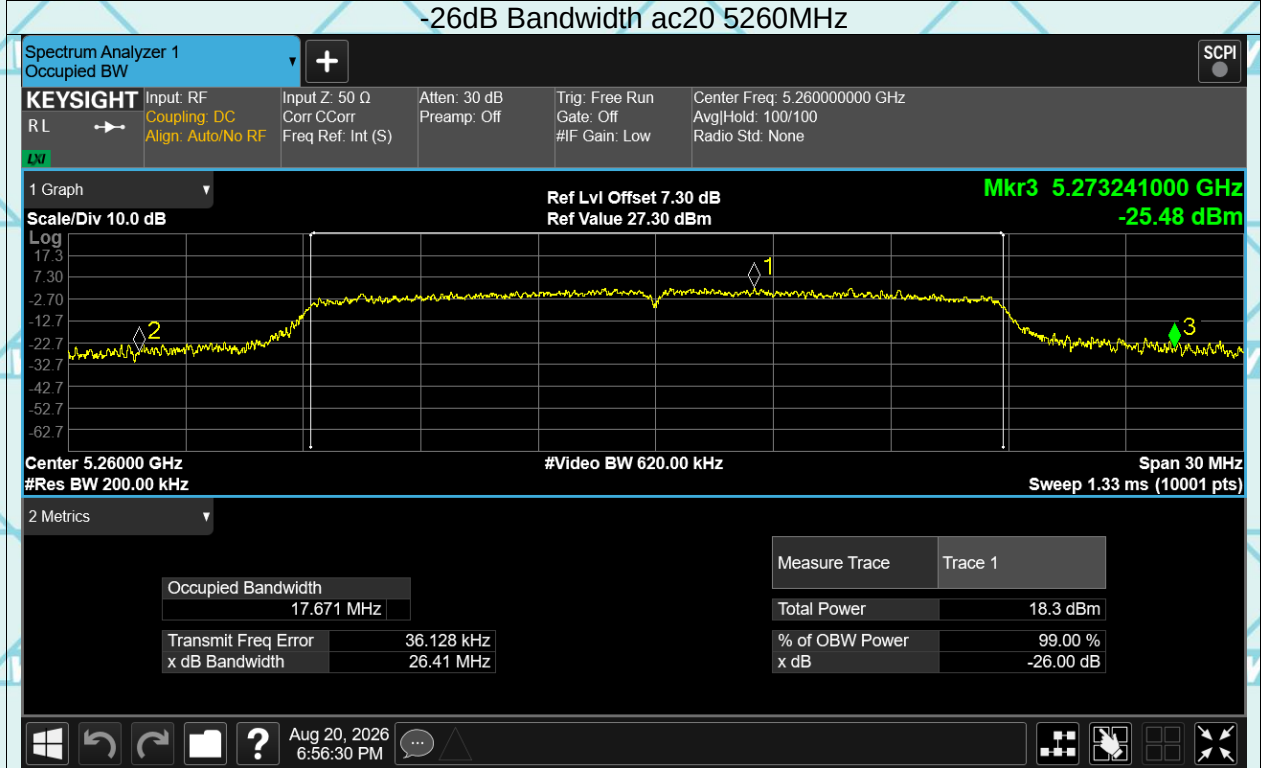


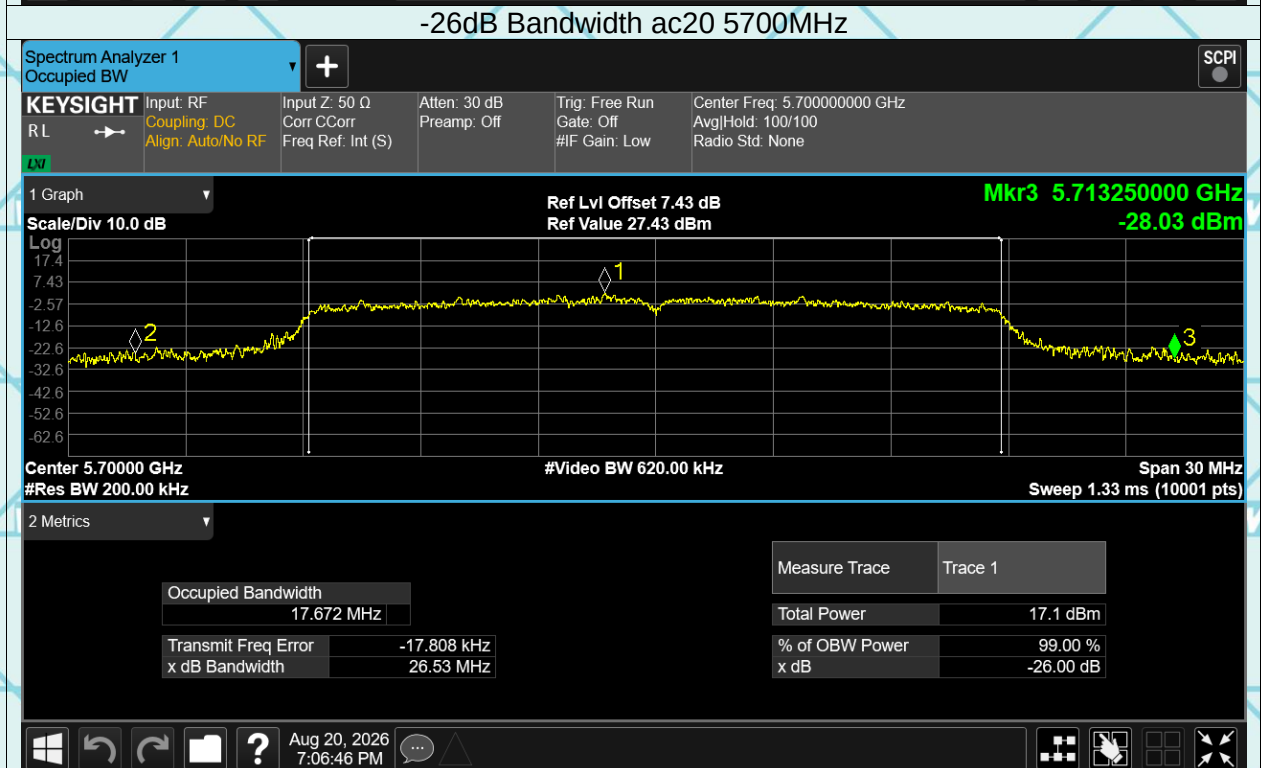
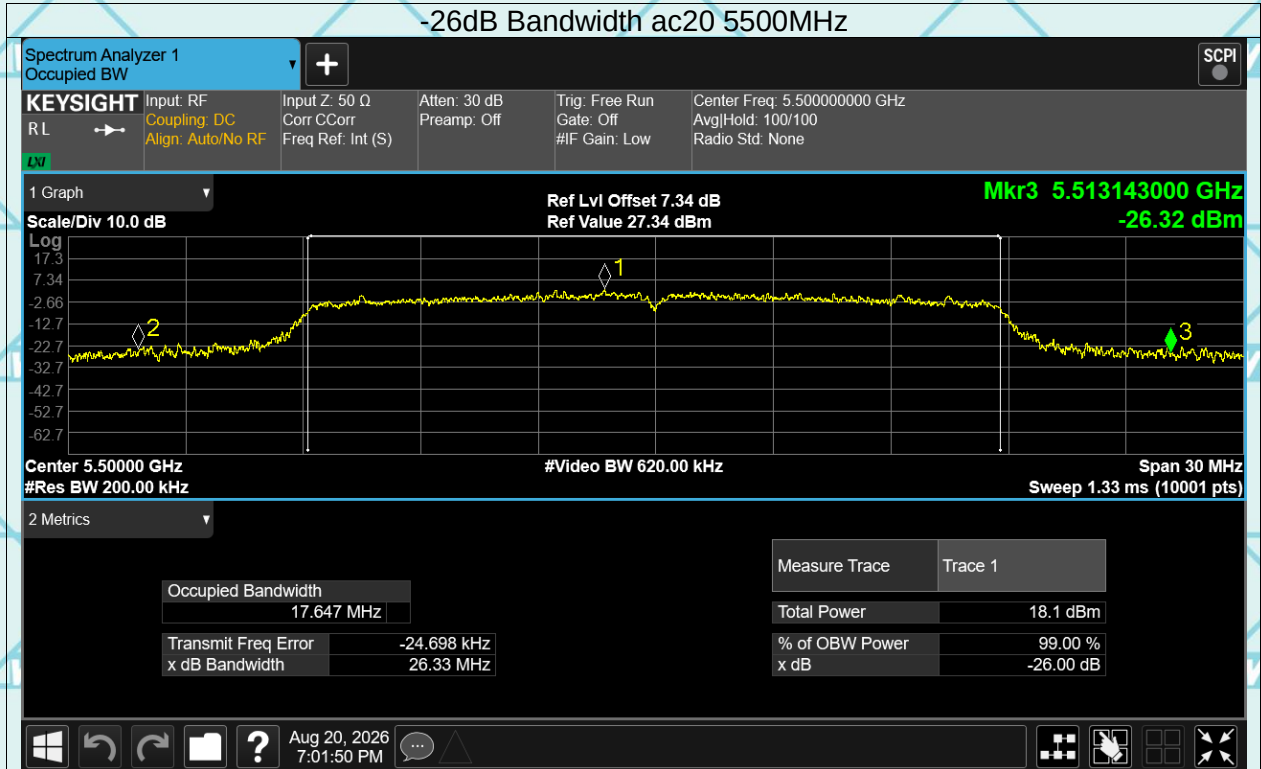


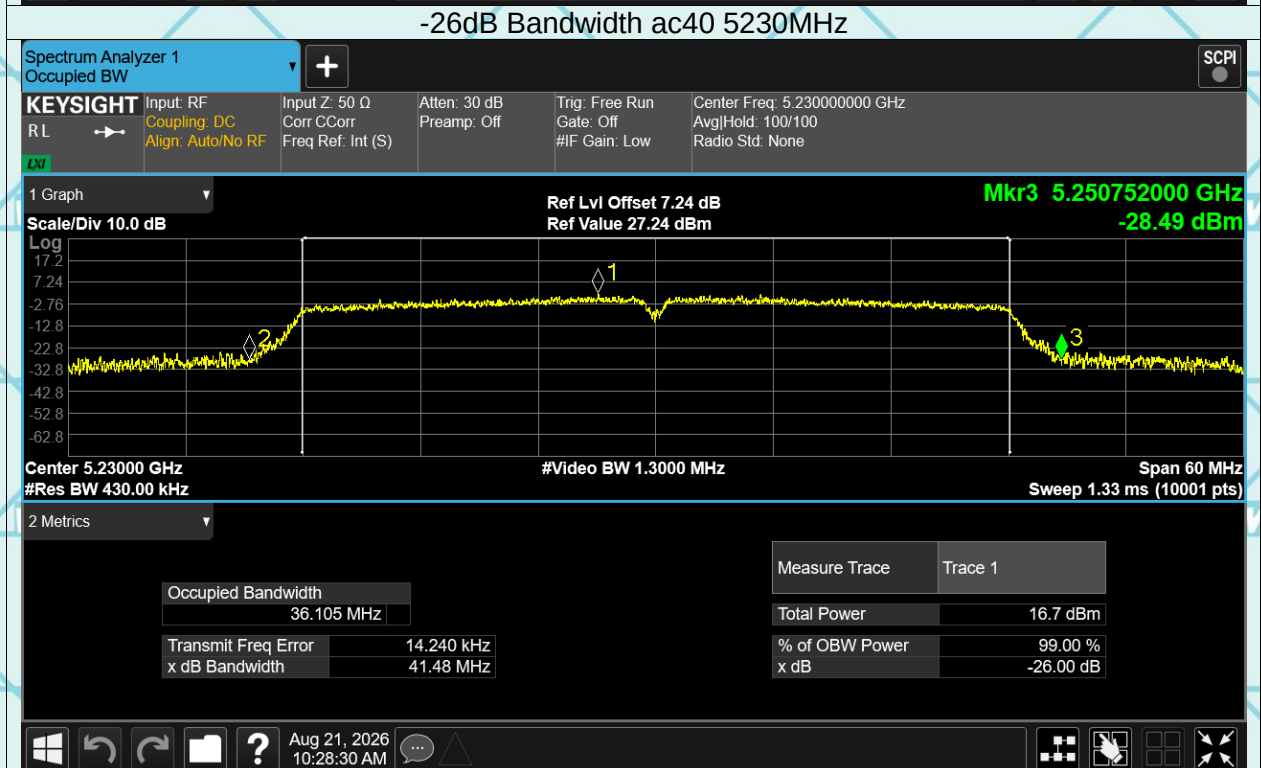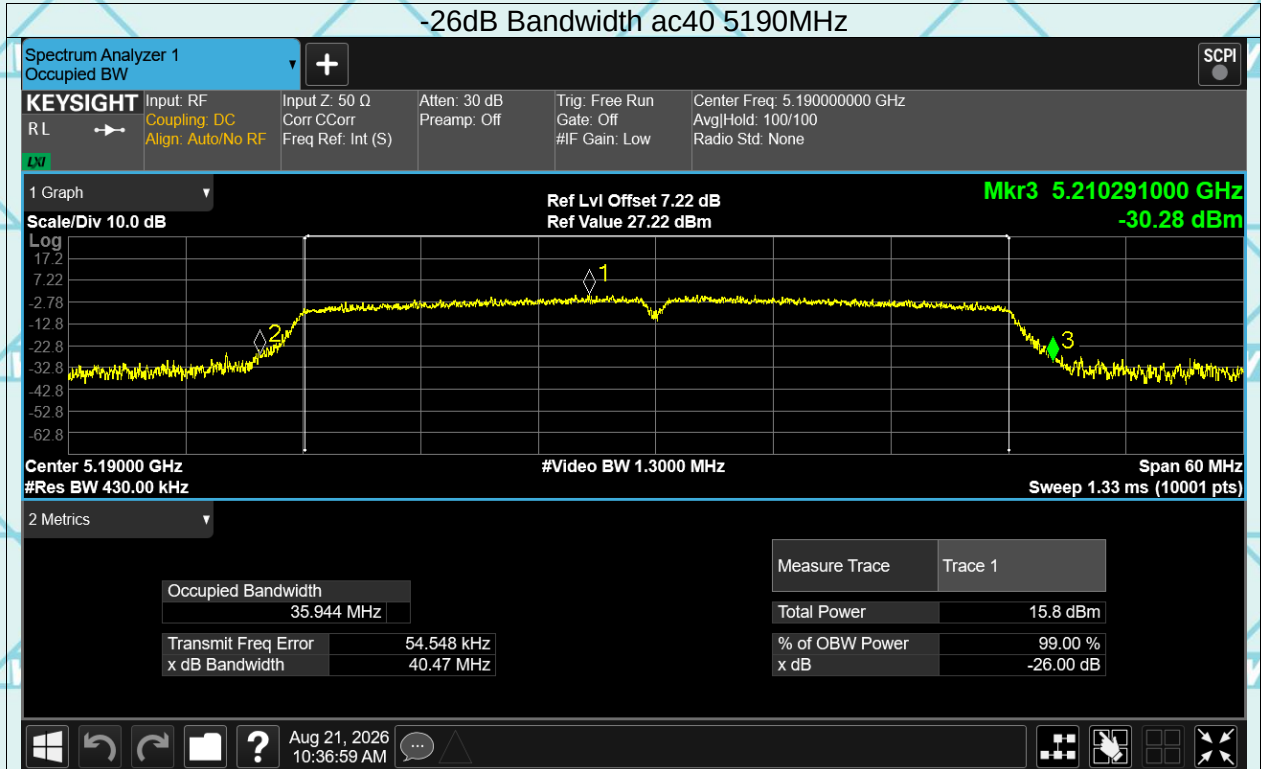

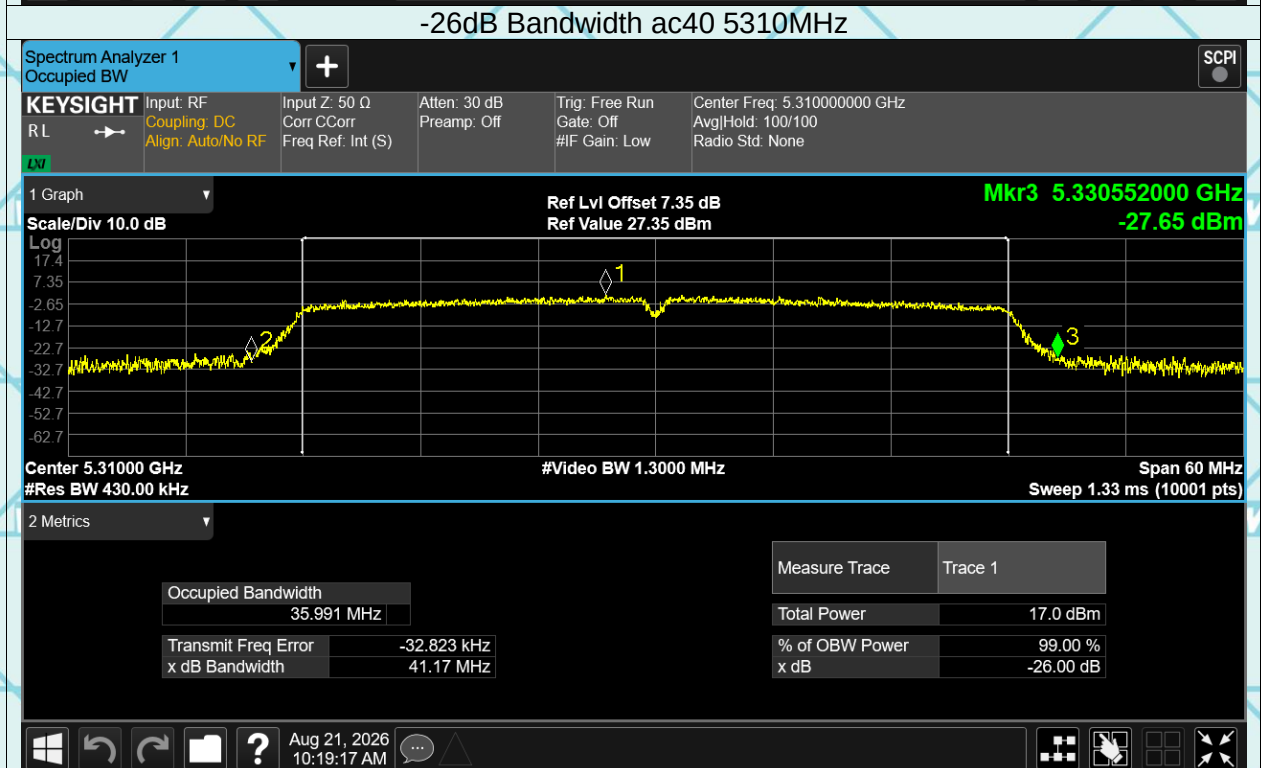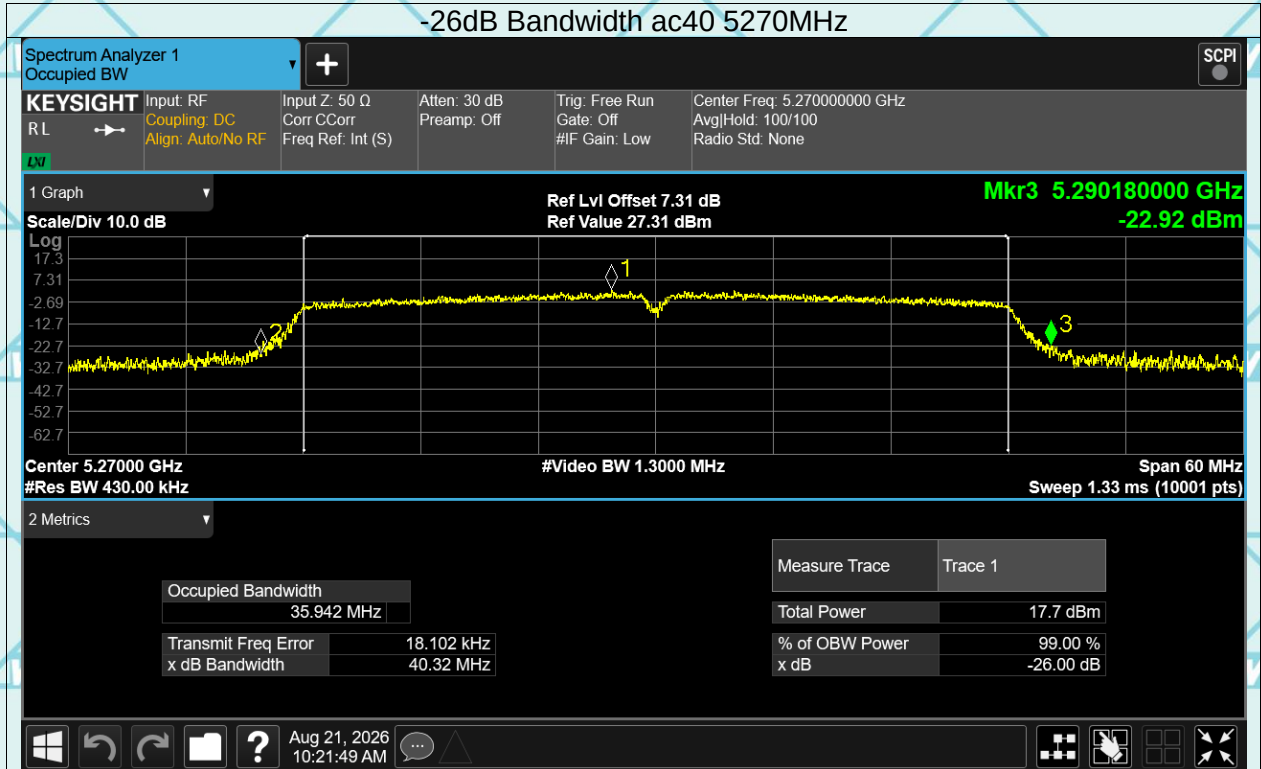

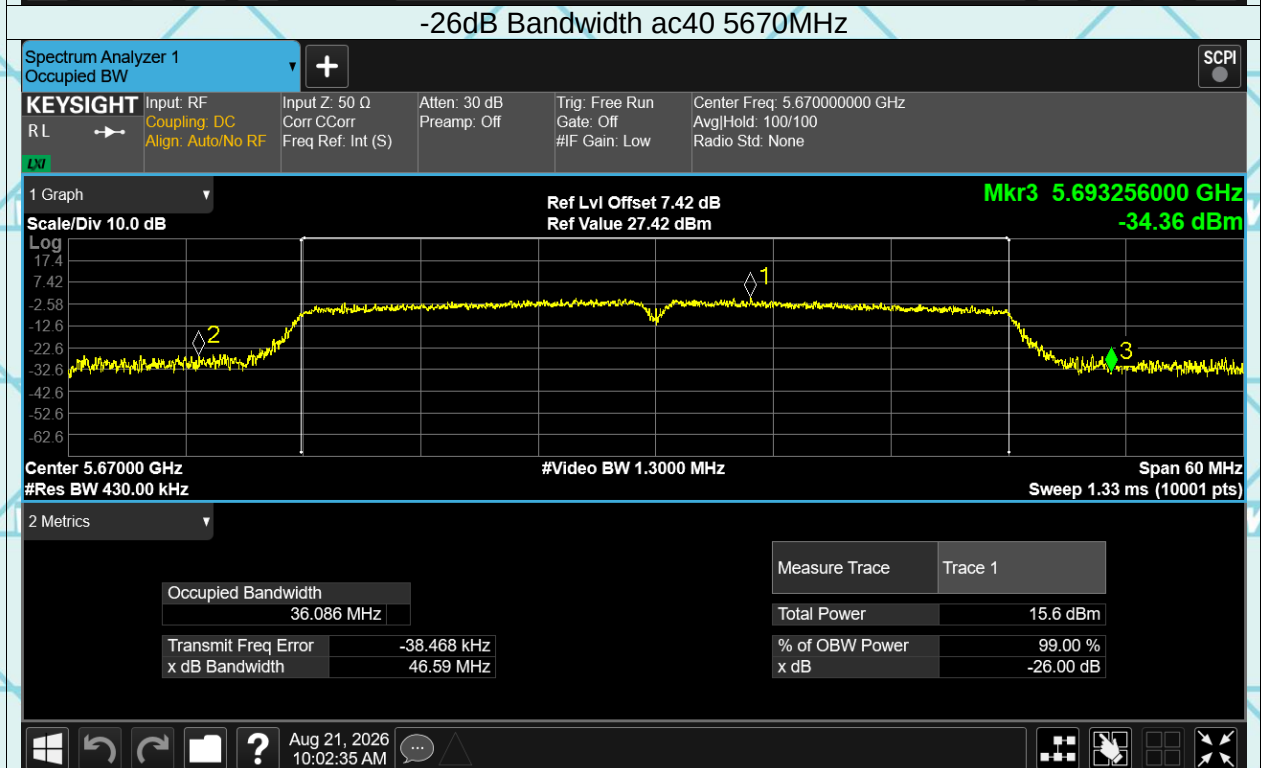
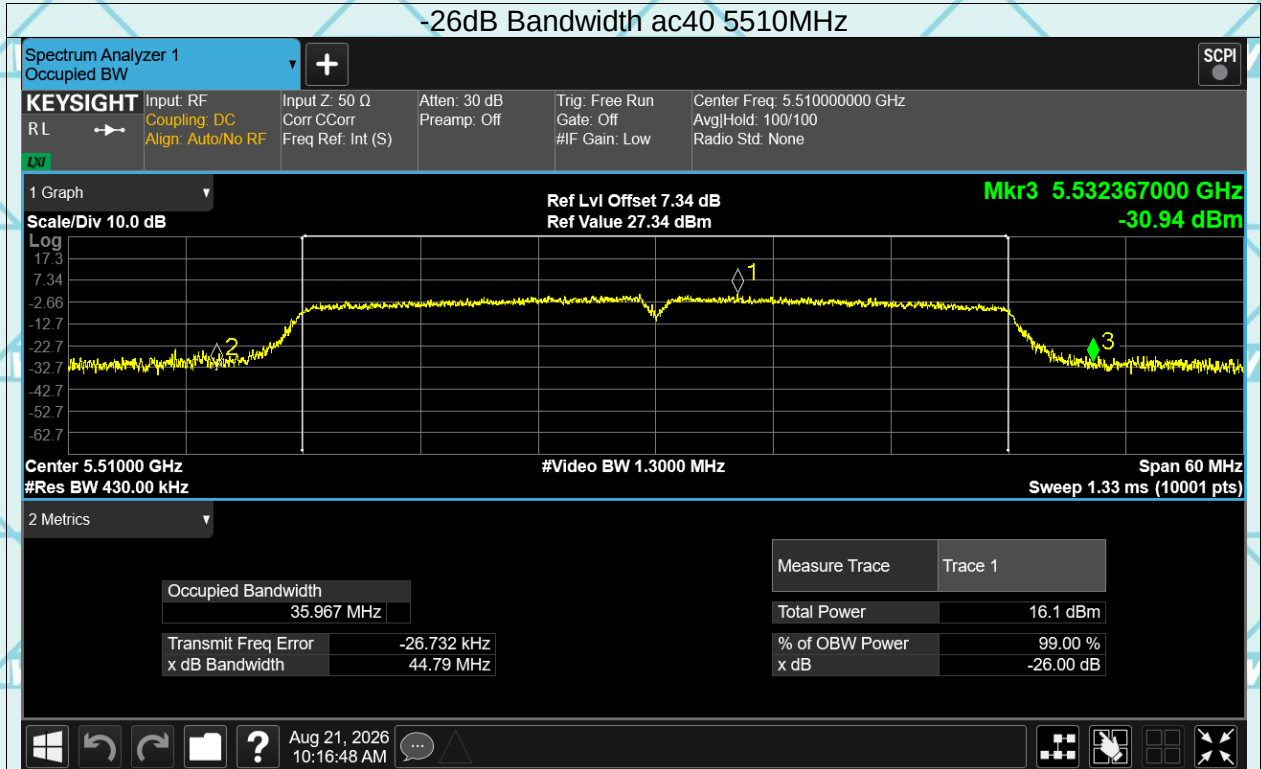


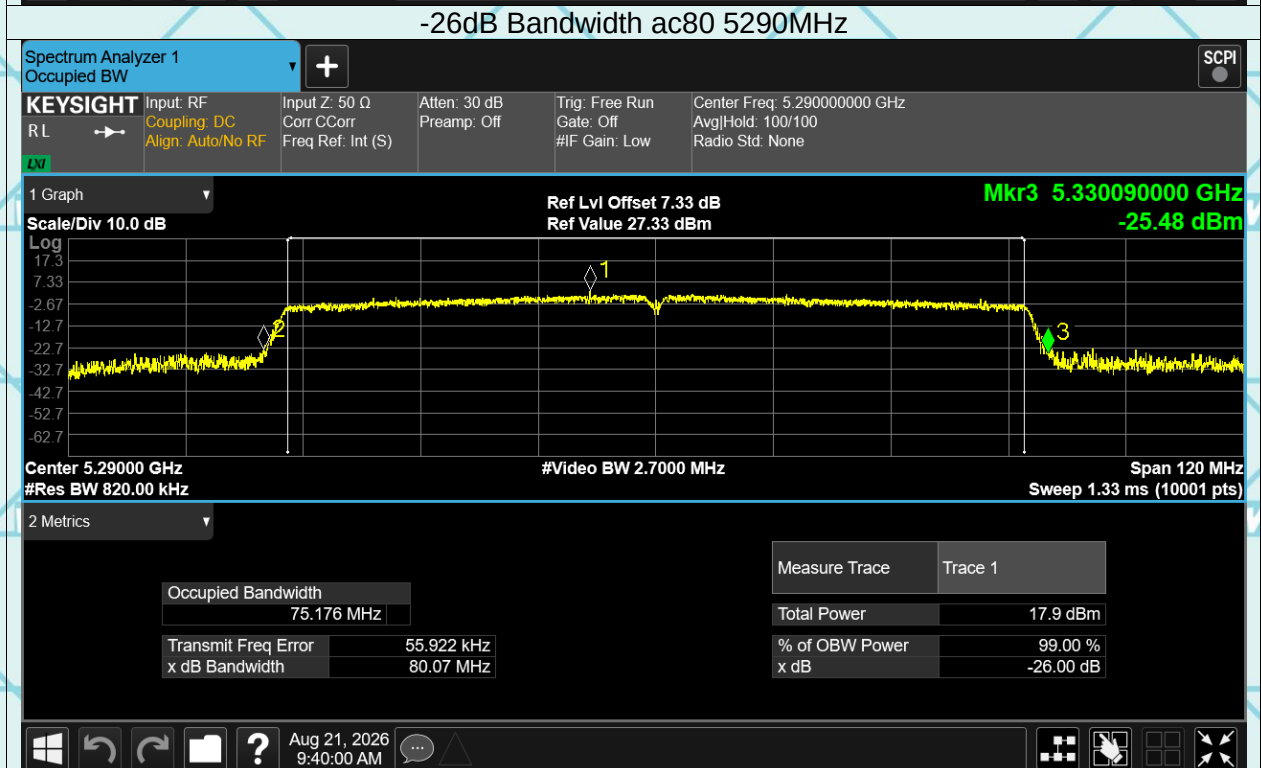
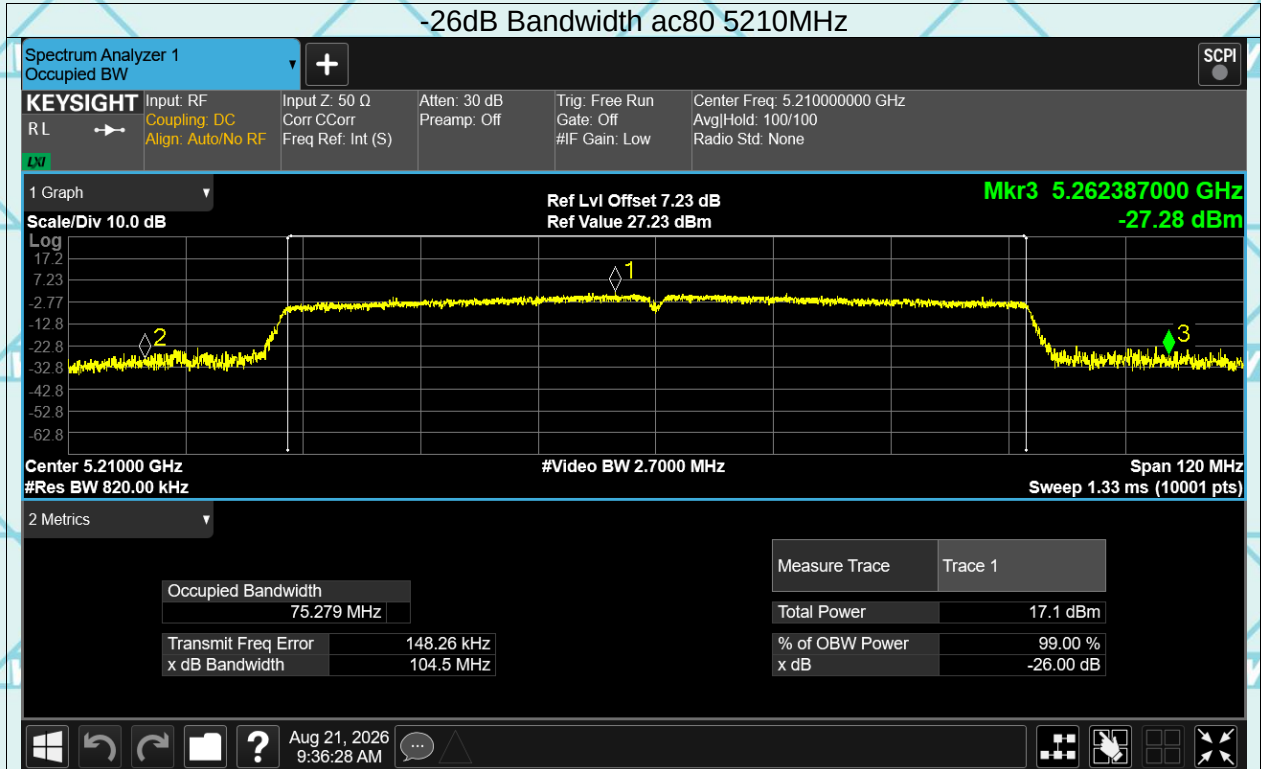


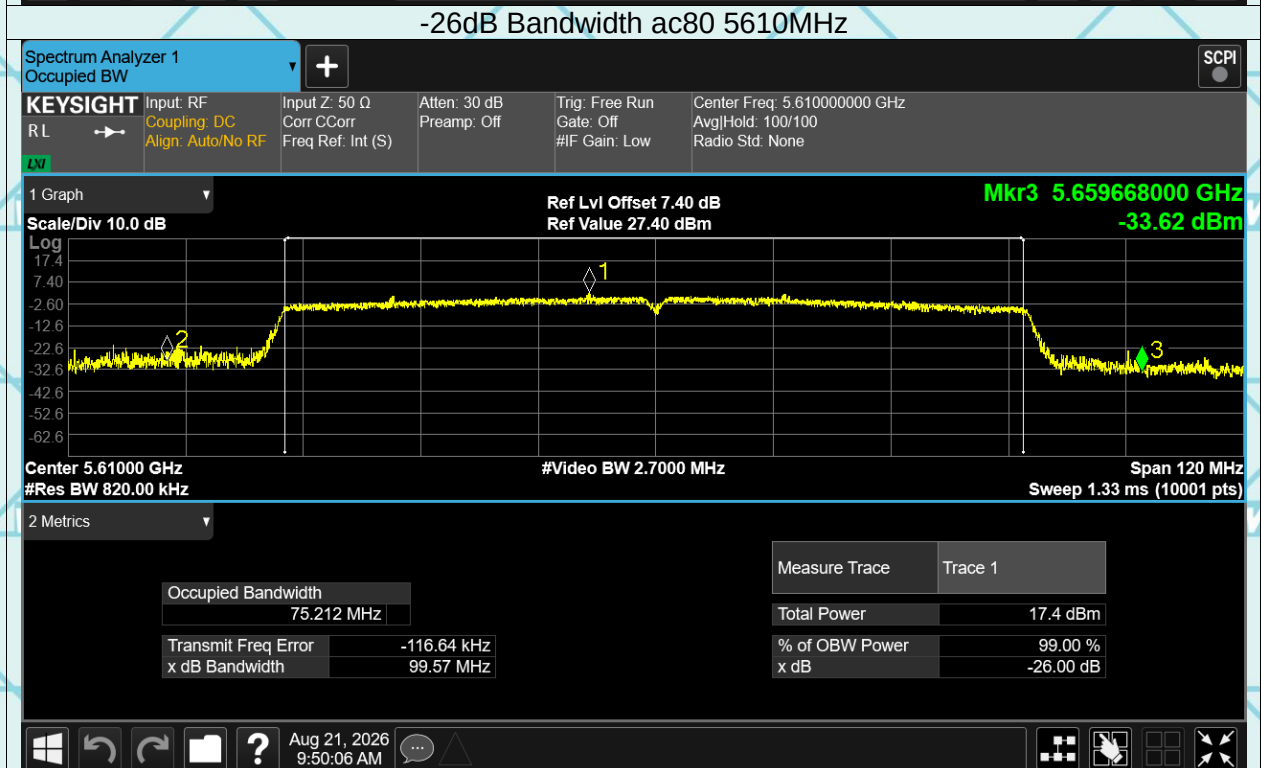
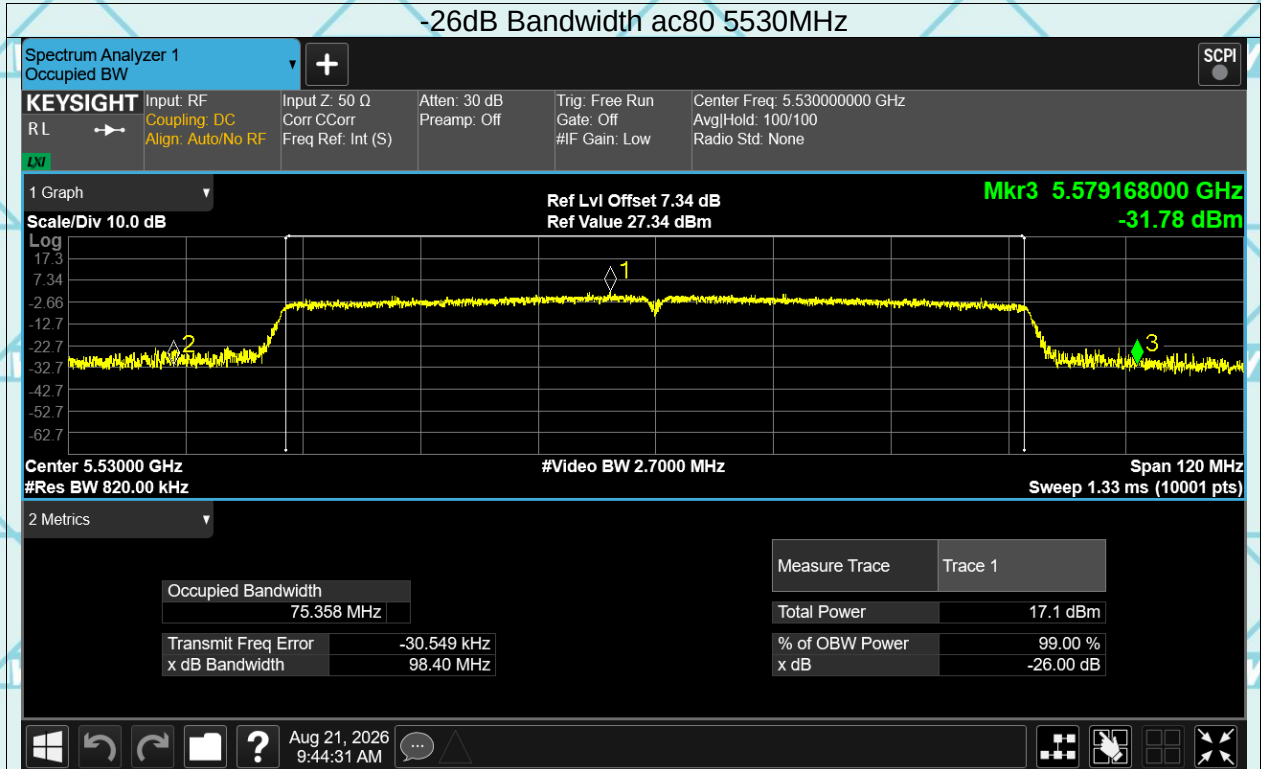




Report No.: WSCT-ANAB-R&E260800069A-Wi-Fi2 Issued Date: 21 September 2026



-6dB&99% Bandwidth

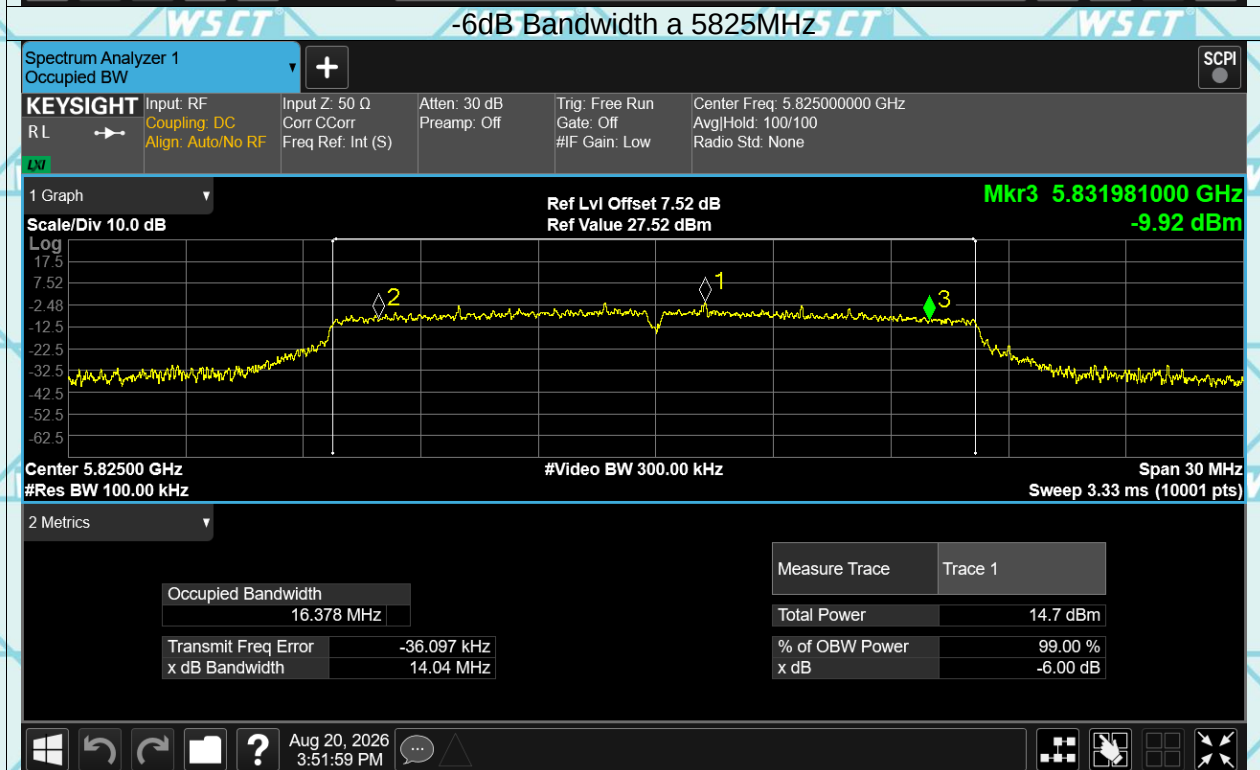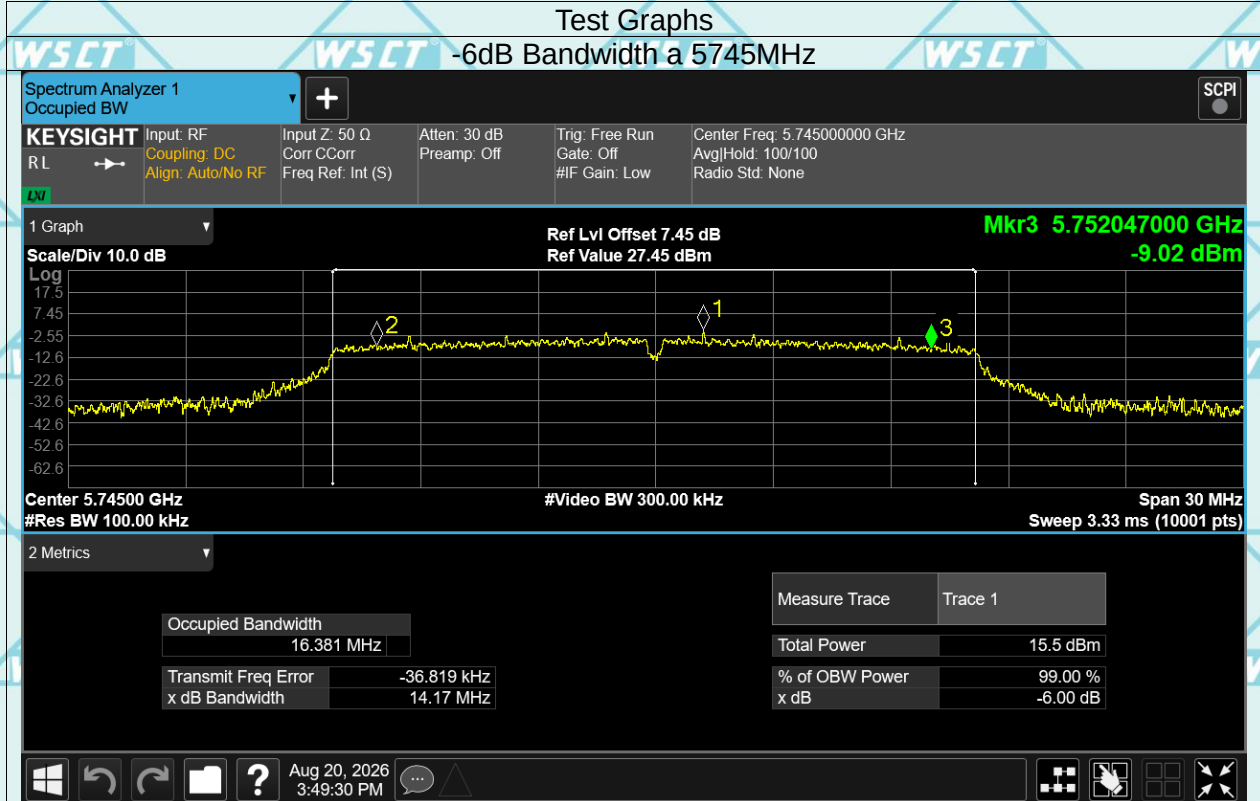


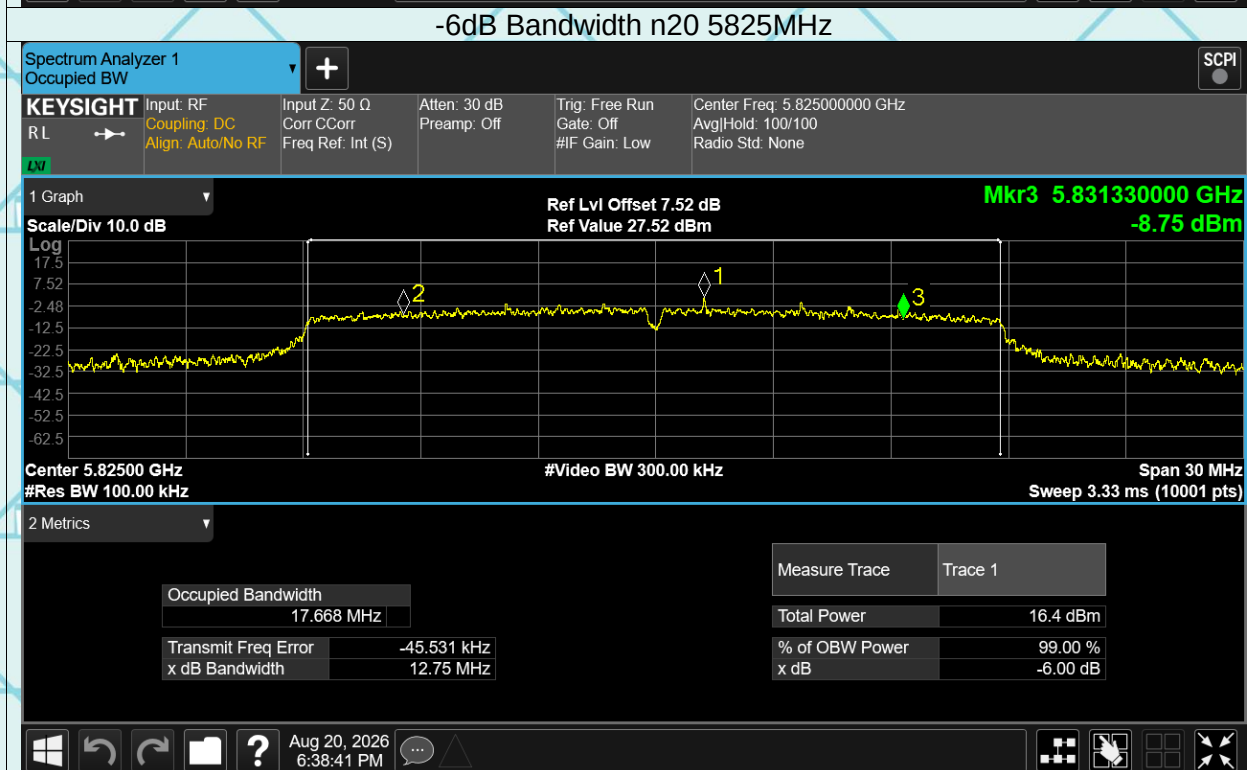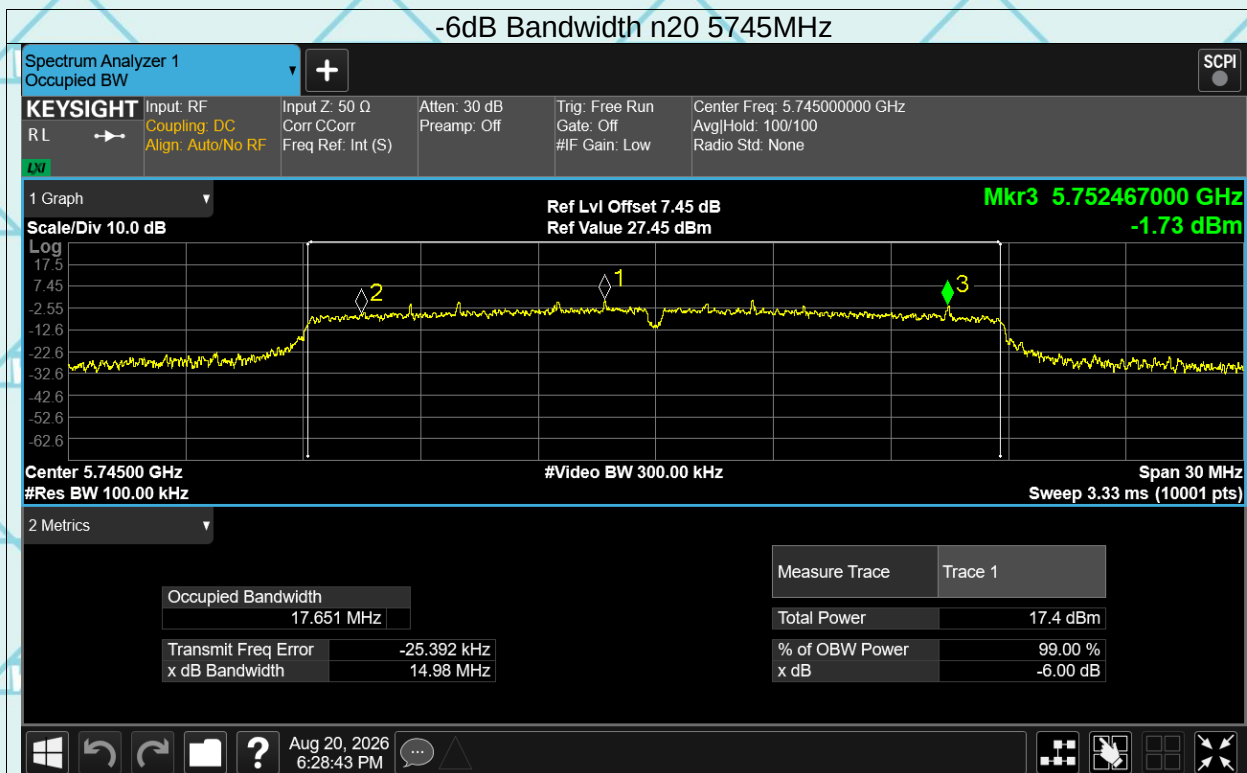

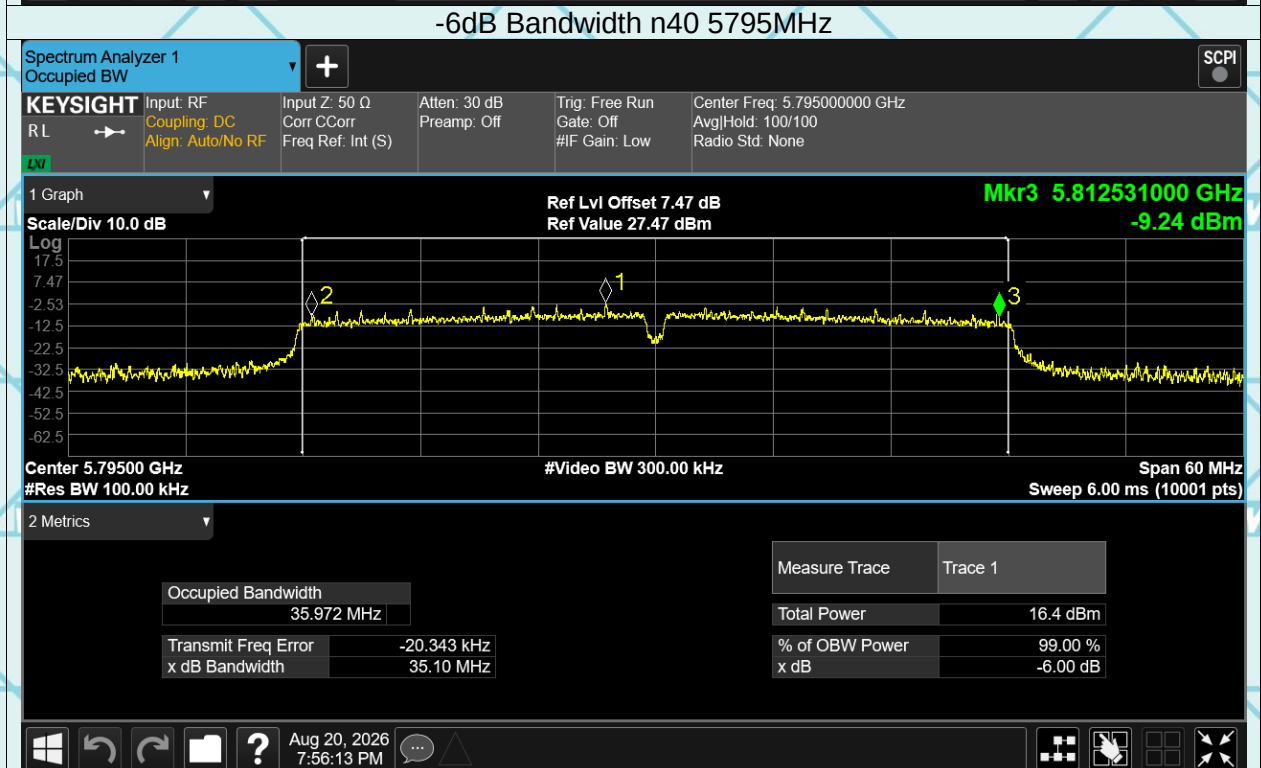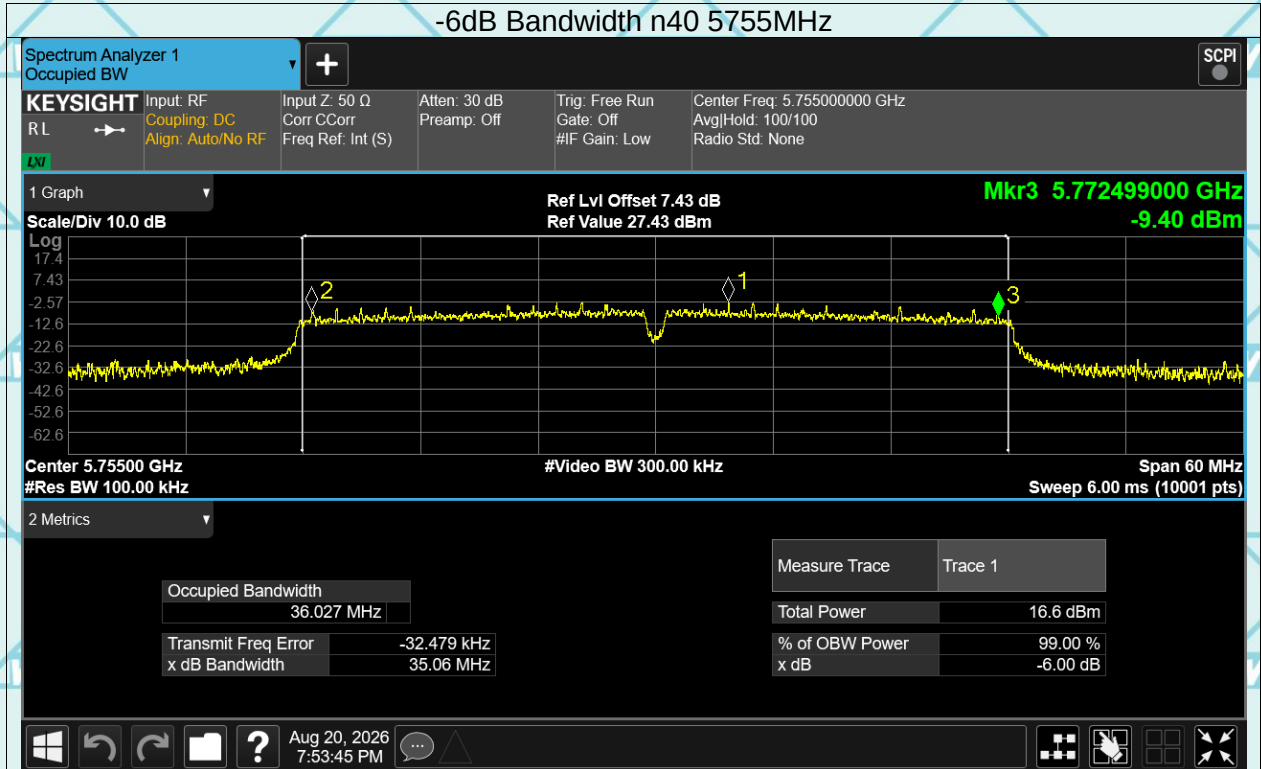

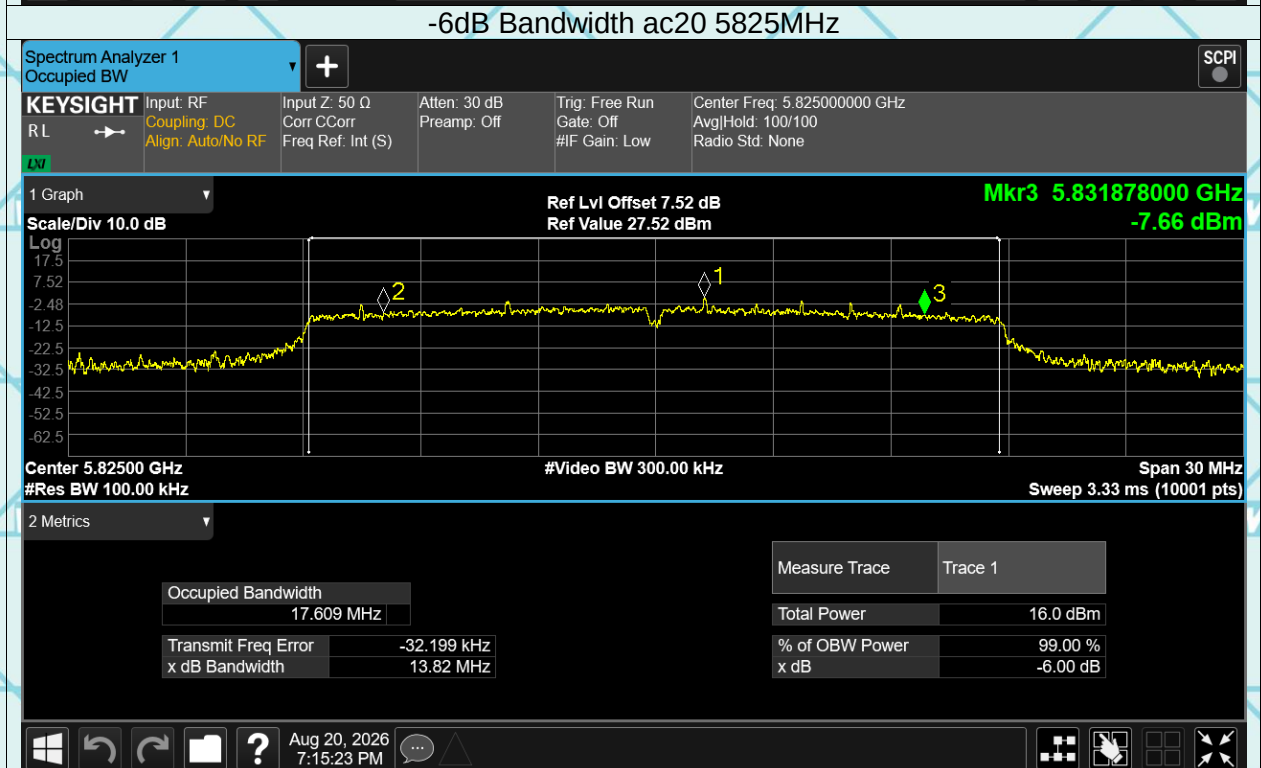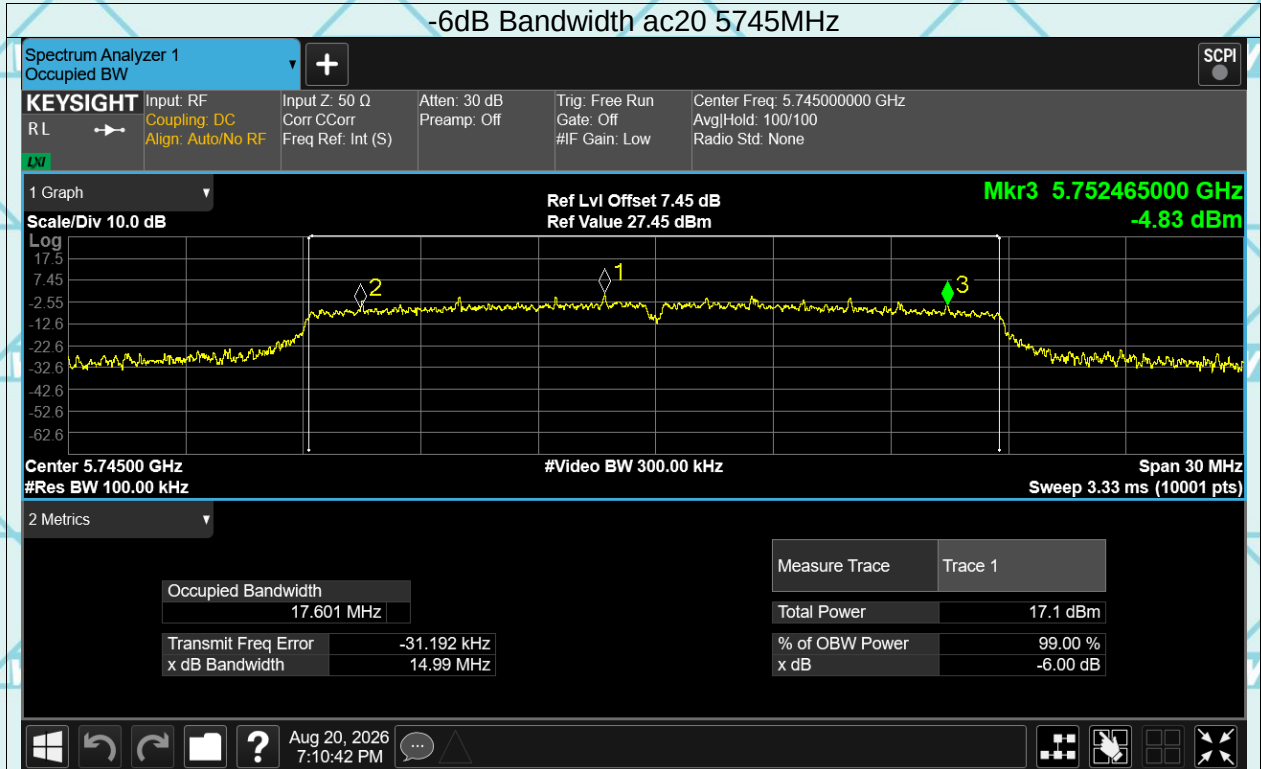

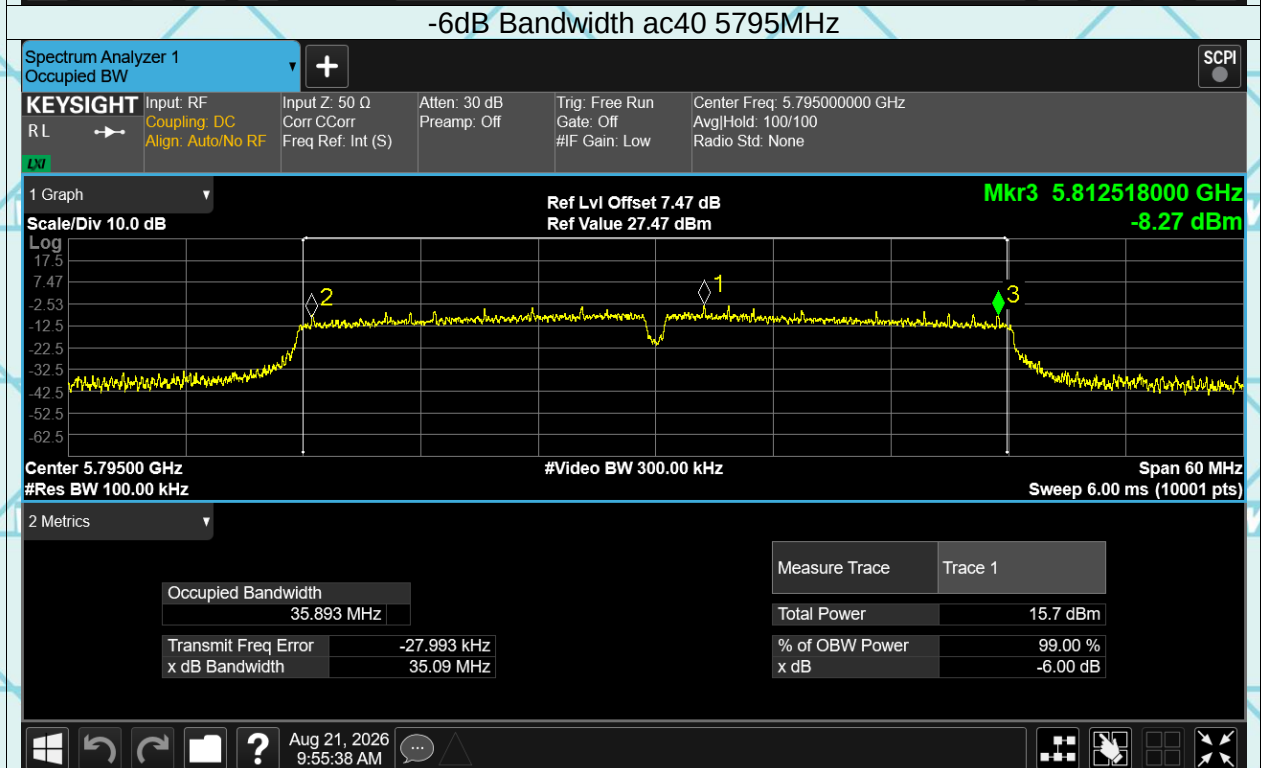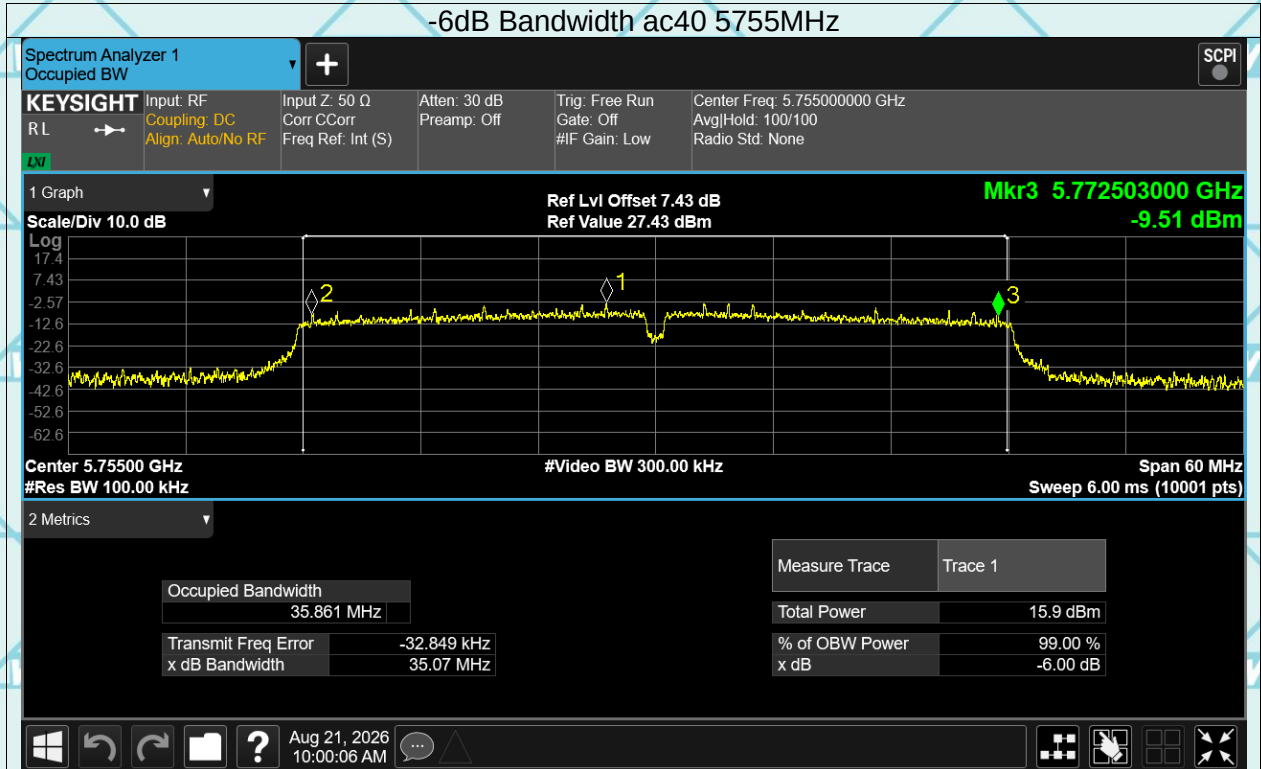

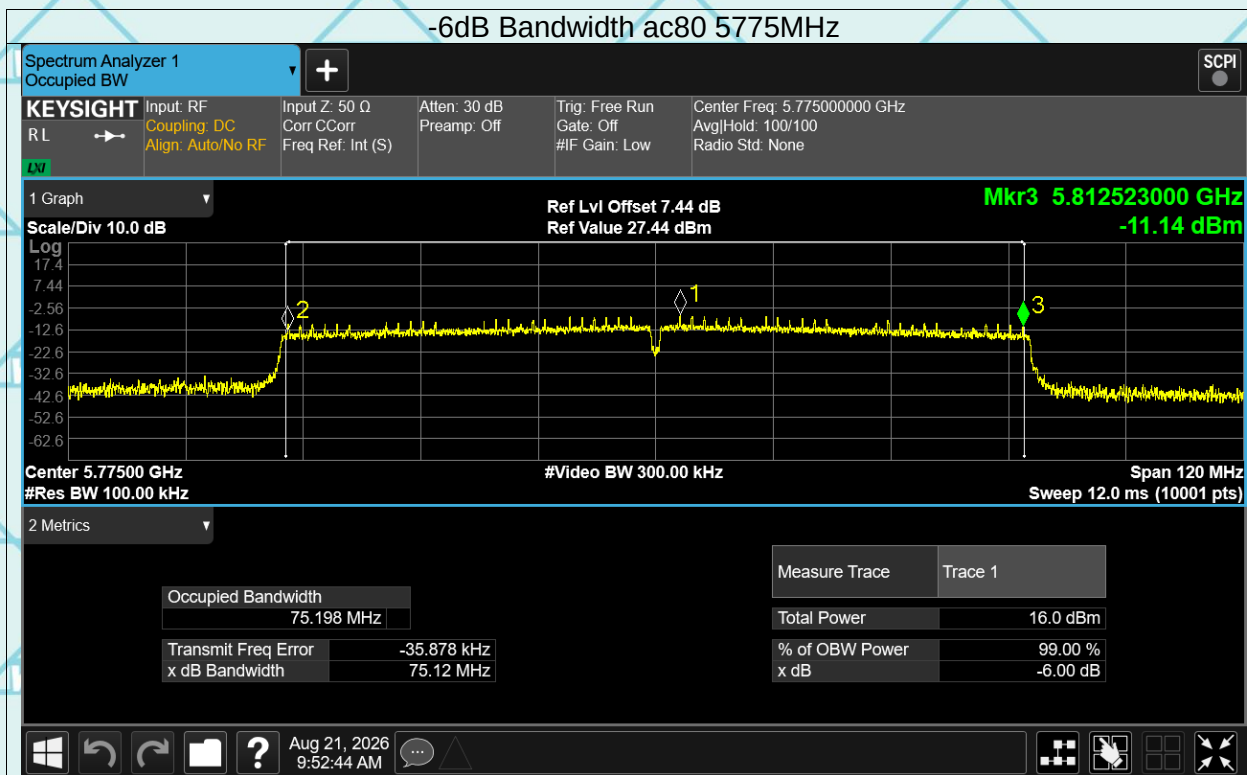

7.6 MAXIMUM CONDUCTED OUTPUT POWER

Product	: EUT-Sample	Test Mode	: See section 3.4
Test Item	: Maximum Conducted Output Power	Temperature	: 25 °C
Test Voltage	: DC 3.92V	Humidity	: 56%RH
Test Result	: PASS		

Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5180	10.09	0.11	10.20	24	Pass
a	5240	10.62	0.11	10.73	24	Pass
a	5260	11.40	0.11	11.51	24	Pass
a	5320	10.57	0.11	10.68	24	Pass
a	5500	11.20	0.11	11.31	24	Pass
a	5700	10.09	0.11	10.20	24	Pass
a	5745	10.25	0.11	10.36	30	Pass
a	5825	9.33	0.11	9.44	30	Pass
n20	5180	12.09	0.11	12.20	24	Pass
n20	5240	12.39	0.12	12.51	24	Pass
n20	5260	13.25	0.12	13.37	24	Pass
n20	5320	12.20	0.12	12.32	24	Pass
n20	5500	12.67	0.12	12.79	24	Pass
n20	5700	11.76	0.12	11.88	24	Pass
n20	5745	12.16	0.12	12.28	30	Pass
n20	5825	11.16	0.12	11.28	30	Pass
n40	5190	11.69	0.21	11.90	24	Pass
n40	5230	10.72	0.21	10.93	24	Pass
n40	5270	12.65	0.21	12.86	24	Pass
n40	5310	11.75	0.22	11.97	24	Pass
n40	5510	11.29	0.21	11.50	24	Pass
n40	5670	11.03	0.21	11.24	24	Pass
n40	5755	11.06	0.21	11.27	30	Pass
n40	5795	11.07	0.21	11.28	30	Pass
ac20	5180	11.71	0.11	11.82	24	Pass
ac20	5240	12.13	0.11	12.24	24	Pass
ac20	5260	12.88	0.11	12.99	24	Pass
ac20	5320	11.95	0.11	12.06	24	Pass
ac20	5500	12.26	0.11	12.37	24	Pass
ac20	5700	11.51	0.11	11.62	24	Pass
ac20	5745	11.74	0.12	11.86	30	Pass
ac20	5825	10.82	0.11	10.93	30	Pass
ac40	5190	9.99	0.12	10.11	24	Pass
ac40	5230	10.71	0.12	10.83	24	Pass
ac40	5270	11.78	0.21	11.99	24	Pass
ac40	5310	11.05	0.12	11.17	24	Pass
ac40	5510	10.43	0.21	10.64	24	Pass
ac40	5670	9.89	0.22	10.11	24	Pass
ac40	5755	10.61	0.22	10.83	30	Pass
ac40	5795	10.51	0.22	10.73	30	Pass
ac80	5210	10.38	0.45	10.83	24	Pass
ac80	5290	11.06	0.47	11.53	24	Pass
ac80	5530	10.38	0.47	10.85	24	Pass
ac80	5610	10.80	0.47	11.27	24	Pass
ac80	5775	10.25	0.47	10.72	30	Pass

