


Report No.: WSCT-ANAB-R&E260600058A-BT Issued Date: 08 July 2026

Middle channel: 2441MHz

Horizontal:

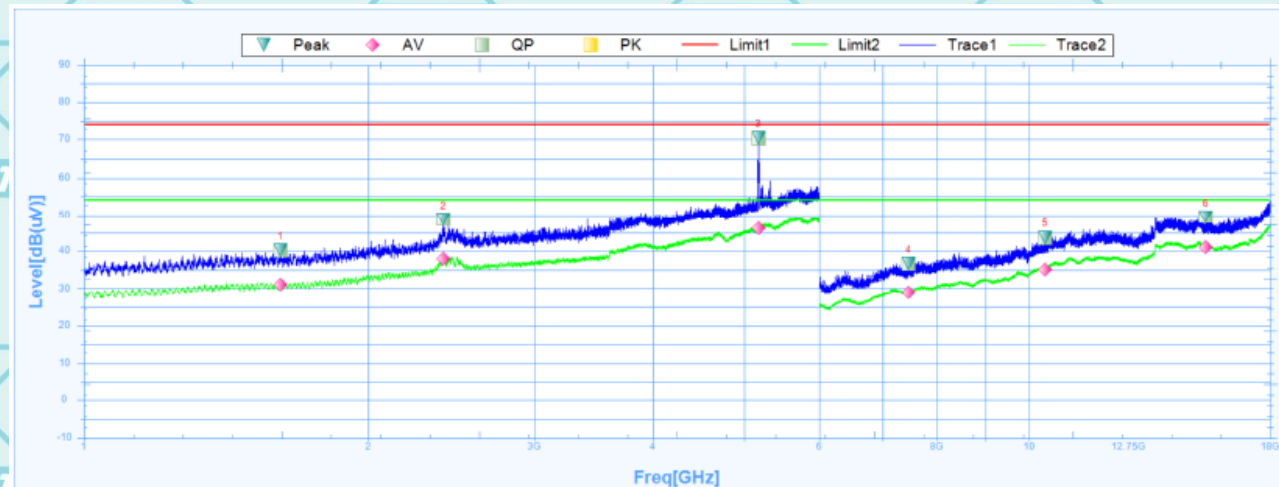


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1614.3750	40.15	24.91	15.24	74	-33.85	342.3	Vertical	PK	Pass
1	1614.3750	31.16	24.91	6.25	54	-22.84	342.3	Vertical	AV	Pass
2	2402.5000	48.67	27.27	21.4	74	-25.33	352.9	Vertical	PK	Pass
2	2402.5000	37.89	27.27	10.62	54	-16.11	352.9	Vertical	AV	Pass
3	5175.6250	70.36	31.74	38.62	74	-3.64	335.2	Vertical	PK	Pass
3	5175.6250	46.05	31.74	14.31	54	-7.95	335.2	Vertical	AV	Pass
4	7461.0000	36.56	7.37	29.19	74	-37.44	305.8	Vertical	PK	Pass
4	7461.0000	28.87	7.37	21.5	54	-25.13	305.8	Vertical	AV	Pass
5	10407.0000	43.57	13.62	29.95	74	-30.43	170.7	Vertical	PK	Pass
5	10407.0000	35.15	13.62	21.53	54	-18.85	170.7	Vertical	AV	Pass
6	15393.0000	49.5	18.36	31.14	74	-24.5	0	Vertical	PK	Pass
6	15393.0000	41.03	18.36	22.67	54	-12.97	0	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260600058A-BT Issued Date: 08 July 2026

Vertical:

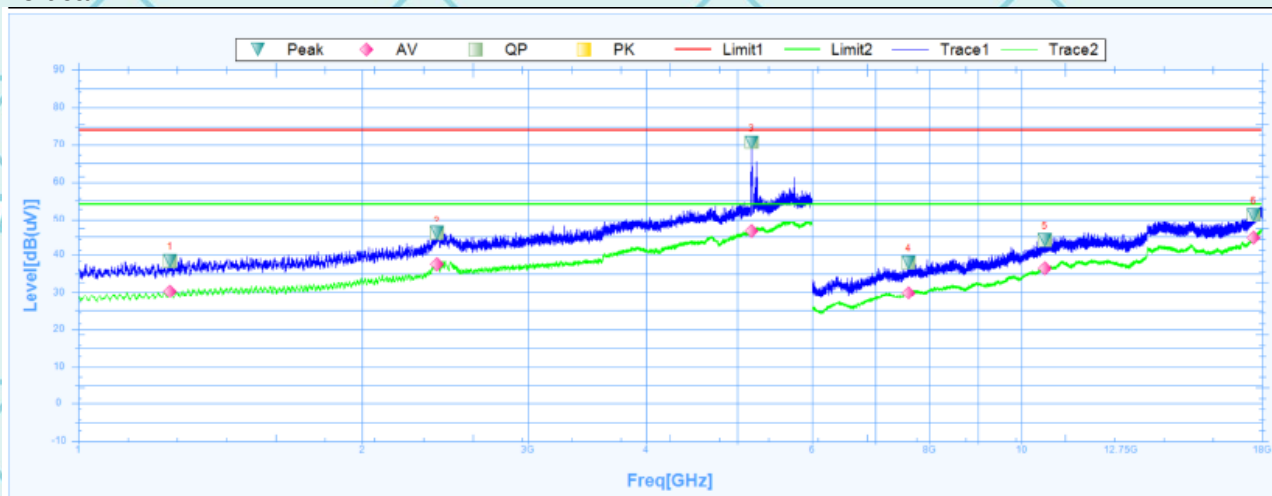

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1251.2500	38.48	24.58	13.9	74	-35.52	207.3	Horizontal	PK	Pass
1	1251.2500	30.28	24.58	5.7	54	-23.72	207.3	Horizontal	AV	Pass
2	2401.8750	45.84	27.27	18.57	74	-28.16	357.1	Horizontal	PK	Pass
2	2401.8750	37.58	27.27	10.31	54	-16.42	357.1	Horizontal	AV	Pass
3	5179.3750	70.67	31.74	38.93	74	-3.33	20.1	Horizontal	PK	Pass
3	5179.3750	46.3	31.74	14.56	54	-7.7	20.1	Horizontal	AV	Pass
4	7593.0000	37.85	7.89	29.96	74	-36.15	342.6	Horizontal	PK	Pass
4	7593.0000	29.79	7.89	21.9	54	-24.21	342.6	Horizontal	AV	Pass
5	10590.0000	43.9	14.28	29.62	74	-30.1	-0.1	Horizontal	PK	Pass
5	10590.0000	36.49	14.28	22.21	54	-17.51	-0.1	Horizontal	AV	Pass
6	17632.5000	51.1	21.51	29.59	74	-22.9	320.1	Horizontal	PK	Pass
6	17632.5000	44.52	21.51	23.01	54	-9.48	320.1	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260600058A-BT Issued Date: 08 July 2026

High channel: 2480MHz

Horizontal:




Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1398.7500	38.03	25.1	12.93	74	-35.97	253.1	Horizontal	PK	Pass
1	1398.7500	29.49	25.1	4.39	54	-24.51	253.1	Horizontal	AV	Pass
2	2450.0000	45.26	27.43	17.83	74	-28.74	139.5	Horizontal	PK	Pass
2	2450.0000	36.69	27.43	9.26	54	-17.31	139.5	Horizontal	AV	Pass
3	5182.5000	59.62	31.75	27.87	74	-14.38	63	Horizontal	PK	Pass
3	5182.5000	43.79	31.75	12.04	54	-10.21	63	Horizontal	AV	Pass
4	8544.0000	37.97	9.28	28.69	74	-36.03	1.3	Horizontal	PK	Pass
4	8544.0000	30.92	9.28	21.64	54	-23.08	1.3	Horizontal	AV	Pass
5	10258.5000	41.94	13.16	28.78	74	-32.06	360	Horizontal	PK	Pass
5	10258.5000	34.29	13.16	21.13	54	-19.71	360	Horizontal	AV	Pass
6	14362.5000	49.25	18.76	30.49	74	-24.75	280.2	Horizontal	PK	Pass
6	14362.5000	41.42	18.76	22.66	54	-12.58	280.2	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260600058A-BT Issued Date: 08 July 2026

Vertical:

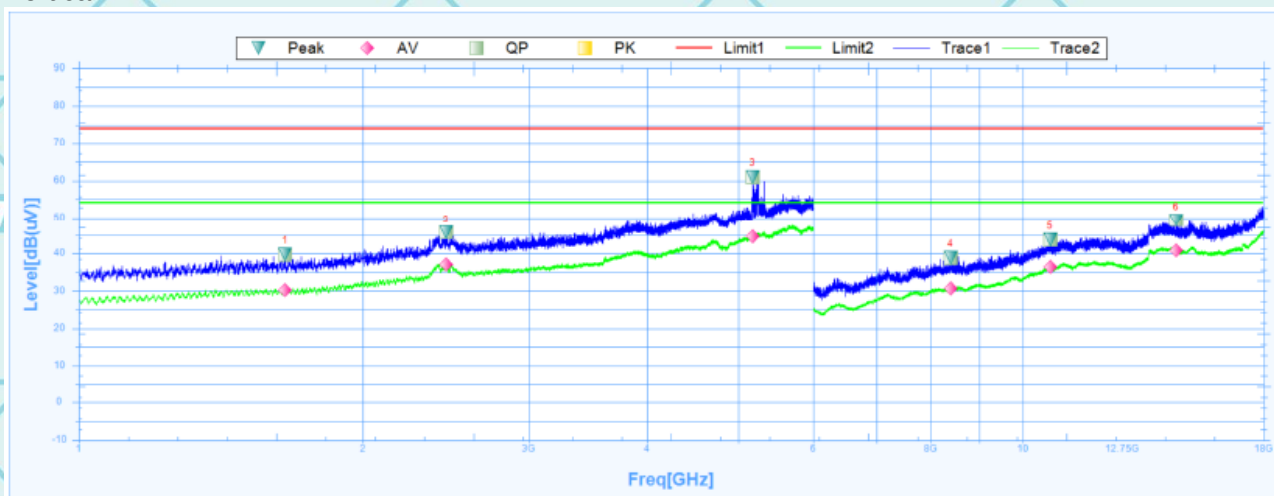

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1653.7500	39.8	24.93	14.87	74	-34.2	58.2	Vertical	PK	Pass
1	1653.7500	30.12	24.93	5.19	54	-23.88	58.2	Vertical	AV	Pass
2	2450.0000	45.75	27.43	18.32	74	-28.25	256.6	Vertical	PK	Pass
2	2450.0000	36.99	27.43	9.56	54	-17.01	256.6	Vertical	AV	Pass
3	5178.1250	60.86	31.74	29.12	74	-13.14	358.9	Vertical	PK	Pass
3	5178.1250	44.65	31.74	12.91	54	-9.35	358.9	Vertical	AV	Pass
4	8391.0000	38.82	9.08	29.74	74	-35.18	228.8	Vertical	PK	Pass
4	8391.0000	30.68	9.08	21.6	54	-23.32	228.8	Vertical	AV	Pass
5	10692.0000	43.75	14.59	29.16	74	-30.25	31.6	Vertical	PK	Pass
5	10692.0000	36.31	14.59	21.72	54	-17.69	31.6	Vertical	AV	Pass
6	14541.0000	49.27	18.6	30.67	74	-24.73	171.4	Vertical	PK	Pass
6	14541.0000	40.79	18.6	22.19	54	-13.21	171.4	Vertical	AV	Pass

Note:

- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Data of measurement shown "----" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
- Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.
- EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) – Limits (dBμV)

Report No.: WSCT-ANAB-R&E260600058A-BT Issued Date: 08 July 2026


6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result GFSK model was report as below


GFSK

Low channel

Horizontal:

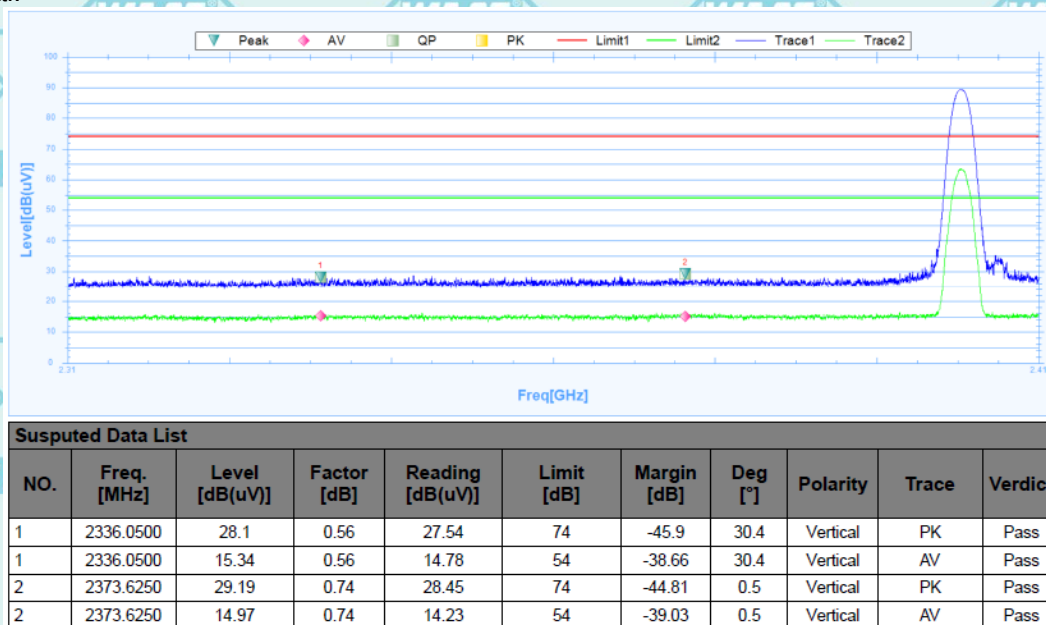


Vertical:

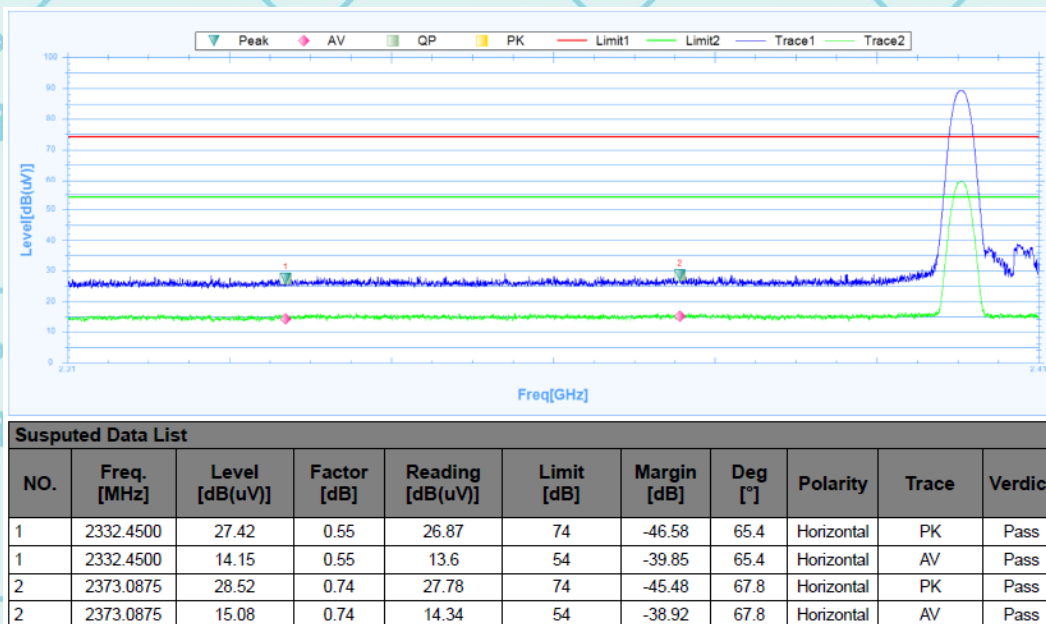


Report No.: WSCT-ANAB-R&E260600058A-BT Issued Date: 08 July 2026

High channel
Horizontal:

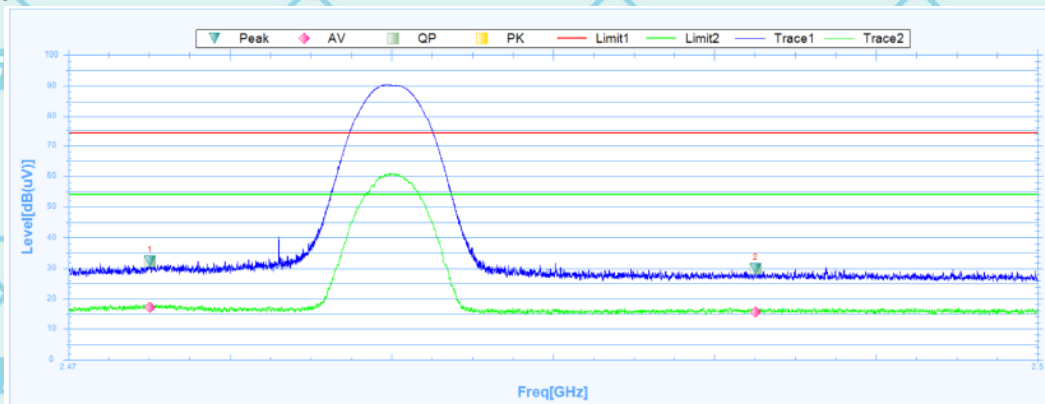

Susputed Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2472.5200	32.31	1.32	30.99	74	-41.69	189.4	Vertical	PK	Pass
1	2472.5200	17.07	1.32	15.75	54	-36.93	189.4	Vertical	AV	Pass
2	2491.2738	29.82	1.44	28.38	74	-44.18	133.2	Vertical	PK	Pass
2	2491.2738	15.38	1.44	13.94	54	-38.62	133.2	Vertical	AV	Pass

Vertical:

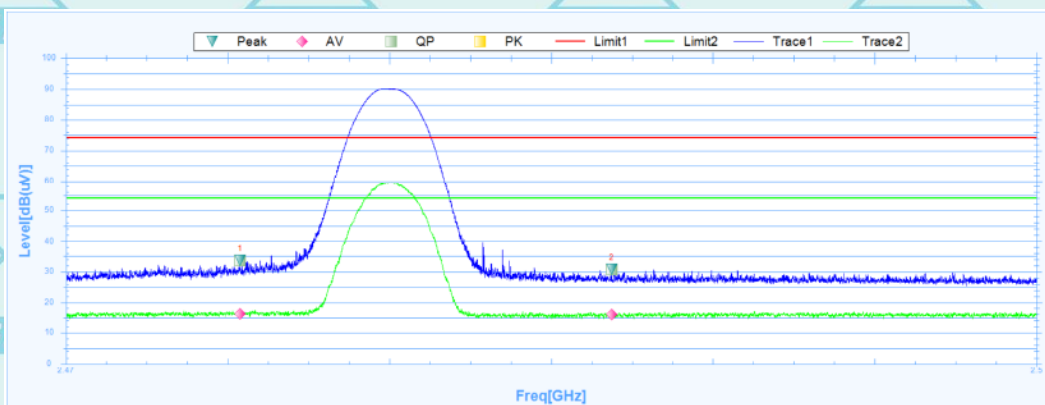

Susputed Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2475.3812	33.67	1.34	32.33	74	-40.33	248.3	Horizontal	PK	Pass
1	2475.3812	16.04	1.34	14.7	54	-37.96	248.3	Horizontal	AV	Pass
2	2486.8712	30.68	1.41	29.27	74	-43.32	328.4	Horizontal	PK	Pass
2	2486.8712	15.82	1.41	14.41	54	-38.18	328.4	Horizontal	AV	Pass

Note: Freq. = Emission frequency in MHz
 Reading level (dBμV) = Receiver reading
 Corr. Factor (dB) = Attenuation factor + Cable loss
 Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)
 Limit (dBμV) = Limit stated in standard
 Margin (dB) = Level (dBμV) – Limits (dBμV)

7. Test Setup Photographs

Please refer to Annex "Set Up Photos-15C" for test setup photos

*******END OF REPORT*******