

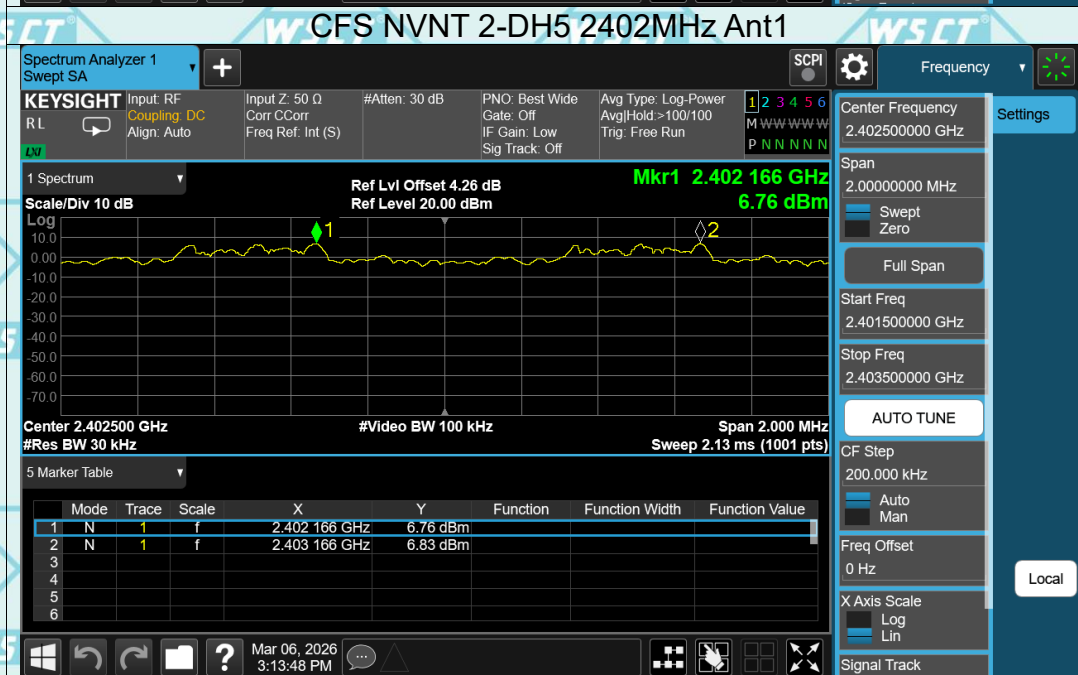
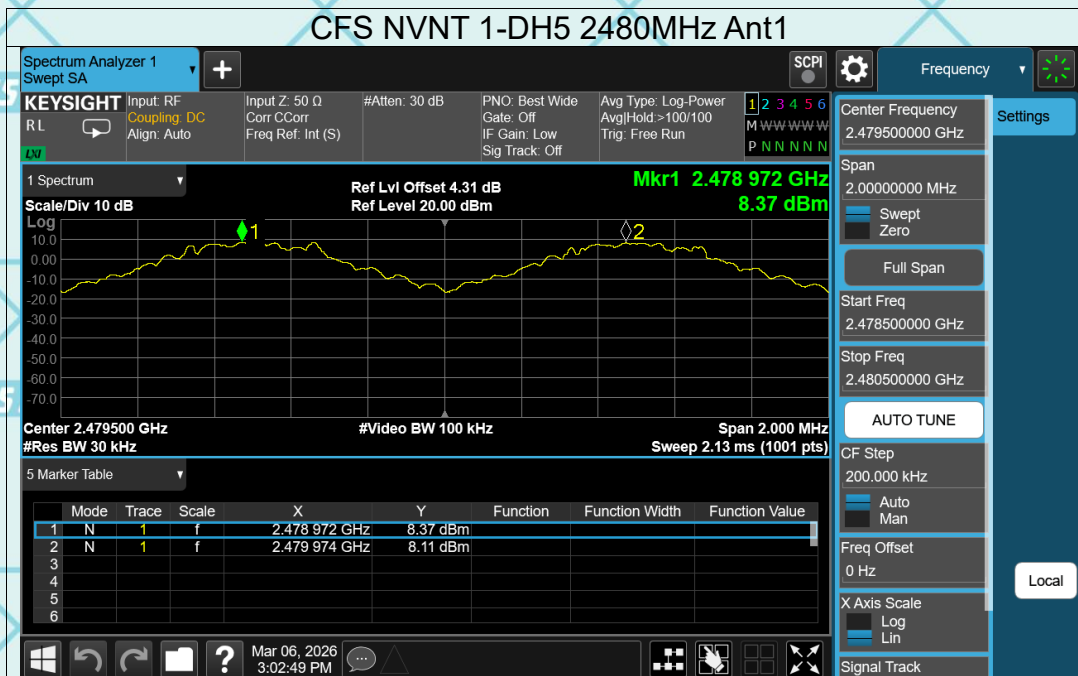




Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

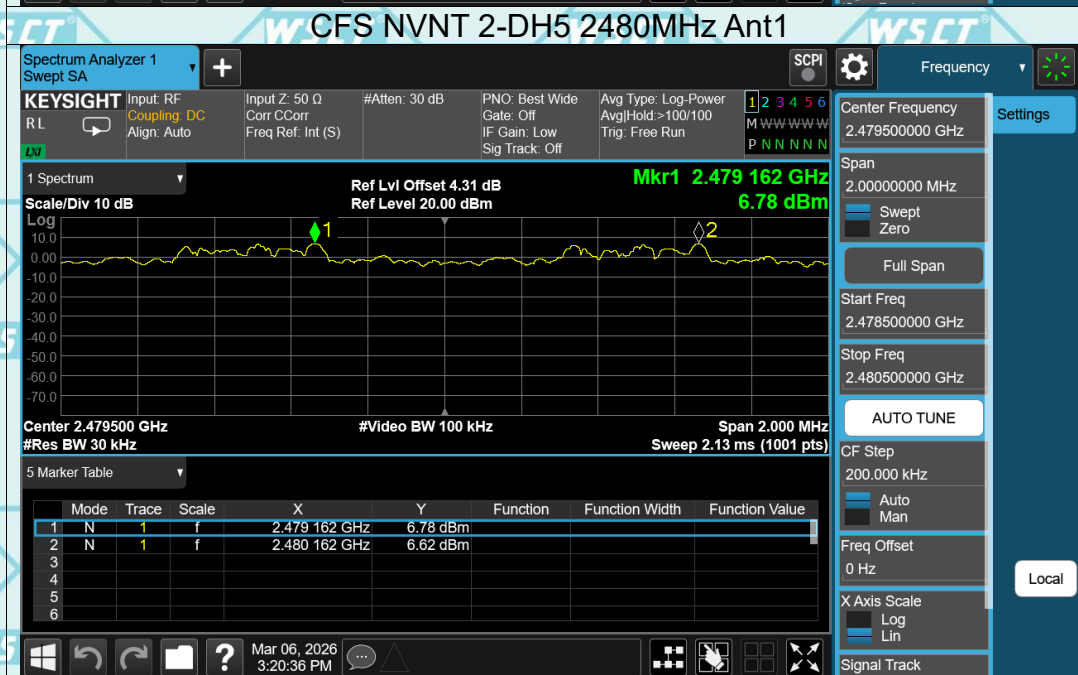


Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

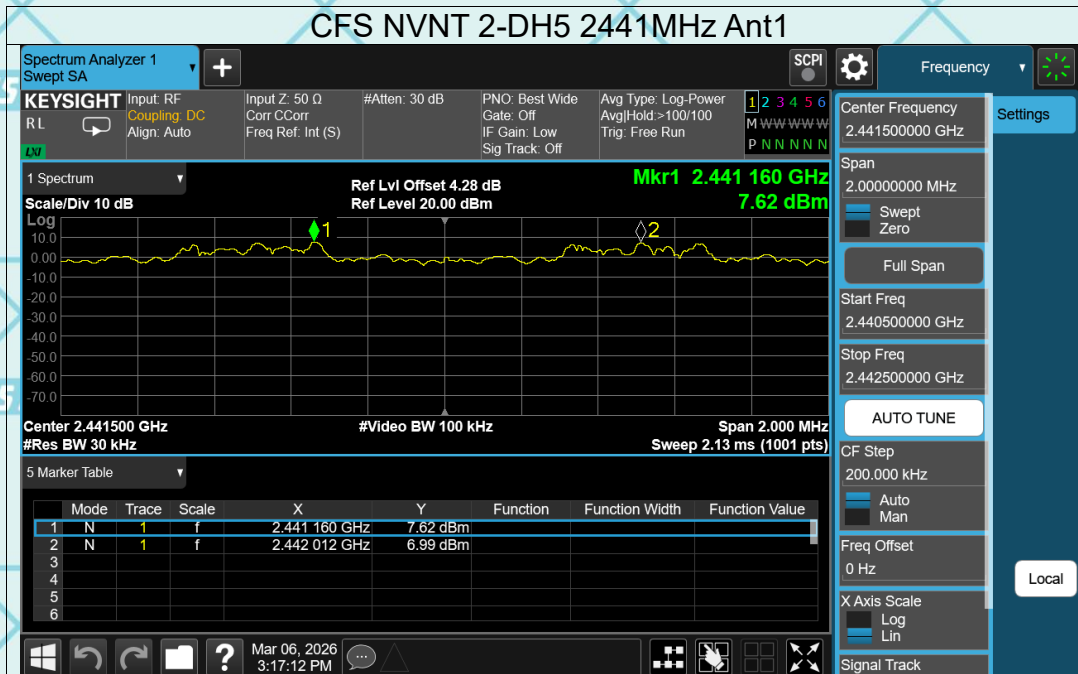

Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

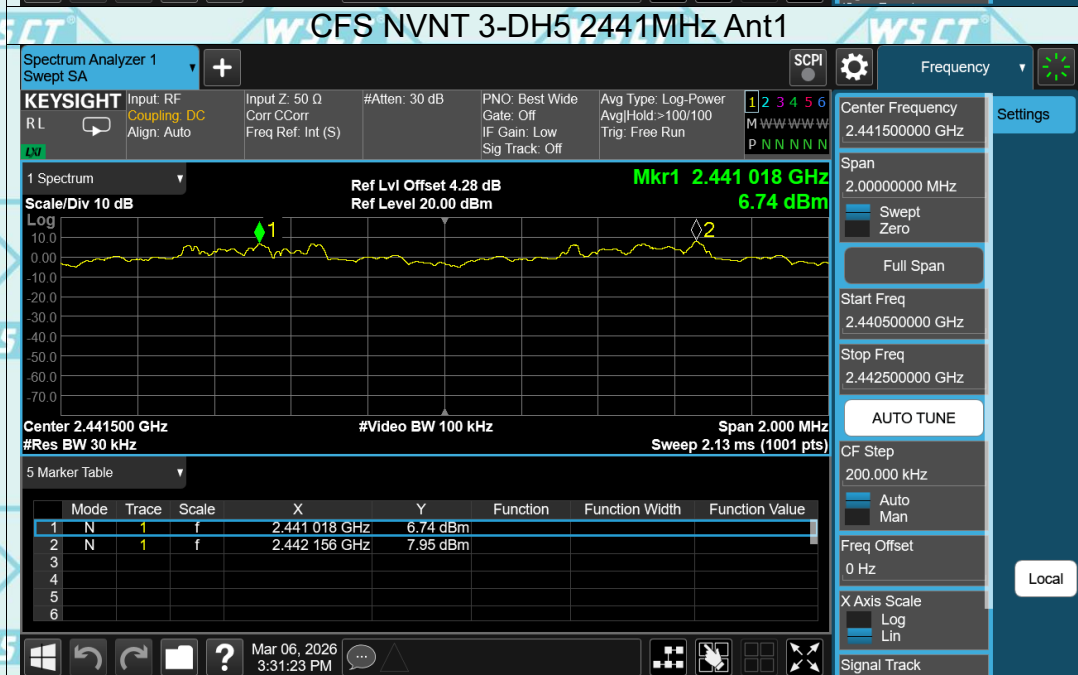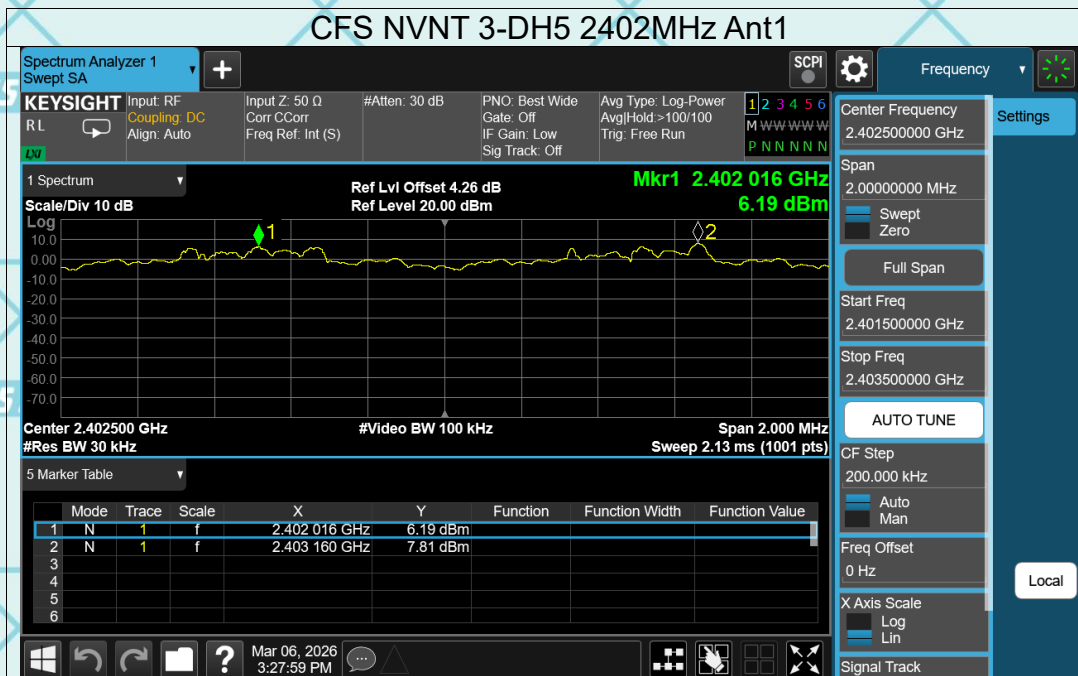


Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

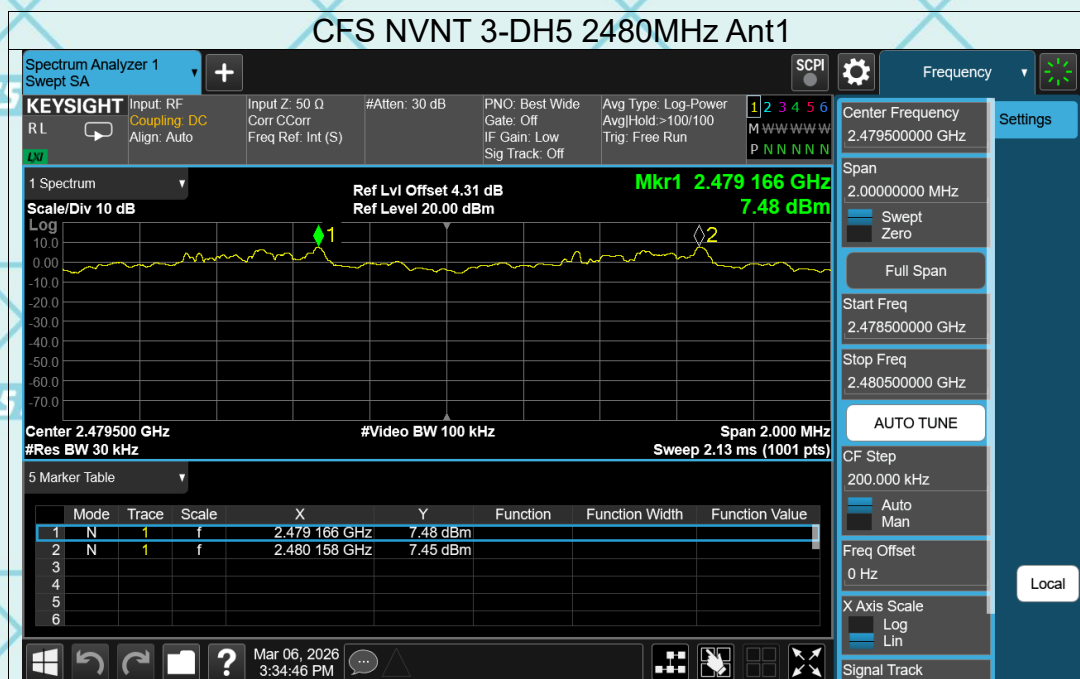

6.6. Hopping Channel Number

6.6.1. Test Specification

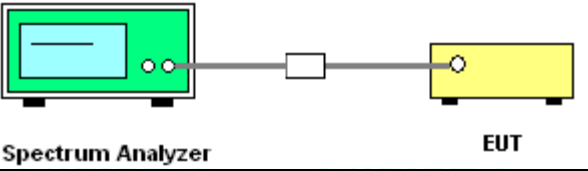Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2020
Limit:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	1. The testing follows ANSI C63.10:2020 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = the frequency band of operation; set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller; VBW≥RBW; Sweep = auto; Detector function = peak; Trace = max hold. 6. The number of hopping frequency used is defined as the number of total channel. 7. Record the measurement data in report.
Test Result:	PASS


Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

6.6.2. Test data


Mode	Hopping channel numbers	Limit	Result
GFSK, P/4-DQPSK, 8DPSK	79	15	PASS

Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

Test plots as follows:

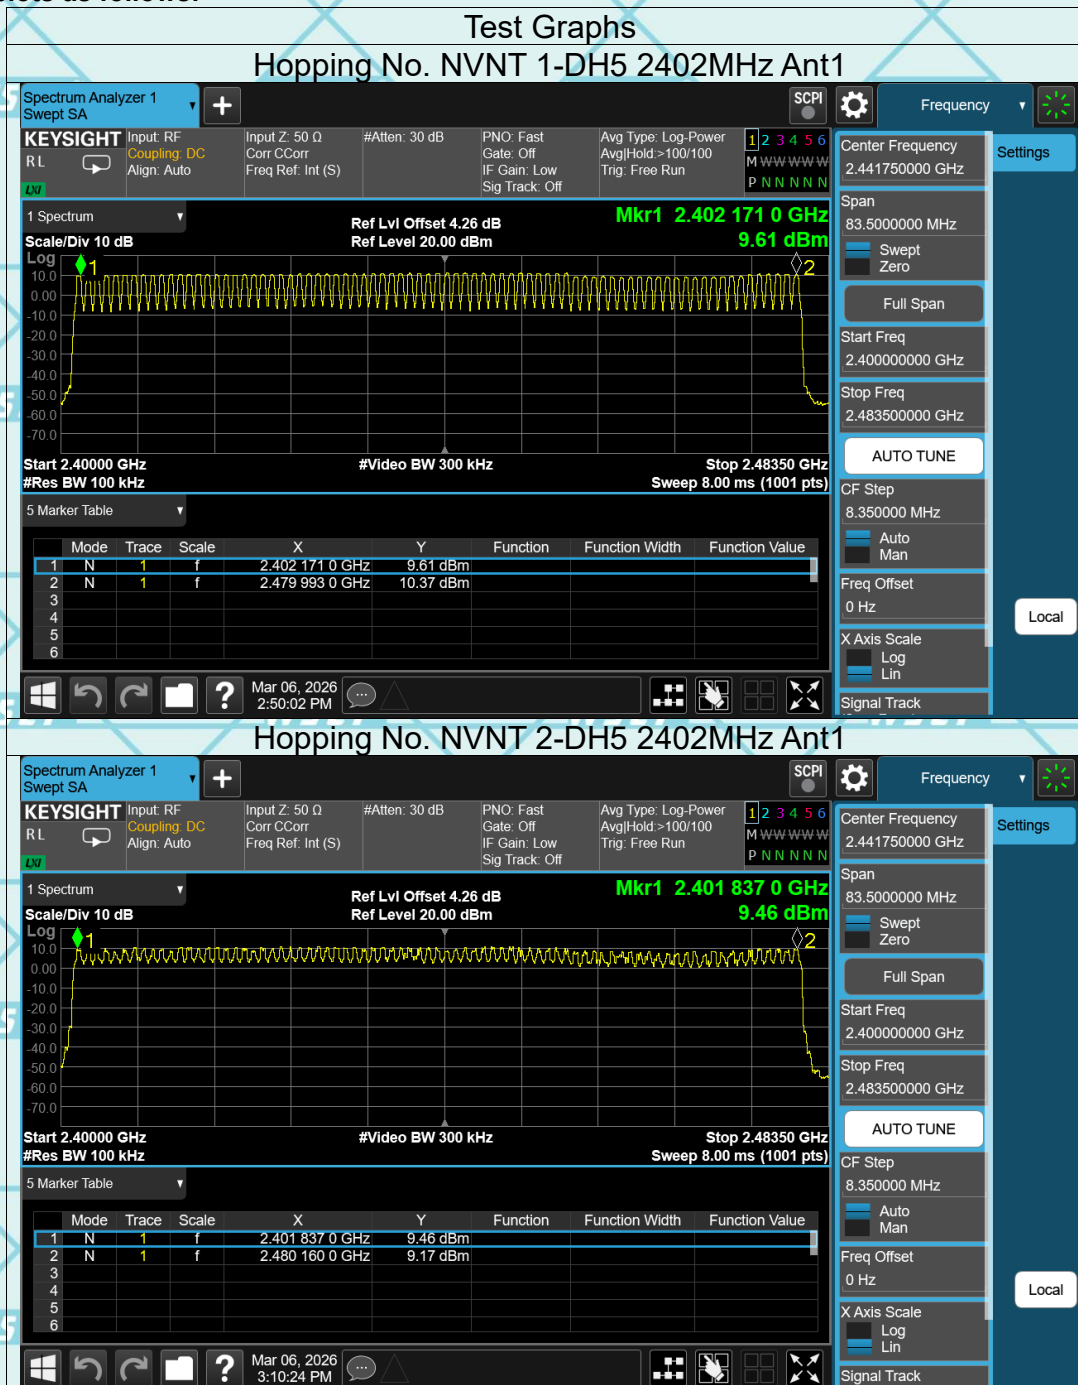

Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

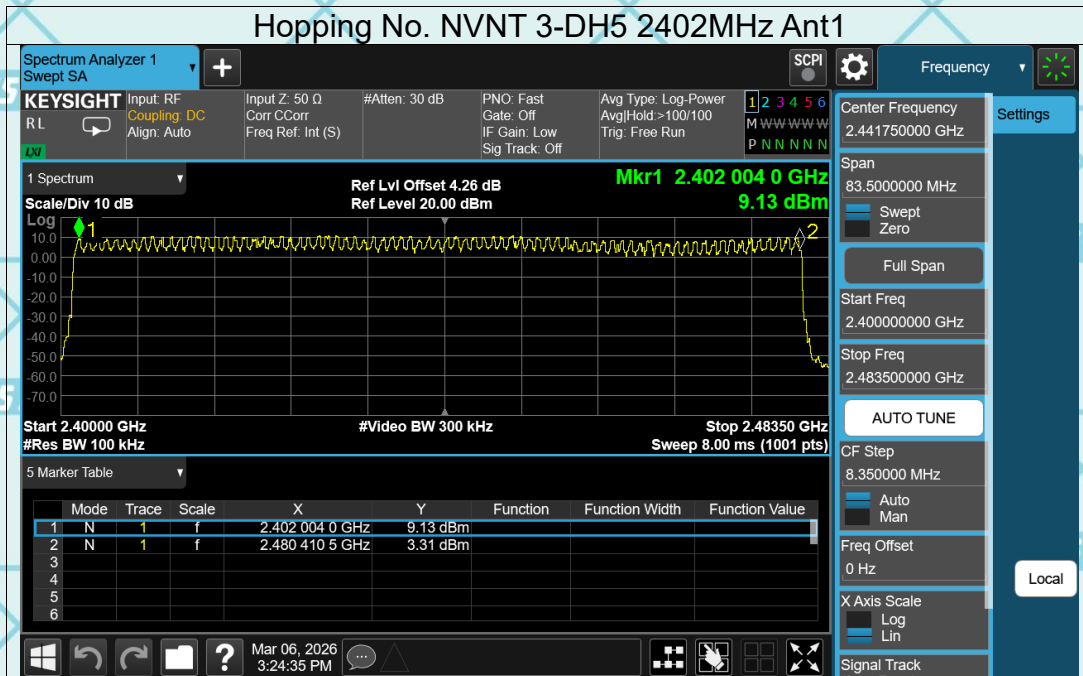

6.7. Dwell Time

6.7.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2020
Limit:	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Hopping mode
Test Procedure:	1. The testing follows ANSI C63.10:2020 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold. 6. Measure and record the results in the test report.
Test Result:	PASS

6.7.2. Test Data

Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH1	2402	0.374	118.184	315	31600	400	Pass
1-DH1	2441	0.374	118.932	318	31600	400	Pass
1-DH1	2480	0.374	118.558	318	31600	400	Pass
1-DH3	2402	1.63	236.35	146	31600	400	Pass
1-DH3	2441	1.629	267.156	164	31600	400	Pass
1-DH3	2480	1.629	272.043	166	31600	400	Pass
1-DH5	2402	2.879	293.658	110	31600	400	Pass
1-DH5	2441	2.879	302.295	107	31600	400	Pass
1-DH5	2480	2.879	308.053	102	31600	400	Pass

Note: 1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.

For DH1, With channel hopping rate $(1600 / 2 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 2 / 79) \times (0.4 \times 79) = 320$ hops


For DH3, With channel hopping rate $(1600 / 4 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 4 / 79) \times (0.4 \times 79) = 160$ hops

For DH5, With channel hopping rate $(1600 / 6 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 6 / 79) \times (0.4 \times 79) = 106.67$ hops



2. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

Test plots as follows:



Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

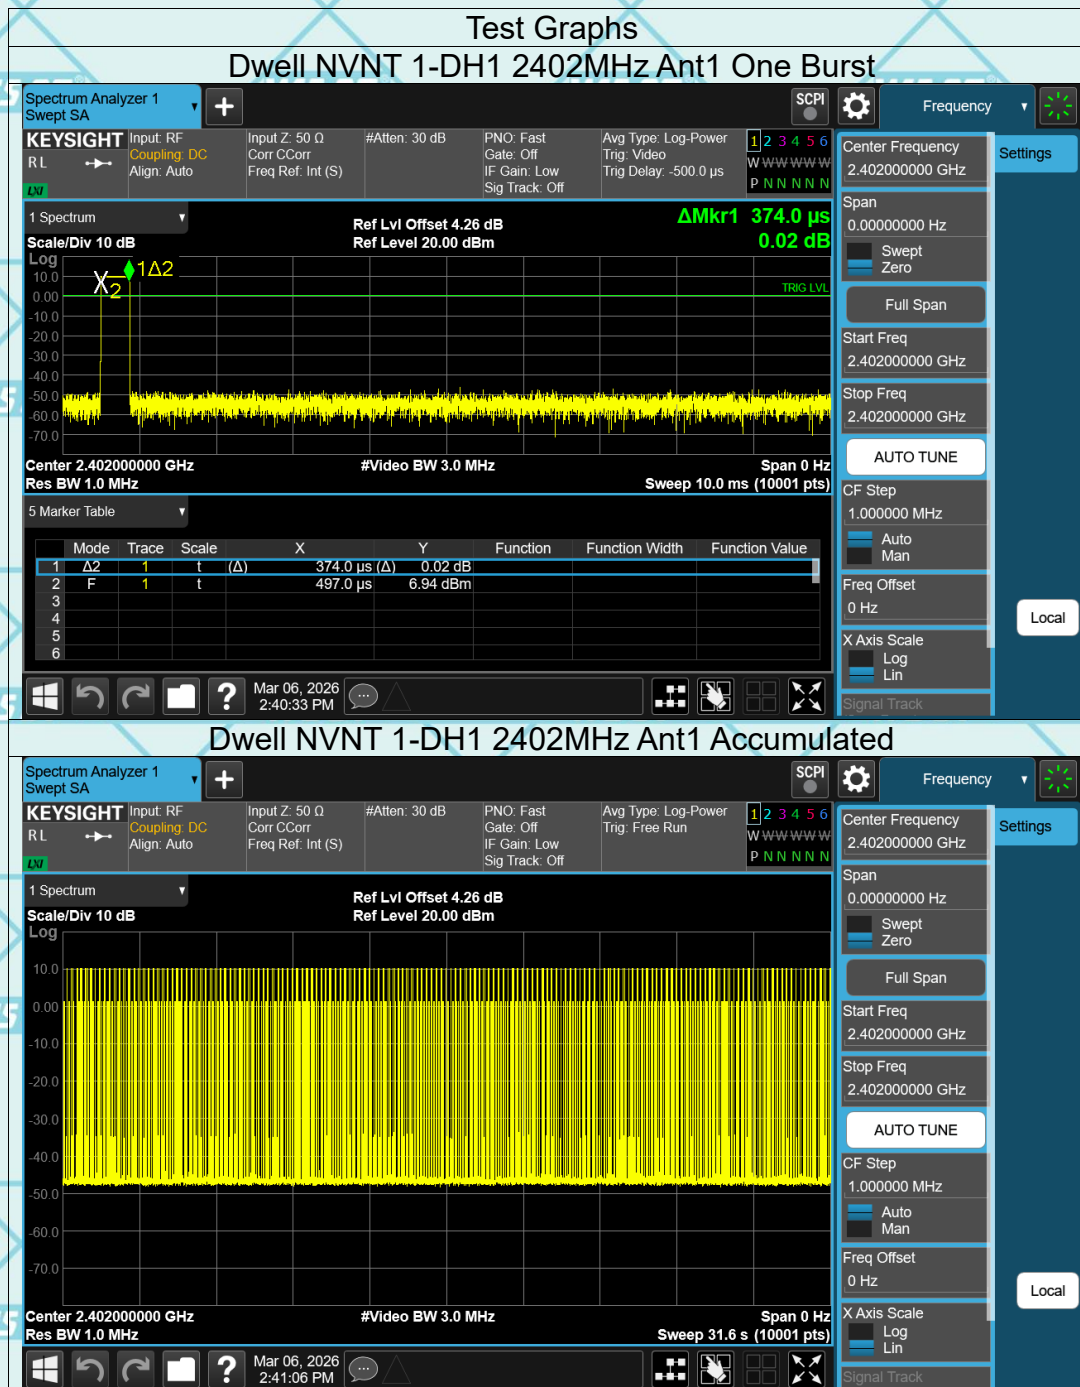



Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

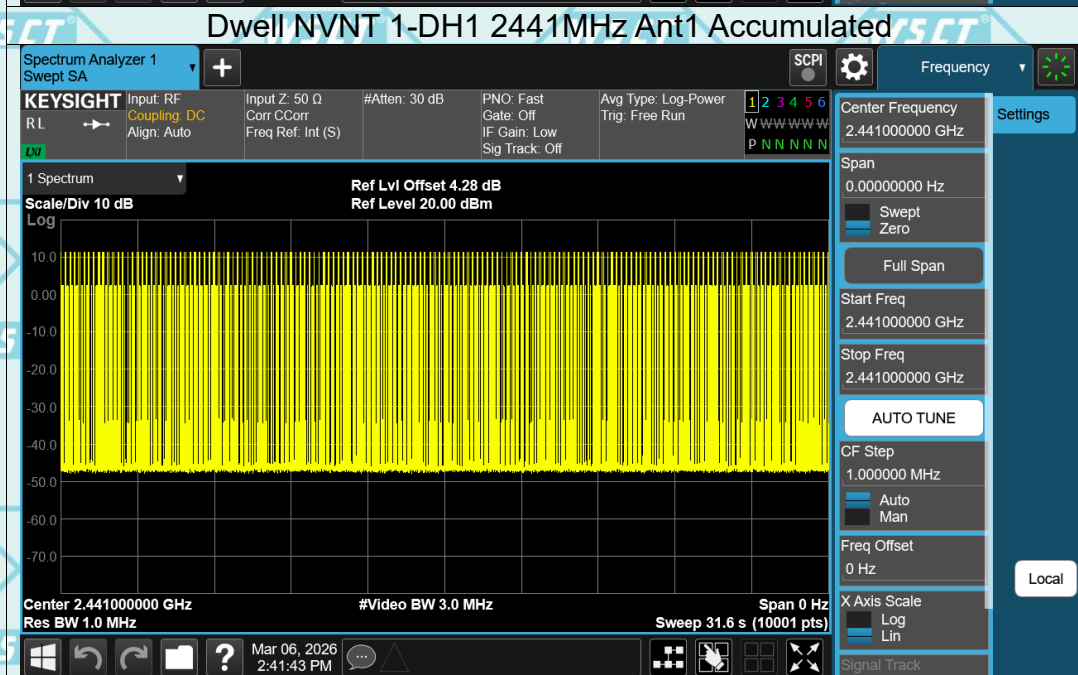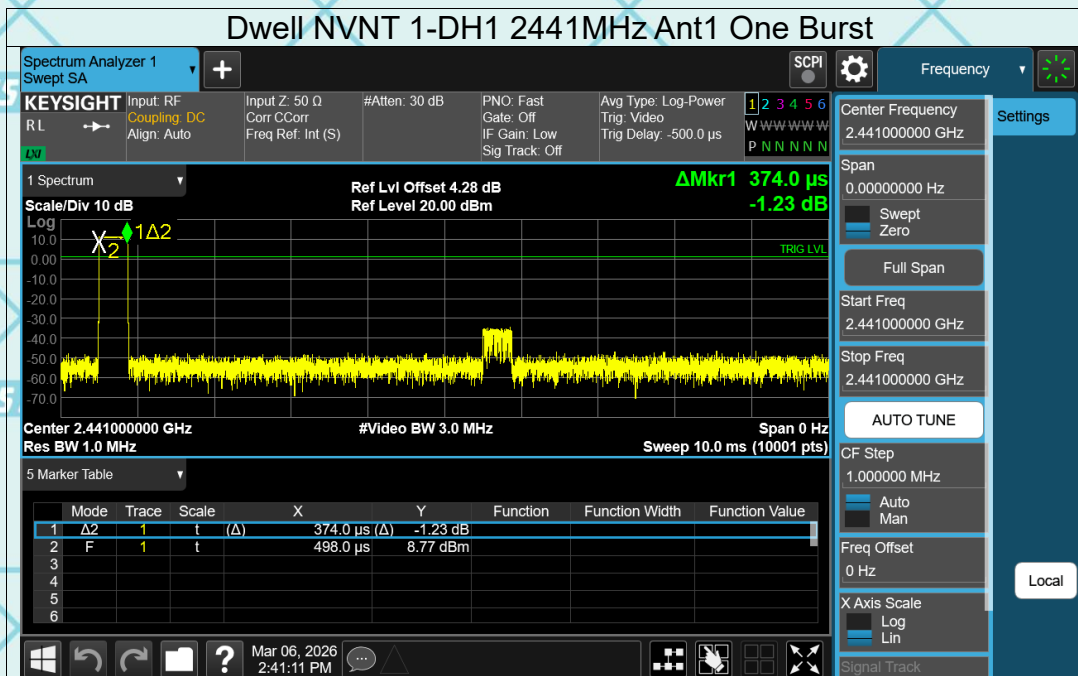



Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

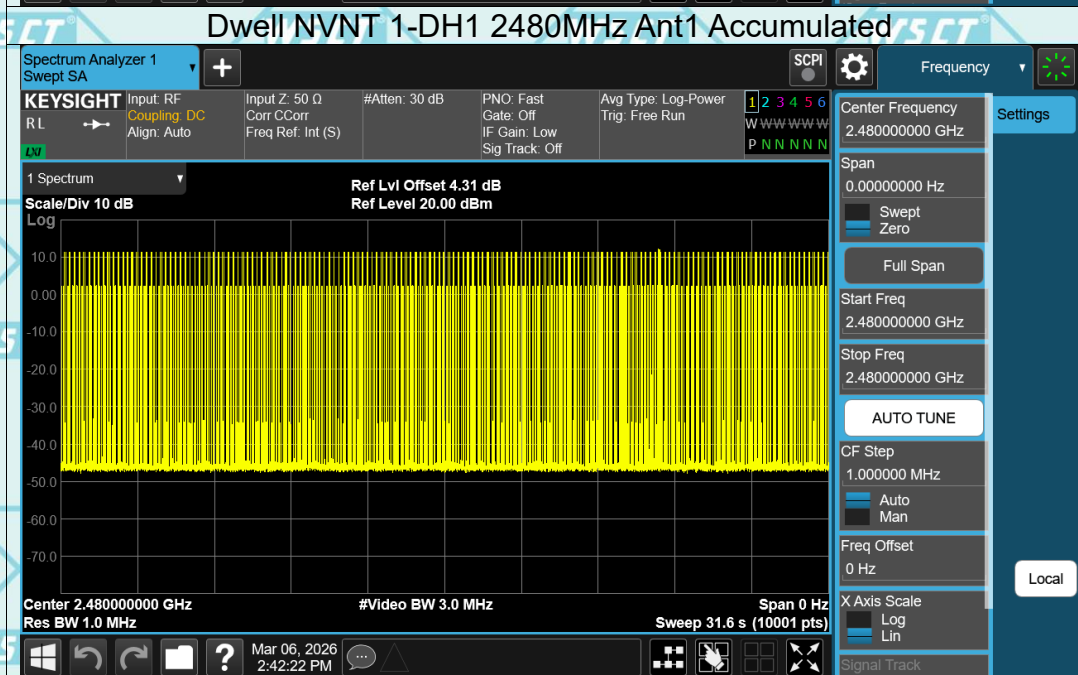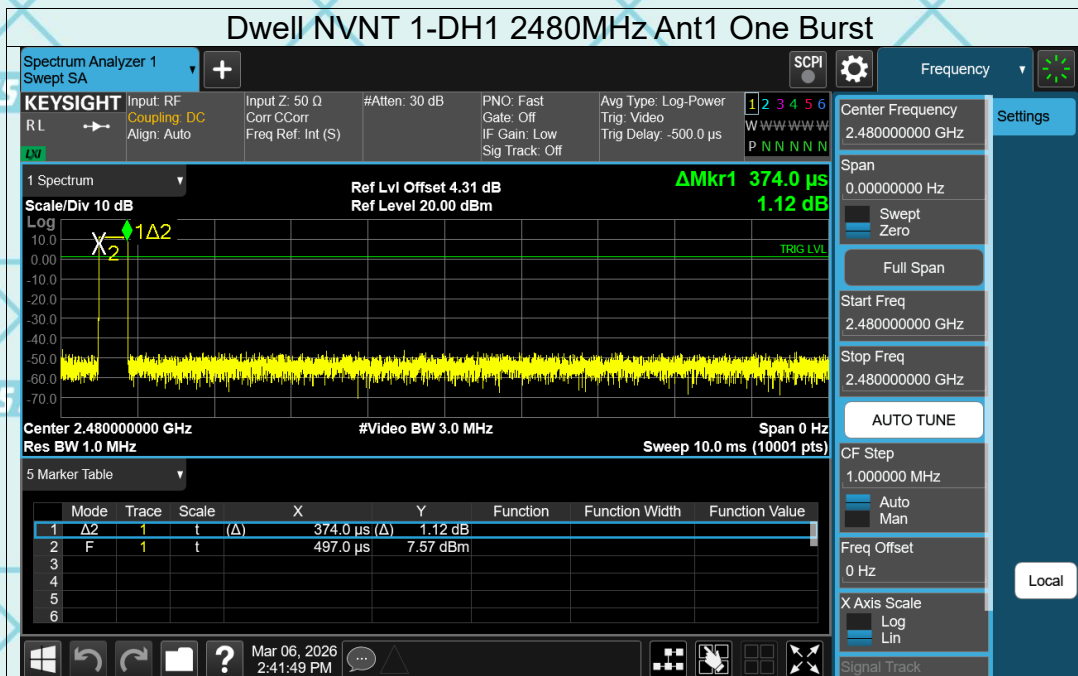



Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

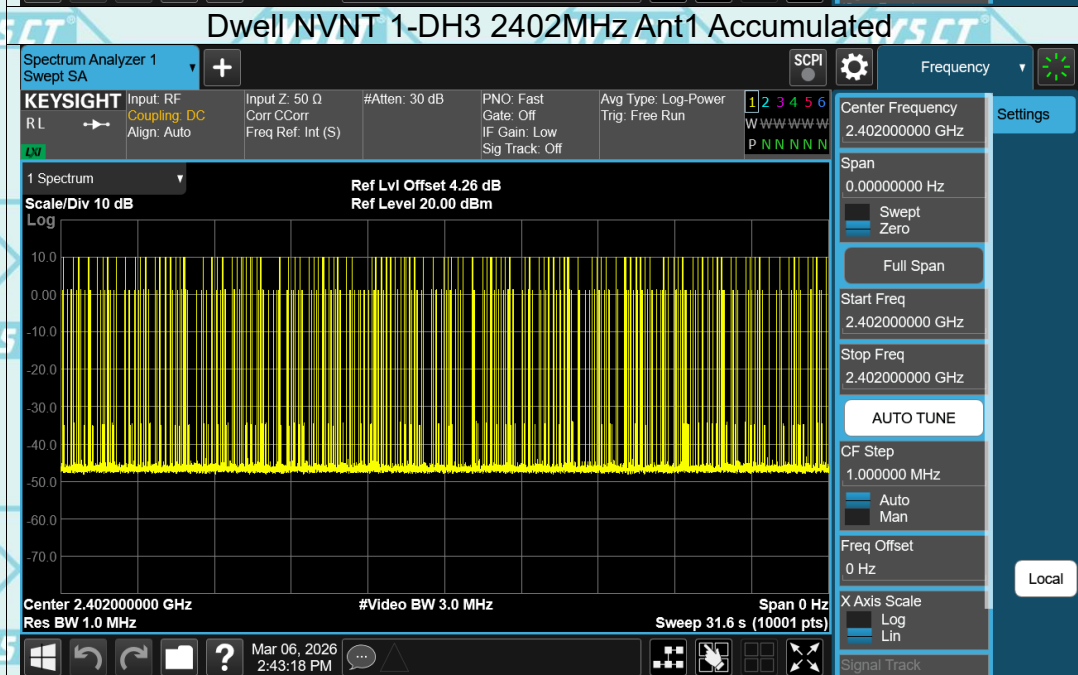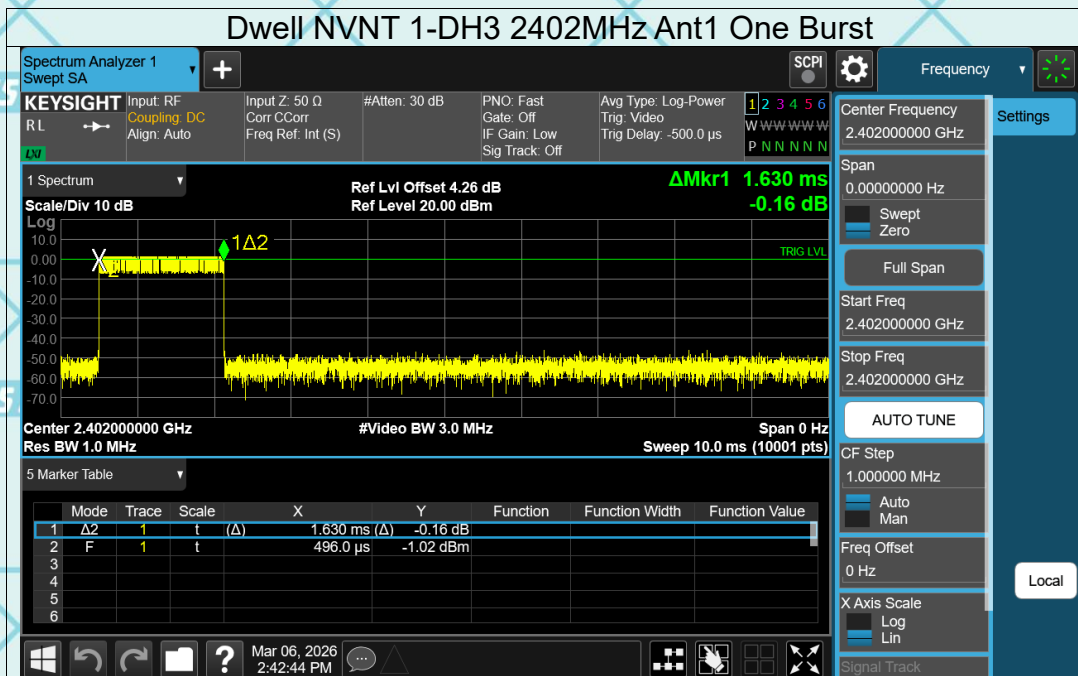



Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

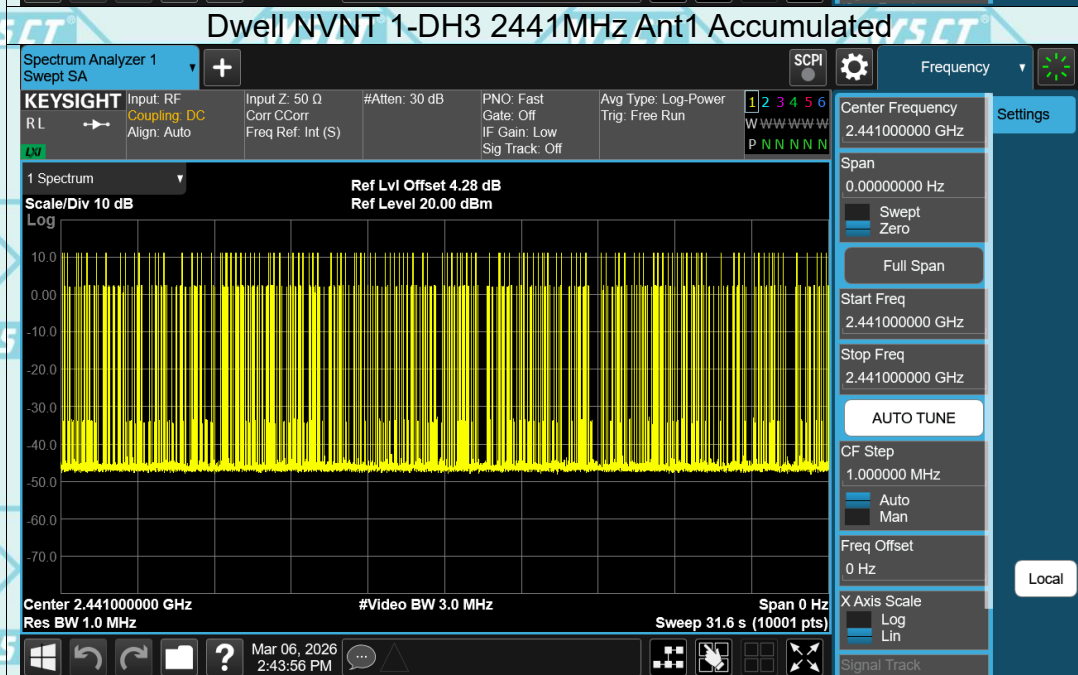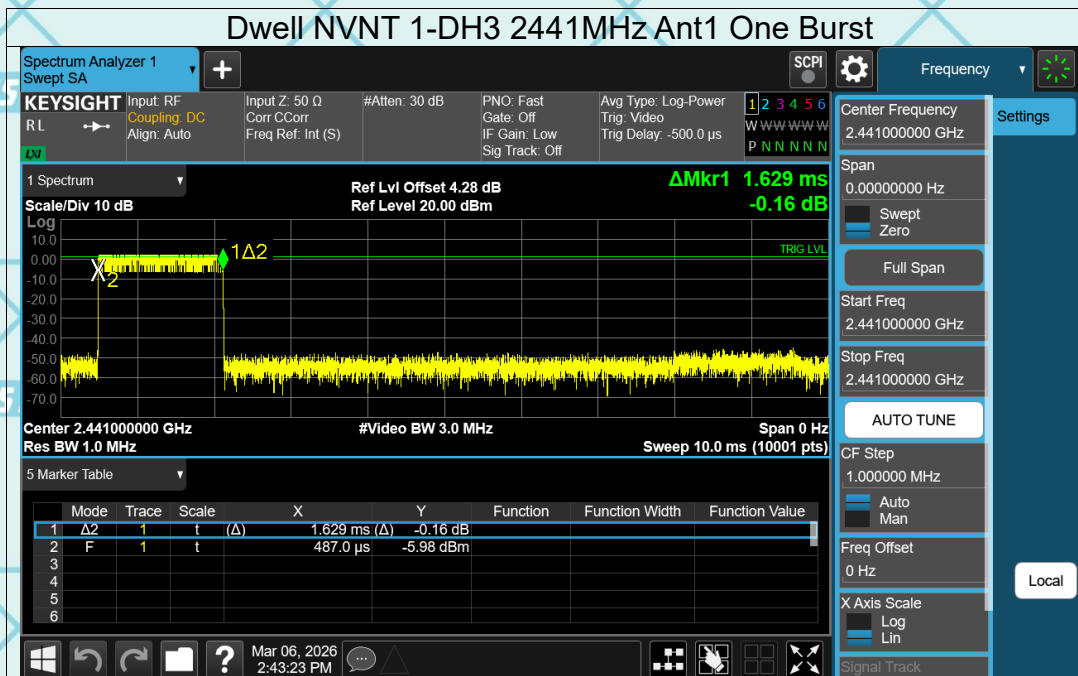

Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

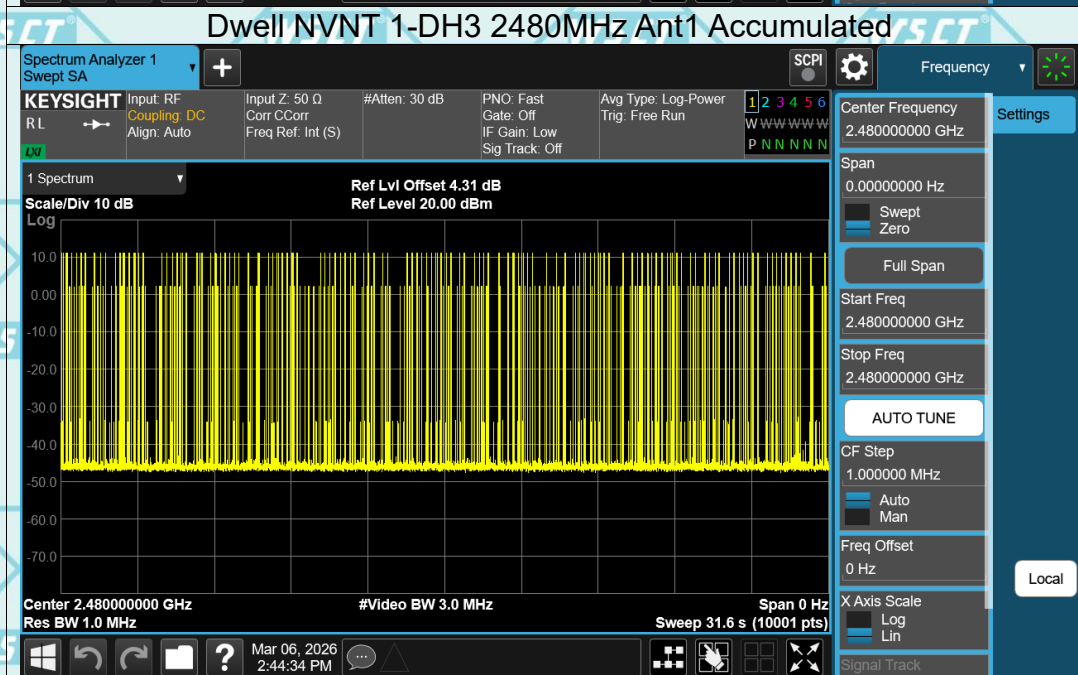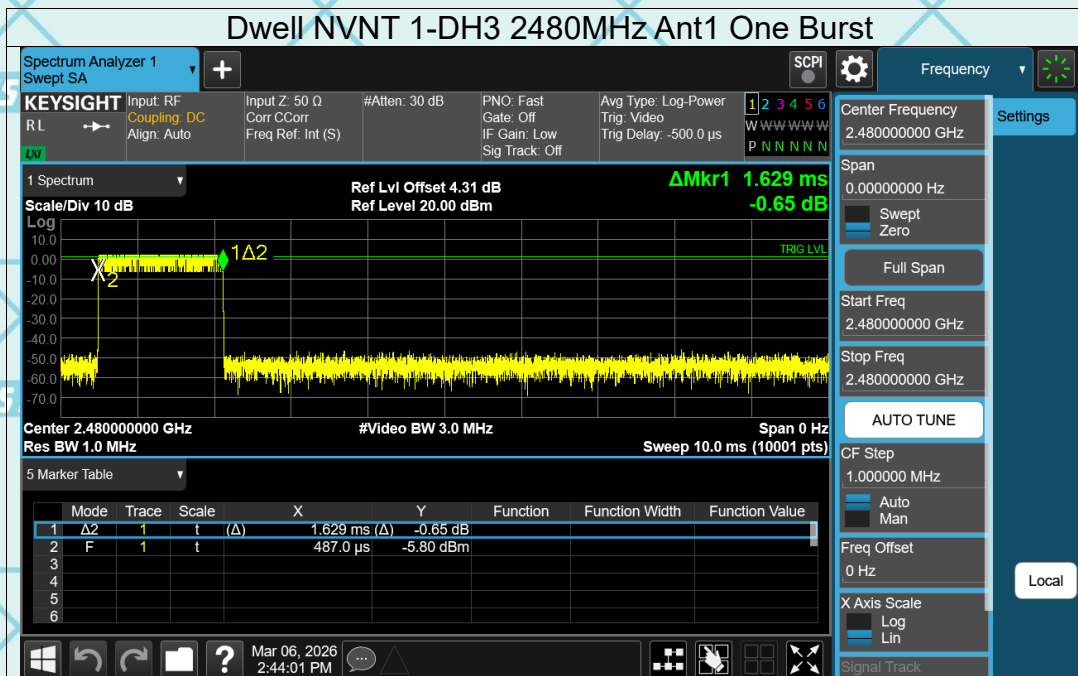


Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

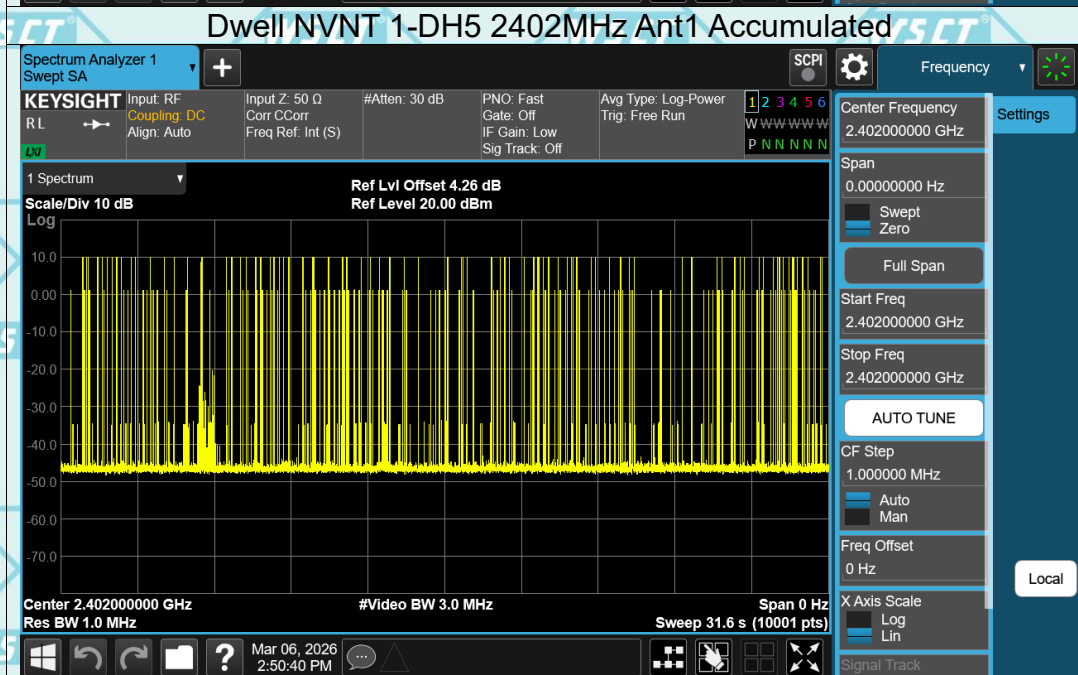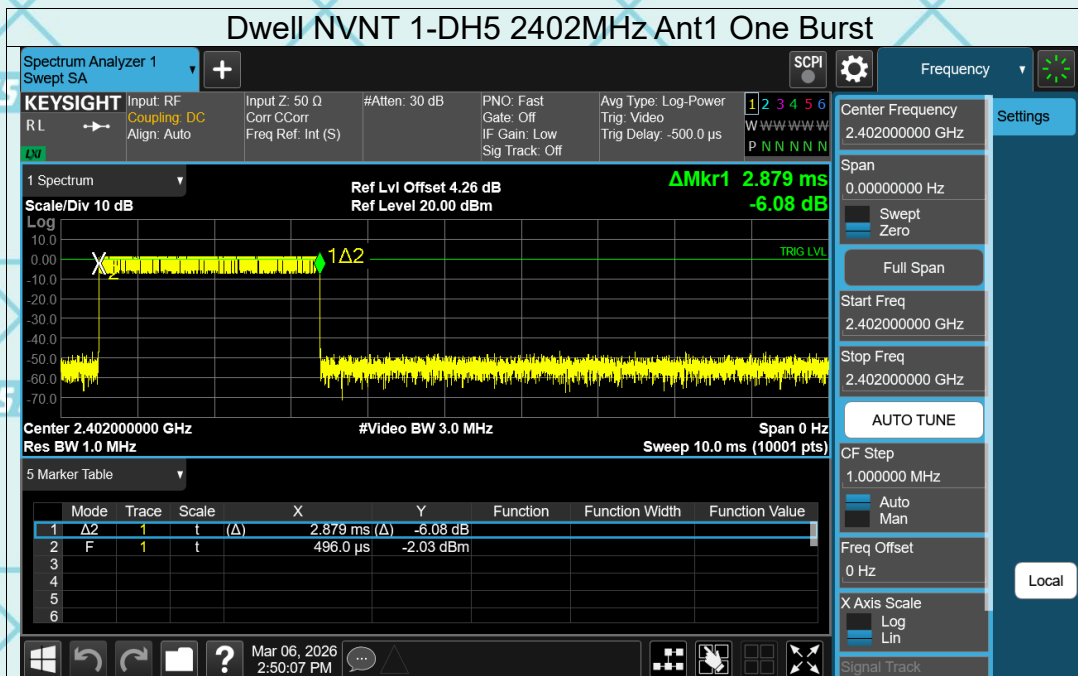


Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026



Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

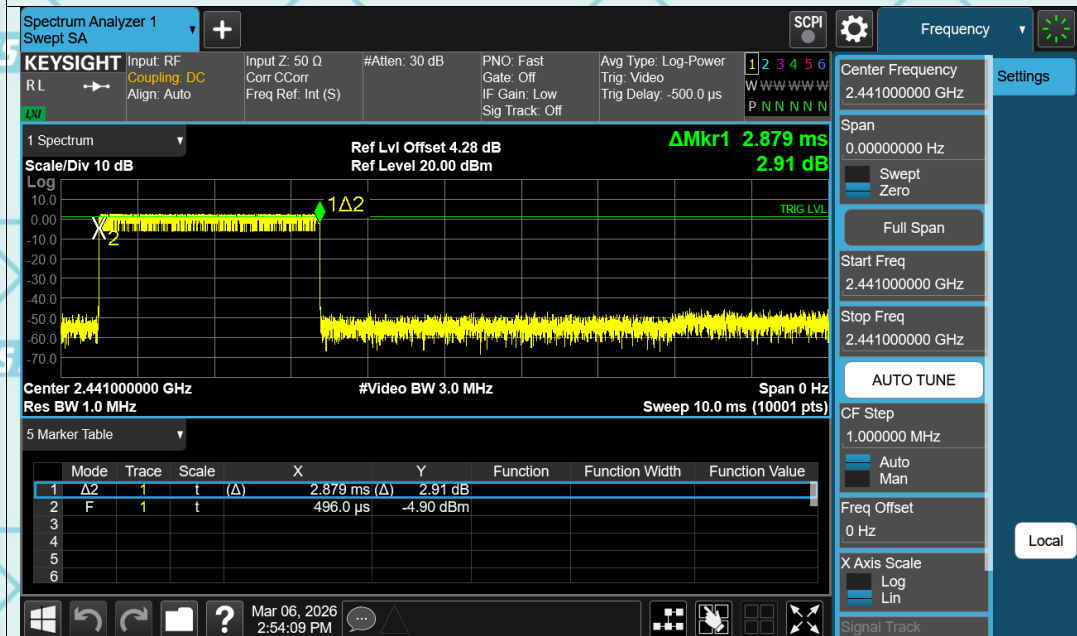

Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

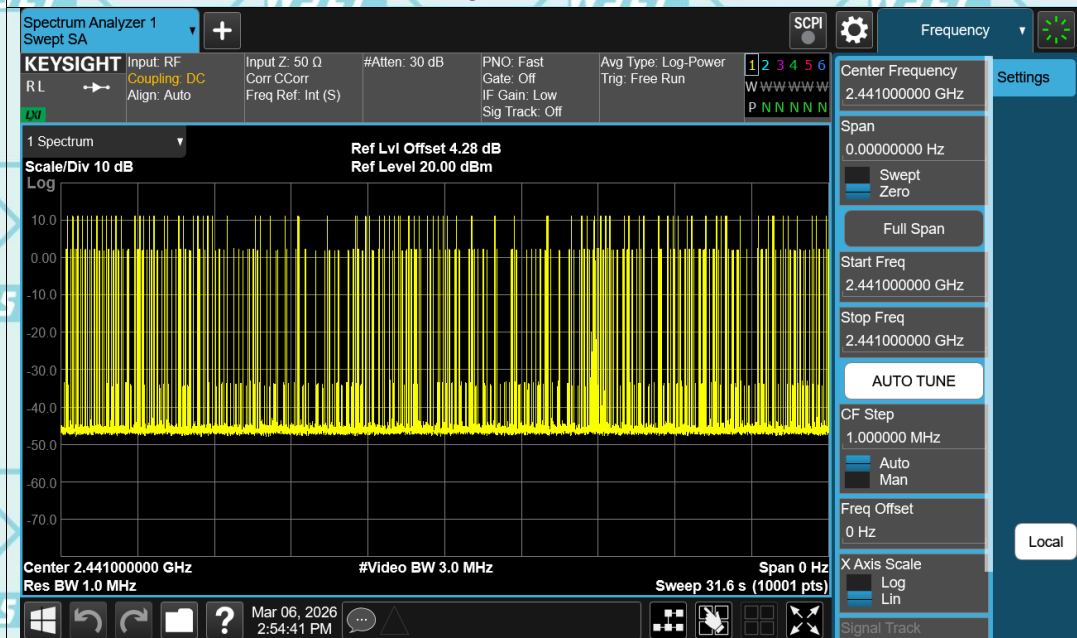

Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

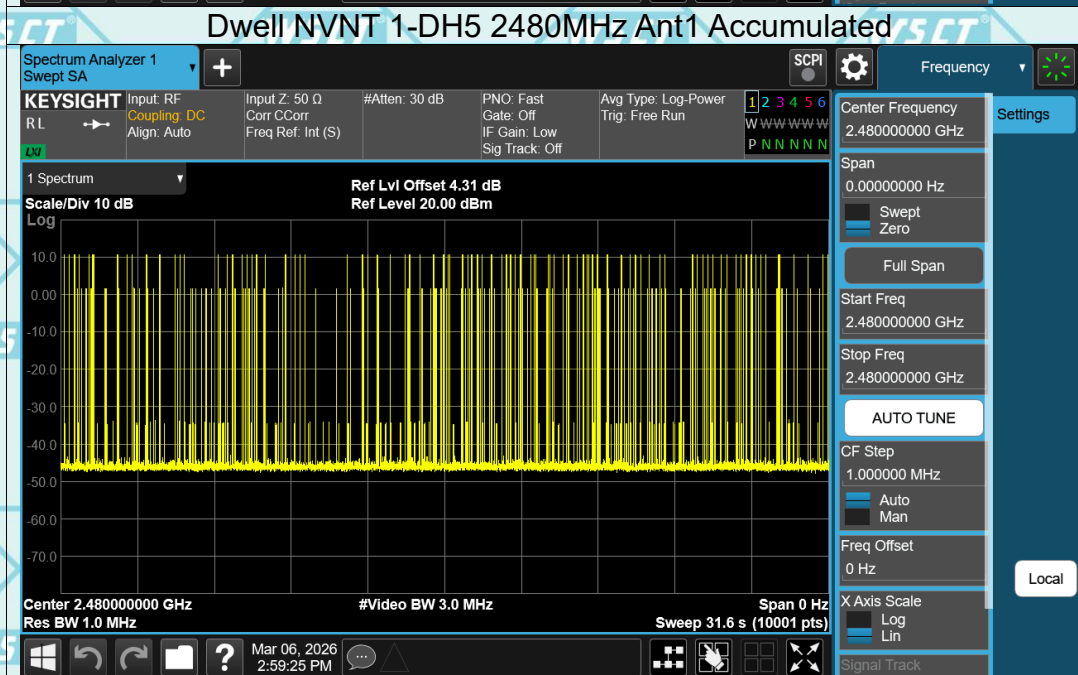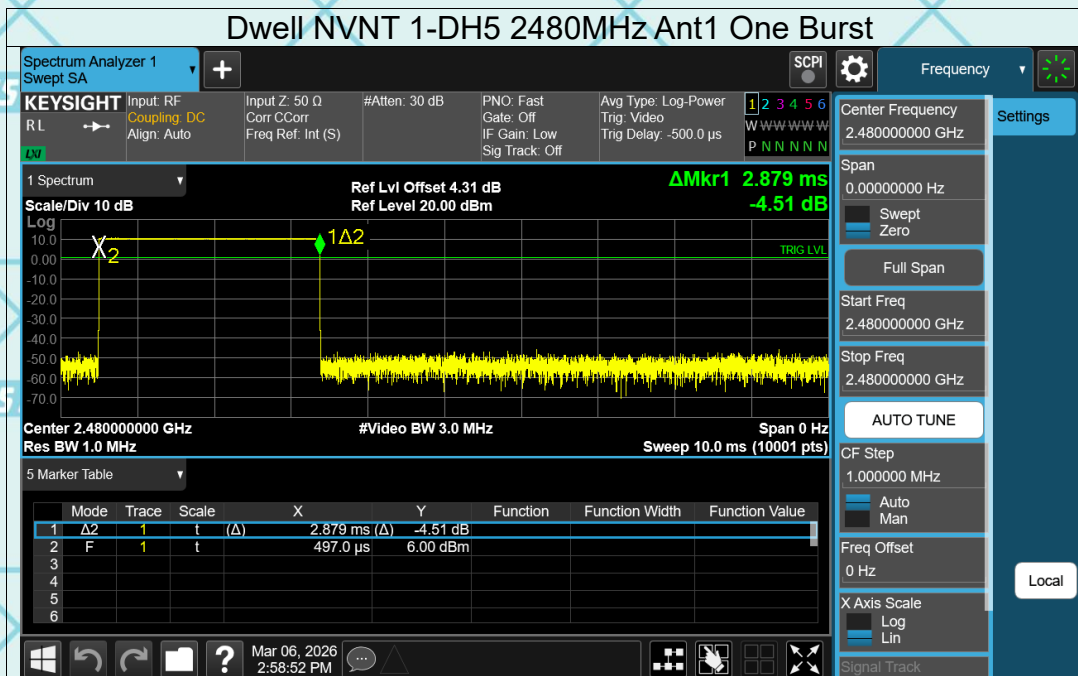

6.8. Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

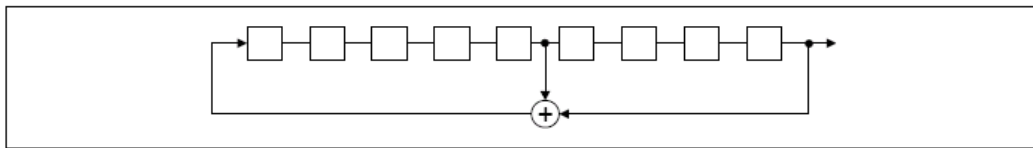

Linear Feedback Shift Register for Generation of the PRBS sequence


An example of Pseudorandom Frequency Hopping Sequence as follow:

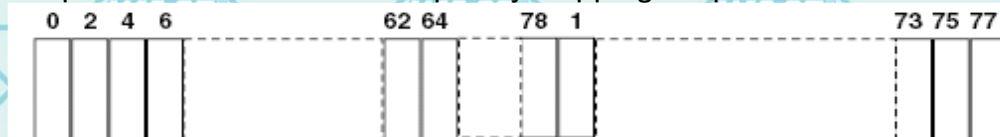

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

6.9. Conducted Band Edge Measurement

6.9.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2020
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of ANSI C63.10:2020 Measurement Guidelines. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz ($\geq 1\%$ span=10MHz), VBW = 300 kHz ($\geq$RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used. 4. Enable hopping function of the EUT and then repeat step 2 and 3. 5. Measure and record the results in the test report.
Test Result:	PASS



Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

Test Data

GFSK Modulation (the worst case)




Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

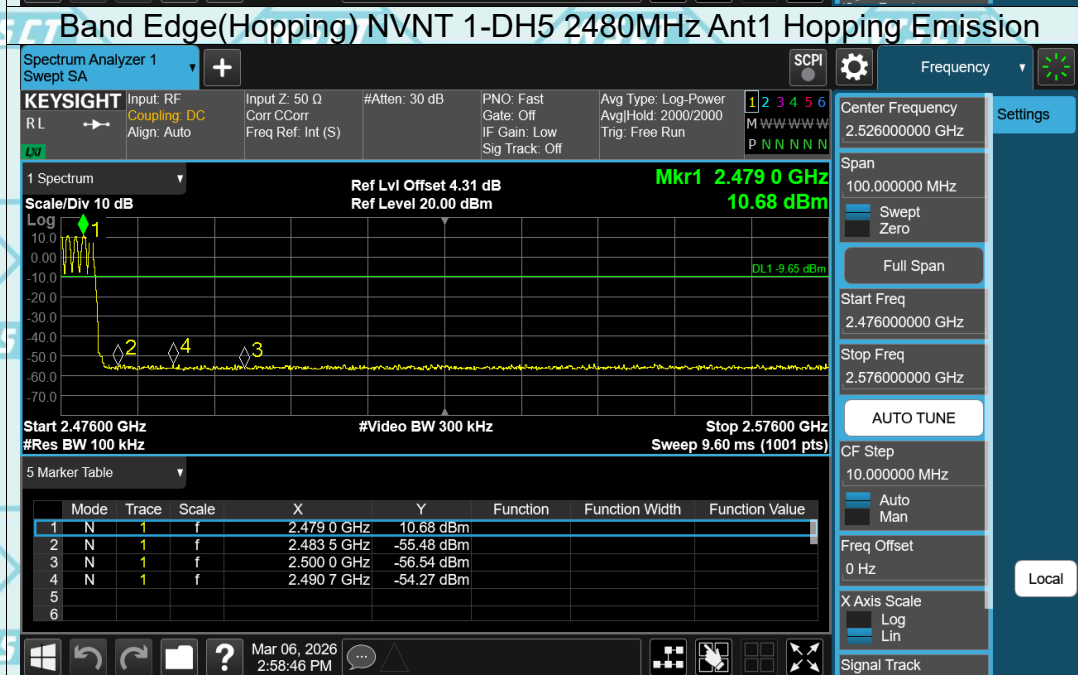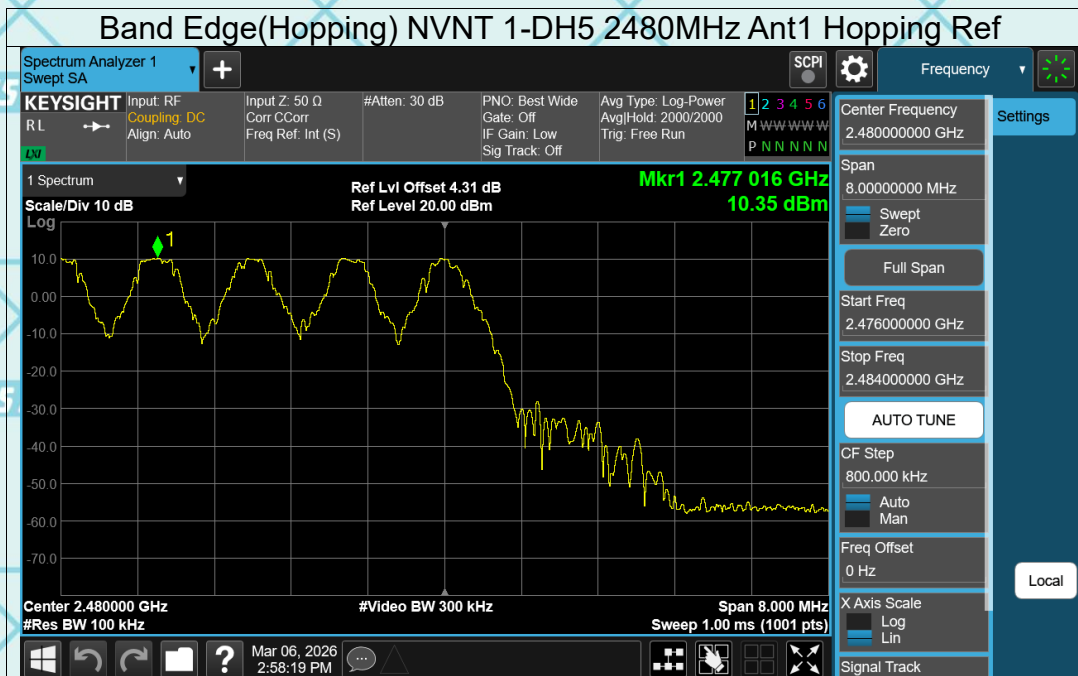



6.10. Conducted Spurious Emission Measurement

6.10.1. Test Specification



Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2020
Limit:	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the guidelines in Spurious RF Conducted Emissions of ANSI C63.10:2020 Measurement Guidelines 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS

Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026



Test Data

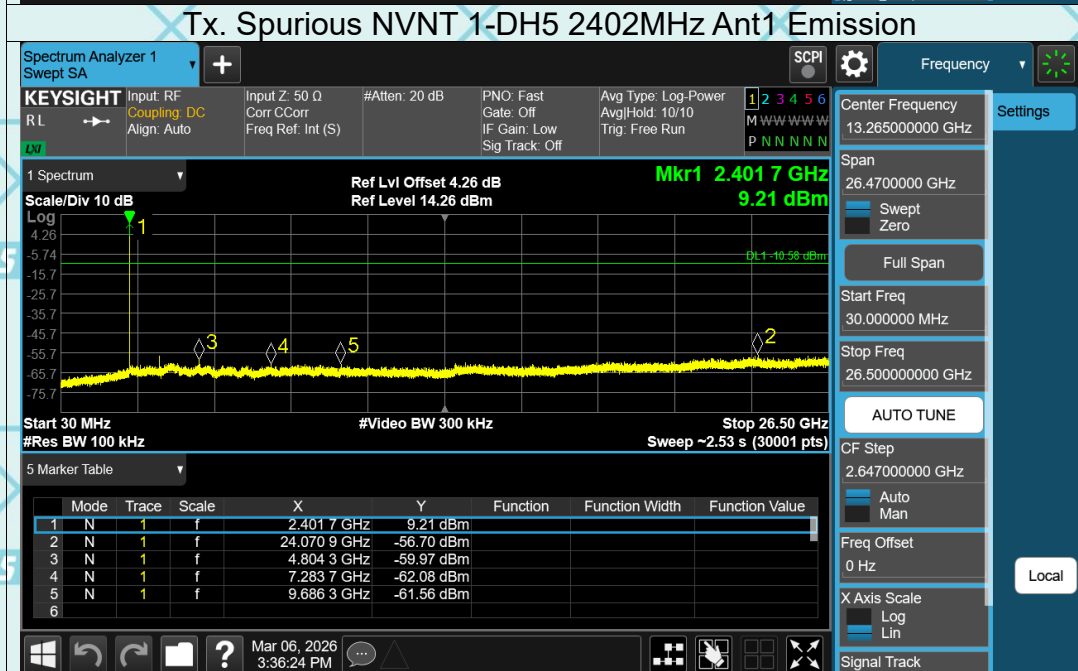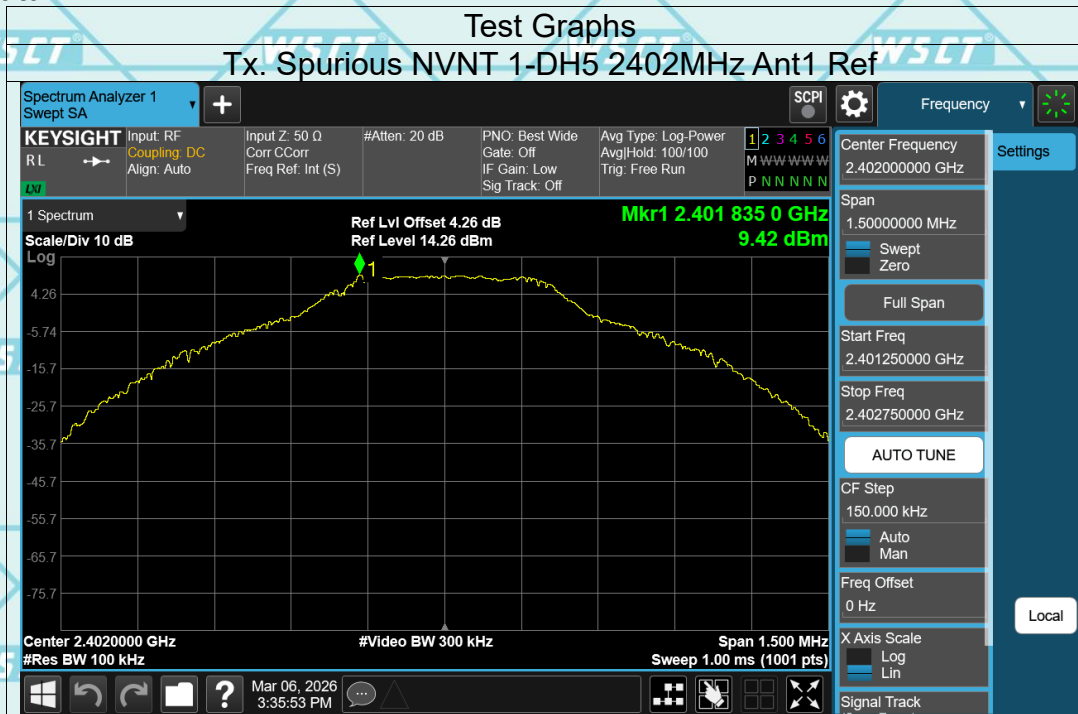

Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

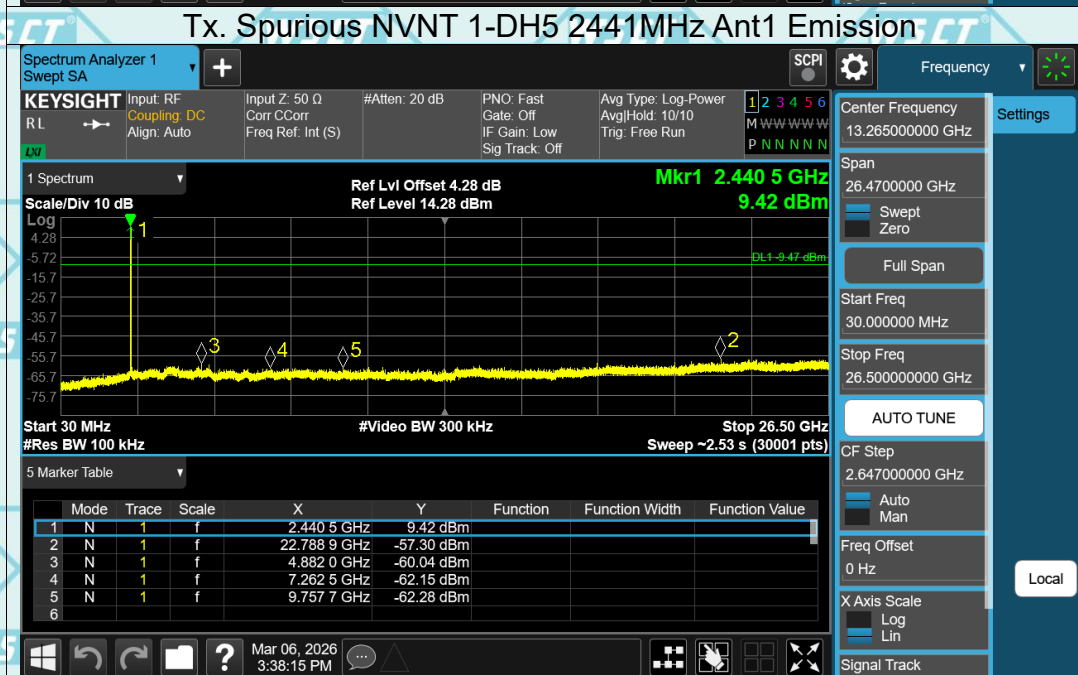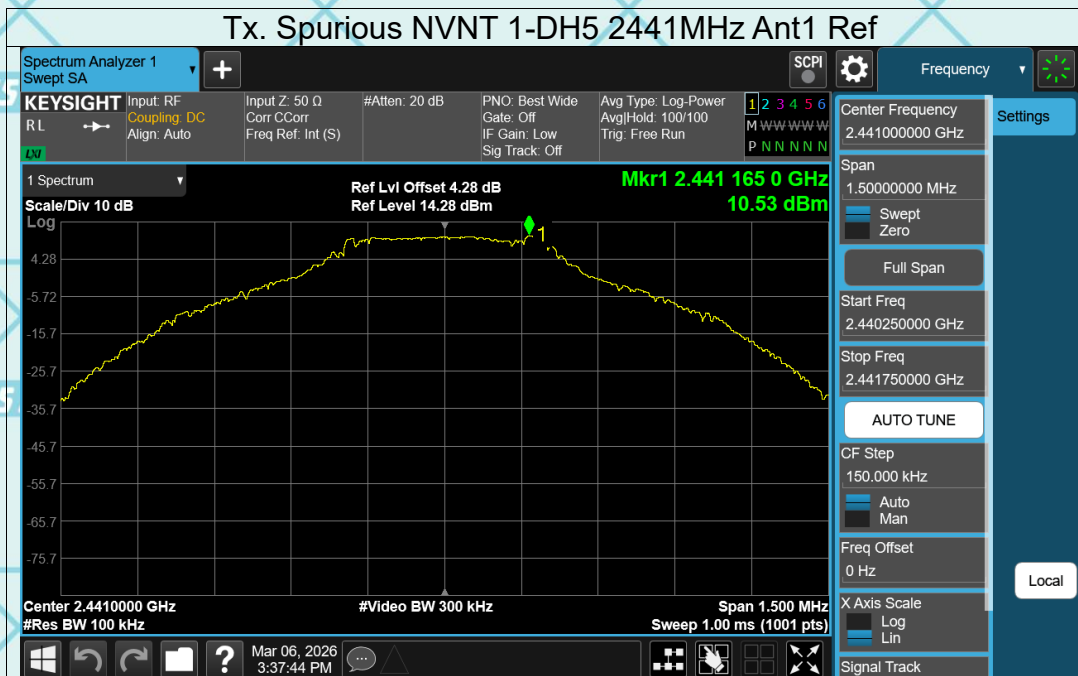

Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

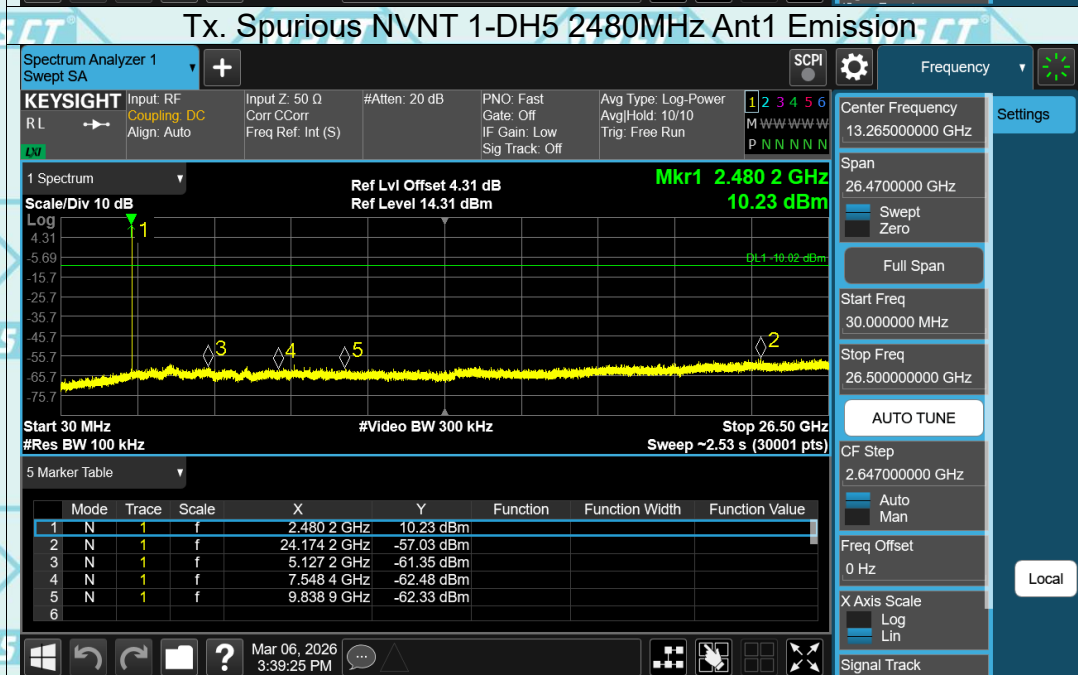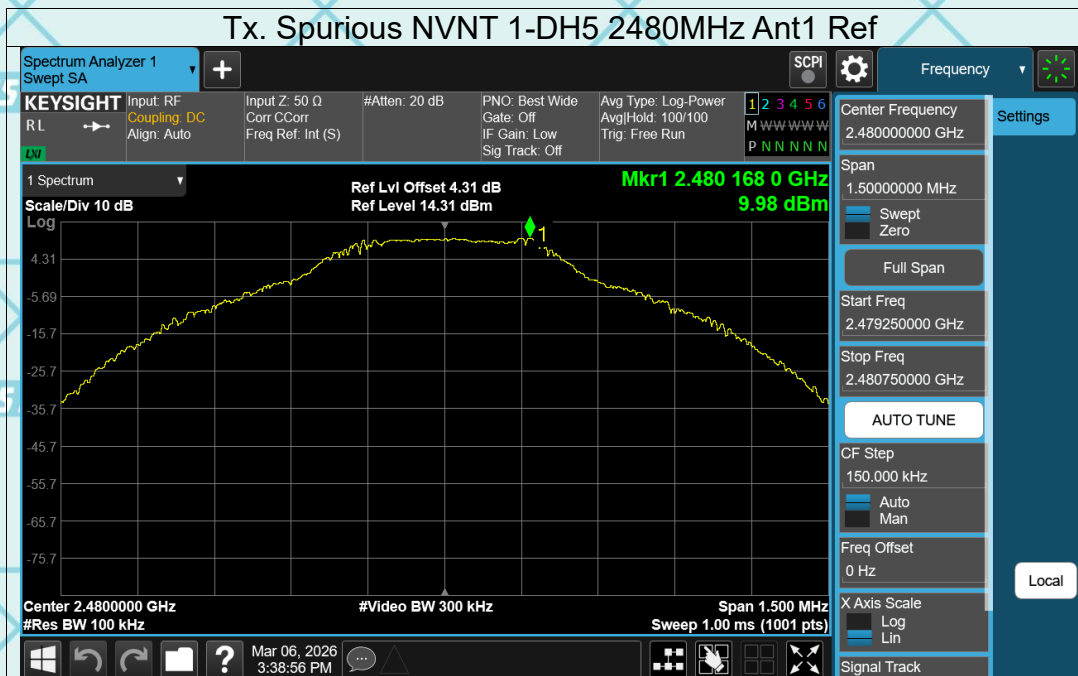

Report No.: WSCT-ANAB-R&E260200023A-BT Issued Date: 13 March 2026

