

Appendix A: Effective (Isotropic) Radiated Power Output Data

Test Result

Band	Channel	PCL	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
GSM850	128	5	33.18	29.53	38.45	PASS
GSM850	190	5	33.30	29.65	38.45	PASS
GSM850	251	5	33.17	29.52	38.45	PASS
GSM1900	512	0	30.54	29.54	33.00	PASS
GSM1900	661	0	30.60	29.6	33.00	PASS
GSM1900	810	0	30.56	29.56	33.00	PASS

Band	Channel	PCL	Slot	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
GPRS850	128	5	1	33.27	29.62	38.45	PASS
GPRS850	128	5	2	32.28	28.63	38.45	PASS
GPRS850	128	5	3	30.22	26.57	38.45	PASS
GPRS850	128	5	4	29.12	25.47	38.45	PASS
GPRS850	190	5	1	33.37	29.72	38.45	PASS
GPRS850	190	5	2	32.37	28.72	38.45	PASS
GPRS850	190	5	3	30.20	26.55	38.45	PASS
GPRS850	190	5	4	29.11	25.46	38.45	PASS
GPRS850	251	5	1	33.14	29.49	38.45	PASS
GPRS850	251	5	2	32.16	28.51	38.45	PASS
GPRS850	251	5	3	30.12	26.47	38.45	PASS
GPRS850	251	5	4	29.04	25.39	38.45	PASS
GPRS1900	512	0	1	30.51	29.51	33.00	PASS
GPRS1900	512	0	2	29.51	28.51	33.00	PASS
GPRS1900	512	0	3	27.29	26.29	33.00	PASS
GPRS1900	512	0	4	26.21	25.21	33.00	PASS
GPRS1900	661	0	1	30.60	29.6	33.00	PASS
GPRS1900	661	0	2	29.66	28.66	33.00	PASS
GPRS1900	661	0	3	27.51	26.51	33.00	PASS
GPRS1900	661	0	4	26.45	25.45	33.00	PASS
GPRS1900	810	0	1	30.53	29.53	33.00	PASS
GPRS1900	810	0	2	29.64	28.64	33.00	PASS
GPRS1900	810	0	3	27.54	26.54	33.00	PASS
GPRS1900	810	0	4	26.50	25.5	33.00	PASS

Band	Channel	PCL	Slot	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
EGPRS850	128	8	1	27.26	23.61	38.45	PASS
EGPRS850	128	8	2	26.15	22.5	38.45	PASS
EGPRS850	128	8	3	24.19	20.54	38.45	PASS
EGPRS850	128	8	4	24.42	20.77	38.45	PASS
EGPRS850	190	8	1	27.18	23.53	38.45	PASS
EGPRS850	190	8	2	26.11	22.46	38.45	PASS
EGPRS850	190	8	3	24.12	20.47	38.45	PASS
EGPRS850	190	8	4	24.32	20.67	38.45	PASS
EGPRS850	251	8	1	27.09	23.44	38.45	PASS
EGPRS850	251	8	2	26.04	22.39	38.45	PASS
EGPRS850	251	8	3	24.00	20.35	38.45	PASS
EGPRS850	251	8	4	24.20	20.55	38.45	PASS
EGPRS1900	512	2	1	26.78	25.78	33.00	PASS
EGPRS1900	512	2	2	25.72	24.72	33.00	PASS
EGPRS1900	512	2	3	23.73	22.73	33.00	PASS
EGPRS1900	512	2	4	24.37	23.37	33.00	PASS
EGPRS1900	661	2	1	26.75	25.75	33.00	PASS
EGPRS1900	661	2	2	25.75	24.75	33.00	PASS
EGPRS1900	661	2	3	23.70	22.7	33.00	PASS
EGPRS1900	661	2	4	24.26	23.26	33.00	PASS
EGPRS1900	810	2	1	26.47	25.47	33.00	PASS
EGPRS1900	810	2	2	25.44	24.44	33.00	PASS
EGPRS1900	810	2	3	23.40	22.4	33.00	PASS
EGPRS1900	810	2	4	24.05	23.05	33.00	PASS

Remark: EIRP (dBm) = Conducted power (dBm) + Antenna Gain (dBi). (For GSM1900)

ERP (dBm) = EIRP (dBm) - 2.15 (dB). (For GSM850)


Appendix B: Peak-to-Average Ratio(CCDF)

Test Result

Band	Channel	PCL	Result(dB)	Limit(dB)	Verdict
GSM850	190	5	2.62	13	PASS
EGPRS850	190	8	5.52	13	PASS
GSM1900	661	0	2.62	13	PASS
EGPRS1900	661	2	5.22	13	PASS

Remark: All channel and all modulation had been tested, but only the worst case data displayed in this report.

Test Graphs

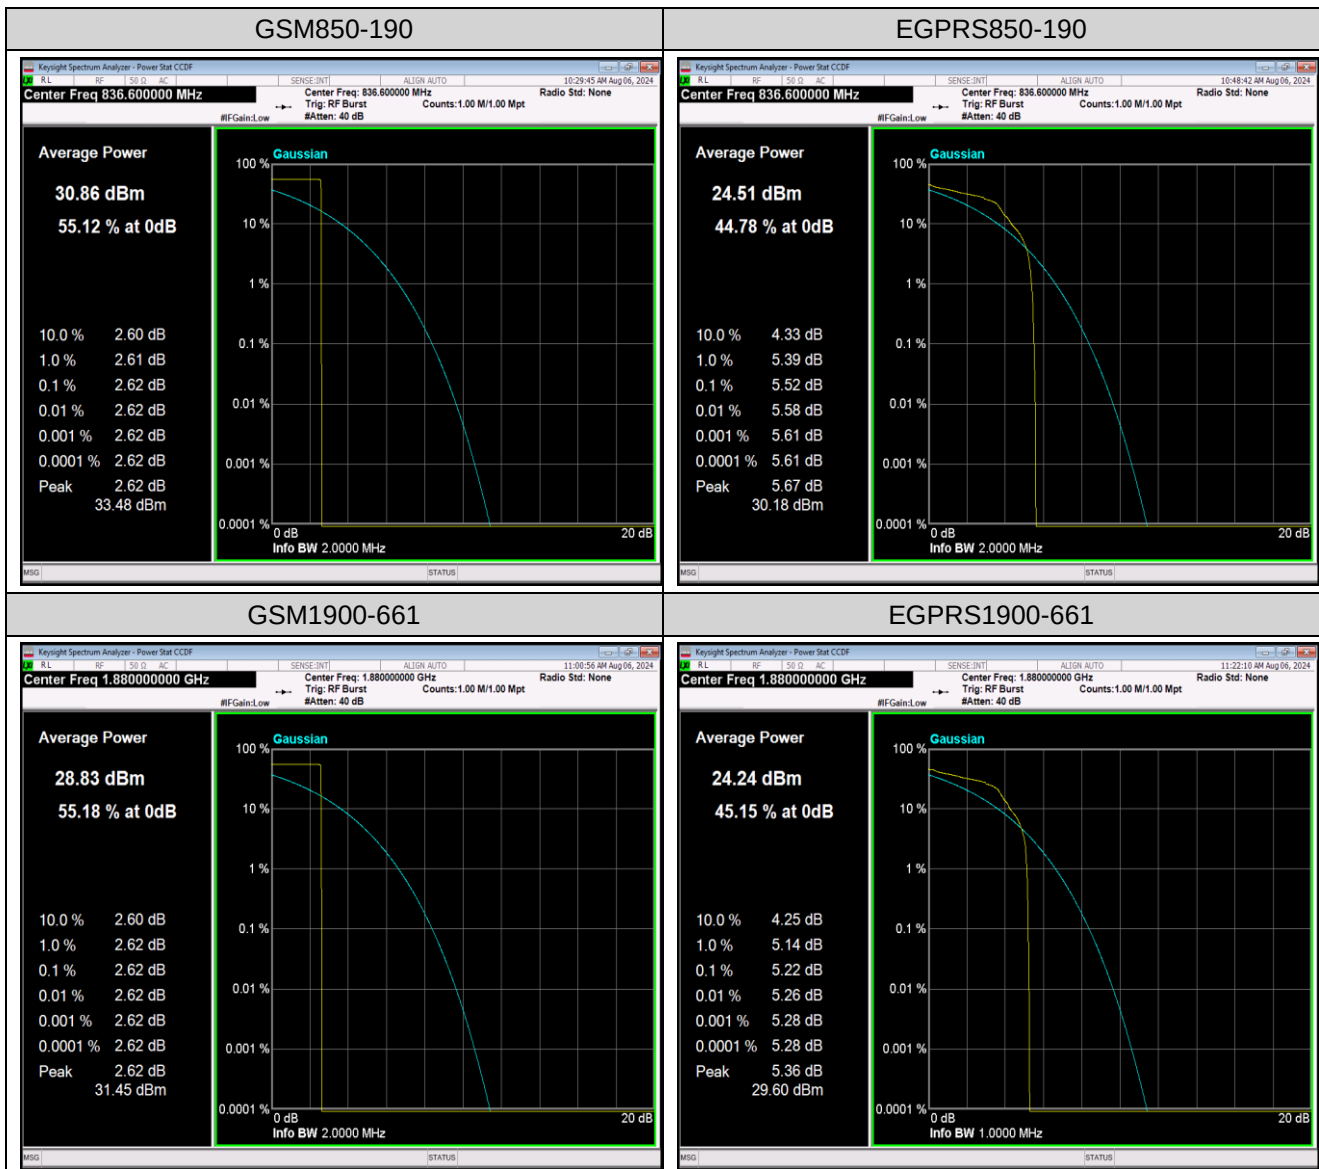



Appendix C: 26dB Bandwidth and Occupied Bandwidth

Test Result

Band	Channel	PCL	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	Verdict
GSM850	128	5	0.24467	0.3182	---	PASS
GSM850	190	5	0.24485	0.3133	---	PASS
GSM850	251	5	0.24619	0.3131	---	PASS
EGPRS850	128	8	0.25031	0.3158	---	PASS
EGPRS850	190	8	0.24970	0.3150	---	PASS
EGPRS850	251	8	0.25130	0.3187	---	PASS
GSM1900	512	0	0.24677	0.3150	---	PASS
GSM1900	661	0	0.24435	0.3147	---	PASS
GSM1900	810	0	0.24664	0.3150	---	PASS
EGPRS1900	512	2	0.25498	0.3249	---	PASS
EGPRS1900	661	2	0.25384	0.3238	---	PASS
EGPRS1900	810	2	0.25234	0.3143	---	PASS

Test Graphs

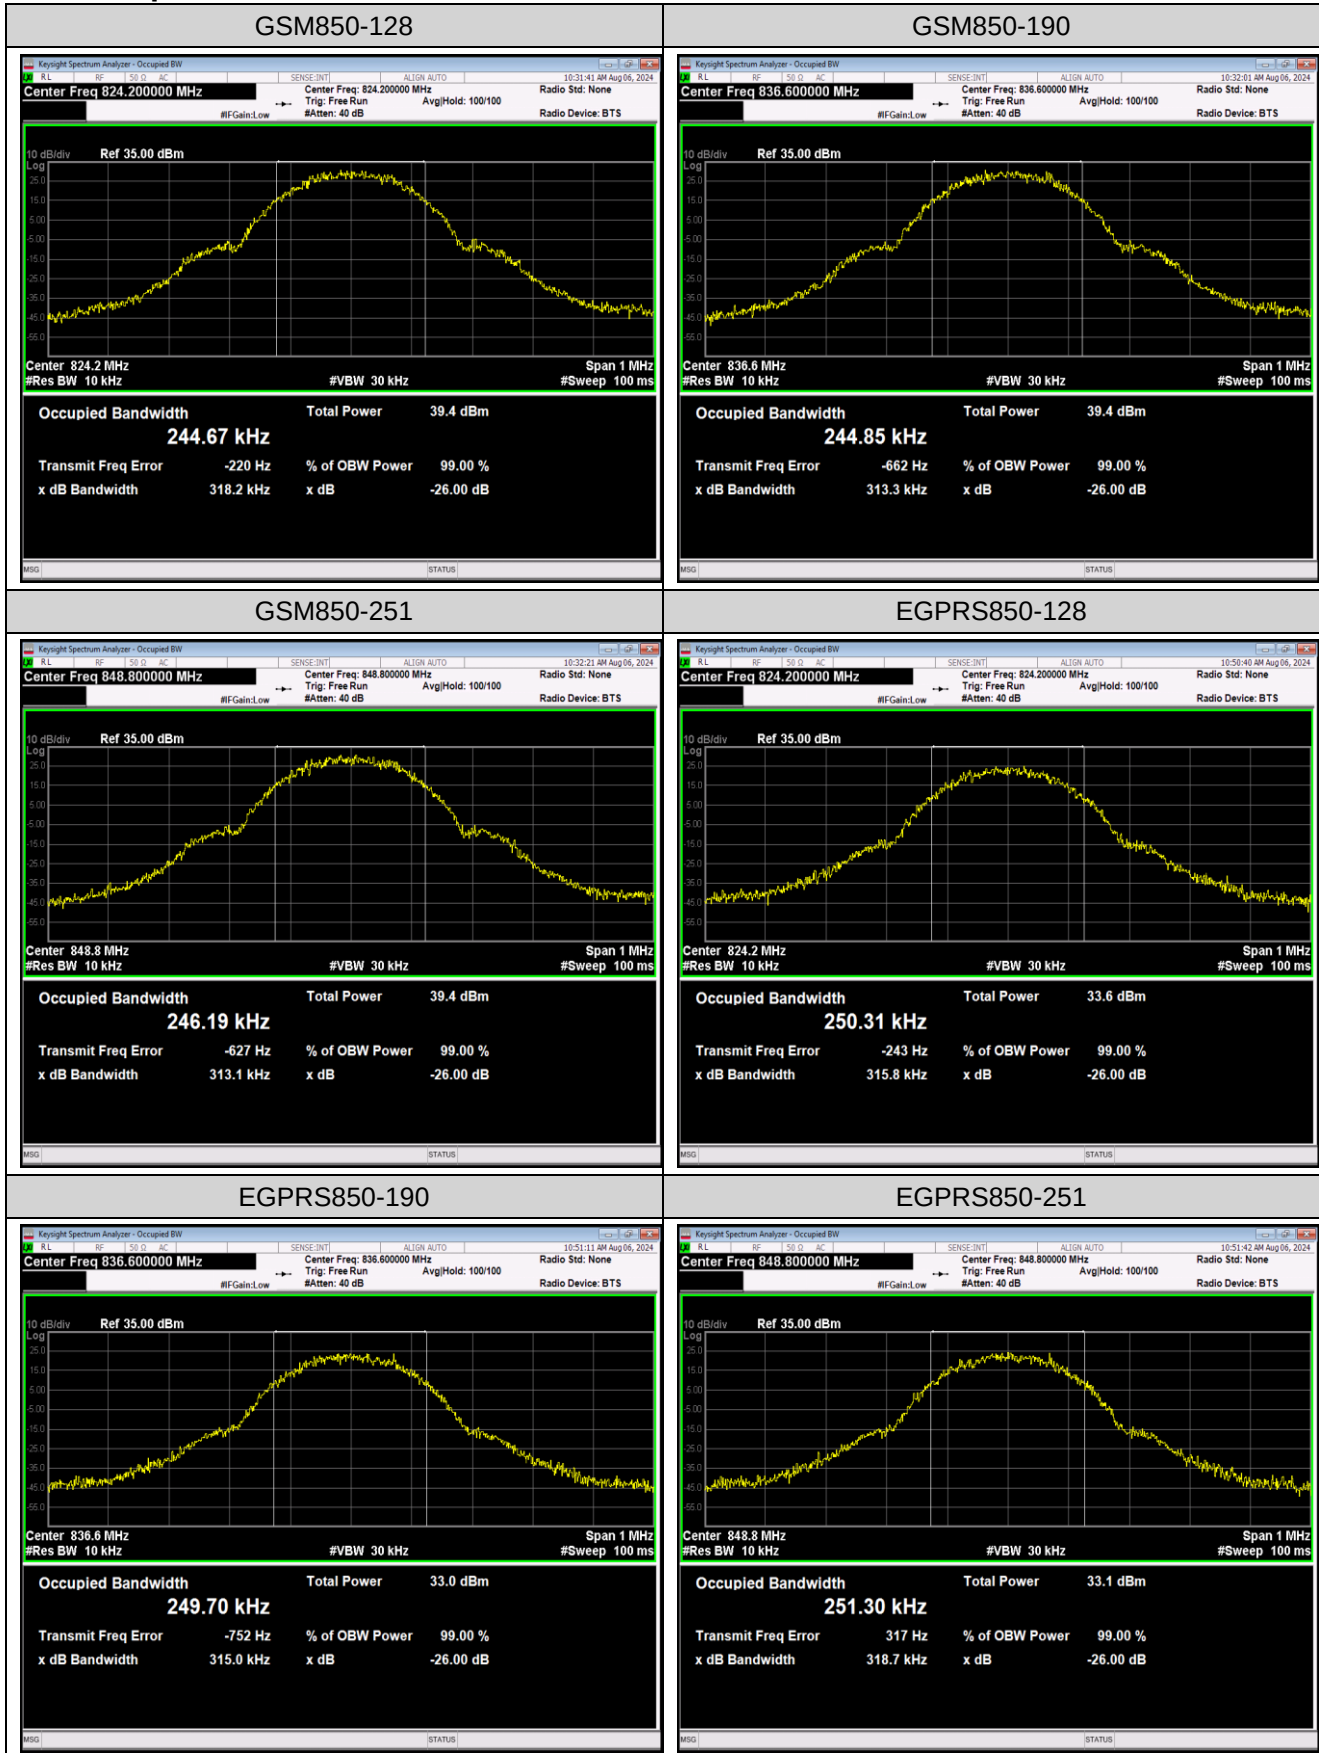

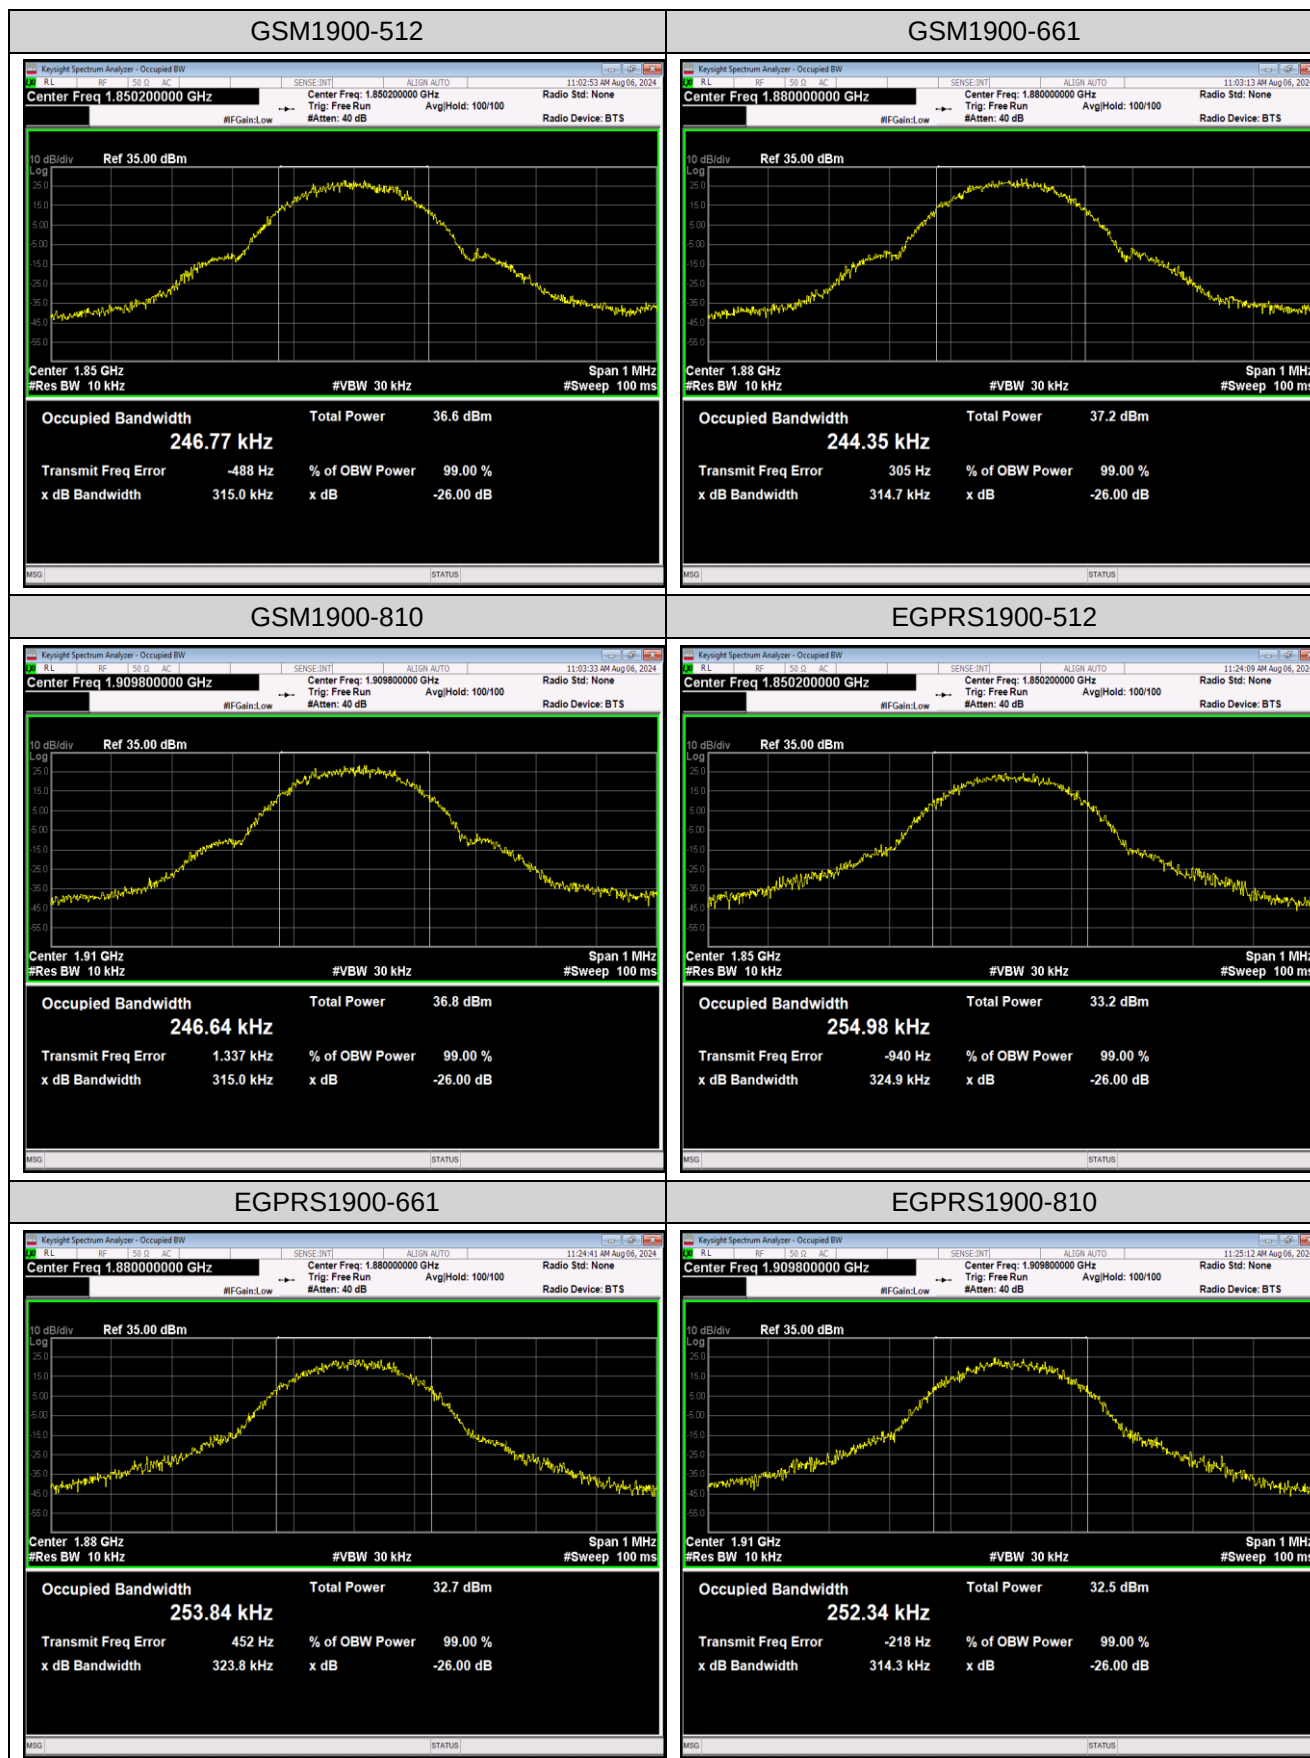



Appendix D: Band Edge

Test Result

Band	Channel	PCL	Freq (MHz)	Result (dBm)	Limit(dBm)	Verdict
GSM850	128	5	823.98	-25.16	-13	PASS
GSM850	251	5	849.02	-25.58	-13	PASS
EGPRS850	128	8	823.98	-33.46	-13	PASS
EGPRS850	251	8	849.00	-34.38	-13	PASS
GSM1900	512	0	1849.98	-27.30	-13	PASS
GSM1900	810	0	1910.02	-25.52	-13	PASS
EGPRS1900	512	2	1850.00	-34.48	-13	PASS
EGPRS1900	810	2	1910.00	-34.19	-13	PASS

Test Graphs

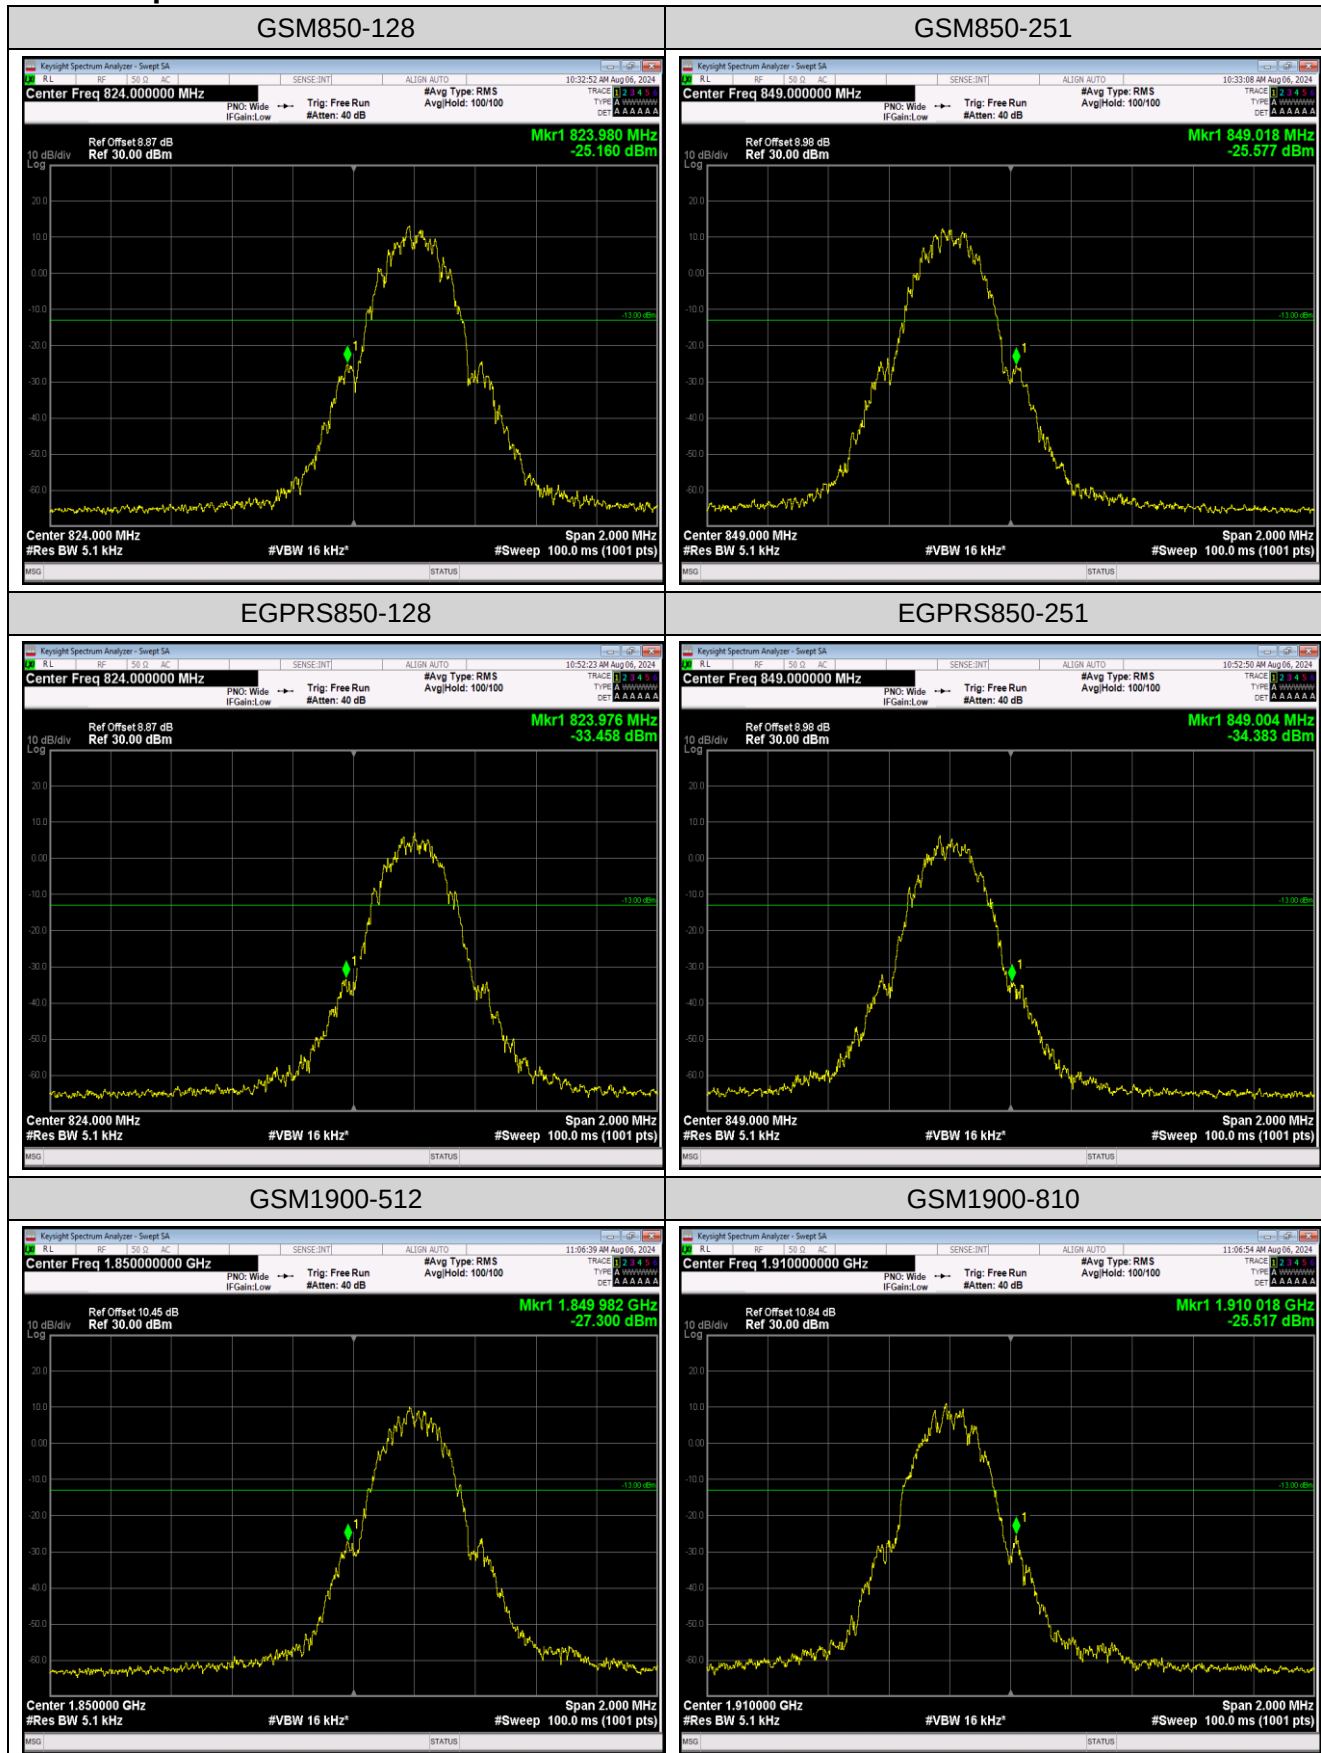

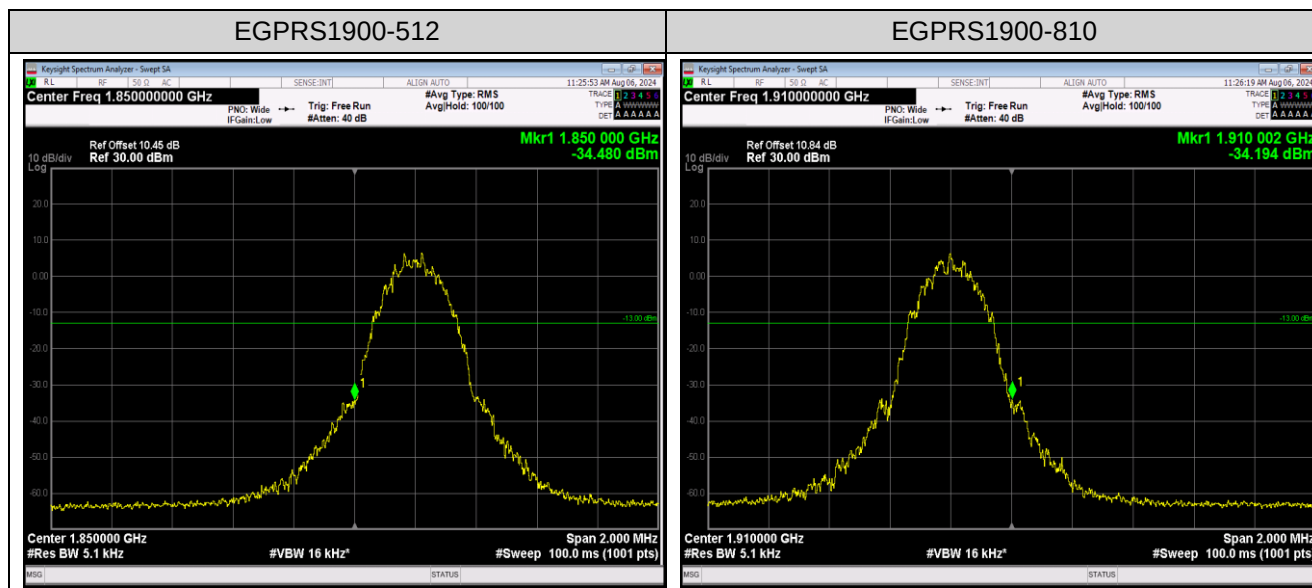


Appendix E: Conducted Spurious Emission

Test Result

Band	Channel	PCL	Frequency Range(MHz)	Max.Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM850	128	5	0.009~0.15MHz	0.01	-54.53	-33	PASS
GSM850	128	5	0.15~30MHz	0.15	-43.89	-13	PASS
GSM850	128	5	30~1000MHz	993.34	-44	-13	PASS
GSM850	128	5	1000~10000MHz	1648.6	-29.12	-13	PASS
GSM850	190	5	0.009~0.15MHz	0.01	-54.4	-33	PASS
GSM850	190	5	0.15~30MHz	0.15	-40.38	-13	PASS
GSM850	190	5	30~1000MHz	499.29	-44.52	-13	PASS
GSM850	190	5	1000~10000MHz	2509.9	-30.36	-13	PASS
GSM850	251	5	0.009~0.15MHz	0.01	-54.47	-33	PASS
GSM850	251	5	0.15~30MHz	0.17	-40.69	-13	PASS
GSM850	251	5	30~1000MHz	963.98	-44.52	-13	PASS
GSM850	251	5	1000~10000MHz	1697.5	-29.97	-13	PASS
GSM1900	512	0	0.009~0.15MHz	0.01	-55.27	-43	PASS
GSM1900	512	0	0.15~30MHz	0.15	-41	-23	PASS
GSM1900	512	0	30~1000MHz	906.82	-44.87	-13	PASS
GSM1900	512	0	1000~18000MHz	16993.6	-22	-13	PASS
GSM1900	661	0	0.009~0.15MHz	0.01	-55.62	-43	PASS
GSM1900	661	0	0.15~30MHz	0.17	-42.21	-23	PASS
GSM1900	661	0	30~1000MHz	213.69	-45.08	-13	PASS
GSM1900	661	0	1000~18000MHz	17071.23	-21.62	-13	PASS
GSM1900	810	0	0.009~0.15MHz	0.01	-56.3	-43	PASS
GSM1900	810	0	0.15~30MHz	0.15	-42.13	-23	PASS
GSM1900	810	0	30~1000MHz	776.93	-45.37	-13	PASS
GSM1900	810	0	1000~18000MHz	16996.43	-22.05	-13	PASS

Remark: All channel and all modulation had been tested, but only the worst case data displayed in this report.

Test Graphs

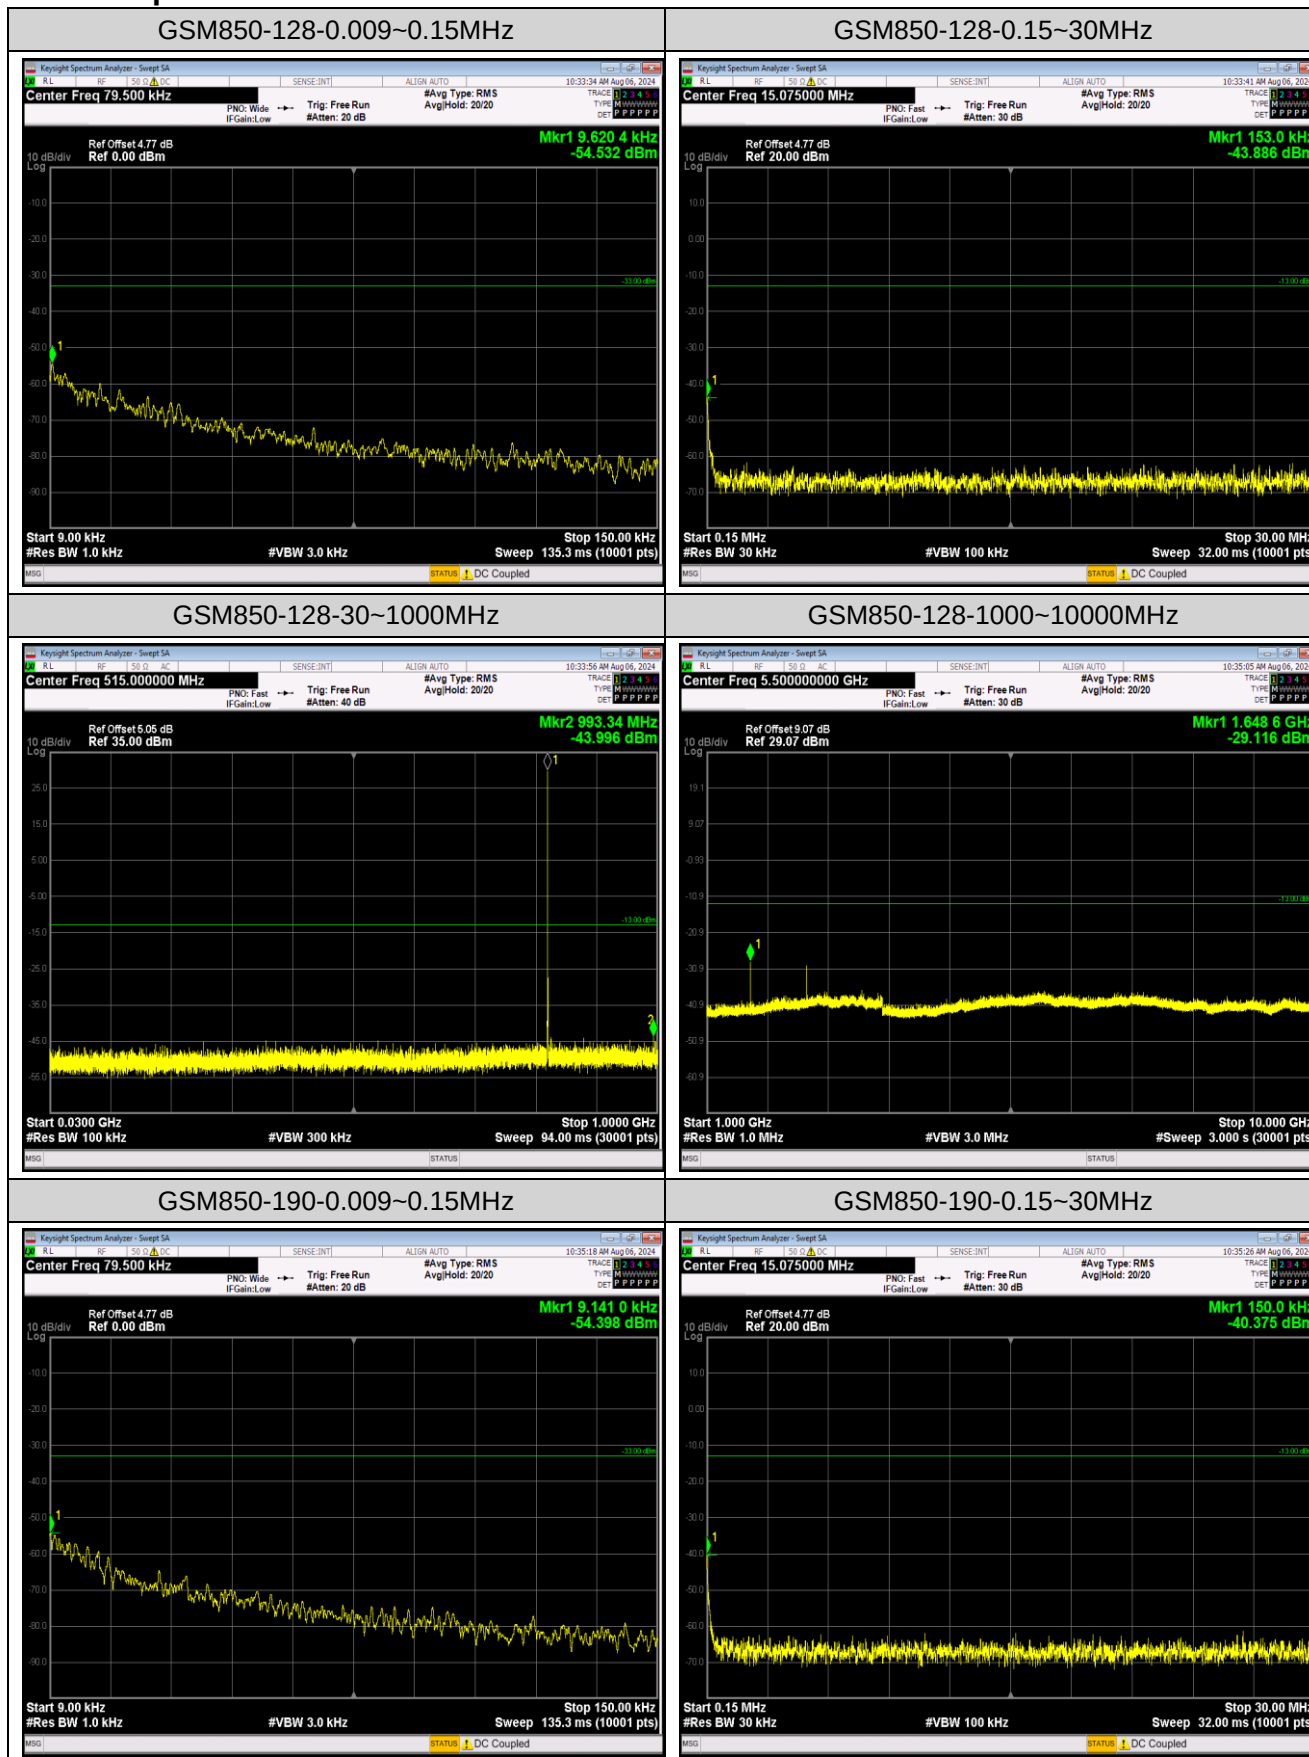



JianYan Testing Group Shenzhen Co., Ltd.


No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Project No.: JYTSZR2407009

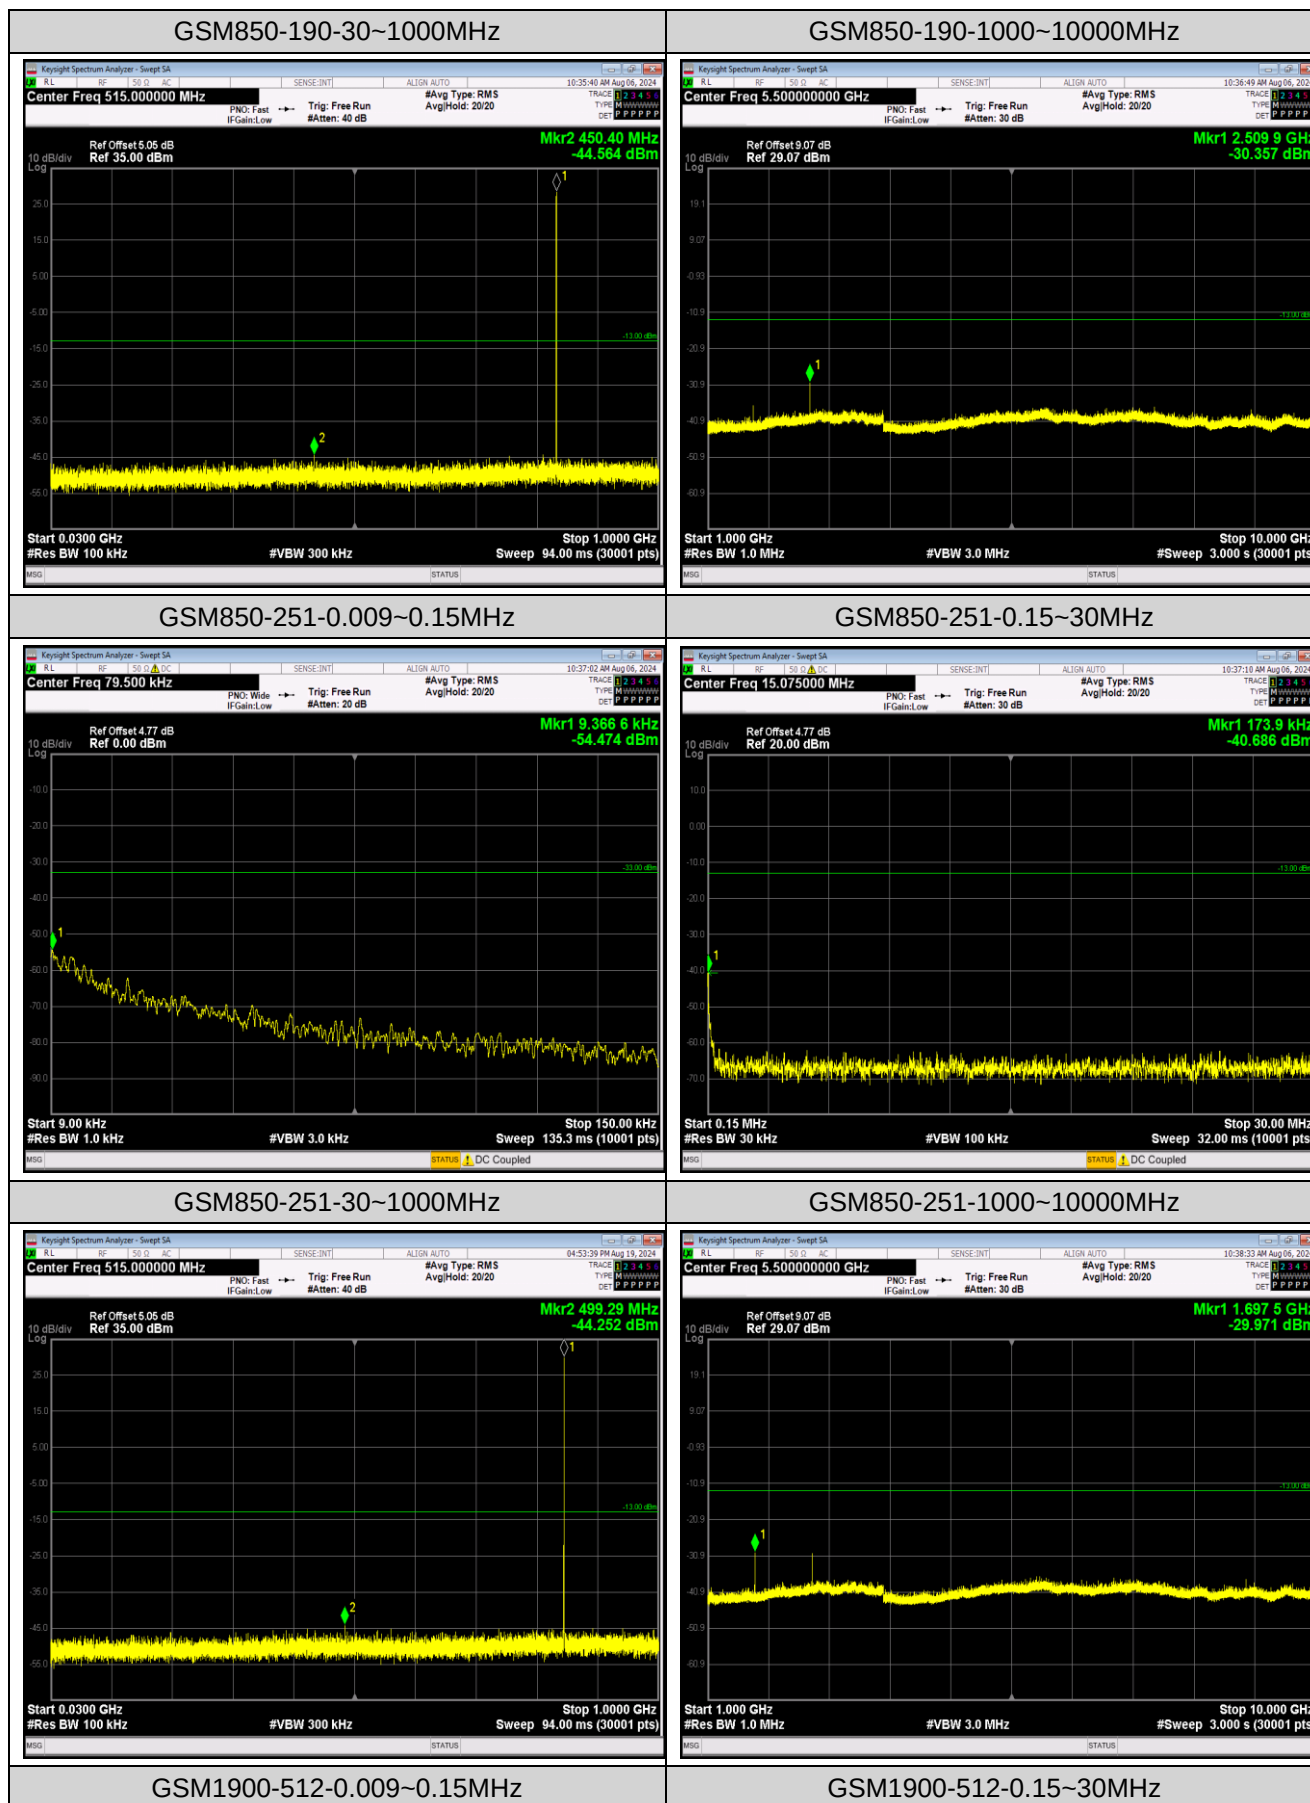

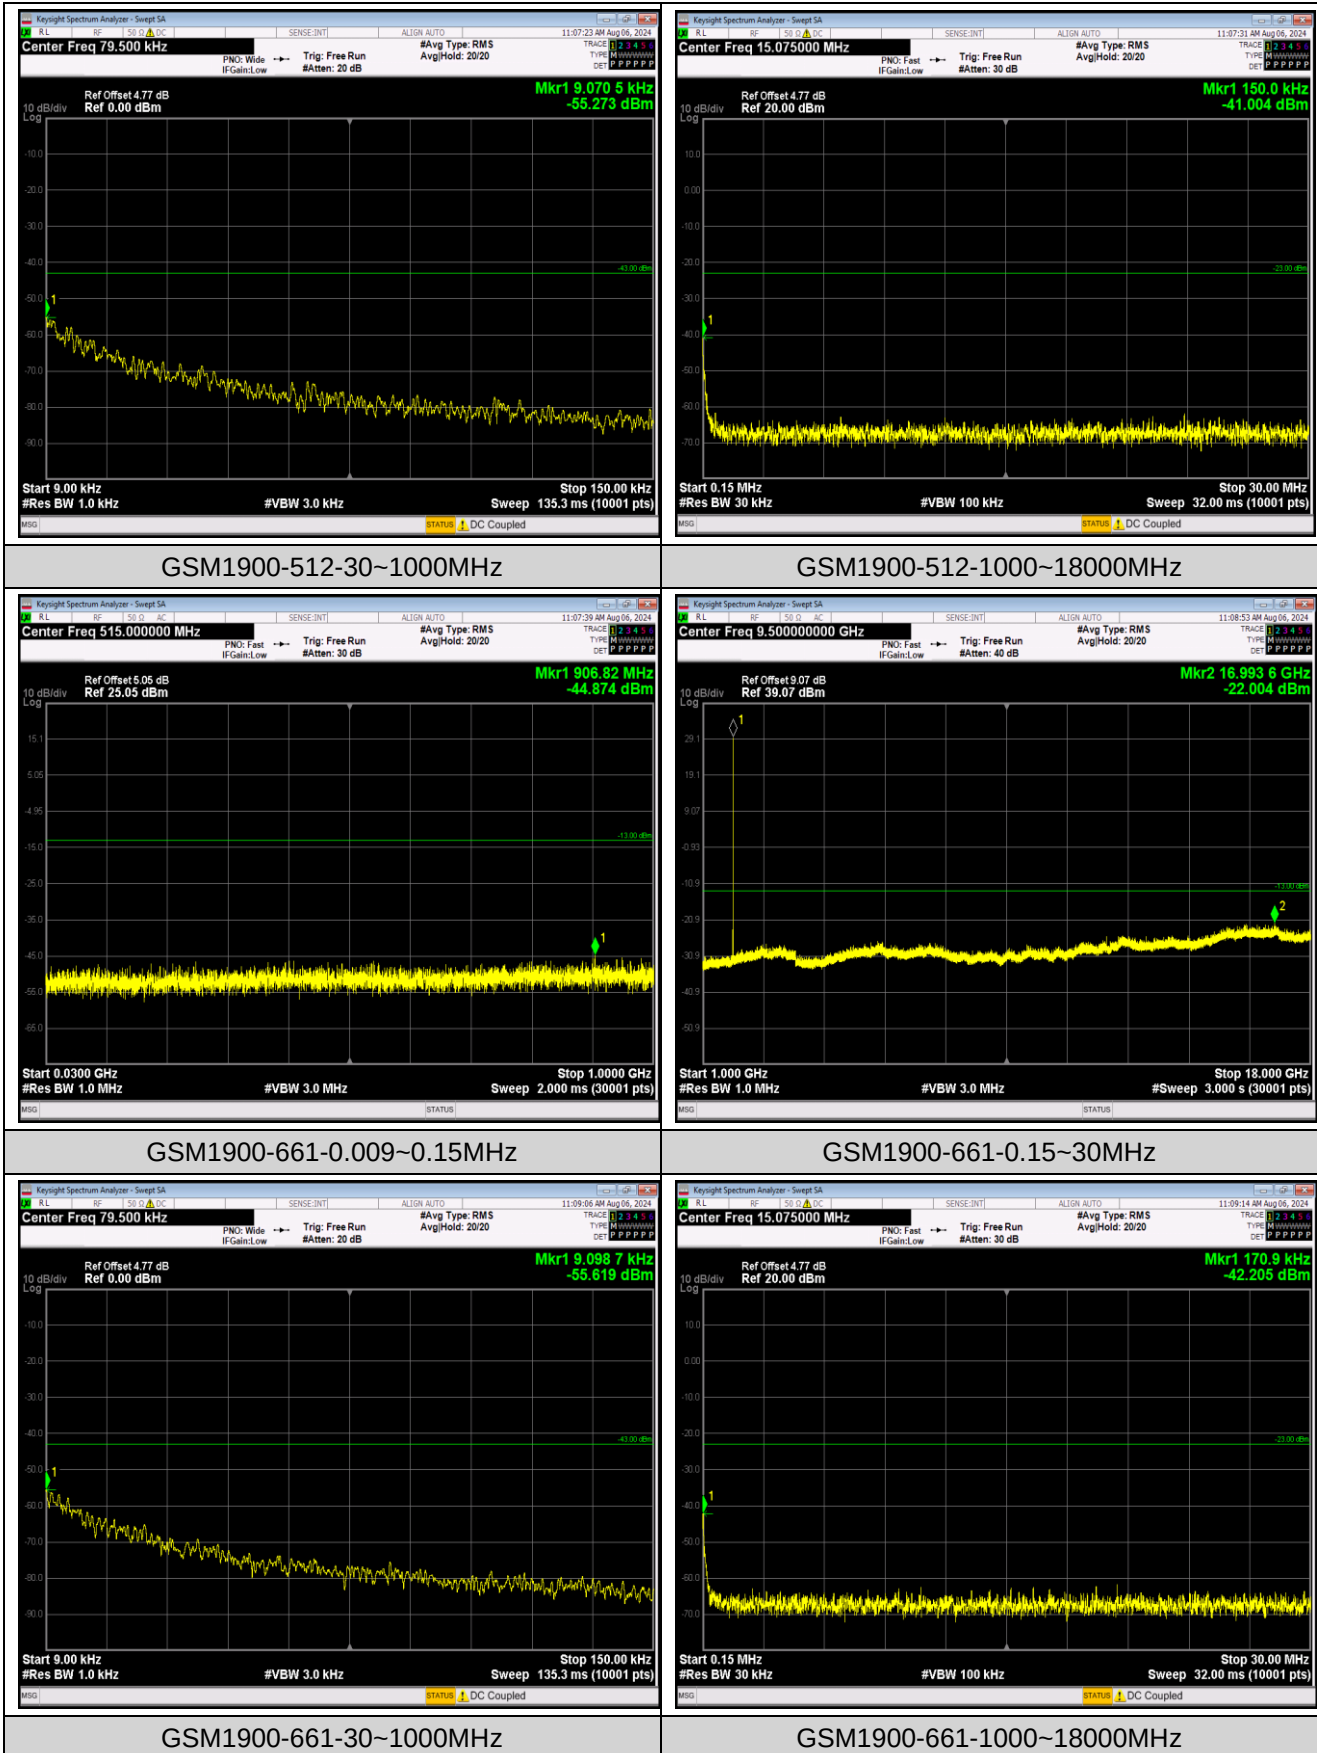

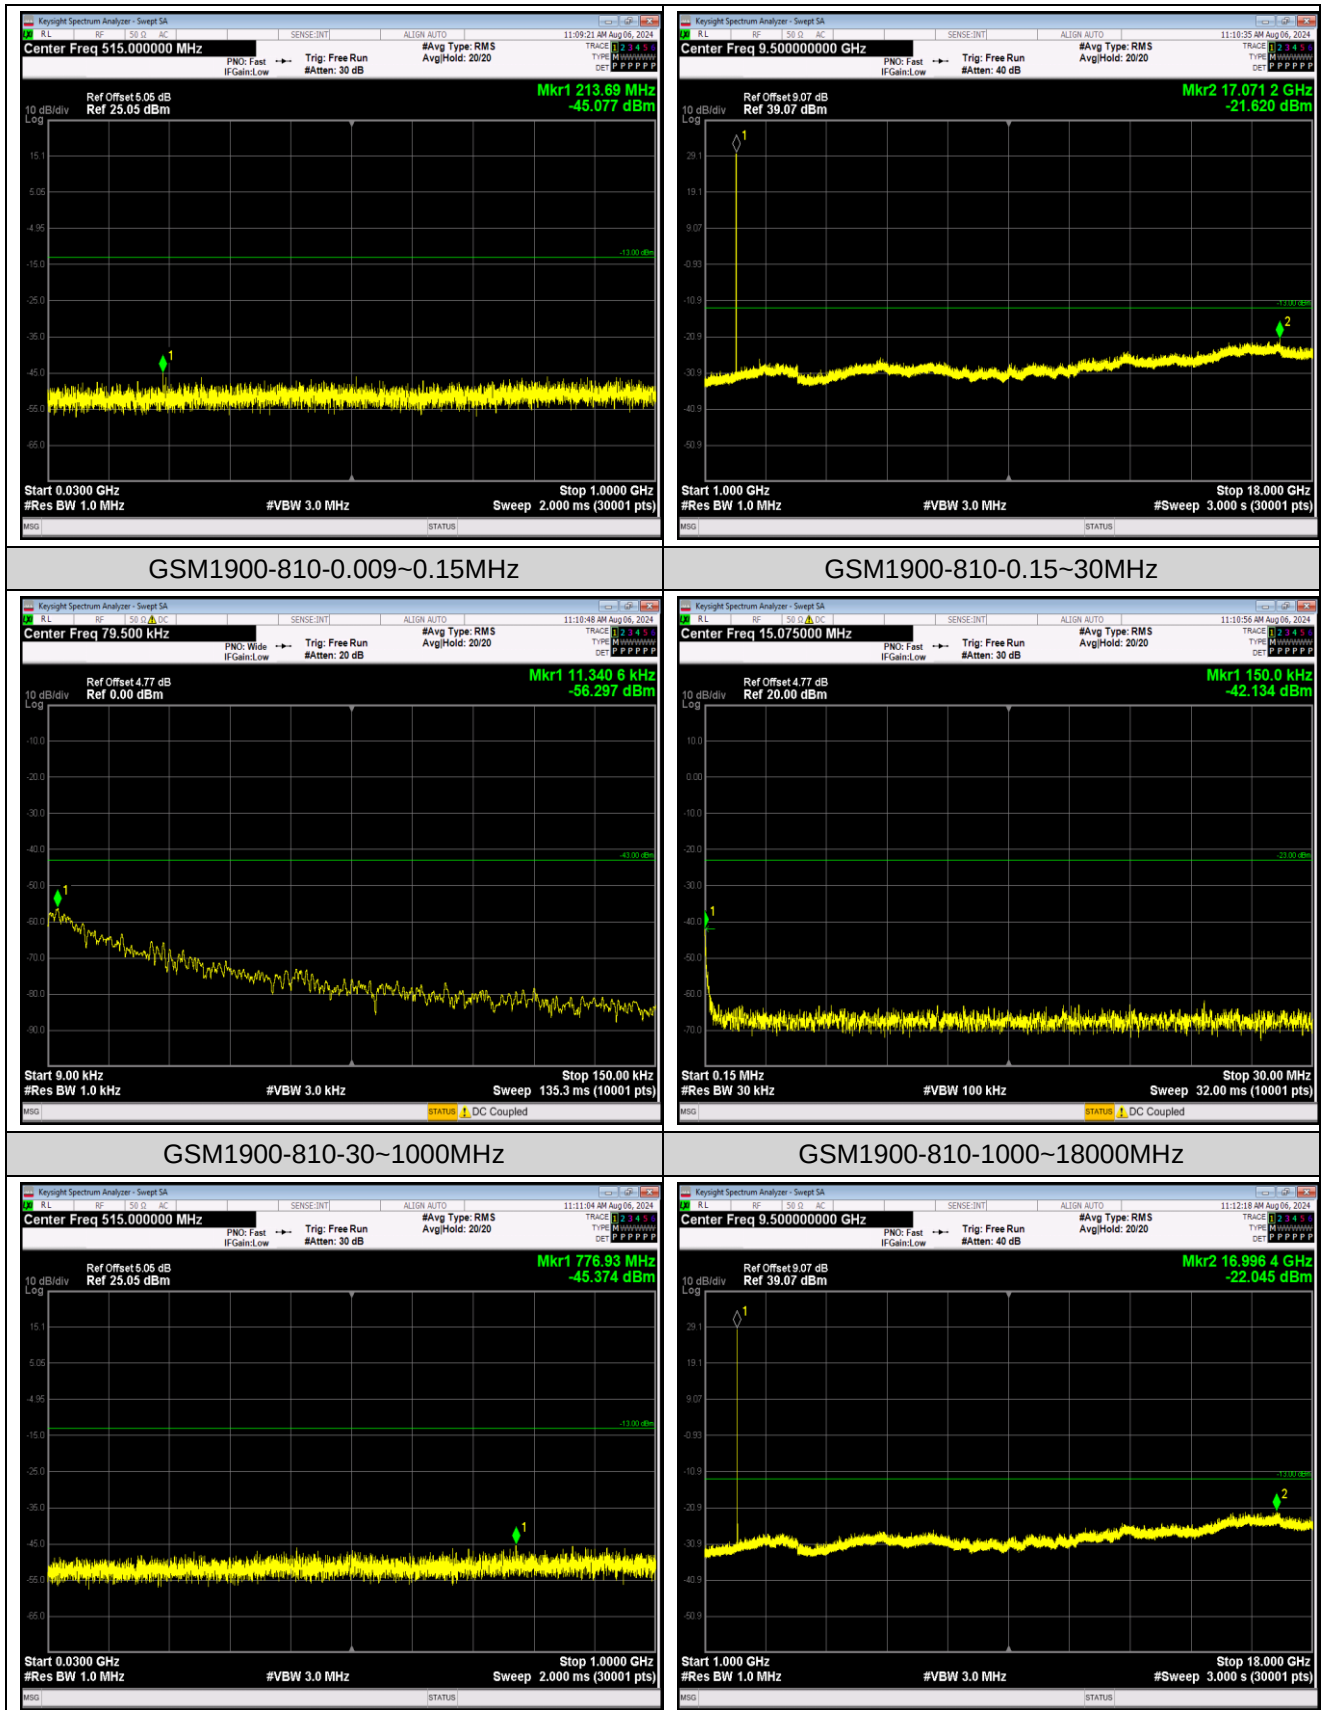

Appendix F: Frequency Stability

Test Result

Reference Frequency: GSM850 Middle channel=190 Frequency=836.6MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.85	-30	3.49	0.004172	±2.5	Pass
	-20	2.26	0.002701		
	-10	3.45	0.004124		
	0	0.48	0.000574		
	10	2.91	0.003478		
	20	2.84	0.003395		
	30	2.65	0.003168		
	40	-0.39	-0.000466		
	50	0.26	0.000311		
Voltage					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	9.94	0.011881	±2.5	Pass
	3.85	8.91	0.010650		
	4.40	7.04	0.008415		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: EGPRS850 Middle channel=190 Frequency=836.6MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.85	-30	-3.07	-0.003670	±2.5	Pass
	-20	-8.10	-0.009682		
	-10	-3.10	-0.003705		
	0	-1.42	-0.001697		
	10	6.42	0.007674		
	20	5.10	0.006096		
	30	4.23	0.005056		
	40	3.62	0.004327		
	50	1.84	0.002199		
Voltage					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-4.20	-0.005020	±2.5	Pass
	3.85	-2.23	-0.002666		
	4.40	-5.20	-0.006216		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: PCS1900 Middle channel=661 Frequency=1880MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.85	-30	-15.01	-0.007984	Within authorized band for PCS 1900	Pass
	-20	-10.82	-0.005755		
	-10	-13.62	-0.007245		
	0	-13.69	-0.007282		
	10	-9.59	-0.005101		
	20	-12.85	-0.006835		
	30	-15.11	-0.008037		
	40	-12.82	-0.006819		
	50	-13.37	-0.007112		
Voltage					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-12.91	-0.006867	Within authorized band for PCS 1900	Pass
	3.85	-14.33	-0.007622		
	4.40	-18.82	-0.010011		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: EGPRS1900 Middle channel=661 Frequency=1880MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.85	-30	-29.83	-0.015867	Within authorized band for PCS 1900	Pass
	-20	-35.16	-0.018702		
	-10	-28.09	-0.014941		
	0	-30.54	-0.016245		
	10	-21.15	-0.011250		
	20	-17.53	-0.009324		
	30	-26.86	-0.014287		
	40	-24.96	-0.013277		
	50	-21.02	-0.011181		
Voltage					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-30.74	-0.016351	Within authorized band for PCS 1900	Pass
	3.85	-38.13	-0.020282		
	4.40	-41.07	-0.021846		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Appendix G: Modulation Characteristics

Test Result

Band	Channel	Result	Verdict
GSM850	190	PASS	PASS
EGPRS850	190	PASS	PASS
GSM1900	661	PASS	PASS
EGPRS1900	661	PASS	PASS

Remark: All channel had been tested, but only the worst case data displayed in this report.

Test Graphs

