

Meas1.Body Back Side 0mm GSM850 Ch190 ANT2

Date: 2026/4/1

Communication System Band: GPRS850; Frequency: 836.6 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.201$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch190/Area Scan (141x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.913 W/kg

Ch190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.628 W/kg; SAR(10 g) = 0.322 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 42.4%

Maximum value of SAR (measured) = 1.13 W/kg

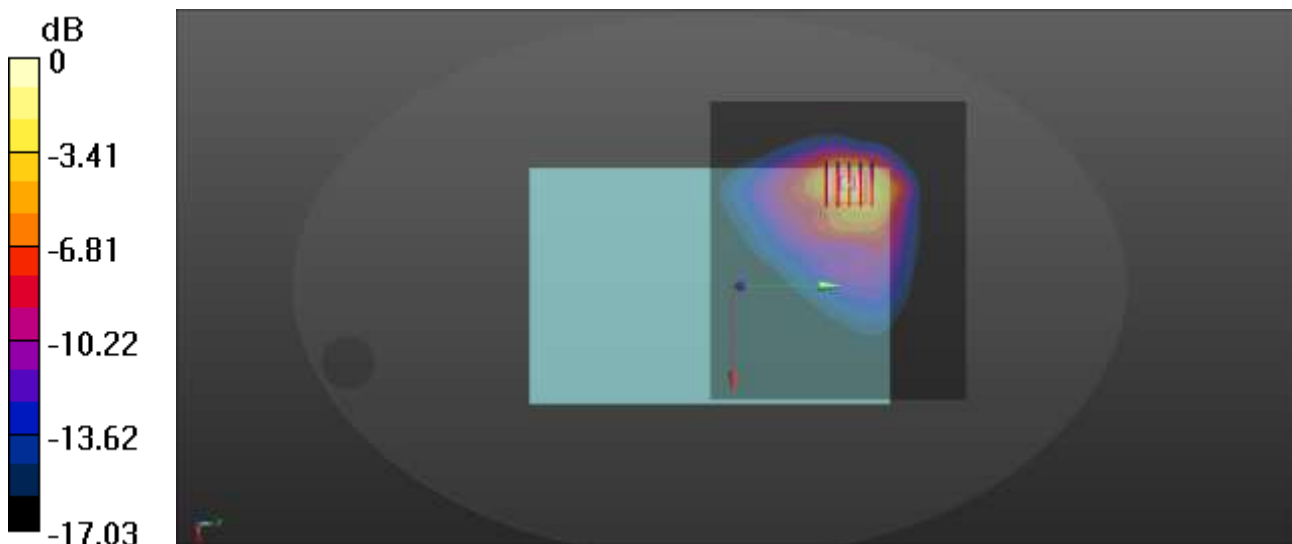

0 dB = 1.13 W/kg

Meas2.Body Top Edge 0mm GSM1900 Ch661 ANT2

Date: 2026/4/1

Communication System Band: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:2.08

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.322$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch661/Area Scan (61x201x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.651 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.294 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 44.4%

Maximum value of SAR (measured) = 0.938 W/kg

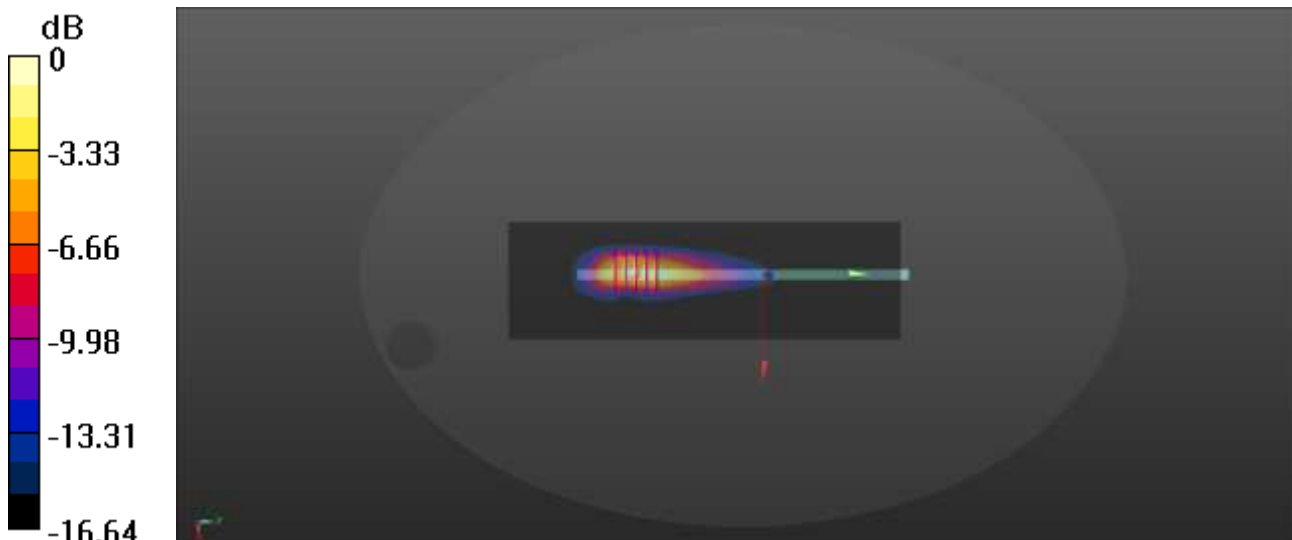

0 dB = 0.938 W/kg

Meas3.Body Top Edge 0mm WCDMA B2 Ch9400 ANT2

Date: 2026/4/1

Communication System Band: II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.322$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch9400/Area Scan (61x201x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.680 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.391 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.243 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 45.2%

Maximum value of SAR (measured) = 0.860 W/kg

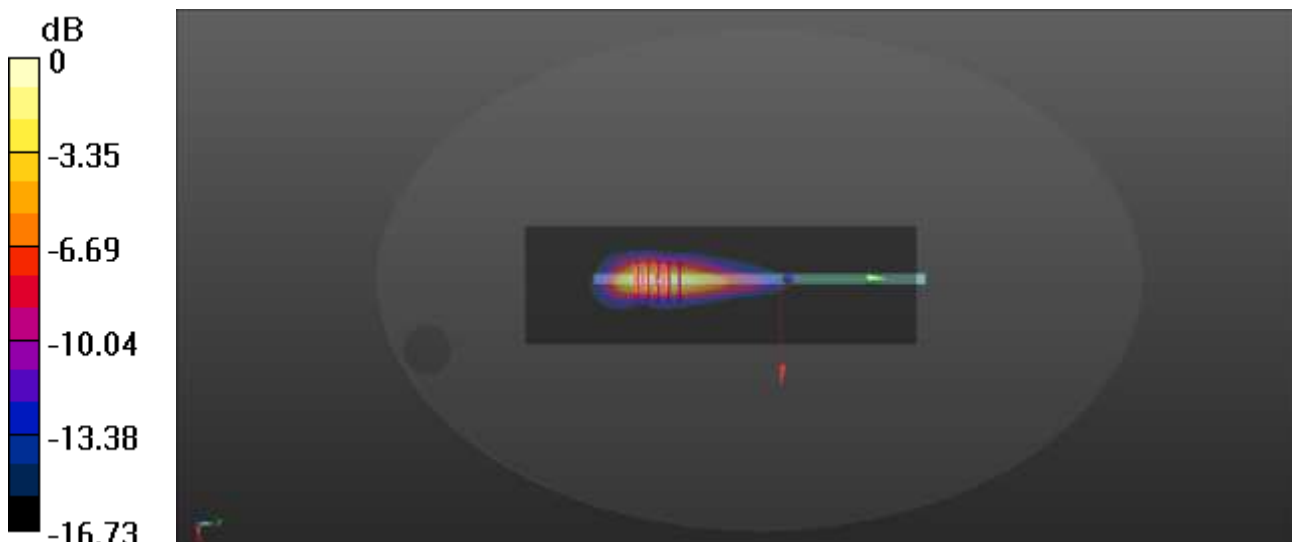

0 dB = 0.860 W/kg

Meas4.Body Top Edge 0mm WCDMA B4 Ch1412 ANT2

Date: 2026/4/1

Communication System Band: IV; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1732.4$ MHz; $\sigma = 1.322$ S/m; $\epsilon_r = 39.948$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch1412/Area Scan (61x201x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.356 W/kg

Ch1412/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.729 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.597 W/kg

SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.115 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 40.7%

Maximum value of SAR (measured) = 0.470 W/kg

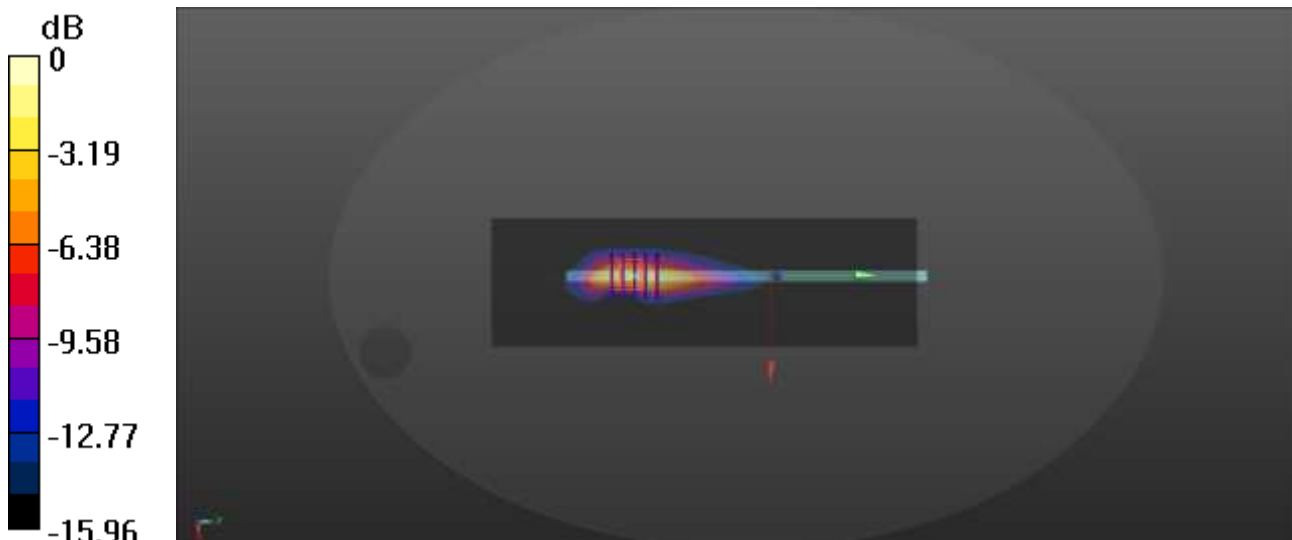

0 dB = 0.470 W/kg

Meas5.Body Back Side 0mm WCDMA B5 Ch4183 ANT2

Date: 2026/4/1

Communication System Band: V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.201$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch4183/Area Scan (101x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.05 W/kg

Ch4183/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.356 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 46.9%

Maximum value of SAR (measured) = 1.08 W/kg

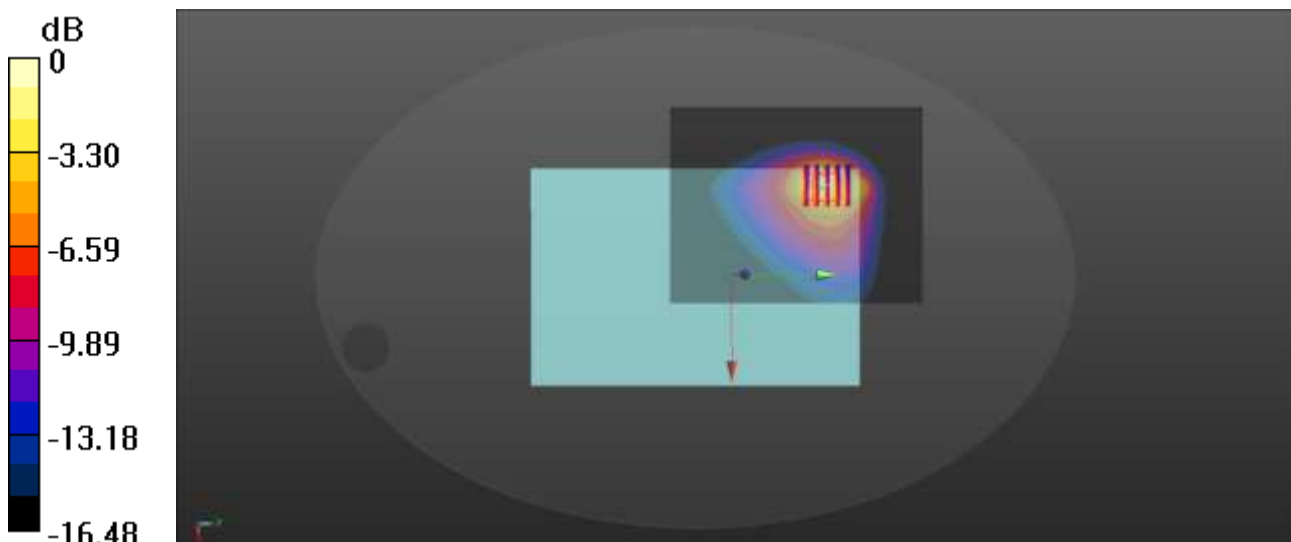

0 dB = 1.08 W/kg

Meas6.Body Top Edge 0mm LTE B2 Ch18900 ANT2

Date: 2026/4/1

Communication System Band: Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.322$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.3, 7.3, 7.3); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch18900/Area Scan (61x201x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.08 W/kg

Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.788 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.658 W/kg; SAR(10 g) = 0.309 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 46.1%

Maximum value of SAR (measured) = 1.21 W/kg

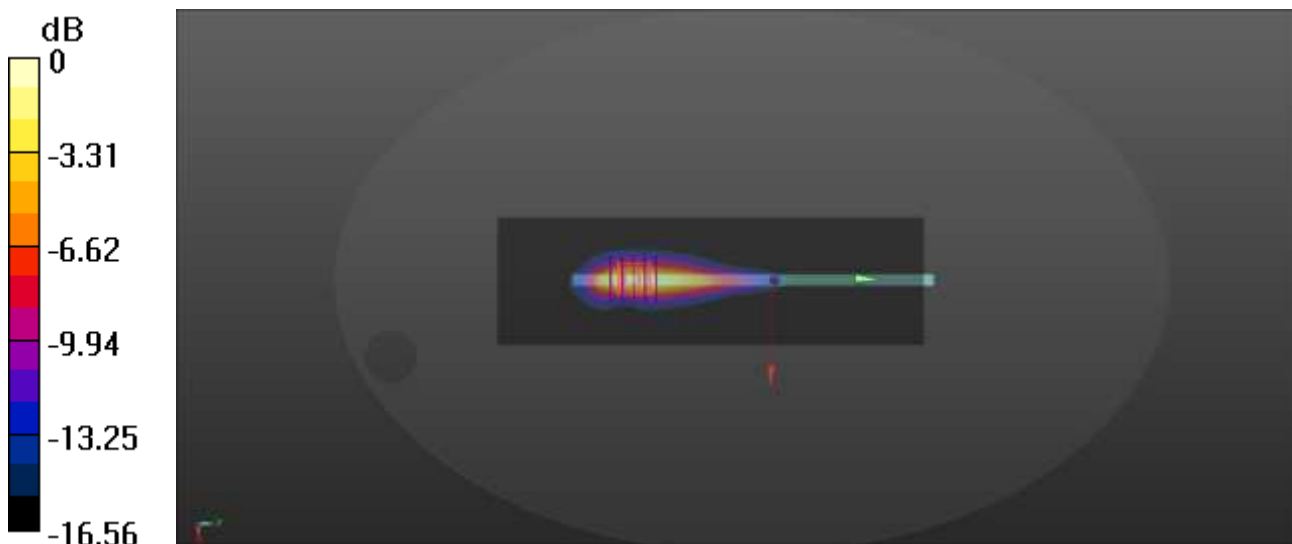

0 dB = 1.21 W/kg

Meas7.Body Top Edge 0mm LTE B7 Ch21100 ANT2

Date: 2026/4/2

Communication System Band: Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.885$ S/m; $\epsilon_r = 38.048$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch21100/Area Scan (61x251x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.05 W/kg

Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.663 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.563 W/kg; SAR(10 g) = 0.262 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 45.2%

Maximum value of SAR (measured) = 1.01 W/kg

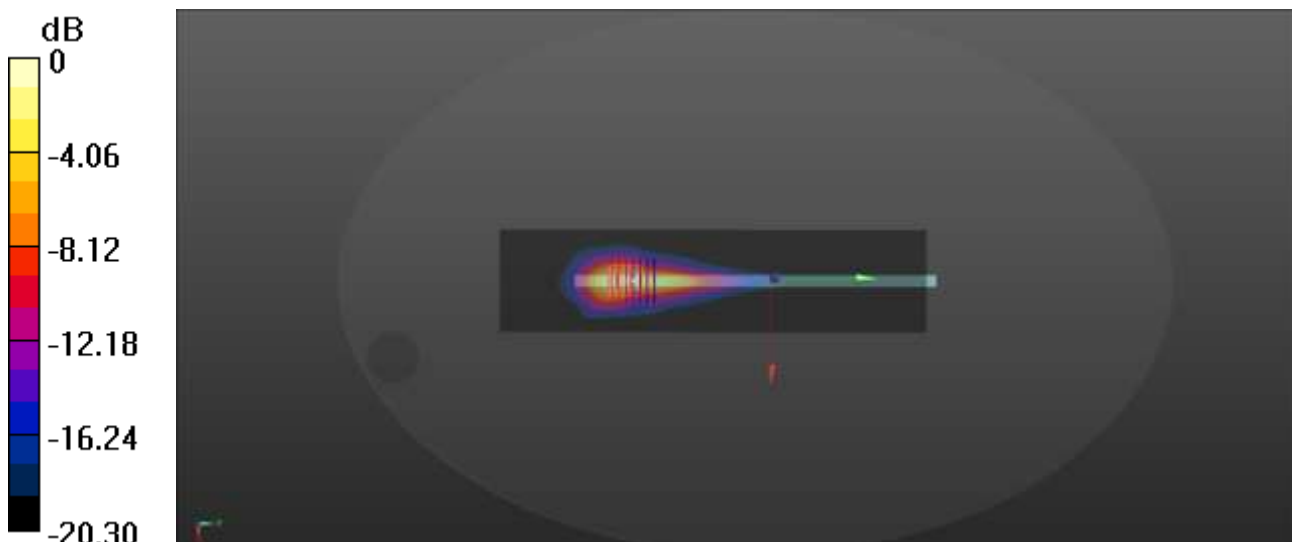

0 dB = 1.01 W/kg

Meas8.Body Top Edge 0mm LTE B12 Ch23095 ANT2

Date: 2026/4/1

Communication System Band: Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 41.088$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.14, 9.14, 9.14); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23095/Area Scan (61x201x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.949 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 15.32 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.561 W/kg; SAR(10 g) = 0.244 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 37.6%

Maximum value of SAR (measured) = 0.949 W/kg

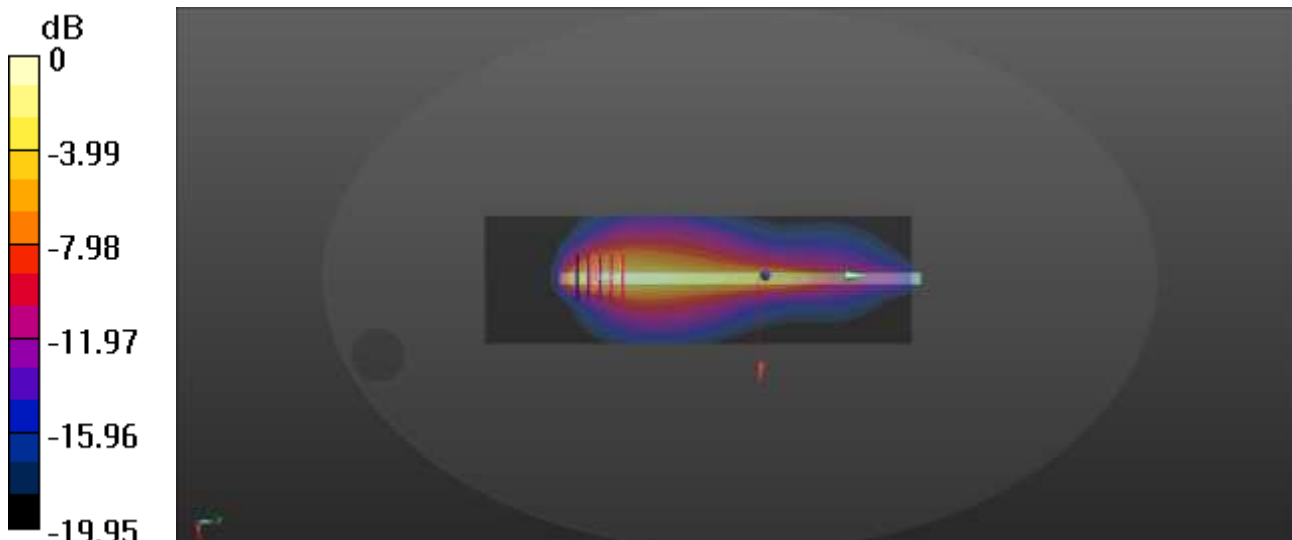

0 dB = 0.949 W/kg

Meas9.Body Top Edge 0mm LTE B13 Ch23230 ANT2

Date: 2026/4/1

Communication System Band: Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.925 \text{ S/m}$; $\epsilon_r = 40.961$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.14, 9.14, 9.14); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch23230/Area Scan (61x201x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.452 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.10 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.119 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 38.2%

Maximum value of SAR (measured) = 0.452 W/kg

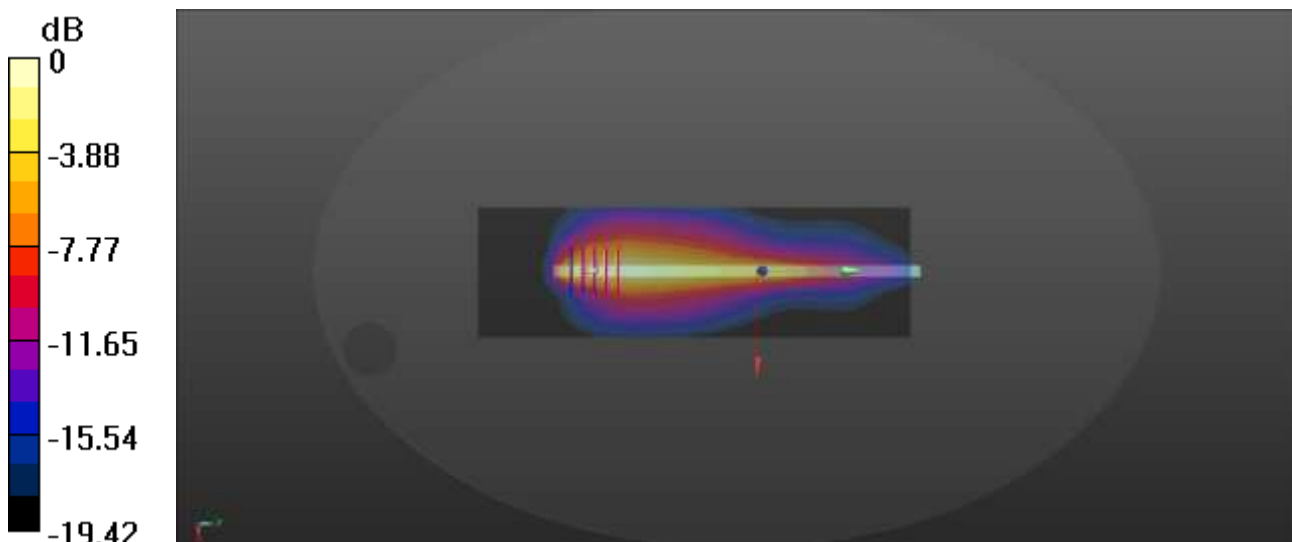

0 dB = 0.452 W/kg

Meas10.Body Back Side 0mm LTE B26 Ch26865 ANT2

Date: 2026/4/1

Communication System Band: Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.206$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.74, 8.74, 8.74); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch26865/Area Scan (141x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.49 W/kg

Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 0.809 W/kg; SAR(10 g) = 0.438 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 44.3%

Maximum value of SAR (measured) = 1.38 W/kg

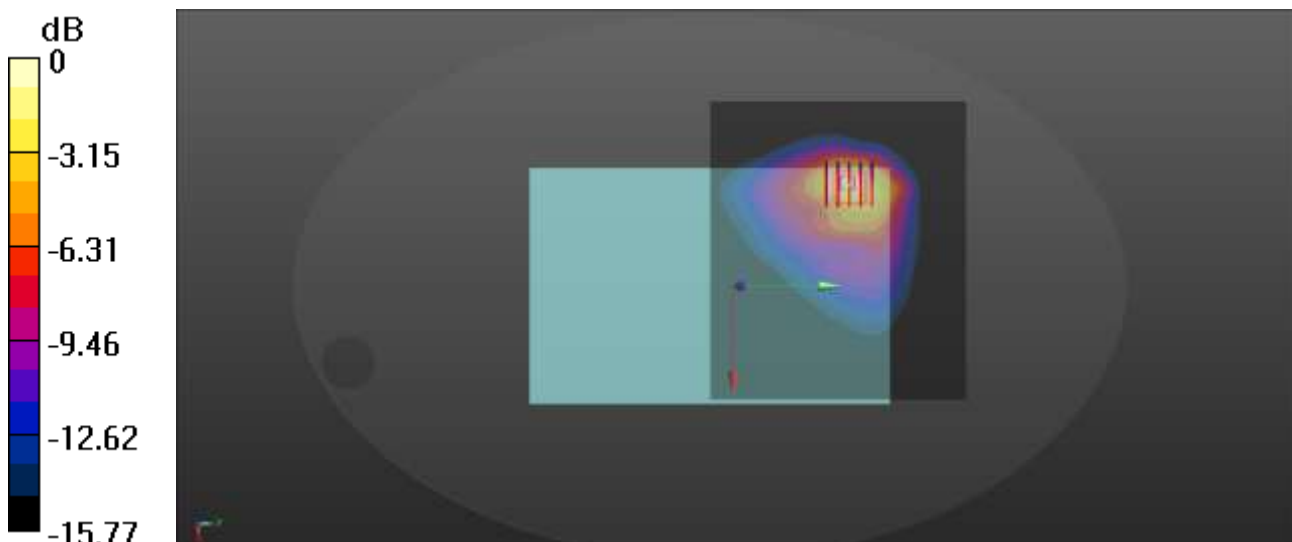

0 dB = 1.38 W/kg

Meas11.Body Top Edge 0mm LTE B66 Ch132322 ANT2

Date: 2026/4/1

Communication System Band: Band 66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.323$ S/m; $\epsilon_r = 39.875$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.63, 7.63, 7.63); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch132322 2/Area Scan (61x201x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.712 W/kg

Ch132322 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.808 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.929 W/kg

SAR(1 g) = 0.434 W/kg; SAR(10 g) = 0.211 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 47%

Maximum value of SAR (measured) = 0.771 W/kg

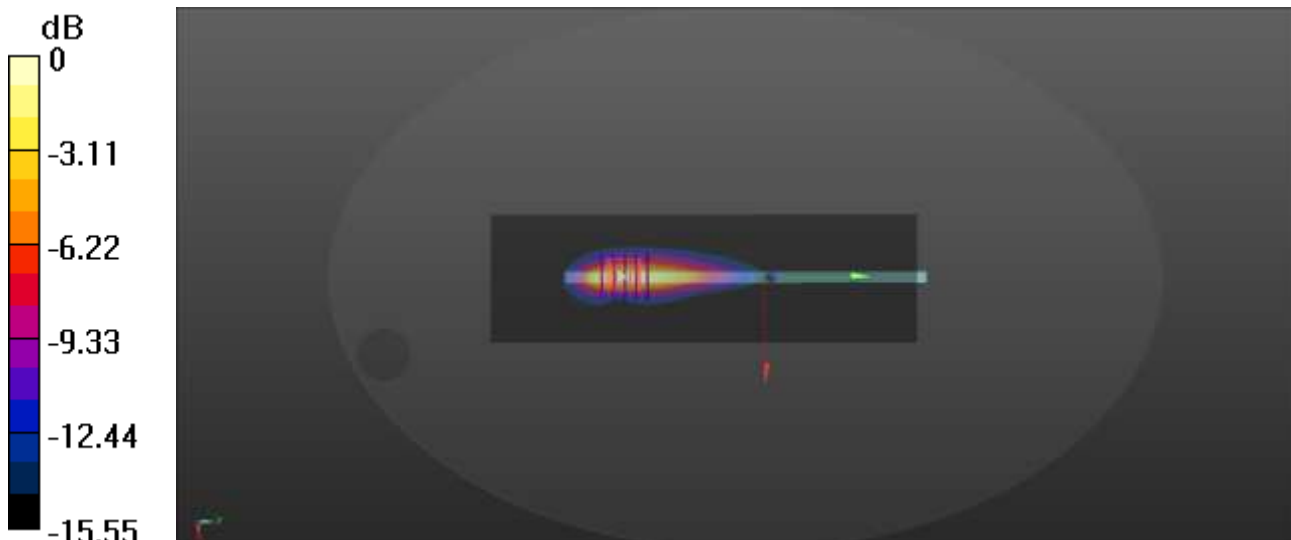

0 dB = 0.771 W/kg

Meas12.Body Top Edge 0mm LTE B41 Ch40620 ANT2

Date: 2026/4/2

Communication System Band: Band 41; Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.926$ S/m; $\epsilon_r = 38.302$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.72, 6.72, 6.72); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch40620/Area Scan (81x251x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.936 W/kg

Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.155 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.624 W/kg; SAR(10 g) = 0.308 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.9%

Maximum value of SAR (measured) = 1.03 W/kg

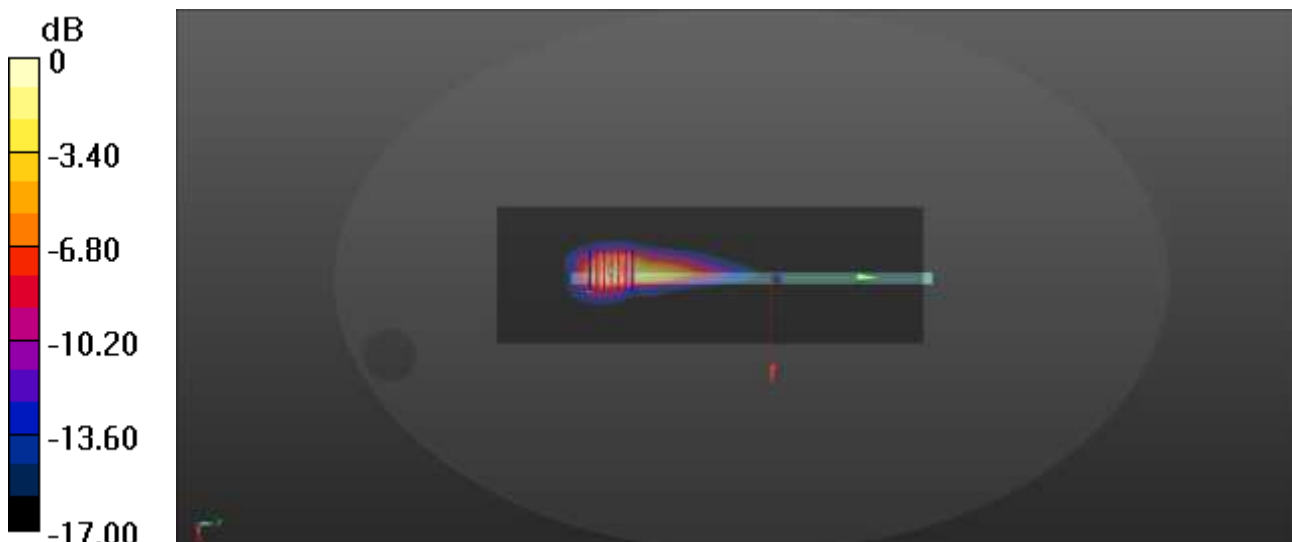

0 dB = 1.03 W/kg

Meas13.Body Left Edge 0mm Bluetooth Ch39 ANT1

Date: 2026/4/2

Communication System Band: BT; Frequency: 2441 MHz; Duty Cycle: 1:1.3

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.837$ S/m; $\epsilon_r = 38.59$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.9, 6.9, 6.9); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch39/Area Scan (51x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.332 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.088 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 47.7%

Maximum value of SAR (measured) = 0.359 W/kg

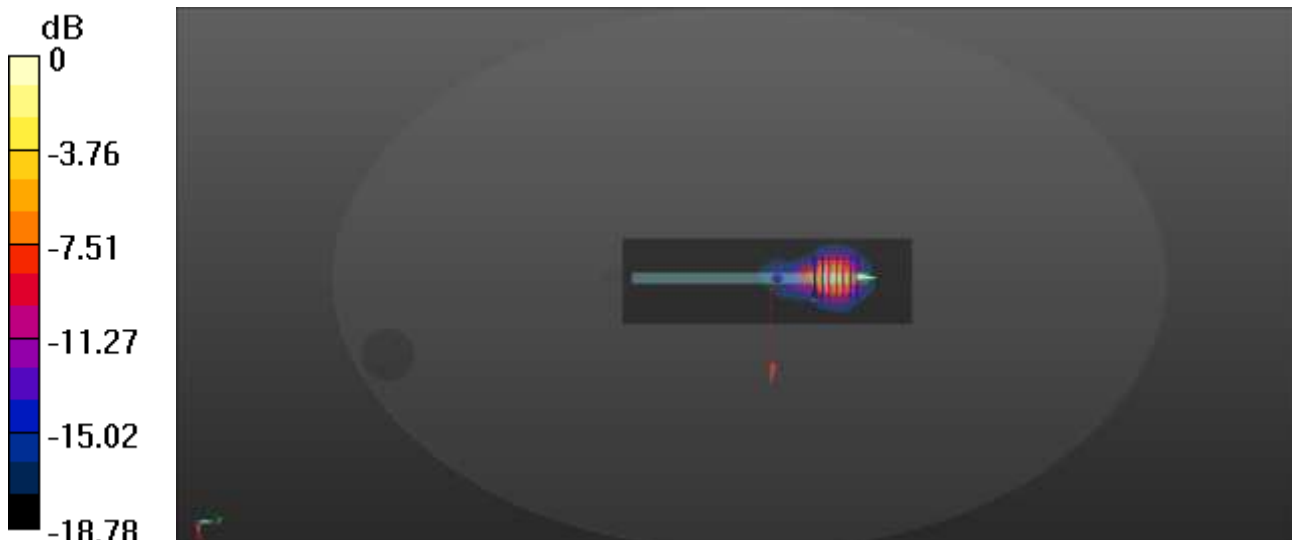

0 dB = 0.359 W/kg

Meas14.Body Left Edge 0mm WLAN 2.4G Ch6 ANT1

Date: 2026/4/2

Communication System Band: WLAN(b); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.834$ S/m; $\epsilon_r = 38.595$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.9, 6.9, 6.9); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch6/Area Scan (51x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.702 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 48%

Maximum value of SAR (measured) = 0.745 W/kg

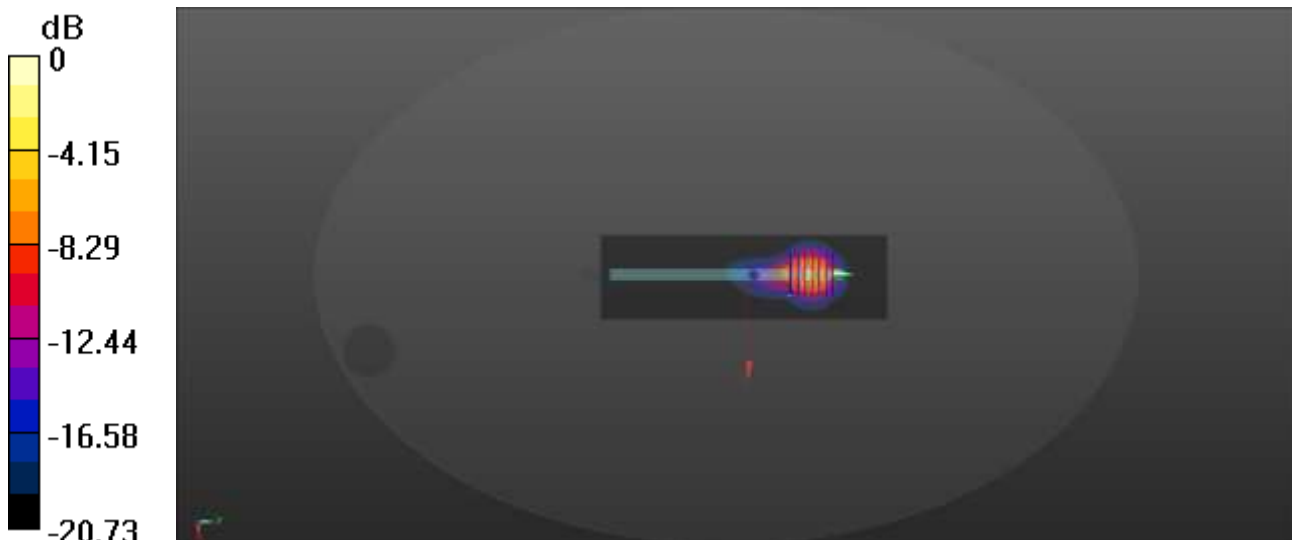

0 dB = 0.745 W/kg

Meas15.Body Left Edge 0mm WLAN 5.2G Ch38 ANT1

Date: 2026/4/2

Communication System Band: WLAN(n)40Mhz; Frequency: 5190 MHz;Duty Cycle: 1:1.1

Medium parameters used: $f = 5190$ MHz; $\sigma = 4.54$ S/m; $\epsilon_r = 35.175$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4°C Liquid Temperature:21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(5, 5, 5); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch38/Area Scan (61x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.623 W/kg

Ch38/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.7760 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.603 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.056 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 66.3%

Maximum value of SAR (measured) = 0.455 W/kg

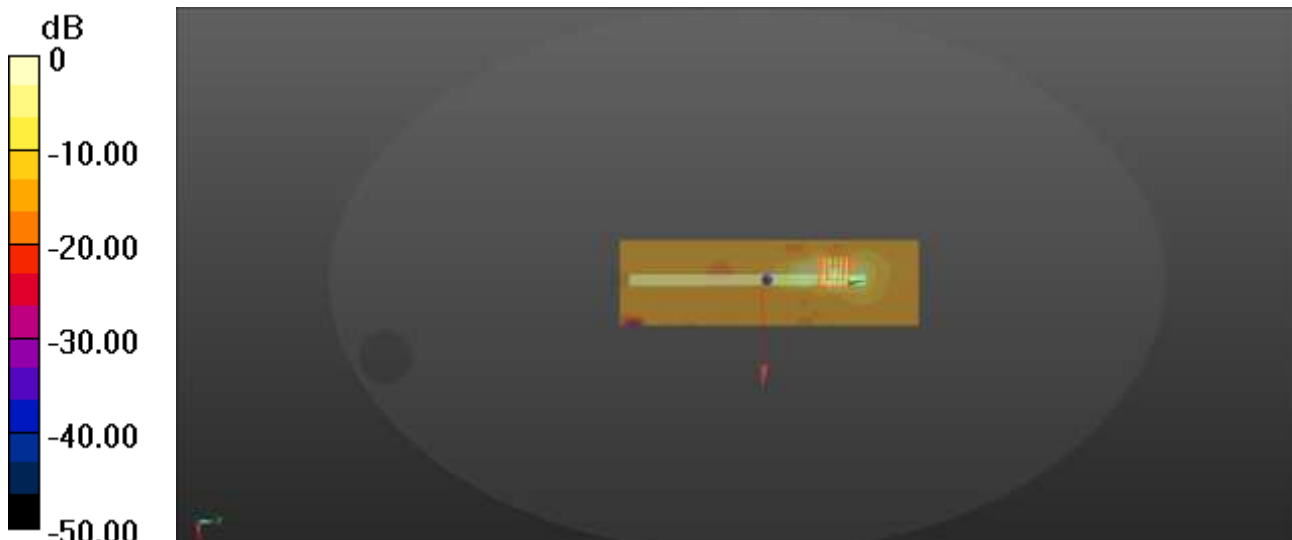

0 dB = 0.455 W/kg

Meas16.Body Left Edge 0mm WLAN 5.3G Ch54 ANT1

Date: 2026/4/2

Communication System Band: WLAN(n)40Mhz; Frequency: 5270 MHz; Duty Cycle: 1:1.1

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.64$ S/m; $\epsilon_r = 34.956$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.85, 4.85, 4.85); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch54/Area Scan (61x211x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.364 W/kg

Ch54/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.714 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.063 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 67.3%

Maximum value of SAR (measured) = 0.493 W/kg

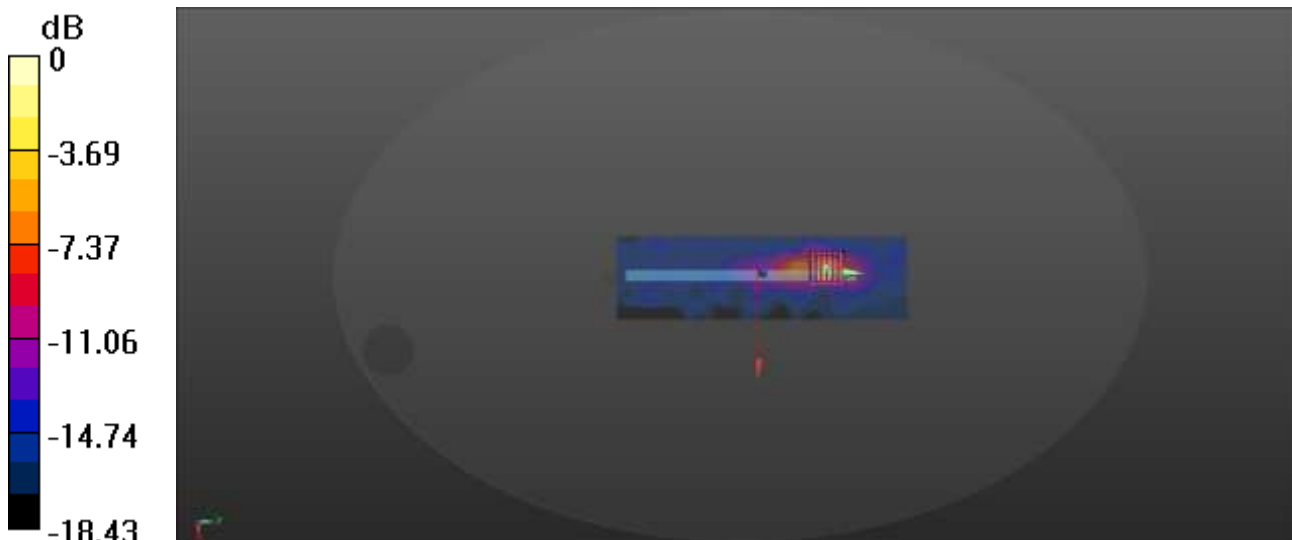

0 dB = 0.493 W/kg

Meas17.Body Left Edge 0mm WLAN 5.6G Ch118 ANT1

Date: 2026/4/2

Communication System Band: WLAN(n)40Mhz; Frequency: 5590 MHz; Duty Cycle: 1:1.1

Medium parameters used: $f = 5590$ MHz; $\sigma = 5.214$ S/m; $\epsilon_r = 34.638$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.39, 4.39, 4.39); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch118/Area Scan (61x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.458 W/kg

Ch118/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.5360 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.081 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 66.2%

Maximum value of SAR (measured) = 0.770 W/kg

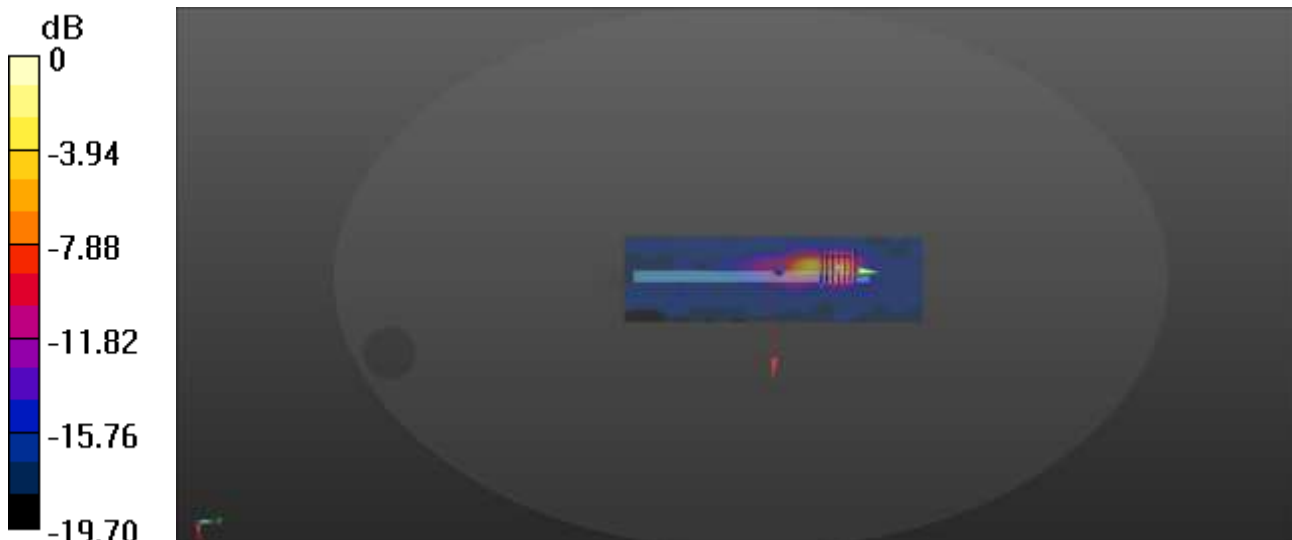

0 dB = 0.770 W/kg

Meas18.Body Back Side 0mm WLAN 5.8G Ch159 ANT1

Date: 2026/4/2

Communication System Band: WLAN(n)40Mhz; Frequency: 5795 MHz;Duty Cycle: 1:1.1

Medium parameters used: $f = 5795$ MHz; $\sigma = 5.448$ S/m; $\epsilon_r = 34.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.4°C Liquid Temperature:21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(4.41, 4.41, 4.41); Calibrated: 2025/4/24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn540; Calibrated: 2025/4/21
- Phantom: ELI V4.0 (20deg probe tilt); Type: QD OVA 001 Bx; Serial: 1086
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch159/Area Scan (191x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.581 W/kg

Ch159/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 67.9%

Maximum value of SAR (measured) = 1.24 W/kg

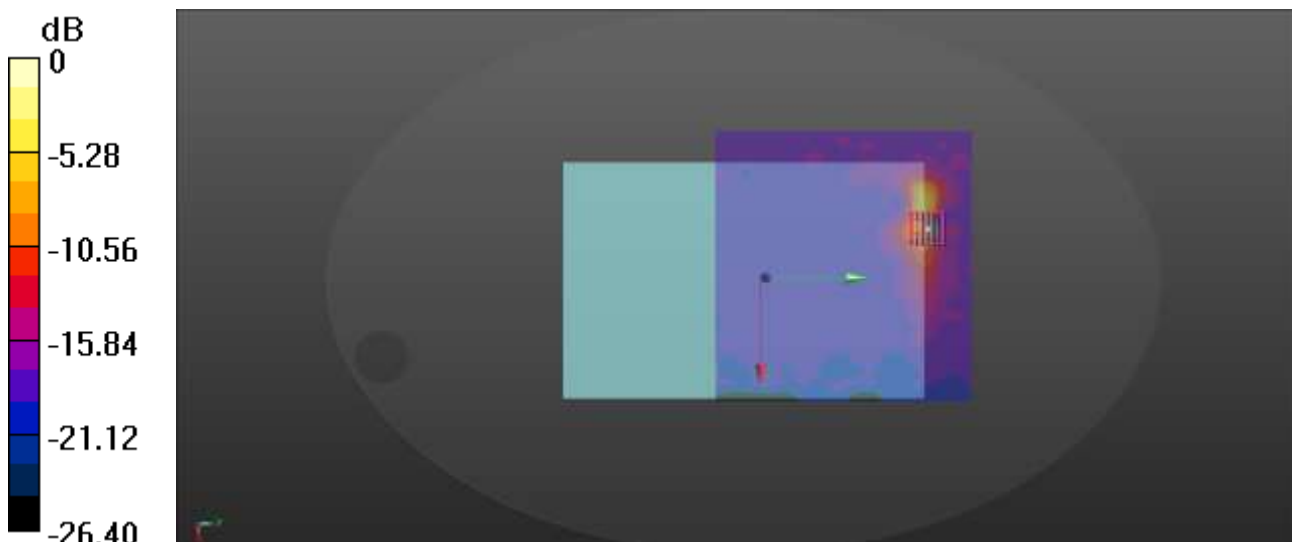

0 dB = 1.24 W/kg