



深圳市鑫尔盛科技有限公司

ShenZhen XinErSheng Technology Co.,Ltd

Acceptance Letter

Customer Name:

Product Name:

2.4G SMA high-gain black antenna male and female pins

Customer material
number:

Manufacturer part
number:

XESANT12A13418


Sample submission
quantity

5PCS



Company Address: 3rd Floor, Building D, No. 96, Lingxia Road, Fenghuang Fourth Industrial Zone, Fuyong, Bao 'an District, Shenzhen City

Email: liqinghui@xinershengant.com

主要技术参数		Main technical specifications	
频率范围（MHZ）	2400-2500	Frequency Range(MHZ)	2400-2500
中心频率 特性阻抗（Ω）	50±10	Impedance(Ω)	50±10
增益（dBi）	2. 51	Gain(dBi)	2. 51
反射损耗	≤-10	ReTurnLoss(dB)	≤-10
输出电压驻波比	≤2	VSWR	≤2
最大功率	1W	Admitted Power	1W
极化方式	圆极化	Polarization	Circular polarization
连接方式	SMA	Connector Type	SMA
物理特性		Physical Properties	
天线本体材料	ABS	Antenna Base	ABS
工作温度	-20℃-+60℃	Operating Temp	-20℃-+60℃
保存温度	-20℃-+70℃	Storage Temp	-20℃-+70℃

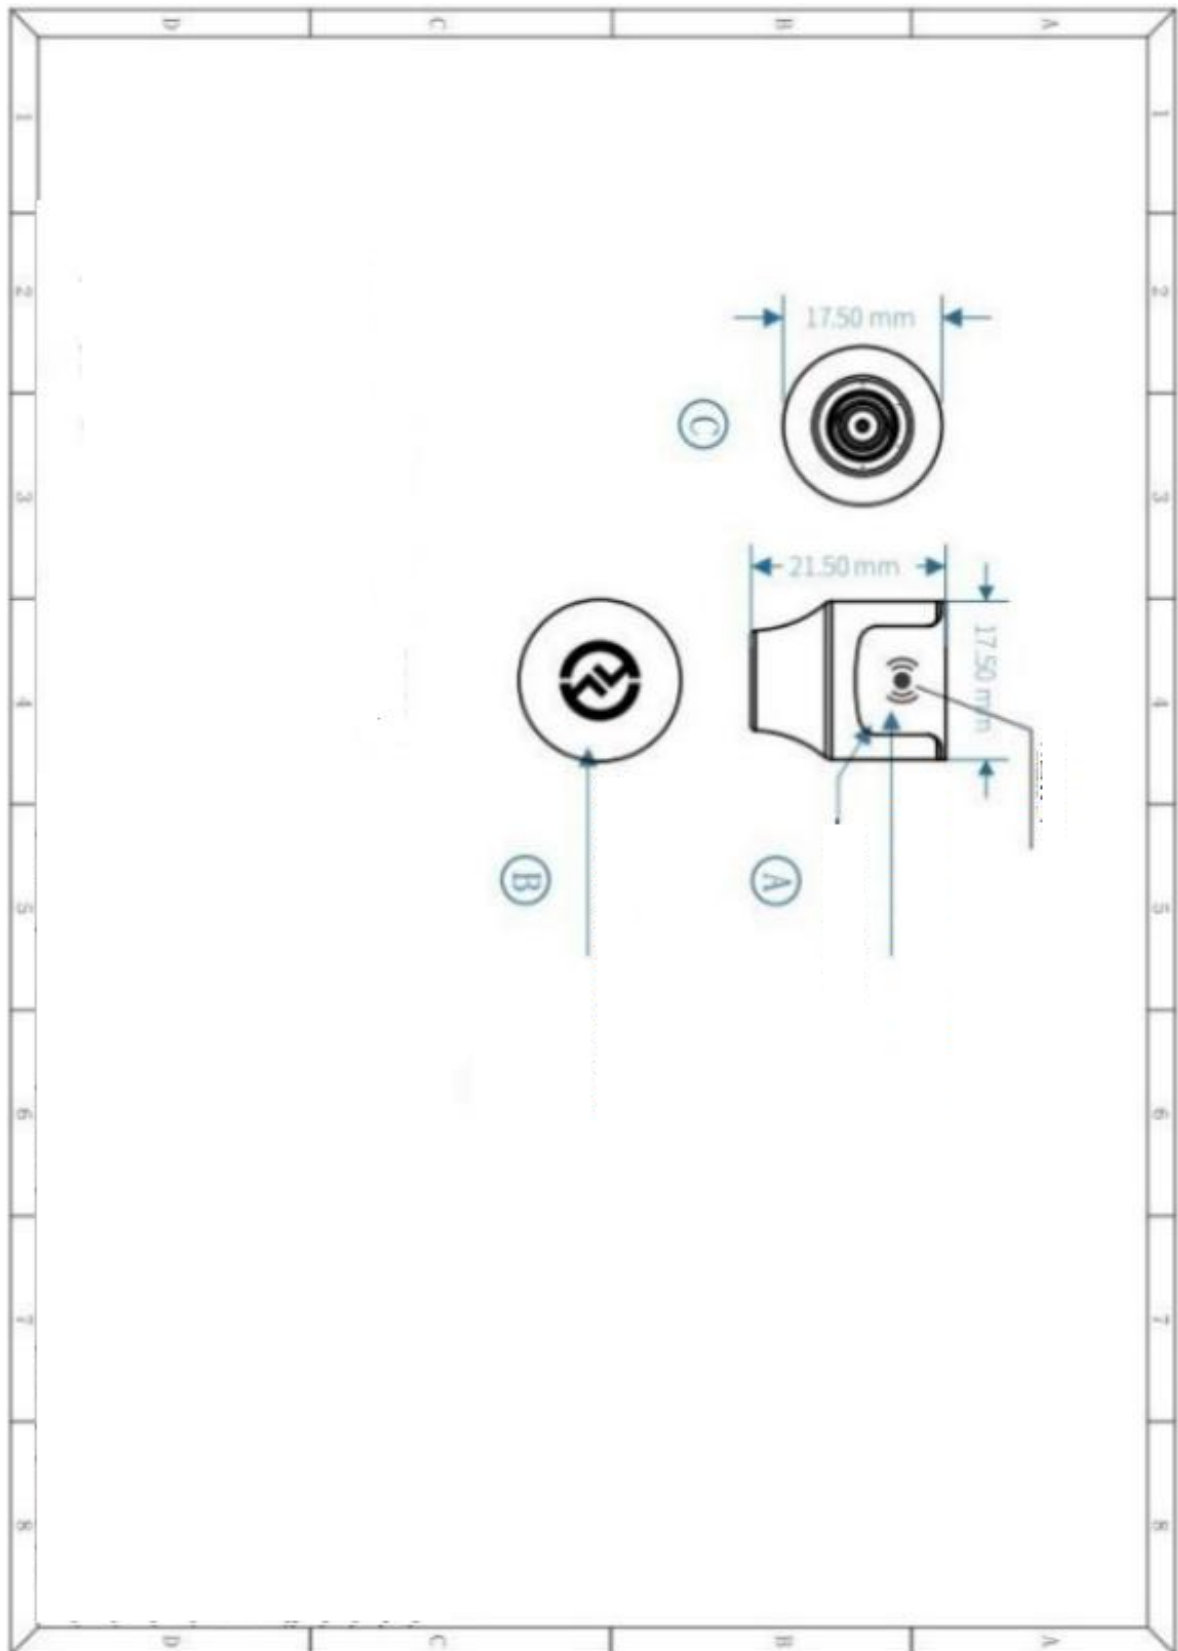

Network Analyzer test Report:

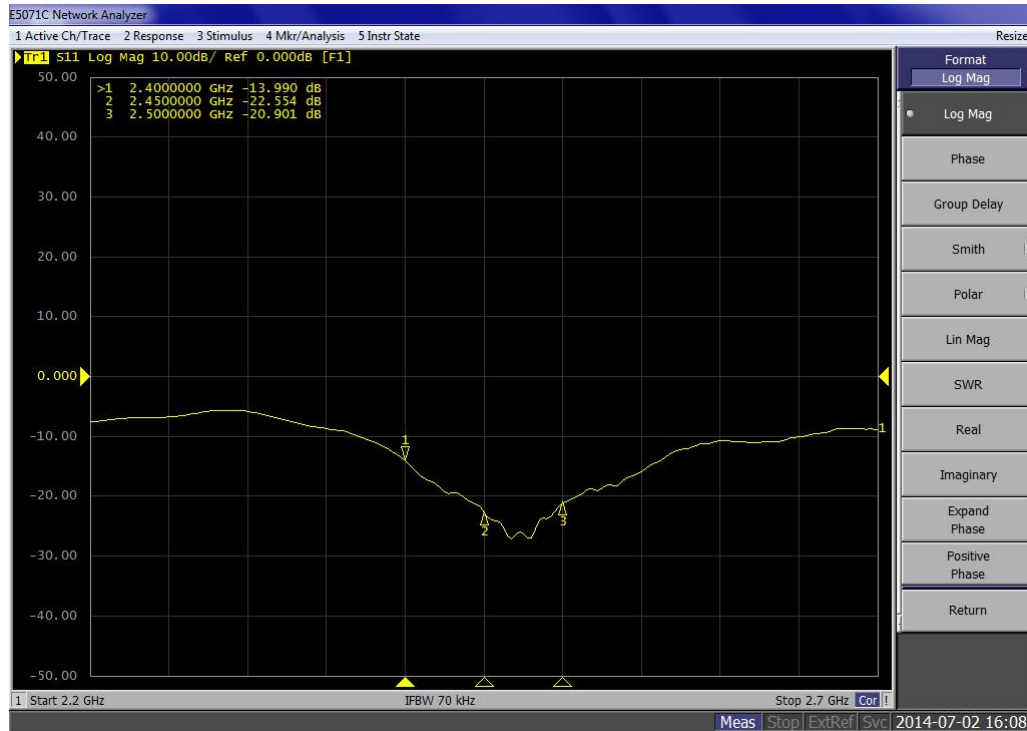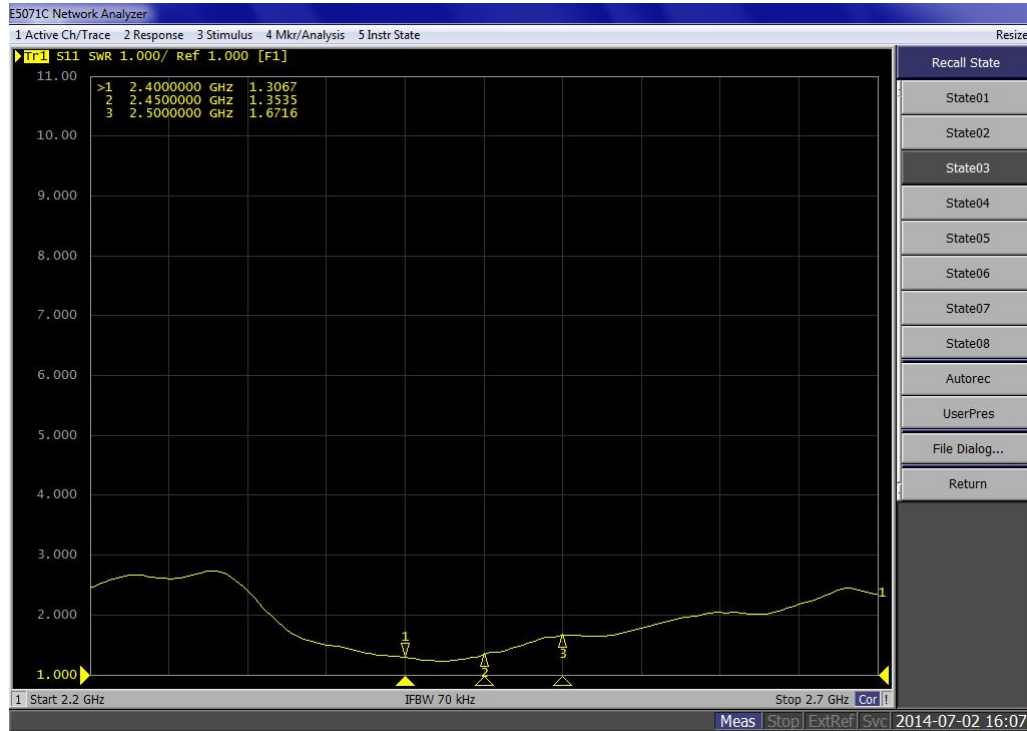

2D、3D Raditation Pattern

