


LARK C1

User Manual

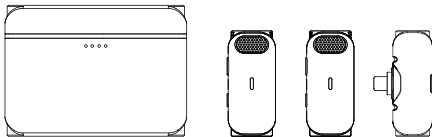

LARK C1

* The quantity is based on the product's various model and is subject to the actual quantity of equipment purchased.

PACKING LIST

LARK C1 SOLO (TX*1 to RX*1) Wireless Microphone System



① Transmitter *1



② Receiver *1



③ USB-A to USB-C Cable *1



④ Furry Windshield *1



⑤ User Manual 1




⑥ Warranty Card *1

* The quantity is based on the product's various model and is subject to the actual quantity of equipment purchased.

PACKING LIST

LARK DUO (TX*2 to RX*1) Wireless Microphone System with Charging Case



① Charging Case *1



② Transmitter *2



③ Receiver *1



④ USB-A to USB-C Cable *1



⑤ Furry Windshield *1




⑥ User Manual *1



⑦ Warranty Card *1

* The quantity is based on the product's various model and is subject to the actual quantity of equipment purchased.

PRODUCTION INTRODUCTION





TX: Transmitter

RX: Receiver

① Built-in Microphone

Indicator LED Guide (*)

- Blue LED Flashing: Device disconnected / HearClear(Denoise) Off
- Blue LED Stays On: Device connected / HearClear(Noise Reduction) Off by default
- Red LED Flashing: Low-battery



USB-C Charging Port


PRODUCTION INSTALLATION



TX



RX




RX

- ① The TX (transmitter) automatically turns on when taken out from the charging case. Simply clip the TX (transmitter) to a shirt collar.
- ② Connect the RX to the smartphone.
- ③ Charge the Smartphone via the RX.

PRODUCTION FUNCTION


Noise Cancellation Function



- ① ◆ Blue LED Stays On : Device disconnected
HearClear(Noise Reduction) Off by default
◆ Green LED Stays On : HearClear(Noise Reduction) ON

Press the TX's yellow button to turn on the HearClear(Noise Reduction) function. When activated, the indicator LED turns green.

Charging Case Battery Level




- ② ◆ LED Flashing: Charging
◆ LED Stays On: Fully charged


One Light Flashing	● ○ ○ ○	25%
Two Lights Flashing	● ● ○ ○	50%
Three Lights Flashing	● ● ● ○	75%
Four Lights Flashing	● ● ● ●	100%

PRODUCTION FUNCTION

Manual Pairing



TX



RX

After the receiver is connected to the smartphone, long press TX's '🔌' button for 3s and then long press RX's '🔌' for 3s pairing.

* The device has been paired in the factory before shipping. The product needs to pair again when there is disconnection.

PARAMETERS

Wireless Transmission	2.4GHz Adaptive Frequency Hopping(AFH)
Transmission Range	130ft(40m)(NLOS), 650ft(200m)(LOS)
Built-in Microphone	Polar Pattern: Omnidirectional Frequency Range:20Hz≈20KHz
Maximum SPL	110dB SPL
Input Dynamic Range	86dB
Battery Capacity	TX: 140mAh (0.518Wh) Charging Case: 1400mAh (5.18Wh)
Runtime	TX: 8H Charging Case: Maximum 3 times charging for 2 TX.
Charging Time	TX: 1.5H Charging Case: 1.5H
Dimensions	TX: 48x21.5x10mm (1.89"x0.85"x0.4") RX: 48.3x27.6x9mm (1.9"x1.1"x0.35") Charging Case: 83x60x30mm (3.3"x2.4"x1.2")
Weight	TX: 11.5g (0.4oz) RX: 7g (0.25oz) Charging Case: 85.5g (3oz)

SUPPORT

If any problems are encountered using the product, please follow these options for receiving technical support:

 Hollyland Products User Group

 HollylandTech

 HollylandTech

 Support@ hollyland-tech.com

 www.hollyland-tech.com

Note:

The frequency range and wireless transmit power of the device vary based on the regulations of different countries and regions.

Safety Precautions

Do not place the product near or inside heating devices (including but not limited to microwave ovens, induction cookers, electric ovens, electric heaters, pressure cookers, water heaters, gas stoves) to prevent the battery from overheating and exploding.

Never use non-original charging cases, cables, and batteries with the product.

The use of non-original spare parts may cause electric shock, fire, explosion, or other dangers.

FCC Requirement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference.
- (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement:

The device has been tested and complies with FCC SAR limits.

Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.