

TEST REPORT

Report Number: 106398251MPK-001

Project Number: G106398251

Issue Date: February 25, 2026

Revision Date: April 21, 2026

ISED Designation Number: US0039

**Testing performed on
Rechargeable Toothbrush Handle
Model Number: HX856W and HX856B**

to

**FCC Part 15 Subpart C (15.247)
ISED RSS-247 Issue 4**

For

Philips Oral Healthcare LLC

Test Performed by:

Intertek
1365 Adams Court
Menlo Park, CA 94025 USA

Test Authorized by:

Philips Oral Healthcare LLC
22100 Bothell Everett Highway
Bothell, WA 98021 USA

Prepared by:



Arjun Mukherjee

Date: February 25, 2026

Reviewed by:



Aaron Chang

Date: February 25, 2026

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.

Report No. 106398251MPK-001	
Equipment Under Test:	Rechargeable Toothbrush Handle
Model Number:	HX856W and HX856B
Applicant:	Philips Oral Healthcare LLC
Contact:	Patrick Erickson
Address:	Philips Oral Healthcare LLC 22100 Bothell Everett Highway Bothell, WA 98021 USA
Country:	USA
Tel. Number:	(425) 487-7000
Email:	patrick.erickson@philips.com
Applicable Regulation:	FCC Part 15 Subpart C (15.247) ISED RSS-247 Issue 4
Date of Test:	January 27 – February 25, 2026

We attest to the accuracy of this report:



Arjun Mukherjea
EMC Engineer



Aaron Chang
EMC Team Leader

TABLE OF CONTENTS

1.0	Summary of Tests	4
2.0	General Information.....	5
2.1	Product Description	5
2.2	Related Submittal(s) Grants.....	6
2.3	Test Facility	6
2.4	Test Methodology	6
2.5	Measurement Uncertainty	6
3.0	System Test Configuration.....	7
3.1	Equipment Under Test (EUT) & Support Equipment	7
3.2	Variant Models	8
3.3	Block Diagram of Test Setup.....	9
3.4	Justification	12
3.5	Software Exercise Program.....	12
3.6	Mode of Operation During Test.....	12
3.7	Modifications Required for Compliance	12
3.8	Additions, Deviations and Exclusions from Standards.....	12
4.0	Measurement Results.....	13
4.1	6-dB Bandwidth and 99% Occupied Bandwidth	13
4.1.1	Requirement.....	13
4.1.2	Procedure	13
4.1.3	Test Result	14
4.2	Maximum Conducted Output Power at Antenna Terminals.....	18
4.2.1	Requirement.....	18
4.2.2	Procedure	18
4.2.3	Test Result	19
4.3	Power Spectral Density.....	23
4.3.1	Requirement.....	23
4.3.2	Procedure	23
4.3.3	Test Result	24
4.4	Out-of-Band Conducted Emissions	28
4.4.1	Requirement.....	28
4.4.2	Procedure	28
4.4.3	Test Result	28
4.5	Transmitter Radiated Emissions	31
4.5.1	Requirement.....	31
4.5.2	Procedure – Radiated Emissions.....	31
4.5.3	Field Strength Calculation	32
4.5.4	Test Results.....	32
4.5.5	Test Setup Photographs	61
4.6	AC Line Conducted Emission	65
4.6.1	Requirement.....	65
4.6.2	Procedure	65
4.6.3	Test Results.....	65
5.0	List of Test Equipment	66
6.0	Document History	67

1.0 Summary of Tests

Test	Reference FCC	Reference Industry Canada	Result
RF Output Power	15.247(b)(3)	RSS-247, 5.4.d)	Complies
6 dB Bandwidth	15.247(a)(2)	RSS-247, 5.2.a)	Complies
Power Density	15.247(e)	RSS-247, 5.2.b)	Complies
Out of Band Antenna Conducted Emission	15.247(d)	RSS-247, 5.5	Complies
Transmitter Radiated Emissions	15.247(d), 15.209, 15.205	RSS-247, 5.5	Complies
AC Line Conducted Emission	15.207	RSS-GEN	Not Applicable – EUT is battery powered
Antenna Requirement	15.203	RSS-GEN	Complies

EUT receive date: January 23, 2026

EUT receive condition: The pre-production version of the EUT was received in good condition with no apparent damage. As declared by the Applicant, it is identical to the production units.

Test start date: January 27, 2026

Test completion date: February 25, 2026

The test results in this report pertain only to the item tested.

2.0 General Information

2.1 Product Description

Philips Oral Healthcare LLC supplied the following description of the EUT:

The Philips HX856W and HX856B are rechargeable electric toothbrushes that is inductively charged. Bluetooth connectivity allows the toothbrush to be connected to an app which provides real-time guidance on pressure, motion, position, duration and frequency of brushing. The toothbrush also tracks the brush head usage through RFID to alert the user when the heads need to be replaced.

This test report covers only the 2.4GHz BLE radio.

Information about the BLE radio is presented below:

Radio Information	
Applicant	Philips Oral Healthcare LLC
Model Number	HX856W and HX856B
Modulation Technique	Digital Transmission System (DTS)
Rated RF Output	-3.55 dBm
Frequency Range	2402 – 2480 MHz
Type of modulation	GFSK
Data Rate	1 Mbit/s
Number of Channel(s)	40
Antenna(s) & Gain*	SLDA31-2R400G-S2TF, +2.5 dBi
Applicant Name & Address	Philips Oral Healthcare LLC 22100 Bothell Everett Highway Bothell, WA 98021 USA

*as provided by the client, Intertek takes no responsibility for the accuracy of this information.

2.2 Related Submittal(s) Grants

None.

2.3 Test Facility

The test site used to collect the radiated data is site 1 (10-m semi-anechoic chamber). This test facility and site measurement data have been fully placed on file with the FCC, IC and A2LA accredited.

2.4 Test Methodology

Antenna conducted measurements were performed according to the FCC documents “Guidance for Performing Compliance Measurement on Digital Transmission Systems (DTS) Operating under §15.247” (KDB 558074 D01 DTS Meas Guidance v05r02), and RSS-247 Issue 4, RSS-GEN Issue 5.

Radiated emissions and AC mains conducted emissions measurements were performed according to the procedures in ANSI C63.10: 2020. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “Data Sheet” of this report.

2.5 Measurement Uncertainty

Compliance with the limits was based on the results of the measurements and doesn’t take into account the measurement uncertainty.

Estimated Measurement Uncertainty

Measurement	Expanded Uncertainty (k=2)		
	0.15 MHz – 1 GHz	1 GHz – 2.5 GHz	> 2.5 GHz
RF Power and Power Density – antenna conducted	-	0.7 dB	-
Unwanted emissions – antenna conducted	1.1 dB	1.3 dB	1.9 dB
Bandwidth – antenna conducted	-	30 Hz	-

Measurement	Expanded Uncertainty (k=2)			
	0.15 MHz – 30MHz	30 – 200 MHz	200 MHz – 1 GHz	1 GHz – 18 GHz
Radiated emissions	-	4.7	4.6	5.1 dB
AC mains conducted emissions	2.1 dB	-	-	-

3.0 System Test Configuration

3.1 Equipment Under Test (EUT) & Support Equipment

Equipment Under Test			
Description	Manufacturer	Model	Serial Number/ID
Rechargeable Toothbrush Handle– Conducted Unit	Philips Oral Healthcare LLC	HX856W	MPK260126097-008
Rechargeable Toothbrush Handle – Black Radiated Unit	Philips Oral Healthcare LLC	HX856B	MPK260126097-012
Rechargeable Toothbrush Handle – White Radiated Unit	Philips Oral Healthcare LLC	HX856W	MPK260126097-016

Support Equipment		
Description	Manufacturer	Model
Laptop	Dell	Latitude 5420

3.2 Variant Models


The following variant models were not tested as part of this evaluation but have been identified by the manufacturer as being electrically identical models, depopulated models, or with reasonable similarity to the model(s) tested. Intertek does not make any claims of compliance for samples or variants which were not tested.

Description	Model	Remarks
Full Set product type reference	HX81nn, HX82nn, HX83nn, HX84nn, HX85nn, HX88nn, HX91nn, HX92nn, HX93nn, HX94nn, HX95nn, HX98nn	Where n can be a number from 0 to 9 indicating different product configurations for marketing purpose only
Electric Toothbrush Handles Codes	HX855x, HX856x, HX987x, HX988x	Where x can be a letter from A to Z indicating different color handles If x = W or P, handle tube is made of Terblend NM-11 All other letters, handle tube is made of Terlux 2802
Electric Toothbrush Base Charger	CBA62nn	Where n can be a number from 0 to 9 indicating different color and finish
Electric Toothbrush Travel Charging Case	HYTC1n, HYTC2n, HYTC3n	Where n can be a number from 0 to 9 indicating different color and finish n = 1 or 2 manufactured by Dongguan Aohai Technology Co.,Ltd. n = 3 – 9 manufactured by PI Electronics
Wall Adaptor	WAA1001, WAA2001	1001 = White 2001 = Black

HVIN/PMN	HX855B, HX855G, HX855L, HX855P, HX855W, HX856B, HX856G, HX856L, HX856P, HX856W, HX987L, HX987W, HX988B, HX988M, HA988W
-----------------	--


3.3 Block Diagram of Test Setup

Conducted Setup

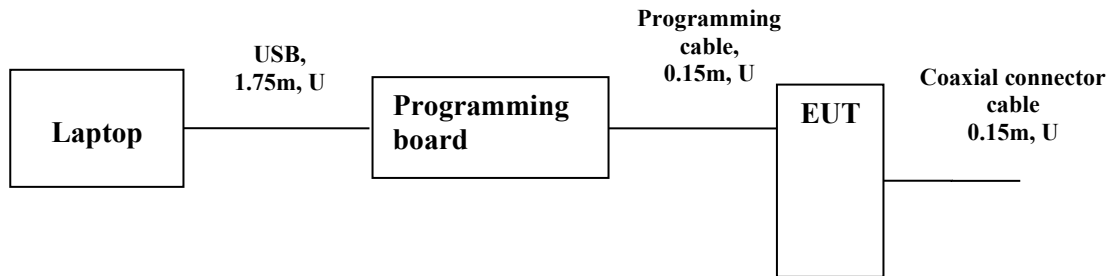

S = Shielded	F = With Ferrite
U = Unshielded	m = Meter

Radiated Setup



S = Shielded	F = With Ferrite
U = Unshielded	m = Meter

EUT Photos



Radiated Samples (Black and White)



Conducted Sample

3.4 Justification

For radiated emission measurements the EUT is placed on a non-conductive table. The EUT was configured to continuously transmit. 3 orientational axis (X, Y, Z) of the EUT were tested and only the worst-case emissions were reported.

As per manufacturer, radio is identical between the 2 models, but the housing materials are different. Therefore, radiated emissions testing was done separately for the 2 models. Other tests are only done for one model, PR1-0206, to represent the same radio module.

3.5 Software Exercise Program

The EUT exercise program used during radiated and conducted testing was provided by Philips Oral Healthcare LLC.

3.6 Mode of Operation During Test

During transmitter testing, the transmitter was set up to transmit continuously using the RF power setting provided by the manufacturers using a laptop with proprietary software. The corresponding output power in dBm can be found in section 4.2 of this report.

The table below reflects the RF power setting needed to be compliant with requirements of FCC 15.247.

Mode	Frequency (MHz)	Channel	EUT RF Setting
Low	2402	37	25 (hex19)
Mid	2442	18	25 (hex19)
High	2480	39	25 (hex19)

3.7 Modifications Required for Compliance

No modifications were made by the manufacturer or Intertek to the EUT in order to bring the EUT into compliance.

3.8 Additions, Deviations and Exclusions from Standards

No additions, deviations or exclusions from the standard were made.

4.0 Measurement Results

4.1 6-dB Bandwidth and 99% Occupied Bandwidth FCC Rule: 15.247(a)(2); RSS-247, 5.2.a) and RSS-GEN;

4.1.1 Requirement

The minimum 6-dB bandwidth shall be at least 500 kHz

4.1.2 Procedure

A spectrum analyzer was connected to the antenna port of the transmitter.

For FCC 6dB Channel Bandwidth the Procedure described in the FCC Publication KDB 558074 D01 Meas Guidance v05r02 was used to determine the DTS occupied bandwidth. Section 11.8.1 Option 1 of ANSI 63.10 was used.


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.1.3 Test Result

Frequency (MHz)	6-dB bandwidth FCC 15.247 & RSS-GEN, kHz	99% Occupied bandwidth, RSS-GEN, MHz	Plot
2402	668.3	-	1.1
	-	1.018	1.2
2442	653.3	-	1.3
	-	1.013	1.4
2480	653.3	-	1.5
	-	1.017	1.6

Tested By	Test Date	Results
Arjun Mukherjea	February 25, 2026	Complies

Occupied Bandwidths – 2402 MHz Low Channel 6dB Bandwidth - Plot 1.1

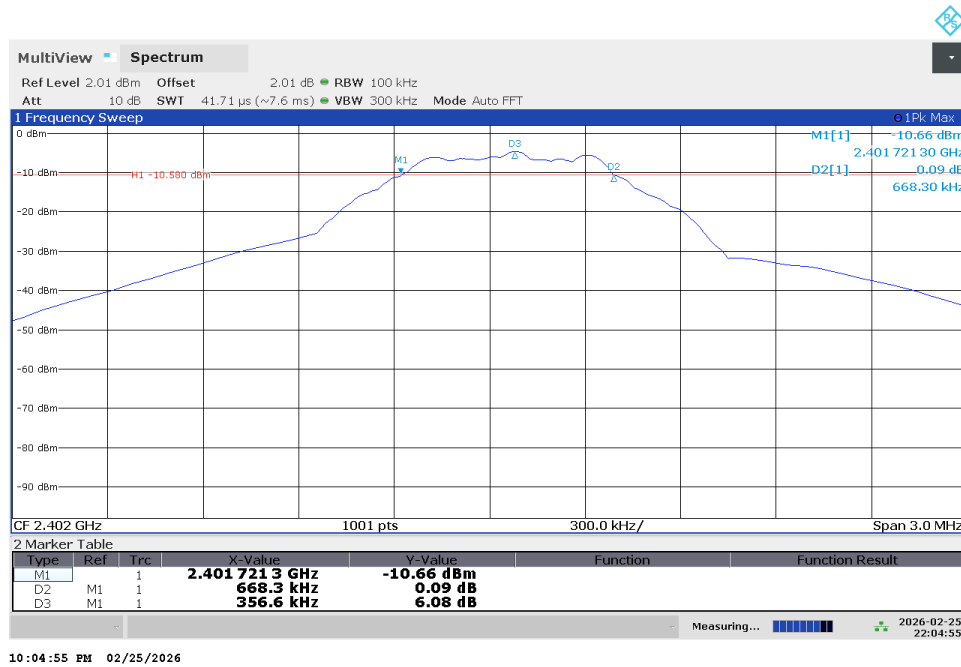

99% Occupied Bandwidth - Plot 1.2




Occupied Bandwidths – 2442 MHz Mid Channel 6dB Bandwidth - Plot 1.3



99% Occupied Bandwidth - Plot 1.4



Occupied Bandwidths – 2480 MHz High Channel 6dB Bandwidth - Plot 1.5

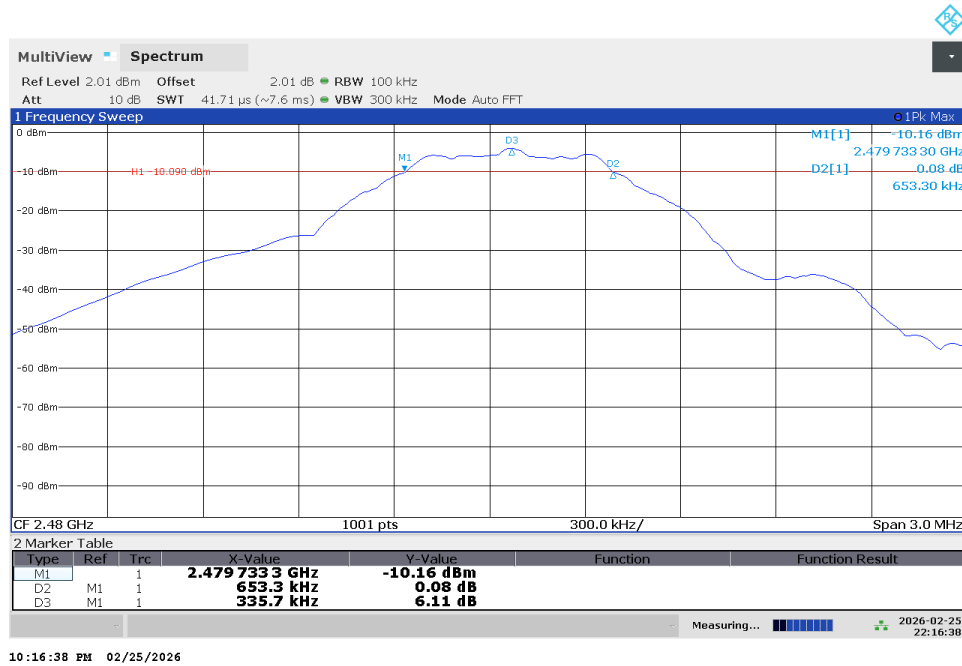

99% Occupied Bandwidth - Plot 1.6



4.2 Maximum Conducted Output Power at Antenna Terminals FCC Rule: 15.247(b)(3); RSS-247, 5.4.d);

4.2.1 Requirement

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm).
For antennas with gains greater than 6 dBi, transmitter output level must be decreased appropriately, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2.2 Procedure

The antenna port of the EUT was connected to the input of a spectrum analyzer to measure the Maximum Conducted Transmitter Output Power. The offset programmed on the analyzer is corrected to include cable loss, attenuator and duty cycle correction.

The procedure described in FCC Publication KDB 558074 D01 Meas Guidance v05r02 was used. Specifically, section 11.9.1.1 in ANSI 63.10 when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement.

The procedure for this method is as follows:

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq [3 \times \text{RBW}]$.
- c) Set span $\geq [3 \times \text{RBW}]$.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level

4.2.3 Test Result


Frequency	Conducted Power (peak)		Plot
	dBm	mW	
2402	-3.81	0.416	2.1
2442	-3.55	0.442	2.2
2480	-3.61	0.436	2.3

Tested By	Test Date	Results
Arjun Mukherjea	February 2, 2026	Complies

Refer to the following plots 2.1 – 2.3 for the test details.

Peak Output Power - 2402 MHz Low Channel


Plot 2. 1

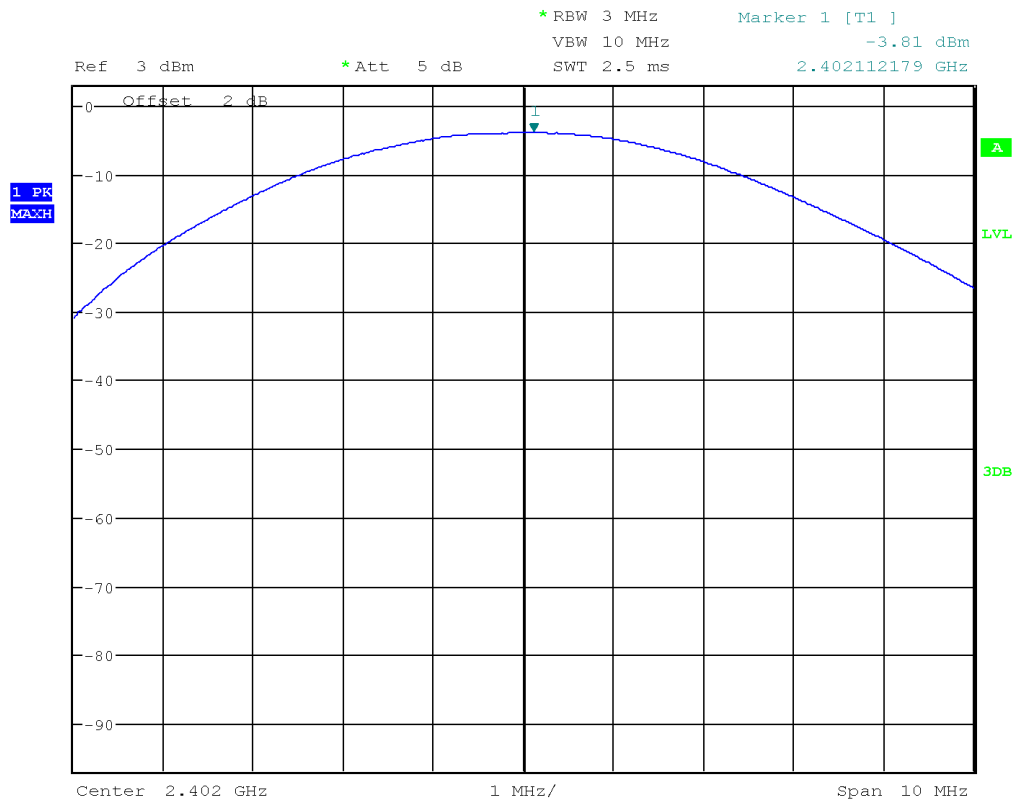

Date: 2.FEB.2026 21:51:22


Peak Output Power - 2442 MHz Mid Channel

Plot 2. 2

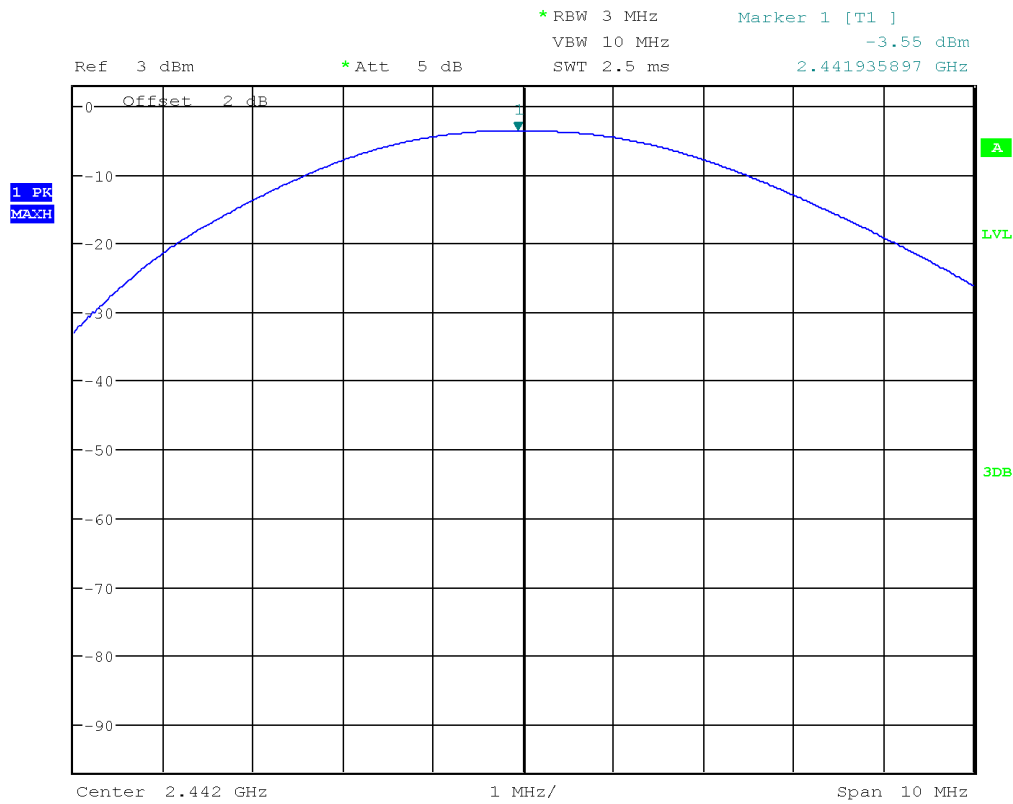

Date: 2.FEB.2026 21:53:43

Peak Output Power - 2480 MHz High Channel
Plot 2.3

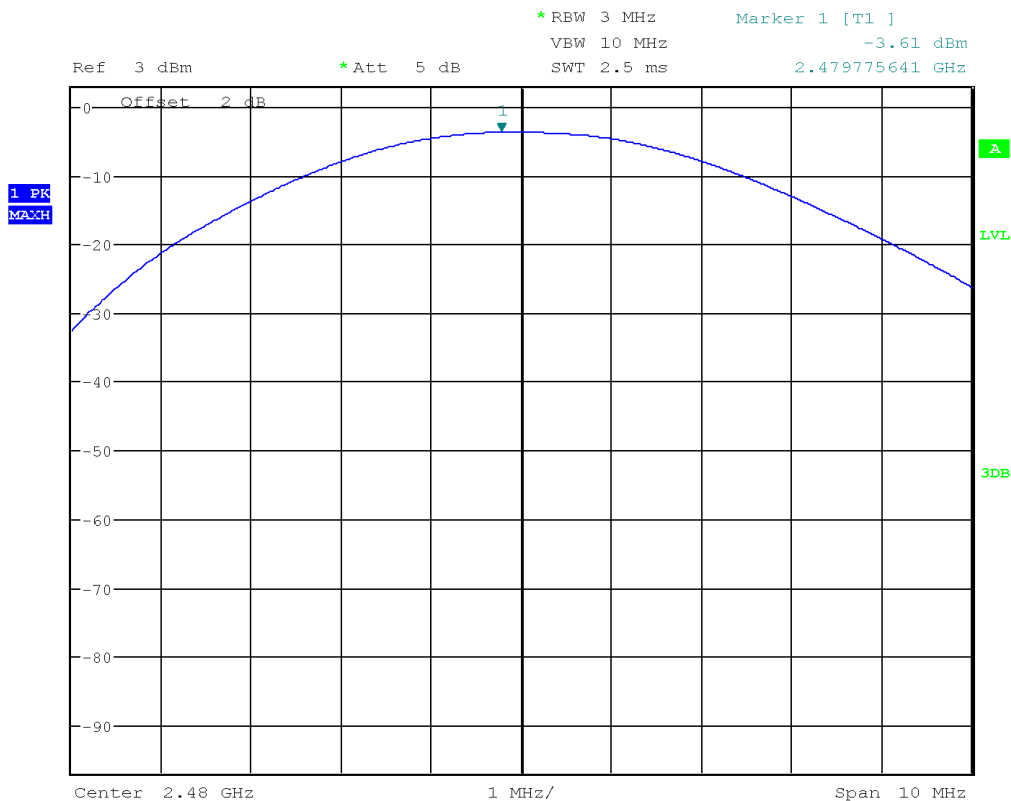

Date: 2.FEB.2026 21:56:00

4.3 Power Spectral Density FCC: 15.247 (e); RSS-247, 5.2.b);

4.3.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna should not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2 Procedure

The antenna port of the EUT was connected to the input of a spectrum analyzer to measure the Transmitter Power Density (PSD). The offset programmed on the analyzer is corrected to include cable loss, attenuator.

The procedure described in FCC Publication FCC Publication KDB 558074 D01 Meas Guidance v05r02, specifically section 11.10.2 Method PKPSD (peak PSD) of ANSI 63.10.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the *DTS bandwidth*.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.3.3 Test Result


Frequency, MHz	Maximum Power Spectral Density, dBm	Maximum Power Spectral Density Limit, dBm	Margin, dB	Plot
2402	-18.78	8.0	-26.78	3.1
2442	-17.70	8.0	-25.70	3.2
2480	-17.96	8.0	-25.96	3.3

Tested By	Test Date	Results
Arjun Mukherjea	February 2, 2026	Complies

Refer to the following plots 3.1 – 3.3 for test details.

Peak Power Spectral Density - 2402 MHz Low Channel


Plot 3. 1

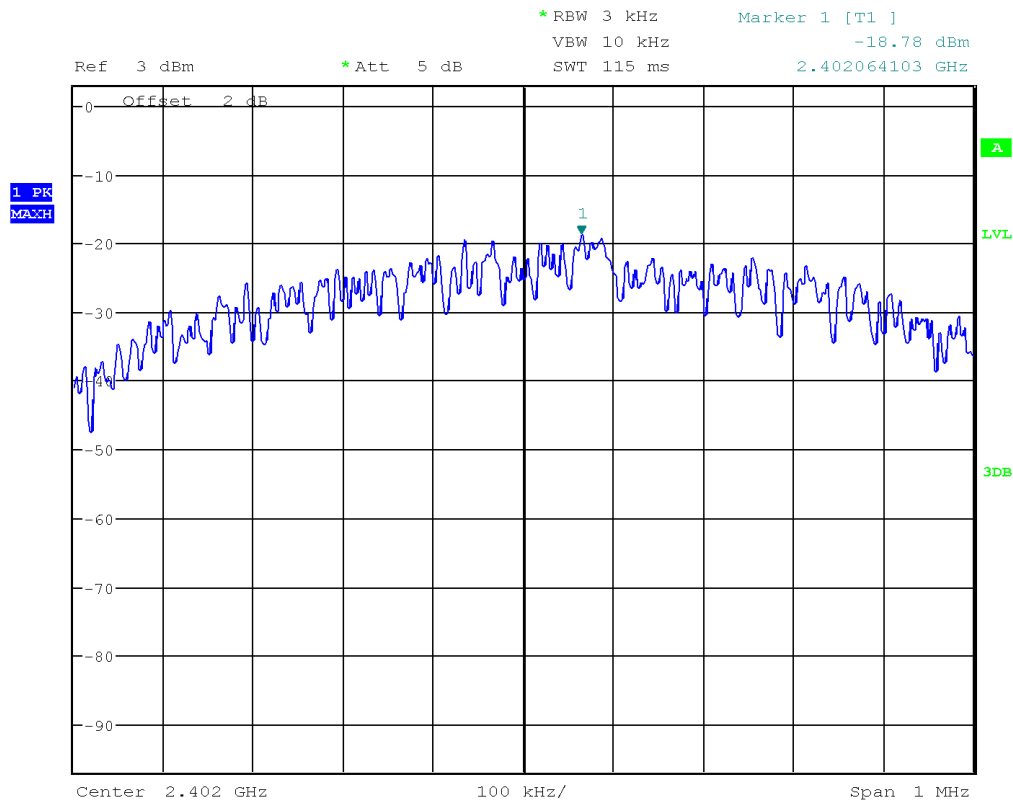

Date: 2.FEB.2026 22:08:23

Peak Power Spectral Density - 2442MHz Mid Channel


Plot 3. 2

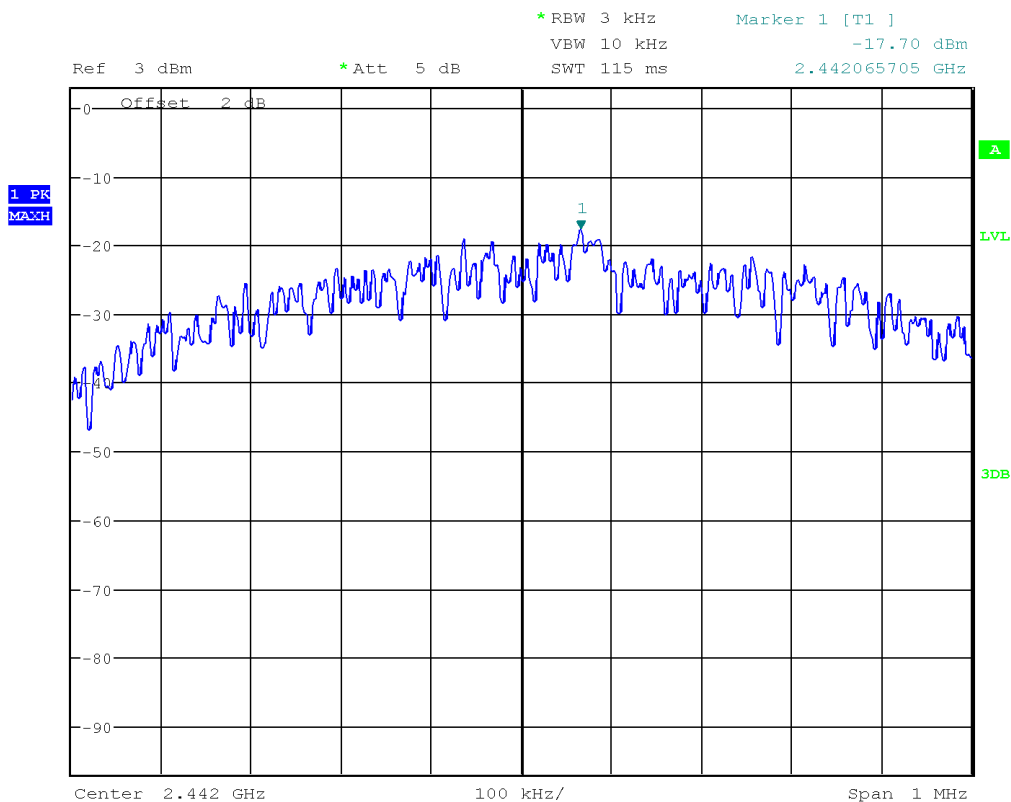

Date: 2.FEB.2026 22:10:35

Peak Power Spectral Density - 2480 MHz High Channel

Plot 3. 3

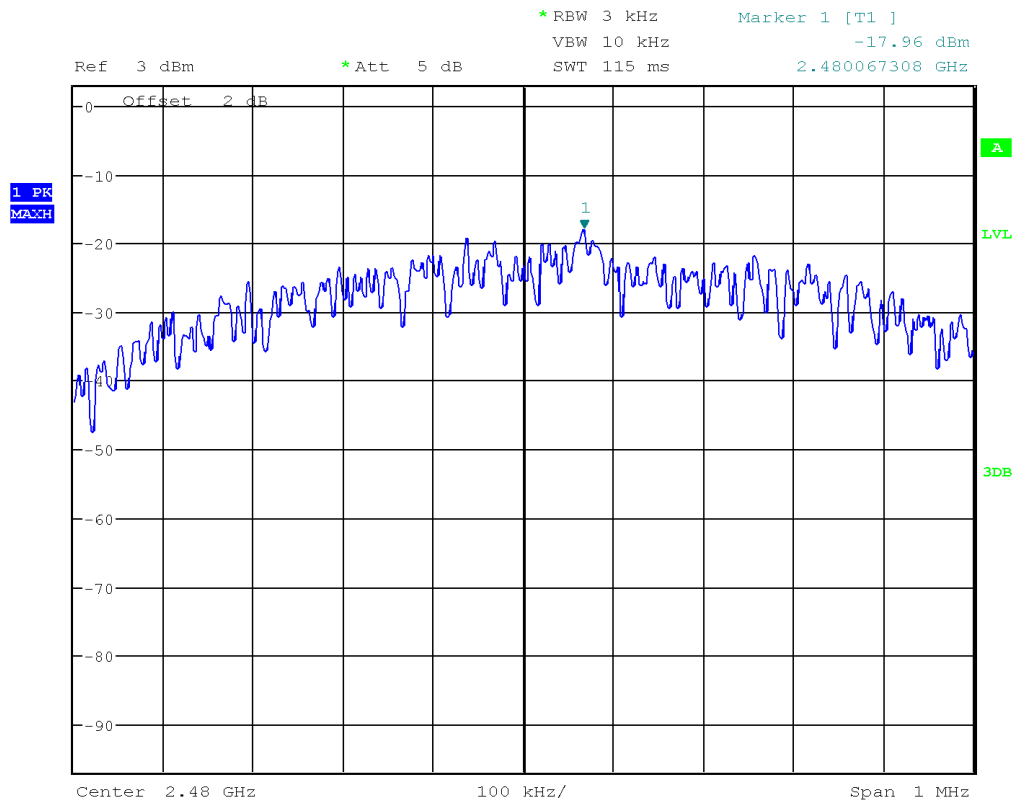

Date: 2.FEB.2026 22:11:21

4.4 Out-of-Band Conducted Emissions FCC: 15.247(d); RSS-247, 5.5;

4.4.1 Requirement

In any 100 kHz bandwidth outside the EUT pass-band, the RF power shall be below the maximum in-band 100 kHz emissions by at least 20 dB (if peak power of in-band emission is measured) or 30 dB (if average power of in-band emission is measured).

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

4.4.2 Procedure

The procedure described in FCC Publication KDB 558074 D01 Meas Guidance v05r02, specifically section 11.11 DTS Emissions in non-restricted frequency bands of ANSI 63.10.

A spectrum analyzer was connected to the antenna port of the transmitter.

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq 3 \times$ RBW.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

The unwanted emissions were measured from 30 MHz to 26 GHz. Plots below are corrected for cable loss and then compared to the limits.


4.4.3 Test Result

Refer to the following plots 4.1 – 4.5 for unwanted conducted emissions. The plot shows -20dB attenuation limit line.

Tested By	Test Date	Results
Arjun Mukherjea	February 2 - 8, 2026	Complies

Tx @ Low Channel, 2402 MHz Band Edge


Plot 4.1

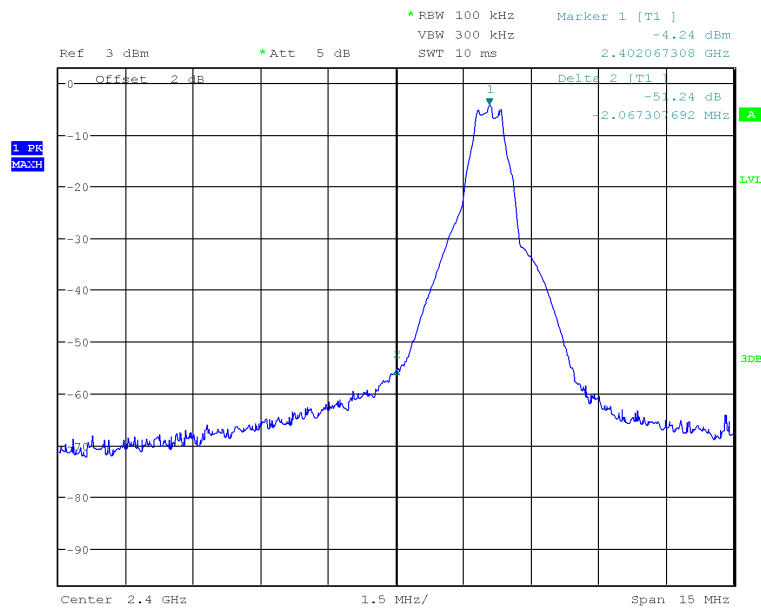

Date: 2.FEB.2026 22:14:55

Tx @ High Channel, 2480 MHz Band Edge


Plot 4.2

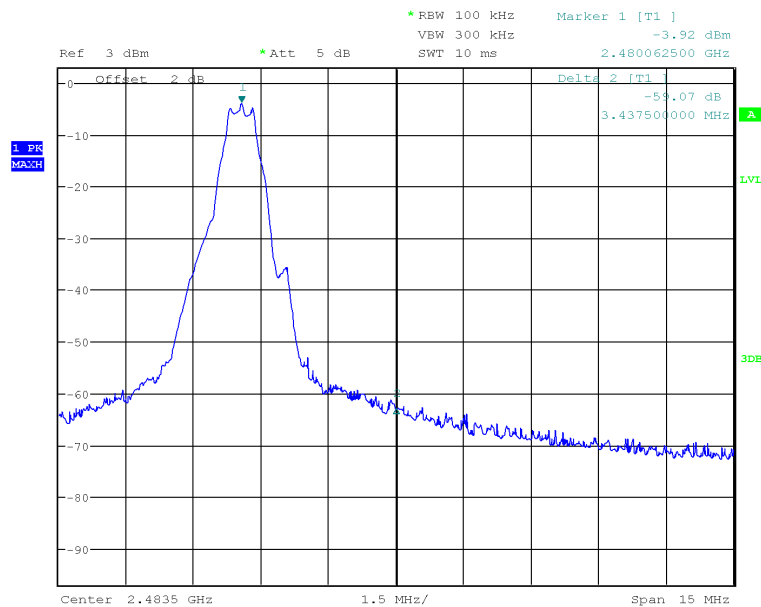

Date: 2.FEB.2026 22:13:18


Tx @ Low Channel, 2402 MHz
30MHz -26GHz Conducted Spurious

Plot 4.3

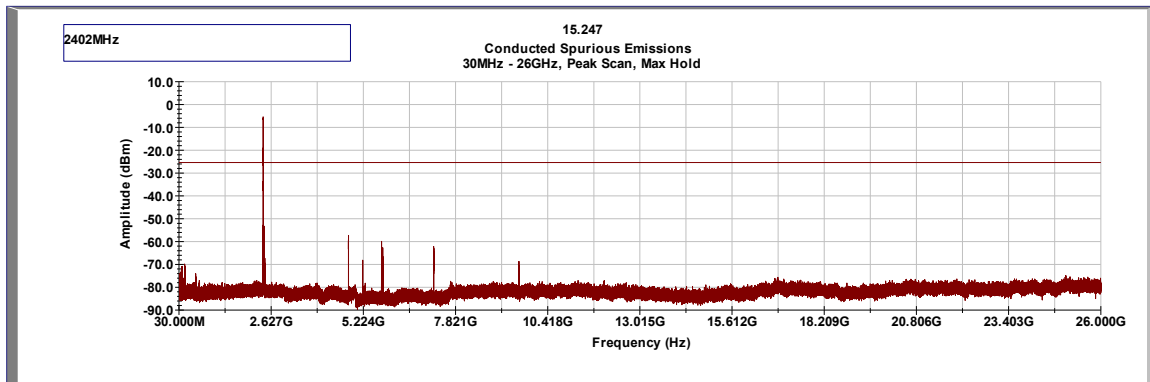


Tx @ Mid Channel, 2442 MHz
30MHz -26GHz Conducted Spurious

Plot 4.4

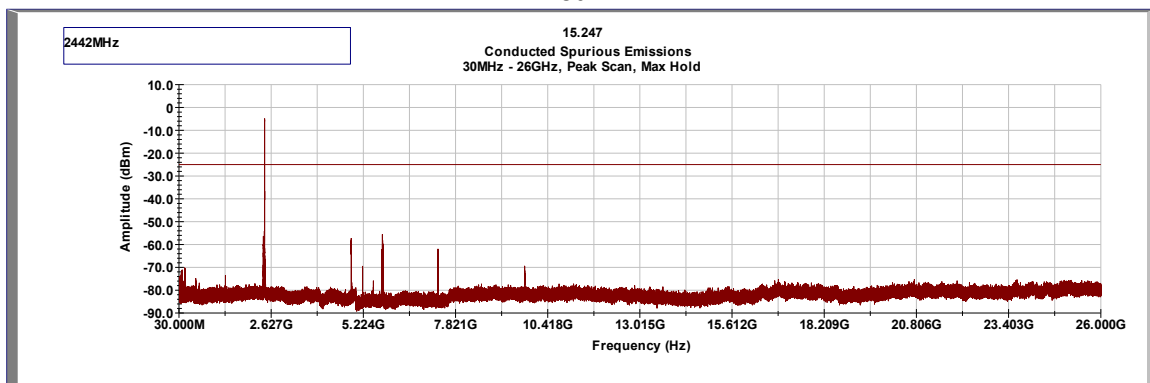

Tx @ High Channel, 2480 MHz
30MHz -26GHz Conducted Spurious

Plot 4.5

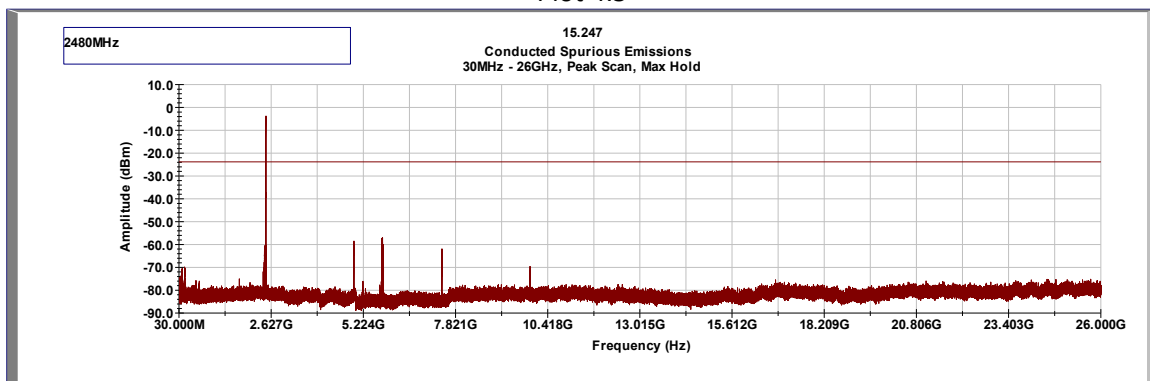

4.5 Transmitter Radiated Emissions FCC Rules: 15.247(d), 15.209, 15.205; RSS-247, 5.5;

4.5.1 Requirement

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

For out of band radiated emissions (except for frequencies in restricted bands), in any 100 kHz bandwidths outside the EUT pass-band, the RF power shall be at least 20dB (peak) or 30 dB (average) below that of the maximum in-band 100 kHz emissions.

4.5.2 Procedure – Radiated Emissions

Radiated emission measurements were performed from 9 kHz to 26.5 GHz according to the procedure described in ANSI C63.10: 2013. Spectrum Analyzer Resolution Bandwidth is 200Hz or greater for frequencies 9kHz to 30MHz, 100 kHz or greater for frequencies 30 MHz to 1000 MHz, 1 MHz for frequencies above 1000 MHz. Above 1000 MHz Peak and Average measurements were performed.

The EUT is placed on a plastic turntable that is 80 cm in height for below 1000MHz and 1.5m in height for above 1GHz. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables were manipulated to produce worst-case emissions. The signal is maximized through rotation. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at 3 meters for frequencies above 1 GHz and at 10 meters for frequencies below 1 GHz.

Measurements made from 1 GHz to 18GHz had a 2.4-2.5GHz notch filter in place. A preamp was used from 30MHz to 40GHz.

All measurements were made with a Peak Detector and compared to QP limits for 30MHz – 1GHz and Peak and Average limits for 1GHz – 40GHz.

Correlation measurements were performed below 30MHz between 10m ALSE and Open Field site according to FCC KDB 414788 D01 Radiated Test Site v01r01 section 2. All readings were within the acceptable tolerance.

EUT was tested in both horizontal and upright position. Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels).

Radiated Band Edge was measured at a 3m distance.

4.5.3 Field Strength Calculation

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$FS = RA + AF + CF - AG$; if measurement is performed at a distance other than specified in the rule, a Distance Correction Factor (DCF) shall be added.

Where FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude (including preamplifier) in dB(μ V); AF = Antenna Factor in dB(1/m)

CF = Cable Attenuation Factor in dB; AG = Amplifier Gain in dB

Assume a receiver reading of 52.0 dB(μ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB(μ V/m). This value in dB(μ V/m) was converted to its corresponding level in μ V/m.

RA = 52.0 dB(μ V)

AF = 7.4 dB(1/m)

CF = 1.6 dB

AG = 29.0 dB

$FS = 52.0 + 7.4 + 1.6 - 29.0 = 32 \text{ dB}(\mu\text{V/m})$.

Level in μ V/m = Com

mon Antilogarithm $[(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$.

4.5.4 Test Results


The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

Tested By	Test Date	Results
Arjun Mukherjea	January 26 – February 6, 2026	Complies

Test Results: 15.209/15.205 Radiated Restricted Band Emissions


Black Handle

Out-of-Band Spurious Emissions at the Band Edge 2402 MHz, Peak Scan with Peak and Average Limits

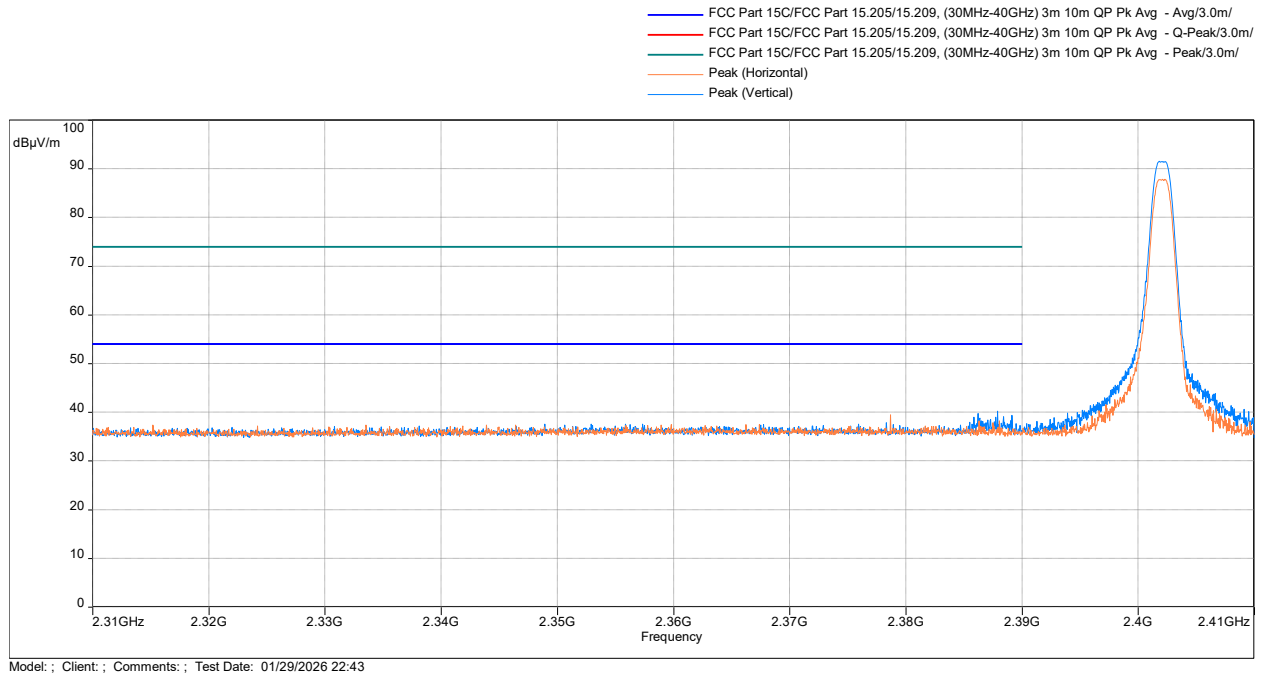

Freq. MHz	Peak @ 3m dB(μV/m)	Ave Limit @ 3m dB(μV/m)	Margin dB	Height m	Azimuth deg	Polarity	Correction dB
2378.707	39.43	54	-14.57	1.25	219.42	Horizontal	-5.6
2387.9	40.21	54	-13.79	1.25	292.79	Vertical	-5.59


Out-of-Band Radiated spurious emissions at the Band-edge 2480 MHz, Peak Scan with Peak and Average Limit

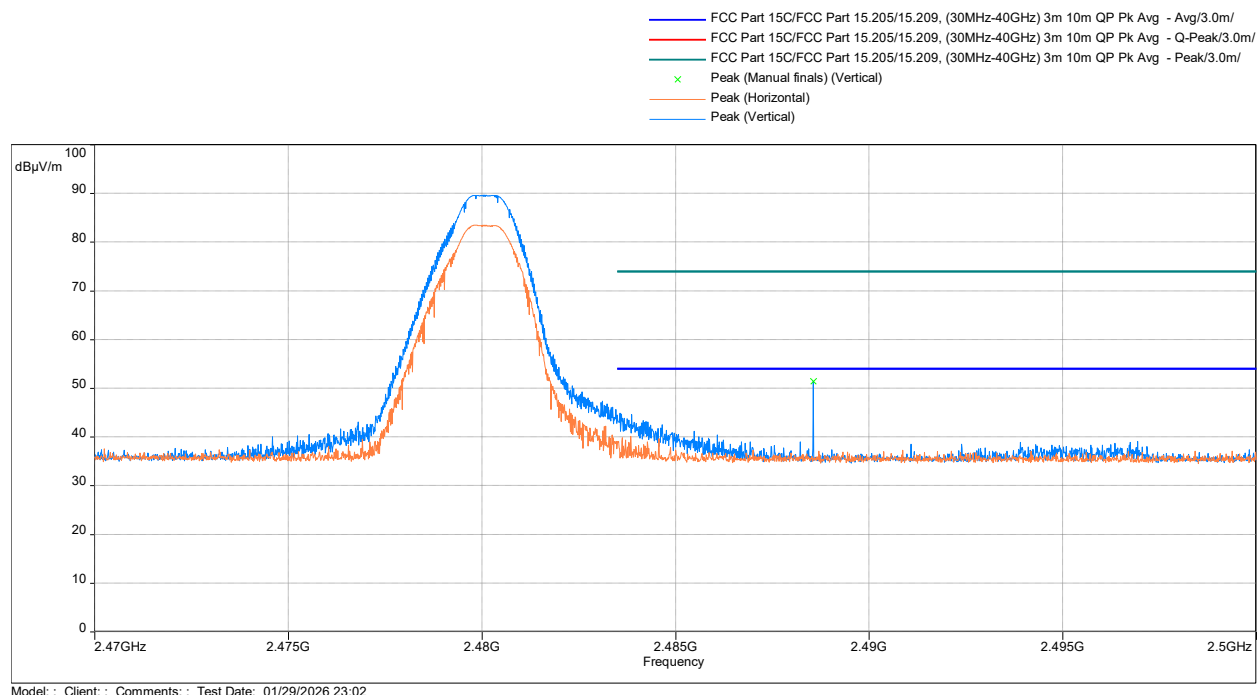


Freq. MHz	Peak @ 3m dB(μV/m)	Ave Limit @ 3m dB(μV/m)	Margin dB	Height m	Azimuth deg	Polarity	Correction dB
2488.566	51.42	54	-2.58	1.75	303.88	Vertical	-5.6

Transmitter Radiated Spurious Emissions: 9kHz – 30MHz


Antenna
Position -
Coaxial

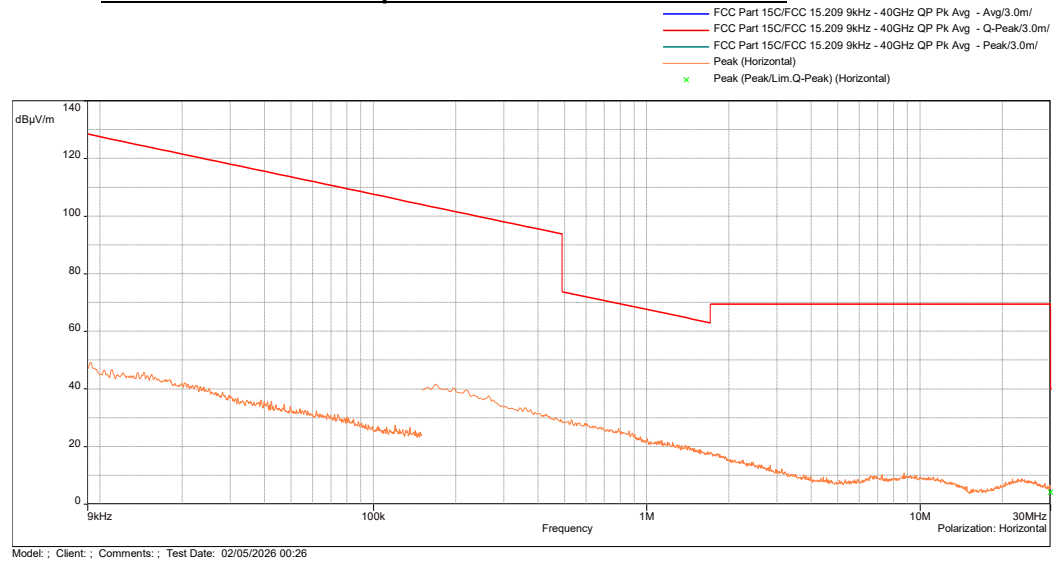

Antenna
Position -
Coplanar

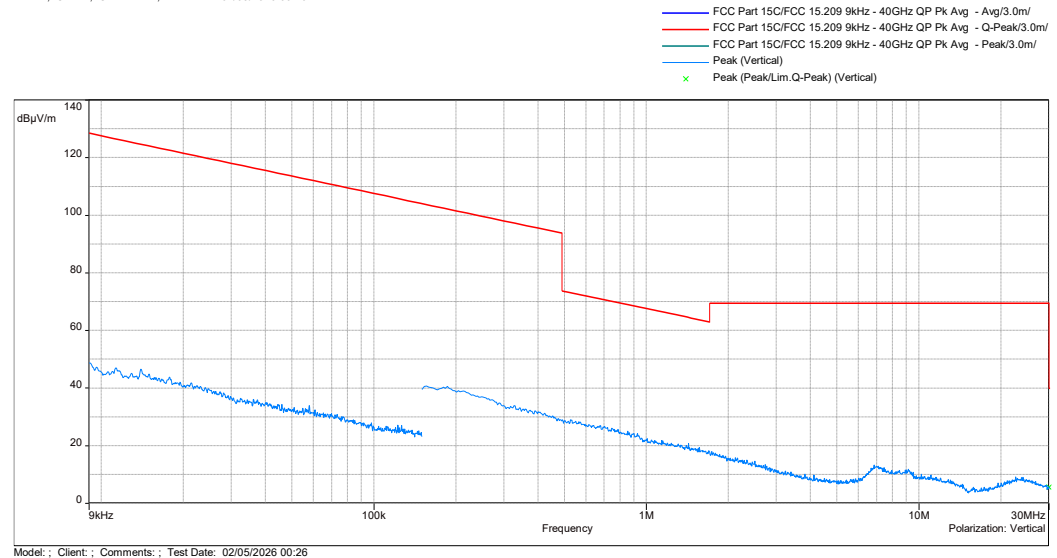


Antenna
Position -
Horizontal

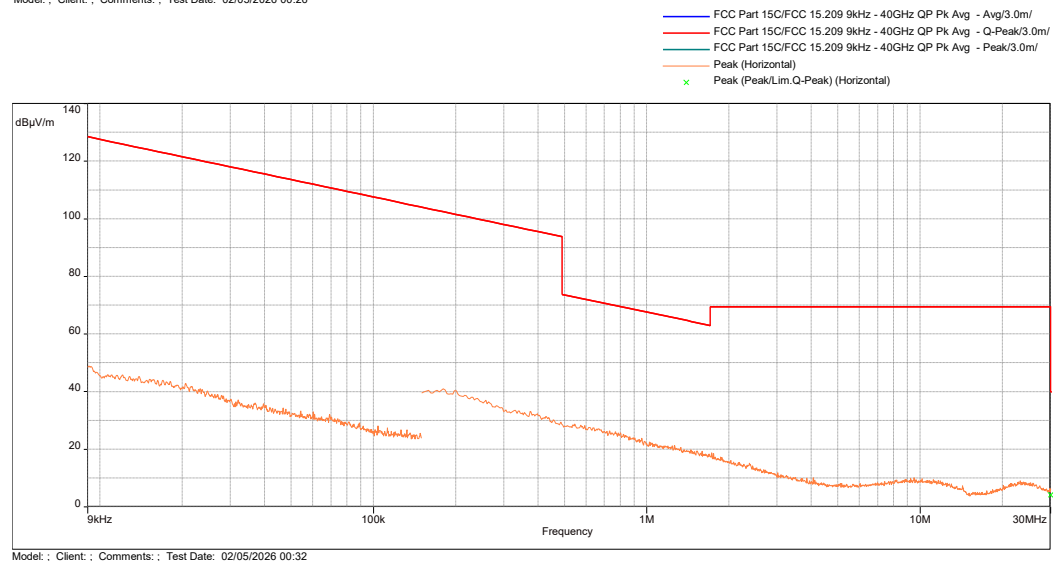


Transmitter Radiated Spurious Emissions Low Channel, Tx at 2402MHz

30 MHz to 1000 MHz

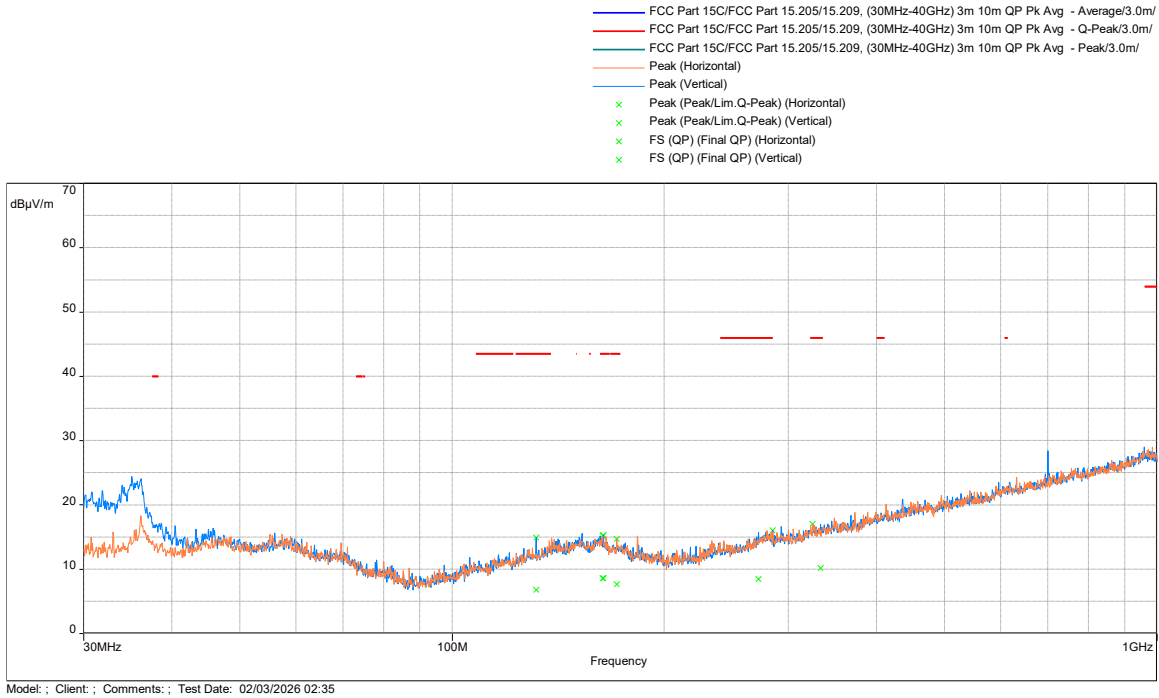


1000 - 18000 MHz, Peak Scan vs Peak Limit

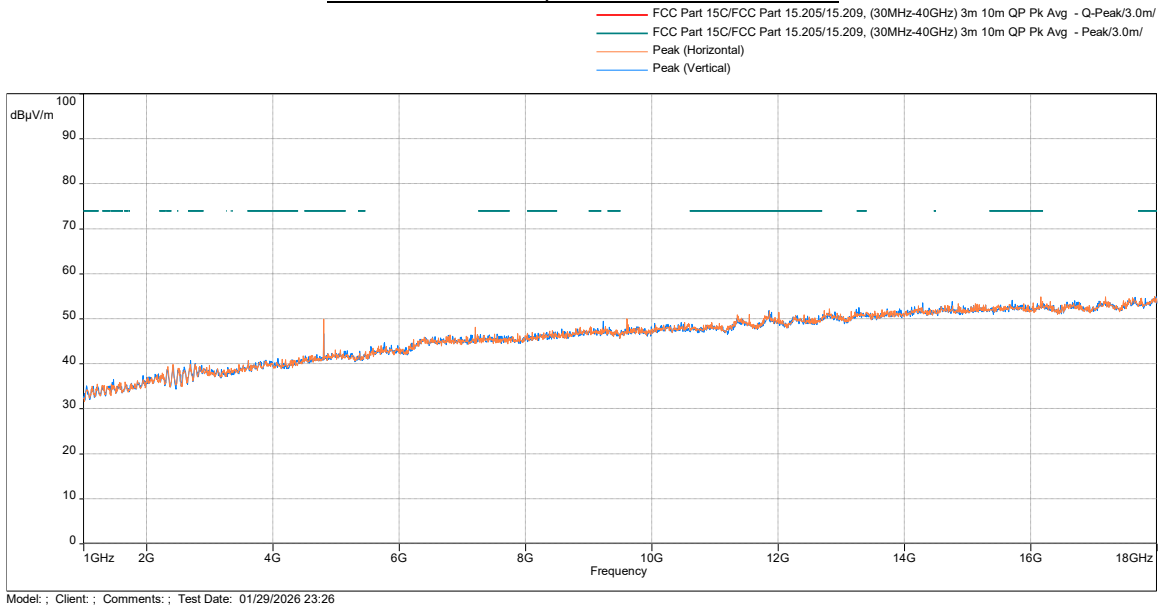


Frequency (MHz)	Peak FS@3m (dB μ V/m)	Peak Limit@3m (dB μ V/m)	Margin (dB)	Height (m)	Azimuth (deg)	Polarity	Correction (dB)
4803.467	49.92	74	-24.08	1.75	0	Horizontal	1.61
4803.467	46.72	74	-27.28	1.25	212.22	Vertical	1.61

1000 - 18000 MHz, Average Scan vs Average Limit

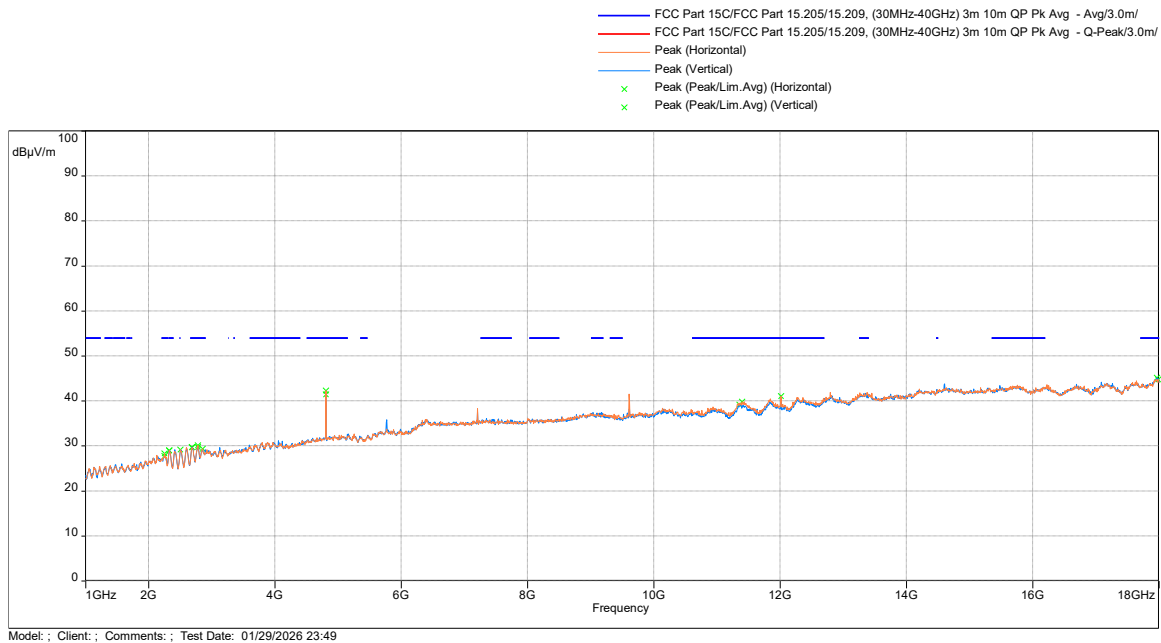

Frequency (MHz)	Avg FS@3m (dBµV/m)	Avg Limit@3m (dB(uV/m))	Margin (dB)	Height (m)	Azimuth (deg)	Polarity	Correction (dB)
4804.033	42.35	54	-11.65	1.5	222.73	Horizontal	1.61
4804.033	41.44	54	-12.56	1.25	220.21	Vertical	1.61


18000 - 26000 MHz, Peak Scan vs Average Limit

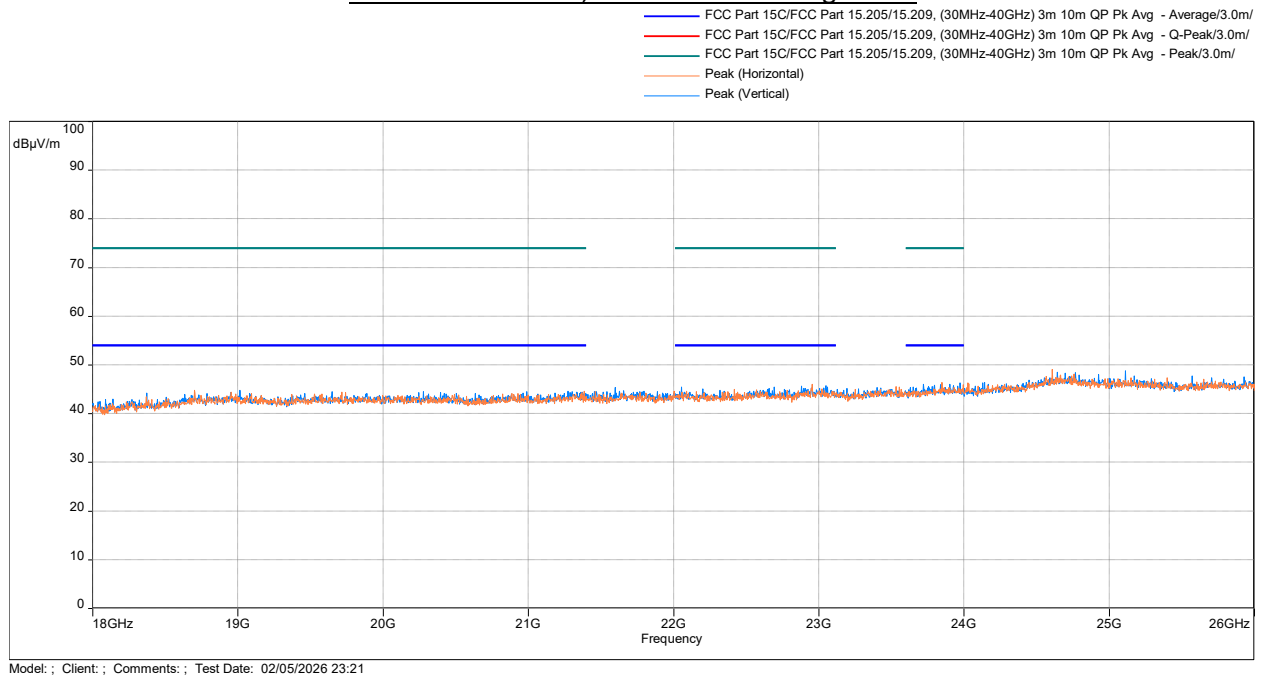


Results

Complies

Transmitter Radiated Spurious Emissions Mid Channel, Tx at 2442 MHz 30 MHz to 1000 MHz

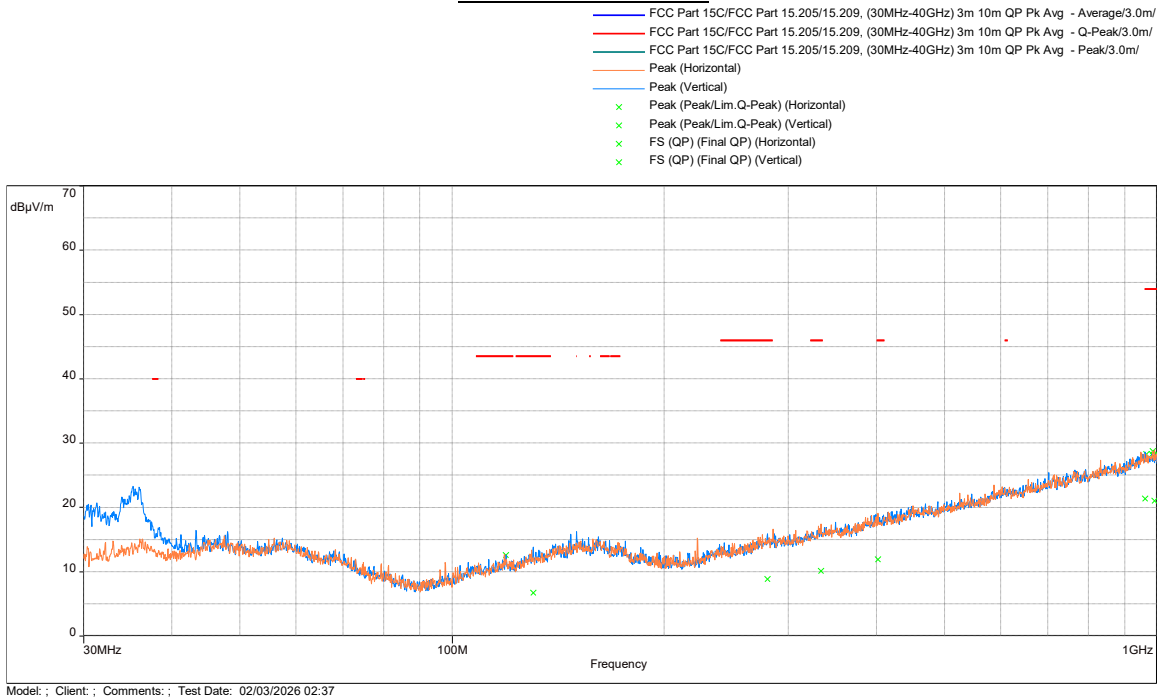


Transmitter Radiated Spurious Emissions Mid Channel, Tx at 2442 MHz 1000 - 18000 MHz, Peak Scan vs Peak Limit

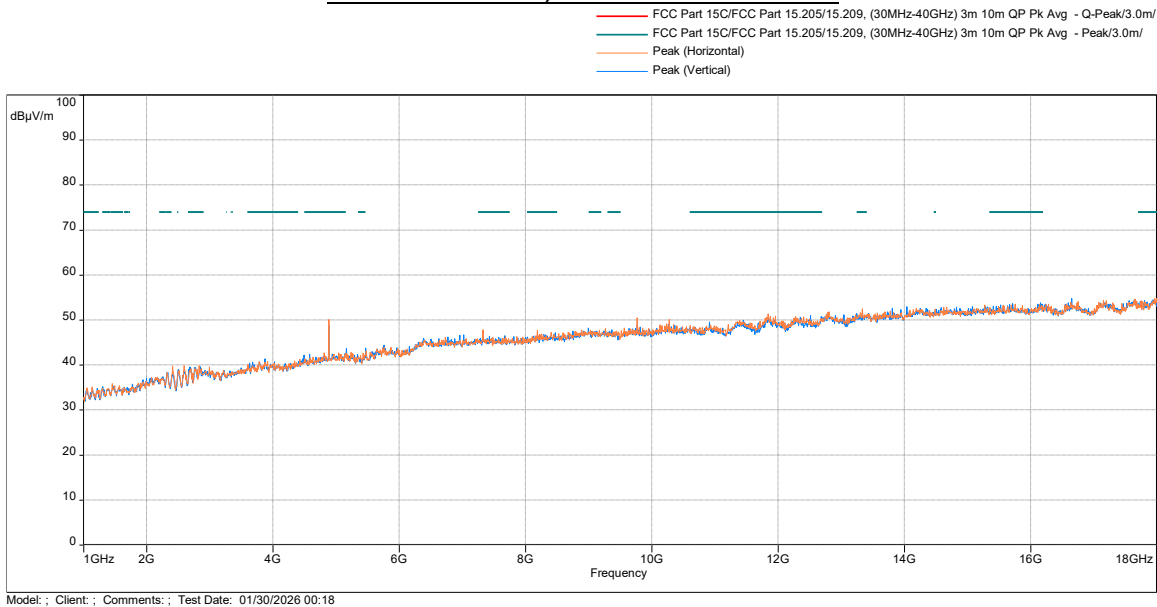

Frequency (MHz)	Peak FS@3m (dBμV/m)	Peak Limit@3m (dBμV/m)	Margin (dB)	Height (m)	Azimuth (deg)	Polarity	Correction (dB)
4883.933	50.07	74	-23.93	1.75	172.19	Horizontal	1.76
4884.5	48.81	74	-25.19	1.5	342.32	Vertical	1.76


1000 - 18000 MHz, Average Scan vs Average Limit

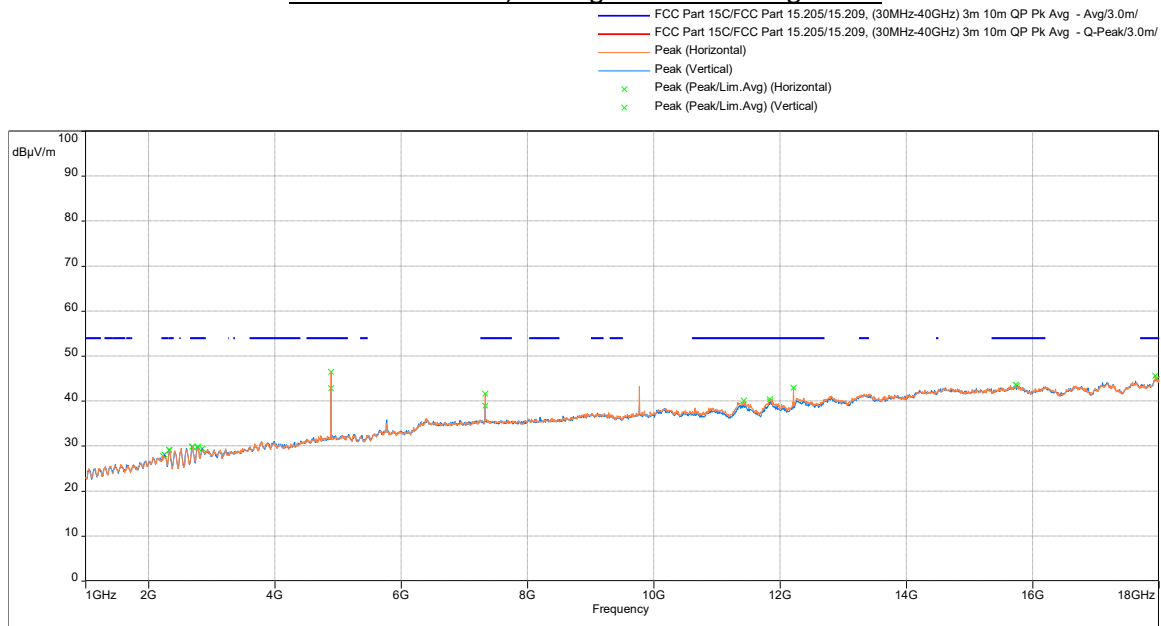

Frequency (MHz)	Avg FS@3m (dBμV/m)	Avg Limit@3m (dBμV/m)	Margin (dB)	Azimuth (deg)	Height (m)	Polarity	Correction (dB)
4883.933	46.52	54	-7.48	1.75	177.01	Horizontal	1.76
4883.933	42.85	54	-11.15	1.75	346.94	Vertical	1.76

Note: Correction = AF + CF – Preamp


18000 - 26000 MHz, Peak Scan vs Average Limit.

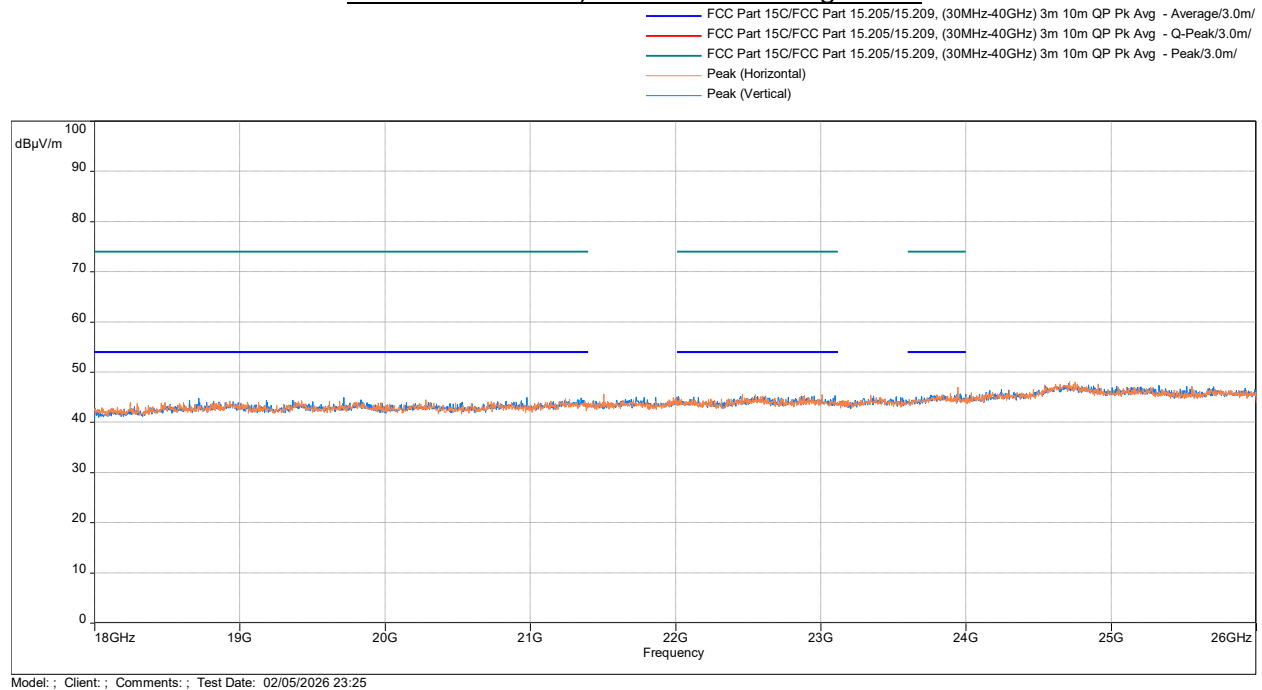

Results	Complies
---------	----------


Transmitter Radiated Spurious Emissions High Channel, Tx at 2480MHz:

30 MHz to 1000 MHz

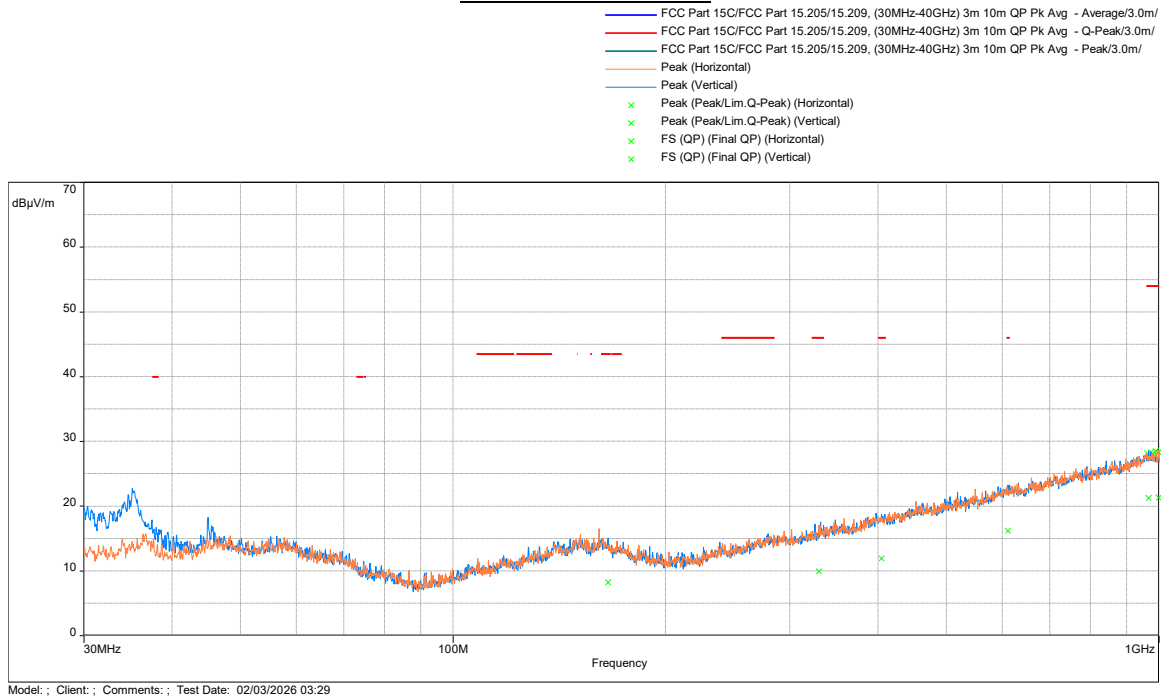


Transmitter Radiated Spurious Emissions High Channel, Tx at 2480MHz:

1000 - 18000 MHz, Peak Scan vs Peak Limit

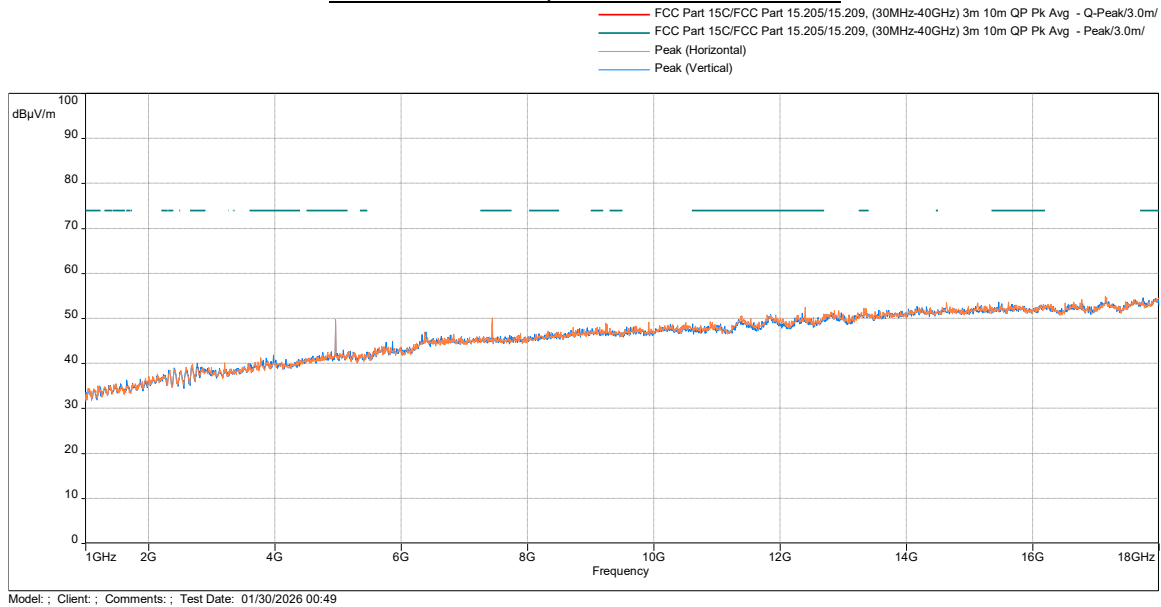

Frequency (MHz)	Peak FS@3m (dBμV/m)	Peak Limit@3m (dBμV/m)	Margin (dB)	Height (m)	Azimuth (deg)	Polarity	Correction (dB)
4959.867	49.74	74	-24.26	1.75	11.23	Horizontal	1.84
4960.433	48.71	74	-25.29	1.25	227.05	Vertical	1.84


1000 - 18000 MHz, Average Scan vs Average Limit

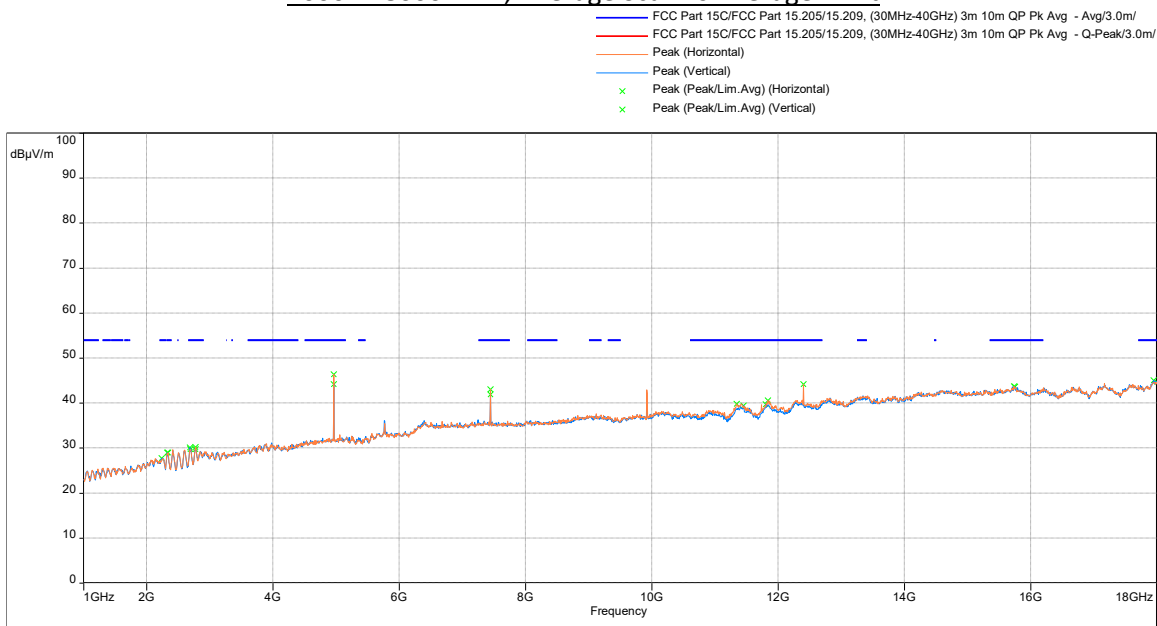

Frequency (MHz)	Avg FS@3m (dBμV/m)	Avg Limit@3m (dBμV/m)	Margin (dB)	Height (m)	Azimuth (deg)	Polarity	Correction (dB)
4959.867	46.43	54	-7.57	1.75	12.51	Horizontal	1.84
4959.867	44.24	54	-9.76	1.25	206.68	Vertical	1.84

Note: Correction = AF + CF - Preamp


18000 - 26000 MHz, Peak Scan vs Average Limit.

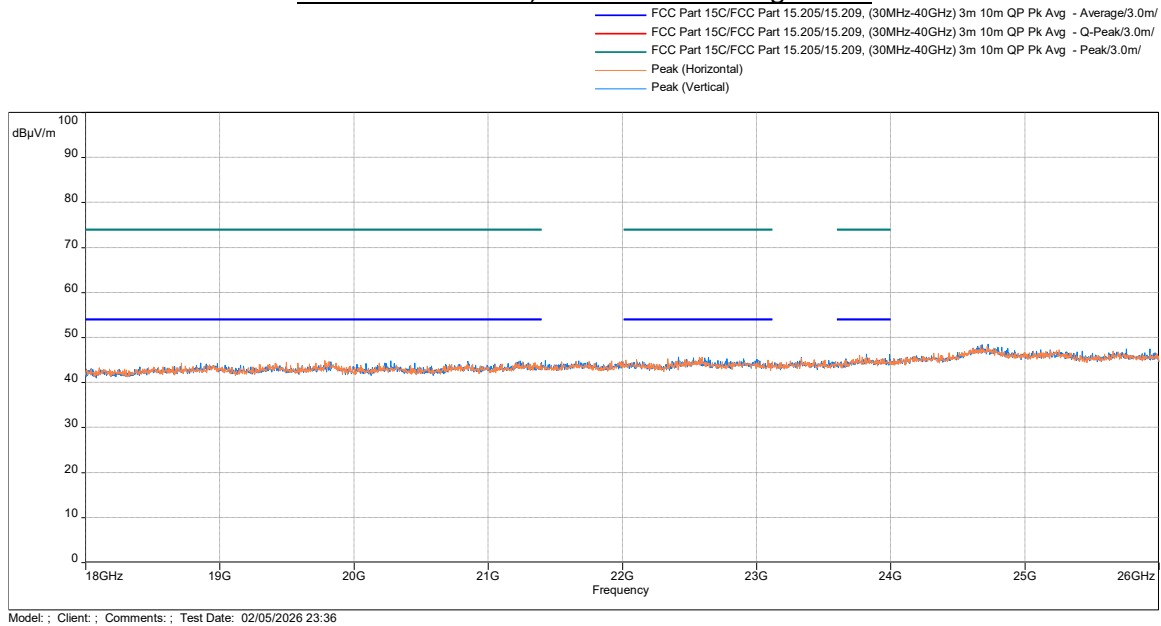

Results


Complies

White Handle
Out-of-Band Spurious Emissions at the Band Edge
2402 MHz, Peak Scan with Peak and Average Limits

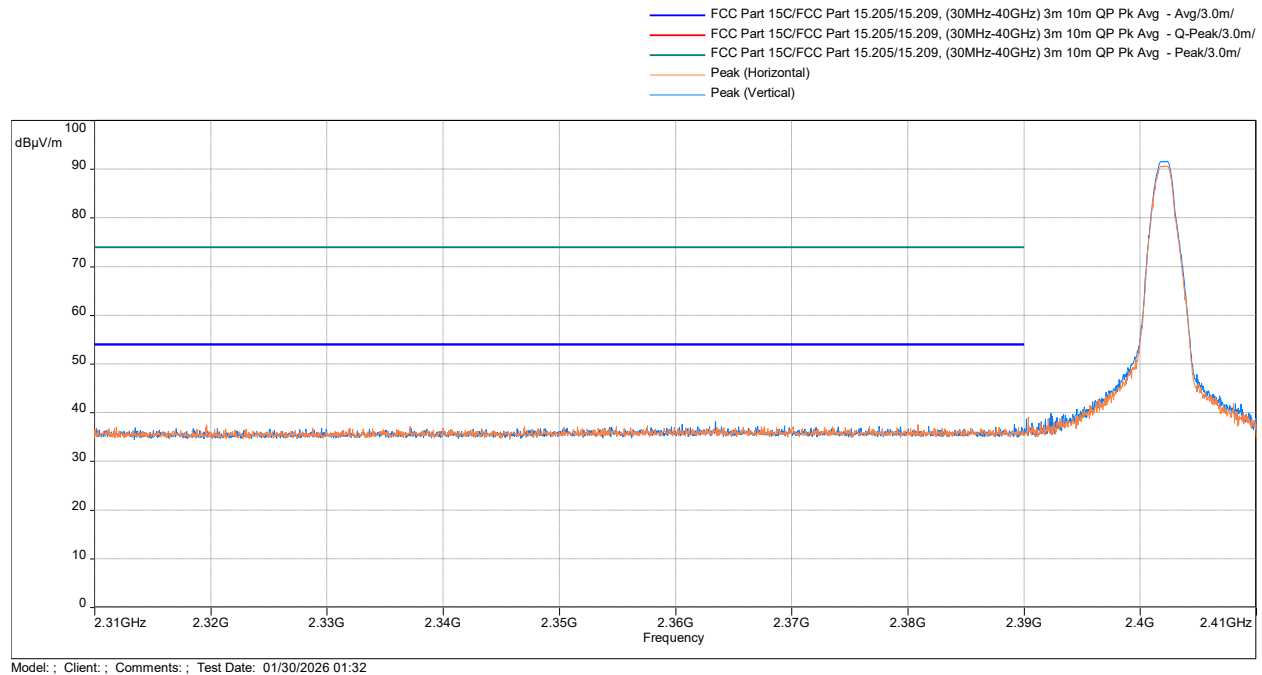

Freq. MHz	Peak @ 3m dB(μV/m)	Ave Limit @ 3m dB(μV/m)	Margin dB	Height m	Azimuth deg	Polarity	Correction dB
2389.533	36.91	54	-17.09	1.25	255.42	Horizontal	-5.58


Out-of-Band Radiated spurious emissions at the Band-edge 2480 MHz, Peak Scan with Peak and Average Limit

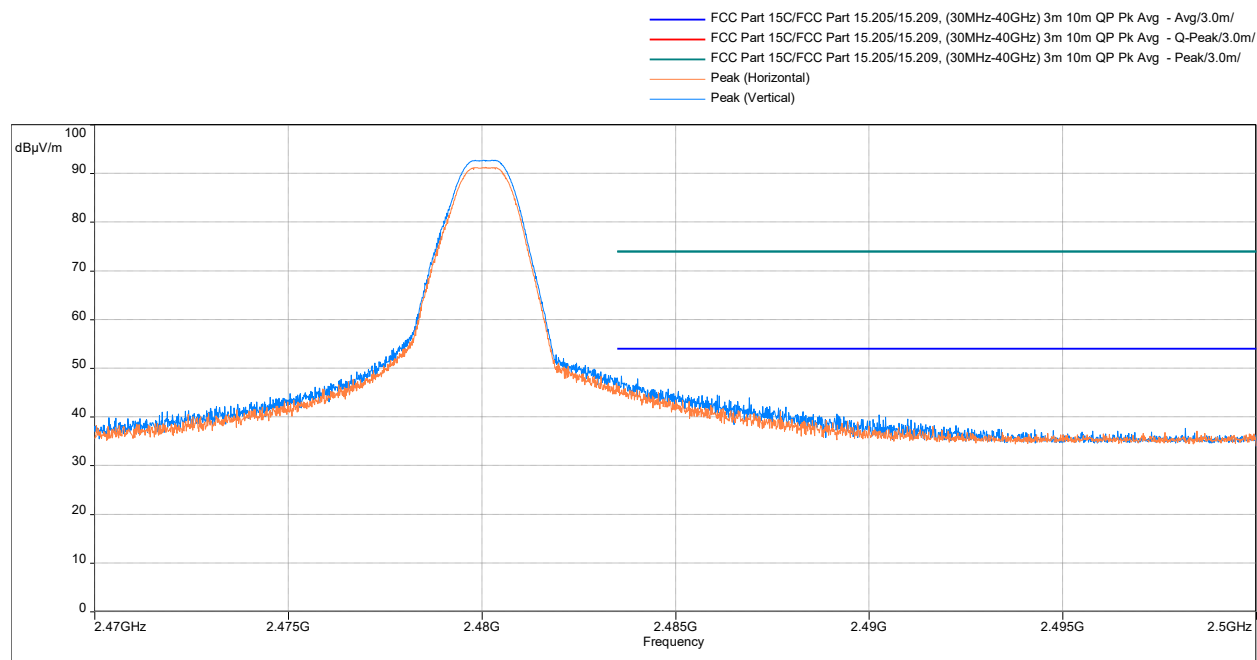


Freq. MHz	Peak @ 3m dB(uV/m)	Ave Limit @ 3m dB(μV/m)	Margin dB	Height m	Azimuth deg	Polarity	Correction dB
2483.609	48.42	54	-5.58	1.25	311.15	Vertical	-5.6
2483.512	46.36	54	-7.64	1.25	278.17	Horizontal	-5.6
2485.075	45.29	54	-8.71	1.25	298.33	Vertical	-5.6

Transmitter Radiated Spurious Emissions: 9kHz – 30MHz


Antenna
Position -
Coaxial

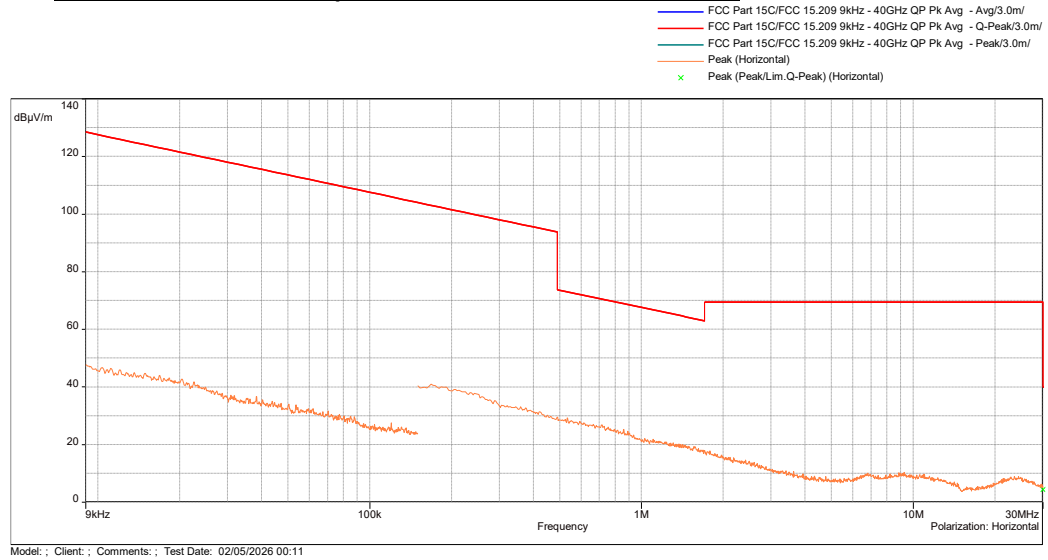

Antenna
Position -
Coplanar

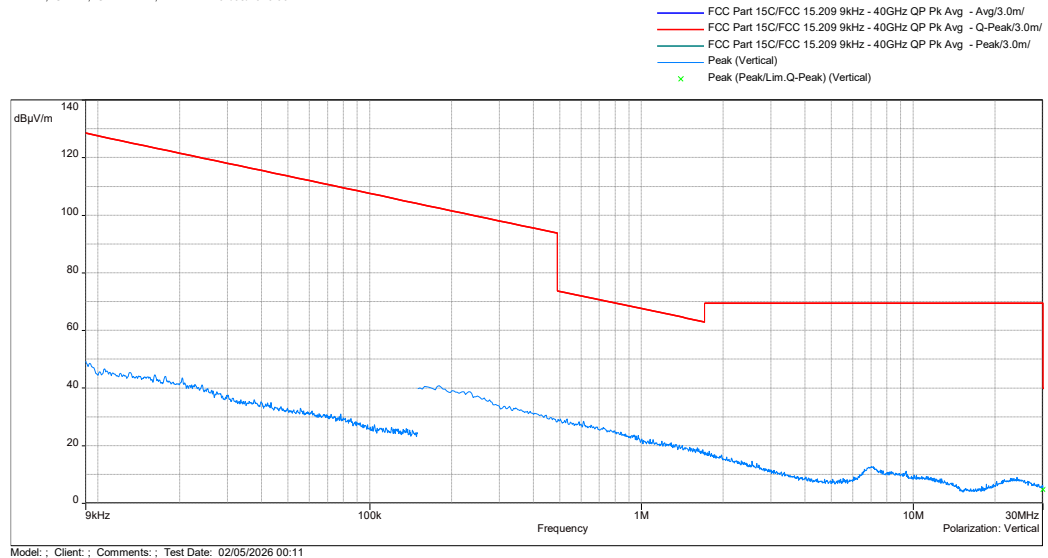


Antenna
Position -
Horizontal

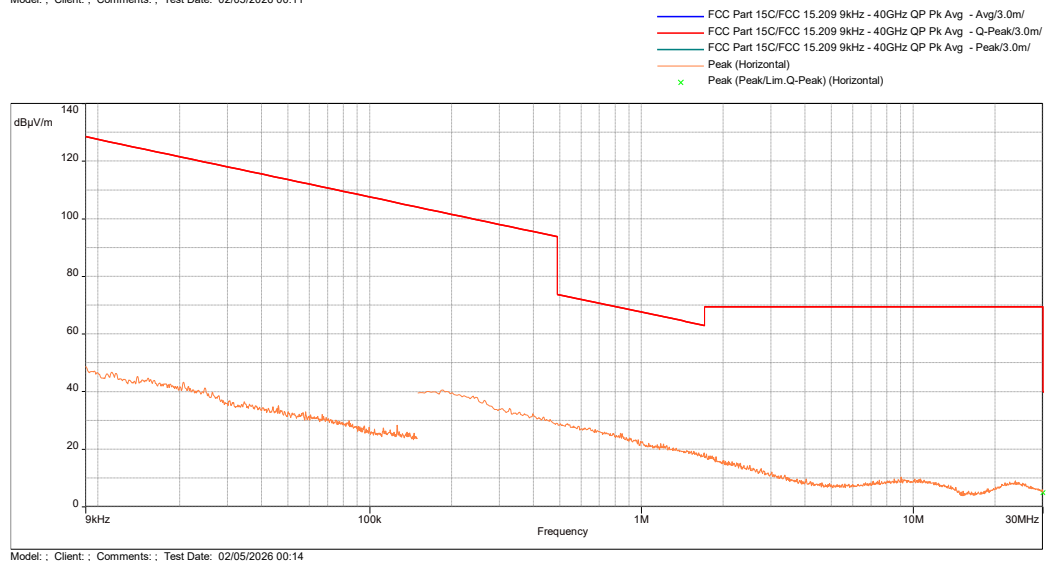


Transmitter Radiated Spurious Emissions Low Channel, Tx at 2402MHz

30 MHz to 1000 MHz

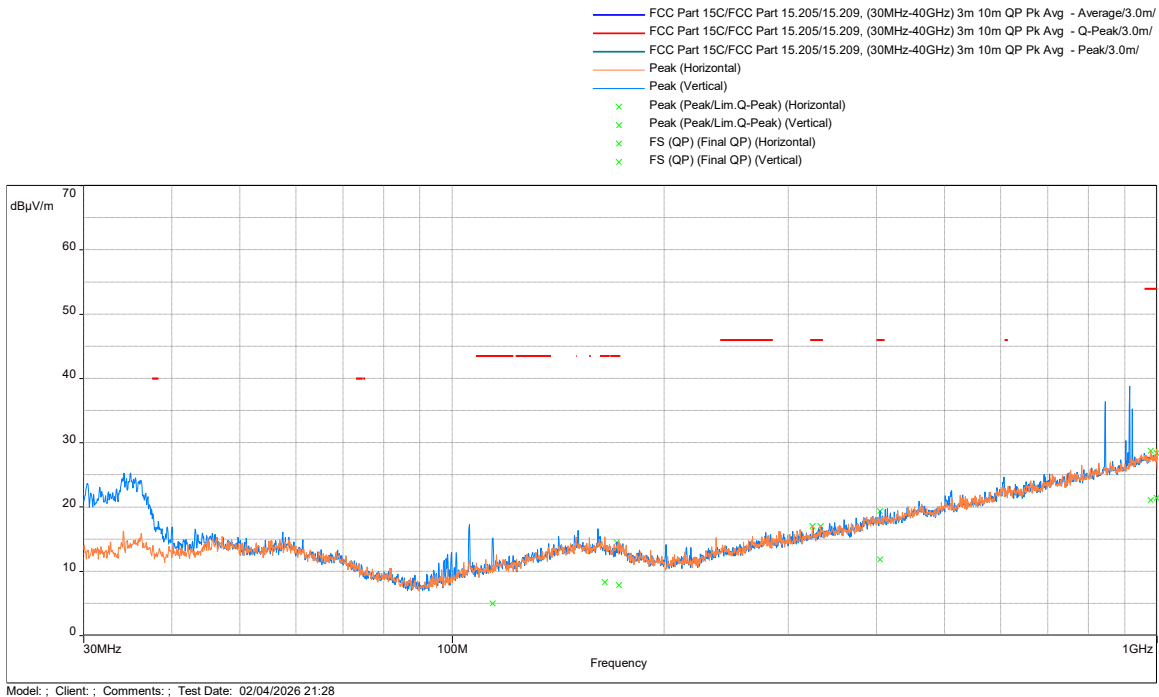


1000 - 18000 MHz, Peak Scan vs Peak Limit

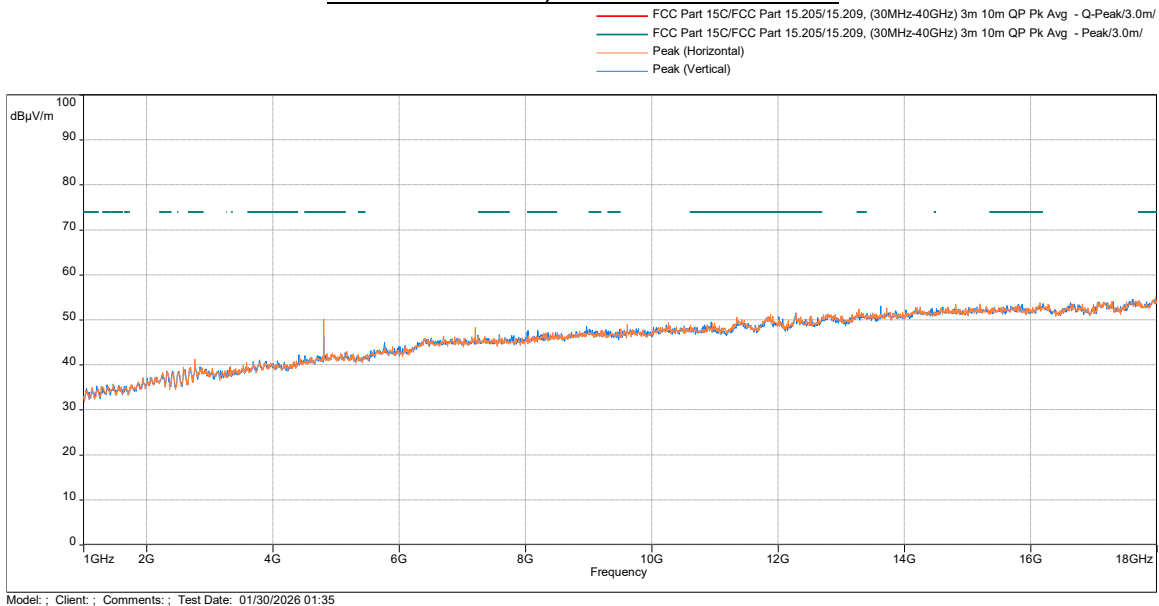


Frequency (MHz)	Peak FS@3m (dBμV/m)	Peak Limit@3m (dBμV/m)	Margin (dB)	Height (m)	Azimuth (deg)	Polarity	Correction (dB)
4804.6	50.18	74	-23.82	2	359.91	Horizontal	1.61
4804.033	46.26	74	-27.74	1.25	215.82	Vertical	1.61

1000 - 18000 MHz, Average Scan vs Average Limit

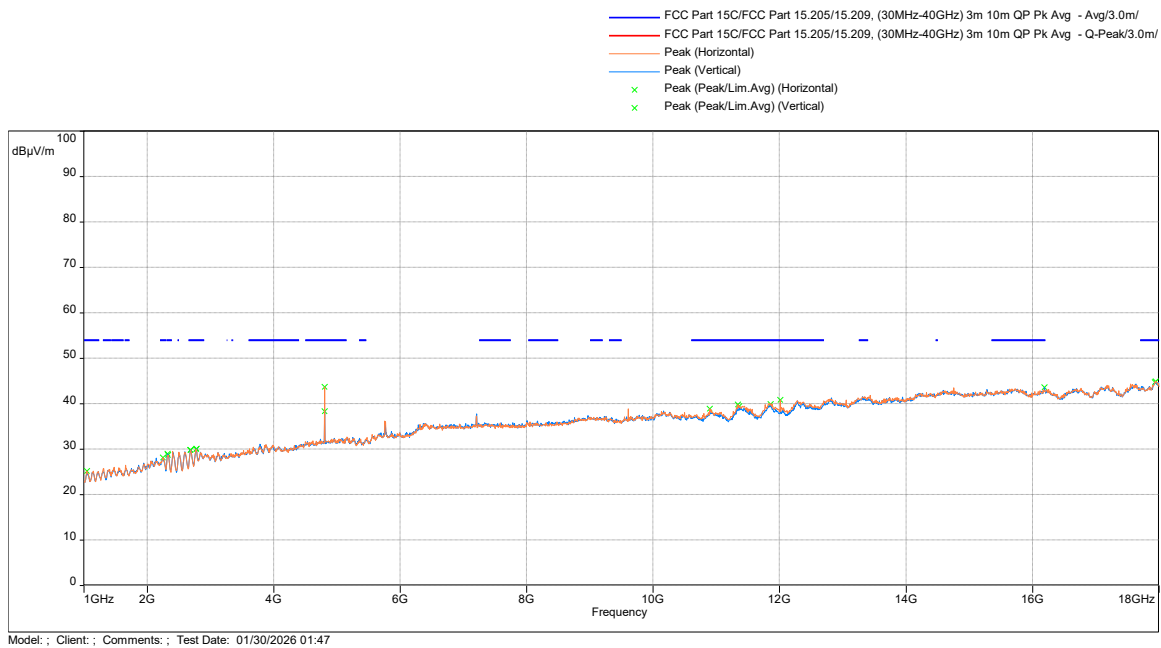

Frequency (MHz)	Avg FS@3m (dBμV/m)	Avg Limit@3m (dB(uV/m))	Margin (dB)	Height (m)	Azimuth (deg)	Polarity	Correction (dB)
4804.033	43.73	54	-10.27	1.75	5.59	Horizontal	1.61
4804.033	38.33	54	-15.67	1.5	197.75	Vertical	1.61


18000 - 26000 MHz, Peak Scan vs Average Limit

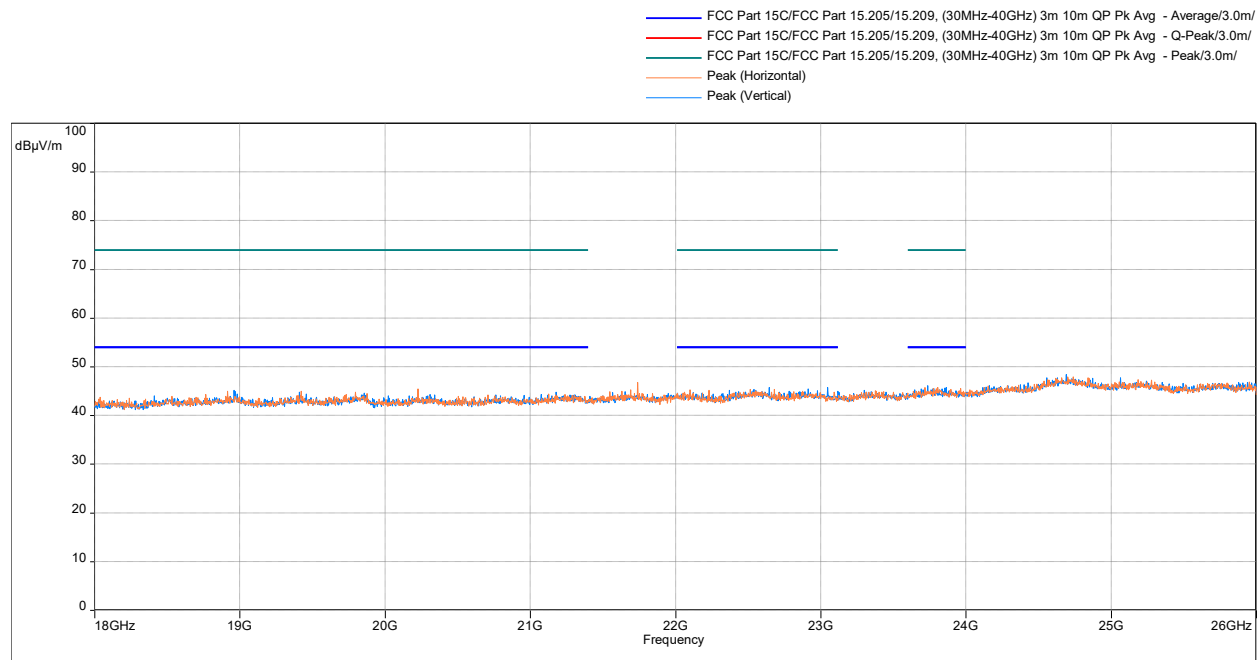


Results

Complies

Transmitter Radiated Spurious Emissions Mid Channel, Tx at 2442 MHz
30 MHz to 1000 MHz

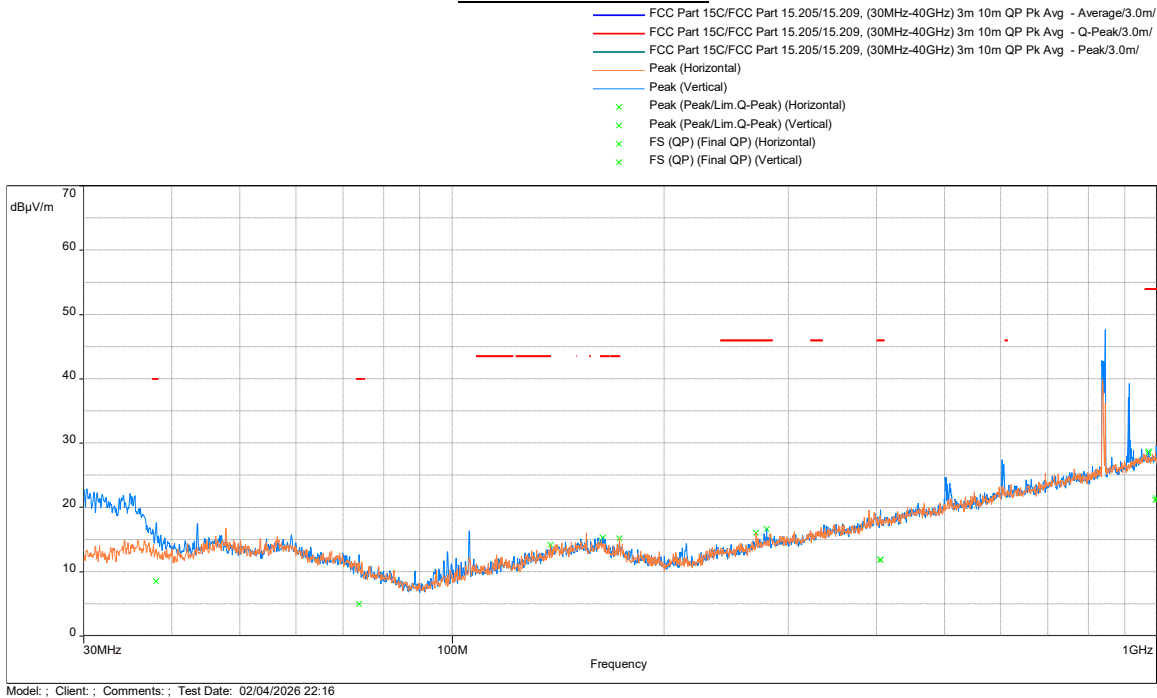


Transmitter Radiated Spurious Emissions Mid Channel, Tx at 2442 MHz
1000 - 18000 MHz, Peak Scan vs Peak Limit

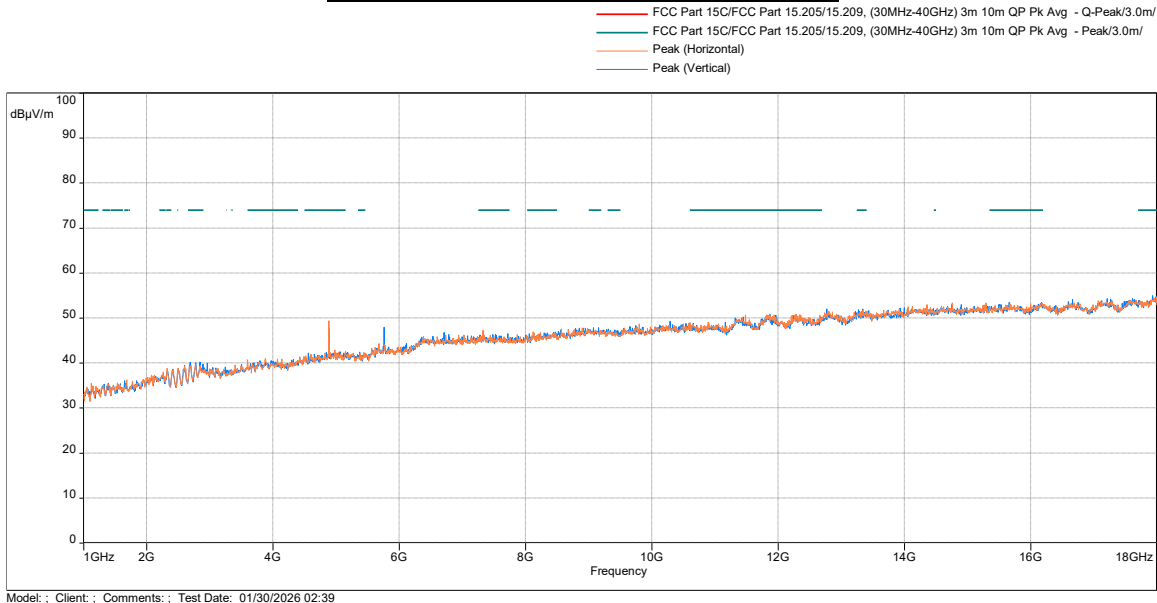

Frequency (MHz)	Peak FS@3m (dBμV/m)	Peak Limit@3m (dBμV/m)	Margin (dB)	Height (m)	Azimuth (deg)	Polarity	Correction (dB)
4883.933	49.34	74	-24.66	1.75	345.04	Horizontal	1.76
4883.367	47.64	74	-26.36	1.5	217.76	Vertical	1.76


1000 - 18000 MHz, Average Scan vs Average Limit

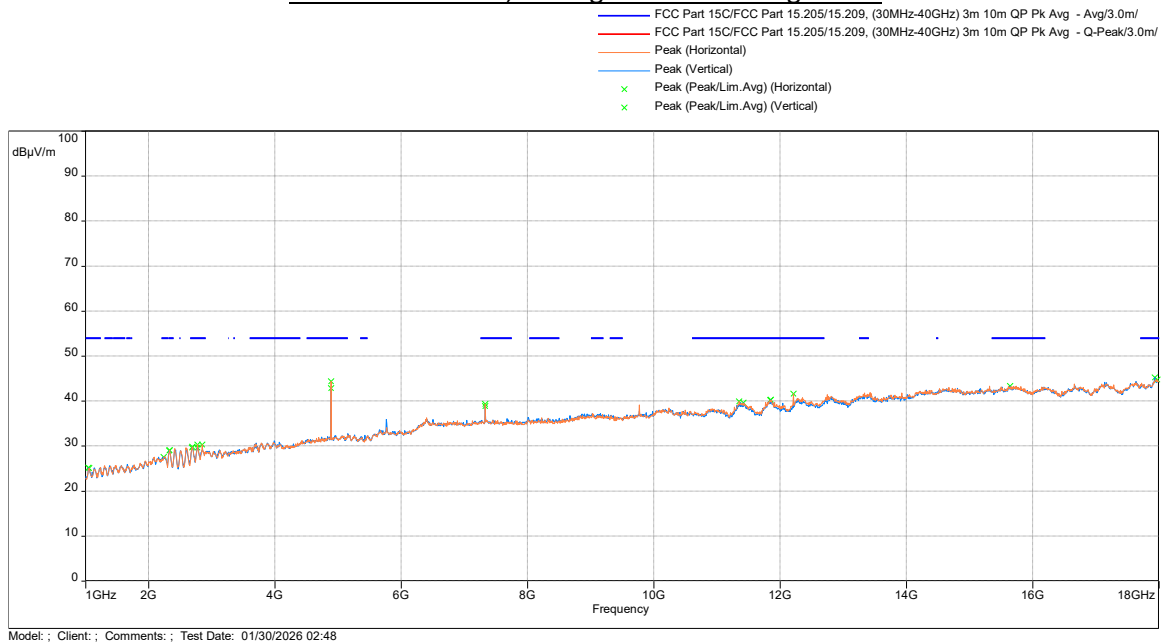

Frequency (MHz)	Avg FS@3m (dBμV/m)	Avg Limit@3m (dBμV/m)	Margin (dB)	Azimuth (deg)	Height (m)	Polarity	Correction (dB)
4883.933	44.41	54	-9.59	1.75	341.6	Horizontal	1.76
4883.933	42.88	54	-11.12	1.25	237.85	Vertical	1.76

Note: Correction = AF + CF – Preampl

18000 - 26000 MHz, Peak Scan vs Average Limit.

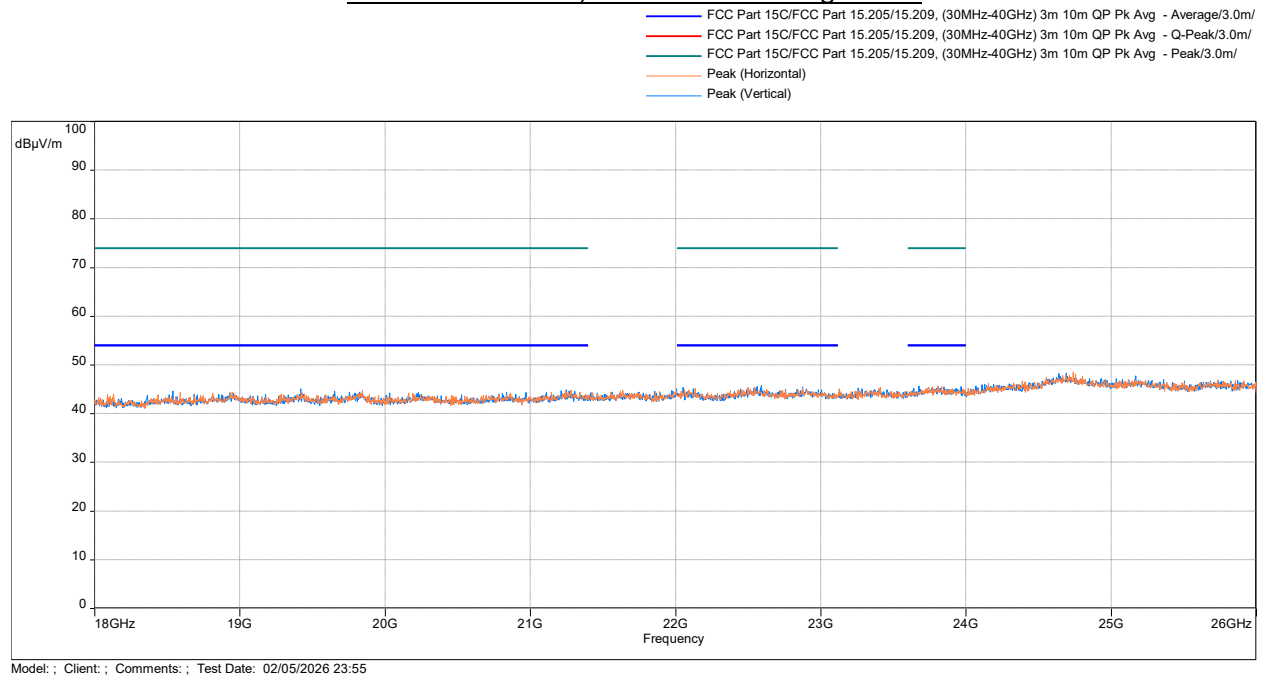


Results

Complies


Transmitter Radiated Spurious Emissions High Channel, Tx at 2480MHz:

30 MHz to 1000 MHz

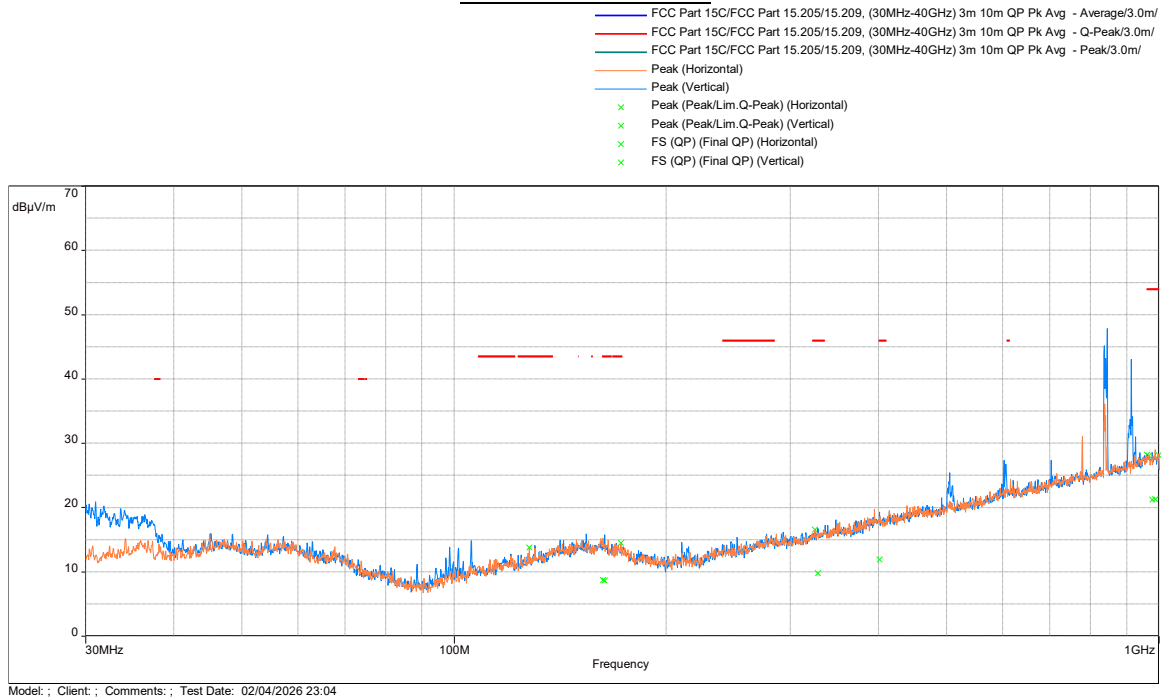


Transmitter Radiated Spurious Emissions High Channel, Tx at 2480MHz:

1000 - 18000 MHz, Peak Scan vs Peak Limit

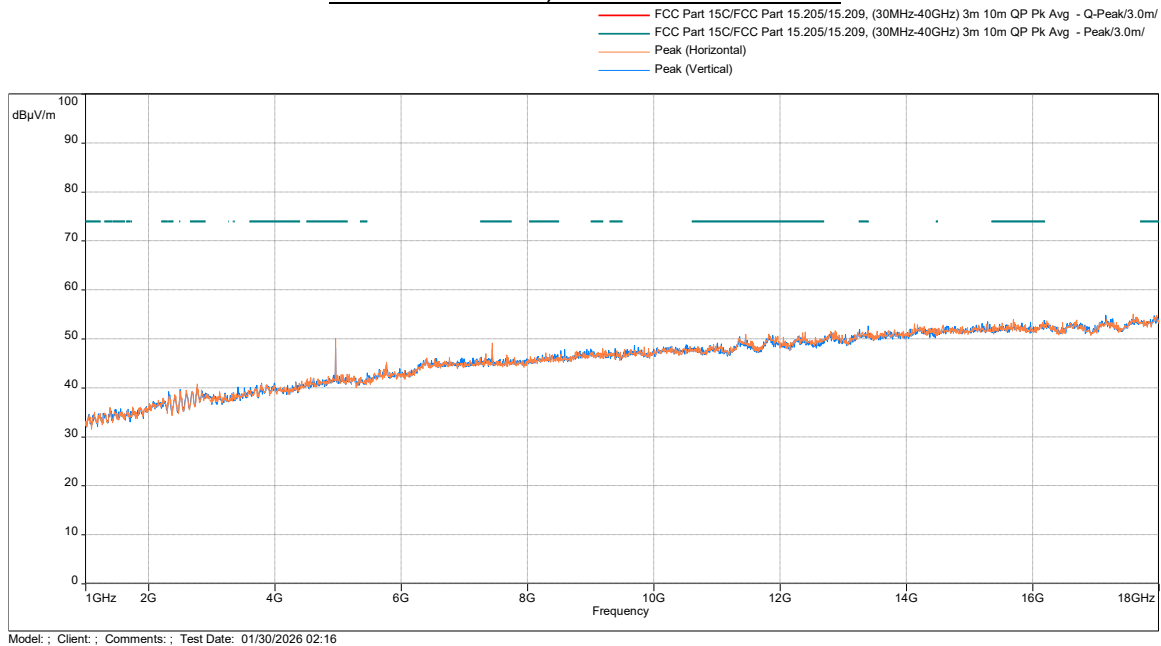

Frequency (MHz)	Peak FS@3m (dBμV/m)	Peak Limit@3m (dBμV/m)	Margin (dB)	Height (m)	Azimuth (deg)	Polarity	Correction (dB)
4959.867	50.08	74	-23.92	1.75	347.49	Horizontal	1.84
4959.3	48.1	74	-25.9	1.25	211.43	Vertical	1.84


1000 - 18000 MHz, Average Scan vs Average Limit

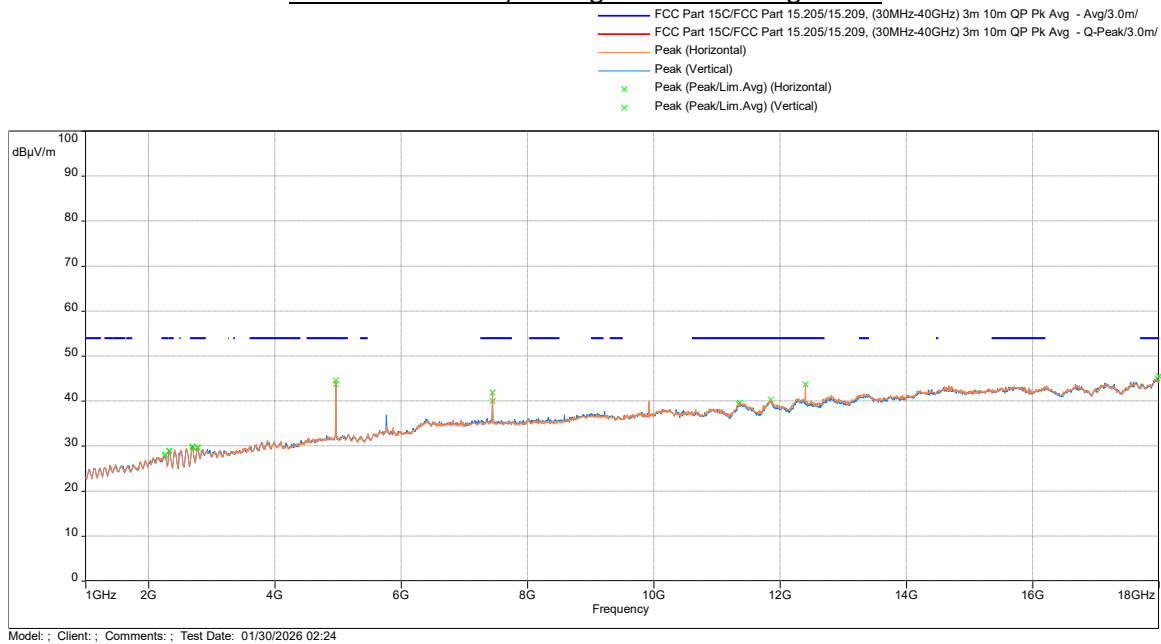

Frequency (MHz)	Avg FS@3m (dBμV/m)	Avg Limit@3m (dBμV/m)	Margin (dB)	Height (m)	Azimuth (deg)	Polarity	Correction (dB)
4959.867	44.61	54	-9.39	1.75	7.77	Horizontal	1.84
4959.867	43.77	54	-10.23	1.25	205.81	Vertical	1.84

Note: Correction = AF + CF - Preamp

18000 - 26000 MHz, Peak Scan vs Average Limit.



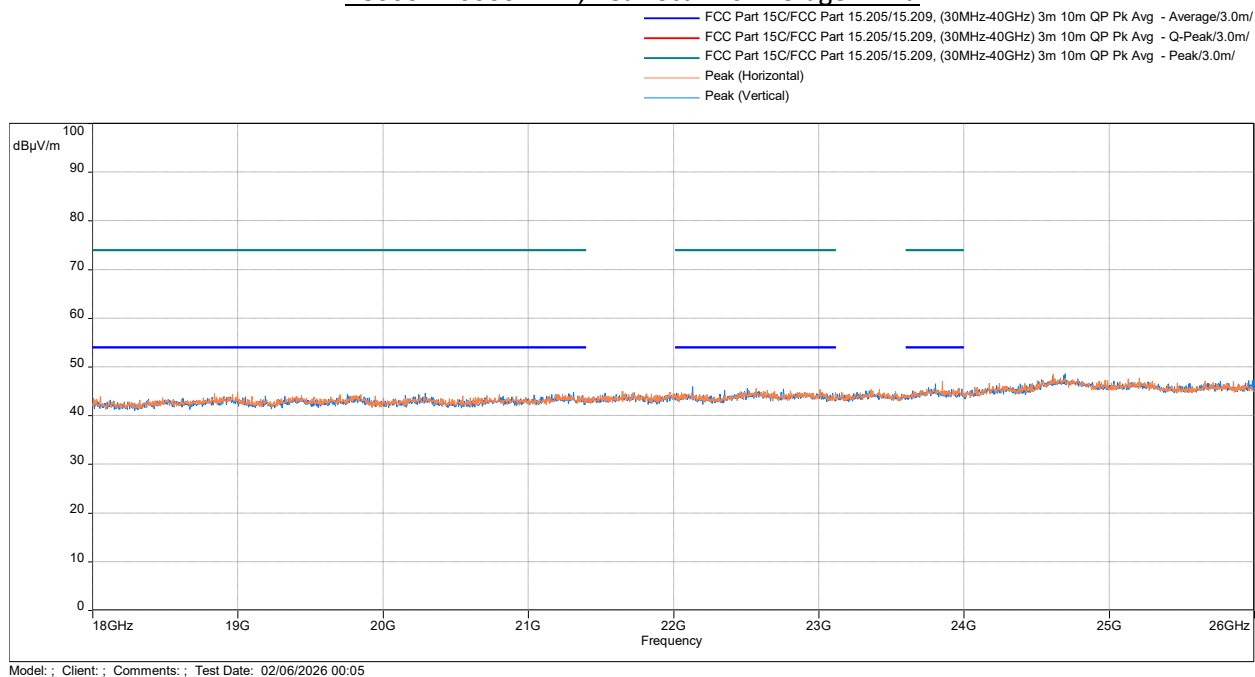


Results






Complies

4.5.5 Test Setup Photographs


The following photographs show the testing configurations used.

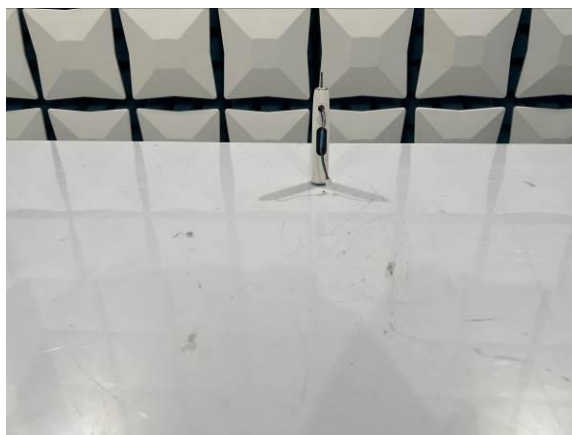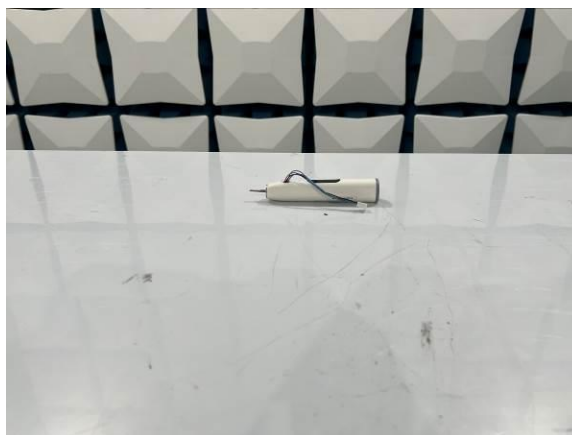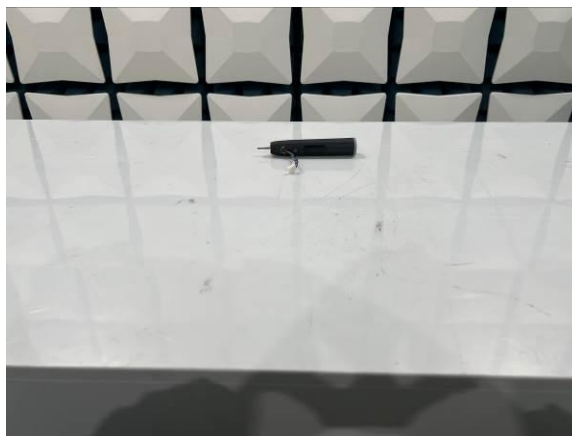


4.5.5 Test Setup Configuration (Continued)

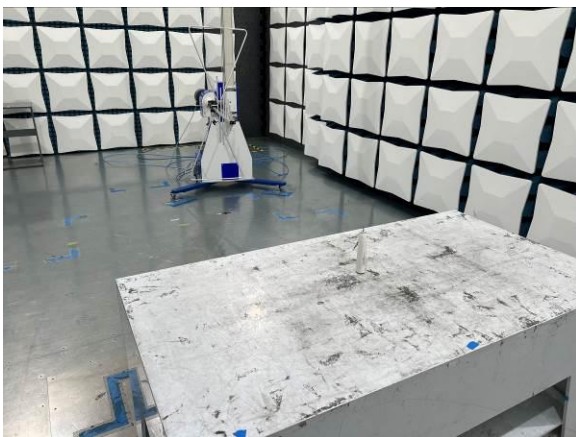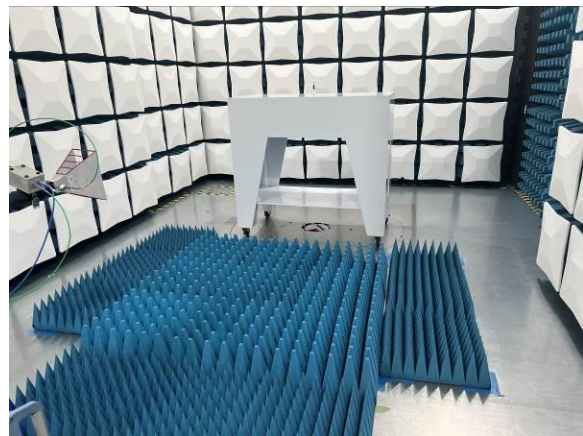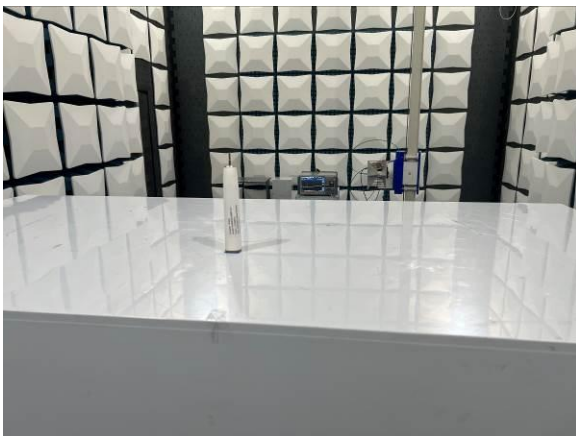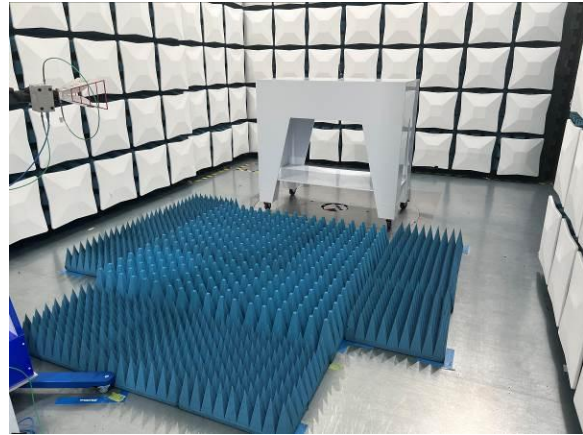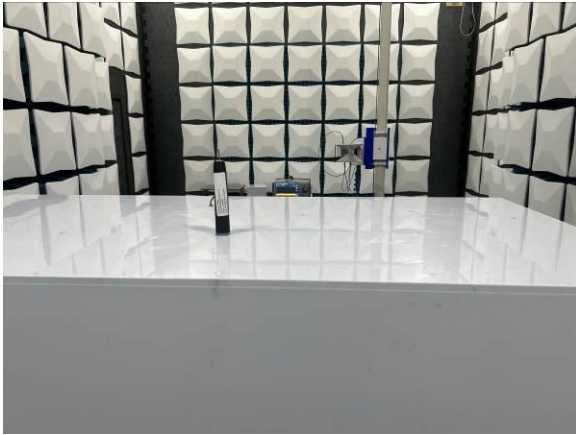

4.5.5 Test Setup Configuration (Continued)

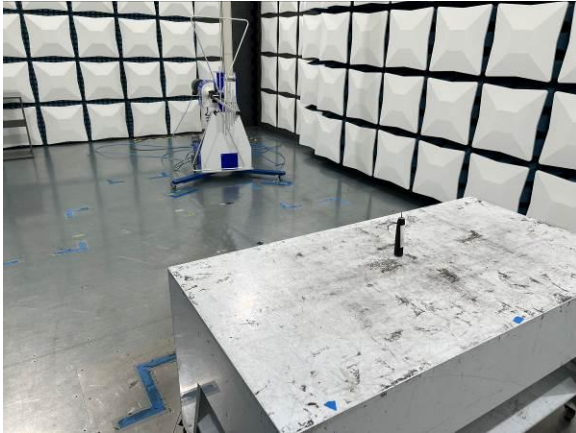

4.5.5 Test Setup Configuration (Continued)

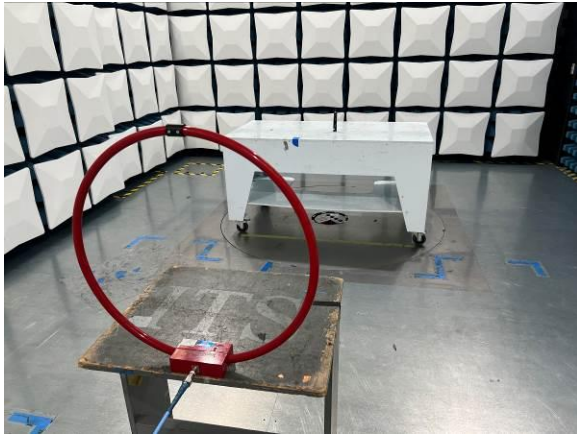

4.6 AC Line Conducted Emission FCC: 15.207; RSS-GEN

4.6.1 Requirement

Frequency Band MHz	FCC Part 15.207 Limits	
	Quasi-Peak	Average
0.15-0.50	66 to 56 *	56 to 46 *
0.50-5.00	56	46
5.00-30.00	60	50

*Note: *Decreases linearly with the logarithm of the frequency
At the transition frequency the lower limit applies.*

4.6.2 Procedure

Measurements are carried out using quasi-peak and average detector receivers in accordance with CISPR 16. An AMN is required to provide a defined impedance at high frequencies across the power feed at the point of measurement of terminal voltage and also to provide isolation of the circuit under test from the ambient noise on the power lines. An AMN as defined in CISPR 16 shall be used.

The EUT is located so that the distance between the boundary of the EUT and the closest surface of the AMN is 0.8m.

Where a flexible mains cord is provided by the manufacturer, this shall be 1m long or if in excess of 1m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4m in length.

The EUT is arranged and connected with cables terminated in accordance with the product specification.

Conducted disturbance is measured between the phase lead and the reference ground, and between the neutral lead and the reference ground. Both measured values are reported.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. A vertical, metal reference plane is placed 0.4m from the EUT. The vertical metal reference-plane is at least 2m by 2m. The EUT shall be kept at least 0.8m from any other metal surface or other ground plane not being part of the EUT. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.

Floor standing EUT are placed on a horizontal metal ground plane and isolated from the ground plane by resting on an insulating material. The metal ground plane extends at least 0.5m beyond the boundaries of the EUT and has minimum dimensions of 2m by 2m.

Equipment setup for conducted disturbance tests followed the guidelines of ANSI C63.10: 2013.

4.6.3 Test Results

Not Applicable – EUT is battery powered

5.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list:

Asset #	Description	Manufacturer	Model	Cal Date	Cal Due
00913	EMI Test Receiver 40GHz	Rohde & Schwarz	FSU26	06/18/2025	06/18/2026
02097	Trilog Antenna	Schwarzbeck	VULB 9168	09/17/2026	09/17/2026
00415	9kHz-1GHz Pre-amplifier	Sonoma Instrument	310N	05/16/2025	05/16/2026
01573	9kHz-30MHz Loop Antenna (Passive)	ETS Lindgren	6512	12/12/2025	12/12/2026
02114	1-18GHz Horn Antenna	RF Spin	DRH18-E	10/09/2025	10/09/2026
02115	18-40GHz Horn Antenna	RF Spin	DRH0844	10/13/2025	10/13/2026
02113	1-18GHz Preamplifier	EMC Instruments	EMC118A45SE	10/14/2025	10/14/2026
02112	18-40GHz Premplifier	EMC Instruments	EMC184045SE	10/14/2025	10/14/2026
01659	EMI Test Receiver 1Hz-44GHz	Rohde & Schwarz	ESW44	10/24/2025	10/24/2026
02089	Signal Analyzer 43GHz	Rohde & Schwarz	FSW43	09/15/2025	09/15/2026
02160	3 Meter Chamber	APAmericas Inc.	3 meter Chamber	#	#

Calibration not required.

Software used for emission compliance testing utilized the following:

Name	Manufacturer	Version
BAT-EMC	Nexio	2024.0.19.1
UCPI	Philips Oral Healthcare LLC	1.4.0.0

6.0 Document History

Revision/ Job Number	Writer Initials	Reviewers Initials	Date	Change
0 / G106398251	AM	AC	February 25, 2026	Original document
1 / G106398251	AM	AC	April 21, 2026	Added ISED Designation Number Added list of HVINs Updated Antenna Gain

END OF TEST REPORT