



FCC RF Test Report

APPLICANT : Nokia Shanghai Bell Co., Ltd.
EQUIPMENT : Nokia FastMile 5G Receiver
BRAND NAME : Nokia
MODEL NAME : 5G16-B
FCC ID : 2ADZR5G16B
STANDARD : 47 CFR Part 2, 96
CLASSIFICATION : Citizens Band End User Devices (CBE)
EQUIPMENT TYPE : End User Equipment
TEST DATE(S) : Jun. 18, 2024 ~ Jul. 19, 2024

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



Table of Contents

History of this test report.....	4
Summary of Test Result.....	5
1 General Description	6
1.1 Applicant.....	6
1.2 Manufacturer	6
1.3 Feature of Equipment Under Test.....	6
1.4 Maximum EIRP and Emission Designator	7
1.5 Testing Site.....	7
1.6 Test Software	8
1.7 Applied Standards	8
2 Test Configuration of Equipment Under Test	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration	10
2.4 Measurement Results Explanation Example	10
2.5 Frequency List of Low/Middle/High Channels.....	11
3 Conducted Test Items	13
3.1 Measuring Instruments.....	13
3.2 Test Setup	13
3.3 Conducted Output Power	14
3.4 EIRP	16
3.5 Occupied Bandwidth	17
3.6 Conducted Band Edge	18
3.7 Conducted Spurious Emission	19
3.8 Frequency Stability	20
4 Radiated Test Items	21
4.1 Measuring Instruments.....	21
4.2 Test Setup	21
4.3 Test Result of Radiated Test.....	22
4.4 Radiated Spurious Emission	23
5 List of Measuring Equipment.....	24
6 Uncertainty of Evaluation	25
Appendix A. Test Results of Conducted Test	A1
A1. Conducted Output Power(Average power) and EIRP	A1
A2. LTE Band 48	A3
A2.1 26dB Bandwidth	A3
A2.2 Occupied Bandwidth	A5
A2.3 ACLR.....	A7
A2.4 Conducted Band Edge	A43
A2.5 Conducted Spurious Emission.....	A79
A2.6 Frequency Stability	A83
A3. LTE Band 48C.....	A84
A3.1 26dB Bandwidth	A84
A3.2 Occupied Bandwidth	A89
A3.3 ACLR.....	A94



A3.4 Conducted Band Edge	A157
A3.5 Conducted Spurious Emission	A199

Appendix B. Test Results of Radiated Test	B1
--	-----------

Appendix C. Setup Photographs	C1
--	-----------



History of this test report

Report No.	Version	Description	Issued Date
FG341901-02C	01	Initial issue of report	Jul. 26, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Limit	Result (PASS/FAIL)	Remark
3.3	§2.1046	Conducted Output Power	-	Reporting only	-
-	§96.41	Peak-to-Average Ratio	<-13dB	Not Applicable	Not applicable for End User Devices
3.4	§96.41	Maximum E.I.R.P	<23dBm/10MHz	Pass	-
		Maximum Power Spectral Density	-	Not Applicable	Not applicable for End User Devices
3.5	§2.1049 §96.41	Occupied Bandwidth	-	Reporting only	-
3.6	§2.1051 §96.41	Conducted Band Edge Measurement Adjacent Channel Leakage Ratio	Part 96.41(e)(1)(ii) & Part 96.41 (e)(2)	Pass	-
3.7	§2.1051 §96.41	Conducted Spurious Emission	<-40dBm/MHz	Pass	-
3.8	§2.1055	Frequency Stability for Temperature & Voltage	Within Authorized Band	Pass	-
4.4	§2.1051 §96.41	Radiated Spurious Emission	<-40dBm/MHz	Pass	Under limit 9.52 dB at 14464.00 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Nokia Shanghai Bell Co., Ltd.

388#, Ningqiao Road, China (Shanghai) Pilot Free Trade Zone, Shanghai 201206, China

1.2 Manufacturer

Nokia Solutions and Networks Oy

Karakaari 7, 02610 Espoo, Finland

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Nokia FastMile 5G Receiver
Brand Name	Nokia
Model Name	5G16-B
FCC ID	2ADZR5G16B
Tx Frequency	LTE Band 48: 3550 MHz – 3700 MHz
Rx Frequency	LTE Band 48: 3550 MHz – 3700 MHz
Bandwidth	5MHz / 10MHz / 15MHz / 20MHz
Maximum Conducted Power	<Ant. 5> LTE Band 48: 13.14 dBm LTE Band 48C: 3.58 dBm
Antenna Gain	<Ant. 5> LTE Band 48: 8.8 dBi
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM
IMEI Code	Conducted: 358937920000081 Radiation: 358937920000248
HW Version	3TG02508Axxx(x:A~Z)
SW Version	5GReceiver-HG-2_D240200BieT0001E0643
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two Samples under test, Sample 1 is 1st antenna, Sample 2 is 2nd antenna and they are with the same Gain but different manufacturers. According to the difference, we choose sample 1 to full test and the sample 2 is verified the worse case for Radiation Spurious Emission.

Specification of Accessory				
AC Adapter	Brand Name	NOKIA	Model Name	G1418B-540-028-2.5G

1.4 Maximum EIRP and Emission Designator

LTE Band 48		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP (W)	Emission Designator (99%OBW)	Maximum EIRP (W)	Emission Designator (99%OBW)
5	3552.5 – 3697.5	0.1549	4M81G7D	0.1535	4M88W7D
10	3555.0 – 3695.0	0.1545	9M73G7D	0.1560	9M63W7D
15	3557.5 – 3692.5	0.1538	14M6G7D	0.1535	14M2W7D
20	3560.0 – 3690.0	0.1563	18M7G7D	0.1538	18M8W7D
LTE Band 48C_CA		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency (MHz)	Maximum EIRP (W)	Emission Designator (99%OBW)	Maximum EIRP (W)	Emission Designator (99%OBW)
5MHz+20MHz		0.0171	23M2G7D	0.0169	23M2W7D
10MHz+20MHz		0.0167	28M2G7D	0.0167	27M9W7D
15MHz+20MHz		0.0167	32M9G7D	0.0168	32M6W7D
20MHz+5MHz		0.0169	23M2G7D	0.0168	23M2W7D
20MHz+10MHz		0.0170	28M2G7D	0.0168	28M2W7D
20MHz+15MHz		0.0169	32M6G7D	0.0167	32M7W7D
20MHz+20MHz		0.0173	37M7G7D	0.0170	37M7W7D

Note: All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.

1.5 Testing Site

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH02-SZ	CN1256	421272

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	48	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Adjacent Channel Leakage Ratio	48	-	-	v	v	v	v	v	v	v		v		v	v	v	v
26dB and 99% Bandwidth	48			v	v	v	v	v	v					v		v	
Conducted Band Edge	48	-	-	v	v	v	v	v	v	v		v		v	v	v	v
E.I.R.P	48	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Conducted Spurious Emission	48	-	-	v	v	v	v	v				v			v	v	v
Frequency Stability	48				v			v						v		v	
Radiated Spurious Emission	48	Worst Case														v	
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. For QAM modulation mode, the whole testing has assessed 16QAM&64QAM mode by referring to the higher conducted power.																

Test Items	Band	Bandwidth (MHz)										Modulation				RB #			Test Channel			
		20+20	20+15	15+20	20+10	10+20	20+5	5+20	15+15	15+10	10+15	QPSK	16 QAM	64 QAM	256 QAM	1	Half	Full	L	M	H	
Max. Output Power	48C_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v	v			v	v	v	
Adjacent Channel Leakage Ratio	48C_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v	v		v	v	v	v	
26dB and 99% Bandwidth	48C_CA	v	v	v	v	v	v	v				v	v					v		v		
Conducted Band Edge	48C_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v	v		v	v	v	v	
E.I.R.P.	48C_CA	v	v	v	v	v	v	v	-	-	-	v	v	v	v	v			v	v	v	
Conducted Spurious Emission	48C_CA	v	v	v	v	v	v	v	-	-	-	v				v			v	v	v	
Radiated Spurious Emission	48C_CA	Worst Case																			v	
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. For QAM modulation mode, the whole testing has assessed 16QAM&64QAM mode by referring to the higher conducted power.																					

2.2 Connection Diagram of Test System

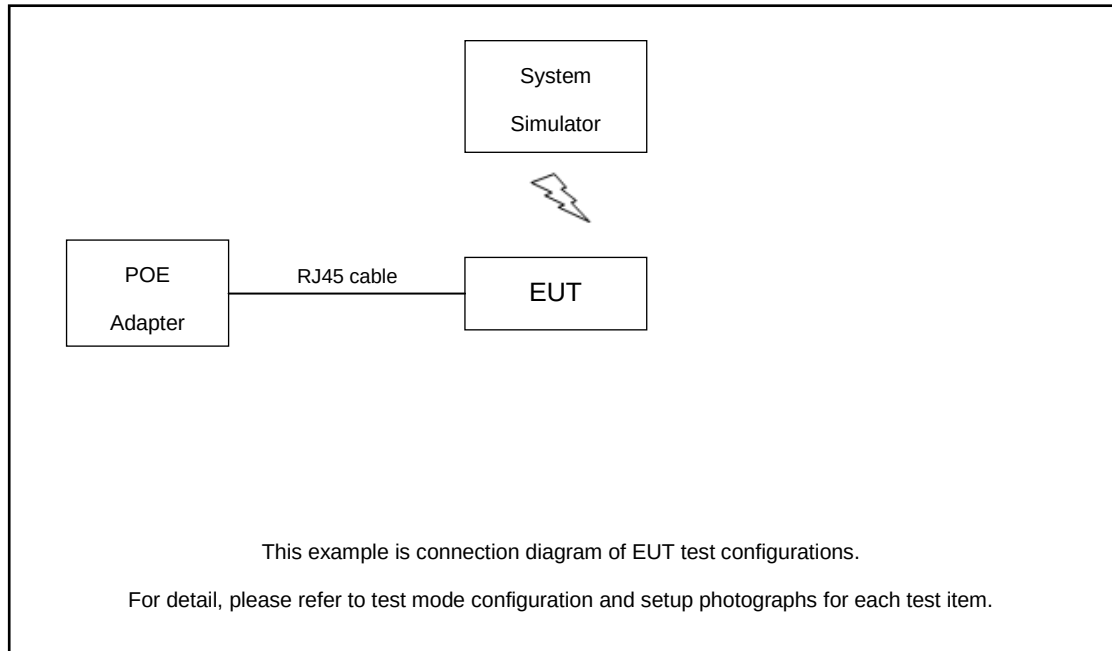

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 9.5dB and 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 9.5 + 10 = 19.5 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	55340	55990	56640
	Frequency	3560.0	3625.0	3690.0
15	Channel	55315	55990	56665
	Frequency	3557.5	3625.0	3692.5
10	Channel	55290	55990	56690
	Frequency	3555.0	3625.0	3695.0
5	Channel	55265	55990	56715
	Frequency	3552.5	3625.0	3697.5

LTE Band 48C_CA Channel and Frequency List					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
5 + 20	PCC	Channel	55273	55898	56523
		Frequency	3553.3	3615.8	3678.3
	SCC	Channel	55390	56015	56640
		Frequency	3565	3627.5	3690
20 + 5	PCC	Channel	55340	55965	56590
		Frequency	3560	3622.5	3685
	SCC	Channel	55457	56082	56707
		Frequency	3571.7	3634.2	3696.7
10 + 20	PCC	Channel	55295	55896	56496
		Frequency	3555.5	3615.6	3675.6
	SCC	Channel	55439	56040	56640
		Frequency	3569.9	3630	3690
20 + 10	PCC	Channel	55340	55941	56541
		Frequency	3560	3620.1	3680.1
	SCC	Channel	55484	56085	56685
		Frequency	3574.4	3634.5	3694.5
15 + 20	PCC	Channel	55318	55893	56469
		Frequency	3557.8	3615.3	3672.9
	SCC	Channel	55489	56064	56640
		Frequency	3574.9	3632.4	3690
20 + 15	PCC	Channel	55340	55916	56491
		Frequency	3560	3617.6	3675.1
	SCC	Channel	55511	56087	56662
		Frequency	3577.1	3634.7	3692.2
20 + 20	PCC	Channel	55340	55891	56442
		Frequency	3560	3615.1	3670.2
	SCC	Channel	55538	56089	56640
		Frequency	3579.8	3634.9	3690


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power / ACLR

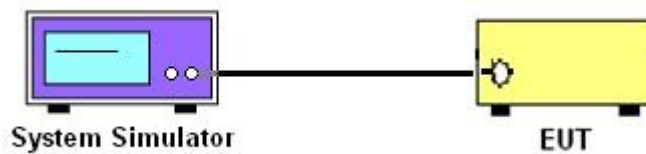

3.2.2 26dB & 99% Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

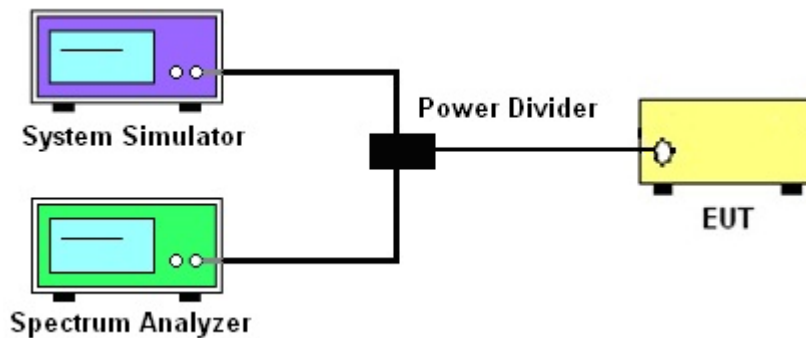

3.2.3 Frequency Stability

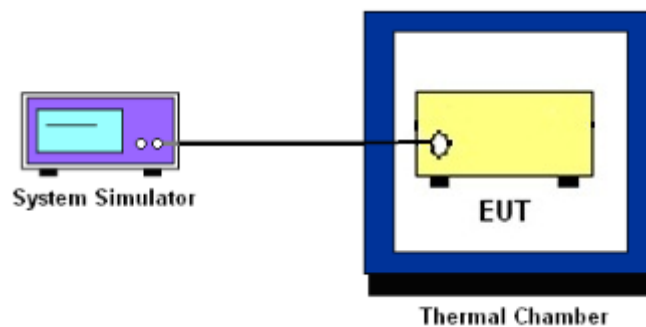

3.2.4 Test Result of Conducted Test

Please refer to Appendix A.



3.3 Conducted Output Power

3.3.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.3.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.


3.3.3 Test Procedures for LTE ULCA

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter PCC & SCC output ports were connected to the system simulator.
3. Set EUT at maximum power, set the PCC/SCC CA band, channel, bandwidth and RB config.


PCC config_(Channel Bandwidth / Channel / Band)

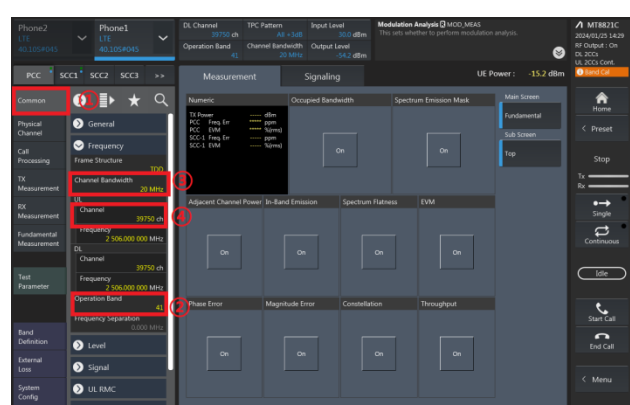


SCC config_(Channel Bandwidth / Channel / Band)

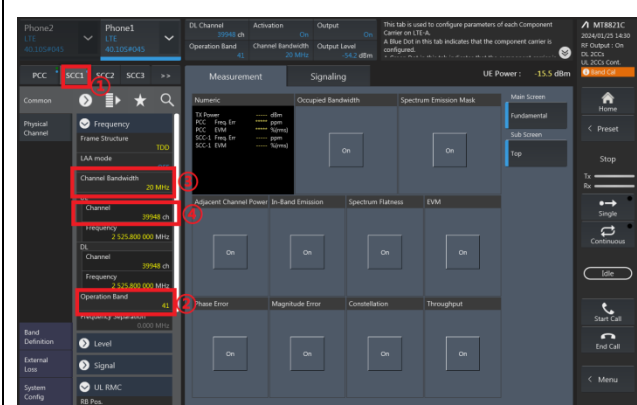

PCC config_(Number of RB / Starting RB)

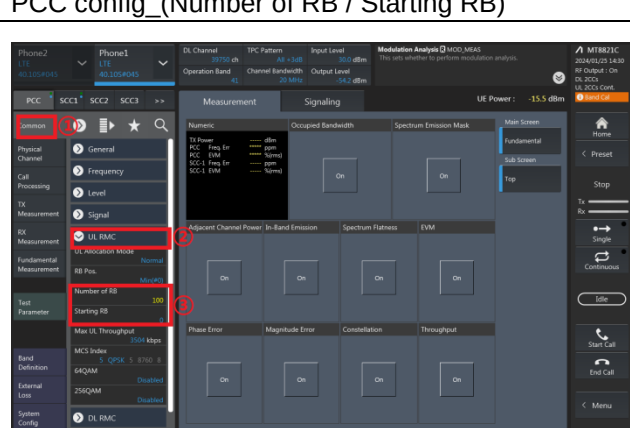


SCC config_(Number of RB / Starting RB)

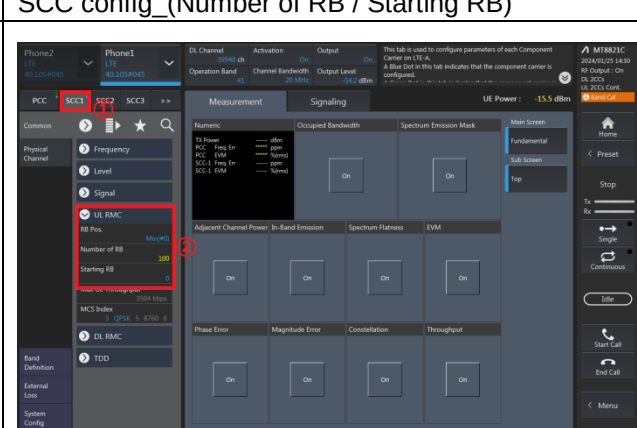


4. Select lowest, middle, and highest channels for each ULCA band and different modulation.
5. Check the ULCA spectrum and record the total power from the system simulator.

Check the ULCA spectrum (eg. 20M+20M)

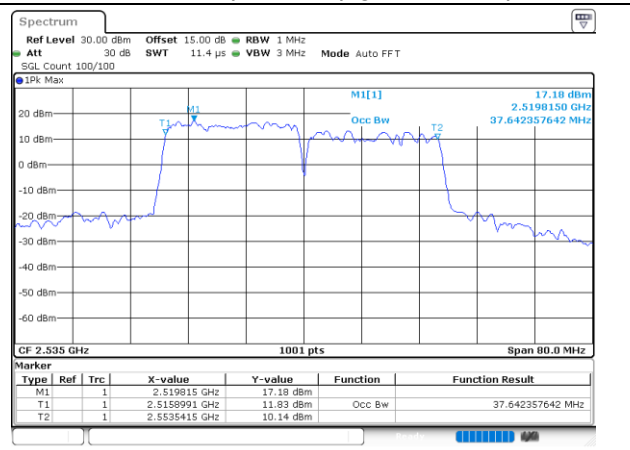

Read the Total UL CA output power (PCC+SCC)

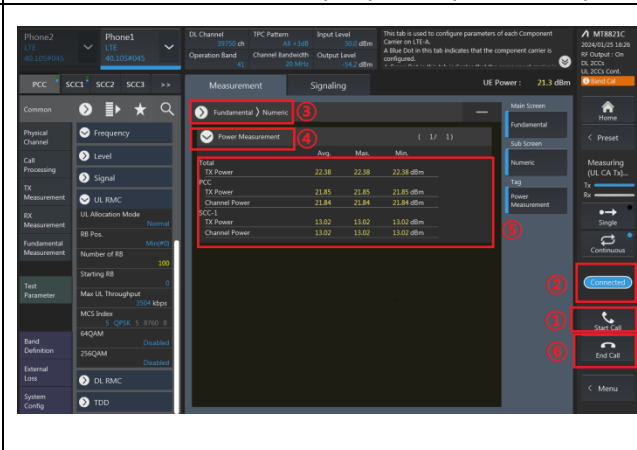

3.4 EIRP

3.4.1 Description of the EIRP Measurement

EIRP and PSD limits for CBRS equipment as below table:

Device		Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
Applied	End User Device	23	N/A
-	Category A CBSD	30	20
-	Category B CBSD	47	37

Remark: The worst case EIRP shown in this section is found with LTE operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz)

3.4.2 Test Procedures for EIRP

1. Establishing a communications link with the call box (Base station) to measure the Maximum conducted power, the parameters were set to force the EUT transmitting at maximum output power level. Use the average power measurement function to measure total channel power of each channel bandwidth (per ANSI C63.26-2015 Section 5.2.1)
2. Determining ERP and/or EIRP from conducted RF output power measurements (Per ANSI C63.26-2015 Section 5.2.5.5)

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.6 Conducted Band Edge

3.6.1 Description of Conducted Band Edge Measurement

Part 96.41 (e) (1) (ii)

For End User Devices the emission limits outside the fundamental are as follows:

Within 0 MHz to B MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than B MHz above and below the assigned channel ≤ -25 dBm/MHz

where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device.

Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

Part 96.41 (e) (2)

For CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
5. Offset has included the duty factor for LTE Band 48. Duty factor $=10 \log (1/x)$, where x is the measured duty cycle.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.

3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

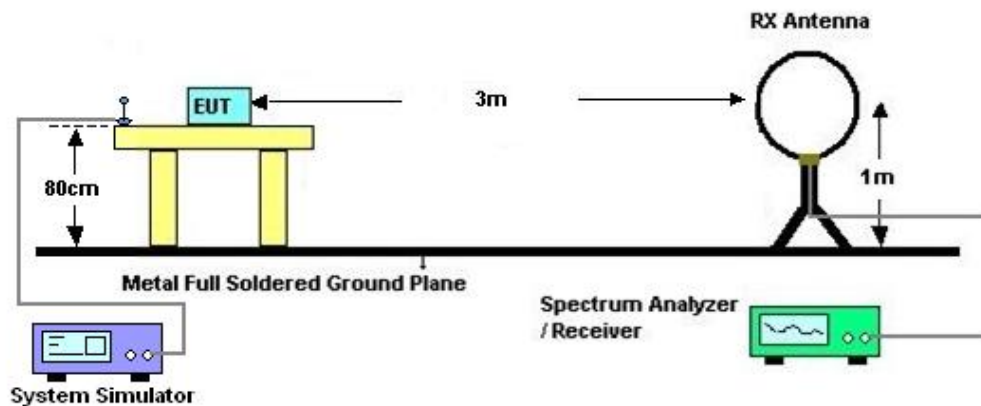

4.2.2 For radiated test from 30MHz to 1GHz

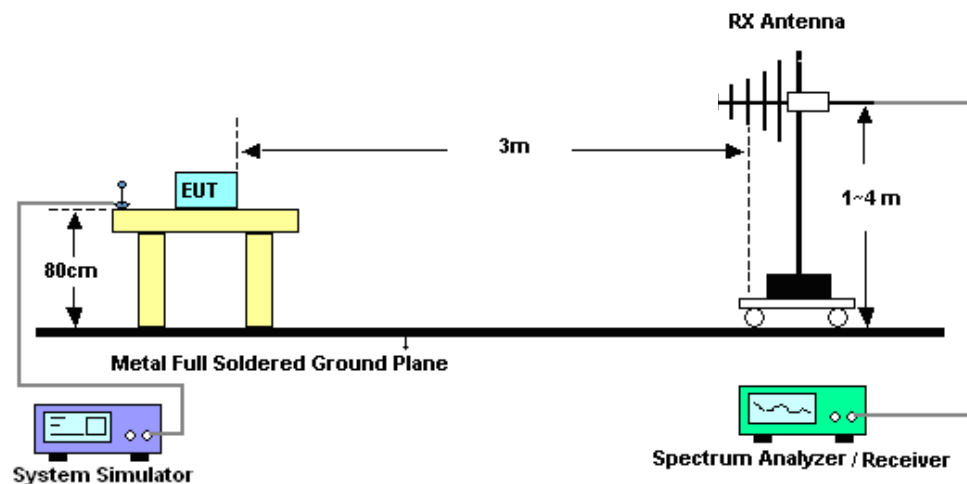

4.2.3 For radiated test above 1GHz

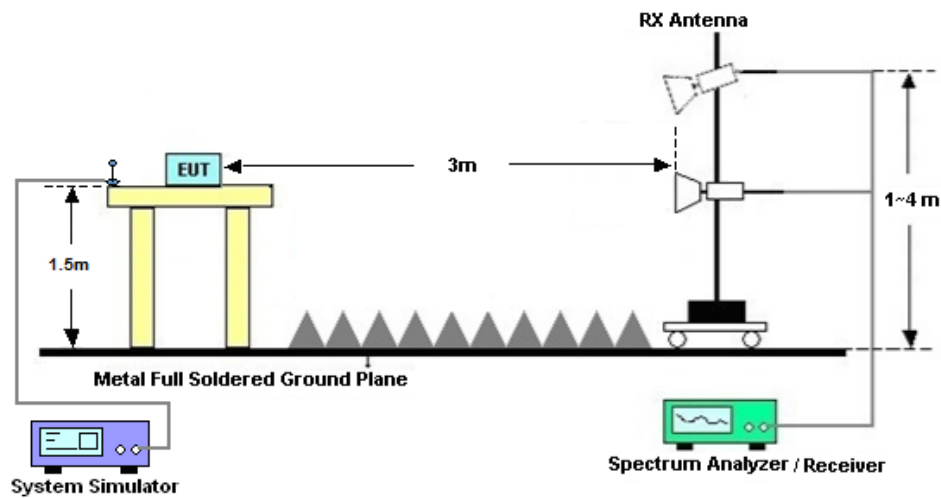

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26-2015.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is -40dBm/MHz



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Jun. 24, 2024~ Jul. 19, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Power Divider	SOLVANG TECHNOLOGY	STI08-0055	-	Max 40GHz	Mar. 20, 2024	Jun. 24, 2024~ Jul. 19, 2024	Mar. 19, 2025	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Jun. 18, 2024~ Jun. 27, 2024	Jul. 06, 2024	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Jun. 18, 2024~ Jun. 27, 2024	Jul. 27, 2024	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Jun. 18, 2024~ Jun. 27, 2024	Oct. 23, 2025	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 08, 2023	Jun. 18, 2024~ Jun. 27, 2024	Jul. 07, 2024	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	Jun. 18, 2024~ Jun. 27, 2024	Jul. 06, 2024	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 09, 2024	Jun. 18, 2024~ Jun. 27, 2024	Apr. 08, 2025	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 18, 2023	Jun. 18, 2024~ Jun. 27, 2024	Oct. 17, 2024	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 18, 2023	Jun. 18, 2024~ Jun. 27, 2024	Oct. 17, 2024	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003043	N/A	Oct. 18, 2023	Jun. 18, 2024~ Jun. 27, 2024	Oct. 17, 2024	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Jun. 18, 2024~ Jun. 27, 2024	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Jun. 18, 2024~ Jun. 27, 2024	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required

6 Uncertainty of Evaluation

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
ACLR	± 1.34 dB
Frequency Stability	± 1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.47 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.31 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.72 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Lorenzo Liu	Temperature :	23~25°C
		Relative Humidity :	41~42%

A1. Conducted Output Power(Average power) and EIRP

LTE Band 48:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)		
Channel				55340	55990	56640			
Frequency (MHz)				3560	3625	3690	L	M	H
20	QPSK	1	0	12.91	13.14	13.03	0.1483	0.1563	0.1524
20	QPSK	1	49	12.89	13.13	12.96	0.1476	0.1560	0.1500
20	QPSK	1	99	12.89	13.05	12.93	0.1476	0.1531	0.1489
20	QPSK	50	0	12.85	13.10	13.01	0.1462	0.1549	0.1517
20	QPSK	50	24	12.84	13.04	12.96	0.1459	0.1528	0.1500
20	QPSK	50	50	12.89	13.04	12.99	0.1476	0.1528	0.1510
20	QPSK	100	0	12.86	13.08	12.95	0.1466	0.1542	0.1496
20	16QAM	1	0	12.83	13.05	12.96	0.1455	0.1531	0.1500
20	64QAM	1	0	12.89	13.04	12.97	0.1476	0.1528	0.1503
20	256QAM	1	0	12.80	13.07	12.97	0.1445	0.1538	0.1503
Channel				55315	55990	56665	EIRP(W)		
Frequency (MHz)				3557.5	3625	3692.5	L	M	H
15	QPSK	1	0	12.84	13.07	12.96	0.1459	0.1538	0.1500
15	16QAM	1	0	12.87	13.06	12.93	0.1469	0.1535	0.1489
Channel				55290	55990	56690	EIRP(W)		
Frequency (MHz)				3555	3625	3695	L	M	H
10	QPSK	1	0	12.90	13.09	12.97	0.1479	0.1545	0.1503
10	16QAM	1	0	12.83	13.13	12.97	0.1455	0.1560	0.1503
Channel				55265	55990	56715	EIRP(W)		
Frequency (MHz)				3552.5	3625	3697.5	L	M	H
5	QPSK	1	0	12.86	13.10	12.94	0.1466	0.1549	0.1493
5	16QAM	1	0	12.90	13.06	12.96	0.1479	0.1535	0.1500



LTE Band 48C_CA:


Combination 20MHz+20MHz (100RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	3.53	0.0171
M	QPSK	1	Max	1	0	3.58	0.0173
H	QPSK	1	Max	1	0	3.47	0.0169
L	16QAM	1	Max	1	0	3.50	0.0170
M	16QAM	1	Max	1	0	3.48	0.0169
H	16QAM	1	Max	1	0	3.45	0.0168
L	64QAM	1	Max	1	0	3.42	0.0167
M	64QAM	1	Max	1	0	3.43	0.0167
H	64QAM	1	Max	1	0	3.34	0.0164
L	256QAM	1	Max	1	0	3.43	0.0167
M	256QAM	1	Max	1	0	3.45	0.0168
H	256QAM	1	Max	1	0	3.38	0.0165
Combination 20MHz+15MHz (100RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	3.49	0.0169
L	16QAM	1	Max	1	0	3.43	0.0167
Combination 15MHz+20MHz (100RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	3.44	0.0167
L	16QAM	1	Max	1	0	3.45	0.0168
Combination 20MHz+10MHz (100RB+50RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	3.50	0.0170
L	16QAM	1	Max	1	0	3.45	0.0168
Combination 10MHz+20MHz (50RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	3.43	0.0167
L	16QAM	1	Max	1	0	3.42	0.0167
Combination 20MHz+5MHz (100RB+25RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	3.47	0.0169
L	16QAM	1	Max	1	0	3.46	0.0168
Combination 5MHz+20MHz (25RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
M	QPSK	1	Max	1	0	3.52	0.0171
L	16QAM	1	Max	1	0	3.48	0.0169



A2. LTE Band 48

A2.1 26dB Bandwidth


Mode	LTE Band 48 : 26dB BW(MHz)							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	4.81	4.88	9.73	9.63	14.57	14.18	18.70	18.82

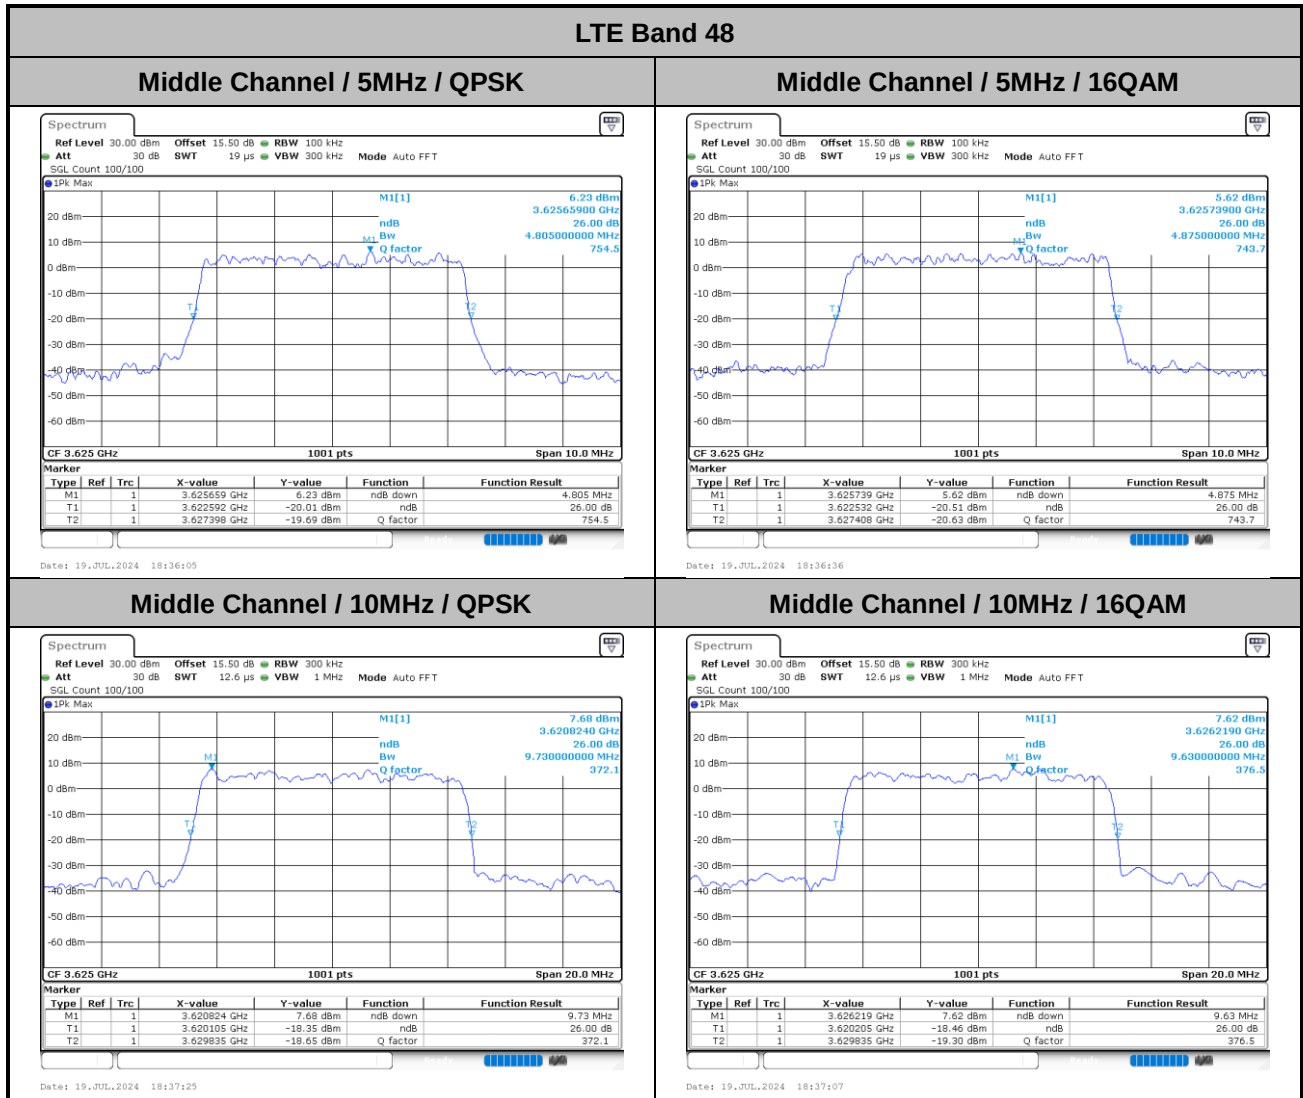




LTE Band 48


Middle Channel / 15MHz / QPSK

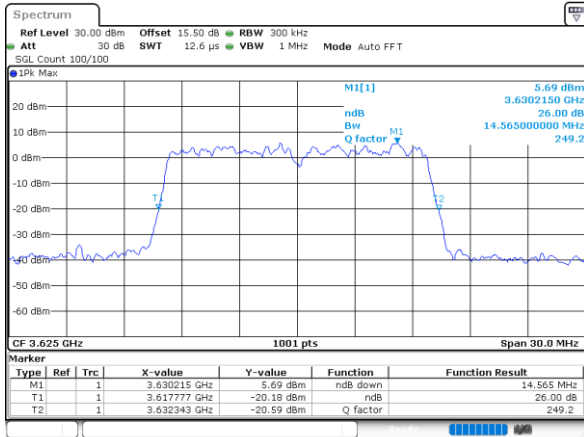


Middle Channel / 15MHz / 16QAM

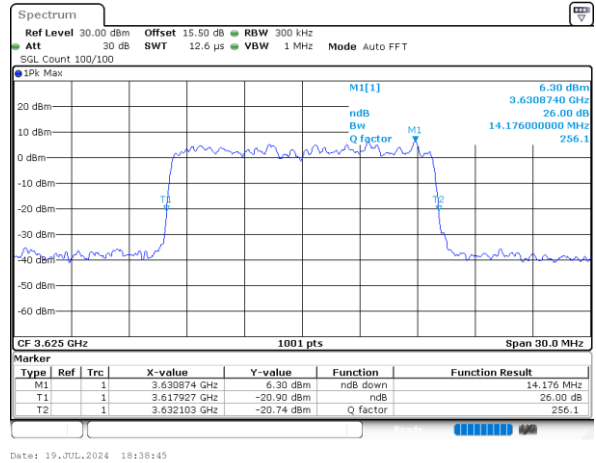

Middle Channel / 20MHz / QPSK

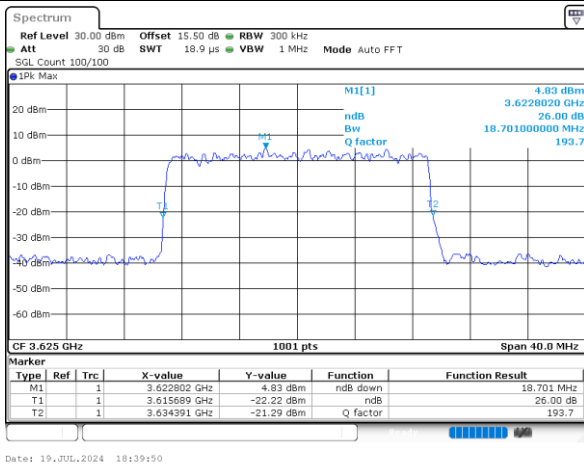


Middle Channel / 20MHz / 16QAM

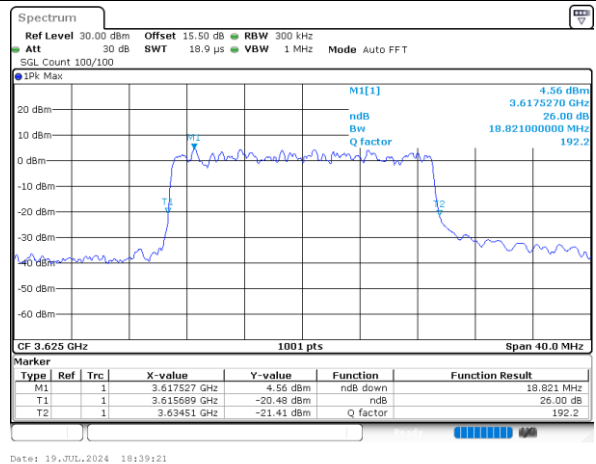



A2.2 Occupied Bandwidth


Mode	LTE Band 48 : 99%OBW(MHz)							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	4.48	4.50	9.05	9.07	13.43	13.43	17.94	17.86

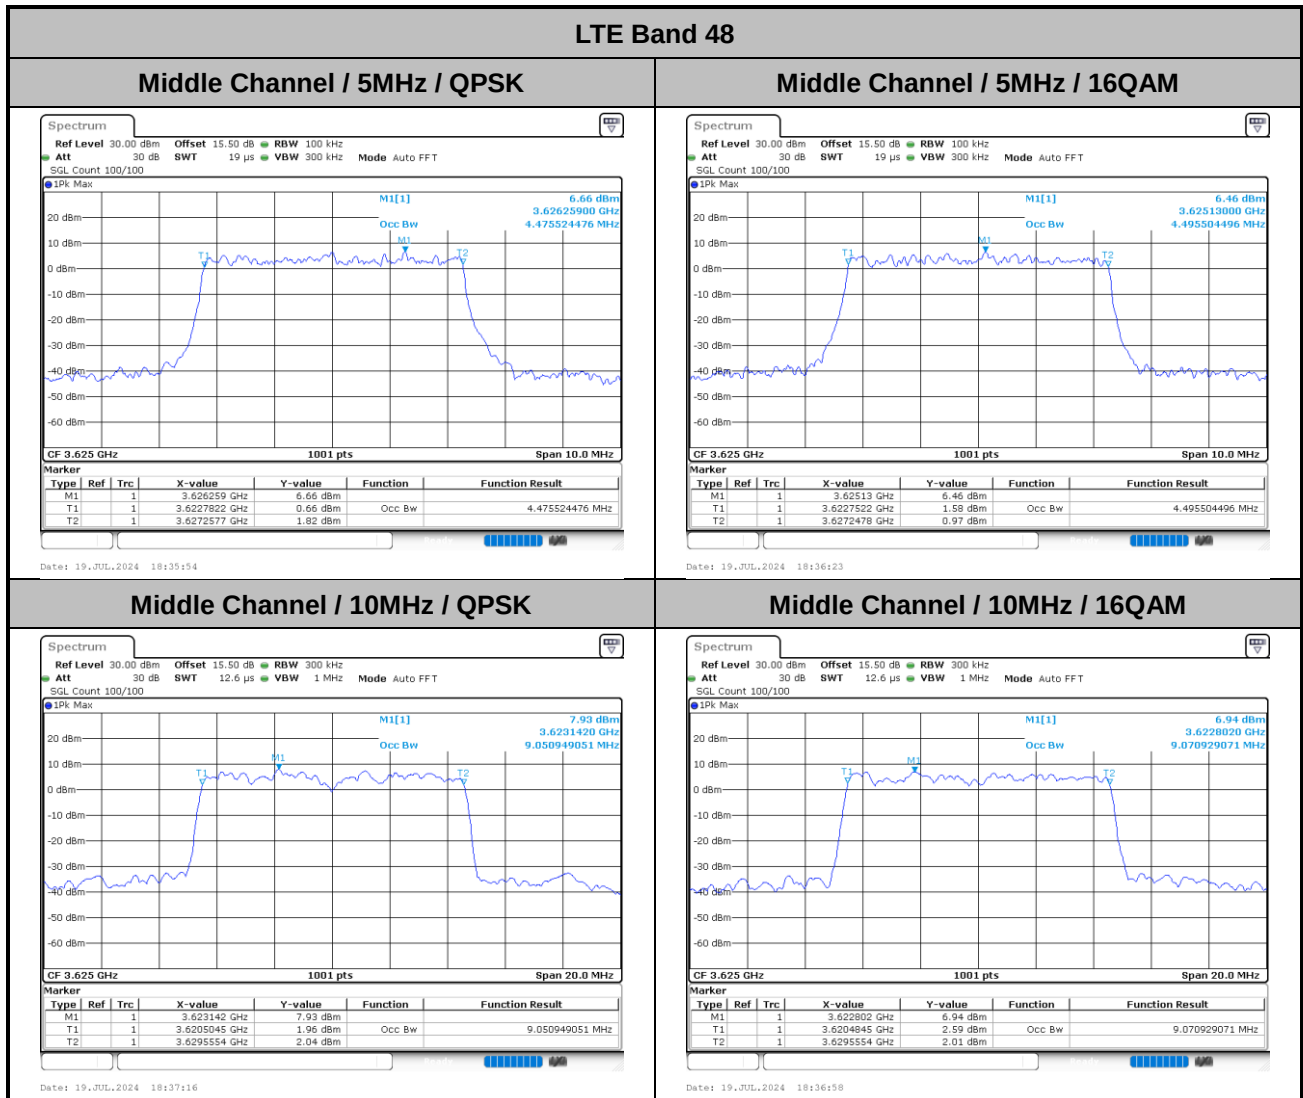




LTE Band 48


Middle Channel / 15MHz / QPSK

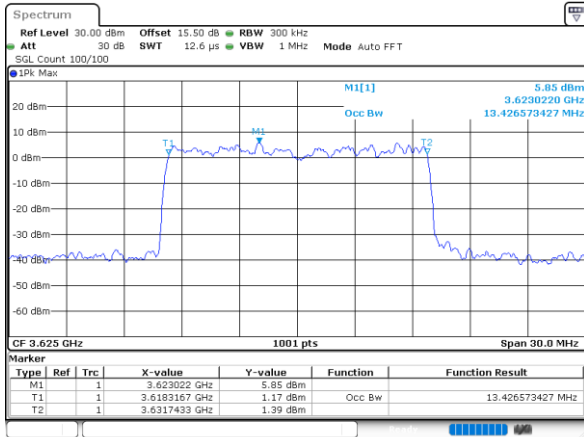


Middle Channel / 15MHz / 16QAM

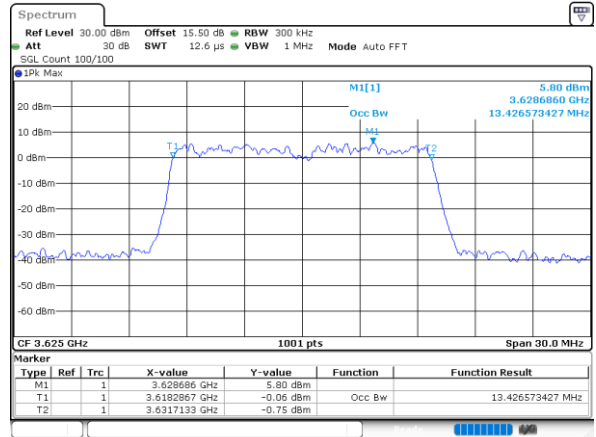

Middle Channel / 20MHz / QPSK

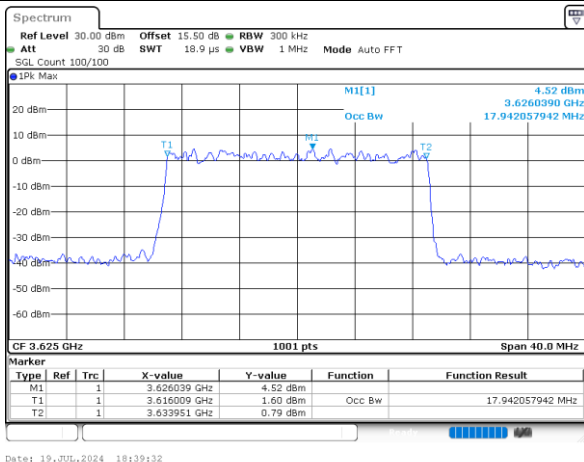


Middle Channel / 20MHz / 16QAM

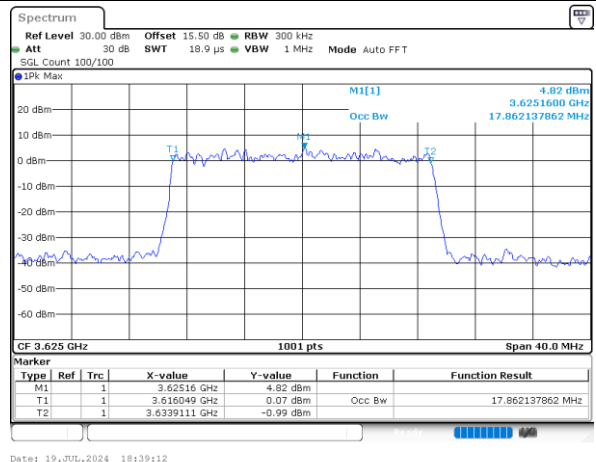



A2.3 ACLR

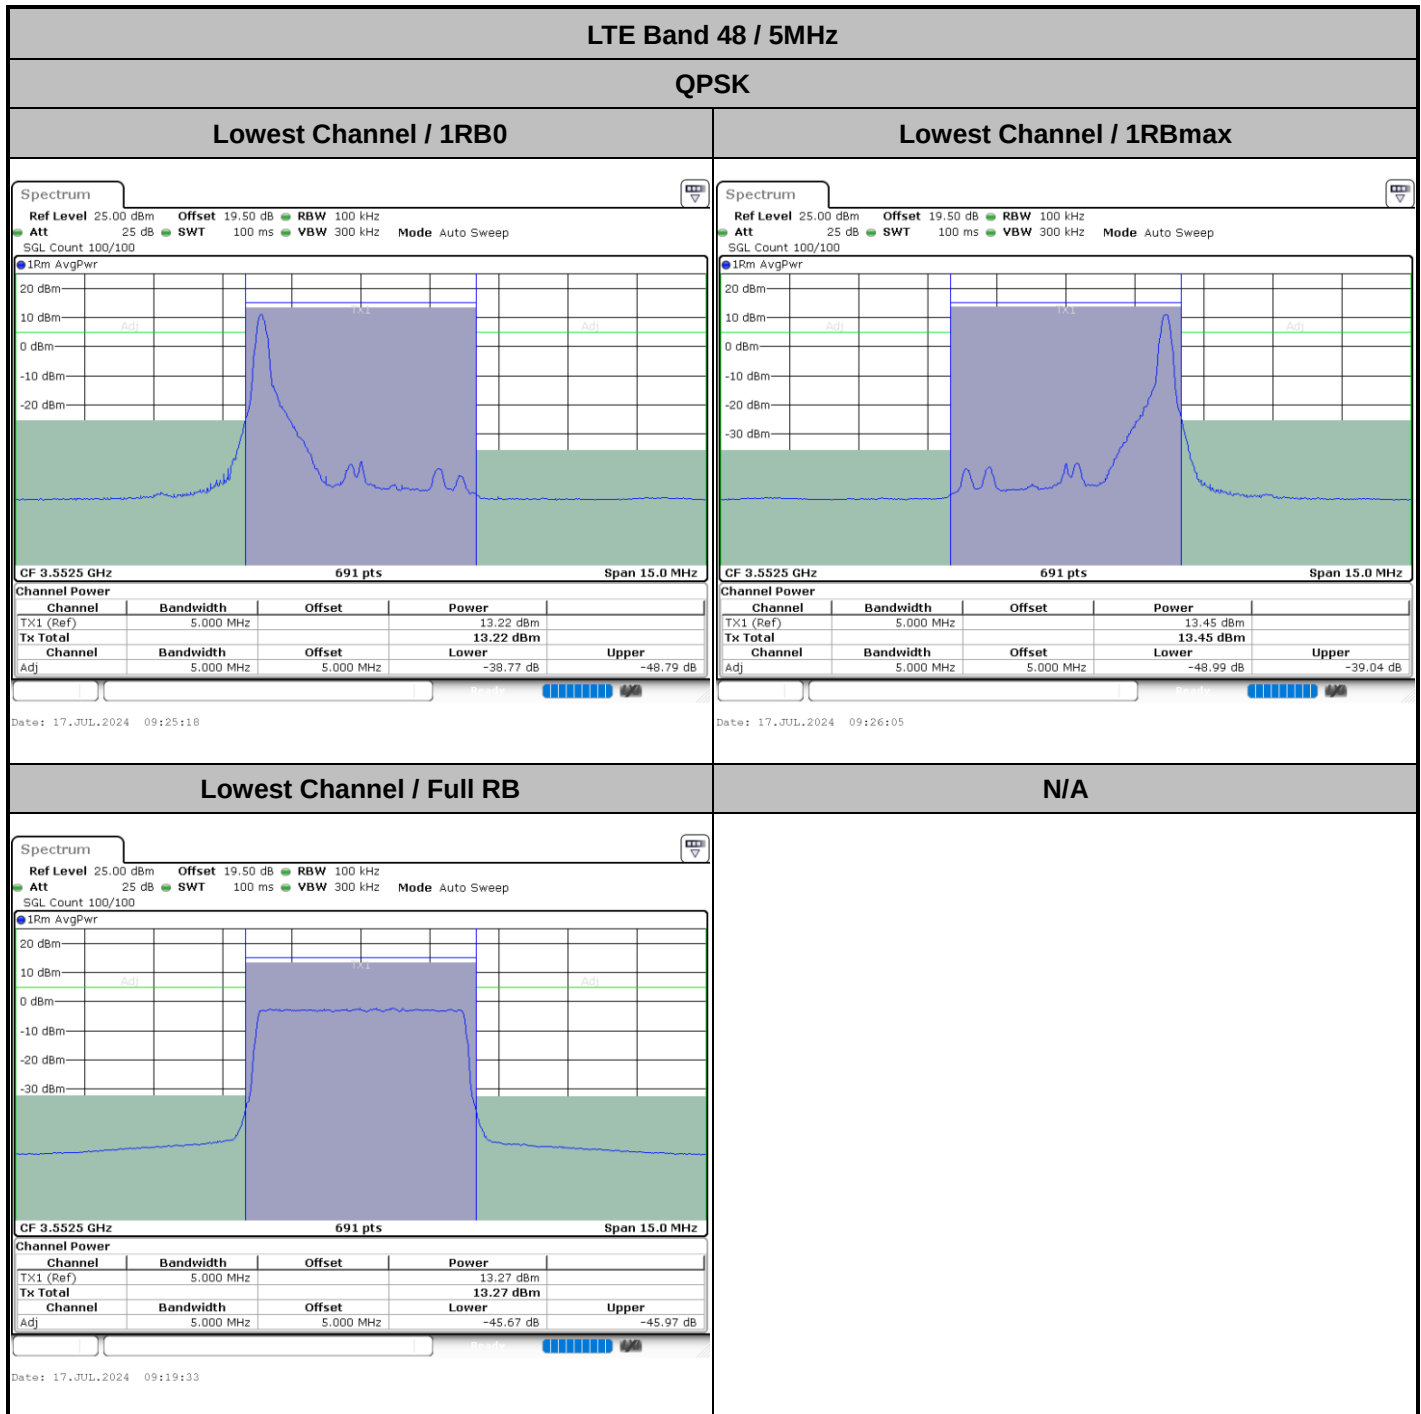




LTE Band 48 / 5MHz


QPSK

Middle Channel / 1RB0

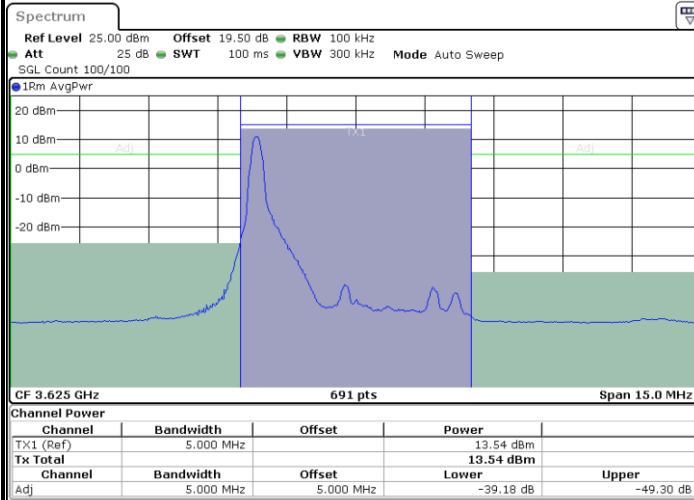


Date: 17.JUL.2024 09:30:54

Middle Channel / 1RBmax

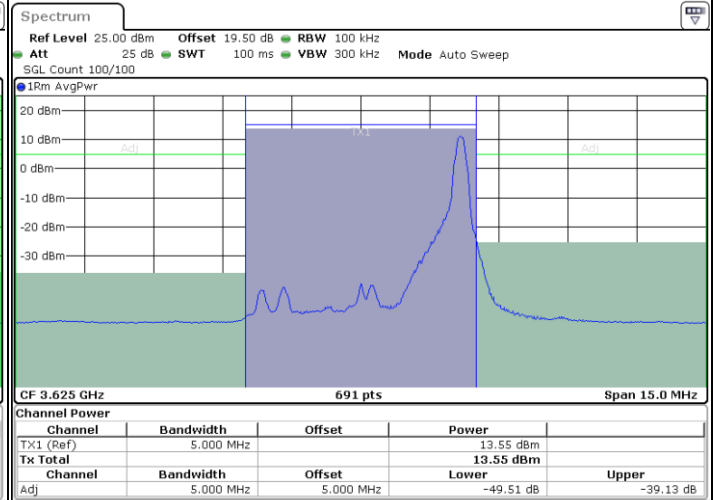

Date: 17.JUL.2024 09:30:06

Middle Channel / Full RB

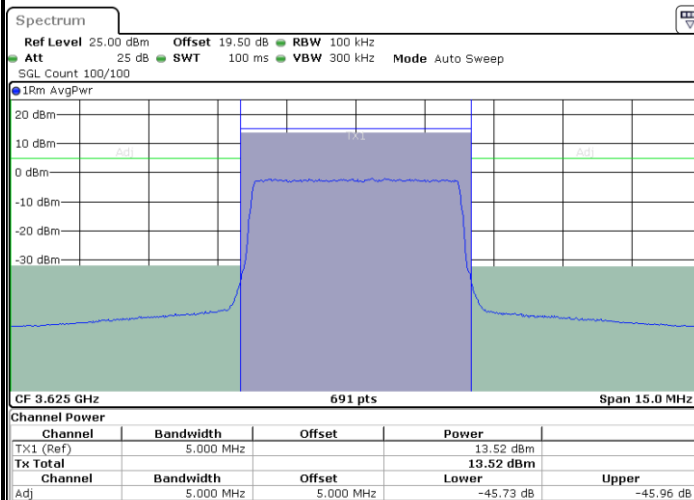

Date: 17.JUL.2024 09:34:52


N/A



LTE Band 48 / 5MHz


QPSK

Highest Channel / 1RB0

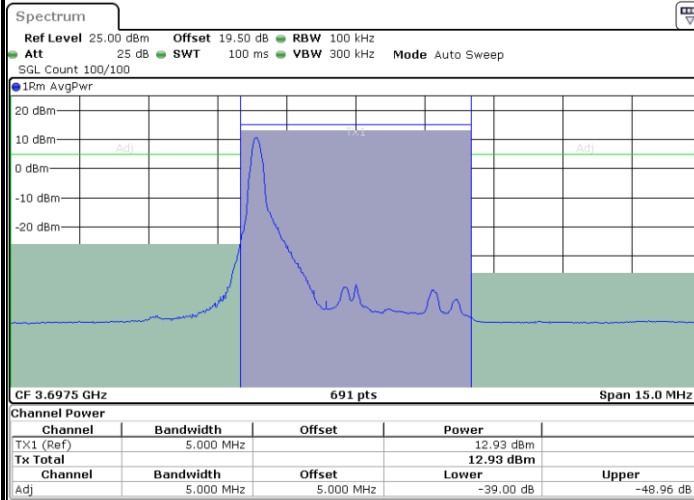


Date: 17.JUL.2024 09:40:24

Highest Channel / 1RBmax

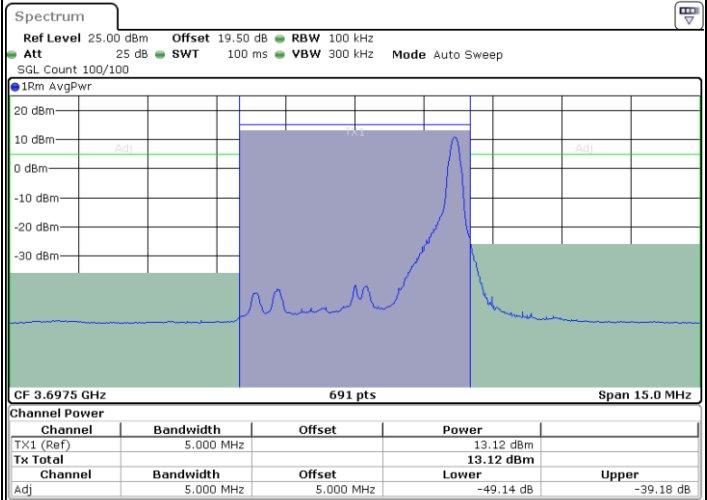

Date: 17.JUL.2024 09:39:36

Highest Channel / Full RB

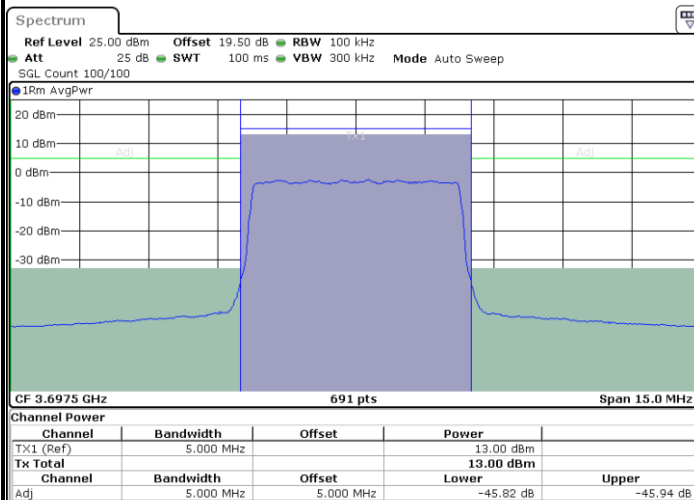

Date: 17.JUL.2024 09:35:39


N/A



LTE Band 48 / 10MHz


QPSK

Lowest Channel / 1RB0

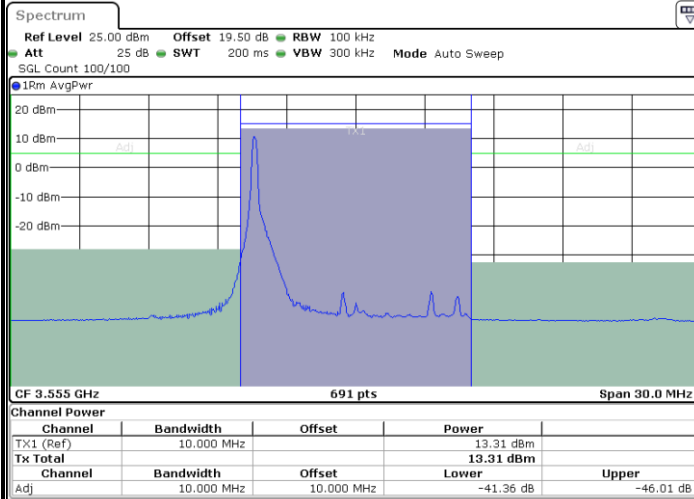


Date: 17.JUL.2024 09:47:47

Lowest Channel / 1RBmax

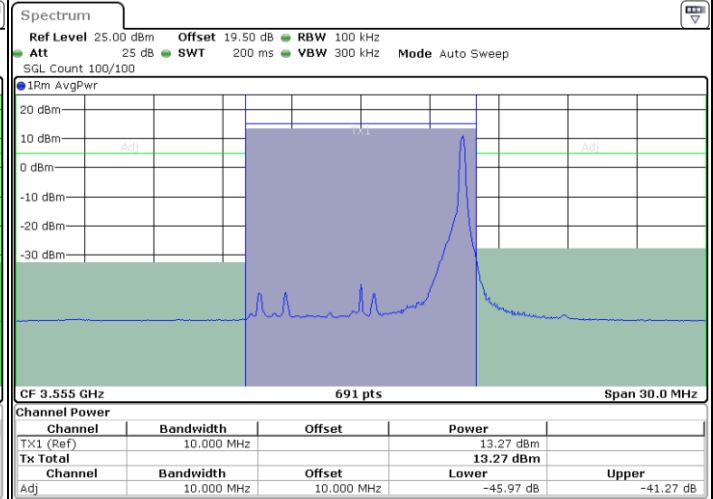

Date: 17.JUL.2024 09:46:59

Lowest Channel / Full RB

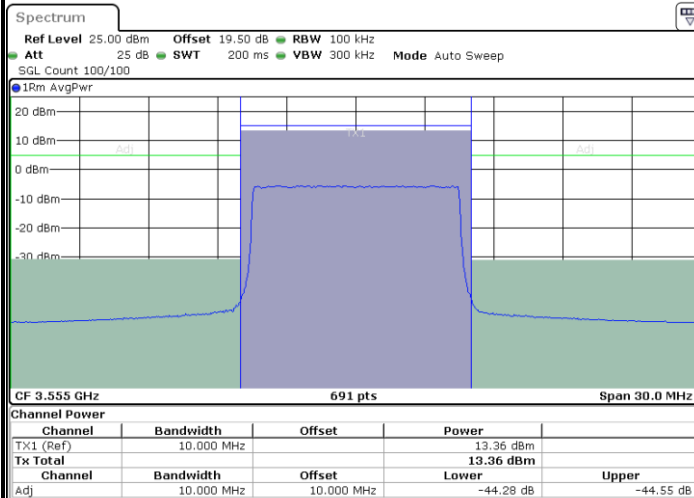

Date: 17.JUL.2024 09:42:55


N/A




LTE Band 48 / 10MHz

QPSK


Middle Channel / 1RB0

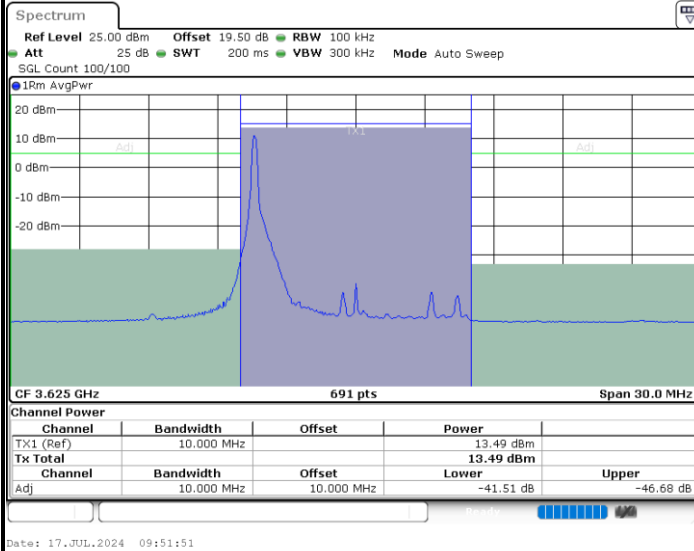

Middle Channel / 1RBmax

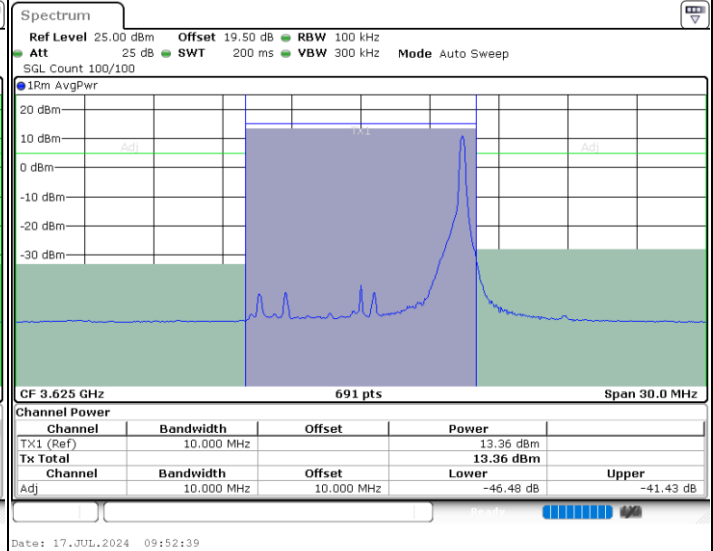

Middle Channel / Full RB

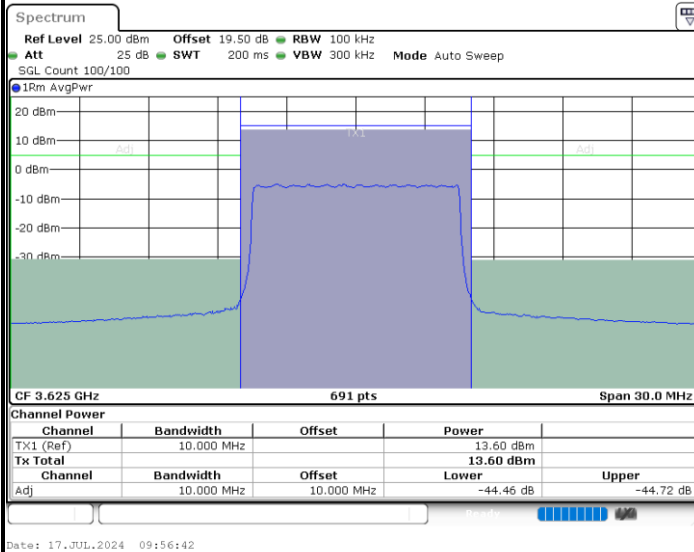


N/A



LTE Band 48 / 10MHz


QPSK

Highest Channel / 1RB0

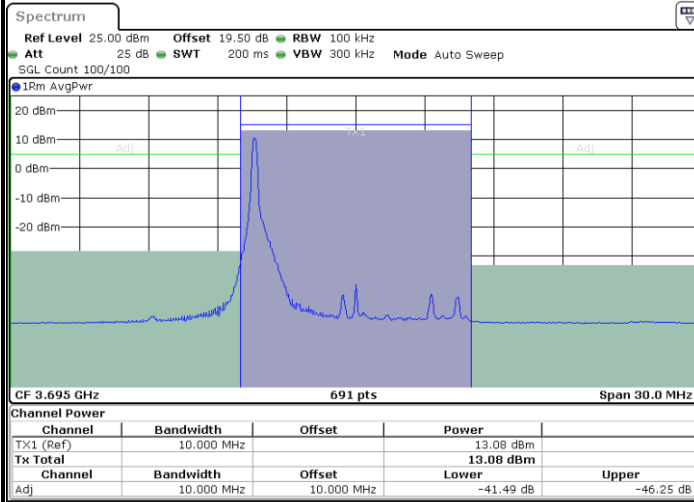


Date: 17.JUL.2024 10:02:30

Highest Channel / 1RBmax

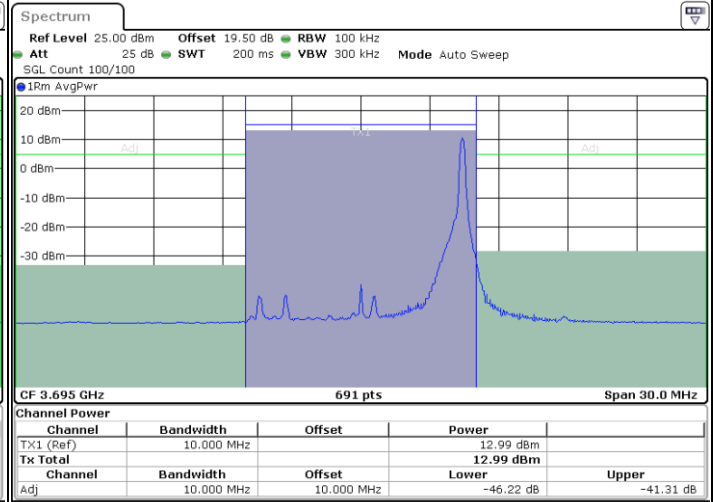

Date: 17.JUL.2024 10:01:40

Highest Channel / Full RB

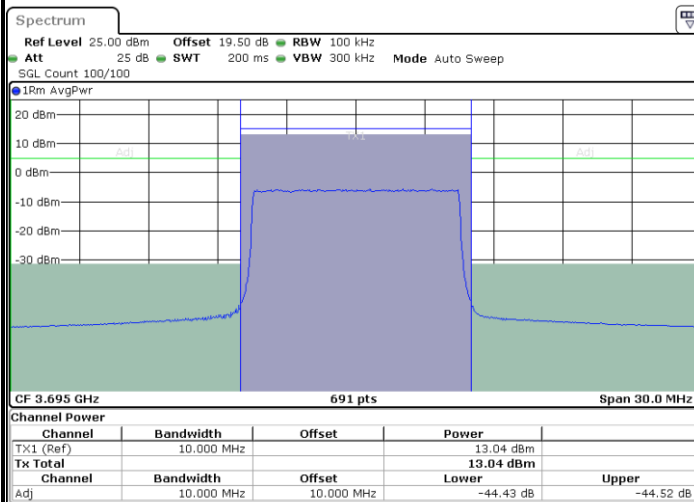

Date: 17.JUL.2024 09:57:32


N/A



LTE Band 48 / 15MHz


QPSK

Lowest Channel / 1RB0

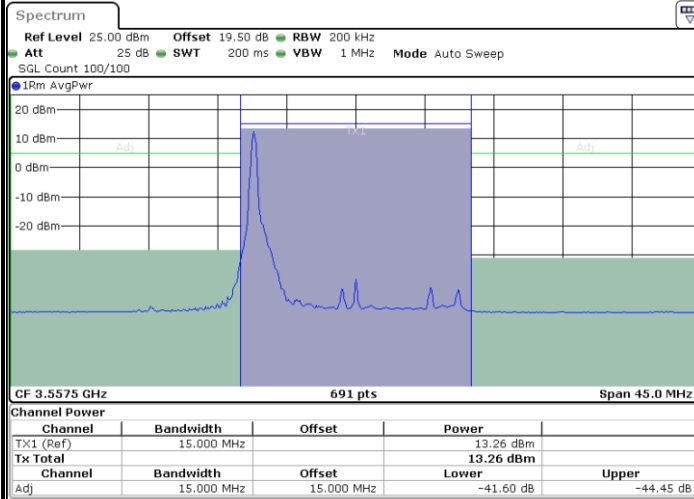


Date: 17.JUL.2024 10:10:00

Lowest Channel / 1RBmax

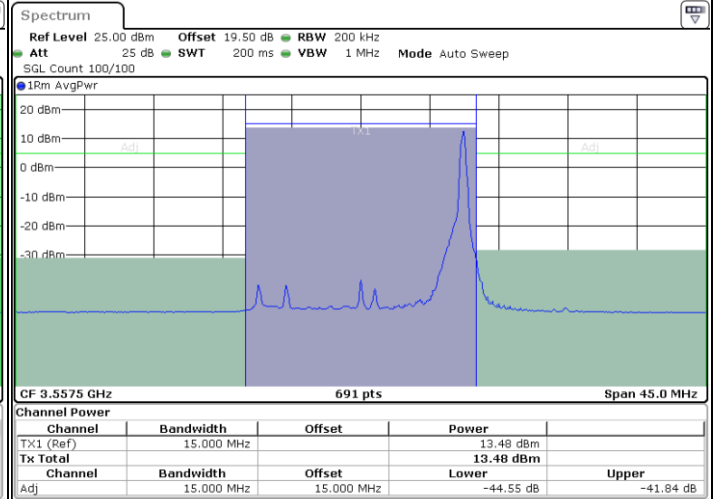

Date: 17.JUL.2024 10:09:11

Lowest Channel / Full RB

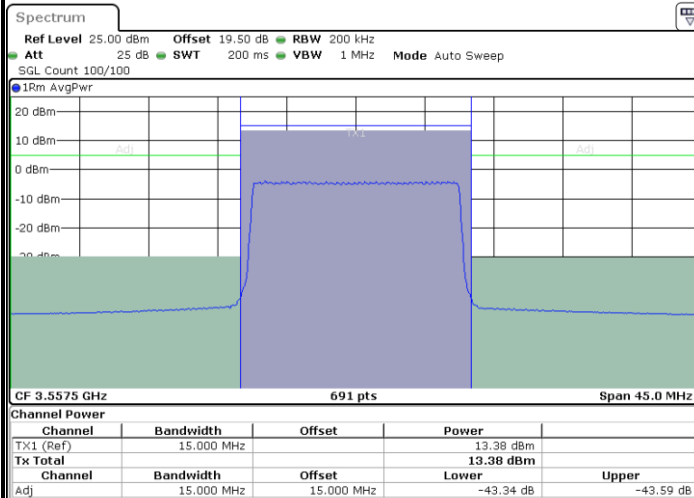

Date: 17.JUL.2024 10:05:04


N/A



LTE Band 48 / 15MHz


QPSK

Middle Channel / 1RB0

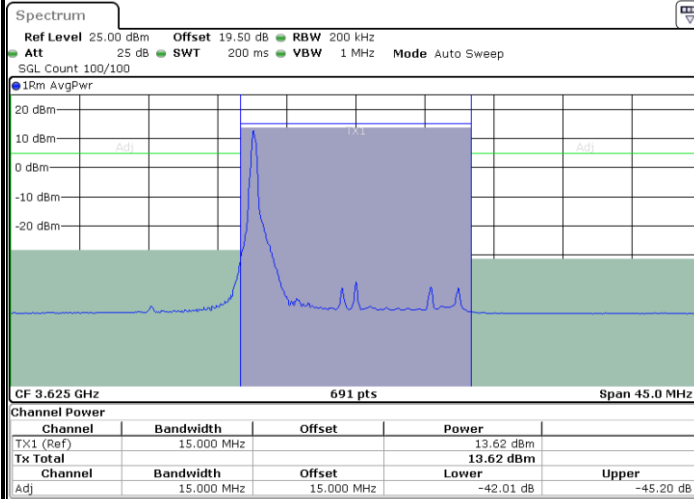


Date: 17.JUL.2024 10:14:04

Middle Channel / 1RBmax

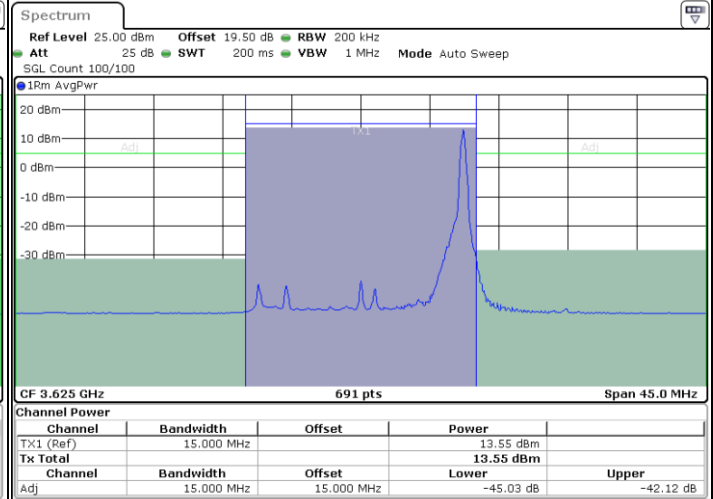

Date: 17.JUL.2024 10:14:53

Middle Channel / Full RB

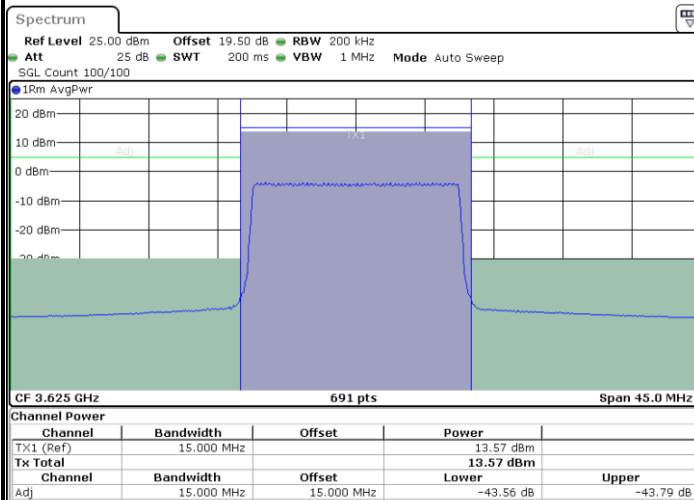

Date: 17.JUL.2024 10:18:55


N/A



LTE Band 48 / 15MHz


QPSK

Highest Channel / 1RB0

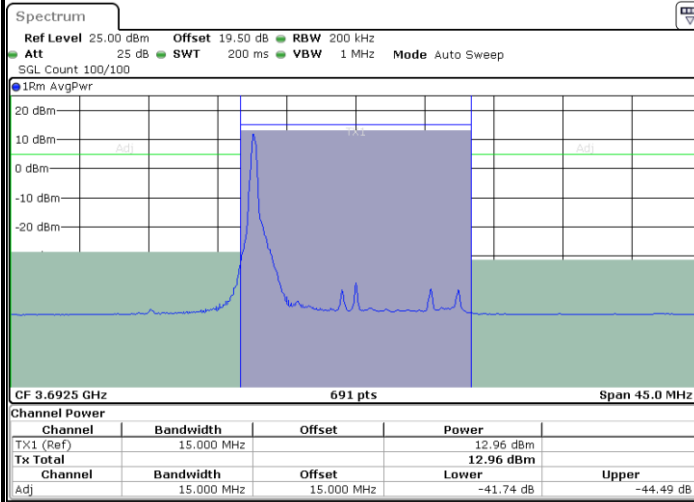


Date: 17.JUL.2024 10:24:44

Highest Channel / 1RBmax

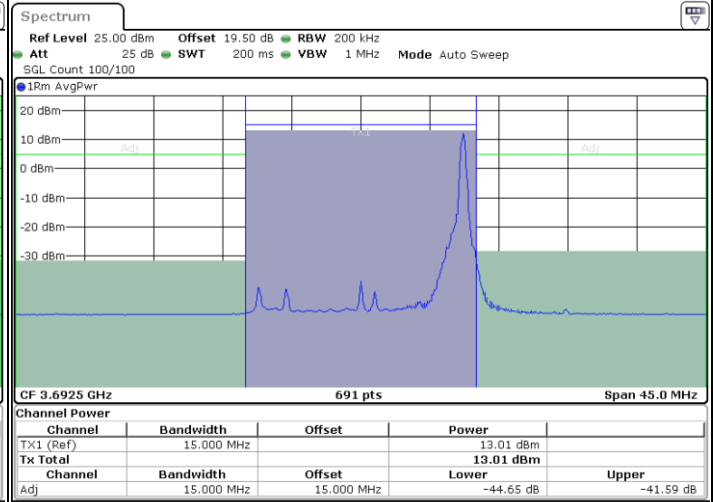

Date: 17.JUL.2024 10:23:54

Highest Channel / Full RB

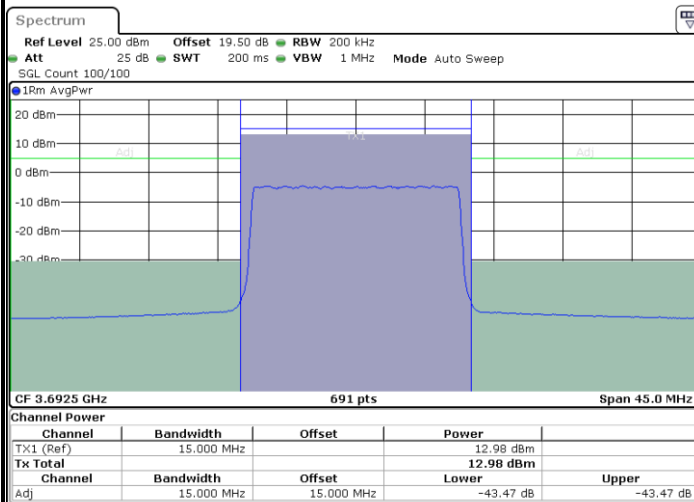

Date: 17.JUL.2024 10:19:45


N/A



LTE Band 48 / 20MHz


QPSK

Lowest Channel / 1RB0

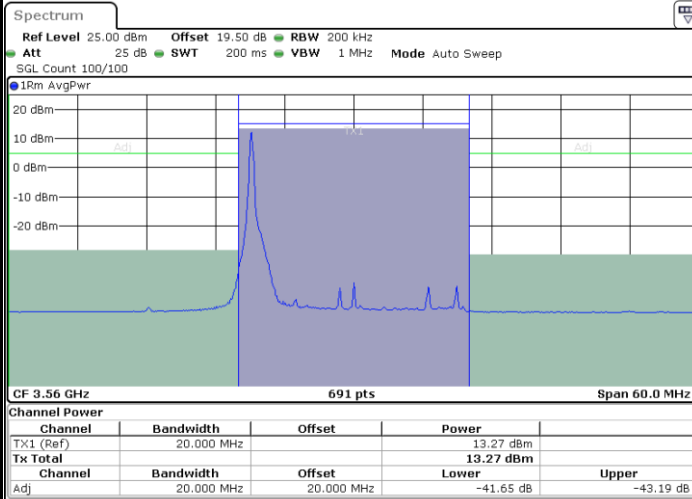


Date: 17.JUL.2024 10:33:45

Lowest Channel / 1RBmax

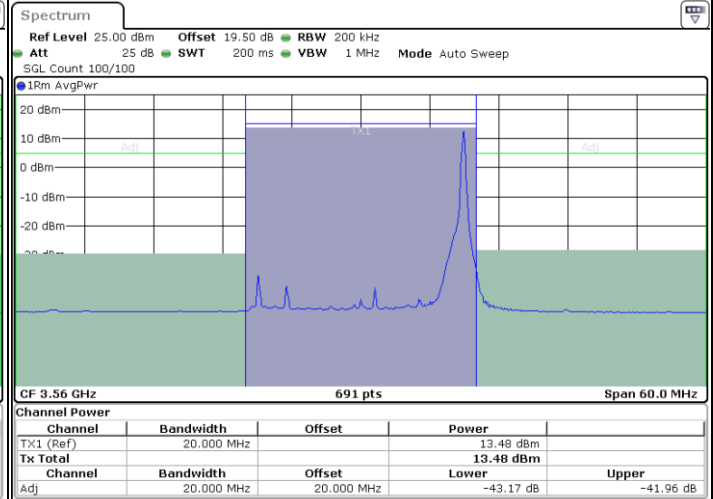

Date: 17.JUL.2024 10:29:43

Lowest Channel / Full RB

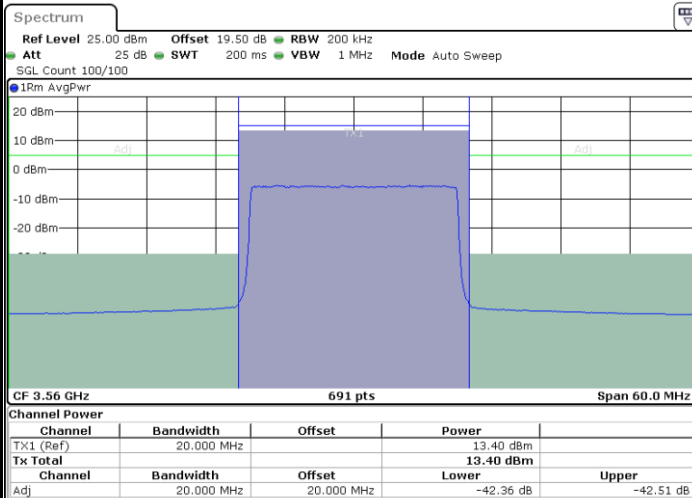

Date: 17.JUL.2024 10:27:18


N/A



LTE Band 48 / 20MHz


QPSK

Middle Channel / 1RB0

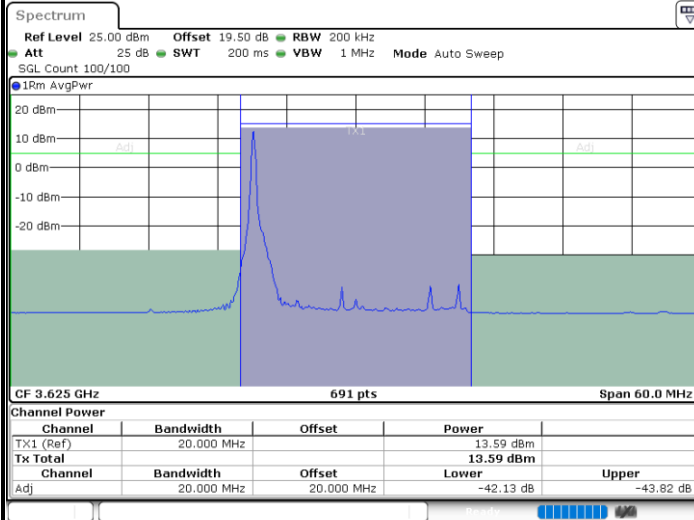


Date: 17.JUL.2024 10:34:33

Middle Channel / 1RBmax

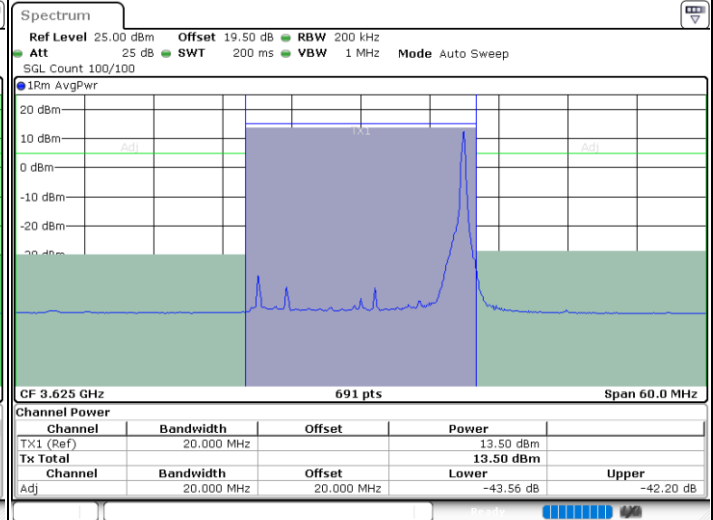

Date: 17.JUL.2024 10:38:32

Middle Channel / Full RB

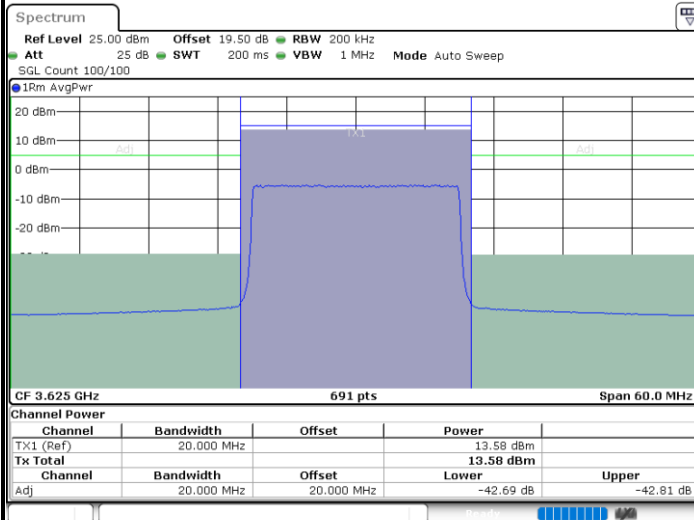

Date: 17.JUL.2024 10:39:20


N/A



LTE Band 48 / 20MHz


QPSK

Highest Channel / 1RB0

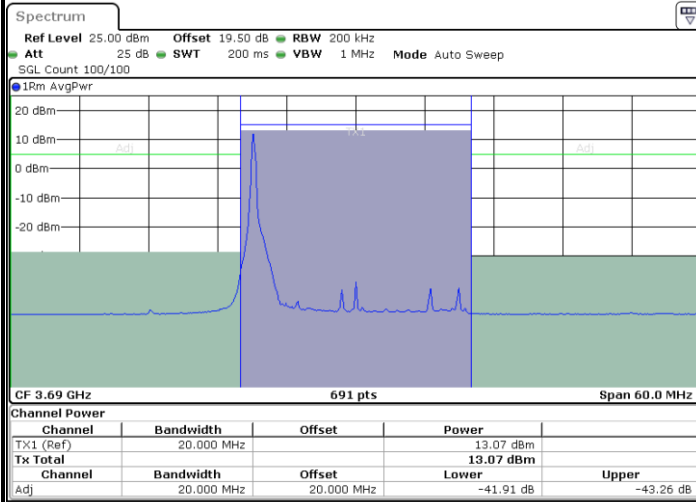


Date: 17.JUL.2024 10:48:11

Highest Channel / 1RBmax

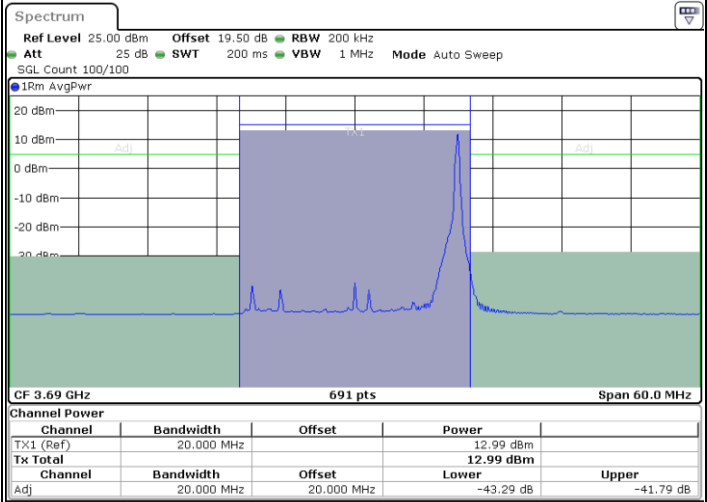

Date: 17.JUL.2024 10:44:08

Highest Channel / Full RB

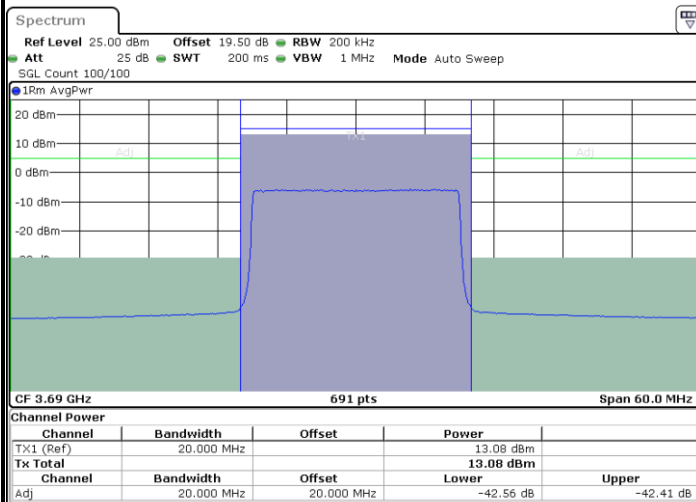

Date: 17.JUL.2024 10:43:20


N/A




LTE Band 48 / 5MHz

16QAM


Lowest Channel / 1RB0

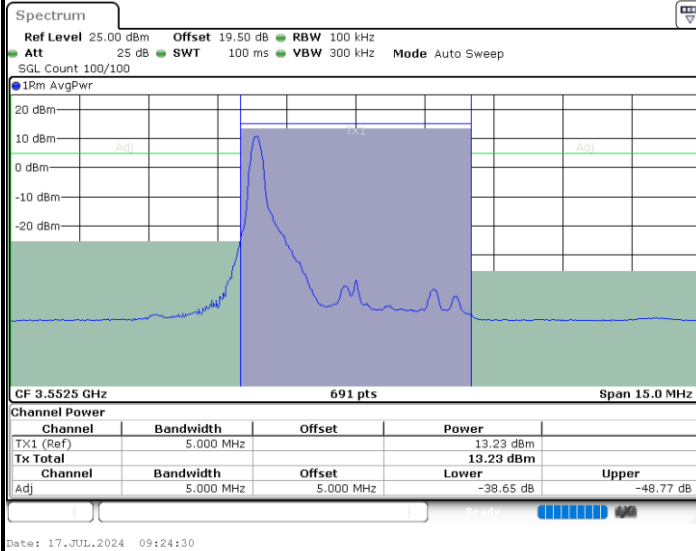

Lowest Channel / 1RBmax

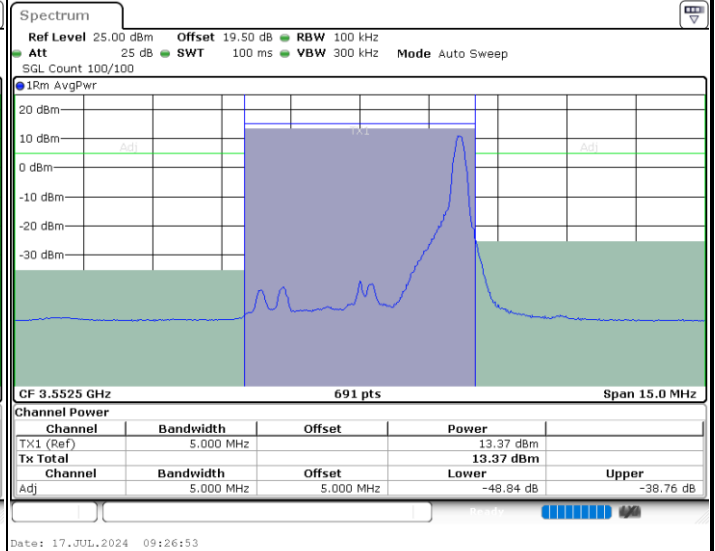

Lowest Channel / Full RB

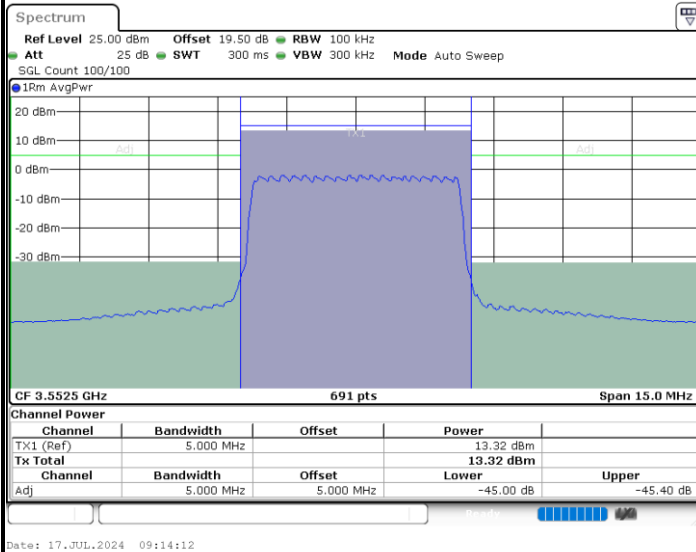


N/A



LTE Band 48 / 5MHz


16QAM

Middle Channel / 1RB0

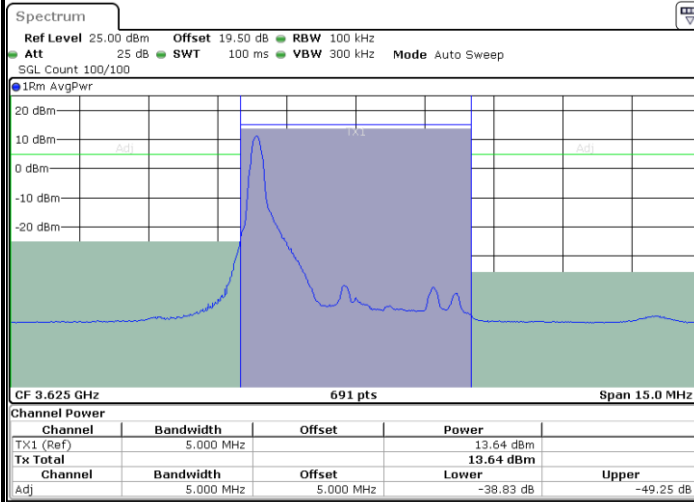


Date: 17.JUL.2024 09:31:41

Middle Channel / 1RBmax

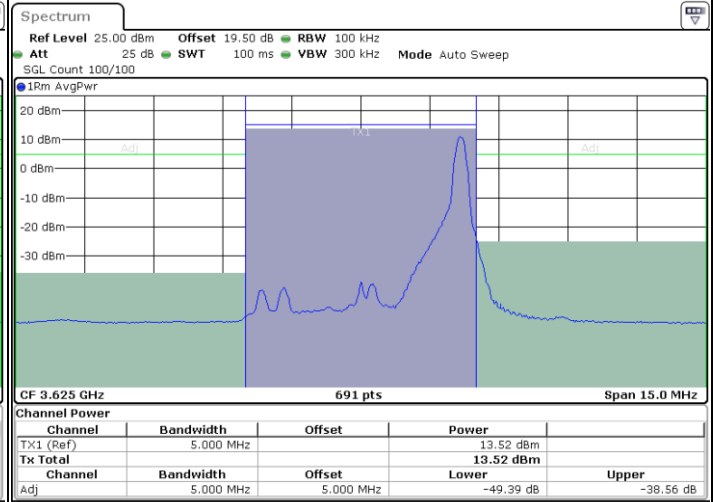

Date: 17.JUL.2024 09:29:19

Middle Channel / Full RB

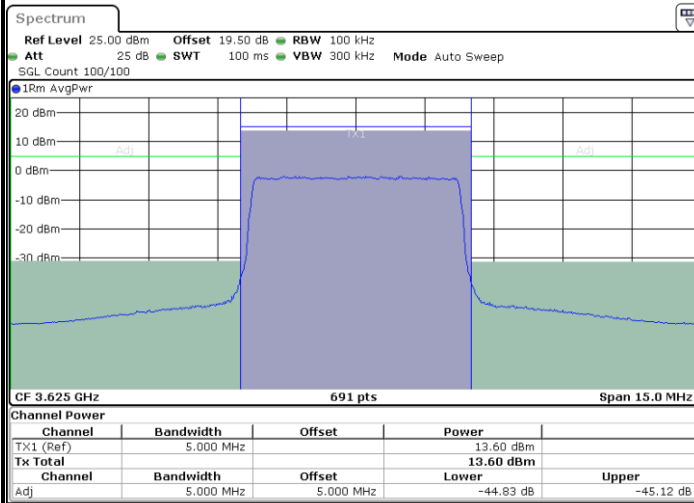

Date: 17.JUL.2024 09:34:05


N/A



LTE Band 48 / 5MHz


16QAM

Highest Channel / 1RB0

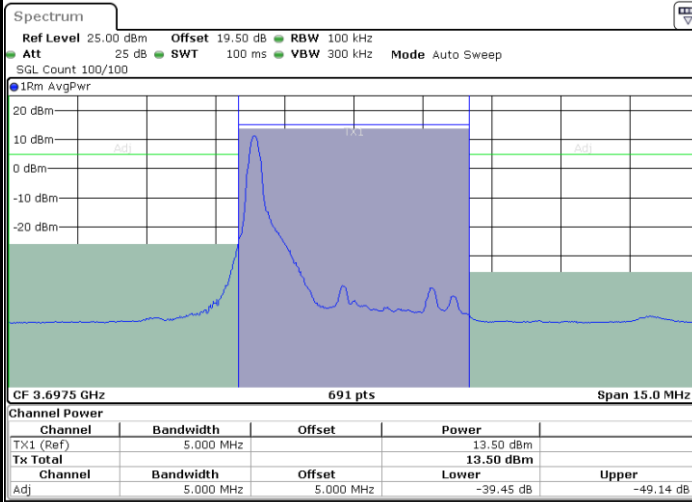


Date: 17.JUL.2024 09:41:12

Highest Channel / 1RBmax

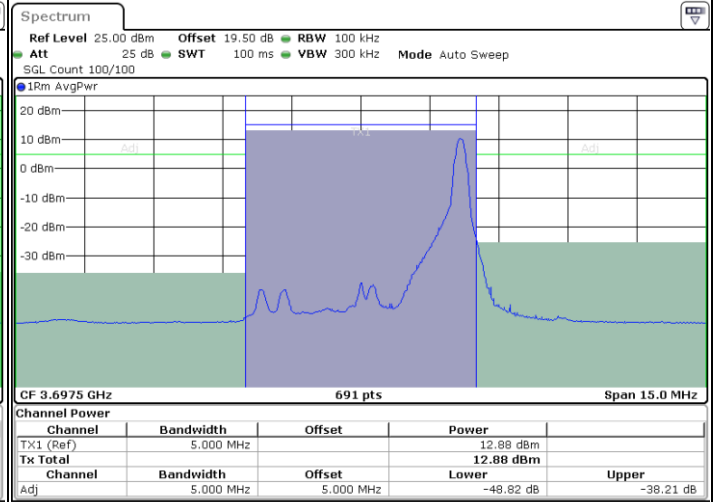

Date: 17.JUL.2024 09:38:49

Highest Channel / Full RB

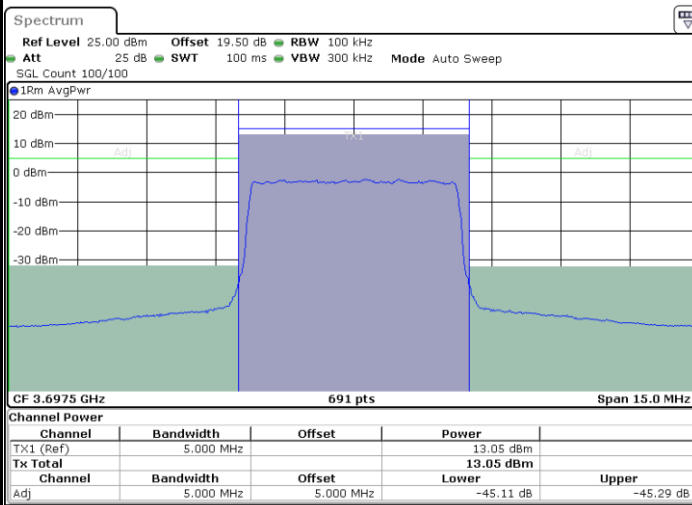

Date: 17.JUL.2024 09:36:27


N/A



LTE Band 48 / 10MHz


16QAM

Lowest Channel / 1RB0

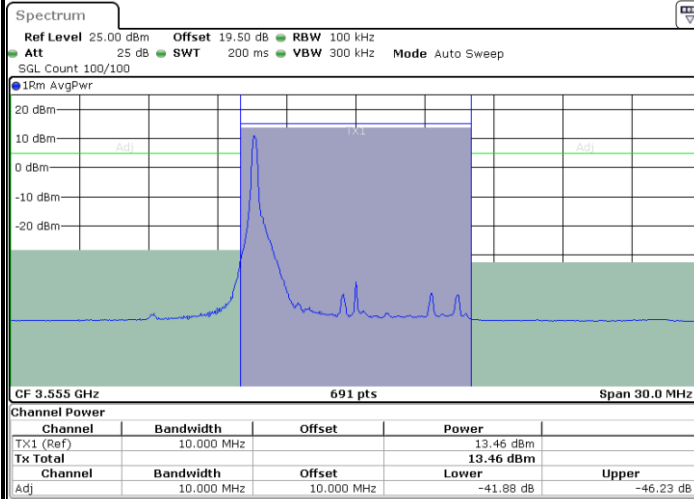


Date: 17.JUL.2024 09:48:36

Lowest Channel / 1RBmax

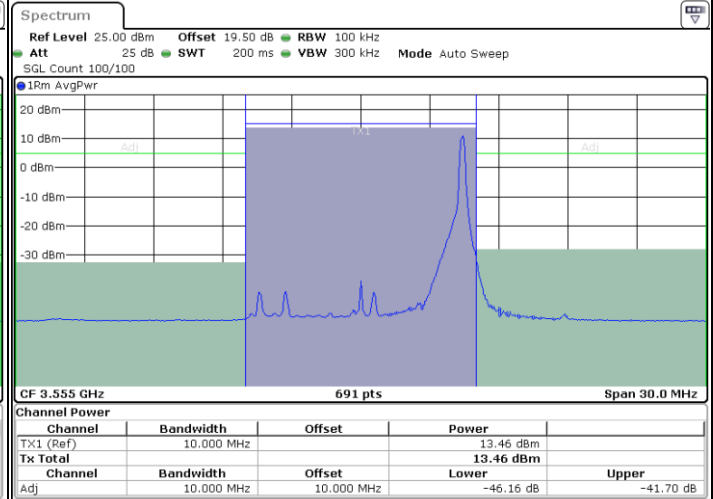

Date: 17.JUL.2024 09:46:10

Lowest Channel / Full RB

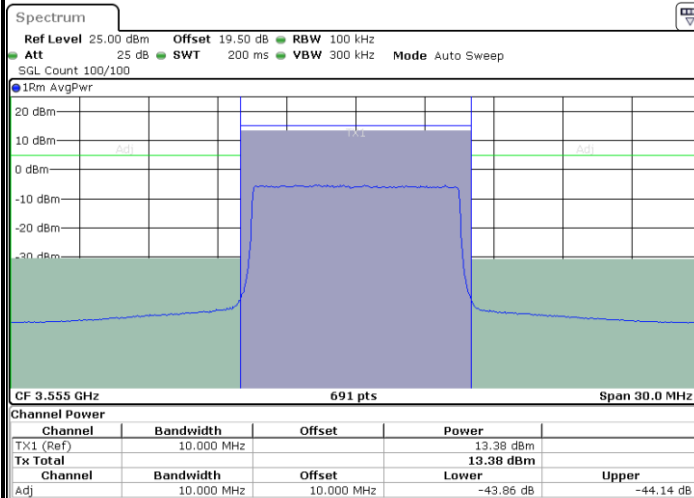

Date: 17.JUL.2024 09:43:43


N/A



LTE Band 48 / 10MHz


16QAM

Middle Channel / 1RB0

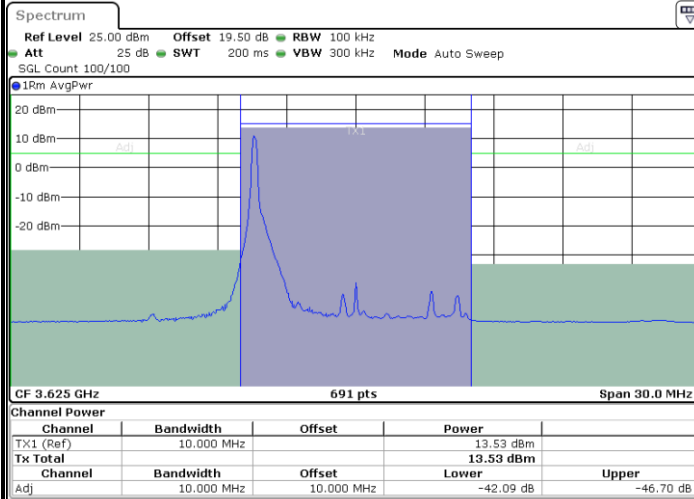


Date: 17.JUL.2024 09:51:03

Middle Channel / 1RBmax

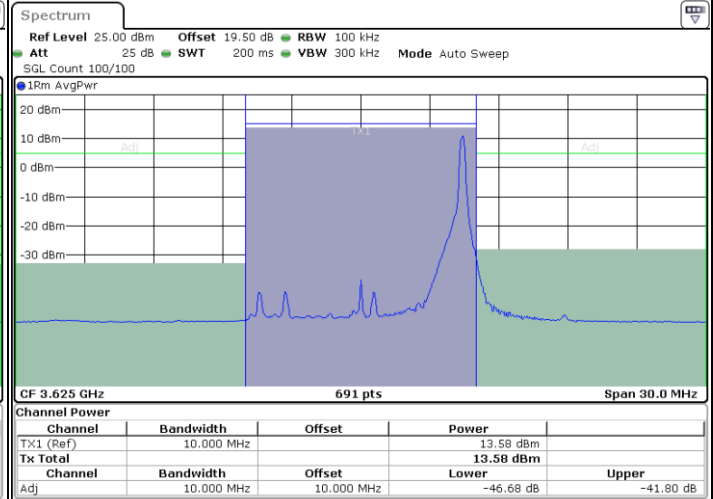

Date: 17.JUL.2024 09:53:28

Middle Channel / Full RB

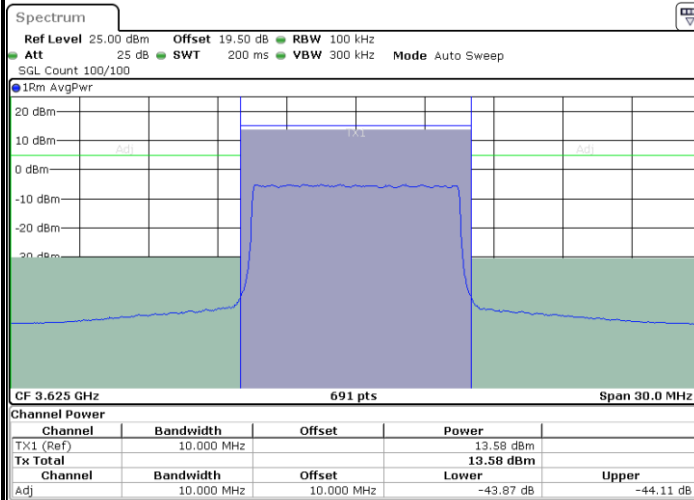

Date: 17.JUL.2024 09:55:54


N/A



LTE Band 48 / 10MHz


16QAM

Highest Channel / 1RB0

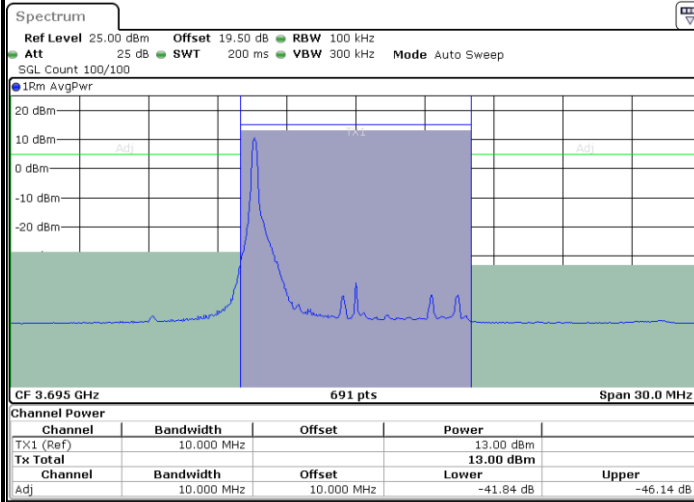


Date: 17.JUL.2024 10:03:20

Highest Channel / 1RBmax

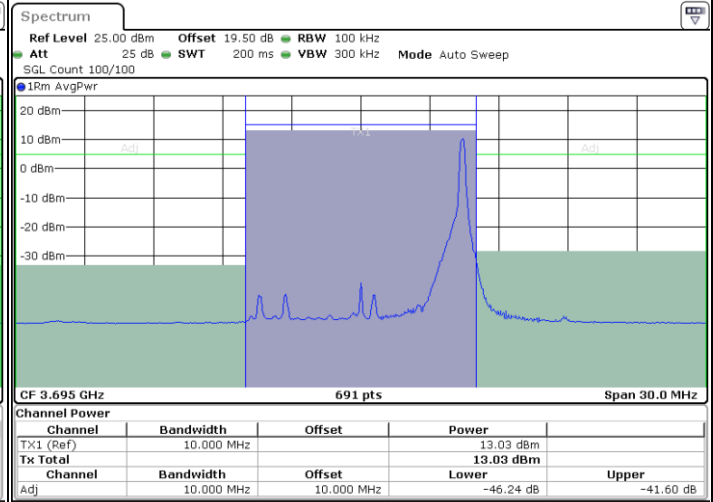

Date: 17.JUL.2024 10:00:51

Highest Channel / Full RB

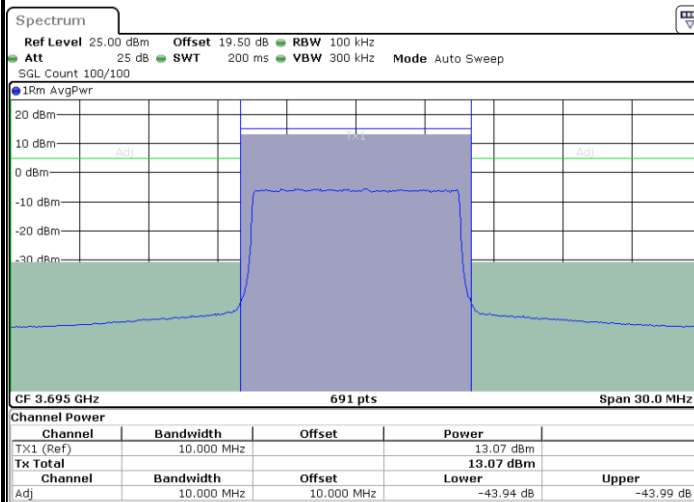

Date: 17.JUL.2024 09:58:21


N/A



LTE Band 48 / 15MHz


16QAM

Lowest Channel / 1RB0

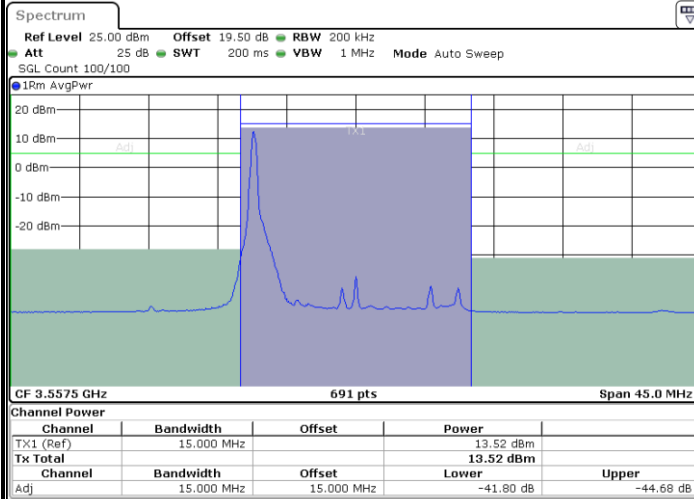


Date: 17.JUL.2024 10:10:49

Lowest Channel / 1RBmax

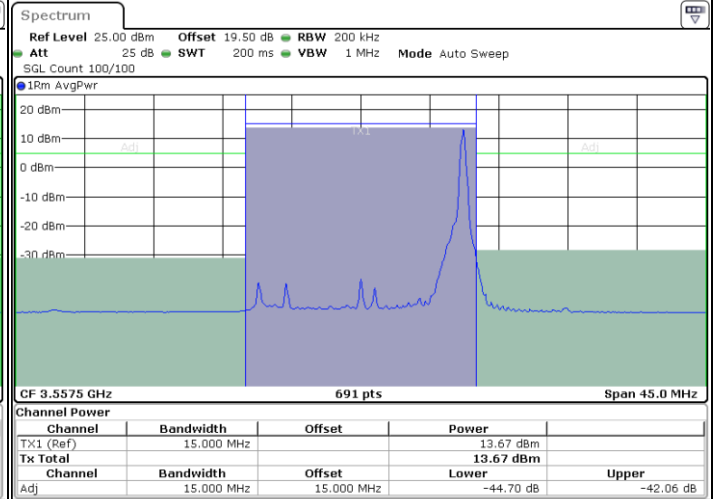

Date: 17.JUL.2024 10:08:21

Lowest Channel / Full RB

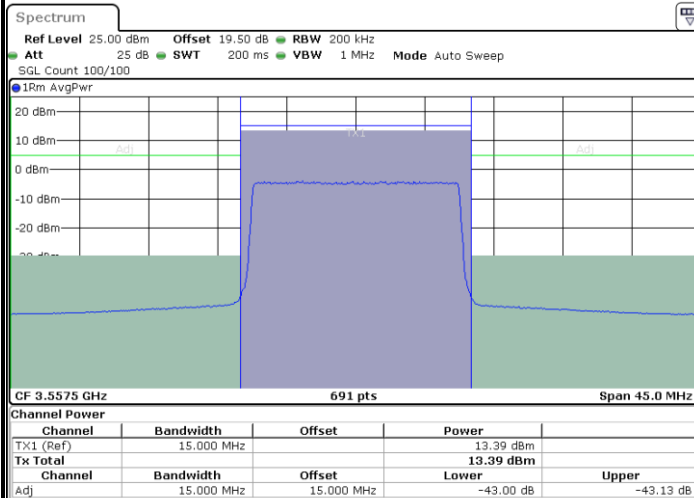

Date: 17.JUL.2024 10:05:53


N/A




LTE Band 48 / 15MHz

16QAM


Middle Channel / 1RB0

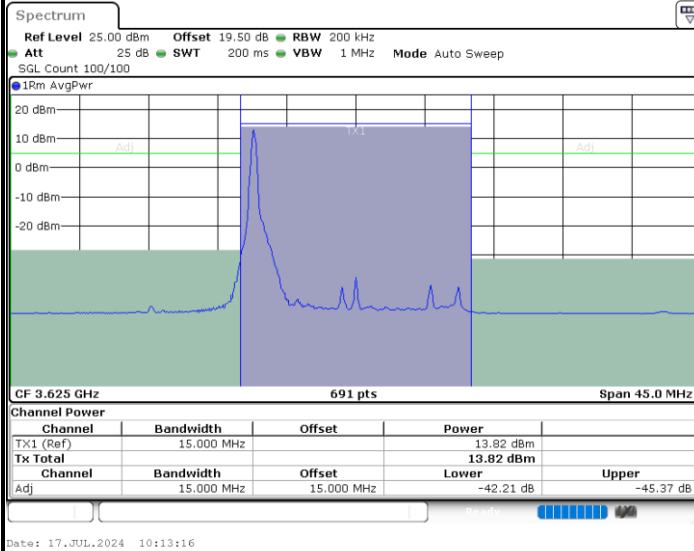

Middle Channel / 1RBmax

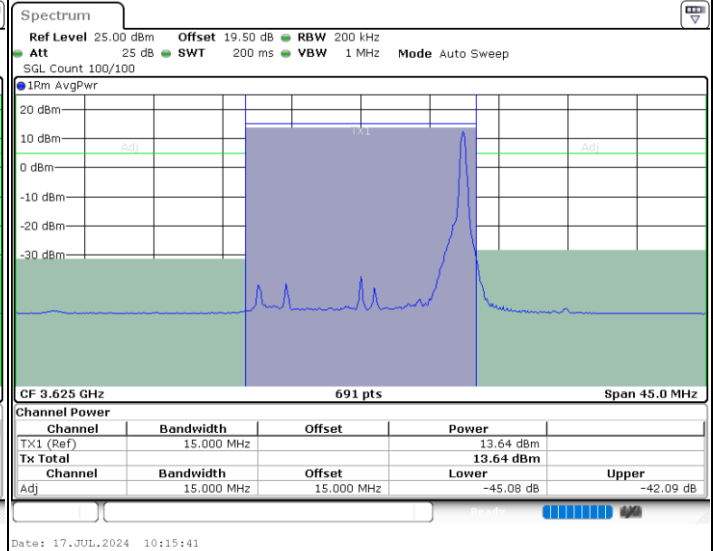

Middle Channel / Full RB

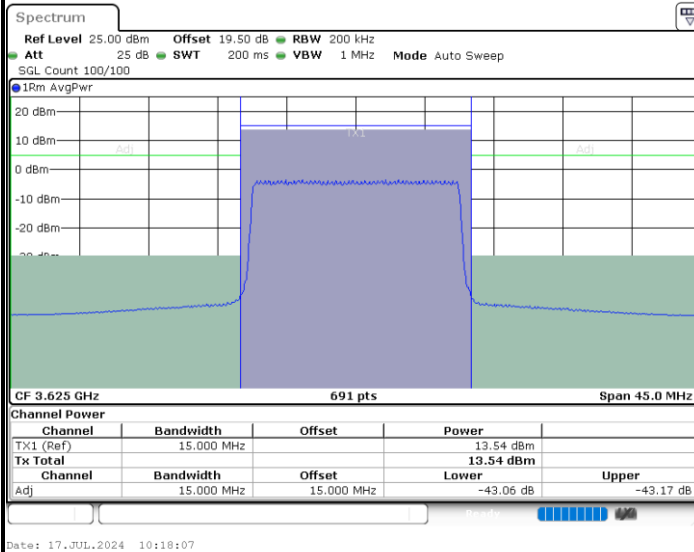


N/A



LTE Band 48 / 15MHz


16QAM

Highest Channel / 1RB0

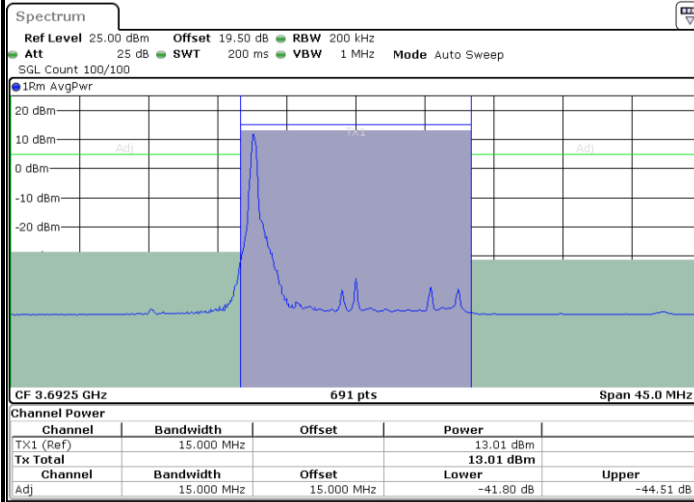


Date: 17.JUL.2024 10:25:34

Highest Channel / 1RBmax

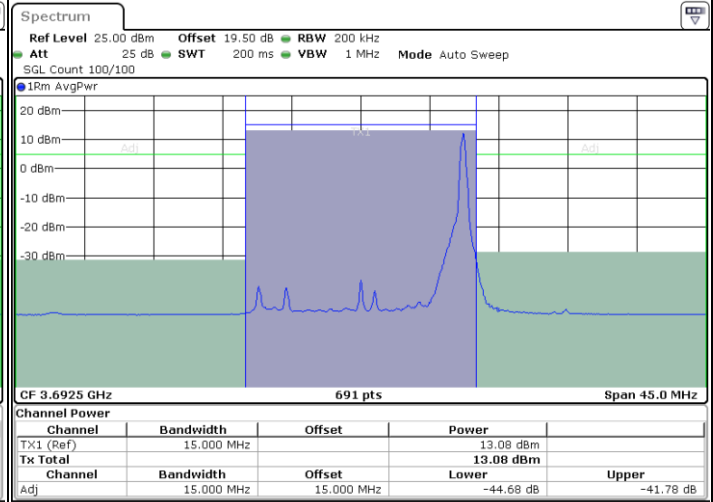

Date: 17.JUL.2024 10:23:04

Highest Channel / Full RB

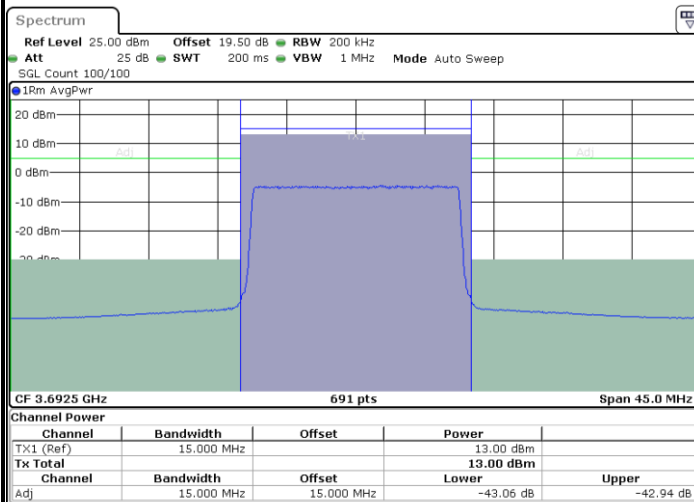

Date: 17.JUL.2024 10:20:34


N/A




LTE Band 48 / 20MHz

16QAM


Lowest Channel / 1RB0

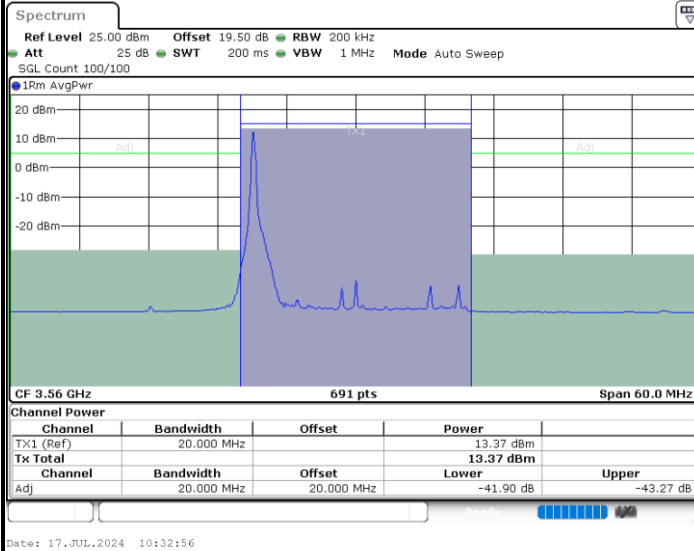

Lowest Channel / 1RBmax

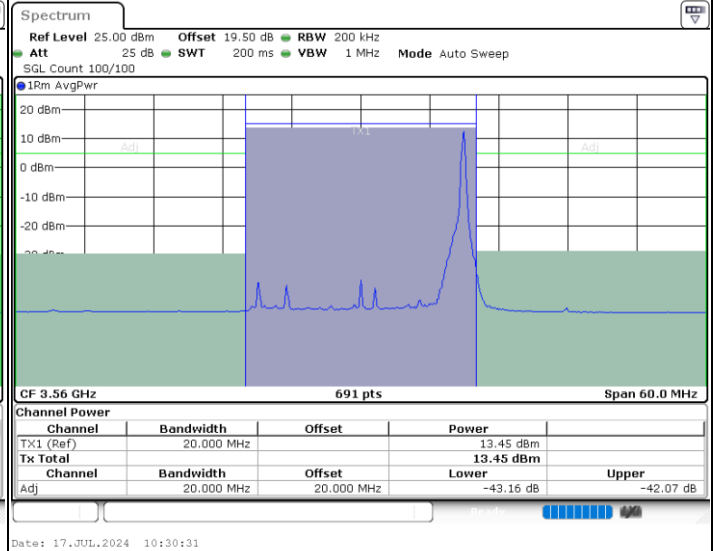

Lowest Channel / Full RB

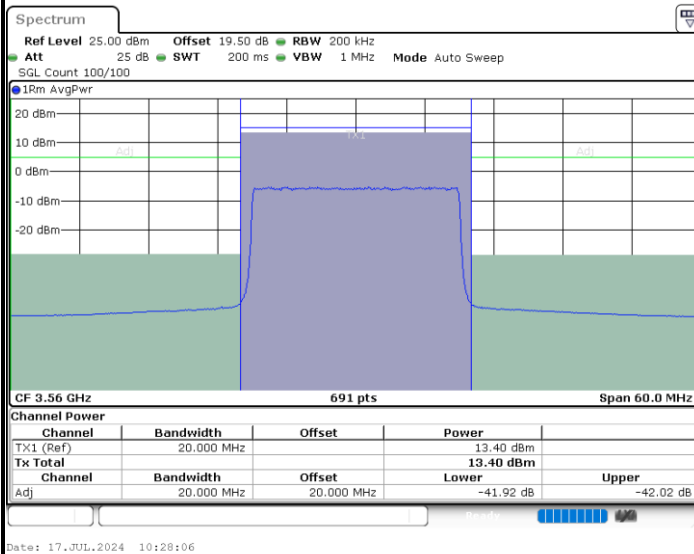


N/A




LTE Band 48 / 20MHz

16QAM


Middle Channel / 1RB0

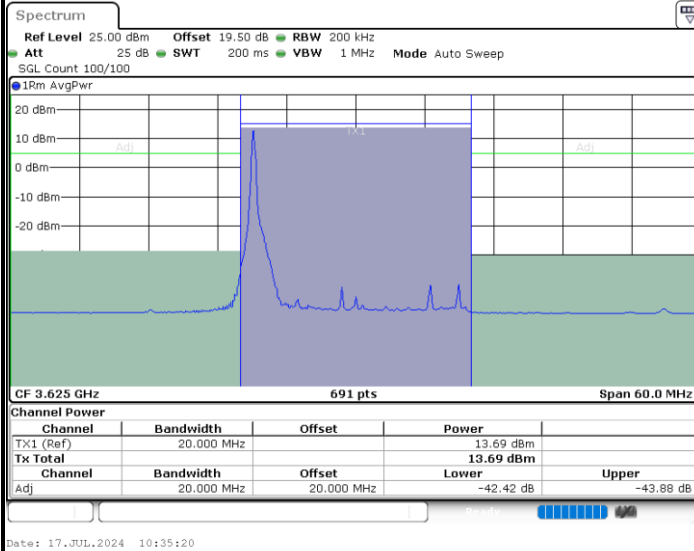

Middle Channel / 1RBmax

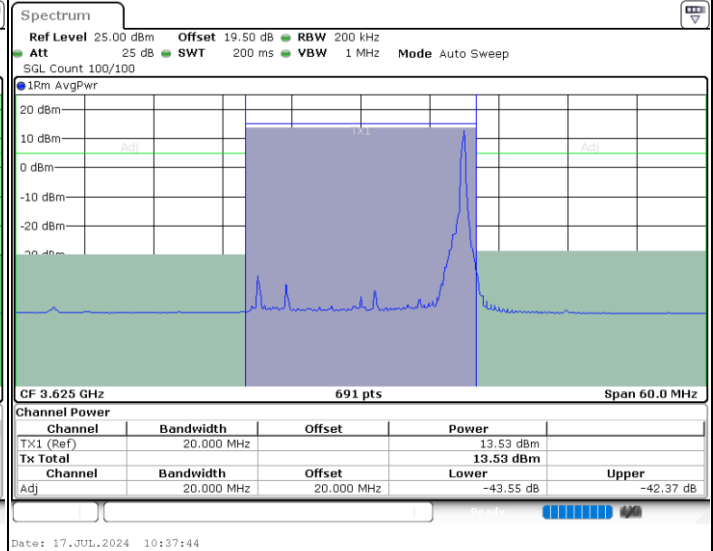

Middle Channel / Full RB

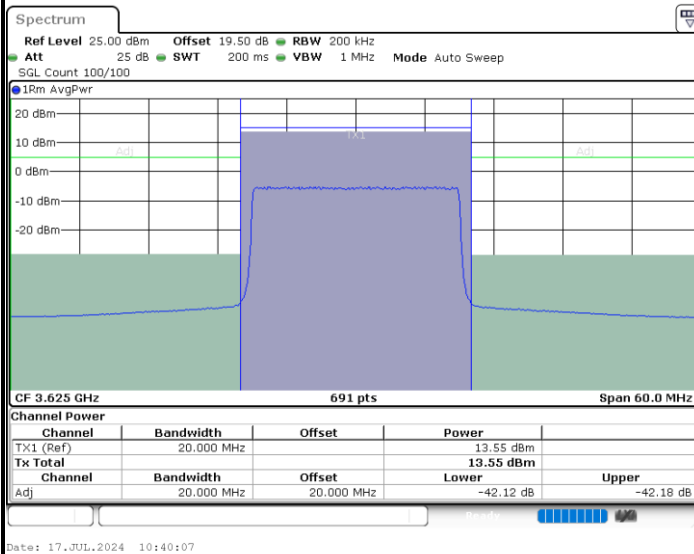


N/A



LTE Band 48 / 20MHz


16QAM

Highest Channel / 1RB0

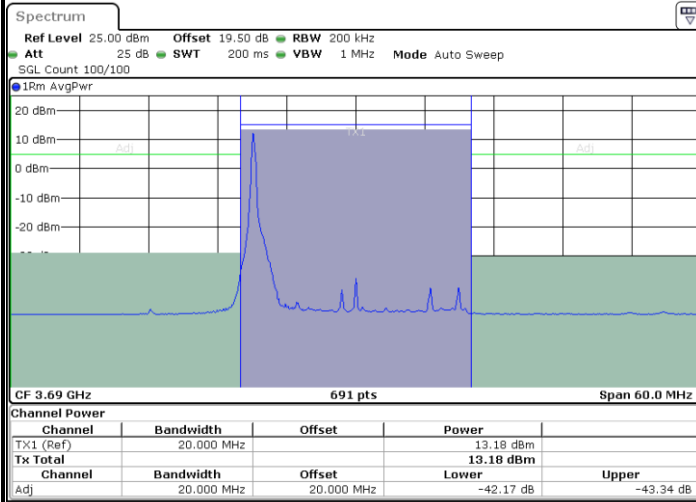


Date: 17.JUL.2024 10:47:22

Highest Channel / 1RBmax

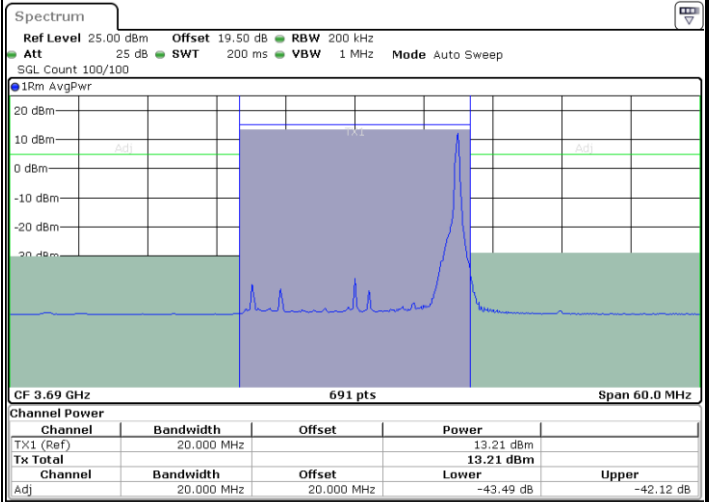

Date: 17.JUL.2024 10:44:56

Highest Channel / Full RB

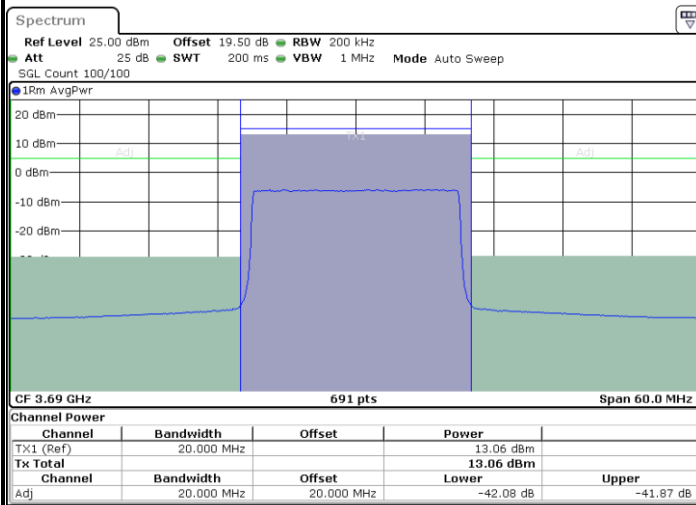

Date: 17.JUL.2024 10:42:31


N/A



LTE Band 48 / 5MHz


64QAM

Lowest Channel / 1RB0

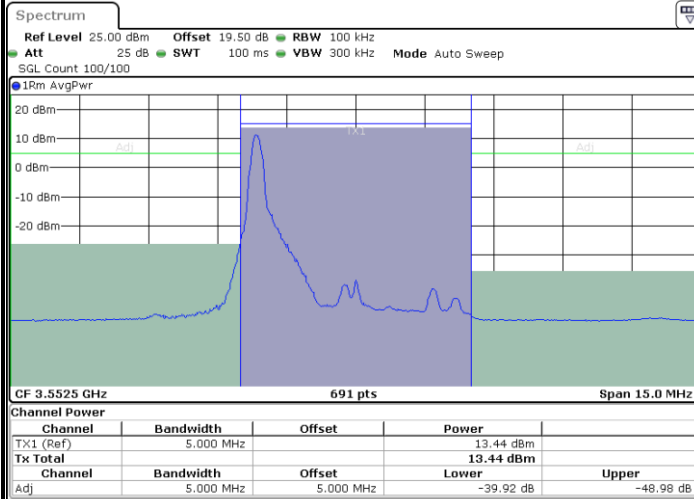


Date: 17.JUL.2024 09:23:43

Lowest Channel / 1RBmax

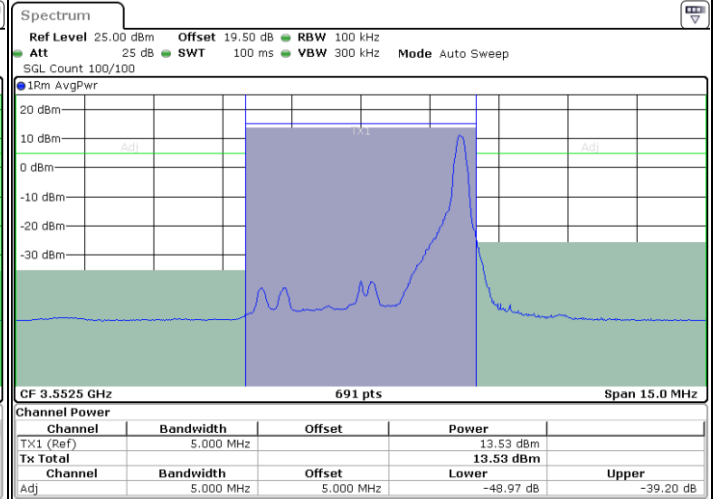

Date: 17.JUL.2024 09:27:40

Lowest Channel / Full RB

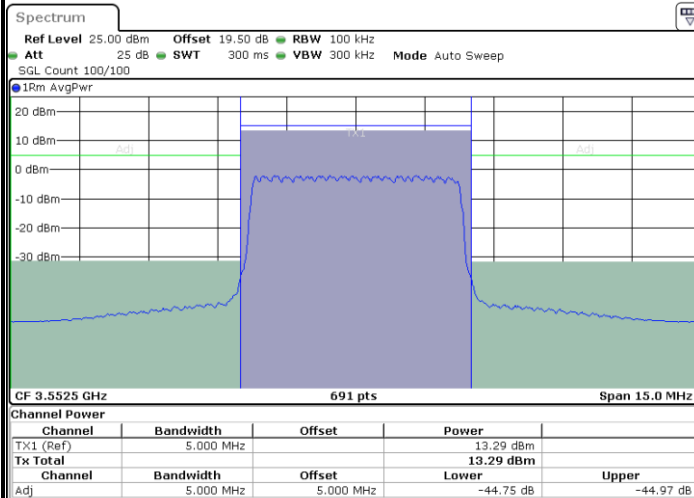

Date: 17.JUL.2024 09:12:52


N/A



LTE Band 48 / 5MHz


64QAM

Middle Channel / 1RB0

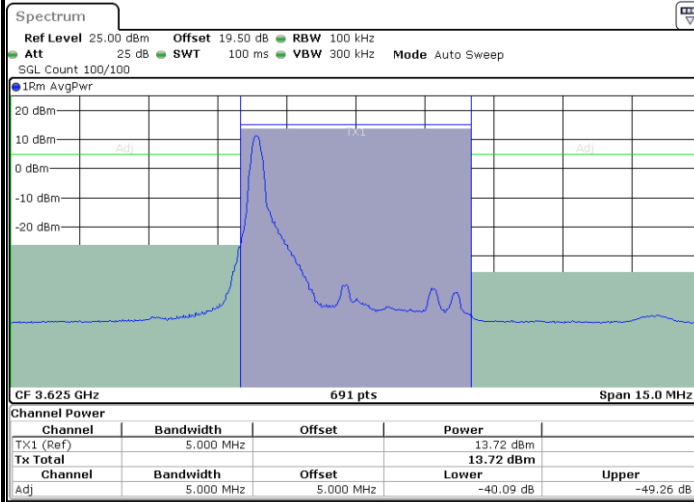


Date: 17.JUL.2024 09:32:30

Middle Channel / 1RBmax

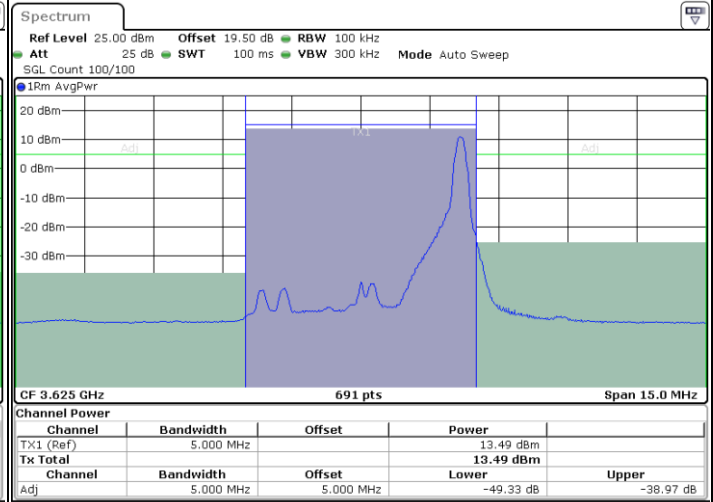

Date: 17.JUL.2024 09:28:30

Middle Channel / Full RB

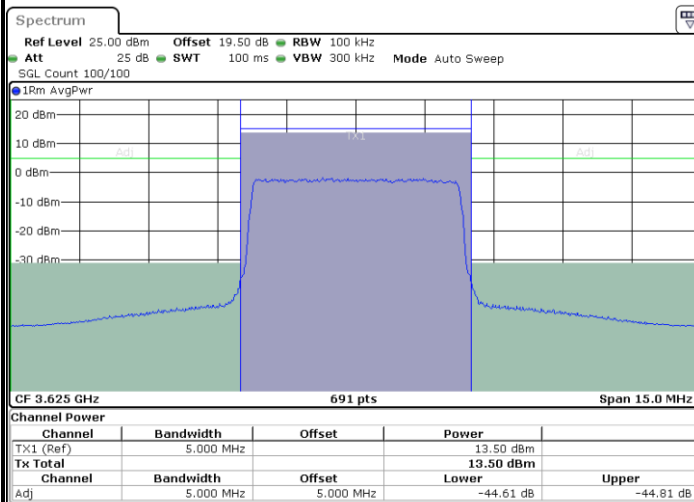

Date: 17.JUL.2024 09:33:18

N/A