

FCC Test Report for Part 15.247

Product name : Trinity Wireless Probe
Applicant : IBS Precision Engineering
FCC ID : 2ADZW-TRINITY

Test report No. : 20153829300 Ver 1.00

Laboratory information

Accreditation

Telefication complies with the accreditation criteria for test laboratories as laid down in ISO/IEC 17025:2005. The accreditation covers the quality system of the laboratory as well as the specific activities as described in the authorized annex bearing the accreditation number L021 and is granted on 30 November 1990 by the Dutch Council For Accreditation (RvA: Raad voor Accreditatie).

Telefication is designated by the FCC as an Accredited Test Firm for compliance testing of equipment subject to Certification under Parts 15 & 18. The Designation number is: NL0001

The Industry Canada registration number for the 3 meter test chamber of Telefication is: 4173A-1.

Documentation

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at Telefication Netherlands

Testing Location

Test Site	Telefication BV
Test Site location	Edisonstraat 12a 6902 PK Zevenaar The Netherlands Tel. +31316583180 Fax. +31316583189
Test Site FCC	NL0001

Revision History

Version	Date	Remarks	By
v0.50	19-05-2016	First draft	RvB
v1.00	09-06-2016	Release version	RvB

Table of Contents

Revision History	2
Summary of Test results.....	5
1 General Description.....	6
1.1 Applicant.....	6
1.2 Manufacturer	6
1.3 Tested Equipment Under Test (EUT)	6
1.4 Product specifications of Equipment under test	7
1.5 Environmental conditions.....	7
1.6 Measurement Standards.....	7
1.7 Applicable Standards	7
1.8 Conclusions.....	8
2 Test configuration of the Equipment Under Test	9
2.1 Test mode	9
2.2 Tested channels and Data rates	9
2.3 Radiated Test setup	10
2.4 Equipment used in the test configuration.....	11
2.5 Sample calculations	11
3 Test results.....	12
3.1 6dB bandwidth Measurement.....	12
3.1.1 Limit.....	12
3.1.2 Measurement instruments	12
3.1.3 Test setup.....	12
3.1.4 Test procedure	12
3.1.5 Test Results of the 6 dB bandwidth Measurement.....	12
3.1.6 Plots of the 6 dB bandwidth Measurement	13
3.2 Output Power Measurement	15
3.2.1 Limit.....	15
3.2.2 Measurement instruments	15
3.2.3 Test setup.....	15
3.2.4 Test procedure	15
3.2.5 Test results of Output Power Measurement.....	15
3.2.6 Plots of Peak Output Power Measurement	16
3.3 Power Spectral Density.....	17
3.3.1 Limit.....	17
3.3.2 Measurement instruments	17
3.3.3 Test setup.....	17
3.3.4 Test procedure	17

3.3.5	Test results of Power Spectral Density Measurement	17
3.3.6	Plots of the Power Spectral Density Measurements.....	18
3.4	Band edge Measurement	20
3.4.1	Limit.....	20
3.4.2	Measurement instruments	20
3.4.3	Test setup.....	20
3.4.4	Test procedure	20
3.4.5	Test results of Band Edges Measurements	20
3.4.6	Notes	20
3.4.7	Plots of the Band edge Measurements	20
3.5	Radiated Spurious Emissions Measurement	21
3.5.1	Limit.....	21
3.5.2	Measurement instruments	21
3.5.3	Test setup.....	21
3.5.4	Test procedure	21
3.5.5	Plots of the Radiated Spurious Emissions Measurement.....	22
3.5.6	Measurement Uncertainty.....	29

Summary of Test results

FCC	Description	Section in report	Verdict
15.247(a)	6dB Bandwidth	3.1	Pass
15.247(b)	RF output power	3.2	Pass
15.247(e)	Power spectral density	3.3	Pass
15.247(d)	Radiated Band edge	3.4	Pass
15.247(d)	Radiated Spurious emissions	3.5	Pass

1 General Description

1.1 Applicant

Client name:	IBS Precision Engineering
Address	Esp 201, Eindhoven
Zip code:	5633 AD
Country	The Netherlands
Telephone:	+31 40 290 1270
E-mail:	houben@ibspe.com
Contact name:	B. Houben

1.2 Manufacturer

Manufacturer name:	IBS Precision Engineering
Address:	Esp 201, Eindhoven
Zip code:	5633 AD
Country	The Netherlands
Telephone:	+31 40 290 1270
E-mail:	houben@ibspe.com
Contact name:	B. Houben

1.3 Tested Equipment Under Test (EUT)

Product name:	Trinity Wireless Probe
Brand name:	Trinity
Product type:	Wireless measurement probe
FCC ID:	2ADZW-TRINITY
Model(s):	TP-001-0044
Software version:	--
Hardware version:	001
Tests started:	17-06-2015
Testing ended:	24-04-2016

1.4 Product specifications of Equipment under test

Tx Frequencies:	2412 – 2462 MHz
Rx frequencies:	2412 – 2462 MHz
Maximum output power to antenna:	16 dBm
Antenna type and Gain	PCB antenna, 3dBi
Type of modulation:	DSSS
Emission designator:	17M5GXW

1.5 Environmental conditions

Test date	17-06-2015	24-04-2016
Ambient temperature	24°C	20.7°C
Humidity	42.1%	38.1%

1.6 Measurement Standards

- FCC KDB Publication No. 558074 D01DTS Meas. Guidance V03r05
- ANSI C63.10:2013

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247.

1.8 Conclusions

The sample of the product showed NO NON-COMPLIANCES to the specifications stated in paragraph 1.7 of this report.

The results of the test as stated in this report, are exclusively applicable to the product items as identified in this report. Telefication accepts no responsibility for any properties of product items in this test report, which are not supported by the tests as specified in paragraph 1.7 "*Applicable standards*".

All tests are performed by:

Name : ing. P.A. Suringa and ing R. van Barneveld

Review of test methods and report by:

Name : ing. P.A. Suringa

The above conclusions have been verified by the following signatory:

Date : 09-06-2016

Name : ing M.T.P.M Wouters v/d Oudenweijer

Function : Director Certification

Signature :



2 Test configuration of the Equipment Under Test

2.1 Test mode


The applicant provided test mode firmware for the EUT, in which it was possible to configure the EUT into different test channels. (the applicant was present during the testing)

2.2 Tested channels and Data rates


Technology	Channels	Data rate	Frequency (MHz)
IEEE 802.11g	1 (Low)	54 Mbps	2412
	4 (Mid	54 Mbps	2427
	10(High)	54 Mbps	2457

2.3 Radiated Test setup

Radiated emissions test setup 30 MHz - 1 GHz

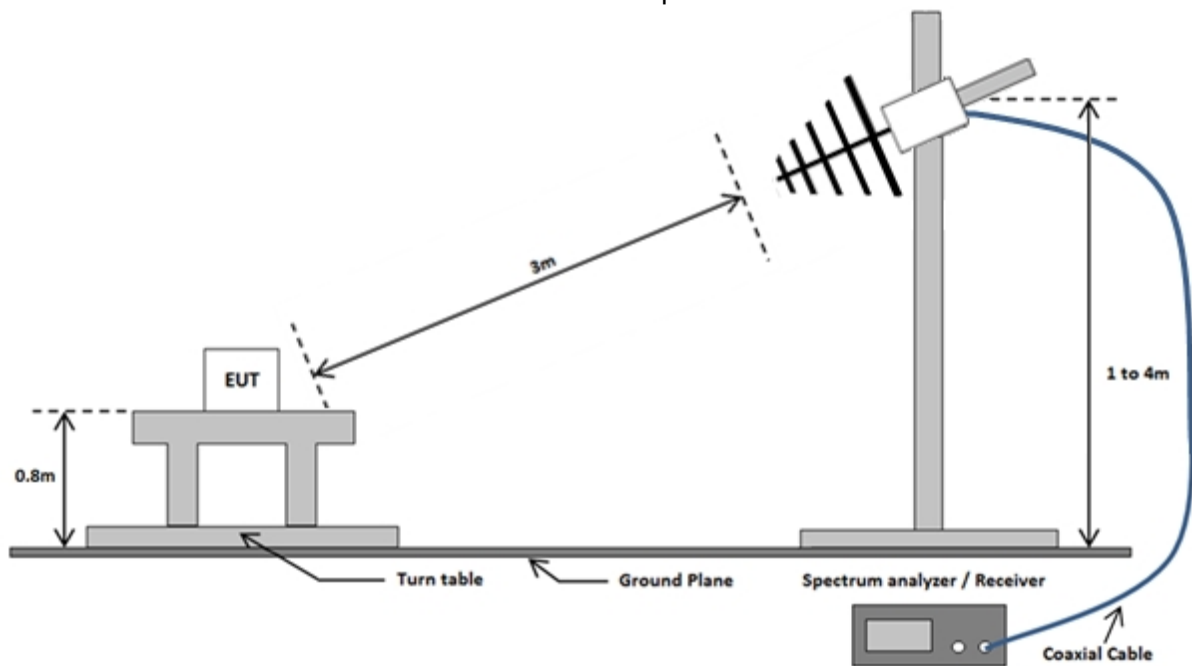

Radiated emissions test setup above 1 GHz

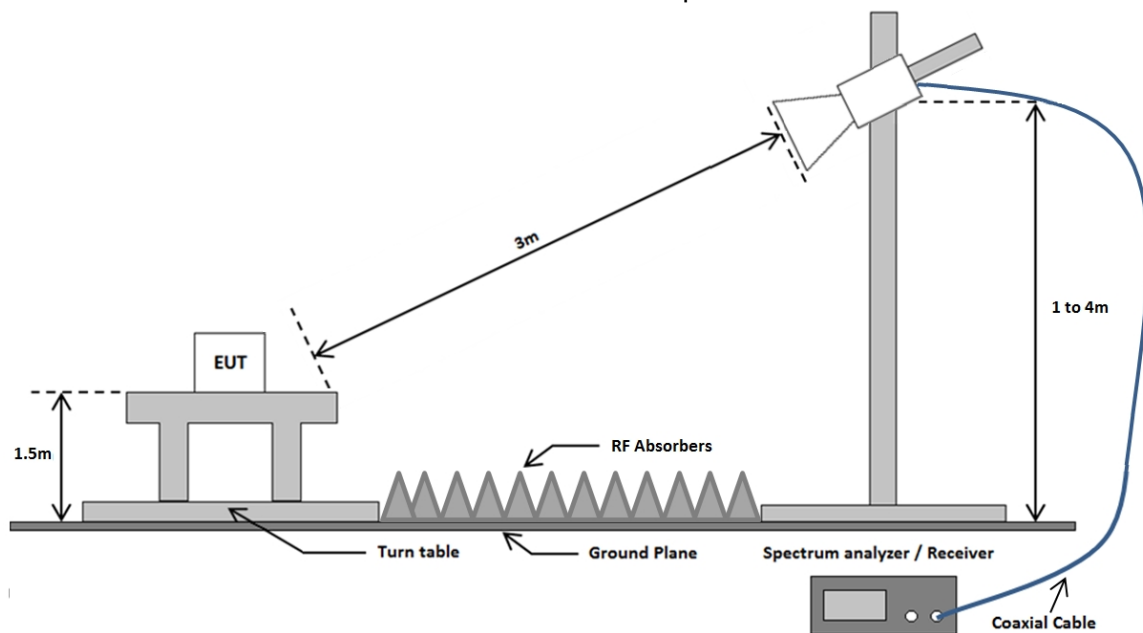

2.4 Equipment used in the test configuration

Description	Manufacturer	Model	ID	Used at Par.
Spectrum Analyzer	Rohde & Schwarz	FSP40	TE11125	3.1 to 3.5
Spectrum Analyzer	Rohde & Schwarz	ESR7	TE01220	3.1 to 3.5
Biconilog Antenna	Chase	CBL6112A	TE00967	3.1 to 3.5
Horn Antenna	EMCO The Electro – Mechanics Co	3115	TE00531	3.1 to 3.5
Pre-amplifier	Miteq	AFS42-041001800-29-OP-42	TE11132	3.1 to 3.5
SAC Chamber	Comtest Engineering BV	-	TE00861	3.1 to 3.5

2.5 Sample calculations

1)

See chapters 3.1 to 3.4

dBμV/m to dBm.(EIRP)	dBμV/m to dBm(ERP).	μV/m to dBμV/m
$E(\text{dB}\mu\text{V/m}) = \text{EIRP}(\text{dBm}) + 95.2$	$E(\text{dB}\mu\text{V/m}) = \text{ERP}(\text{dBm}) + 97.4$	$E(\text{dB}\mu\text{V/m}) = 20 \log (\mu\text{V/m})$

2)

Field Strength Measurement example (see chapter 3.5):

Frequency (MHz)	Polarization	Height(m)	Peak (dBμV/m)
565,2	Vertical	1	47,1

The following relation applies:

$$E (\text{dB}\mu\text{V/m}) = U(\text{dB}\mu\text{V}) + \text{AF} (\text{dB/m}) + \text{CL} (\text{dB})$$

Where:

E = Electric field strength

U = Measuring receiver voltage

AF = Antenna factor

CL = Cable loss

$$(47,1 = 24.77 + 19.2 + 3.01)$$

3 Test results

3.1 6dB bandwidth Measurement

3.1.1 Limit

The minimum 6 dB Bandwidth shall be at least 500 kHz.

3.1.2 Measurement instruments

The measurement instruments are listed in chapter 2.4 of this report.

3.1.3 Test setup

The test setup is as shown in chapter 2.3 of this report.



3.1.4 Test procedure


The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.

3.1.5 Test Results of the 6 dB bandwidth Measurement

Technology Std.	Channel	Frequency (MHz)	Data rate	6dB bandwidth (MHz)
IEEE 802.11g	1	2412	54 Mbps	17.52
	4	2427	54 Mbps	17.28
	10	2457	54 Mbps	17.82
Uncertainty	± 707 kHz			

3.1.6 Plots of the 6 dB bandwidth Measurement

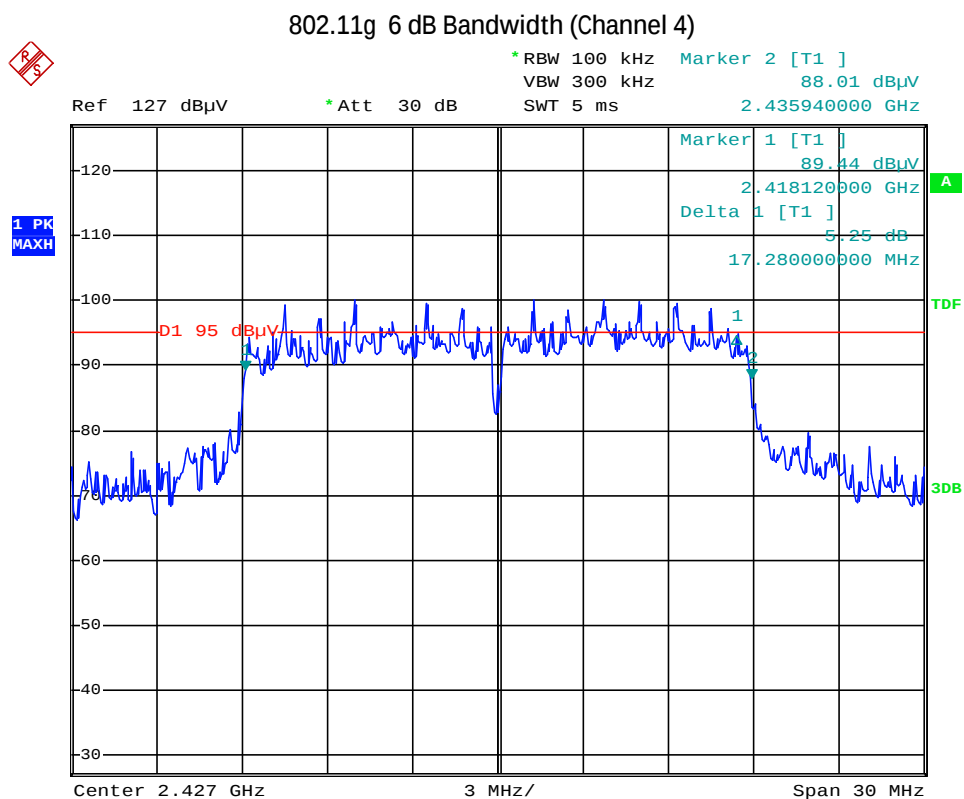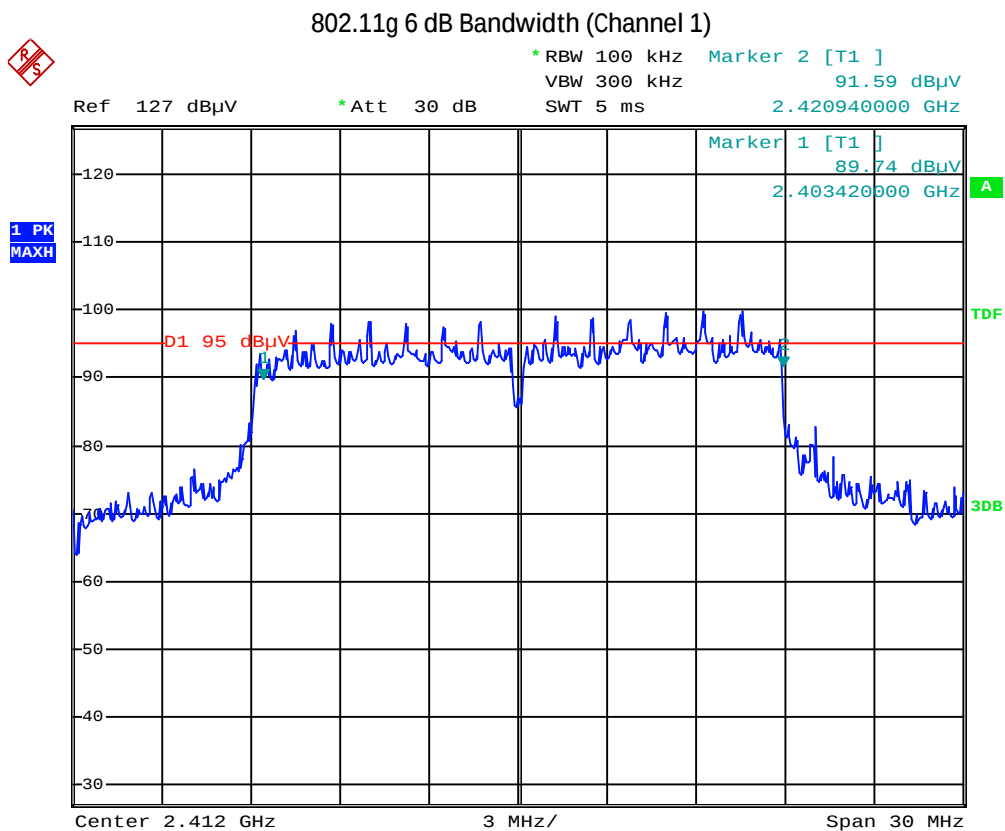

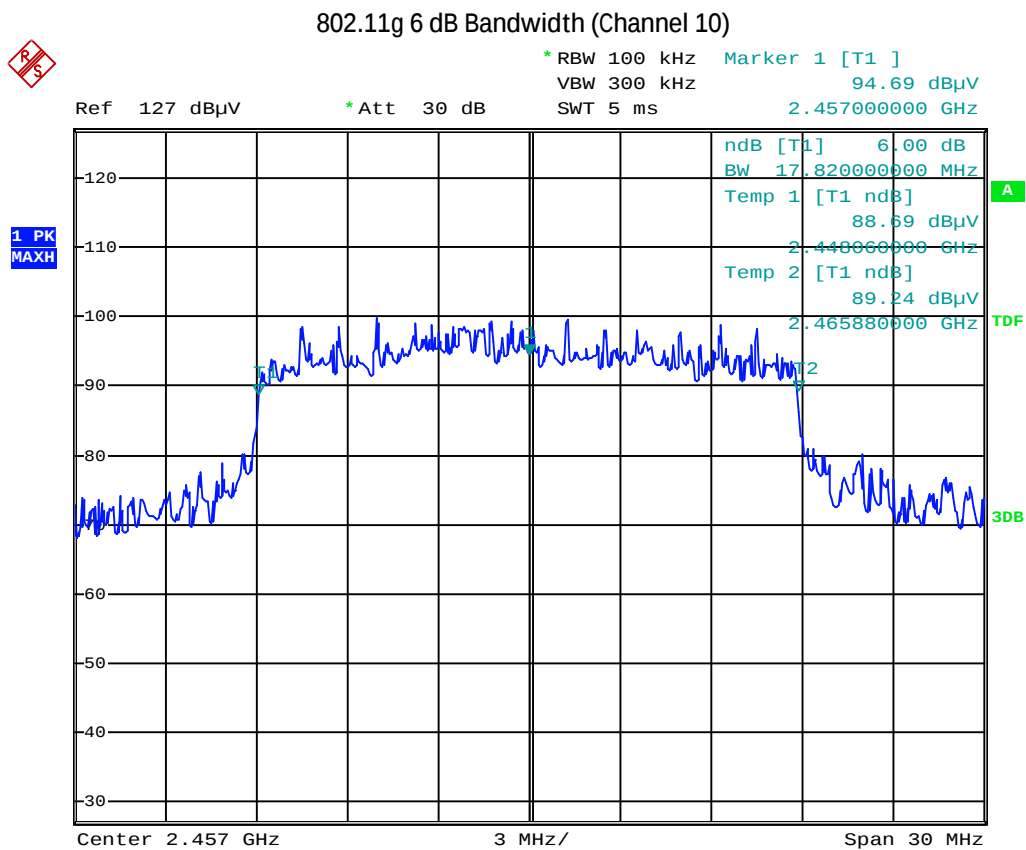

3.2 Output Power Measurement

3.2.1 Limit

For systems using digital modulation in the 2400-2483.5 MHz, the limit for the peak output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point to point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measurement instruments

The measurement instruments are listed in chapter 2.4 of this report.

3.2.3 Test setup

The test setup is as shown in chapter 2.3 of this report.




3.2.4 Test procedure

The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.

3.2.5 Test results of Output Power Measurement

Technology Std.	Channels	Frequency (MHz)	Data rate	Output power (dBm)
IEEE 802.11g	1	2412	54 Mbps	21.73
	4	2427	54 Mbps	23.61
	10	2457	54 Mbps	23.24
Uncertainty	±1.78 dB			

3.2.6 Plots of Peak Output Power Measurement

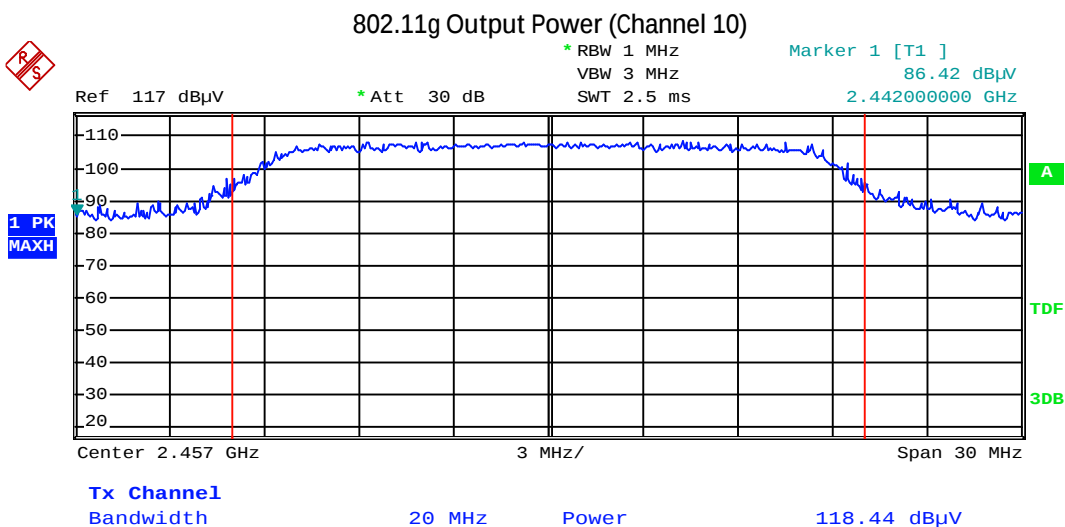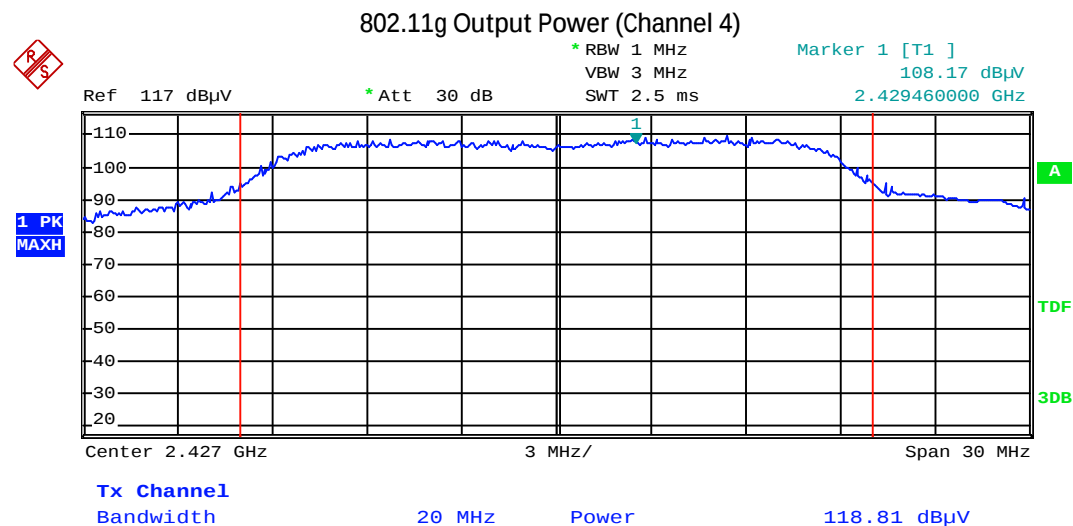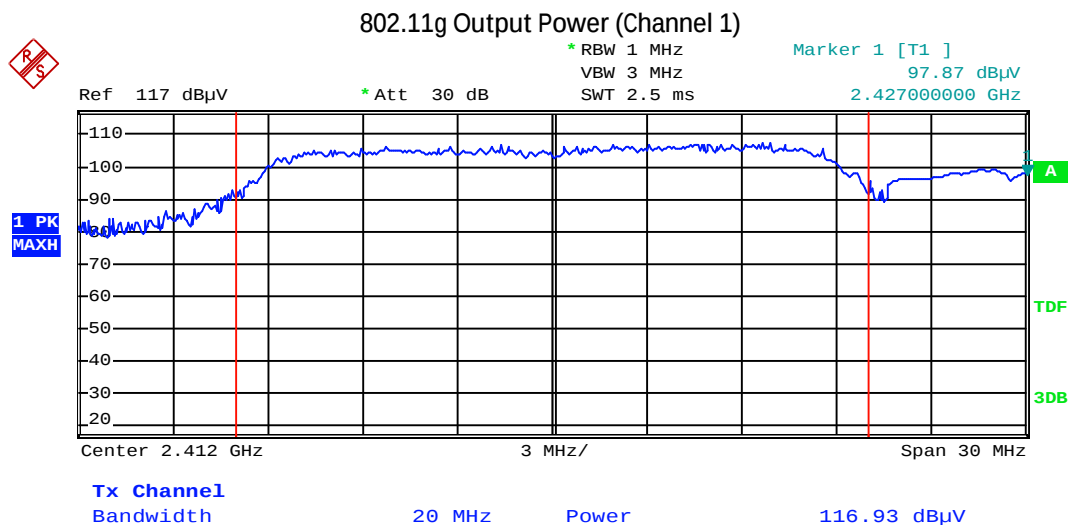

3.3 Power Spectral Density

3.3.1 Limit

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measurement instruments

The measurement instruments are listed in chapter 2.4 of this report.

3.3.3 Test setup

The test setup is as shown in chapter 2.3 of this report.

3.3.4 Test procedure


The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.

3.3.5 Test results of Power Spectral Density Measurement


Technology Std.	Channels	Frequency (MHz)	Data rate	PSD/3 kHz (dBm)
IEEE 802.11g	1	2412	54 Mbps	-13.88
	4	2427	54 Mbps	-12.5
	10	2457	54 Mbps	-9.68
Uncertainty	± 1.78 dB			

3.3.6 Plots of the Power Spectral Density Measurements


Power Spectral Density 3 kHz (channel 1)

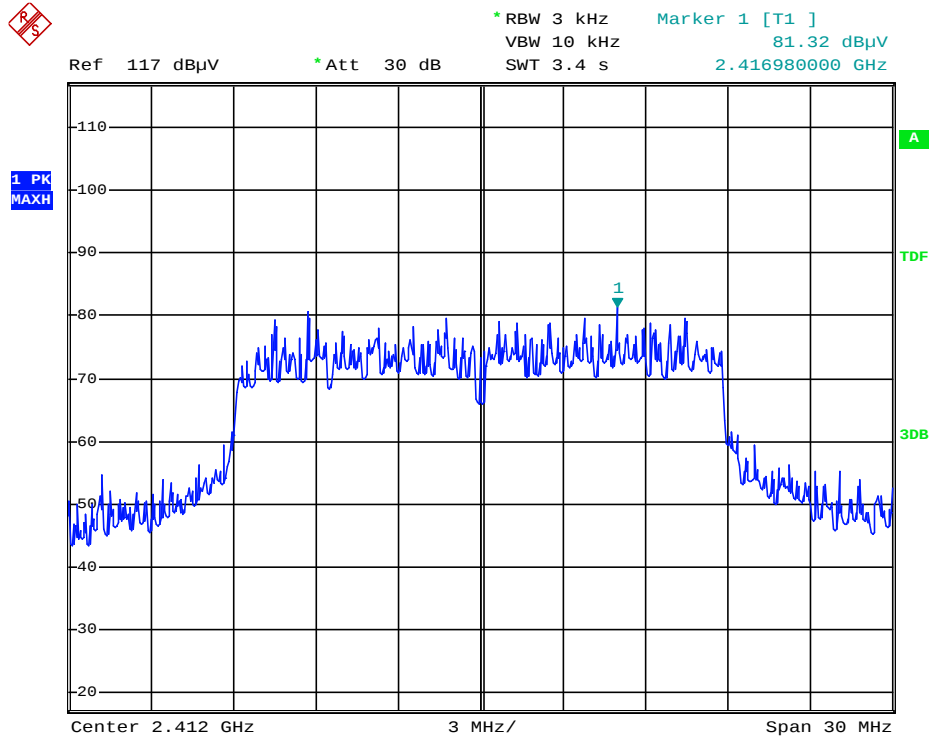

Power Spectral Density 3 kHz (channel 4)

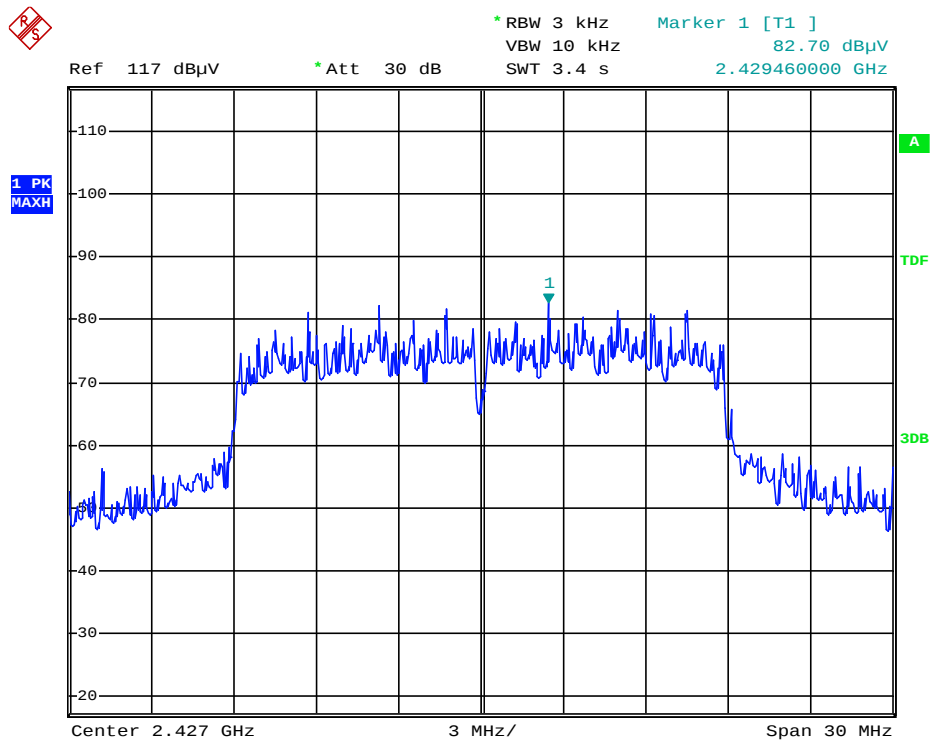

Power Spectral Density 3 kHz (channel 10)

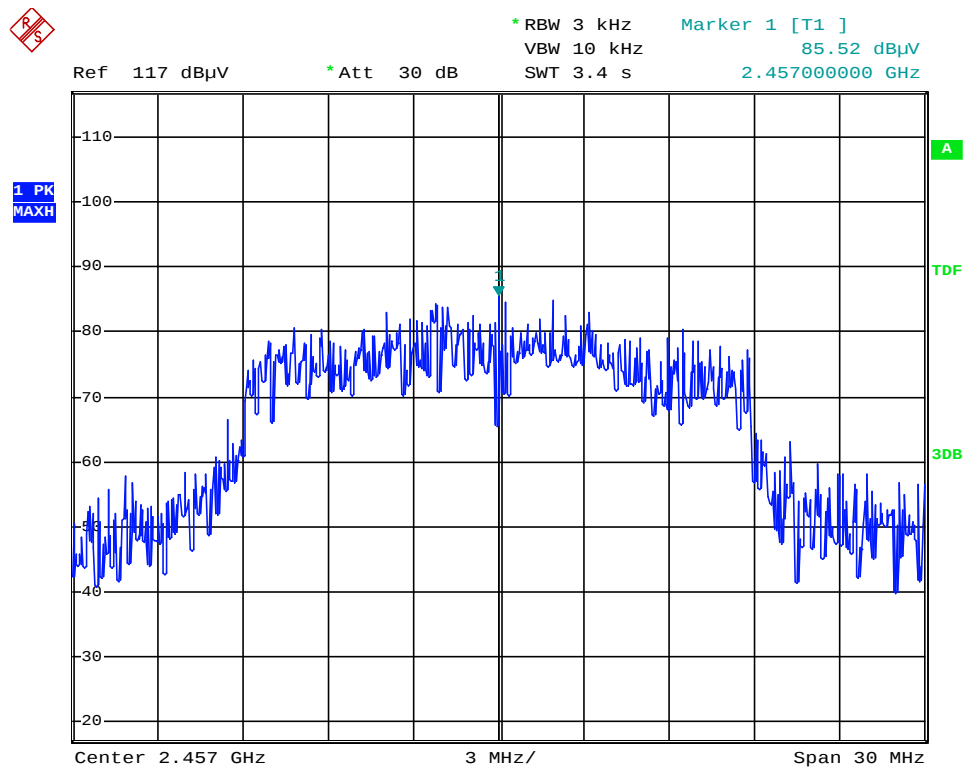

3.4 Band edge Measurement

3.4.1 Limit

At the edge of the authorized band the RF power shall be at least 20 dB down.

3.4.2 Measurement instruments

The measurement instruments are listed in chapter 2.4 of this report.

3.4.3 Test setup

The test setup is as shown in chapter 2.3 of this report.

3.4.4 Test procedure

According to KDB Publication 558074 V02r05, sections 11.3 and 12.1

3.4.5 Test results of Band Edges Measurements


Band edge					
Technology Std.	Channels	Frequency (MHz)	Data rate	20 dB down (dBm)	Limit (dBm)
IEEE 802.11g	1	2412	54 Mbps	-14.11	1.73
Uncertainty	±0.63 dB				

3.4.6 Notes

- The upper band edge was not measured as the highest channel is more than 20 MHz from the upper band edge.

3.4.7 Plots of the Band edge Measurements

BLE Conducted Lower band edge(Channel 1)

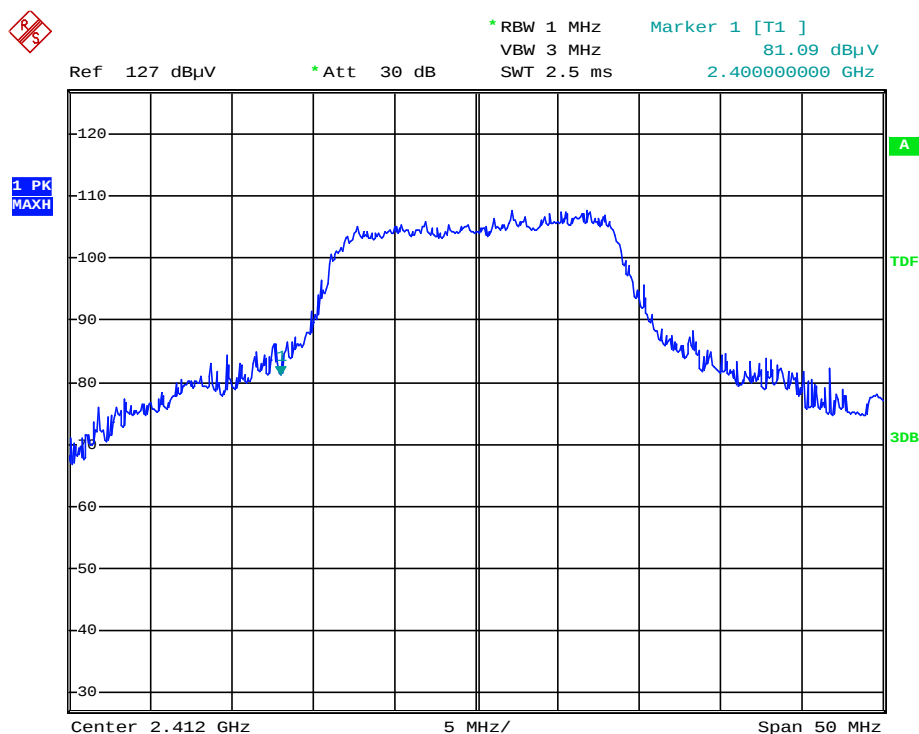

3.5 Radiated Spurious Emissions Measurement

3.5.1 Limit

In any 100 kHz bandwidth outside the operating frequency band, the RF power shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either a RF conducted or a radiated measurement.

3.5.2 Measurement instruments

The measurement instruments are listed in chapter 2.4 of this report.

3.5.3 Test setup

The test setup is as shown in chapter 2.4 of this report.


3.5.4 Test procedure

According to KDB Publication 558074 V02r05, sections 11.3 and 12.1

3.5.5 Plots of the Radiated Spurious Emissions Measurement

30 MHz to 1 GHz Low channel

Vertical polarization

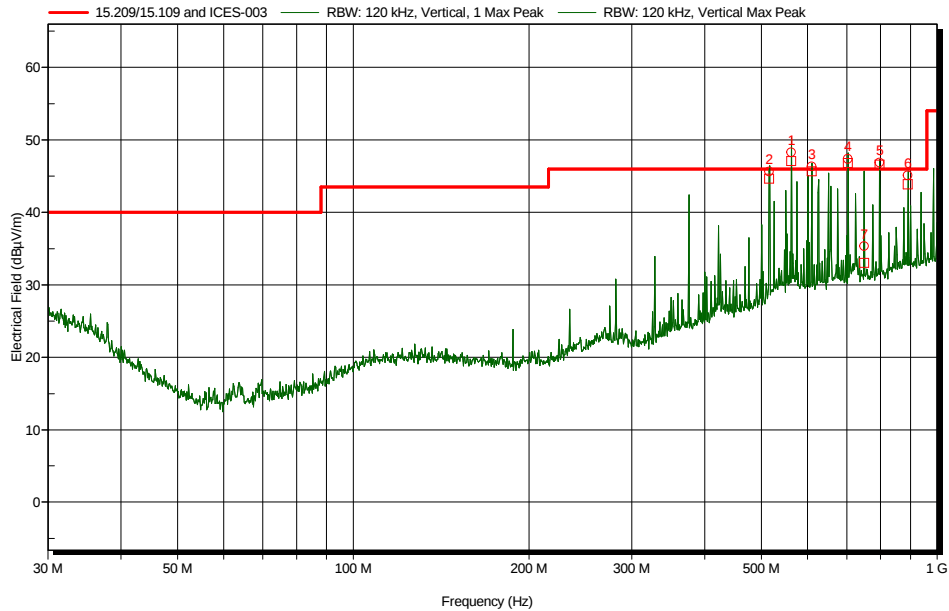

Measured peaks Vertical 30 – 1000 MHz Low channel


Frequency (MHz)	Polarization	Height (m)	Quasi-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)
562,5	Vertical	1	47,	96.93	-49,93
515,628	Vertical	1	44,7	96.93	-52,23
609,378	Vertical	1	45,7	46	-0,3
703,122	Vertical	2	46,8	96.93	-50.13
796,872	Vertical	1,5	46,6	96.93	-50,33
890,622	Vertical	2,5	43,9	96.93	-53,03
749,994	Vertical	1	33	96.93	-63,93

Note:

- Only 609.378 MHz falls within a restricted band (608 -614 MHz)which has a limit of 46 dBμV/m, for the other frequency the limit is 20 dB down from the measured output power (96.93 dBμV/m)
- In the plot only the restricted band limit is shown (15.209)

30 MHz to 1 GHz Middle channel

Vertical polarization

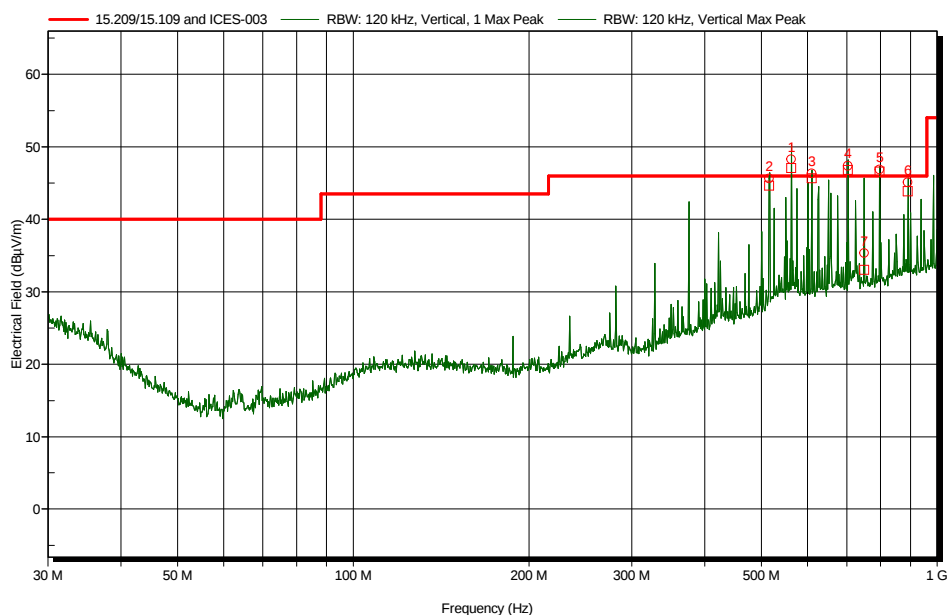

Measured peaks Vertical 30 – 1000 MHz Middle channel


Frequency (MHz)	Polarization	Height (m)	Quasi-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)
562,500	Vertical	1	46,9	98.81	-51,91
515,628	Vertical	1	44,2	98.81	-54,61
609,378	Vertical	1	45,8	46	-0,2
703,128	Vertical	2	46,6	98.81	-52,21
796,872	Vertical	1,5	46,1	98.81	-52,71
750	Vertical	1	31,3	98.81	-67,51
890,622	Vertical	1,5	44,8	98.81	-54.01

Note:

- Only 609.378 MHz falls within a restricted band (608 -614 MHz)which has a limit of 46 dBμV/m, for the other frequency the limit is 20 dB down from the measured output power (98.81 dBμV/m)
- In the plot only the restricted band limit is shown (15.209)

30 MHz to 1 GHz High channel

Vertical polarization

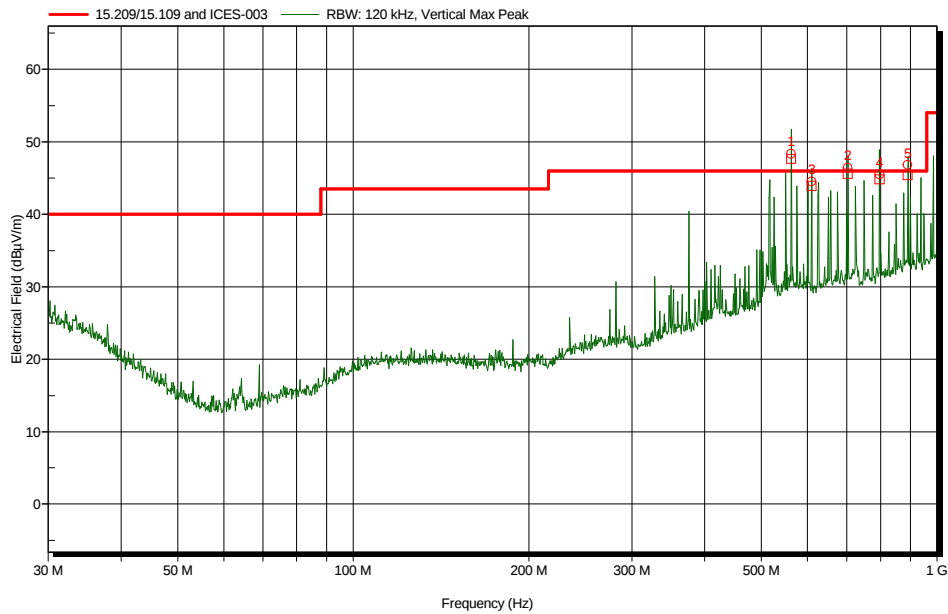

Measured peaks Vertical 30 – 1000 MHz High channel


Frequency (MHz)	Polarization	Height (m)	Quasi-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)
562,5	Vertical	1	47,7	98.44	-50,74
703,122	Vertical	2	45,6	98.44	-52,84
609,372	Vertical	1	43,9	46	-2,1
796,872	Vertical	1,5	44,8	98.44	-53,64
890,628	Vertical	1,5	45,4	98.44	-53,04

Note:

- Only 609.372 MHz falls within a restricted band (608 -614 MHz)which has a limit of 46 dBμV/m, for the other frequency the limit is 20 dB down from the measured output power (98.44 dBμV/m)
- In the plot only the restricted band limit is shown (15.209)

30 MHz to 1 GHz


Horizontal polarization

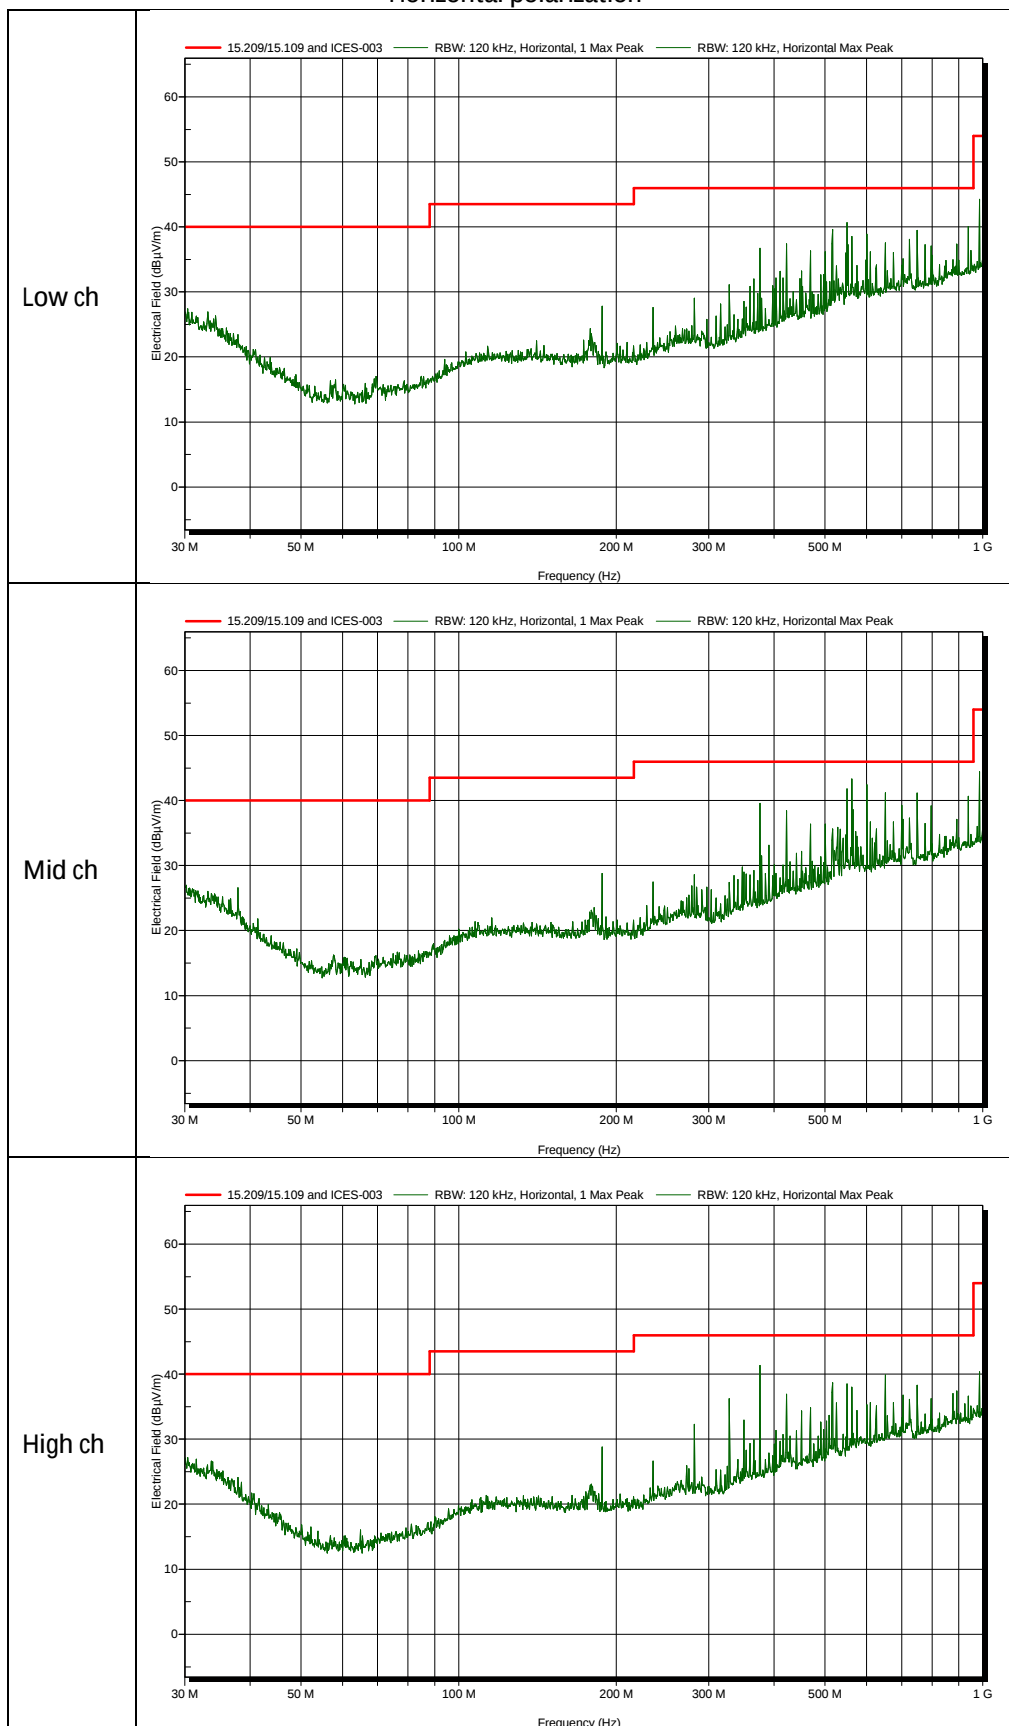


1 GHz to 18 GHz

Vertical polarization


Low channel

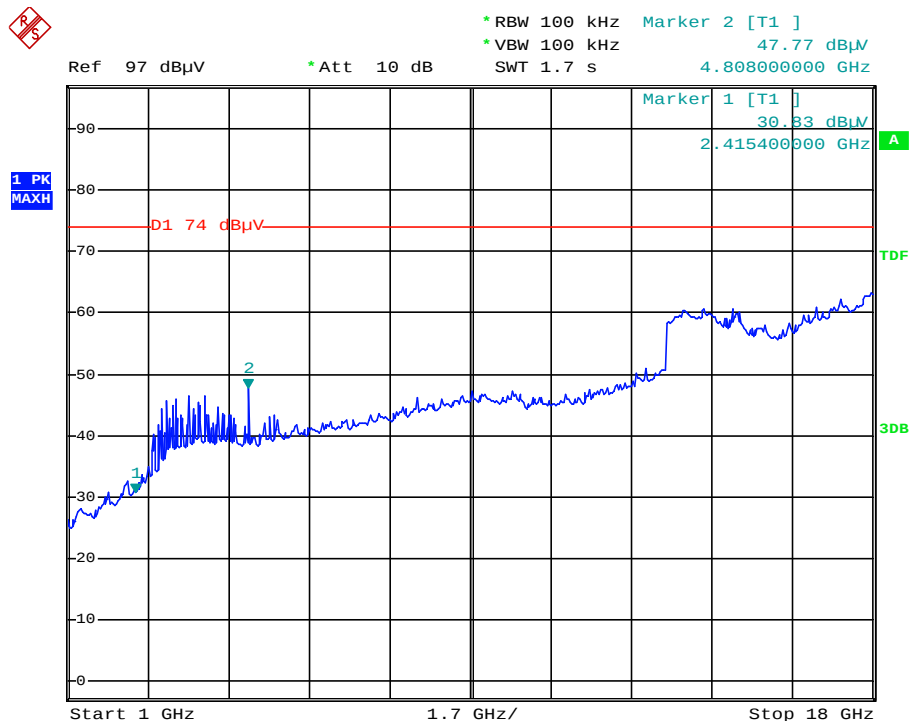

Middle channel

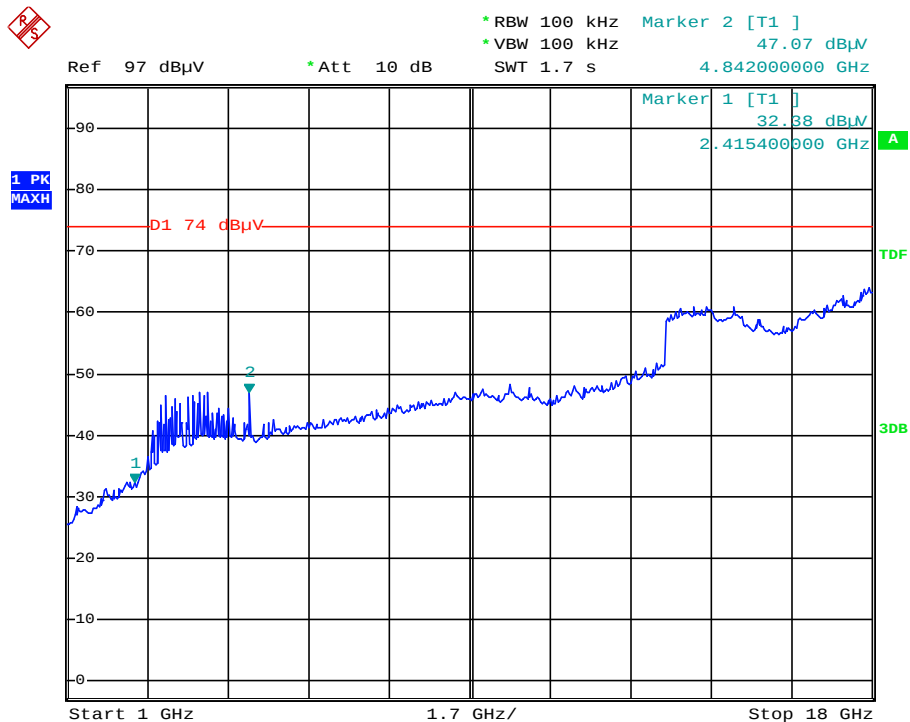

High channel

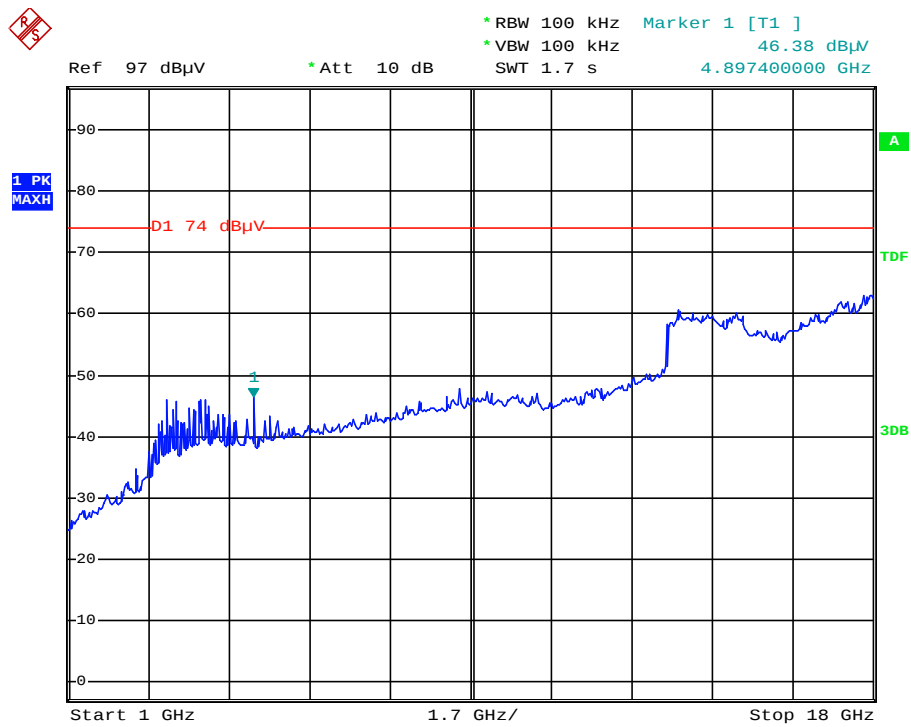


Note:

- the worst case emission is found with vertical polarization so no horizontal measurements were performed


18 GHz to 26 GHz

Vertical polarization


Low channel

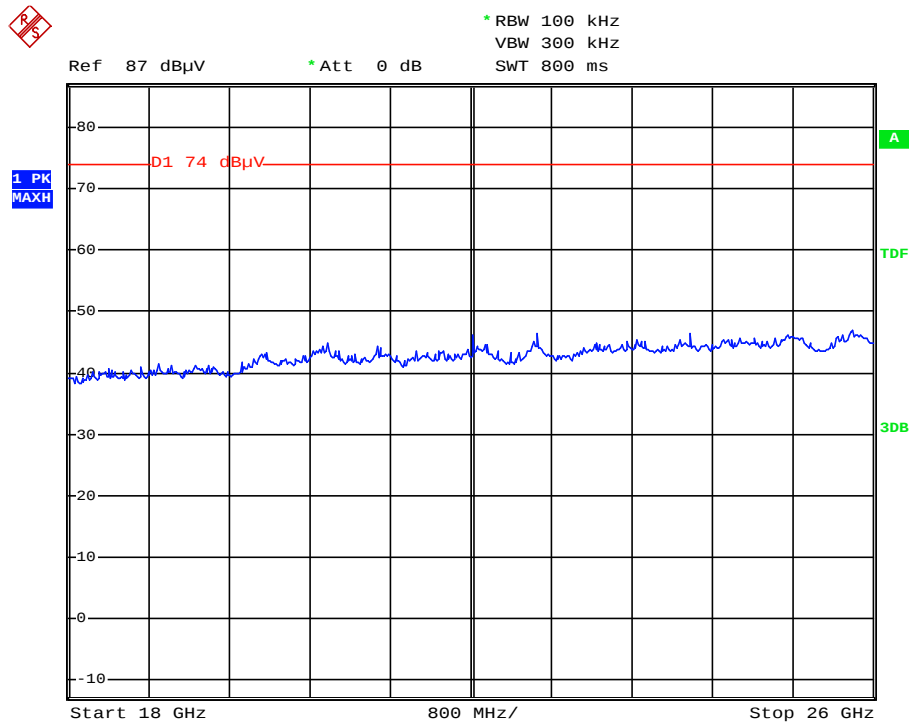

Middle channel

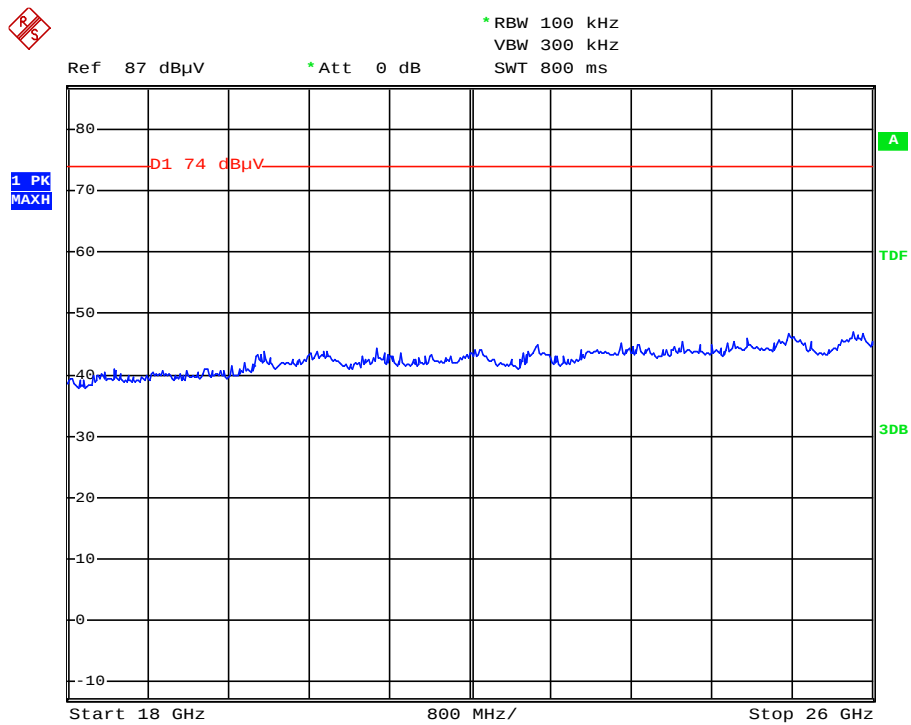

High channel

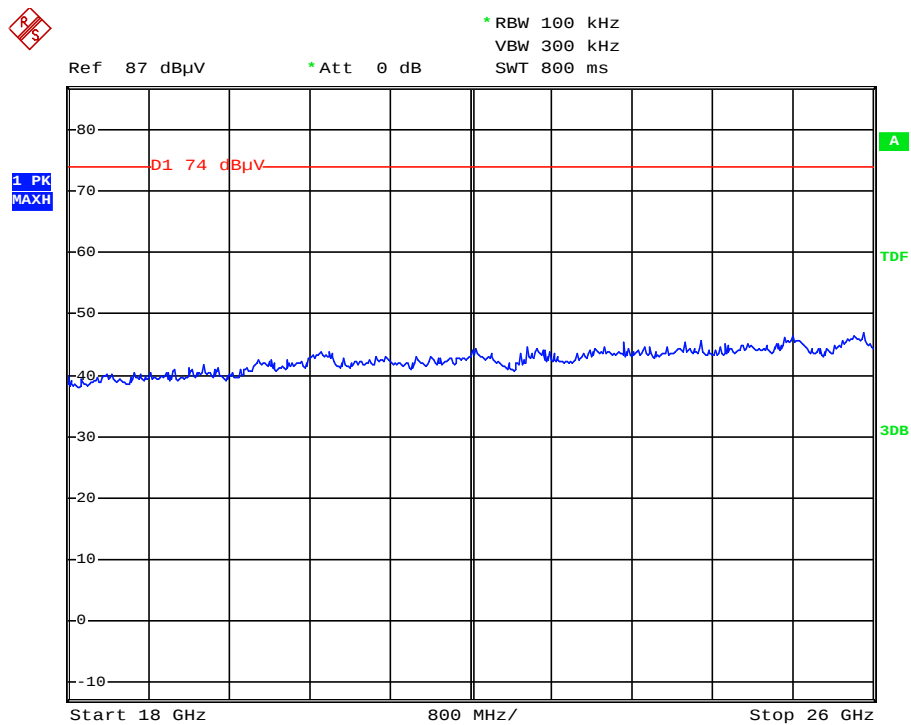

Note:

- the worst case emission is found with vertical polarization so no horizontal measurements were performed

3.5.6 Measurement Uncertainty

Measurement uncertainty Radiated emissions below 1 GHz

Horizontal polarization	
30 – 200 MHz	4.5 dB
200 – 1000 MHz	3.6 dB
Vertical polarization	
30 – 200 MHz	5.4 dB
200 – 1000 MHz	4.6 dB

Measurement uncertainty Radiated emissions above 1 GHz

1 – 18 GHz	+ 5.7/- 5.7dB
18 – 26,5 GHz	+ 3 /- 3 dB