


FeedbackNow solution Operational description

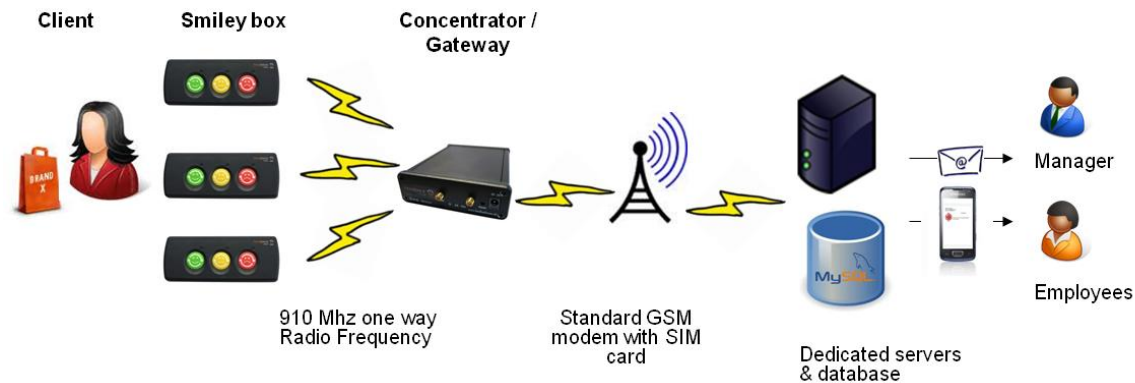

CAPABILITIES

Solution capability

- Overall solution offers the possibility to collect client feedback on the spot and real-time. Solution is totally independent from client's IT and combined 3 main technologies: Radio Frequency, GSM, IT capabilities

Smiley box capabilities

- Smiley box is a simple, wireless, low power, short range voting device. It communicates by 910 Mhz Radio Frequency mono-directional in a range less than 1'500 feet

Concentrator / Gateway capabilities

- Concentrator / Gateway works as a hub collecting Smiley boxes emissions and forwarding them through GSM. Concentrator/Gateway has no radio Frequency emission capabilities. Concentrator/Gateway has only Radio Frequency reception capabilities, GSM/GPRS standard modem capabilities and information storage capabilities

CONFIDENTIAL AND PROPRIETARY

Any use of this material without specific permission of S.NOW S.A. is strictly prohibited
S.NOW sa – 20 chemin de Saint Georges – 1815 Clarens - Suisse



RF DESCRIPTION

The smiley box and the concentrator use the same integrated circuit from Nordic Semiconductors. (nRF905). The part is able to work as a transceiver, but the smiley box uses it only for transmission and the concentrator only for reception. Each time a button is pressed, a short RF message is sent to the concentrator. The chip allows the selection of the output power and the carrier frequency. The power used for the emission is set to -2dBm. The frequency is set to 910 MHz.

ANTENNA DATA

The smiley uses a PCB antenna. The picture shows the form of the antenna.

