

FCC 47 CFR PART 15 SUBPART C

Product Type : Roominate rPower
Applicant : Maykah, Inc.
Address : 2975 Bowers Ave, Suite 301 Santa Clara California 95051 United States
Trade Name : roominate
Model Number : rPower
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2014
ANSI C63.10:2013
Receive Date : Jun. 10, 2015
Test Period : Jul. 08 ~ 09, 2015
Issue Date : Aug. 18, 2015

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Aug. 11, 2015	Initial Issue	
01	Aug. 18, 2015	Revised report information.	Peggy Chang

Verification of Compliance

Issued Date: 08/18/2015

Product Type : Roominate rPower
Applicant : Maykah, Inc.
Address : 2975 Bowers Ave, Suite 301 Santa Clara California 95051
United States
Trade Name : roominate
Model Number : rPower
FCC ID : 2AE37-RPOWER
EUT Rated Voltage : DC 3V
Test Voltage : DC 3V
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2014
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By

: Fly Lu

(Manager)

(Fly Lu)

Reviewed By

: Eric Ou Yang

(Testing Engineer)

(Eric Ou Yang)

TABLE OF CONTENTS

1	General Information	6
2	EUT Description	7
3	Test Methodology	8
3.1.	Mode of Operation.....	8
3.2.	EUT Exercise Software	8
3.3.	Configuration of Test System Details	9
3.4.	Test Site Environment	9
4	Radiated Emission Measurement.....	10
4.1.	Limit	10
4.2.	Test Instruments	10
4.3.	Setup	11
4.4.	Test Procedure	13
4.5.	Test Result.....	15
5	Maximum Conducted Output Power Measurement.....	18
5.1.	Limit	18
5.2.	Test Setup.....	18
5.3.	Test Instruments	18
5.4.	Test Procedure	18
5.5.	Test Result.....	19
6	6dB RF Bandwidth Measurement.....	20
6.1.	Limit	20
6.2.	Test Setup.....	20
6.3.	Test Instruments	20
6.4.	Test Procedure	21
6.5.	Test Result.....	21
6.6.	Test Graphs	22
7	Maximum Power Density Measurement	23
7.1.	Limit	23
7.2.	Test Setup.....	23
7.3.	Test Instruments	23
7.4.	Test Procedure	23
7.5.	Test Result.....	24
7.6.	Test Graphs	25

8	Out of Band Conducted Emissions Measurement	26
8.1.	Limit	26
8.2.	Test Setup.....	26
8.3.	Test Instruments	26
8.4.	Test Procedure	26
8.5.	Test Graphs	27
9	Band Edges Measurement	30
9.1.	Limit	30
9.2.	Test Setup.....	30
9.3.	Test Instruments	30
9.4.	Test Procedure	31
9.5.	Test Result.....	32
10	Antenna Measurement.....	33
10.1.	Limit	33
10.2.	Antenna Connector Construction	33

1 General Information

1.1 Summary of Test Result

Standard	Item	Result	Remark
15.247			
15.207	AC Power Conducted Emission	N/A	This device power support by DC source.
Standard	Item	Result	Remark
15.247			
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	Max. Output Power	PASS	-----
15.247(a)(2)	6dB RF Bandwidth	PASS	-----
15.247(e)	Power Spectral Density	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	Band Edge Measurement	PASS	-----
15.203	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Test Item	Frequency Range		Uncertainty (dB)
Conducted Emission	9kHz ~ 30MHz		± 2.02
Radiated Emission	30MHz ~ 1000MHz	Horizontal	± 3.98
		Vertical	± 3.62
	1000MHz ~ 18000MHz	Horizontal	± 3.11
		Vertical	± 3.07
	18000MHz ~ 40000MHz	Horizontal	± 3.66
		Vertical	± 3.54

2 EUT Description

Product Type	Roominate rPower
Trade Name	roominate
Model No.	rPower
Applicant	Maykah, Inc. 2975 Bowers Ave, Suite 301 Santa Clara California 95051 United States
Manufacturer	EnzyTek Technoloy Inc. 7F,No.35,Hsueh Fu Rd., Hsinchu 300, Taiwan , R.O.C.
FCC ID	2AE37-RPOWER
Frequency Range	Bluetooth v4.0 LE: 2402 ~ 2480 MHz
Modulation Type	GFSK
Antenna Type	PCB Antenna
Antenna Gain	-6.62 dBi
RF Output Power	0.00119 W / 0.76 dBm

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal Operation Mode
Mode 2: Bluetooth v4.0 LE Link Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

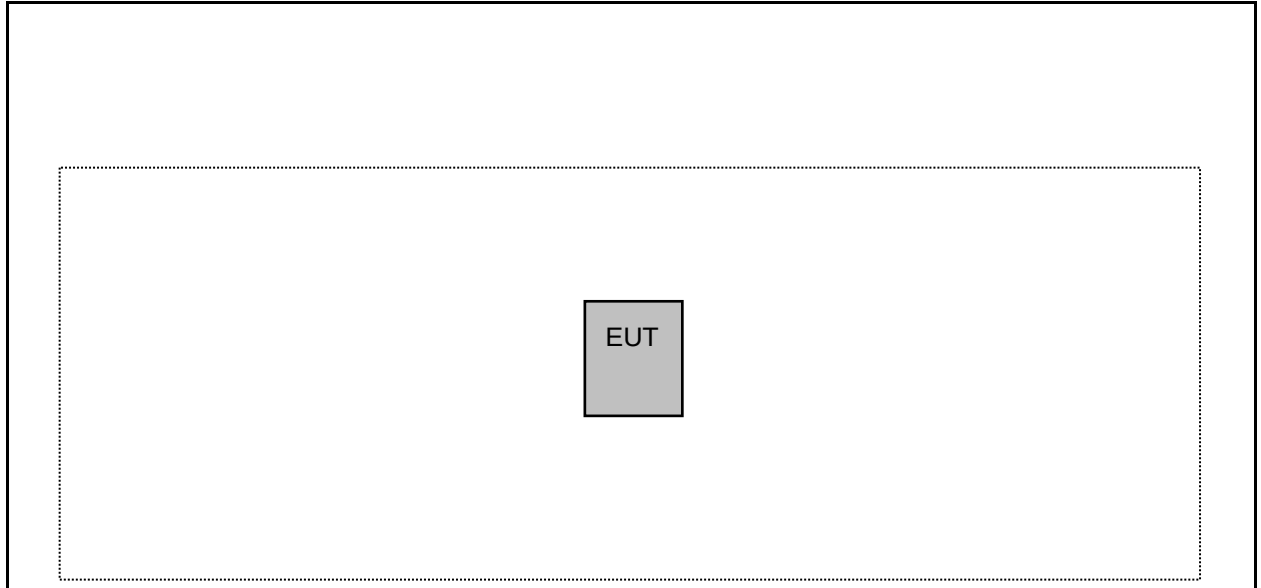
Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

3.2. EUT Exercise Software

1. Setup the EUT shown on 3.3.
2. Turn on the power of all equipment.
3. Turn Bluetooth function link to CBT.
4. EUT run test program.

3.3. Configuration of Test System Details

Radiated Emissions



3.4. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Radiated Emission Measurement

4.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

4.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/06/2015	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/06/2015	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/24/2015	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/24/2015	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/22/2014	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/12/2015	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	07/06/2015	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	02/02/2015	(1)
Microwave Cable	EMCI	EMC-104-SM-S M-14000	140202	02/24/2015	(1)
Microwave Cable	EMCI	EMC104-SM-S M-600	140301	02/24/2015	(1)
Test Site	ATL	TE01	888001	08/28/2014	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.


Note: N.C.R. = No Calibration Request.

4.3. Setup

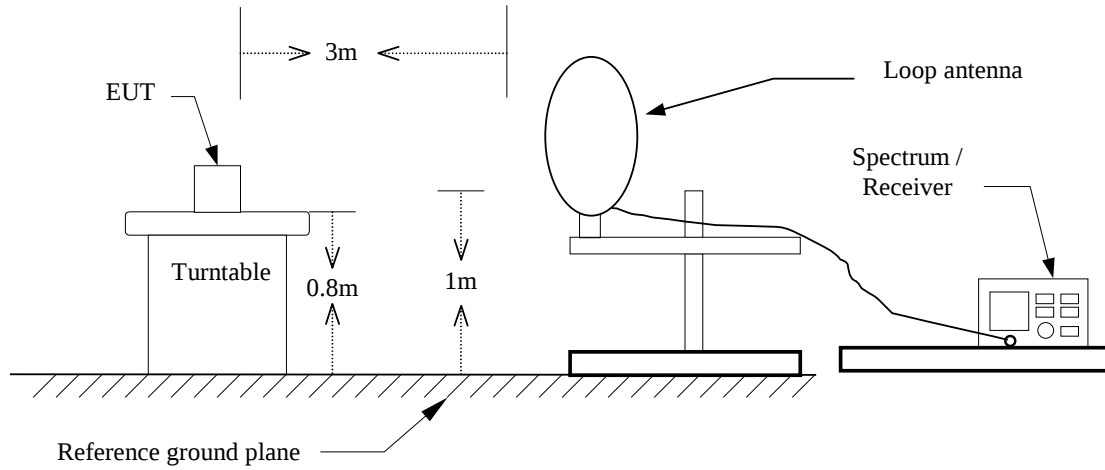
9kHz ~ 30MHz



Below 1GHz

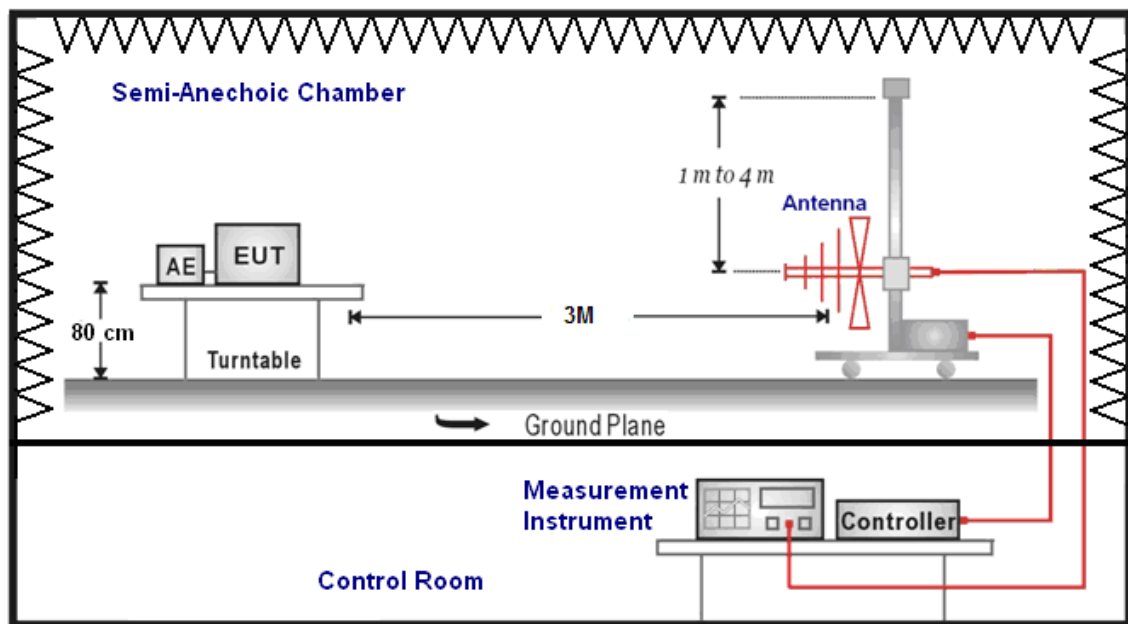

Above 1GHz

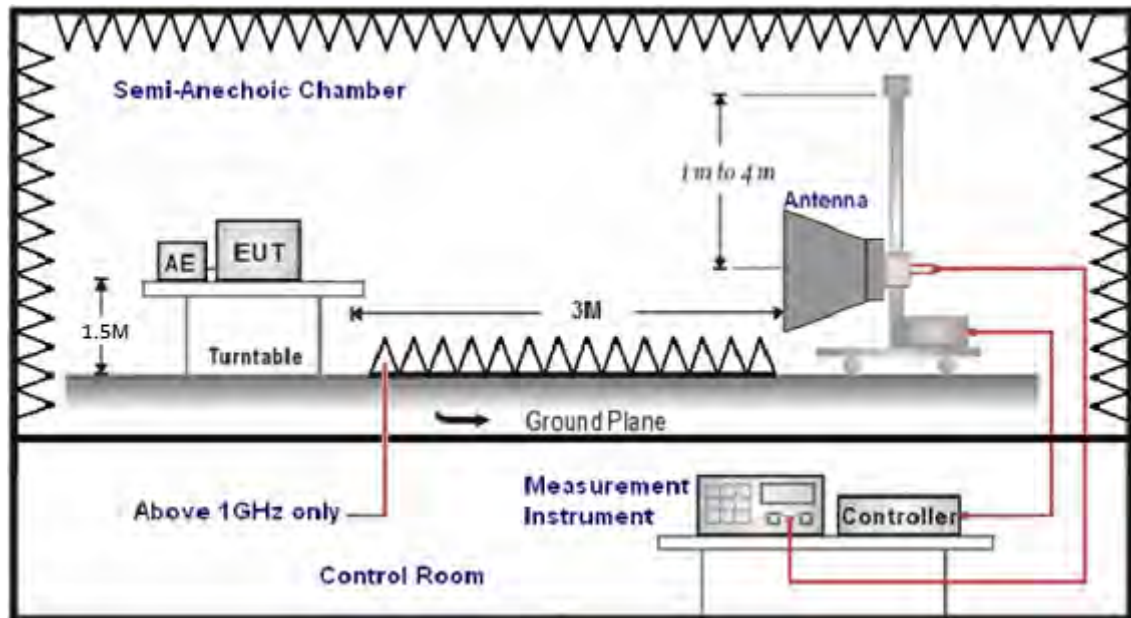

4.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1GHz use 0.8m turntable / above 1GHz use 1.5m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >98% / 1/T for average measurements when Duty cycle <98%.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (model VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

4.5. Test Result

Below 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		DC 3V	
Model Number:		rPower		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		1		Date:		07/09/2015	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
189.0000	47.24	-17.60	29.64	43.50	-13.86	QP	H
309.5000	40.29	-14.13	26.16	46.00	-19.84	QP	H
385.5000	35.20	-12.22	22.98	46.00	-23.02	QP	H
514.5000	33.20	-9.38	23.82	46.00	-22.18	QP	H
872.5000	30.66	-3.62	27.04	46.00	-18.96	QP	H
900.0000	41.84	-3.15	38.69	46.00	-7.31	QP	H
160.0000	35.54	-14.83	20.71	43.50	-22.79	QP	V
189.0000	45.55	-17.60	27.95	43.50	-15.55	QP	V
256.0000	35.76	-15.98	19.78	46.00	-26.22	QP	V
352.0000	43.56	-13.17	30.39	46.00	-15.61	QP	V
464.0000	32.77	-10.16	22.61	46.00	-23.39	QP	V
900.0000	41.29	-3.15	38.14	46.00	-7.86	QP	V

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Above 1GHz

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	DC 3V		
Model Number:	rPower			Temp.(℃)/Hum.(%RH):	26(℃)/60%RH		
Mode:	2			Date:	07/09/2015		
Frequency:	2402MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3002.000	40.50	7.07	47.57	74.00	-26.43	peak	H
4804.000	44.86	10.78	55.64	74.00	-18.36	peak	H
4804.000	28.67	10.78	39.45	54.00	-14.55	AVG	H
7206.000	47.85	15.44	63.29	74.00	-10.71	peak	H
7206.000	27.84	15.44	43.28	54.00	-10.72	AVG	H
3177.000	39.36	7.32	46.68	74.00	-27.32	peak	V
4804.000	47.50	10.78	58.28	74.00	-15.72	peak	V
4804.000	28.80	10.78	39.58	54.00	-14.42	AVG	V
7206.000	48.08	15.44	63.52	74.00	-10.48	peak	V
7206.000	27.46	15.44	42.90	54.00	-11.10	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	DC 3V		
Model Number:	rPower			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	07/09/2015		
Frequency:	2440MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2995.000	41.27	7.06	48.33	74.00	-25.67	peak	H
4880.000	47.97	10.90	58.87	74.00	-15.13	peak	H
4880.000	28.88	10.90	39.78	54.00	-14.22	AVG	H
7320.000	44.64	15.52	60.16	74.00	-13.84	peak	H
7320.000	26.94	15.52	42.46	54.00	-11.54	AVG	H
2995.000	39.16	7.06	46.22	74.00	-27.78	peak	V
4880.000	47.03	10.90	57.93	74.00	-16.07	peak	V
4880.000	28.43	10.90	39.33	54.00	-14.67	AVG	V
7320.000	46.85	15.52	62.37	74.00	-11.63	peak	V
7320.000	27.82	15.52	43.34	54.00	-10.66	AVG	V


Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	DC 3V		
Model Number:	rPower			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	07/08/2015		
Frequency:	2480MHz			Test By:	Eric Ou Yang		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2995.000	41.38	7.06	48.44	74.00	-25.56	peak	H
4960.000	46.05	11.03	57.08	74.00	-16.92	peak	H
4960.000	29.37	11.03	40.40	54.00	-13.60	AVG	H
7440.000	38.37	15.59	53.96	74.00	-20.04	peak	H
7440.000	26.18	15.59	41.77	54.00	-12.23	AVG	H
3086.000	38.69	7.19	45.88	74.00	-28.12	peak	V
4960.000	48.50	11.03	59.53	74.00	-14.47	peak	V
4960.000	29.36	11.03	40.39	54.00	-13.61	AVG	V
7440.000	44.06	15.59	59.65	74.00	-14.35	peak	V
7440.000	26.87	15.59	42.46	54.00	-11.54	AVG	V

5 Maximum Conducted Output Power Measurement

5.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

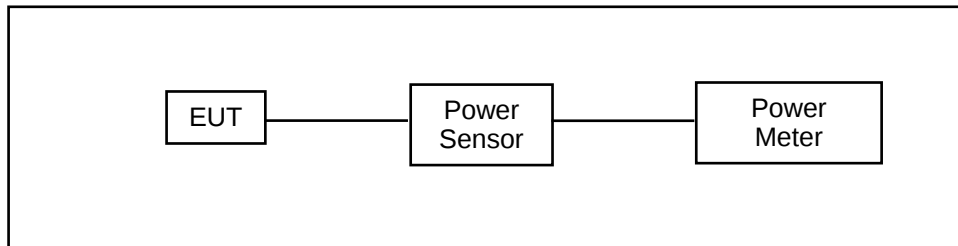5.2. Test Setup



5.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/15/2014	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/15/2014	(1)
Microwave Cable	EMCI	EMC104-SM-S M-1500	140303	02/24/2015	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

5.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

5.5. Test Result

Model Number	rPower					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 2: Bluetooth v4.0 LE Link Mode					
Date of Test	07/08/2015			Test Site	TE05	
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)
		(dBm)	(W)	(dBm)	(W)	
2402	---	0.35	0.00108	0.76	0.00119	< 30
2440	---	-1.16	0.00077	-0.90	0.00081	< 30
2480	---	-3.23	0.00048	-2.98	0.00050	< 30

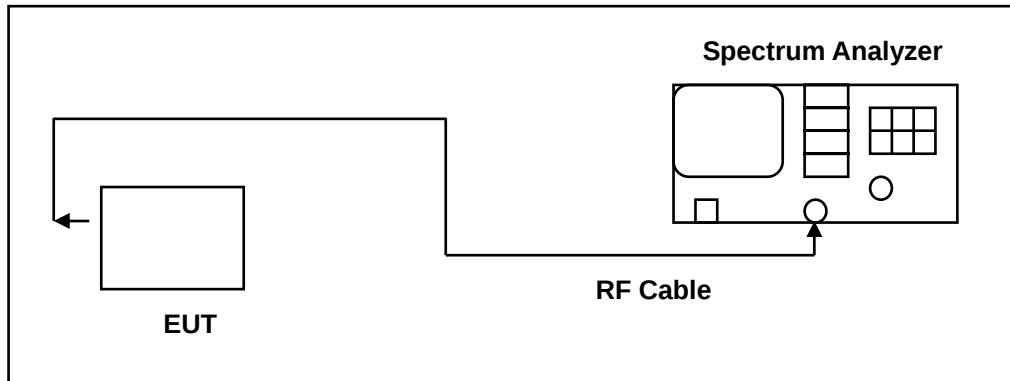
Note: The relevant measured result has the offset with cable loss already.

6 6dB RF Bandwidth Measurement

6.1. Limit

6dB RF Bandwidth: Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

6.2. Test Setup



6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/16/2014	(1)
Microwave Cable	EMCI	EMC104-SM-S M-1500	140303	02/24/2015	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

dRemark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

6.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.




6dB RF Bandwidth: The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES RBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel low, middle, high)

6.5. Test Result

Model Number	rPower		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 2: Bluetooth v4.0 LE Link Mode		
Date of Test	07/09/2015	Test Site	TE05
Frequency (MHz)	6dB Bandwidth (kHz)	6dB RF Bandwidth Limit (kHz)	
2402	796	> 500	
2440	683	> 500	
2480	691	> 500	

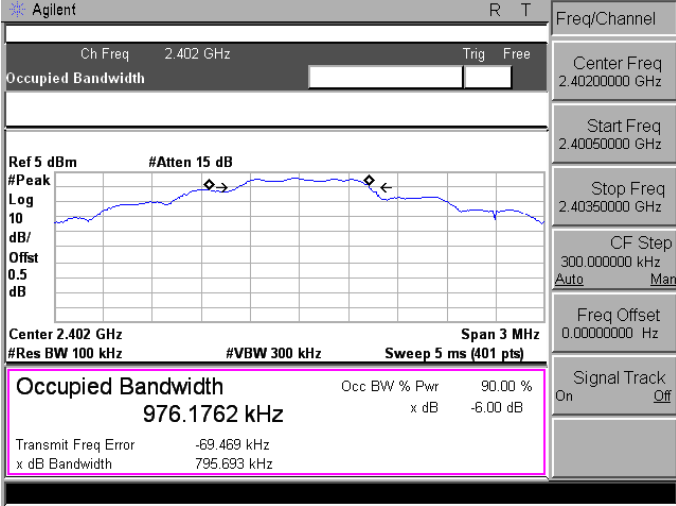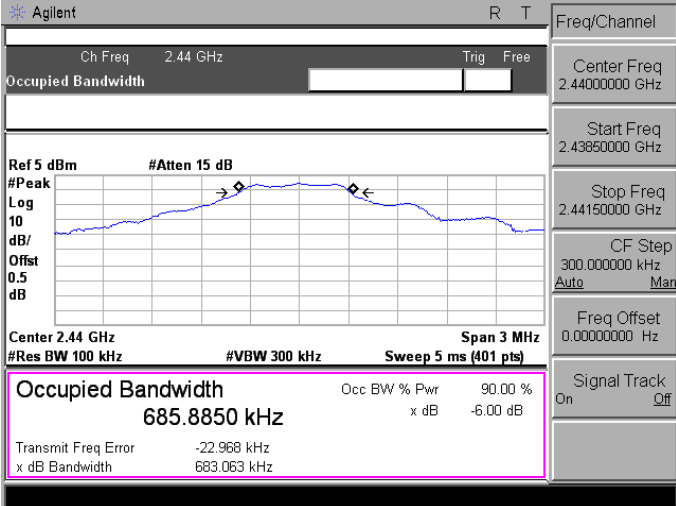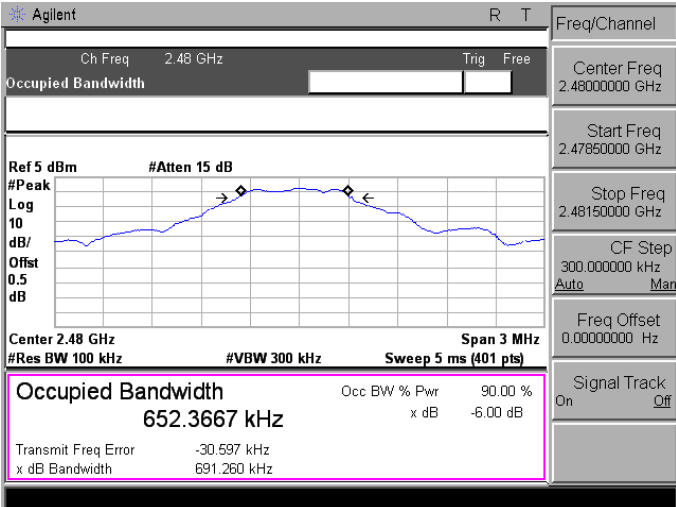6.6. Test Graphs


Mode 2: Bluetooth v4.0 LE Link Mode	
2402	 Agilent R T Ch Freq 2.402 GHz Trig Free Occupied Bandwidth Ref 5 dBm #Peak Log 10 dB/Offset 0.5 dB #Atten 15 dB Center 2.402 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts) Occupied Bandwidth 976.1762 kHz Occ BW % Pwr 90.00 % x dB -6.00 dB Transmit Freq Error -69.469 kHz x dB Bandwidth 796.693 kHz Freq/Channel Center Freq 2.40200000 GHz Start Freq 2.40050000 GHz Stop Freq 2.40350000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2440	 Agilent R T Ch Freq 2.44 GHz Trig Free Occupied Bandwidth Ref 5 dBm #Peak Log 10 dB/Offset 0.5 dB #Atten 15 dB Center 2.44 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts) Occupied Bandwidth 685.8850 kHz Occ BW % Pwr 90.00 % x dB -6.00 dB Transmit Freq Error -22.968 kHz x dB Bandwidth 683.063 kHz Freq/Channel Center Freq 2.44000000 GHz Start Freq 2.43850000 GHz Stop Freq 2.44150000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2480	 Agilent R T Ch Freq 2.48 GHz Trig Free Occupied Bandwidth Ref 5 dBm #Peak Log 10 dB/Offset 0.5 dB #Atten 15 dB Center 2.48 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts) Occupied Bandwidth 652.3667 kHz Occ BW % Pwr 90.00 % x dB -6.00 dB Transmit Freq Error -30.597 kHz x dB Bandwidth 691.260 kHz Freq/Channel Center Freq 2.48000000 GHz Start Freq 2.47850000 GHz Stop Freq 2.48150000 GHz CF Step 300.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

7 Maximum Power Density Measurement

7.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

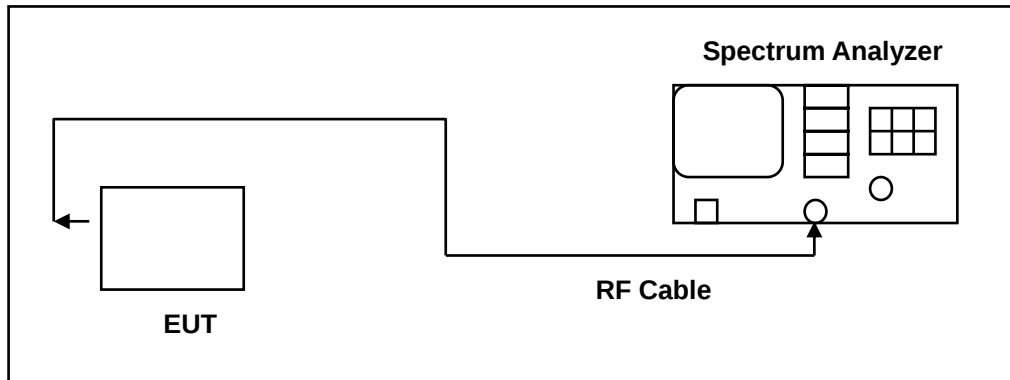7.2. Test Setup



7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/16/2014	(1)
Microwave Cable	EMCI	EMC104-SM-S M-1500	140303	02/24/2015	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

7.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.




1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.5. Test Result

Model Number	rPower		
Test Item	Maximum Power Density		
Test Mode	Mode 2: Bluetooth v4.0 LE Link Mode		
Date of Test	07/09/2015	Test Site	TE05
Frequency (MHz)	Reading (dBm/3KHz)		Limit (dBm)
2402	-14.170		< 8
2440	-15.000		< 8
2480	-16.430		< 8

7.6. Test Graphs

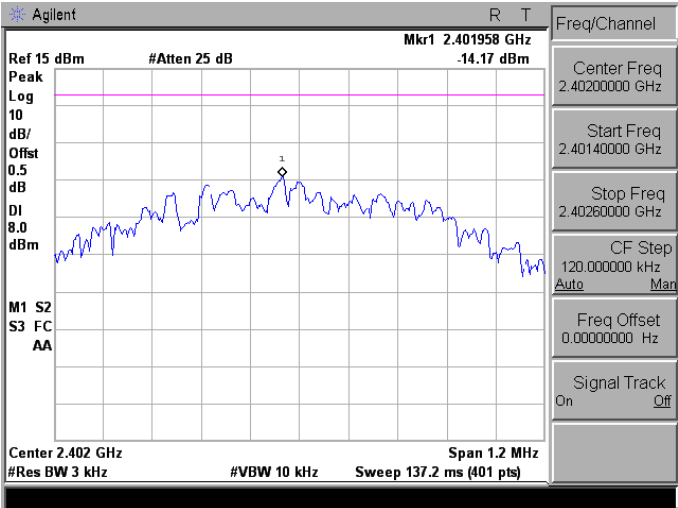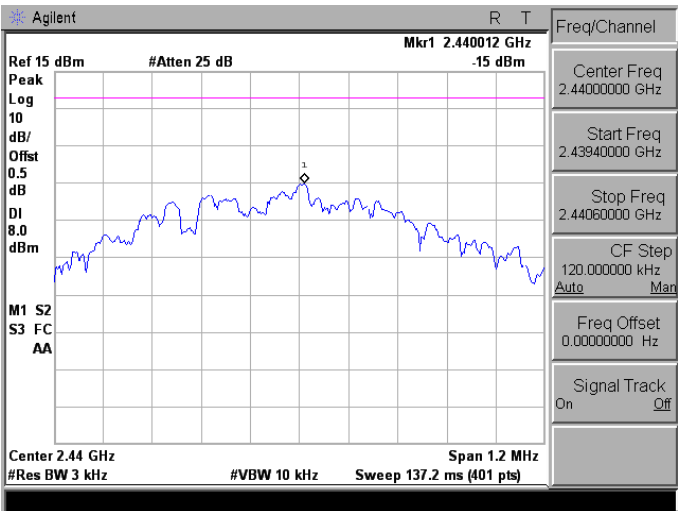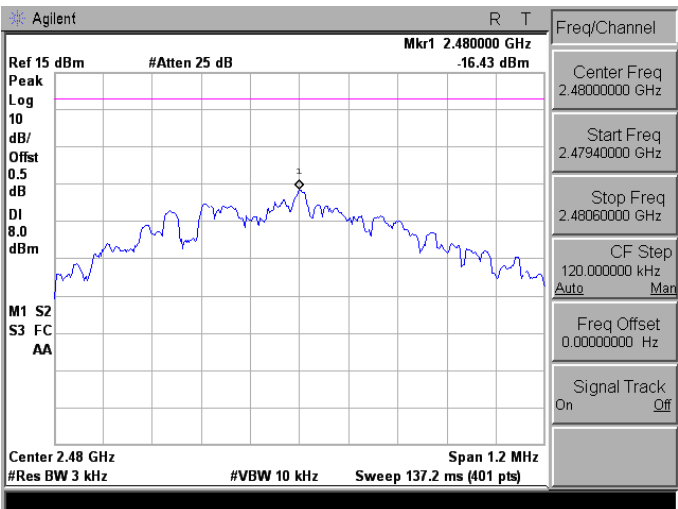Mode 2: Bluetooth v4.0 LE Link Mode


2402	 Agilent R T Ref 15 dBm #Atten 25 dB Mkr1 2.401958 GHz -14.17 dBm Peak Log 10 dB/Offset 0.5 dB DI 8.0 dBm M1 S2 S3 FC AA Center 2.402 GHz Span 1.2 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 137.2 ms (401 pts) Freq/Channel Center Freq 2.4020000 GHz Start Freq 2.40140000 GHz Stop Freq 2.40260000 GHz CF Step 120.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2440	 Agilent R T Ref 15 dBm #Atten 25 dB Mkr1 2.440012 GHz -15 dBm Peak Log 10 dB/Offset 0.5 dB DI 8.0 dBm M1 S2 S3 FC AA Center 2.44 GHz Span 1.2 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 137.2 ms (401 pts) Freq/Channel Center Freq 2.4400000 GHz Start Freq 2.43940000 GHz Stop Freq 2.44060000 GHz CF Step 120.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off
2480	 Agilent R T Ref 15 dBm #Atten 25 dB Mkr1 2.480000 GHz -16.43 dBm Peak Log 10 dB/Offset 0.5 dB DI 8.0 dBm M1 S2 S3 FC AA Center 2.48 GHz Span 1.2 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 137.2 ms (401 pts) Freq/Channel Center Freq 2.4800000 GHz Start Freq 2.47940000 GHz Stop Freq 2.48060000 GHz CF Step 120.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off

8 Out of Band Conducted Emissions Measurement

8.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

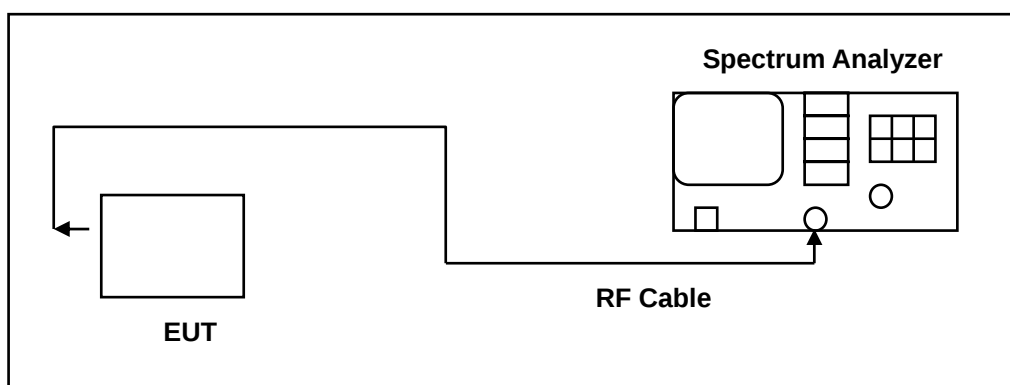8.2. Test Setup



8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/16/2014	(1)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/24/2014	(1)
Microwave Cable	EMCI	EMC104-SM-S M-1500	140303	02/24/2015	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year.

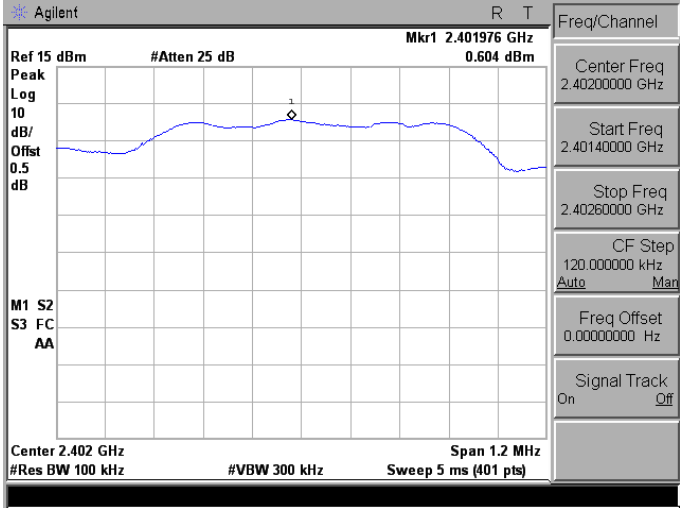
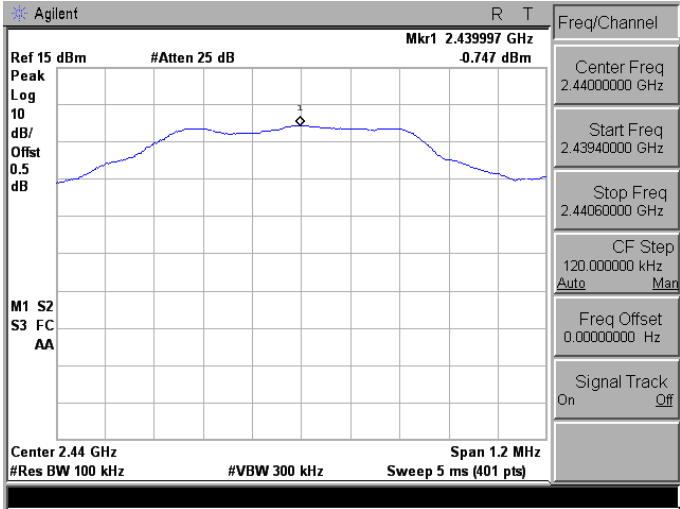
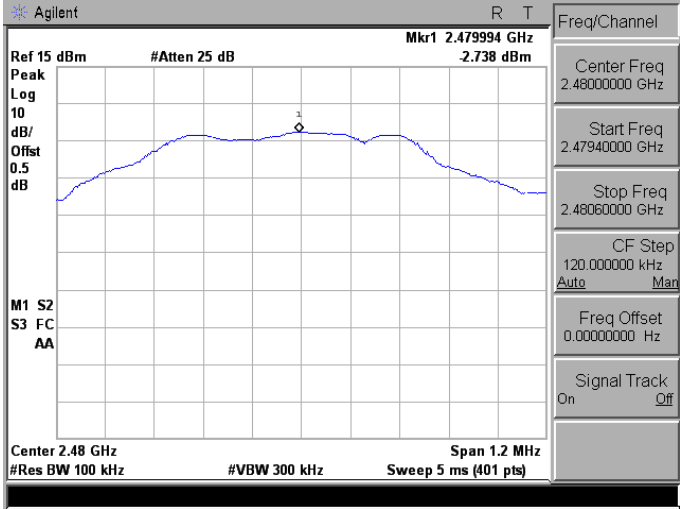
Note: N.C.R. = No Calibration Request.

8.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels.




8.5. Test Graphs

Reference level

Mode 2: Bluetooth v4.0 LE Link Mode		
2402		
2440		
2480		

Out of Band Conducted Emissions

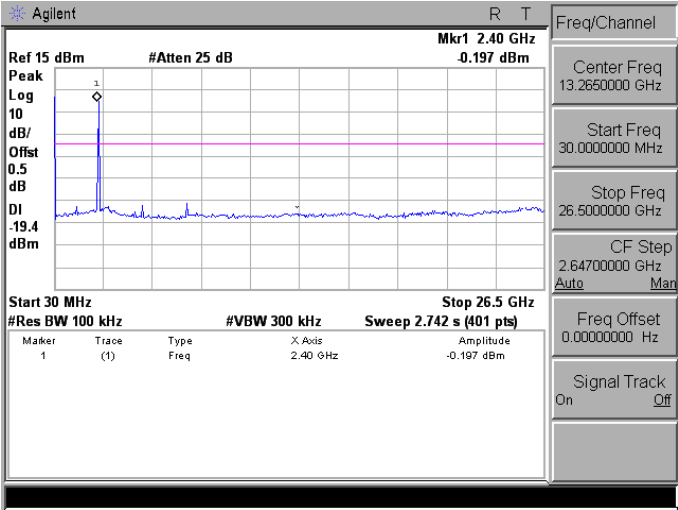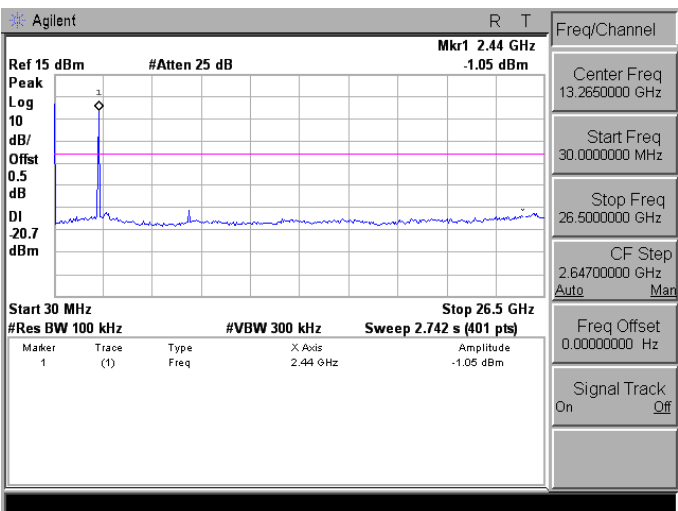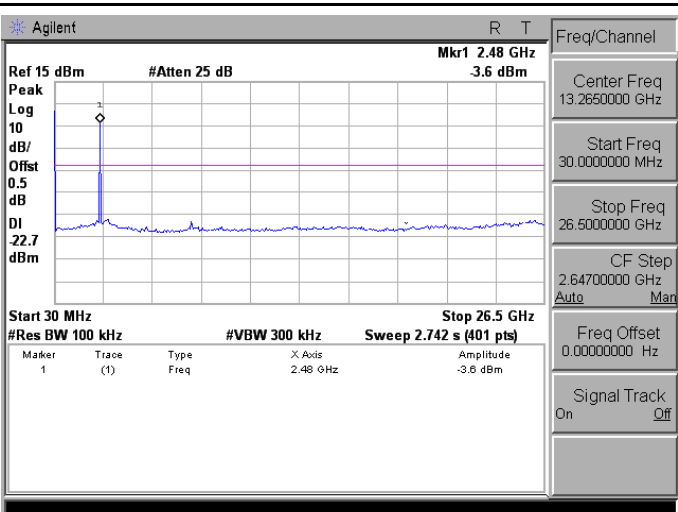
Mode 2: Bluetooth v4.0 LE Link Mode

2402	
2440	
2480	


Conducted Band Edge

Mode 2: Bluetooth v4.0 LE Link Mode

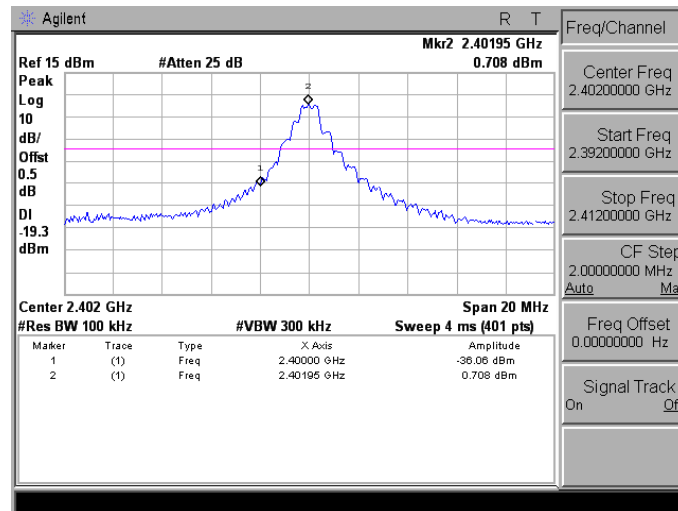2402



2480

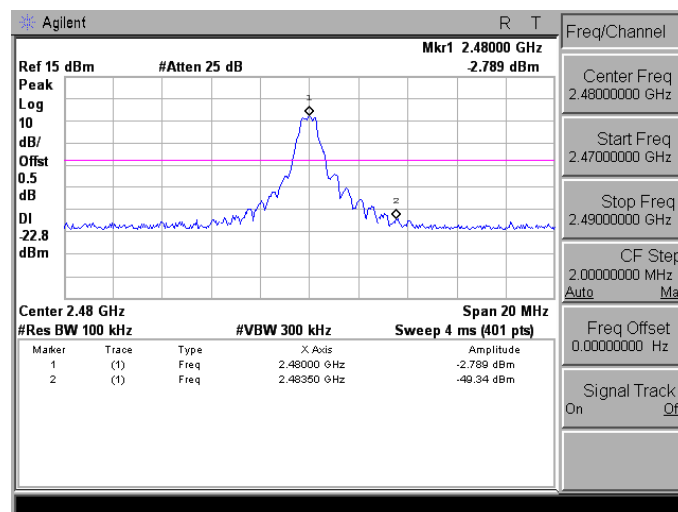


9 Band Edges Measurement

9.1. Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

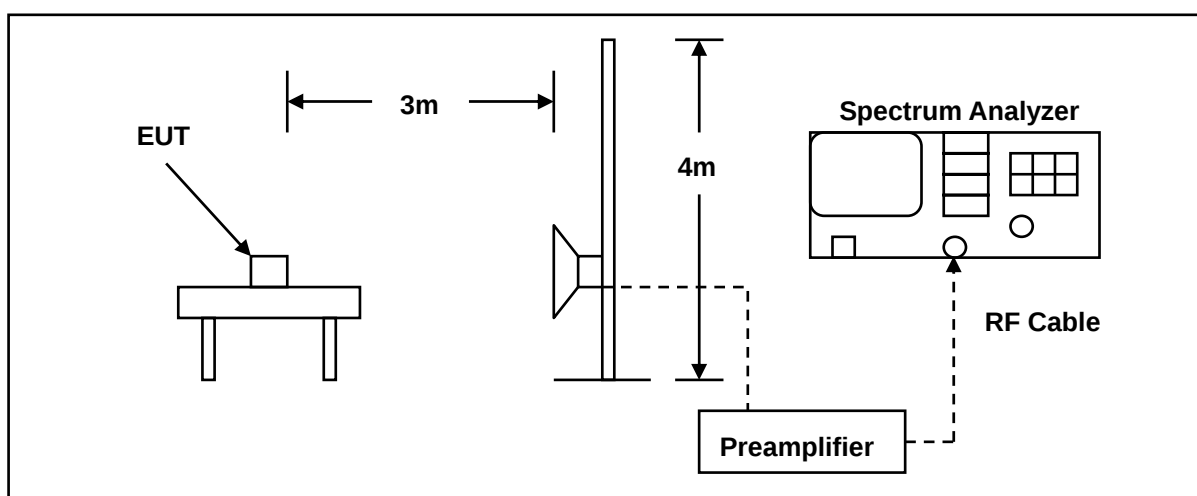9.2. Test Setup



9.3. Test Instruments

3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/06/2015	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/06/2015	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/24/2015	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/24/2015	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/12/2015	(1)
Microwave Cable	EMCI	EMC-104-SM-S M-14000	140202	02/24/2015	(1)
Microwave Cable	EMCI	EMC104-SM-S M-600	140301	02/24/2015	(1)
Test Site	ATL	TE01	888001	08/28/2014	(1)

Remark: (1) Calibration period 1 year.

Note: N.C.R. = No Calibration Request.

9.4. Test Procedure

The EUT tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements when Duty cycle $>98\%$ / $1/T$ for average measurements when Duty cycle $<98\%$.

9.5. Test Result

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		DC 3V	
Model Number:		rPower		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		2		Date:		07/08/2015	
Frequency:		2402 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2388.760	45.93	5.41	51.34	74.00	-22.66	peak	H
2390.000	41.97	5.41	47.38	74.00	-26.62	peak	H
2318.690	44.00	5.20	49.20	74.00	-24.80	peak	V
2390.000	38.02	5.41	43.43	74.00	-30.57	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		DC 3V	
Model Number:		rPower		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		2		Date:		07/08/2015	
Frequency:		2480 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	53.11	5.70	58.81	74.00	-15.19	peak	H
2483.500	28.09	5.70	33.79	54.00	-20.21	AVG	H
2484.000	53.67	5.70	59.37	74.00	-14.63	peak	H
2484.000	27.88	5.70	33.58	54.00	-20.42	AVG	H
2495.480	52.05	5.72	57.77	74.00	-16.23	peak	H
2495.480	27.34	5.72	33.06	54.00	-20.94	AVG	H
2483.500	47.97	5.70	53.67	74.00	-20.33	peak	V
2483.500	27.62	5.70	33.32	54.00	-20.68	AVG	V
2483.600	52.46	5.70	58.16	74.00	-15.84	peak	V
2483.600	27.59	5.70	33.29	54.00	-20.71	AVG	V
2495.500	48.84	5.72	54.56	74.00	-19.44	peak	V
2495.500	26.93	5.72	32.65	54.00	-21.35	AVG	V

10 Antenna Measurement

10.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2.Antenna Connector Construction

The antenna used in this product is PCB Antenna. And the maximum Gain of this antenna is -6.62 dBi.