



REPORT No. : SZ15060040W01A

FCC RF TEST REPORT

APPLICANT : CHANCO ELECTRONICS FACTORY

PRODUCT NAME : Bluetooth Headset

MODEL NAME : CK-051,KBH770, BTH-2000,PLR940,
E-EPA103

TRADE NAME : N/A

BRAND NAME : N/A

FCC ID : 2AE57CAIHS007

STANDARD(S) : 47 CFR Part 15 Subpart C

ISSUE DATE : 2015-08-06



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , Guangdong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	5
1. TECHNICAL INFORMATION.....	6
1.1. EQUIPMENT UNDER TEST (EUT) DESCRIPTION.....	6
1.2. TEST STANDARDS AND RESULTS.....	7
1.2.1. TEST ENVIRONMENT CONDITIONS.....	7
2. 47 CFR PART 15C REQUIREMENTS	8
2.1. ANTENNA REQUIREMENT	8
2.1.1. APPLICABLE STANDARD	8
2.1.2. RESULT: COMPLIANT.....	8
2.2. NUMBER OF HOPPING FREQUENCY	8
2.2.1. REQUIREMENT	8
2.2.2. TEST DESCRIPTION	8
2.2.3. TEST PROCEDURE	9
2.2.4. TEST RESULT	9
2.3. PEAK OUTPUT POWER	13
2.3.1. REQUIREMENT	13
2.3.2. TEST DESCRIPTION	13
2.3.3. TEST RESULT	13
2.3.3.1. GFSK MODE.....	14
2.3.3.2. $\Pi/4$ -DQPSK MODE	14
2.3.3.3. 8-DPSK MODE	14
2.4. 20dB BANDWIDTH.....	15
2.4.1. DEFINITION.....	15
2.4.2. TEST DESCRIPTION	15
2.4.3. TEST PROCEDURE.....	15
2.4.4. TEST RESULT	16
2.4.4.1. GFSK MODE.....	16
2.4.4.2. $\Pi/4$ -DQPSK MODE	18
2.4.4.3. 8-DPSK MODE	20
2.5. CARRIED FREQUENCY SEPARATION	22
2.5.1. DEFINITION.....	22



2.5.2. TEST DESCRIPTION	22
2.5.3. TEST PROCEDURE	22
2.5.4. TEST RESULT	23
2.6. TIME OF OCCUPANCY (DWELL TIME).....	25
2.6.1. REQUIREMENT	25
2.6.2. TEST DESCRIPTION	25
2.6.3. TEST PROCEDURE	25
2.6.4. TEST RESULT	26
2.6.4.1. GFSK MODE	26
2.6.4.2. $\Pi/4$ -DQPSK MODE	29
2.6.4.3. 8-DPSK MODE	33
2.7. CONDUCTED SPURIOUS EMISSIONS	37
2.7.1. REQUIREMENT	37
2.7.2. TEST DESCRIPTION	37
2.7.3. TEST PROCEDURE	37
2.7.4. TEST RESULT	38
2.7.4.1. GFSK MODE	38
2.7.4.2. $\Pi/4$ -DQPSK MODE	42
2.7.4.3. 8-DPSK MODE	46
2.8. RESTRICTED FREQUENCY BANDS	51
2.8.1. REQUIREMENT	51
2.8.2. TEST DESCRIPTION	51
2.8.3. TEST PROCEDURE	52
2.8.4. TEST RESULT	52
2.8.4.1. GFSK MODE	53
2.8.4.2. $\Pi/4$ -DQPSK MODE	55
2.8.4.3. 8-DPSK MODE	58
2.9. CONDUCTED EMISSION	61
2.9.1. REQUIREMENT	61
2.9.2. TEST DESCRIPTION	61
2.9.3. TEST RESULT	62
2.10. RADIATED EMISSION	64
2.10.1. REQUIREMENT	64
2.10.2. TEST DESCRIPTION	64
2.10.3. TEST PROCEDURE	67
2.10.4. TEST RESULT	67
2.10.4.1. GFSK MODE:	68
2.10.4.2. $\Pi/4$ -DQPSK MODE:	74



2.10.4.3. 8-DPSK MODE: 80

3. GENERAL INFORMATION.....86**1.1 IDENTIFICATION OF THE RESPONSIBLE TESTING LABORATORY86****1.2 IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION.....86****1.3 FACILITIES AND ACCREDITATIONS.....86****1.4 TEST EQUIPMENTS UTILIZED87**

1.4.1 CONDUCTED TEST EQUIPMENTS 87

1.4.2 CONDUCTED EMISSION TEST EQUIPMENTS..... 87

1.4.3 RADIATED TEST EQUIPMENTS..... 88

1.4.4 CLIMATE CHAMBER..... 88

1.4.5 VIBRATION TABLE..... 88

1.4.6 ANECHOIC CHAMBER 89

Change History

Issue	Date	Reason for change
1.0	2015-08-06	First edition



REPORT No. : SZ15060040W01A

Test Report Declaration

Applicant	CHANCO ELECTRONICS FACTORY
Applicant Address	sha jin nan street 27 Changan town, dongguan city, guangdong province
Manufacturer	CHANCO ELECTRONICS FACTORY
Manufacturer Address	sha jin nan street 27 Changan town, dongguan city, guangdong province
Product Name	Bluetooth Headset
Model Name	CK-051,KBH770, BTH-2000,PLR940,E-EPA103
Brand Name	N/A
HW Version	VER1.0
SW Version	VER1.0
Test Standards	47 CFR Part 15 Subpart C
Test Date	2015-06-12 to 2015-06-24
Test Result	PASS

Tested by : Zou Jian
Zou Jian (Test Engineer)

Reviewed by : Qiu Xiaojun
Qiu Xiaojun (RF Manager)

Approved by : Zeng Dexin
Zeng Dexin (Chief Engineer)



1. Technical Information

Note: Provide by applicant.

1.1. Equipment under Test (EUT) Description

Frequency Range:	The frequency range used is 2402MHz – 2480MHz (79 channels, at intervals of 1MHz); The frequency block is 2400MHz to 2483.5MHz.
Modulation Type:	Bluetooth: FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))
Bluetooth Version:	2.1 with EDR
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi

NOTE:

1. The EUT is a Bluetooth Headset, it operate at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).
2. The EUT has a series of models, such as CK-051, KBH770, BTH-2000, PLR940, E-EPA103. Since this models have same software, hardware, antenna and only model name is different, we just main test CK-051.
3. The EUT radiated emission was tested with a new battery, and RF conducted emission was tested with a DC power.
4. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-13 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Result
1	15.203	Antenna Requirement	<u>PASS</u>
2	15.247(a)	Number of Hopping Frequency	<u>PASS</u>
3	15.247(b)	Peak Output Power	<u>PASS</u>
4	15.247(a)	20dB Bandwidth	<u>PASS</u>
5	15.247(a)	Carrier Frequency Separation	<u>PASS</u>
6	15.247(a)	Time of Occupancy (Dwell time)	<u>PASS</u>
7	15.247(d)	Conducted Spurious Emission	<u>PASS</u>
8	15.247(d)	Restricted Frequency Bands	<u>PASS</u>
9	15.207	Conducted Emission	<u>PASS</u>
10	15.209 15.247(d)	Radiated Emission	<u>PASS</u>

NOTE: The tests were performed according to the method of measurements prescribed in DA-00-705, ANSI C63.4-2003 and ANSI C63.10-2009.

1.2.1. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2. Number of Hopping Frequency

2.2.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.2.2. Test Description

A. Test Setup:

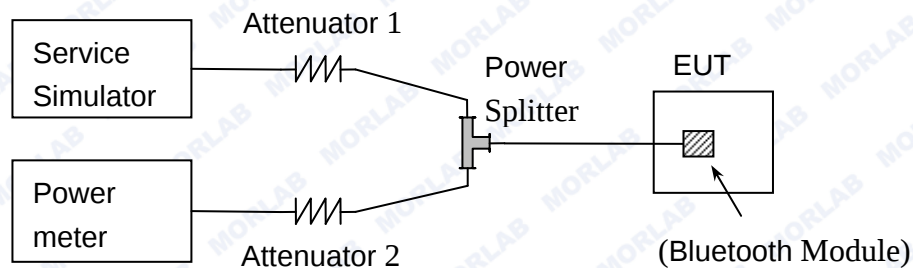

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.2.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

2.2.4. Test Result


The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.



REPORT No. : SZ15060040W01A

A. Test Verdict:


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	79	15	Plot A	PASS
$\Pi/4$ -DQPSK	2400 - 2483.5	79	15	Plot B	PASS
8-DPSK	2400 - 2483.5	79	15	Plot C	PASS

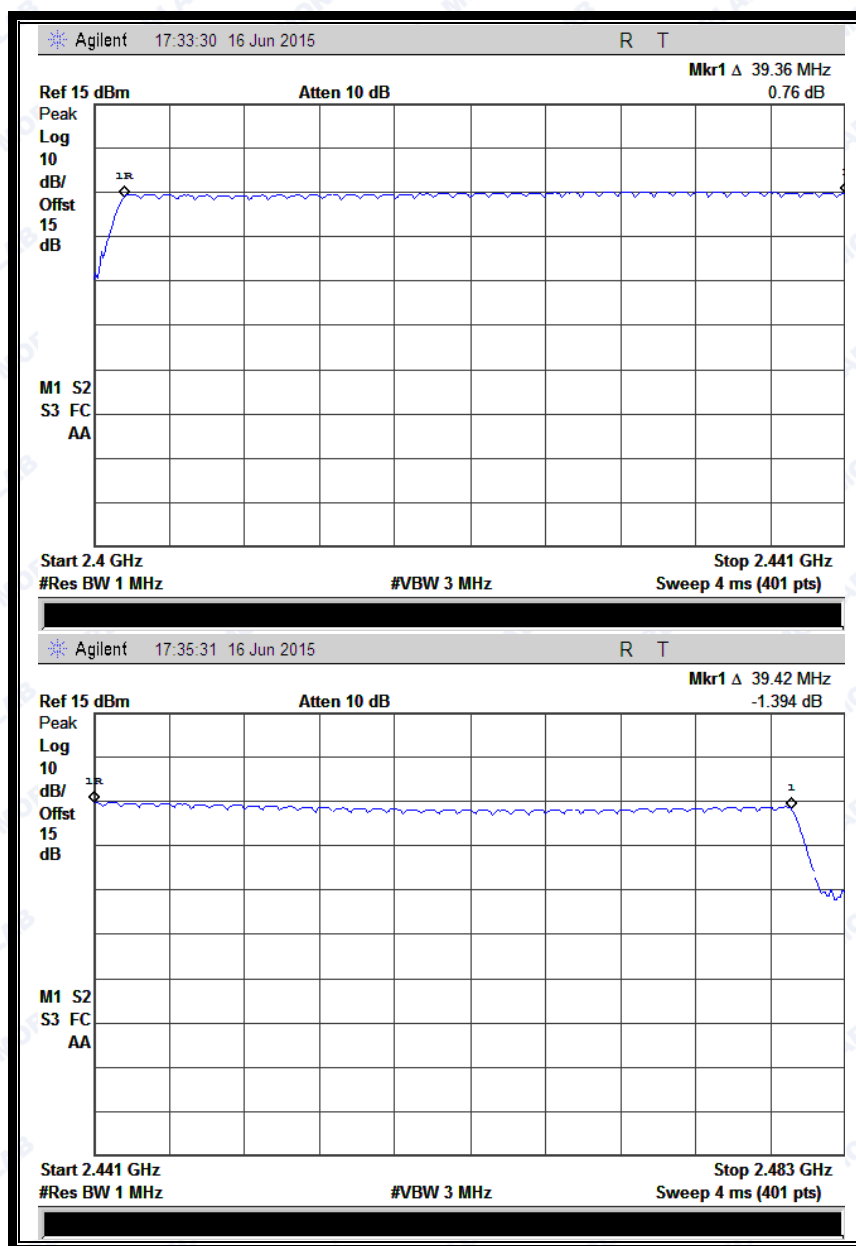B. Test Plots:

(Plot A: GFSK)




REPORT No. : SZ15060040W01A

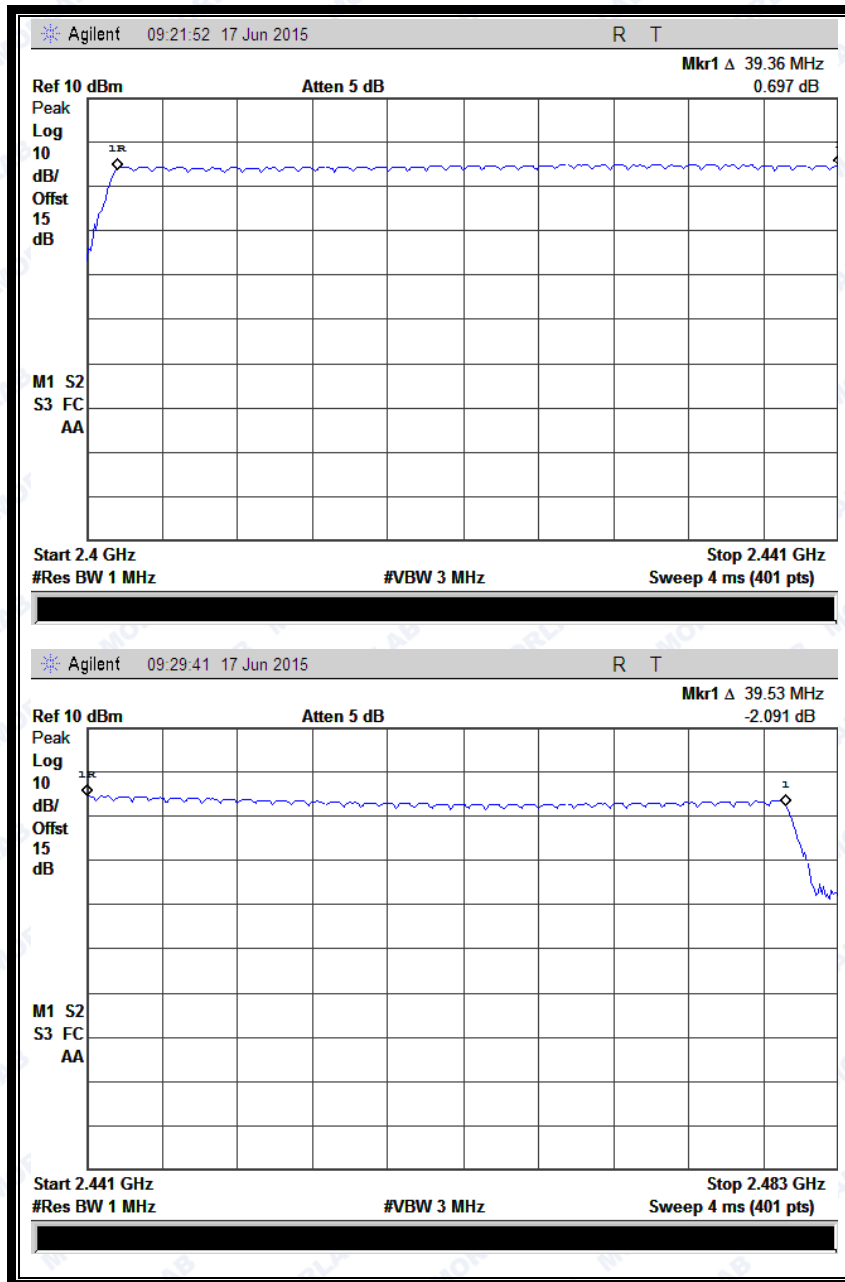

(Plot B: $\square/4$ -DQPSK)



REPORT No. : SZ15060040W01A

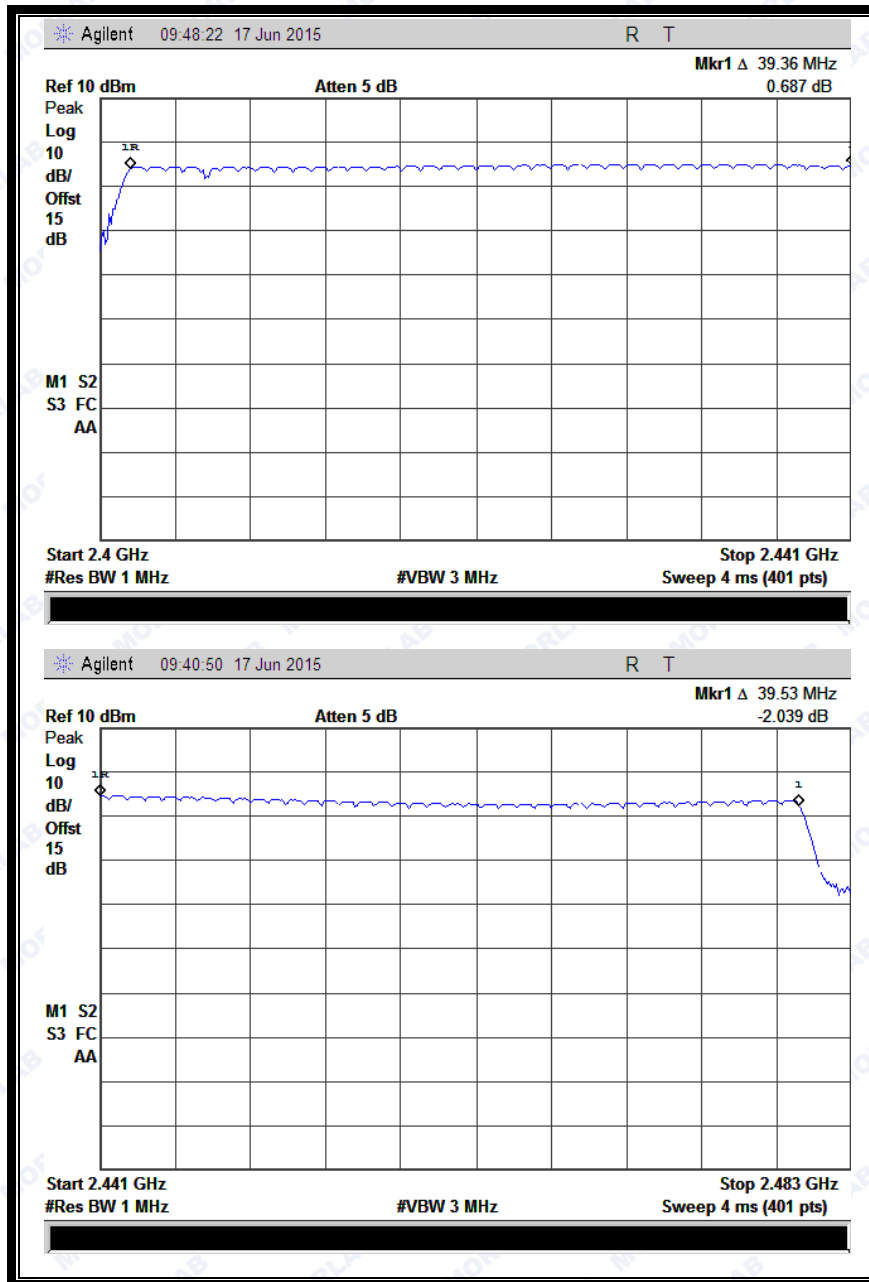

(Plot C: 8- DPSK)


2.3. Peak Output Power

2.3.1. Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.3.2. Test Description

A. Test Setup:

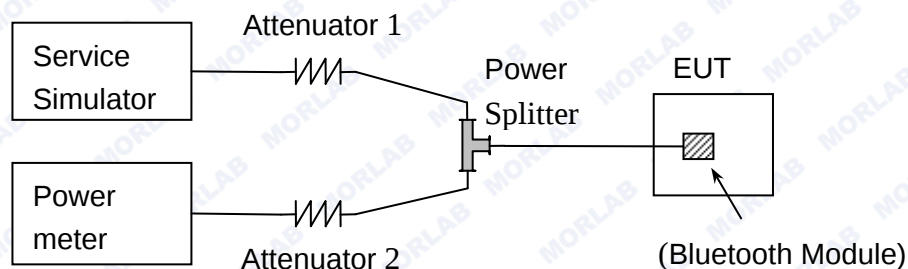

The Bluetooth Module of the EUT is coupled to the Power meter and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.3.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module. The lowest, middle and highest channel were tested by Power meter.



2.3.3.1. GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	-5.00	0.000316	30	1	PASS
39	2441	-5.13	0.000307			PASS
78	2480	-6.30	0.000230			PASS

2.3.3.2. $\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	-5.32	0.000294	30	1	PASS
39	2441	-5.06	0.000312			PASS
78	2480	-6.32	0.000233			PASS

2.3.3.3. 8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	-5.32	0.000294	30	1	PASS
39	2441	-5.16	0.000305			PASS
78	2480	-6.27	0.000240			PASS


2.4. 20dB Bandwidth

2.4.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2. Test Description

A. Test Setup:

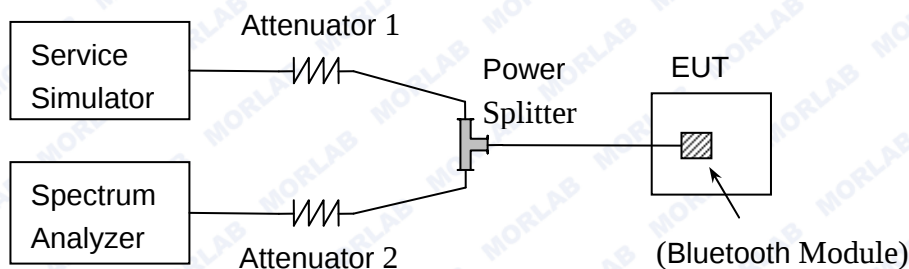

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.4.3. Test Procedure


Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel


RBW $\geq$ 1% of the 20 dB bandwidth



REPORT No. : SZ15060040W01A

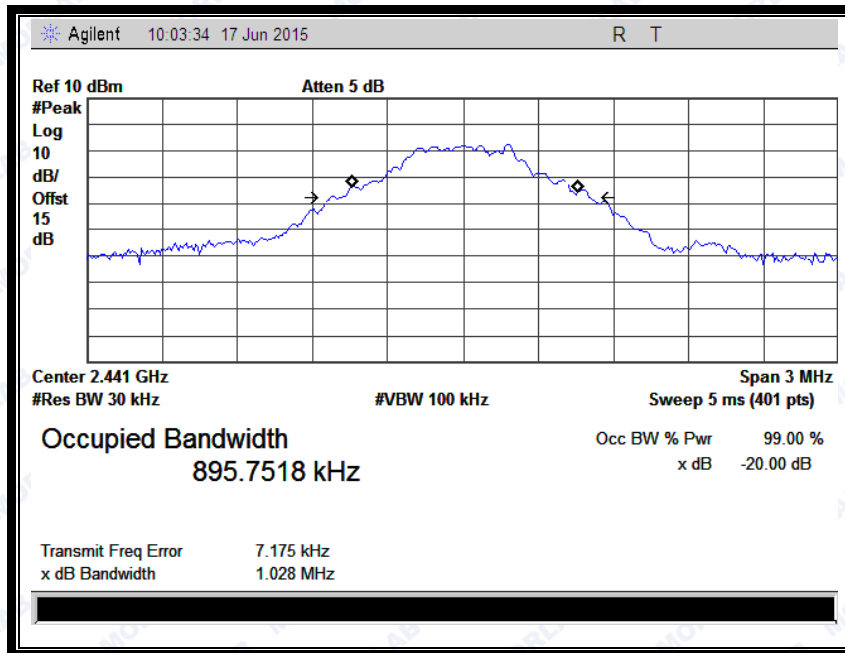

(Plot B: Channel = 2441 @ GFSK)

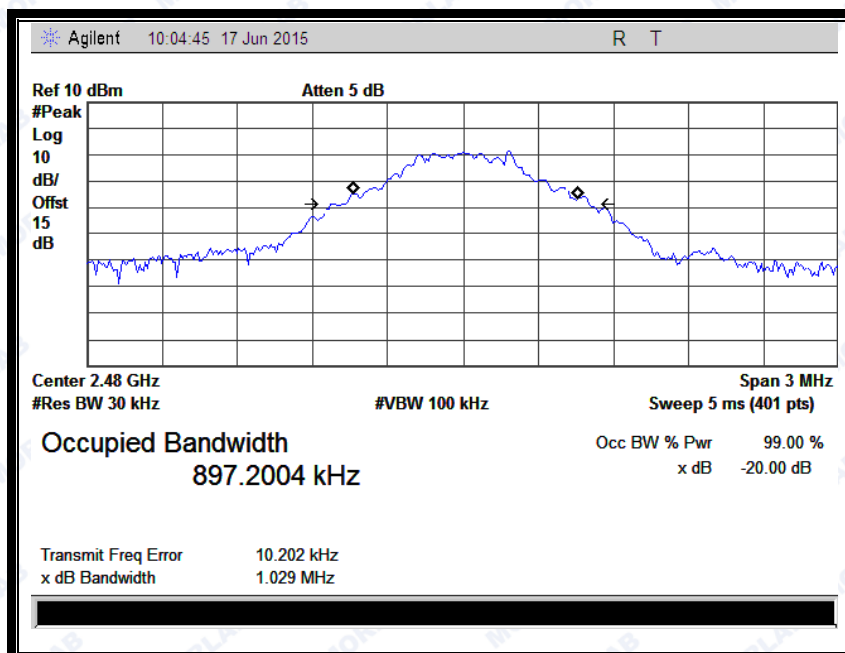

(Plot C: Channel = 2480 @ GFSK)




REPORT No. : SZ15060040W01A

2.4.4.2. $\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.264	Plot D
39	2441	1.262	Plot E
78	2480	1.259	Plot F


B. Test Plots:

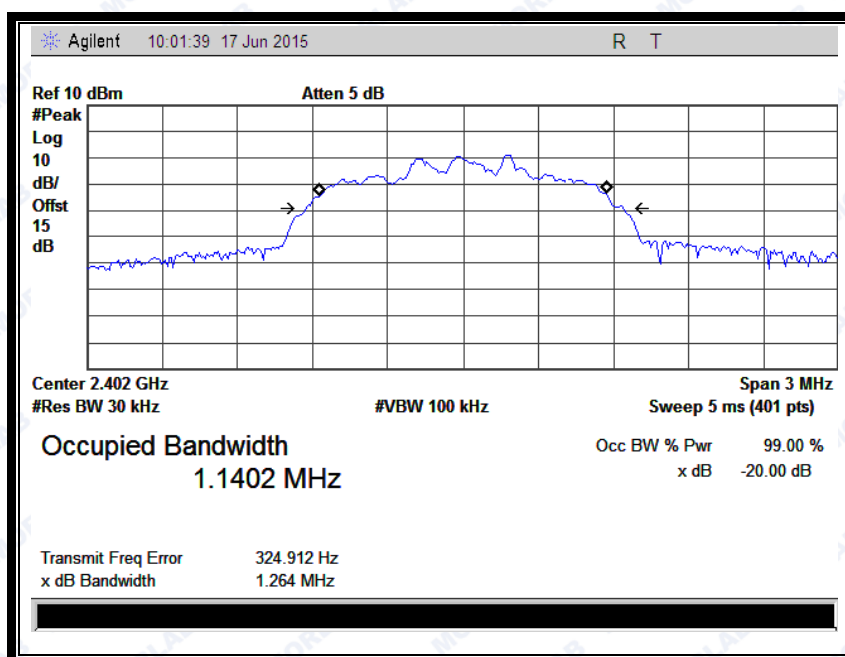


(Plot D: Channel = 2402 @ $\pi/4$ -DQPSK)



REPORT No. : SZ15060040W01A

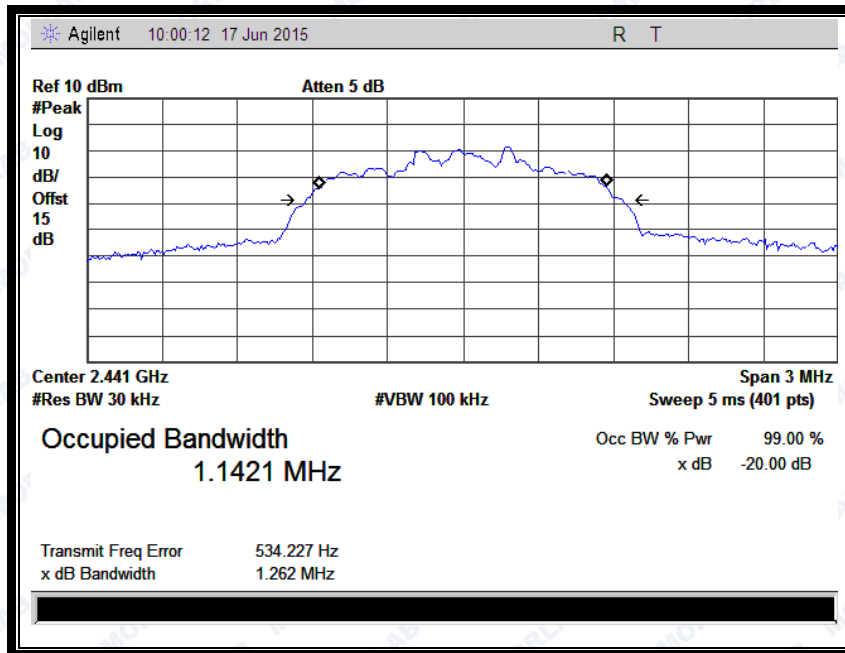

(Plot E: Channel = 2441 @ $\pi/4$ -DQPSK)

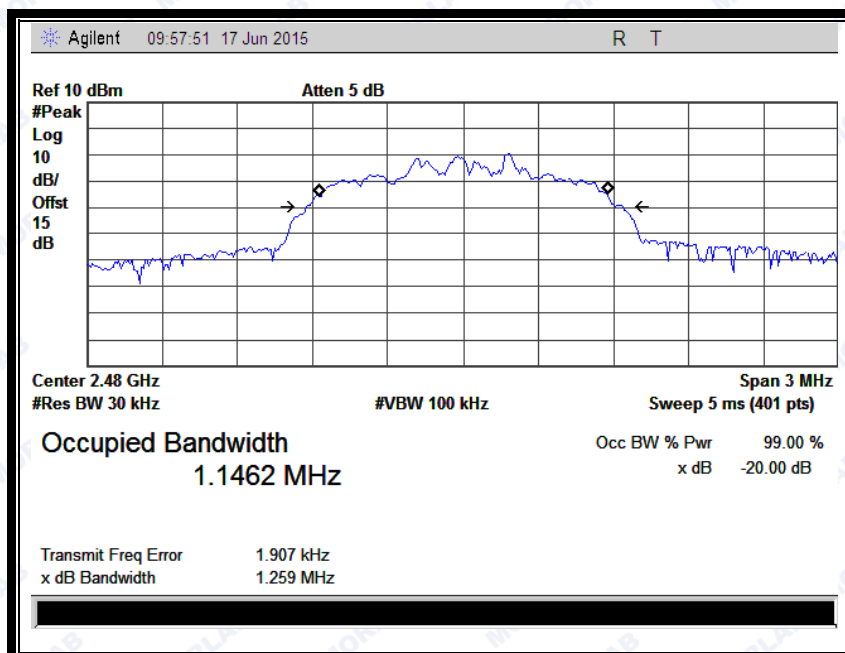

(Plot F: Channel = 2480 @ $\pi/4$ -DQPSK)




2.4.4.3. 8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.263	Plot G
39	2441	1.255	Plot H
78	2480	1.264	Plot I


B. Test Plots:

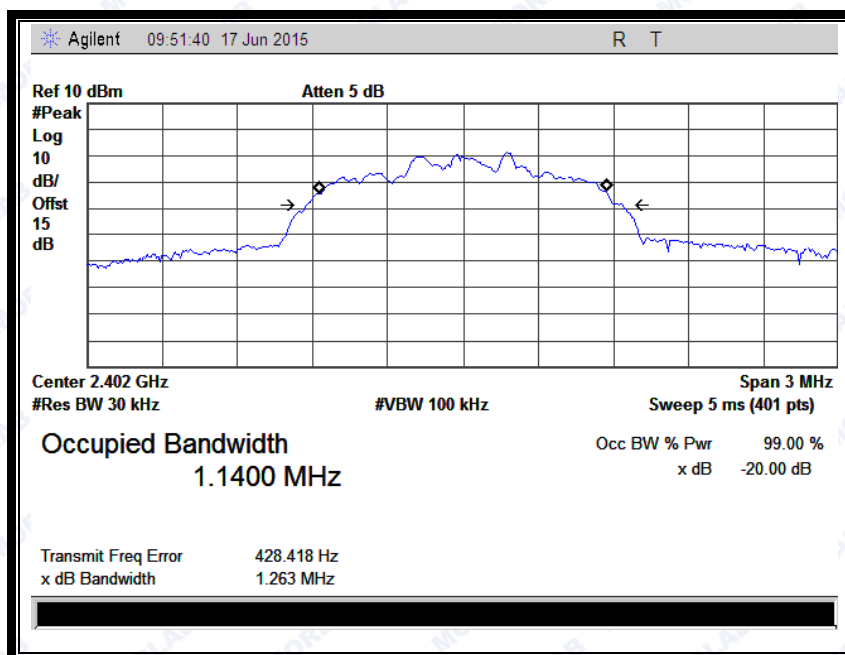


(Plot G: Channel = 2402 @ 8-DPSK)



REPORT No. : SZ15060040W01A

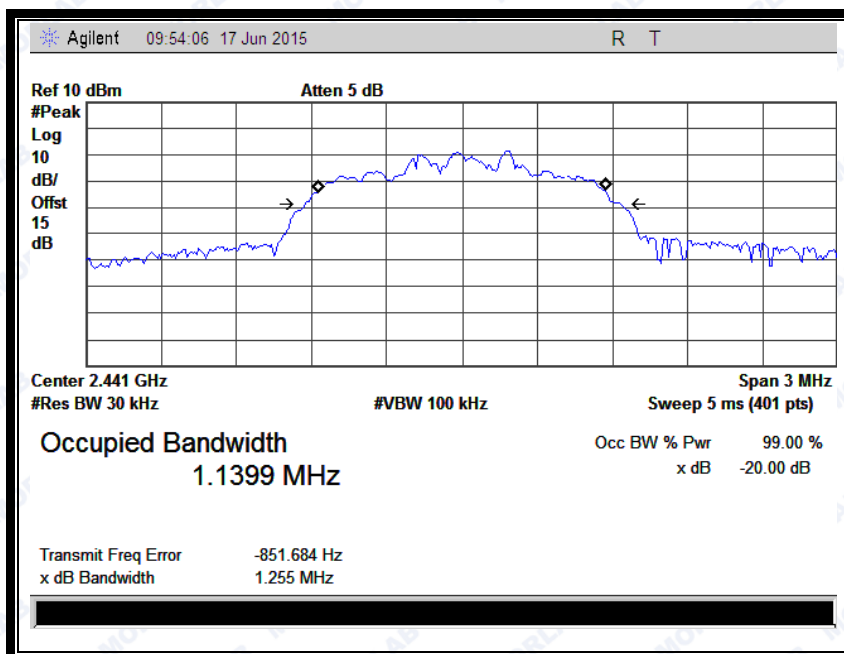

(Plot H: Channel = 2441 @ 8-DPSK)

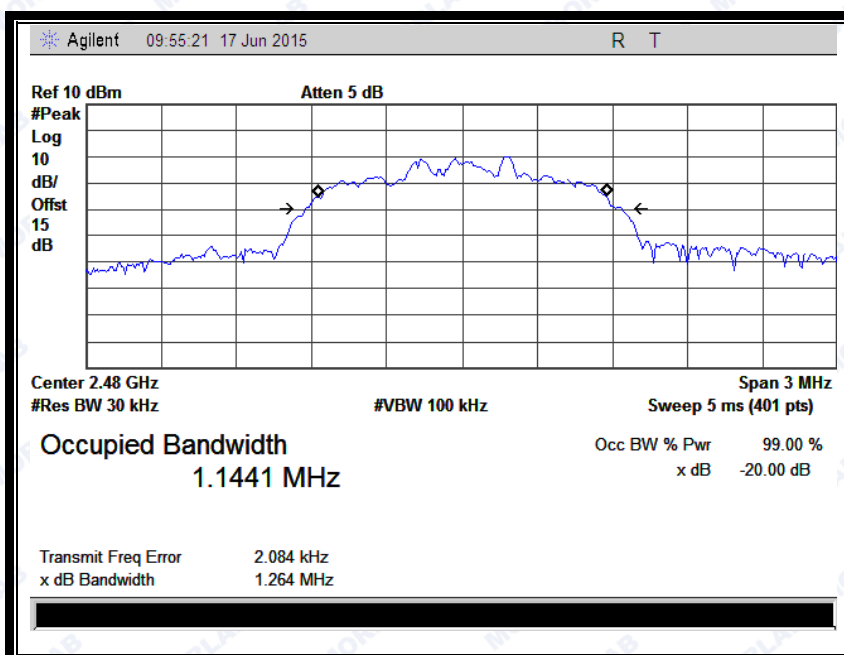

(Plot I: Channel = 2480 @ 8-DPSK)


2.5. Carried Frequency Separation

2.5.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2. Test Description

A. Test Setup:

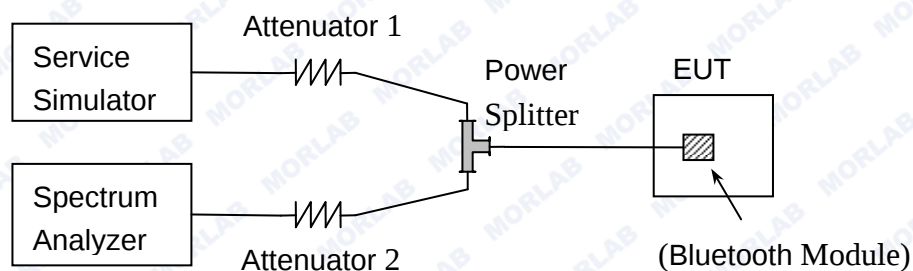

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.5.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW



Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

2.5.4. Test Result

The Bluetooth Module operates at hopping-on test mode.


For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 0), whichever is greater. So, the verdict is PASSING

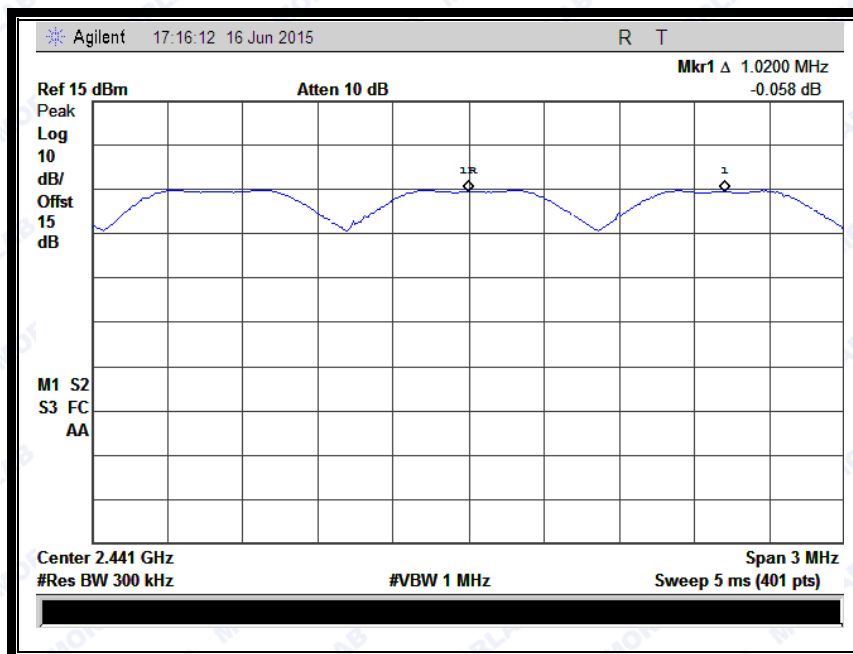


(Plot A: GFSK)



REPORT No. : SZ15060040W01A

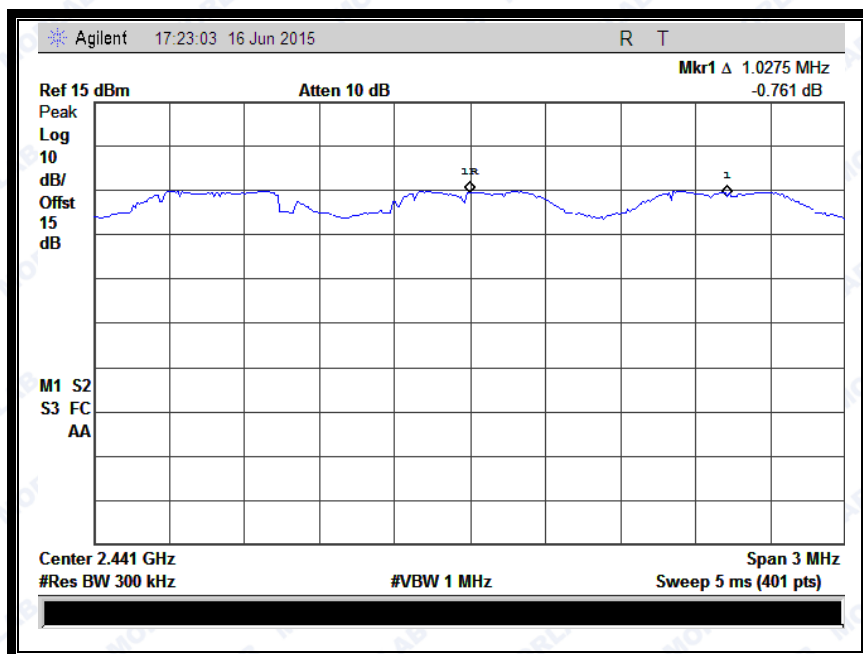

(Plot B: 1/4-DQPSK)

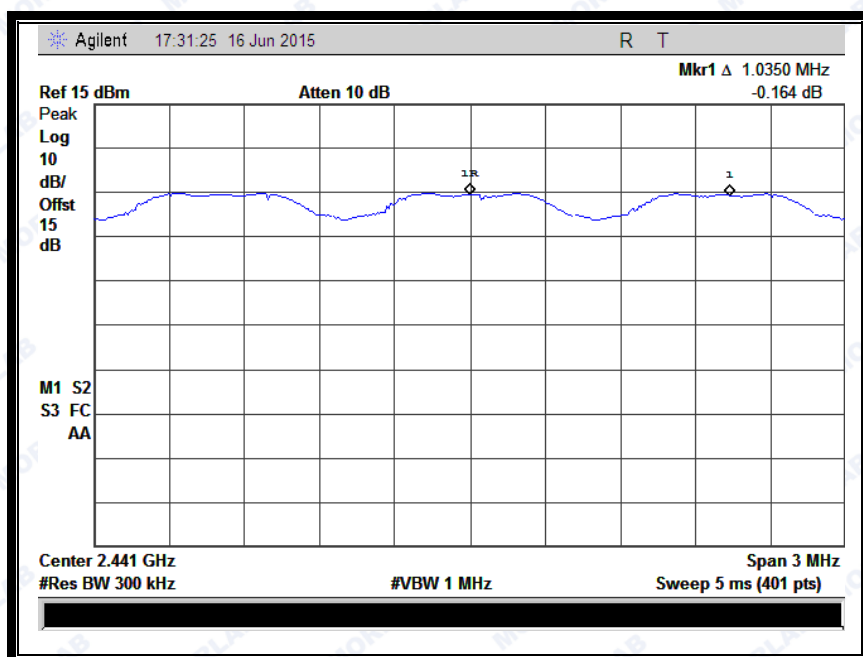

(Plot C: 8-DPSK)


2.6. Time of Occupancy (Dwell time)

2.6.1. Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.6.2. Test Description

A. Test Setup:

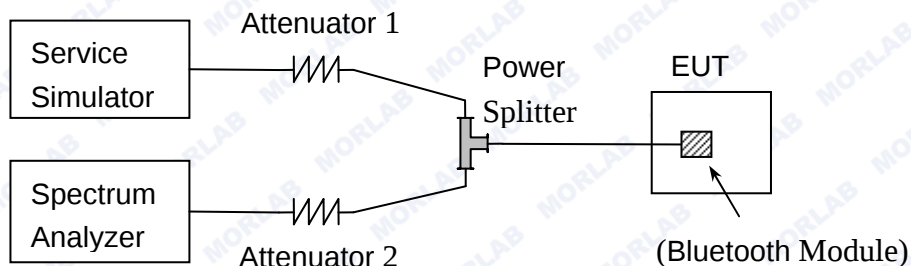

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.6.3. Test Procedure

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The



REPORT No. : SZ15060040W01A

number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channel * 0.4 s) is equal to $10 * (\# \text{ of pulses in 3.16 s}) * \text{pulse width}$.


2.6.4. Test Result

2.6.4.1. GFSK Mode

A. Test Verdict:


DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Refer to Plot	Average Time of Occupancy (sec)	Limit (sec)	Verdict
DH1	0.38	30	Plot A	0.11	0.4	PASS
DH3	1.60	14	Plot B	0.22		PASS
DH5	2.90	11	Plot C	0.32		PASS

B. Test Plots:

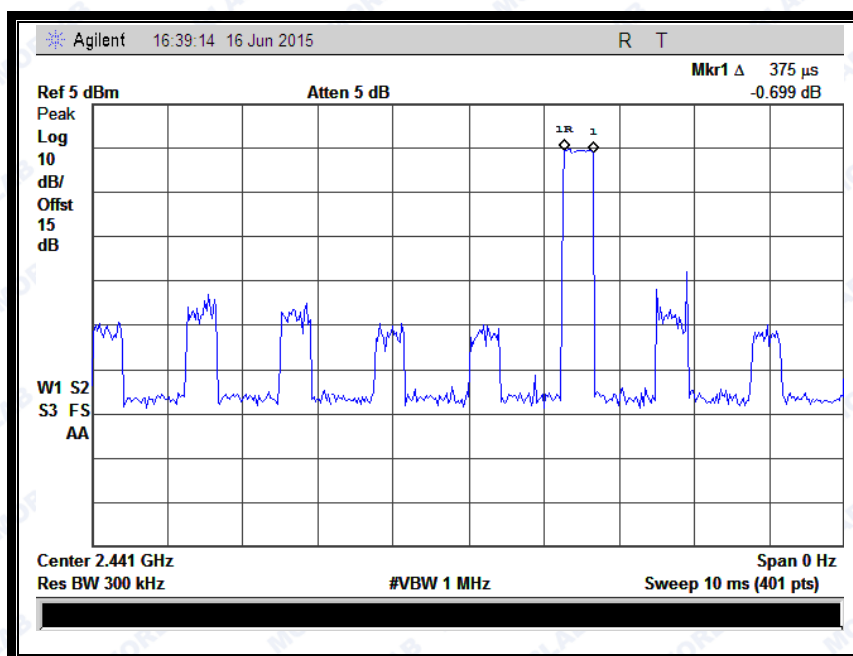




REPORT No. : SZ15060040W01A

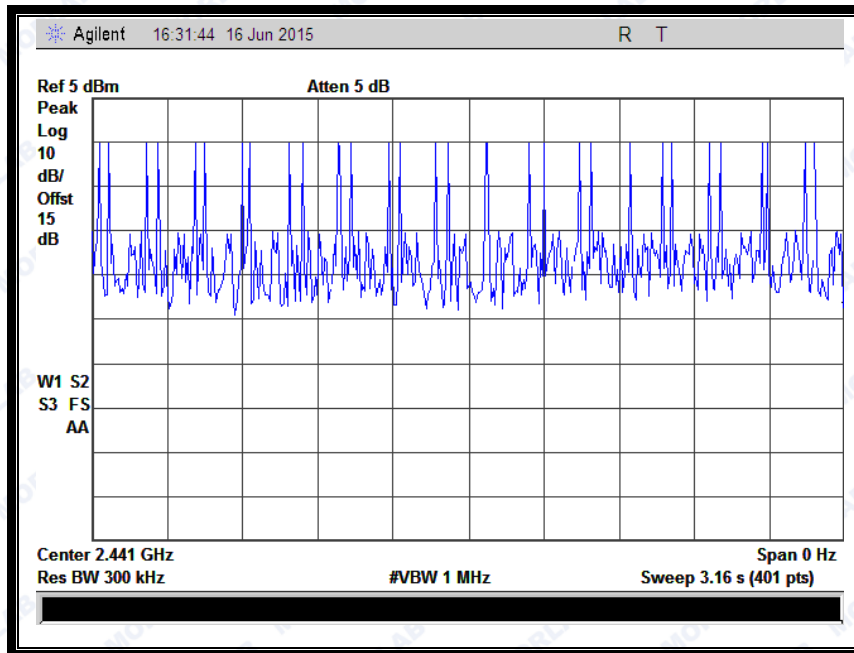


(Plot A: DH1 @ GFSK)

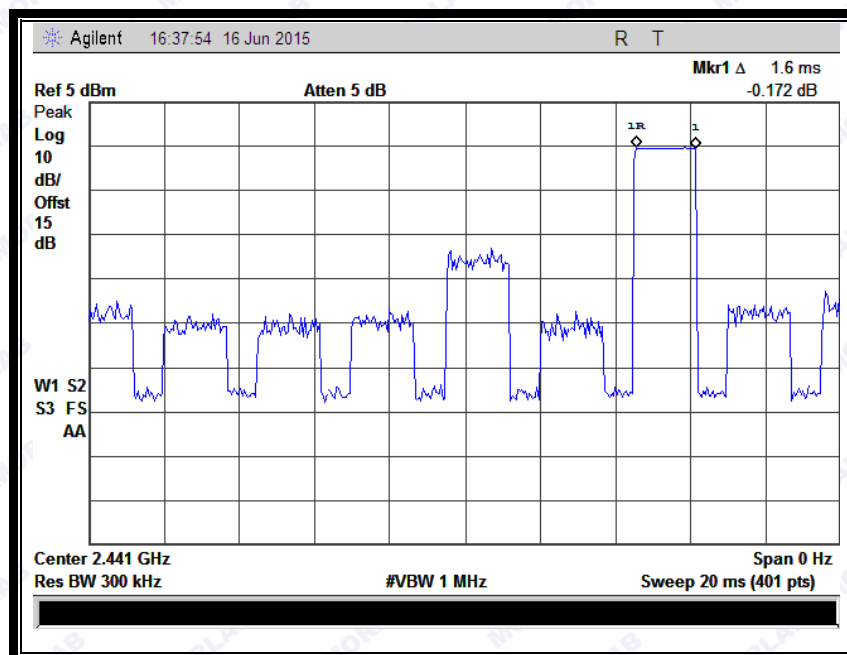




REPORT No. : SZ15060040W01A

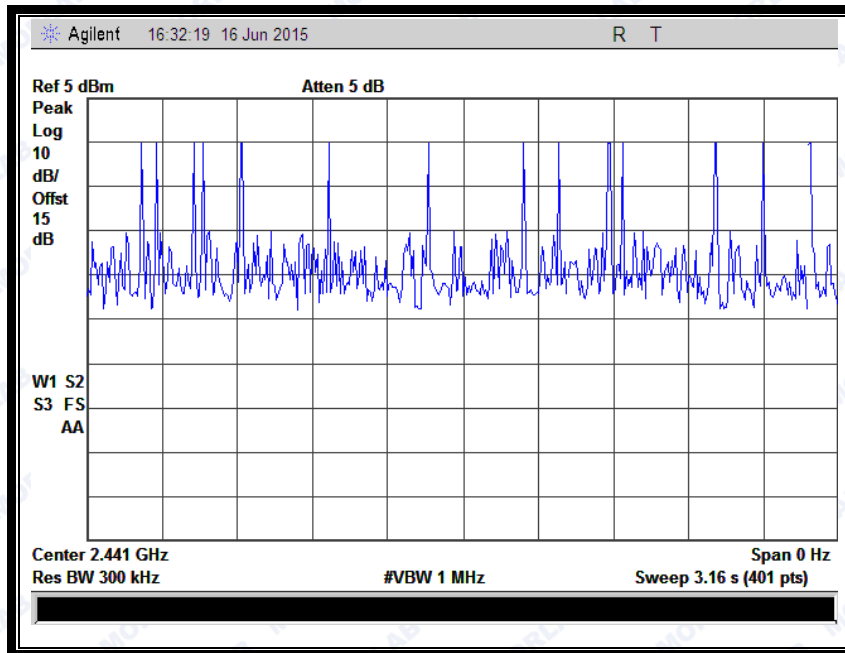


(Plot B: DH3 @ GFSK)

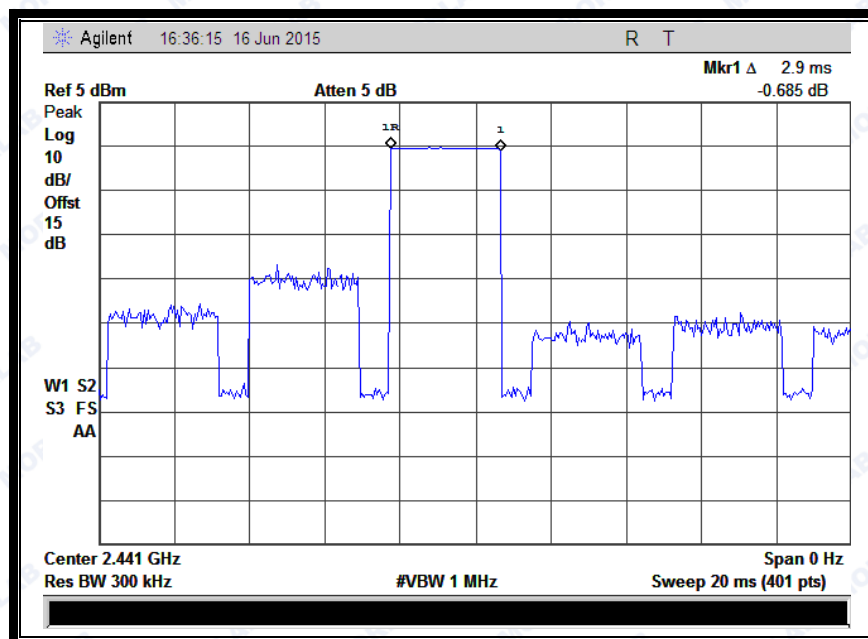



REPORT No. : SZ15060040W01A

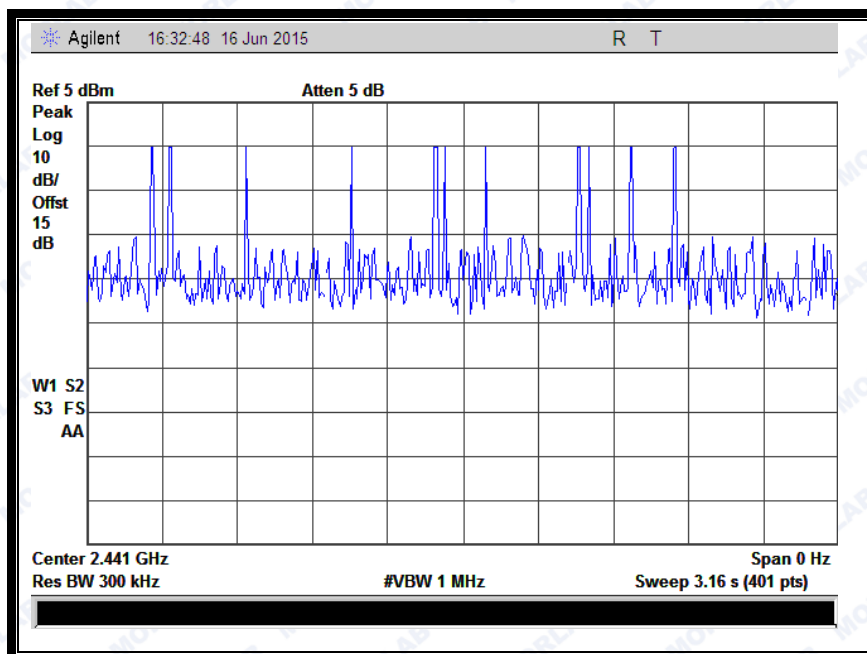

(Plot C: DH5 @ GFSK)

2.6.4.2. $\pi/4$ -DQPSK Mode


A. Test Verdict:

DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Refer to Plot	Average Time of Occupancy (sec)	Limit (sec)	Verdict
DH1	0.40	31	Plot A	0.12	0.4	PASS
DH3	1.65	18	Plot B	0.30		PASS
DH5	2.80	9	Plot C	0.25		PASS

B. Test Plots:




REPORT No. : SZ15060040W01A

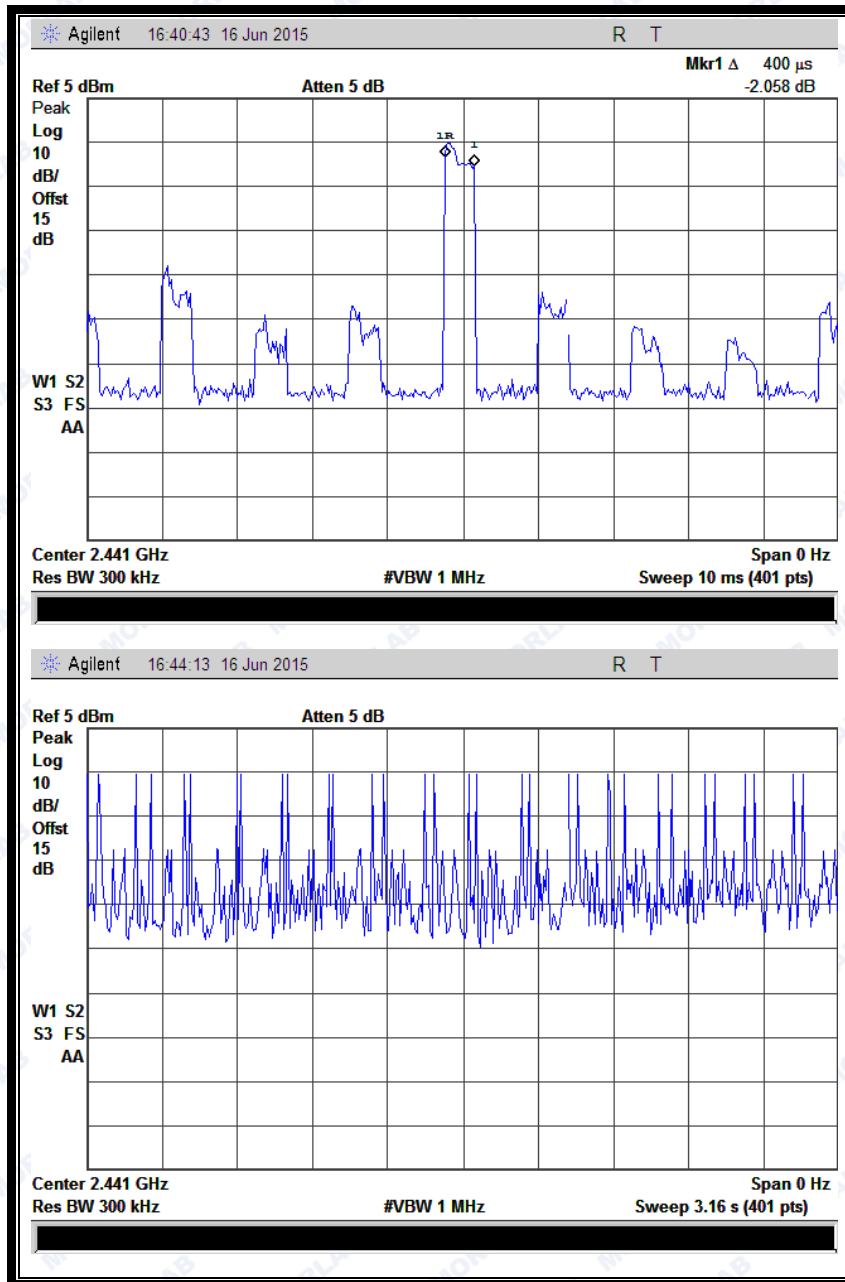

(Plot D: DH1 @ $\pi/4$ -DQPSK)




REPORT No. : SZ15060040W01A

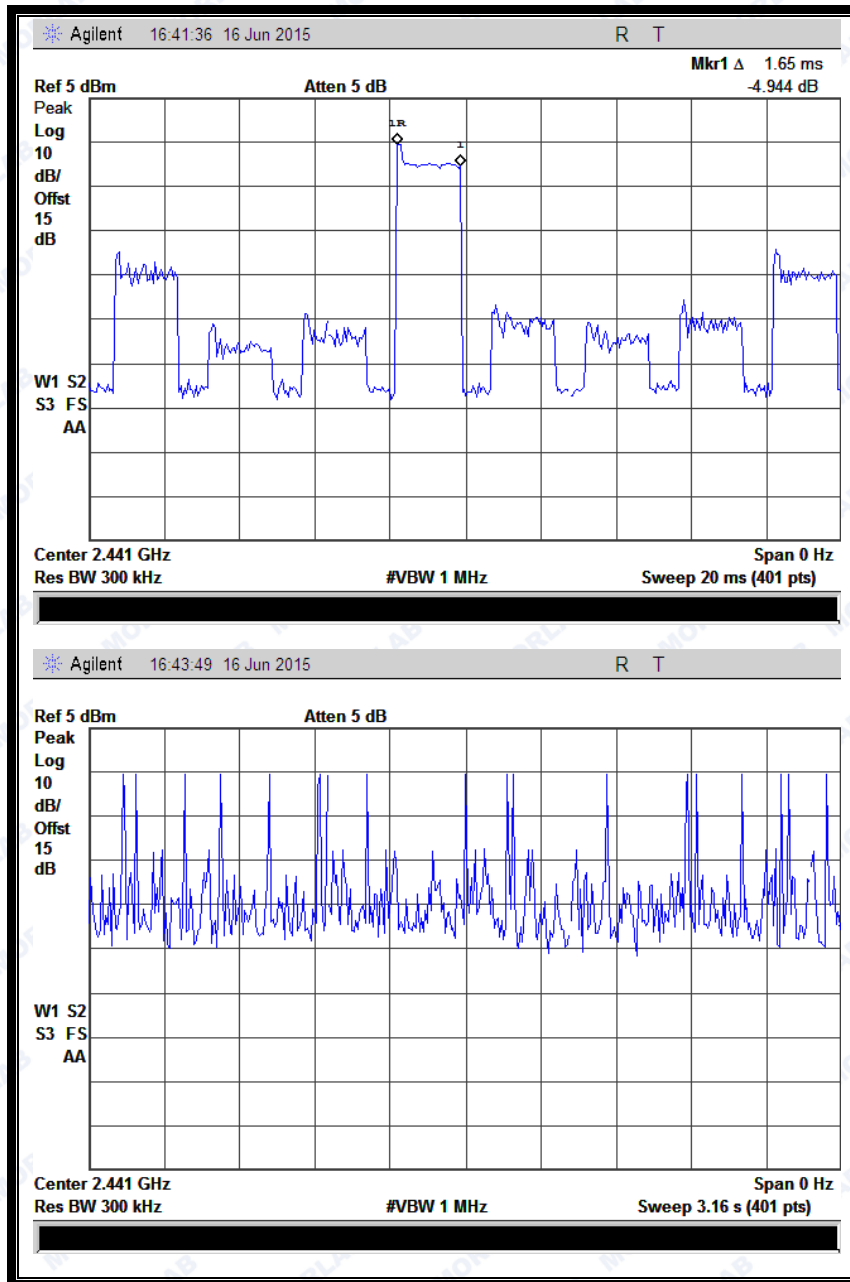

(Plot E: DH3 @ $\pi/4$ -DQPSK)



REPORT No. : SZ15060040W01A

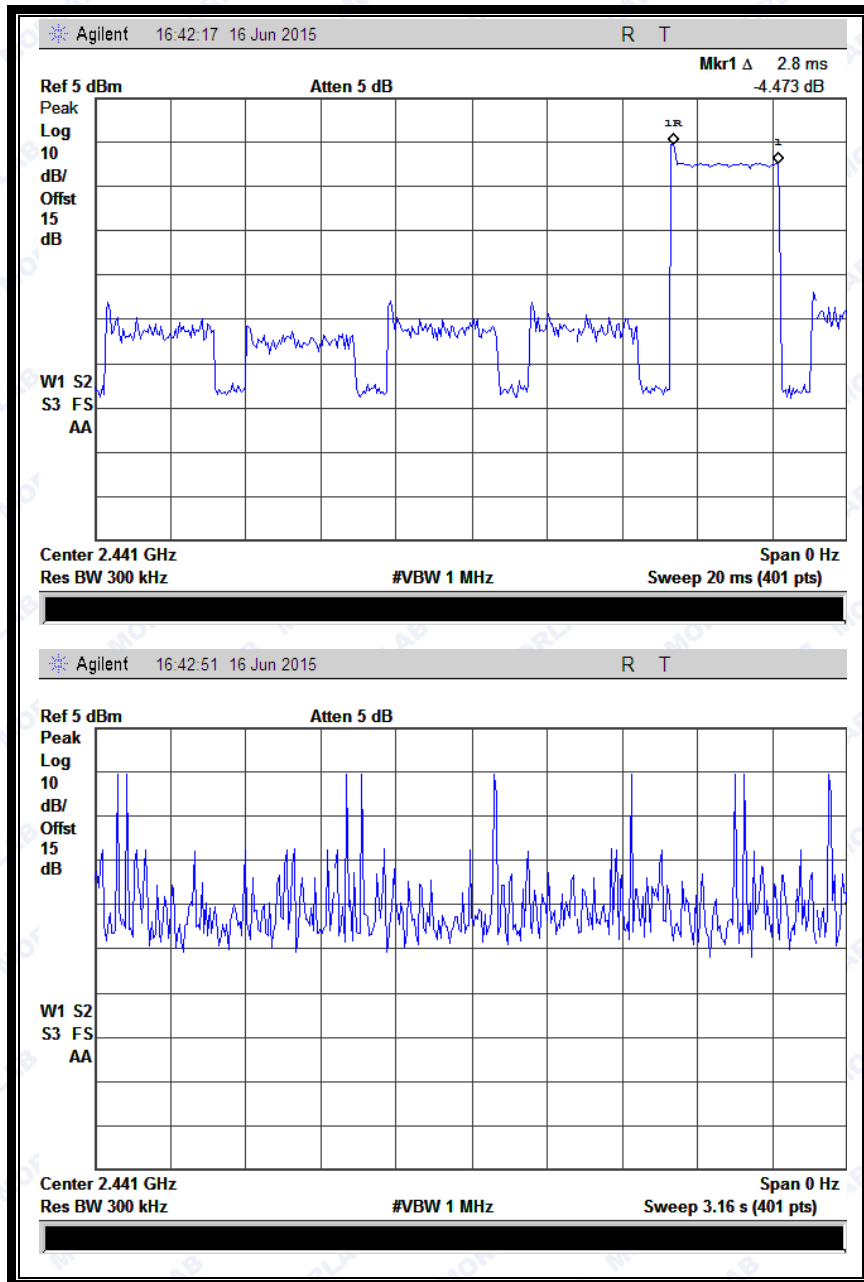

(Plot F: DH5 @ $\pi/4$ -DQPSK)




REPORT No. : SZ15060040W01A

2.6.4.3. 8-DPSK mode

A. Test Verdict:


DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Refer to Plot	Average Time of Occupancy (sec)	Limit (sec)	Verdict
DH1	0.38	30	Plot A	0.11	0.4	PASS
DH3	1.70	15	Plot B	0.26		PASS
DH5	2.80	10	Plot C	0.28		PASS

B. Test Plots:

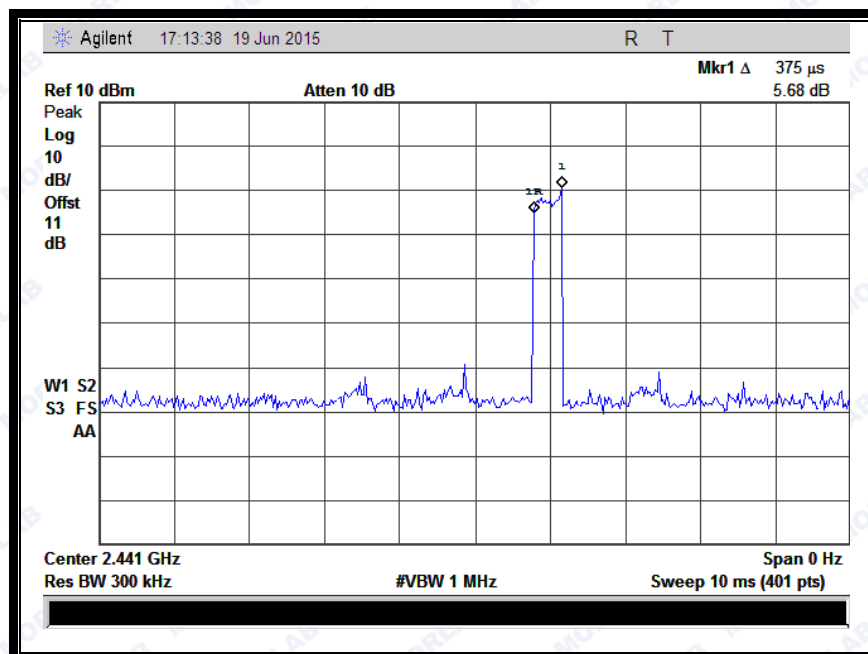




REPORT No. : SZ15060040W01A

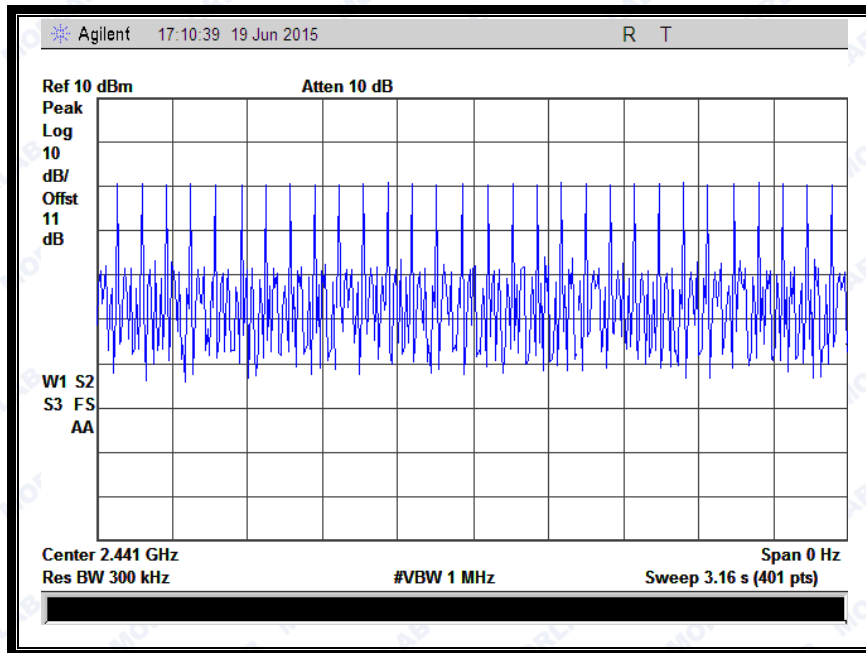


(Plot G: DH1 @ 8-DPSK)

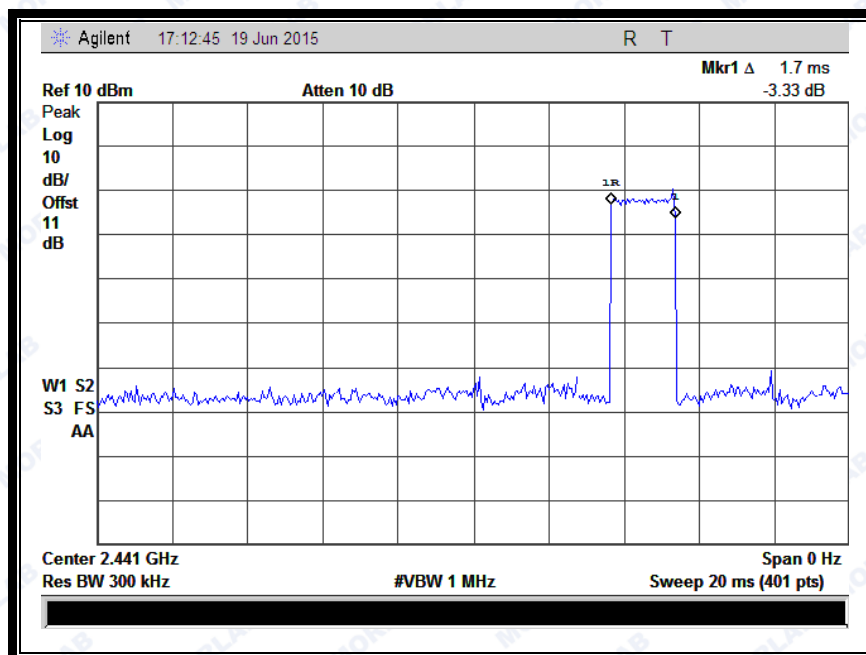




REPORT No. : SZ15060040W01A

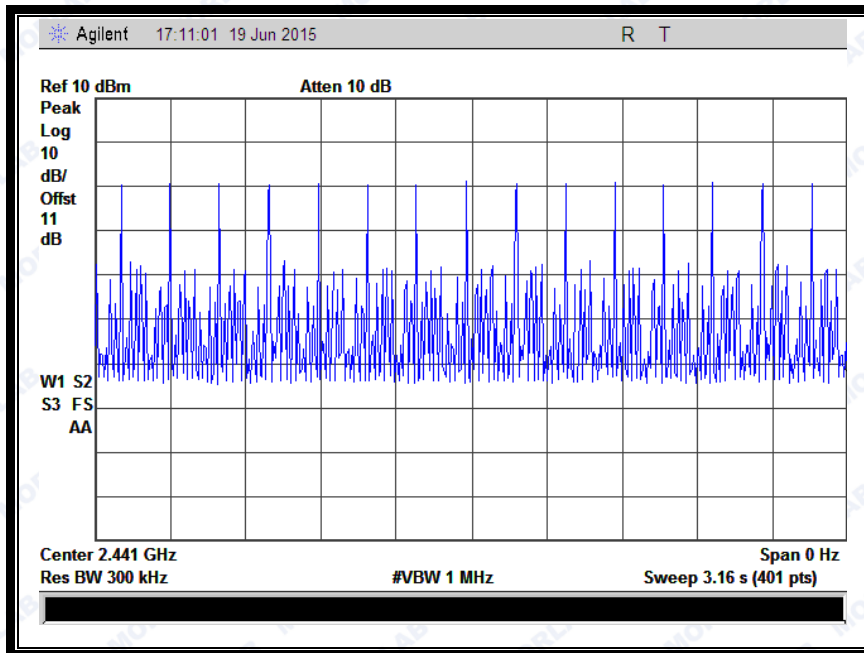


(Plot H: DH3 @ 8-DPSK)

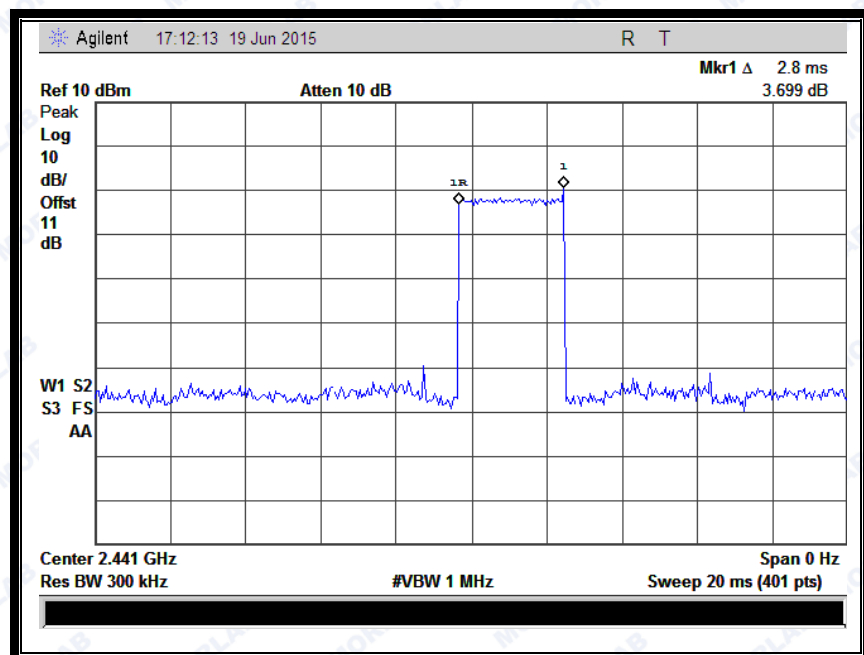



REPORT No. : SZ15060040W01A

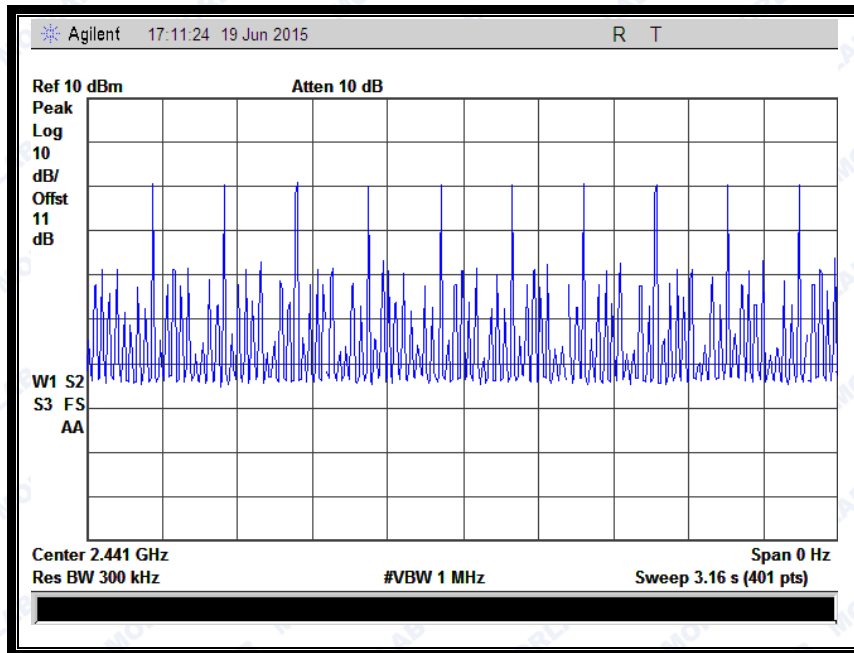

(Plot I: DH5 @ 8-DPSK)


2.7. Conducted Spurious Emissions

2.7.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2. Test Description

A. Test Setup:

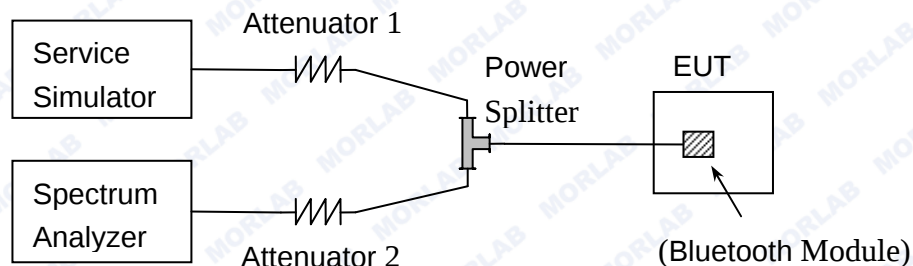

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions



(e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.7.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

2.7.4.1. GFSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-44.85	Plot A.1	-6.272	-26.272	PASS
39	2441	-42.54	Plot B.1	-6.018	-26.018	PASS
78	2480	-38.47	Plot C.1	-8.081	-28.081	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.



REPORT No. : SZ15060040W01A

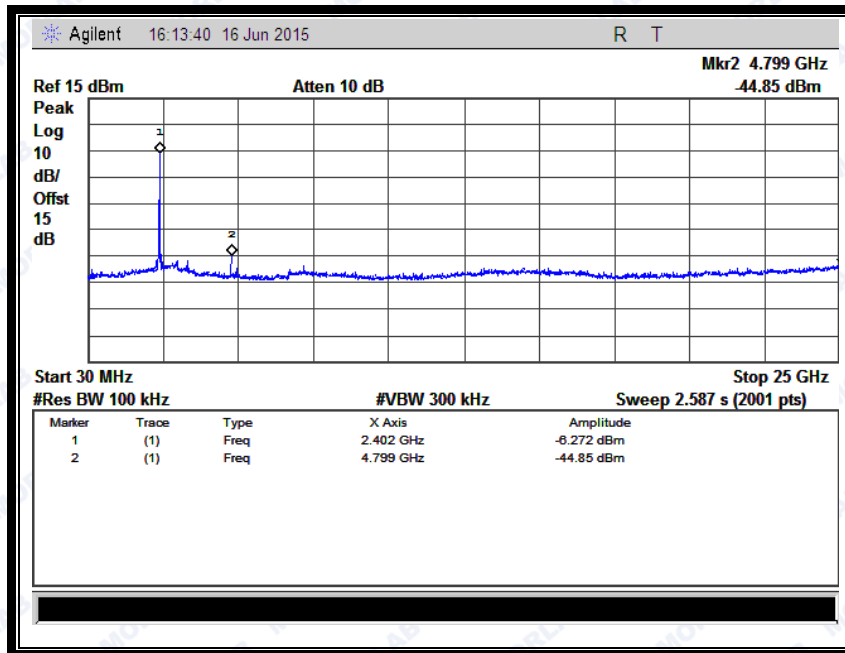


(Plot A.1: Channel = 0, 30MHz to 25GHz @ GFSK Mode)

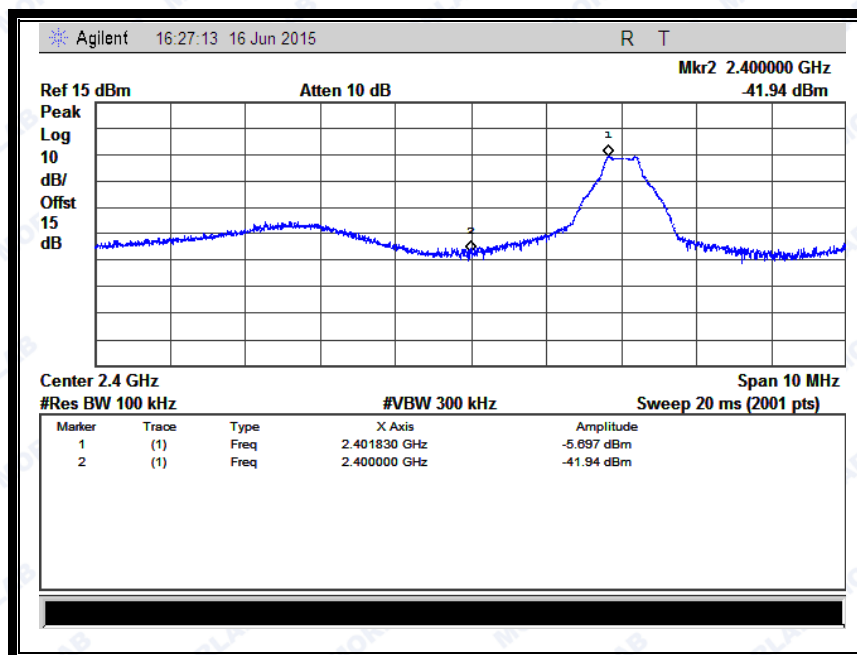


(Channel = 0, Band edge @ GFSK Mode)



REPORT No. : SZ15060040W01A

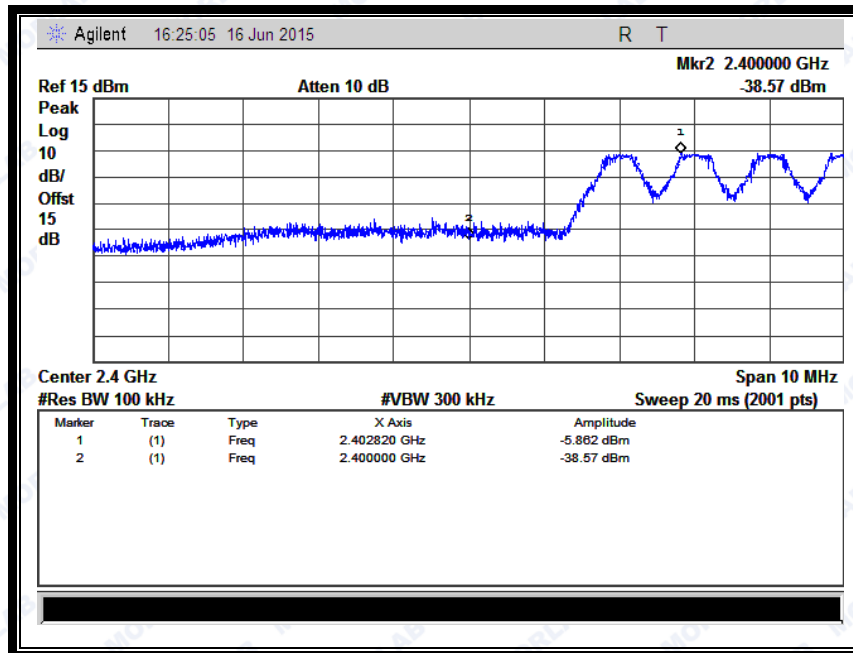


(Channel = 0, Band edge with hopping on @ GFSK Mode)

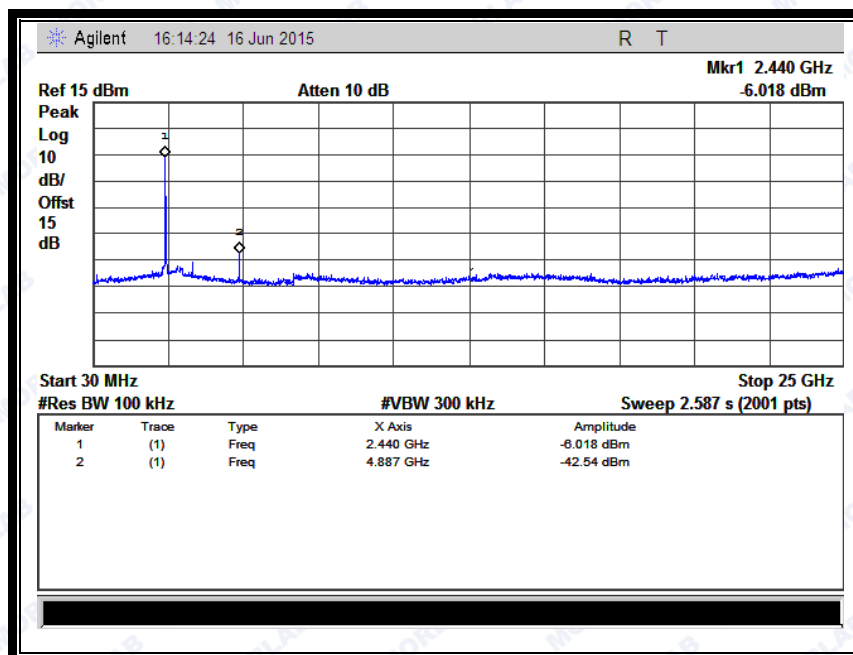


(Plot B.1: Channel = 39, 30MHz to 25GHz @ GFSK Mode)




REPORT No. : SZ15060040W01A

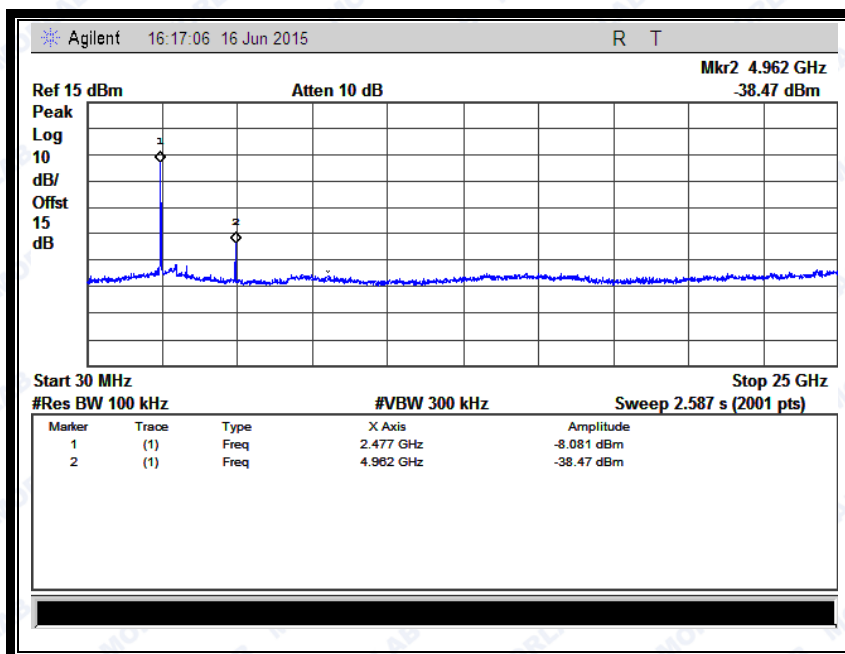

(Plot C.1: Channel = 78, 30MHz to 25GHz @ GFSK Mode)

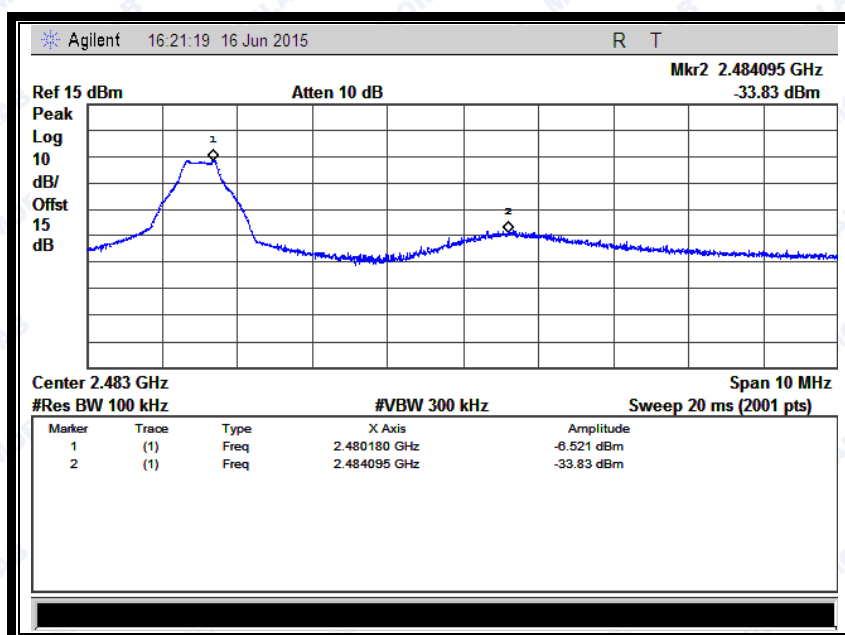

(Channel = 78, Band edge @ GFSK Mode)

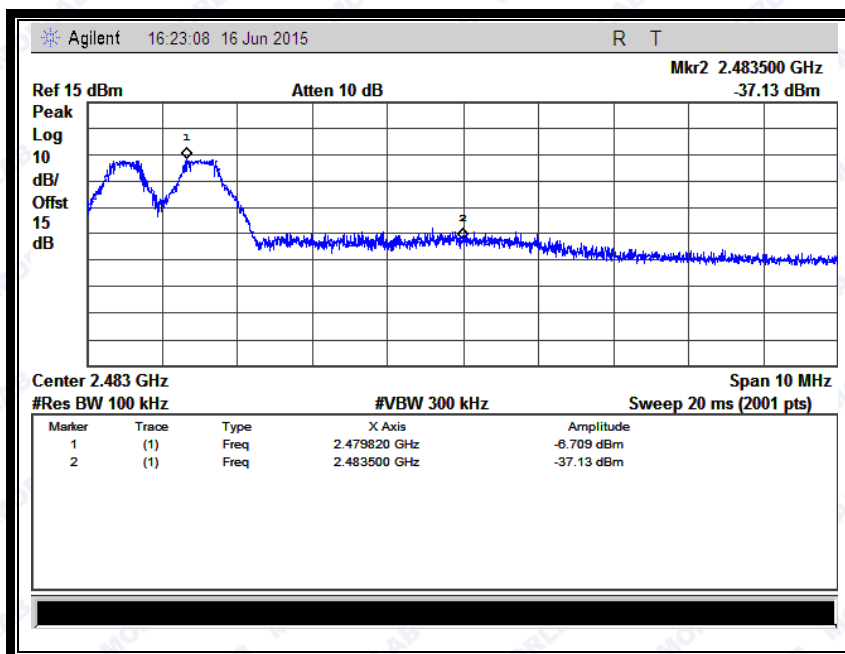

(Channel = 78, Band edge with hopping on @ GFSK Mode)

2.7.4.2. $\pi/4$ -DQPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-43.81	Plot D.1	-5.649	-25.649	PASS
39	2441	-43.56	Plot E.1	-12.03	-32.030	PASS
78	2480	-38.08	Plot F.1	-6.801	-26.801	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.



REPORT No. : SZ15060040W01A

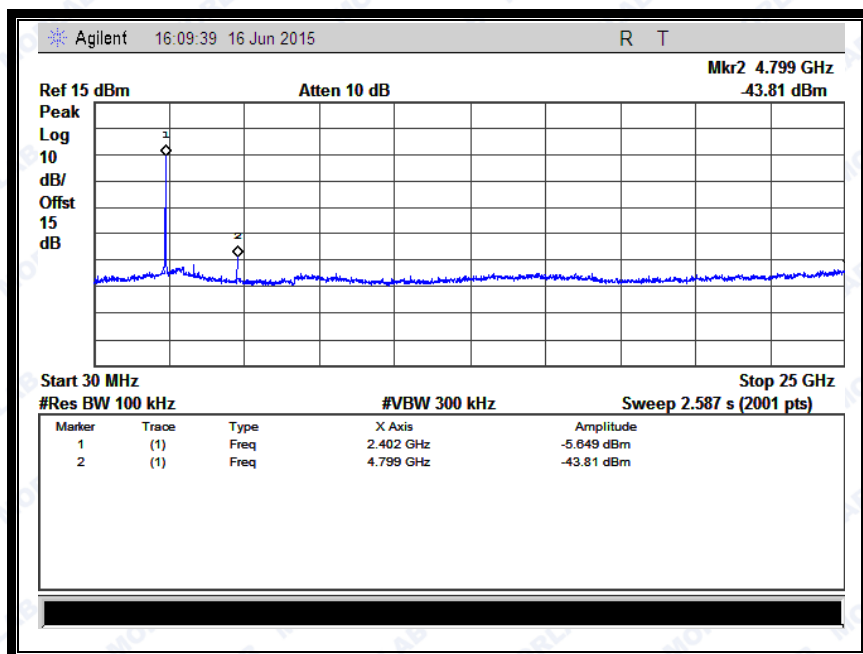


(Plot D.1: Channel = 0, 30MHz to 25GHz @ $\pi/4$ -DQPSK)

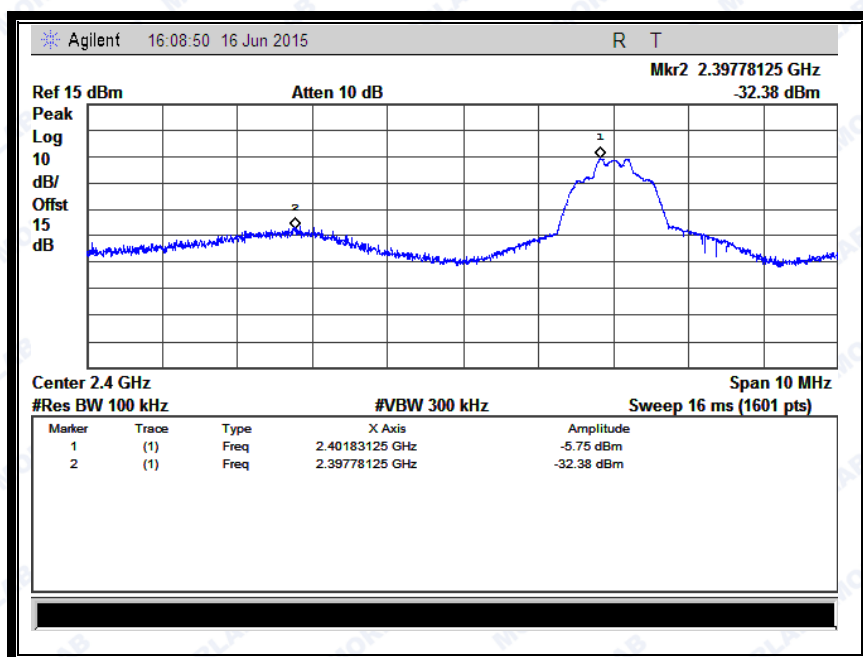


(Channel = 0, Band edge @ $\pi/4$ -DQPSK)



REPORT No. : SZ15060040W01A

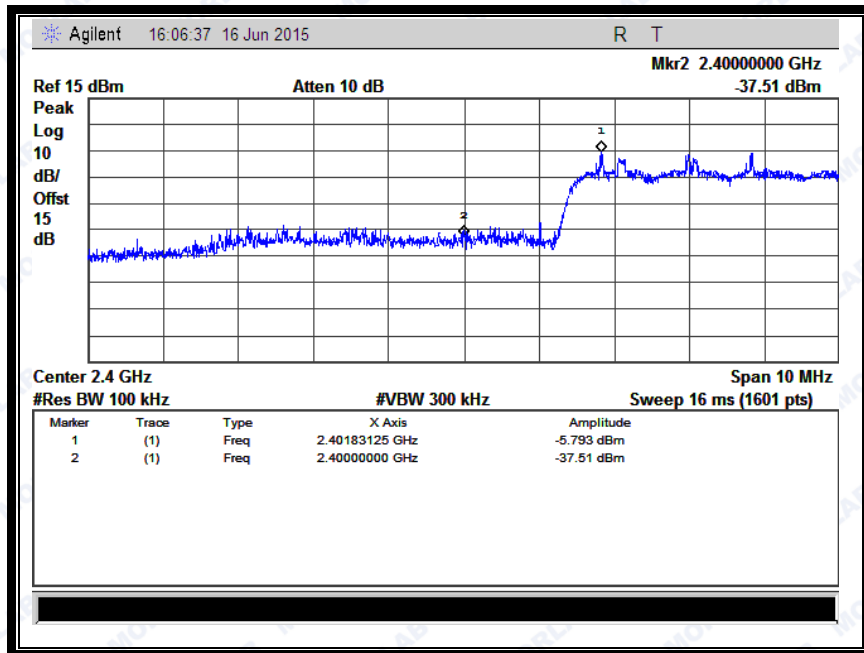


(Channel = 0, Band edge with hopping on @ $\pi/4$ -DQPSK)

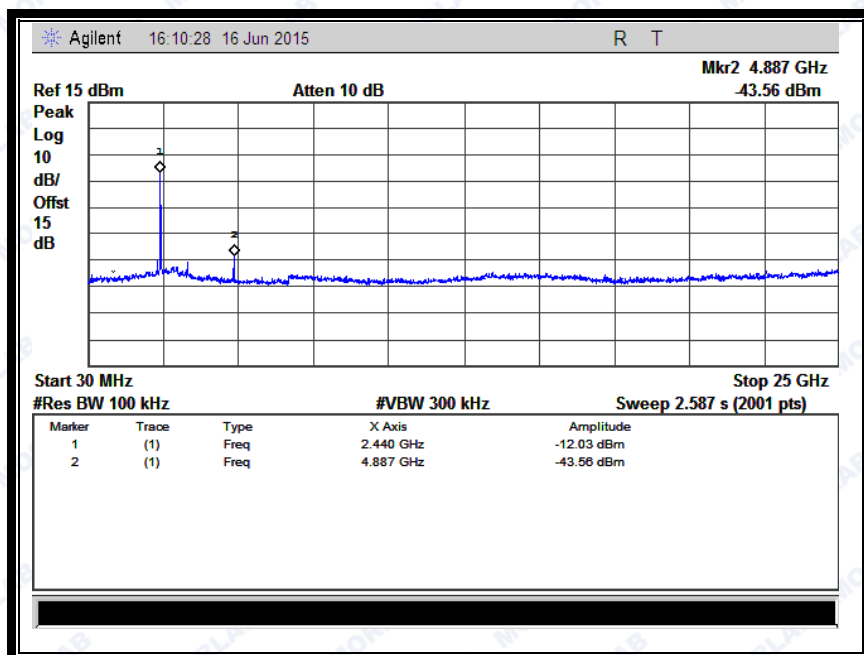


(Plot E.1: Channel = 39, 30MHz to 25GHz @ $\pi/4$ -DQPSK)



REPORT No. : SZ15060040W01A

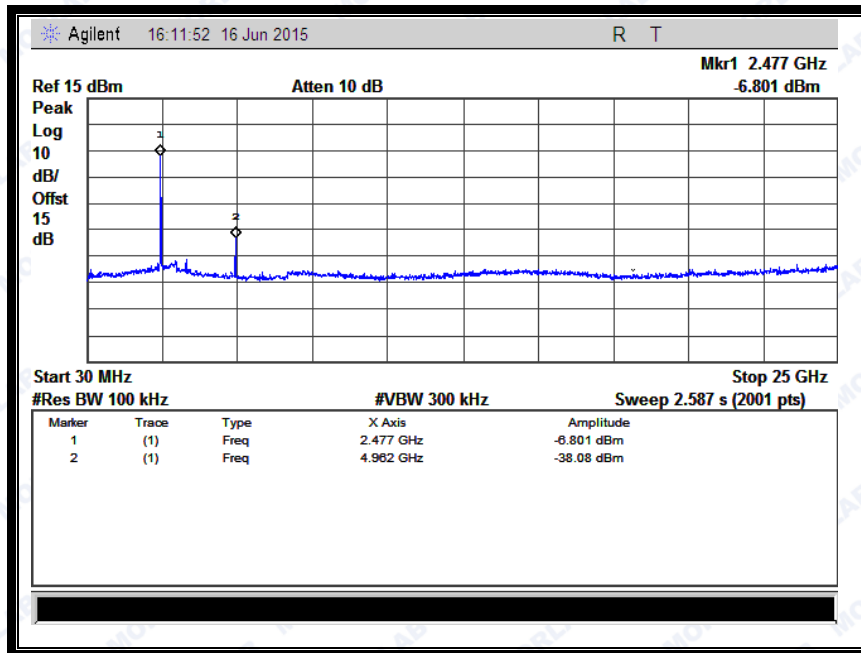


(Plot F.1: Channel = 78, 30MHz to 25GHz @ $\pi/4$ -DQPSK)

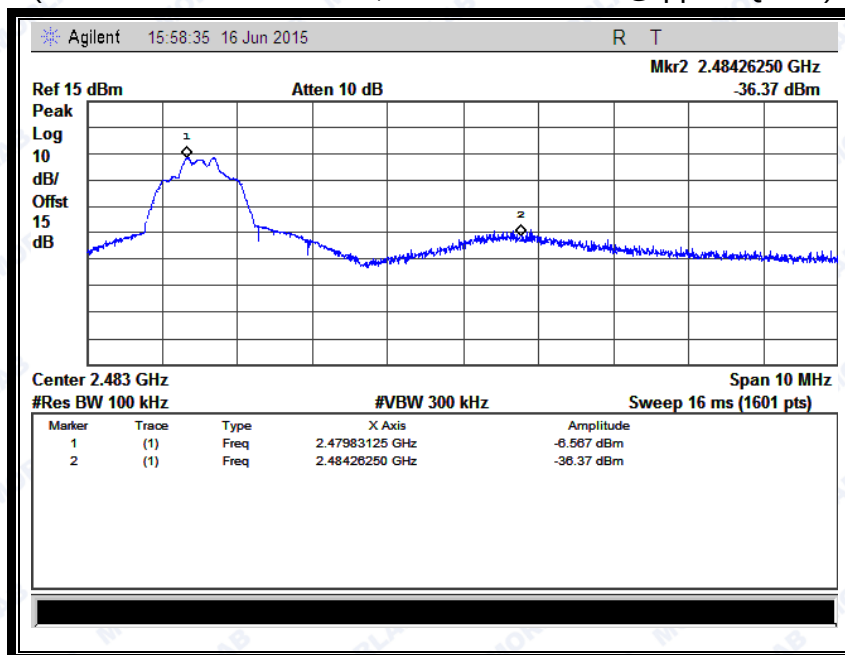

(Channel = 78, Band edge @ $\pi/4$ -DQPSK)



REPORT No. : SZ15060040W01A

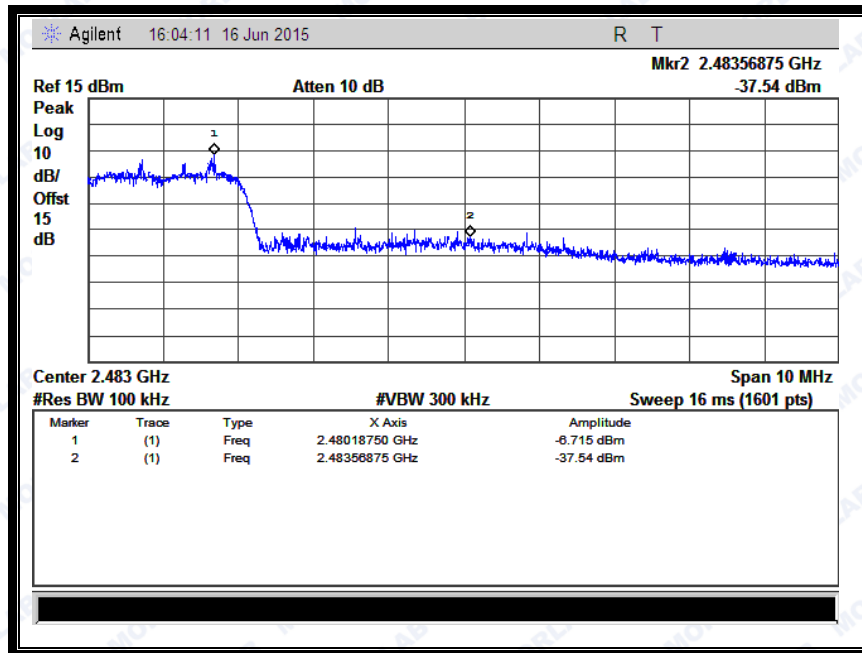

(Channel = 78, Band edge with hopping on @ $\pi/4$ -DQPSK)

2.7.4.3. 8-DPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-45.49	Plot G.1	-11.75	-31.750	PASS
39	2441	-43.25	Plot H.1	-5.745	-25.745	PASS
78	2480	-36.80	Plot I.1	-7.485	-27.485	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.



REPORT No. : SZ15060040W01A

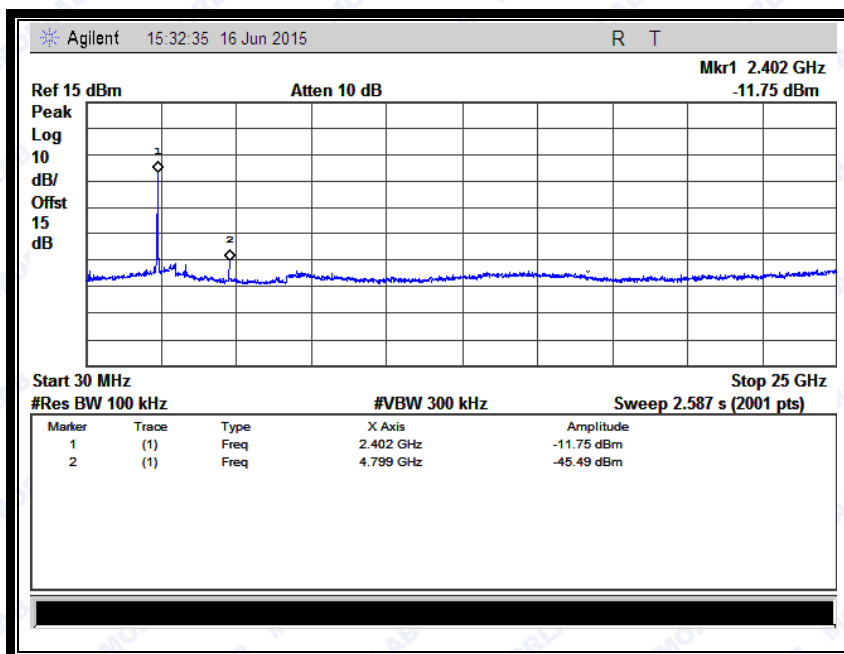


(Plot G.1: Channel = 0, 30MHz to 25GHz @ 8-DPSK)

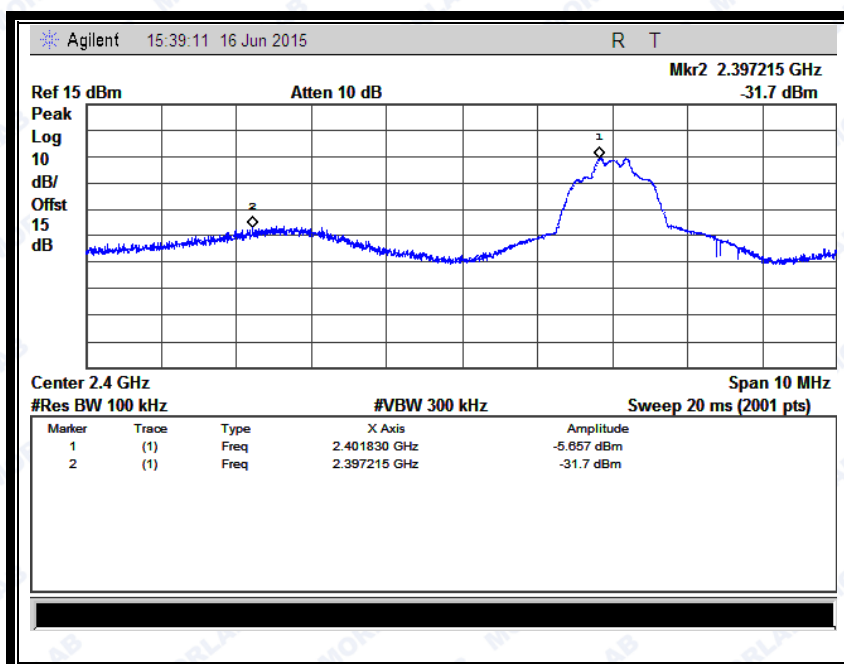


(Channel = 0, Band edge @ 8-DPSK)



REPORT No. : SZ15060040W01A

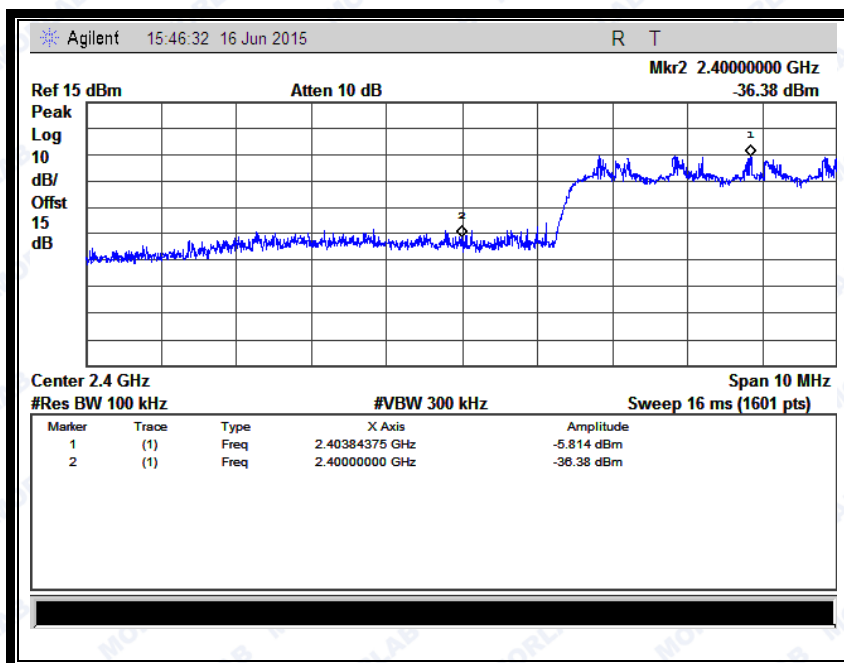


(Channel = 0, Band edge with hopping on @ 8-DPSK)

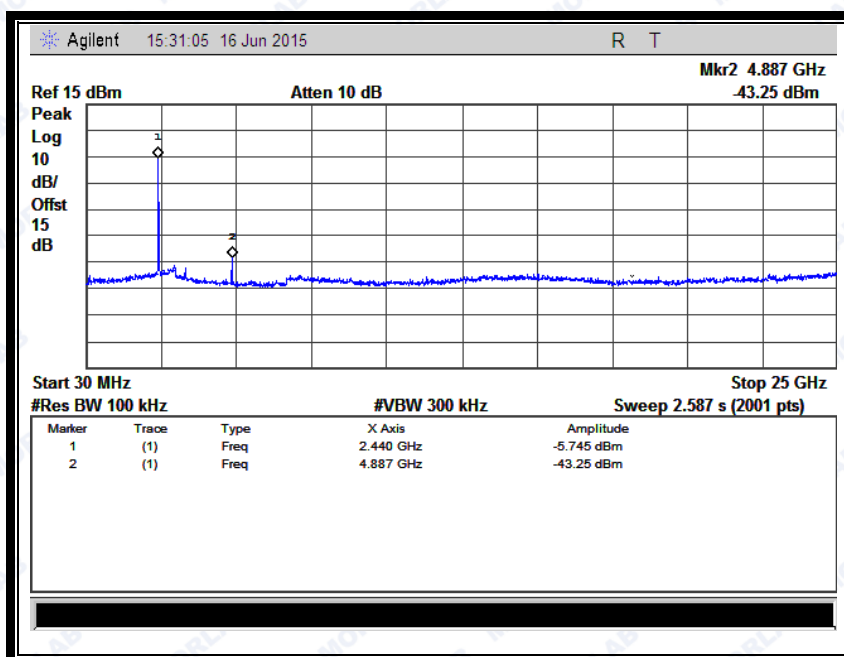

(Plot H.1: Channel = 39, 30MHz to 25GHz @ 8-DPSK)




REPORT No. : SZ15060040W01A

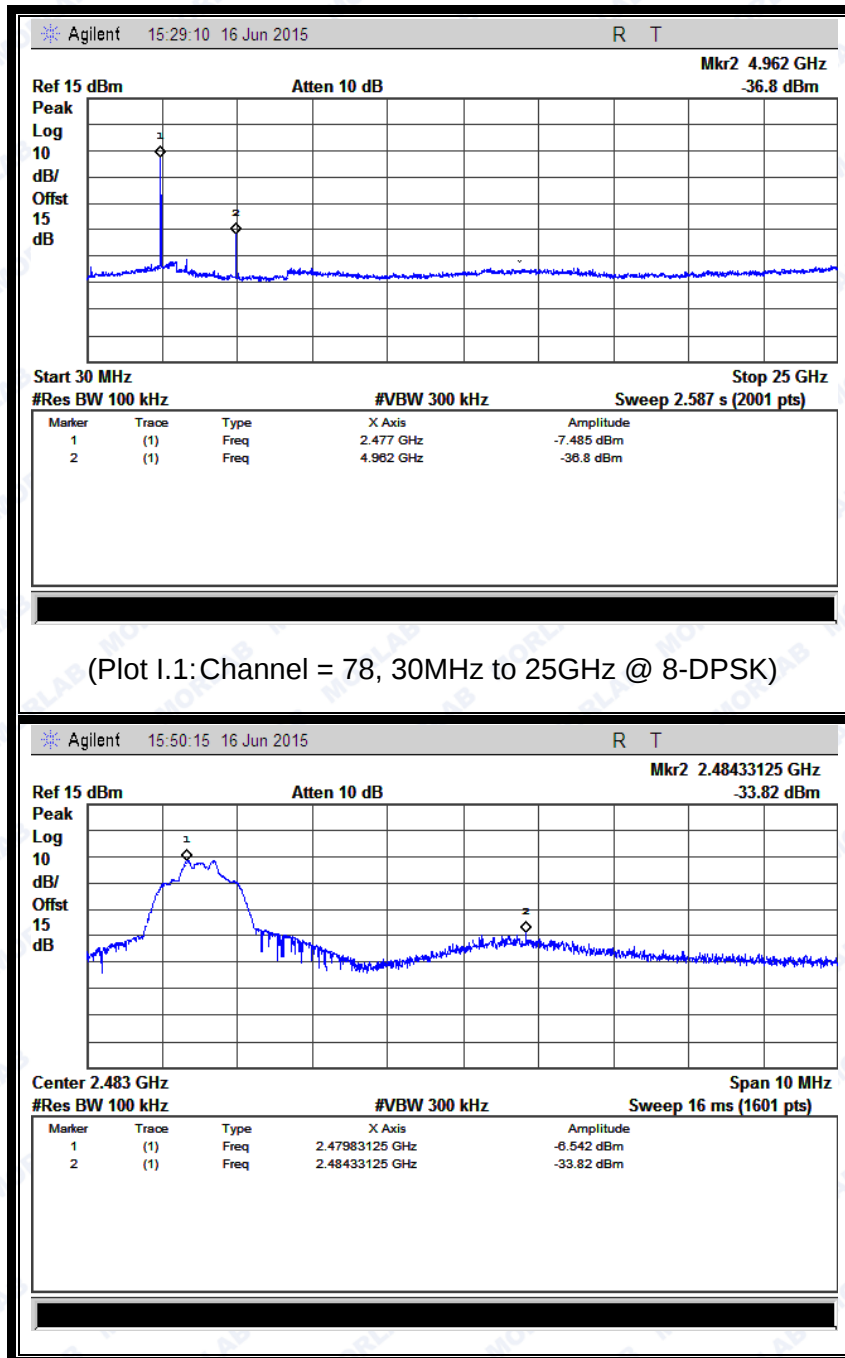

(Plot I.1: Channel = 78, Band edge @ 8-DPSK)



REPORT No. : SZ15060040W01A

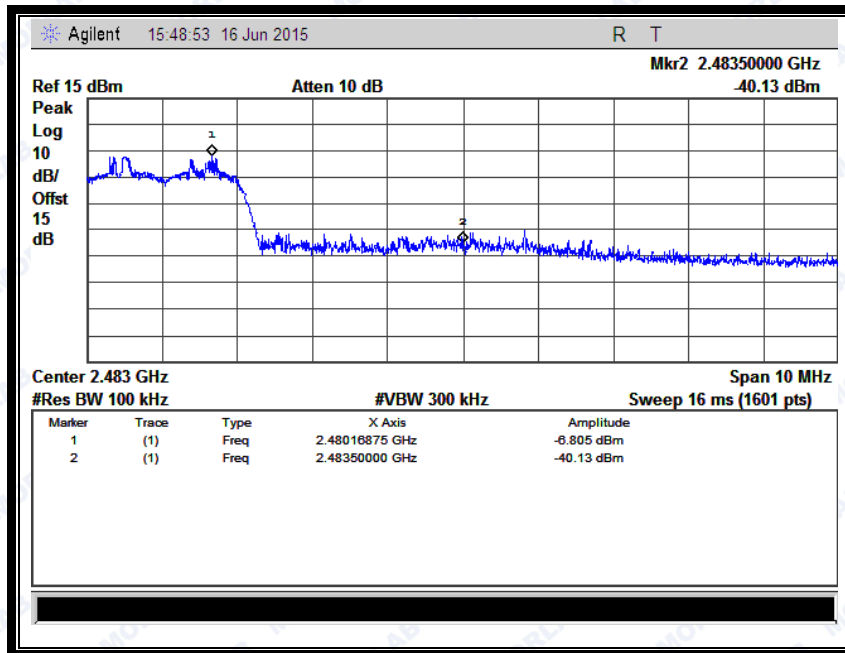

(Plot I.1: Channel = 78, Band edge with hopping on @ 8-DPSK)


2.8. Restricted Frequency Bands

2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2. Test Description

A. Test Setup:

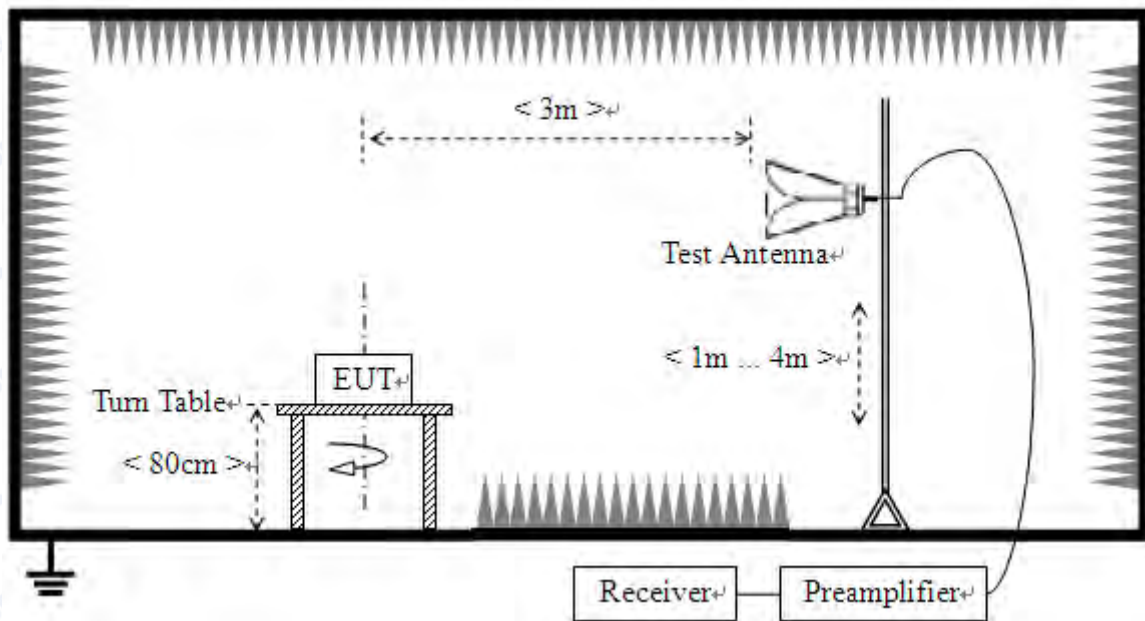

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.



For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

B. Equipments List:

Please reference ANNEX A(1.4).

2.8.3. Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.8.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$E [\text{dB}\mu\text{V/m}] = \text{UR} + \text{AT} + \text{AFactor} [\text{dB}]; \text{AT} = \text{LCable loss} [\text{dB}] - \text{Gpreamp} [\text{dB}]$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.




REPORT No. : SZ15060040W01A

2.8.4.1. GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2370.72	PK	47.27	-33.63	32.56	46.20	74	Pass
0	2354.60	AV	34.78	-33.63	32.56	33.71	54	Pass
78	2484.44	PK	53.47	-33.18	32.5	52.79	74	Pass
78	2483.50	AV	35.18	-33.18	32.5	34.50	54	Pass


B. Test Plots:

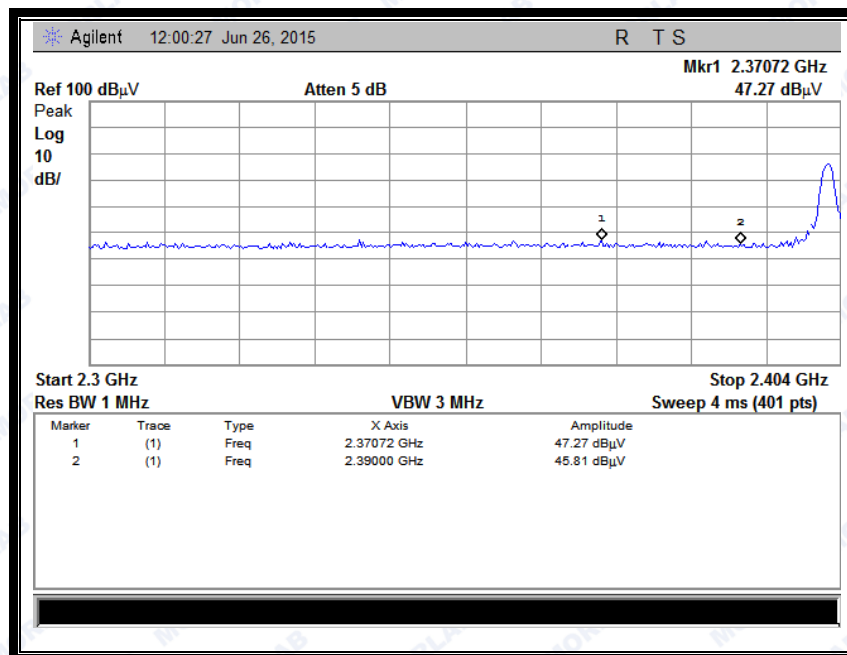


(Plot A1:Channel = 0 PEAK @ GFSK)



REPORT No. : SZ15060040W01A

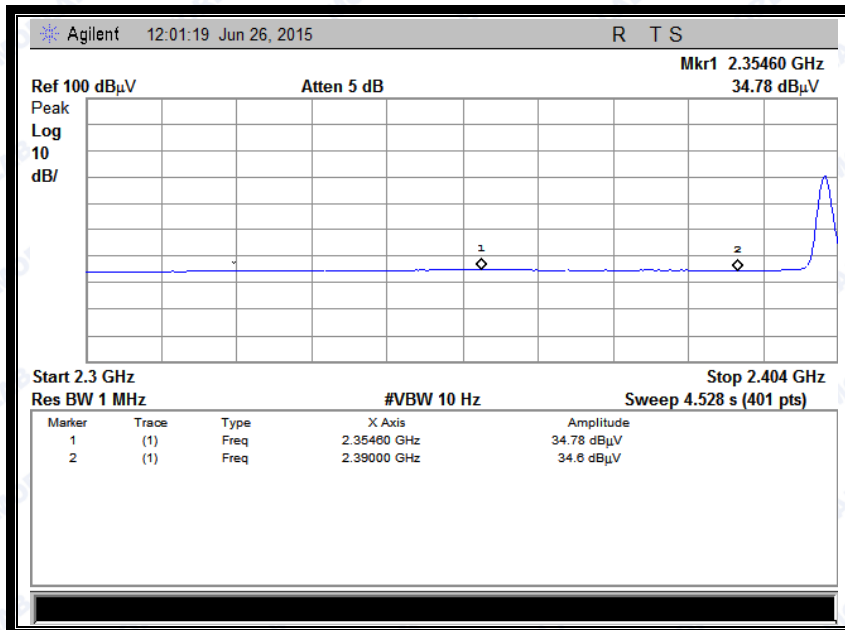


(Plot A2:Channel = 0 AVERAGE @ GFSK)

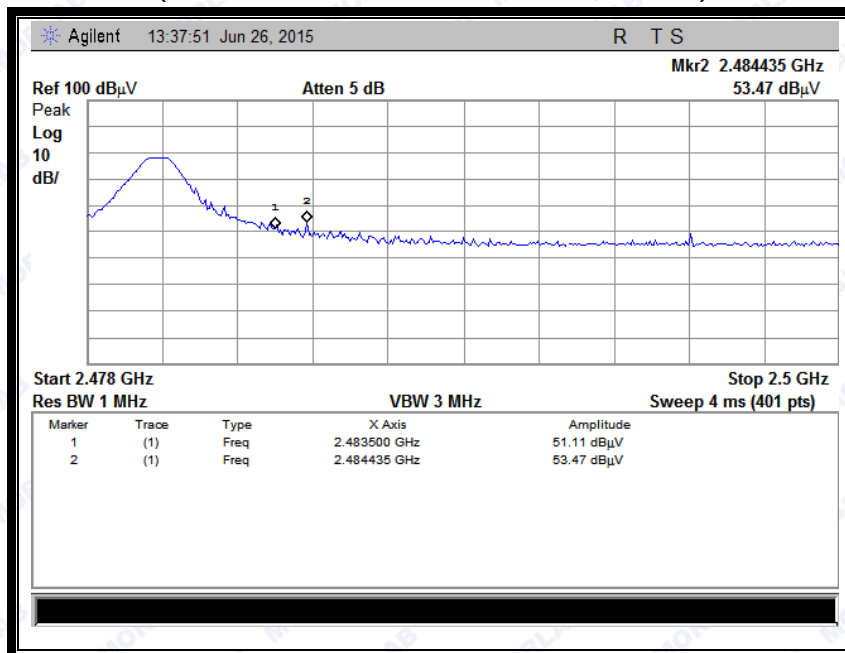

(Plot B1:Channel = 78 PEAK @ GFSK)



REPORT No. : SZ15060040W01A

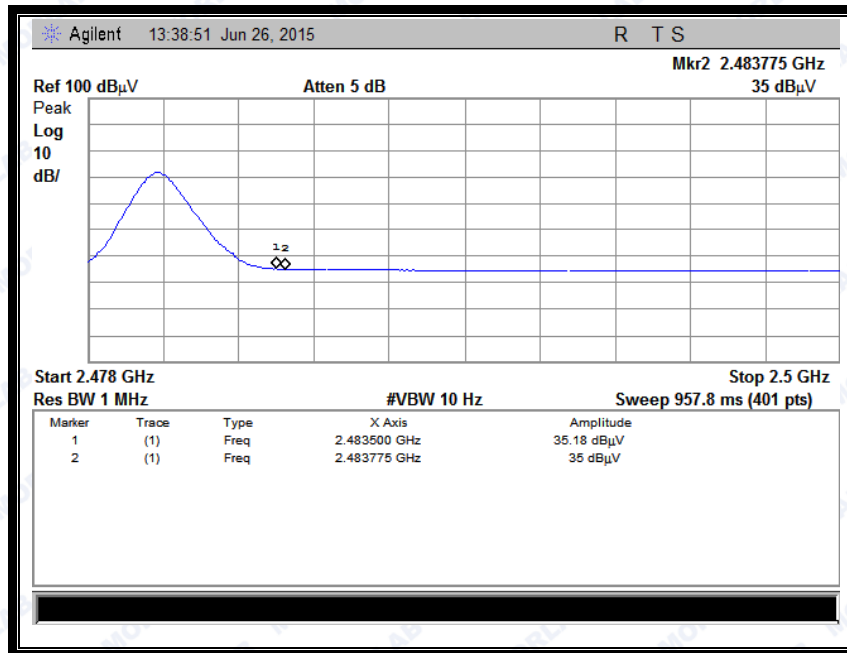

(Plot B2: Channel = 78 AVERAGE @ GFSK)

2.8.4.2. $\pi/4$ -DQPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dB μ V)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2369.94	PK	52.70	-33.63	32.56	51.63	74	Pass
0	2352.52	AV	34.78	-33.63	32.56	33.71	54	Pass
78	2483.50	PK	61.22	-33.18	32.5	60.54	74	Pass
78	2483.50	AV	35.51	-33.18	32.5	34.83	54	Pass


B. Test Plots:



REPORT No. : SZ15060040W01A

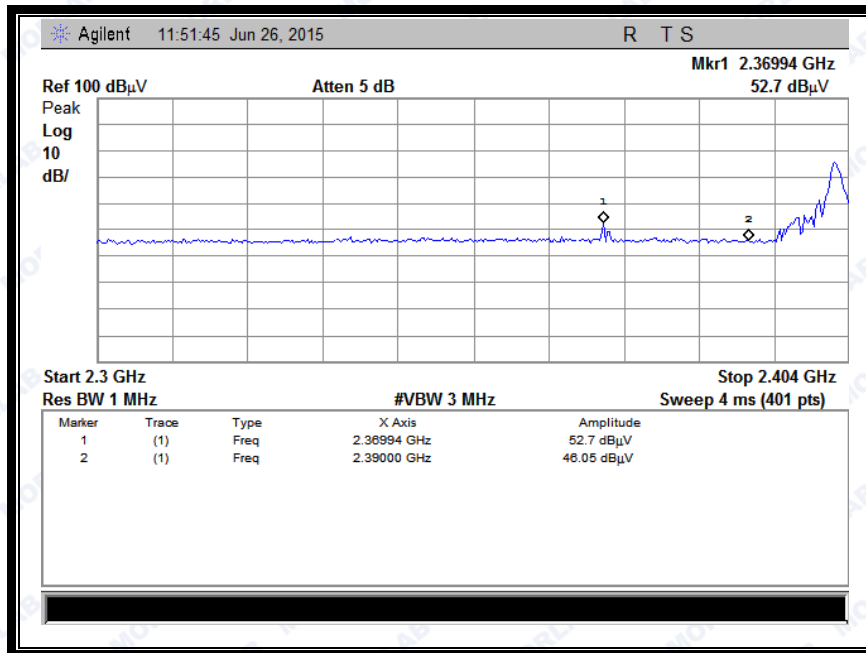


(Plot C1: Channel = 0 PEAK @ $\pi/4$ -DQPSK)

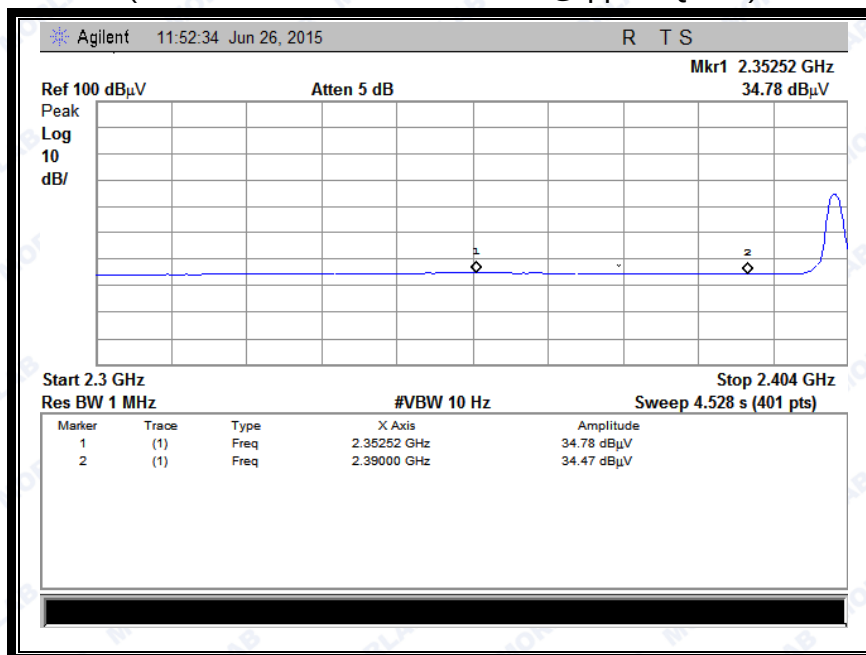


(Plot C2: Channel = 0 AVERAGE @ $\pi/4$ -DQPSK)



REPORT No. : SZ15060040W01A

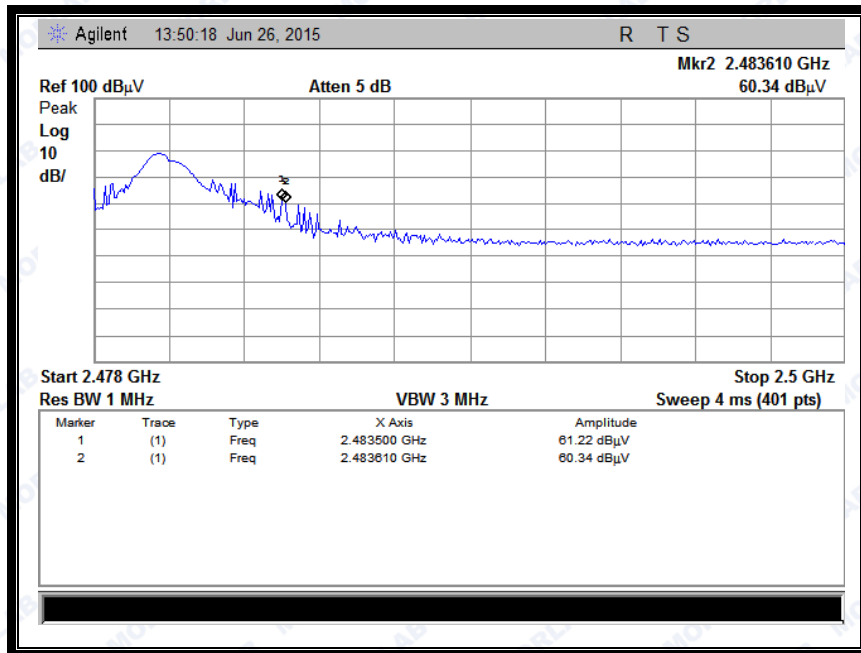

(Plot D1: Channel = 78 PEAK @ $\pi/4$ -DQPSK)

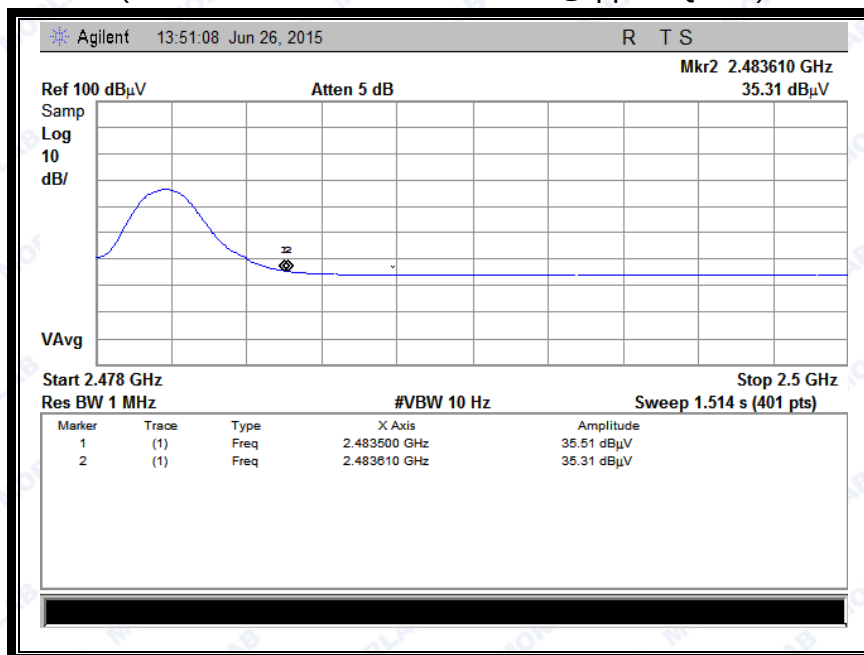

(Plot D2: Channel = 78 AVERAGE @ $\pi/4$ -DQPSK)




REPORT No. : SZ15060040W01A

2.8.4.3. 8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2352.26	PK	46.79	-33.63	32.56	45.72	74	Pass
0	2349.66	AV	34.84	-33.63	32.56	33.77	54	Pass
78	2483.67	PK	57.48	-33.18	32.5	56.80	74	Pass
78	2483.50	AV	36.21	-33.18	32.5	35.53	54	Pass


B. Test Plots:

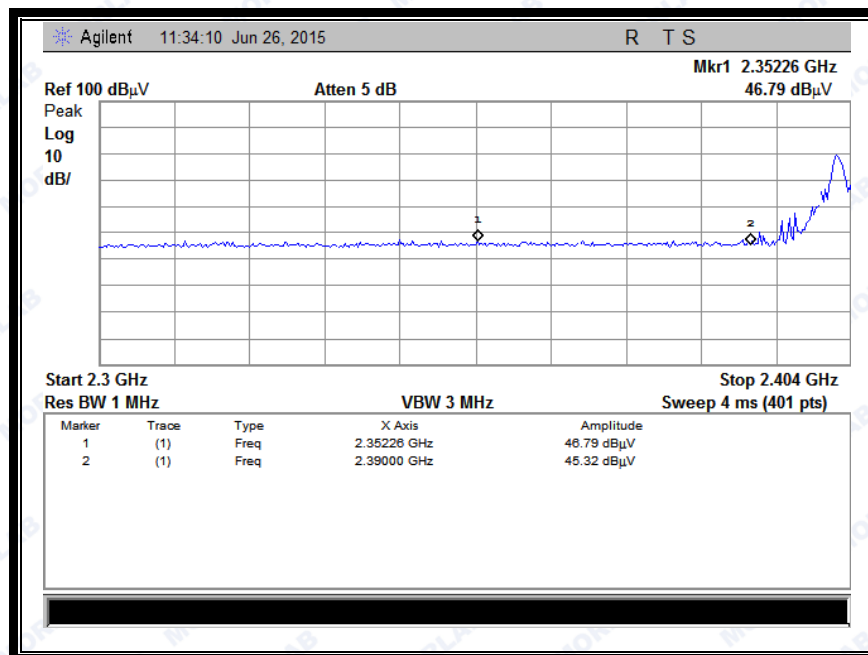


(Plot E1: Channel = 0 PEAK @ 8-DPSK Mode)



REPORT No. : SZ15060040W01A

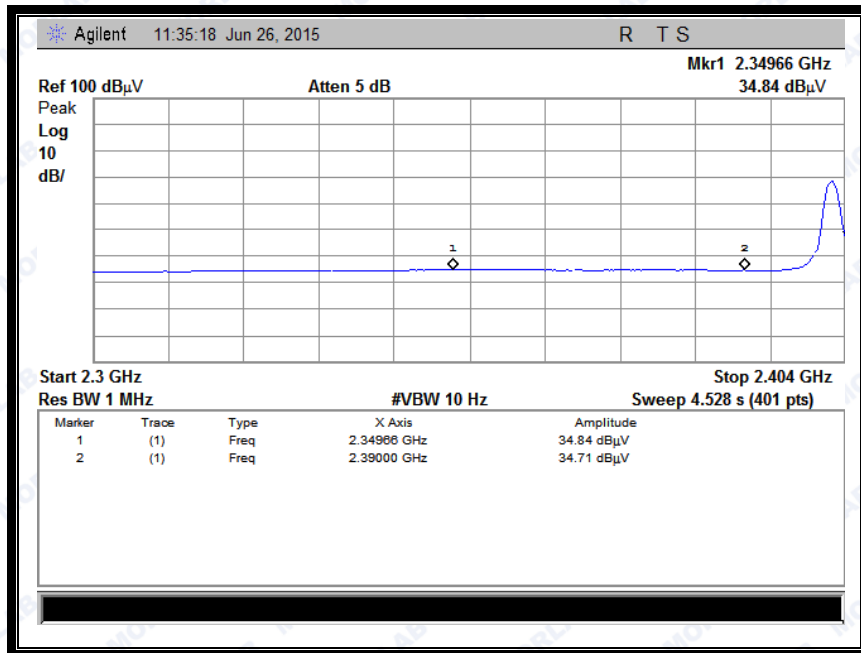


(Plot E2: Channel = 0 AVERAGE @ 8-DPSK Mode)

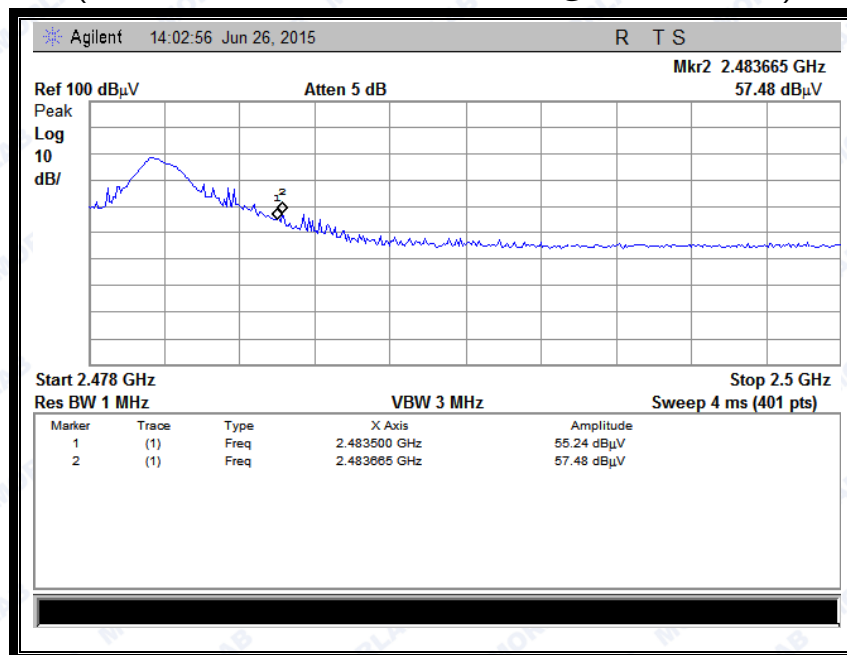

(Plot F1:Channel = 78 PEAK @ 8-DPSK Mode)



REPORT No. : SZ15060040W01A

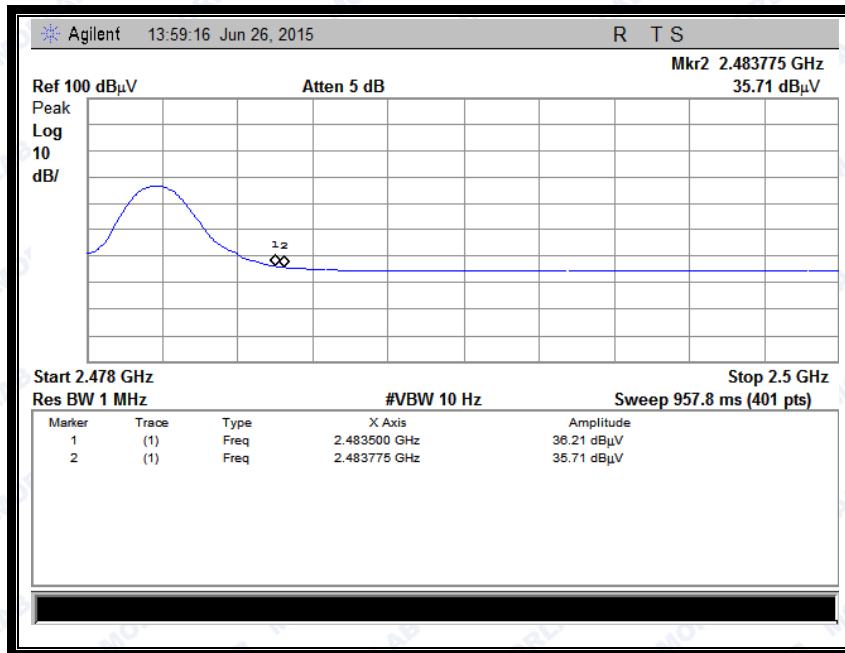

(Plot F2:Channel = 78 AVERAGE @ 8-DPSK Mode)

2.9. Conducted Emission

2.9.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5- 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.9.2. Test Description

A. Test Setup:

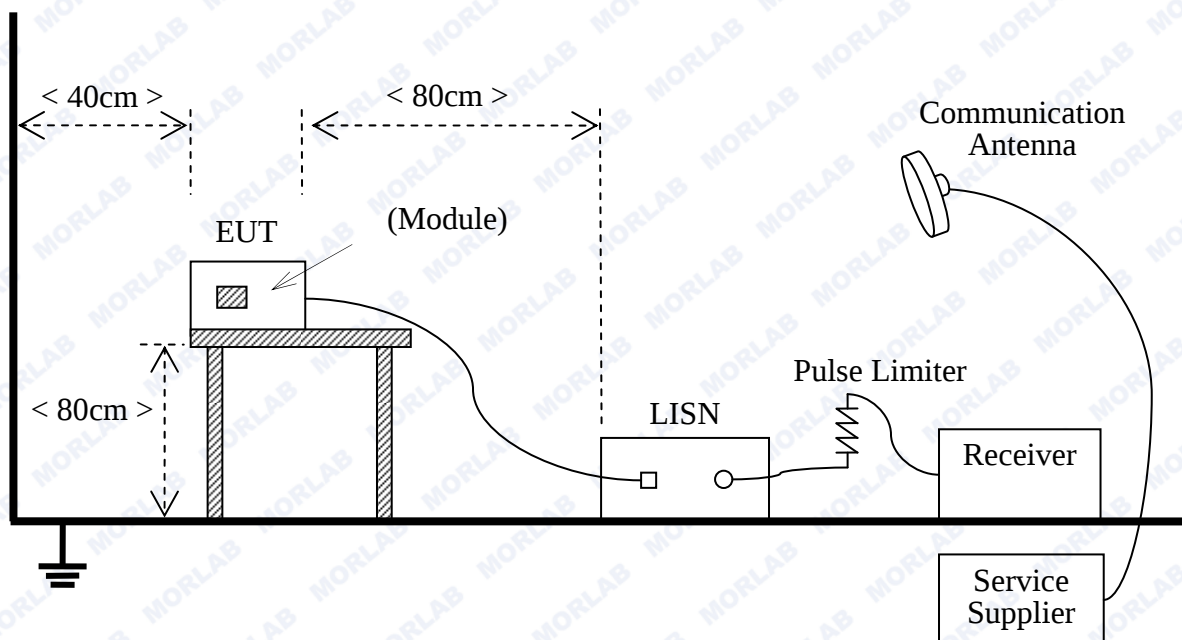



The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009

The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).


2.9.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


C. Test setup:

The EUT configuration of the emission tests is EUT + Link.

D. Test Plots:

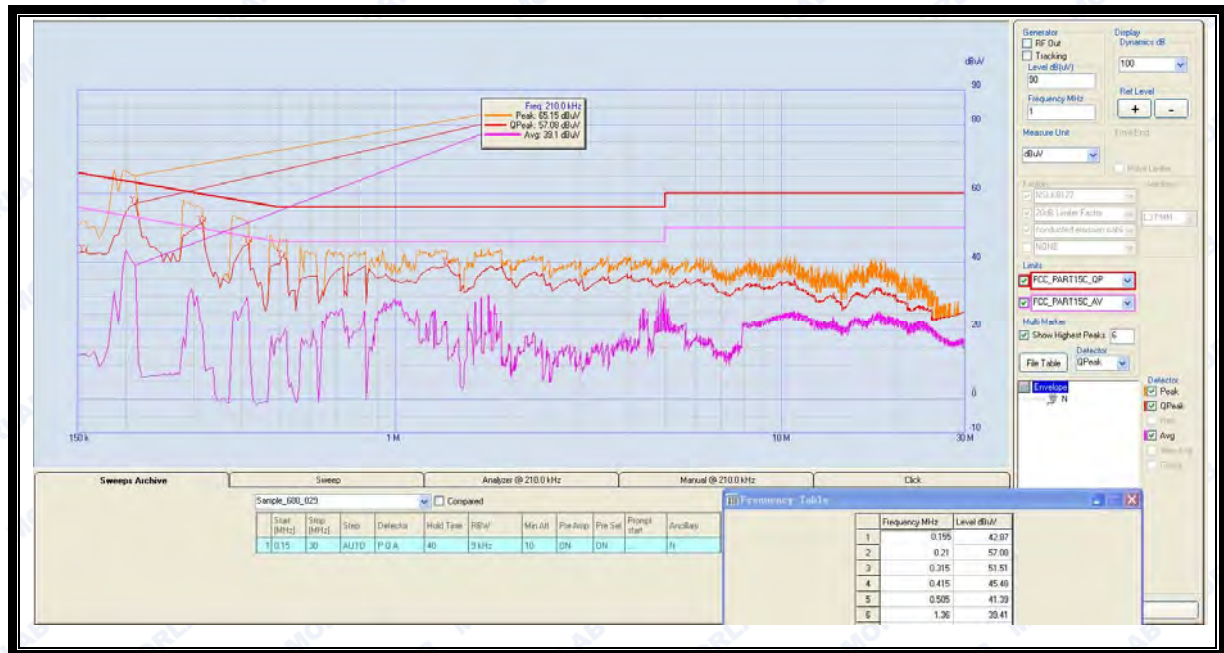

(Plot A: L Phase)

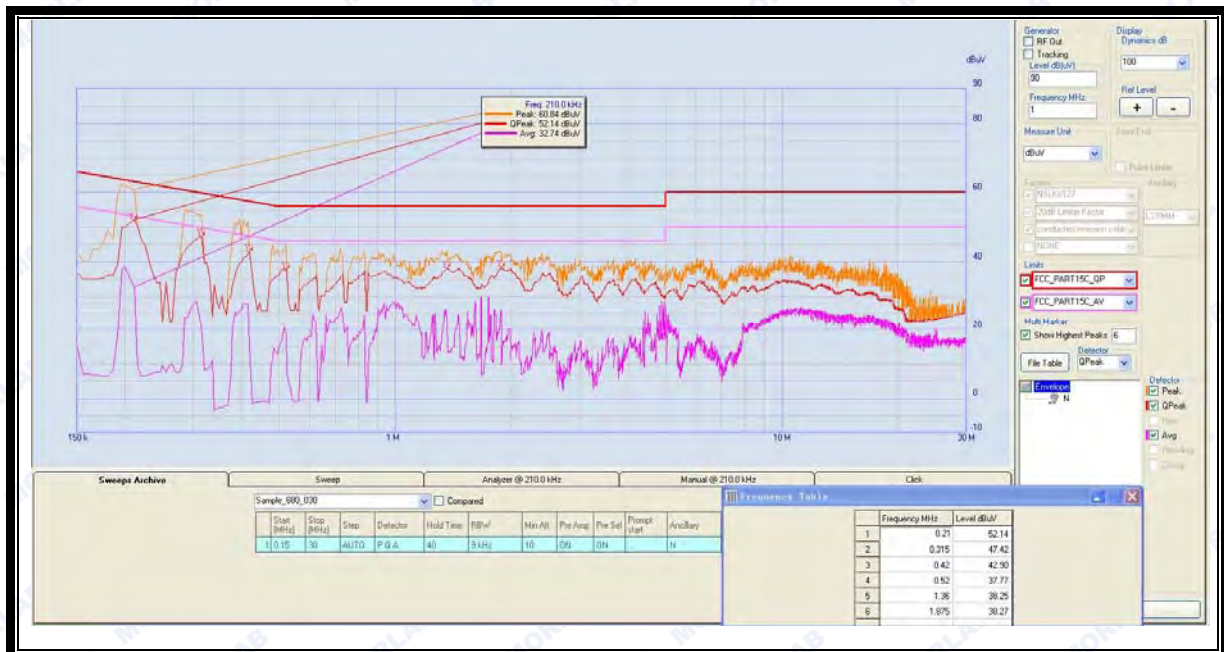

(Plot B: N Phase)



2.10. Radiated Emission

2.10.1. Requirement

According to FCC section 15.247(d) and RSS-A8.5, radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.10.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

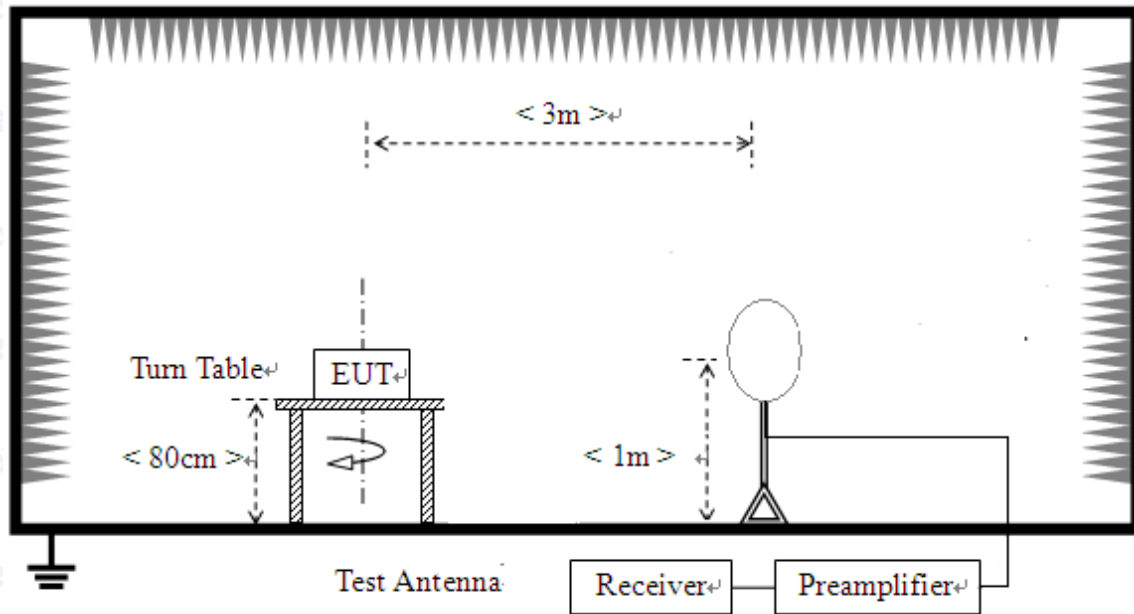

2) For radiated emissions from 30MHz to 1GHz

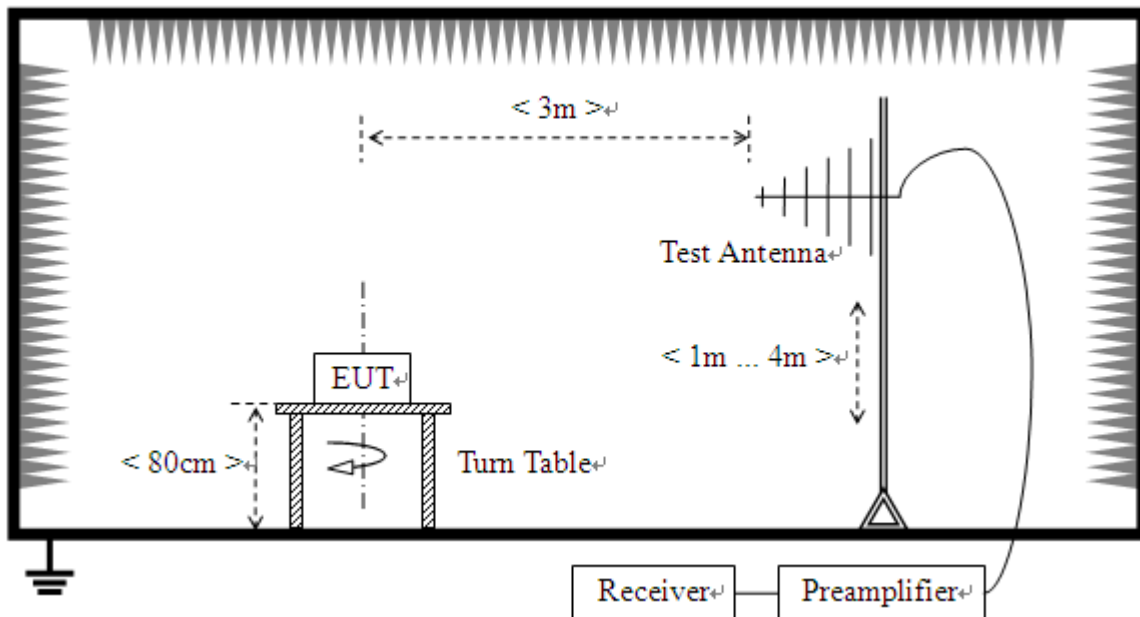

3) For radiated emissions above 1GHz

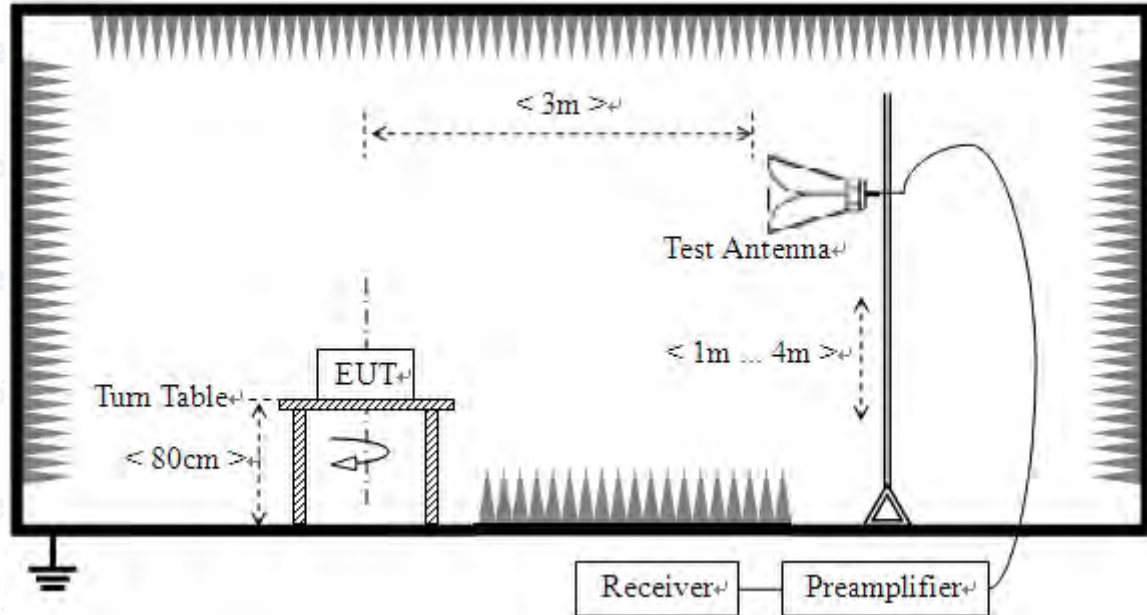

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.



B. Equipments List:

Please reference ANNEX A(1.4).

2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.10.4. Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

**2.10.4.1. GFSK Mode:****A. Test Plots for the Whole Measurement Frequency Range:**

Plots for Channel = 0

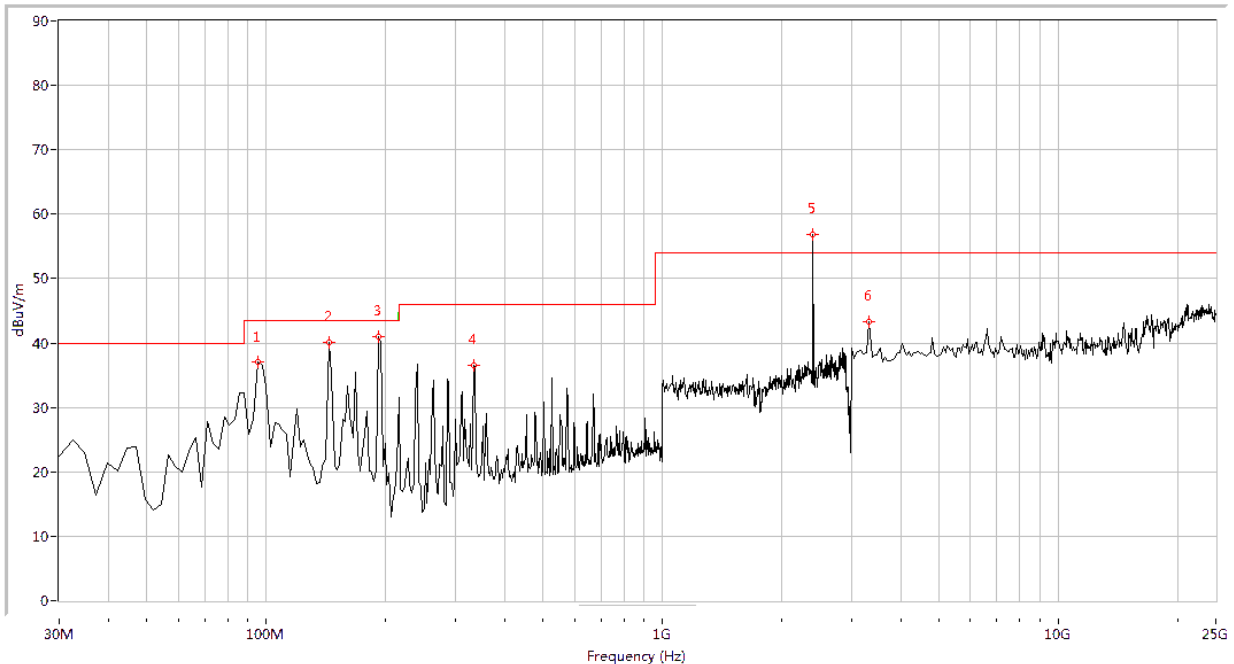


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
95.312	37.09	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
143.691	40.12	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
192.070	41.03	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
334.788	36.49	N.A	N.A	N.A	46.0	N.A	0.0	Horizontal	PASS
2402.000	56.93	N.A	N.A	N.A	N.A	N.A	0.0	Horizontal	N.A
3329.177	43.37	N.A	N.A	74.0	N.A	54.0	0.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 0)



REPORT No. : SZ15060040W01A

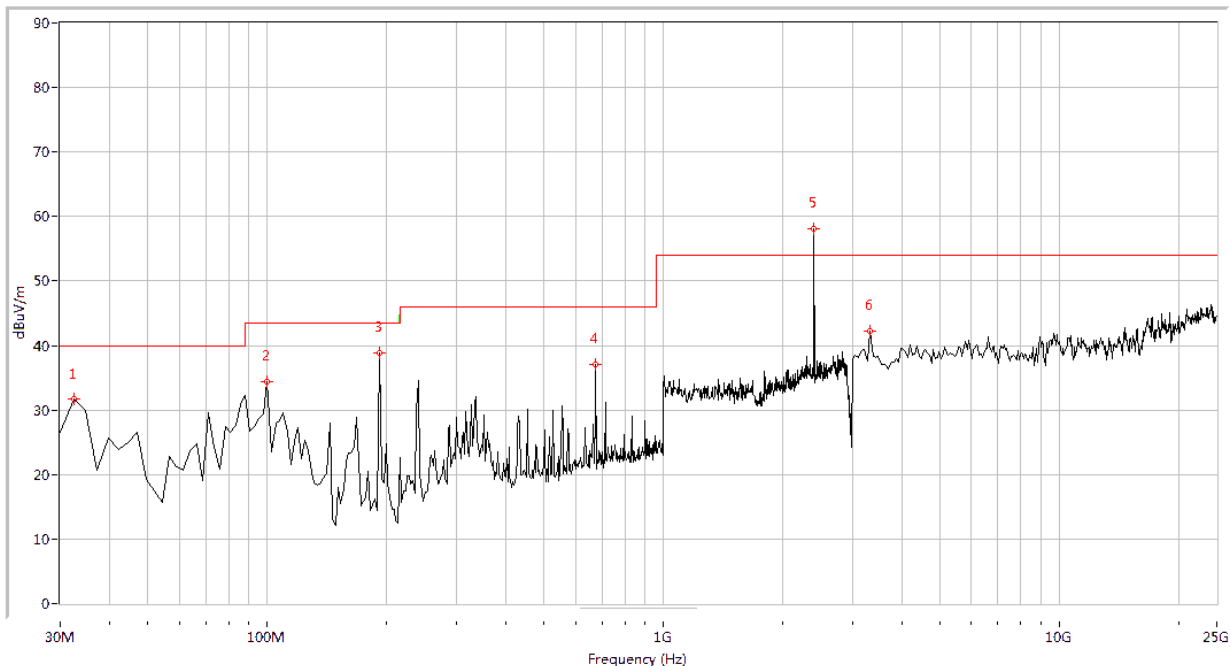


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
32.419	31.73	N.A	N.A	N.A	40.0	N.A	0.0	Vertical	PASS
100.150	34.47	N.A	N.A	N.A	43.5	N.A	0.0	Vertical	PASS
192.070	38.86	N.A	N.A	N.A	43.5	N.A	0.0	Vertical	PASS
675.860	36.99	N.A	N.A	N.A	46.0	N.A	0.0	Vertical	PASS
2402.000	58.04	N.A	N.A	N.A	N.A	N.A	0.0	Vertical	N.A
3329.177	42.27	N.A	N.A	74.0	N.A	54.0	0.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 0)



Plot for Channel = 39

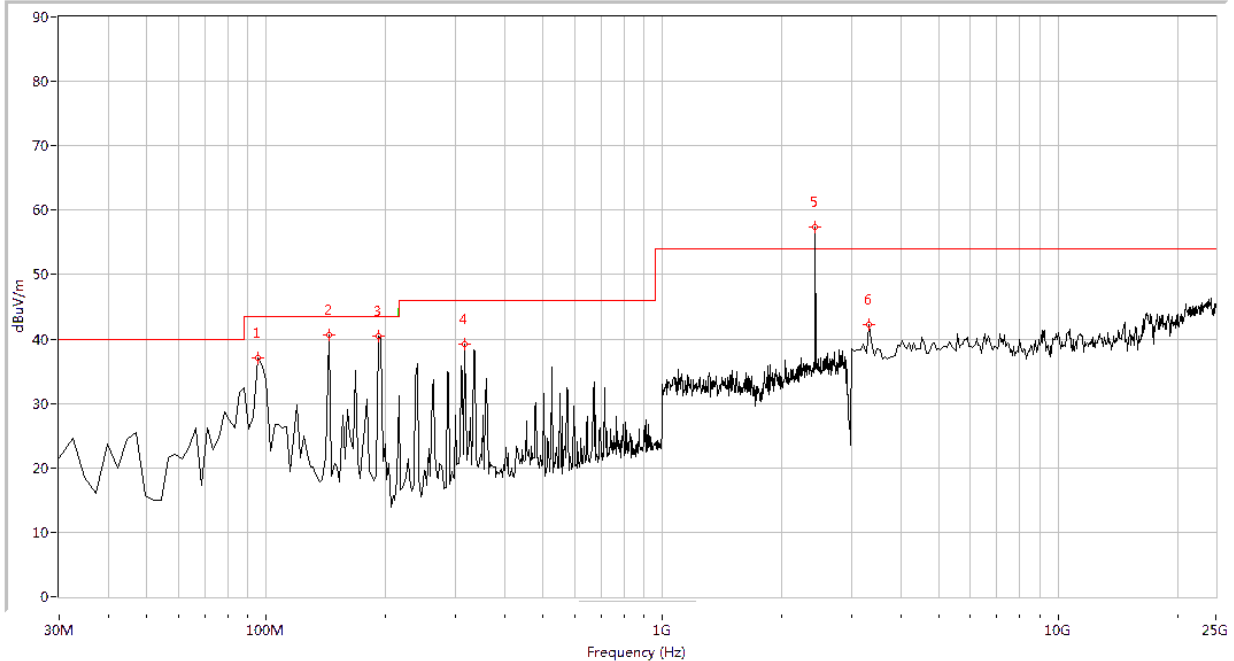


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
95.312	36.99	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
143.691	40.61	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
192.070	40.52	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
317.855	39.26	N.A	N.A	N.A	46.0	N.A	0.0	Horizontal	PASS
2441.000	57.47	N.A	N.A	N.A	N.A	N.A	0.0	Horizontal	N.A
3329.177	42.31	N.A	N.A	74.0	N.A	54.0	0.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 39)



REPORT No. : SZ15060040W01A

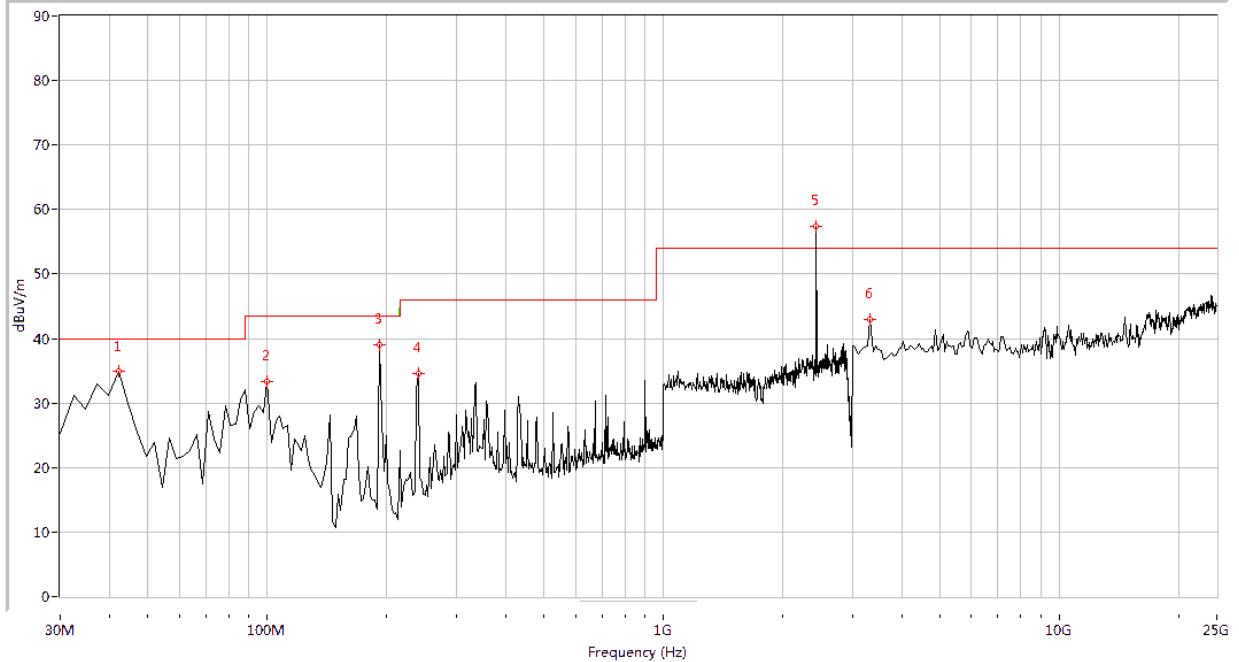


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
42.095	34.91	N.A	N.A	N.A	40.0	N.A	0.0	Vertical	PASS
100.150	33.35	N.A	N.A	N.A	43.5	N.A	0.0	Vertical	PASS
192.070	39.04	N.A	N.A	N.A	43.5	N.A	0.0	Vertical	PASS
240.449	34.56	N.A	N.A	N.A	46.0	N.A	0.0	Vertical	PASS
2441.000	57.45	N.A	N.A	N.A	N.A	N.A	0.0	Vertical	N.A
3329.177	42.94	N.A	N.A	74.0	N.A	54.0	0.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 39)



REPORT No. : SZ15060040W01A

Plot for Channel = 78

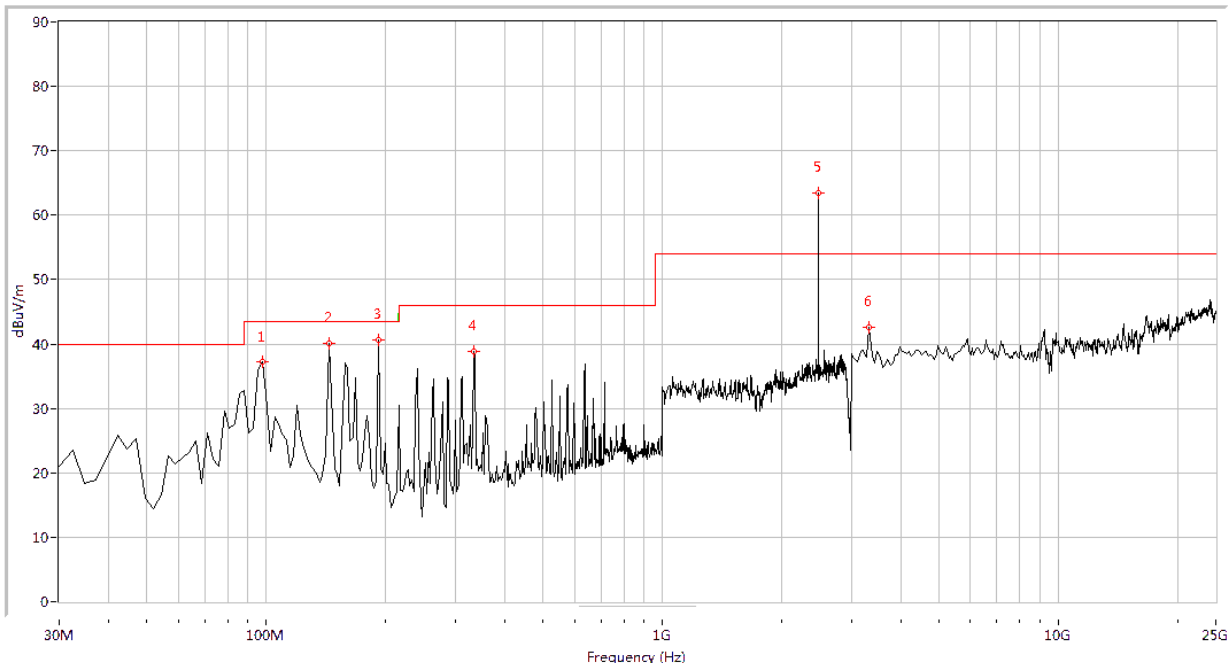


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
97.731	37.21	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
143.691	40.14	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
192.070	40.58	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
334.788	38.89	N.A	N.A	N.A	46.0	N.A	0.0	Horizontal	PASS
2480.000	63.39	N.A	N.A	N.A	N.A	N.A	0.0	Horizontal	N.A
3329.177	42.59	N.A	N.A	74.0	N.A	54.0	0.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 78)




REPORT No. : SZ15060040W01A

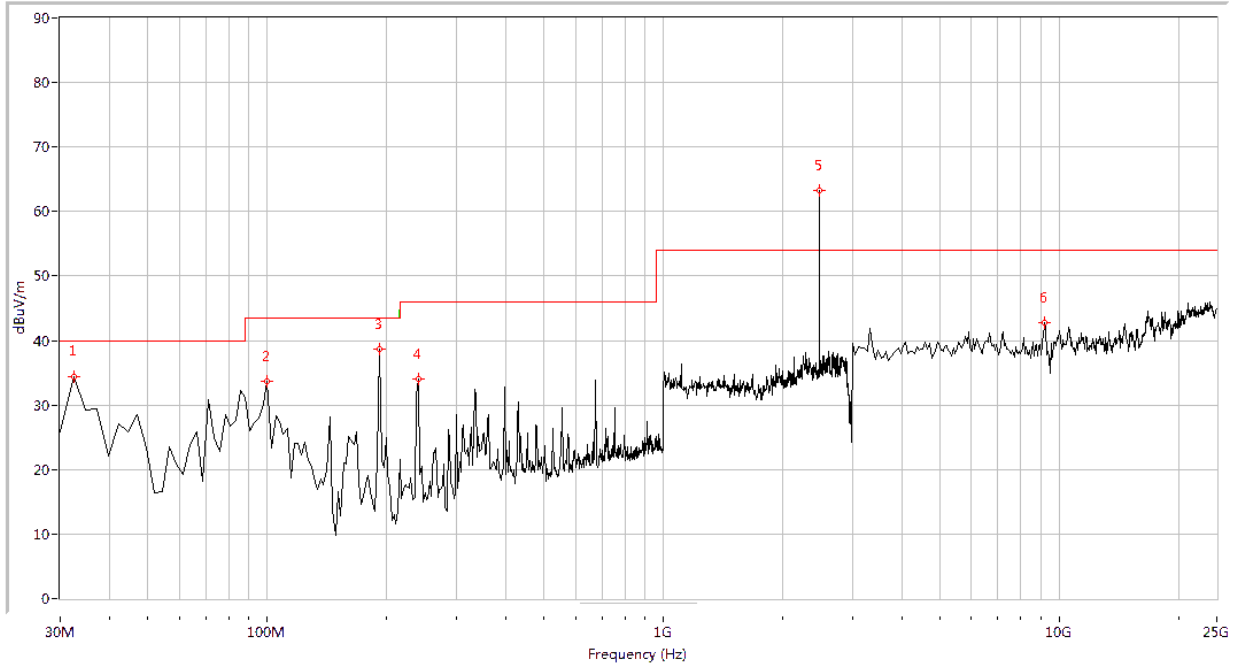


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
32.419	34.47	N.A	N.A	N.A	40.0	N.A	0.0	Vertical	PASS
100.150	33.72	N.A	N.A	N.A	43.5	N.A	0.0	Vertical	PASS
192.070	38.76	N.A	N.A	N.A	43.5	N.A	0.0	Vertical	PASS
240.449	34.12	N.A	N.A	N.A	46.0	N.A	0.0	Vertical	PASS
2480.000	63.28	N.A	N.A	N.A	N.A	N.A	0.0	Vertical	N.A
9199.501	42.80	N.A	N.A	74.0	N.A	54.0	0.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 78)

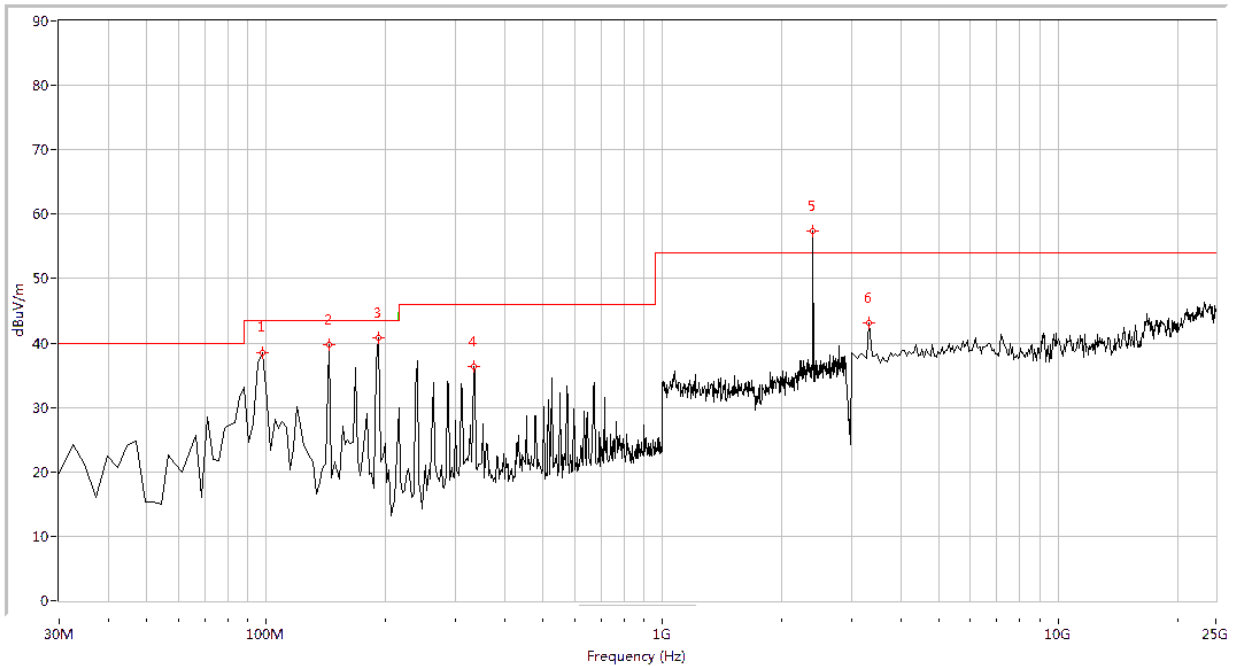**2.10.4.2. $\pi/4$ -DQPSK Mode:****A. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 0

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
97.731	38.42	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
143.691	39.79	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
192.070	40.78	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
334.788	36.43	N.A	N.A	N.A	46.0	N.A	0.0	Horizontal	PASS
2402.000	57.31	N.A	N.A	N.A	N.A	N.A	0.0	Horizontal	N.A
3329.177	43.06	N.A	N.A	74.0	N.A	54.0	0.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 0)

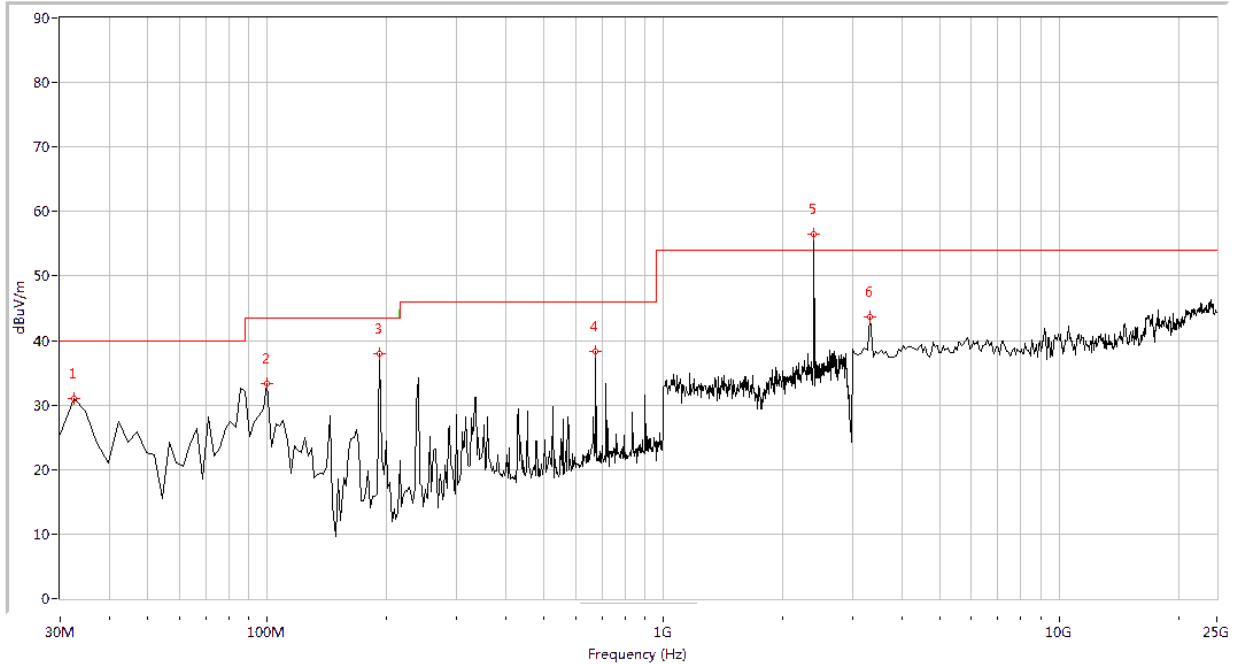


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
32.419	30.94	N.A	N.A	N.A	40.0	N.A	0.0	Vertical	PASS
100.150	33.30	N.A	N.A	N.A	43.5	N.A	0.0	Vertical	PASS
192.070	37.99	N.A	N.A	N.A	43.5	N.A	0.0	Vertical	PASS
675.860	38.37	N.A	N.A	N.A	46.0	N.A	0.0	Vertical	PASS
2402.000	56.52	N.A	N.A	N.A	N.A	N.A	0.0	Vertical	N.A
3329.177	43.63	N.A	N.A	74.0	N.A	54.0	0.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 0)



REPORT No. : SZ15060040W01A

Plot for Channel = 39

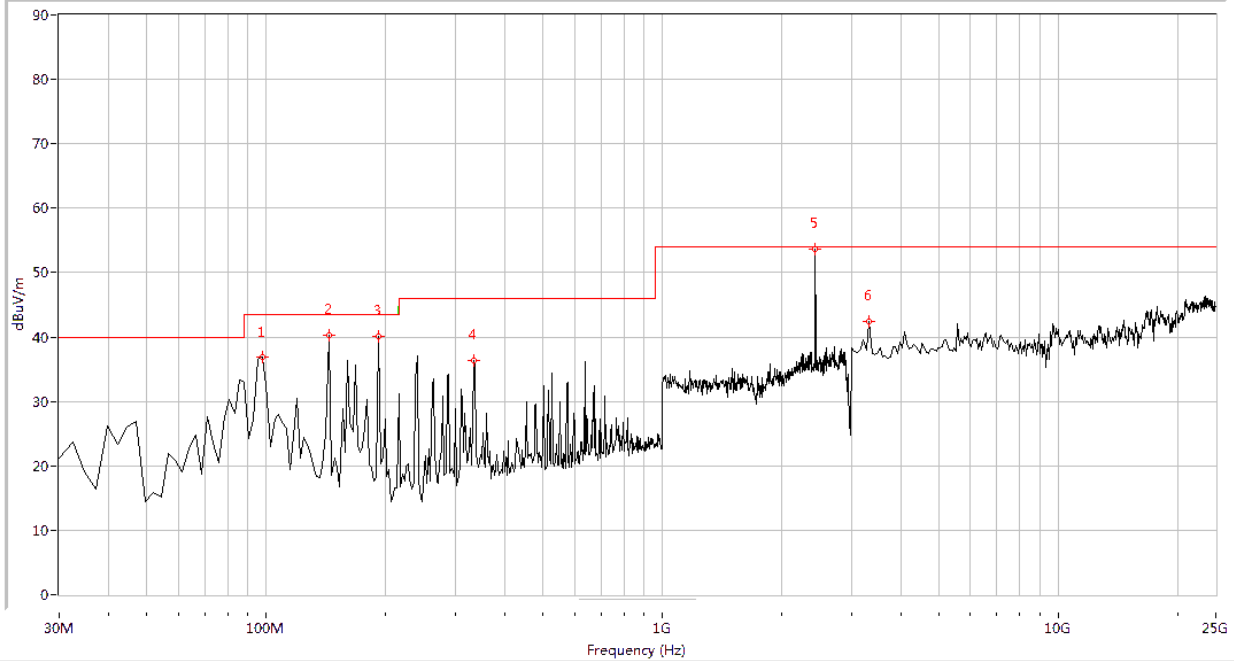


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
97.731	36.83	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
143.691	40.28	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
192.070	40.16	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
334.788	36.35	N.A	N.A	N.A	46.0	N.A	0.0	Horizontal	PASS
2441.000	53.59	N.A	N.A	N.A	N.A	N.A	0.0	Horizontal	N.A
3329.177	42.50	N.A	N.A	74.0	N.A	54.0	0.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 39)



REPORT No. : SZ15060040W01A

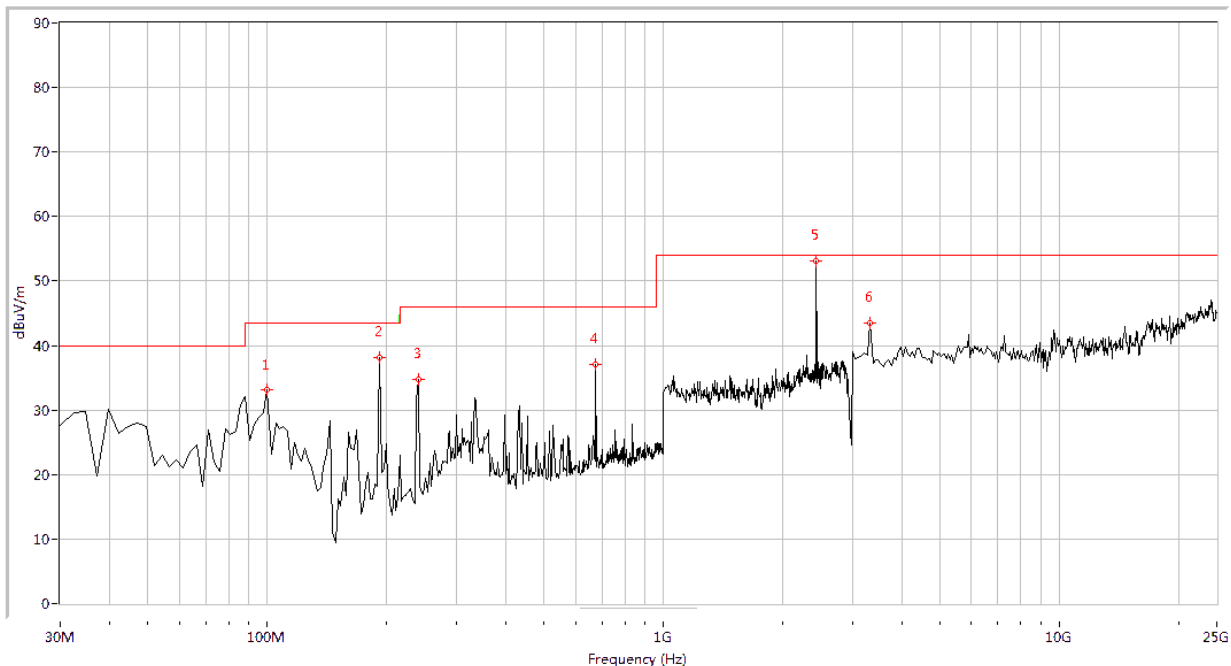


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
100.150	33.18	N.A	N.A	N.A	43.5	N.A	0.0	Vertical	PASS
192.070	38.20	N.A	N.A	N.A	43.5	N.A	0.0	Vertical	PASS
240.449	34.81	N.A	N.A	N.A	46.0	N.A	0.0	Vertical	PASS
675.860	37.13	N.A	N.A	N.A	46.0	N.A	0.0	Vertical	PASS
2441.000	53.14	N.A	N.A	N.A	N.A	N.A	0.0	Vertical	N.A
3329.177	43.46	N.A	N.A	74.0	N.A	54.0	0.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 39)



REPORT No. : SZ15060040W01A

Plot for Channel = 78

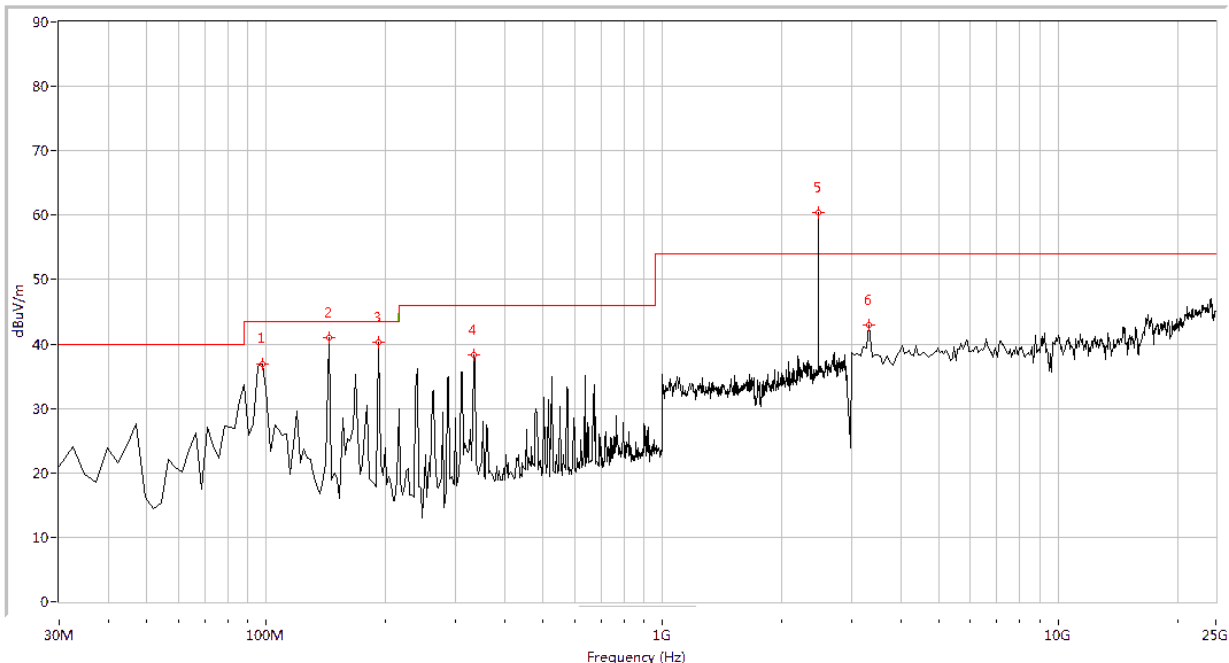


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
97.731	36.83	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
143.691	40.93	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
192.070	40.29	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
334.788	38.33	N.A	N.A	N.A	46.0	N.A	0.0	Horizontal	PASS
2480.000	60.41	N.A	N.A	N.A	N.A	N.A	0.0	Horizontal	N.A
3329.177	42.94	N.A	N.A	74.0	N.A	54.0	0.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 78)




REPORT No. : SZ15060040W01A

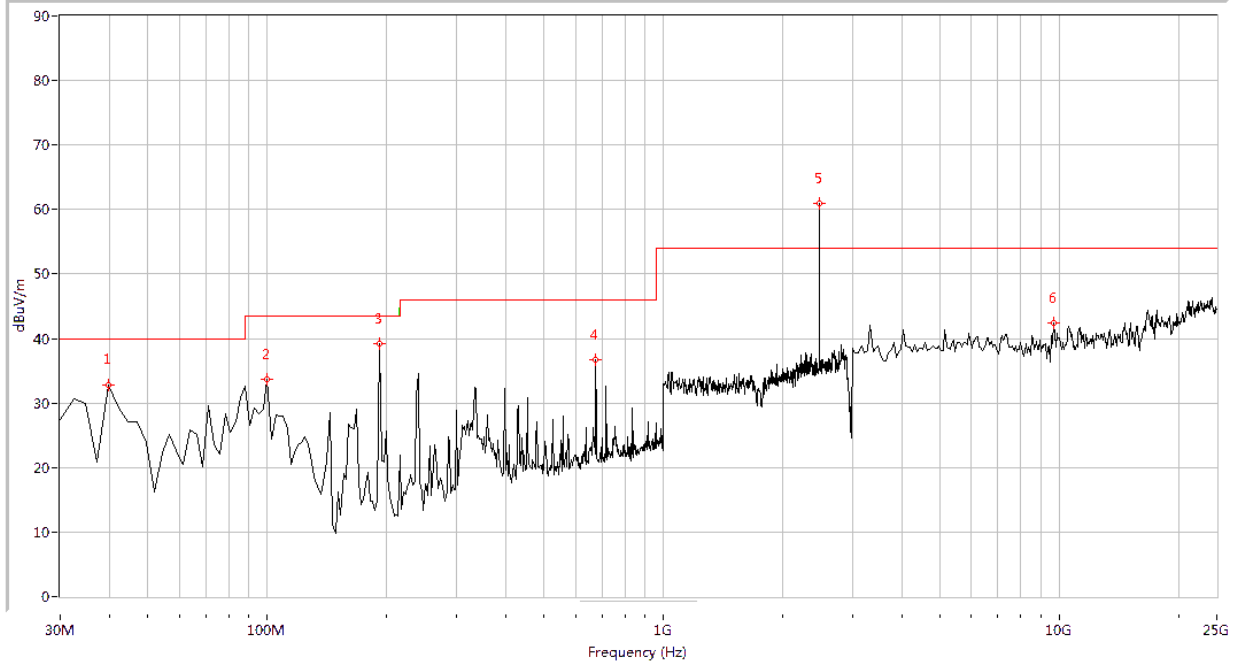

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
39.676	32.86	N.A	N.A	N.A	40.0	N.A	0.0	Vertical	PASS
100.150	33.73	N.A	N.A	N.A	43.5	N.A	0.0	Vertical	PASS
192.070	39.15	N.A	N.A	N.A	43.5	N.A	0.0	Vertical	PASS
675.860	36.80	N.A	N.A	N.A	46.0	N.A	0.0	Vertical	PASS
2480.000	60.91	N.A	N.A	N.A	N.A	N.A	0.0	Vertical	N.A
9693.267	42.34	N.A	N.A	74.0	N.A	54.0	0.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 78)

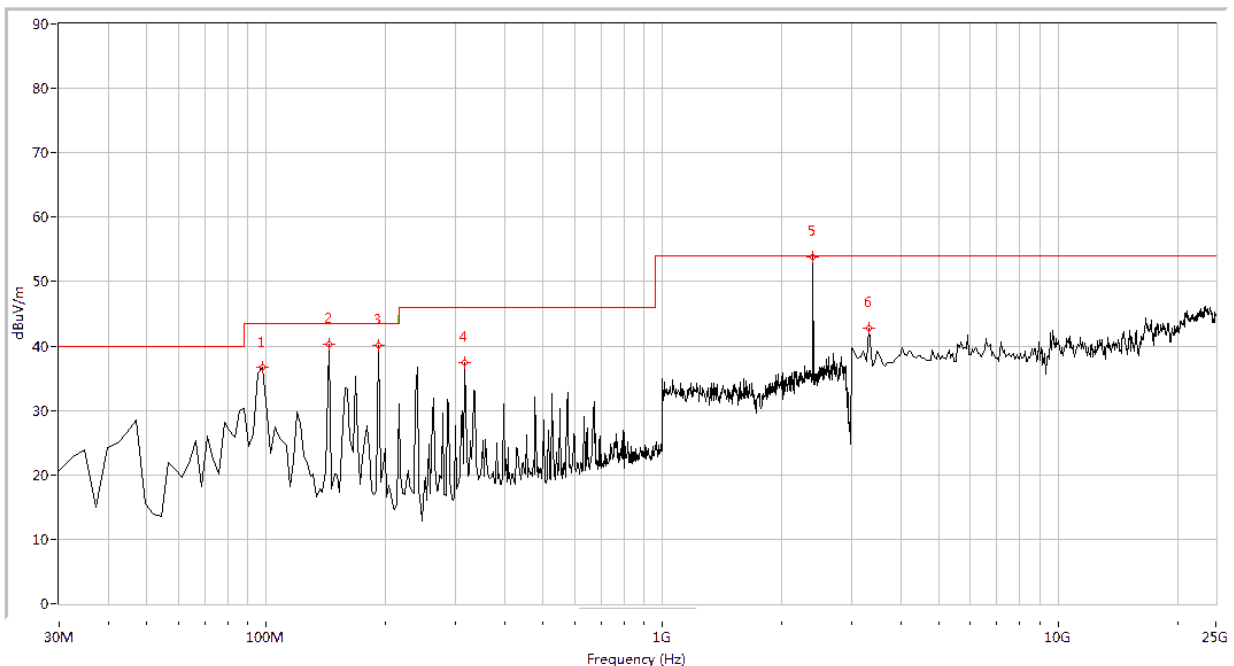
**2.10.4.3. 8-DPSK Mode:****A. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 0

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
97.731	36.64	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
143.691	40.20	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
192.070	40.16	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
317.855	37.48	N.A	N.A	N.A	46.0	N.A	0.0	Horizontal	PASS
2402.000	53.82	N.A	N.A	N.A	N.A	N.A	0.0	Horizontal	N.A
3329.177	42.72	N.A	N.A	74.0	N.A	54.0	0.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 0)



REPORT No. : SZ15060040W01A

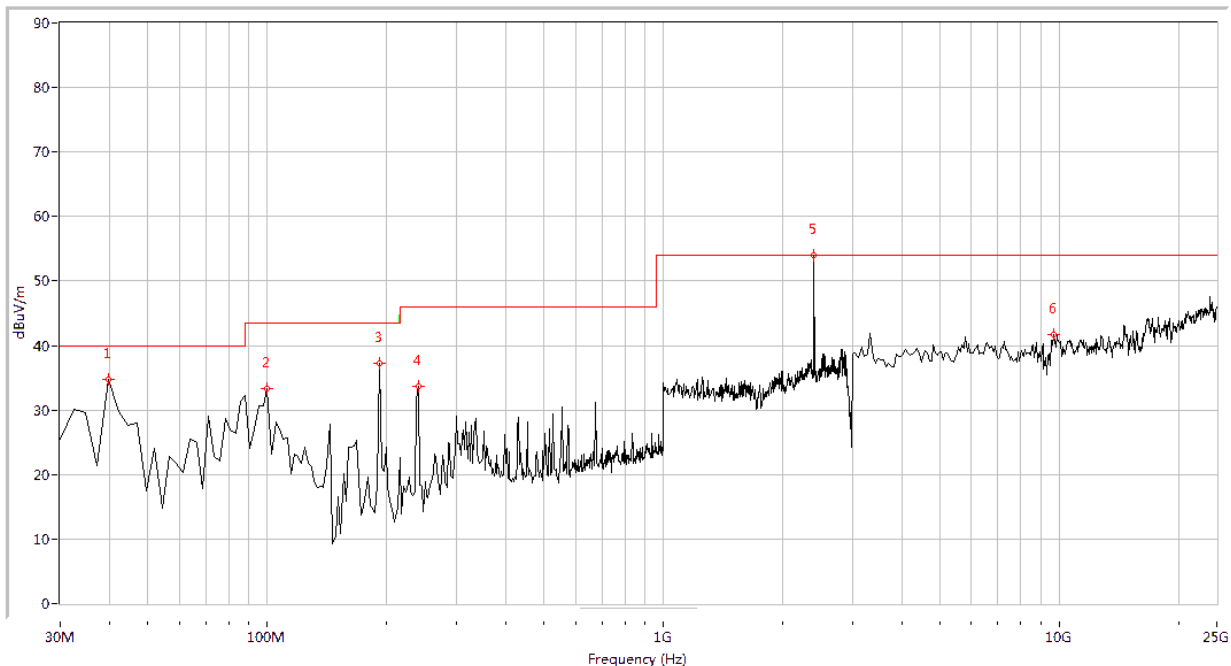


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
39.676	34.68	N.A	N.A	N.A	40.0	N.A	0.0	Vertical	PASS
100.150	33.33	N.A	N.A	N.A	43.5	N.A	0.0	Vertical	PASS
192.070	37.24	N.A	N.A	N.A	43.5	N.A	0.0	Vertical	PASS
240.449	33.63	N.A	N.A	N.A	46.0	N.A	0.0	Vertical	PASS
2402.000	54.09	N.A	N.A	N.A	N.A	N.A	0.0	Vertical	N.A
9693.267	41.79	N.A	N.A	74.0	N.A	54.0	0.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 0)




REPORT No. : SZ15060040W01A

Plot for Channel = 39

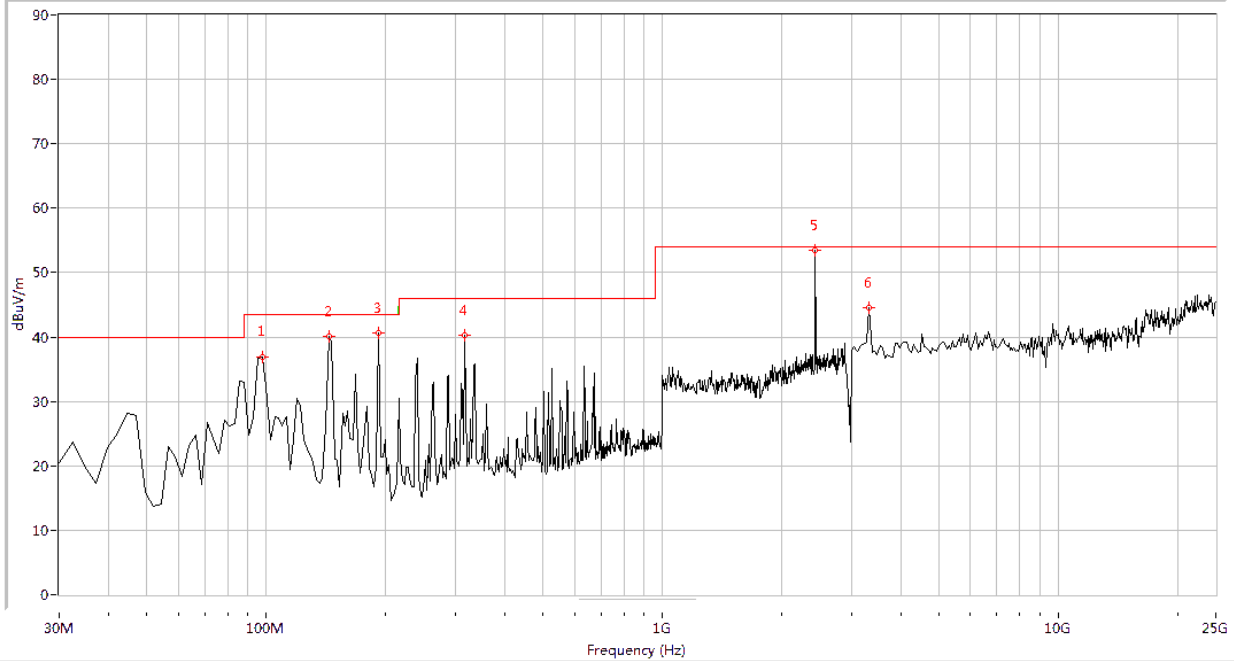

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
97.731	36.83	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
143.691	40.04	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
192.070	40.60	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
317.855	40.30	N.A	N.A	N.A	46.0	N.A	0.0	Horizontal	PASS
2441.000	53.41	N.A	N.A	N.A	N.A	N.A	0.0	Horizontal	N.A
3329.177	44.50	N.A	N.A	74.0	N.A	54.0	0.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 39)

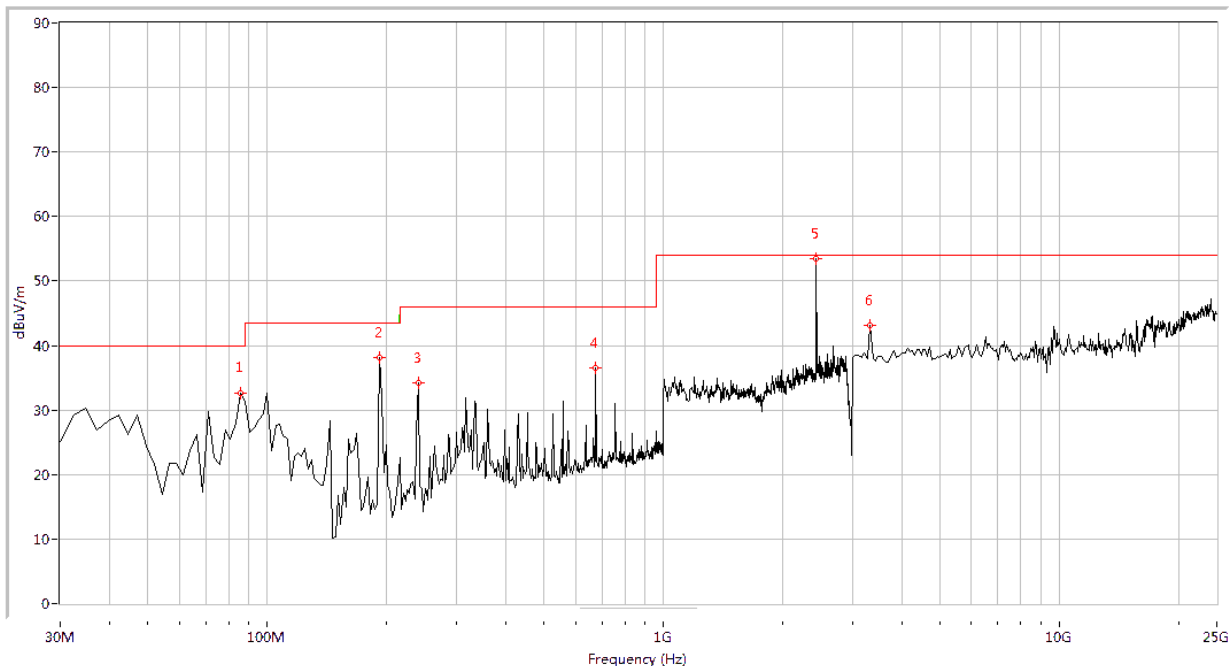


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
85.636	32.54	N.A	N.A	N.A	40.0	N.A	0.0	Vertical	PASS
192.070	38.09	N.A	N.A	N.A	43.5	N.A	0.0	Vertical	PASS
240.449	34.22	N.A	N.A	N.A	46.0	N.A	0.0	Vertical	PASS
675.860	36.61	N.A	N.A	N.A	46.0	N.A	0.0	Vertical	PASS
2441.000	53.55	N.A	N.A	N.A	N.A	N.A	0.0	Vertical	N.A
3329.177	43.16	N.A	N.A	74.0	N.A	54.0	0.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 39)



REPORT No. : SZ15060040W01A

Plot for Channel = 78

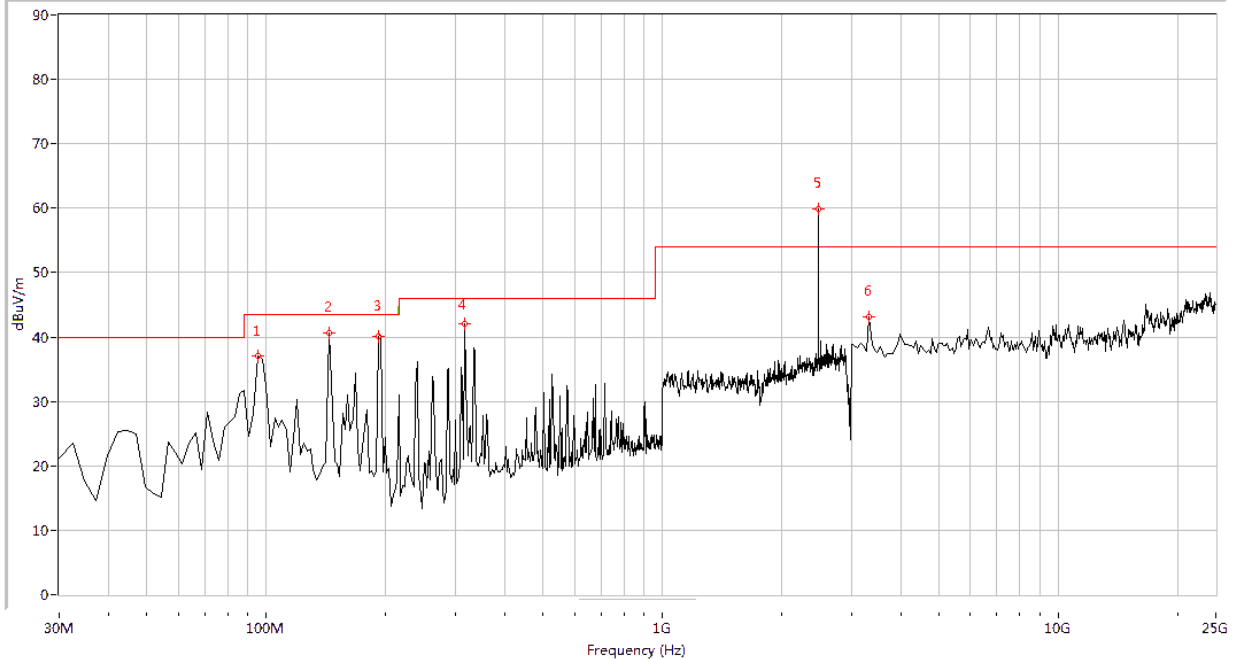


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
95.312	37.11	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
143.691	40.62	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
192.070	40.06	N.A	N.A	N.A	43.5	N.A	0.0	Horizontal	PASS
317.855	42.09	N.A	N.A	N.A	46.0	N.A	0.0	Horizontal	PASS
2480.000	59.92	N.A	N.A	N.A	N.A	N.A	0.0	Horizontal	N.A
3329.177	43.15	N.A	N.A	74.0	N.A	54.0	0.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 78)



REPORT No. : SZ15060040W01A

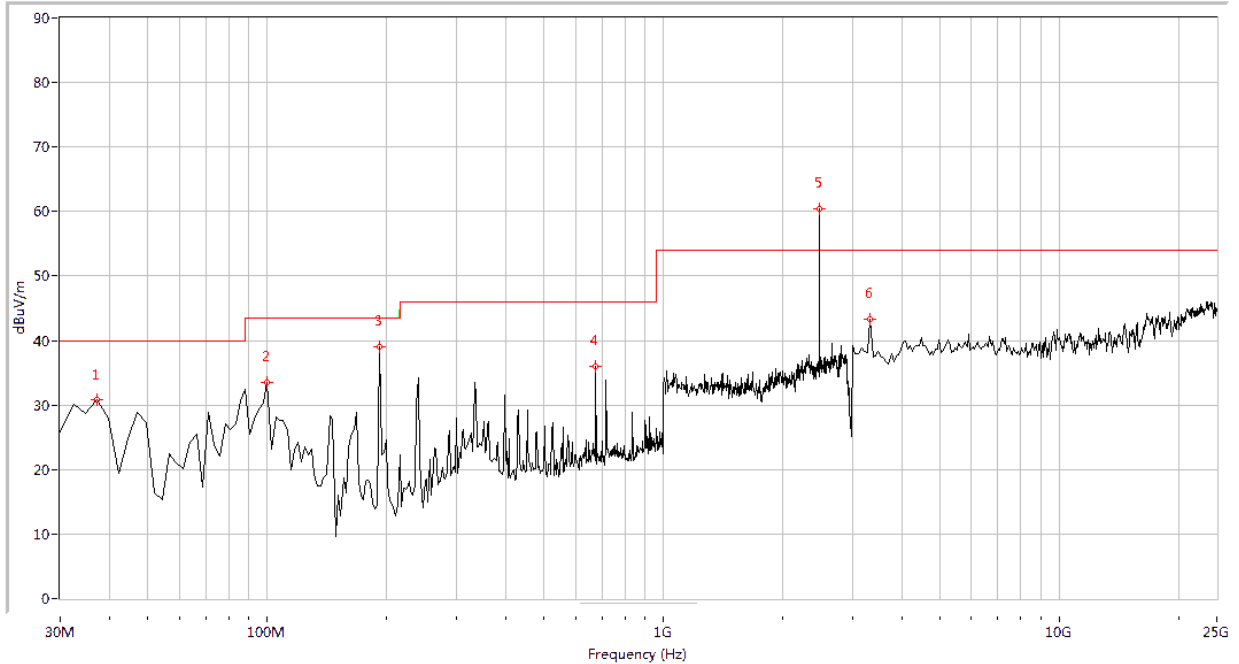

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
37.257	30.86	N.A	N.A	N.A	40.0	N.A	0.0	Vertical	PASS
100.150	33.45	N.A	N.A	N.A	43.5	N.A	0.0	Vertical	PASS
192.070	38.94	N.A	N.A	N.A	43.5	N.A	0.0	Vertical	PASS
675.860	36.03	N.A	N.A	N.A	46.0	N.A	0.0	Vertical	PASS
2480.000	60.41	N.A	N.A	N.A	N.A	N.A	0.0	Vertical	N.A
3329.177	43.26	N.A	N.A	74.0	N.A	54.0	0.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 78)



3. General Information

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

1.3 Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2009, ANSI C63.4 2009 and CISPR Publication 22; the FCC registration number is 695796.

The IC registration number is 7183A-2.



REPORT No. : SZ15060040W01A

1.4 Test Equipments Utilized

1.4.1 Conducted Test Equipments

Conducted Test Equipment						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	System Simulator	6K00006210	MT8852B	Anritsu	2015.02.26	2016.02.25
2	Spectrum Analyzer	MY45101810	E4407B	Agilent	2015.02.26	2016.02.25
3	Power Splitter	NW521	1506A	Weinschel	2015.02.26	2016.02.25
4	Attenuator 1	(n.a.)	10dB	Resnet	2015.02.26	2016.02.25
5	Attenuator 2	(n.a.)	3dB	Resnet	2015.02.26	2016.02.25
6	EXA Signal Analyzer	MY51440152	N9010A	Agilent	2015.02.26	2016.02.25
7	RF cable	CB01	RF01	Morlab	N/A	N/A
8	Coaxial cable	CB02	RF02	Morlab	N/A	N/A
9	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.4.2 Conducted Emission Test Equipments

Conducted Emission Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Receiver	US44210471	E7405A	Agilent	2015.02.26	2016.02.25
2	LISN	812744	NSLK 8127	Schwarzbeck	2015.02.26	2016.02.25
3	Service Supplier	100448	CMU200	R&S	2015.02.26	2016.02.25
4	Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2015.02.26	2016.02.25
5	Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A



REPORT No. : SZ15060040W01A

1.4.3 Radiated Test Equipments

Radiated Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	System Simulator	100448	CMU200	R&S	2015.02.26	2016.02.25
2	Receiver	US44210471	E7405A	Agilent	2015.02.26	2016.02.25
3	Test Antenna - Bi-Log	9163-274	9m*6m*6m	Albatross	2015.02.26	2016.02.25
4	Test Antenna - Horn	9120D-963	VULB 9163	Schwarzbeck	2015.02.26	2016.02.25
5	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2015.02.26	2016.02.25
6	Test Antenna - Loop	1519-022	HL050S7	R&S	2015.02.26	2016.02.25
7	Reject Filter	(n.a.)	BRM50702	Micro-Tronics	2015.02.26	2016.02.25
8	Coaxial cable (N male)	CB02	EMC02	Morlab	N/A	N/A
9	Coaxial cable (N male)	CB03	EMC03	Morlab	N/A	N/A

1.4.4 Climate Chamber

Climate Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2015.02.26	2016.02.25

1.4.5 Vibration Table

Vibration Table						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2015.02.26	2016.02.25



REPORT No. : SZ15060040W01A

1.4.6 Anechoic Chamber

Anechoic Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Albatross	2015.02.26	2016.02.25

***** END OF REPORT *****