

EMC Test Report**Application for Grant of Equipment Authorization****Industry Canada RSS-Gen Issue 3 / RSS 210 Issue 8
FCC Part 15 Subpart C****Model: PBA5001**

FCC ID: PD9PBA5001

IC CERTIFICATION # 1000M-PBA5001

APPLICANT: Intel Mobile Communications
100 Center Point Circle Suite 200
Columbia, SC 29210TEST SITE(S): National Technical Systems - Silicon Valley
41039 Boyce Road.
Fremont, CA. 94538-2435

IC SITE REGISTRATION #: 2845B-3; 2845B-4, 2845B-5, 2845B-7

REPORT DATE: October 25, 2013

FINAL TEST DATES: September 19, 20, 23, 24, 25, 26 and 30 and
October 1, 2, 4, 7, 8, 9, 10 and 11, 2013

TOTAL NUMBER OF PAGES: 260

PROGRAM MGR /
TECHNICAL REVIEWER:David W. Bare
Chief EngineerQUALITY ASSURANCE DELEGATE /
FINAL REPORT PREPARER:David Guidotti
Senior Technical Writer

National Technical Systems - Silicon Valley is accredited by the A2LA, certificate number 0214.26, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full

REVISION HISTORY

Rev#	Date	Comments	Modified By
-	October 25, 2013	First release	

TABLE OF CONTENTS

REVISION HISTORY	2
TABLE OF CONTENTS	3
SCOPE.....	4
OBJECTIVE	5
STATEMENT OF COMPLIANCE.....	5
DEVIATIONS FROM THE STANDARDS.....	5
TEST RESULTS SUMMARY	6
DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHz)	6
DIGITAL TRANSMISSION SYSTEMS (5725 –5850 MHz)	7
ADDITIONAL MEASUREMENTS	7
GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS	8
MEASUREMENT UNCERTAINTIES	9
EQUIPMENT UNDER TEST (EUT) DETAILS.....	10
GENERAL.....	10
ANTENNA SYSTEM	10
ENCLOSURE	10
MODIFICATIONS.....	10
SUPPORT EQUIPMENT	11
PORTS.....	11
EUT OPERATION	11
TEST SITE.....	12
GENERAL INFORMATION	12
CONDUCTED EMISSIONS CONSIDERATIONS	12
RADIATED EMISSIONS CONSIDERATIONS	12
MEASUREMENT INSTRUMENTATION	13
RECEIVER SYSTEM	13
INSTRUMENT CONTROL COMPUTER	13
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	13
FILTERS/ATTENUATORS	14
ANTENNAS.....	14
ANTENNA MAST AND EQUIPMENT TURNTABLE	14
INSTRUMENT CALIBRATION.....	14
TEST PROCEDURES	15
EUT AND CABLE PLACEMENT	15
CONDUCTED EMISSIONS.....	15
RADIATED EMISSIONS	16
CONDUCTED EMISSIONS FROM ANTENNA PORT	18
BANDWIDTH MEASUREMENTS	18
SPECIFICATION LIMITS AND SAMPLE CALCULATIONS	19
CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(A), RSS GEN	19
GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS	20
RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS	20
OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS	21
TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS AND DTS SYSTEMS.....	21
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS	21
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	22
SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION.....	23
APPENDIX A TEST EQUIPMENT CALIBRATION DATA.....	24
APPENDIX B TEST DATA	28
END OF REPORT	260

SCOPE

An electromagnetic emissions test has been performed on the Intel Mobile Communications model PBA5001, pursuant to the following rules:

Industry Canada RSS-Gen Issue 3

RSS 210 Issue 8 “Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment”

FCC Part 15 Subpart C

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards and as outlined in National Technical Systems - Silicon Valley test procedures:

ANSI C63.10-2009

FCC DTS Measurement Guidance KDB558074

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant Industry Canada performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA, all unlicensed transmitters and transceivers require certification. Receive-only devices operating between 30 MHz and 960 MHz are subject to either certification or a manufacturer's declaration of conformity, with all other receive-only devices exempt from the technical requirements.

Prior to marketing in Canada, Class I transmitters, receivers and transceivers require certification. Class II devices are required to meet the appropriate technical requirements but are exempt from certification requirements.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

STATEMENT OF COMPLIANCE

The tested sample of Intel Mobile Communications model PBA5001 complied with the requirements of the following regulations:

Industry Canada RSS-Gen Issue 3

RSS 210 Issue 8 "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment"

FCC Part 15 Subpart C

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

The test results recorded herein are based on a single type test of Intel Mobile Communications model PBA5001 and therefore apply only to the tested sample. The sample was selected and prepared by Steve Hackett of Intel Mobile Communications.

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS SUMMARY**DIGITAL TRANSMISSION SYSTEMS (2400 – 2483.5MHz)**

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.247(a)	RSS 210 A8.2	Digital Modulation	Systems uses OFDM / DSSS techniques	System must utilize a digital transmission technology	Complies
15.247 (a) (2)	RSS 210 A8.2 (1)	6dB Bandwidth	> 500 kHz	>500kHz	Complies
15.247 (b) (3)	RSS 210 A8.2 (4)	Output Power (multipoint systems)	BLE: 4.4 dBm 802.11b: 15.5 dBm 802.11g: 19.2 dBm 802.11n20: 20.7 dBm 802.11n40: 20.5 dBm EIRP = 0.245 W ^{Note 1}	1 Watt, EIRP limited to 4 Watts.	Complies
15.247(d)	RSS 210 A8.2 (2)	Power Spectral Density	BLE: -4.5 dBm / 10kHz 802.11b: 6.0 dBm / 100kHz 802.11g: 6.3 dBm / 100kHz 802.11n20: 6.4 dBm / 100kHz 802.11n40: 4.1 dBm / 100kHz	8dBm/3kHz	Complies
15.247(c)	RSS 210 A8.5	Antenna Port Spurious Emissions 30MHz – 25 GHz	All spurious emissions < -20dBc or -30dBc	< -20dBc < -30dBc ^{Note 2}	Complies
15.247(c) / 15.209	RSS 210 A8.5	Radiated Spurious Emissions 30MHz – 25 GHz	53.7 dBμV/m @ 2483.5 MHz (-0.3 dB)	15.207 in restricted bands, all others < -20dBc <-30dBc ^{Note 2}	Complies
Note 1: EIRP calculated using antenna gain of 3.2 dBi for the highest EIRP system. Note 2: A limit of -30dBc was used when the maximum conducted output power was measured and a limit of -20dBc was used when maximum peak conducted output power was measured.					

DIGITAL TRANSMISSION SYSTEMS (5725 –5850 MHz)

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.247(a)	RSS 210 A8.2	Digital Modulation	Systems uses OFDM techniques	System must utilize a digital transmission technology	Complies
15.247 (a) (2)	RSS 210 A8.2 (1)	6dB Bandwidth	> 500 kHz	>500kHz	Complies
15.247 (b)	RSS 210 A8.2 (4)	Output Power (multipoint systems)	802.11a: 19.8 dBm 802.11n20: 20.9 dBm 802.11n40: 20.3 dBm 802.11ac80: 19.4 dBm EIRP = 0.390 W ^{Note 1}	1 Watt, EIRP limited to 4 Watts.	Complies
15.247(d)	RSS 210 A8.2 (2)	Power Spectral Density	802.11a: 2.8 dBm / 30kHz 802.11n20: 2.2 dBm / 30kHz 802.11n40: -0.7 dBm / 30kHz 802.11ac80: -2.6 dBm / 30kHz	Maximum permitted is 8dBm/3kHz	Complies
15.247(c)	RSS 210 A8.5	Antenna Port Spurious Emissions – 30MHz – 40 GHz	All spurious emissions < -20dBc	< -20dBc < -30dBc ^{Note 2}	Complies
15.247(c) / 15.209	RSS 210 A8.5 Table 2, 3	Radiated Spurious Emissions 30MHz – 40 GHz	39.6 dBμV/m @ 7471.2 MHz (-14.4 dB)	15.207 in restricted bands, all others < -20dBc < -30dBc ^{Note 2}	Complies
Note 1: EIRP calculated using antenna gain of 5 dBi for the highest EIRP system.					
Note 2: A limit of -30dBc was used when the maximum conducted output power was measured and a limit of -20dBc was used when maximum peak conducted output power was measured.					

ADDITIONAL MEASUREMENTS

As both Bluetooth and 802.11 transmissions can occur simultaneously, radiated spurious measurements were made with both Bluetooth and 802.11 transmitting simultaneously.

FCC Rule Part	RSS Rule Part	Description	Measured Value / Comments	Limit / Requirement	Result
15.209	RSS 210 A8.5	Radiated Spurious Emissions	53.4 dBμV/m @ 2390.0 MHz (-0.6 dB) ^{Note 1}	15.209 in restricted bands, all others < -20dBc or < -30dBc ^{Note 2}	Complies
Note 1: Emission was second harmonic of the 802.11 signal and not an intermodulation product, but was the highest amplitude emissions observed with both Bluetooth and Wi-Fi operating simultaneously.					
Note 2: A limit of -30dBc was used when the maximum conducted output power was measured and a limit of -20dBc was used when maximum peak conducted output power was measured.					

GENERAL REQUIREMENTS APPLICABLE TO ALL BANDS

FCC Rule Part	RSS Rule part	Description	Measured Value / Comments	Limit / Requirement	Result (margin)
15.203	-	RF Connector	Not applicable as antennas are integral in host systems	Unique or integral antenna required	Complies
15.207	RSS GEN Table 2	AC Conducted Emissions	15.0 dBμV @ 7.009 MHz (-35.0 dB)	Refer to page 19	Complies
15.247 (b) (5) 15.407 (f)	RSS 102	RF Exposure Requirements	Refer to MPE calculations in separate exhibit, RSS 102 declaration and User Manual statements.	Refer to OET 65, FCC Part 1 and RSS 102	Complies
-	RSP 100 RSS GEN 7.1.5	User Manual	Refer to User Manual for details	Statement required regarding non-interference	Complies
-	RSP 100 RSS GEN 7.1.5	User Manual	No detachable antenna	Statement for products with detachable antenna	Complies
-	RSP 100 RSS GEN 4.4.1	99% Bandwidth	2.4 GHz BT: 1.037 MHz b: 14.28 MHz g: 17.81 MHz n20: 18.75 MHz n40: 35.17 MHz 5.8 GHz a: 26.21 MHz n20: 26.09 MHz n40: 42.33 MHz ac80: 76.54 MHz	Information only	N/A

MEASUREMENT UNCERTAINTIES

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with UKAS document LAB 34.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
RF power, conducted (power meter)	dBm	25 to 7000 MHz	± 0.52 dB
RF power, conducted (Spectrum analyzer)	dBm	25 to 7000 MHz	± 0.7 dB
Conducted emission of transmitter	dBm	25 to 26500 MHz	± 0.7 dB
Conducted emission of receiver	dBm	25 to 26500 MHz	± 0.7 dB
Radiated emission (substitution method)	dBm	25 to 26500 MHz	± 2.5 dB
Radiated emission (field strength)	dB μ V/m	25 to 1000 MHz	± 3.6 dB
		1000 to 40000 MHz	± 6.0 dB
Conducted Emissions (AC Power)	dB μ V	0.15 to 30 MHz	± 2.4 dB

EQUIPMENT UNDER TEST (EUT) DETAILS**GENERAL**

The Intel Mobile Communications model PBA5001 is an IEEE 802.11a/b/g/n/ac + BT 4.0 wireless network adapter module that supports 2x2 (MIMO) and 1x1 (SISO) operation and Bluetooth operation in Basic Rate, Enhanced Data Rate and Low Energy modes.

For radio testing purposes the card was installed in a test fixture that exposed all sides of the card. For digital device testing for certification under equipment code JBP the card was installed in a test fixture that exposed all sides of the card.

The sample was received on September 18, 2013 and tested on September 19, 20, 23, 24, 25, 26 and 30 and October 1, 2, 4, 7, 8, 9, 10 and 11, 2013. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
Intel Mobile Communications	PBA5001	PCIe Half Mini Card form factor Bluetooth / IEEE 802.11a/b/g/n/ac wireless network adapter	001500DC7B25	PD9PBA5001

ANTENNA SYSTEM

The EUT antenna is a two-antenna PIFA antenna system – SkyCross, Inc. One or both antennas are used for WiFi operation and one for Bluetooth operation. For Bluetooth: Tx is chain B, Rx is chain B. For WiFi, only Chain A is used for transmit in the 2.4GHz band when Bluetooth is active, both chains can be used in 5GHz bands.

The antenna connects to the EUT via a non-standard antenna connector, thereby meeting the requirements of FCC 15.203.

Band (MHz)	Antenna Gain
2400-2483.5	3.2 dBi
5150-5250	3.6 dBi
5250-5350	3.7 dBi
5470-5725	4.8 dBi
5725-5850	5.0 dBi

ENCLOSURE

The EUT does not have an enclosure as it is designed to be installed within the enclosure of a host computer or system.

MODIFICATIONS

No modifications were made to the EUT during the time the product was at NTS Silicon Valley.

SUPPORT EQUIPMENT

The following equipment was used as support equipment for testing:

Company	Model	Description	Serial Number	FCC ID
Dell	Latitude E5400	Laptop Computer	GFZW54J	-
Agilent	E3610A	DC Power Supply	MY40001912	-
Intel	HMC-NGFF Extension REV.01	Extender board	-	-

PORTS

The cabling configuration during testing was as follows:

Port	Connected To	Cable(s)		
		Description	Shielded or Unshielded	Length(m)
Antenna (x2)	Antenna	Coax	Shielded	0.3
Laptop Mini PCIe slot	Extender Board PCIe	Ribbon	Unshielded	0.8
Laptop USB	Extender Board USB	Multiwire	Shielded	1.5

EUT OPERATION

The EUT was installed into a test fixture that exposed all sides of the card. The test fixture interfaced to a laptop computer for power and control. The laptop computer was used to configure the EUT to continuously transmit at a specified output power on the channel specified in the test data. For transmit mode measurements the system was configured to operate in each of the available operating modes – 802.11b, 802.11g, 802.11n (20, 40 and 80 MHz channel bandwidths), 802.11ac (20, 40 and 80 MHz channel bandwidths), Bluetooth 1Mb/s, Bluetooth 3Mb/s and Bluetooth Low Energy. In addition radiated spurious tests were repeated with the device operating in both Bluetooth and 802.11 modes to determine if any spurious emissions due to intermodulation products were created.

The data rates used for all tests were the lowest data rates for each 802.11 mode – 1Mb/s for 802.11b, 6Mb/s for 802.11a and 802.11g, 6.5MB/s for 802.11n20, 13.5 Mb/s for 802.11n40, and 29.3 Mb/s for 802.11ac80. The device operates at its maximum output power at the lowest data rate (this was confirmed through separate measurements – refer to test data for actual measurements). Bluetooth operation was evaluated at both 1Mb/s and 3Mb/s data rates. 2Mb/s data rate was found, through preliminary testing, to produce emissions similar to those for 3Mb/s.

The PC was using the Intel test utility DRTU Version 1.7.1-752 for WiFi tests and 1.7.1-777 for Bluetooth mode tests and the device driver was version 16.6.0.1 for all tests.

TEST SITE

GENERAL INFORMATION

Final test measurements were taken at the test sites listed below. Pursuant to section 2.948 of the FCC's Rules and section 3.3 of RSP-100, construction, calibration, and equipment data has been filed with the Commission and with industry Canada.

Site	Registration Numbers		Location
	FCC	Canada	
Chamber 3	769238	2845B-3	41039 Boyce Road Fremont, CA 94538-2435
Chamber 4	211948	2845B-4	
Chamber 5	211948	2845B-5	
Chamber 7	A2LA accreditation	2845B-7	

ANSI C63.4 recommends that ambient noise at the test site be at least 6 dB below the allowable limits. Ambient levels are below this requirement. The test site(s) contain separate areas for radiated and conducted emissions testing. Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements of ANSI C63.4.

CONDUCTED EMISSIONS CONSIDERATIONS

Conducted emissions testing is performed in conformance with ANSI C63.10. Measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

RADIATED EMISSIONS CONSIDERATIONS

The FCC has determined that radiation measurements made in a shielded enclosure are not suitable for determining levels of radiated emissions. Radiated measurements are performed in an open field environment or in a semi-anechoic chamber. The test sites are maintained free of conductive objects within the CISPR defined elliptical area incorporated in ANSI C63.4 guidelines and meet the Normalized Site Attenuation (NSA) requirements of ANSI C63.4.

MEASUREMENT INSTRUMENTATION

RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1-1 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 2000 MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements. If the repetition frequency of the signal being measured is below 20Hz, peak measurements are made in lieu of Quasi-Peak measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz, unless the signal is pulsed in which case the average (or video) bandwidth of the measuring instrument is reduced to onset of pulse desensitization and then increased.

INSTRUMENT CONTROL COMPUTER

The receivers utilize either a Rohde & Schwarz EZM Spectrum Monitor/Controller or contain an internal Spectrum Monitor/Controller to view and convert the receiver measurements to the field strength at an antenna or voltage developed at the LISN measurement port, which is then compared directly with the appropriate specification limit. This provides faster, more accurate readings by performing the conversions described under Sample Calculations within the Test Procedures section of this report. Results are printed in a graphic and/or tabular format, as appropriate. A personal computer is used to record all measurements made with the receivers.

The Spectrum Monitor provides a visual display of the signal being measured. In addition, the controller or a personal computer run automated data collection programs which control the receivers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

LINE IMPEDANCE STABILIZATION NETWORK (LISN)

Line conducted measurements utilize a fifty microhenry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250 uH CISPR adapter. This network provides for calibrated radio frequency noise measurements by the design of the internal low pass and high pass filters on the EUT and measurement ports, respectively.

FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transient events.

ANTENNAS

A loop antenna is used below 30 MHz. For the measurement range 30 MHz to 1000 MHz either a combination of a biconical antenna and a log periodic or a bi-log antenna is used. Above 1000 MHz, horn antennas are used. The antenna calibration factors to convert the received voltage to an electric field strength are included with appropriate cable loss and amplifier gain factors to determine an overall site factor, which is then programmed into the test receivers or incorporated into the test software.

ANTENNA MAST AND EQUIPMENT TURNTABLE

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. Measurements below 30 MHz are made with the loop antenna at a fixed height of 1m above the ground plane.

ANSI C63.10 specifies that the test height above ground for table mounted devices shall be 80 centimeters. Floor mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material from 3 to 12 mm if the device is normally used on a non-conductive floor as specified in ANSI C63.4. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

TEST PROCEDURES

EUT AND CABLE PLACEMENT

The regulations require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.10, and the worst-case orientation is used for final measurements.

CONDUCTED EMISSIONS

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord.

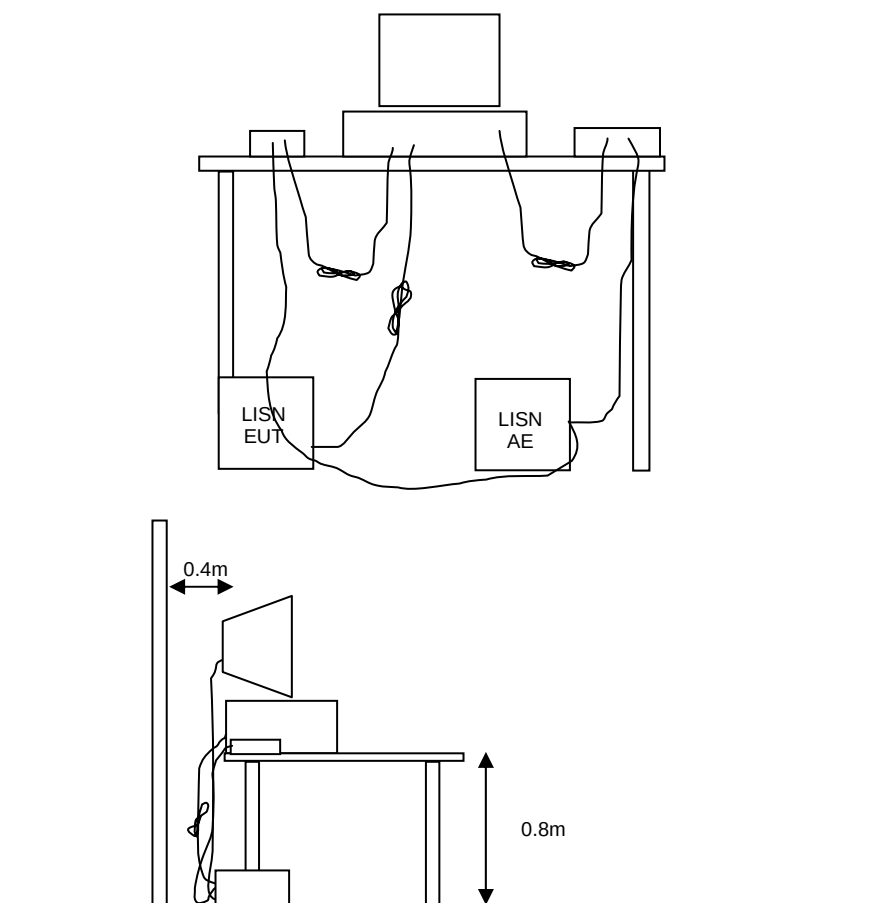


Figure 1 Typical Conducted Emissions Test Configuration


RADIATED EMISSIONS

A preliminary scan of the radiated emissions is performed in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed, one scan for each antenna polarization (horizontal and vertical; loop parallel and perpendicular to the EUT). During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied (for measurements above 30 MHz) and cable positions are varied to determine the highest emission relative to the limit. Preliminary scans may be performed in a fully anechoic chamber for the purposes of identifying the frequencies of the highest emissions from the EUT.


A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions. Other methods used during the preliminary scan for EUT emissions involve scanning with near field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

Final maximization is a phase in which the highest amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth, which results in the highest emission is then maintained while varying the antenna height from one to four meters (for measurements above 30 MHz, measurements below 30 MHz are made with the loop antenna at a fixed height of 1m). The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain.

When testing above 18 GHz, the receive antenna is located at 1 meter from the EUT and the antenna height is restricted to a maximum of 2.5 meters.

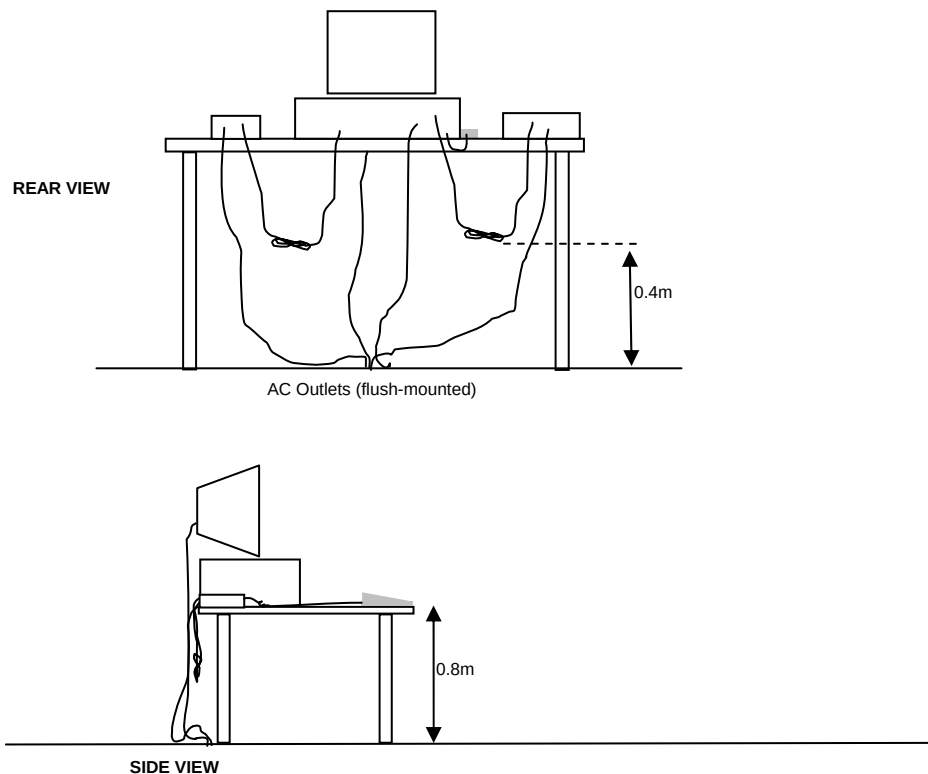


Typical Test Configuration for Radiated Field Strength Measurements

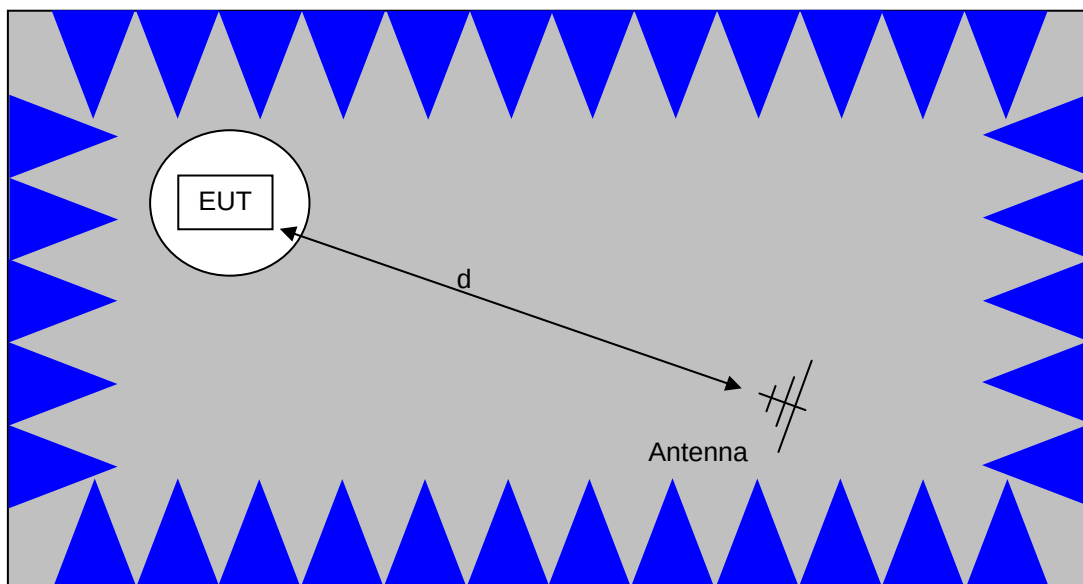

The anechoic materials on the walls and ceiling ensure compliance with the normalized site attenuation requirements of CISPR 16 / CISPR 22 / ANSI C63.4 for an alternate test site at the measurement distances used.


Floor-standing equipment is placed on the floor with insulating supports between the unit and the ground plane.

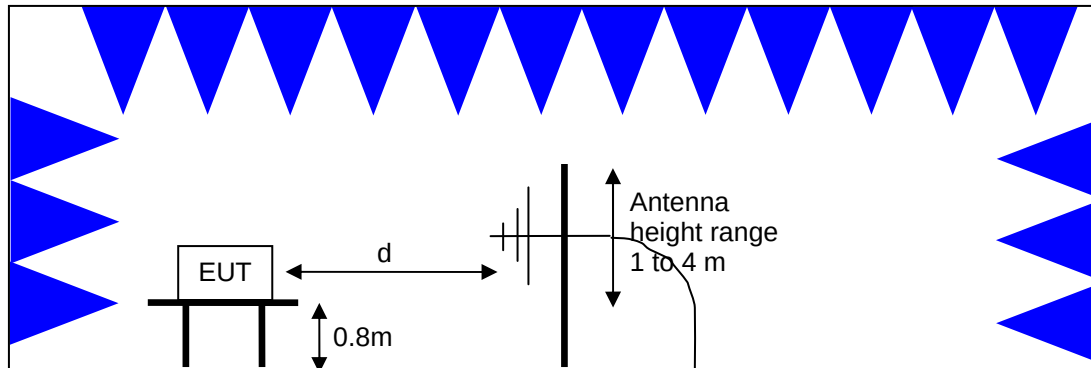

Test Configuration for Radiated Field Strength Measurements
Semi-Anechoic Chamber, Plan and Side Views

CONDUCTED EMISSIONS FROM ANTENNA PORT

Direct measurements of power, bandwidth and power spectral density are performed, where possible, with the antenna port of the EUT connected to either the power meter or spectrum analyzer via a suitable attenuator and/or filter. These are used to ensure that the front end of the measurement instrument is not overloaded by the fundamental transmission.

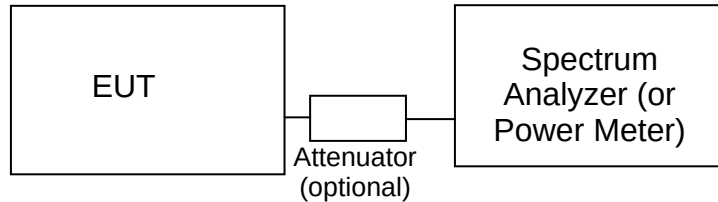**Test Configuration for Antenna Port Measurements**

Measurement bandwidths (video and resolution) are set in accordance with the relevant standards and NTS Silicon Valley's test procedures for the type of radio being tested. When power measurements are made using a resolution bandwidth less than the signal bandwidth the power is calculated by summing the power across the signal bandwidth using either the analyzer channel power function or by capturing the trace data and calculating the power using software. In both cases the summed power is corrected to account for the equivalent noise bandwidth (ENBW) of the resolution bandwidth used.

If power averaging is used (typically for certain digital modulation techniques), the EUT is configured to transmit continuously. Power averaging is performed using either the built-in function of the analyzer or, if the analyzer does not feature power averaging, using external software. In both cases the average power is calculated over a number of sweeps (typically 100). When the EUT cannot be configured to continuously transmit then either the analyzer is configured to perform a gated sweep to ensure that the power is averaged over periods that the device is transmitting or power averaging is disabled and a max-hold feature is used.

If a power meter is used to make output power measurements the sensor head type (peak or average) is stated in the test data table.

BANDWIDTH MEASUREMENTS

The 6dB, 20dB, 26dB and/or 99% signal bandwidth are measured using the bandwidths recommended by ANSI C63.10 and RSS GEN.

SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

The limits for conducted emissions are given in units of microvolts, and the limits for radiated emissions are given in units of microvolts per meter at a specified test distance. Data is measured in the logarithmic form of decibels relative to one microvolt, or dB microvolts (dBuV). For radiated emissions, the measured data is converted to the field strength at the antenna in dB microvolts per meter (dBuV/m). The results are then converted to the linear forms of uV and uV/m for comparison to published specifications.

For reference, converting the specification limits from linear to decibel form is accomplished by taking the base ten logarithm, then multiplying by 20. These limits in both linear and logarithmic form are as follows:

CONDUCTED EMISSIONS SPECIFICATION LIMITS: FCC 15.207; FCC 15.107(a), RSS GEN

The table below shows the limits for the emissions on the AC power line from an intentional radiator and a receiver.

Frequency (MHz)	Average Limit (dBuV)	Quasi Peak Limit (dBuV)
0.150 to 0.500	Linear decrease on logarithmic frequency axis between 56.0 and 46.0	Linear decrease on logarithmic frequency axis between 66.0 and 56.0
0.500 to 5.000	46.0	56.0
5.000 to 30.000	50.0	60.0

GENERAL TRANSMITTER RADIATED EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from transmitters that fall in restricted bands¹ (with the exception of transmitters operating under FCC Part 15 Subpart D and RSS 210 Annex 9), the limits for all emissions from a low power device operating under the general rules of RSS 310 (tables 3 and 4), RSS 210 (table 2) and FCC Part 15 Subpart C section 15.209.

Frequency Range (MHz)	Limit (uV/m)	Limit (dBuV/m @ 3m)
0.009-0.490	2400/F _{KHz} @ 300m	67.6-20*log ₁₀ (F _{KHz}) @ 300m
0.490-1.705	24000/F _{KHz} @ 30m	87.6-20*log ₁₀ (F _{KHz}) @ 30m
1.705 to 30	30 @ 30m	29.5 @ 30m
30 to 88	100 @ 3m	40 @ 3m
88 to 216	150 @ 3m	43.5 @ 3m
216 to 960	200 @ 3m	46.0 @ 3m
Above 960	500 @ 3m	54.0 @ 3m

RECEIVER RADIATED SPURIOUS EMISSIONS SPECIFICATION LIMITS

The table below shows the limits for the spurious emissions from receivers as detailed in FCC Part 15.109, RSS 210 Table 2, RSS GEN Table 1 and RSS 310 Table 3. Note that receivers operating outside of the frequency range 30 MHz – 960 MHz are exempt from the requirements of 15.109.

Frequency Range (MHz)	Limit (uV/m @ 3m)	Limit (dBuV/m @ 3m)
30 to 88	100	40
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

¹ The restricted bands are detailed in FCC 15.203, RSS 210 Table 1 and RSS 310 Table 2

OUTPUT POWER LIMITS – DIGITAL TRANSMISSION SYSTEMS

The table below shows the limits for output power and output power density. Where the signal bandwidth is less than 20 MHz the maximum output power is reduced to the power spectral density limit plus 10 times the log of the bandwidth (in MHz).

Operating Frequency (MHz)	Output Power	Power Spectral Density
902 – 928	1 Watt (30 dBm)	8 dBm/3kHz
2400 – 2483.5	1 Watt (30 dBm)	8 dBm/3kHz
5725 – 5850	1 Watt (30 dBm)	8 dBm/3kHz

The maximum permitted output power is reduced by 1dB for every dB the antenna gain exceeds 6dBi. Fixed point-to-point applications using the 5725 – 5850 MHz band are not subject to this restriction.

TRANSMIT MODE SPURIOUS RADIATED EMISSIONS LIMITS – FHSS and DTS SYSTEMS

The limits for unwanted (spurious) emissions from the transmitter falling in the restricted bands are those specified in the general limits sections of FCC Part 15 and RSS 210. All other unwanted (spurious) emissions shall be at least 20dB below the level of the highest in-band signal level (30dB if the power is measured using the sample detector/power averaging method).

SAMPLE CALCULATIONS - CONDUCTED EMISSIONS

Receiver readings are compared directly to the conducted emissions specification limit (decibel form) as follows:

$$R_r - S = M$$

where:

R_r = Receiver Reading in dBuV

S = Specification Limit in dBuV

M = Margin to Specification in +/- dB

SAMPLE CALCULATIONS - RADIATED EMISSIONS

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

A distance factor, when used for electric field measurements above 30MHz, is calculated by using the following formula:

$$F_d = 20 * \text{LOG}_{10} (D_m/D_s)$$

where:

$$F_d = \text{Distance Factor in dB}$$

$$D_m = \text{Measurement Distance in meters}$$

$$D_s = \text{Specification Distance in meters}$$

For electric field measurements below 30MHz the extrapolation factor is either determined by making measurements at multiple distances or a theoretical value is calculated using the formula:

$$F_d = 40 * \text{LOG}_{10} (D_m/D_s)$$

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The antenna factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$$R_r = \text{Receiver Reading in dBuV/m}$$

$$F_d = \text{Distance Factor in dB}$$

$$R_c = \text{Corrected Reading in dBuV/m}$$

$$L_s = \text{Specification Limit in dBuV/m}$$

$$M = \text{Margin in dB Relative to Spec}$$

SAMPLE CALCULATIONS - FIELD STRENGTH TO EIRP CONVERSION

Where the radiated electric field strength is expressed in terms of the equivalent isotropic radiated power (eirp), or where a field strength measurement of output power is made in lieu of a direct measurement, the following formula is used to convert between eirp and field strength at a distance of d (meters) from the equipment under test:

$$E = \frac{1000000 \sqrt{30 P}}{d} \quad \text{microvolts per meter}$$

where P is the eirp (Watts)

For a measurement at 3m the conversion from a logarithmic value for field strength (dBuV/m) to an eirp power (dBm) is -95.3dB.

Appendix A Test Equipment Calibration Data

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Radio Antenna Port (Power), 18-Sep-13				
Rohde & Schwarz	Power Sensor, 1 uW-100 mW, DC-18 GHz, 50ohms	NRV-Z51	1070	6/3/2014
Rohde & Schwarz	Power Meter, Single Channel, +1795+1796	NRVS	1534	7/29/2014
Radio Antenna Port (Power and Spurious Emissions), 19-Sep-13				
Rohde & Schwarz	Signal Analyzer 20 Hz - 26.5 GHz	FSQ26	2327	4/25/2014
Radiated Emissions, 1,000 - 6,500 MHz, 19-Sep-13				
Rohde & Schwarz	Power Sensor, 1 uW-100 mW, DC-18 GHz, 50ohms	NRV-Z51	1070	6/3/2014
EMCO	Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	8/23/2014
Rohde & Schwarz	Power Meter, Single Channel, +1795+1796	NRVS	1534	7/29/2014
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1630	6/22/2014
Radiated Emissions, Band edge, 20-Sep-13				
Rohde & Schwarz	Power Sensor, 1 uW-100 mW, DC-18 GHz, 50ohms	NRV-Z51	1070	6/3/2014
EMCO	Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	8/23/2014
Rohde & Schwarz	Power Meter, Single Channel, +1795+1796	NRVS	1534	7/29/2014
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1630	6/22/2014
Radiated Emissions, 30 - 6,500 MHz, 20-Sep-13				
EMCO	Antenna, Horn, 1-18 GHz	3115	487	7/19/2014
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1630	6/22/2014
Radiated Emissions, 1 - 26 GHz, 23-Sep-13				
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	11/9/2013
EMCO	Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	8/23/2014
Hewlett Packard	Head (Inc flex cable, 1143, 2198) Red	84125C	1145	6/26/2014
Hewlett Packard	SpecAn 30 Hz -40 GHz, SV (SA40) Red	8564E (84125C)	1148	9/14/2014
A. H. Systems	Spare System Horn, 18-40GHz	SAS-574, p/n: 2581	2162	7/24/2014
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	2249	10/11/2013
Radiated Emissions, 1,000 - 40,000 MHz, 24-Sep-13				
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	11/9/2013
EMCO	Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	8/23/2014
Hewlett Packard	Head (Inc flex cable, 1143, 2198) Red	84125C	1145	6/26/2014
Hewlett Packard	SpecAn 30 Hz -40 GHz, SV (SA40) Red	8564E (84125C)	1148	9/14/2014

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	High Pass filter, 8.2 GHz (Purple System)	P/N 84300-80039	1767	12/5/2013
A. H. Systems	Spare System Horn, 18-40GHz	SAS-574, p/n: 2581	2162	7/24/2014
Micro-Tronics	Band Reject Filter, 5725-5875 MHz	BRC50705-02	2241	10/4/2013
Radio Antenna Port (Power and Spurious Emissions), 25-Sep-13				
Agilent Technologies	3Hz -44GHz PSA Spectrum Analyzer	E4446A	2796	1/28/2014
Radio Antenna Port (Power and Spurious Emissions), 27-Sep-13				
Agilent Technologies	3Hz -44GHz PSA Spectrum Analyzer	E4446A	2796	1/28/2014
Radio Antenna Port (Power and Spurious Emissions), 30-Sep-13				
Rohde & Schwarz	Power Sensor 100 uW - 2 Watts use with 20dB attenuator sn:1031.6959.00 only	NRV-Z32	1423	9/17/2014
Rohde & Schwarz	Power Meter, Single Channel, +1795+1796	NRVS	1534	7/29/2014
Agilent Technologies	3Hz -44GHz PSA Spectrum Analyzer	E4446A	2796	1/28/2014
Radio Antenna Port (Power and Spurious Emissions), 01-Oct-13				
Agilent Technologies	USB Average Power Sensor	U2001A	2442	12/17/2013
Fischer Custom Comm	LISN, 4x 50A, 50 uH , decoupling network, 150kHz-30MHz	FCC-LISN-50-50-4-02-550v	2776	1/10/2014
Radio Antenna Port (Power and Spurious Emissions), 02-Oct-13				
Agilent Technologies	3Hz -44GHz PSA Spectrum Analyzer	E4446A	2796	1/28/2014
Radiated Emissions, 30 - 1,000 MHz, 03-Oct-13				
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1548	8/9/2014
Com-Power	Preamplifier, 30-1000 MHz	PA-103	1632	7/6/2014
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	6/8/2014
Radiated Emissions, 1000 - 26,500 MHz, 05-Oct-13				
EMCO	Antenna, Horn, 1-18GHz	3115	868	6/19/2014
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	6/8/2014
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	2199	2/19/2014
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	2249	10/3/2014
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	2415	8/24/2014
Radiated Emissions, 1 - 26 GHz, 07-Oct-13				
EMCO	Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	8/23/2014
Hewlett Packard	High Pass filter, 8.2 GHz (Blu System)	P/N 84300-80039 (84125C)	1392	5/14/2014
Hewlett Packard	SpecAn 9 kHz - 40 GHz, FT (SA40) Blue	8564E (84125C)	1393	5/9/2014
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	1780	12/5/2013

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	2249	10/3/2014
Hewlett Packard	Head (Inc W1-W4, 1946 , 1947) Purple	84125C	1772	6/18/2014
A. H. Systems	Red System Horn, 18-40GHz	SAS-574, p/n: 2581	2161	6/10/2014
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	2415	8/24/2014
Radiated Emissions, 1000 - 10,000 MHz, 08-Oct-13				
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	11/9/2013
Hewlett Packard	SpecAn 30 Hz -40 GHz, SV (SA40) Red	8564E (84125C)	1148	9/14/2014
EMCO	Antenna, Horn, 1-18 GHz	3115	1561	7/12/2014
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	2238	9/18/2014
Radiated Spurious Emissions, 1000 - 15,000 MHz, 09-Oct-13				
Hewlett Packard	Microwave Preamplifier, 1-26.5GHz	8449B	785	11/9/2013
Narda West	High Pass Filter, 8 GHz	HPF 180	821	3/13/2014
Hewlett Packard	SpecAn 30 Hz -40 GHz, SV (SA40) Red	8564E (84125C)	1148	9/14/2014
EMCO	Antenna, Horn, 1-18 GHz	3115	1561	7/12/2014
Micro-Tronics	Band Reject Filter, 5725-5875 MHz	BRC50705-02	1682	3/13/2014
Micro-Tronics	Band Reject Filter, 5150-5350 MHz	BRC50703-02	1729	8/2/2014
Micro-Tronics	Band Reject Filter, 5470-5725 MHz	BRC50704-02	1730	8/2/2014
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	2238	9/18/2014
Radio Antenna Port (Power and Spurious Emissions), 11-Oct-13				
Rohde & Schwarz	Power Sensor 100 uW - 2 Watts use with 20dB attenuator sn:1031.6959.00 only	NRV-Z32	1423	9/17/2014
Rohde & Schwarz	Power Meter, Dual Channel	NRVD	1539	8/30/2014
Agilent Technologies	PSA, Spectrum Analyzer, (installed options, 111, 115, 123, 1DS, B7J, HYX,	E4446A	2139	3/7/2014
Radio Antenna Port (Power and Spurious Emissions), 11-Oct-13				
Agilent Technologies	PSA, Spectrum Analyzer, (installed options, 111, 115, 123, 1DS, B7J, HYX,	E4446A	2139	3/7/2014
Radiated Emissions, 30 - 1,000 MHz, 14-Oct-13				
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1548	8/9/2014
Com-Power	Preamplifier, 30-1000 MHz	PA-103	1632	7/6/2014
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	6/8/2014
Conducted Emissions - AC Power Ports, 14-Oct-13				
EMCO	LISN, 10 kHz-100 MHz	3825/2	1293	2/14/2014
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	6/8/2014
Com-Power	9KHz-30MHz, 50uH, 15Aac, 10Adc, max	LI-215A	2671	5/24/2014

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Radiated Emissions, 30 - 1,000 MHz, 15-Oct-13				
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1548	8/9/2014
Com-Power	Preamplifier, 30-1000 MHz	PA-103	1632	7/6/2014
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	6/8/2014
Radiated Emissions, 1000 - 26,500 MHz, 17-Oct-13				
EMCO	Antenna, Horn, 1-18 GHz (SA40-Red)	3115	1142	8/23/2014
Hewlett Packard	Head (Inc W1-W4, 1946 , 1947) Purple	84125C	1772	6/18/2014
Hewlett Packard	Microwave Preamplifier, 1- 26.5GHz	8449B	2199	2/19/2014
Hewlett Packard	SpecAn 9 kHz - 40 GHz, (SA40) Purple	8564E (84125C)	2415	8/24/2014
Radio Antenna Port (Power and Spurious Emissions), 17-Oct-13				
Agilent Technologies	PSA, Spectrum Analyzer, (installed options, 111, 115, 123, 1DS, B7J, HYX,	E4446A	2139	3/7/2014
Radiated Emissions, 1,000-3,000 MHz & Radiated Power, 22-Oct-13				
EMCO	Antenna, Horn, 1-18 GHz	3115	487	7/19/2014
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1756	6/8/2014
Radiated Emissions, 1000 - 26,500 MHz, 23-Oct-13				
Micro-Tronics	Band Reject Filter, 2400-2500 MHz	BRM50702-02	1683	8/2/2014
Hewlett Packard	Head (Inc W1-W4, 1946 , 1947) Purple	84125C	1772	6/18/2014
A. H. Systems	Spare System Horn, 18-40GHz	SAS-574, p/n: 2581	2162	7/24/2014
Hewlett Packard	Microwave Preamplifier, 1- 26.5GHz	8449B	2199	2/19/2014

Appendix B Test Data

T93372 Pages 29 – 259



EMC Test Data

Client:	Intel Corporation	Job Number:	J93358
Product	PBA5001	T-Log Number:	T93372
		Project Manager:	Christine Krebill
Contact:	Steve Hackett	Project Coordinator:	-
Emissions Standard(s):	FCC Part 15.247, 15.407	Class:	B
Immunity Standard(s):	-	Environment:	Radio

EMC Test Data

For The

Intel Corporation

Product

PBA5001

Date of Last Test: 10/24/2013

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Power vs. Data Rate

In normal operating modes the card uses power settings stored on EEPROM to set the output power. For a given nominal output power the actual transmit power normally is reduced as the data rate increases, therefore testing was performed at the data rate in the mode with highest power to determine compliance with the requirements.

The following power measurements were made using a GATED average power meter and with the device configured in a continuous transmit mode on Chain 1 at the various data rates in each mode to verify the highest power mode:

Sample Notes

MAC Address: 001500DC7B25 DRTU Tool Version 1.7.1-752, Driver version 16.6.0.1 (WiFi only)

MAC Address: 001500DC7B25 DRTU Tool Version 1.7.1-777, for ac80 mode (10/1/13)

MAC Address: 001500DC7B29 DRTU Tool Version 1.7.1-777, Driver version ??? (BT basic & enhanced)

Date of Test: 9/18/2013

Test Engineer: Jack Liu

Test Location: FT chamber # 4

2.4GHz -20MHz

Mode	Data Rate	Power (dBm)	Power setting
802.11b	1	15.4	20.0
	2	15.4	
	5.5	15.3	
	11	15.3	
802.11g	6	14.6	20.0
	9	14.5	
	12	14.5	
	18	14.5	
	24	14.4	
	36	14.3	
	48	14.3	
	54	14.2	

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Date of Test: 9/18/2013
 Test Engineer: Joseph Cadigal
 Test Location: FT chamber # 4

2.4GHz -20/40MHz

Mode	Data Rate	Power (dBm)	Power setting
802.11n/ac 20MHz	6.5	14.9	20.0
	13	14.7	
	19.5	14.6	
	26	14.4	
	39	14.4	
	52	14.2	
	58.5	14.3	
	65	14.2	
	78		
802.11n/ac 40MHz	13.5	15.0	20.0
	27	14.6	
	40.5	14.3	
	54	14.2	
	81	14.0	
	108	13.9	
	121.5	13.9	
	135	13.8	
	162		
	180		

<<-11ac mode only

<<-11ac mode only

<<-11ac mode only

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

5GHz -20/40/80MHz

Mode	Data Rate	Power (dBm)	Power setting
802.11n/ac 20MHz	6.5	7.1	20.0
	13	7.0	
	19.5	7.0	
	26	6.7	
	39	6.5	
	52	6.4	
	58.5	6.4	
	65	6.5	
	78	6.0	
802.11n/ac 40MHz	13.5	6.4	20.0
	27	6.4	
	40.5	6.3	
	54	6.3	
	81	6.2	
	108	6.1	
	121.5	6.1	
	135	6.1	
	162	6.0	
	180	6.0	

<<-11ac mode only

<<-11ac mode only
<<-11ac mode only

Date of Test: 10/1/2013
 Test Engineer: John Caizzi
 Test Location: Lab 4A

802.11ac 80MHz	29.3	4.4	20.0
	58.5	4.3	
	87.8	4.2	
	117	4.1	
	175.5	4.0	
	234	3.9	
	266.3	3.8	
	292.5	3.8	
	351	3.8	
	390	3.7	

Note : Power setting - the software power setting used during testing, included for reference only.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Duty Cycle

Date of Test: 9/18/2013

Test Engineer: Joseph Cadigal

Test Location: FT chamber # 4

2.4GHz - 20/40MHz

Duty cycle measurements performed on the worse case data rate for power.


Notes: Measurements taken with maximum RBW/VBW settings allowed.

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
11b	1Mbps	0.99	Yes	5.94	0.0	0.0	168
11g	6Mbps	0.99	Yes	5.71	0.0	0.0	175
n20	6.5Mbps	0.99	Yes	5.36	0.0	0.0	187
n40	13.5Mbps	0.97	Yes	2.88	0.1	0.2	347

* Correction factor when using RMS/Power averaging - $10 \cdot \log(1/x)$

** Correction factor when using linear voltage average - $20 \cdot \log(1/x)$

T = Minimum transmission duration

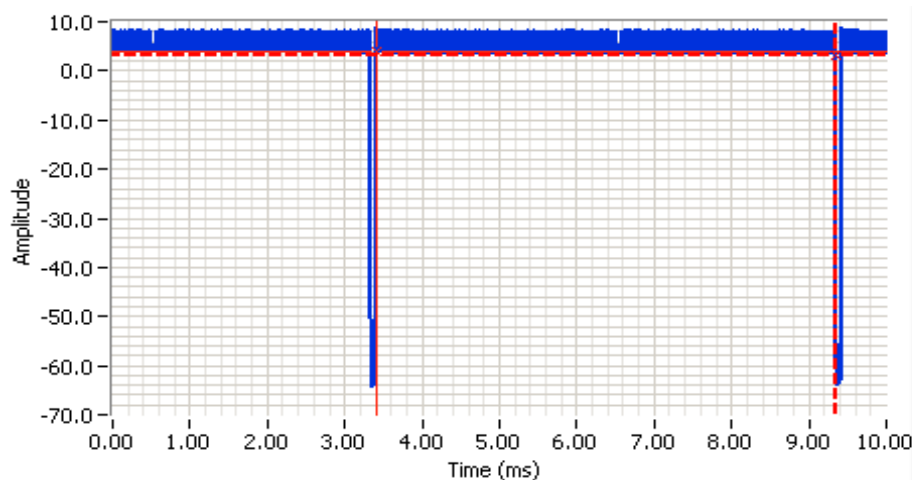

Analyzer Settings


Rohde&Schwarz,FSQ
 CF: 2437.000 MHz
 SPAN: 0.000 MHz
 RB: 1.000 MHz
 VB: 10.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 10.0 DB
 Sweep Time: 10.0ms
 Ref Lvl: 20.0 DBM

Comments

802.11b 1Mbps
 On time: 5.94ms
 Off time: .07ms
 Cycle time : 99%

Cursor 1	9.3490	3.18		Delta Time (ms)	5.94
Cursor 1	3.4089	3.93		Delta Amplitude	0.76

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

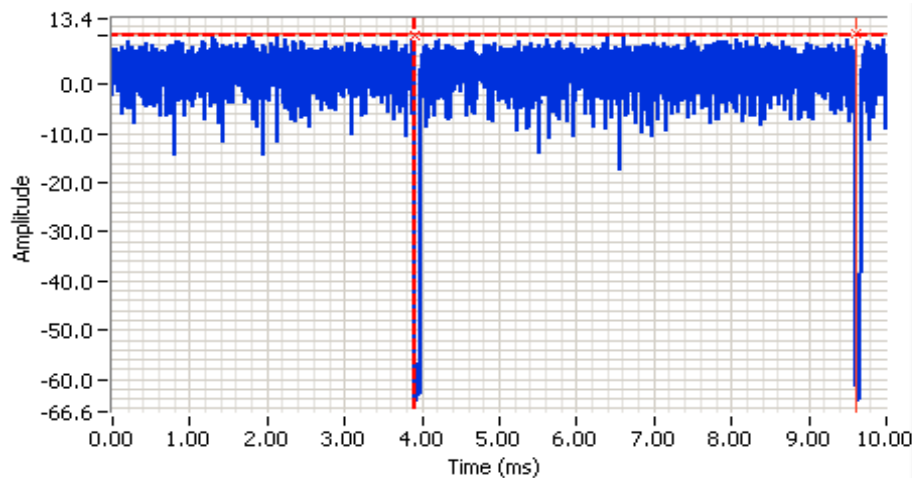


Analyzer Settings

Rohde&Schwarz,FSQ
 CF: 2437.000 MHz
 SPAN: 0.000 MHz
 RB: 1.000 MHz
 VB: 10.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 10.0 DB
 Sweep Time: 10.0ms
 Ref Lvl: 20.0 DBM

Comments

802.11g 6Mbps
 On time: 5.71ms
 Off time: .07ms
 Cycle time : 99%

Cursor 1	3.8984	9.93		Delta Time (ms)	5.71
Cursor 1	9.6094	10.38		Delta Amplitude	0.45

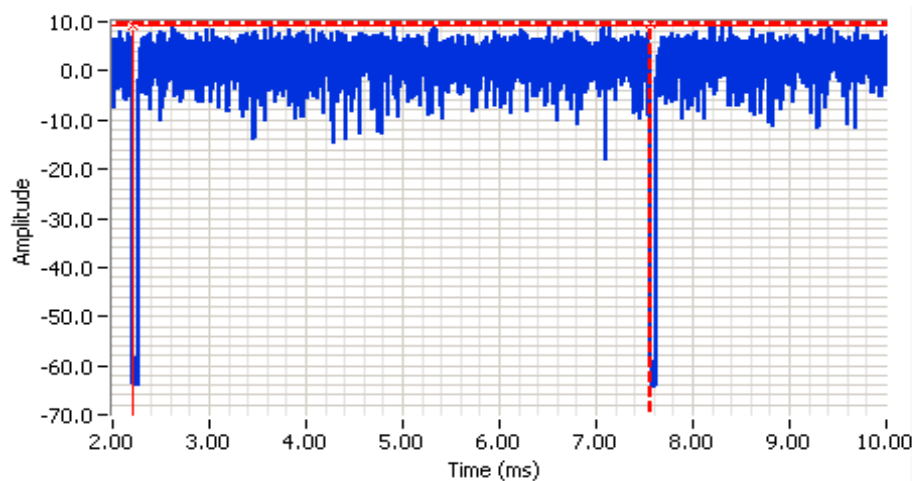

Analyzer Settings

Rohde&Schwarz,FSQ
 CF: 2437.000 MHz
 SPAN: 0.000 MHz
 RB: 1.000 MHz
 VB: 10.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 10.0 DB
 Sweep Time: 10.0ms
 Ref Lvl: 20.0 DBM


Comments

802.11n20 6.5Mbps
 On time: 5.36ms
 Off time: .07ms
 Cycle time : 99%

Cursor 1	7.5625	9.71		Delta Time (ms)	5.36
Cursor 1	2.2005	9.24		Delta Amplitude	0.47



Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

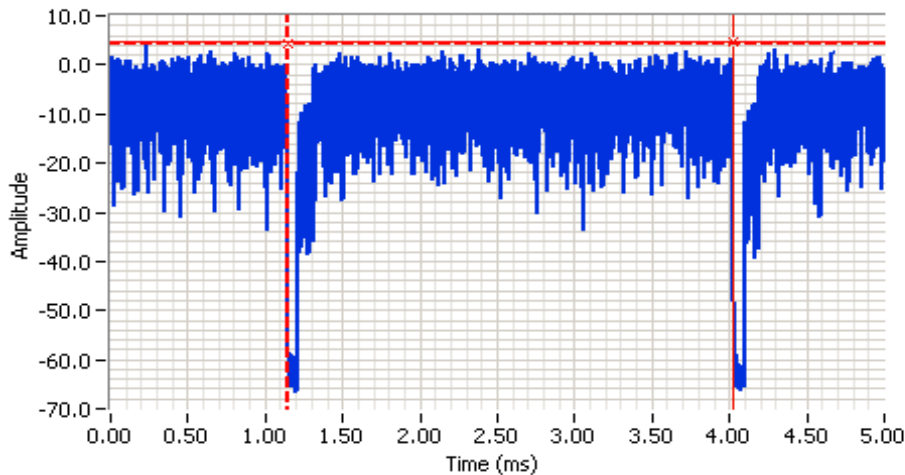

Analyzer Settings

Rohde&Schwarz,FSQ
 CF: 2437.000 MHz
 SPAN: 0.000 MHz
 RB: 1.000 MHz
 VB: 10.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 10.0 DB
 Sweep Time: 5.0ms
 Ref Lvl: 20.0 DBM

Comments

802.11n40 13.5Mbps
 On time: 2.88ms
 Off time: .08ms
 Cycle time : 97%

Cursor 1	1.1432	4.34			
Cursor 1	4.0273	4.69			

Delta Time (ms) 2.88

Delta Amplitude 0.36

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Date of Test: 9/18/2013

Test Engineer: Joseph Cadigal

Test Location: FT chamber # 4

5GHz-20/40/80MHz

Duty cycle measurements performed on the worse case data rate for power.


Notes: Measurements taken with maximum RBW/VBW settings allowed.

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
a	6Mbps	0.99	Yes	5.75	0.0	0.0	174
n20	6.5Mbps	0.99	Yes	5.36	0.0	0.0	187
n40	13.5Mbps	0.97	Yes	3.08	0.1	0.2	325
ac80	VHT0	0.93	Yes	0.43	0.3	0.6	2326

* Correction factor when using RMS/Power averaging - $10 \cdot \log(1/x)$

** Correction factor when using linear voltage average - $20 \cdot \log(1/x)$

T = Minimum transmission duration

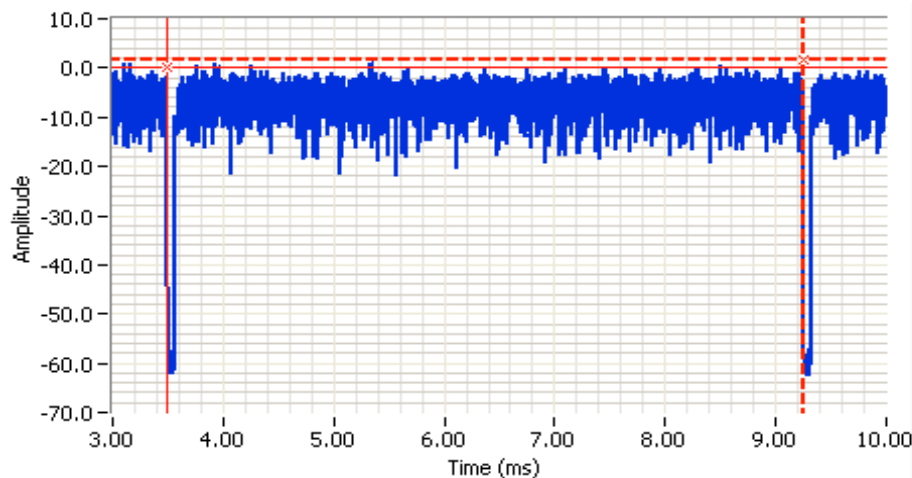

Analyzer Settings


Rohde&Schwarz,FSQ
 CF: 5180.000 MHz
 SPAN: 0.000 MHz
 RB: 1.000 MHz
 VB: 10.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 10.0 DB
 Sweep Time: 10.0ms
 Ref Lvl: 22.0 DBM

Comments

802.11a 6Mbps
 On time:5.75ms
 Off time:.07ms
 Cycle time: 99%

Cursor 1	9.2474	1.56		Delta Time (ms)	5.75
Cursor 1	3.4974	0.00		Delta Amplitude	1.56

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

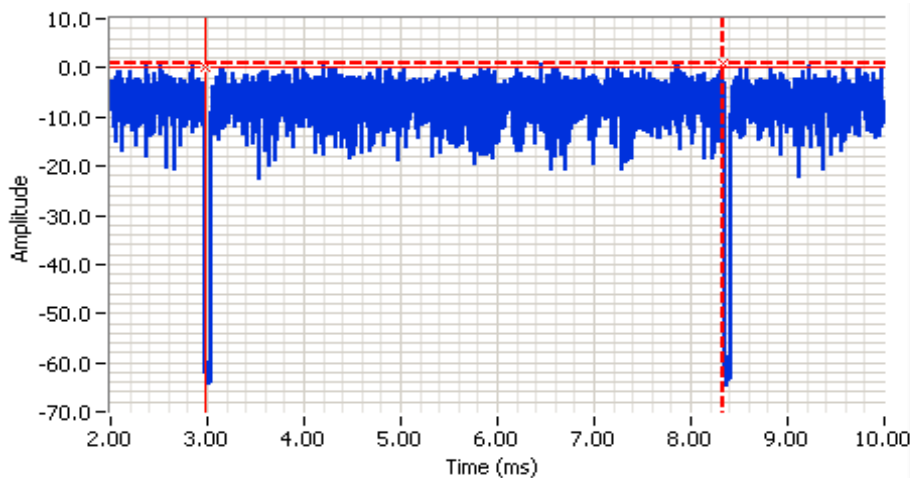


Analyzer Settings

Rohde&Schwarz,FSQ
 CF: 5180.000 MHz
 SPAN: 0.000 MHz
 RB: 1.000 MHz
 VB: 10.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 10.0 DB
 Sweep Time: 10.0ms
 Ref Lvl: 20.0 DBM

Comments

802.11n20 6.5Mbps
 On time: 5.36ms
 Off time: .07ms
 Cycle time : 99%

Cursor 1	8.3333	0.96		Delta Time (ms)	5.36
Cursor 1	2.9740	0.00		Delta Amplitude	0.96

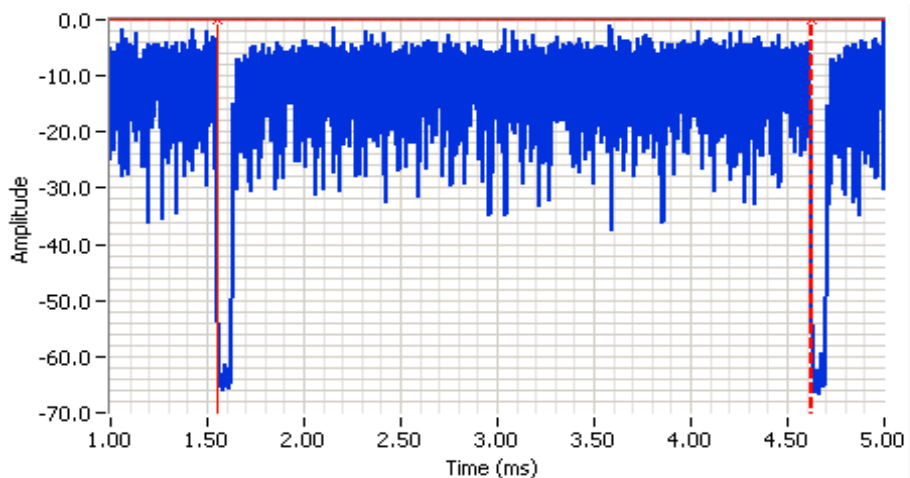

Analyzer Settings

Rohde&Schwarz,FSQ
 CF: 5180.000 MHz
 SPAN: 0.000 MHz
 RB: 1.000 MHz
 VB: 10.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 10.0 DB
 Sweep Time: 5.0ms
 Ref Lvl: 20.0 DBM

Comments


802.11n40 13.5Mbps
 On time: 3.08ms
 Off time: .07ms
 Cycle time : 97%

Cursor 1	4.6250	0.00		Delta Time (ms)	3.08
Cursor 1	1.5495	0.00		Delta Amplitude	0.00



Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

Date of Test: 10/1/2013
 Test Engineer: John Caizzi
 Test Location: Lab 4A

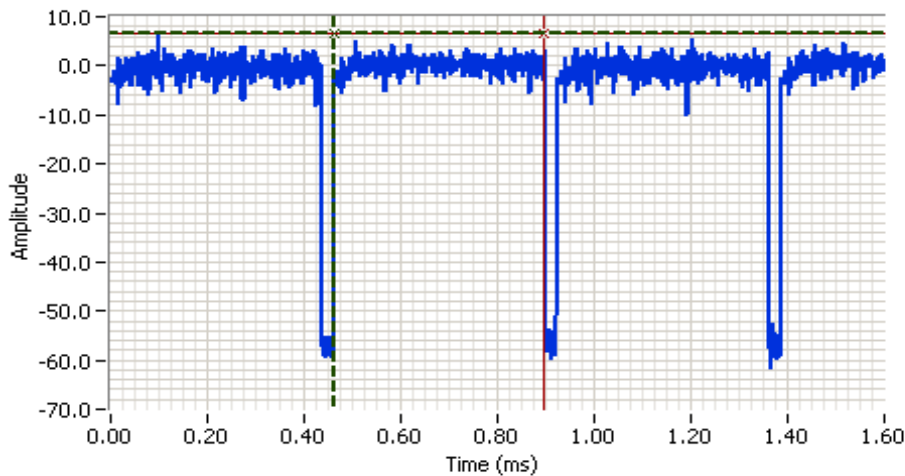

Analyzer Settings

Agilent Technologies, E4446A
 CF: 5775.000 MHz
 SPAN: 0.000 MHz
 RB: 8.000 MHz
 VB: 50.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 11.2 DB
 Sweep Time: 1.6ms
 Ref Lvl: 10.0 DBM

Comments

ac80, VHT0
 On time = .43 ms
 Off time = .0311 ms
 Duty cycle = 93%

Cursor 1	0.4623	6.72	
Cursor 2	0.8954	6.72	

Delta Time (ms) 0.43

Delta Amplitude 0.00

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Date of Test: 10/3/2013 & 10/16/2013
 Test Engineer: John Caizzi & Joseph Cadigal
 Test Location: Lab 4A

Bluetooth


Notes: Measurements taken with maximum RBW/VBW settings allowed.

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
Basic	DH5	0.77	Yes	2.89	1.1	2.3	346
Enhanced	3-DH5	0.73	Yes	2.77	1.3	2.7	361
LE	BLE	0.66	Yes	0.40	1.8	3.6	2500

* Correction factor when using RMS/Power averaging - $10 \cdot \log(1/x)$

** Correction factor when using linear voltage average - $20 \cdot \log(1/x)$

T = Minimum transmission duration

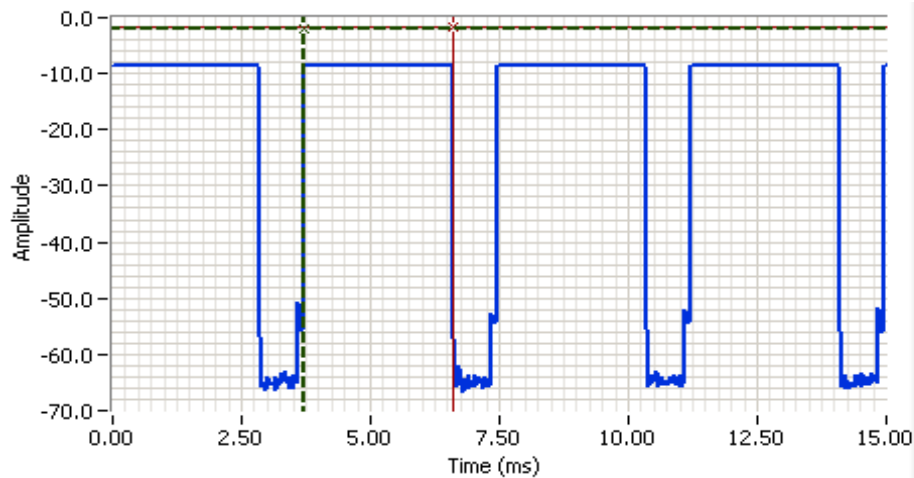


Analyzer Settings
 Agilent Technologies, E4446A
 CF: 2402.000 MHz
 SPAN: 0.000 MHz
 RB: 8.000 MHz
 VB: 50.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 0.0 DB
 Sweep Time: 15.0ms
 Ref Lvl: 0.0 DBM

Comments
 BT basic, DH5
 On time = 2.89 ms

Cursor 1	3.7109	-1.99		Delta Time (ms)	2.89
Cursor 2	6.6016	-1.66		Delta Amplitude	0.33

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

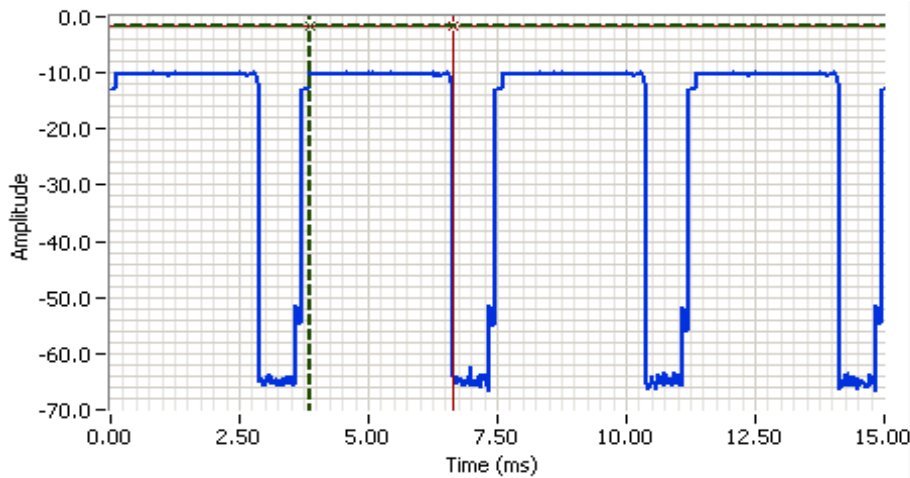


Analyzer Settings

Agilent Technologies, E4446A
 CF: 2402.000 MHz
 SPAN: 0.000 MHz
 RB: 8.000 MHz
 VB: 50.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 0.0 DB
 Sweep Time: 15.0ms
 Ref Lvl: 0.0 DBM

Comments

BT enhanced, 3-DH5
 On time = 2.77 ms

Cursor 1 3.8672 -1.66 Delta Time (ms) 2.77
 Cursor 2 6.6406 -1.66 Delta Amplitude 0.00

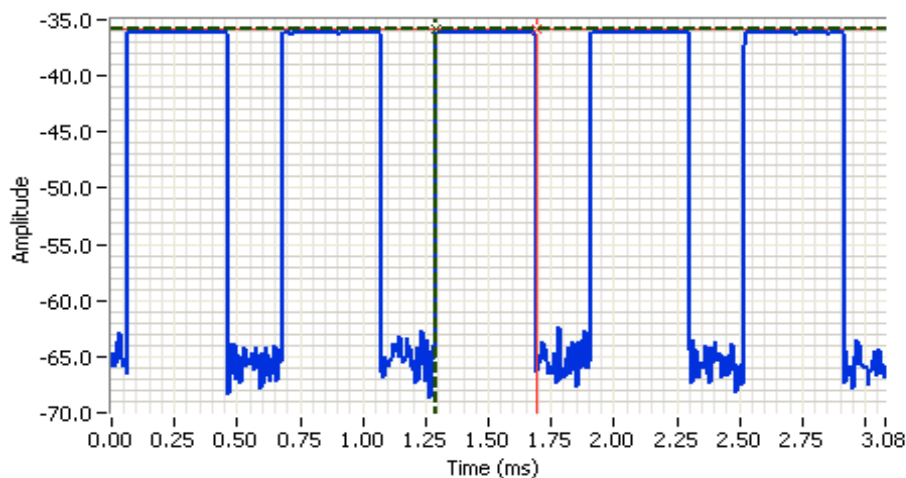

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2402.000 MHz
 SPAN: 0.000 MHz
 RB: 8.000 MHz
 VB: 50.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 0.0 DB
 Sweep Time: 3.1ms
 Ref Lvl: 0.0 DBM

Comments

BT Low Energy
 On time = 0.40ms

Cursor 1 1.2914 -35.89 Delta Time (ms) 0.40
 Cursor 2 1.6924 -35.89 Delta Amplitude 0.00



Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements Power, PSD, Bandwidth and Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Ambient Conditions:

Temperature: 20 °C
Rel. Humidity: 37 %

Summary of Results

Run #	Pwr setting	Avg Pwr	Test Performed	Limit	Pass / Fail	Result / Margin
1	-	-	Output Power	15.247(b)	Pass	802.11b: 15.5 dBm 802.11g: 17.8 dBm 802.11n20: 20.7 dBm 802.11n40: 20.5 dBm
2	-	-	Power spectral Density (PSD)	15.247(d)	Pass	b: 6.0 dBm/100kHz g: 6.3 dBm/100kHz n20: 6.4 dBm/100kHz n40: 4.1 dBm/100kHz
3	-	-	Minimum 6dB Bandwidth	15.247(a)	Pass	802.11b: 12.1MHz 802.11g: 16.350MHz 802.11n20: 17.6MHz 802.11n40:35.167MHz
3	-	-	99% Bandwidth	RSS GEN	-	802.11b: 14.276MHz 802.11g: 17.571MHz 802.11n20: 17.6MHz 802.11n40:36.273MHz
4	-	-	Spurious emissions	15.247(b)	Pass	b mode all emissions below -30dBc limit
4	-	-	Spurious emissions	15.247(b)	Pass	g, n20, n40 all emissions mode below -20dBc limit

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
11b	1 Mb/s	0.99	Yes	5.94	0.0	0.0	168
11g	6 Mb/s	0.99	Yes	5.71	0.0	0.0	175
n20	MCS0	0.99	Yes	5.36	0.0	0.0	187
n40	MCS0	0.97	Yes	2.88	0.1	0.2	347

Sample Notes

MAC Address: 001500DC7B25 DRTU Tool Version 1.7.1-752, Driver version 16.6.0.1 (WiFi only)

Run #1: Output Power

Date of Test: 9/26/2013

Test Engineer: Joseph Cadigal

Test Location: FT Lab#4B

Config. Used: 1

Config Change: none

EUT Voltage: 3.3Vdc

Mode: 11b

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
19.5	2412	15.1	32.0	3.2	Pass	18.3	0.067		
20	2437	15.5	35.6	3.2	Pass	18.7	0.074		
20	2462	15.2	32.9	3.2	Pass	18.4	0.069		

Mode: 11g

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
18.5	2412	17.8	60.3	3.2	Pass	21.0	0.126		
22.5	2437	17.1	51.3	3.2	Pass	20.3	0.107		
18.5	2462	17.7	58.9	3.2	Pass	20.9	0.123		

EMC Test Data

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Mode: n20

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
18.5	2412	17.6	57.5	3.2	Pass	20.8	0.120		
22.5	2437	20.7	117.5	3.2	Pass	23.9	0.245		
18.5	2462	17.5	56.2	3.2	Pass	20.7	0.117		

Mode: n40

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
17.5	2422	16.1	40.7	3.2	Pass	19.3	0.085		
23	2437	20.5	112.2	3.2	Pass	23.7	0.234		
18.5	2452	16.9	49.0	3.2	Pass	20.1	0.102		

Note 1:	802.11 g, n20 and n40 mode. Output power measured using a peak power meter, spurious limit is -20dBc.
Note 1:	802.11 b mode mode. Duty Cycle $\geq 98\%$. Output power measured using a spectrum analyzer (see plots below) with RBW= 1-5% of OBW, VB $\geq 3^*$ RBW, RMS detector, power averaging on, and power integration over the OBW, trace average 100 traces (option AVGSA-1, in KDB 558074). Spurious limit becomes -30dBc.
Note 2:	Power setting - the software power setting used during testing, included for reference only.
Note 3:	Power measured using average power meter (non-gated) and is included for reference only.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #2: Power spectral Density
 Date of Test: 9/26/2013
 Test Engineer: Joseph Cadigal
 Test Location: FT Lab#4B
 Config. Used: 1
 Config Change: none
 EUT Voltage: 3.3Vdc

Mode: 11b

Power Setting	Frequency (MHz)	PSD (dBm/xxkHz) ^{Note 1}	Limit dBm/3kHz	Result
19.5	2412	5.5	8.0	Pass
20	2437	6.0	8.0	Pass
20	2462	5.7	8.0	Pass

Mode: 11g

Power Setting	Frequency (MHz)	PSD (dBm/xxkHz) ^{Note 1}	Limit dBm/3kHz	Result
18.5	2412	3.0	8.0	Pass
22.5	2437	6.3	8.0	Pass
18.5	2462	2.7	8.0	Pass

Mode: n20


Power Setting	Frequency (MHz)	PSD (dBm/xxkHz) ^{Note 1}	Limit dBm/3kHz	Result
18.5	2412	3.0	8.0	Pass
22.5	2437	6.4	8.0	Pass
18.5	2462	2.8	8.0	Pass

Mode: n40

Power Setting	Frequency (MHz)	PSD (dBm/xxkHz) ^{Note 1}	Limit dBm/3kHz	Result
17.5	2422	-0.63	8.0	Pass
23	2437	4.1	8.0	Pass
18.5	2452	-0.30	8.0	Pass

Note 1: Test performed per method PKSPD, in KDB 558074. Power spectral density measured using: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$,
 $\text{VBW}=3*\text{RBW}$, peak detector, span = $1.5*\text{DTS BW}$, auto sweep time, max hold.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

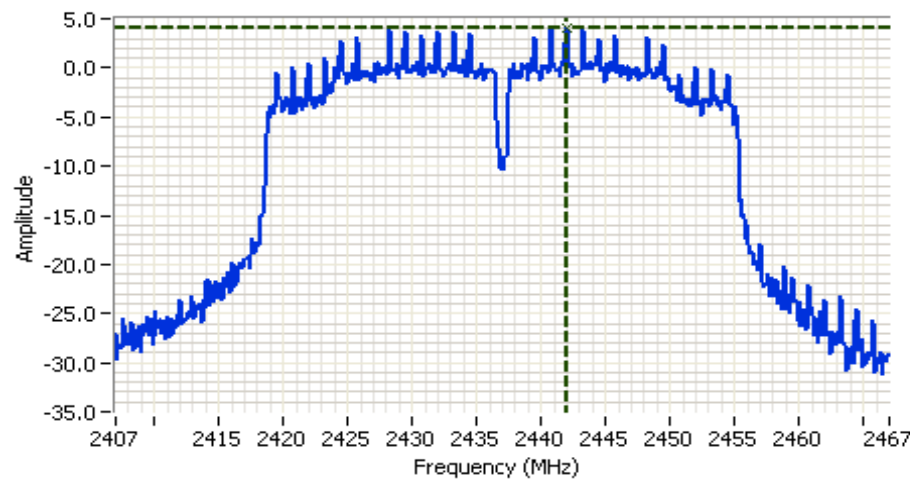

Analyzer Settings


Agilent Technologies, E4446A
 CF: 2437.000 MHz
 SPAN: 60.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 5.8ms
 Ref Lvl: 10.5 DBM

Comments

PSD: 4.07dBm/100kHz
 802.11 n40 mode
 Chain A

Cursor 1 2442.0000 4.07

0.0000 0.00

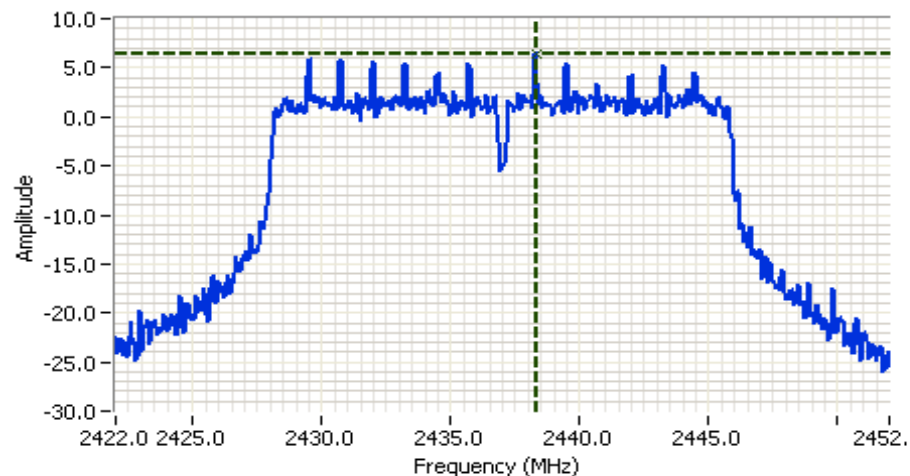

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2437.000 MHz
 SPAN: 30.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 2.9ms
 Ref Lvl: 10.5 DBM


Comments

PSD: 6.4dBm/100kHz
 802.11 n20 mode
 Chain A

Cursor 1 2438.3000 6.40

0.0000 0.00

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A


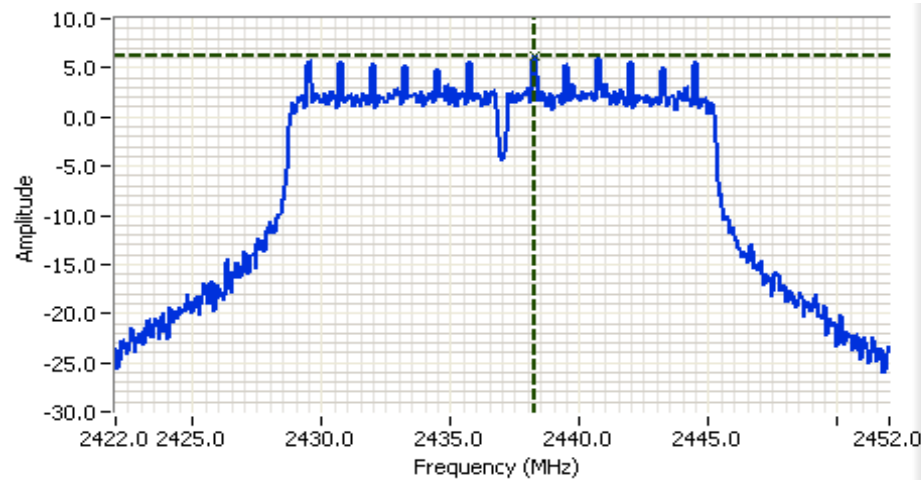


Analyzer Settings

Agilent Technologies, E4446A
 CF: 2437.000 MHz
 SPAN: 30.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 2.9ms
 Ref Lvl: 10.5 DBM

Comments

PSD: 6.25dBm/100kHz
 802.11 g mode
 Chain A

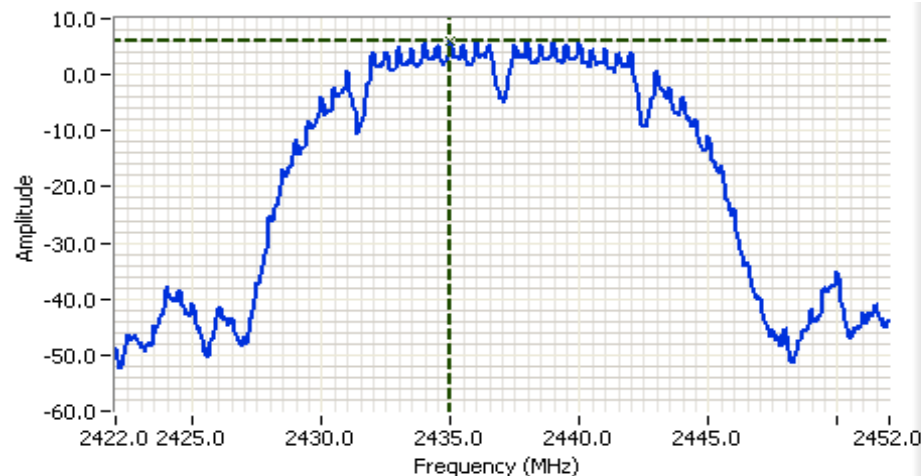

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2437.000 MHz
 SPAN: 30.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 2.9ms
 Ref Lvl: 10.5 DBM

Comments

PSD: 6.01dBm/100kHz
 802.11 b mode
 Chain A



Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #3: Signal Bandwidth

Mode: 11b

Power Setting	Frequency (MHz)	Bandwidth (MHz)		RBW Setting (MHz)	
		6dB	99%	6dB	99%
19.5	2412	12.05	14.28	100	300
20	2437	12.1	14.23	100	300
20	2462	12.05	14.28	100	300

Mode: 11g

Power Setting	Frequency (MHz)	Bandwidth (MHz)		RBW Setting (MHz)	
		6dB	99%	6dB	99%
18.5	2412	16.35	17.07	100	300
22.5	2437	16.3	17.57	100	300
18.5	2462	16.35	17.15	100	300

Mode: n20

Power Setting	Frequency (MHz)	Bandwidth (MHz)		RBW Setting (MHz)	
		6dB	99%	6dB	99%
18.5	2412	17.6	18.17	100	300
22.5	2437	17.6	18.57	100	300
18.5	2462	17.6	18.12	100	300


Mode: n40

Power Setting	Frequency (MHz)	Bandwidth (MHz)		RBW Setting (MHz)	
		6dB	99%	6dB	99%
17.5	2422	35.167	36.02	100	510
23	2437	35.083	36.27	100	510
18.5	2452	35.167	36.11	100	510

Note 1:

DTS BW: RBW=100kHz, VBW $\geq 3 \times$ RBW, peak detector, max hold, auto sweep time.
 99% BW: RBW=1-5% of 99%BW, VBW $\geq 3 \times$ RBW, peak detector, max hold, auto sweep time.

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

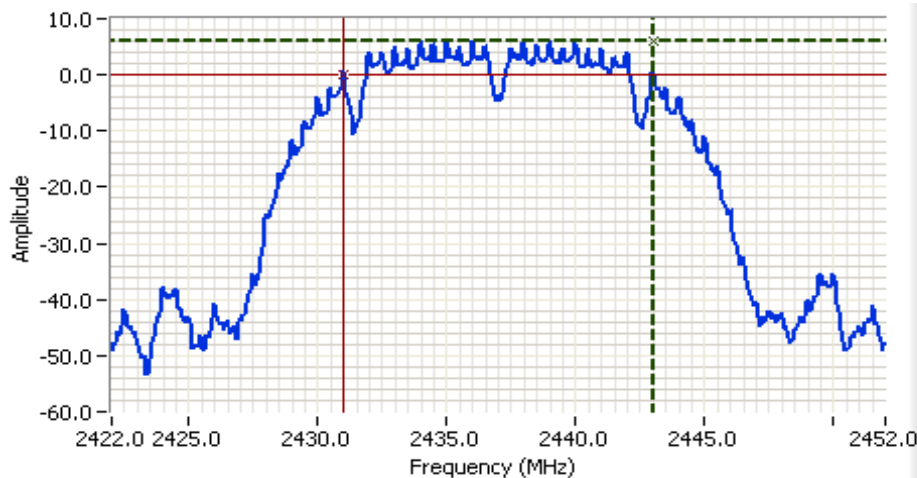

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2437.000 MHz
 SPAN: 30.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 2.9ms
 Ref Lvl: 10.5 DBM

Comments


6dB BW: 12.100 MHz
 802.11 b mode chain a

Cursor 1 2443.0500 5.96

Cursor 2 2430.9500 -0.04

Delta Freq. 12.100

Delta Amplitude 6.00

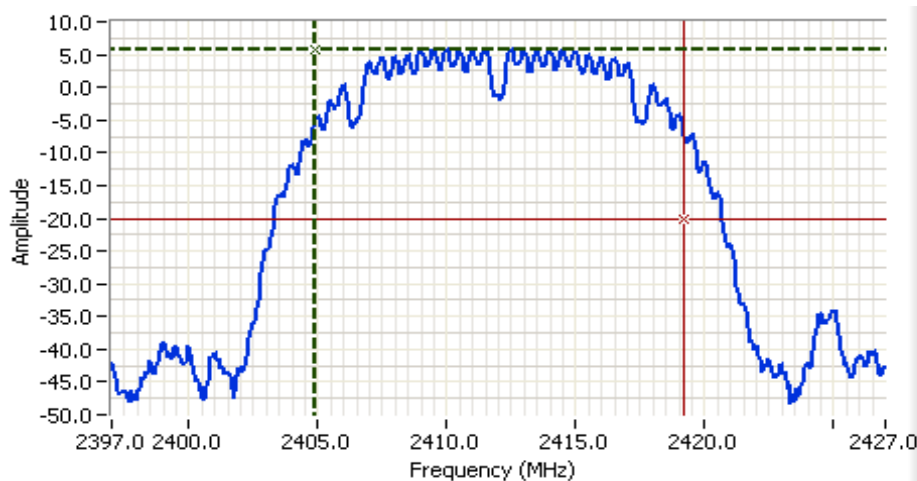

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2412.000 MHz
 SPAN: 30.000 MHz
 RB: 300 kHz
 VB: 910 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 1.0ms
 Ref Lvl: 10.5 DBM

Comments

99% power BW: 14.276 MHz
 802.11 b mode chain a

Cursor 1 2404.8869 5.80


Cursor 2 2419.1631 -20.20

Delta Freq. 14.276

Delta Amplitude 26.00



Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

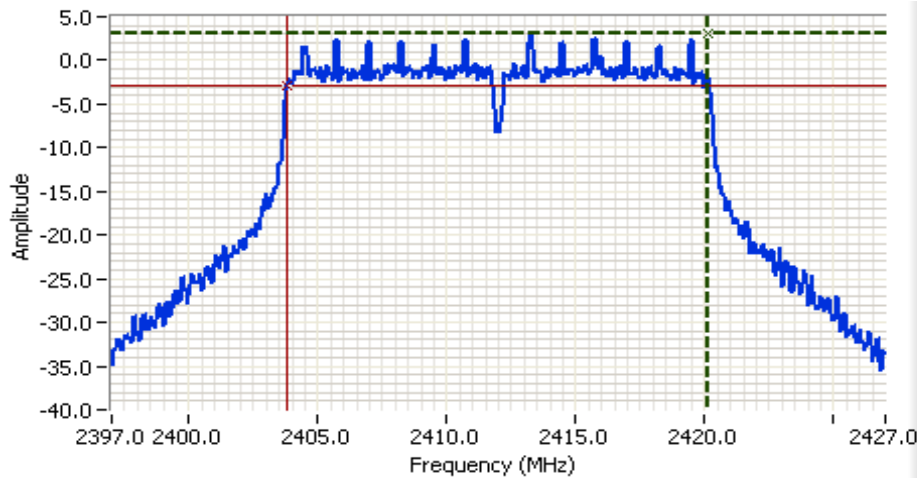

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2412.000 MHz
 SPAN: 30.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 2.9ms
 Ref Lvl: 10.5 DBM

Comments


6dB BW: 16.350 MHz
 802.11 g mode chain a

Cursor 1 2420.1500 3.02

Cursor 2 2403.8000 -2.98

Delta Freq. 16.350

Delta Amplitude 6.00

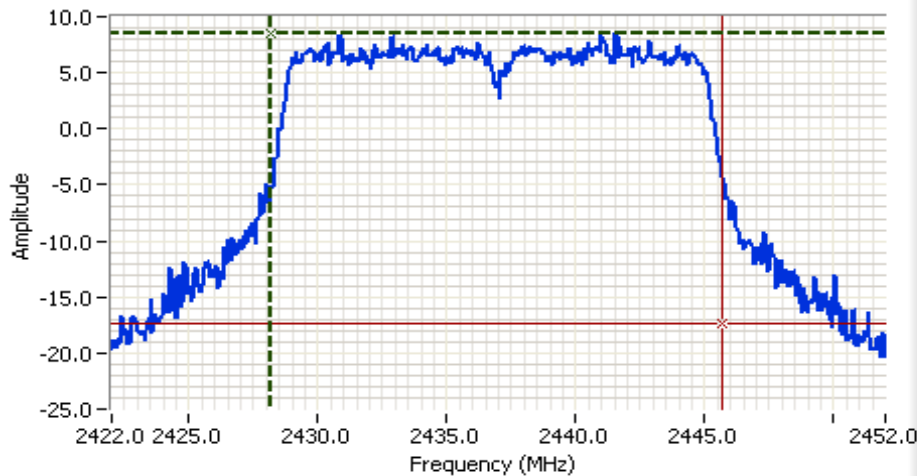

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2437.000 MHz
 SPAN: 30.000 MHz
 RB: 300 kHz
 VB: 910 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 1.0ms
 Ref Lvl: 10.5 DBM

Comments

99% power BW: 17.571 MHz
 802.11 g mode chain a

Cursor 1 2428.1398 8.56


Cursor 2 2445.7105 -17.44

Delta Freq. 17.571

Delta Amplitude 26.00



Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

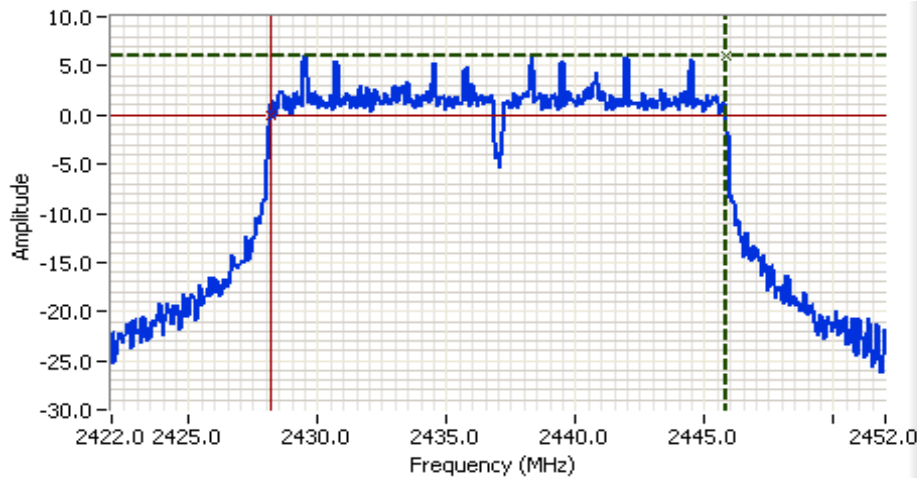


Analyzer Settings
 Agilent Technologies, E4446A
 CF: 2437.000 MHz
 SPAN: 30.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 2.9ms
 Ref Lvl: 10.5 DBM

Comments
 6dB BW: 17.600 MHz
 802.11 n20 mode chain a

Cursor 1 2445.8000 5.97
 Cursor 2 2428.2000 -0.03

Delta Freq. 17.600

Delta Amplitude 6.00

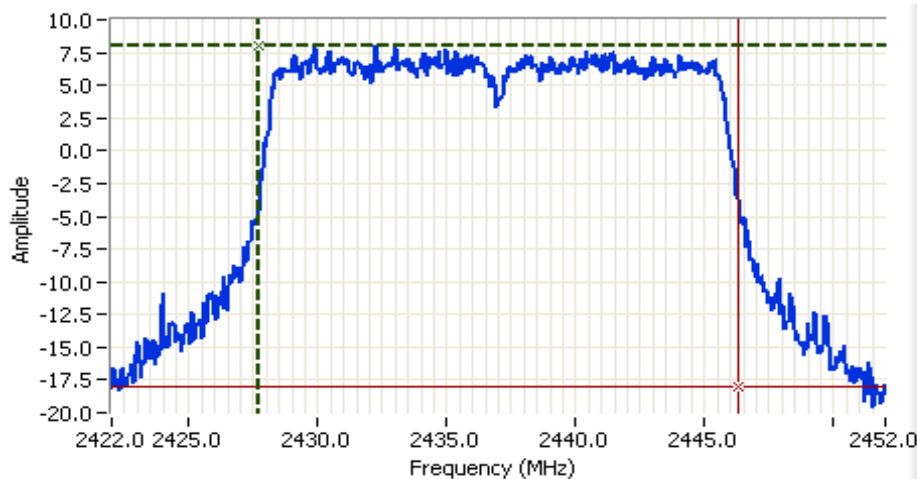

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 2437.000 MHz
 SPAN: 30.000 MHz
 RB: 300 kHz
 VB: 910 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 1.0ms
 Ref Lvl: 10.5 DBM

Comments
 99% power BW: 18.569 MHz
 802.11 n20 mode chain a


Cursor 1 2427.6905 8.00
 Cursor 2 2446.2596 -18.00

Delta Freq. 18.569

Delta Amplitude 26.00



Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

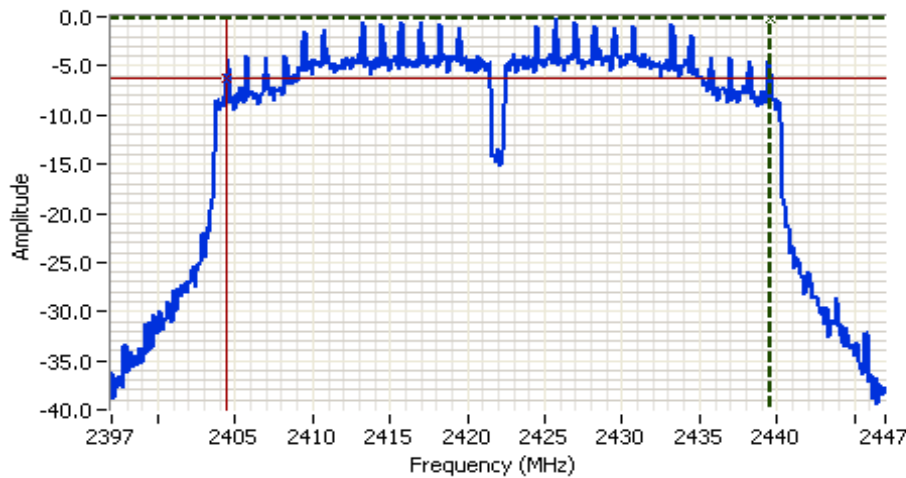


Analyzer Settings
 Agilent Technologies, E4446A
 CF: 2422.000 MHz
 SPAN: 50.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 4.8ms
 Ref Lvl: 10.5 DBM

Comments
 6dB BW: 35.167 MHz
 802.11 n40 mode chain a

Cursor 1 2439.5833 -0.24
 Cursor 2 2404.4167 -6.24

Delta Freq. 35.167

Delta Amplitude 6.00

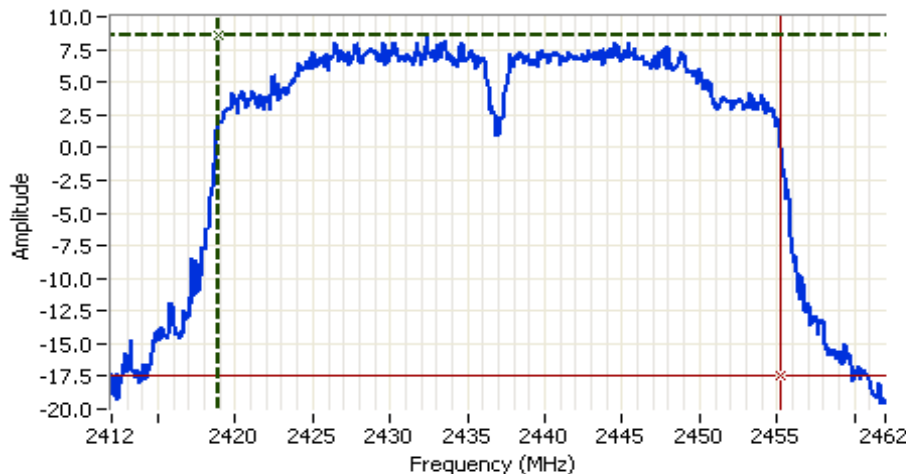

Analyzer Settings
 Agilent Technologies, E4446A
 CF: 2437.000 MHz
 SPAN: 50.000 MHz
 RB: 510 kHz
 VB: 1.500 MHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 1.0ms
 Ref Lvl: 10.5 DBM

Comments
 99% power BW: 36.273 MHz
 802.11 n40 mode chain a

Cursor 1 2418.9052 8.54
 Cursor 2 2455.1780 -17.46

Delta Freq. 36.273

Delta Amplitude 26.00



Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4a: Out of Band Spurious Emissions

Date of Test: 9/24/2013

Test Engineer: Joseph Cadigal

Test Location: FT Lab#4B

Config. Used: 1


Config Change: none

EUT Voltage: 3.3Vdc

Mode: 802.11b


Frequency (MHz)	Power Setting	Mode	Limit	Result
2412	20	b	-30dBc	Pass
2437	20	b	-30dBc	Pass
2462	20	b	-30dBc	Pass

Plots for low channel

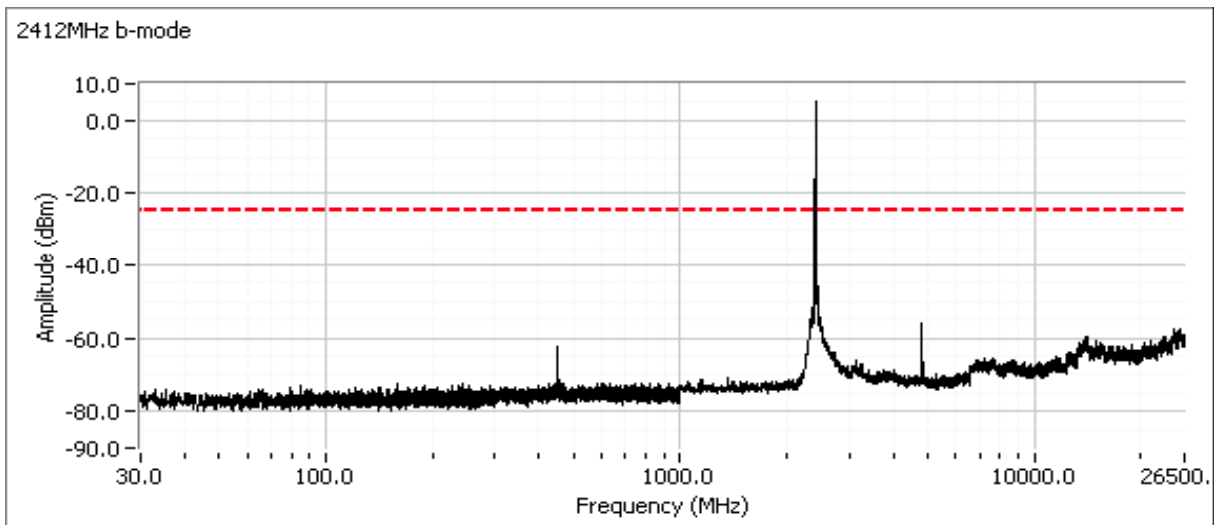


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Additional plot showing compliance with **-30dBc** limit from 2390 MHz to 2400 MHz. Radiated measurements used to show compliance with the limits in the restricted band below 2390 MHz.

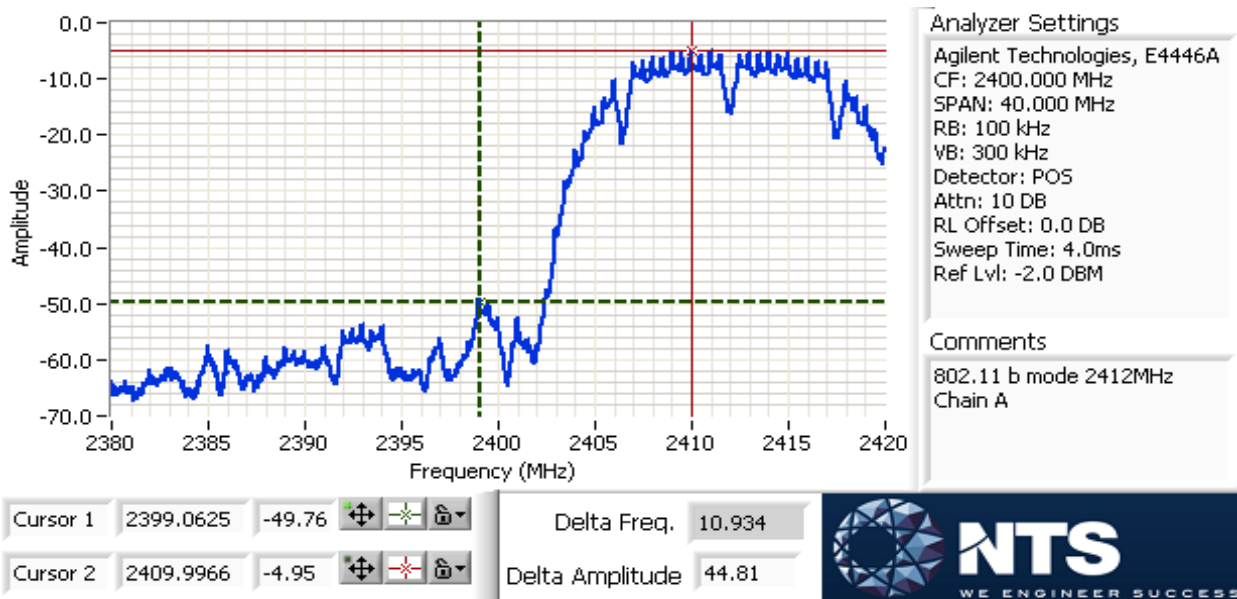


Plots for center channel

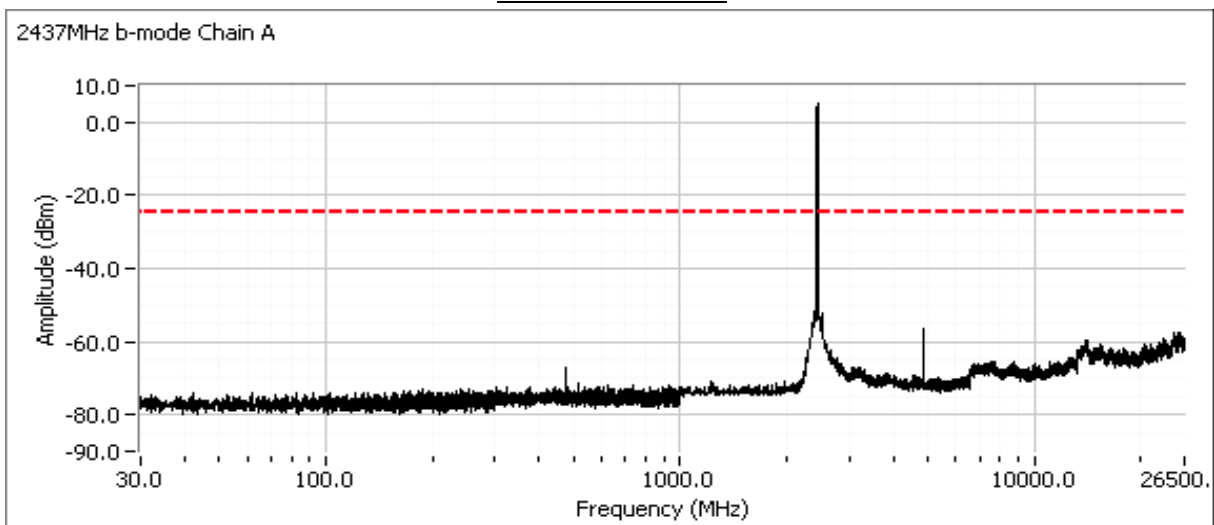

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Plots for high channel

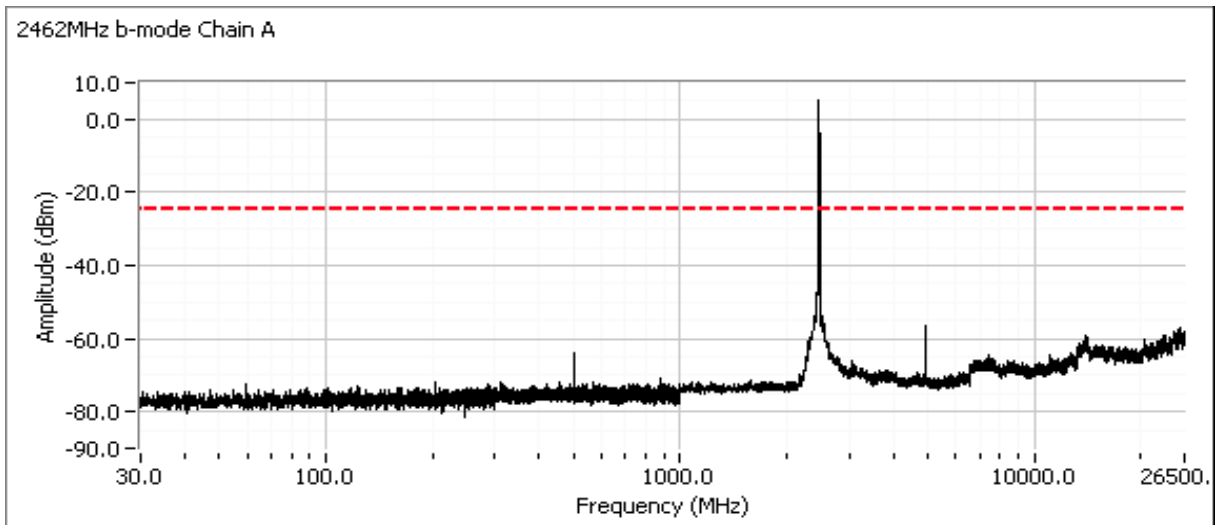


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4b: Out of Band Spurious Emissions
Date of Test: 9/24/2013 & 9/26/2013
Test Engineer: Joseph Cadigal
Test Location: FT Lab#4B
Mode: 802.11g

Config. Used: 1
Config Change: none
EUT Voltage: 3.3Vdc


Frequency (MHz)	Power Setting	Mode	Limit	Result
2412	19	g	-20dBc	Pass
2437	22.5	g	-20dBc	Pass
2462	19	g	-20dBc	Pass

Plots for low channel

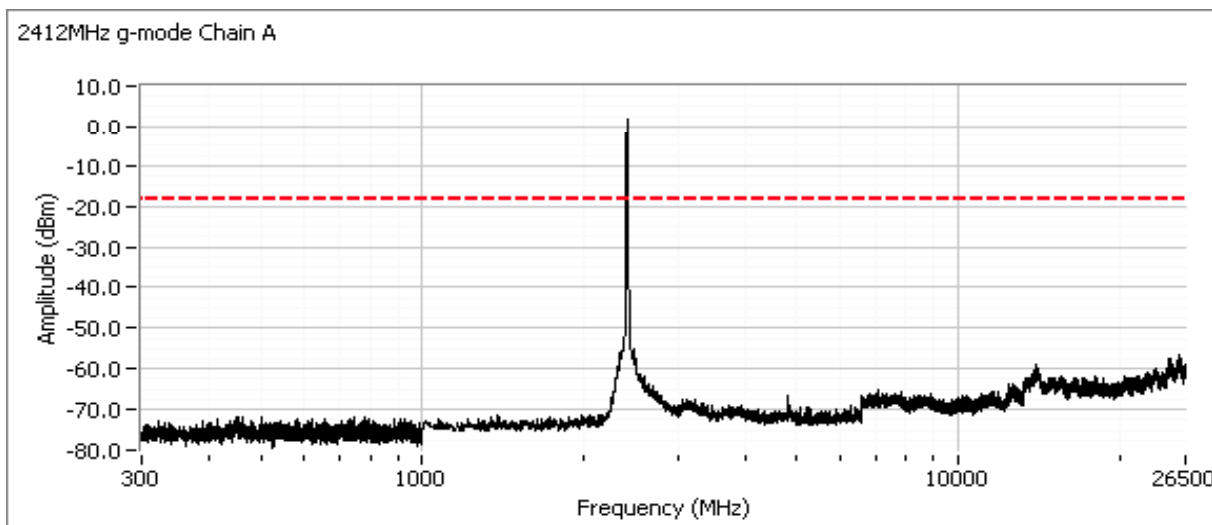


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Additional plot showing compliance with **-20dBc** limit from 2390 MHz to 2400 MHz. Radiated measurements used to show compliance with the limits in the restricted band below 2390 MHz.

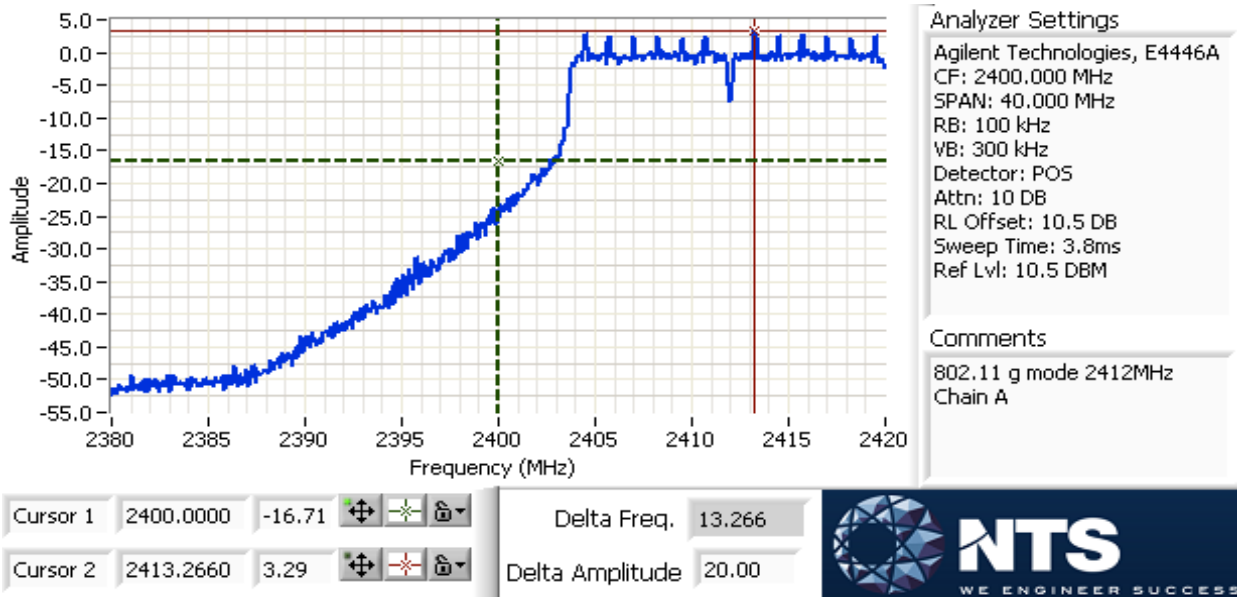


Plots for center channel

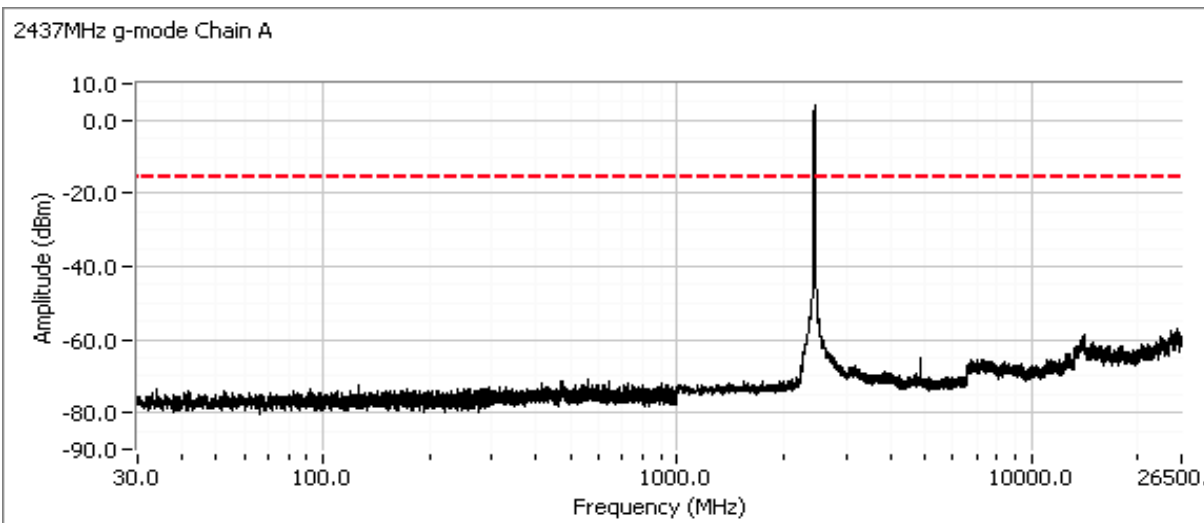

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Plots for high channel

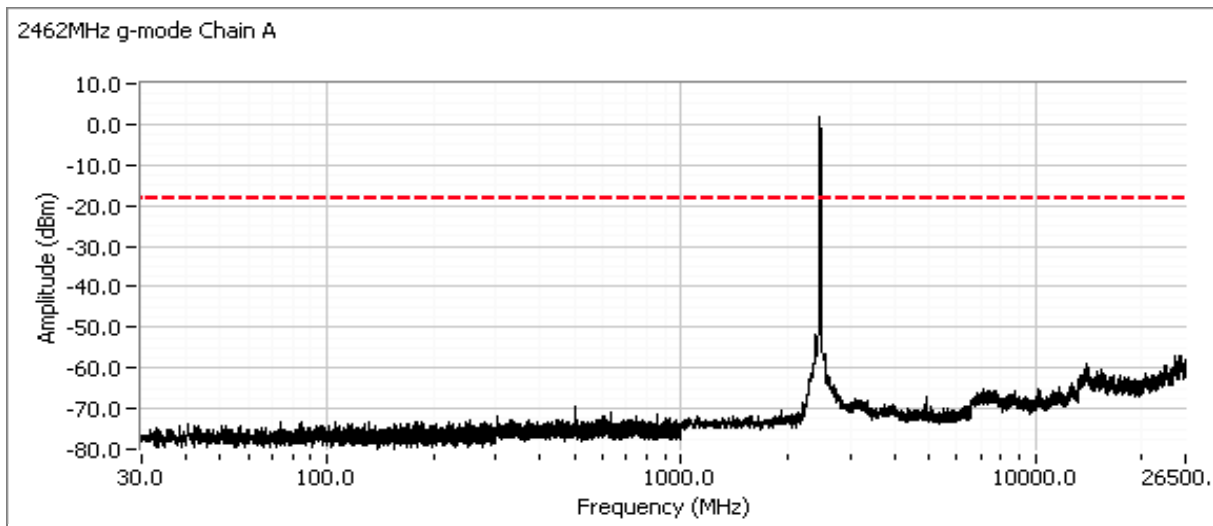


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4c: Out of Band Spurious Emissions
 Date of Test: 9/24/2013 & 9/26/2013
 Test Engineer: Joseph Cadigal
 Test Location: FT Lab#4B
 Mode: 802.11n20

Config. Used: 1
 Config Change: none
 EUT Voltage: 3.3Vdc


Frequency (MHz)	Power Setting	Mode	Limit	Result
2412	18.5	n20	-20dBc	Pass
2437	22.5	n20	-20dBc	Pass
2462	19	n20	-20dBc	Pass

Plots for low channel

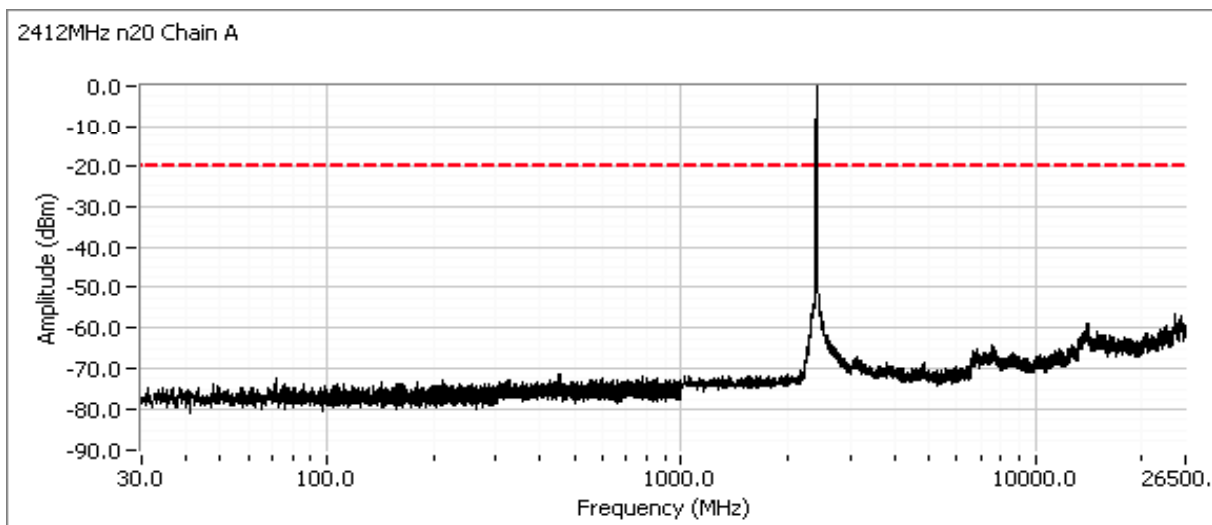


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Additional plot showing compliance with **-20dBc** limit from 2390 MHz to 2400 MHz. Radiated measurements used to show compliance with the limits in the restricted band below 2390 MHz.

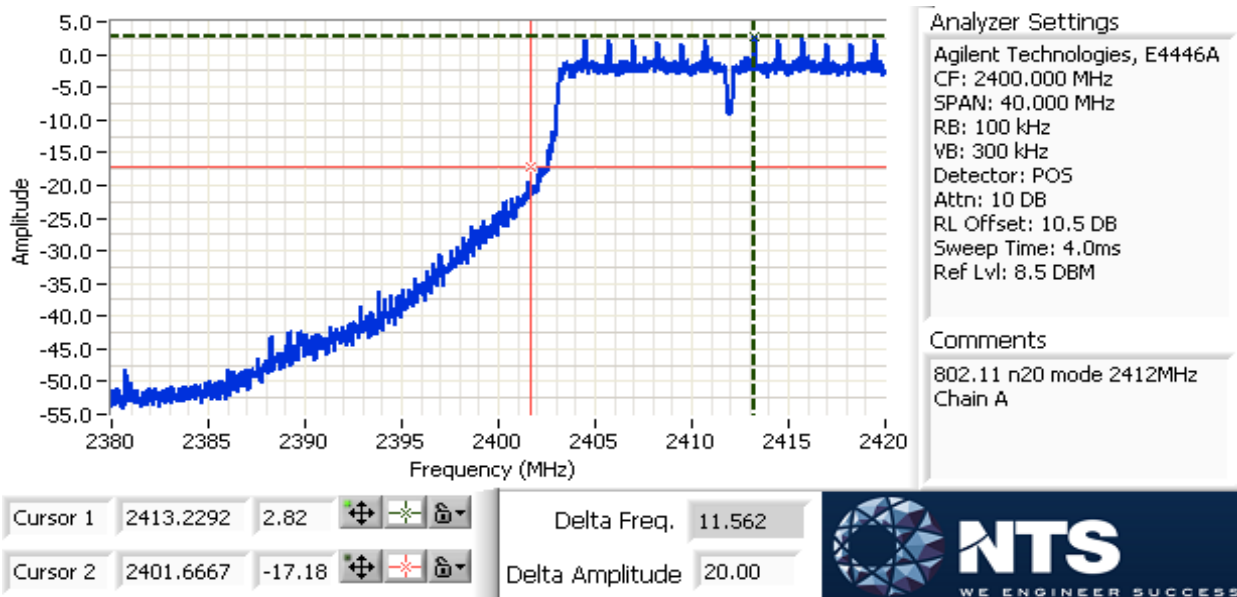


Plots for center channel

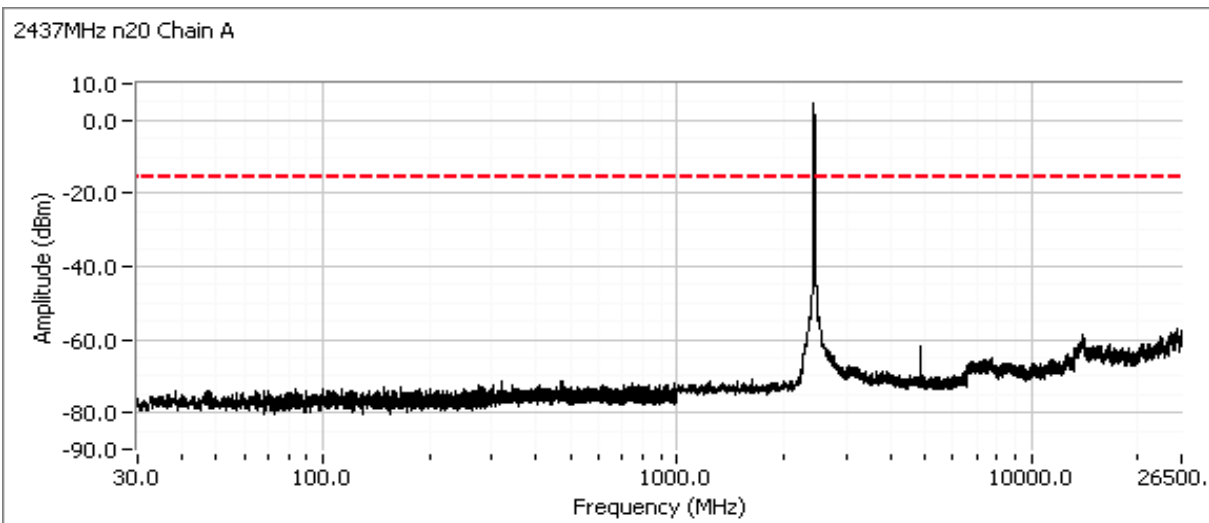

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Plots for high channel

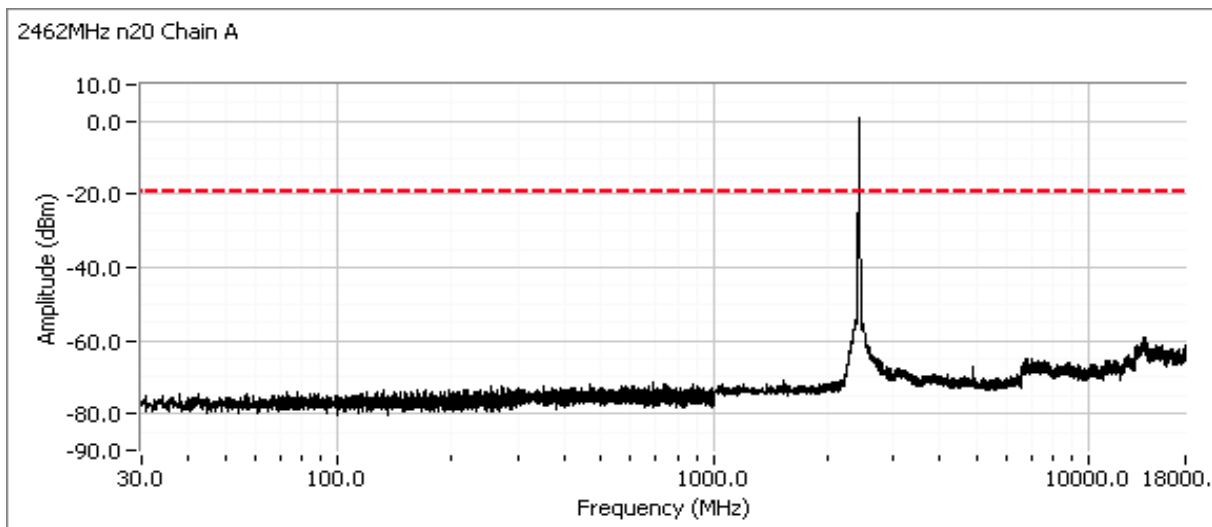

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4d: Out of Band Spurious Emissions

Date of Test: 9/25/2013

Test Engineer: Jack Liu

Test Location: FT Lab# 4a

Mode: 802.11n40


Config. Used: 1

Config Change: none

EUT Voltage: 3.3Vdc


Frequency (MHz)	Power Setting	Mode	Limit	Result
2422	17.5	n40	-20dBc	Pass
2437	23.0	n40	-20dBc	Pass
2452	18.5	n40	-20dBc	Pass

Plots for low channel

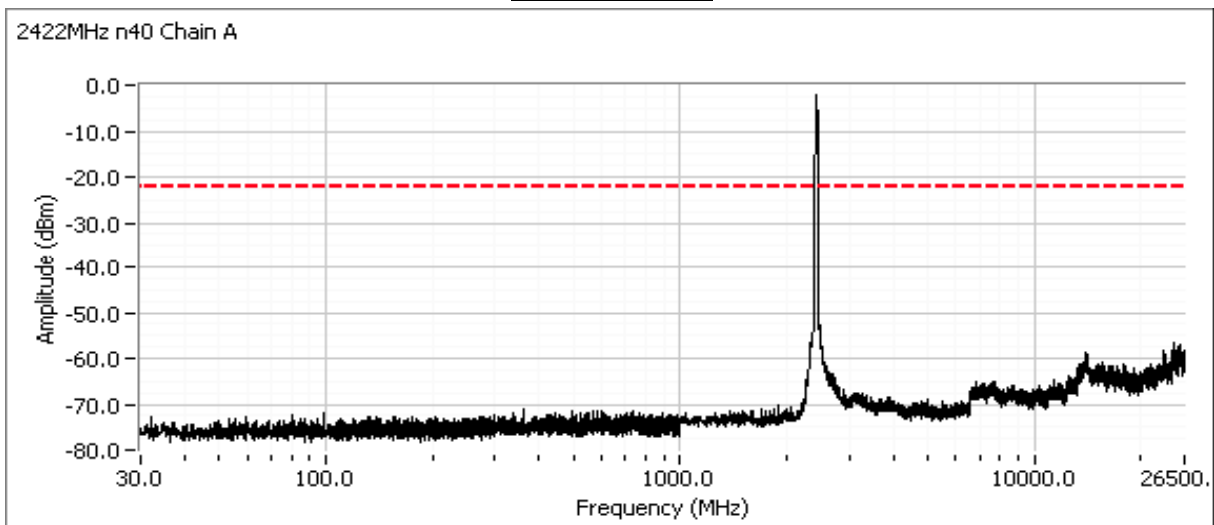

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

Additional plot showing compliance with **-20dBc** limit from 2390 MHz to 2400 MHz. Radiated measurements used to show compliance with the limits in the restricted band below 2390 MHz.

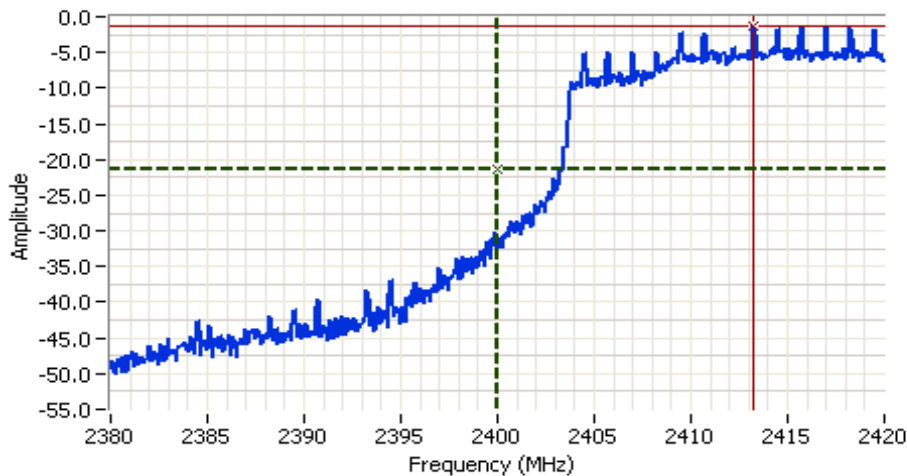

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2400.000 MHz
 SPAN: 40.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 10.5 DB
 Sweep Time: 3.8ms
 Ref Lvl: 10.0 DBM


Comments

802.11 n40 mode 2422MHz
 Chain A

Cursor 1	2400.0000	-21.33	
Cursor 2	2413.2666	-1.33	


Delta Freq. 13.267
 Delta Amplitude 20.00

Plots for center channel

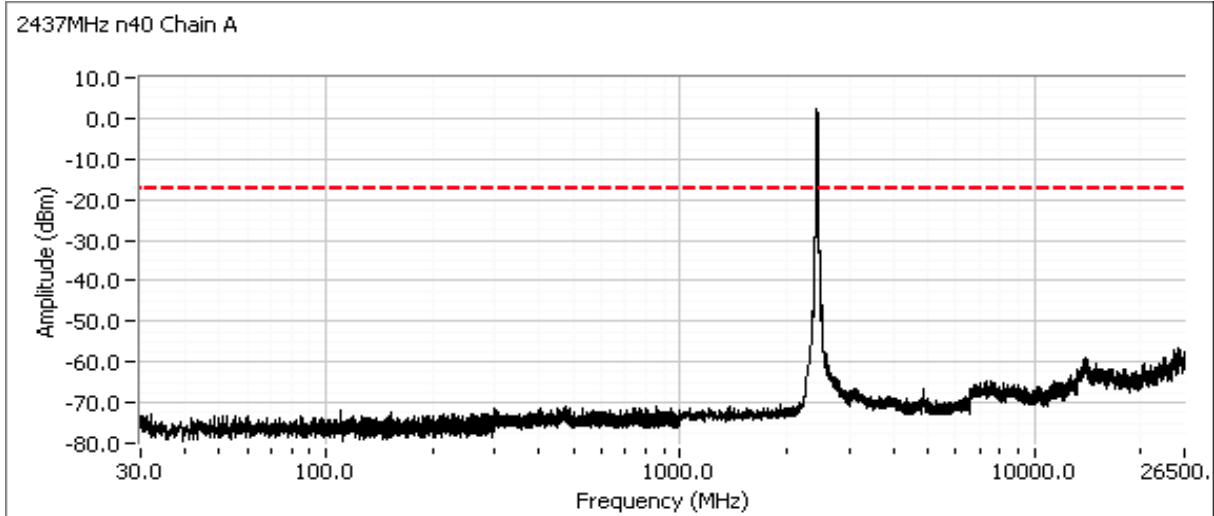

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Plots for high channel

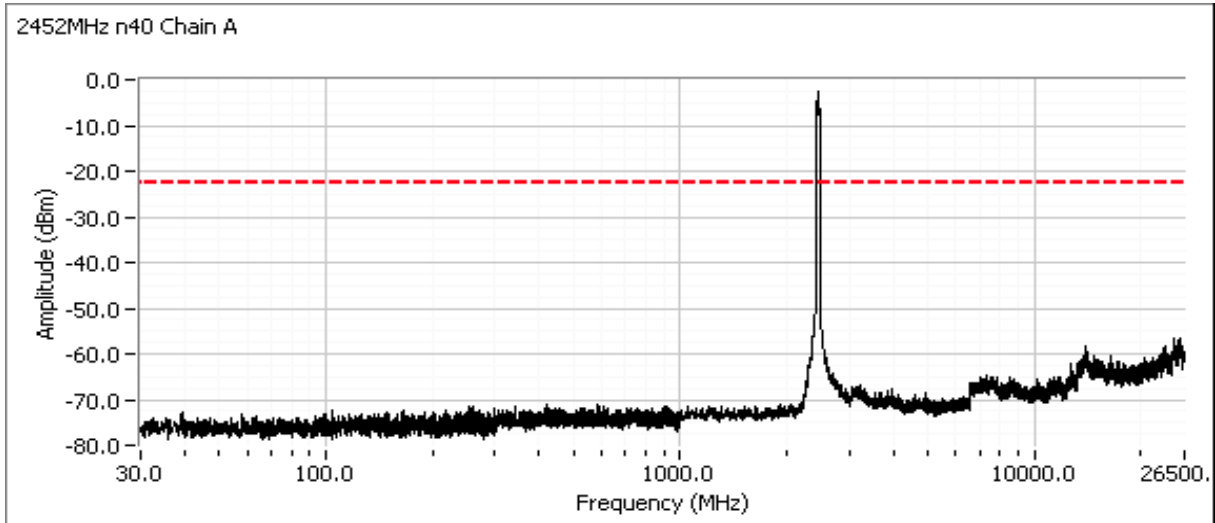

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements Power, PSD, Bandwidth and Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Ambient Conditions:

Temperature: 25 °C
Rel. Humidity: 40 %

Summary of Results

Run #	Pwr setting	Avg Pwr	Test Performed	Limit	Pass / Fail	Result / Margin
1			Output Power	15.247(b)	Pass	802.11b: 14.3 dBm 802.11g: 19.2 dBm 802.11n20: 19.2 dBm 802.11n40: 17.2 dBm
2			Power spectral Density (PSD)	15.247(d)	Pass	b: 4.6 dBm/100kHz g: 5.4 dBm/100kHz n20: 5.6 dBm/100kHz n40: 1.2 dBm/100kHz
3			Minimum 6dB Bandwidth	15.247(a)	Pass	802.11b: 12.05MHz 802.11g: 16.33MHz 802.11n20: 17.57MHz 802.11n40: 35.09MHz
3			99% Bandwidth	RSS GEN	-	802.11b: 14.22MHz 802.11g: 17.81MHz 802.11n20: 18.75MHz 802.11n40: 36.07MHz
4			Spurious emissions	15.247(b)	Pass	b mode: All Emissions below -30dBc limit
4			Spurious emissions	15.247(b)	Pass	g/n20/n40 modes: All Emissions below - 20dBc limit

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
11b	1 Mb/s	0.99	Yes	5.94	0.0	0.0	168
11g	6 Mb/s	0.99	Yes	5.71	0.0	0.0	175
n20	MCS0	0.99	Yes	5.36	0.0	0.0	187
n40	MCS0	0.97	Yes	2.88	0.1	0.2	347

Sample Notes

MAC Address: 001500DC7B25 DRTU Tool Version 1.7.1-752, Driver version 16.6.0.1 (WiFi only)

EMC Test Data

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1: Output Power

Date of Test: 9/26/2013

Test Engineer: Jack Liu

Test Location: FT Lab# 4a

Config. Used: 1

Config Change: none

EUT Voltage: 3.3Vdc

Mode: 11b

Power Setting ²	Frequency (MHz)	Output Power (dBm) ¹	mW	Antenna Gain (dBi)	Result	EIRP dBm	W	Output Power (dBm) ³	mW
22.5	2412	14.3	27.2	3.2	Pass	17.5	0.057	14.0	25.1
22.5	2437	14.2	26.5	3.2	Pass	17.4	0.055	14.0	25.1
22.5	2462	14.1	25.8	3.2	Pass	17.3	0.054	14.1	25.7

Date of Test: 9/25/2013

Test Engineer: Jack Liu

Test Location: FT Lab# 4a

Config. Used: 1

Config Change: none

EUT Voltage: 3.3Vdc

Mode: 11g

Power Setting ²	Frequency (MHz)	Output Power (dBm) ¹	mW	Antenna Gain (dBi)	Result	EIRP dBm	W	Output Power (dBm) ³	mW
21.0	2412	15.6	36.3	3.2	Pass	18.8	0.076	12.1	16.2
26.0	2437	19.2	83.2	3.2	Pass	22.4	0.174	15.4	34.7
22.0	2462	16.5	44.7	3.2	Pass	19.7	0.093	13.5	22.4

Mode: n20

Power Setting ²	Frequency (MHz)	Output Power (dBm) ¹	mW	Antenna Gain (dBi)	Result	EIRP dBm	W	Output Power (dBm) ³	mW
21.0	2412	15.7	37.2	3.2	Pass	18.9	0.078	12.1	16.2
26.0	2437	19.2	83.2	3.2	Pass	22.4	0.174	15.4	34.7
22.0	2462	16.5	44.7	3.2	Pass	19.7	0.093	13.4	21.9

Mode: n40

Power Setting ²	Frequency (MHz)	Output Power (dBm) ¹	mW	Antenna Gain (dBi)	Result	EIRP dBm	W	Output Power (dBm) ³	mW
19.0	2422	12.8	19.1	3.2	Pass	16.0	0.040	10.2	10.5
23.5	2437	17.2	52.5	3.2	Pass	20.4	0.110	13.6	22.9
23.0	2452	16.8	47.9	3.2	Pass	20.0	0.100	13.1	20.4

Note 1: 802.11 g, n20 and n40 mode. Output power measured using a peak power meter, spurious limit is -20dBc.

Note 1: 802.11 b mode mode. Duty Cycle $\geq 98\%$. Output power measured using a spectrum analyzer (see plots below) with RBW= 1-5% of OBW, VB $\geq 3^*$ RBW, RMS detector, power averaging on, and power integration over the OBW, trace average 100 traces (option AVGSA-1, in KDB 558074). Spurious limit becomes -30dBc.

Note 2: Power setting - the software power setting used during testing, included for reference only.

Note 3: Power measured using average power meter (non-gated) and is included for reference only.



EMC Test Data

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #2: Power spectral Density

Date of Test: 9/26/2013
 Test Engineer: Jack Liu
 Test Location: FT Lab# 4a

Config. Used: 1
 Config Change: none
 EUT Voltage: 3.3Vdc

Mode: 11b

Power Setting	Frequency (MHz)	PSD (dBm/100kHz) ^{Note 1}	Limit dBm/3kHz	Result
22.5	2412	4.6	8.0	Pass
22.5	2437	4.5	8.0	Pass
22.5	2462	4.6	8.0	Pass

Mode: 11g

Power Setting	Frequency (MHz)	PSD (dBm/100kHz) ^{Note 1}	Limit dBm/3kHz	Result
21	2412	1.5	8.0	Pass
26	2437	5.4	8.0	Pass
22	2462	2.3	8.0	Pass

Mode: n20


Power Setting	Frequency (MHz)	PSD (dBm/100kHz) ^{Note 1}	Limit dBm/3kHz	Result
21	2412	1.7	8.0	Pass
26	2437	5.6	8.0	Pass
22	2462	2.1	8.0	Pass

Mode: n40

Power Setting	Frequency (MHz)	PSD (dBm/100kHz) ^{Note 1}	Limit dBm/3kHz	Result
19	2422	-2.7	8.0	Pass
23.5	2437	1.2	8.0	Pass
23	2452	0.6	8.0	Pass

Note 1: Test performed per method PKSPD, in KDB 558074. Power spectral density measured using: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$, $\text{VBW}=3*\text{RBW}$, peak detector, span = $1.5*\text{DTS BW}$, auto sweep time, max hold.

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A


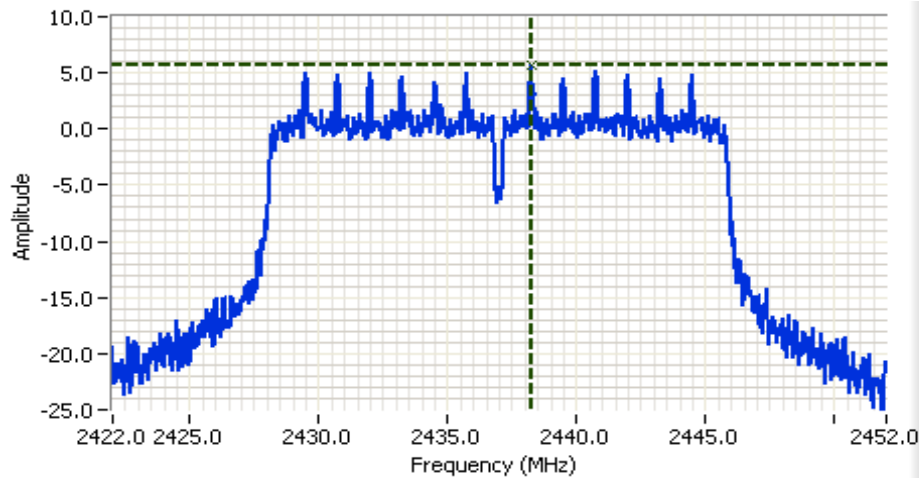


Analyzer Settings

Agilent Technologies, E4446A
 CF: 2437.000 MHz
 SPAN: 30.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 2.9ms
 Ref Lvl: 20.0 DBM

Comments

PSD: 5.64dBm/100kHz
 802.11 n20 mode chainB

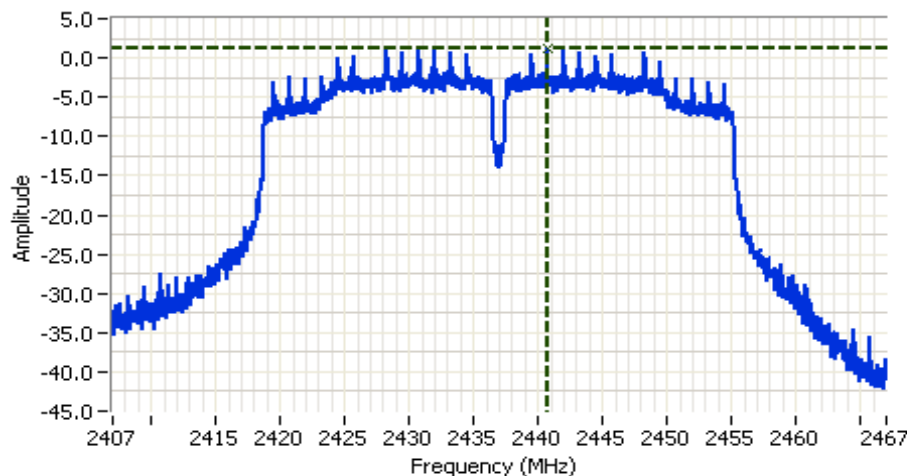


Analyzer Settings

Agilent Technologies, E4446A
 CF: 2437.000 MHz
 SPAN: 60.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 5.9ms
 Ref Lvl: 20.0 DBM

Comments

PSD: 1.21dBm/100kHz
 802.11 n40 mode chainB



Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #3: Signal Bandwidth

Date of Test: 9/26/2013

Test Engineer: Jack Liu

Test Location: FT Lab# 4a

Config. Used: 1

Config Change: none

EUT Voltage: 3.3Vdc

Mode: 11b

Power Setting	Frequency (MHz)	Bandwidth (MHz)		RBW Setting (kHz)	
		6dB	99%	6dB	99%
22.5	2412	12.05	14.22	100	300
22.5	2437	12.05	14.21	100	300
22.5	2462	12.05	14.19	100	300

Mode: 11g

Power Setting	Frequency (MHz)	Bandwidth (MHz)		RBW Setting (kHz)	
		6dB	99%	6dB	99%
21	2412	16.33	16.97	100	300
26	2437	16.33	17.81	100	300
22	2462	16.34	16.95	100	300

Mode: n20

Power Setting	Frequency (MHz)	Bandwidth (MHz)		RBW Setting (kHz)	
		6dB	99%	6dB	99%
21	2412	17.59	18.11	100	300
26	2437	17.59	18.75	100	300
22	2462	17.57	18.05	100	300

Mode: n40


Power Setting	Frequency (MHz)	Bandwidth (MHz)		RBW Setting (kHz)	
		6dB	99%	6dB	99%
19	2422	35.09	36.03	100	510
23.5	2437	35.09	36.07	100	510
23	2452	35.09	36.05	100	510

Note 1:

DTS BW: RBW=100kHz, VBW ≥ 3*RBW, peak detector, max hold, auto sweep time.

99% BW: RBW=1-5% of 99%BW, VBW ≥ 3*RBW, peak detector, max hold, auto sweep time.

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

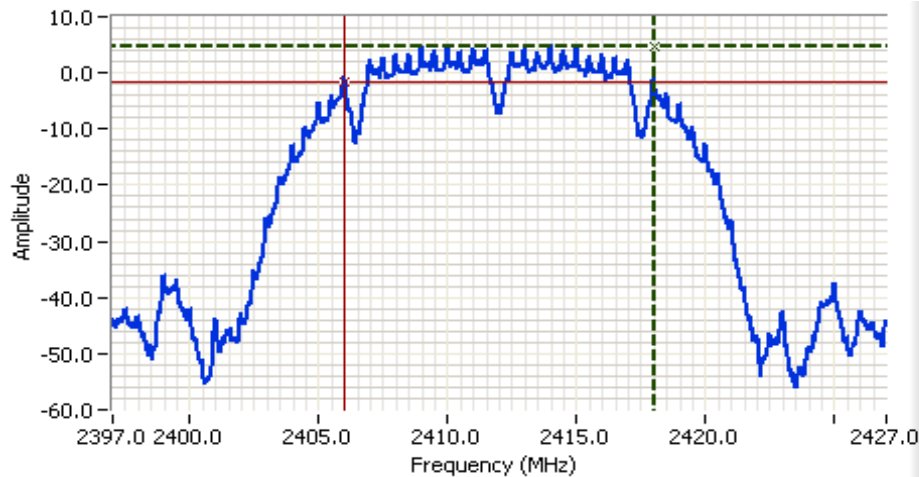

Analyzer Settings


Agilent Technologies, E4446A
 CF: 2412.000 MHz
 SPAN: 30.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 2.9ms
 Ref Lvl: 20.0 DBM

Comments

6dB BW: 12.051 MHz
 802.11 b mode chainB

Cursor 1 2418.0105 4.54
 Cursor 2 2405.9595 -1.46

Delta Freq. 12.051
 Delta Amplitude 6.00

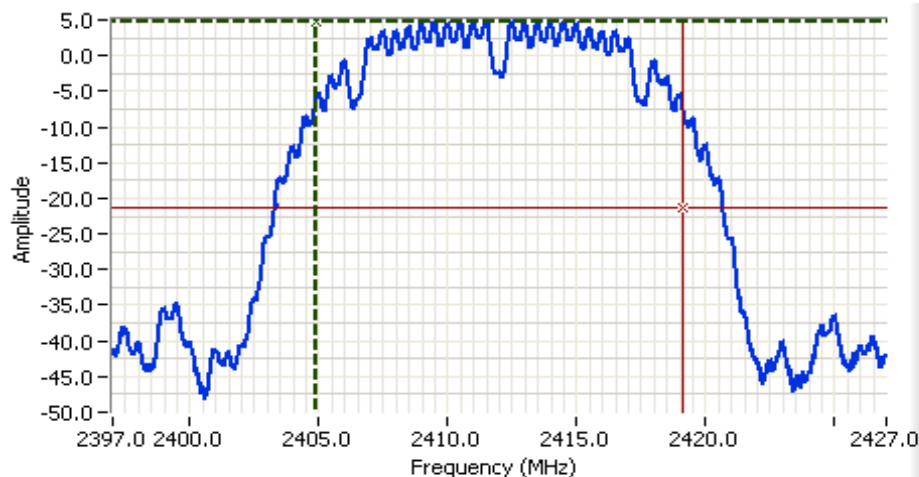

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2412.000 MHz
 SPAN: 30.000 MHz
 RB: 300 kHz
 VB: 910 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 1.1ms
 Ref Lvl: 20.0 DBM

Comments


99% power BW: 14.220 MHz
 802.11 b mode chainB

Cursor 1 2404.8750 4.79
 Cursor 2 2419.0950 -21.21

Delta Freq. 14.220
 Delta Amplitude 26.00



Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

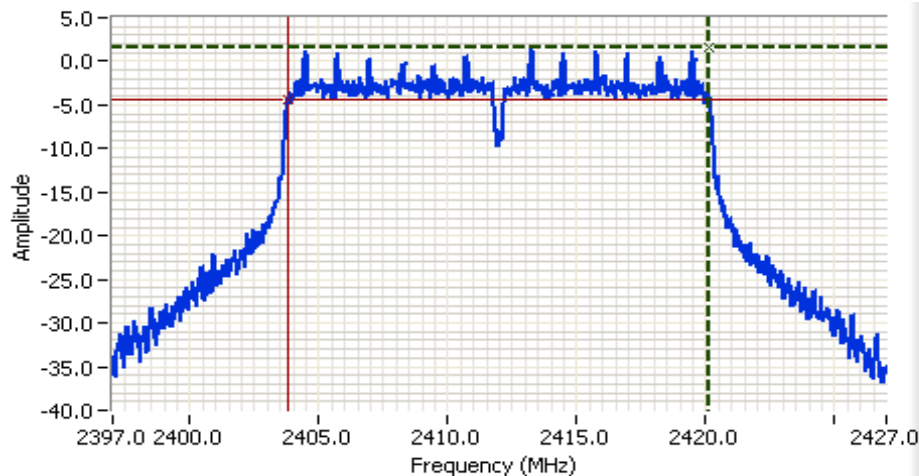

Analyzer Settings


Agilent Technologies, E4446A
 CF: 2412.000 MHz
 SPAN: 30.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 2.9ms
 Ref Lvl: 20.0 DBM

Comments

6dB BW: 16.328 MHz
 802.11 g mode chainB

Cursor 1	2420.1566	1.62	
Cursor 2	2403.8284	-4.38	

Delta Freq. 16.328
 Delta Amplitude 6.00

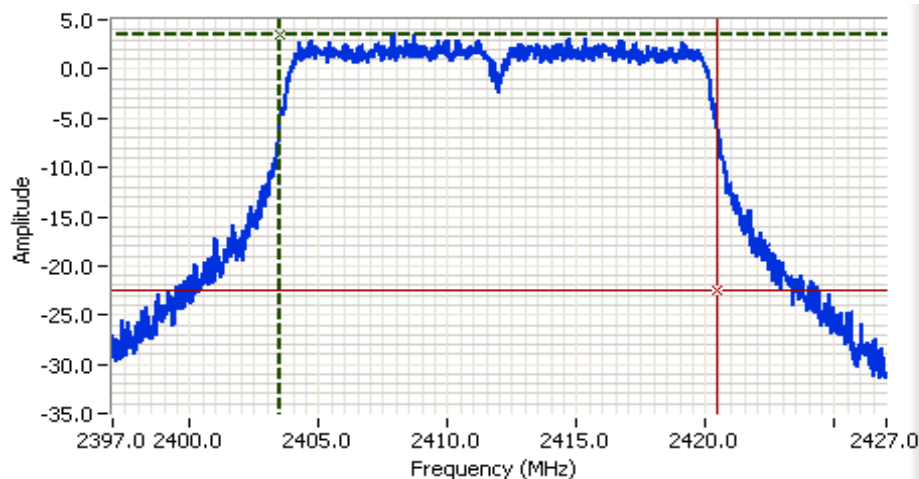

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2412.000 MHz
 SPAN: 30.000 MHz
 RB: 300 kHz
 VB: 910 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 1.1ms
 Ref Lvl: 20.0 DBM

Comments


99% power BW: 16.965 MHz
 802.11 g mode chainB

Cursor 1	2403.4950	3.57	
Cursor 2	2420.4600	-22.43	

Delta Freq. 16.965
 Delta Amplitude 26.00



Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

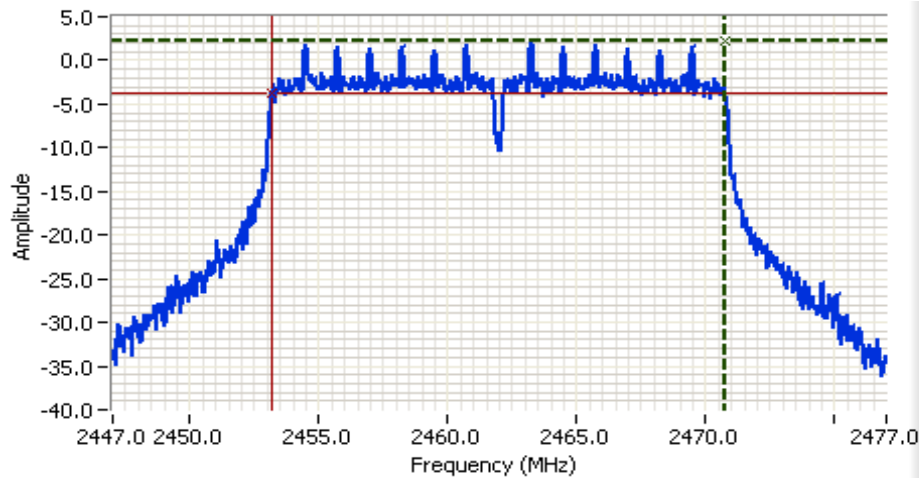

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2462.000 MHz
 SPAN: 30.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 2.9ms
 Ref Lvl: 20.0 DBM


Comments

6dB BW: 17.574 MHz
 802.11 n20 mode chainB

Cursor 1 2470.7719 2.32
 Cursor 2 2453.1981 -3.68

Delta Freq. 17.574

Delta Amplitude 6.00

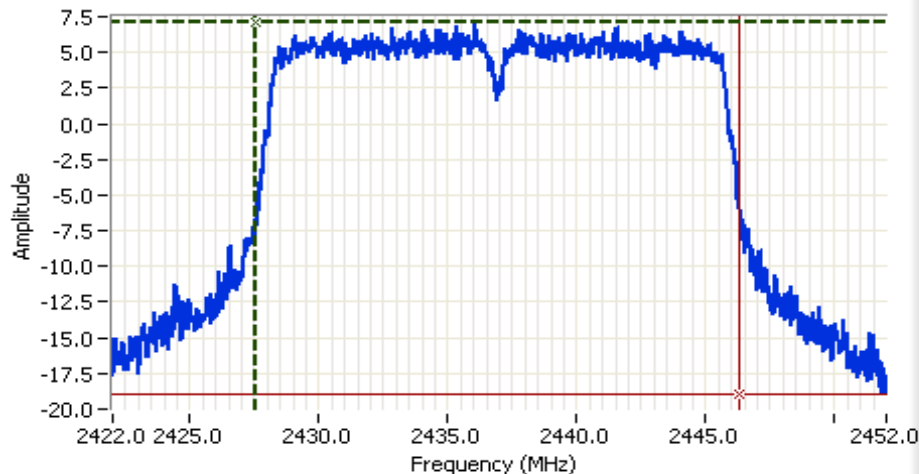

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2437.000 MHz
 SPAN: 30.000 MHz
 RB: 300 kHz
 VB: 910 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 1.1ms
 Ref Lvl: 20.0 DBM

Comments

99% power BW: 18.750 MHz
 802.11 n20 mode chainB


Cursor 1 2427.5650 7.06
 Cursor 2 2446.3150 -18.94

Delta Freq. 18.750

Delta Amplitude 26.00



Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

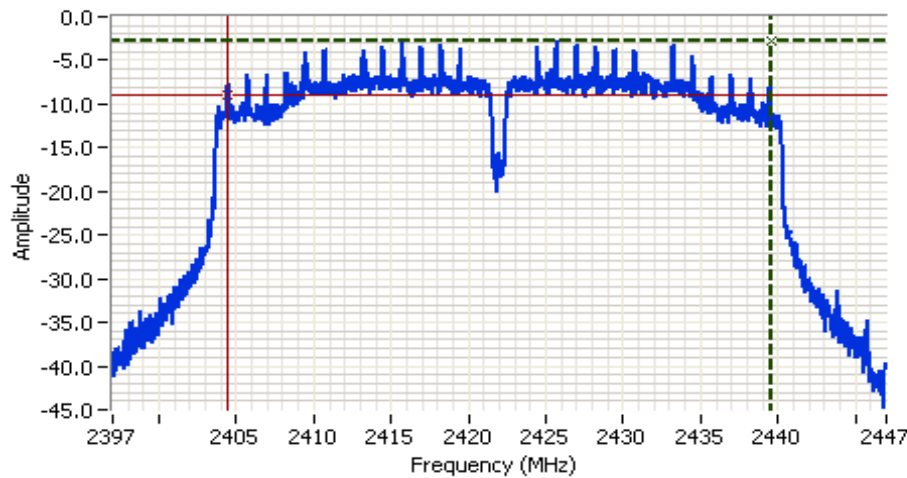

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2422.000 MHz
 SPAN: 50.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 4.8ms
 Ref Lvl: 20.0 DBM


Comments

6dB BW: 35.093 MHz
 802.11 n40 mode chainB

Cursor 1	2439.5463	-2.86	
Cursor 2	2404.4537	-8.86	

Delta Freq. 35.093

Delta Amplitude 6.00

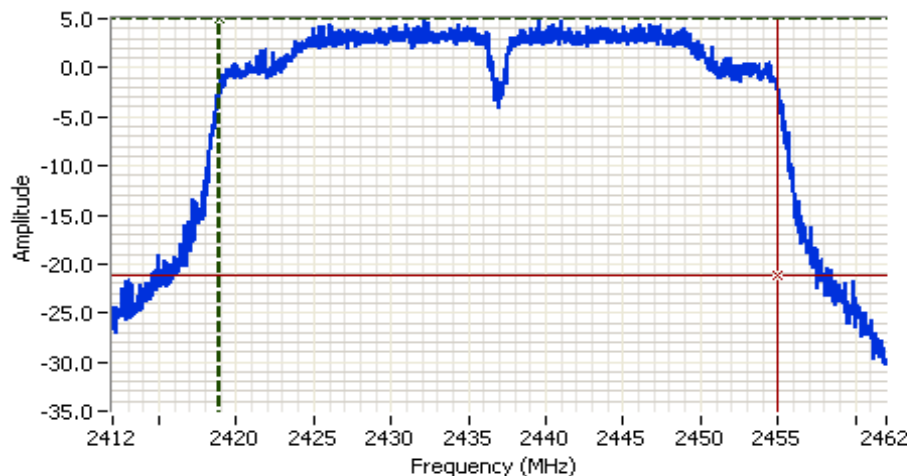

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2437.000 MHz
 SPAN: 50.000 MHz
 RB: 510 kHz
 VB: 1.500 MHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 1.1ms
 Ref Lvl: 20.0 DBM

Comments

99% power BW: 36.075 MHz
 802.11 n40 mode chainB

Cursor 1	2418.9500	4.92	
Cursor 2	2455.0250	-21.08	

Delta Freq. 36.075

Delta Amplitude 26.00



Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4a: Out of Band Spurious Emissions

Date of Test: 9/25/2013

Test Engineer: Jack Liu

Test Location: FT Lab# 4a

Mode: 802.11b


Config. Used: 1

Config Change: none

EUT Voltage: 3.3Vdc


Frequency (MHz)	Power Setting	Mode	Limit	Result
2412	22.5	b	-30dBc	Pass
2437	22.5	b	-30dBc	Pass
2462	22.5	b	-30dBc	Pass

Plots for low channel

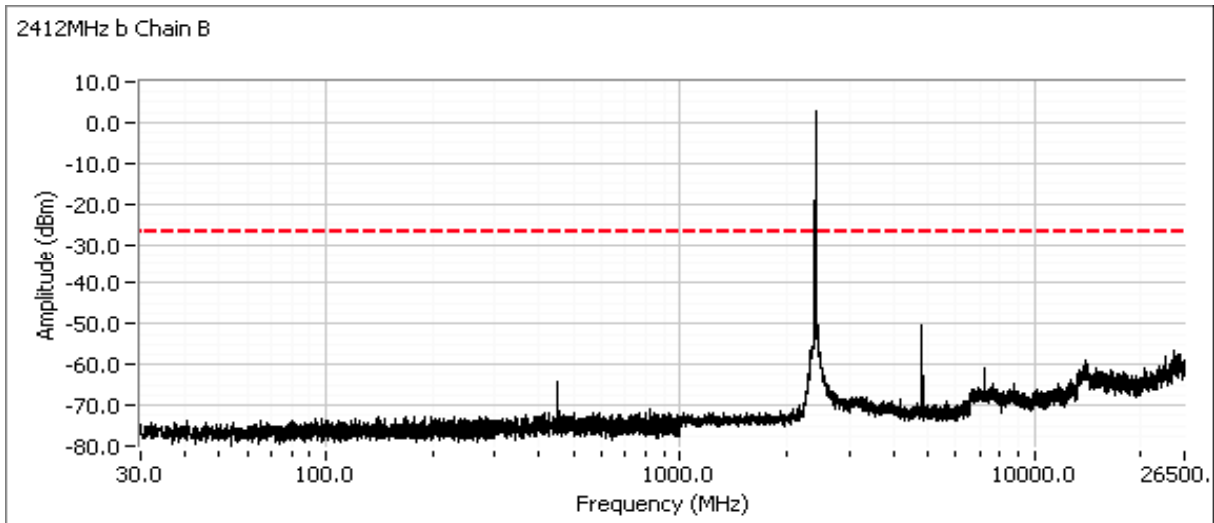


Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

Additional plot showing compliance with **-30dBc** limit from 2390 MHz to 2400 MHz. Radiated measurements used to show compliance with the limits in the restricted band below 2390 MHz.

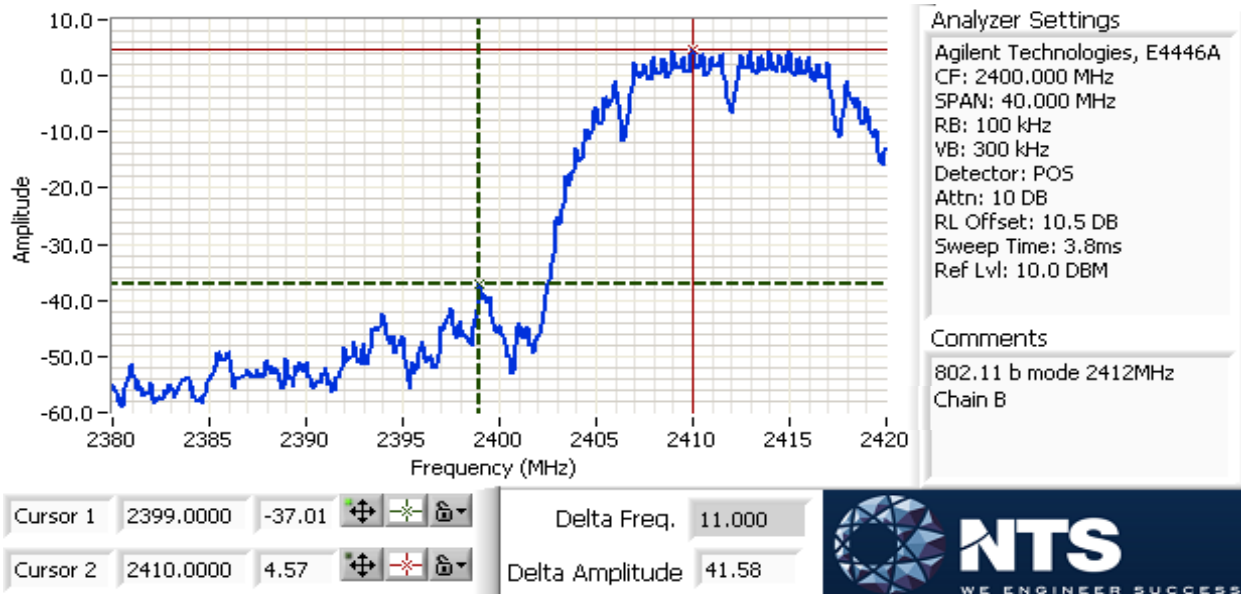


Plots for center channel

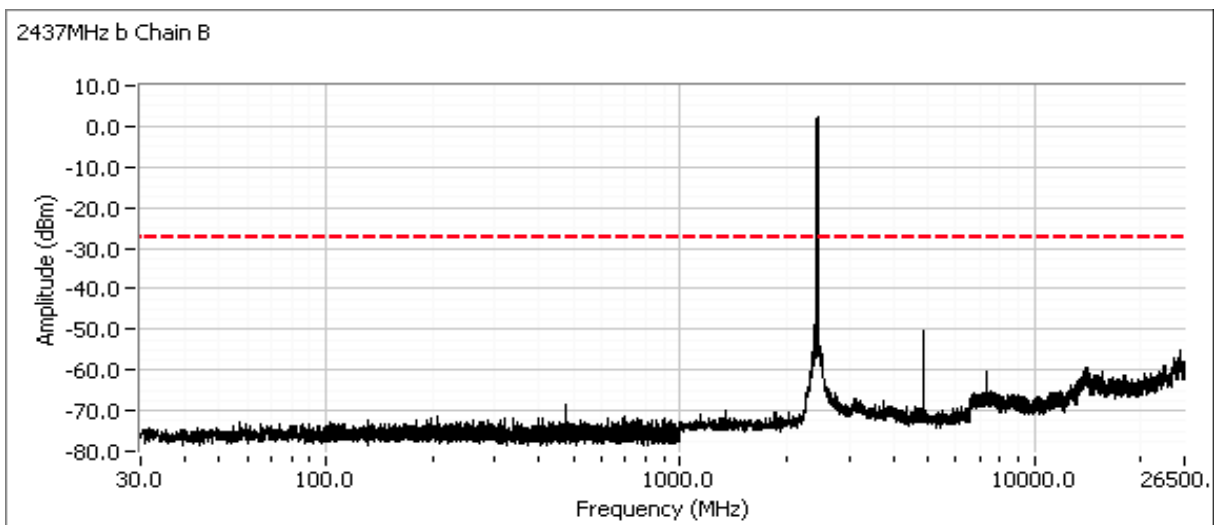

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Plots for high channel

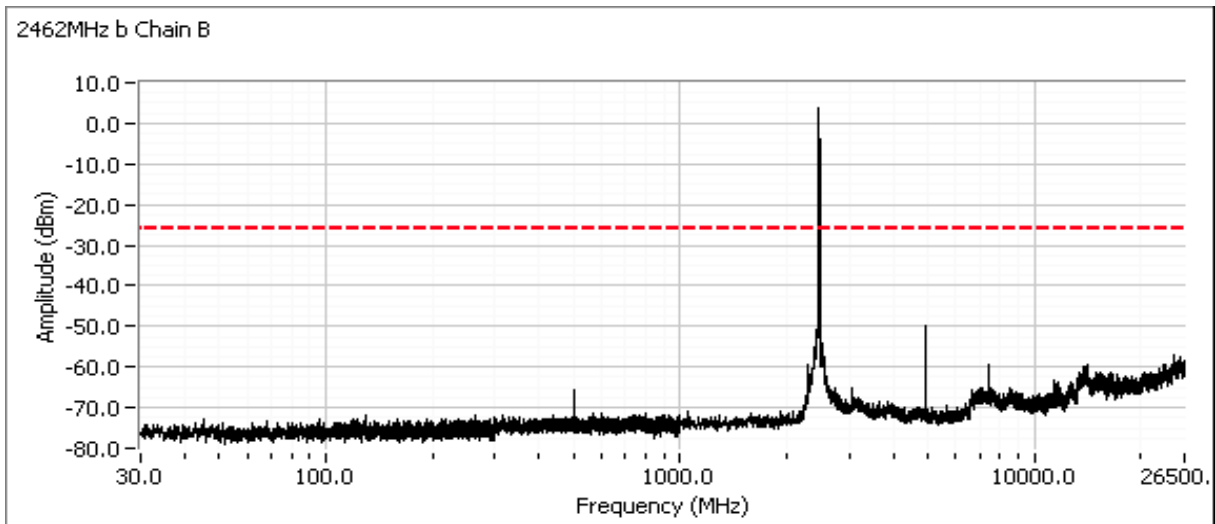

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4b: Out of Band Spurious Emissions

Date of Test: 9/25/2013

Test Engineer: Jack Liu

Test Location: FT Lab# 4a

Mode: 802.11g


Config. Used: 1

Config Change: none

EUT Voltage: 3.3Vdc


Frequency (MHz)	Power Setting	Mode	Limit	Result
2412	21	g	-20dBc	Pass
2437	26	g	-20dBc	Pass
2462	22	g	-20dBc	Pass

Plots for low channel

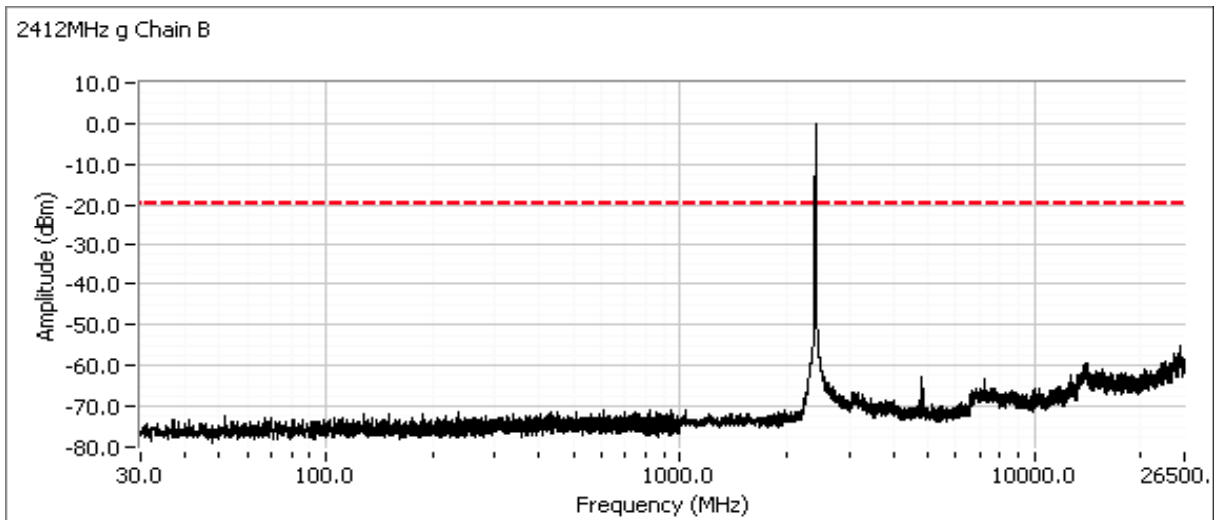


Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

Additional plot showing compliance with **-20dBc** limit from 2390 MHz to 2400 MHz. Radiated measurements used to show compliance with the limits in the restricted band below 2390 MHz.

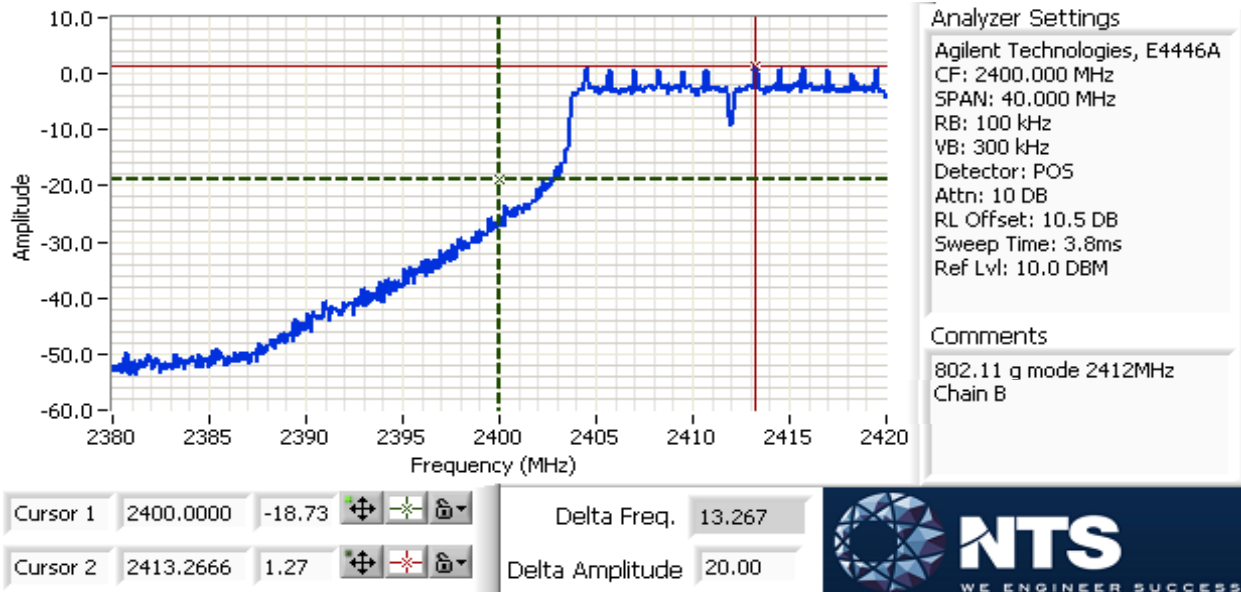


Plots for center channel

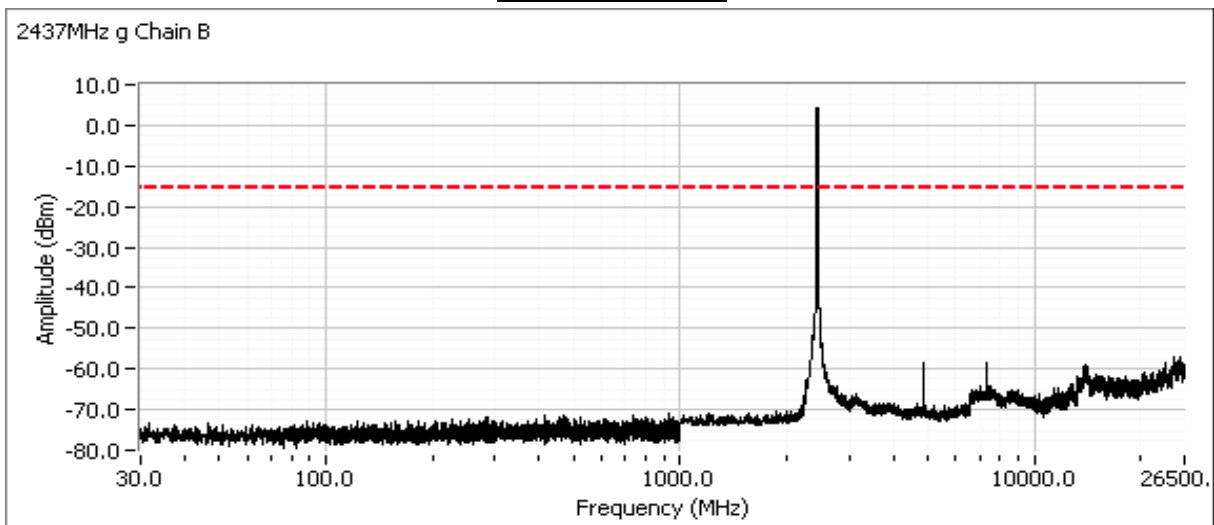

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Plots for high channel

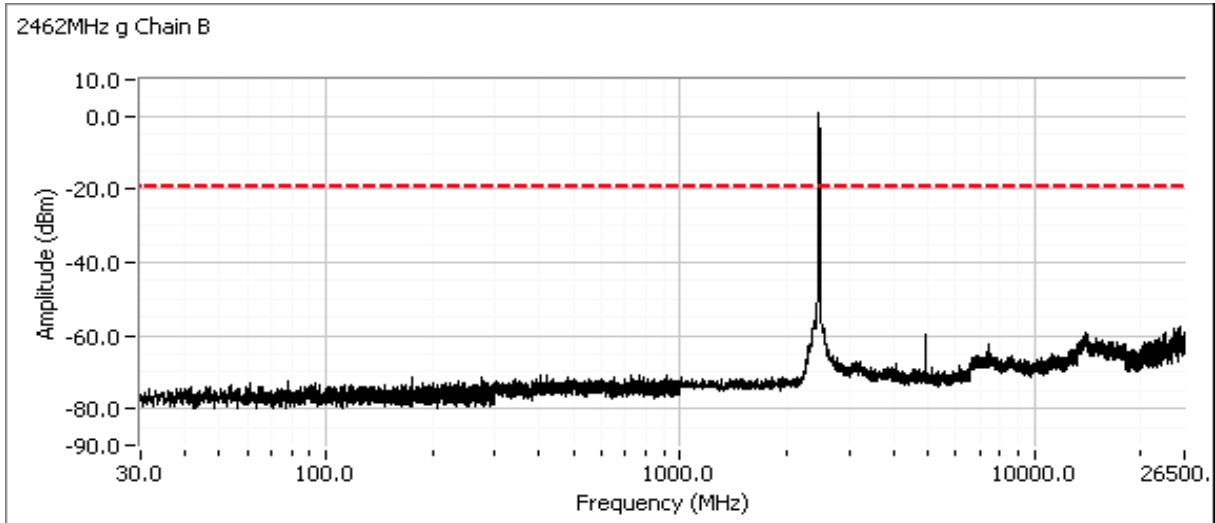

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4c: Out of Band Spurious Emissions

Date of Test: 9/25/2013

Test Engineer: Jack Liu

Test Location: FT Lab# 4a

Mode: 802.11n20


Config. Used: 1

Config Change: none

EUT Voltage: 3.3Vdc


Frequency (MHz)	Power Setting	Mode	Limit	Result
2412	21	n20	-20dBc	Pass
2437	26	n20	-20dBc	Pass
2462	22	n20	-20dBc	Pass

Plots for low channel

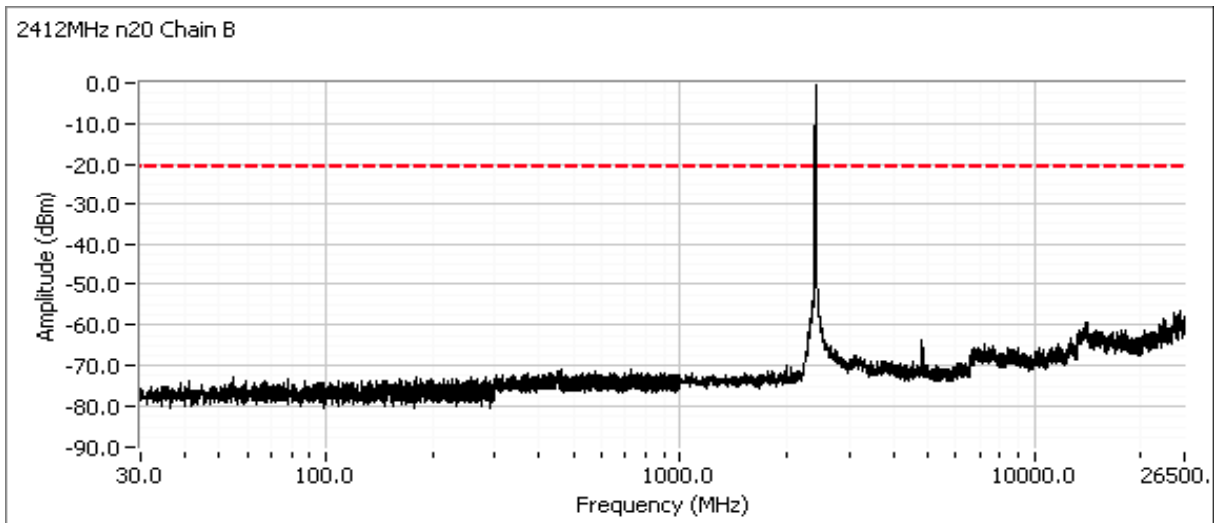

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Additional plot showing compliance with **-20dBc** limit from 2390 MHz to 2400 MHz. Radiated measurements used to show compliance with the limits in the restricted band below 2390 MHz.

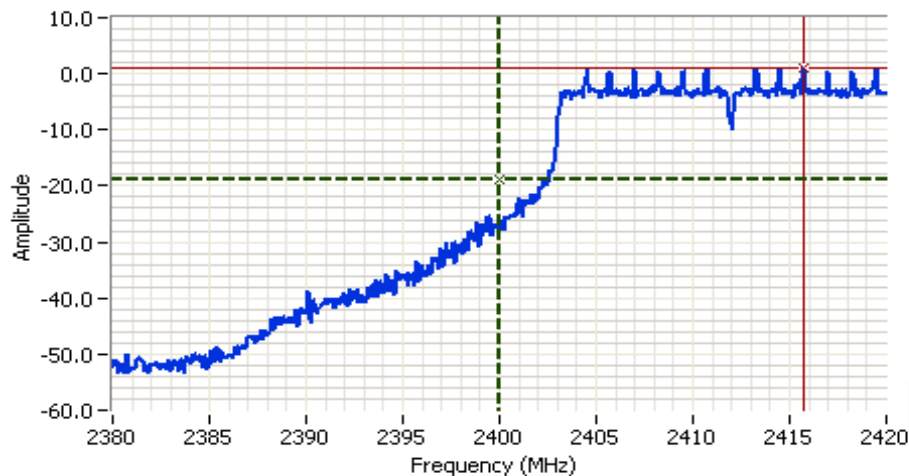

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2400.000 MHz
 SPAN: 40.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 10.5 DB
 Sweep Time: 3.8ms
 Ref Lvl: 10.0 DBM

Comments


802.11 n20 mode 2412MHz
 Chain B

Cursor 1	2400.0000	-19.00	
Cursor 2	2415.7334	1.00	

Delta Freq. 15.733
 Delta Amplitude 20.00


Plots for center channel

2437MHz n20 Chain B

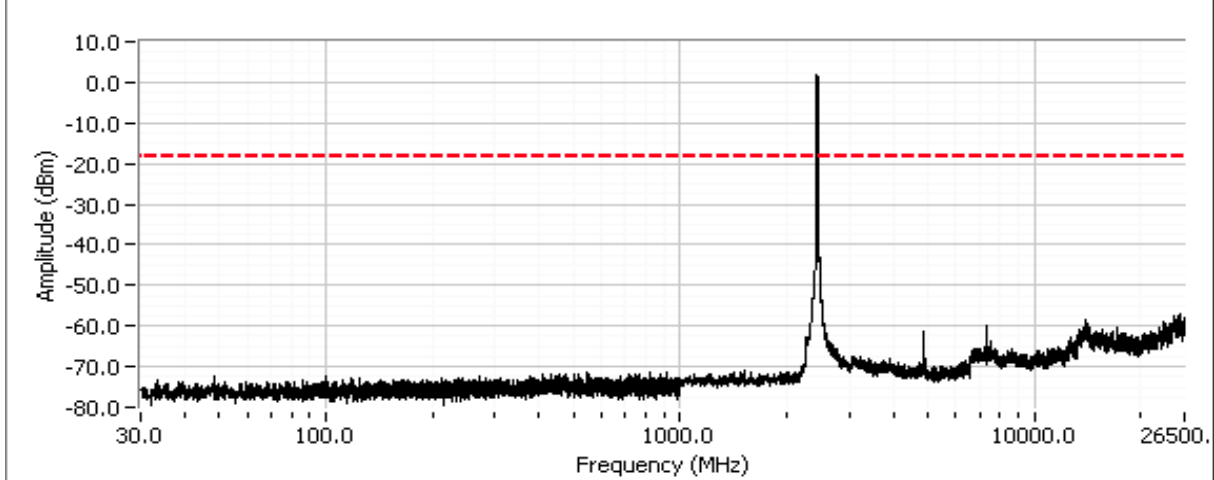

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Plots for high channel

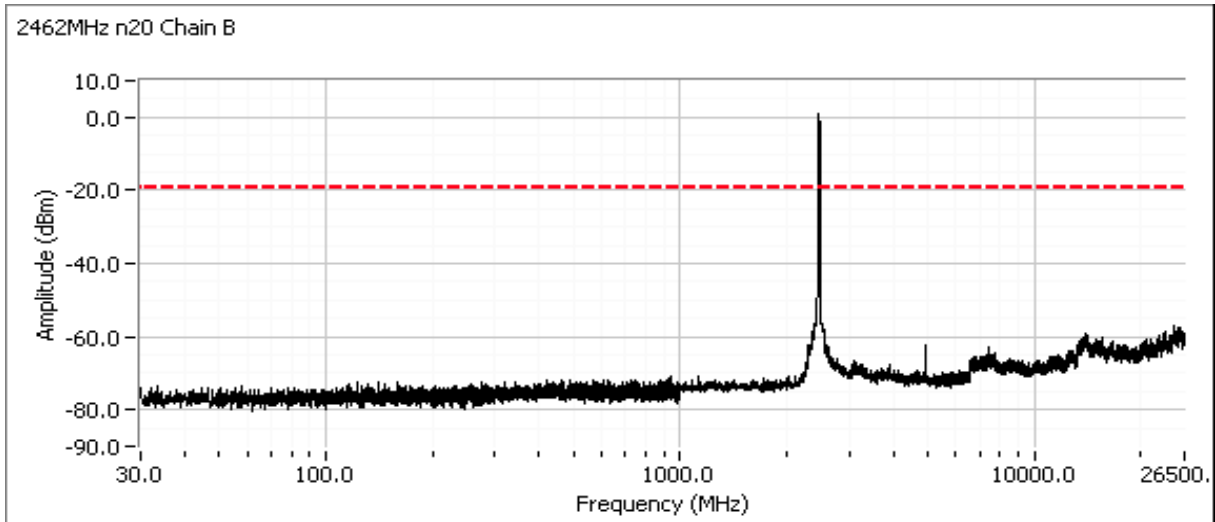

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4d: Out of Band Spurious Emissions

Date of Test: 9/25/2013

Test Engineer: Jack Liu

Test Location: FT Lab# 4a

Mode: 802.11n40


Config. Used: 1

Config Change: none

EUT Voltage: 3.3Vdc

Frequency (MHz)	Power Setting	Mode	Limit	Result
2422	19	n40	-20dBc	Pass
2437	23.5	n40	-20dBc	Pass
2452	23	n40	-20dBc	Pass

Plots for low channel

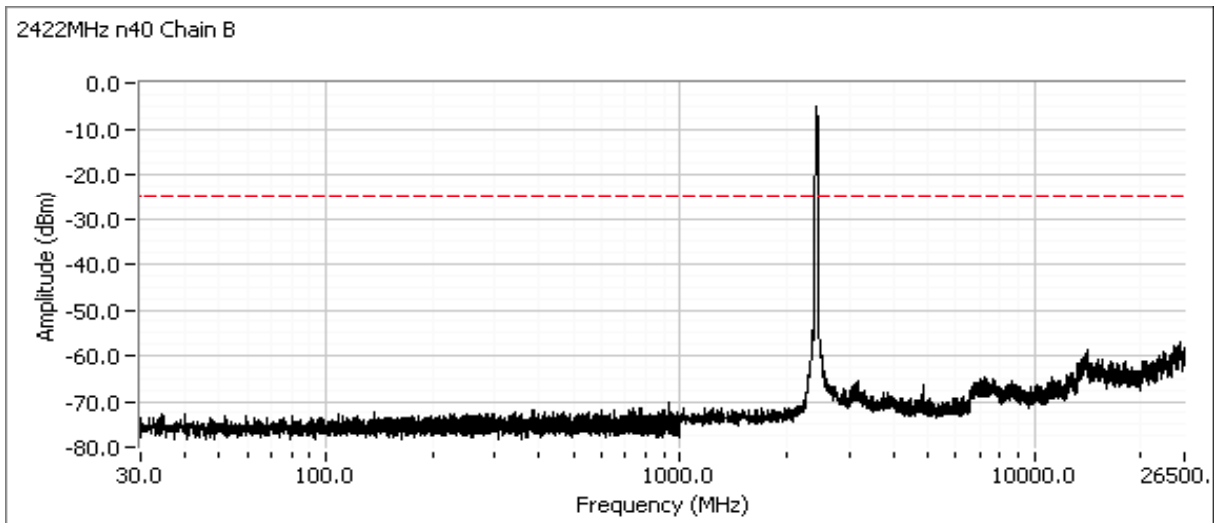

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

Additional plot showing compliance with **-20dBc** limit from 2390 MHz to 2400 MHz. Radiated measurements used to show compliance with the limits in the restricted band below 2390 MHz.



Analyzer Settings

Agilent Technologies, E4446A
 CF: 2400.000 MHz
 SPAN: 40.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 10.5 DB
 Sweep Time: 3.8ms
 Ref Lvl: 10.0 DBM

Comments

802.11 n40 mode 2422MHz
 Chain B


Cursor 1	2400.0000	-23.18	
Cursor 2	2413.2666	-3.18	

Delta Freq. 13.267

Delta Amplitude 20.00


Plots for center channel

2437MHz n40 Chain B

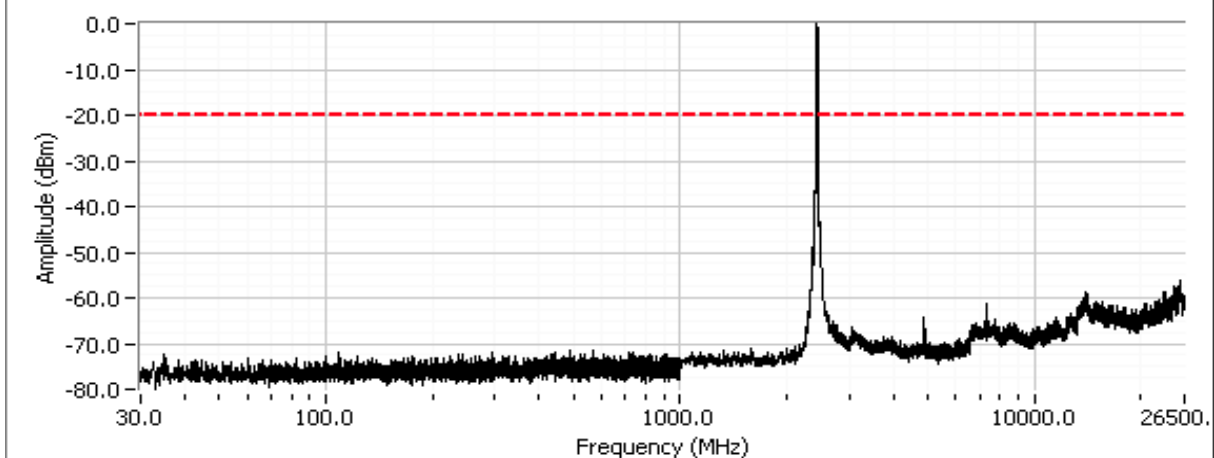

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Plots for high channel

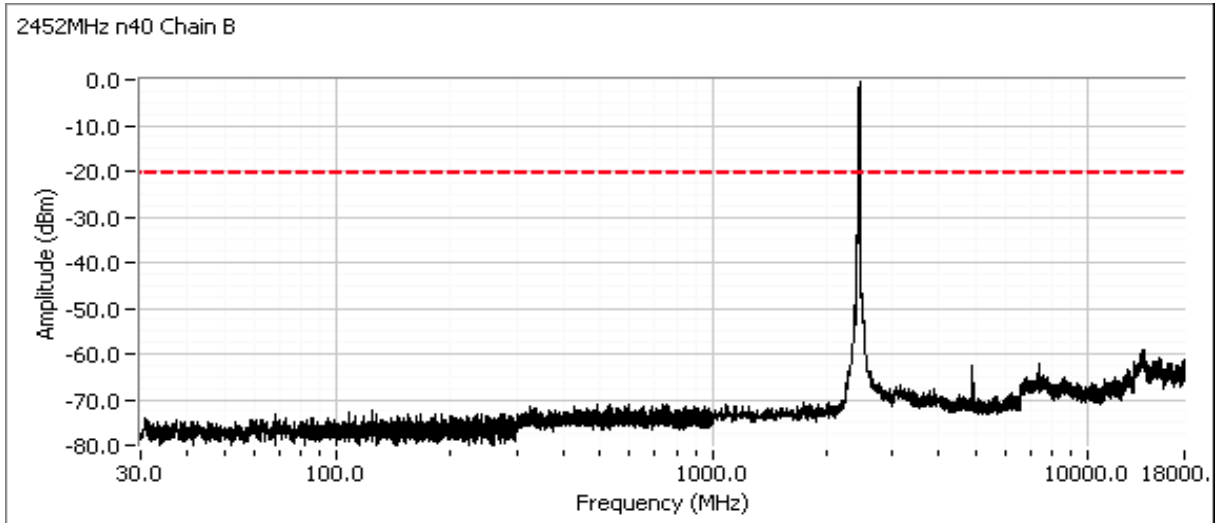

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements Power, PSD, Bandwidth and Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 9/26/2013
 Test Engineer: Jack Liu
 Test Location: FT Lab# 4a

Config. Used: 1
 Config Change: none
 EUT Voltage: 3.3Vdc

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Ambient Conditions:

Temperature: 22 °C
 Rel. Humidity: 45 %

Summary of Results

Run #	Pwr setting	Avg Pwr	Test Performed	Limit	Pass / Fail	Result / Margin
1			Output Power	15.247(b)	Pass	802.11n20: 20.5dBm 802.11n40: 17.2dBm
2			Power spectral Density (PSD)	15.247(d)	Pass	n20: 0.6 dBm/30kHz n40: -1.4 dBm/30kHz
3			Minimum 6dB Bandwidth	15.247(a)		These measurements are covered by the single chain data
3			99% Bandwidth	RSS GEN		
4			Spurious emissions	15.247(b)		

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
n20	MCS0	0.99	Yes	5.36	0.0	0.0	187
n40	MCS0	0.97	Yes	2.88	0.1	0.2	347

Sample Notes

MAC Address: 001500DC7B25 DRTU Tool Version 1.7.1-752, Driver version 16.6.0.1 (WiFi only)

Antenna Gain Information

Freq	Antenna Gain (dBi) / Chain				BF	MultiChain Legacy	CDD	Sectorized / Xpol	Dir G (PWR)	Dir G (PSD)
	1	2	3	4						
2400-2483.5	3.2	3.2			No	No	Yes	No	3.2	

For devices that support CDD modes

Min # of spatial streams: 1
 Max # of spatial streams: 2

Notes:	BF = beamforming mode supported, Multichain Legacy = 802.11 legacy data rates supported for multichain transmissions, CDD = Cyclic Delay Diversity (or Cyclic Shift Diversity) modes supported, Sectorized / Xpol = antennas are sectorized or cross polarized.
Notes:	Dir G (PWR) = total gain (Gant + Array Gain) for power calculations; Dir G (PSD) = total gain for PSD calculations based on FCC KDB 662911. Depending on the modes supported, the Array Gain value for power could be different from the PSD value.
Notes:	Array gain for power/psd calculated per KDB 662911 D01, v01r02.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1: Output Power

Operating Mode: 802.11n20
Directional Gain (dBi): 3.2

Frequency (MHz)	Chain	Software Setting	Power ¹ dBm	Total Power		Limit dBm	Max Power (W)	Result	Power eirp (W)	Power (dBm) ³
				mW	dBm					
2412	A	23	16.4	87.3	19.4	30.0	0.111	Pass	0.232	11.5
	B	26	16.4							11.2
2437	A	24.5	17.5	111.2	20.5	30.0		Pass		13.6
	B	27.5	17.4							13.6
2462	A	24.5	17.3	106.2	20.3	30.0		Pass		12.6
	B	27.5	17.2							12.5

Operating Mode: 802.11n40
Directional Gain (dBi): 3.2

Frequency (MHz)	Chain	Software Setting	Power ¹ dBm	Total Power		Limit dBm	Max Power (W)	Result	Power eirp (W)	Power (dBm) ³
				mW	dBm					
2422	A	20.5	13.0	39.0	15.9	30.0	0.096	Pass	0.200	8.8
	B	24	12.8							8.8
2437	A	24	16.0	83.5	19.2	30.0		Pass		13.1
	B	27	16.4							13.1
2452	A	24.5	16.8	95.7	19.8	30.0		Pass		12.3
	B	27.5	16.8							12.3

Note 1:	Output power measured using a peak power meter, spurious limit is -20dBc.
Note 2:	Power setting - if a single number the same power setting was used for each chain. If multiple numbers the power setting for each chain is separated by a comma (e.g. x,y would indicate power setting x for chain 1, power setting y for chain 2.
Note 3:	Power measured using average power meter (non-gated) and is included for reference only.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #2: Power spectral Density

Mode: n20


Power Setting	Frequency (MHz)	PSD (dBm/30kHz) ^{Note 1}				Total	Limit dBm/3kHz	Result
		Chain A	Chain B	Chain 3	Chain 4			
23/26	2412	-3.7	-2.9			-0.3	8.0	Pass
24.5/27.5	2437	-2.6	-2.2			0.6	8.0	Pass
24.5/27.5	2462	-2.8	-2.5			0.4	8.0	Pass

Mode: n40

Power Setting	Frequency (MHz)	PSD (dBm/30kHz) ^{Note 1}				Total	Limit dBm/3kHz	Result
		Chain A	Chain B	Chain 3	Chain 4			
20.5/24	2422	-7.6	-7.9			-4.7	8.0	Pass
24/27	2437	-4.3	-5.2			-1.7	8.0	Pass
24.5/27.5	2452	-4.3	-4.6			-1.4	8.0	Pass

Note 1:

Test performed per method PKSPD, in KDB 558074. Power spectral density measured using: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$, $\text{VBW}=3*\text{RBW}$, peak detector, span = $1.5*\text{DTS BW}$, auto sweep time, max hold.

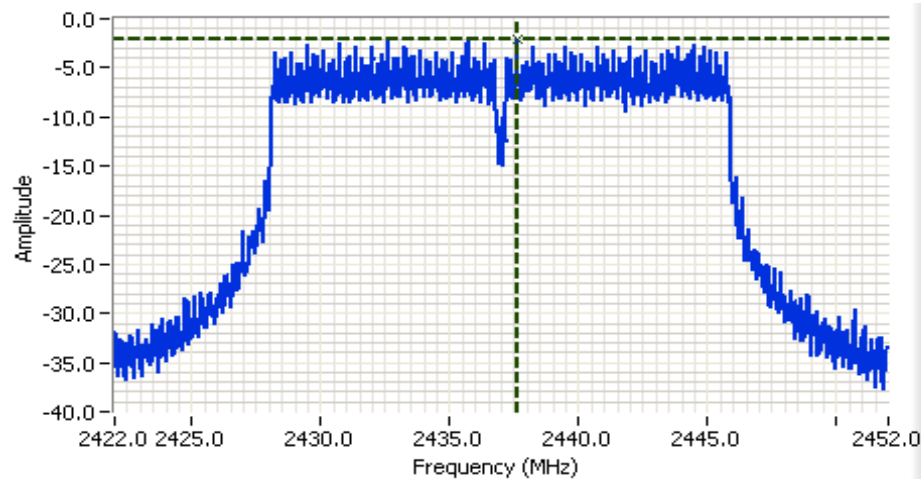

Analyzer Settings


Agilent Technologies, E4446A
 CF: 2437.000 MHz
 SPAN: 30.000 MHz
 RB: 30.0 kHz
 VB: 91.0 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 31.9ms
 Ref Lvl: 20.0 DBM

Comments

PSD: -2.17dBm/30kHz
 802.11 n20 mode
 MIMO chainB

Cursor 1	2437.6228	-2.17		
	0.0000	0.00		

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

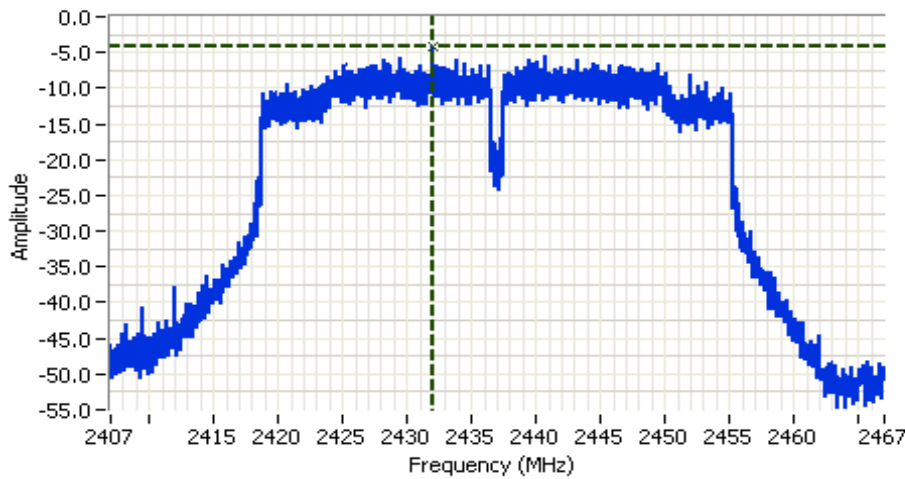


Analyzer Settings

Agilent Technologies, E4446A
 CF: 2437.000 MHz
 SPAN: 60.000 MHz
 RB: 30.0 kHz
 VB: 91.0 kHz
 Detector: POS
 Attn: 20 DB
 RL Offset: 10.5 DB
 Sweep Time: 63.7ms
 Ref Lvl: 20.0 DBM

Comments

PSD: -4.28dBm/30kHz
 802.11 n40 mode
 MIMO chainA



Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements Power, PSD, Bandwidth and Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Ambient Conditions:

Temperature: 20 °C
Rel. Humidity: 40 %

Summary of Results

Run #	Pwr setting	Avg Pwr	Test Performed	Limit	Pass / Fail	Result / Margin
1	-	-	Output Power	15.247(b)	Pass	11a: 19.4 dBm n20: 19.7 dBm n40: 19.5 dBm ac80: 19.4 dBm
2	-	-	Power spectral Density (PSD)	15.247(d)	Pass	11a: 2.6 dBm / 30kHz n20: 2.2 dBm / 30kHz n40: -0.7 dBm / 30kHz ac80: -3.0 dBm / 30kHz
3	-	-	Minimum 6dB Bandwidth	15.247(a)	Pass	11a: 16.292 MHz n20: 17.540 MHz n40: 35.032 MHz ac80: 72.5MHz
3	-	-	99% Bandwidth	RSS GEN	-	11a: 26.212 MHz n20: 25.812 MHz n40: 42.118 MHz ac80: 76.539 MHz
4	-	-	Spurious emissions	15.247(b)	Pass	All emissions < -20 dBc

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
11a	6Mbps	0.99	Yes	5.75	0.0	0.0	174
n20	6.5Mbps	0.99	Yes	5.36	0.0	0.0	187
n40	13.5Mbps	0.97	Yes	3.08	0.1	0.2	325
ac80	VHT0	0.93	Yes	0.43	0.3	0.6	2326

* Correction factor when using RMS/Power averaging - $10 \cdot \log(1/x)$

** Correction factor when using linear voltage average - $20 \cdot \log(1/x)$

T = Minimum transmission duration

Sample Notes

MAC Address: 001500DC7B25 DRTU Tool Version 1.7.1-752, Driver version 16.6.0.1 (WiFi only)



EMC Test Data

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1: Output Power

Date of Test: 9/26/2013, 9/30/13, & 10/1/13

Test Engineer: Joseph Cadigal & John Caizzi

Test Location: FT Lab#4B & 4A

Config. Used: 1

Config Change: none

EUT Voltage: 3.3Vdc

Mode: 11a

Power Setting ²	Frequency (MHz)	Output Power (dBm) ¹	mW	Antenna Gain (dBi)	Result	EIRP dBm	W	Output Power (dBm) ³	mW
36.0	5745	19.1	81.3	5.0	Pass	24.1	0.257		
36.5	5785	19.4	87.1	5.0	Pass	24.4	0.275		
37.0	5825	19.3	85.1	5.0	Pass	24.3	0.269		

Mode: n20

Power Setting ²	Frequency (MHz)	Output Power (dBm) ¹	mW	Antenna Gain (dBi)	Result	EIRP dBm	W	Output Power (dBm) ³	mW
36.0	5745	19.7	93.3	5.0	Pass	24.7	0.295		
36.0	5785	19.6	91.2	5.0	Pass	24.6	0.288		
36.0	5825	19.4	87.1	5.0	Pass	24.4	0.275		

Mode: n40

Power Setting ²	Frequency (MHz)	Output Power (dBm) ¹	mW	Antenna Gain (dBi)	Result	EIRP dBm	W	Output Power (dBm) ³	mW
36.0	5755	19.5	89.1	5.0	Pass	24.5	0.282		
36.0	5795	19.3	85.1	5.0	Pass	24.3	0.269		

Mode: ac80

Power Setting ²	Frequency (MHz)	Output Power (dBm) ¹	mW	Antenna Gain (dBi)	Result	EIRP dBm	W	Output Power (dBm) ³	mW
36.0	5775	19.4	87.1	5.0	Pass	24.4	0.275		

Note 1: Output power measured using a peak power meter, spurious limit is -20dBc.

Note 2: Power setting - the software power setting used during testing, included for reference only.

Note 3: Power measured using average power meter (non-gated) and is included for reference only.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #2: Power spectral Density

Mode: 11a

Power Setting	Frequency (MHz)	PSD (dBm/30kHz) ^{Note 1}	Limit dBm/3kHz	Result
36.0	5745	2.6	8.0	Pass
36.5	5785	1.7	8.0	Pass
37.0	5825	2.6	8.0	Pass

Mode: n20

Power Setting	Frequency (MHz)	PSD (dBm/30kHz) ^{Note 1}	Limit dBm/3kHz	Result
36.0	5745	2.2	8.0	Pass
36.0	5785	1.6	8.0	Pass
36.0	5825	1.9	8.0	Pass

Mode: n40


Power Setting	Frequency (MHz)	PSD (dBm/30kHz) ^{Note 1}	Limit dBm/3kHz	Result
36.0	5755	-0.7	8.0	Pass
36.0	5795	-0.9	8.0	Pass

Mode: ac80

Power Setting	Frequency (MHz)	PSD (dBm/30kHz) ^{Note 1}	Limit dBm/3kHz	Result
36.0	5775	-3.0	8.0	Pass

Note 1: Test performed per method PKSPD, in KDB 558074. Power spectral density measured using: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$, $\text{VBW}=3*\text{RBW}$, peak detector, span = $1.5*\text{DTS BW}$, auto sweep time, max hold.

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

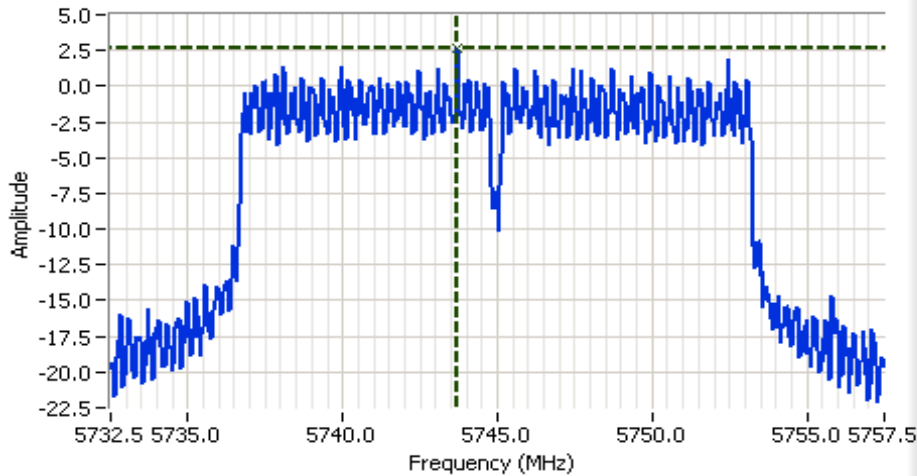

Analyzer Settings

Agilent Technologies, E4446A
 CF: 5745.000 MHz
 SPAN: 25.000 MHz
 RB: 30.0 kHz
 VB: 100 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 11.2 DB
 Sweep Time: 26.4ms
 Ref Lvl: 0.0 DBM

Comments

PSD, 11a, chain A

Cursor 1	5743.7083	2.61		
	0.0000	0.00		

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #3: Signal Bandwidth

Mode: 11a

Power Setting	Frequency (MHz)	Bandwidth (MHz)	RBW Setting (MHz)
		6dB	99%
36.0	5745	16.40	24.89
36.5	5785	16.29	25.60
37.0	5825	16.34	26.21

Mode: n20

Power Setting	Frequency (MHz)	Bandwidth (MHz)	RBW Setting (MHz)
		6dB	99%
36.0	5745	17.54	25.74
36.0	5785	17.56	25.81
36.0	5825	17.56	24.99


Mode: n40

Power Setting	Frequency (MHz)	Bandwidth (MHz)	RBW Setting (MHz)
		6dB	99%
36.0	5755	35.03	41.65
36.0	5795	33.86	42.12

Mode: ac80

Power Setting	Frequency (MHz)	Bandwidth (MHz)	RBW Setting (MHz)
		6dB	99%
36.0	5775	72.50	76.54

Note 1: DTS BW: RBW=100kHz, VBW ≥ 3*RBW, peak detector, max hold, auto sweep time.
 99% BW: RBW=1-5% of 99%BW, VBW ≥ 3*RBW, peak detector, max hold, auto sweep time.

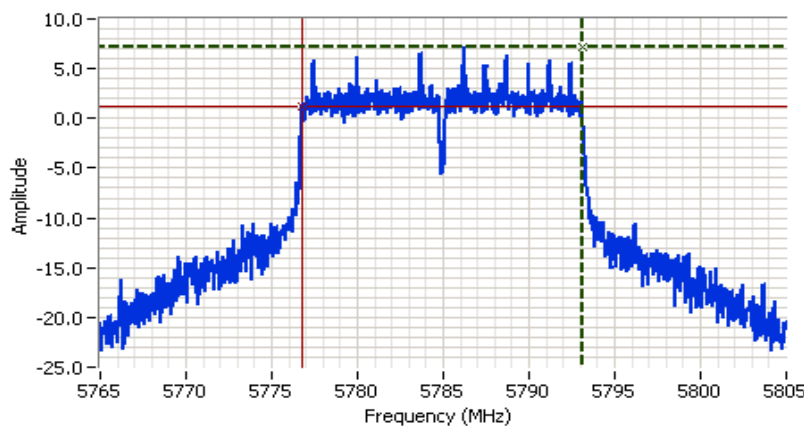


Analyzer Settings
 Agilent Technologies, E4446A
 CF: 5785.000 MHz
 SPAN: 40.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 11.2 DB
 Sweep Time: 3.9ms
 Ref Lvl: 10.0 DBM

Comments
 6dB BW: 16.292 MHz
 11a, chain A

Cursor 1 5793.1107 7.13
 Cursor 2 5776.8187 1.13

Delta Freq. 16.292
 Delta Amplitude 6.00

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

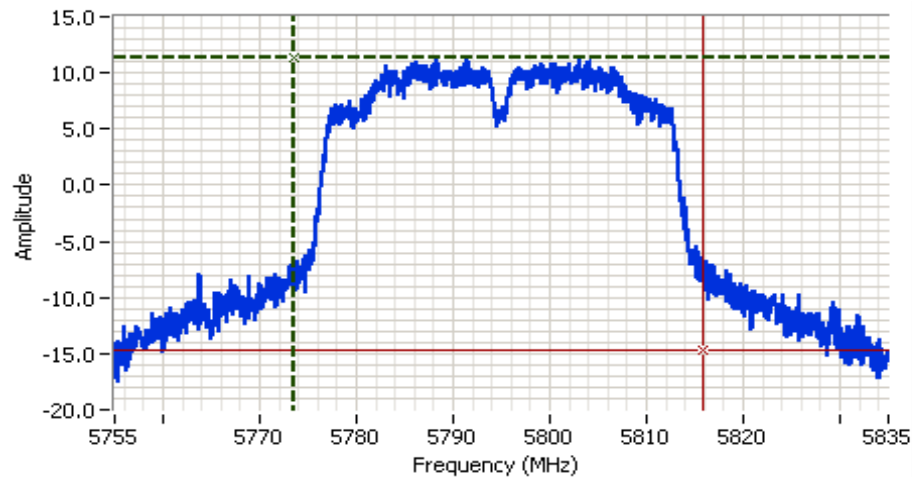

Analyzer Settings

Agilent Technologies, E4446A
 CF: 5795.000 MHz
 SPAN: 80.000 MHz
 RB: 1.000 MHz
 VB: 3.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 11.2 DB
 Sweep Time: 1.0ms
 Ref Lvl: 10.0 DBM

Comments

99% power BW: 42.118 MHz
 n40, chain A

Cursor 1	5773.6353	11.37			
Cursor 2	5815.7529	-14.62			

Delta Freq. 42.118
 Delta Amplitude 26.00

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4a: Out of Band Spurious Emissions


Date of Test: 9/26/2013
 Test Engineer: Joseph Cadigal
 Test Location: FT Lab#4B

Config. Used: 1
 Config Change: none
 EUT Voltage: 3.3Vdc

Mode: 802.11a


Frequency (MHz)	Power Setting	Mode	Limit	Result
5745	36.0	11a	-20dBc	Pass
5785	36.5	11a	-20dBc	Pass
5825	37.0	11a	-20dBc	Pass

Plots for low channel

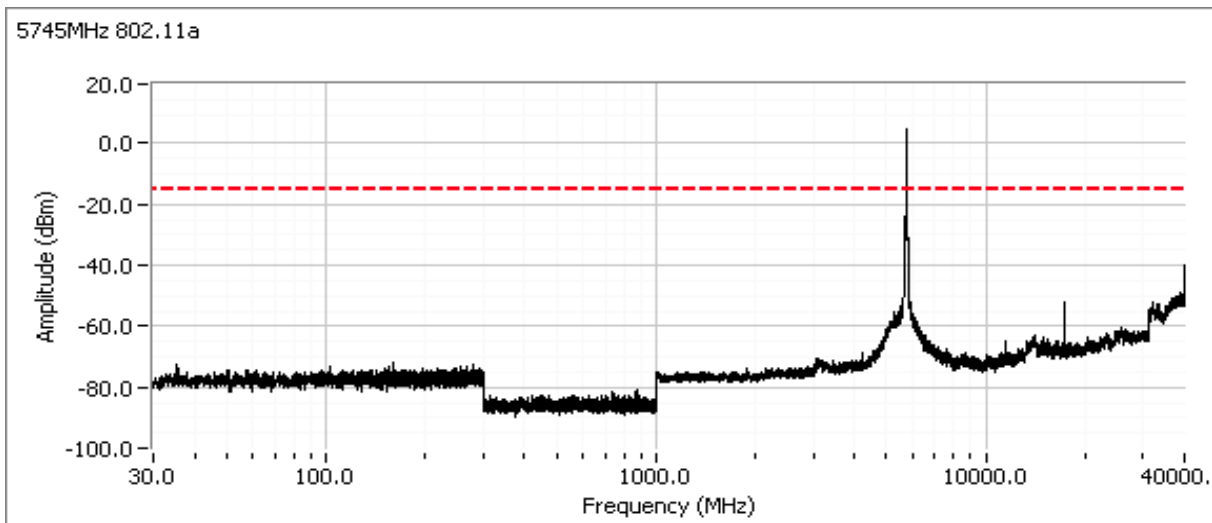


Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

Additional plot from 5715 - 5755 MHz showing compliance with -20dBc at the band edge.

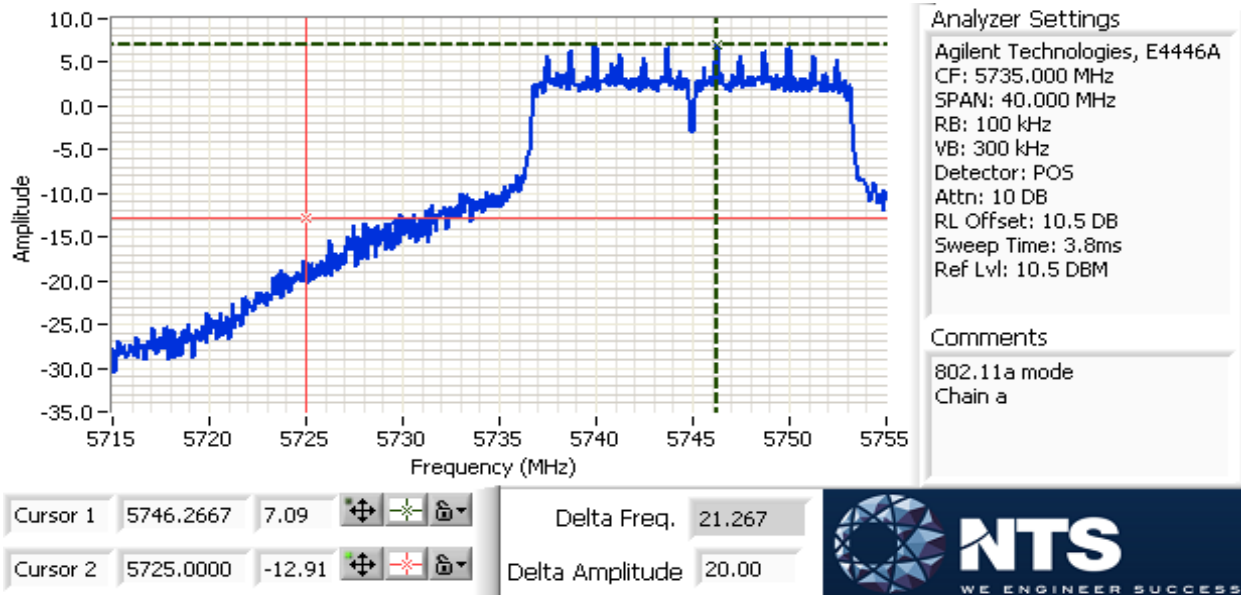


Plots for center channel

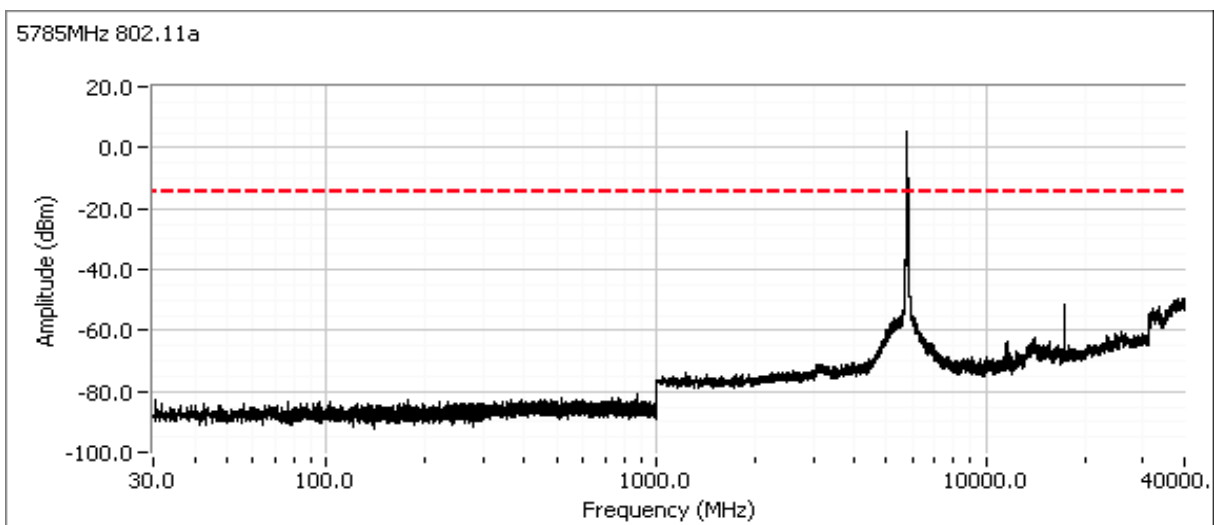


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Plots for high channel

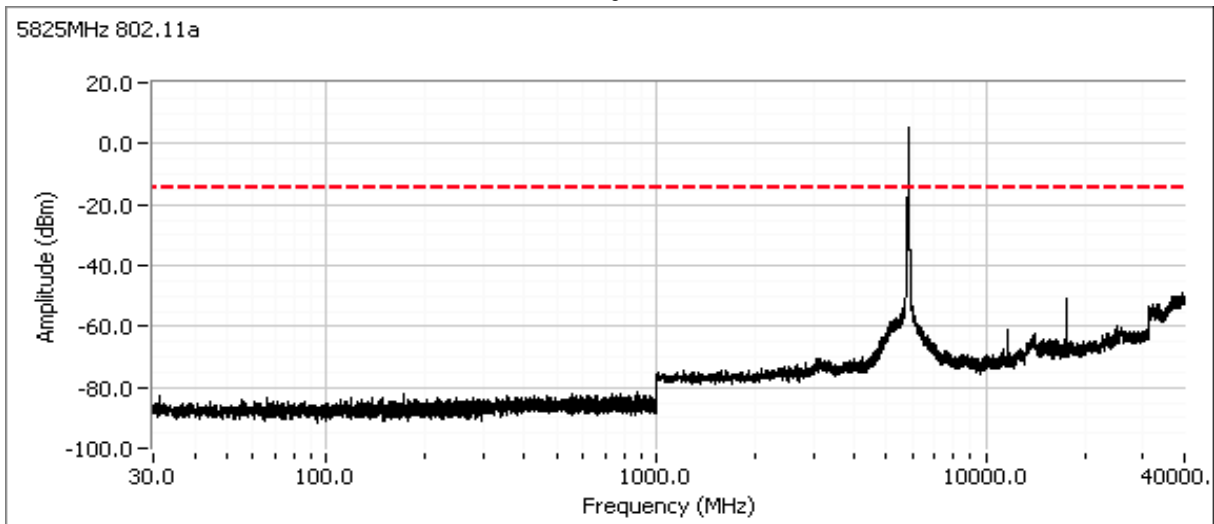

Additional plot from 5820 - 5860 MHz showing compliance with -20dBc at the band edge.

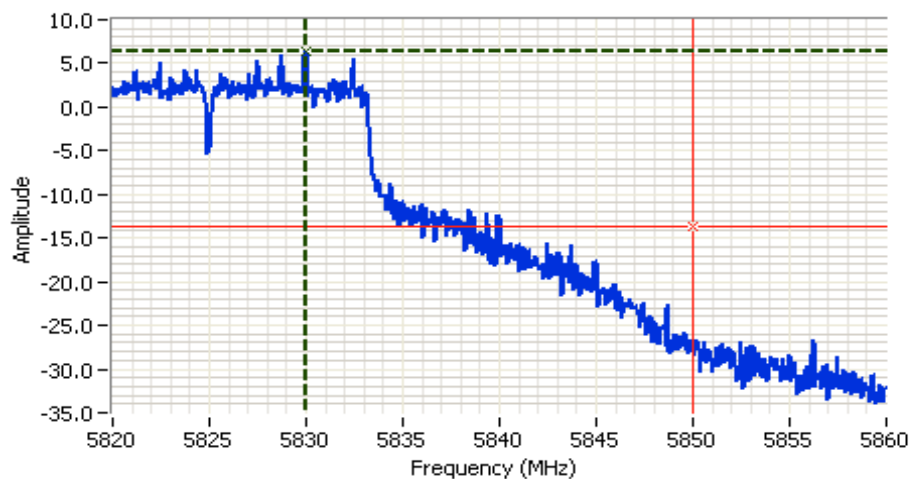

Analyzer Settings

Agilent Technologies, E4446A
 CF: 5840.000 MHz
 SPAN: 40.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 10.5 DB
 Sweep Time: 3.8ms
 Ref Lvl: 10.5 DBM

Comments

802.11a mode
 Chain a

Cursor 1	5830.0000	6.43	
Cursor 1	5850.0000	-13.57	

Delta Freq. 20.000
 Delta Amplitude 20.00


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4b: Out of Band Spurious Emissions

Mode: 802.11n20


Frequency (MHz)	Power Setting	Mode	Limit	Result
5745	36.0	n20	-20dBc	Pass
5785	36.0	n20	-20dBc	Pass
5825	36.0	n20	-20dBc	Pass

Plots for low channel

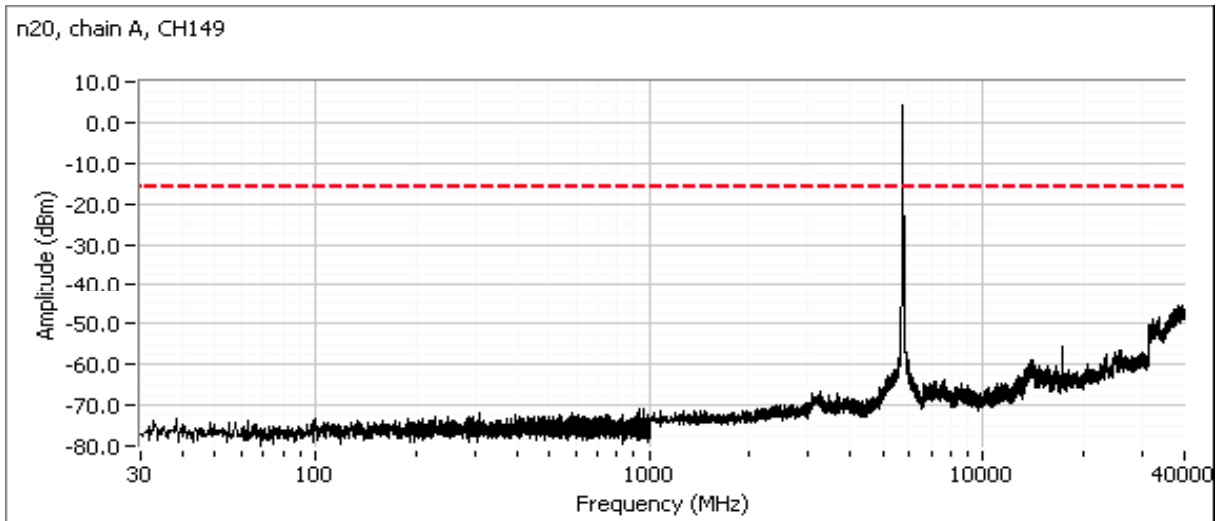


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Additional plot from 5715 - 5755 MHz showing compliance with -20dBc at the band edge.

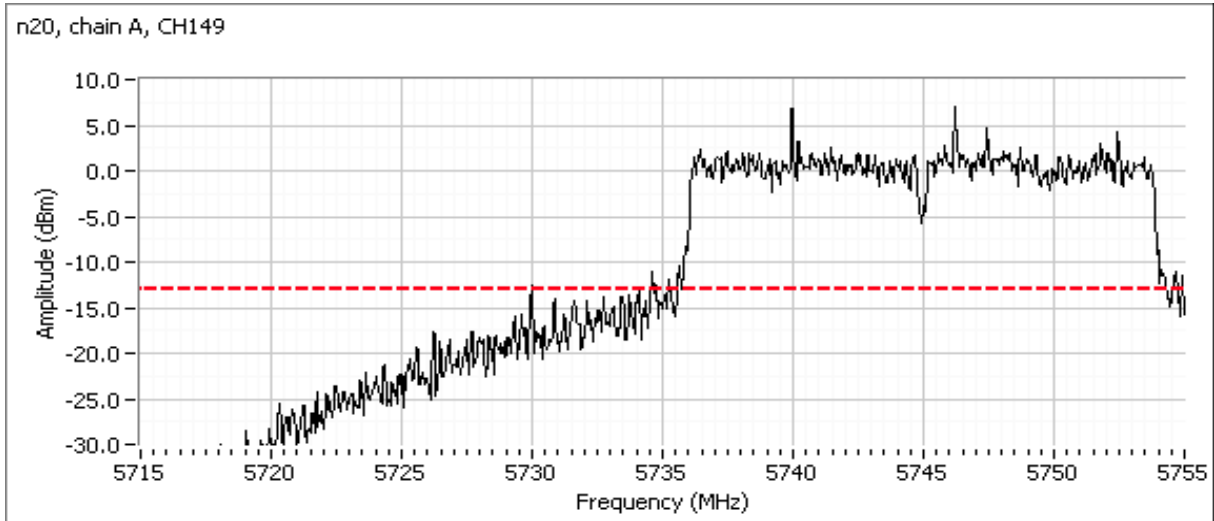


Plots for center channel

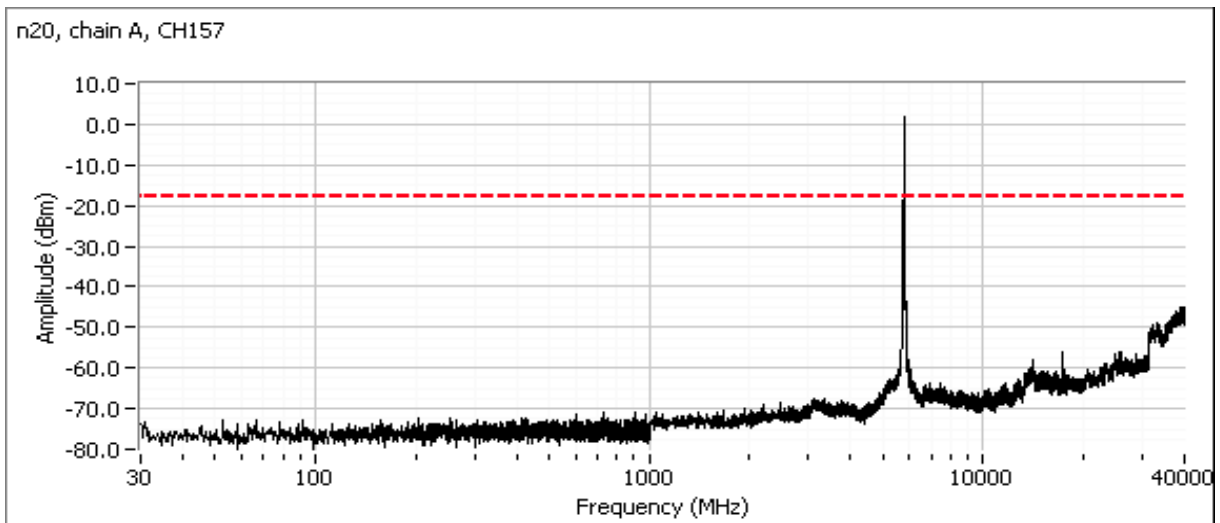


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Plots for high channel

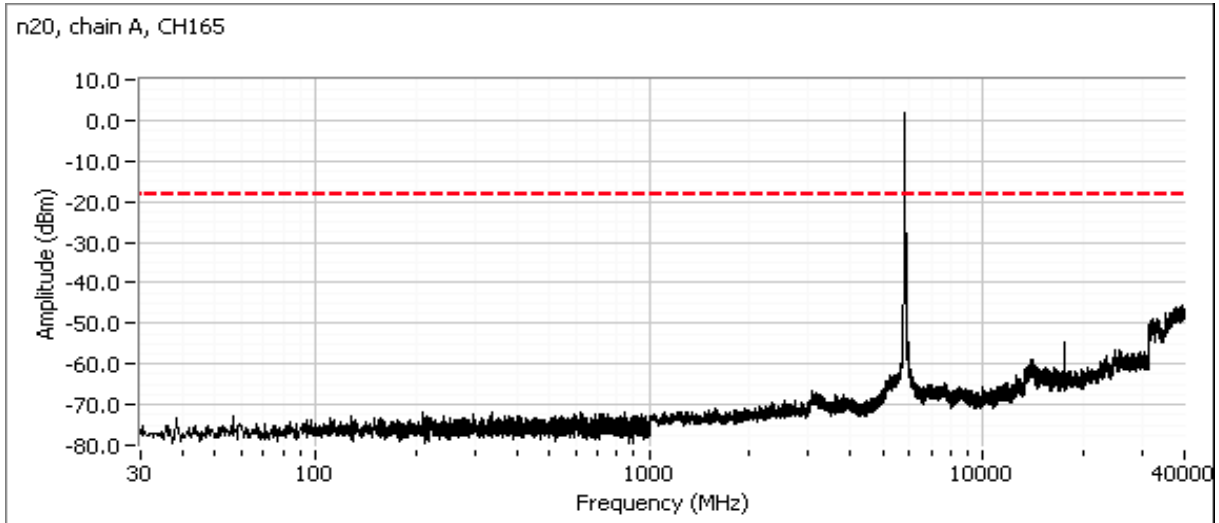

Additional plot from 5820 - 5860 MHz showing compliance with -20dBc at the band edge.

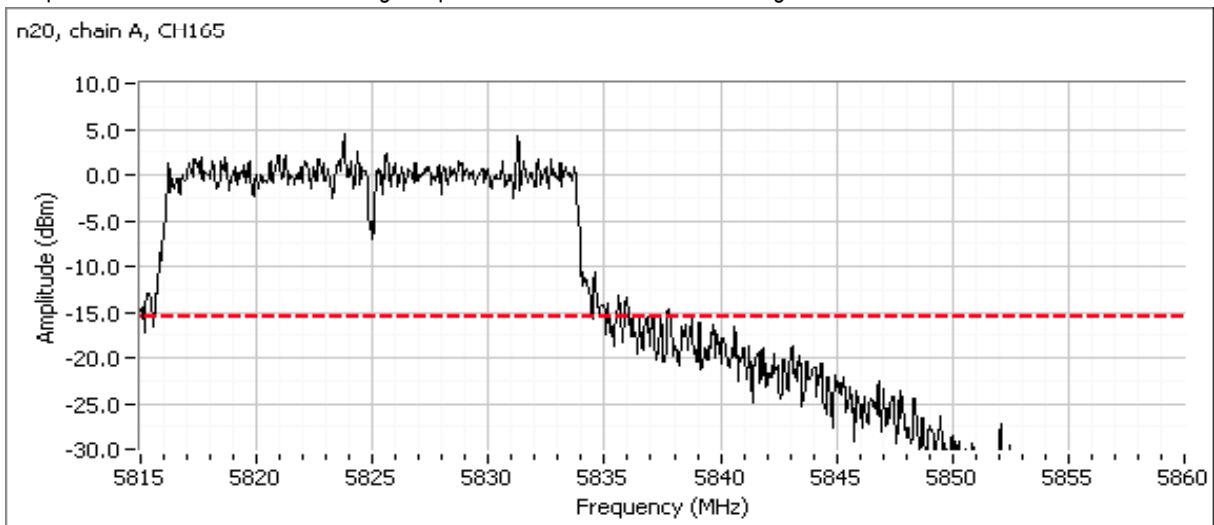


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4c: Out of Band Spurious Emissions


Mode: 802.11n40

Frequency (MHz)	Power Setting	Mode	Limit	Result
5755	36.0	n40	-20dBc	Pass
5795	36.0	n40	-20dBc	Pass

Plots for low channel

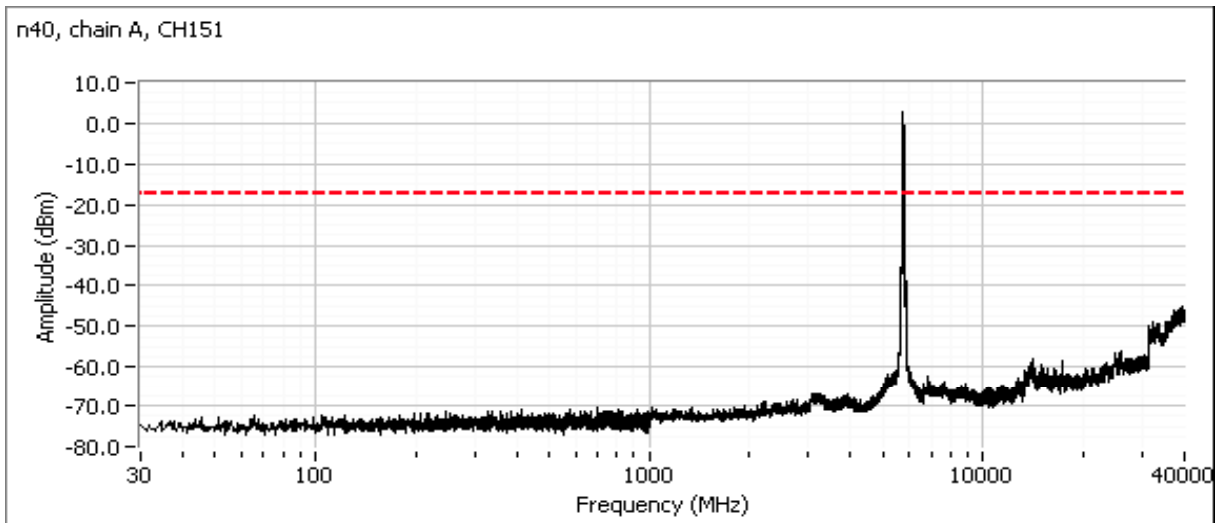


Additional plot from 5715 - 5755 MHz showing compliance with -20dBc at the band edge.

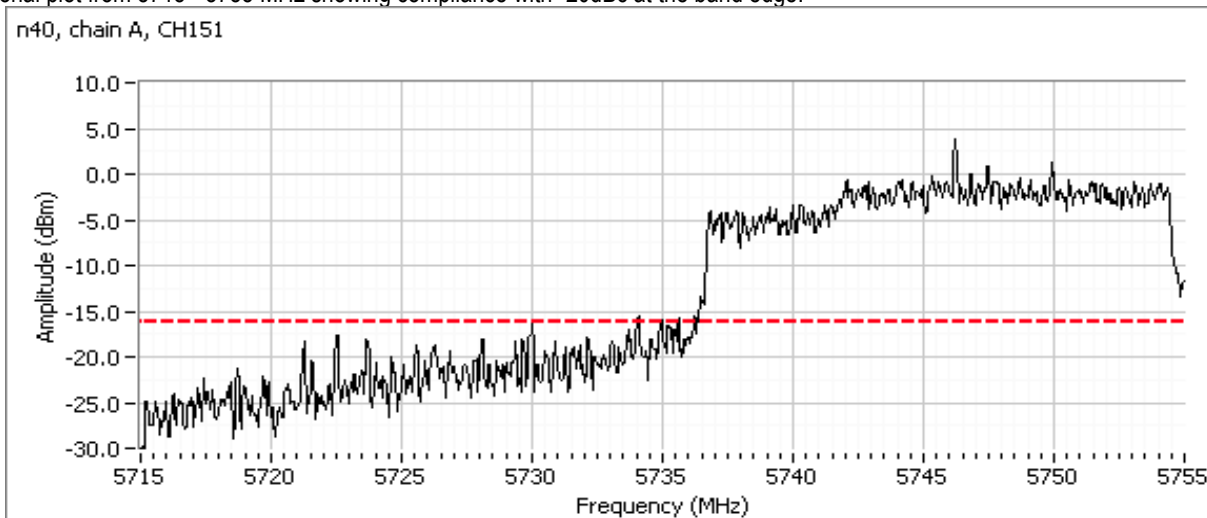


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Plots for center channel

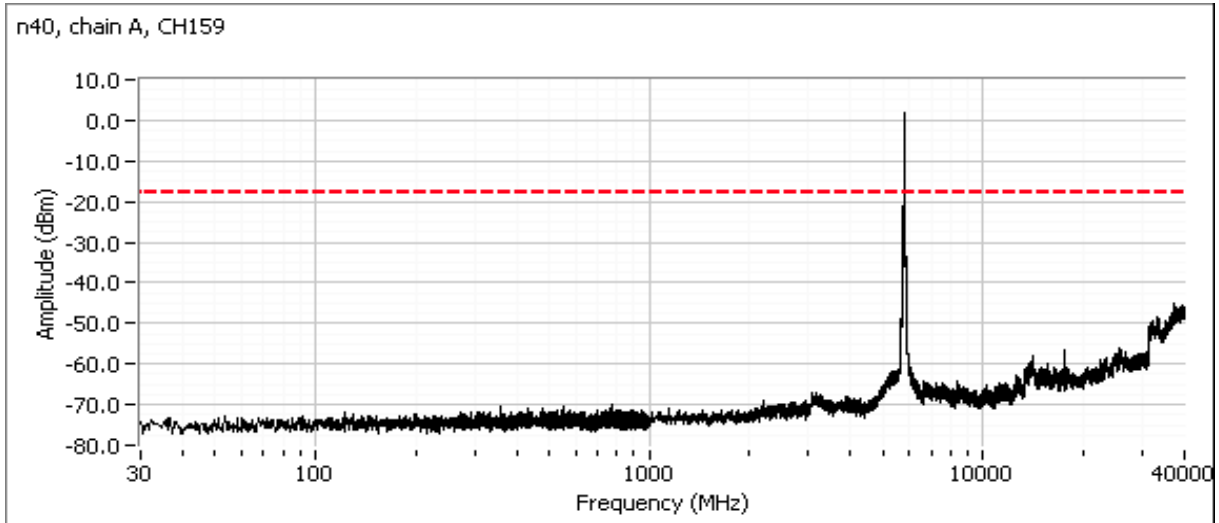

Additional plot from 5820 - 5860 MHz showing compliance with -20dBc at the band edge.

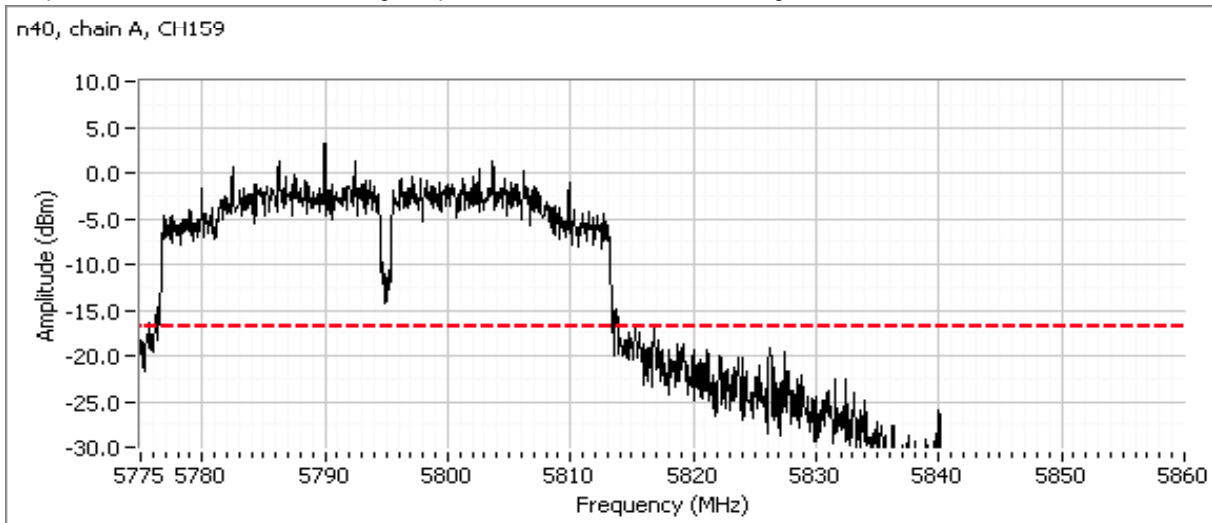

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4d: Out of Band Spurious Emissions

Date of Test: 10/1/2013

Test Engineer: Joseph Cadigal

Test Location: FT Lab#4A

Config. Used: 1


Config Change: none

EUT Voltage: 3.3Vdc

Mode: 802.11ac80


Frequency (MHz)	Power Setting	Mode	Limit	Result
5775	36.0	ac80	-20dBc	Pass

Plots for low channel

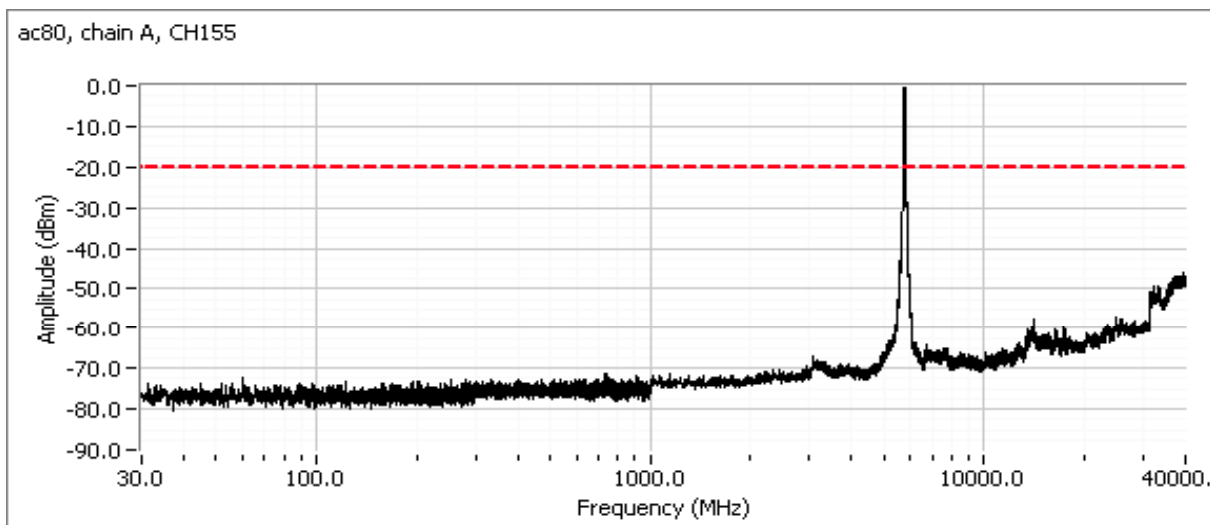

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Additional plot from 5715 - 5755 MHz showing compliance with -20dBc at the band edge.

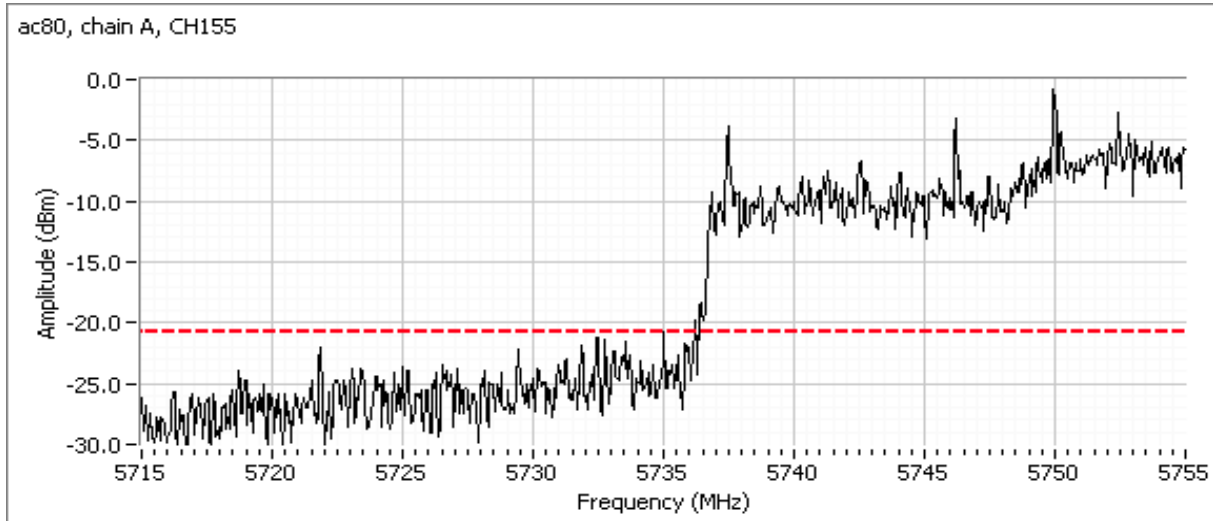

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements Power, PSD, Bandwidth and Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 9/30/2013, 10/1/13
 Test Engineer: John Caizzi
 Test Location: Lab 4A

Config. Used: No antennas
 Config Change:
 EUT Voltage: 3.3Vdc

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Ambient Conditions:

Temperature: 24 °C
 Rel. Humidity: 33 %

Summary of Results

Run #	Pwr setting	Avg Pwr	Test Performed	Limit	Pass / Fail	Result / Margin
1	-	-	Output Power	15.247(b)	Pass	11a: 19.8dBm n20: 19.8 dBm n40: 19.6 dBm ac80: 19.0dBm
2	-	-	Power spectral Density (PSD)	15.247(d)	Pass	11a: 2.8 dBm / 30kHz n20: 2.2 dBm / 30kHz n40: -1.1 dBm / 30kHz ac80: -2.6 dBm/30kHz
3	-	-	Minimum 6dB Bandwidth	15.247(a)	Pass	11a: 16.333 MHz n20: 17.533 MHz n40: 33.733 MHz ac80: 72.500 MHz
3	-	-	99% Bandwidth	RSS GEN	-	11a: 25.424 MHz n20: 26.090 MHz n40: 42.329 MHz ac80: 76.040MHz
4	-	-	Spurious emissions	15.247(b)	Pass	All emissions < -20 dBc

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
11a	6Mbps	0.99	Yes	5.75	0.0	0.0	174
n20	6.5Mbps	0.99	Yes	5.36	0.0	0.0	187
n40	13.5Mbps	0.97	Yes	3.08	0.1	0.2	325
ac80	VHT0	0.93	Yes	0.43	0.3	0.6	2326

* Correction factor when using RMS/Power averaging - $10 \cdot \log(1/x)$

** Correction factor when using linear voltage average - $20 \cdot \log(1/x)$

T = Minimum transmission duration

Sample Notes

MAC Address: 001500DC7B25 DRTU Tool Version 1.7.1-752, Driver version 16.6.0.1 (WiFi only)

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1: Output Power

Mode: 11a

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
36.0	5745	19.8	95.5	5.0	Pass	24.8	0.302		
35.5	5785	19.7	93.3	5.0	Pass	24.7	0.295		
36.0	5825	19.7	93.3	5.0	Pass	24.7	0.295		

Mode: n20

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
36.0	5745	19.8	95.5	5.0	Pass	24.8	0.302		
35.5	5785	19.7	93.3	5.0	Pass	24.7	0.295		
36.0	5825	19.7	93.3	5.0	Pass	24.7	0.295		

Mode: n40

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
36.0	5755	19.6	91.2	5.0	Pass	24.6	0.288		
35.5	5795	19.4	87.1	5.0	Pass	24.4	0.275		

Mode: ac80

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
36.0	5775	19.0	79.4	5.0	Pass	24.0	0.251		

Note 1: Output power measured using a peak power meter, spurious limit is -20dBc.

Note 2: Power setting - the software power setting used during testing, included for reference only.

Note 3: Power measured using average power meter (non-gated) and is included for reference only.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #2: Power spectral Density

Mode: 11a

Power Setting	Frequency (MHz)	PSD (dBm/30kHz) ^{Note 1}	Limit dBm/3kHz	Result
36.0	5745	2.8	8.0	Pass
35.5	5785	2.0	8.0	Pass
36.0	5825	2.5	8.0	Pass

Mode: n20

Power Setting	Frequency (MHz)	PSD (dBm/30kHz) ^{Note 1}	Limit dBm/3kHz	Result
36.0	5745	2.2	8.0	Pass
35.5	5785	1.4	8.0	Pass
36.0	5825	2.0	8.0	Pass

Mode: n40


Power Setting	Frequency (MHz)	PSD (dBm/30kHz) ^{Note 1}	Limit dBm/3kHz	Result
36.0	5755	-1.1	8.0	Pass
35.5	5795	-1.2	8.0	Pass

Mode: ac80

Power Setting	Frequency (MHz)	PSD (dBm/30kHz) ^{Note 1}	Limit dBm/3kHz	Result
36.0	5775	-2.6	8.0	Pass

Note 1: Test performed per method PKSPD, in KDB 558074. Power spectral density measured using: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$, $\text{VBW}=3*\text{RBW}$, peak detector, span = $1.5*\text{DTS BW}$, auto sweep time, max hold.

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

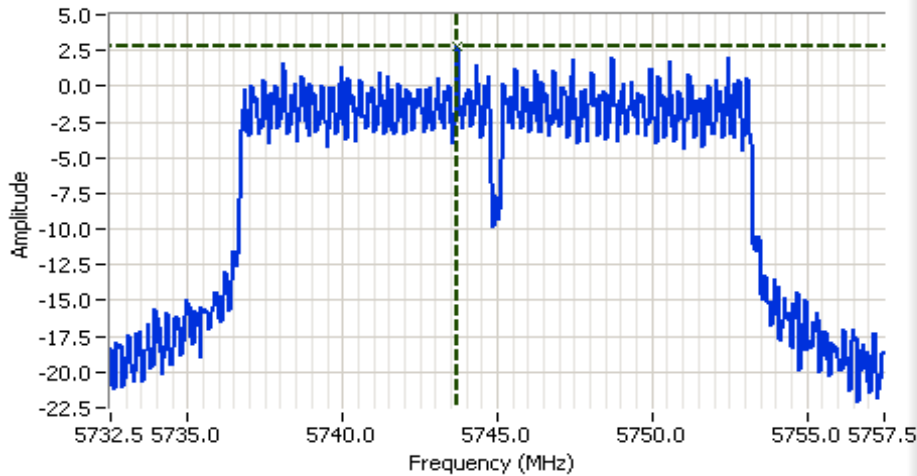

Analyzer Settings

Agilent Technologies, E4446A
 CF: 5745.000 MHz
 SPAN: 25.000 MHz
 RB: 30.0 kHz
 VB: 100 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 11.2 DB
 Sweep Time: 26.4ms
 Ref Lvl: 0.0 DBM

Comments

PSD, 11a, chain B

Cursor 1	5743.7083	2.81		
	0.0000	0.00		

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #3: Signal Bandwidth

Mode: 11a

Power Setting	Frequency (MHz)	Bandwidth (MHz)		RBW Setting (MHz)	
		6dB	99%	6dB	99%
36.0	5745	16.33	25.42	0.1	0.3
35.5	5785	16.33	24.03	0.1	0.3
36.0	5825	16.33	24.96	0.1	0.3

Mode: n20

Power Setting	Frequency (MHz)	Bandwidth (MHz)		RBW Setting (MHz)	
		6dB	99%	6dB	99%
36.0	5745	17.53	26.09	0.1	0.3
35.5	5785	17.53	24.49	0.1	0.3
36.0	5825	17.53	25.42	0.1	0.3

Mode: n40


Power Setting	Frequency (MHz)	Bandwidth (MHz)		RBW Setting (MHz)	
		6dB	99%	6dB	99%
36.0	5755	33.73	42.33	0.1	1
35.5	5795	35.07	40.33	0.1	1

Mode: ac80

Power Setting	Frequency (MHz)	Bandwidth (MHz)		RBW Setting (MHz)	
		6dB	99%	6dB	99%
36.0	5775	72.50	76.04	0.1	1

Note 1: DTS BW: RBW=100kHz, VBW $\geq 3 \times$ RBW, peak detector, max hold, auto sweep time.
 99% BW: RBW=1-5% of 99%BW, VBW $\geq 3 \times$ RBW, peak detector, max hold, auto sweep time.

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

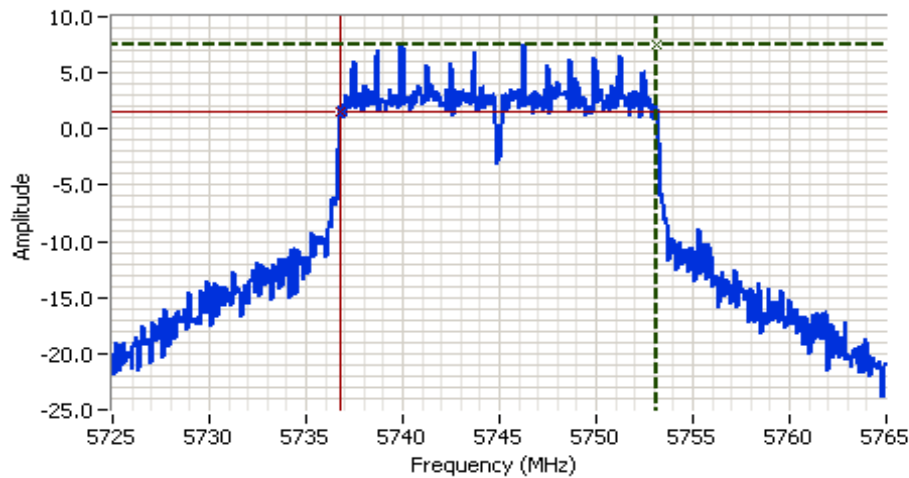


Analyzer Settings

Agilent Technologies, E4446A
 CF: 5745.000 MHz
 SPAN: 40.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 11.2 DB
 Sweep Time: 3.8ms
 Ref Lvl: 10.0 DBM

Comments

6dB BW: 16.333 MHz
 11a, chain B

Cursor 1	5753.1333	7.53		Delta Freq.	16.333
Cursor 2	5736.8000	1.53		Delta Amplitude	6.00

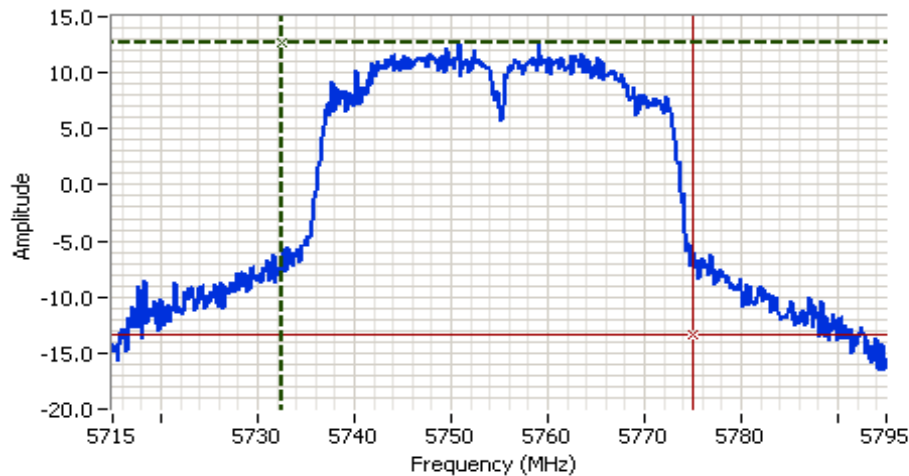

Analyzer Settings

Agilent Technologies, E4446A
 CF: 5755.000 MHz
 SPAN: 80.000 MHz
 RB: 1.000 MHz
 VB: 3.000 MHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 11.2 DB
 Sweep Time: 1.0ms
 Ref Lvl: 10.0 DBM

Comments

99% power BW: 42.329 MHz
 n40, chain B

Cursor 1	5732.5707	12.64		Delta Freq.	42.329
Cursor 2	5774.9002	-13.36		Delta Amplitude	26.00




Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4a: Out of Band Spurious Emissions

Mode: 802.11a


Frequency (MHz)	Power Setting	Mode	Limit	Result
5745	36.0	11a	-20dBc	Pass
5785	35.5	11a	-20dBc	Pass
5825	36.0	11a	-20dBc	Pass

Plots for low channel

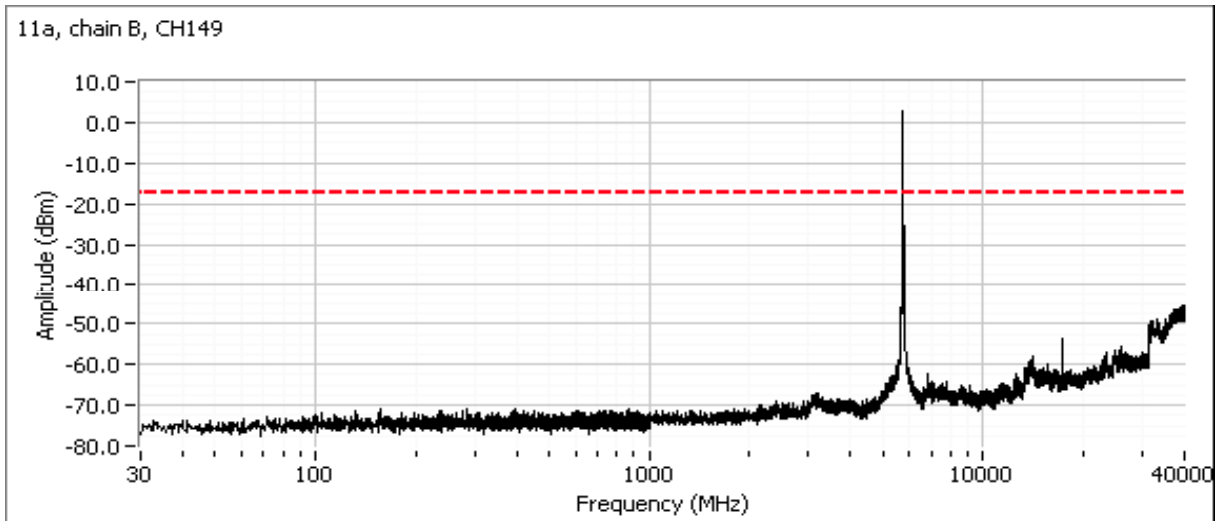


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Additional plot from 5715 - 5755 MHz showing compliance with -30dBc at the band edge.

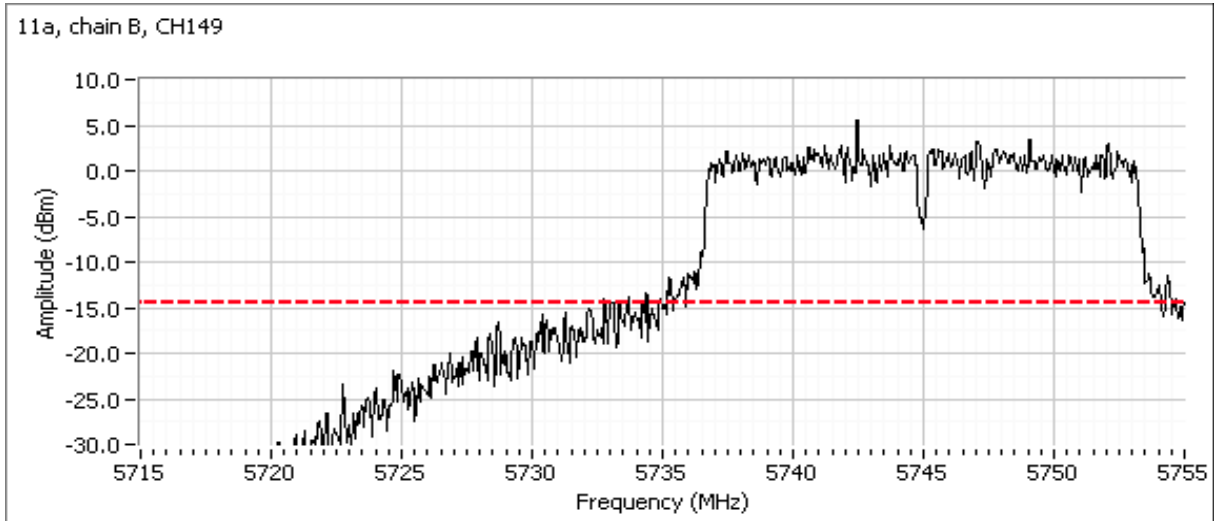


Plots for center channel

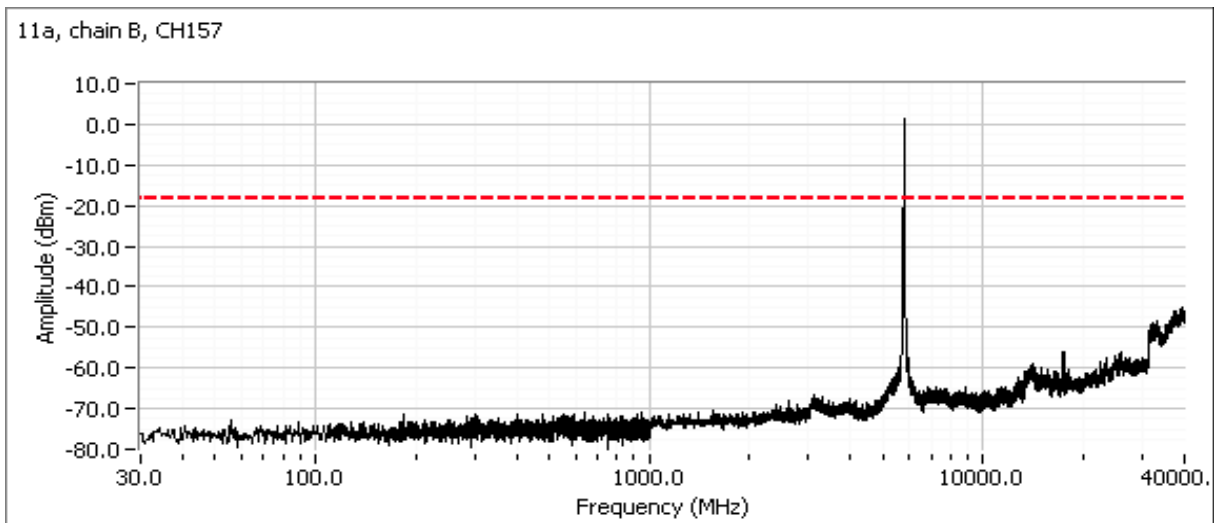


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Plots for high channel

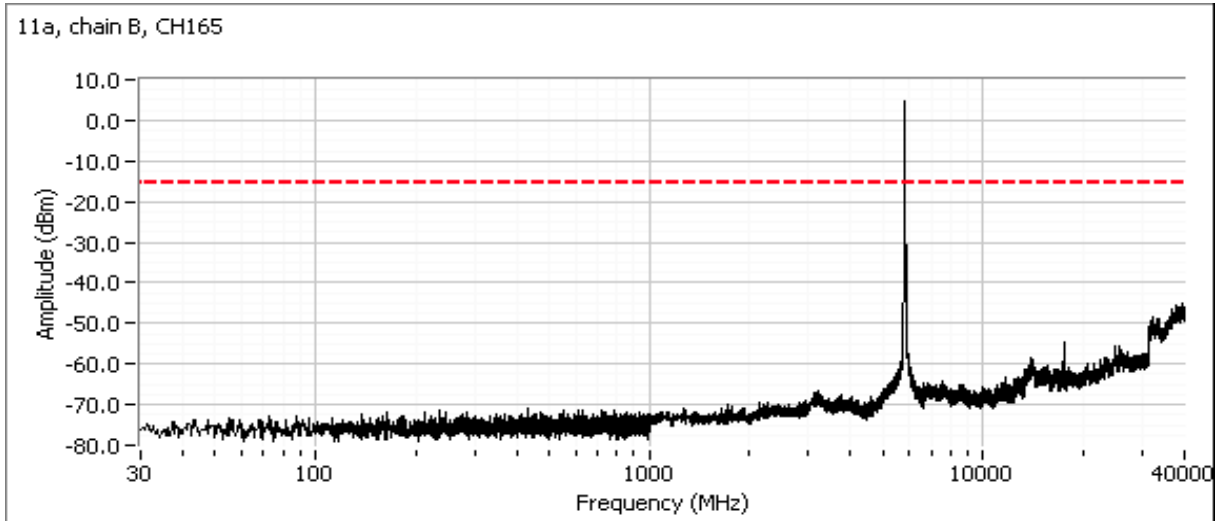

Additional plot from 5820 - 5860 MHz showing compliance with -30dBc at the band edge.

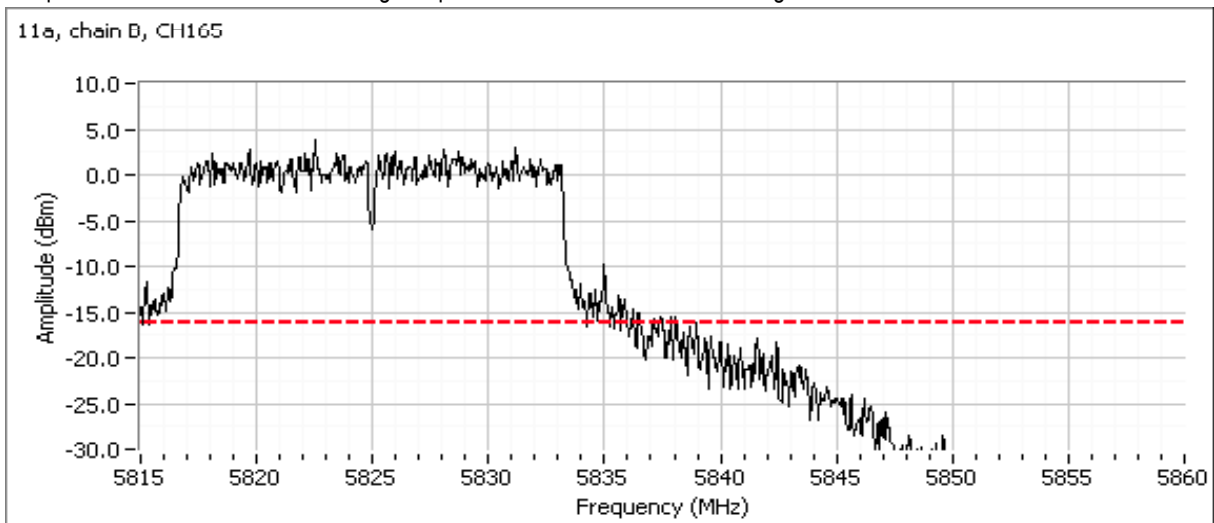


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4b: Out of Band Spurious Emissions

Mode: 802.11n20


Frequency (MHz)	Power Setting	Mode	Limit	Result
5745	36.0	n20	-20dBc	Pass
5785	35.5	n20	-20dBc	Pass
5825	36.0	n20	-20dBc	Pass

Plots for low channel

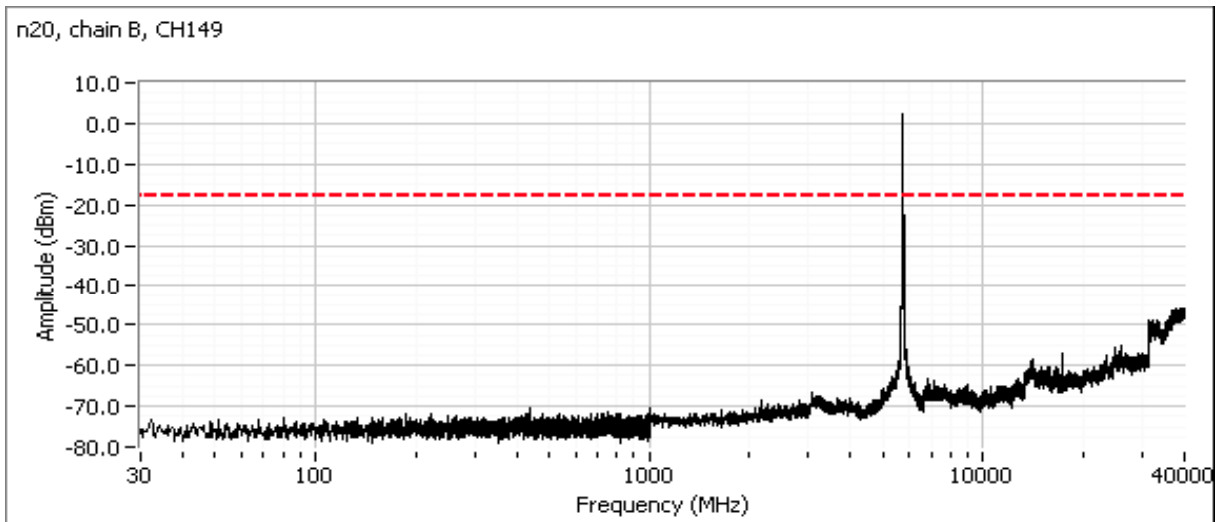


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Additional plot from 5715 - 5755 MHz showing compliance with -20dBc at the band edge.

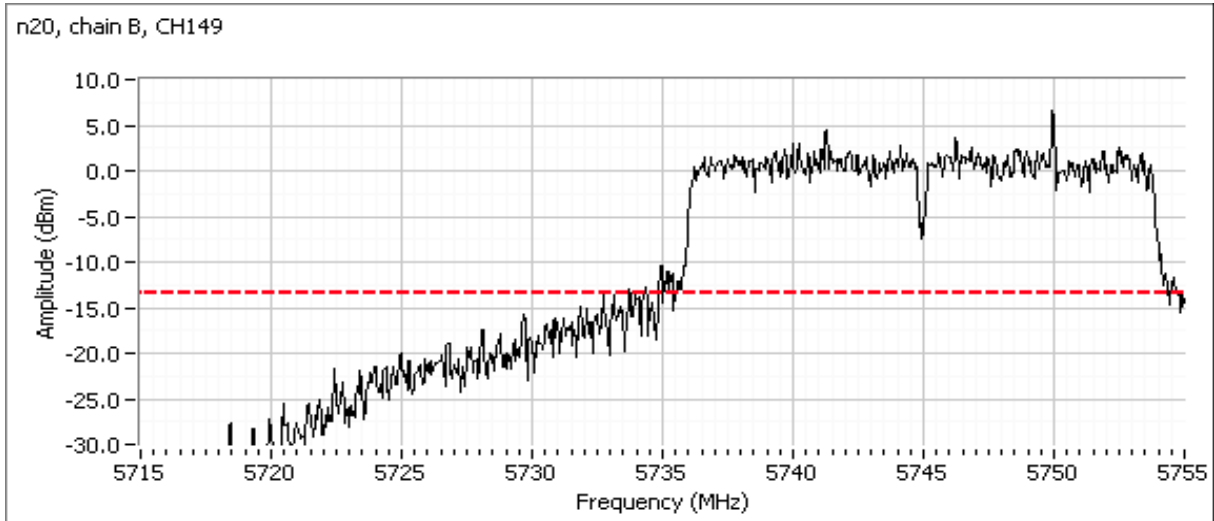


Plots for center channel

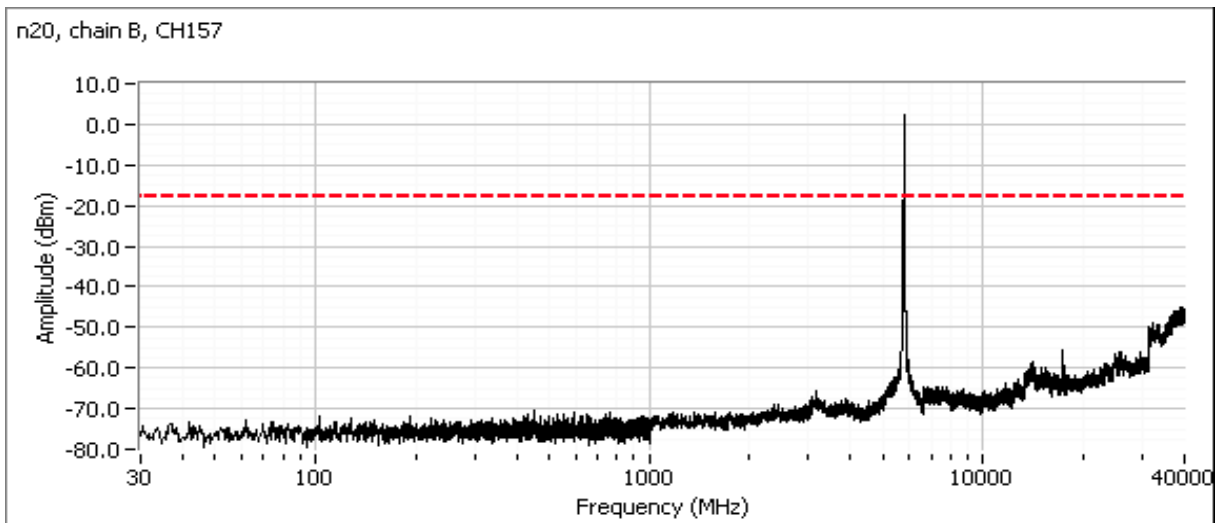


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Plots for high channel

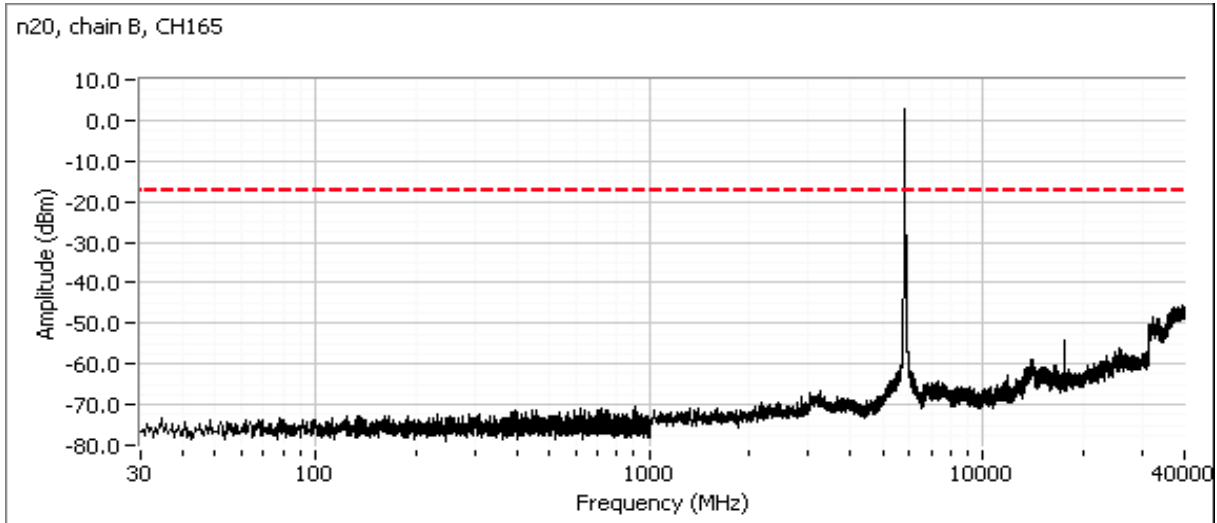

Additional plot from 5820 - 5860 MHz showing compliance with -20dBc at the band edge.

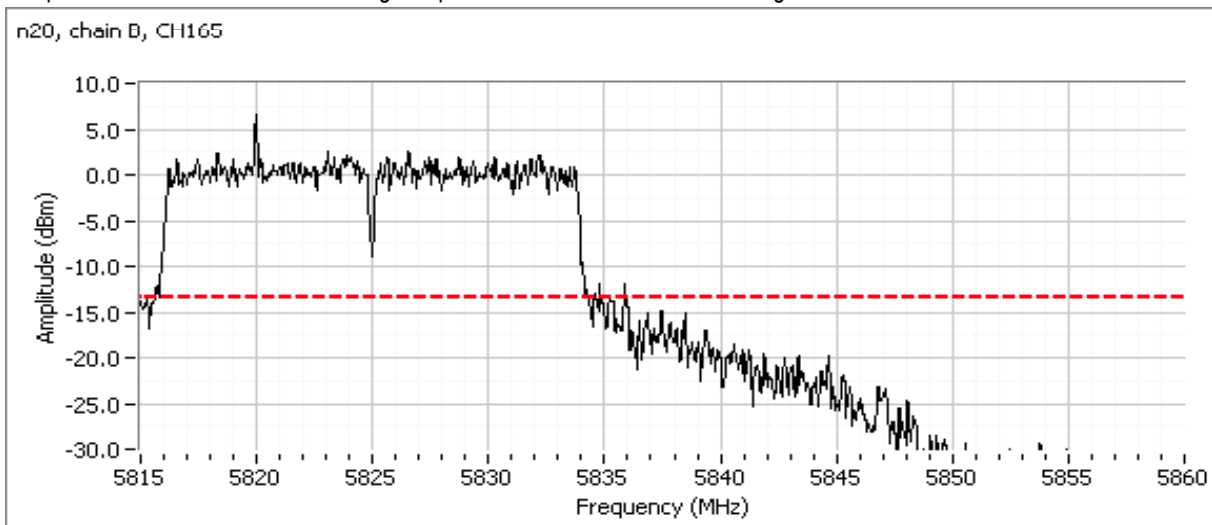


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4c: Out of Band Spurious Emissions


Mode: 802.11n40

Frequency (MHz)	Power Setting	Mode	Limit	Result
5755	36.0	n40	-20dBc	Pass
5795	35.5	n40	-20dBc	Pass

Plots for low channel

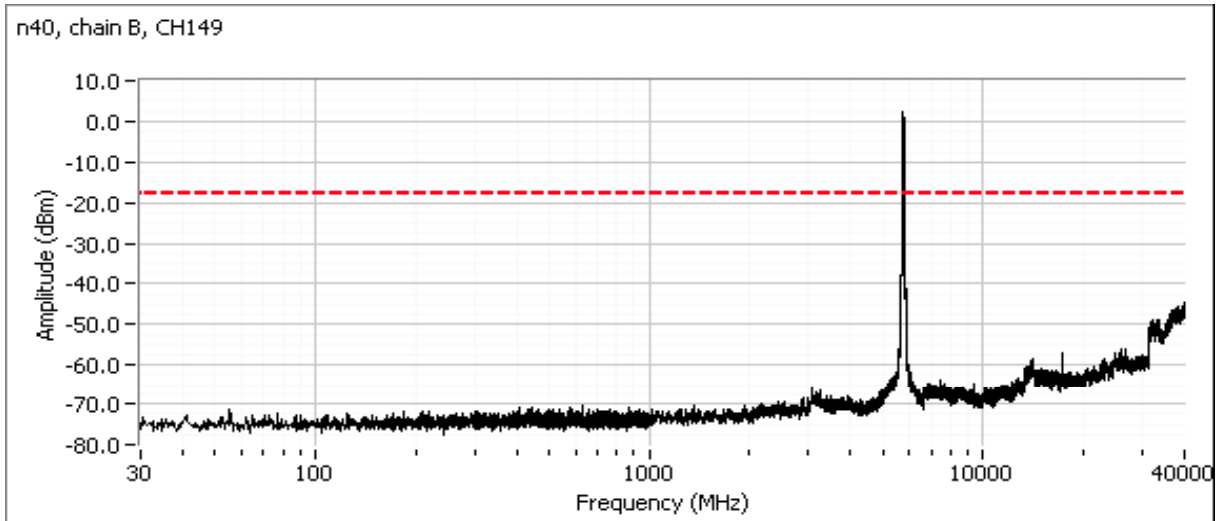


Additional plot from 5715 - 5755 MHz showing compliance with -20dBc at the band edge.

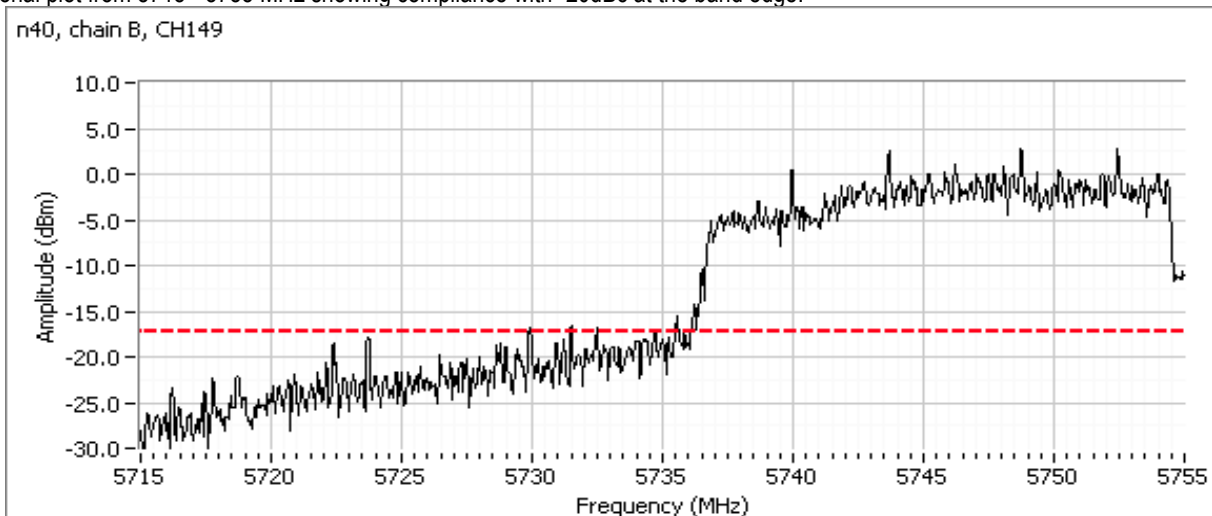


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Plots for center channel

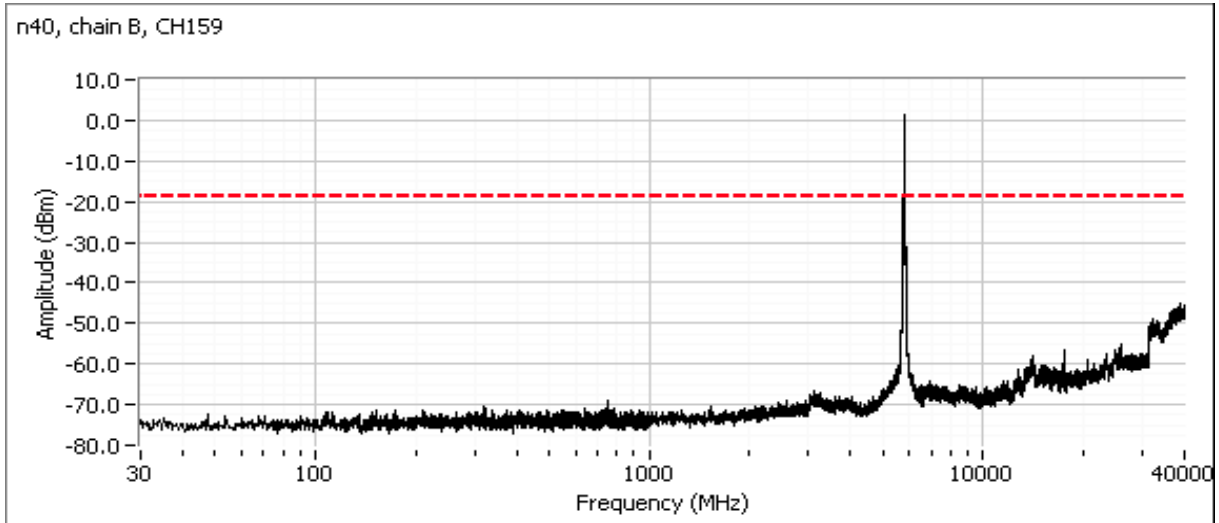

Additional plot from 5820 - 5860 MHz showing compliance with -30dBc at the band edge.

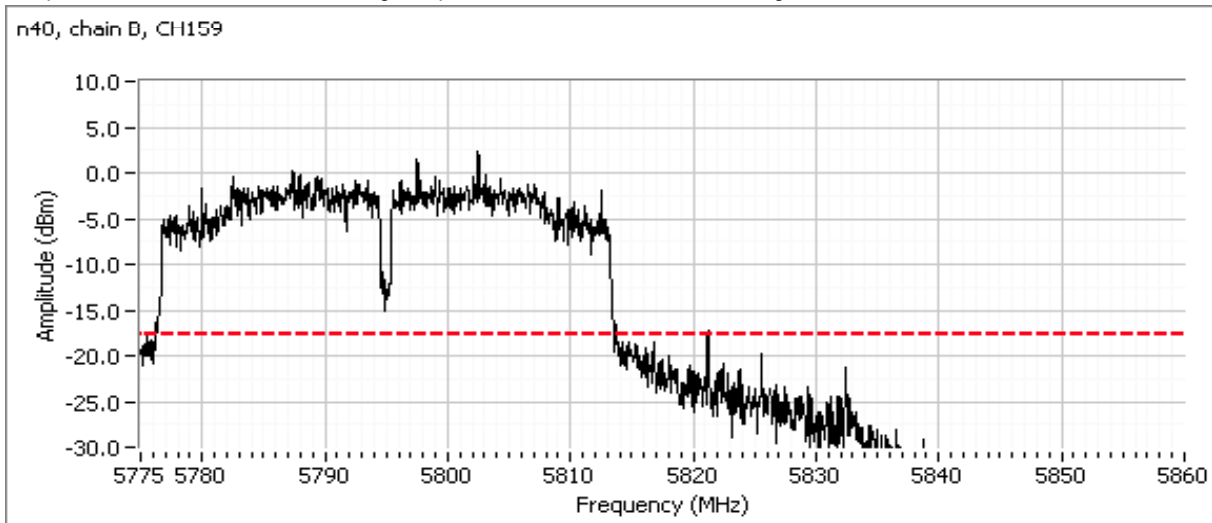

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4d: Out of Band Spurious Emissions

Date of Test: 10/1/2013

Test Engineer: Joseph Cadigal

Test Location: Lab 4A

Config. Used: No antennas


Config Change:

EUT Voltage: 3.3Vdc

Mode: 802.11ac80


Frequency (MHz)	Power Setting	Mode	Limit	Result
5775	36.0	n40	-20dBc	Pass

Plots for low channel

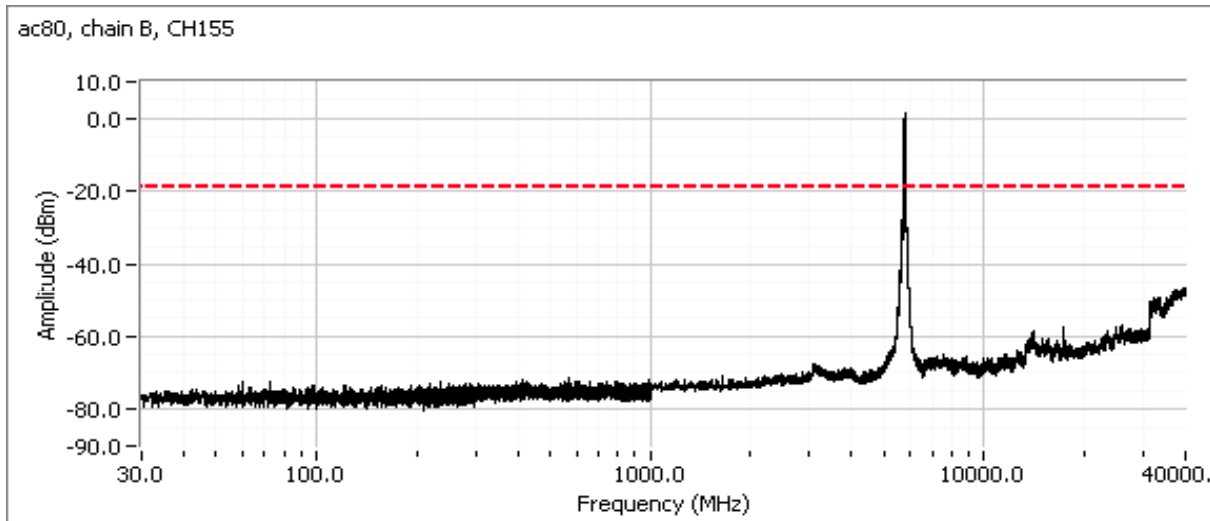

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Additional plot from 5715 - 5755 MHz showing compliance with -20dBc at the band edge.

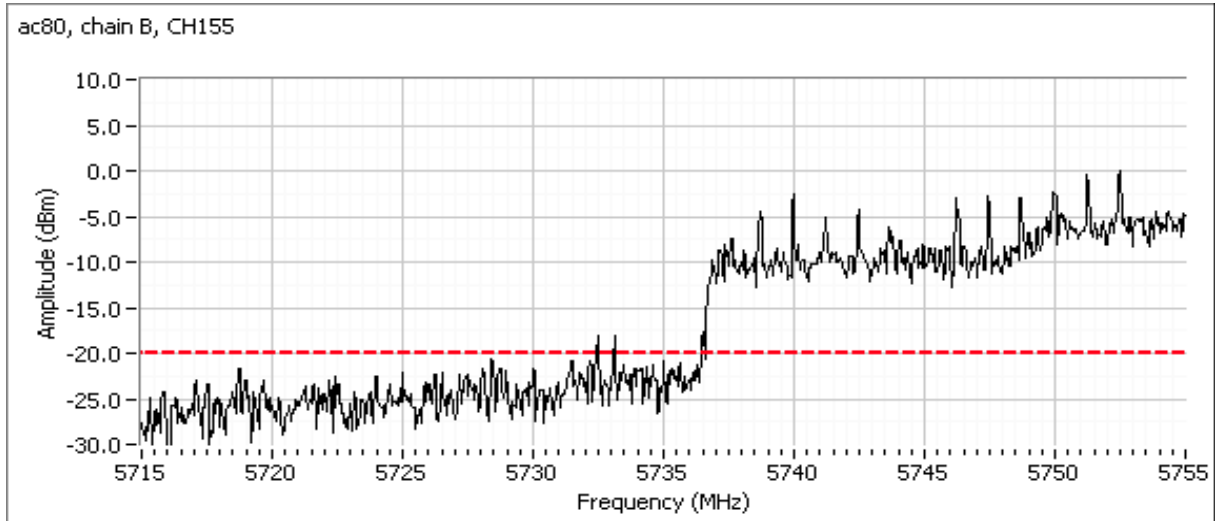

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements Power, PSD, Bandwidth and Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 9/30/2013 & 10/1/13
 Test Engineer: John Caizzi & Joseph Cadigal
 Test Location: Lab 4A

Config. Used: No antennas
 Config Change:
 EUT Voltage: 3.3Vdc

General Test Configuration

The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements were made on a single chain.

All measurements have been corrected to allow for the external attenuators used.

Ambient Conditions:

Temperature: 24 °C
 Rel. Humidity: 33 %

Summary of Results

Run #	Pwr setting	Avg Pwr	Test Performed	Limit	Pass / Fail	Result / Margin
1	-	-	Output Power	15.247(b)	Pass	n20: 20.9 dBm n40: 20.3 dBm ac80: 16.8 dBm
2	-	-	Power spectral Density (PSD)	15.247(d)	Pass	n20: 2.1 dBm / 30kHz n40: 0.5 dBm / 30kHz ac80: -6.0 dBm / 30kHz
3			Minimum 6dB Bandwidth	15.247(a)		These measurements are covered by the single chain data
3			99% Bandwidth	RSS GEN		
4			Spurious emissions	15.247(b)		

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

EMC Test Data

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
n20	6.5Mbps	0.99	Yes	5.36	0.0	0.0	187
n40	13.5Mbps	0.97	Yes	3.08	0.1	0.2	325
ac80	VHT0	0.93	Yes	0.43	0.3	0.6	2326

* Correction factor when using RMS/Power averaging - $10 \cdot \log(1/x)$

** Correction factor when using linear voltage average - $20 \cdot \log(1/x)$

T = Minimum transmission duration

Sample Notes

MAC Address: 001500DC7B25 DRTU Tool Version 1.7.1-752, Driver version 16.6.0.1 (WiFi only)

Antenna Gain Information

Freq	Antenna Gain (dBi) / Chain				BF	MultiChain Legacy	CDD	Sectorized / Xpol	Dir G (PWR)	Dir G (PSD)
	1	2	3	4						
5725-5850	5	5			No	No	Yes	No	5.0	

For devices that support CDD modes

Min # of spatial streams: 1

Max # of spatial streams: 2

Notes:	BF = beamforming mode supported, Multichain Legacy = 802.11 legacy data rates supported for multichain transmissions, CDD = Cyclic Delay Diversity (or Cyclic Shift Diversity) modes supported, Sectorized / Xpol = antennas are sectorized or cross polarized.
Notes:	Dir G (PWR) = total gain (Gant + Array Gain) for power calculations; Dir G (PSD) = total gain for PSD calculations based on FCC KDB 662911. Depending on the modes supported, the Array Gain value for power could be different from the PSD value.
Notes:	Array gain for power/psd calculated per KDB 662911 D01, v01r02.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1: Output Power

Operating Mode: 802.11n20
 Directional Gain (dBi): 5.0

Max EIRP (mW): 390.1

Frequency (MHz)	Chain	Software Setting	Power ¹		Total		Max Power (W)	Limit dBm	Result	Power (dBm) ³
			dBm	mW	mW	dBm				
5745	1	34.0 / 33.5	17.8	60.3	121.9	20.9	0.123	30.0	Pass	
	2		17.9	61.7						
5785	1	34.5 / 34.0	18.0	63.1	123.4	20.9		30.0	Pass	
	2		17.8	60.3						
5825	1	34.5 / 34.0	17.9	61.7	121.9	20.9		30.0	Pass	
	2		17.8	60.3						

Operating Mode: 802.11n40
 Directional Gain (dBi): 5.0

Max EIRP (mW): 335.8

Frequency (MHz)	Chain	Software Setting	Power ¹		Total		Max Power (W)	Limit dBm	Result	Power (dBm) ³
			dBm	mW	mW	dBm				
5755	1	34.5 / 34.0	17.3	53.7	106.2	20.3	0.106	30.0	Pass	
	2		17.2	52.5						
5795	1	34.5 / 34.0	17.3	53.7	103.8	20.2		30.0	Pass	
	2		17.0	50.1						

Operating Mode: 802.11ac80
 Directional Gain (dBi): 5.0

Max EIRP (mW): 150.0

Frequency (MHz)	Chain	Software Setting	Power ¹		Total		Max Power (W)	Limit dBm	Result	Power (dBm) ³
			dBm	mW	mW	dBm				
5775	1	30 / 29.5	13.8	24.0	47.4	16.8	0.047	30.0	Pass	
	2		13.7	23.4						

Note 1: Output power measured using a peak power meter, spurious limit is -20dBc.

Note 2: Power setting - if a single number the same power setting was used for each chain. If multiple numbers the power setting for each chain is separated by a comma (e.g. x,y would indicate power setting x for chain 1, power setting y for chain 2.

Note 3: Power measured using average power meter (non-gated) and is included for reference only.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #2: Power spectral Density

Mode: n20

Power Setting	Frequency (MHz)	PSD (dBm/30kHz) ^{Note 1}				Total	Limit dBm/3kHz	Result
		Chain 1	Chain 2	Chain 3	Chain 4			
34.0, 33.5	5745	-0.7	-1.1			2.1	8.0	Pass
34.5, 34.0	5785	-1.1	-1.5			1.7	8.0	Pass
34.5, 34.0	5825	-1.0	-1.1			2.0	8.0	Pass


Mode: n40

Power Setting	Frequency (MHz)	PSD (dBm/30kHz) ^{Note 1}				Total	Limit dBm/3kHz	Result
		Chain 1	Chain 2	Chain 3	Chain 4			
34.5, 34.0	5755	-2.4	-2.6			0.5	8.0	Pass
34.5, 34.0	5795	-3.3	-3.3			-0.3	8.0	Pass

Mode: ac80

Power Setting	Frequency (MHz)	PSD (dBm/30kHz) ^{Note 1}				Total	Limit dBm/3kHz	Result
		Chain 1	Chain 2	Chain 3	Chain 4			
30, 29.5	5775	-9.1	-9.0			-6.0	8.0	Pass

Note 1: Test performed per method PKSPD, in KDB 558074. Power spectral density measured using: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$, $\text{VBW}=3*\text{RBW}$, peak detector, span = $1.5*\text{DTS BW}$, auto sweep time, max hold.

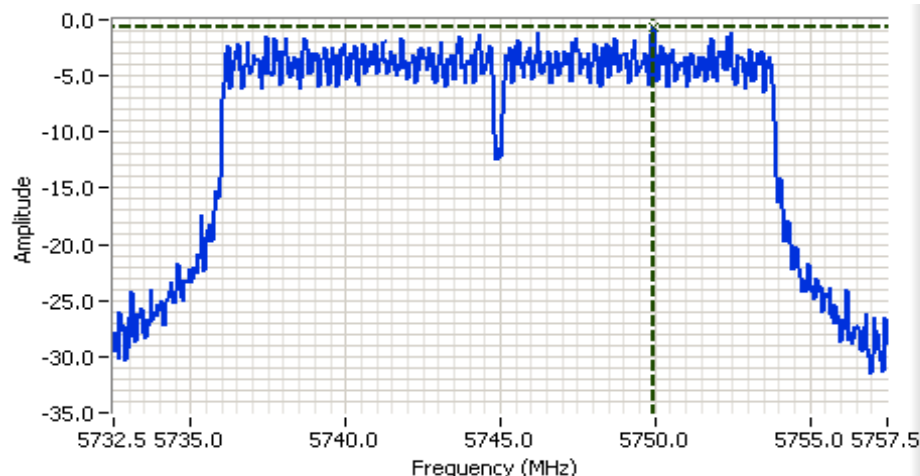

Analyzer Settings


Agilent Technologies, E4446A
 CF: 5745.000 MHz
 SPAN: 25.000 MHz
 RB: 30.0 kHz
 VB: 100 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 11.2 DB
 Sweep Time: 26.4ms
 Ref Lvl: 0.0 DBM

Comments

PSD, n20, chain A MIMO

Cursor 1	5749.9583	-0.69	
	0.0000	0.00	

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

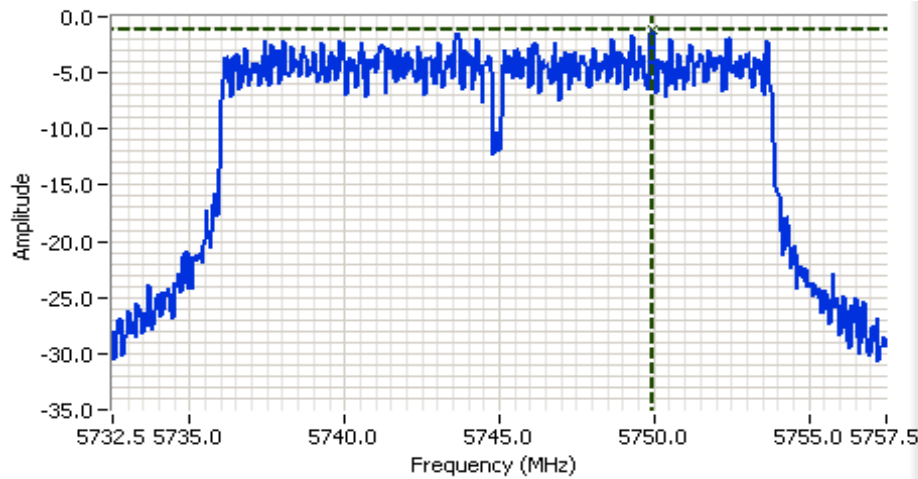

Analyzer Settings

Agilent Technologies, E4446A
 CF: 5745.000 MHz
 SPAN: 25.000 MHz
 RB: 30.0 kHz
 VB: 100 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 11.2 DB
 Sweep Time: 26.4ms
 Ref Lvl: 0.0 DBM

Comments

PSD, n20, chain B MIMO

Cursor 1 5749.9167 -1.12

0.0000 0.00

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.
 For radiated emissions testing the measurement antenna was located 3 meters from the EUT, unless otherwise noted.

Ambient Conditions:

Temperature: 25 °C
 Rel. Humidity: 40 %

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Target / Measured Power	Power Setting	Test Performed	Limit	Result / Margin
1	b	1 - 2412MHz	15.5 / 15.4	19.5	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	46.0 dBµV/m @ 2386.3 MHz (-8.0 dB)
	b	11 - 2462MHz	15.5 / 15.6	20.0	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	47.8 dBµV/m @ 2488.2 MHz (-6.2 dB)
2	g	1 - 2412MHz	13.5 / 13.6	18.5	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	45.3 dBµV/m @ 2390.0 MHz (-8.7 dB)
	g	2 - 2417MHz	16 / 16	21.5	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	47.0 dBµV/m @ 2390.0 MHz (-7.0 dB)
	g	10 - 2457MHz	16 / 16	21.5	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	46.7 dBµV/m @ 2483.5 MHz (-7.3 dB)
	g	11 - 2462MHz	13.5 / 13.5	18.5	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	44.2 dBµV/m @ 2483.5 MHz (-9.8 dB)
3	n20	1 - 2412MHz	13.5 / 13.6	18.5	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	46.1 dBµV/m @ 2390.0 MHz (-7.9 dB)
	n20	2 - 2417MHz	16 / 16	21.5	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	46.0 dBµV/m @ 2390.0 MHz (-8.0 dB)
	n20	10 - 2457MHz	16 / 16	21.5	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	46.8 dBµV/m @ 2483.5 MHz (-7.2 dB)
	n20	11 - 2462MHz	13.5 / 13.5	18.5	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	46.4 dBµV/m @ 2483.6 MHz (-7.6 dB)

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #	Mode	Channel	Target / Measured Power	Power Setting	Test Performed	Limit	Result / Margin
4	n40	3 - 2422MHz	12 / 12.2	17.5	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	44.7 dBµV/m @ 2389.5 MHz (-9.3 dB)
	n40	4 - 2427MHz	12.5 / 12.3	17.5	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	44.1 dBµV/m @ 2389.8 MHz (-9.9 dB)
	n40	5 - 2432MHz	15 / 15	20.5	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	46.1 dBµV/m @ 2390.0 MHz (-7.9 dB)
	n40	9 - 2452MHz -	13 / 13	18.5	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	46.5 dBµV/m @ 2483.6 MHz (-7.5 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Sample Notes

MAC Address: 001500DC7B25 DRTU Tool Version 1.7.1-752, Driver version 16.6.0.1 (WiFi only)

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

Peak measurements performed with: RBW=1MHz, VBW=3MHz, peak detector, max hold, auto sweep time

Unless otherwise stated/noted, emission has duty cycle $\geq 98\%$ and was measured using RBW=1MHz, VBW=10Hz, peak detector, linear average mode, auto sweep time, max hold.

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
11b	1 Mb/s	0.99	Yes	5.94	0.0	0.0	168
11g	6 Mb/s	0.99	Yes	5.71	0.0	0.0	175
n20	MCS0	0.99	Yes	5.36	0.0	0.0	187
n40	MCS0	0.97	Yes	2.88	0.1	0.2	347

Measurement Specific Notes:

Note 1:	Emission has duty cycle $< 98\%$, but constant, average measurement performed: RBW=1MHz, VBW=10Hz, peak detector, linear averaging, auto sweep, trace average 100 traces, measurement corrected by Linear Voltage correction factor
Note 2:	Plots of the average bandedge do not account for any duty cycle correction. Refer to the tabular results for final measurements.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1: Radiated Bandedge Measurements

Date of Test: 9/19/2013 0:00

Test Engineer: Jack Liu

Test Location: FT Chamber # 3

Config. Used: 1

Config Change: None

EUT Voltage: 3.3VDC

Channel: 1

Mode: b


Tx Chain: A

Data Rate: 1 Mb/s

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
15.5	15.4	19.5

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2386.310	46.0	V	54.0	-8.0	AVG	245	1.0	POS; RB 1 MHz; VB: 10 Hz
2388.080	54.4	V	74.0	-19.6	PK	245	1.0	POS; RB 1 MHz; VB: 3 MHz
2386.310	44.2	H	54.0	-9.8	AVG	344	1.0	POS; RB 1 MHz; VB: 10 Hz
2386.150	52.3	H	74.0	-21.7	PK	344	1.0	POS; RB 1 MHz; VB: 3 MHz

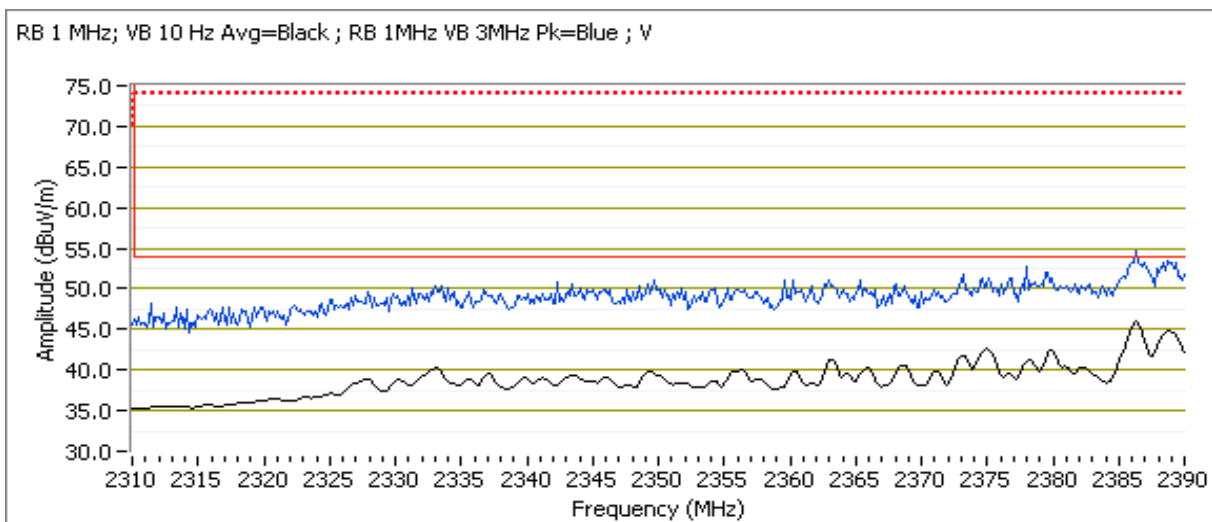


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 11 Mode: b
 Tx Chain: A Data Rate: 1 Mb/s

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
15.5	15.6	20.0

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2488.200	47.8	H	54.0	-6.2	AVG	238	1.0	POS; RB 1 MHz; VB: 10 Hz
2488.000	55.1	H	74.0	-18.9	PK	238	1.0	POS; RB 1 MHz; VB: 3 MHz
2488.230	44.4	V	54.0	-9.6	AVG	252	1.2	POS; RB 1 MHz; VB: 10 Hz
2487.930	52.3	V	74.0	-21.7	PK	252	1.2	POS; RB 1 MHz; VB: 3 MHz

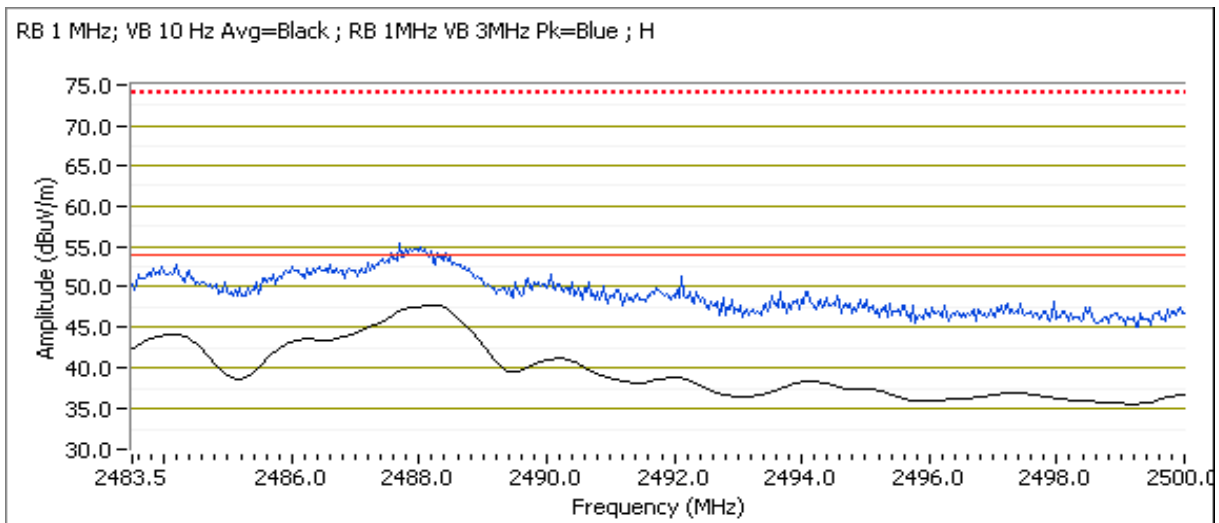

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #2: Radiated Bandedge Measurements

Date of Test: 9/19/2013 0:00

Test Engineer: Jack Liu

Test Location: FT Chamber # 3

Config. Used: 1

Config Change: None

EUT Voltage: 3.3VDC

Channel: 1

Mode: g


Tx Chain: A

Data Rate: 6 Mb/s

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
13.5	13.6	18.5

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2390.000	45.3	V	54.0	-8.7	AVG	239	1.0	POS; RB 1 MHz; VB: 10 Hz
2390.000	61.4	V	74.0	-12.6	PK	239	1.0	POS; RB 1 MHz; VB: 3 MHz
2390.000	43.9	H	54.0	-10.1	AVG	343	1.0	POS; RB 1 MHz; VB: 10 Hz
2389.680	57.7	H	74.0	-16.3	PK	343	1.0	POS; RB 1 MHz; VB: 3 MHz

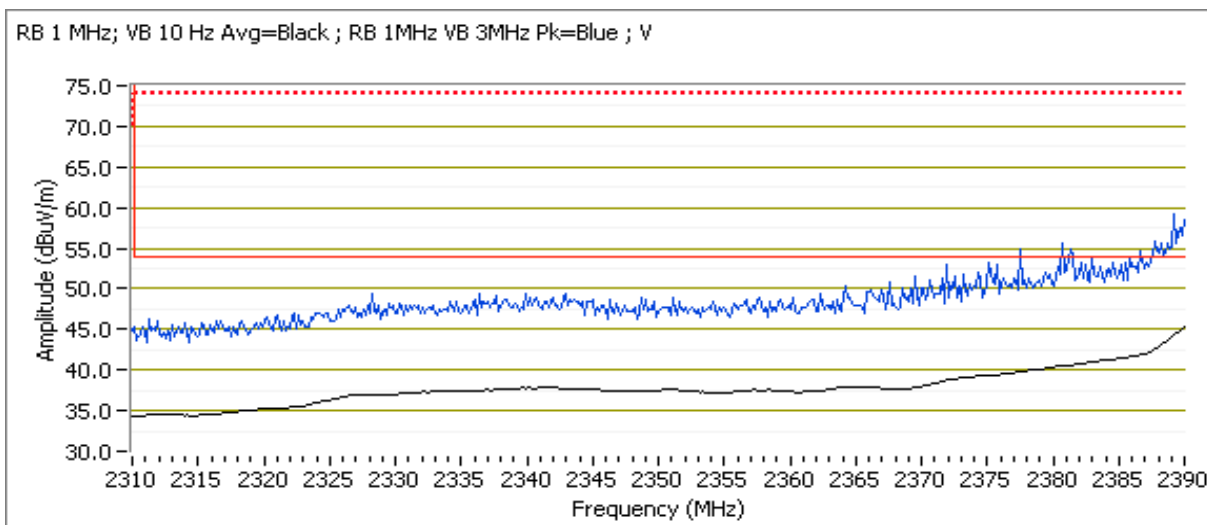


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 2 Mode: g
 Tx Chain: A Data Rate: 6 Mb/s

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
16.0	16.0	21.5

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2390.000	47.0	V	54.0	-7.0	AVG	240	1.0	POS; RB 1 MHz; VB: 10 Hz
2388.880	60.5	V	74.0	-13.5	PK	240	1.0	POS; RB 1 MHz; VB: 3 MHz
2390.000	45.7	H	54.0	-8.3	AVG	343	1.2	POS; RB 1 MHz; VB: 10 Hz
2387.760	60.3	H	74.0	-13.7	PK	343	1.2	POS; RB 1 MHz; VB: 3 MHz

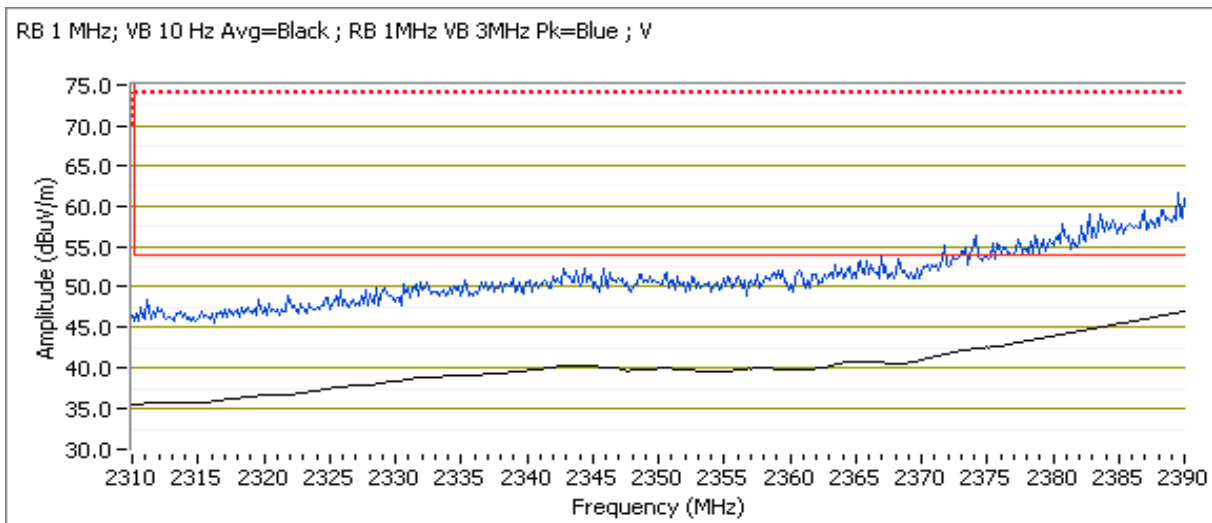


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 10 Mode: g
 Tx Chain: A Data Rate: 6 Mb/s

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
16.0	16.0	21.5

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2483.500	46.7	H	54.0	-7.3	AVG	242	1.0	POS; RB 1 MHz; VB: 10 Hz
2483.630	62.6	H	74.0	-11.4	PK	242	1.0	POS; RB 1 MHz; VB: 3 MHz
2483.500	44.1	V	54.0	-9.9	AVG	255	1.0	POS; RB 1 MHz; VB: 10 Hz
2484.130	60.1	V	74.0	-13.9	PK	255	1.0	POS; RB 1 MHz; VB: 3 MHz

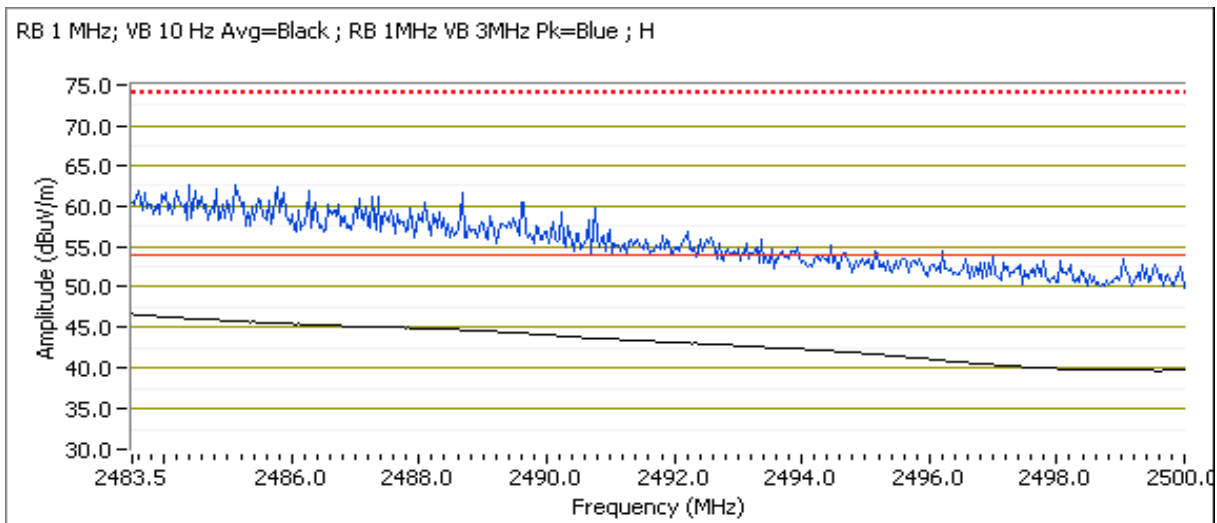


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 11 Mode: g
 Tx Chain: A Data Rate: 6 Mb/s

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
13.5	13.5	18.5

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2483.500	44.2	H	54.0	-9.8	AVG	246	1.0	POS; RB 1 MHz; VB: 10 Hz
2483.900	60.3	H	74.0	-13.7	PK	246	1.0	POS; RB 1 MHz; VB: 3 MHz
2483.500	41.2	V	54.0	-12.8	AVG	253	1.2	POS; RB 1 MHz; VB: 10 Hz
2484.100	57.1	V	74.0	-16.9	PK	253	1.2	POS; RB 1 MHz; VB: 3 MHz

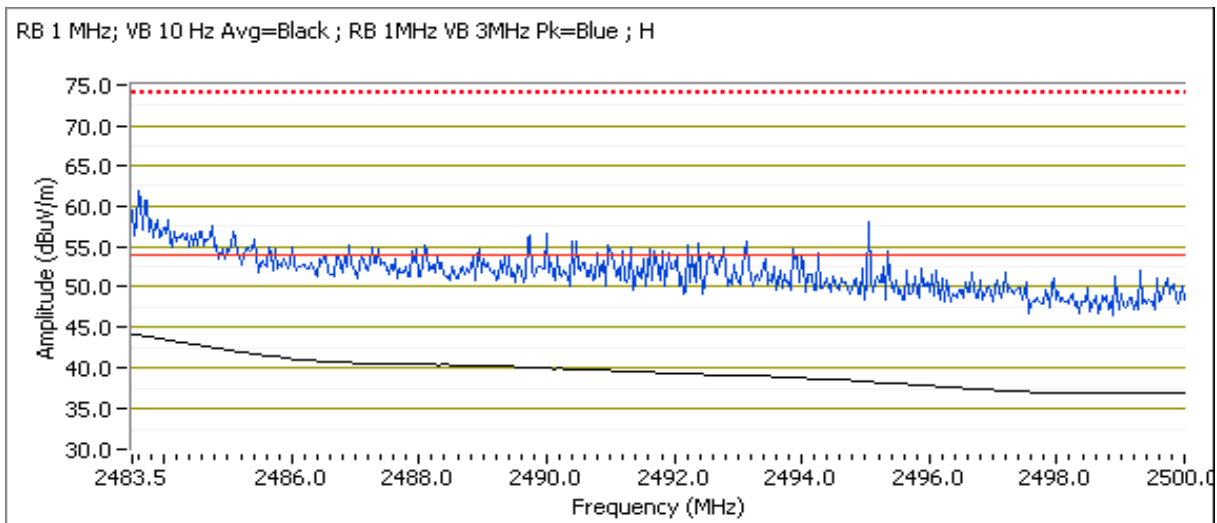

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #3: Radiated Bandedge Measurements

Date of Test: 9/19/2013 0:00

Test Engineer: Joseph Cadigal

Test Location: FT Chamber#3

Config. Used: 1

Config Change: None

EUT Voltage: 3.3VDC


Channel: 1
Tx Chain: A

Mode: n20
Data Rate: MCS0

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
13.5	13.6	18.5

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2390.000	46.1	V	54.0	-7.9	AVG	242	1.0	POS; RB 1 MHz; VB: 10 Hz
2389.680	65.2	V	74.0	-8.8	PK	242	1.0	POS; RB 1 MHz; VB: 3 MHz
2390.000	44.6	H	54.0	-9.4	AVG	360	1.2	POS; RB 1 MHz; VB: 10 Hz
2389.840	57.6	H	74.0	-16.4	PK	360	1.2	POS; RB 1 MHz; VB: 3 MHz

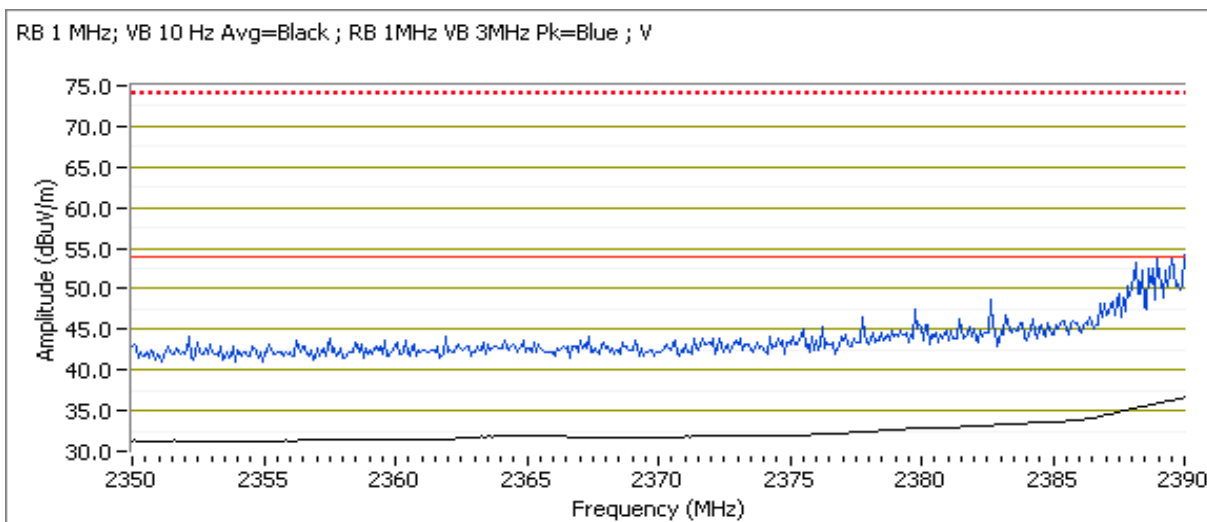


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 2 Mode: n20
 Tx Chain: A Data Rate: MCS0

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
16.0	16.0	21.5

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2390.000	46.0	V	54.0	-8.0	AVG	246	1.0	POS; RB 1 MHz; VB: 10 Hz
2389.440	57.6	V	74.0	-16.4	PK	246	1.0	POS; RB 1 MHz; VB: 3 MHz
2390.000	45.6	H	54.0	-8.4	AVG	345	1.0	POS; RB 1 MHz; VB: 10 Hz
2387.350	58.4	H	74.0	-15.6	PK	345	1.0	POS; RB 1 MHz; VB: 3 MHz

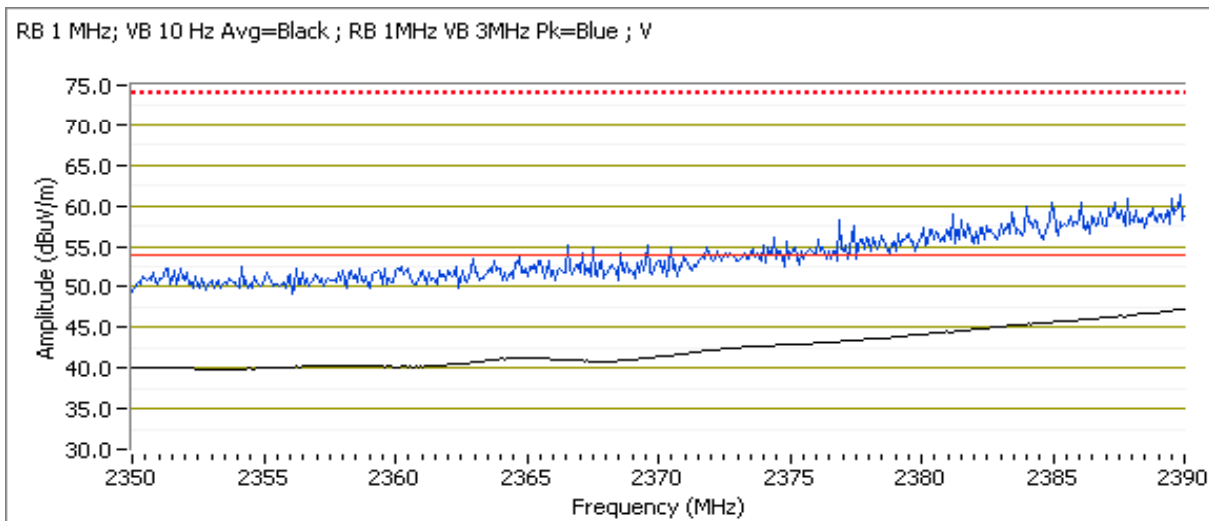


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 10 Mode: n20
 Tx Chain: A Data Rate: MCS0

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
16.0	16.0	21.5

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2483.500	46.8	H	54.0	-7.2	AVG	243	1.0	POS; RB 1 MHz; VB: 10 Hz
2484.490	61.4	H	74.0	-12.6	PK	243	1.0	POS; RB 1 MHz; VB: 3 MHz
2483.530	43.5	V	54.0	-10.5	AVG	257	1.0	POS; RB 1 MHz; VB: 10 Hz
2487.630	57.2	V	74.0	-16.8	PK	257	1.0	POS; RB 1 MHz; VB: 3 MHz

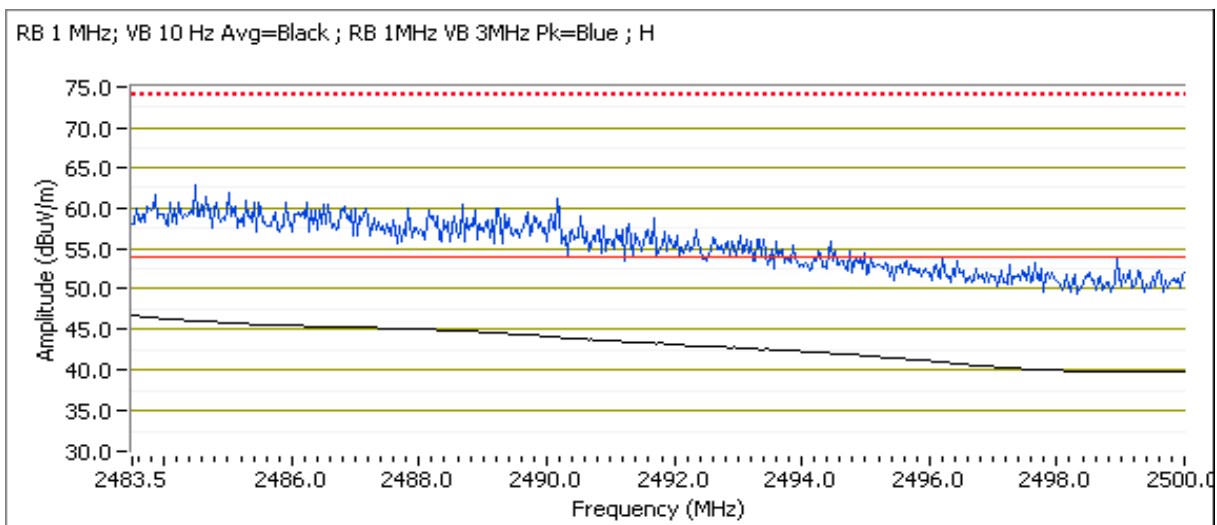


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 11 Mode: n20
 Tx Chain: A Data Rate: MCS0

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
13.5	13.5	18.5

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2483.570	46.4	H	54.0	-7.6	AVG	241	1.0	POS; RB 1 MHz; VB: 10 Hz
2484.360	60.6	H	74.0	-13.4	PK	241	1.0	POS; RB 1 MHz; VB: 3 MHz
2483.500	43.5	V	54.0	-10.5	AVG	255	1.2	POS; RB 1 MHz; VB: 10 Hz
2483.930	56.9	V	74.0	-17.1	PK	255	1.2	POS; RB 1 MHz; VB: 3 MHz

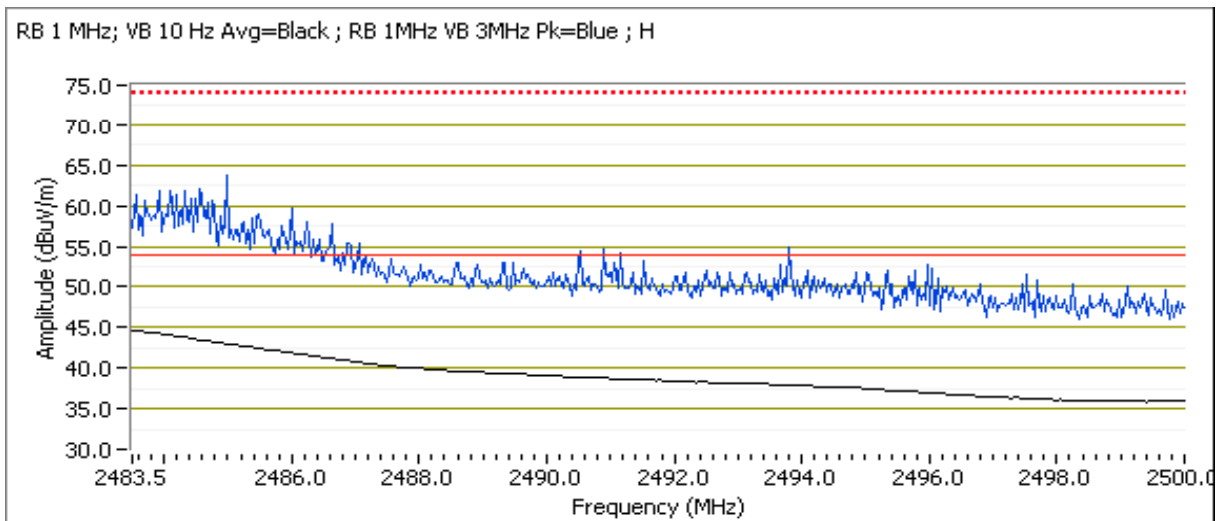

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4: Radiated Bandedge Measurements

Date of Test: 9/19/2013 0:00

Test Engineer: Joseph Cadigal

Test Location: FT Chamber#3

Config. Used: 1

Config Change: none

EUT Voltage: 3.3Vdc

Channel: 3

Mode: n40


Tx Chain: A

Data Rate: MCS0

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
12.0	12.2	17.5

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2389.520	44.7	V	54.0	-9.3	AVG	243	1.0	POS; RB 1 MHz; VB: 10 Hz, Note 1
2389.920	55.7	V	74.0	-18.3	PK	243	1.0	POS; RB 1 MHz; VB: 3 MHz
2389.760	43.9	H	54.0	-10.1	AVG	346	1.0	POS; RB 1 MHz; VB: 10 Hz, Note 1
2388.400	55.3	H	74.0	-18.7	PK	346	1.0	POS; RB 1 MHz; VB: 3 MHz

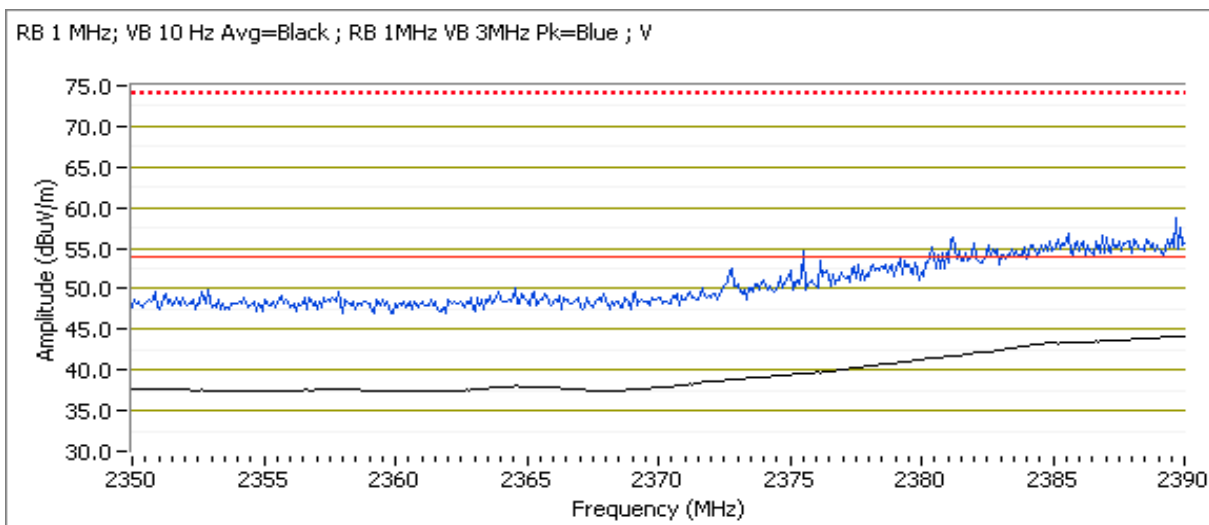


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 4 Mode: n40
 Tx Chain: A Data Rate: MCS0

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
12.5	12.3	17.5

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2389.840	44.1	V	54.0	-9.9	AVG	238	1.0	POS; RB 1 MHz; VB: 10 Hz, Note 1
2390.000	55.1	V	74.0	-18.9	PK	238	1.0	POS; RB 1 MHz; VB: 3 MHz
2389.840	43.0	H	54.0	-11.0	AVG	345	1.0	POS; RB 1 MHz; VB: 10 Hz, Note 1
2388.320	54.5	H	74.0	-19.5	PK	345	1.0	POS; RB 1 MHz; VB: 3 MHz

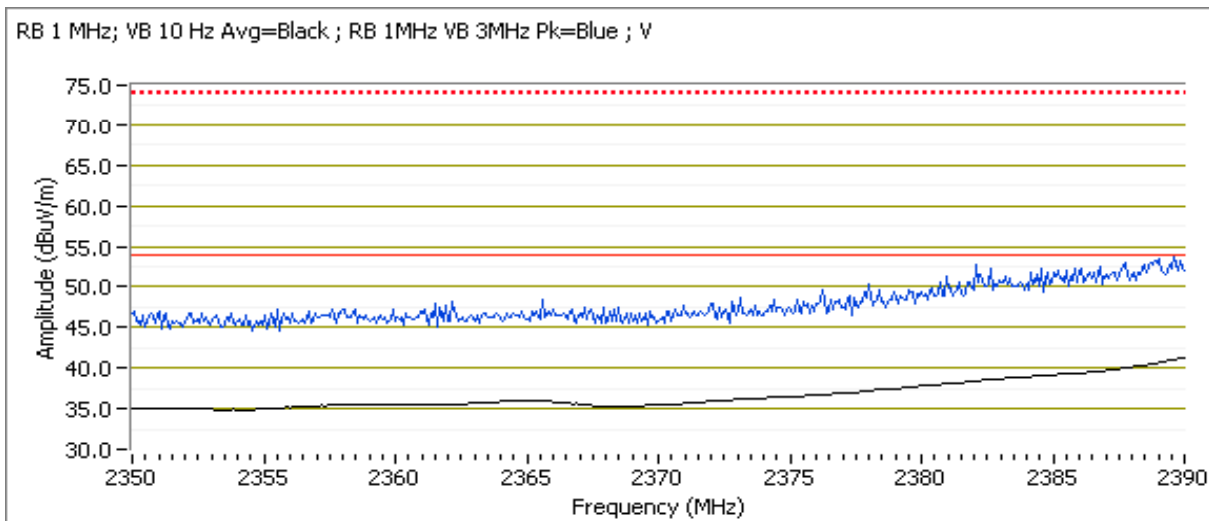


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 5 Mode: n40
 Tx Chain: A Data Rate: MCS0

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
15.0	15.0	20.5

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2390.000	46.1	V	54.0	-7.9	AVG	242	1.0	POS; RB 1 MHz; VB: 10 Hz, Note 1
2389.120	56.5	V	74.0	-17.5	PK	242	1.0	POS; RB 1 MHz; VB: 3 MHz
2390.000	45.1	H	54.0	-8.9	AVG	343	1.0	POS; RB 1 MHz; VB: 10 Hz, Note 1
2388.240	56.1	H	74.0	-17.9	PK	343	1.0	POS; RB 1 MHz; VB: 3 MHz

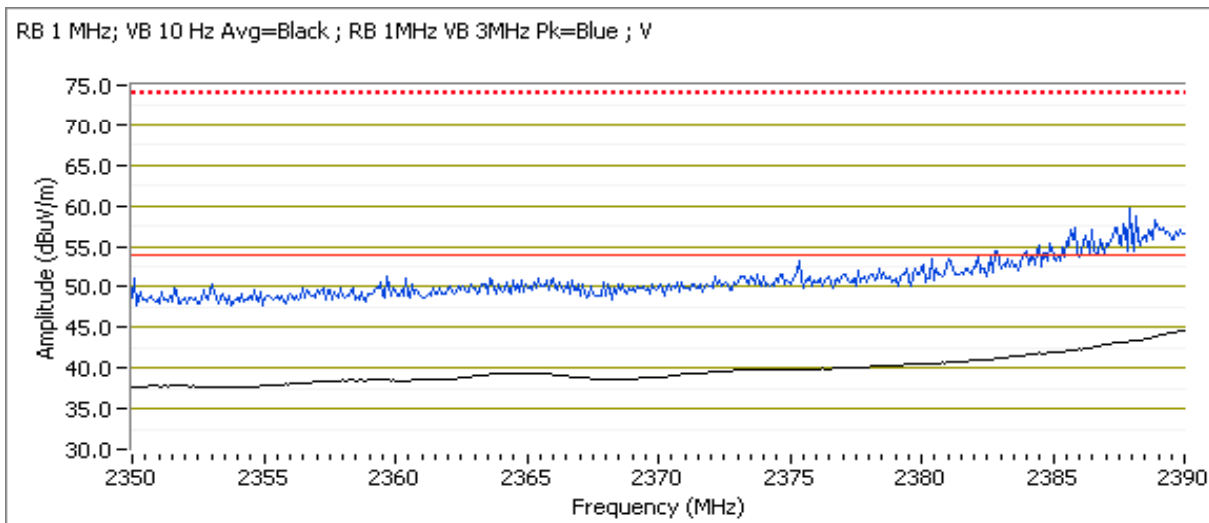


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 9 Mode: n40
 Tx Chain: A Data Rate: MCS0

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
13.0	13.0	18.5

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2483.570	46.5	H	54.0	-7.5	AVG	242	1.0	POS; RB 1 MHz; VB: 10 Hz, Note 1
2484.100	58.5	H	74.0	-15.5	PK	242	1.0	POS; RB 1 MHz; VB: 3 MHz
2483.570	43.7	V	54.0	-10.3	AVG	254	1.0	POS; RB 1 MHz; VB: 10 Hz, Note 1
2484.460	55.3	V	74.0	-18.7	PK	254	1.0	POS; RB 1 MHz; VB: 3 MHz

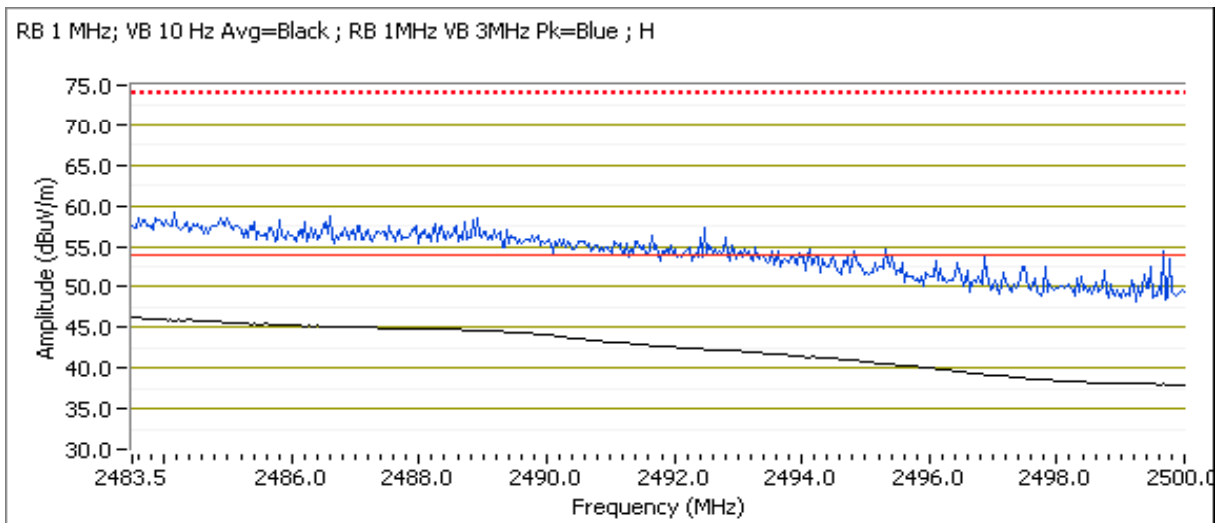

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.
 For radiated emissions testing the measurement antenna was located 3 meters from the EUT, unless otherwise noted.

Ambient Conditions:

Temperature: 25 °C
 Rel. Humidity: 40 %

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Target / Measured Power	Power Setting	Test Performed	Limit	Result / Margin
1	b	1 - 2412MHz	14 / 14	22.5	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	45.9 dBµV/m @ 2385.8 MHz (-8.1 dB)
	b	11 - 2462MHz	14 / 14.1	22.5	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	41.2 dBµV/m @ 2487.8 MHz (-12.8 dB)
2	g	1 - 2412MHz	12 / 12.1	21.0	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	43.6 dBµV/m @ 2390.0 MHz (-10.4 dB)
	g	2 - 2417MHz	15 / 15.1	25.0	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	44.9 dBµV/m @ 2390.0 MHz (-9.1 dB)
	g	11 - 2462MHz	13.5 / 13.4	22.0	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	42.0 dBµV/m @ 2483.5 MHz (-12.0 dB)
3	n20	1 - 2412MHz	12 / 12.1	21.0	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	44.4 dBµV/m @ 2390.0 MHz (-9.6 dB)
	n20	2 - 2417MHz	15 / 15.2	25.0	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	45.9 dBµV/m @ 2390.0 MHz (-8.1 dB)
	n20	11 - 2462MHz	13.5 / 13.4	22.0	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	43.4 dBµV/m @ 2483.5 MHz (-10.6 dB)
4	n40	3 - 2422MHz	10 / 10.2	19.0	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	45.4 dBµV/m @ 2389.7 MHz (-8.6 dB)
	n40	4 - 2427MHz	11 / 11.1	20.0	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	45.8 dBµV/m @ 2389.8 MHz (-8.2 dB)
	n40	5 - 2432MHz	13 / 12.9	22.0	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	45.0 dBµV/m @ 2389.9 MHz (-9.0 dB)
	n40	9 - 2452MHz -	13 / 13.1	23.0	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	43.0 dBµV/m @ 2483.6 MHz (-11.0 dB)

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Sample Notes

MAC Address: 001500DC7B25 DRTU Tool Version 1.7.1-752, Driver version 16.6.0.1 (WiFi only)

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

Peak measurements performed with: RBW=1MHz, VBW=3MHz, peak detector, max hold, auto sweep time

Unless otherwise stated/noted, emission has duty cycle $\geq 98\%$ and was measured using RBW=1MHz, VBW=10Hz, peak detector, linear average mode, auto sweep time, max hold.

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
11b	1 Mb/s	0.99	Yes	5.94	0.0	0.0	168
11g	6 Mb/s	0.99	Yes	5.71	0.0	0.0	175
n20	MCS0	0.99	Yes	5.36	0.0	0.0	187
n40	MCS0	0.97	Yes	2.88	0.1	0.2	347

Measurement Specific Notes:

Note 1:	Emission has duty cycle $< 98\%$, but constant, average measurement performed: RBW=1MHz, VBW=10Hz, peak detector, linear averaging, auto sweep, trace average 100 traces, measurement corrected by Linear Voltage correction factor
Note 2:	Plots of the average bandedge do not account for any duty cycle correction. Refer to the tabular results for final measurements.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1: Radiated Bandedge Measurements

Date of Test: 9/19/2013 & 9/20/13

Test Engineer: Joseph Cadigal & John Caizzi

Test Location: FT Chamber#3

Config. Used: 1

Config Change: none

EUT Voltage: 3.3Vdc


Channel: 1
Tx Chain: B

Mode: b
Data Rate: 1 Mb/s

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
14.0	14.0	22.5

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2385.750	45.9	H	54.0	-8.1	AVG	41	1.0	POS; RB 1 MHz; VB: 10 Hz
2385.990	52.0	H	74.0	-22.0	PK	41	1.0	POS; RB 1 MHz; VB: 3 MHz
2385.830	41.9	V	54.0	-12.1	AVG	92	1.0	POS; RB 1 MHz; VB: 10 Hz
2385.990	48.7	V	74.0	-25.3	PK	92	1.0	POS; RB 1 MHz; VB: 3 MHz

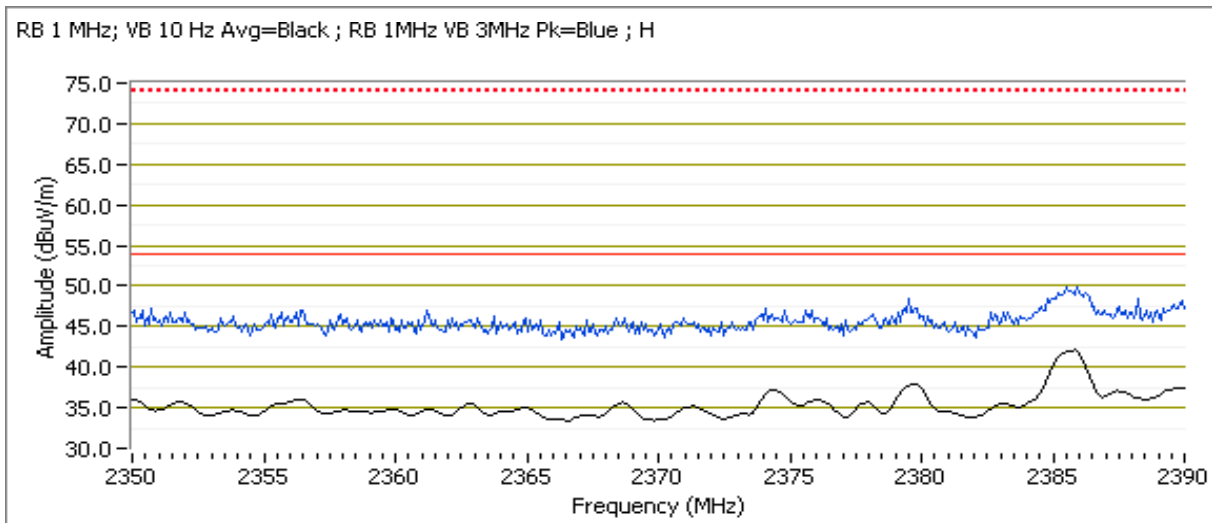


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 11 Mode: b
 Tx Chain: B Data Rate: 1 Mb/s

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
14.0	14.1	22.5

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2487.800	41.2	H	54.0	-12.8	AVG	336	1.03	POS; RB 1 MHz; VB: 10 Hz
2487.340	50.5	H	74.0	-23.5	PK	336	1.03	POS; RB 1 MHz; VB: 3 MHz
2487.830	41.0	V	54.0	-13.0	AVG	92	1.01	POS; RB 1 MHz; VB: 10 Hz
2487.800	50.2	V	74.0	-23.8	PK	92	1.01	POS; RB 1 MHz; VB: 3 MHz

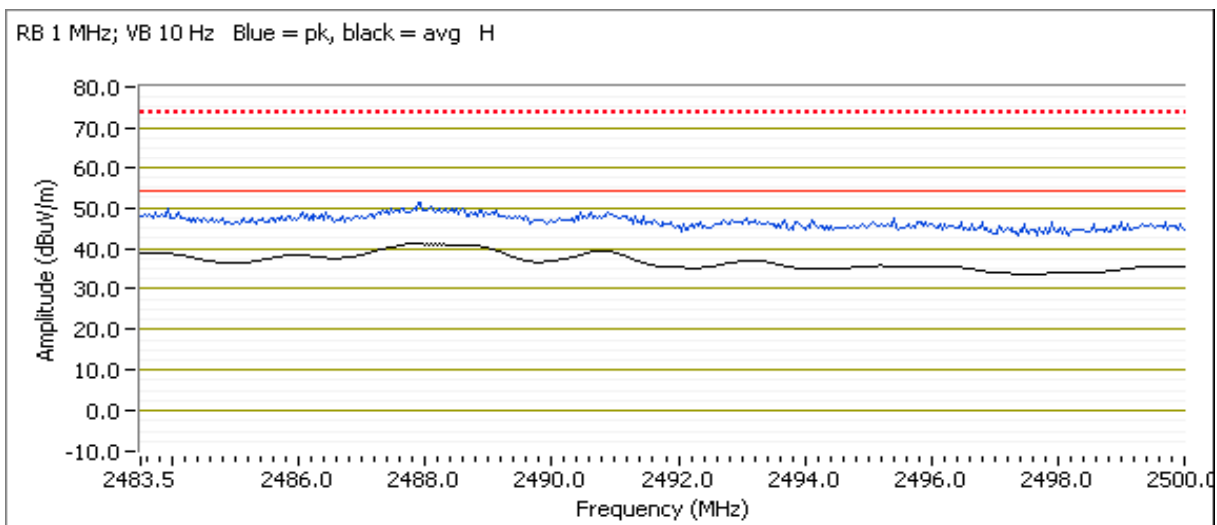

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #2: Radiated Bandedge Measurements

Date of Test: 9/20/2013 0:00

Test Engineer: John Caizzi

Test Location: Chamber 3

Config. Used: 1

Config Change: none

EUT Voltage: 3.3 VDC


Channel: 1
Tx Chain: B

Mode: g
Data Rate: 6 Mb/s

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
12.0	12.1	21.0

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2390.000	43.6	H	54.0	-10.4	AVG	43	1.19	POS; RB 1 MHz; VB: 10 Hz
2389.520	59.5	H	74.0	-14.5	PK	43	1.19	POS; RB 1 MHz; VB: 3 MHz
2390.000	41.2	V	54.0	-12.8	AVG	133	1.20	POS; RB 1 MHz; VB: 10 Hz
2389.040	56.5	V	74.0	-17.5	PK	133	1.20	POS; RB 1 MHz; VB: 3 MHz

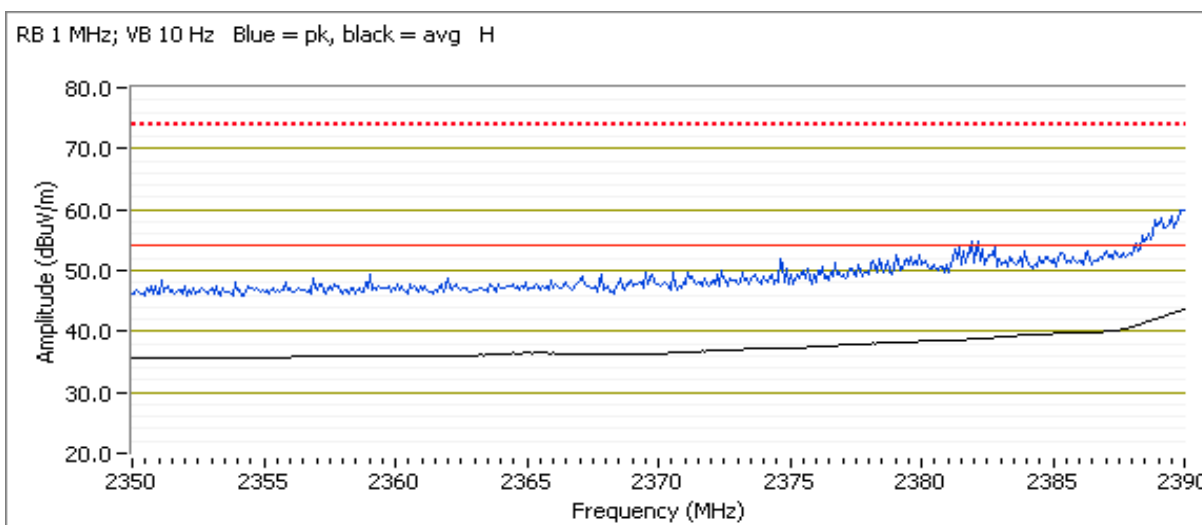


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 2 Mode: g
 Tx Chain: B Data Rate: 6 Mb/s

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
15.0	15.1	25.0

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2390.000	44.9	H	54.0	-9.1	AVG	51	1.21	POS; RB 1 MHz; VB: 10 Hz
2387.190	57.3	H	74.0	-16.7	PK	51	1.21	POS; RB 1 MHz; VB: 3 MHz
2390.000	42.2	V	54.0	-11.8	AVG	134	1.23	POS; RB 1 MHz; VB: 10 Hz
2389.200	55.7	V	74.0	-18.3	PK	134	1.23	POS; RB 1 MHz; VB: 3 MHz

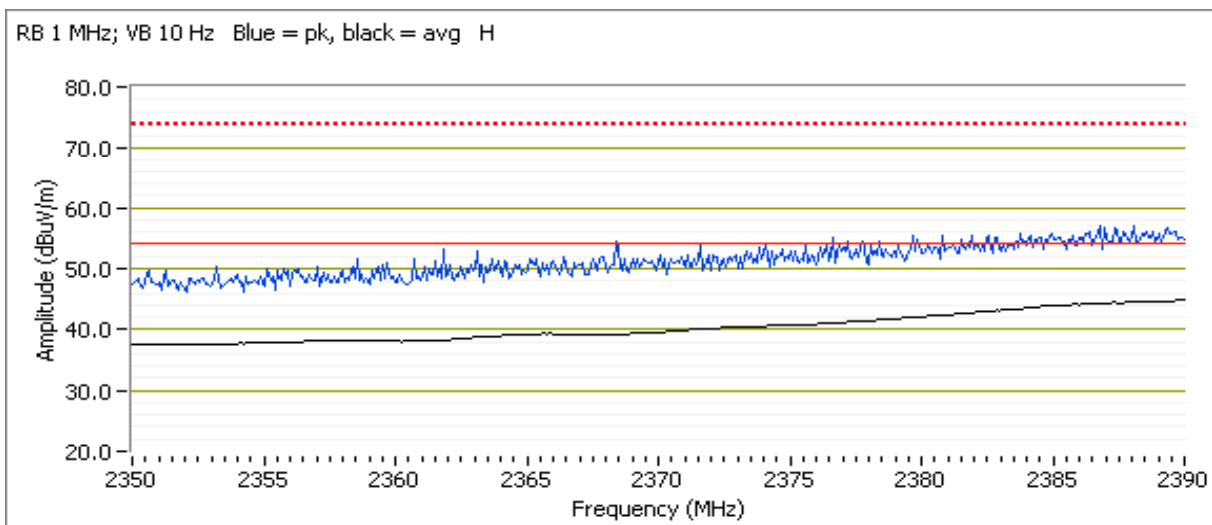


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 11 Mode: g
 Tx Chain: B Data Rate: 6 Mb/s

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
13.5	13.4	22.0

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2483.500	42.0	H	54.0	-12.0	AVG	2	1.54	POS; RB 1 MHz; VB: 10 Hz
2490.410	56.5	H	74.0	-17.5	PK	2	1.54	POS; RB 1 MHz; VB: 3 MHz
2483.600	38.5	V	54.0	-15.5	AVG	23	1.49	POS; RB 1 MHz; VB: 10 Hz
2491.700	54.7	V	74.0	-19.3	PK	23	1.49	POS; RB 1 MHz; VB: 3 MHz

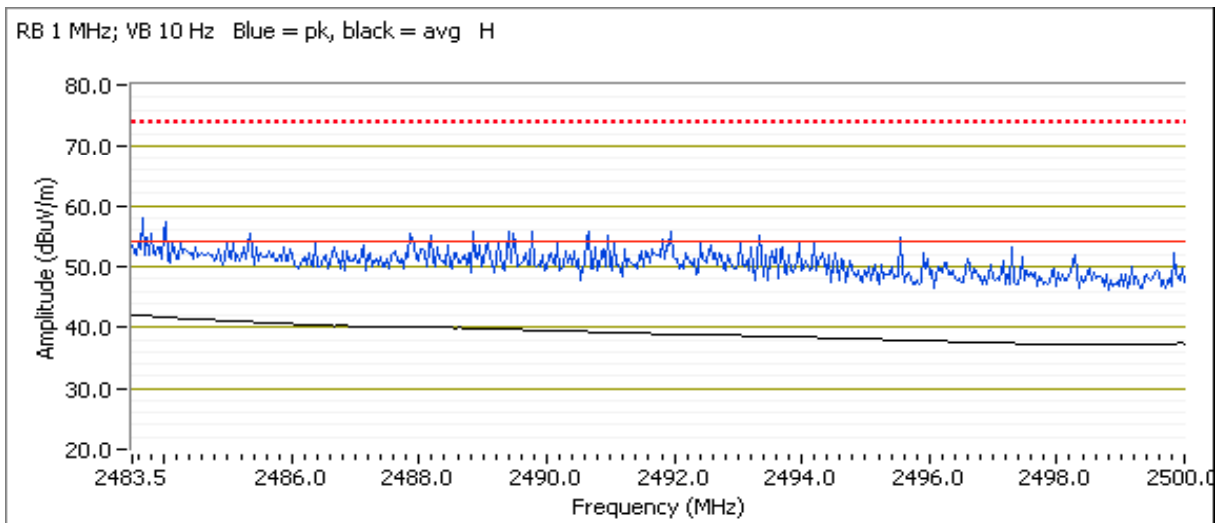

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #3: Radiated Bandedge Measurements

Date of Test: 9/20/2013 0:00
 Test Engineer: John Caizzi
 Test Location: Chamber 3


Config. Used: 1
 Config Change: none
 EUT Voltage: 3.3 VDC

Channel: 1 Mode: n20
 Tx Chain: B Data Rate: MCS0

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
12.0	12.1	21.0

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2390.000	44.4	H	54.0	-9.6	AVG	169	1.58	POS; RB 1 MHz; VB: 10 Hz
2388.880	61.5	H	74.0	-12.5	PK	169	1.58	POS; RB 1 MHz; VB: 3 MHz
2390.000	42.7	V	54.0	-11.3	AVG	20	1.57	POS; RB 1 MHz; VB: 10 Hz
2387.920	59.2	V	74.0	-14.8	PK	20	1.57	POS; RB 1 MHz; VB: 3 MHz

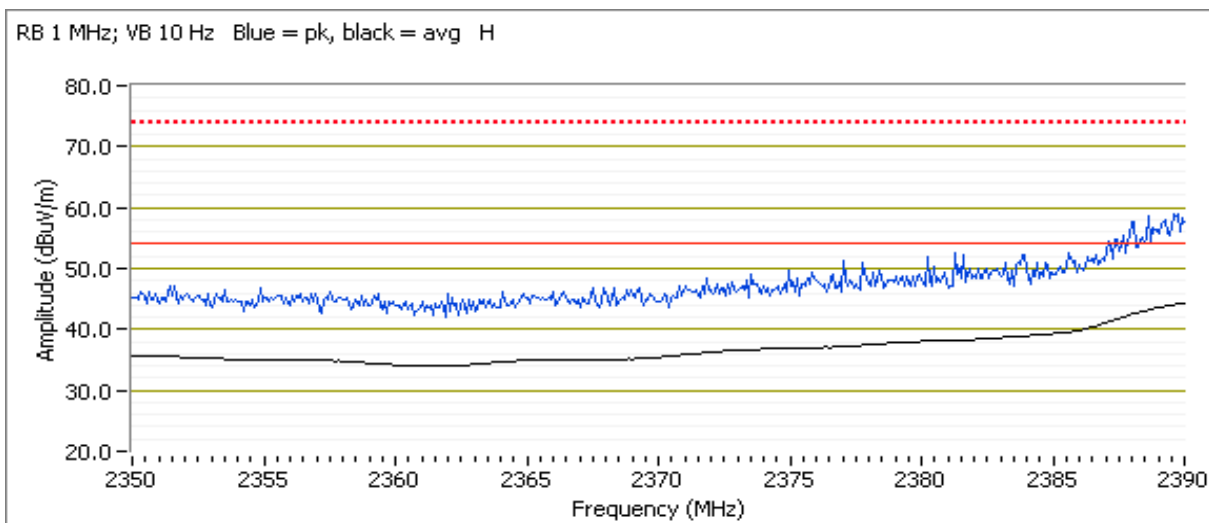


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 2 Mode: n20
Tx Chain: B Data Rate: MCS0

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
15.0	15.2	25.0

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2390.000	45.9	H	54.0	-8.1	AVG	161	1.63	POS; RB 1 MHz; VB: 10 Hz
2389.840	58.5	H	74.0	-15.5	PK	161	1.63	POS; RB 1 MHz; VB: 3 MHz
2390.000	43.6	V	54.0	-10.4	AVG	21	1.57	POS; RB 1 MHz; VB: 10 Hz
2383.190	56.4	V	74.0	-17.6	PK	21	1.57	POS; RB 1 MHz; VB: 3 MHz

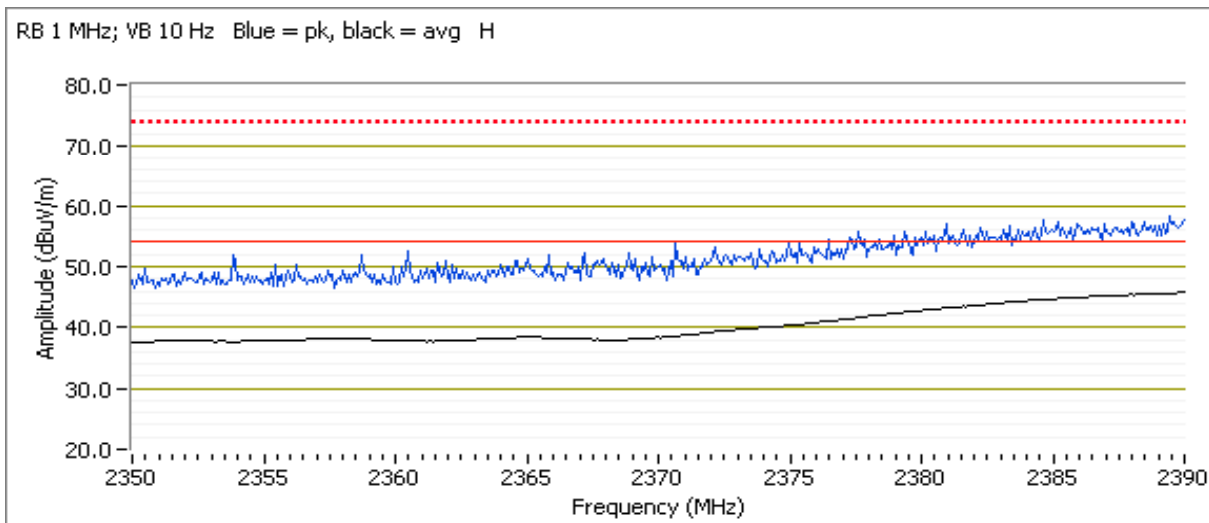


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 11 Mode: n20
 Tx Chain: B Data Rate: MCS0

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
13.5	13.4	22.0

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2483.530	43.4	H	54.0	-10.6	AVG	7	1.54	POS; RB 1 MHz; VB: 10 Hz
2483.800	62.7	H	74.0	-11.3	PK	7	1.54	POS; RB 1 MHz; VB: 3 MHz
2483.570	39.5	V	54.0	-14.5	AVG	26	1.50	POS; RB 1 MHz; VB: 10 Hz
2484.490	58.1	V	74.0	-15.9	PK	26	1.50	POS; RB 1 MHz; VB: 3 MHz

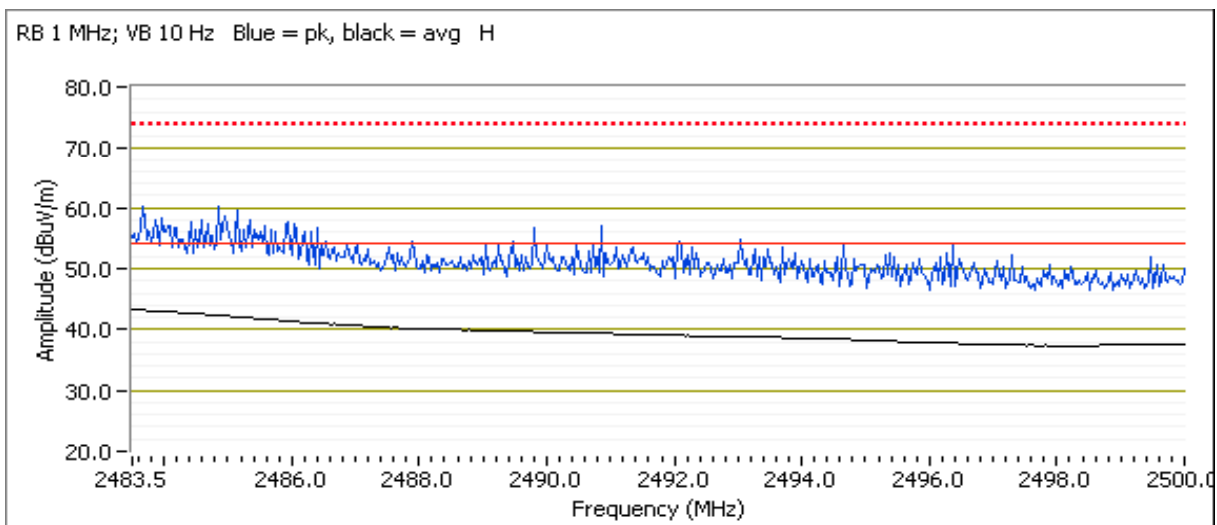

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4: Radiated Bandedge Measurements

Date of Test: 9/20/2013 0:00
 Test Engineer: Deniz Demirci
 Test Location: Chamber 3


Config. Used: 1
 Config Change: none
 EUT Voltage: 3.3 VDC

Channel: 3 Mode: n40
 Tx Chain: B Data Rate: MCS0

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
10.0	10.2	19.0

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2389.680	45.4	H	54.0	-8.6	AVG	40	0.98	POS; RB 1 MHz; VB: 10 Hz, Note 1
2388.720	58.7	H	74.0	-15.3	PK	40	0.98	POS; RB 1 MHz; VB: 3 MHz
2389.440	44.2	V	54.0	-9.8	AVG	81	1.08	POS; RB 1 MHz; VB: 10 Hz, Note 1
2388.480	57.1	V	74.0	-16.9	PK	81	1.08	POS; RB 1 MHz; VB: 3 MHz

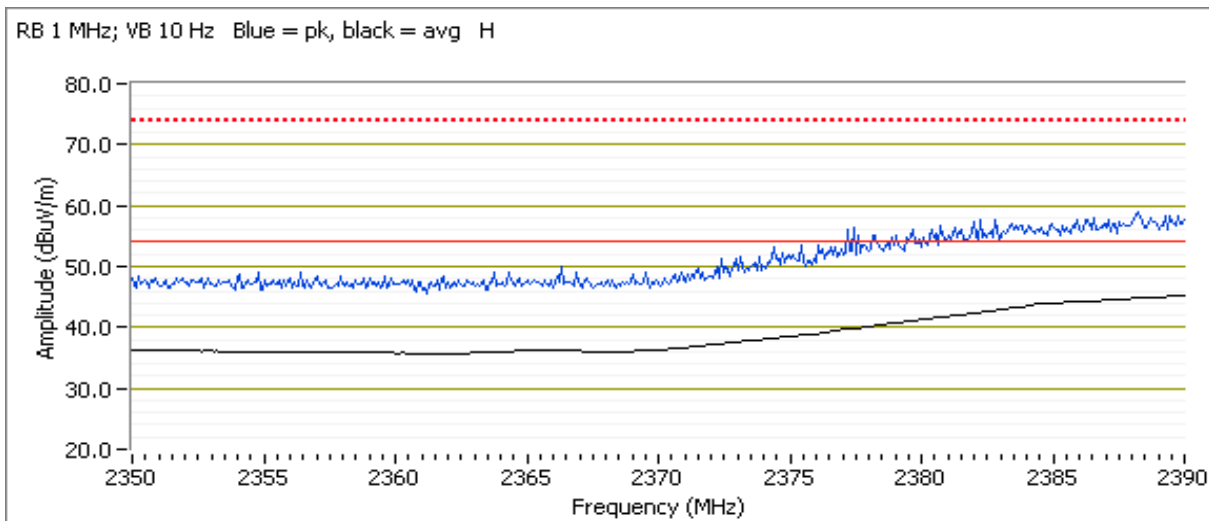


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 4 Mode: n40
 Tx Chain: B Data Rate: MCS0

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
11.0	11.1	20.0

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2389.840	45.8	H	54.0	-8.2	AVG	45	1.0	POS; RB 1 MHz; VB: 10 Hz, Note 1
2387.030	59.0	H	74.0	-15.0	PK	45	1.0	POS; RB 1 MHz; VB: 3 MHz
2389.920	44.6	V	54.0	-9.4	AVG	82	1.1	POS; RB 1 MHz; VB: 10 Hz, Note 1
2389.760	57.8	V	74.0	-16.2	PK	82	1.1	POS; RB 1 MHz; VB: 3 MHz

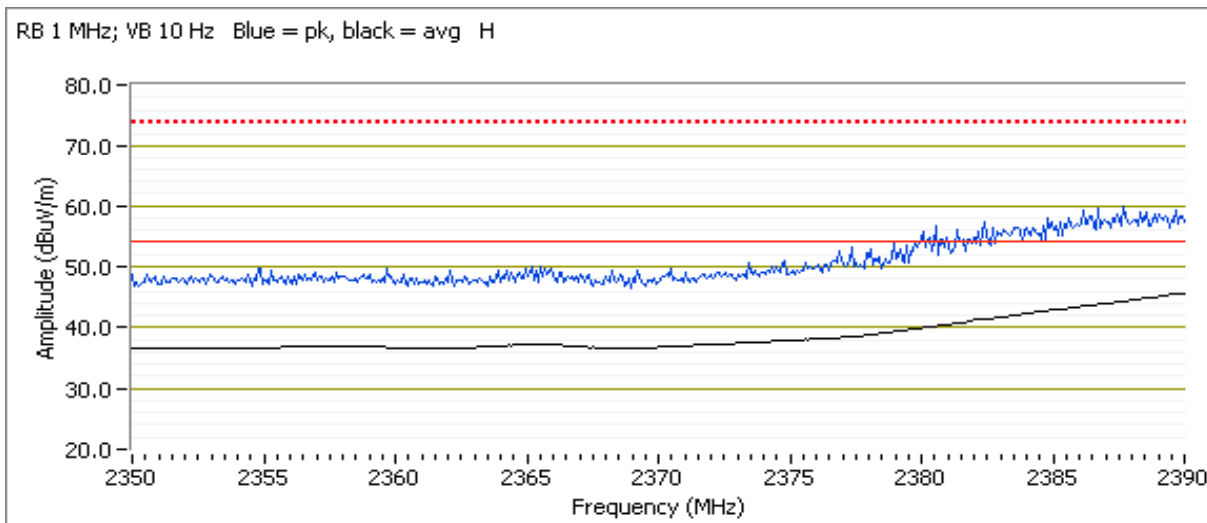


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 5 Mode: n40
 Tx Chain: B Data Rate: MCS0


Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
13.0	12.9	22.0

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2389.920	45.0	H	54.0	-9.0	AVG	45	1.2	POS; RB 1 MHz; VB: 10 Hz, Note 1
2387.270	59.9	H	74.0	-14.1	PK	45	1.2	POS; RB 1 MHz; VB: 3 MHz
2389.840	43.1	V	54.0	-11.1	AVG	87	1.1	POS; RB 1 MHz; VB: 10 Hz, Note 1
2388.080	59.1	V	74.0	-14.9	PK	87	1.1	POS; RB 1 MHz; VB: 3 MHz
Upper Bandedge								
2483.630	34.7	H	54.0	-19.5	AVG	45	1.2	POS; RB 1 MHz; VB: 10 Hz, Note 1
2484.030	47.1	H	74.0	-26.9	PK	45	1.2	POS; RB 1 MHz; VB: 3 MHz
2483.570	34.8	V	54.0	-19.4	AVG	87	1.1	POS; RB 1 MHz; VB: 10 Hz, Note 1
2489.350	46.4	V	74.0	-27.6	PK	87	1.1	POS; RB 1 MHz; VB: 3 MHz

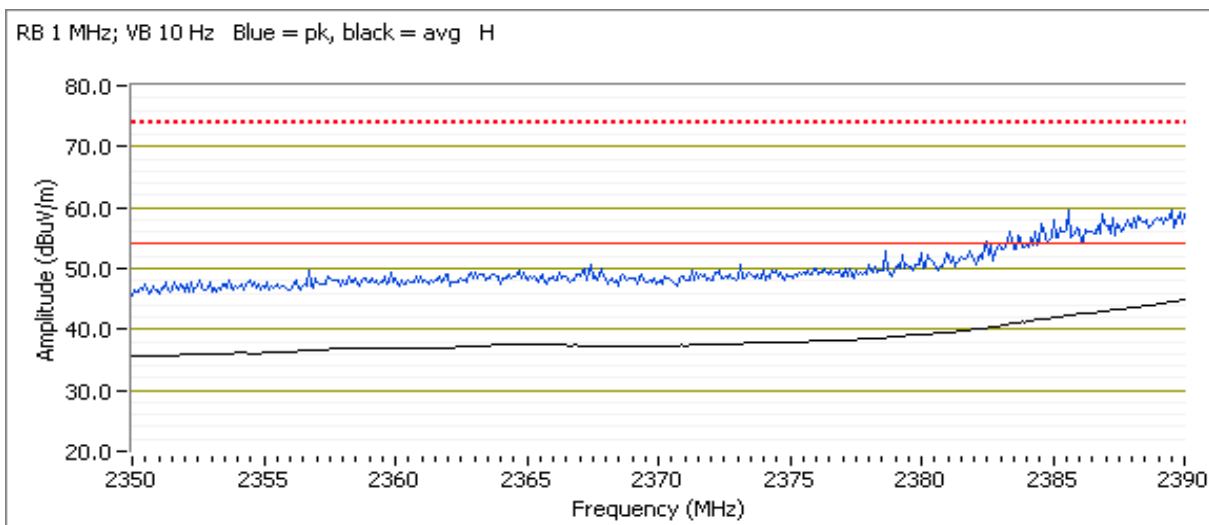

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

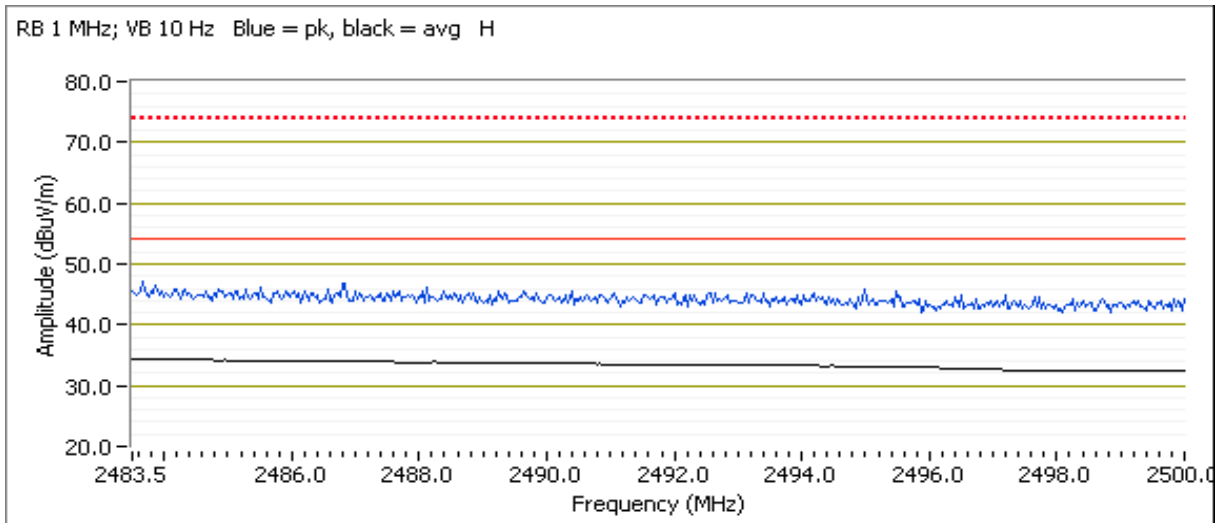


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Channel: 9 Mode: n40
 Tx Chain: B Data Rate: MCS0

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
13.0	13.1	23.0

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2483.570	43.0	H	54.0	-11.0	AVG	50	1.2	POS; RB 1 MHz; VB: 10 Hz, Note 1
2483.630	55.6	H	74.0	-18.4	PK	50	1.2	
2483.500	42.3	V	54.0	-11.9	AVG	80	1.0	POS; RB 1 MHz; VB: 10 Hz, Note 1
2485.320	54.8	V	74.0	-19.2	PK	80	1.0	

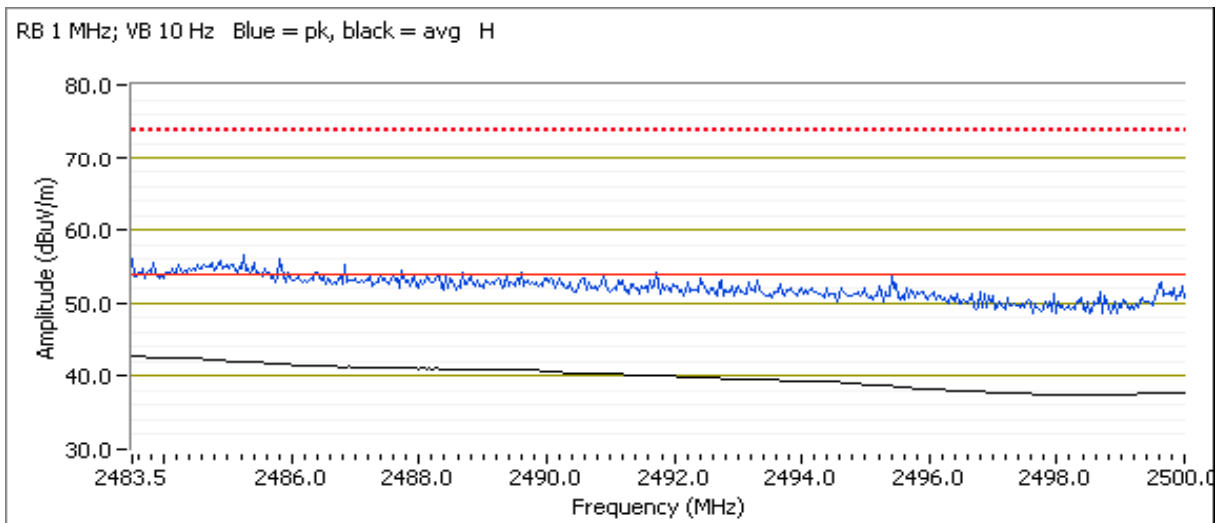

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.
 For radiated emissions testing the measurement antenna was located 3 meters from the EUT, unless otherwise noted.

Ambient Conditions:

Temperature: 25 °C
 Rel. Humidity: 40 %

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Target Power	Power Setting	Test Performed	Limit	Result / Margin
1	n20	1 - 2412MHz	12.0, 12.0	23.0/26.0	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	52.7 dBµV/m @ 2390.0 MHz (-1.3 dB)
	n20	11 - 2462MHz	12.5, 12.5	24.5,27.5	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	52.9 dBµV/m @ 2483.5 MHz (-1.1 dB)
2	n40	3 - 2422MHz	8.5, 8.5	20.5,24	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	48.1 dBµV/m @ 2389.7 MHz (-5.9 dB)
	n40	4 - 2427MHz	9.5, 9.5	21,25	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	50.6 dBµV/m @ 2389.6 MHz (-3.4 dB)
	n40	5 - 2432MHz	12.0, 12.0	24,27.5	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	51.9 dBµV/m @ 2390.0 MHz (-2.1 dB)
	n40	9 - 2452MHz -	12, 12	24.5, 27.5	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	53.7 dBµV/m @ 2483.5 MHz (-0.3 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Sample Notes

MAC Address: 001500DC7B25 DRTU Tool Version 1.7.1-752, Driver version 16.6.0.1 (WiFi only)

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

Peak measurements performed with: RBW=1MHz, VBW=3MHz, peak detector, max hold, auto sweep time

Unless otherwise stated/noted, emission has duty cycle $\geq 98\%$ and was measured using RBW=1MHz, VBW=10Hz, peak detector, linear average mode, auto sweep time, max hold.

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
n20	MCS0	0.99	Yes	5.36	0.0	0.0	187
n40	MCS0	0.97	Yes	2.88	0.1	0.2	347

Measurement Specific Notes:

Note 1:	Emission in non-restricted band, but limit of 15.209 used.
Note 2:	Emission in non-restricted band, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
Note 3:	Emission has duty cycle $< 98\%$, but constant, average measurement performed: RBW=1MHz, VBW=10Hz, peak detector, linear averaging, auto sweep, trace average 100 traces, measurement corrected by Linear Voltage correction factor
Note 4:	Plots of the average bandedge do not account for any duty cycle correction. Refer to the tabular results for final measurements.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1: Radiated Bandedge Measurements

Date of Test: 9/20/2013 0:00

Test Engineer: Deniz Demirci

Test Location: Chamber 3

Config. Used: 1

Config Change: none


EUT Voltage: 3.3 VDC

Channel: 1 Mode: n20
 Tx Chain: Both Data Rate: HT8


Chain	Target (dBm)				Power Settings Measured (dBm)				Software Setting
	A	B	C	Total	A	B	C	Total	
	12.0	12.0		15.0	11.5	11.2		14.4	

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2390.000	52.7	H	54.0	-1.3	AVG	48	1.0	POS; RB 1 MHz; VB: 10 Hz
2388.000	70.1	H	74.0	-3.9	PK	48	1.0	POS; RB 1 MHz; VB: 3 MHz
2390.000	51.9	V	54.0	-2.1	AVG	78	1.1	POS; RB 1 MHz; VB: 10 Hz
2387.680	69.2	V	74.0	-4.8	PK	78	1.1	POS; RB 1 MHz; VB: 3 MHz

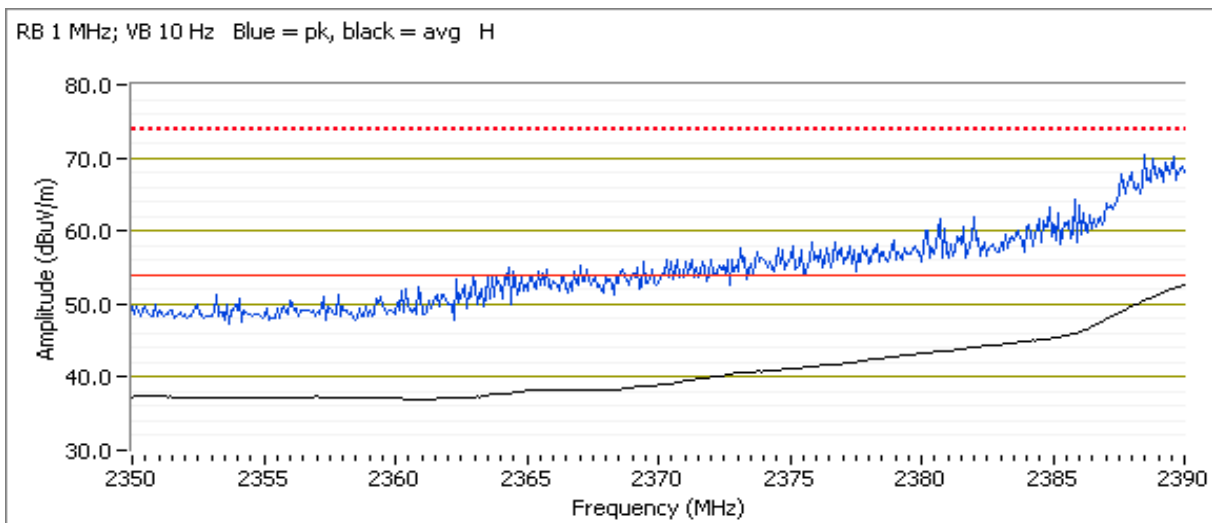

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

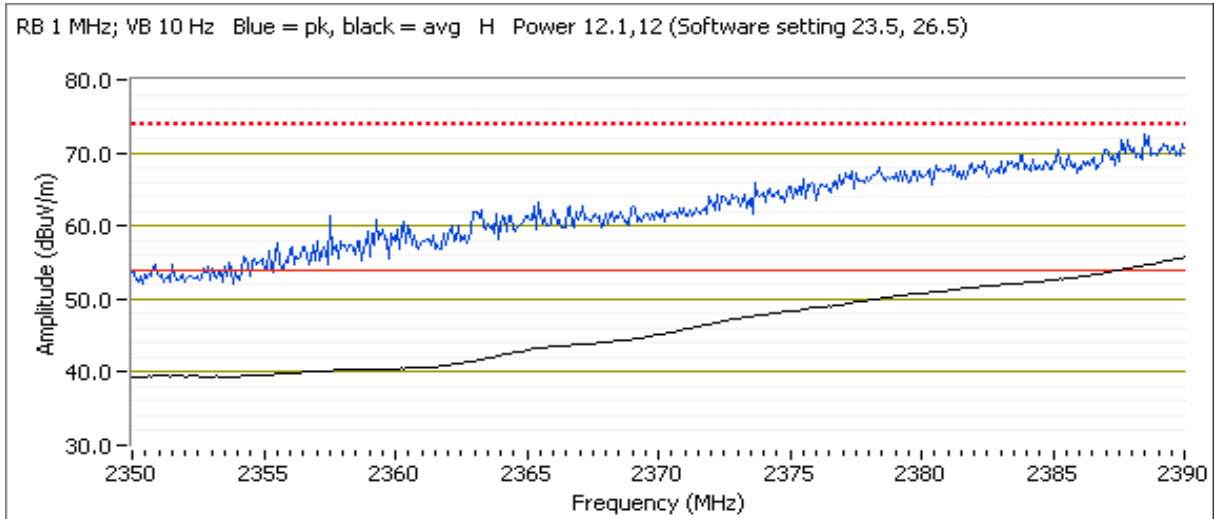

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Date of Test: 9/20/2013 0:00
 Test Engineer: Joseph Cadigal
 Test Location: Chamber 3

Config. Used: 1
 Config Change: none
 EUT Voltage: 3.3 VDC


Channel: 11 Mode: n20
 Tx Chain: Both Data Rate: HT8

Chain	Target (dBm)				Measured (dBm)				Software Setting
	A	B	C	Total	A	B	C	Total	
	12.5	12.5		15.5	12.6	12.5		15.6	

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2483.500	52.9	H	54.0	-1.1	AVG	107	1.0	POS; RB 1 MHz; VB: 10 Hz
2484.620	68.2	H	74.0	-5.8	PK	107	1.0	POS; RB 1 MHz; VB: 3 MHz
2483.530	52.3	V	54.0	-1.7	AVG	77	1.1	POS; RB 1 MHz; VB: 10 Hz
2483.530	66.2	V	74.0	-7.8	PK	77	1.1	POS; RB 1 MHz; VB: 3 MHz

RB 1 MHz; VB 10 Hz Blue = pk, black = avg H

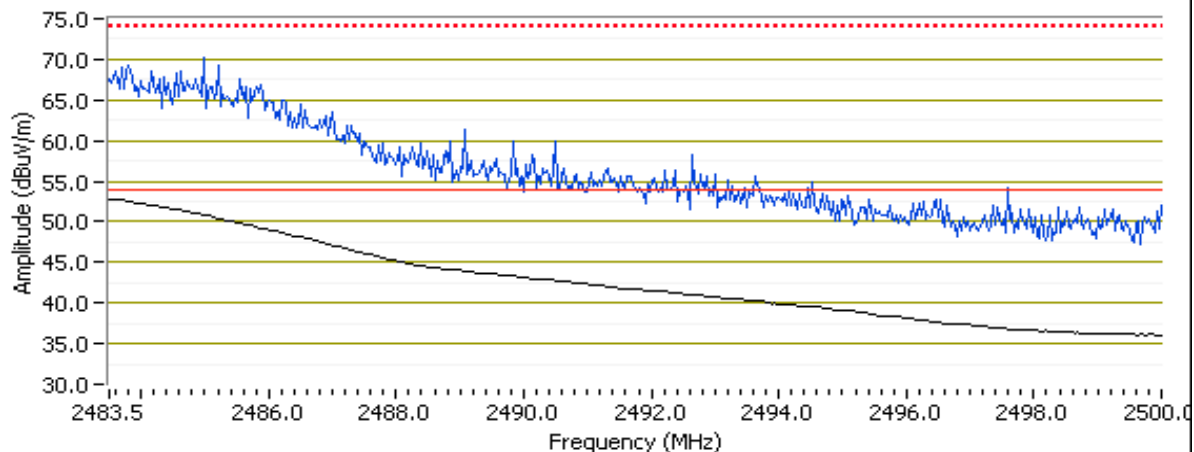

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #2: Radiated Bandedge Measurements

Date of Test: 9/20/2013 0:00

Test Engineer: Joseph Cadigal

Test Location: Chamber 3

Config. Used: 1

Config Change: none

EUT Voltage: 3.3 VDC


Channel: 3 Mode: n40
 Tx Chain: Both Data Rate: HT8

Chain	Target (dBm)				Measured (dBm)				Software Setting
	A	B	C	Total	A	B	C	Total	
	8.5	8.5		11.5	8.8	8.8		11.8	20.5,24

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2389.680	48.1	H	54.0	-5.9	AVG	145	1.0	POS; RB 1 MHz; VB: 10 Hz, Note 3
2386.710	59.9	H	74.0	-14.1	PK	145	1.0	POS; RB 1 MHz; VB: 3 MHz
2389.680	44.9	V	54.0	-9.1	AVG	252	1.2	POS; RB 1 MHz; VB: 10 Hz, Note 3
2389.120	56.0	V	74.0	-18.0	PK	252	1.2	POS; RB 1 MHz; VB: 3 MHz

RB 1 MHz; VB 10 Hz Blue = pk, black = avg H

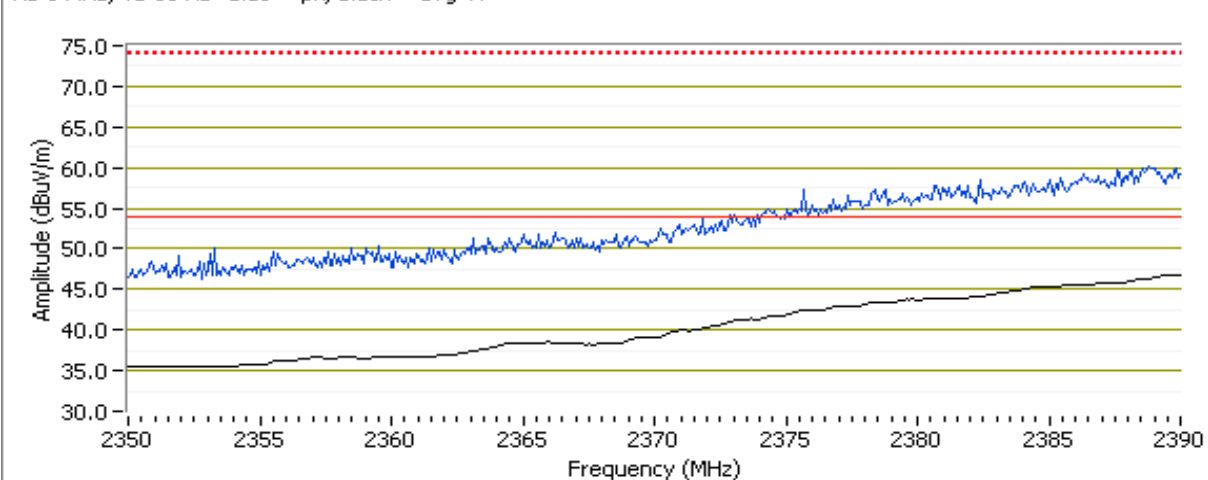

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A


Channel: 4 Mode: n40
 Tx Chain: Both Data Rate: HT8

Chain	Target (dBm)				Power Settings Measured (dBm)				Software Setting
	A	B	C	Total	A	B	C	Total	
	9.5	9.5		12.5	9.7	9.9		12.8	

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2389.600	50.6	V	54.0	-3.4	AVG	83	1.1	POS; RB 1 MHz; VB: 10 Hz, Note 3
2388.400	62.8	V	74.0	-11.2	PK	83	1.1	POS; RB 1 MHz; VB: 3 MHz
2389.840	48.3	H	54.0	-5.7	AVG	147	1.0	POS; RB 1 MHz; VB: 10 Hz, Note 3
2389.760	59.2	H	74.0	-14.8	PK	147	1.0	POS; RB 1 MHz; VB: 3 MHz

RB 1 MHz; VB 10 Hz Blue = pk, black = avg V

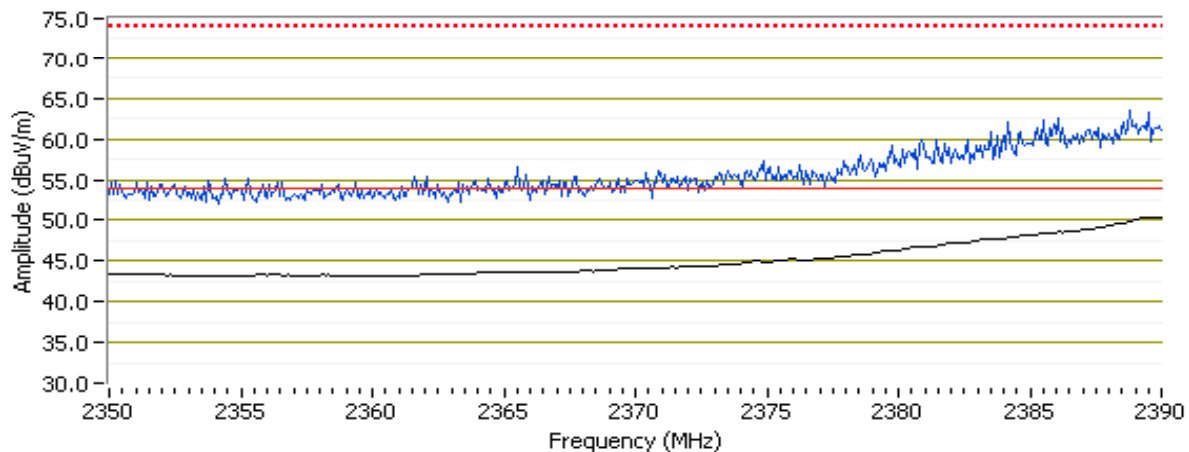

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A


Channel: 5 Mode: n40
 Tx Chain: Both Data Rate: HT8

Chain	Target (dBm)				Power Settings Measured (dBm)				Software Setting
	A	B	C	Total	A	B	C	Total	
	12.0	12.0		15.0	12.2	12.3		15.3	24,27.5

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2390.000	51.9	H	54.0	-2.1	AVG	144	2.1	POS; RB 1 MHz; VB: 10 Hz, Note 3
2388.720	65.6	H	74.0	-8.4	PK	144	2.1	POS; RB 1 MHz; VB: 3 MHz
2390.000	45.8	V	54.0	-8.2	AVG	237	1.2	POS; RB 1 MHz; VB: 10 Hz, Note 3
2387.030	57.2	V	74.0	-16.8	PK	237	1.2	POS; RB 1 MHz; VB: 3 MHz

RB 1 MHz; VB 10 Hz Blue = pk, black = avg H

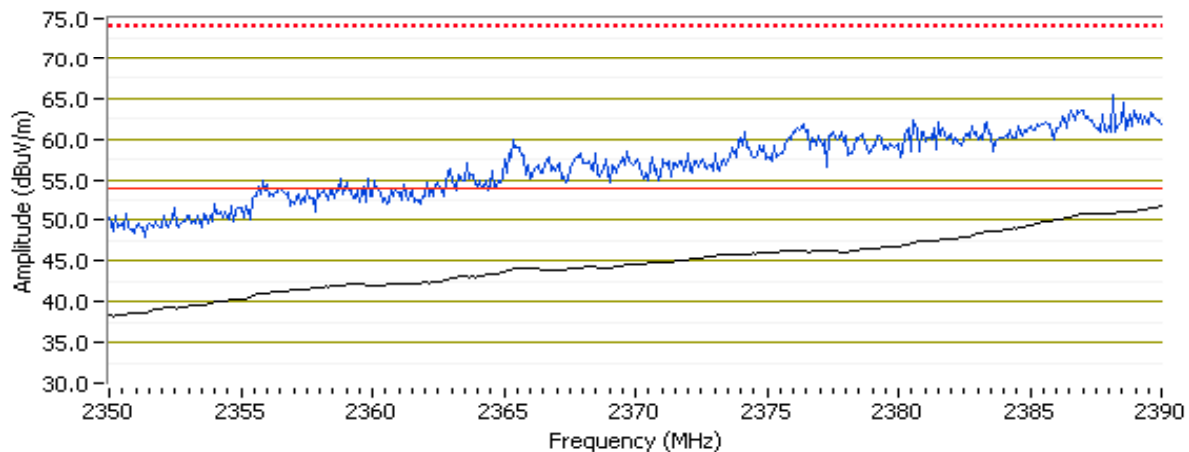

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A


Channel: 9 Mode: n40
 Tx Chain: Both Data Rate: HT8

Chain	Target (dBm)				Power Settings Measured (dBm)				Software Setting
	A	B	C	Total	A	B	C	Total	
	12.0	12.0		15.0	12.3	12.3		15.3	24.5,27.5

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2483.530	53.7	V	54.0	-0.3	AVG	90	1.0	POS; RB 1 MHz; VB: 10 Hz, Note 3
2484.260	66.5	V	74.0	-7.5	PK	90	1.0	POS; RB 1 MHz; VB: 3 MHz
2483.500	49.4	H	54.0	-4.6	AVG	246	1.4	POS; RB 1 MHz; VB: 10 Hz, Note 3
2483.570	60.5	H	74.0	-13.5	PK	246	1.4	POS; RB 1 MHz; VB: 3 MHz

RB 1 MHz; VB 10 Hz Blue = pk, black = avg V

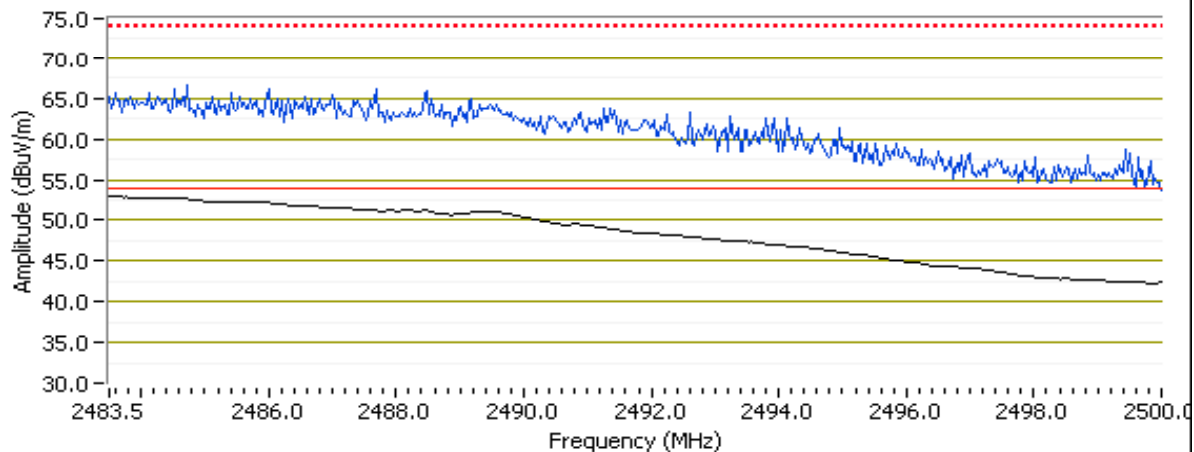

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT, unless otherwise noted.

Ambient Conditions:

Temperature: 22-24 °C
 Rel. Humidity: 35-45 %

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

Run #	Mode	Channel	Target Power	Power Setting	Test Performed	Limit	Result / Margin
1	b - Chain A	1 - 2412MHz	15.5	19.5	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(c)	41.1 dBµV/m @ 4824.0 MHz (-12.9 dB)
	b - Chain A	6 - 2437MHz	15.5	20.0	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(c)	40.2 dBµV/m @ 4874.0 MHz (-13.8 dB)
	b - Chain A	11 - 2462MHz	15.5	20.0	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(c)	41.9 dBµV/m @ 4924.1 MHz (-12.1 dB)
2	b - Chain B	1 - 2412MHz	14.0	22.5	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(c)	48.7 dBµV/m @ 4824.0 MHz (-5.3 dB)
	b - Chain B	6 - 2437MHz	14.0	22.5	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(c)	45.3 dBµV/m @ 4874.0 MHz (-8.7 dB)
	b - Chain B	11 - 2462MHz	14.0	22.5	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(c)	45.1 dBµV/m @ 4924.0 MHz (-8.9 dB)

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #	Mode	Channel	Target Power	Power Setting	Test Performed	Limit	Result / Margin
Scans on center channel in all three OFDM modes to determine the worst case mode.							
3	g - Chain A	6 - 2437MHz	16.5	22.5	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(c)	34.2 dBµV/m @ 1196.8 MHz (-19.8 dB)
	g - Chain B	6 - 2437MHz	15.5	25.5	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(c)	50.4 dBµV/m @ 1199.3 MHz (-23.6 dB)
	n20 - Chain A+B	6 - 2437MHz	13.5, 13.5	24.5, 27.5	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(c)	34.0 dBµV/m @ 4874.2 MHz (-20.0 dB)
	n40 - Chain A	6 - 2437MHz	16.5	22.5	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(c)	33.6 dBµV/m @ 1195.0 MHz (-20.4 dB)
	n40 - Chain B	6 - 2437MHz	13.5	24.5	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(c)	33.0 dBµV/m @ 1596.0 MHz (-21 dB)
	n40 - Chain A+B	6 - 2437MHz	13.0, 13.0	24, 27	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(c)	34.3 dBµV/m @ 4867.8 MHz (-20.7 dB)
Measurements on low and high channels in worst-case OFDM mode.							
4	g - Chain A	1 - 2412MHz	13.5	19	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(c)	38.9 dBµV/m @ 7465.2 MHz (-15.1 dB)
	g - Chain A	11 - 2462MHz	13.5	19	Radiated Emissions, 1 - 25 GHz	FCC Part 15.209 / 15.247(c)	38.9 dBµV/m @ 7468.9 MHz (-15.1 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Sample Notes

MAC Address: 001500DC7B25 DRTU Tool Version 1.7.1-752, Driver version 16.6.0.1 (WiFi only)

Antenna:

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

Peak measurements performed with: RBW=1MHz, VBW=3MHz, peak detector, max hold, auto sweep time

Unless otherwise stated/noted, emission has duty cycle $\geq 98\%$ and was measured using RBW=1MHz, VBW=10Hz, peak detector, linear average mode, auto sweep time, max hold.

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
11b	1 Mb/s	0.99	Yes	5.94	0.0	0.0	168
11g	6 Mb/s	0.99	Yes	5.71	0.0	0.0	175
n20	MCS0	0.99	Yes	5.36	0.0	0.0	187
n40	MCS0	0.97	Yes	2.88	0.1	0.2	347

Measurement Specific Notes:

Note 1:	Emission in non-restricted band, but limit of 15.209 used.
Note 2:	Emission in non-restricted band, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
Note 3:	Emission has duty cycle $< 98\%$, but constant, average measurement performed: RBW=1MHz, VBW=10Hz, peak detector, linear averaging, auto sweep, trace average 100 traces, measurement corrected by Linear Voltage correction factor


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1: Radiated Spurious Emissions, 1,000 - 25000 MHz. Operating Mode: 802.11b
 Date of Test: 9/23/2013 0:00 Config. Used: 1
 Test Engineer: Deniz Demirci Config Change: None
 Test Location: FT Ch#4 EUT Voltage: 3.3 VDC

Run #1a: Low Channel

Channel: 1 Mode: b
 Tx Chain: A Data Rate: 1 Mbps

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
15.5	15.5	19.5

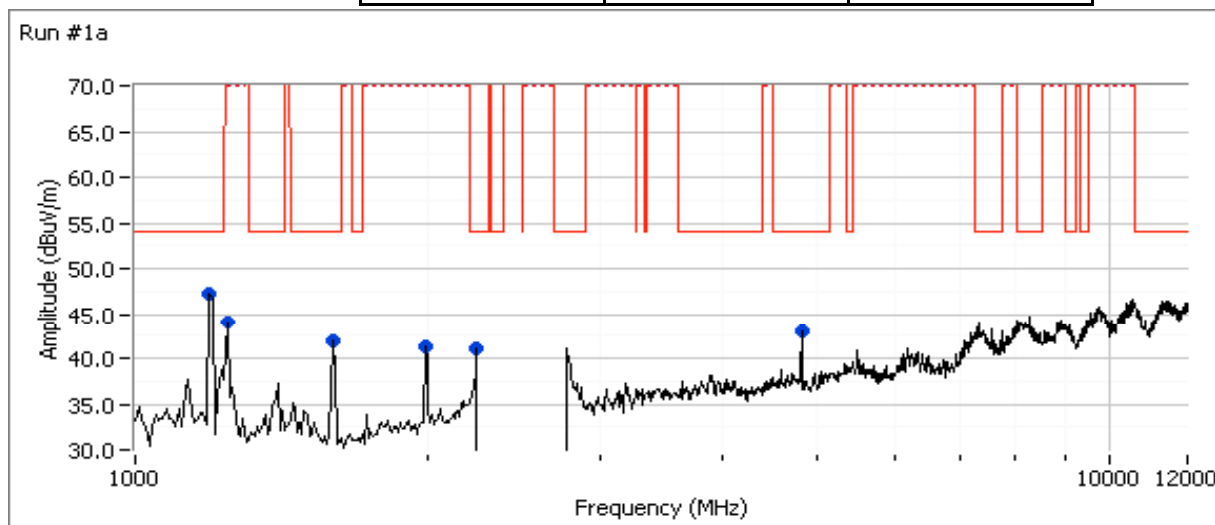

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4824.010	41.1	H	54.0	-12.9	AVG	120	1.0	RB 1 MHz;VB 10 Hz;Peak
1248.260	55.8	V	74.0	-18.2	PK	327	1.5	RB 1 MHz;VB 3 MHz;Peak, Note 1
2236.890	38.1	V	54.0	-15.9	AVG	22	2.2	RB 1 MHz;VB 10 Hz;Peak
1195.750	57.8	H	74.0	-16.2	PK	0	1.1	RB 1 MHz;VB 3 MHz;Peak
1598.620	55.1	V	74.0	-18.9	PK	243	1.0	RB 1 MHz;VB 3 MHz;Peak
1197.870	33.7	H	54.0	-20.3	AVG	0	1.1	RB 1 MHz;VB 10 Hz;Peak
1596.020	33.2	V	54.0	-20.8	AVG	243	1.0	RB 1 MHz;VB 10 Hz;Peak
2241.440	50.6	V	74.0	-23.4	PK	22	2.2	RB 1 MHz;VB 3 MHz;Peak
4823.900	49.2	H	74.0	-24.8	PK	120	1.0	RB 1 MHz;VB 3 MHz;Peak
1984.610	42.5	V	74.0	-31.5	PK	204	0.9	RB 1 MHz;VB 3 MHz;Peak, Note 1
1984.190	29.6	V	54.0	-24.4	AVG	204	0.9	RB 1 MHz;VB 10 Hz;Peak, Note 1
1248.280	28.2	V	54.0	-25.8	AVG	327	1.5	RB 1 MHz;VB 10 Hz;Peak, Note 1


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1b: Center Channel

Channel: 6
 Tx Chain: A

Mode: b
 Data Rate: 1 Mbps

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
15.5	15.6	20

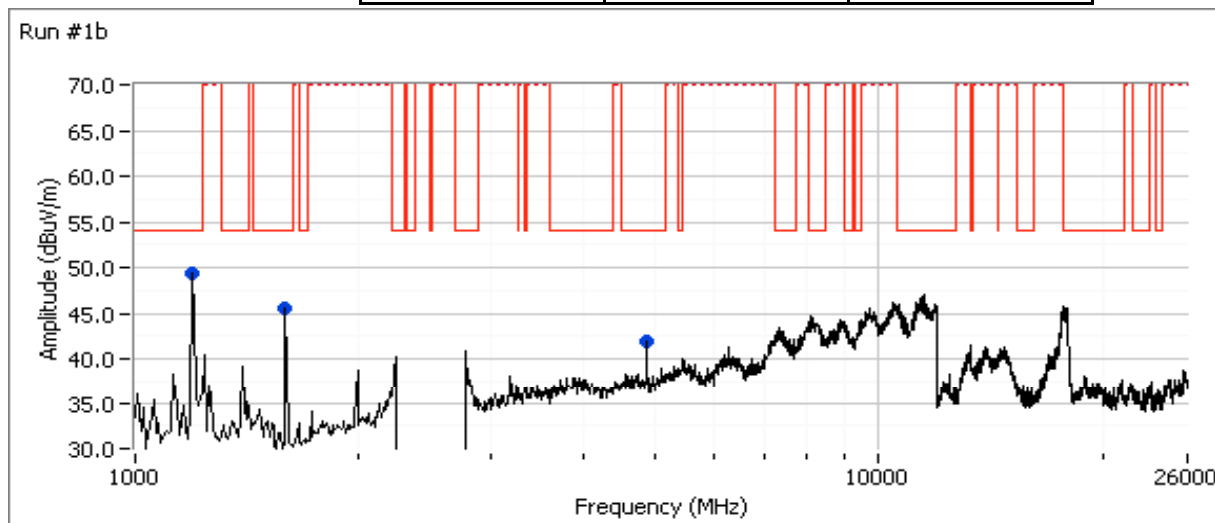

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4874.000	40.2	H	54.0	-13.8	AVG	120	1.0	RB 1 MHz;VB 10 Hz;Peak
1197.830	59.3	H	74.0	-14.7	PK	245	1.0	RB 1 MHz;VB 3 MHz;Peak
1195.210	39.1	H	54.0	-14.9	AVG	245	1.0	RB 1 MHz;VB 10 Hz;Peak
1594.620	53.5	V	74.0	-20.5	PK	211	1.1	RB 1 MHz;VB 3 MHz;Peak
1593.910	31.6	V	54.0	-22.4	AVG	211	1.1	RB 1 MHz;VB 10 Hz;Peak
4873.730	48.5	H	74.0	-25.5	PK	120	1.0	RB 1 MHz;VB 3 MHz;Peak


Note: As there were no significant emissions observed between 12 - 25 GHz on this channel, measurements above 12 GHz were not performed on the lowest and highest channels.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1c: High Channel

Channel: 11
 Tx Chain: A
 Mode: b
 Data Rate: 1 Mbps

Target (dBm)	Power Settings Measured (dBm)	Software Setting
15.5	15.6	20

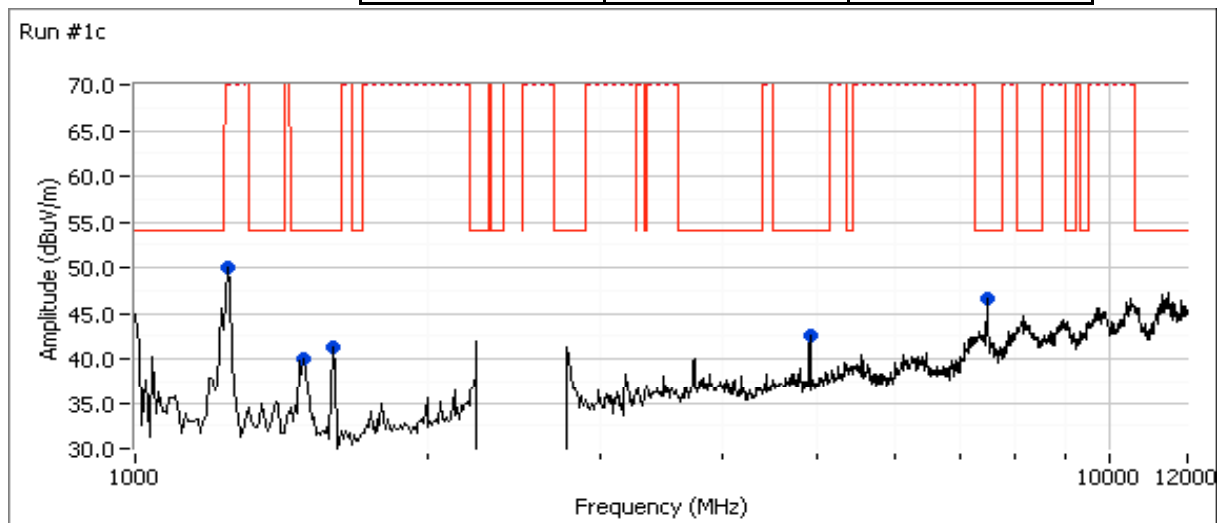

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4924.070	41.9	V	54.0	-12.1	AVG	351	2.0	RB 1 MHz;VB 10 Hz;Peak
7469.800	40.4	V	54.0	-13.6	AVG	40	1.8	RB 1 MHz;VB 10 Hz;Peak
7472.900	58.8	V	74.0	-15.2	PK	40	1.8	RB 1 MHz;VB 3 MHz;Peak
1228.910	56.4	H	74.0	-17.6	PK	329	1.2	RB 1 MHz;VB 3 MHz;Peak
1230.550	36.2	H	54.0	-17.8	AVG	329	1.2	RB 1 MHz;VB 10 Hz;Peak
1594.310	35.8	V	54.0	-18.2	AVG	316	0.9	RB 1 MHz;VB 10 Hz;Peak
1593.940	53.2	V	74.0	-20.8	PK	316	0.9	RB 1 MHz;VB 3 MHz;Peak
1493.550	50.9	H	74.0	-23.1	PK	288	1.0	RB 1 MHz;VB 3 MHz;Peak
1497.340	30.4	H	54.0	-23.6	AVG	288	1.0	RB 1 MHz;VB 10 Hz;Peak
4924.000	49.7	V	74.0	-24.3	PK	351	2.0	RB 1 MHz;VB 3 MHz;Peak


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #2: Radiated Spurious Emissions, 1,000 - 25000 MHz. Operating Mode: 802.11b
 Date of Test: 9/23/2013 0:00 Config. Used: 1
 Test Engineer: Deniz Demirci Config Change: None
 Test Location: FT Ch#4 EUT Voltage: 3.3 VDC

Run #2a: Low Channel

Channel: 1 Mode: b
 Tx Chain: B Data Rate: 1 Mbps

Target (dBm)	Power Settings Measured (dBm)	Software Setting
14.0	14.1	22.5

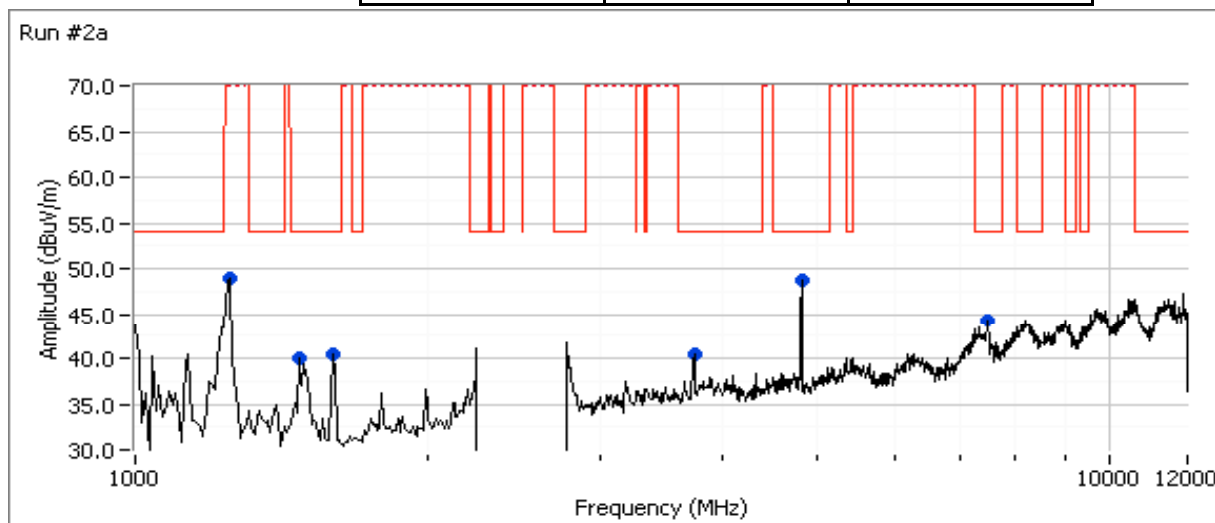


Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4823.960	48.7	H	54.0	-5.3	AVG	288	1.0	RB 1 MHz;VB 10 Hz;Peak
7485.330	39.3	V	54.0	-14.7	AVG	18	1.4	RB 1 MHz;VB 10 Hz;Peak
1598.040	36.1	V	54.0	-17.9	AVG	317	1.0	RB 1 MHz;VB 10 Hz;Peak
7472.670	55.7	V	74.0	-18.3	PK	18	1.4	RB 1 MHz;VB 3 MHz;Peak
1229.120	55.3	V	74.0	-18.7	PK	340	1.2	RB 1 MHz;VB 3 MHz;Peak
1229.900	35.2	V	54.0	-18.8	AVG	340	1.2	RB 1 MHz;VB 10 Hz;Peak
3738.340	54.1	V	74.0	-19.9	PK	291	1.0	RB 1 MHz;VB 3 MHz;Peak
3747.000	33.9	V	54.0	-20.1	AVG	291	1.0	RB 1 MHz;VB 10 Hz;Peak
1595.290	53.4	V	74.0	-20.6	PK	317	1.0	RB 1 MHz;VB 3 MHz;Peak
4823.880	53.1	H	74.0	-20.9	PK	288	1.0	RB 1 MHz;VB 3 MHz;Peak
1477.840	52.5	V	74.0	-21.5	PK	294	1.0	RB 1 MHz;VB 3 MHz;Peak
1480.910	31.8	V	54.0	-22.2	AVG	294	1.0	RB 1 MHz;VB 10 Hz;Peak

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #2b: Center Channel

Channel: 6 Mode: b
 Tx Chain: B Data Rate: 1 Mbps

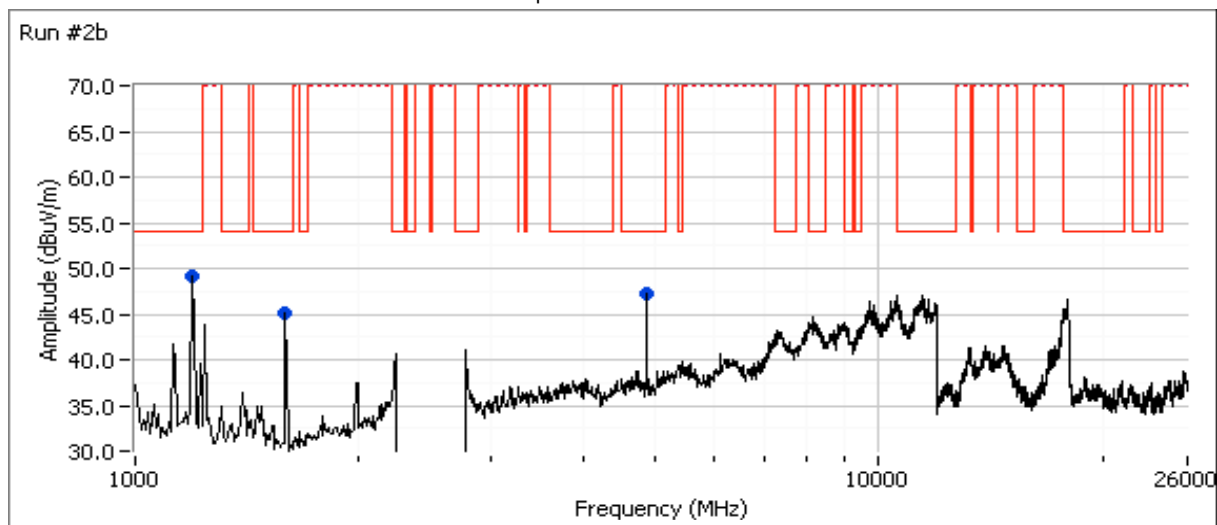

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
14.0	13.8	22.5

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4874.020	45.3	V	54.0	-8.7	AVG	360	1.1	RB 1 MHz;VB 10 Hz;Peak
1197.870	55.4	V	74.0	-18.6	PK	91	1.0	RB 1 MHz;VB 3 MHz;Peak
1595.600	33.5	V	54.0	-20.5	AVG	265	1.0	RB 1 MHz;VB 10 Hz;Peak
1197.990	33.2	V	54.0	-20.8	AVG	91	1.0	RB 1 MHz;VB 10 Hz;Peak
4873.830	50.5	V	74.0	-23.5	PK	360	1.1	RB 1 MHz;VB 3 MHz;Peak
1597.530	49.5	V	74.0	-24.5	PK	265	1.0	RB 1 MHz;VB 3 MHz;Peak


Note: As there were no significant emissions observed between 12 - 25 GHz on this channel, measurements above 12 GHz were not performed on the lowest and highest channels.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #2c: High Channel

Channel: 11
 Tx Chain: B
 Mode: b
 Data Rate: 1 Mbps

Target (dBm)	Power Settings Measured (dBm)	Software Setting
14.0	14.0	22.5

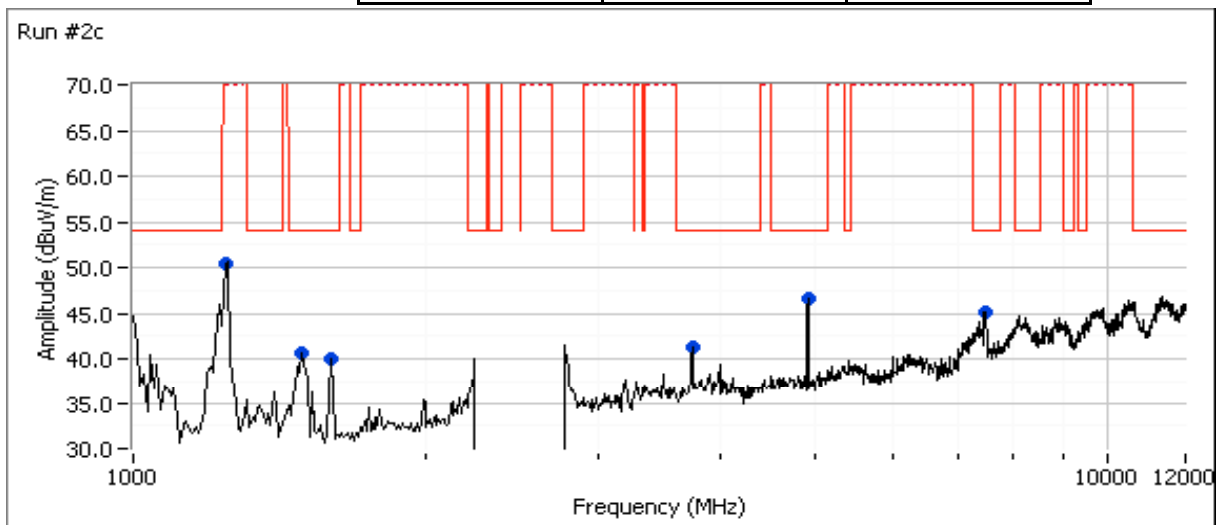

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4924.000	45.1	V	54.0	-8.9	AVG	340	1.9	RB 1 MHz;VB 10 Hz;Peak
7470.800	40.0	V	54.0	-14.0	AVG	41	1.8	RB 1 MHz;VB 10 Hz;Peak
7467.330	58.5	V	74.0	-15.5	PK	41	1.8	RB 1 MHz;VB 3 MHz;Peak
1231.800	36.9	V	54.0	-17.1	AVG	130	1.0	RB 1 MHz;VB 10 Hz;Peak
1229.490	55.9	V	74.0	-18.1	PK	130	1.0	RB 1 MHz;VB 3 MHz;Peak
1594.440	35.5	V	54.0	-18.5	AVG	319	1.0	RB 1 MHz;VB 10 Hz;Peak
3733.330	34.0	H	54.0	-20.0	AVG	270	1.1	RB 1 MHz;VB 10 Hz;Peak
3739.970	53.1	H	74.0	-20.9	PK	270	1.1	RB 1 MHz;VB 3 MHz;Peak
1597.970	51.8	V	74.0	-22.2	PK	319	1.0	RB 1 MHz;VB 3 MHz;Peak
1493.450	51.7	H	74.0	-22.3	PK	323	1.8	RB 1 MHz;VB 3 MHz;Peak
4924.060	50.8	V	74.0	-23.2	PK	340	1.9	RB 1 MHz;VB 3 MHz;Peak
1496.960	30.1	H	54.0	-23.9	AVG	323	1.8	RB 1 MHz;VB 10 Hz;Peak


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #3: Radiated Spurious Emissions, 1,000 - 25000 MHz. Operating Mode: OFDM
 Date of Test: 9/23/2013 0:00 Config. Used: 1
 Test Engineer: Joseph Cadigal Config Change: None
 Test Location: FT Ch#4 EUT Voltage: 3.3 VDC

Run #3a: Center Channel

Channel: 6 Mode: g
 Tx Chain: A Data Rate: 6Mbps

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
16.5	16.5	22.5

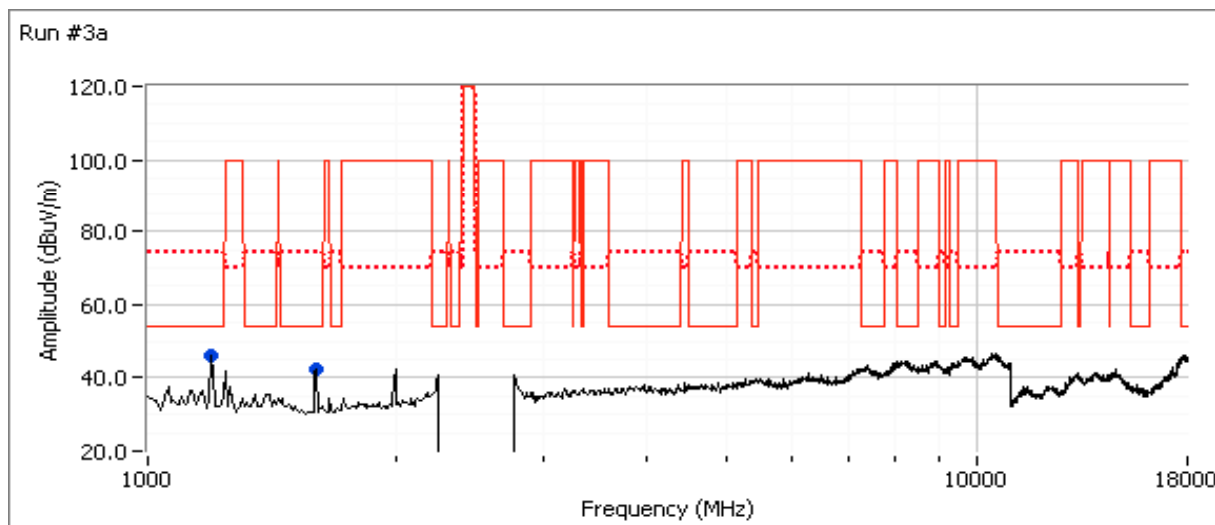

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1196.770	34.2	V	54.0	-19.8	AVG	125	1.0	RB 1 MHz;VB 10 Hz;Peak
1197.060	54.2	V	74.0	-19.8	PK	125	1.0	RB 1 MHz;VB 3 MHz;Peak
1594.490	31.8	V	54.0	-22.2	AVG	246	1.0	RB 1 MHz;VB 10 Hz;Peak
1594.810	49.5	V	74.0	-24.5	PK	246	1.0	RB 1 MHz;VB 3 MHz;Peak


Note: Scans made between 18 - 25 GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #3b: Center Channel

Channel: 6
 Tx Chain: B
 Mode: g
 Data Rate: 6Mbps

Target (dBm)	Power Settings Measured (dBm)	Software Setting
15.5	15.6	25.5

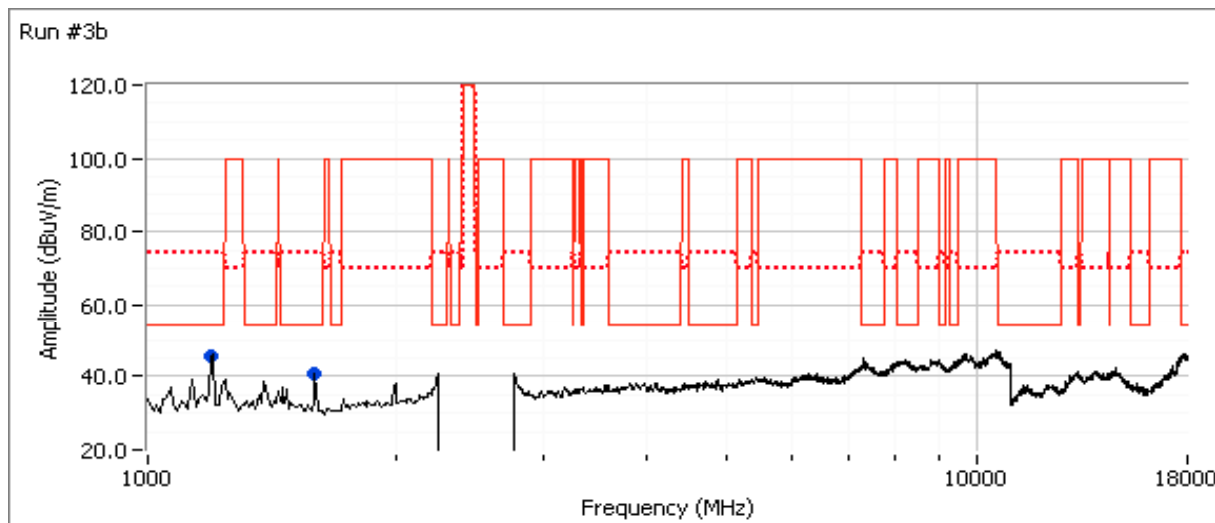

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1199.330	50.4	V	74.0	-23.6	PK	61	1.0	RB 1 MHz;VB 3 MHz;Peak
1598.440	29.7	V	54.0	-24.3	AVG	75	1.3	RB 1 MHz;VB 10 Hz;Peak
1199.130	29.3	V	54.0	-24.7	AVG	61	1.0	RB 1 MHz;VB 10 Hz;Peak
1598.170	46.0	V	74.0	-28.0	PK	75	1.3	RB 1 MHz;VB 3 MHz;Peak


Note: Scans made between 18 - 25 GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #3c: Center Channel

Channel: 6 Mode: n20
 Tx Chain: A+B Data Rate: HT8

Chain	Power Settings								
	Target (dBm)				Measured (dBm)				Software Setting
	A	B	C	Total	A	B	C	Total	
	13.5	13.5		16.5	13.6	13.6		16.6	24.5,27.5

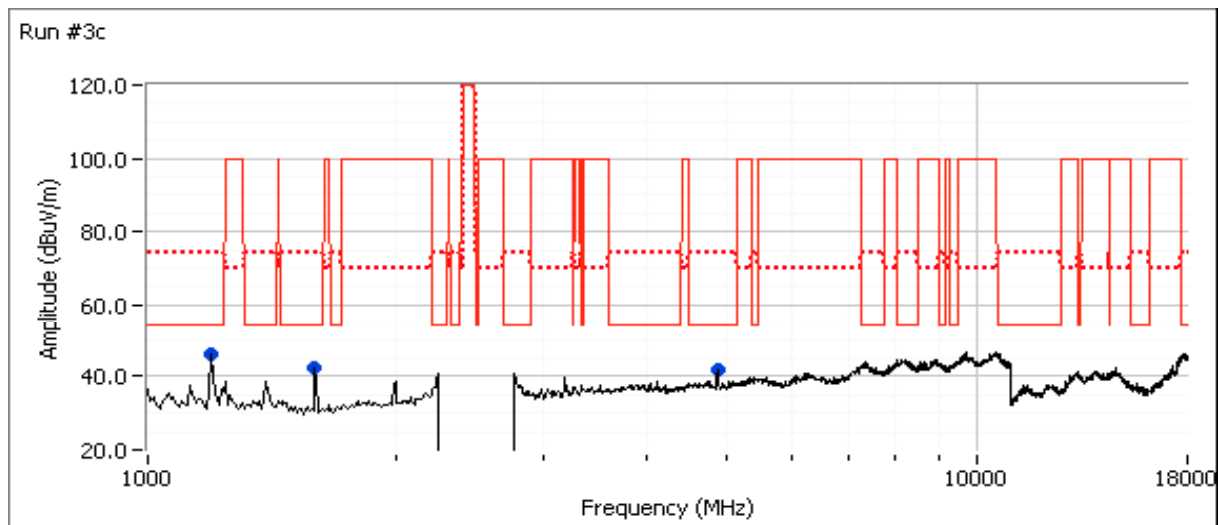

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4874.150	34.0	V	54.0	-20.0	AVG	24	1.0	RB 1 MHz;VB 10 Hz;Peak
1196.810	33.9	V	54.0	-20.1	AVG	263	1.3	RB 1 MHz;VB 10 Hz;Peak
1598.010	53.7	V	74.0	-20.3	PK	308	1.0	RB 1 MHz;VB 3 MHz;Peak
1598.180	32.9	V	54.0	-21.1	AVG	308	1.0	RB 1 MHz;VB 10 Hz;Peak
1197.080	52.8	V	74.0	-21.2	PK	263	1.3	RB 1 MHz;VB 3 MHz;Peak
4873.870	45.7	V	74.0	-28.3	PK	24	1.0	RB 1 MHz;VB 3 MHz;Peak


Note: Scans made between 18 - 25 GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #3d: Center Channel

Channel: 6 Mode: n40
 Tx Chain: A Data Rate: HT8

Target (dBm)	Power Settings Measured (dBm)	Software Setting
16.5	16.6	22.5

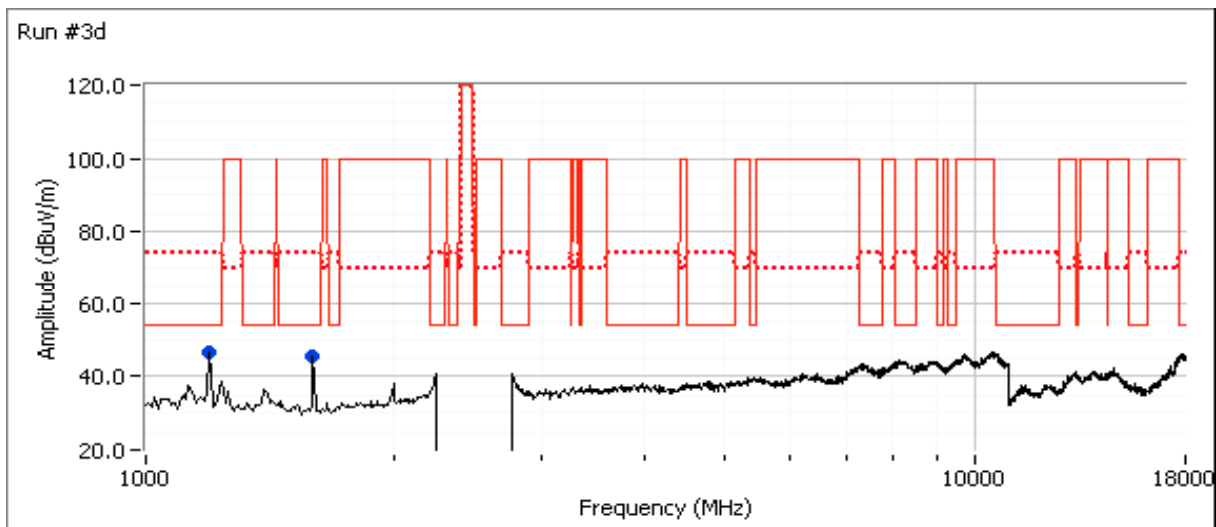

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	PK/QP/Avg	degrees	meters	
1195.010	33.6	V	54.0	-20.4	AVG	105	1.0	RB 1 MHz;VB 10 Hz;Peak
1593.190	53.1	H	74.0	-20.9	PK	328	1.3	RB 1 MHz;VB 3 MHz;Peak
1196.000	52.5	V	74.0	-21.5	PK	105	1.0	RB 1 MHz;VB 3 MHz;Peak
1595.260	32.0	H	54.0	-22.0	AVG	328	1.3	RB 1 MHz;VB 10 Hz;Peak


Note: Scans made between 18 - 25 GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #3e: Center Channel

Channel: 6 Mode: n40
Tx Chain: B Data Rate: HT0

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
13.5	13.6	24.5

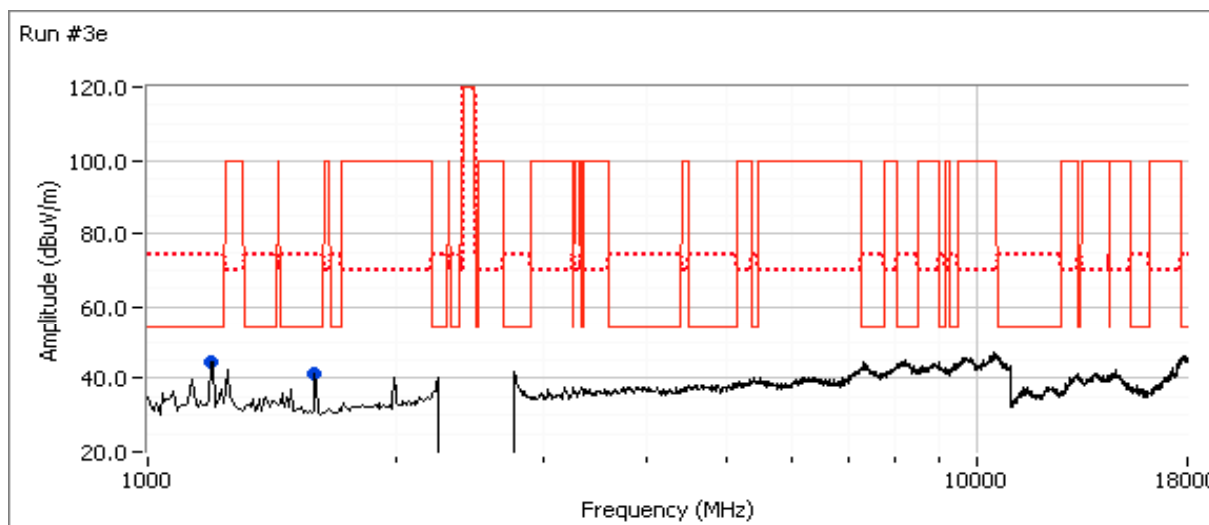

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1596.030	33.0	V	54.0	-21.0	AVG	302	1.0	RB 1 MHz;VB 10 Hz;Peak
1598.340	52.2	V	74.0	-21.8	PK	302	1.0	RB 1 MHz;VB 3 MHz;Peak
1195.500	30.3	V	54.0	-23.7	AVG	302	1.6	RB 1 MHz;VB 10 Hz;Peak
1195.970	49.1	V	74.0	-24.9	PK	302	1.6	RB 1 MHz;VB 3 MHz;Peak


Note: Scans made between 18 - 25 GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #3f: Center Channel

Channel: 6 Mode: n40
 Tx Chain: A+B Data Rate: HT8

	Power Settings								
	Target (dBm)				Measured (dBm)				Software Setting
Chain	A	B	C	Total	A	B	C	Total	
	13.0	13.0		16.0	13.1	13.1		16.1	24,27

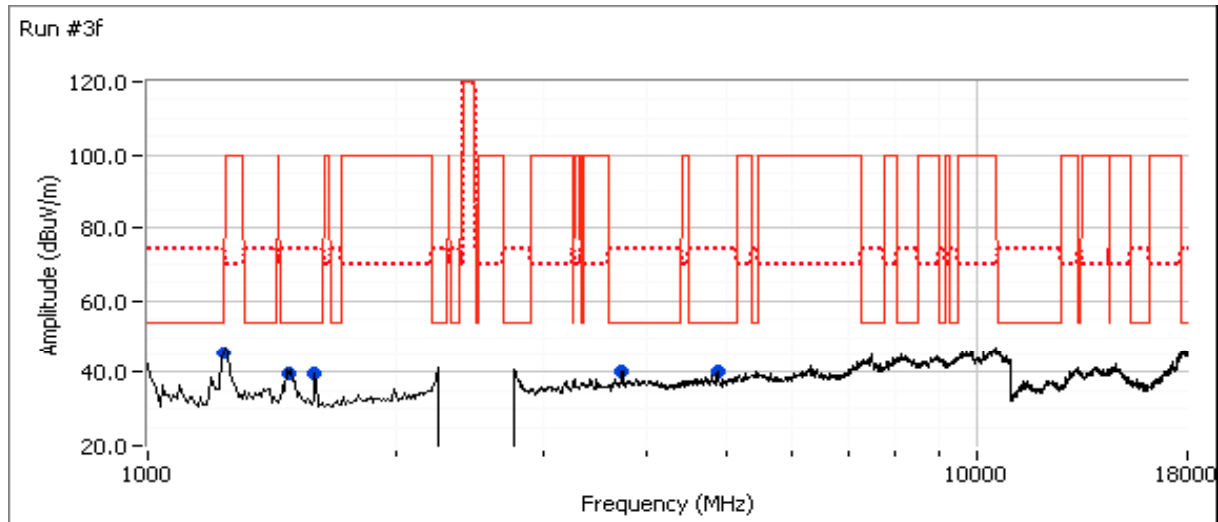

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4867.800	33.3	H	54.0	-20.7	AVG	285	1.0	RB 1 MHz;VB 10 Hz;Peak
3739.610	33.7	H	54.0	-20.3	AVG	302	1.0	RB 1 MHz;VB 10 Hz;Peak
1230.480	33.5	H	54.0	-20.5	AVG	330	1.3	RB 1 MHz;VB 10 Hz;Peak
1229.330	53.5	H	74.0	-20.5	PK	330	1.3	RB 1 MHz;VB 3 MHz;Peak
3740.350	51.7	H	74.0	-22.3	PK	302	1.0	RB 1 MHz;VB 3 MHz;Peak
1593.750	30.5	V	54.0	-23.5	AVG	281	1.3	RB 1 MHz;VB 10 Hz;Peak
1480.960	30.4	V	54.0	-23.6	AVG	259	1.0	RB 1 MHz;VB 10 Hz;Peak
1482.010	49.4	V	74.0	-24.6	PK	259	1.0	RB 1 MHz;VB 3 MHz;Peak
4869.790	46.1	H	74.0	-27.9	PK	285	1.0	RB 1 MHz;VB 3 MHz;Peak
1592.310	44.7	V	74.0	-29.3	PK	281	1.3	RB 1 MHz;VB 3 MHz;Peak

Note: Scans made between 18 - 25 GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4: Radiated Spurious Emissions, 1,000 - 25000 MHz. Operating Mode: Worse case from OFDM-mode

Date of Test: 9/23/2013 0:00

Config. Used: 1

Test Engineer: Joseph Cadigal

Config Change: None


Test Location: FT Ch#4

EUT Voltage: 3.3 VDC

Run #4a: Low Channel

Channel: 1 Mode: g
Tx Chain: A Data Rate: 6Mbps

Chain	Power Settings								Software Setting
	Target (dBm)				Measured (dBm)				
	A	B	C	Total	A	B	C	Total	
	13.5			13.5	13.7			13.7	19.0

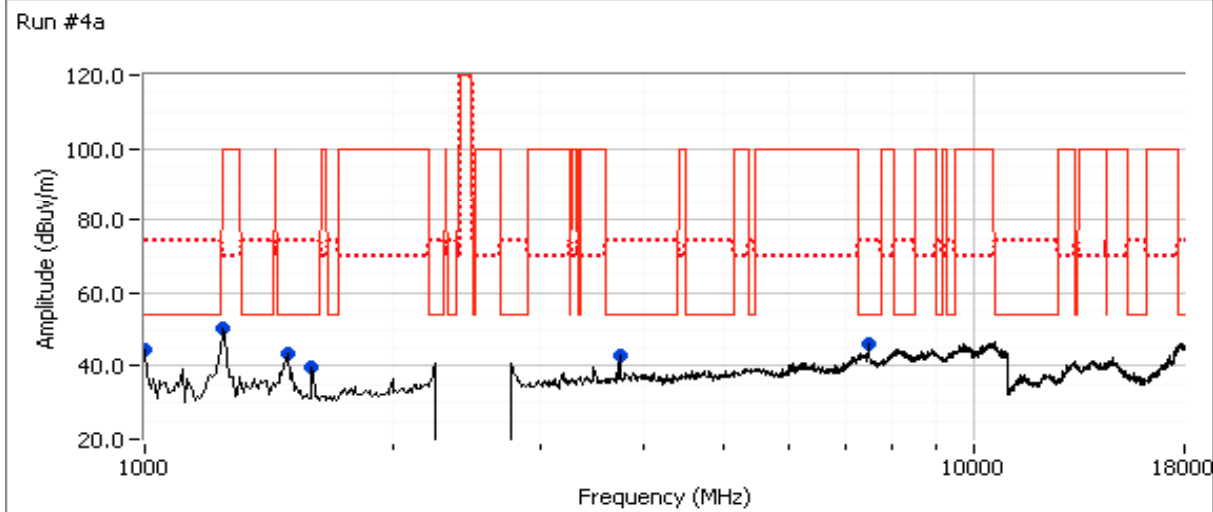


Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
7465.170	38.9	V	54.0	-15.1	AVG	48	1.6	RB 1 MHz;VB 10 Hz;Peak
1498.100	55.5	V	74.0	-18.5	PK	273	1.0	RB 1 MHz;VB 3 MHz;Peak
7465.420	54.7	V	74.0	-19.3	PK	48	1.6	RB 1 MHz;VB 3 MHz;Peak
1594.090	34.1	V	54.0	-19.9	AVG	310	1.0	RB 1 MHz;VB 10 Hz;Peak
3747.800	33.5	H	54.0	-20.5	AVG	302	1.0	RB 1 MHz;VB 10 Hz;Peak
3746.250	51.2	H	74.0	-22.8	PK	302	1.0	RB 1 MHz;VB 3 MHz;Peak
1498.650	31.0	V	54.0	-23.0	AVG	273	1.0	RB 1 MHz;VB 10 Hz;Peak
1593.770	50.6	V	74.0	-23.4	PK	310	1.0	RB 1 MHz;VB 3 MHz;Peak
1005.240	27.5	V	54.0	-26.5	AVG	359	1.6	RB 1 MHz;VB 10 Hz;Peak

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4b: High Channel

Channel: 11 Mode: g
 Tx Chain: A Data Rate: 6Mbps

	Power Settings								
	Target (dBm)				Measured (dBm)				Software Setting
Chain	A	B	C	Total	A	B	C	Total	
	13.5			13.5	13.6			13.6	19.0

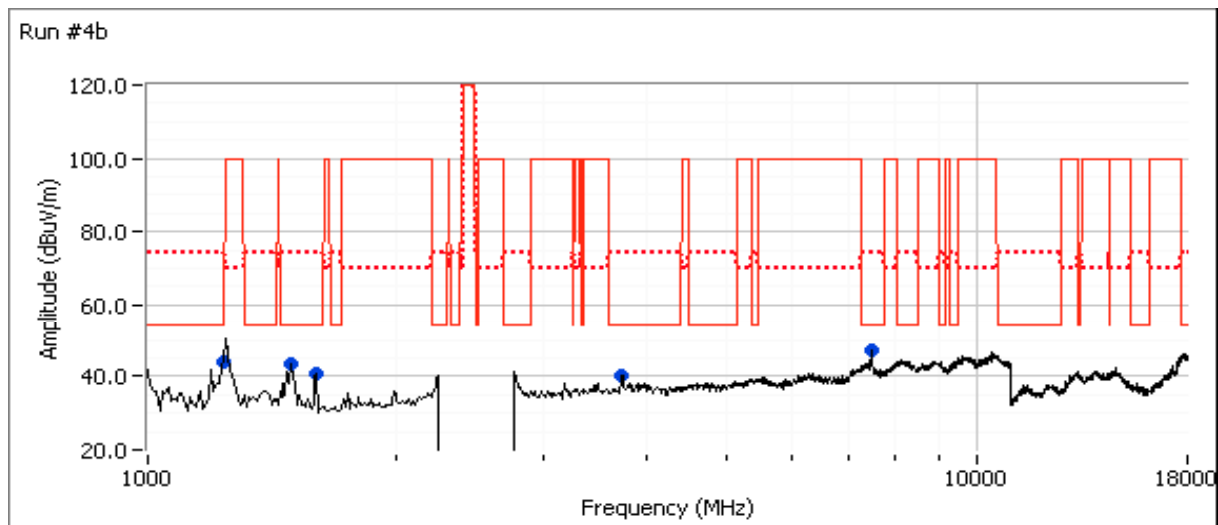

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
7468.920	38.9	V	54.0	-15.1	AVG	41	2.2	RB 1 MHz;VB 10 Hz;Peak
7470.380	54.5	V	74.0	-19.5	PK	41	2.2	RB 1 MHz;VB 3 MHz;Peak
3730.270	33.3	V	54.0	-20.7	AVG	21	1.0	RB 1 MHz;VB 10 Hz;Peak
1230.580	33.0	H	54.0	-21.0	AVG	334	1.3	RB 1 MHz;VB 10 Hz;Peak
1593.700	32.8	V	54.0	-21.2	AVG	310	1.0	RB 1 MHz;VB 10 Hz;Peak
1497.760	31.1	V	54.0	-22.9	AVG	274	1.0	RB 1 MHz;VB 10 Hz;Peak
3732.720	51.0	V	74.0	-23.0	PK	21	1.0	RB 1 MHz;VB 3 MHz;Peak
1230.780	50.8	H	74.0	-23.2	PK	334	1.3	RB 1 MHz;VB 3 MHz;Peak
1497.740	50.6	V	74.0	-23.4	PK	274	1.0	RB 1 MHz;VB 3 MHz;Peak
1592.480	50.1	V	74.0	-23.9	PK	310	1.0	RB 1 MHz;VB 3 MHz;Peak

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing.

For radiated emissions testing the measurement antenna was located 3 meters from the EUT, unless otherwise noted.

Ambient Conditions:

Temperature: 23 °C
 Rel. Humidity: 40 %

Summary of Results - Device Operating in the 5725-5850 MHz Band

Run #	Mode	Channel	Target / Measured Power	Power Setting	Test Performed	Limit	Result / Margin
Scans on center channel in all three OFDM modes to determine the worst case mode.							
1	a - Chain A	157 - 5785MHz	16.5 / 16.6	36	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	55.9 dBµV/m @ 1196.5 MHz (-18.1 dB)
	a - Chain B	157 - 5785MHz	16.5 / 16.6	35.5	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	58.7 dBµV/m @ 1195.5 MHz (-15.3 dB)
	n20 - Chain A+B	157 - 5785MHz	13.5, 13.5 / 13.5, 13.5	34.5 / 34	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	58.9 dBµV/m @ 1198.6 MHz (-15.1 dB)
	n40 - Chain A	159 - 5795MHz	16.5 / 16.5	36	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	54.6 dBµV/m @ 1198.9 MHz (-19.4 dB)
	n40 - Chain B	159 - 5795MHz	16.5 / 16.5	35.5	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	38.8 dBµV/m @ 7453.6 MHz (-15.2 dB)
	n40 - Chain A+B	159 - 5795MHz	13.5, 13.5 / 13.4, 13.5	34.5 / 34	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	59.5 dBµV/m @ 1230.4 MHz (-14.5 dB)
	ac80 - Chain A+B	155 - 5775MHz	13.5, 13.5	37.5, 37	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	31.5 dBµV/m @ 1136.6 MHz (-22.5 dB)
Measurements on low and high channels in worst-case OFDM mode.							
2	n20 - Chain A+B	149 - 5745MHz	13.5, 13.5	34, 33.5	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	39.1 dBµV/m @ 7467.7 MHz (-14.9 dB)
	n20 - Chain A+B	165 - 5825MHz	13.5, 13.5	34.5, 34	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	38.3 dBµV/m @ 7500.5 MHz (-15.7 dB)

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #	Mode	Channel	Target / Measured Power	Power Setting	Test Performed	Limit	Result / Margin
40MHz - use if worse case from 1							
2	n40 - Chain A+B	151 - 5755MHz	13.5,13.5	34,33.5	Radiated Emissions, 1 - 40 GHz	FCC Part 15.209 / 15.247(c)	39.6 dBμV/m @ 7471.2 MHz (-14.4 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Sample Notes

MAC Address: 001500DC7B25 DRTU Tool Version 1.7.1-752, Driver version 16.6.0.1 (WiFi only)

Antenna:

Procedure Comments:

Measurements performed in accordance with FCC KDB 558074

Peak measurements performed with: RBW=1MHz, VBW=3MHz, peak detector, max hold, auto sweep time

Unless otherwise stated/noted, emission has duty cycle ≥ 98% and was measured using RBW=1MHz, VBW=10Hz, peak detector, linear average mode, auto sweep time, max hold.

Mode	Data Rate	Duty Cycle (x)	Constant DC?	T (ms)	Pwr Cor Factor*	Lin Volt Cor Factor**	Min VBW for FS (Hz)
a	6Mbps	0.99	Yes	5.75	0.0	0.0	174
n20	6.5Mbps	0.99	Yes	5.36	0.0	0.0	187
n40	13.5Mbps	0.97	Yes	3.08	0.1	0.2	325
ac80	VHT0	0.93	Yes	0.43	0.3	0.6	2326

Measurement Specific Notes:

Note 1:	Emission in non-restricted band, but limit of 15.209 used.
Note 2:	Emission in non-restricted band, the limit was set 30dB below the level of the fundamental and measured in 100kHz.
Note 3:	Emission has duty cycle < 98%, but constant, average measurement performed: RBW=1MHz, VBW=10Hz, peak detector, linear averaging, auto sweep, trace average 100 traces, measurement corrected by Linear Voltage correction factor

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1: Radiated Spurious Emissions, 1,000 - 40000 MHz. Operating Mode: Determination of worse case OFDM mode
 Date of Test: 9/24/2013 0:00 Config. Used: 1
 Test Engineer: Jack Liu Config Change: None
 Test Location: FT chamber#4 EUT Voltage: POE


Run #1a: Center Channel

Channel: 157 Mode: a
 Tx Chain: A Data Rate: 6Mbps

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
16.5	16.6	36.0

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1189.200	33.2	H	54.0	-20.8	AVG	244	1.1	RB 1 MHz;VB 10 Hz;Peak
1196.530	55.9	H	74.0	-18.1	PK	244	1.1	RB 1 MHz;VB 3 MHz;Peak
1595.270	32.1	V	54.0	-21.9	AVG	276	1.1	RB 1 MHz;VB 10 Hz;Peak
1593.340	53.3	V	74.0	-20.7	PK	276	1.1	RB 1 MHz;VB 3 MHz;Peak

Note: Scans made between 18 - 40 GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range

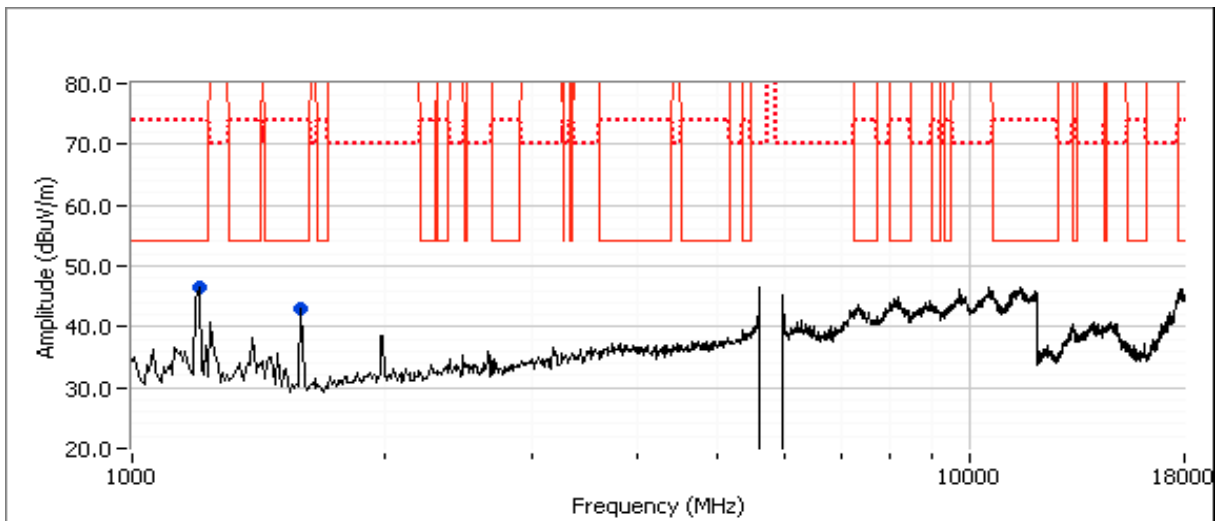

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A


Run #1b: Center Channel

Channel: 157 Mode: a
 Tx Chain: B Data Rate: 6Mbps

Target (dBm)	Power Settings Measured (dBm)	Software Setting
16.5	16.6	35.5

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1195.670	36.5	V	54.0	-17.5	AVG	81	1.0	RB 1 MHz;VB 10 Hz;Peak
1195.540	58.7	V	74.0	-15.3	PK	81	1.0	RB 1 MHz;VB 3 MHz;Peak
1593.340	31.6	V	54.0	-22.4	AVG	298	1.0	RB 1 MHz;VB 10 Hz;Peak
1597.400	53.8	V	74.0	-20.2	PK	298	1.0	RB 1 MHz;VB 3 MHz;Peak

Note: Scans made between 18 - 40 GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range

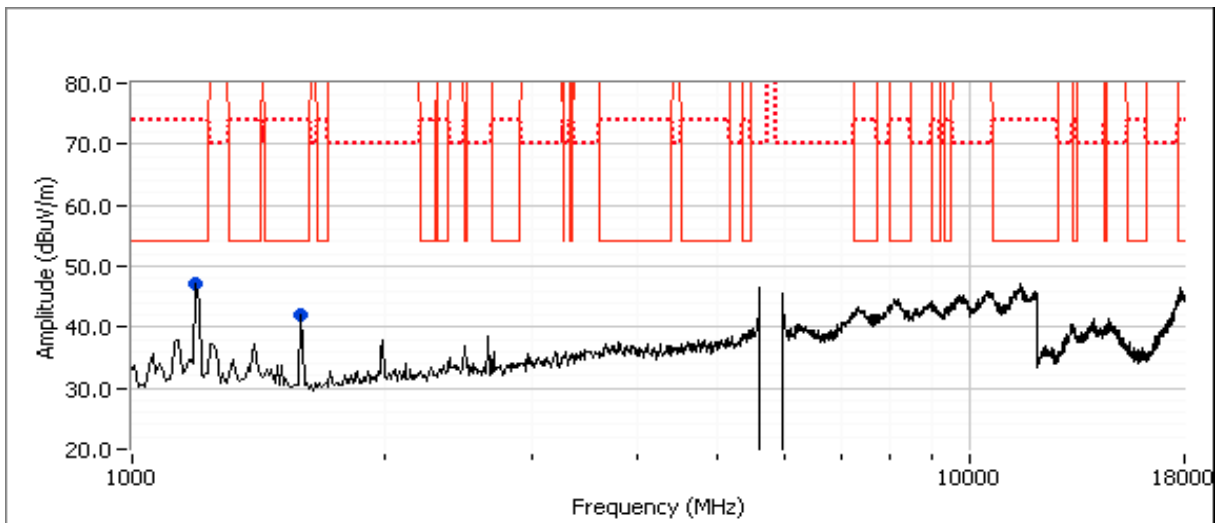

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A


Run #1c: Center Channel

Channel: 157 Mode: n20
 Tx Chain: A+B Data Rate: 6.5Mbps

Chain	Power Settings								
	Target (dBm)				Measured (dBm)				Software Setting
	A	B	C	Total	A	B	C	Total	
	13.5	13.5		16.5	13.5	13.5		16.5	34.5 / 34

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1196.600	35.8	V	54.0	-18.2	AVG	81	1.0	RB 1 MHz;VB 10 Hz;Peak
1198.600	58.9	V	74.0	-15.1	PK	81	1.0	RB 1 MHz;VB 3 MHz;Peak
2490.400	30.3	H	54.0	-23.7	AVG	276	1.5	RB 1 MHz;VB 10 Hz;Peak
2490.400	47.3	H	74.0	-26.7	PK	276	1.5	RB 1 MHz;VB 3 MHz;Peak
1595.400	31.6	V	54.0	-22.4	AVG	234	1.0	RB 1 MHz;VB 10 Hz;Peak
1595.540	54.6	V	74.0	-19.4	PK	234	1.0	RB 1 MHz;VB 3 MHz;Peak

Note: Scans made between 18 - 40 GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range

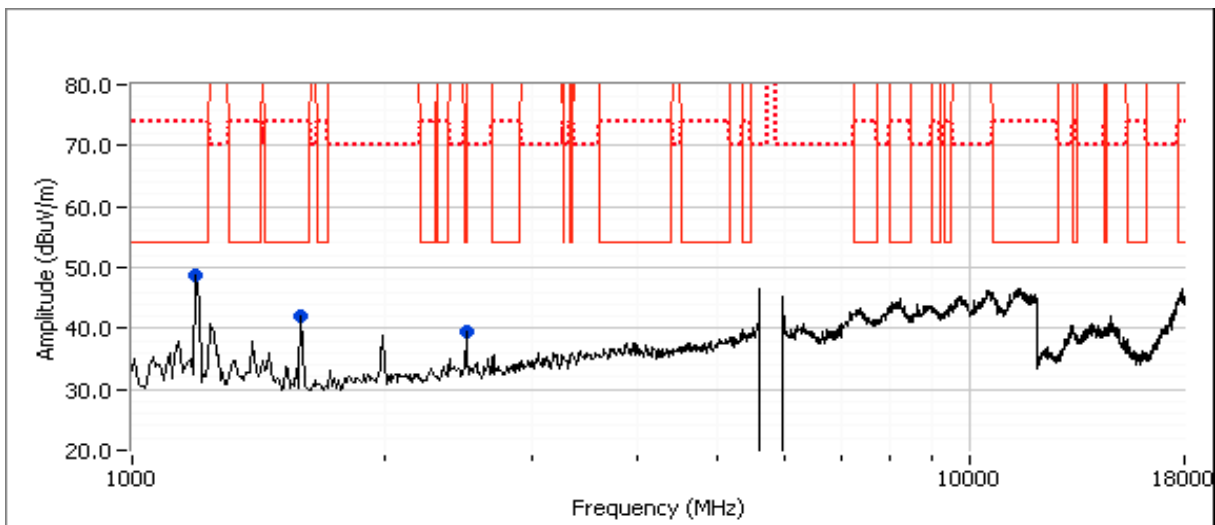

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A


Run #1d: Center Channel

Channel: 159 Mode: n40
 Tx Chain: A Data Rate: 13.5Mbps

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
16.5	16.5	36.0

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1198.530	34.3	V	54.0	-19.7	AVG	261	1.3	RB 1 MHz;VB 10 Hz;Peak
1198.870	54.6	V	74.0	-19.4	PK	261	1.3	RB 1 MHz;VB 3 MHz;Peak
1593.470	32.1	V	54.0	-21.9	AVG	297	0.9	RB 1 MHz;VB 10 Hz;Peak
1598.340	54.6	V	74.0	-19.4	PK	297	0.9	RB 1 MHz;VB 3 MHz;Peak

Note: Scans made between 18 - 40 GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range

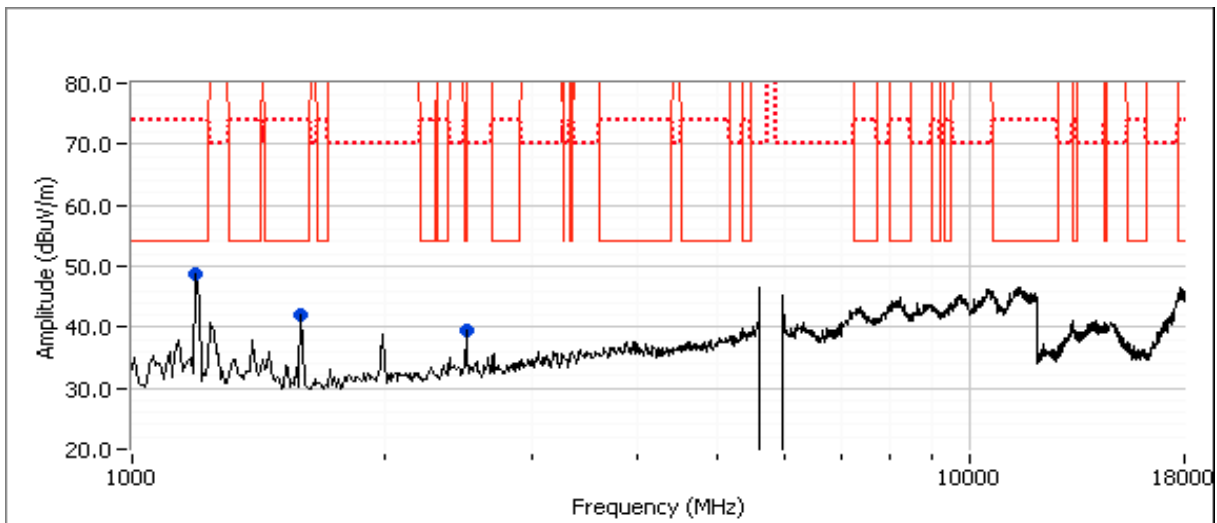

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A


Run #1e: Center Channel

Channel: 159 Mode: n40
 Tx Chain: B Data Rate: 13.5Mbps

Power Settings		
Target (dBm)	Measured (dBm)	Software Setting
16.5	16.5	35.5

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
7453.600	38.8	V	54.0	-15.2	AVG	38	1.6	RB 1 MHz;VB 10 Hz;Peak
7485.000	54.2	V	74.0	-19.8	PK	38	1.6	RB 1 MHz;VB 3 MHz;Peak
1593.470	30.6	V	54.0	-23.4	AVG	245	1.0	RB 1 MHz;VB 10 Hz;Peak
1597.000	52.4	V	74.0	-21.6	PK	245	1.0	RB 1 MHz;VB 3 MHz;Peak
1196.770	30.9	V	54.0	-23.1	AVG	69	1.0	RB 1 MHz;VB 10 Hz;Peak
1199.600	52.8	V	74.0	-21.2	PK	69	1.0	RB 1 MHz;VB 3 MHz;Peak

Note: Scans made between 18 - 40 GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range

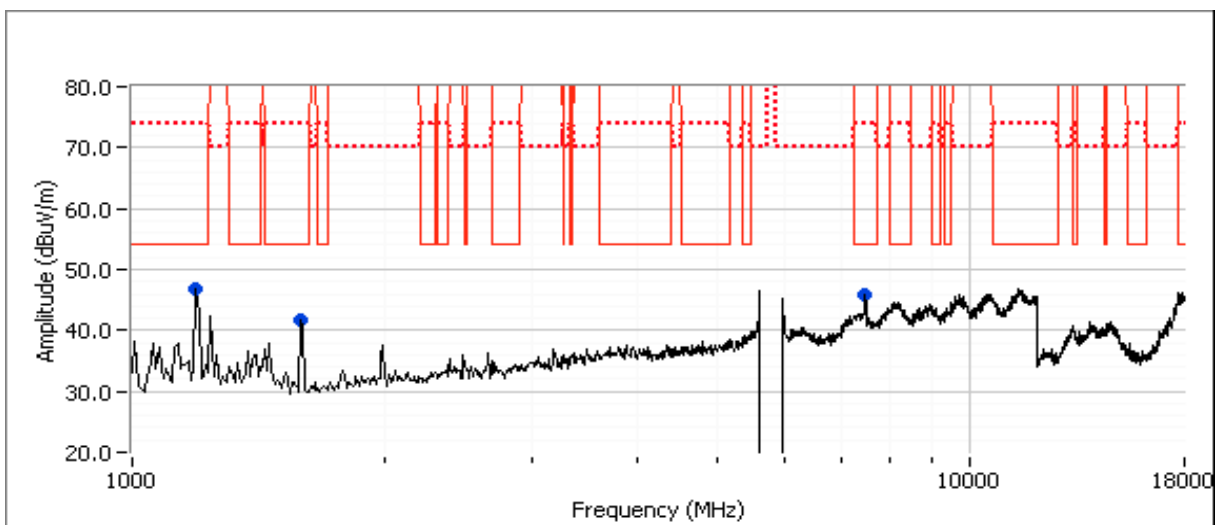

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A


Run #1f: Center Channel

Channel: 159 Mode: n40
 Tx Chain: A+B Data Rate: 13.5Mbps

Chain	Power Settings								
	Target (dBm)				Measured (dBm)				Software Setting
	A	B	C	Total	A	B	C	Total	
	13.5	13.5		16.5	13.4	13.5		16.5	34.5 / 34

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
7474.330	38.5	V	54.0	-15.5	AVG	40	1.6	RB 1 MHz;VB 10 Hz;Peak
7486.800	54.5	V	74.0	-19.5	PK	40	1.6	RB 1 MHz;VB 3 MHz;Peak
1486.600	32.5	V	54.0	-21.5	AVG	276	1.0	RB 1 MHz;VB 10 Hz;Peak
1494.600	56.5	V	74.0	-17.5	PK	276	1.0	RB 1 MHz;VB 3 MHz;Peak
2498.070	31.4	H	54.0	-22.6	AVG	329	1.0	RB 1 MHz;VB 10 Hz;Peak
2498.570	49.0	H	74.0	-25.0	PK	329	1.0	RB 1 MHz;VB 3 MHz;Peak
1230.420	38.0	H	54.0	-16.0	AVG	352	1.9	RB 1 MHz;VB 10 Hz;Peak
1230.420	59.5	H	74.0	-14.5	PK	352	1.9	RB 1 MHz;VB 3 MHz;Peak

Note: Scans made between 18 - 40 GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range

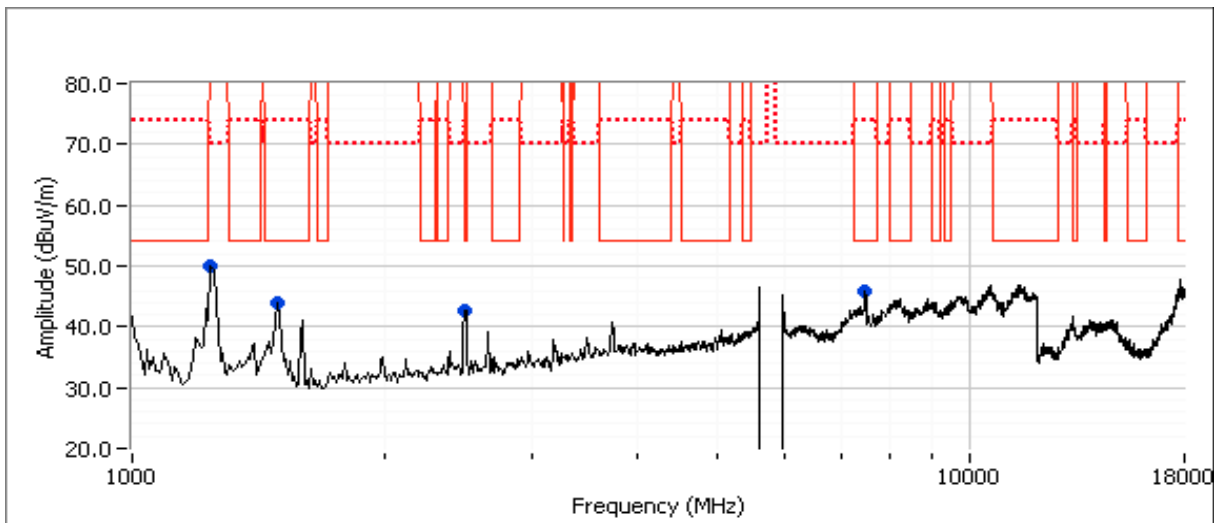

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1g: Center Channel

Date of Test: 10/2/2013 0:00

Test Engineer: Joseph Cadigal

Test Location: FT chamber#4

Config. Used: 1

Config Change: None


EUT Voltage: POE

Channel: 155 Mode: ac80
 Tx Chain: A+B Data Rate: VHT0

Chain	Target (dBm)				Measured (dBm)				Software Setting
	A	B	C	Total	A	B	C	Total	
	13.5	13.5		16.5	13.7	13.7		16.7	

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1136.560	31.5	V	54.0	-22.5	AVG	196	1.9	RB 1 MHz;VB 10 Hz;Peak
1194.800	51.5	V	74.0	-22.5	PK	3	2.2	RB 1 MHz;VB 3 MHz;Peak
1195.420	30.8	V	54.0	-23.2	AVG	3	2.2	RB 1 MHz;VB 10 Hz;Peak
1595.370	30.7	V	54.0	-23.3	AVG	88	1.6	RB 1 MHz;VB 10 Hz;Peak
1594.540	47.9	V	74.0	-26.1	PK	88	1.6	RB 1 MHz;VB 3 MHz;Peak
1135.350	44.0	V	74.0	-30.0	PK	196	1.9	RB 1 MHz;VB 3 MHz;Peak

Note: Scans made between 18 - 40 GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range

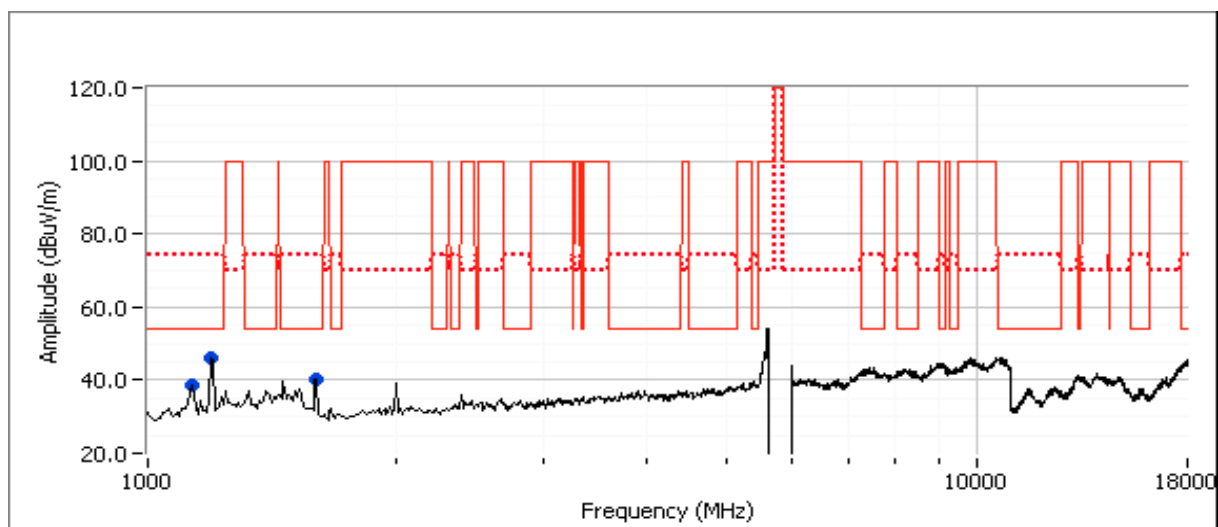

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #2: Radiated Spurious Emissions, 1,000 - 40000 MHz. Operating Mode: Worse case from Run #1

Date of Test: 9/24/2013 0:00

Config. Used: 1

Test Engineer: Joseph Cadigal

Config Change: none

Test Location: FT Chamber#4

EUT Voltage: 3.3Vdc

Run #2a: Low Channel


Channel: 149

Mode: n20

Tx Chain: A + B

Data Rate: HT8

Chain	Target (dBm)				Measured (dBm)				Software Setting
	A	B	C	Total	A	B	C	Total	
	13.5	13.5		16.5	13.7	13.6		16.7	

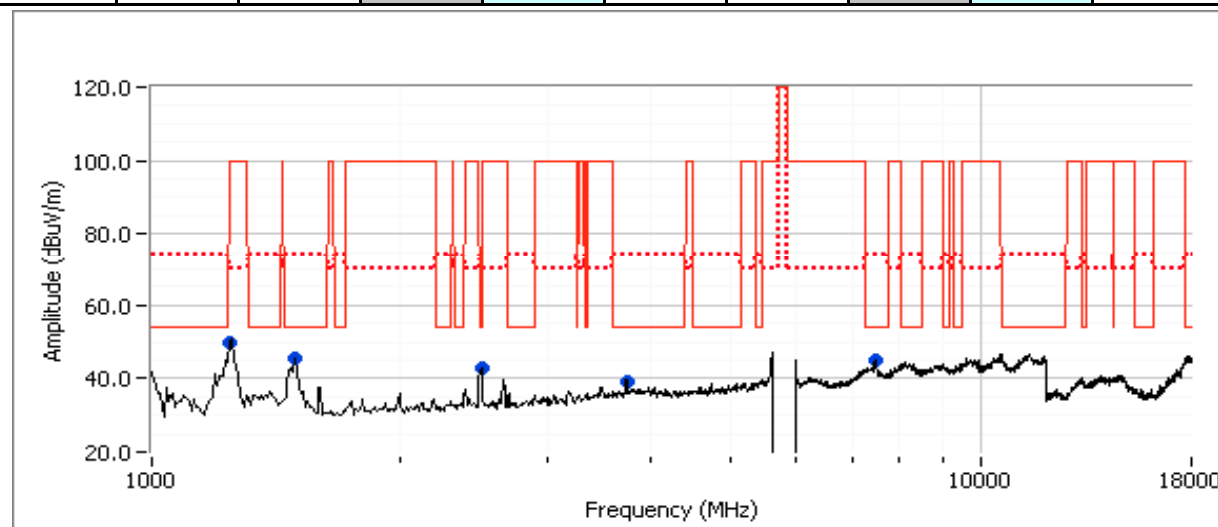


Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
7467.740	39.1	V	54.0	-14.9	AVG	339	1.6	RB 1 MHz;VB 10 Hz;Peak
2497.780	34.5	H	54.0	-19.5	AVG	269	1.6	RB 1 MHz;VB 10 Hz;Peak
7468.210	54.5	V	74.0	-19.5	PK	339	1.6	RB 1 MHz;VB 3 MHz;Peak
1229.140	53.8	H	74.0	-20.2	PK	331	1.0	RB 1 MHz;VB 3 MHz;Peak
1493.790	53.7	H	74.0	-20.3	PK	321	1.0	RB 1 MHz;VB 3 MHz;Peak
1229.190	33.1	H	54.0	-20.9	AVG	331	1.0	RB 1 MHz;VB 10 Hz;Peak
3743.670	33.0	V	54.0	-21.0	AVG	309	1.0	RB 1 MHz;VB 10 Hz;Peak
2499.330	52.4	H	74.0	-21.6	PK	269	1.6	RB 1 MHz;VB 3 MHz;Peak
1494.580	30.5	H	54.0	-23.5	AVG	321	1.0	RB 1 MHz;VB 10 Hz;Peak
3743.270	49.0	V	74.0	-25.0	PK	309	1.0	RB 1 MHz;VB 3 MHz;Peak

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #2b: High Channel

Channel: 165 Mode: n20
 Tx Chain: A + B Data Rate: HT8

Chain	Power Settings								
	Target (dBm)				Measured (dBm)				Software Setting
	A	B	C	Total	A	B	C	Total	
	13.5	13.5		16.5	13.7	13.7		16.7	34.5,34

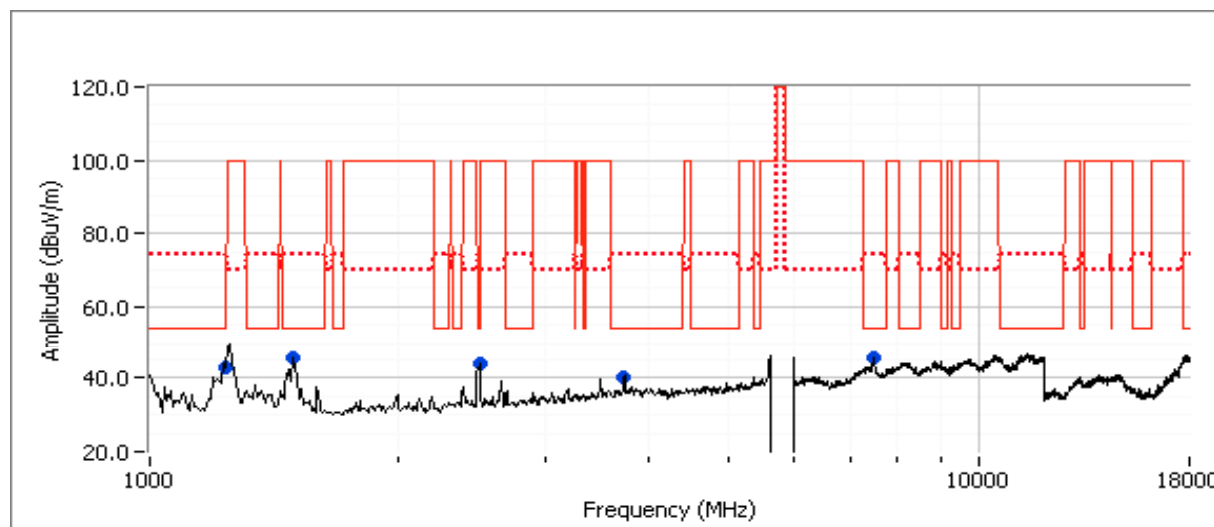


Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
7500.480	38.3	V	54.0	-15.7	AVG	37	1.9	RB 1 MHz;VB 10 Hz;Peak
1496.540	57.0	H	74.0	-17.0	PK	313	1.0	RB 1 MHz;VB 3 MHz;Peak
1229.340	34.4	H	54.0	-19.6	AVG	353	1.6	RB 1 MHz;VB 10 Hz;Peak
1229.240	54.1	H	74.0	-19.9	PK	353	1.6	RB 1 MHz;VB 3 MHz;Peak
2496.970	33.7	H	54.0	-20.3	AVG	275	1.6	RB 1 MHz;VB 10 Hz;Peak
3739.960	33.4	V	54.0	-20.6	AVG	322	1.0	RB 1 MHz;VB 10 Hz;Peak
3739.690	51.5	V	74.0	-22.5	PK	322	1.0	RB 1 MHz;VB 3 MHz;Peak
1496.950	31.4	H	54.0	-22.6	AVG	313	1.0	RB 1 MHz;VB 10 Hz;Peak
7500.710	49.6	V	74.0	-24.4	PK	37	1.9	RB 1 MHz;VB 3 MHz;Peak
2498.100	49.2	H	74.0	-24.8	PK	275	1.6	RB 1 MHz;VB 3 MHz;Peak

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #2c: High Channel - Worse case from Run #1

Channel: 165 Mode: n40
 Tx Chain: A + B Data Rate: HT8

Chain	Power Settings								
	Target (dBm)				Measured (dBm)				Software Setting
	A	B	C	Total	A	B	C	Total	
	13.5	13.5		16.5	13.7	13.7		16.7	34.5,34

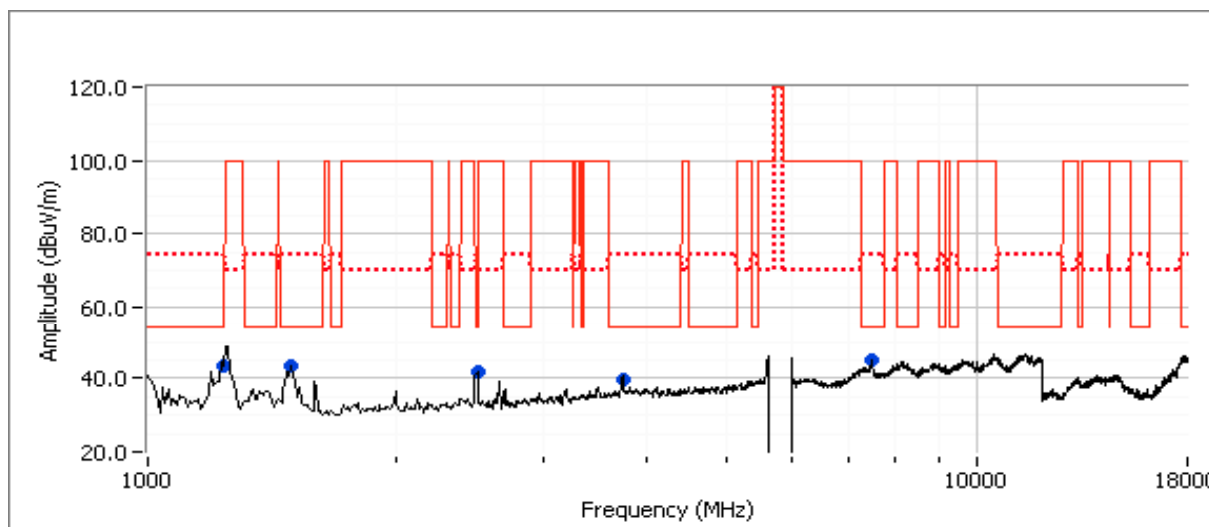

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
7471.180	39.6	V	54.0	-14.4	AVG	42	1.9	RB 1 MHz;VB 10 Hz;Peak
7473.550	57.0	V	74.0	-17.0	PK	42	1.9	RB 1 MHz;VB 3 MHz;Peak
1228.900	54.9	H	74.0	-19.1	PK	351	1.6	RB 1 MHz;VB 3 MHz;Peak
1229.800	34.3	H	54.0	-19.7	AVG	351	1.6	RB 1 MHz;VB 10 Hz;Peak
2497.560	34.2	H	54.0	-19.8	AVG	252	1.0	RB 1 MHz;VB 10 Hz;Peak
3739.020	32.8	H	54.0	-21.2	AVG	314	1.3	RB 1 MHz;VB 10 Hz;Peak
1493.610	52.0	V	74.0	-22.0	PK	289	1.0	RB 1 MHz;VB 3 MHz;Peak
1494.650	30.8	V	54.0	-23.2	AVG	289	1.0	RB 1 MHz;VB 10 Hz;Peak
2499.040	50.6	H	74.0	-23.4	PK	252	1.0	RB 1 MHz;VB 3 MHz;Peak
3739.760	48.2	H	74.0	-25.8	PK	314	1.3	RB 1 MHz;VB 3 MHz;Peak

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

RSS 210 and FCC 15.247 (DTS) Antenna Port Measurements

Power, PSD, Bandwidth and Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

When measuring the conducted emissions from the EUT's antenna port, the antenna port of the EUT was connected to the spectrum analyzer or power meter via a suitable attenuator to prevent overloading the measurement system. All measurements are corrected to allow for the external attenuators used.

Ambient Conditions:

Temperature: 25 °C
 Rel. Humidity: 38 %

Summary of Results

MAC Address: 001500DC7B25 DRTU Tool Version 1.7.1-777, Driver version 16.6.0.1

1	Max	-	Output Power	15.247(b)	Pass	4.4 dBm (2.8mW)
2	Default		Power spectral Density (PSD)	15.247(d)	Pass	-4.5 dBm/10kHz
3	Default		Minimum 6dB Bandwidth	15.247(a)	Pass	655 kHz
3	Default		99% Bandwidth	RSS GEN	-	1037 kHz
4	Default		Spurious emissions	15.247(b)	Pass	All emissions > -20dBc

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Duty Cycle: 0.660
 Correction Factor (dB) 3.6



EMC Test Data

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1: Output Power

Date of Test: 10/16/2013
 Test Engineer: Joseph Cadigal
 Test Location: FT Lab#4

Config. Used: 1
 Config Change: none
 Host Unit Voltage 3.3Vdc

Power Setting ²	Frequency (MHz)	Output Power		Antenna Gain (dBi)	Result	EIRP ^{Note 2}		Output Power	
		(dBm) ¹	mW			dBm	W	(dBm) ³	mW
Max	2402	2.8	1.9	3.2	Pass	6.0	0.004		
Max	2440	3.7	2.3	3.2	Pass	6.9	0.005		
Max	2480	4.4	2.8	3.2	Pass	7.6	0.006		

Note 1:	Output power measured using a peak power meter, spurious limit is -20dBc.
Note 2:	Power setting - the software power setting used during testing, included for reference only.
Note 3:	Power measured using average power meter and is included for reference only.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A


Run #2: Power spectral Density

Date of Test: 10/17/2013
 Test Engineer: John Caizzi
 Test Location: FT Lab#4

Config. Used: 1
 Config Change: none
 EUTt Voltage 3.3 VDC

Power Setting	Frequency (MHz)	PSD (dBm/10kHz) ^{Note 1}	Limit dBm/3kHz	Result
Default	2402	-6.2	8.0	Pass
Default	2440	-5.5	8.0	Pass
Default	2480	-4.5	8.0	Pass

Note 1: Test performed per method PKSPD, in KDB 558074. Power spectral density measured using: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$, $\text{VBW}=3*\text{RBW}$, peak detector, span = $1.5*\text{DTS BW}$, auto sweep time, max hold.

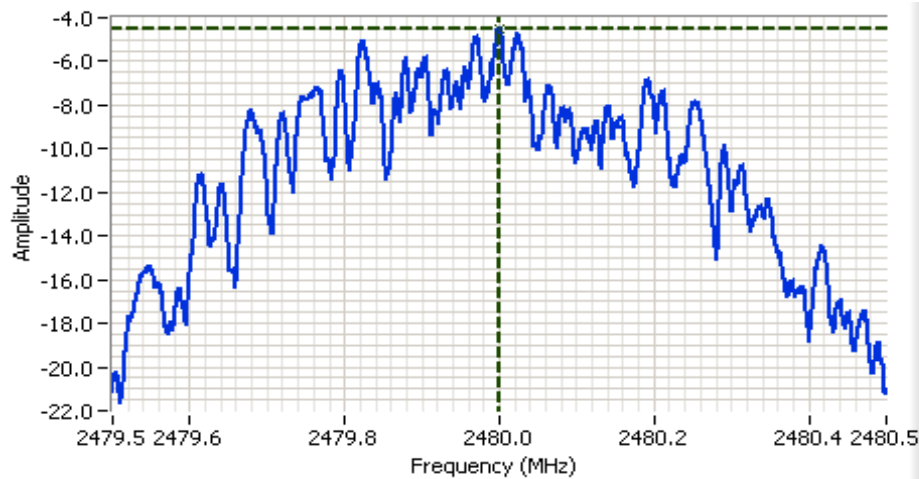

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2480.000 MHz
 SPAN: 1.000 MHz
 RB: 10.0 kHz
 VB: 30.0 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 10.7 DB
 Sweep Time: 9.6ms
 Ref Lvl: 10.0 DBM

Comments

BTLE
 PSD = -4.47 dBm/10 kHz

Cursor 1	2479.9988	-4.47		
	0.0000	0.00		

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A


Run #3: Signal Bandwidth

Date of Test: 10/17/2013
 Test Engineer: John Caizzi
 Test Location: FT Lab#4

Config. Used: 1
 Config Change: none
 EUTt Voltage 3.3 VDC

Power Setting	Frequency (MHz)	Bandwidth (kHz)		RBW Setting (kHz)	
		6dB	99%	6dB	99%
Default	2402	655	1035	100	20
Default	2440	667	1037	100	20
Default	2480	669	1037	100	20

Note 1: DTS BW: RBW=100kHz, VBW ≥ 3*RBW, peak detector, max hold, auto sweep time.
 99% BW: RBW=1-5% of 99%BW, VBW ≥ 3*RBW, peak detector, max hold, auto sweep time.

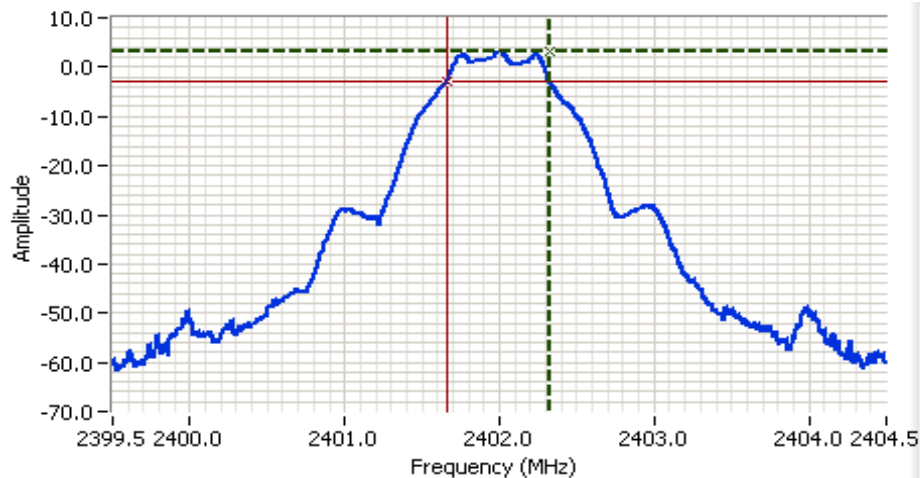

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2402.000 MHz
 SPAN: 5.000 MHz
 RB: 100 kHz
 VB: 300 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 10.7 DB
 Sweep Time: 1.0ms
 Ref Lvl: 10.0 DBM


Comments

BTLE
 6dB BW: 655 kHz

Cursor 1	2402.3209	3.25	
Cursor 2	2401.6657	-2.75	

Delta Freq. 655 kHz
 Delta Amplitude 6.00

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

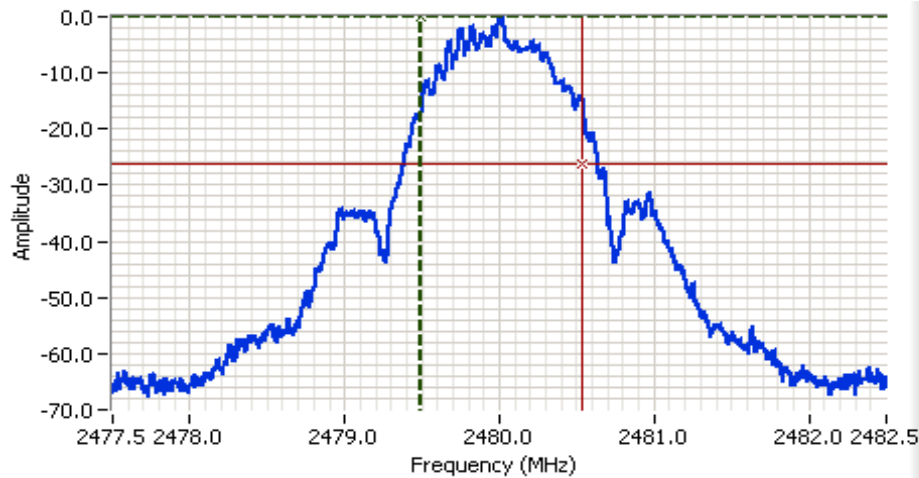

Analyzer Settings

Agilent Technologies, E4446A
 CF: 2480.000 MHz
 SPAN: 5.000 MHz
 RB: 20.0 kHz
 VB: 62.0 kHz
 Detector: POS
 Attn: 10 DB
 RL Offset: 10.7 DB
 Sweep Time: 12.0ms
 Ref Lvl: 10.0 DBM

Comments

BTLE
 99% power BW: 1.037 MHz

Cursor 1	2479.4967	-0.16			
Cursor 2	2480.5333	-26.16			

Delta Freq. 1.037

Delta Amplitude 26.00

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A


Run #4: Out of Band Spurious Emissions

Date of Test: 10/17/2013
 Test Engineer: John Caizzi
 Test Location: FT Lab#4

Config. Used: 1
 Config Change: none
 EUTt Voltage 3.3 VDC


Frequency (MHz)	Limit	Result
2402	-20dBc	Pass
2440	-20dBc	Pass
2480	-20dBc	Pass

Plots for low channel, power setting = default.

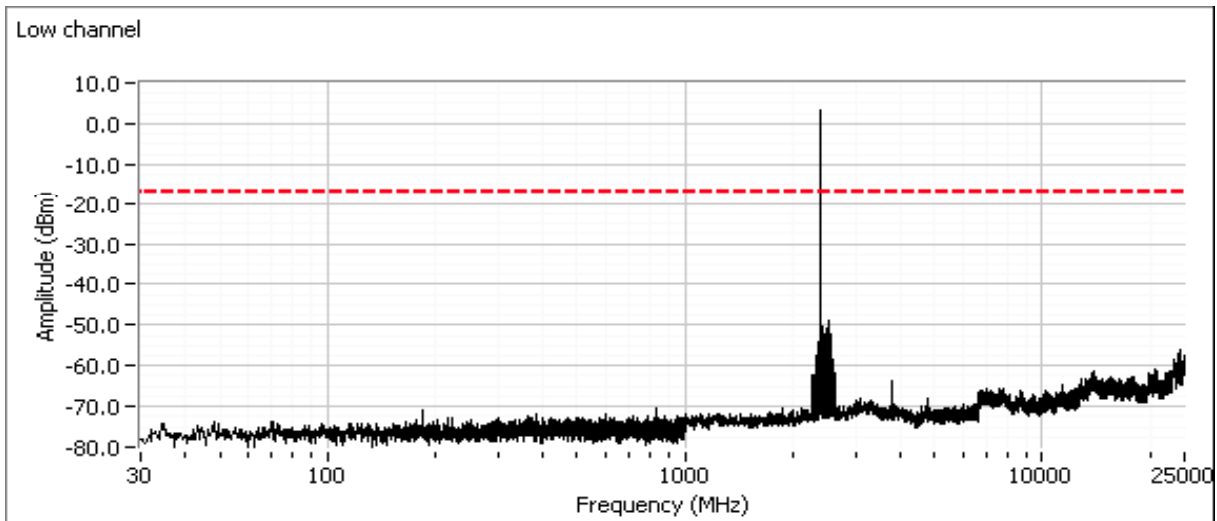


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Additional plot showing compliance with -30dBc limit from 2390 MHz to 2400 MHz. Radiated measurements used to show compliance with the limits in the restricted band below 2390 MHz.

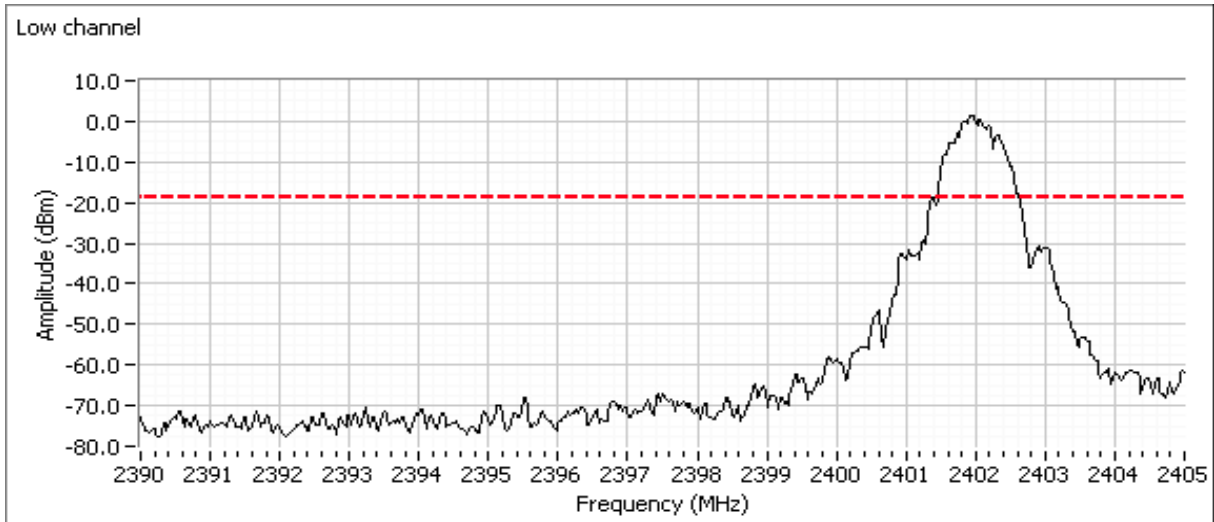


Plot for center channel, power setting = default.

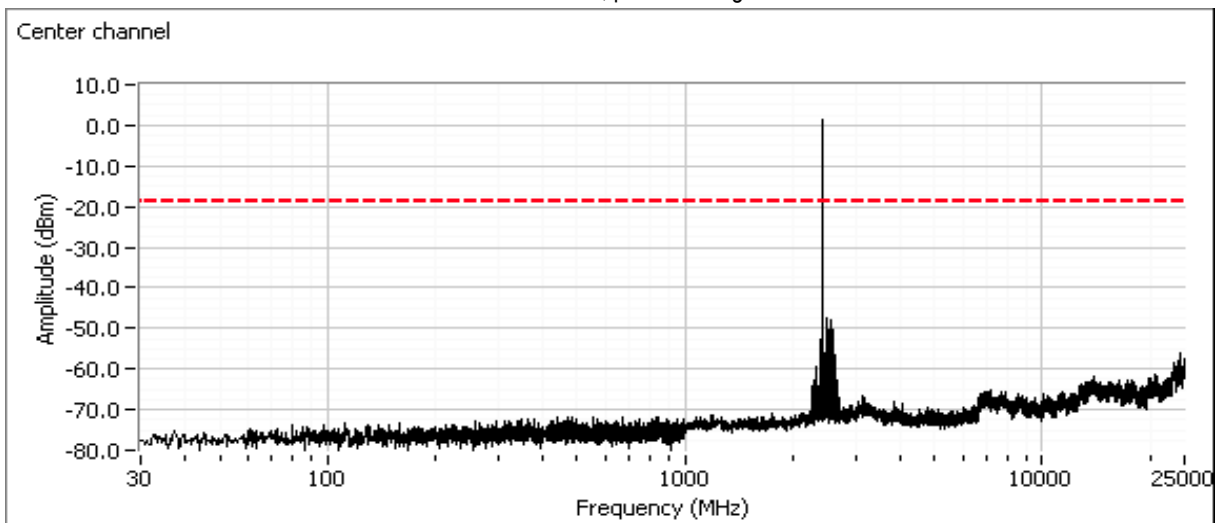

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Plos for high channel, power setting = default

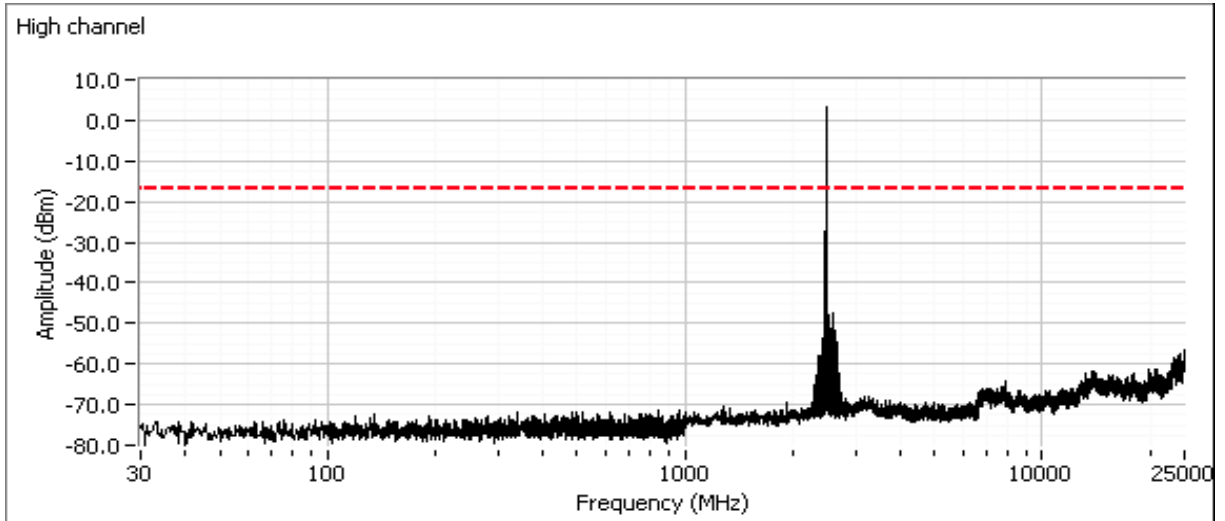

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

Ambient Conditions:

Temperature: 22 °C
 Rel. Humidity: 45 %

Summary of Results - Device Operating in the 2400-2483.5 MHz Band

MAC Address: 001500DC7B25 DRTU Tool Version 1.7.1-805, Driver version 16.6.0.1

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
1a	Bluetooth LE	low	Max	0.7	Restricted Band Edge (2390 MHz)	FCC Part 15.209 / 15.247(c)	42.6 dBµV/m @ 2362.1 MHz (-11.4 dB)
					Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	40.1 dBµV/m @ 7471.7 MHz (-13.9 dB)
1b		center	Max	1.7	Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	40.4 dBµV/m @ 7494.2 MHz (-13.6 dB)
1c		high	Max	2.4	Restricted Band Edge (2483.5 MHz)	FCC Part 15.209 / 15.247(c)	40.0 dBµV/m @ 2500.0 MHz (-14.0 dB)
					Radiated Emissions, 1 - 26 GHz	FCC Part 15.209 / 15.247(c)	40.1 dBµV/m @ 7490.2 MHz (-13.9 dB)



EMC Test Data

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Antenna: antenna connected.

Duty Cycle: 0.660

Correction Factor (dB) 3.6

Unless otherwise stated/noted, emission has duty cycle $\geq 98\%$ and was measured using RBW=1MHz, VBW=10Hz, peak detector, linear average mode, auto sweep time, max hold.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1: Radiated Spurious Emissions, 1000-26000 MHz. Operating Mode: Low Energy

Run #1a: Low Channel @ 2402 MHz

Date of Test: 10/22/2013

Test Engineer: Jack Liu

Test Location: FT chamber # 4

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain B	-	0.74	Max

Note - measured power in table above is average power, for reference only.


Fundamental Signal Field Strength: Peak and average values measured in 1 MHz, and peak value measured in 100kHz

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2401.990	93.6	V	-	-	Pk	234	1.0	POS; RB 100 kHz; VB: 300 kHz
2402.000	92.6	H	-	-	Pk	355	2.6	POS; RB 100 kHz; VB: 300 kHz

Fundamental emission level @ 3m in 100kHz RBW:	93.6	dB μ V/m	
Limit for emissions outside of restricted bands:	73.6	dB μ V/m	Limit is -20dBc (Peak power measurement)

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2362.100	42.6	H	54.0	-11.4	AVG	17	2.6	POS; RB 1 MHz; VB: 10 Hz, Note 2
2361.620	47.8	H	74.0	-26.2	PK	17	2.6	POS; RB 1 MHz; VB: 3 MHz
2362.100	40.0	V	54.0	-14.0	AVG	333	1.2	POS; RB 1 MHz; VB: 10 Hz, Note 2
2361.780	45.7	V	74.0	-28.3	PK	333	1.2	POS; RB 1 MHz; VB: 3 MHz

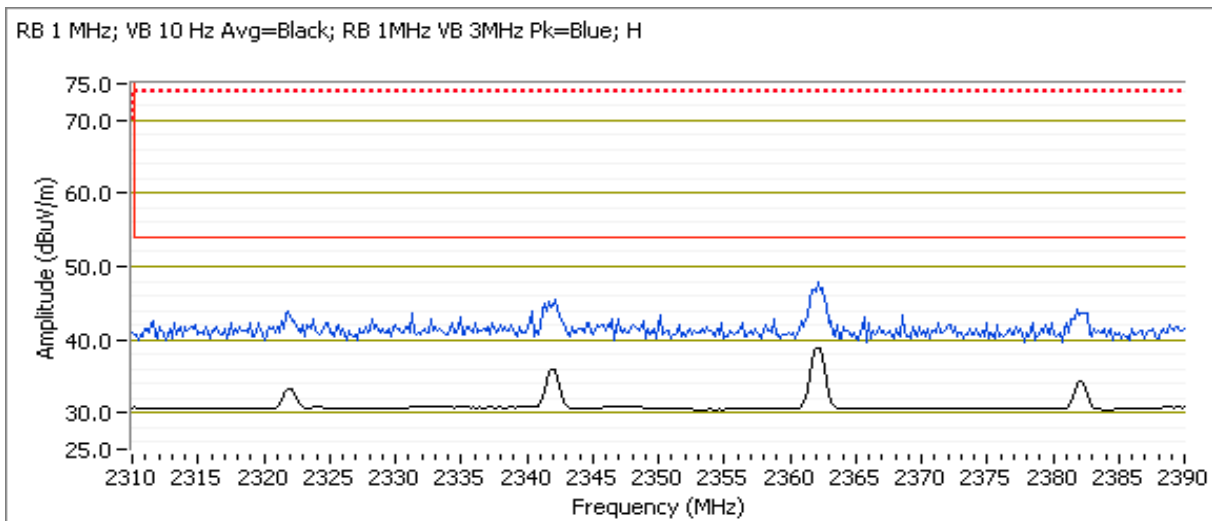

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A


Date of Test: 10/22/2013
 Test Engineer: Joseph Cadigal
 Test Location: FT chamber # 4

Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
7471.670	40.1	V	54.0	-13.9	AVG	42	1.6	RB 1 MHz;VB 10 Hz;Peak
7471.950	54.3	V	74.0	-19.7	PK	42	1.6	RB 1 MHz;VB 3 MHz;Peak
1598.820	32.3	V	54.0	-21.7	AVG	39	1.3	RB 1 MHz;VB 10 Hz;Peak
1598.820	45.5	V	74.0	-28.5	PK	39	1.3	RB 1 MHz;VB 3 MHz;Peak
1239.700	27.8	V	54.0	-26.2	AVG	76	1.6	RB 1 MHz;VB 10 Hz;Peak
1238.930	40.0	V	74.0	-34.0	PK	76	1.6	RB 1 MHz;VB 3 MHz;Peak
1497.540	33.5	V	54.0	-20.5	AVG	108	1.6	RB 1 MHz;VB 10 Hz;Peak
1497.920	55.8	V	74.0	-18.2	PK	108	1.6	RB 1 MHz;VB 3 MHz;Peak

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental and measured in 100kHz.

Note 2: Emission has duty cycle < 98%, but constant, average measurement performed: RBW=1MHz, VBW=10Hz, peak detector, linear averaging, auto sweep, trace average 100 traces, measurement corrected by Linear Voltage correction factor.

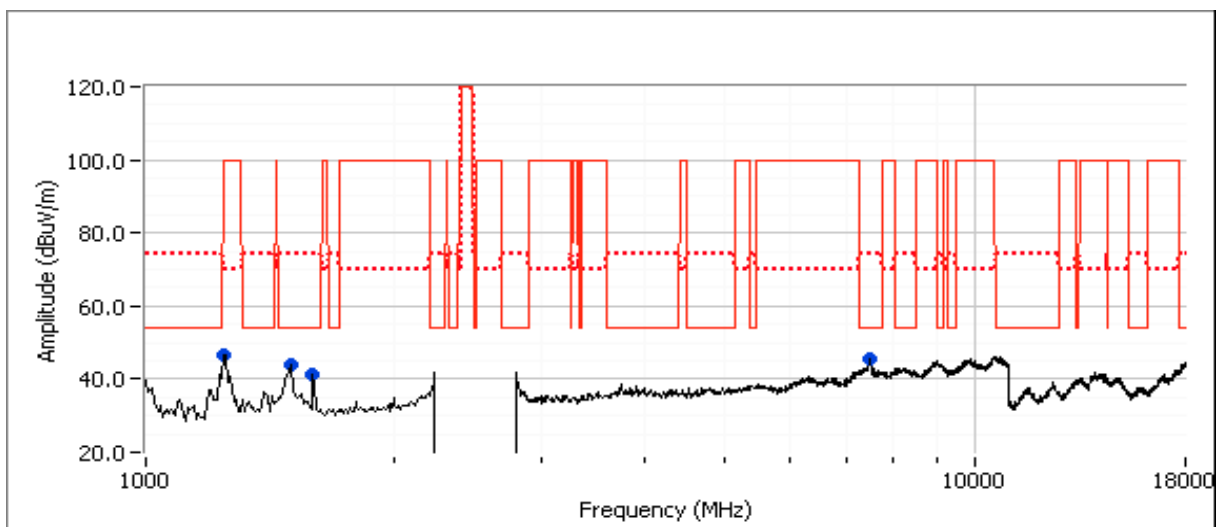



EMC Test Data

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1b: Center Channel @ 2440 MHz

Date of Test: 10/22/2013

Test Engineer: Jack Liu

Test Location: FT chamber # 4

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain B	-	1.65	Max

Note - measured power in table above is average power, for reference only.

Fundamental Signal Field Strength: Peak value measured in 100kHz

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2439.950	94.7	V	-	-	Pk	3	2.5	POS; RB 100 kHz; VB: 300 kHz
2439.970	95.0	H	-	-	Pk	187	1.0	POS; RB 100 kHz; VB: 300 kHz

Fundamental emission level @ 3m in 100kHz RBW:	95.0	dB μ V/m	
Limit for emissions outside of restricted bands:	75.0	dB μ V/m	Limit is -20dBc (Peak power measurement)


Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Date of Test: 10/22/2013
 Test Engineer: Joseph Cadigal
 Test Location: FT chamber # 4

Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
7494.220	40.4	V	54.0	-13.6	AVG	74	1.6	RB 1 MHz;VB 10 Hz;Peak
1598.570	36.4	V	54.0	-17.6	AVG	27	1.3	RB 1 MHz;VB 10 Hz;Peak
7493.370	54.5	V	74.0	-19.5	PK	74	1.6	RB 1 MHz;VB 3 MHz;Peak
1496.290	33.6	H	54.0	-20.4	AVG	92	1.0	RB 1 MHz;VB 10 Hz;Peak
3747.970	31.9	V	54.0	-22.1	AVG	158	1.6	RB 1 MHz;VB 10 Hz;Peak
1597.100	50.4	V	74.0	-23.6	PK	27	1.3	RB 1 MHz;VB 3 MHz;Peak
1497.620	49.5	H	74.0	-24.5	PK	92	1.0	RB 1 MHz;VB 3 MHz;Peak
3748.510	49.2	V	74.0	-24.8	PK	158	1.6	RB 1 MHz;VB 3 MHz;Peak

Note 1:	For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental and measured in 100kHz.
Note 2:	Emission has duty cycle < 98%, but constant, average measurement performed: RBW=1MHz, VBW=10Hz, peak detector, linear averaging, auto sweep, trace average 100 traces, measurement corrected by Linear Voltage correction factor.
Note 3:	Scans made between 18 - 26GHz with the measurement antenna moved around the card and its antennas 20-50cm from the device indicated there were no significant emissions in this frequency range.

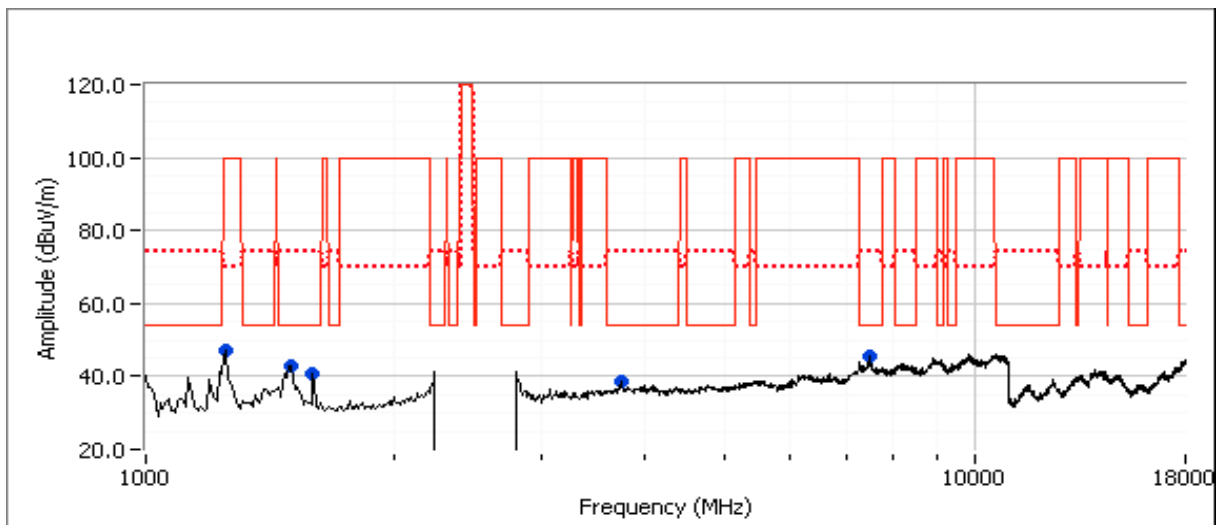

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1c: High Channel @ 2480 MHz
 Date of Test: 10/22/2013
 Test Engineer: Jack Liu
 Test Location: FT chamber # 4

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain B	-	2.36	Max

Note - measured power in table above is average power, for reference only.


Fundamental Signal Field Strength: Peak value measured in 100kHz

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2479.970	97.0	V	-	-	Pk	326	1.1	POS; RB 100 kHz; VB: 300 kHz
2480.230	97.9	H	-	-	Pk	360	1.0	POS; RB 100 kHz; VB: 300 kHz

Fundamental emission level @ 3m in 100kHz RBW:	97.9	dB μ V/m	
Limit for emissions outside of restricted bands:	77.9	dB μ V/m	Limit is -20dBc (Peak power measurement)

Band Edge Signal Field Strength - Direct measurement of field strength

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2500.000	40.0	H	54.0	-14.0	AVG	360	2.0	POS; RB 1 MHz; VB: 10 Hz, Note 2
2484.990	51.5	H	74.0	-22.5	PK	360	2.0	POS; RB 1 MHz; VB: 3 MHz
2500.000	39.0	V	54.0	-15.0	AVG	326	1.0	POS; RB 1 MHz; VB: 10 Hz, Note 2
2485.150	51.1	V	74.0	-22.9	PK	326	1.0	POS; RB 1 MHz; VB: 3 MHz

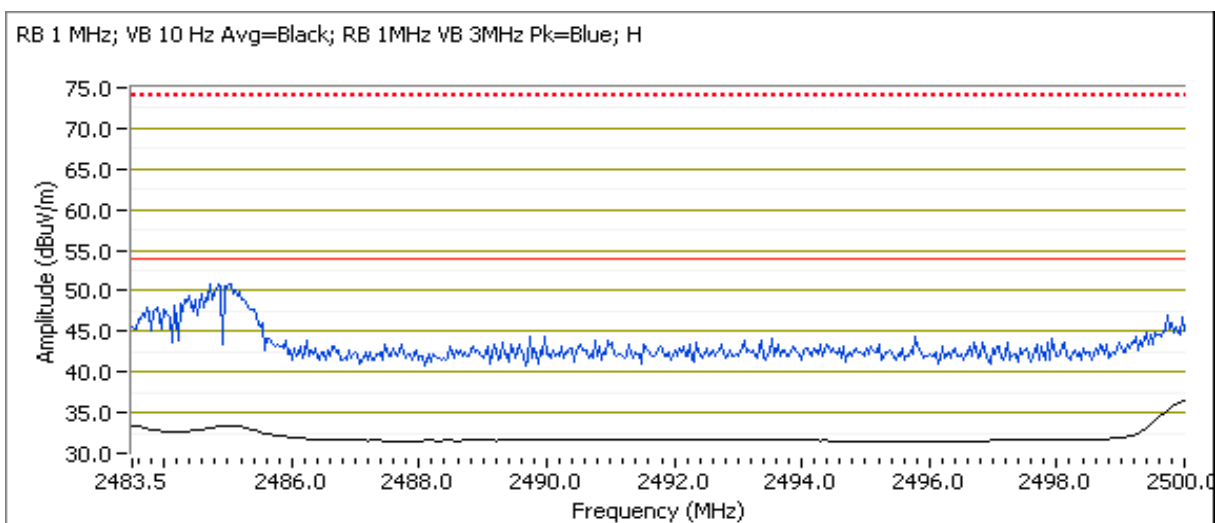

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A


Date of Test: 10/22/2013
 Test Engineer: Joseph Cadigal
 Test Location: FT chamber # 4

Other Spurious Emissions

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
7490.190	40.1	V	54.0	-13.9	AVG	78	1.6	RB 1 MHz;VB 10 Hz;Peak
7490.460	56.1	V	74.0	-17.9	PK	78	1.6	RB 1 MHz;VB 3 MHz;Peak
1594.480	34.9	V	54.0	-19.1	AVG	27	1.3	RB 1 MHz;VB 10 Hz;Peak
1494.810	33.3	V	54.0	-20.7	AVG	109	1.0	RB 1 MHz;VB 10 Hz;Peak
1593.910	50.2	V	74.0	-23.8	PK	27	1.3	RB 1 MHz;VB 3 MHz;Peak
1494.310	49.4	V	74.0	-24.6	PK	109	1.0	RB 1 MHz;VB 3 MHz;Peak

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental and measured in 100kHz.

Note 2: Emission has duty cycle < 98%, but constant, average measurement performed: RBW=1MHz, VBW=10Hz, peak detector, linear averaging, auto sweep, trace average 100 traces, measurement corrected by Linear Voltage correction factor.

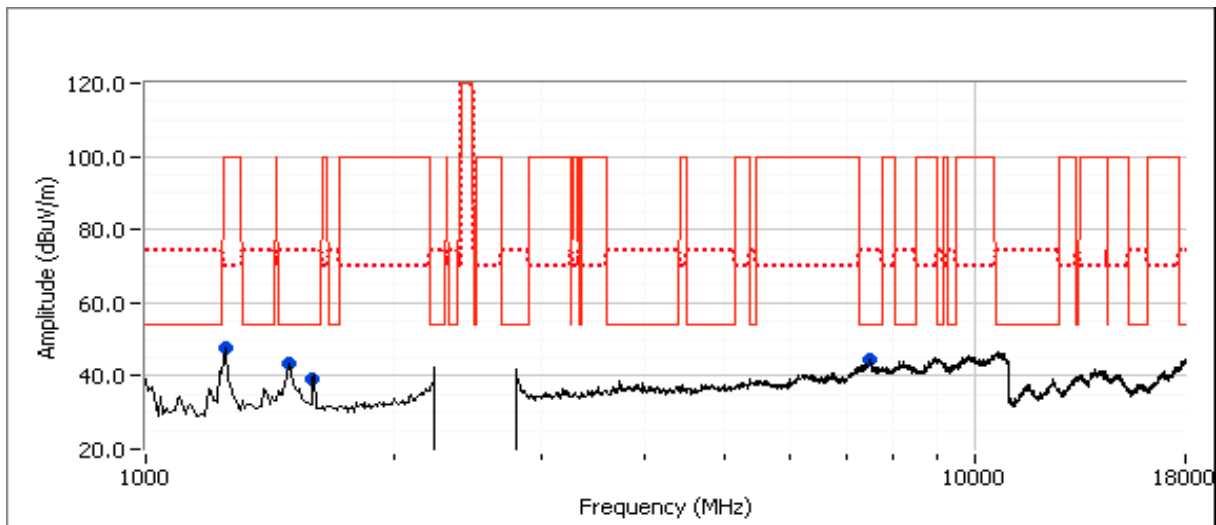



EMC Test Data

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

RSS 210 and FCC 15.247 (DTS) Radiated Spurious Emissions

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

General Test Configuration

The EUT and all local support equipment were located on the turntable for radiated spurious emissions testing. For radiated emissions testing the measurement antenna was located 3 meters from the EUT.

For Bluetooth: Tx is chain B, Rx is chain B. For WiFi, only Chain A is used for transmit in the 2.4GHz band when Bluetooth is active, both chains can be used in 5GHz bands.

Ambient Conditions:

Temperature: 24 °C
Rel. Humidity: 39 %

Summary of Results

MAC Address: 001500DC7B25 DRTU Tool Version 1.7.1-777, Driver version 16.6.0.1

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
1	BT 1Mb/s 802.11b	2402MHz 2412MHz	Max 21	16.7	Radiated Emissions 1- 10 GHz	FCC 15.247	51.2 dBµV/m @ 2389.8 MHz (-2.8 dB)
2	BT 1Mb/s 802.11b	2480MHz 2462MHz	Max 22	16.7		FCC 15.247	51.6 dBµV/m @ 2488.0 MHz (-2.4 dB)
3	BT 1Mb/s 802.11g	2402MHz 2412MHz	Max 20	15.5		FCC 15.247	53.0 dBµV/m @ 2390.0 MHz (-1.0 dB)
4	BT 1Mb/s 802.11g	2480MHz 2462MHz	Max 22.5	16.6		FCC 15.247	51.3 dBµV/m @ 2483.6 MHz (-2.7 dB)

WiFi mode for the following runs based on worst case mode from runs 1 through 4

5	BT 1Mb/s 802.11g	2402MHz 2437MHz	Max 23.5	16.7	Radiated Emissions 1- 10 GHz	FCC 15.247	51.2 dBµV/m @ 2483.6 MHz (-2.8 dB)
6	BT 1Mb/s 802.11g	2440MHz 2412MHz	Max 23	16.5		FCC 15.247	53.4 dBµV/m @ 2390.0 MHz (-0.6 dB)



EMC Test Data

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #	Mode	Channel	Power Setting	Measured Power	Test Performed	Limit	Result / Margin
7	BT 1Mb/s 802.11g	2440MHz 2462MHz	Max 23	16.6	Radiated Emissions 1- 10 GHz	FCC 15.247	53.4 dBµV/m @ 2483.6 MHz (-0.6 dB)
8	BT 1Mb/s 802.11g	2480MHz 2437MHz	Max 23.5	16.6		FCC 15.247	51.8 dBµV/m @ 2483.5 MHz (-2.2 dB)

WiFi mode and channel and Bluetooth channel based on the worst case mode from runs 1 through 8

9	BT 3Mb/s 802.11g	2440 MHz 2412 MHz	Max 18.5	13.5	Radiated Emissions 1- 10 GHz	FCC 15.247	50.3 dBµV/m @ 2389.8 MHz (-3.7 dB)
10	BTLE 802.11b	2440 MHz 2412 MHz	Max 19.5	15.4		FCC 15.247	45.0 dBµV/m @ 2332.4 MHz (-9.0 dB)

WiFi mode - 802.11n 20MHz with both chains active at 16.5dBm per chain, center channel in each 5GHz band. Bluetooth on center channel, 1Mb/s mode

11	BT 1Mb/s 802.11n20	2440MHz 5200MHz	28 28.5 Max	12.1 12.2	Radiated Emissions 1- 15 GHz	FCC 15.247	42.9 dBµV/m @ 4880.0 MHz (-11.1 dB)
12	BT 1Mb/s 802.11n20	2440MHz 5300MHz	30.5 30.5 Max	13 13		FCC 15.247	42.5 dBµV/m @ 4880.0 MHz (-11.5 dB)
13	BT 1Mb/s 802.11n20	2440MHz 5580MHz	30.5 30.5 Max	13.7 13.6		FCC 15.247	43.3 dBµV/m @ 4880.0 MHz (-10.7 dB)
14	BT 1Mb/s 802.11n20	2440MHz 5785MHz	30.5 30.5 Max	13.5 13.5		FCC 15.247	42.4 dBµV/m @ 4880.0 MHz (-11.6 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Basic data rate	Extended data rate
Duty Cycle: 0.770	Duty Cycle: 0.730
Correction Factor (dB) 2.3	Correction Factor (dB) 2.7

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Notes:

Bluetooth Basic Rate and EDR modes use a frequency hopping algorithm that means that the device, during normal operation, is only on a specific channel for a short period of time. The average correction factor is calculated as follows:

A maximum length packet has a duration of 5 time slots.

The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms.

With a minimum of 20 hopping channels a channel will not be used more than 4 times in any 100ms period.

The maximum dwell time in a 100ms period is $4 \times 3.125\text{ms} = 12.5\text{ms}$.

The average correction factor is, therefore, $20\log(12.5/100) = -18\text{dB}$

As this is a hopping radio this correction factor can be applied to the average value of the signal provided the average value was measured with the device continuously transmitting. DA 00-0705 permits the use of the average correction on the measured average value for frequency hopping radios.

All measurements in this data sheet do not include this average correction factor.

Run #1: 1-10GHz, 802.11b @ 2412 MHz Chain 1, BT Basic Rate @ 2402 MHz Chain 2

Date of Test: 10/7/2013

Test Location: FT Chamber#7


Test Engineer: Joseph Cadigal

Config Change: none

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain 1	16.5	16.7	21.0
Chain 2	-		Max

Note - measured power in table above is average power, for reference only.

Perform normal 1-10 GHz scan with filter for fundamental and then 2-3 GHz scan 20-30 cm from the product without filter.

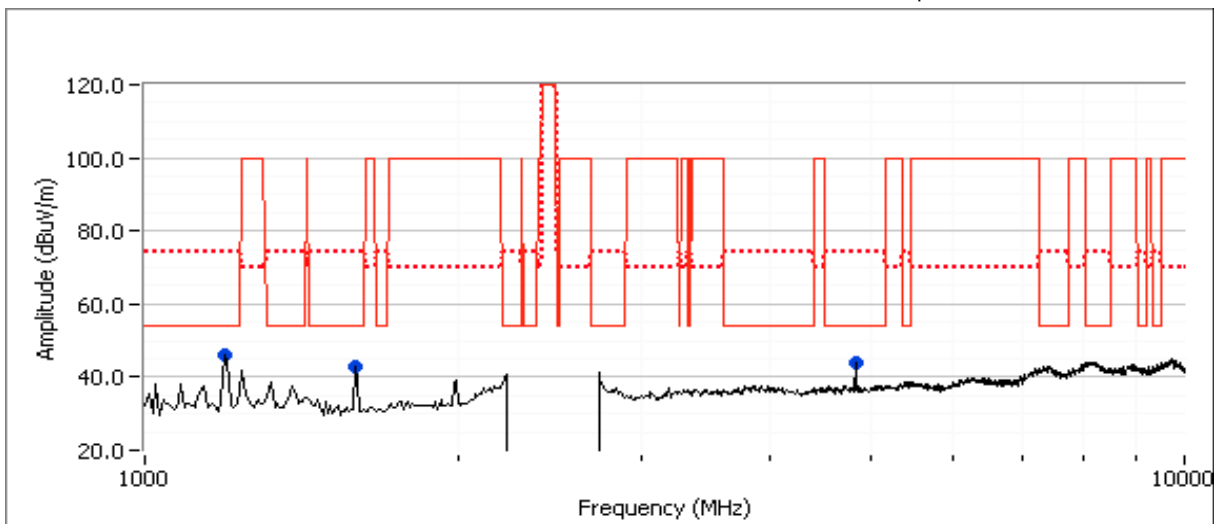

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A


Preliminary Measurements (Peak versus average limit)

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4824.030	44.0	V	54.0	-10.0	Peak	143	1.6	
1199.430	46.2	V	54.0	-7.8	Peak	200	1.0	
1594.190	42.7	V	54.0	-11.3	Peak	228	1.9	

Spurious Emissions excluding allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4823.990	42.9	V	54.0	-11.1	AVG	143	1.6	RB 1 MHz;VB 10 Hz;Peak
4824.100	48.8	V	74.0	-25.2	PK	143	1.6	RB 1 MHz;VB 3 MHz;Peak
1198.200	31.0	V	54.0	-23.0	AVG	200	1.0	RB 1 MHz;VB 10 Hz;Peak
1198.360	56.5	V	74.0	-17.5	PK	200	1.0	RB 1 MHz;VB 3 MHz;Peak
1593.910	30.2	V	54.0	-23.8	AVG	228	1.9	RB 1 MHz;VB 10 Hz;Peak
1595.290	51.1	V	74.0	-22.9	PK	228	1.9	RB 1 MHz;VB 3 MHz;Peak

Preliminary Measurements (Peak versus average limit) at 20-30cm from EUT

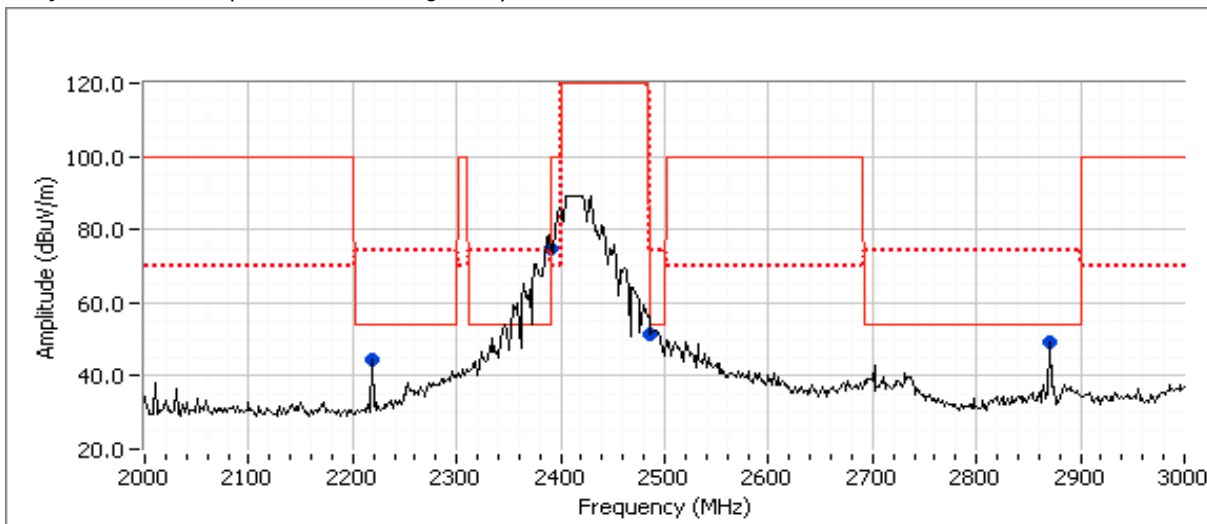

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2226.620	44.6	V	54.0	-9.4	Peak	360	1.0	
2863.210	49.0	V	54.0	-5.0	Peak	360	1.0	

EMC Test Data

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Spurious Emissions near allocated band (final measurments at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2222.350	28.5	V	54.0	-25.5	AVG	336	1.0	RB 1 MHz;VB 10 Hz;Peak
2225.490	39.6	V	74.0	-34.4	PK	336	1.0	RB 1 MHz;VB 3 MHz;Peak
2862.720	30.9	V	54.0	-23.1	AVG	192	1.0	RB 1 MHz;VB 10 Hz;Peak
2863.740	42.4	V	74.0	-31.6	PK	192	1.0	RB 1 MHz;VB 3 MHz;Peak
2225.290	27.9	H	54.0	-26.1	AVG	0	1.0	RB 1 MHz;VB 10 Hz;Peak
2226.850	39.2	H	74.0	-34.8	PK	0	1.0	RB 1 MHz;VB 3 MHz;Peak
2863.100	30.9	H	54.0	-23.1	AVG	0	1.0	RB 1 MHz;VB 10 Hz;Peak
2861.990	42.4	H	74.0	-31.6	PK	0	1.0	RB 1 MHz;VB 3 MHz;Peak

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #2: 1-10GHz, 802.11b @ 2462 MHz Chain 1, BT Basic Rate @ 2480 MHz Chain 2

Date of Test: 10/7/2013

Test Location: FT Chamber#7


Test Engineer: Joseph Cadigal

Config Change: none

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain 1	16.5	16.6	22.0
Chain 2	-		Max

Note - measured power in table above is average power, for reference only.

Perform normal 1-10 GHz scan with filter for fundamental and then 2-3 GHz scan 20-30 cm from the product without filter.

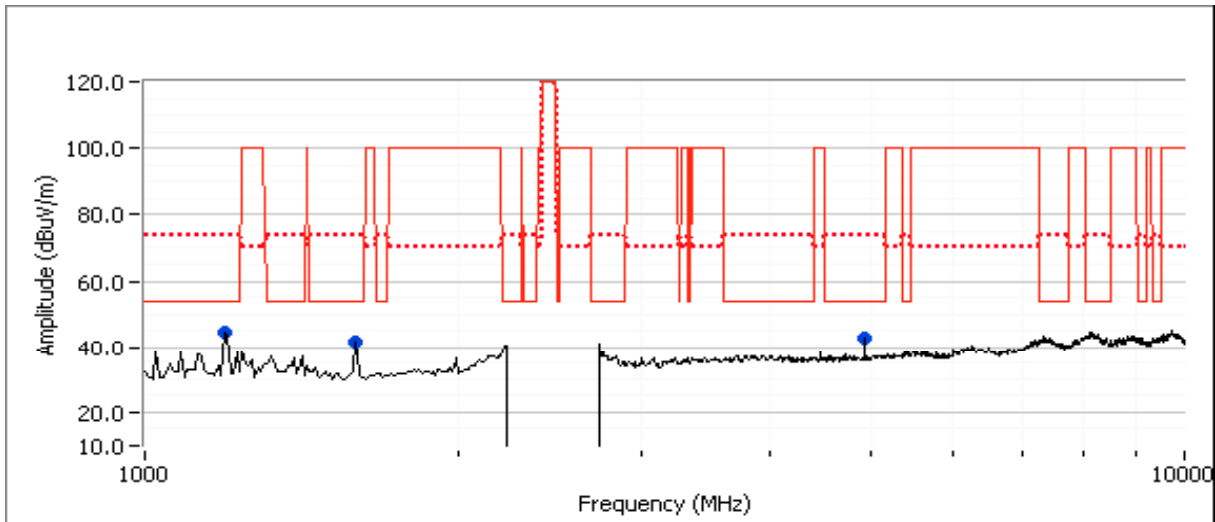

Preliminary Measurements (Peak versus average limit)


Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1584.680	41.8	V	54.0	-12.2	Peak	79	1.3	
4924.030	42.8	V	54.0	-11.2	Peak	117	1.3	
1199.430	44.7	V	54.0	-9.3	Peak	330	1.6	

Spurious Emissions excluding allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1585.860	27.4	V	54.0	-26.6	AVG	79	1.3	RB 1 MHz;VB 10 Hz;Peak
1583.720	38.4	V	74.0	-35.6	PK	79	1.3	RB 1 MHz;VB 3 MHz;Peak
4924.000	41.4	V	54.0	-12.6	AVG	117	1.3	RB 1 MHz;VB 10 Hz;Peak
4924.310	48.0	V	74.0	-26.0	PK	117	1.3	RB 1 MHz;VB 3 MHz;Peak
1199.230	30.2	V	54.0	-23.8	AVG	330	1.6	RB 1 MHz;VB 10 Hz;Peak
1198.990	49.2	V	74.0	-24.8	PK	330	1.6	RB 1 MHz;VB 3 MHz;Peak

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Preliminary Measurements (Peak versus average limit) at 20-30cm from EUT

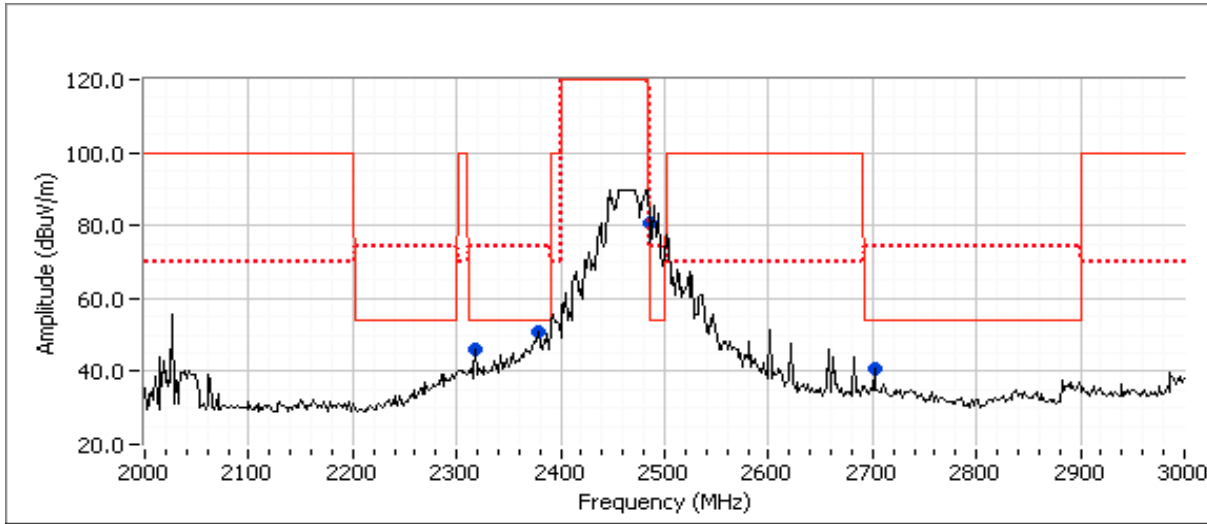

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2310.620	46.0	V	54.0	-8.0	Peak	308	1.0	
2700.120	40.7	V	54.0	-13.3	Peak	360	1.0	

Spurious Emissions near allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2379.270	39.2	V	54.0	-14.8	AVG	264	1.0	RB 1 MHz;VB 10 Hz;Peak
2379.540	50.1	V	74.0	-23.9	PK	264	1.0	RB 1 MHz;VB 3 MHz;Peak
2700.060	34.5	V	54.0	-19.5	AVG	196	1.7	RB 1 MHz;VB 10 Hz;Peak
2700.400	43.6	V	74.0	-30.4	PK	196	1.7	RB 1 MHz;VB 3 MHz;Peak
2700.080	35.9	H	54.0	-18.1	AVG	360	1.2	RB 1 MHz;VB 10 Hz;Peak
2700.000	45.4	H	74.0	-28.6	PK	360	1.2	RB 1 MHz;VB 3 MHz;Peak

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #3: 1-10GHz, 802.11g @ 2412 MHz Chain 1, BT Basic Rate @ 2402 MHz Chain 2

Date of Test: 10/7/2013

Test Location: FT Chamber#7


Test Engineer: Joseph Cadigal

Config Change: none

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain 1	16.5	15.5	20.0
Chain 2	-		Max

Note - measured power in table above is average power, for reference only.

Perform normal 1-10 GHz scan with filter for fundamental and then 2-3 GHz scan 20-30 cm from the product without filter.

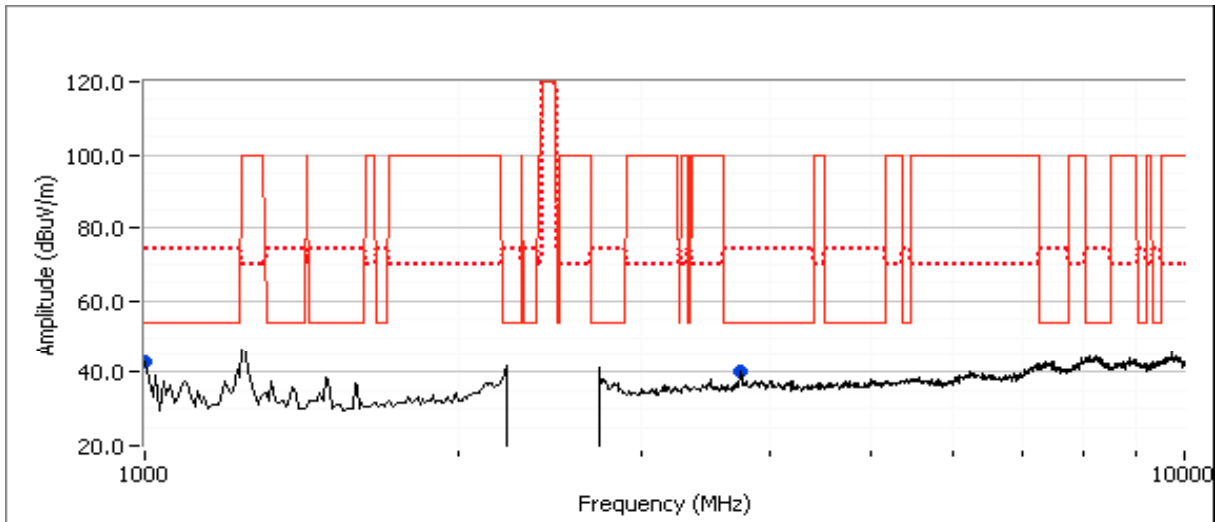

Preliminary Measurements (Peak versus average limit)


Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
3746.860	40.2	H	54.0	-13.8	Peak	62	1.3	
1000.140	43.1	H	54.0	-10.9	Peak	224	1.6	

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Spurious Emissions excluding allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
3746.910	33.1	H	54.0	-20.9	AVG	62	1.3	RB 1 MHz;VB 10 Hz;Peak
3745.660	51.1	H	74.0	-22.9	PK	62	1.3	RB 1 MHz;VB 3 MHz;Peak
1000.795	25.3	H	54.0	-28.7	AVG	224	1.6	RB 100 kHz;VB 10 Hz;Peak
1000.270	39.2	H	74.0	-34.8	PK	224	1.6	RB 100 kHz;VB 300 kHz;Peak

Preliminary Measurements (Peak versus average limit) at 20-30cm from EUT

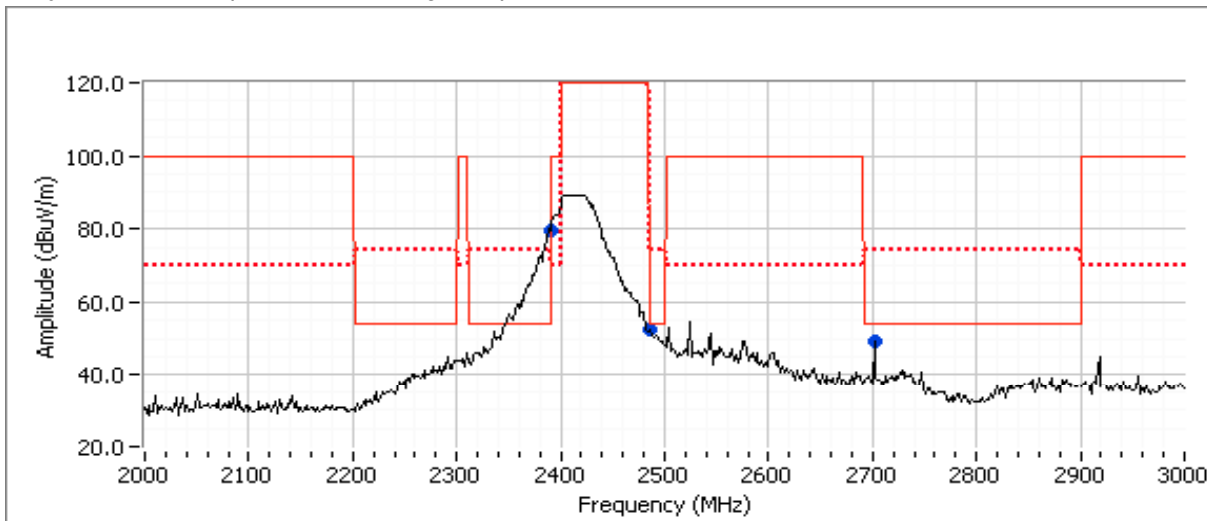

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2694.820	49.3	V	54.0	-4.7	Peak	153	1.0	

Spurious Emissions near allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2695.670	30.8	V	54.0	-23.2	AVG	290	1.0	RB 1 MHz;VB 10 Hz;Peak
2693.530	41.6	V	74.0	-32.4	PK	290	1.0	RB 1 MHz;VB 3 MHz;Peak
2696.040	32.2	H	54.0	-21.8	AVG	353	1.0	RB 1 MHz;VB 10 Hz;Peak
2695.390	43.7	H	74.0	-30.3	PK	353	1.0	RB 1 MHz;VB 3 MHz;Peak

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #4: 1-10GHz, 802.11g @ 2462 MHz Chain 1, BT Basic Rate @ 2480 MHz Chain 2

Date of Test: 10/7/2013

Test Location: FT Chamber#7


Test Engineer: Joseph Cadigal

Config Change: none

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain 1	16.5	16.6	22.5
Chain 2	-		Max

Note - measured power in table above is average power, for reference only.

Perform normal 1-10 GHz scan with filter for fundamental and then 2-3 GHz scan 20-30 cm from the product without filter.

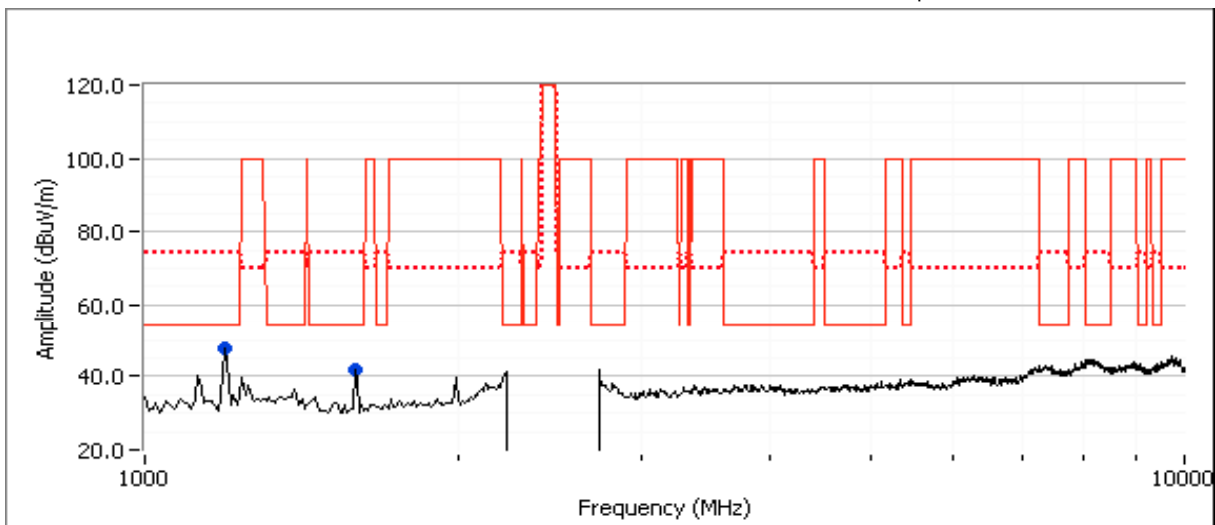

Preliminary Measurements (Peak versus average limit)


Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1194.610	47.7	V	54.0	-6.3	Peak	319	1.6	
1597.080	42.0	V	54.0	-12.0	Peak	329	1.0	

Spurious Emissions excluding allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1195.820	33.2	V	54.0	-20.8	AVG	317	1.6	RB 1 MHz;VB 10 Hz;Peak
1195.220	56.9	V	74.0	-17.1	PK	317	1.6	RB 1 MHz;VB 3 MHz;Peak
1597.870	30.5	V	54.0	-23.5	AVG	331	1.0	RB 1 MHz;VB 10 Hz;Peak
1596.460	50.1	V	74.0	-23.9	PK	331	1.0	RB 1 MHz;VB 3 MHz;Peak

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Preliminary Measurements (Peak versus average limit) at 20-30cm from EUT

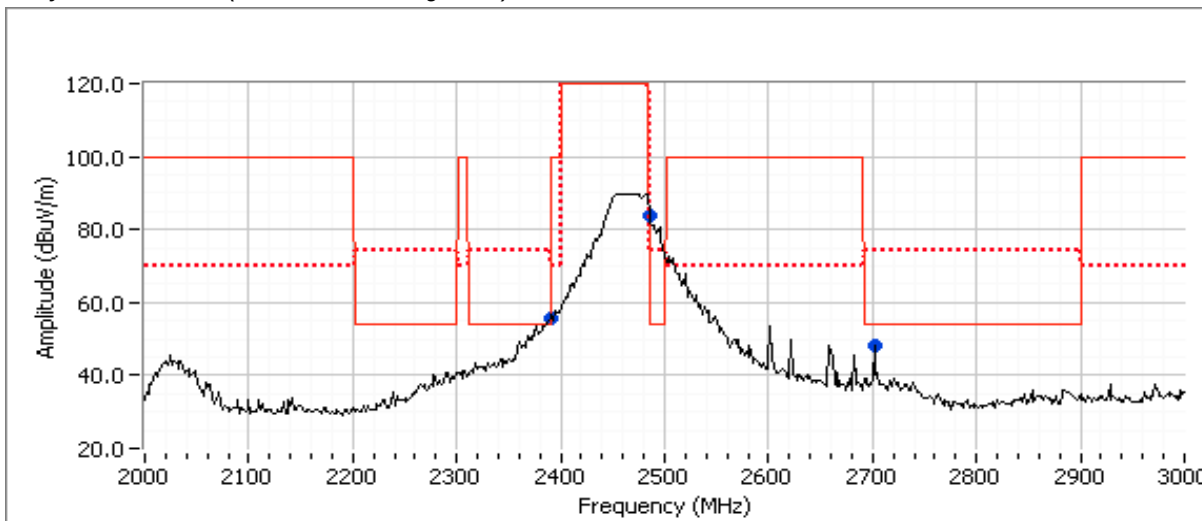

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1194.610	47.7	V	54.0	-6.3	Peak	319	1.6	
1597.080	42.0	V	54.0	-12.0	Peak	329	1.0	
2701.670	48.2	V	54.0	-5.8	Peak	211	1.0	

Spurious Emissions near allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2700.180	34.1	V	54.0	-19.9	AVG	203	1.6	RB 1 MHz;VB 10 Hz;Peak
2700.190	43.0	V	74.0	-31.0	PK	203	1.6	RB 1 MHz;VB 3 MHz;Peak
2700.170	36.6	H	54.0	-17.4	AVG	360	1.0	RB 1 MHz;VB 10 Hz;Peak
2700.290	46.4	H	74.0	-27.6	PK	360	1.0	RB 1 MHz;VB 3 MHz;Peak

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #5: 1-10GHz, 802.11g @ 2437 MHz Chain 1, BT Basic Rate @ 2402 MHz Chain 2

Date of Test: 10/8/2013

Test Location: FT Chamber#7


Test Engineer: Joseph Cadigal

Config Change: none

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain 1	16.5	16.7	23.5
Chain 2	-		Max

Note - measured power in table above is average power, for reference only.

Perform normal 1-10 GHz scan with filter for fundamental and then 2-3 GHz scan 20-30 cm from the product without filter.

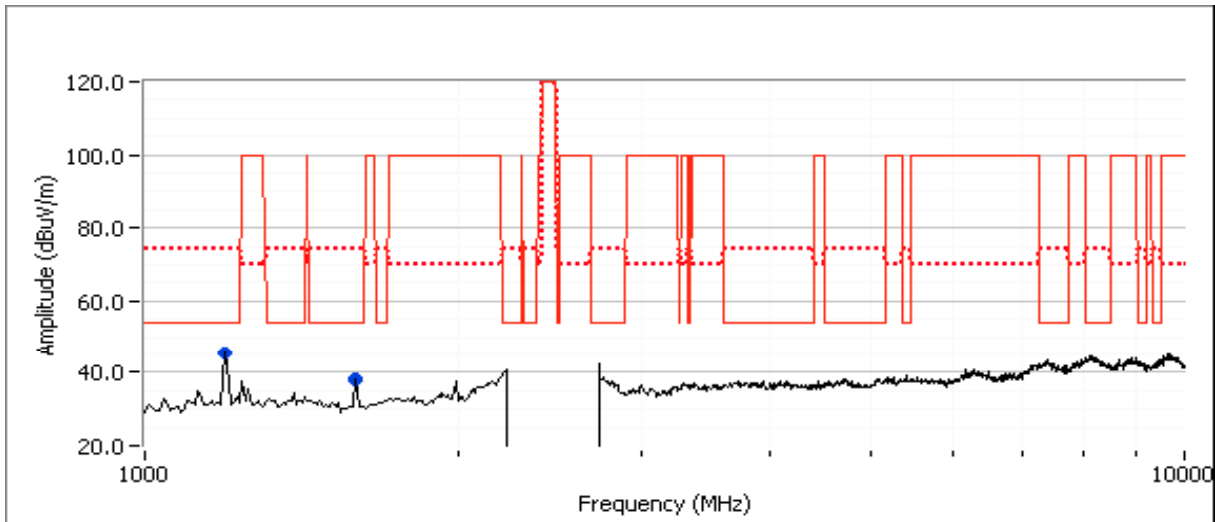

Preliminary Measurements (Peak versus average limit)


Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1593.250	38.2	H	54.0	-15.8	Peak	155	2.2	
1195.690	45.5	V	54.0	-8.5	Peak	339	2.5	

Spurious Emissions excluding allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1593.400	28.2	H	54.0	-25.8	AVG	156	2.2	RB 1 MHz;VB 10 Hz;Peak
1592.420	45.7	H	74.0	-28.3	PK	156	2.2	RB 1 MHz;VB 3 MHz;Peak
1195.300	31.0	V	54.0	-23.0	AVG	340	2.5	RB 1 MHz;VB 10 Hz;Peak
1196.420	50.4	V	74.0	-23.6	PK	340	2.5	RB 1 MHz;VB 3 MHz;Peak

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Preliminary Measurements (Peak versus average limit) at 20-30cm from EUT

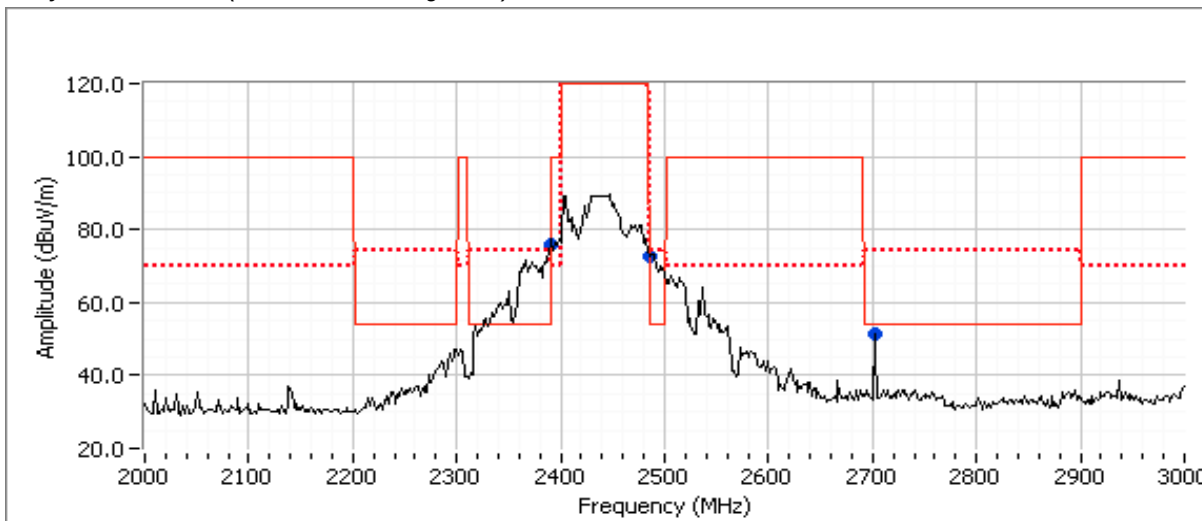

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2700.120	51.2	V	54.0	-2.8	Peak	0	1.0	

Spurious Emissions near allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2700.100	34.9	V	54.0	-19.1	AVG	311	1.9	RB 1 MHz;VB 10 Hz;Peak
2700.100	43.6	V	74.0	-30.4	PK	311	1.9	RB 1 MHz;VB 3 MHz;Peak
2700.040	35.8	H	54.0	-18.2	AVG	22	1.7	RB 1 MHz;VB 10 Hz;Peak
2700.290	45.1	H	74.0	-28.9	PK	22	1.7	RB 1 MHz;VB 3 MHz;Peak

Note 1:	For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental and measured in 100kHz.
Note 2:	Signal is not in a restricted band but the more stringent restricted band limit was used.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #6: 1-10GHz, 802.11g @ 2412 MHz Chain 1, BT Basic Rate @ 2440 MHz Chain 2

Date of Test: 10/8/2013

Test Location: FT Chamber#7


Test Engineer: Joseph Cadigal

Config Change: none

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain 1	16.5	16.5	23.0
Chain 2	-		Max

Note - measured power in table above is average power, for reference only.

Perform normal 1-10 GHz scan with filter for fundamental and then 2-3 GHz scan 20-30 cm from the product without filter.

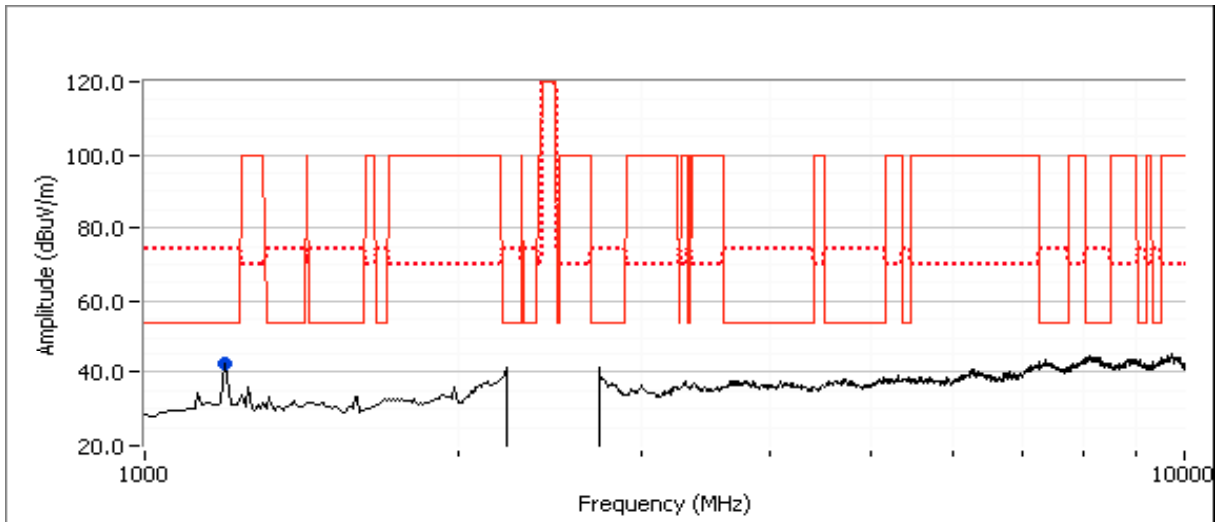

Preliminary Measurements (Peak versus average limit)


Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1198.380	42.3	V	54.0	-11.7	Peak	184	1.3	

Spurious Emissions excluding allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1196.970	30.3	V	54.0	-23.7	AVG	182	1.3	RB 1 MHz;VB 10 Hz;Peak
1199.600	53.5	V	74.0	-20.5	PK	182	1.3	RB 1 MHz;VB 3 MHz;Peak

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Preliminary Measurements (Peak versus average limit) at 20-30cm from EUT

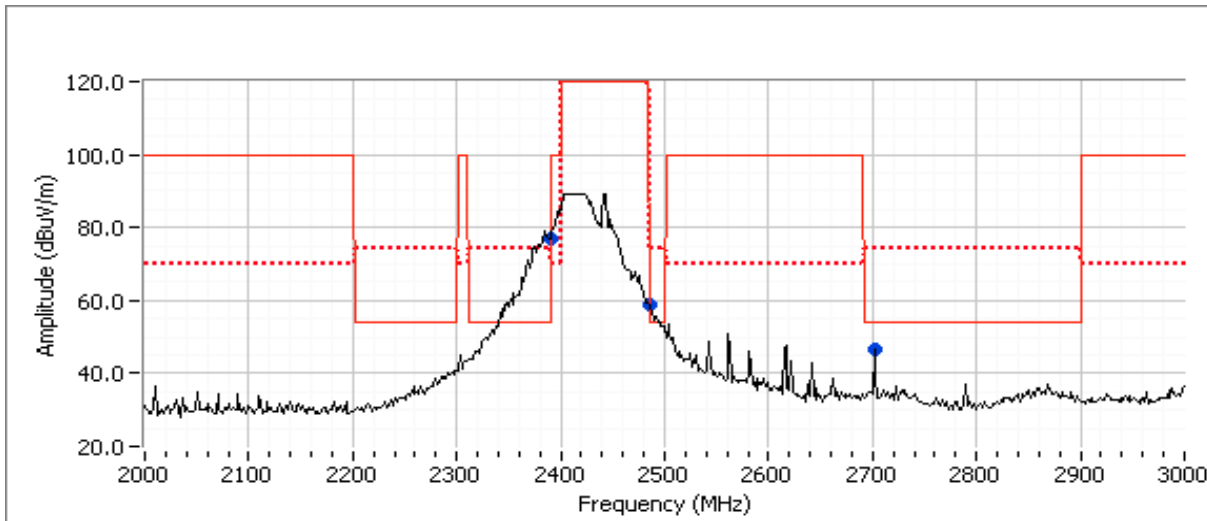

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2700.140	46.7	V	54.0	-7.3	Peak	0	1.0	

Spurious Emissions near allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2700.110	33.4	V	54.0	-20.6	AVG	294	2.1	RB 1 MHz;VB 10 Hz;Peak
2700.150	42.9	V	74.0	-31.1	PK	294	2.1	RB 1 MHz;VB 3 MHz;Peak
2700.090	34.6	H	54.0	-19.4	AVG	0	1.2	RB 1 MHz;VB 10 Hz;Peak
2699.710	44.4	H	74.0	-29.6	PK	0	1.2	RB 1 MHz;VB 3 MHz;Peak

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental and measured in 100kHz.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #7: 1-10GHz, 802.11g @ 2462 MHz Chain 1, BT Basic Rate @ 2440 MHz Chain 2

Date of Test: 10/8/2013

Test Location: FT Chamber#7


Test Engineer: Joseph Cadigal

Config Change: none

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain 1	16.5	16.6	23.0
Chain 2	-		Max

Note - measured power in table above is average power, for reference only.

Perform normal 1-10 GHz scan with filter for fundamental and then 2-3 GHz scan 20-30 cm from the product without filter.

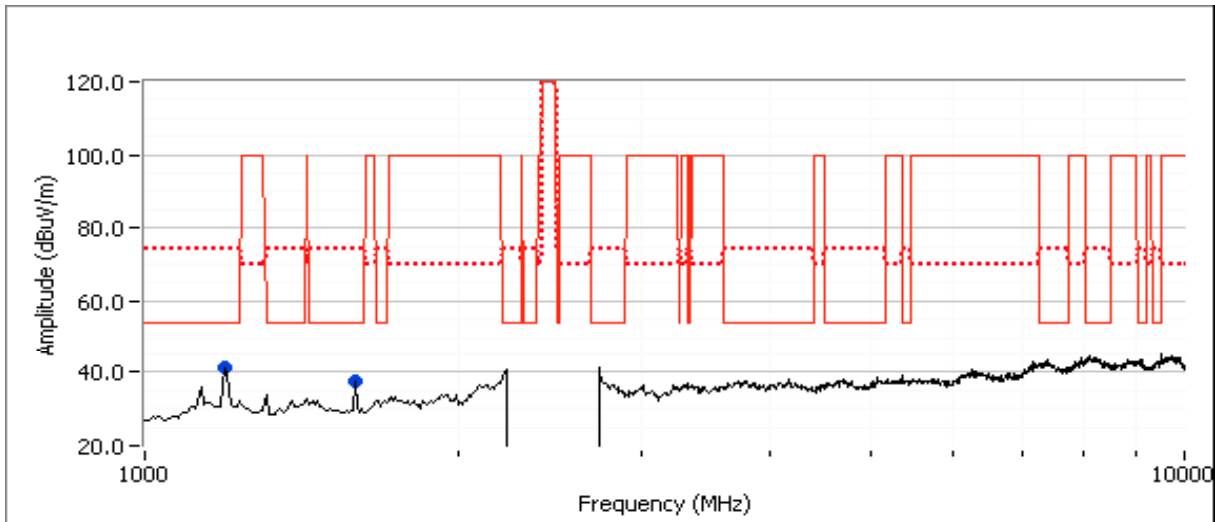


Preliminary Measurements (Peak versus average limit)

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1588.060	37.3	V	54.0	-16.7	Peak	210	1.0	
1199.570	41.2	V	54.0	-12.8	Peak	354	1.3	

Spurious Emissions excluding allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1588.490	25.6	V	54.0	-28.4	AVG	211	1.0	RB 1 MHz;VB 10 Hz;Peak
1588.710	36.6	V	74.0	-37.4	PK	211	1.0	RB 1 MHz;VB 3 MHz;Peak
1199.860	28.3	V	54.0	-25.7	AVG	355	1.3	RB 1 MHz;VB 10 Hz;Peak
1198.620	49.0	V	74.0	-25.0	PK	355	1.3	RB 1 MHz;VB 3 MHz;Peak

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

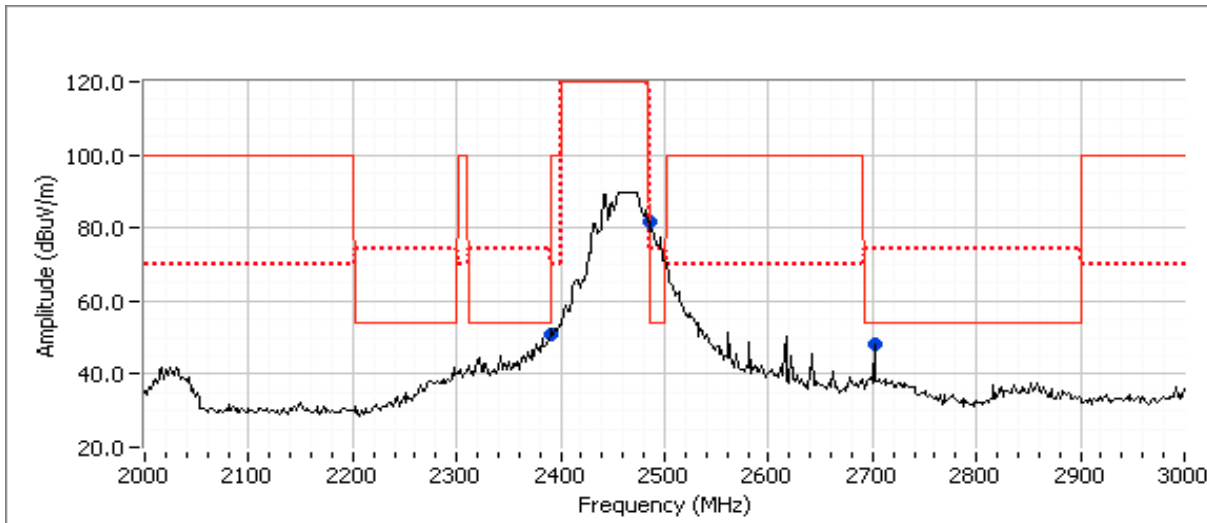

Preliminary Measurements (Peak versus average limit) at 20-30cm from EUT

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2700.140	48.2	V	54.0	-5.8	Peak	0	1.0	

Spurious Emissions near allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2700.100	31.7	V	54.0	-22.3	AVG	130	1.0	RB 1 MHz;VB 10 Hz;Peak
2700.320	41.8	V	74.0	-32.2	PK	130	1.0	RB 1 MHz;VB 3 MHz;Peak
2699.980	32.9	H	54.0	-21.1	AVG	360	1.0	RB 1 MHz;VB 10 Hz;Peak
2699.910	45.0	H	74.0	-29.0	PK	360	1.0	RB 1 MHz;VB 3 MHz;Peak

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #8: 1-10GHz, 802.11g @ 2437 MHz Chain 1, BT Basic Rate @ 2480 MHz Chain 2

Date of Test: 10/8/2013

Test Location: FT Chamber#7


Test Engineer: Joseph Cadigal

Config Change: none

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain 1	16.5	16.6	23.5
Chain 2	-		Max

Note - measured power in table above is average power, for reference only.

Perform normal 1-10 GHz scan with filter for fundamental and then 2-3 GHz scan 20-30 cm from the product without filter.

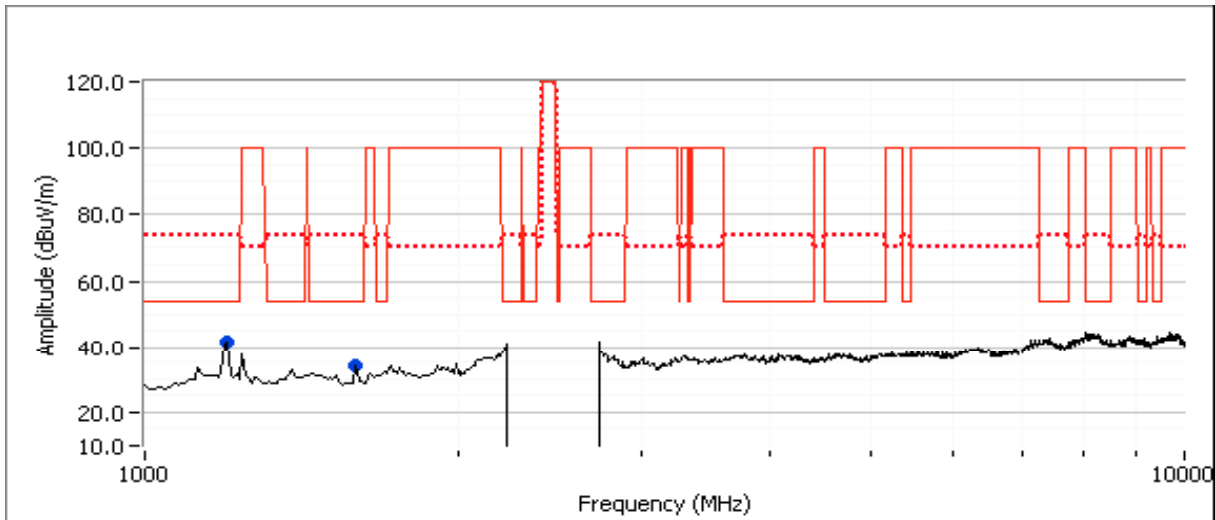

Preliminary Measurements (Peak versus average limit)


Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1196.420	41.7	V	54.0	-12.3	Peak	0	1.9	
1586.650	33.7	V	54.0	-20.3	Peak	209	1.9	

Spurious Emissions excluding allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1195.790	28.9	V	54.0	-25.1	AVG	0	1.9	RB 1 MHz;VB 10 Hz;Peak
1195.270	48.2	V	74.0	-25.8	PK	0	1.9	RB 1 MHz;VB 3 MHz;Peak
1587.690	25.4	V	54.0	-28.6	AVG	210	1.9	RB 1 MHz;VB 10 Hz;Peak
1586.420	37.3	V	74.0	-36.7	PK	210	1.9	RB 1 MHz;VB 3 MHz;Peak

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Preliminary Measurements (Peak versus average limit) at 20-30cm from EUT

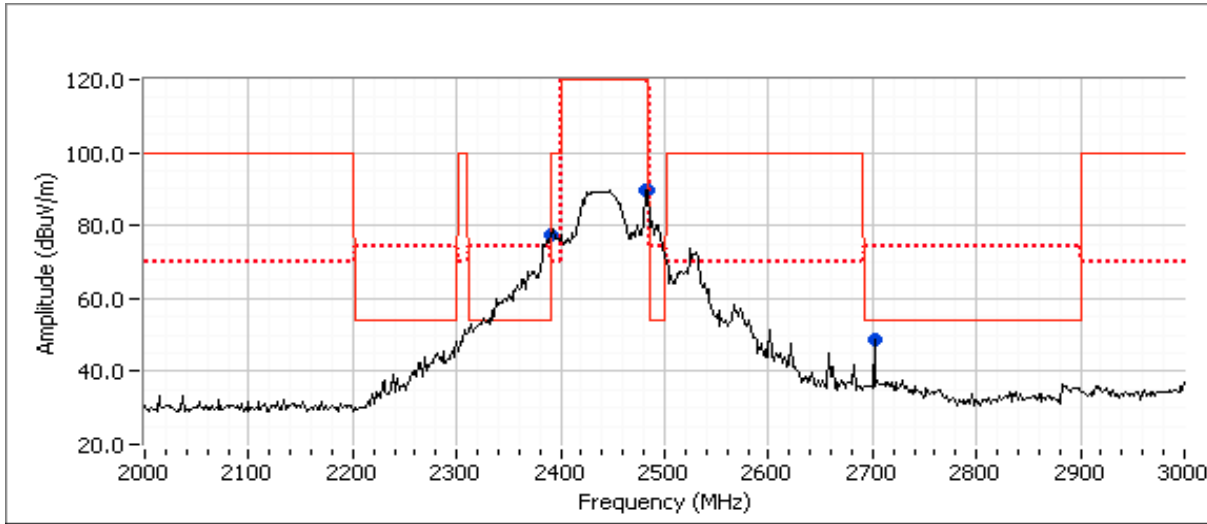

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2700.120	48.7	V	54.0	-5.3	Peak	0	1.0	

Spurious Emissions near allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2700.030	33.6	V	54.0	-20.4	AVG	112	1.0	RB 1 MHz;VB 10 Hz;Peak
2700.230	42.4	V	74.0	-31.6	PK	112	1.0	RB 1 MHz;VB 3 MHz;Peak
2700.090	35.0	H	54.0	-19.0	AVG	360	1.0	RB 1 MHz;VB 10 Hz;Peak
2699.920	45.3	H	74.0	-28.7	PK	360	1.0	RB 1 MHz;VB 3 MHz;Peak

Note 1: For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental and measured in 100kHz.

Note 2: Signal is not in a restricted band but the more stringent restricted band limit was used.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #9: 1-10GHz, 802.11g @ 2412 MHz Chain 1, BT EDR Rate @ 2440 MHz Chain 2


Date of Test: 10/9/2013
 Test Engineer: John Caizzi & Joseph Cadigal

Test Location: Chamber 4
 Config Change: none

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain 1	13.5	13.6	18.5
Chain 2			Max

Note - measured power in table above is average power, for reference only.

Perform normal 1-10 GHz scan with filter for fundamental and then 2-3 GHz scan 20-30 cm from the product without filter.

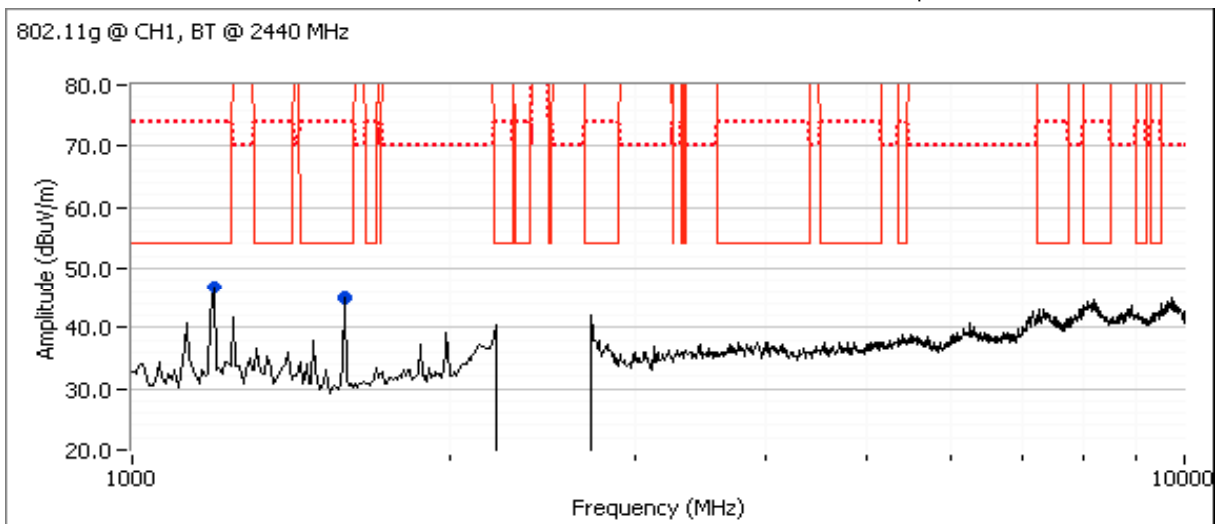


Preliminary Measurements (Peak versus average limit)

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1195.000	46.7	H	54.0	-7.3	Peak	256	1.0	Note 3
1592.500	45.0	V	54.0	-9.0	Peak	194	1.0	Note 3

Spurious Emissions excluding allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBμV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1195.620	31.2	H	54.0	-22.8	AVG	257	1.0	RB 1 MHz;VB 10 Hz;Peak
1194.230	51.9	H	74.0	-22.1	PK	257	1.0	RB 1 MHz;VB 3 MHz;Peak
1593.570	32.5	V	54.0	-21.5	AVG	192	1.0	RB 1 MHz;VB 10 Hz;Peak
1593.570	55.1	V	74.0	-18.9	PK	192	1.0	RB 1 MHz;VB 3 MHz;Peak

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

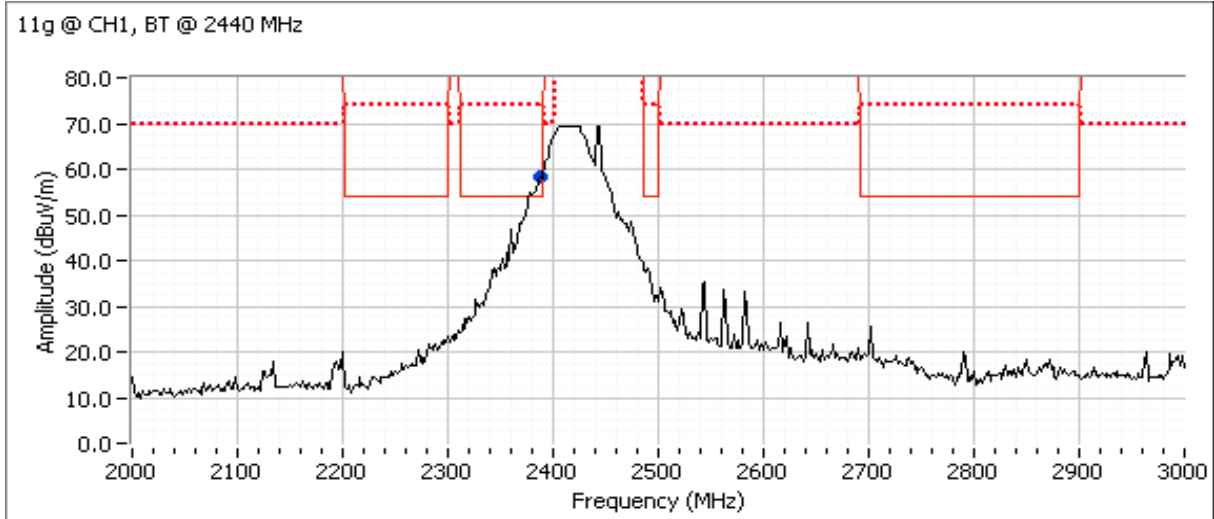

Note 1: There were no significant out of band emissions in this frequency range.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #10: 1-10GHz, 802.11b @ 2412 MHz Chain 1, BTLE @ 2440 MHz Chain 2

Date of Test: 10/23/2013

Test Location: Chamber 4


Test Engineer: Rafael Varelas

Config Change: none

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
Chain 1	15.5	15.4	19.5
Chain 2			Max

Note - measured power in table above is average power, for reference only.

Perform normal 1-10 GHz scan with filter for fundamental and then 2-3 GHz scan 20-30 cm from the product without filter.

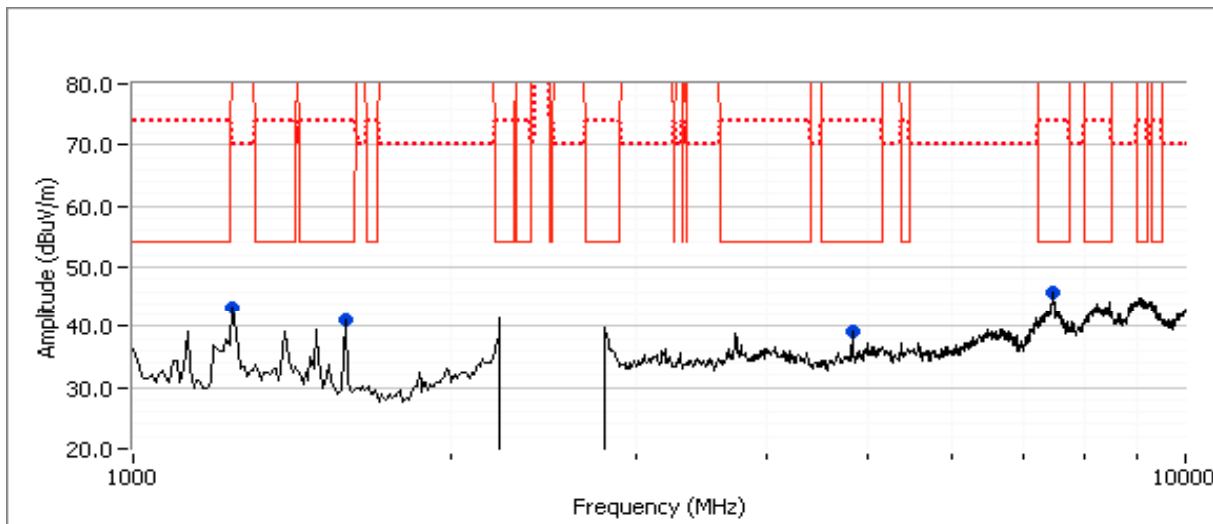

EMC Test Data

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A


Preliminary Measurements (Peak versus average limit)

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
1244.580	43.2	H	74.0	-30.8	Peak	302	1.3	Note 2
1593.960	41.0	V	54.0	-13.0	Peak	203	1.0	
4824.030	39.2	V	54.0	-14.8	Peak	106	1.3	
7466.840	45.9	V	54.0	-8.1	Peak	116	1.6	

Spurious Emissions excluding allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
7468.640	40.3	V	54.0	-13.7	AVG	102	0.9	RB 1 MHz;VB 10 Hz;Peak
7468.960	54.0	V	74.0	-20.0	PK	102	0.9	RB 1 MHz;VB 3 MHz;Peak
4824.040	35.4	V	54.0	-18.6	AVG	103	1.0	RB 1 MHz;VB 10 Hz;Peak
4823.900	43.0	V	74.0	-31.0	PK	103	1.0	RB 1 MHz;VB 3 MHz;Peak
1594.890	32.2	V	54.0	-21.8	AVG	206	0.9	RB 1 MHz;VB 10 Hz;Peak
1593.410	49.8	V	74.0	-24.2	PK	206	0.9	RB 1 MHz;VB 3 MHz;Peak
1246.060	30.3	H	54.0	-23.7	AVG	296	1.2	RB 1 MHz;VB 10 Hz;Peak, Note 2
1246.050	50.7	H	74.0	-23.3	PK	296	1.2	RB 1 MHz;VB 3 MHz;Peak, Note 2

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

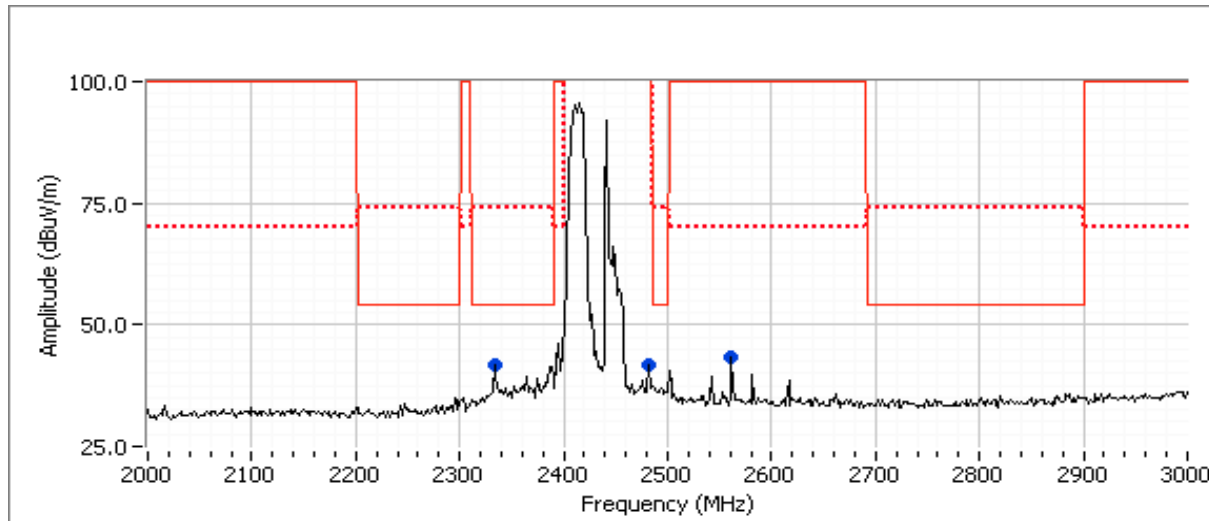

Preliminary Measurements (Peak versus average limit) at 20-30cm from EUT

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2333.330	41.7	H	74.0	-32.3	Peak	180	1.0	
2481.670	41.6	H	120.0	-78.4	Peak	180	1.0	
2561.670	43.3	H	74.0	-30.7	Peak	180	1.0	Note 2

Spurious Emissions near allocated band (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
2332.400	45.0	H	54.0	-9.0	AVG	245	1.0	RB 1 MHz;VB 10 Hz;Peak
2330.210	56.2	H	74.0	-17.8	PK	245	1.0	RB 1 MHz;VB 3 MHz;Peak
2332.440	44.5	V	54.0	-9.5	AVG	308	1.0	RB 1 MHz;VB 10 Hz;Peak
2332.010	56.0	V	74.0	-18.0	PK	308	1.0	RB 1 MHz;VB 3 MHz;Peak

Note 1:	For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental and measured in 100kHz.
Note 2:	Signal is not in a restricted band but the more stringent restricted band limit was used.
Note 3:	Signal is only present when Bluetooth is enabled, average correction for hopping occupancy could be applied.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #11: 1-15GHz, 802.11n20 @ 5200 MHz Chain 1+2, BT Basic Rate @ 2440 MHz Chain 2


Date of Test: 10/9/2013
 Test Engineer: John Caizzi & Joseph Cadigal

Test Location: Chamber 4
 Config Change: none

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
WiFi 1	12.0	12.1	28.0
WiFi 2	12.0	12.2	28.5
Bluetooth			Max

Note - measured power in table above is average power, for reference only.



Perform normal 7-15 GHz scan with filter for fundamental and then 1-4 and 4-7 GHz scans 20-30 cm from the product without filter.

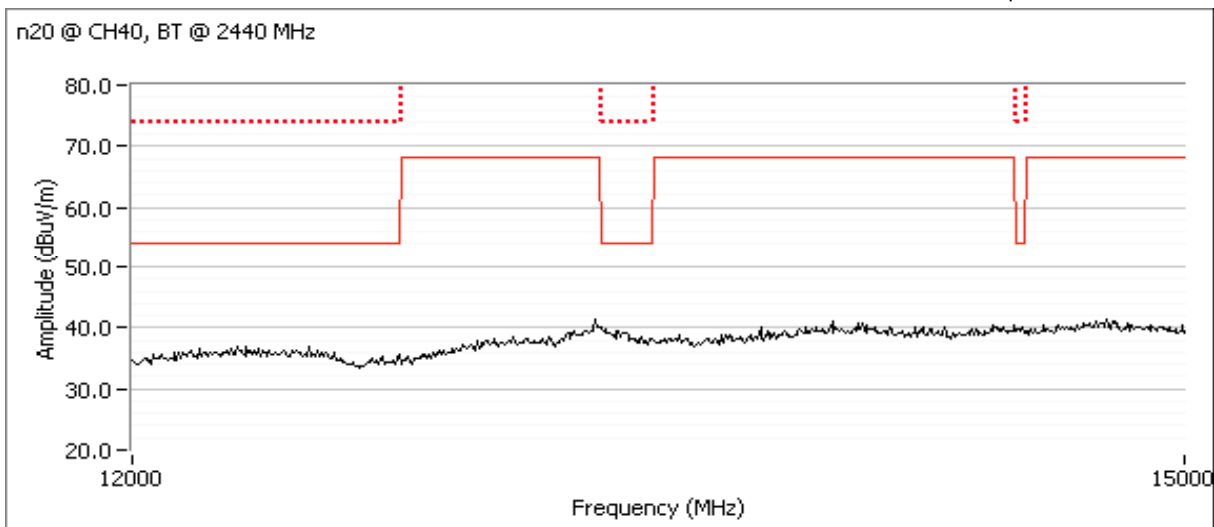

Preliminary Measurements (Peak versus average limit)

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
								No emissions found 7-12 GHz.

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

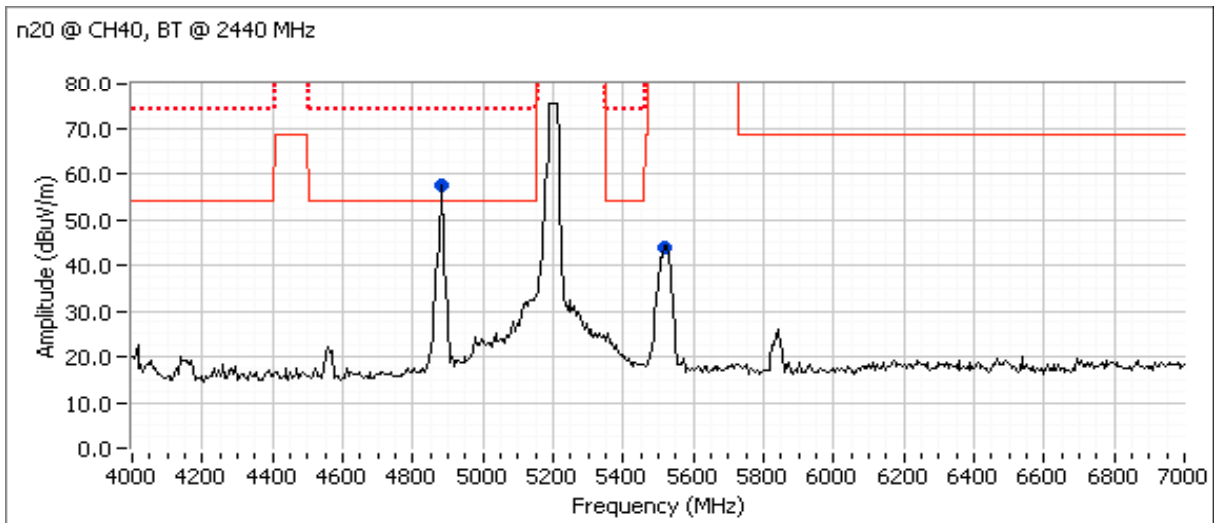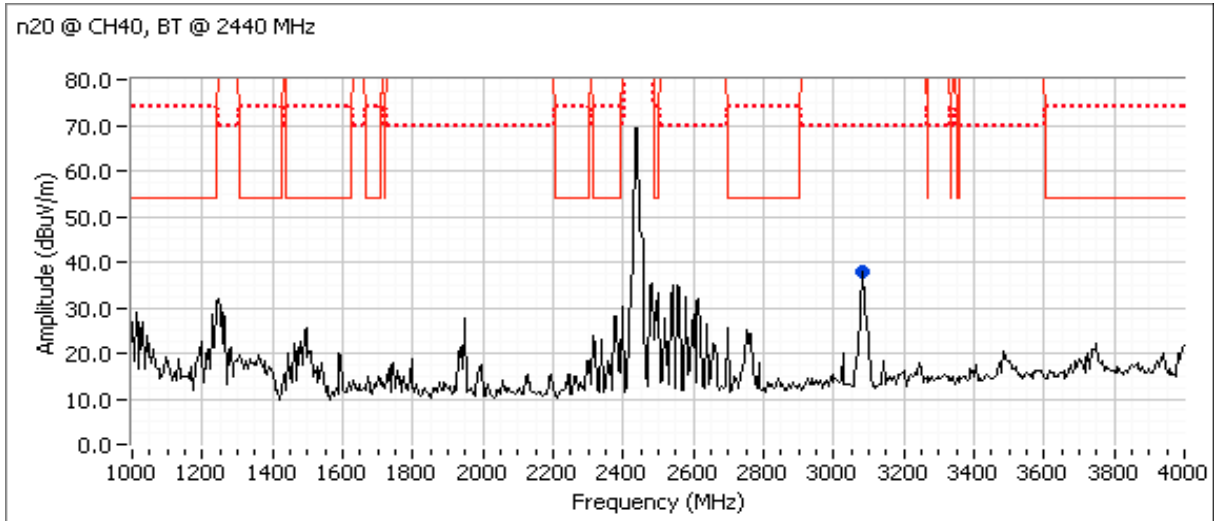

EMC Test Data

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Preliminary Measurements (Peak versus average limit) at 20-30cm from EUT

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
3080.000	37.9	V	70.0	-32.1	Peak	0	1.0	
4880.000	57.3	V	54.0	3.3	Peak	0	1.0	
5520.000	43.8	V	112.3	-68.5	Peak	0	1.0	

Spurious Emissions (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4880.020	42.9	V	54.0	-11.1	AVG	137	1.3	RB 1 MHz;VB 10 Hz;Peak, Note 3
4880.270	47.3	V	74.0	-26.7	PK	137	1.3	RB 1 MHz;VB 3 MHz;Peak
5520.500	46.0	V	68.3	-22.3	PK	189	1.0	RB 1 MHz;VB 3 MHz;Peak
4880.000	37.4	H	54.0	-16.6	AVG	109	1.6	RB 1 MHz;VB 10 Hz;Peak, Note 3
4880.050	46.1	H	74.0	-27.9	PK	109	1.6	RB 1 MHz;VB 3 MHz;Peak
5520.230	45.7	H	68.3	-22.6	PK	360	1.0	RB 1 MHz;VB 3 MHz;Peak

Note 1:	For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental and measured in 100kHz.
Note 2:	Signal is not in a restricted band but the more stringent restricted band limit was used.
Note 3:	Emission has duty cycle < 98%, but constant, average measurement performed: RBW=1MHz, VBW=10Hz, peak detector, linear averaging, auto sweep, trace average 100 traces, measurement corrected by Linear Voltage correction factor.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #12: 1-15GHz, 802.11n20 @ 5300 MHz Chain 1+2, BT Basic Rate @ 2440 MHz Chain 2


Date of Test: 10/9/2013
 Test Engineer: John Caizzi & Joseph Cadigal

Test Location: Chamber 4
 Config Change: none

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
WiFi 1	13.0	13.0	30.5
WiFi 2	13.0	13.0	30.5
Bluetooth			Max

Note - measured power in table above is average power, for reference only.



Perform normal 7-15 GHz scan with filter for fundamental and then 1-4 and 4-7 GHz scans 20-30 cm from the product without filter.

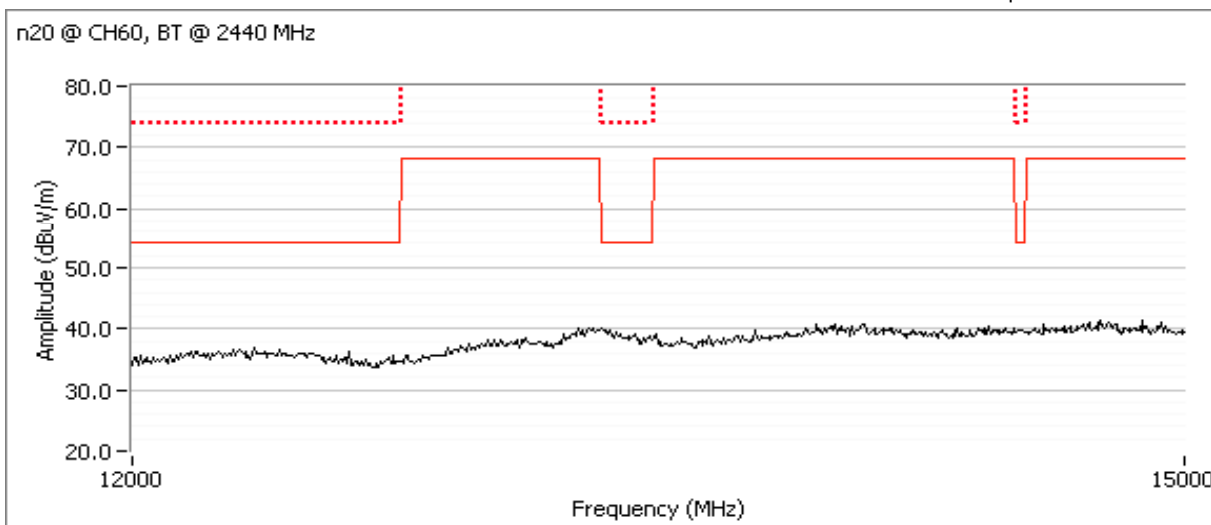

Preliminary Measurements (Peak versus average limit)

Frequency	Level	Pol	15.209/15.247	Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
							No emissions found 7-12 GHz.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

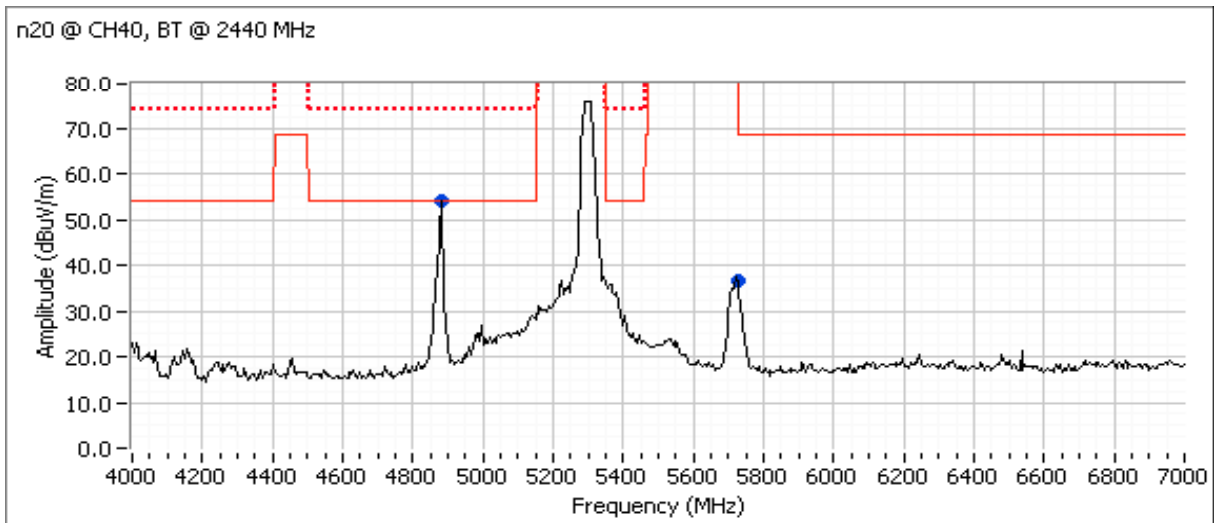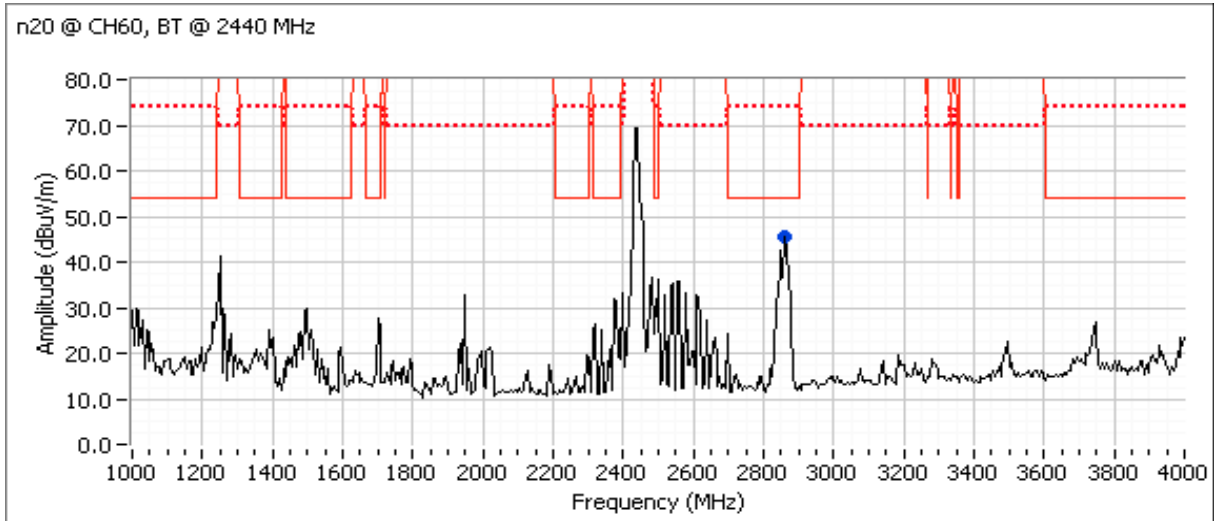

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Preliminary Measurements (Peak versus average limit) at 20-30cm from EUT

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4880.000	54.0	V	54.0	0.0	Peak	0	1.0	CH60
5725.000	36.6	V	68.3	-31.7	Peak	0	1.0	CH60
2860.000	45.6	V	54.0	-8.4	Peak	0	1.0	CH60

Spurious Emissions (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4880.020	42.5	V	54.0	-11.5	AVG	225	1.0	RB 1 MHz;VB 10 Hz;Peak, Note 3
4879.840	47.3	V	74.0	-26.7	PK	225	1.0	RB 1 MHz;VB 3 MHz;Peak
5724.080	45.2	V	68.3	-23.1	PK	171	1.0	RB 1 MHz;VB 3 MHz;Peak
2859.470	30.5	V	54.0	-23.5	AVG	123	1.0	RB 1 MHz;VB 10 Hz;Peak
2859.900	42.0	V	74.0	-32.0	PK	123	1.0	RB 1 MHz;VB 3 MHz;Peak
4879.880	39.0	H	54.0	-15.0	AVG	135	1.0	RB 1 MHz;VB 10 Hz;Peak, Note 3
4880.690	46.8	H	74.0	-27.2	PK	135	1.0	RB 1 MHz;VB 3 MHz;Peak
5724.870	45.4	H	68.3	-22.9	PK	65	1.0	RB 1 MHz;VB 3 MHz;Peak
2860.790	30.4	H	54.0	-23.6	AVG	360	1.0	RB 1 MHz;VB 10 Hz;Peak
2860.000	41.3	H	74.0	-32.7	PK	360	1.0	RB 1 MHz;VB 3 MHz;Peak

Note 1:	For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental and measured in 100kHz.
Note 2:	Signal is not in a restricted band but the more stringent restricted band limit was used.
Note 3:	Emission has duty cycle < 98%, but constant, average measurement performed: RBW=1MHz, VBW=10Hz, peak detector, linear averaging, auto sweep, trace average 100 traces, measurement corrected by Linear Voltage correction factor.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #13: 1-15GHz, 802.11n20 @ 5580 MHz Chain 1+2, BT Basic Rate @ 2440 MHz Chain 2


Date of Test: 10/9/2013
 Test Engineer: John Caizzi & Joseph Cadigal

Test Location: Chamber 4
 Config Change: none

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
WiFi 1	13.5	13.7	32.5
WiFi 2	13.5	13.6	32.0
Bluetooth			Max

Note - measured power in table above is average power, for reference only.



Perform normal 7-15 GHz scan with filter for fundamental and then 1-4 and 4-7 GHz scans 20-30 cm from the product without filter.

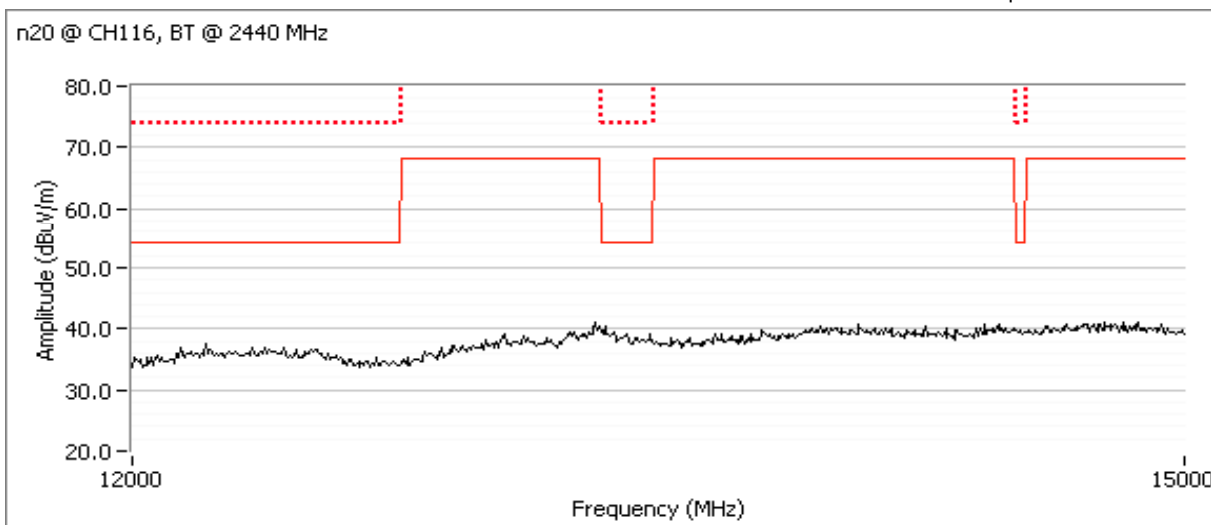

Preliminary Measurements (Peak versus average limit)

Frequency	Level	Pol	15.209/15.247	Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
							No emissions found 7-12 GHz.

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

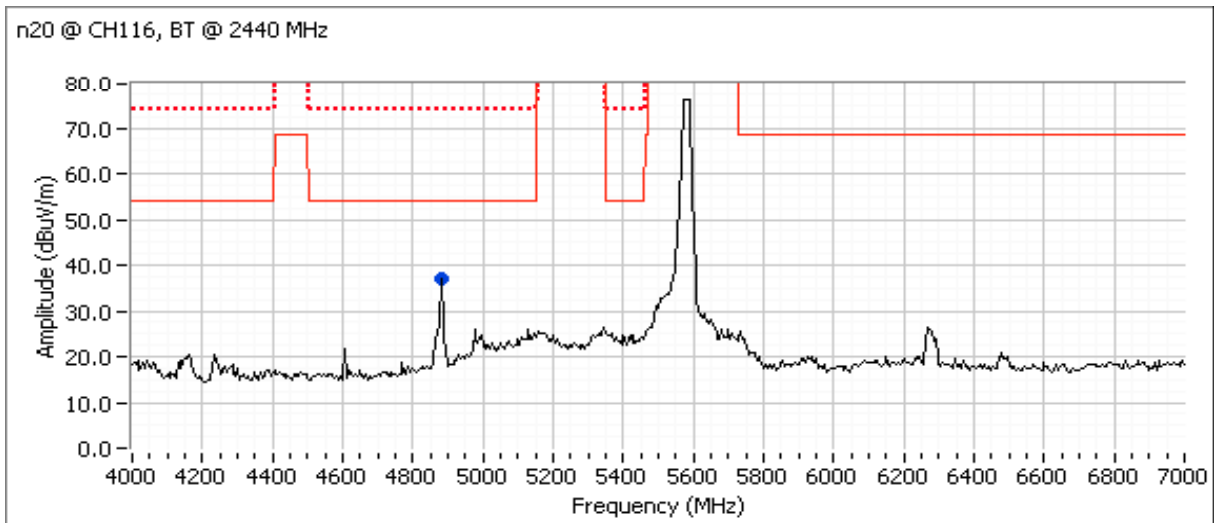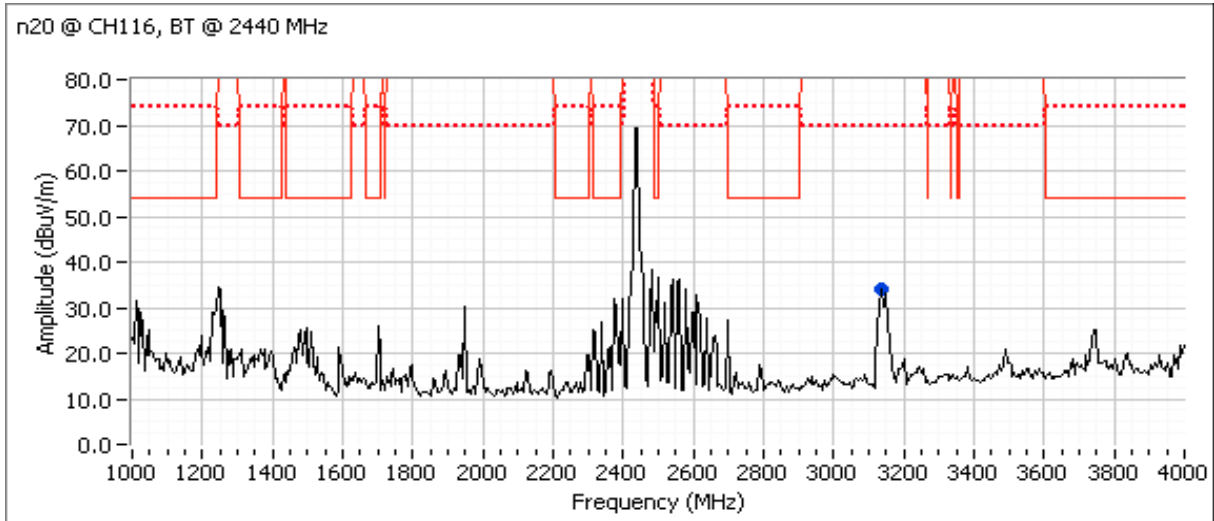

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Preliminary Measurements (Peak versus average limit) at 20-30cm from EUT

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
3135.000	34.0	V	70.0	-36.0	Peak	0	1.0	CH116
4880.000	37.2	V	54.0	-16.8	Peak	0	1.0	CH116

Spurious Emissions (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4880.010	43.3	H	54.0	-10.7	AVG	129	1.0	RB 1 MHz;VB 10 Hz;Peak, Note 3
4879.960	48.1	H	74.0	-25.9	PK	129	1.0	RB 1 MHz;VB 3 MHz;Peak
3133.620	43.1	V	68.3	-25.2	PK	360	1.0	RB 1 MHz;VB 3 MHz;Peak
4880.100	40.6	V	54.0	-13.4	AVG	224	1.0	RB 1 MHz;VB 10 Hz;Peak, Note 3
4880.350	48.2	V	74.0	-25.8	PK	224	1.0	RB 1 MHz;VB 3 MHz;Peak
3133.620	43.1	V	68.3	-25.2	PK	360	1.0	RB 1 MHz;VB 3 MHz;Peak
3134.070	42.0	H	68.3	-26.3	PK	360	1.0	RB 1 MHz;VB 3 MHz;Peak

Note 1:	For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental and measured in 100kHz.
Note 2:	Signal is not in a restricted band but the more stringent restricted band limit was used.
Note 3:	Emission has duty cycle < 98%, but constant, average measurement performed: RBW=1MHz, VBW=10Hz, peak detector, linear averaging, auto sweep, trace average 100 traces, measurement corrected by Linear Voltage correction factor.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #14: 1-15GHz, 802.11n20 @ 5785 MHz Chain 1+2, BT Basic Rate @ 2440 MHz Chain 2


Date of Test: 10/9/2013
 Test Engineer: John Caizzi

Test Location: Chamber 4
 Config Change: none

	Target (dBm)	Power Settings Measured (dBm)	Software Setting
WiFi 1	13.5	13.5	34.5
WiFi 2	13.5	13.5	34.0
Bluetooth			Max

Note - measured power in table above is average power, for reference only.



Perform normal 7-15 GHz scan with filter for fundamental and then 1-4 and 4-7 GHz scans 20-30 cm from the product without filter.

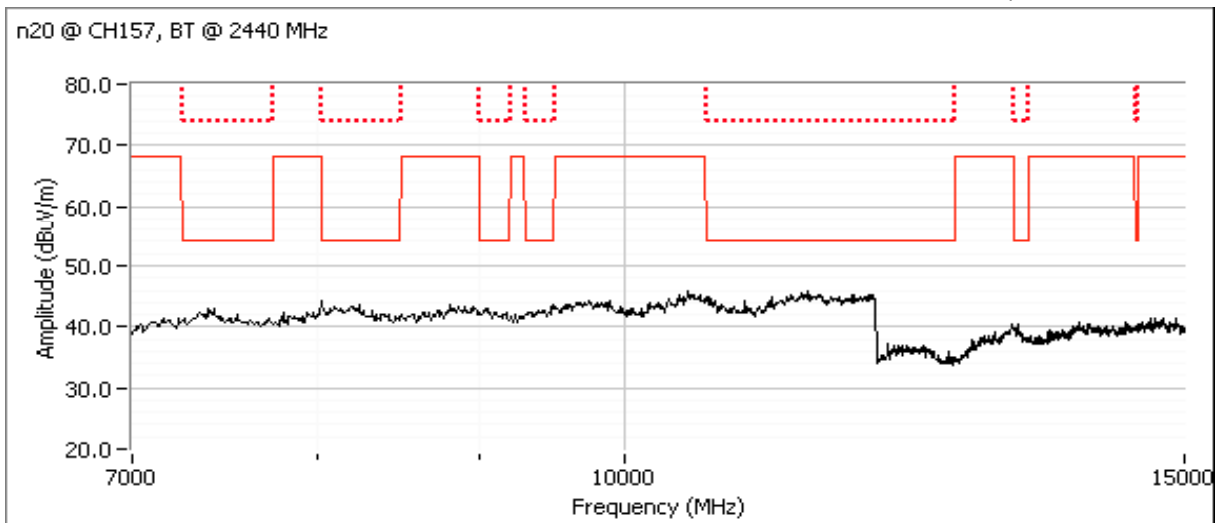

Preliminary Measurements (Peak versus average limit)

Frequency	Level	Pol	15.209/15.247	Detector	Azimuth	Height	Comments
MHz	dBuV/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters
							No emissions found 7-12 GHz.

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

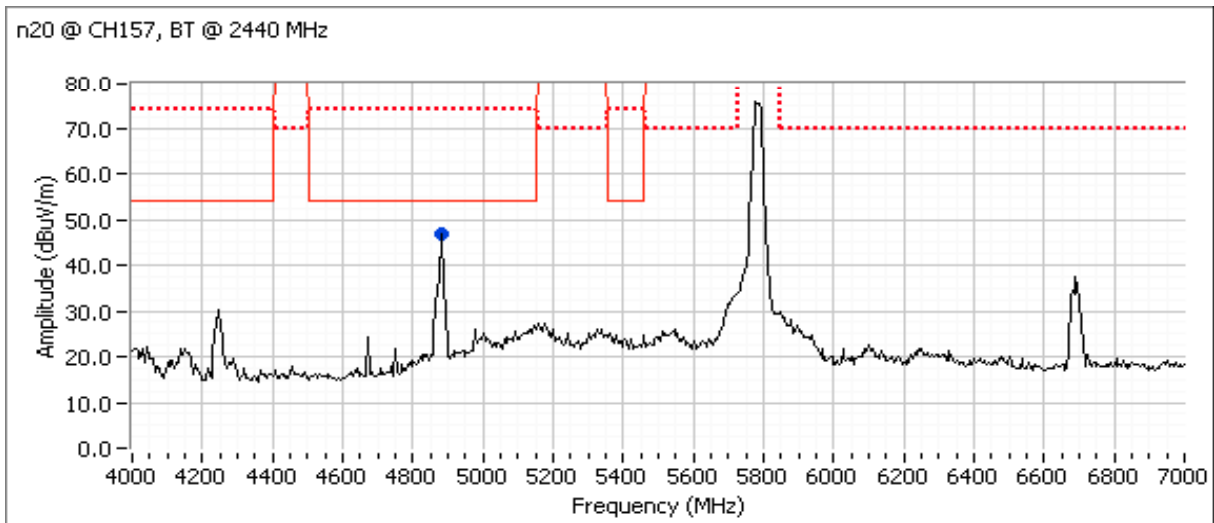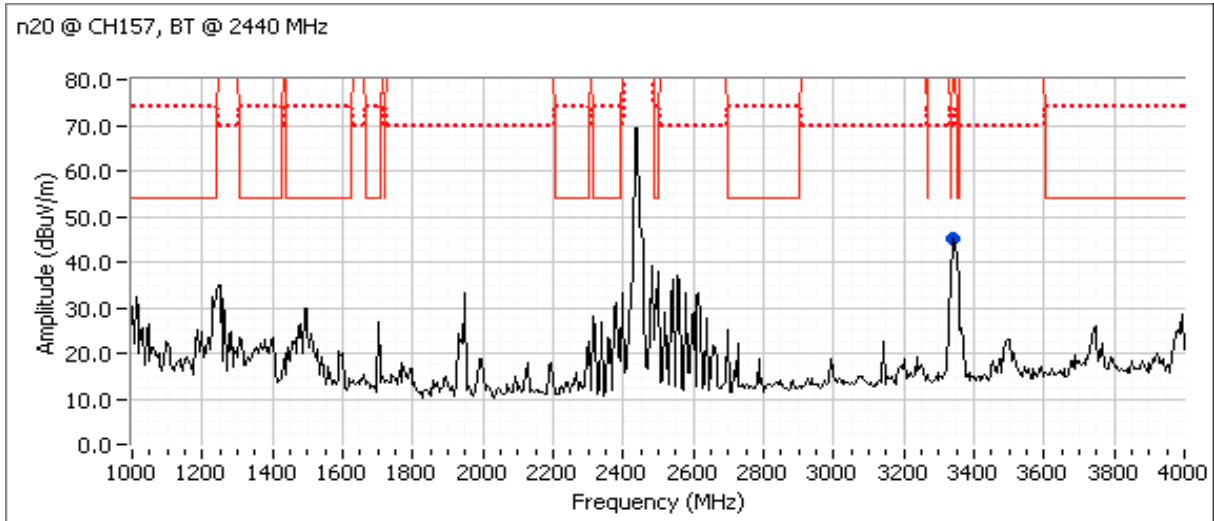

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Preliminary Measurements (Peak versus average limit) at 20-30cm from EUT

Frequency	Level	Pol	15.209/15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4880.000	46.8	V	54.0	-7.2	Peak	0	1.0	CH157
3340.000	45.1	V	70.0	-24.9	Peak	0	1.0	CH157

Spurious Emissions (final measurements at 3m)

Frequency	Level	Pol	15.209 / 15.247		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
4880.000	42.4	H	54.0	-11.6	AVG	128	1.0	RB 1 MHz;VB 10 Hz;Peak, Note 3
4879.890	47.9	H	74.0	-26.1	PK	128	1.0	RB 1 MHz;VB 3 MHz;Peak
4879.940	38.3	V	54.0	-15.7	AVG	241	1.0	RB 1 MHz;VB 10 Hz;Peak, Note 3
4880.190	46.6	V	74.0	-27.4	PK	241	1.0	RB 1 MHz;VB 3 MHz;Peak
3339.910	42.8	V	68.3	-25.5	PK	360	1.0	RB 1 MHz;VB 3 MHz;Peak
3340.560	43.2	H	68.3	-25.1	PK	334	1.0	RB 1 MHz;VB 3 MHz;Peak

Note 1:	For emissions in restricted bands, the limit of 15.209 was used. For all other emissions, the limit was set 20dB below the level of the fundamental and measured in 100kHz.
Note 2:	Signal is not in a restricted band but the more stringent restricted band limit was used.
Note 3:	Emission has duty cycle < 98%, but constant, average measurement performed: RBW=1MHz, VBW=10Hz, peak detector, linear averaging, auto sweep, trace average 100 traces, measurement corrected by Linear Voltage correction factor.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Radiated Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 10/2/2013 0:00
 Test Engineer: Joseph Cadigal
 Test Location: FT chamber#4

Config. Used: 1
 Config Change: None
 EUT Voltage: POE

General Test Configuration

The EUT and any local support equipment were located on the turntable for radiated emissions testing.

The test distance and extrapolation factor (if applicable) are detailed under each run description.

Note, preliminary testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. Maximized testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna and manipulation of the cables.

Ambient Conditions:

Temperature: 23 °C
 Rel. Humidity: 40 %

Summary of Results

MAC Address: 001500DC7B25 DRTU Tool Version 1.7.1-752, Driver version 16.6.0.1

Run #	Test Performed	Limit	Result	Margin
1	Radiated Emissions 30 - 1000 MHz, Preliminary	FCC 15.209 / RSS 210	Eval	Refer to individual runs
2	Radiated Emissions 30 - 1000 MHz, Maximized	FCC 15.209 / RSS 210	Pass	37.7 dBμV/m @ 906.14 MHz (-8.3 dB)
3	Radiated Emissions 30 - 1000 MHz, Preliminary	FCC 15.209 / RSS 210	Eval	Refer to individual runs
4	Radiated Emissions 30 - 1000 MHz, Maximized	FCC 15.209 / RSS 210	Pass	26.3 dBμV/m @ 48.00 MHz (-13.7 dB)

Modifications Made During Testing

No modifications were made to the EUT during testing

Deviations From The Standard



No deviations were made from the requirements of the standard.

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #1: Preliminary Radiated Emissions, 30 - 1000 MHz

Configured to TX , 802.11b 16.5dBm on chain A (setting 23) on channel 6, BT chain B (setting Max) on channel 2440MHz

Test Parameters for Preliminary Scan(s)			
Frequency Range	Prescan Distance	Limit Distance	Extrapolation Factor
30 - 1000 MHz	3	3	0.0

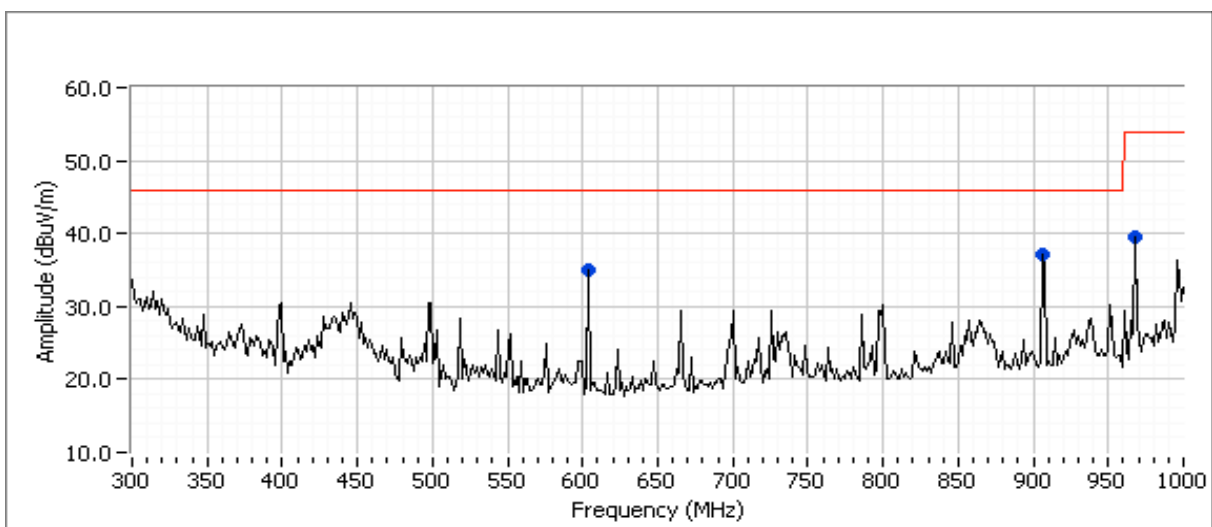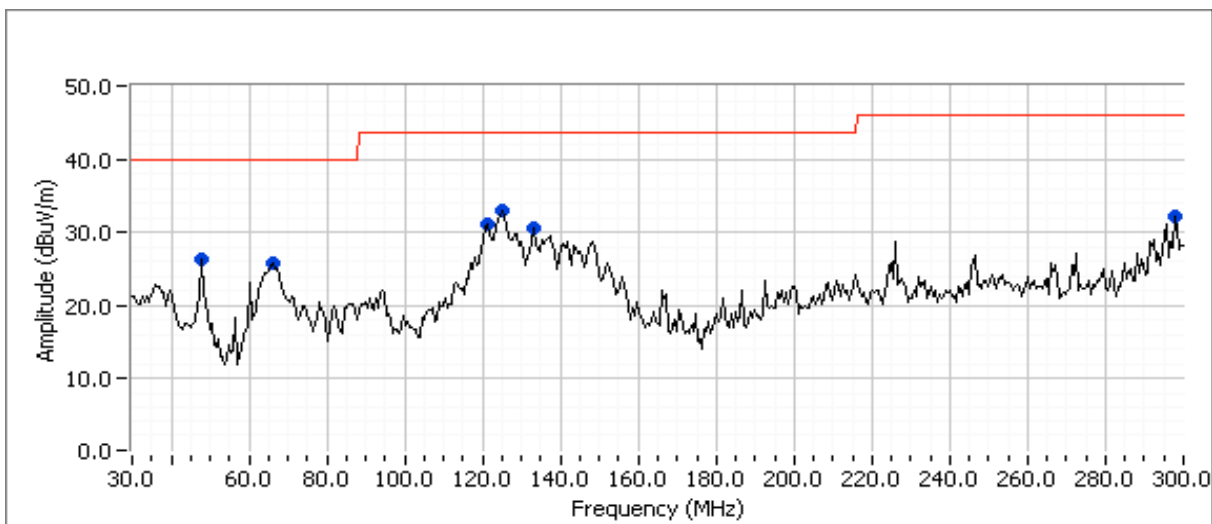

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Preliminary peak readings captured during pre-scan

Frequency	Level	Pol	FCC 15.209 / RSS 210		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
966.543	39.5	V	54.0	-14.5	Peak	16	1.0	
66.345	25.9	V	40.0	-14.1	Peak	109	1.0	
604.092	35.1	H	46.0	-10.9	Peak	154	1.0	
297.341	32.2	H	46.0	-13.8	Peak	195	1.0	
906.138	37.1	V	46.0	-8.9	Peak	195	1.0	
133.097	30.7	H	43.5	-12.8	Peak	234	2.0	
121.422	31.2	H	43.5	-12.3	Peak	269	2.5	
125.606	32.9	H	43.5	-10.6	Peak	273	2.5	
48.000	26.2	V	40.0	-13.8	Peak	322	1.0	

Preliminary quasi-peak readings (no manipulation of EUT interface cables)

Frequency	Level	Pol	FCC 15.209 / RSS 210		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
966.543	39.7	V	54.0	-14.3	QP	16	1.0	QP (1.00s)
66.345	21.8	V	40.0	-18.2	QP	109	1.0	QP (1.00s)
604.092	35.1	H	46.0	-10.9	QP	154	1.0	QP (1.00s)
297.341	25.3	H	46.0	-20.7	QP	195	1.0	QP (1.00s)
906.138	37.7	V	46.0	-8.3	QP	195	1.0	QP (1.00s)
133.097	23.6	H	43.5	-19.9	QP	234	2.0	QP (1.00s)
121.422	25.7	H	43.5	-17.8	QP	269	2.5	QP (1.00s)
125.606	26.9	H	43.5	-16.6	QP	273	2.5	QP (1.00s)
48.000	25.1	V	40.0	-14.9	QP	322	1.0	QP (1.00s)

Run #2: Maximized Readings From Run #1

Test Parameters for Maximized Reading(s)			
Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
30 - 1000 MHz	3	3	0.0

Maximized quasi-peak readings (includes manipulation of EUT interface cables)



Frequency	Level	Pol	FCC 15.209 / RSS 210		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
906.138	37.7	V	46.0	-8.3	QP	195	1.0	QP (1.00s)
604.092	35.1	H	46.0	-10.9	QP	154	1.0	QP (1.00s)
966.543	39.7	V	54.0	-14.3	QP	16	1.0	QP (1.00s)
48.000	25.1	V	40.0	-14.9	QP	322	1.0	QP (1.00s)
125.606	26.9	H	43.5	-16.6	QP	273	2.5	QP (1.00s)
121.422	25.7	H	43.5	-17.8	QP	269	2.5	QP (1.00s)

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Run #3: Preliminary Radiated Emissions, 30 - 1000 MHz

Configured to TX , 802.11a 16.5dBm on each chain (settings 37, 39) on channel 100, BT chain B (setting Max) on channel 2440MHz

Test Parameters for Preliminary Scan(s)			
Frequency Range	Prescan Distance	Limit Distance	Extrapolation Factor
30 - 1000 MHz	3	3	0.0

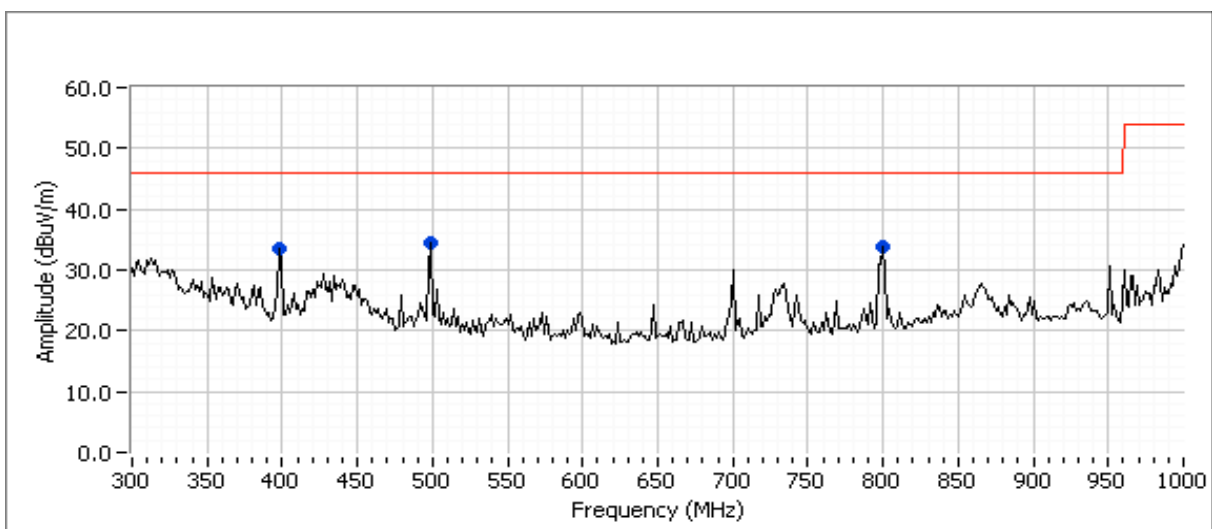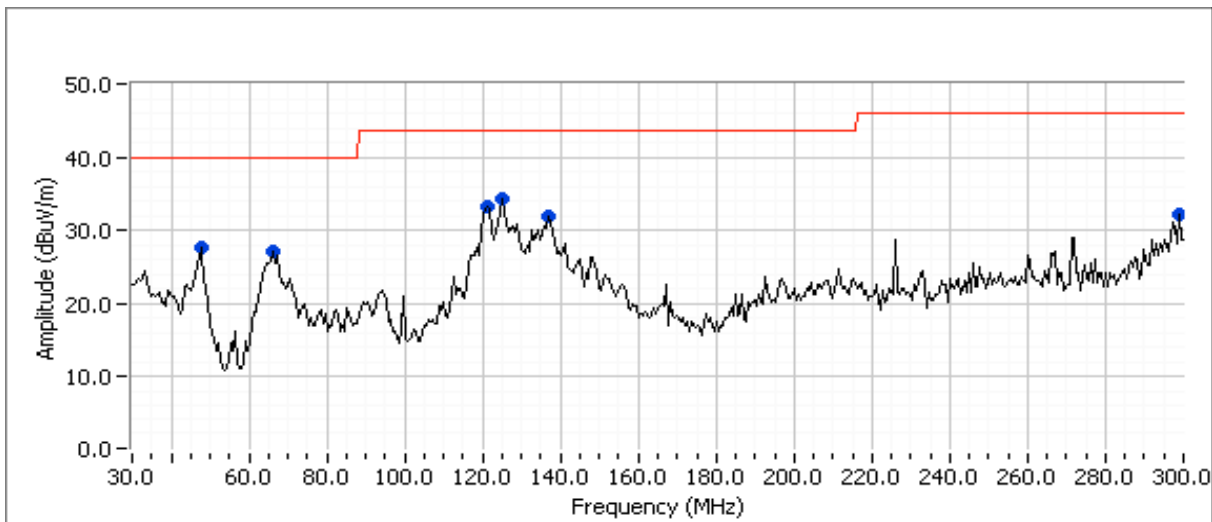

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Preliminary peak readings captured during pre-scan

Frequency	Level	Pol	FCC 15.209 / RSS 210		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
299.038	32.3	H	46.0	-13.7	Peak	11	2.0	
48.000	27.6	V	40.0	-12.4	Peak	12	1.0	
66.646	27.0	V	40.0	-13.0	Peak	147	1.0	
800.047	33.7	V	46.0	-12.3	Peak	187	1.0	
136.947	31.8	H	43.5	-11.7	Peak	234	2.0	
498.376	34.5	H	46.0	-11.5	Peak	249	1.0	
124.989	34.2	H	43.5	-9.3	Peak	273	2.5	
121.635	33.2	H	43.5	-10.3	Peak	300	2.5	
398.603	33.6	H	46.0	-12.4	Peak	326	1.0	

Preliminary quasi-peak readings (no manipulation of EUT interface cables)

Frequency	Level	Pol	FCC 15.209 / RSS 210		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
299.038	19.9	H	46.0	-26.1	QP	11	2.0	QP (1.00s)
48.000	26.3	V	40.0	-13.7	QP	11	1.0	QP (1.00s)
66.646	22.5	V	40.0	-17.5	QP	147	1.0	QP (1.00s)
800.047	24.2	V	46.0	-21.8	QP	187	1.0	QP (1.00s)
136.947	21.7	H	43.5	-21.8	QP	234	2.0	QP (1.00s)
498.376	15.1	H	46.0	-30.9	QP	249	1.0	QP (1.00s)
124.989	23.7	H	43.5	-19.8	QP	273	2.5	QP (1.00s)
121.635	23.9	H	43.5	-19.6	QP	300	2.5	QP (1.00s)
398.603	22.1	H	46.0	-23.9	QP	326	1.0	QP (1.00s)

Run #4: Maximized Readings From Run #3

Test Parameters for Maximized Reading(s)			
Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
30 - 1000 MHz	3	3	0.0

Maximized quasi-peak readings (includes manipulation of EUT interface cables)

Frequency	Level	Pol	FCC 15.209 / RSS 210		Detector	Azimuth	Height	Comments
MHz	dB μ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
48.000	26.3	V	40.0	-13.7	QP	11	1.0	QP (1.00s)
66.646	22.5	V	40.0	-17.5	QP	147	1.0	QP (1.00s)
121.635	23.9	H	43.5	-19.6	QP	300	2.5	QP (1.00s)
124.989	23.7	H	43.5	-19.8	QP	273	2.5	QP (1.00s)
800.047	24.2	V	46.0	-21.8	QP	187	1.0	QP (1.00s)
136.947	21.7	H	43.5	-21.8	QP	234	2.0	QP (1.00s)

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Conducted Emissions

(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)

Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 10/2/2013 0:00
 Test Engineer: Joseph Cadigal
 Test Location: FT chamber#4

Config. Used: 1
 Config Change: None
 EUT Voltage: 3.3Vdc

General Test Configuration

The EUT on the test fixture and other support equipment was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment. Remote support located outside the chamber.

Ambient Conditions: Temperature: 23 °C
 Rel. Humidity: 40 %

Summary of Results

MAC Address: 00:15:00:DC:7B:25, EUT installed in Laptop

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power, 120V/60Hz	RSS 210 / 15.207	Pass	15.0 dBµV @ 7.009 MHz (-35.0 dB)

Modifications Made During Testing



No modifications were made to the EUT during testing

Deviations From The Standard

No deviations were made from the requirements of the standard.

Client: Intel Corporation	Job Number: J93358
Model: PBA5001	T-Log Number: T93372
Contact: Steve Hackett	Project Manager: Christine Krebill
Standard: FCC Part 15.247, 15.407	Project Coordinator: -
	Class: N/A

Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz

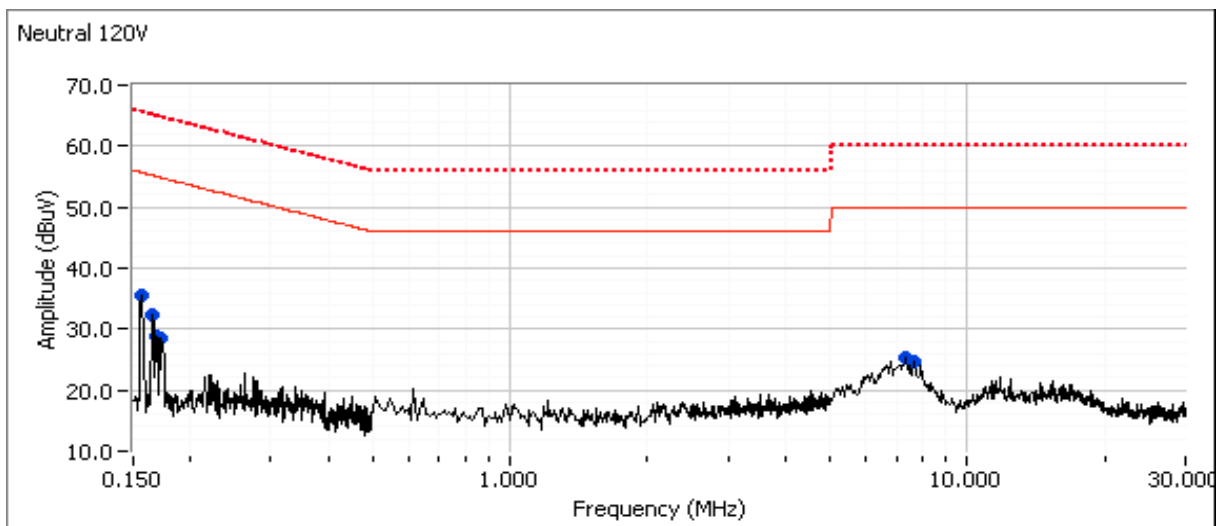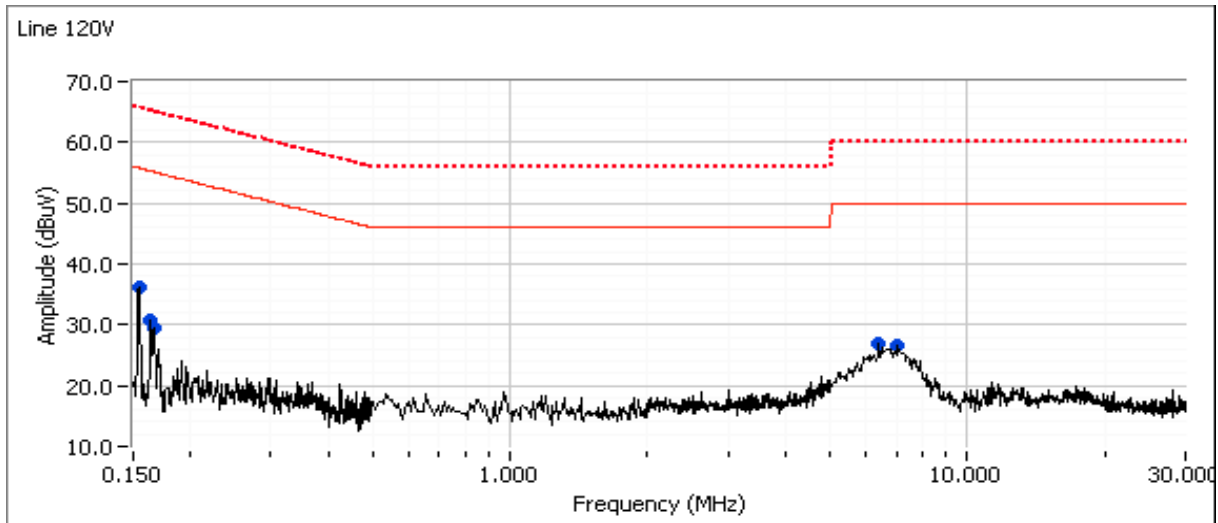

Client:	Intel Corporation	Job Number:	J93358
Model:	PBA5001	T-Log Number:	T93372
Contact:	Steve Hackett	Project Manager:	Christine Krebill
Standard:	FCC Part 15.247, 15.407	Project Coordinator:	-
		Class:	N/A

Preliminary peak readings captured during pre-scan (peak readings vs. average limit)

Frequency MHz	Level dBμV	AC Line	RSS 210 / 15.207		Detector QP/Ave	Comments
			Limit	Margin		
0.154	36.3	Line	55.8	-19.5	Peak	
0.163	30.9	Line	55.3	-24.4	Peak	
0.166	29.5	Line	55.1	-25.6	Peak	
7.009	26.7	Line	50.0	-23.3	Peak	
6.392	27.0	Line	50.0	-23.0	Peak	
0.157	35.4	Neutral	55.7	-20.3	Peak	
0.165	32.3	Neutral	55.2	-22.9	Peak	
0.170	28.8	Neutral	55.0	-26.2	Peak	
0.172	28.6	Neutral	54.8	-26.2	Peak	
7.623	24.6	Neutral	50.0	-25.4	Peak	
7.314	25.3	Neutral	50.0	-24.7	Peak	

Final quasi-peak and average readings

Frequency MHz	Level dBμV	AC Line	RSS 210 / 15.207		Detector QP/Ave	Comments
			Limit	Margin		
7.009	15.0	Line	50.0	-35.0	AVG	AVG (0.10s)
0.156	30.2	Neutral	65.7	-35.5	QP	QP (1.00s)
6.392	14.3	Line	50.0	-35.7	AVG	AVG (0.10s)
0.154	29.6	Line	65.8	-36.2	QP	QP (1.00s)
0.172	28.1	Neutral	64.9	-36.8	QP	QP (1.00s)
7.314	11.2	Neutral	50.0	-38.8	AVG	AVG (0.10s)
7.623	11.1	Neutral	50.0	-38.9	AVG	AVG (0.10s)
0.169	25.9	Neutral	65.0	-39.1	QP	QP (1.00s)
7.009	20.5	Line	60.0	-39.5	QP	QP (1.00s)
6.392	20.2	Line	60.0	-39.8	QP	QP (1.00s)
0.165	25.2	Neutral	65.2	-40.0	QP	QP (1.00s)
0.163	24.2	Line	65.3	-41.1	QP	QP (1.00s)
7.314	18.9	Neutral	60.0	-41.1	QP	QP (1.00s)
0.166	23.0	Line	65.2	-42.2	QP	QP (1.00s)
7.623	16.5	Neutral	60.0	-43.5	QP	QP (1.00s)
0.172	11.1	Neutral	54.9	-43.8	AVG	AVG (0.10s)
0.154	11.6	Line	55.8	-44.2	AVG	AVG (0.10s)
0.156	11.5	Neutral	55.7	-44.2	AVG	AVG (0.10s)
0.163	10.7	Line	55.3	-44.6	AVG	AVG (0.10s)
0.166	10.6	Line	55.2	-44.6	AVG	AVG (0.10s)
0.169	10.4	Neutral	55.0	-44.6	AVG	AVG (0.10s)
0.165	10.5	Neutral	55.2	-44.7	AVG	AVG (0.10s)

End of Report

This page is intentionally blank and marks the last page of this test report.