

# FCC Radio Test Report

## FCC ID: 2AE6WRP-R1

### Original Grant

**Report No.** : TB-FCC153955  
**Applicant** : Shenzhen omimo Technology Co.,Ltd.  
**Equipment Under Test (EUT)**  
**EUT Name** : omimo WIFI Repeater  
**Model No.** : RP-R1  
**Series Model No.** : N/A  
**Brand Name** : omimo  
**Receipt Date** : 2017-05-18  
**Test Date** : 2017-05-19 to 2016-06-08  
**Issue Date** : 2017-06-09  
**Standards** : FCC Part 15, Subpart C (15.247:2016)  
**Test Method** : ANSI C63.10: 2013  
**Conclusions** : **PASS**

In the configuration tested, the EUT complied with the standards specified above,  
The EUT technically complies with the FCC and IC requirements

**Test/Witness Engineer** :

IVAN SU

**Approved &  
Authorized**

Ray Li



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

TB-RF-074-1.0



## Contents

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>CONTENTS.....</b>                                              | <b>2</b>  |
| <b>1. GENERAL INFORMATION ABOUT EUT .....</b>                     | <b>4</b>  |
| 1.1 Client Information.....                                       | 4         |
| 1.2 General Description of EUT (Equipment Under Test) .....       | 4         |
| 1.3 Block Diagram Showing the Configuration of System Tested..... | 5         |
| 1.4 Description of Support Units .....                            | 6         |
| 1.5 Description of Test Mode.....                                 | 6         |
| 1.6 Description of Test Software Setting .....                    | 7         |
| 1.7 Measurement Uncertainty .....                                 | 8         |
| 1.8 Test Facility.....                                            | 8         |
| <b>2. TEST SUMMARY.....</b>                                       | <b>9</b>  |
| <b>3. TEST EQUIPMENT.....</b>                                     | <b>10</b> |
| <b>4. CONDUCTED EMISSION TEST .....</b>                           | <b>11</b> |
| 4.1 Test Standard and Limit.....                                  | 11        |
| 4.2 Test Setup.....                                               | 11        |
| 4.3 Test Procedure.....                                           | 11        |
| 4.4 EUT Operating Mode .....                                      | 12        |
| 4.5 Test Data.....                                                | 12        |
| <b>5. RADIATED EMISSION TEST .....</b>                            | <b>17</b> |
| 5.1 Test Standard and Limit.....                                  | 17        |
| 5.2 Test Setup.....                                               | 18        |
| 5.3 Test Procedure.....                                           | 19        |
| 5.4 EUT Operating Condition .....                                 | 19        |
| 5.5 Test Data.....                                                | 20        |
| <b>6. RESTRICTED BANDS REQUIREMENT .....</b>                      | <b>47</b> |
| 6.1 Test Standard and Limit.....                                  | 47        |
| 6.2 Test Setup.....                                               | 47        |
| 6.3 Test Procedure.....                                           | 47        |
| 6.4 EUT Operating Condition .....                                 | 48        |
| 6.5 Test Data.....                                                | 48        |
| <b>7. BANDWIDTH TEST.....</b>                                     | <b>71</b> |
| 7.1 Test Standard and Limit.....                                  | 71        |
| 7.2 Test Setup.....                                               | 71        |
| 7.3 Test Procedure.....                                           | 71        |
| 7.4 EUT Operating Condition .....                                 | 71        |
| 7.5 Test Data.....                                                | 72        |
| <b>8. PEAK OUTPUT POWER TEST.....</b>                             | <b>88</b> |
| 8.1 Test Standard and Limit.....                                  | 88        |
| 8.2 Test Setup.....                                               | 88        |



---

|                                             |            |
|---------------------------------------------|------------|
| 8.3 Test Procedure.....                     | 88         |
| 8.4 EUT Operating Condition .....           | 88         |
| 8.5 Test Data.....                          | 89         |
| <b>9. POWER SPECTRAL DENSITY TEST .....</b> | <b>92</b>  |
| 9.1 Test Standard and Limit.....            | 92         |
| 9.2 Test Setup.....                         | 92         |
| 9.3 Test Procedure.....                     | 92         |
| 9.4 EUT Operating Condition .....           | 92         |
| 9.5 Test Data.....                          | 93         |
| <b>10. ANTENNA REQUIREMENT.....</b>         | <b>102</b> |
| 10.1 Standard Requirement.....              | 102        |
| 10.2 Antenna Connected Construction.....    | 102        |



# 1. General Information about EUT

## 1.1 Client Information

**Applicant** : Shenzhen omimo Technology Co.,Ltd.  
**Address** : Room1212, Chuangjian Building, No.6023, Shennan Boulevard, Futian District, Shenzhen, China  
**Manufacturer** : Shenzhen omimo Technology Co.,Ltd.  
**Address** : Room1212, Chuangjian Building, No.6023, Shennan Boulevard, Futian District, Shenzhen, China

## 1.2 General Description of EUT (Equipment Under Test)

|                               |   |                                              |                                                                                                                                                                                       |
|-------------------------------|---|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EUT Name</b>               | : | omimo WIFI Repeater                          |                                                                                                                                                                                       |
| <b>Models No.</b>             | : | RP-R1                                        |                                                                                                                                                                                       |
| <b>Model Difference</b>       | : | N/A                                          |                                                                                                                                                                                       |
| <b>Product Description</b>    |   | Operation Frequency:                         | 802.11b/g/n(HT20): 2412MHz~2462MHz<br>802.11n(HT40): 2422MHz~2452MHz                                                                                                                  |
|                               |   | Number of Channel:                           | 802.11b/g/n(HT20):11 channels <b>see note(3)</b><br>802.11n(HT40): 7 channels <b>see note(3)</b>                                                                                      |
|                               |   | RF Output Power:                             | 802.11b: 14.54 dBm<br>802.11g: 14.64 dBm<br>802.11n (HT20): 14.33 dBm<br>802.11n (HT40): 14.41 dBm                                                                                    |
|                               | : | Antenna Gain:                                | 1 dBi PCB Antenna                                                                                                                                                                     |
|                               |   | Modulation Type:                             | 802.11b: DSSS(BPSK, QPSK, CCK)<br>802.11g/n:OFDM(BPSK,QPSK,16QAM, 64QAM)                                                                                                              |
|                               |   | Bit Rate of Transmitter:                     | 802.11b:11/5.5/2/1 Mbps<br>802.11g:54/48/36/24/18/12/9/6 Mbps<br>802.11n(HT20):14.44/28.88/43.34/57.78/86.66/115.56 /130/144.44Mbps<br>802.11n(HT40):30/60/90/120/180/240/270/300Mbps |
|                               |   |                                              |                                                                                                                                                                                       |
| <b>Power Supply</b>           | : | DC 5V supplied by AC/DC Adapter.             |                                                                                                                                                                                       |
| <b>Power Rating</b>           | : | Input: AC 100~240V, 50/60Hz<br>Output: DC 5V |                                                                                                                                                                                       |
| <b>Connecting I/O Port(S)</b> | : | Please refer to the User's Manual            |                                                                                                                                                                                       |

### Note:

(1) This Test Report is FCC Part 15.247 for 802.11b/g/n, the test procedure follows the FCC KDB 558074 D01 DTS Meas Guidance v04 and KDB 662911 D01 Multiple Transmitter



Output v02r01.

(2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

(3) Channel List:


| Channel                                                                  | Frequency (MHz) | Channel   | Frequency (MHz) | Channel   | Frequency (MHz) |
|--------------------------------------------------------------------------|-----------------|-----------|-----------------|-----------|-----------------|
| <b>01</b>                                                                | <b>2412</b>     | 05        | 2432            | 09        | 2452            |
| 02                                                                       | 2417            | <b>06</b> | <b>2437</b>     | 10        | 2457            |
| 03                                                                       | 2422            | 07        | 2442            | <b>11</b> | <b>2462</b>     |
| 04                                                                       | 2427            | 08        | 2447            |           |                 |
| Note: CH 01~CH 11 for 802.11b/g/n(HT20)<br>CH 03~CH 09 for 802.11n(HT40) |                 |           |                 |           |                 |

(4) Antenna information

| Mode                                                                                                                |       | TX Antenna (s) |      | Remark                      |
|---------------------------------------------------------------------------------------------------------------------|-------|----------------|------|-----------------------------|
| 802.11b                                                                                                             |       | 1              |      | The worst case is ANT. a TX |
| 802.11g                                                                                                             |       | 1              |      | The worst case is ANT. a TX |
| 802.11n(HT20)                                                                                                       |       | 2              |      | ANT. a+b TX                 |
| 802.11n(HT40)                                                                                                       |       | 2              |      | ANT. a+b TX                 |
| Antenna                                                                                                             | Brand | Model Name     | Type | Antenna Gain(dBi)           |
| ANT. a                                                                                                              | N/A   | N/A            | PCB  | 1                           |
| ANT. b                                                                                                              | N/A   | N/A            | PCB  | 1                           |
| Note:For MIMO mode: Directional gain=Gain(Ant. a )+Gain(Ant. b)=4.01 dBi in 2.4G 802.11 n(HT20/HT40) has MIMO mode. |       |                |      |                             |

### 1.3 Block Diagram Showing the Configuration of System Tested

#### TX Mode

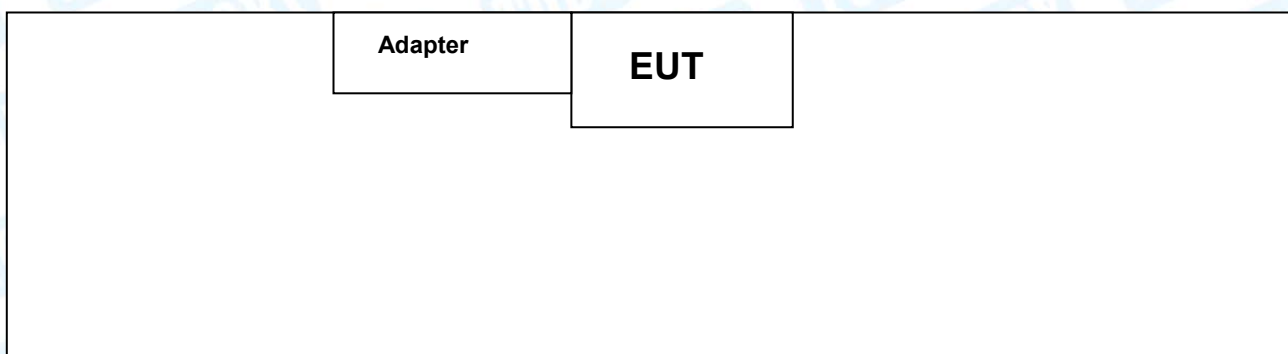



## 1.4 Description of Support Units

| Equipment Information                                        |         |      |              |          |
|--------------------------------------------------------------|---------|------|--------------|----------|
| Name                                                         | Model   | S/N  | Manufacturer | Used “√” |
| AC/DC Adapter                                                | TEKA012 | ---- | TEKA         | √        |
| AC/DC Adapter: Input:100~240V, 50/60Hz, 0.2A. Output: 5V, 1A |         |      |              |          |

## 1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

| For Conducted Test |             |
|--------------------|-------------|
| Final Test Mode    | Description |
| Mode 1             | TX B Mode   |

| For Radiated Test |                                       |
|-------------------|---------------------------------------|
| Final Test Mode   | Description                           |
| Mode 2            | TX Mode B Mode Channel 01/06/11       |
| Mode 3            | TX Mode G Mode Channel 01/06/11       |
| Mode 4            | TX Mode N(HT20) Mode Channel 01/06/11 |
| Mode 5            | TX Mode N(HT40) Mode Channel 03/06/09 |

### Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

- 802.11b Mode: CCK (1 Mbps)
- 802.11g Mode: OFDM (6 Mbps)
- 802.11n (HT20) Mode: MCS 0 (14.4 Mbps)
- 802.11n (HT40) Mode: MCS 0 (30 Mbps)

- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a fixed unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.



## 1.6 Description of Test Software Setting

During testing channel& Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN.

| Test Software:N/A                                                                                                                                                                            |             |         |            |       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---------|------------|-------|
| Test Mode: Continuously transmitting                                                                                                                                                         |             |         |            |       |
| Mode                                                                                                                                                                                         | Data Rate   | Channel | Parameters |       |
|                                                                                                                                                                                              |             |         | ANT a      | ANT b |
| 802.11b                                                                                                                                                                                      | CCK/ 1Mbps  | 01      | DEF        | DEF   |
|                                                                                                                                                                                              | CCK/ 1Mbps  | 06      | DEF        | DEF   |
|                                                                                                                                                                                              | CCK/ 1Mbps  | 11      | DEF        | DEF   |
| 802.11g                                                                                                                                                                                      | OFDM/ 6Mbps | 01      | DEF        | DEF   |
|                                                                                                                                                                                              | OFDM/ 6Mbps | 06      | DEF        | DEF   |
|                                                                                                                                                                                              | OFDM/ 6Mbps | 11      | DEF        | DEF   |
| 802.11n(20)                                                                                                                                                                                  | MCS 0       | 01      | DEF        | DEF   |
|                                                                                                                                                                                              | MCS 0       | 06      | DEF        | DEF   |
|                                                                                                                                                                                              | MCS 0       | 11      | DEF        | DEF   |
| 802.11n(40)                                                                                                                                                                                  | MCS 0       | 03      | DEF        | DEF   |
|                                                                                                                                                                                              | MCS 0       | 06      | DEF        | DEF   |
|                                                                                                                                                                                              | MCS 0       | 09      | DEF        | DEF   |
| Note: TX signal at 802.11b/g mode only could transmit at Ant.a or Ant. b. All the test mode have pretest with two Antenna, but the worst case is Ant. a.The report only show the worst case. |             |         |            |       |



## 1.7 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| Test Item          | Parameters                                        | Expanded Uncertainty ( $U_{Lab}$ ) |
|--------------------|---------------------------------------------------|------------------------------------|
| Conducted Emission | Level Accuracy:<br>9kHz~150kHz<br>150kHz to 30MHz | $\pm 3.42$ dB<br>$\pm 3.42$ dB     |
| Radiated Emission  | Level Accuracy:<br>9kHz to 30 MHz                 | $\pm 4.60$ dB                      |
| Radiated Emission  | Level Accuracy:<br>30MHz to 1000 MHz              | $\pm 4.40$ dB                      |
| Radiated Emission  | Level Accuracy:<br>Above 1000MHz                  | $\pm 4.20$ dB                      |

## 1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

### **CNAS (L5813)**

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

### **FCC List No.: (811562)**

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562.

### **IC Registration No.: (11950A-1)**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

## 2. Test Summary

| FCC Part 15 Subpart C(15.247)/ RSS 247 Issue 1                                                        |                    |                                           |          |        |
|-------------------------------------------------------------------------------------------------------|--------------------|-------------------------------------------|----------|--------|
| Standard Section                                                                                      |                    | Test Item                                 | Judgment | Remark |
| FCC                                                                                                   | IC                 |                                           |          |        |
| 15.203                                                                                                | /                  | Antenna Requirement                       | PASS     | N/A    |
| 15.207                                                                                                | RSS-GEN 7.2.4      | Conducted Emission                        | PASS     | N/A    |
| 15.205                                                                                                | RSS-GEN 7.2.2      | Restricted Bands                          | PASS     | N/A    |
| 15.247(a)(2)                                                                                          | RSS 247<br>5.2 (1) | 6dB Bandwidth                             | PASS     | N/A    |
| 15.247(b)                                                                                             | RSS 247<br>5.4 (4) | Peak Output Power                         | PASS     | N/A    |
| 15.247(e)                                                                                             | RSS 247<br>5.2 (2) | Power Spectral Density                    | PASS     | N/A    |
| 15.247(d)                                                                                             | RSS 247<br>5.5     | Band Edge                                 | PASS     | N/A    |
| 15.247(d)&<br>15.209                                                                                  | RSS 247<br>5.5     | Transmitter Radiated Spurious<br>Emission | PASS     | N/A    |
| <b>Note:</b> “/” for no requirement for this test item.<br>N/A is an abbreviation for Not Applicable. |                    |                                           |          |        |



### 3. Test Equipment

| Conducted Emission Test    |                                  |             |            |               |               |
|----------------------------|----------------------------------|-------------|------------|---------------|---------------|
| Equipment                  | Manufacturer                     | Model No.   | Serial No. | Last Cal.     | Cal. Due Date |
| EMI Test Receiver          | Rohde & Schwarz                  | ESCI        | 100321     | Jul. 22, 2016 | Jul. 21, 2017 |
| RF Switching Unit          | Compliance Direction Systems Inc | RSU-A4      | 34403      | Jul. 22, 2016 | Jul. 21, 2017 |
| AMN                        | SCHWARZBECK                      | NNBL 8226-2 | 8226-2/164 | Jul. 22, 2016 | Jul. 21, 2017 |
| LISN                       | Rohde & Schwarz                  | ENV216      | 101131     | Jul. 22, 2016 | Jul. 21, 2017 |
| Radiation Emission Test    |                                  |             |            |               |               |
| Equipment                  | Manufacturer                     | Model No.   | Serial No. | Last Cal.     | Cal. Due Date |
| Spectrum Analyzer          | Agilent                          | E4407B      | MY45106456 | Jul. 22, 2016 | Jul. 21, 2017 |
| EMI Test Receiver          | Rohde & Schwarz                  | ESPI        | 100010/007 | Jul. 22, 2016 | Jul. 21, 2017 |
| Bilog Antenna              | ETS-LINDGREN                     | 3142E       | 00117537   | Mar. 24, 2017 | Mar. 23, 2018 |
| Bilog Antenna              | ETS-LINDGREN                     | 3142E       | 00117542   | Mar. 24, 2017 | Mar. 23, 2018 |
| Horn Antenna               | ETS-LINDGREN                     | 3117        | 00143207   | Mar. 25, 2017 | Mar. 24, 2018 |
| Horn Antenna               | ETS-LINDGREN                     | 3117        | 00143209   | Mar. 25, 2017 | Mar. 24, 2018 |
| Pre-amplifier              | Sonoma                           | 310N        | 185903     | Mar. 24, 2017 | Mar. 23, 2018 |
| Pre-amplifier              | HP                               | 8447B       | 3008A00849 | Mar. 24, 2017 | Mar. 23, 2018 |
| Loop Antenna               | Laplace instrument               | RF300       | 0701       | Mar. 29, 2017 | Mar. 28, 2018 |
| Cable                      | HUBER+SUHNER                     | 100         | SUCOFLEX   | Mar. 29, 2017 | Mar. 28, 2018 |
| Positioning Controller     | ETS-LINDGREN                     | 2090        | N/A        | N/A           | N/A           |
| Antenna Conducted Emission |                                  |             |            |               |               |
| Equipment                  | Manufacturer                     | Model No.   | Serial No. | Last Cal.     | Cal. Due Date |
| Spectrum Analyzer          | Agilent                          | E4407B      | MY45106456 | Jul. 22, 2016 | Jul. 21, 2017 |
| Spectrum Analyzer          | Rohde & Schwarz                  | ESCI        | 100321     | Jul. 22, 2016 | Jul. 21, 2017 |
| Power Meter                | Anritsu                          | ML2495A     | 25406005   | Jul. 22, 2016 | Jul. 21, 2017 |
| Power Sensor               | Anritsu                          | ML2411B     | 25406005   | Jul. 22, 2016 | Jul. 21, 2017 |

## 4. Conducted Emission Test

### 4.1 Test Standard and Limit

#### 4.1.1 Test Standard

FCC Part 15.207

#### 4.1.2 Test Limit

**Conducted Emission Test Limit**

| Frequency     | Maximum RF Line Voltage (dB $\mu$ V) |               |
|---------------|--------------------------------------|---------------|
|               | Quasi-peak Level                     | Average Level |
| 150kHz~500kHz | 66 ~ 56 *                            | 56 ~ 46 *     |
| 500kHz~5MHz   | 56                                   | 46            |
| 5MHz~30MHz    | 60                                   | 50            |


Notes:

(1) \*Decreasing linearly with logarithm of the frequency.

(2) The lower limit shall apply at the transition frequencies.

(3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2 Test Setup

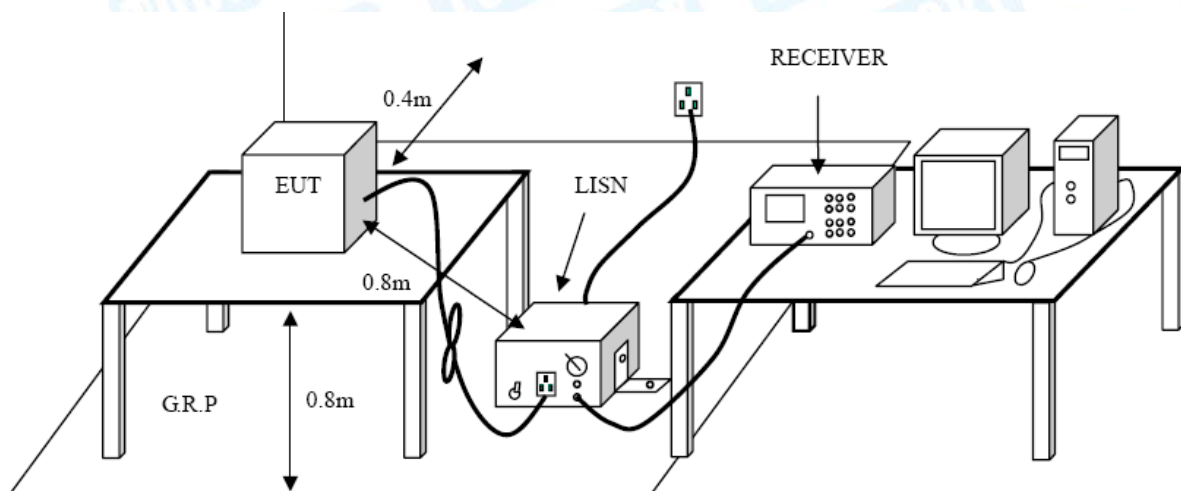

### 4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.



I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.


#### 4.4 EUT Operating Mode

Please refer to the description of test mode.

#### 4.5 Test Data

Please see the next page.

|                      |                             |                           |       |
|----------------------|-----------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater         | <b>Model Name :</b>       | RP-R1 |
| <b>Temperature:</b>  | 25 °C                       | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz               |                           |       |
| <b>Terminal:</b>     | Line                        |                           |       |
| <b>Test Mode:</b>    | TX B Mode                   |                           |       |
| <b>Remark:</b>       | Only worse case is reported |                           |       |

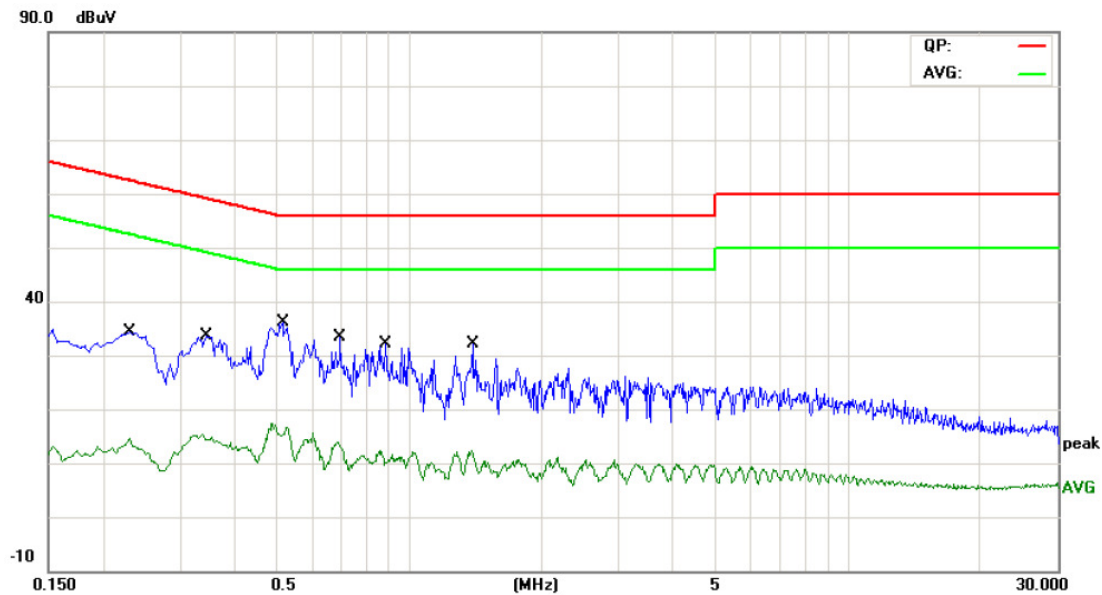


| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit | Over   |          |
|-----|-----|--------|---------------|----------------|-------------|-------|--------|----------|
|     |     | MHz    | dBuV          | dB             | dBuV        | dBuV  | dB     | Detector |
| 1   |     | 0.2300 | 16.20         | 10.02          | 26.22       | 62.45 | -36.23 | QP       |
| 2   |     | 0.2300 | 3.72          | 10.02          | 13.74       | 52.45 | -38.71 | AVG      |
| 3   |     | 0.3460 | 16.79         | 10.02          | 26.81       | 59.06 | -32.25 | QP       |
| 4   |     | 0.3460 | 4.06          | 10.02          | 14.08       | 49.06 | -34.98 | AVG      |
| 5   | *   | 0.5140 | 18.40         | 10.03          | 28.43       | 56.00 | -27.57 | QP       |
| 6   |     | 0.5140 | 4.27          | 10.03          | 14.30       | 46.00 | -31.70 | AVG      |
| 7   |     | 0.6940 | 14.07         | 10.12          | 24.19       | 56.00 | -31.81 | QP       |
| 8   |     | 0.6940 | 2.60          | 10.12          | 12.72       | 46.00 | -33.28 | AVG      |
| 9   |     | 0.8820 | 12.50         | 10.08          | 22.58       | 56.00 | -33.42 | QP       |
| 10  |     | 0.8820 | -0.67         | 10.08          | 9.41        | 46.00 | -36.59 | AVG      |
| 11  |     | 1.3940 | 12.55         | 10.06          | 22.61       | 56.00 | -33.39 | QP       |
| 12  |     | 1.3940 | 1.01          | 10.06          | 11.07       | 46.00 | -34.93 | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                             |                           |       |
|----------------------|-----------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater         | <b>Model Name :</b>       | RP-R1 |
| <b>Temperature:</b>  | 25 °C                       | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz               |                           |       |
| <b>Terminal:</b>     | Neutral                     |                           |       |
| <b>Test Mode:</b>    | TX B Mode                   |                           |       |
| <b>Remark:</b>       | Only worse case is reported |                           |       |

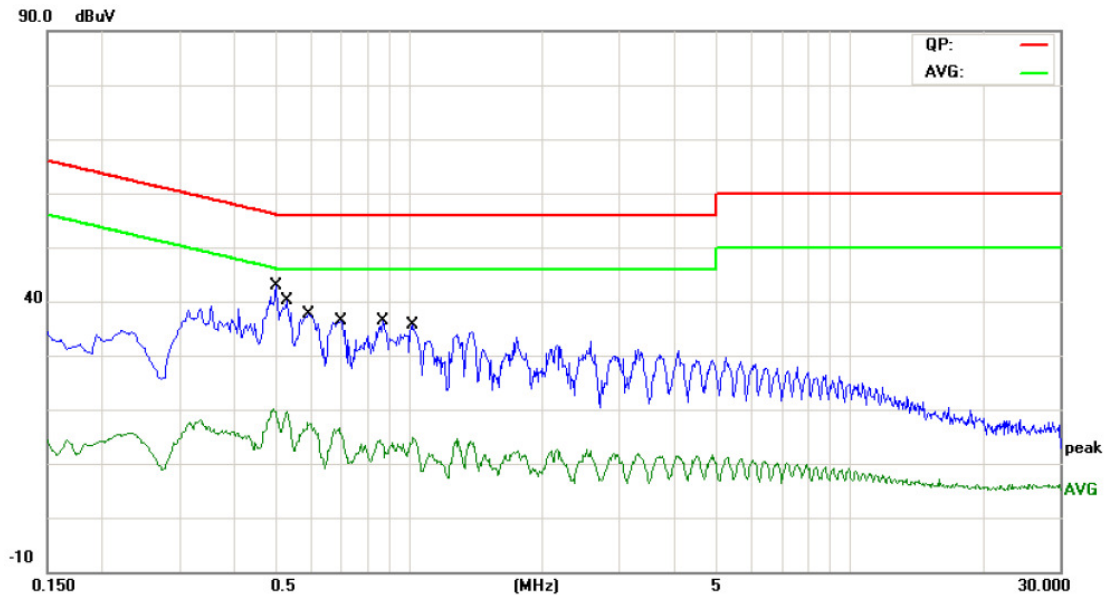

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   | *   | 0.4980       | 24.43                    | 10.02                   | 34.45                    | 56.03         | -21.58     | QP       |
| 2   |     | 0.4980       | 8.45                     | 10.02                   | 18.47                    | 46.03         | -27.56     | AVG      |
| 3   |     | 0.5260       | 24.35                    | 10.02                   | 34.37                    | 56.00         | -21.63     | QP       |
| 4   |     | 0.5260       | 9.16                     | 10.02                   | 19.18                    | 46.00         | -26.82     | AVG      |
| 5   |     | 0.5899       | 21.36                    | 10.02                   | 31.38                    | 56.00         | -24.62     | QP       |
| 6   |     | 0.5899       | 6.49                     | 10.02                   | 16.51                    | 46.00         | -29.49     | AVG      |
| 7   |     | 0.6980       | 18.91                    | 10.02                   | 28.93                    | 56.00         | -27.07     | QP       |
| 8   |     | 0.6980       | 4.52                     | 10.02                   | 14.54                    | 46.00         | -31.46     | AVG      |
| 9   |     | 0.8700       | 18.20                    | 10.10                   | 28.30                    | 56.00         | -27.70     | QP       |
| 10  |     | 0.8700       | 2.67                     | 10.10                   | 12.77                    | 46.00         | -33.23     | AVG      |
| 11  |     | 1.0140       | 17.52                    | 10.16                   | 27.68                    | 56.00         | -28.32     | QP       |
| 12  |     | 1.0140       | 3.48                     | 10.16                   | 13.64                    | 46.00         | -32.36     | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                             |                           |       |
|----------------------|-----------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater         | <b>Model Name :</b>       | RP-R1 |
| <b>Temperature:</b>  | 25 °C                       | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 240V/60 Hz               |                           |       |
| <b>Terminal:</b>     | Line                        |                           |       |
| <b>Test Mode:</b>    | TX B Mode                   |                           |       |
| <b>Remark:</b>       | Only worse case is reported |                           |       |

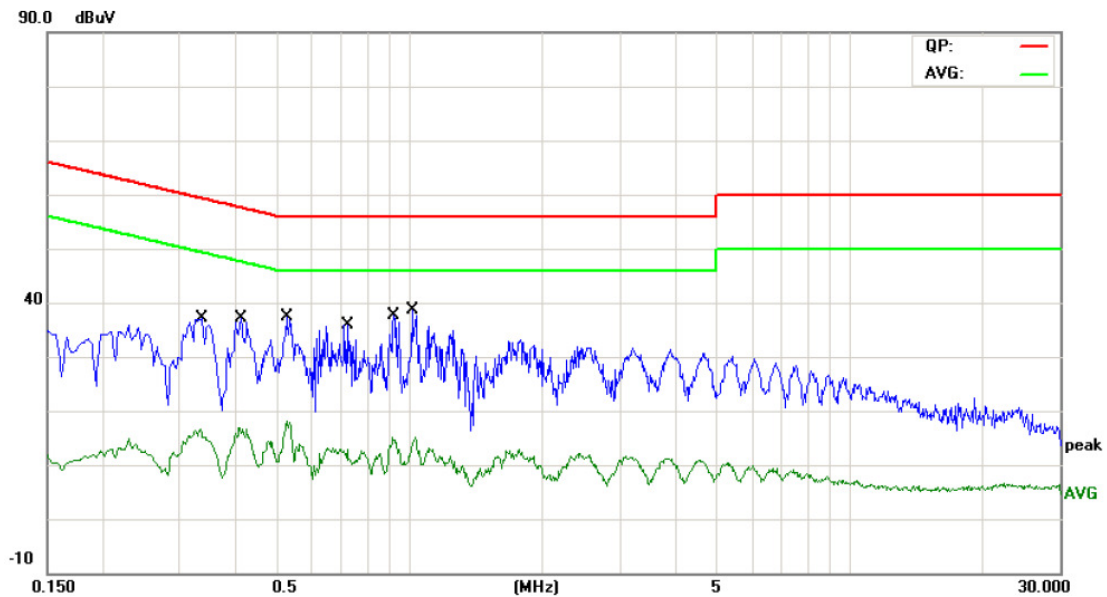


| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit | Over   |          |
|-----|-----|--------|---------------|----------------|-------------|-------|--------|----------|
|     |     | MHz    | dBuV          | dB             | dBuV        | dBuV  | dB     | Detector |
| 1   |     | 0.3379 | 19.42         | 10.02          | 29.44       | 59.25 | -29.81 | QP       |
| 2   |     | 0.3379 | 5.60          | 10.02          | 15.62       | 49.25 | -33.63 | AVG      |
| 3   |     | 0.4140 | 19.72         | 10.02          | 29.74       | 57.57 | -27.83 | QP       |
| 4   |     | 0.4140 | 6.14          | 10.02          | 16.16       | 47.57 | -31.41 | AVG      |
| 5   | *   | 0.5260 | 20.58         | 10.03          | 30.61       | 56.00 | -25.39 | QP       |
| 6   |     | 0.5260 | 7.23          | 10.03          | 17.26       | 46.00 | -28.74 | AVG      |
| 7   |     | 0.7220 | 16.21         | 10.12          | 26.33       | 56.00 | -29.67 | QP       |
| 8   |     | 0.7220 | 1.39          | 10.12          | 11.51       | 46.00 | -34.49 | AVG      |
| 9   |     | 0.9220 | 17.88         | 10.08          | 27.96       | 56.00 | -28.04 | QP       |
| 10  |     | 0.9220 | 4.33          | 10.08          | 14.41       | 46.00 | -31.59 | AVG      |
| 11  |     | 1.0140 | 17.36         | 10.06          | 27.42       | 56.00 | -28.58 | QP       |
| 12  |     | 1.0140 | 3.71          | 10.06          | 13.77       | 46.00 | -32.23 | AVG      |

Emission Level= Read Level+ Correct Factor



|                      |                             |                           |       |
|----------------------|-----------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater         | <b>Model Name :</b>       | RP-R1 |
| <b>Temperature:</b>  | 25 °C                       | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 240V/60 Hz               |                           |       |
| <b>Terminal:</b>     | Neutral                     |                           |       |
| <b>Test Mode:</b>    | TX B Mode                   |                           |       |
| <b>Remark:</b>       | Only worse case is reported |                           |       |

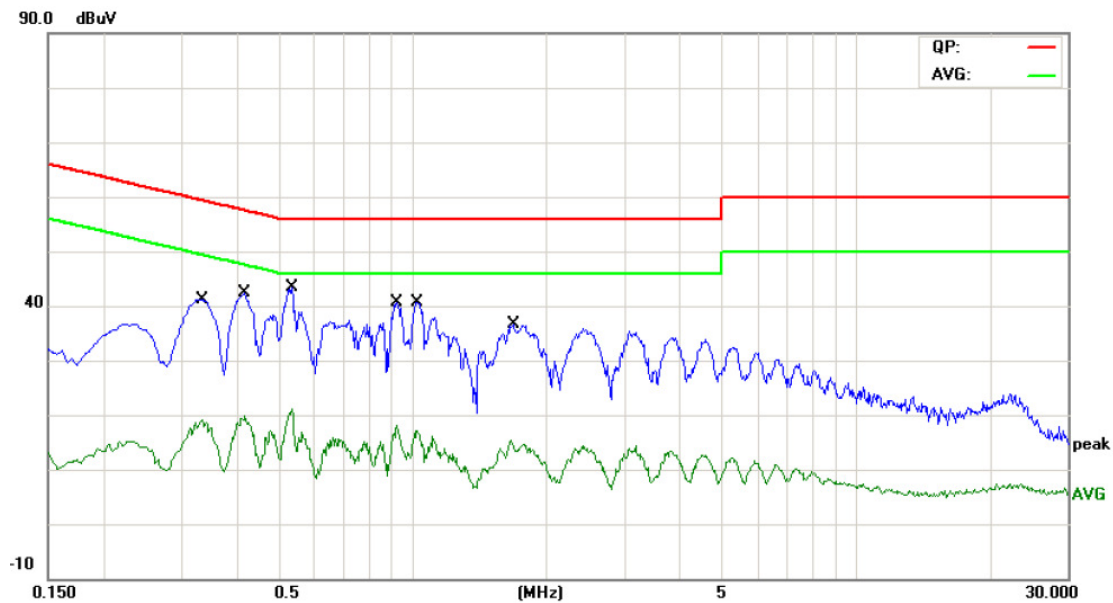

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   |     | 0.3339       | 24.50                    | 10.08                   | 34.58                    | 59.35         | -24.77     | QP       |
| 2   |     | 0.3339       | 7.73                     | 10.08                   | 17.81                    | 49.35         | -31.54     | AVG      |
| 3   |     | 0.4180       | 25.38                    | 10.05                   | 35.43                    | 57.49         | -22.06     | QP       |
| 4   |     | 0.4180       | 8.65                     | 10.05                   | 18.70                    | 47.49         | -28.79     | AVG      |
| 5   | *   | 0.5340       | 26.40                    | 10.02                   | 36.42                    | 56.00         | -19.58     | QP       |
| 6   |     | 0.5340       | 9.60                     | 10.02                   | 19.62                    | 46.00         | -26.38     | AVG      |
| 7   |     | 0.9220       | 23.03                    | 10.12                   | 33.15                    | 56.00         | -22.85     | QP       |
| 8   |     | 0.9220       | 6.35                     | 10.12                   | 16.47                    | 46.00         | -29.53     | AVG      |
| 9   |     | 1.0220       | 23.01                    | 10.16                   | 33.17                    | 56.00         | -22.83     | QP       |
| 10  |     | 1.0220       | 6.06                     | 10.16                   | 16.22                    | 46.00         | -29.78     | AVG      |
| 11  |     | 1.6820       | 19.06                    | 10.09                   | 29.15                    | 56.00         | -26.85     | QP       |
| 12  |     | 1.6820       | 3.53                     | 10.09                   | 13.62                    | 46.00         | -32.38     | AVG      |

Emission Level= Read Level+ Correct Factor

## 5. Radiated Emission Test

### 5.1 Test Standard and Limit

#### 5.1.1 Test Standard

FCC Part 15.209

#### 5.1.2 Test Limit

**Radiated Emission Limits (9kHz~1000MHz)**

| Frequency (MHz) | Field Strength (microvolt/meter) | Measurement Distance (meters) |
|-----------------|----------------------------------|-------------------------------|
| 0.009~0.490     | 2400/F(KHz)                      | 300                           |
| 0.490~1.705     | 24000/F(KHz)                     | 30                            |
| 1.705~30.0      | 30                               | 30                            |
| 30~88           | 100                              | 3                             |
| 88~216          | 150                              | 3                             |
| 216~960         | 200                              | 3                             |
| Above 960       | 500                              | 3                             |

**Radiated Emission Limit (Above 1000MHz)**


| Frequency (MHz) | Distance Meters (at 3m) |                  |
|-----------------|-------------------------|------------------|
|                 | Peak (dBuV/m)           | Average (dBuV/m) |
| Above 1000      | 74                      | 54               |

**Note:**


- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level(uV/m)




## 5.2 Test Setup

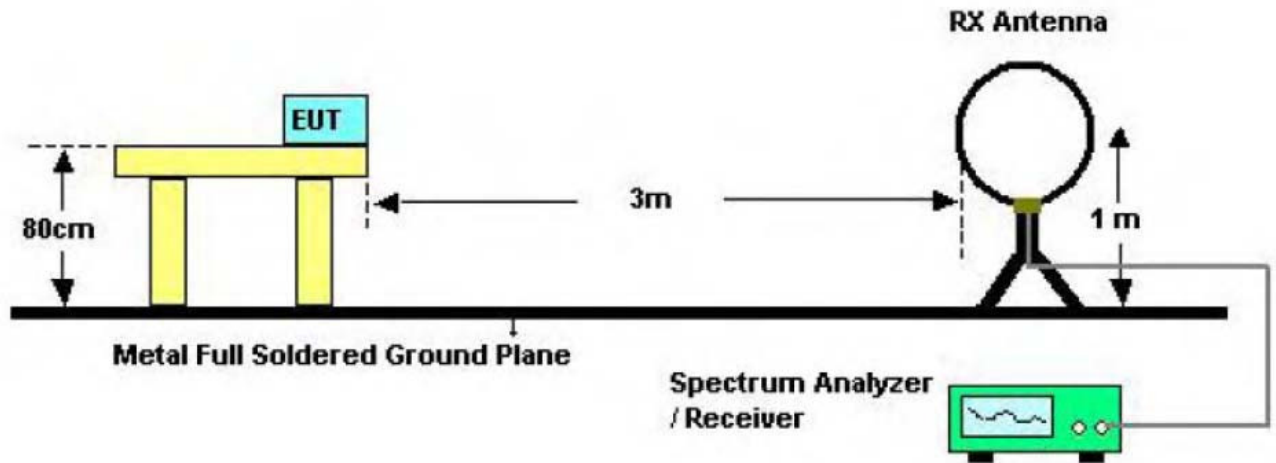

### Below 30MHz Test Setup

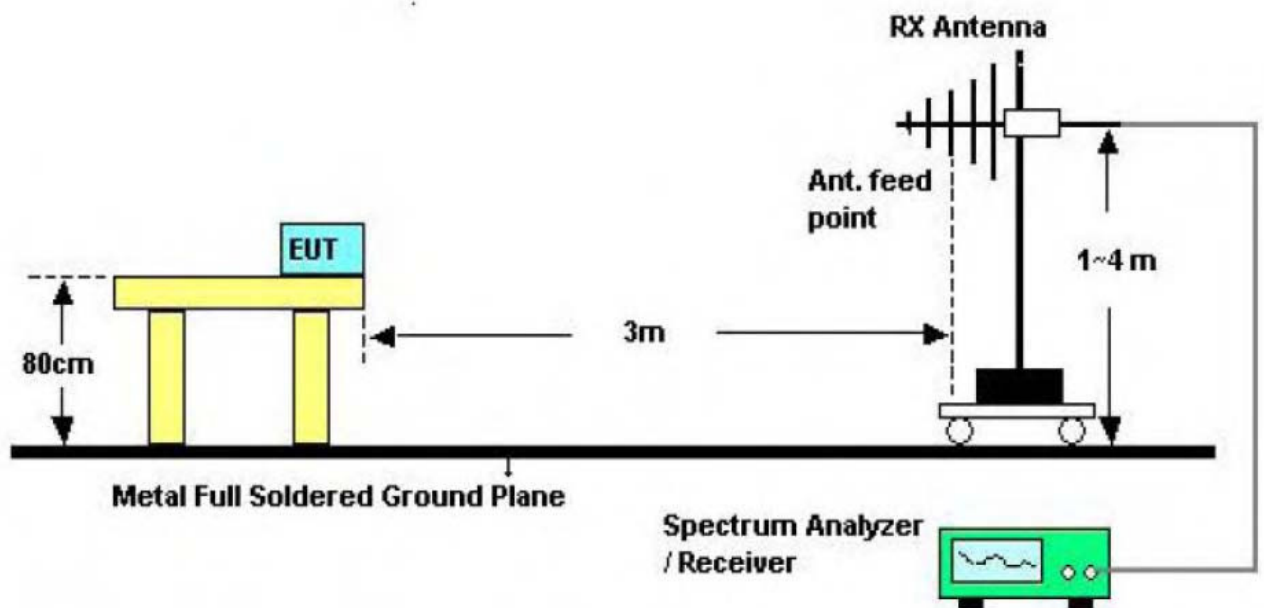

### Below 1000MHz Test Setup

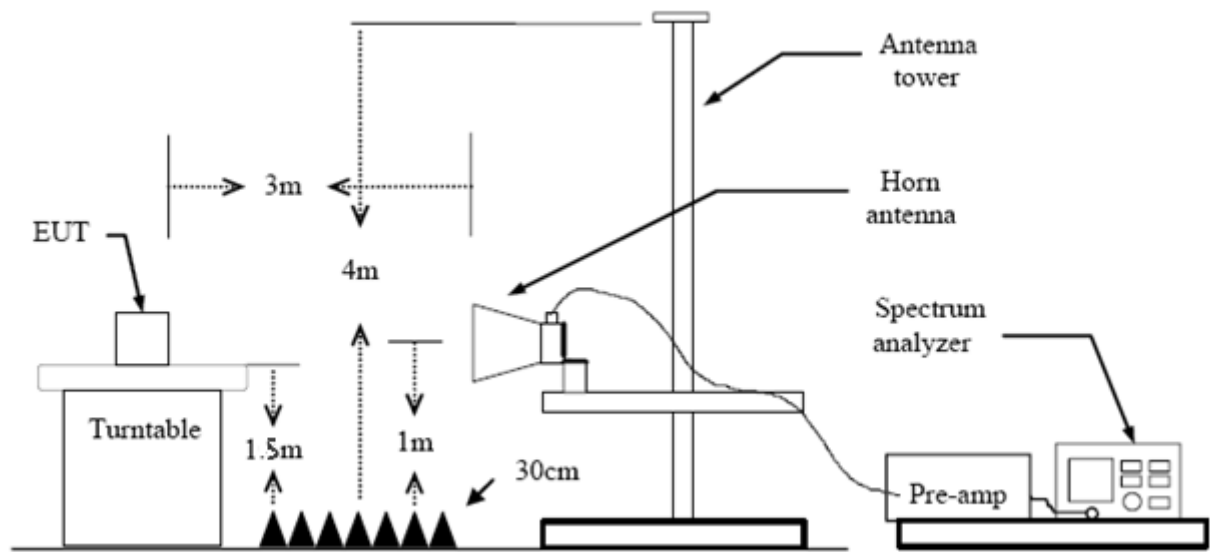

Above 1GHz Test Setup

### 5.3 Test Procedure

- (1) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (3) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (4) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (5) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (6) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (7) For the actual test configuration, please see the test setup photo.

### 5.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.



## 5.5 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Test data please refer the following pages.


**9 KHz~30 MHz**

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**30MHz~1GHz**

|                      |                             |                           |       |
|----------------------|-----------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater         | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                       | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz               |                           |       |
| <b>Ant. Pol.</b>     | Horizontal                  |                           |       |
| <b>Test Mode:</b>    | TX B Mode 2412MHz           |                           |       |
| <b>Remark:</b>       | Only worse case is reported |                           |       |

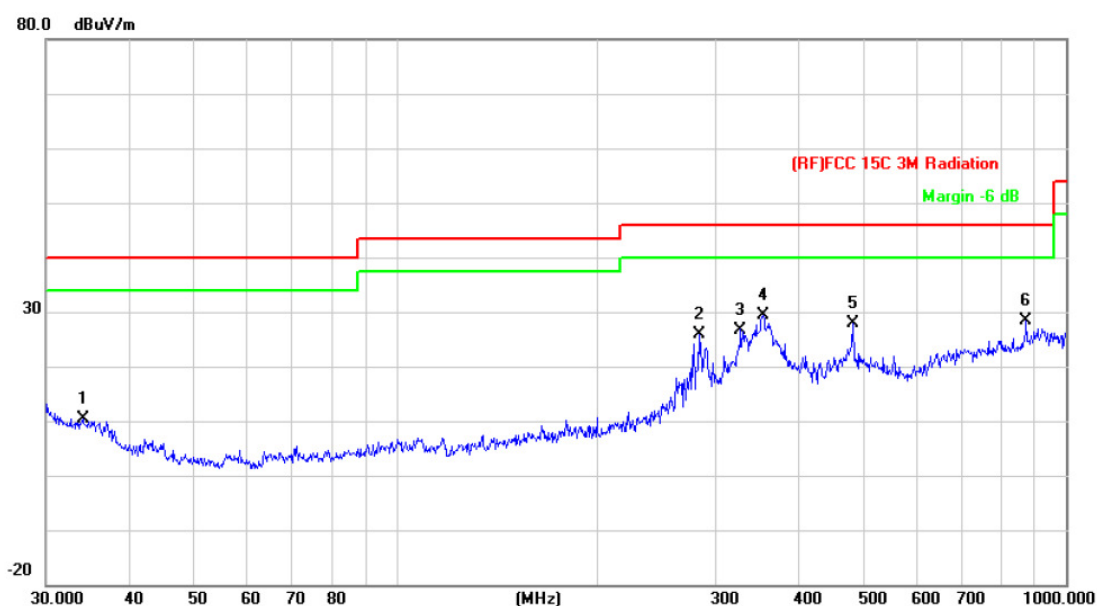


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 34.0365      | 27.06                    | -16.63                    | 10.43                      | 40.00           | -29.57     | QP       |
| 2   |     | 282.9852     | 42.90                    | -16.99                    | 25.91                      | 46.00           | -20.09     | QP       |
| 3   |     | 326.7395     | 42.34                    | -15.59                    | 26.75                      | 46.00           | -19.25     | QP       |
| 4   | *   | 352.9433     | 43.58                    | -14.14                    | 29.44                      | 46.00           | -16.56     | QP       |
| 5   |     | 480.5276     | 39.09                    | -11.13                    | 27.96                      | 46.00           | -18.04     | QP       |
| 6   |     | 872.1832     | 33.12                    | -4.71                     | 28.41                      | 46.00           | -17.59     | QP       |

\*:Maximum data    x:Over limit    !:over margin

**Emission Level= Read Level+ Correct Factor**



|                      |                             |                           |       |
|----------------------|-----------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater         | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                       | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz               |                           |       |
| <b>Ant. Pol.</b>     | Vertical                    |                           |       |
| <b>Test Mode:</b>    | TX B Mode 2412MHz           |                           |       |
| <b>Remark:</b>       | Only worse case is reported |                           |       |

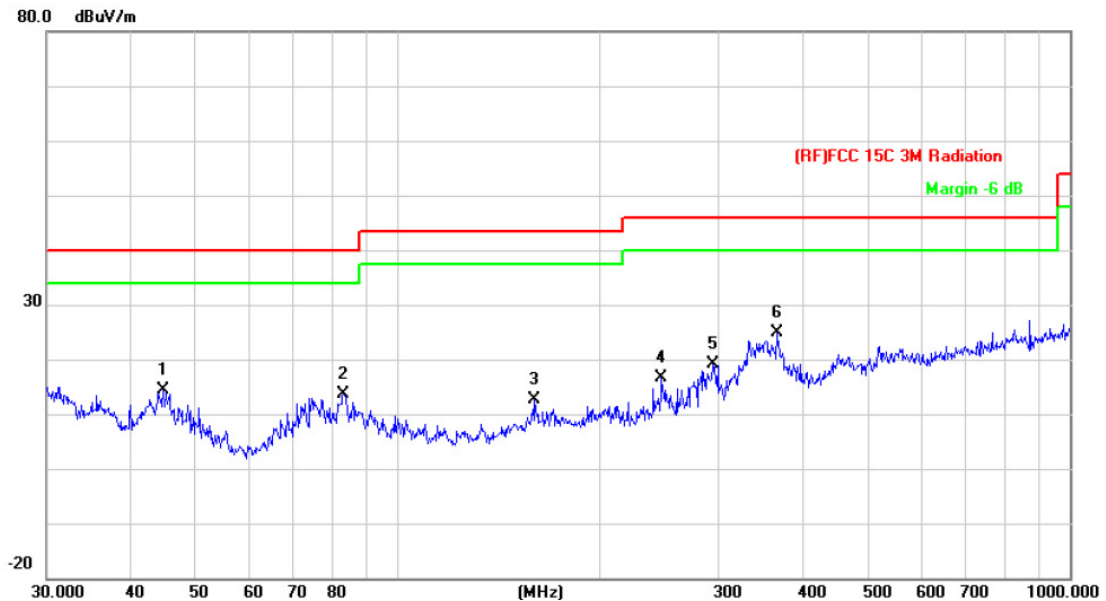


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m       | dBuV/m | dB     | Detector |
| 1   |     | 44.7433  | 36.59         | -22.28         | 14.31        | 40.00  | -25.69 | QP       |
| 2   |     | 82.9385  | 36.83         | -23.16         | 13.67        | 40.00  | -26.33 | QP       |
| 3   |     | 159.7844 | 33.04         | -20.29         | 12.75        | 43.50  | -30.75 | QP       |
| 4   |     | 246.8149 | 34.45         | -17.85         | 16.60        | 46.00  | -29.40 | QP       |
| 5   |     | 294.1137 | 35.87         | -16.77         | 19.10        | 46.00  | -26.90 | QP       |
| 6   | *   | 366.8231 | 39.00         | -14.05         | 24.95        | 46.00  | -21.05 | QP       |

\*:Maximum data    x:Over limit    !:over margin

**Emission Level= Read Level+ Correct Factor**

**Above 1GHz**

|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |       |
| <b>Test Mode:</b>    | TX B Mode 2412MHz ANT a                                                      |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

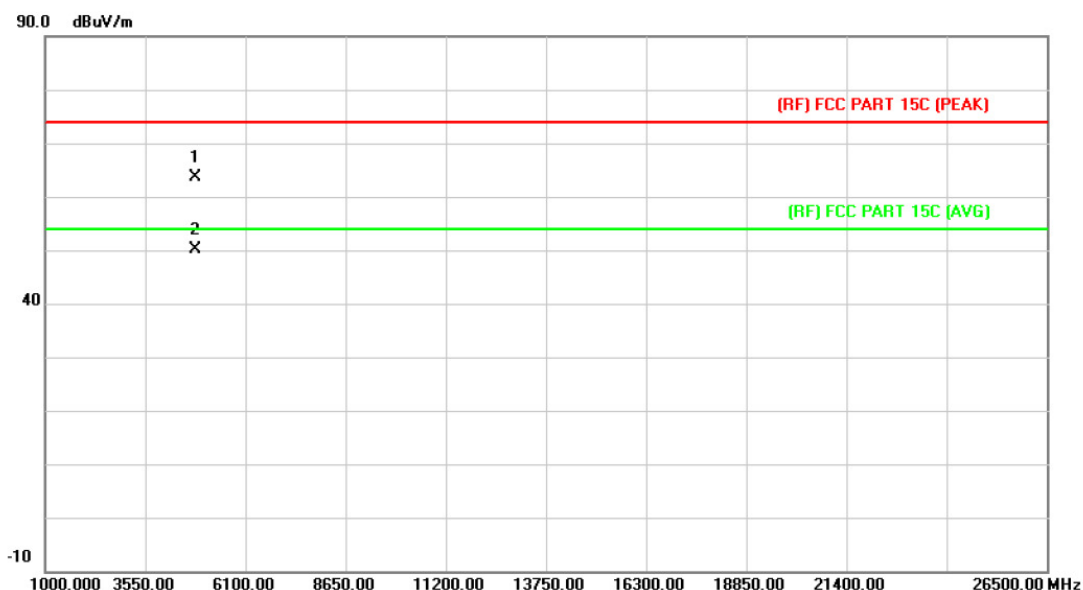


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   |     | 4817.160 | 50.01         | 13.53          | 63.54       | 74.00  | -10.46 | peak     |
| 2   | *   | 4838.760 | 36.60         | 13.64          | 50.24       | 54.00  | -3.76  | AVG      |

**Emission Level= Read Level+ Correct Factor**




|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |       |
| <b>Test Mode:</b>    | TX B Mode 2412MHz ANT a                                                      |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

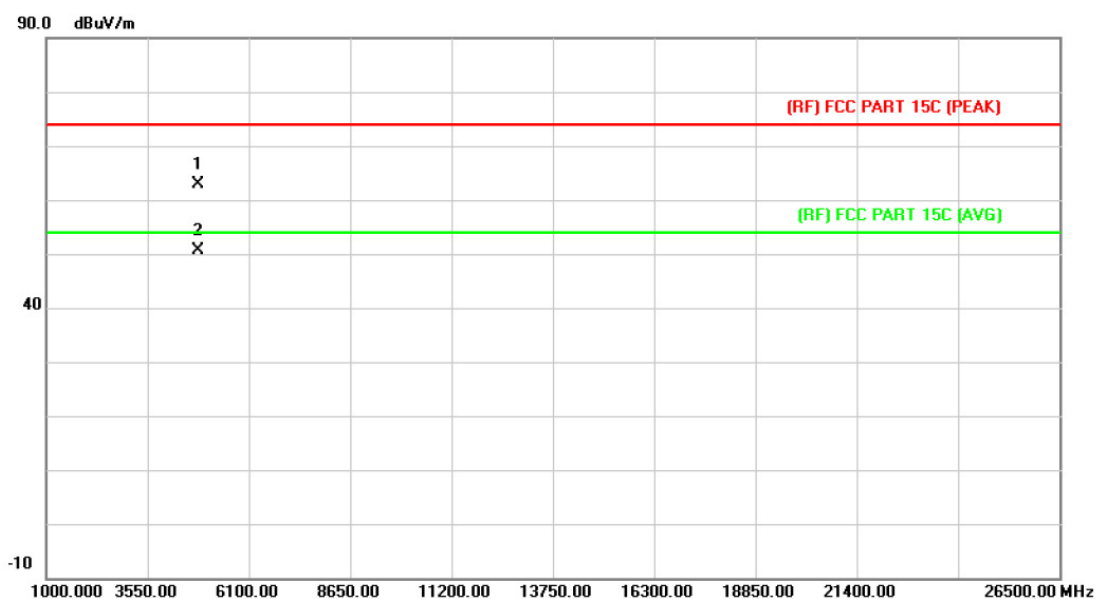

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   |     | 4818.720 | 49.34         | 13.53          | 62.87       | 74.00  | -11.13 | peak     |
| 2   | *   | 4834.000 | 37.07         | 13.62          | 50.69       | 54.00  | -3.31  | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |       |
| <b>Test Mode:</b>    | TX B Mode 2437MHz ANT a                                                      |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

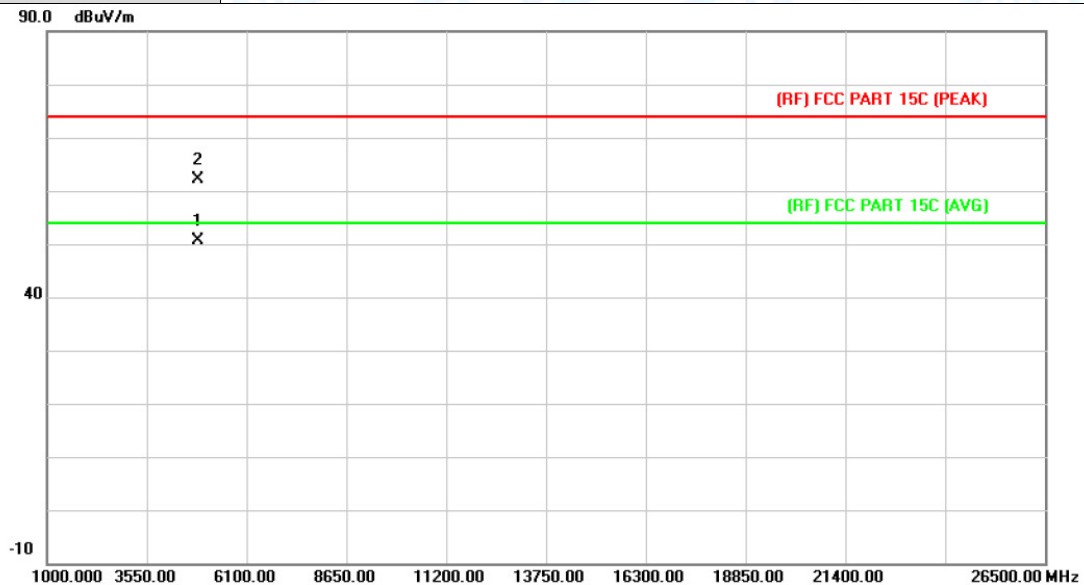


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 4871.860 | 36.85         | 13.84          | 50.69       | 54.00  | -3.31  | AVG      |
| 2   |     | 4872.500 | 48.28         | 13.85          | 62.13       | 74.00  | -11.87 | peak     |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |       |
| <b>Test Mode:</b>    | TX B Mode 2437MHz ANT a                                                      |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

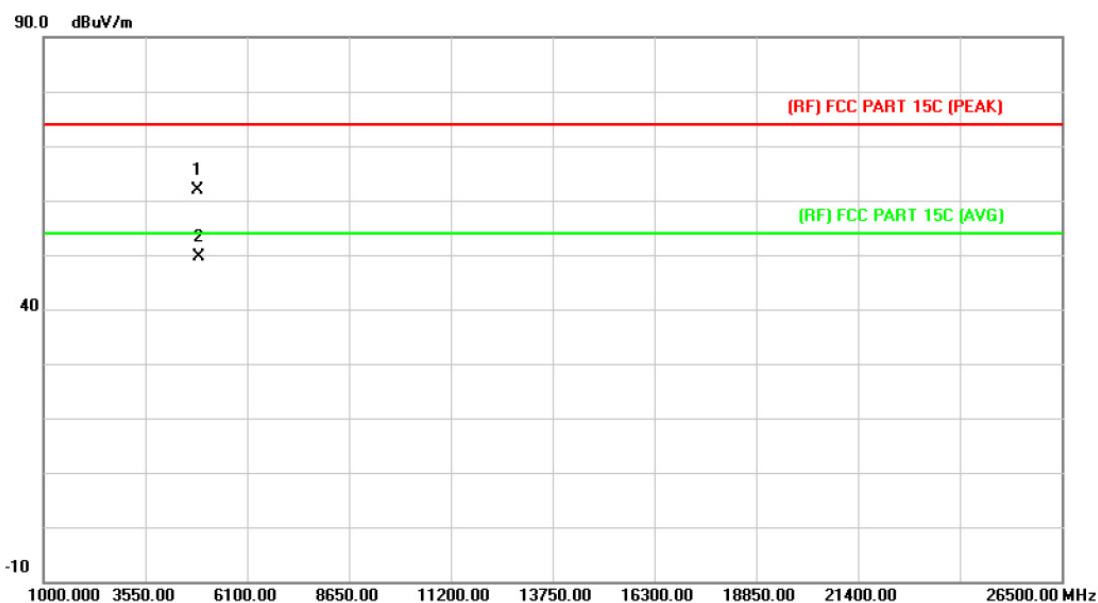

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   |     | 4865.240 | 48.02         | 13.81          | 61.83       | 74.00  | -12.17 | peak     |
| 2   | *   | 4878.040 | 35.80         | 13.88          | 49.68       | 54.00  | -4.32  | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |       |
| <b>Test Mode:</b>    | TX B Mode 2462MHz ANT a                                                      |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

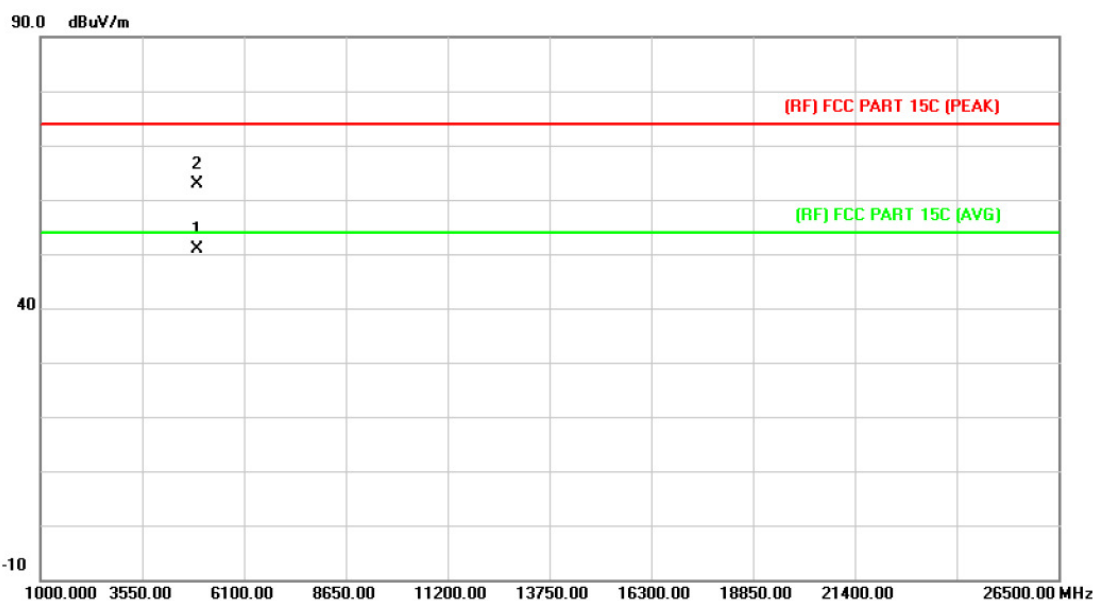


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m       | dBuV/m | dB     | Detector |
| 1   | *   | 4926.580 | 36.83         | 14.16          | 50.99        | 54.00  | -3.01  | AVG      |
| 2   |     | 4928.500 | 48.59         | 14.18          | 62.77        | 74.00  | -11.23 | peak     |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |       |
| <b>Test Mode:</b>    | TX B Mode 2462MHz ANT a                                                      |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

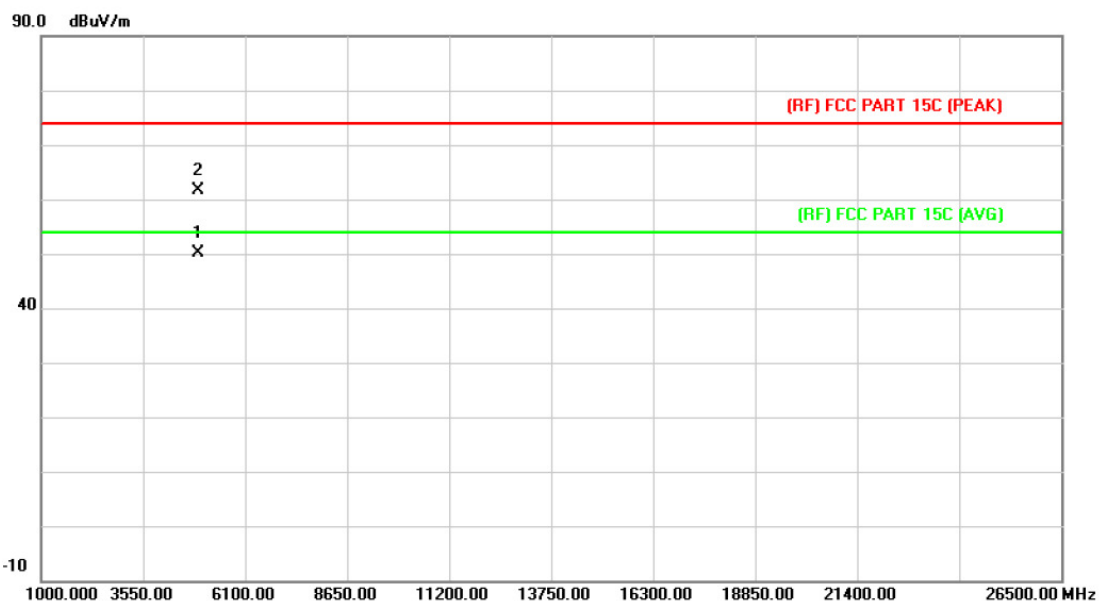

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 4930.960 | 36.05         | 14.19          | 50.24       | 54.00  | -3.76  | AVG      |
| 2   |     | 4933.580 | 47.38         | 14.21          | 61.59       | 74.00  | -12.41 | peak     |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |       |
| <b>Test Mode:</b>    | TX G Mode 2412MHz ANT a                                                      |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

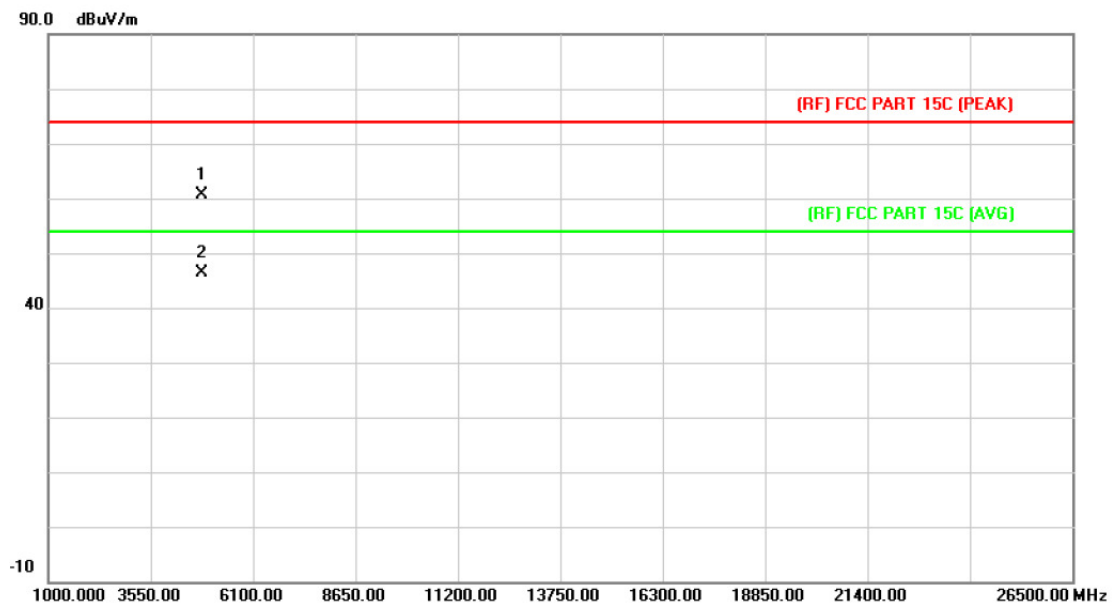


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   |     | 4822.000 | 46.96         | 13.55          | 60.51       | 74.00  | -13.49 | peak     |
| 2   | *   | 4831.340 | 32.73         | 13.61          | 46.34       | 54.00  | -7.66  | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |       |
| <b>Test Mode:</b>    | TX G Mode 2412MHz ANT a                                                      |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

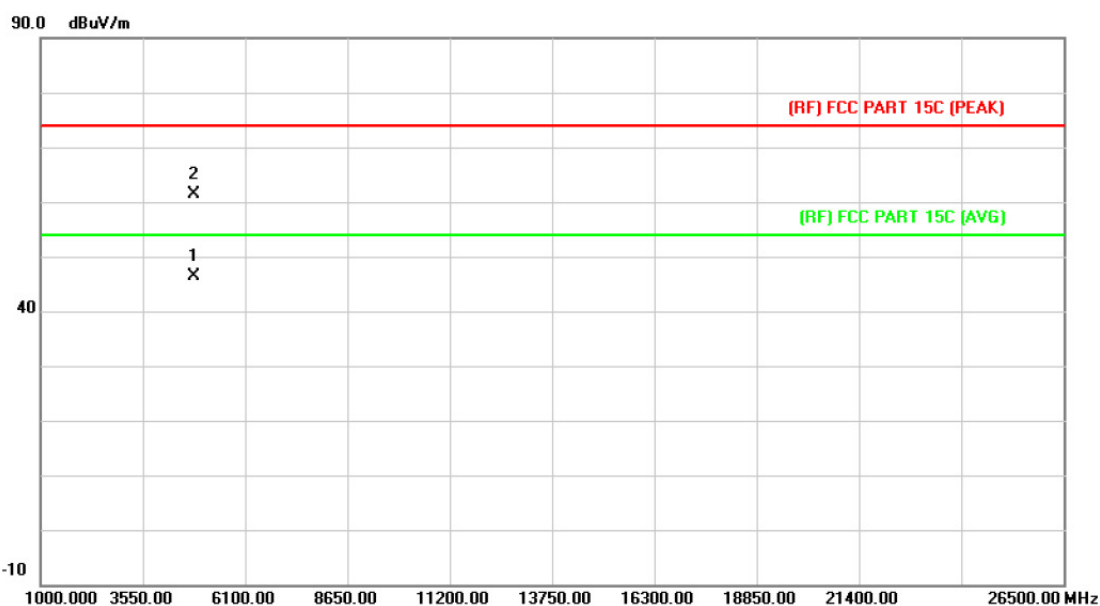

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m       | dBuV/m | dB     | Detector |
| 1   | *   | 4831.940 | 32.72         | 13.61          | 46.33        | 54.00  | -7.67  | AVG      |
| 2   |     | 4834.000 | 47.72         | 13.62          | 61.34        | 74.00  | -12.66 | peak     |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |       |
| <b>Test Mode:</b>    | TX G Mode 2437MHz ANT a                                                      |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

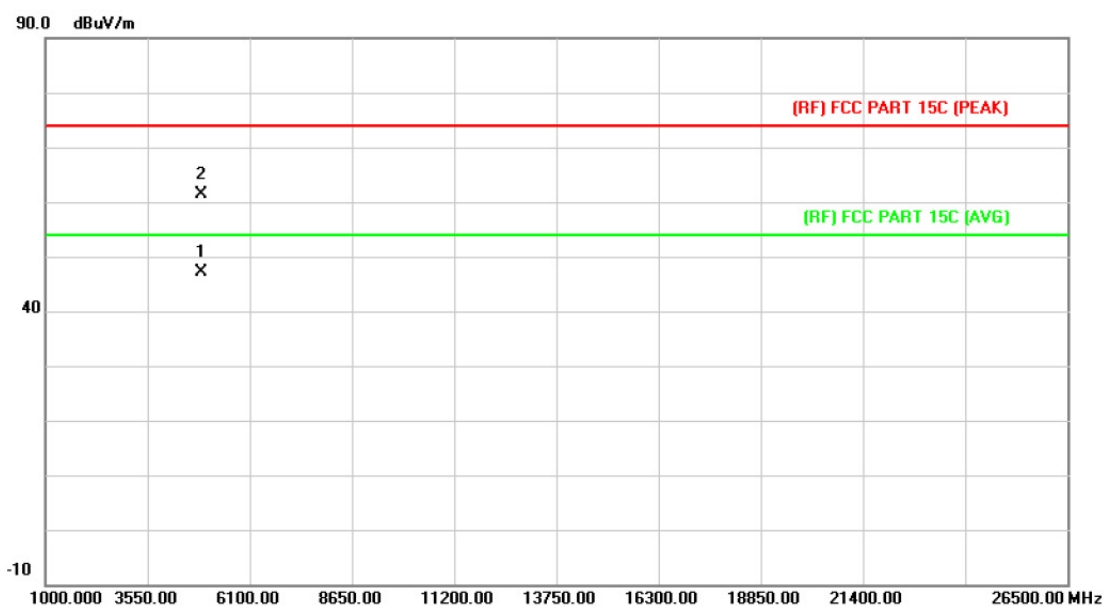


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 4879.260 | 33.20         | 13.89          | 47.09       | 54.00  | -6.91  | AVG      |
| 2   |     | 4883.420 | 47.36         | 13.92          | 61.28       | 74.00  | -12.72 | peak     |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |       |
| <b>Test Mode:</b>    | TX G Mode 2437MHz ANT a                                                      |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

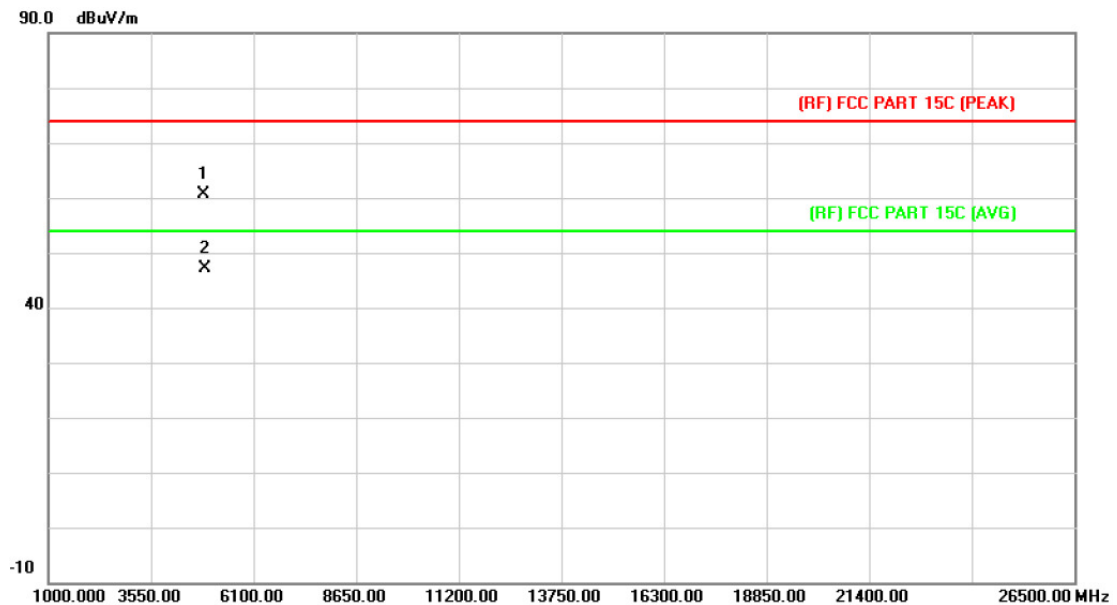

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m       | dBuV/m | dB     | Detector |
| 1   |     | 4865.920 | 46.84         | 13.81          | 60.65        | 74.00  | -13.35 | peak     |
| 2   | *   | 4881.040 | 33.15         | 13.90          | 47.05        | 54.00  | -6.95  | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |       |
| <b>Test Mode:</b>    | TX G Mode 2462MHz ANT a                                                      |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

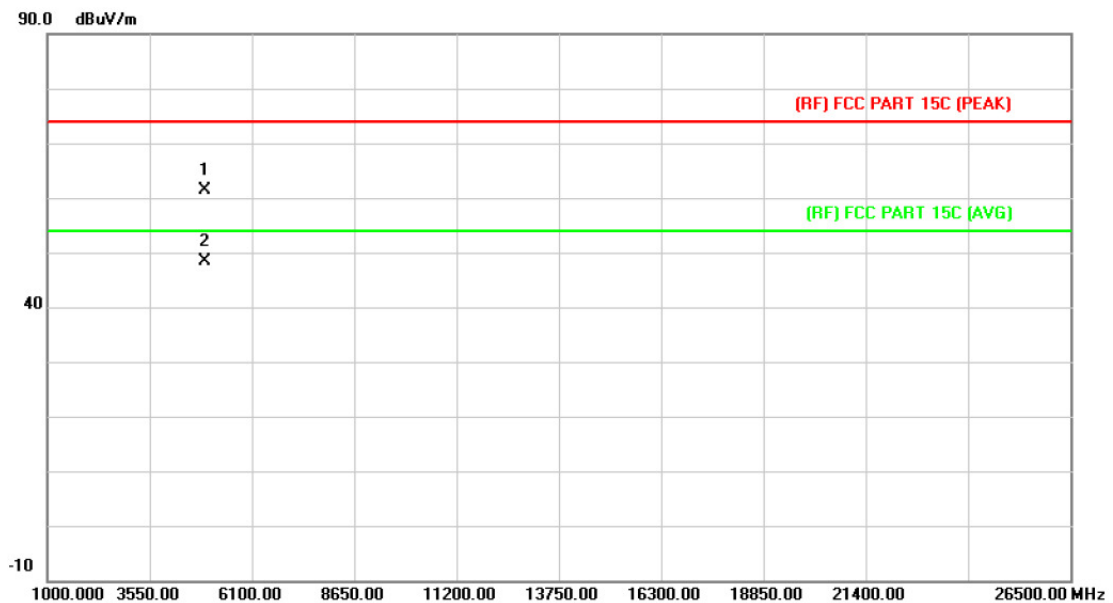


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 4916.640     | 47.35                    | 14.10                     | 61.45                      | 74.00           | -12.55     | peak     |
| 2   | *   | 4922.780     | 34.15                    | 14.14                     | 48.29                      | 54.00           | -5.71      | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |       |
| <b>Test Mode:</b>    | TX G Mode 2462MHz ANT a                                                      |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

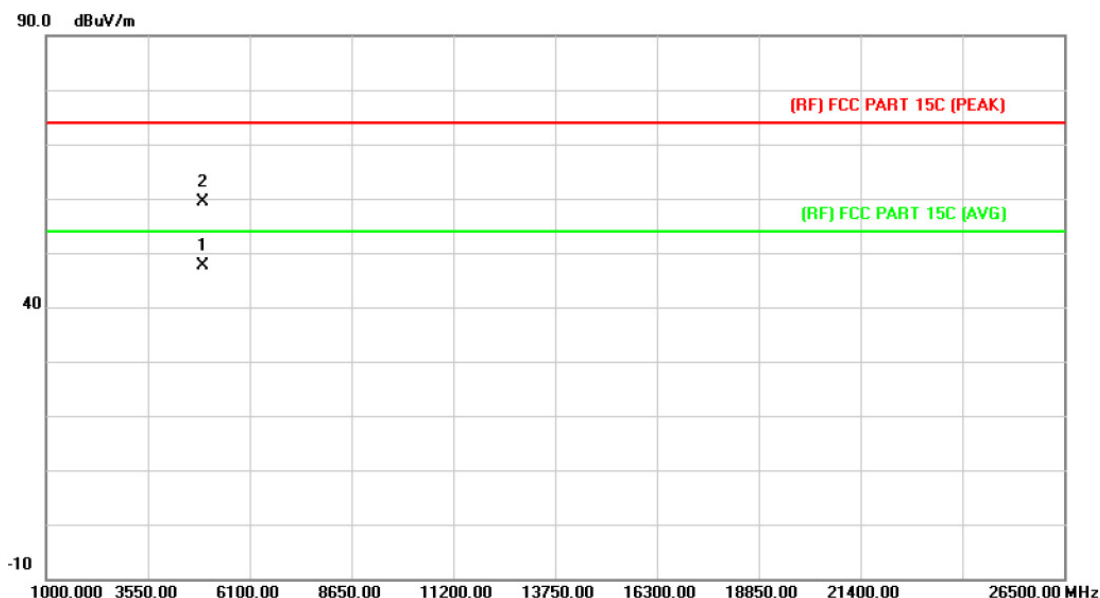

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 4922.520 | 33.57         | 14.14          | 47.71       | 54.00  | -6.29  | AVG      |
| 2   |     | 4924.480 | 45.18         | 14.15          | 59.33       | 74.00  | -14.67 | peak     |

**Emission Level= Read Level+ Correct Factor**

|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |       |
| <b>Test Mode:</b>    | TX N(HT20) Mode 2412MHz ANT a+b                                              |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

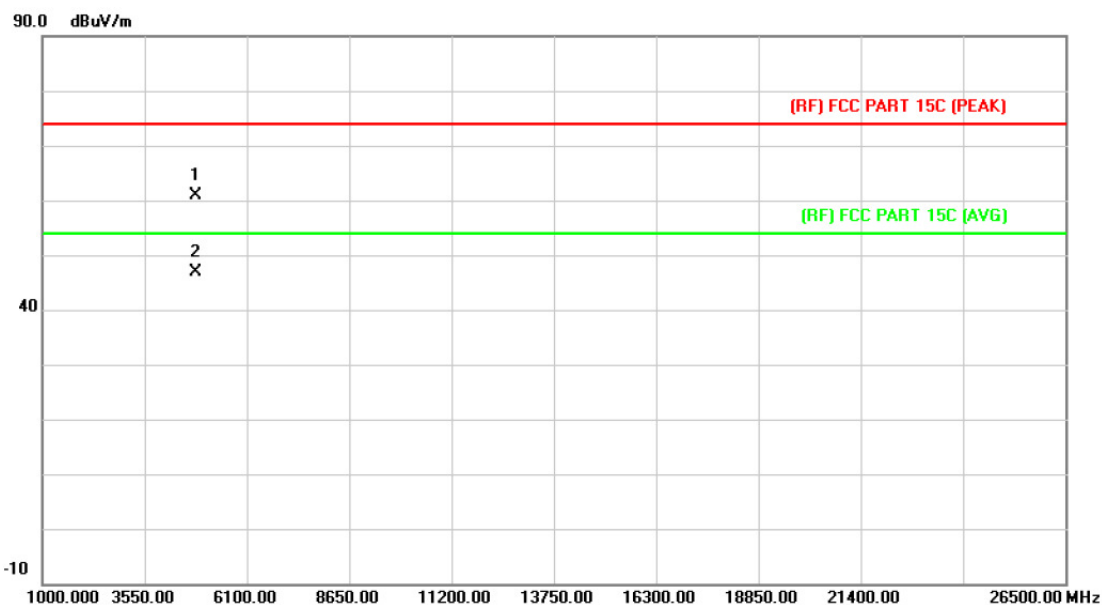


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   |     | 4830.260 | 47.25         | 13.60          | 60.85       | 74.00  | -13.15 | peak     |
| 2   | *   | 4832.360 | 33.30         | 13.61          | 46.91       | 54.00  | -7.09  | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |       |
| <b>Test Mode:</b>    | TX N(HT20) Mode 2412MHz ANT a+b                                              |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

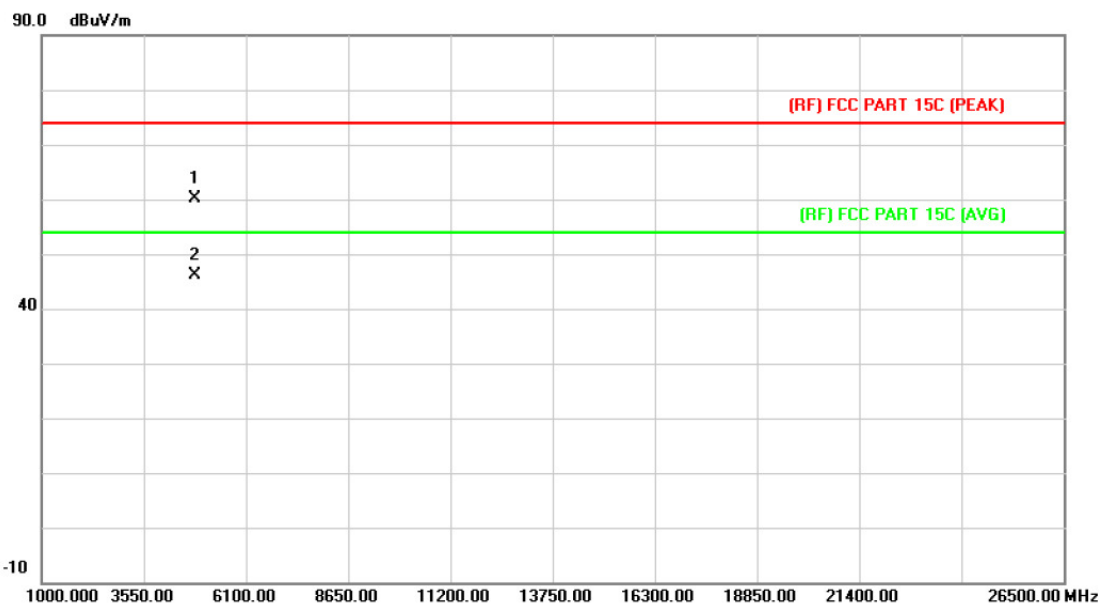

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   |     | 4816.200 | 46.55         | 13.51          | 60.06       | 74.00  | -13.94 | peak     |
| 2   | *   | 4822.180 | 32.59         | 13.55          | 46.14       | 54.00  | -7.86  | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |       |
| <b>Test Mode:</b>    | TX N(HT20) Mode 2437MHz ANT a+b                                              |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

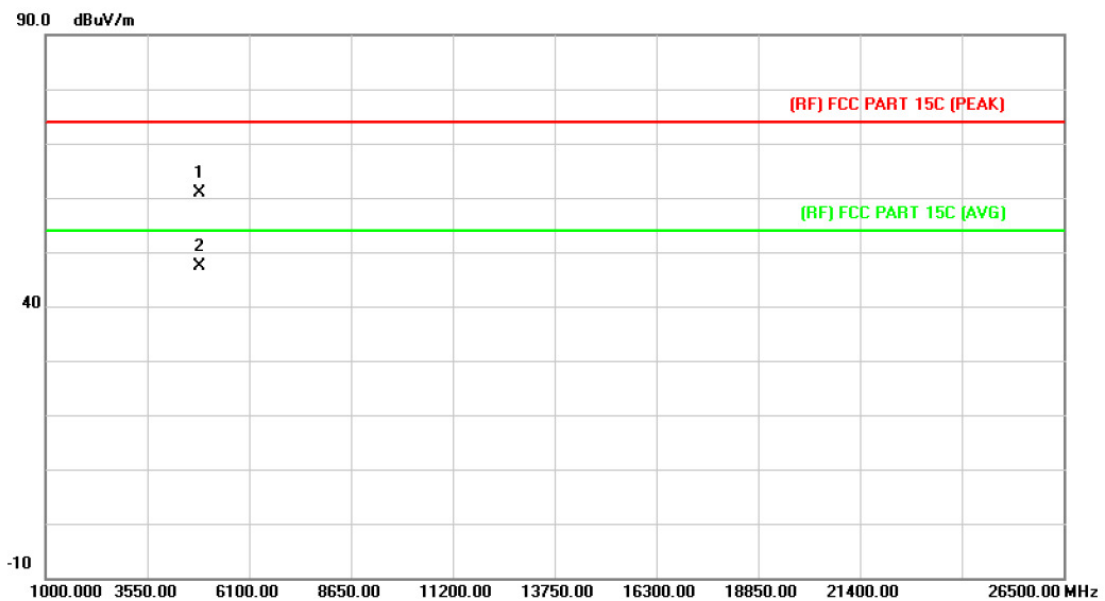


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m       | dBuV/m | dB     | Detector |
| 1   |     | 4864.500 | 47.13         | 13.80          | 60.93        | 74.00  | -13.07 | peak     |
| 2   | *   | 4869.540 | 33.48         | 13.83          | 47.31        | 54.00  | -6.69  | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |       |
| <b>Test Mode:</b>    | TX N(HT20) Mode 2437MHz ANT a+b                                              |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

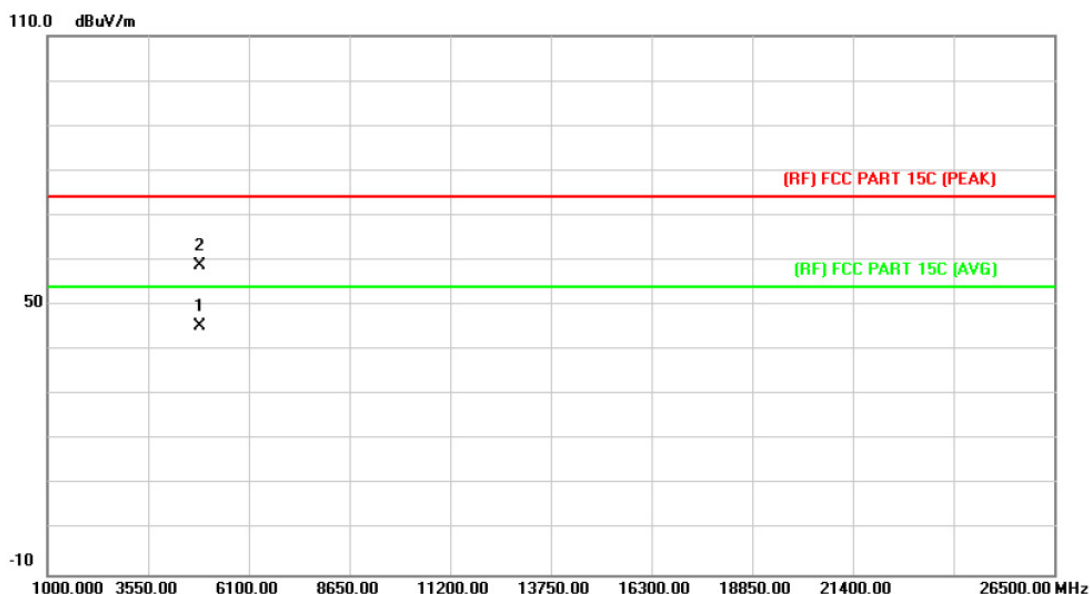

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 4874.258 | 31.43         | 13.86          | 45.29       | 54.00  | -8.71  | AVG      |
| 2   |     | 4875.163 | 45.09         | 13.87          | 58.96       | 74.00  | -15.04 | peak     |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |       |
| <b>Test Mode:</b>    | TX N(HT20) Mode 2462MHz ANT a+b                                              |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

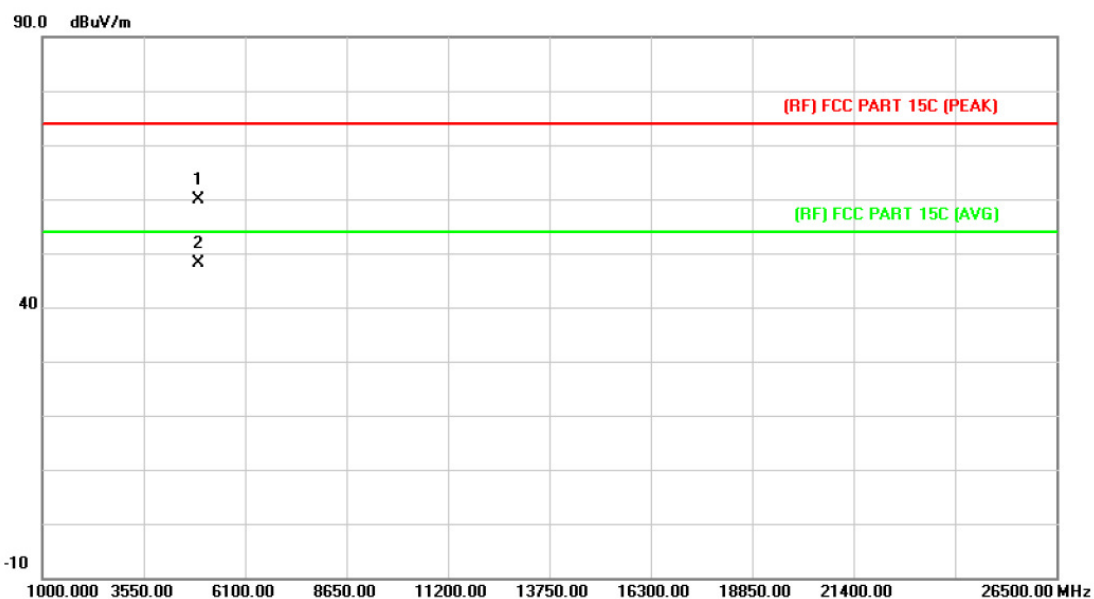


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   |     | 4923.680 | 45.69         | 14.15          | 59.84       | 74.00  | -14.16 | peak     |
| 2   | *   | 4926.560 | 33.86         | 14.16          | 48.02       | 54.00  | -5.98  | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |       |
| <b>Test Mode:</b>    | TX N(HT20) Mode 2462MHz ANT a+b                                              |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

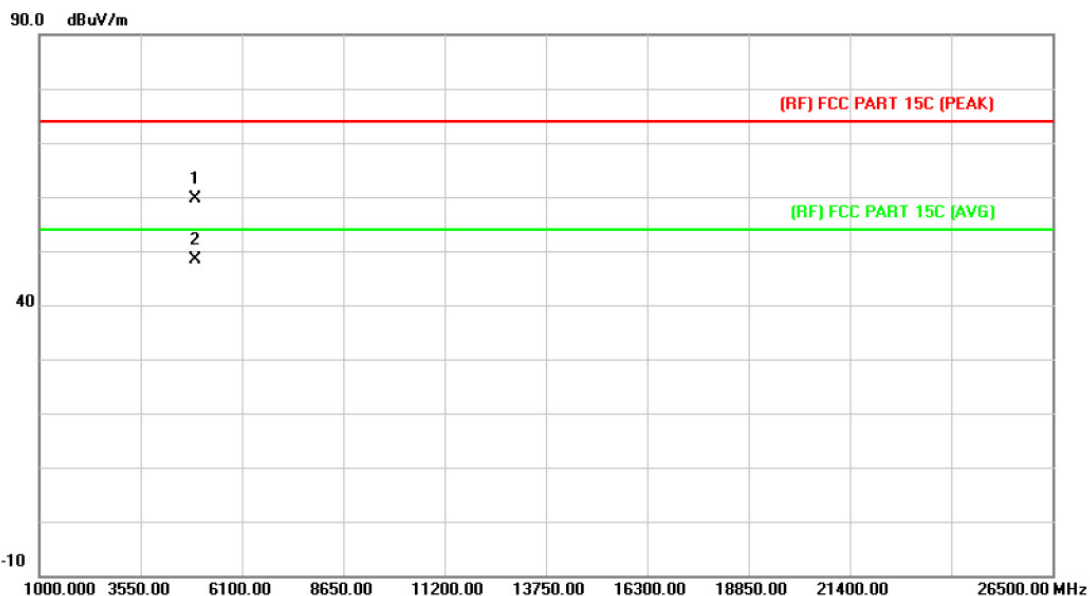

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   |     | 4921.920 | 45.38         | 14.14          | 59.52       | 74.00  | -14.48 | peak     |
| 2   | *   | 4929.100 | 34.08         | 14.19          | 48.27       | 54.00  | -5.73  | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |       |
| <b>Test Mode:</b>    | TX N(HT40) Mode 2422MHz ANT a+b                                              |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

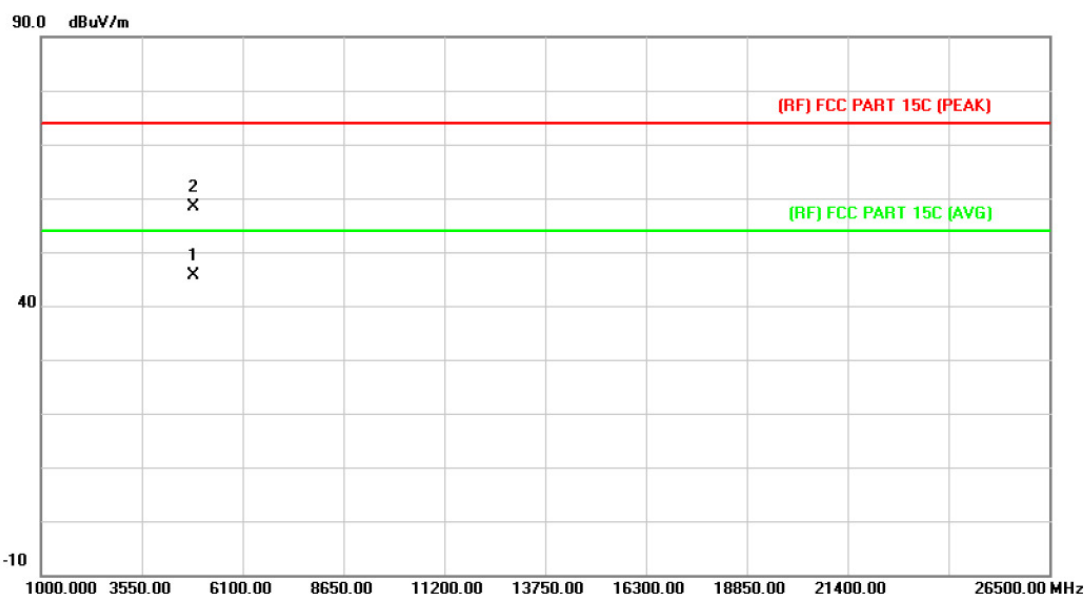


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 4846.352 | 31.99         | 13.69          | 45.68       | 54.00  | -8.32  | AVG      |
| 2   |     | 4848.362 | 44.62         | 13.70          | 58.32       | 74.00  | -15.68 | peak     |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |       |
| <b>Test Mode:</b>    | TX N(HT40) Mode 2422MHz ANT a+b                                              |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

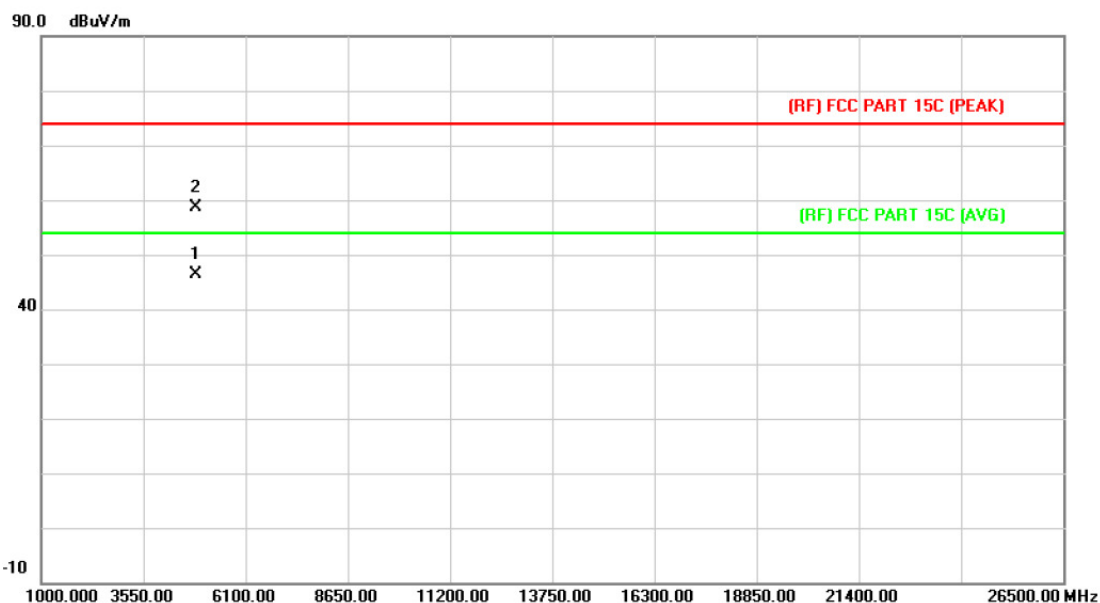

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 4845.870 | 32.63         | 13.69          | 46.32       | 54.00  | -7.68  | AVG      |
| 2   |     | 4846.360 | 44.98         | 13.69          | 58.67       | 74.00  | -15.33 | peak     |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |       |
| <b>Test Mode:</b>    | TX N(HT40) Mode 2437MHz ANT a+b                                              |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

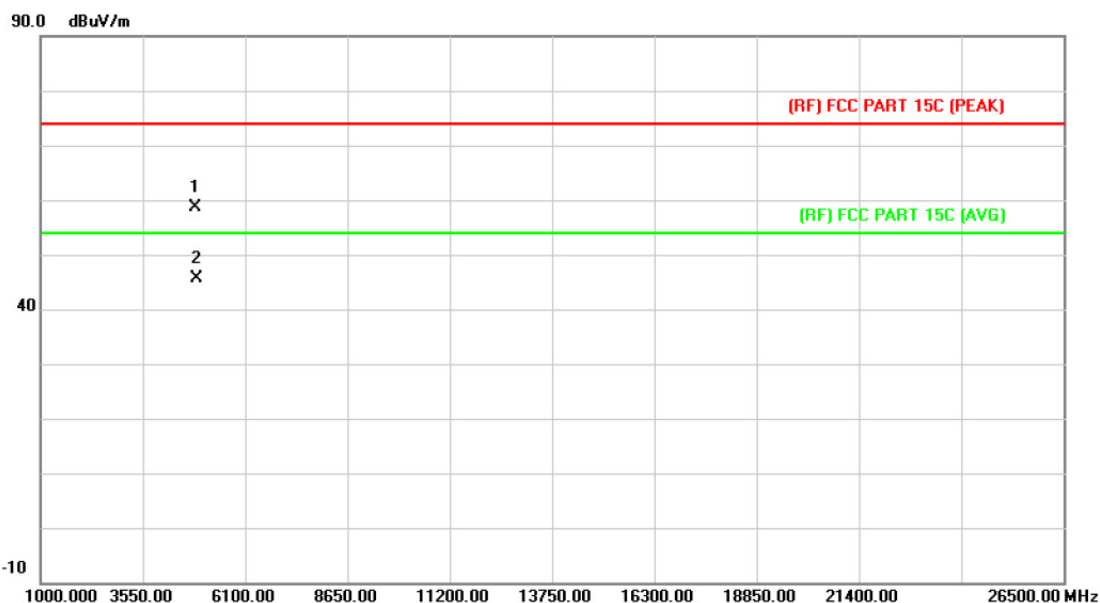


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   |     | 4874.660 | 44.76         | 13.86          | 58.62       | 74.00  | -15.38 | peak     |
| 2   | *   | 4876.520 | 31.81         | 13.87          | 45.68       | 54.00  | -8.32  | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |       |
| <b>Test Mode:</b>    | TX N(HT40) Mode 2437MHz ANT a+b                                              |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

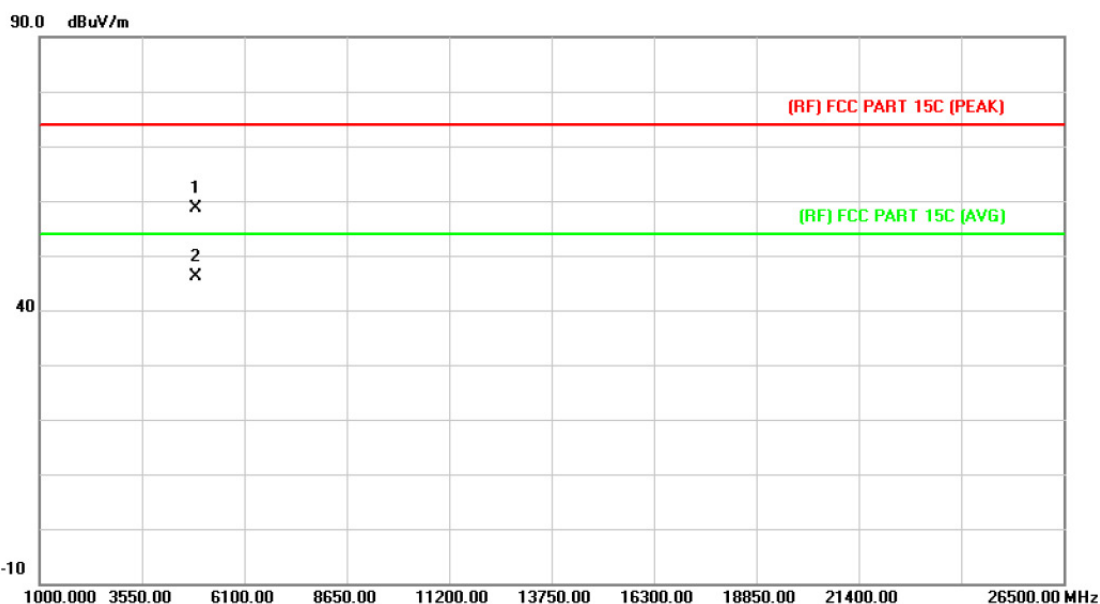

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m       | dBuV/m | dB     | Detector |
| 1   |     | 4878.320 | 44.79         | 13.88          | 58.67        | 74.00  | -15.33 | peak     |
| 2   | *   | 4876.520 | 32.34         | 13.87          | 46.21        | 54.00  | -7.79  | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |       |
| <b>Test Mode:</b>    | TX N(HT40) Mode 2452MHz ANT a+b                                              |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

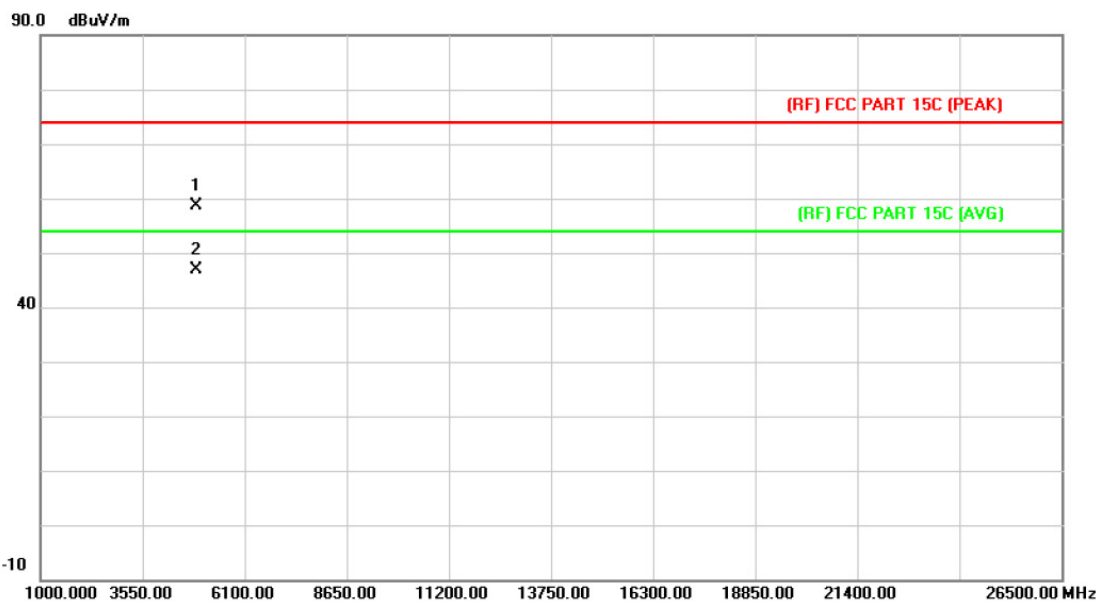


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   |     | 4905.250 | 44.60         | 14.04          | 58.64       | 74.00  | -15.36 | peak     |
| 2   | *   | 4906.541 | 32.82         | 14.05          | 46.87       | 54.00  | -7.13  | AVG      |

Emission Level= Read Level+ Correct Factor



|                      |                                                                              |                           |       |
|----------------------|------------------------------------------------------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater                                                          | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                                                                        | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                                                                |                           |       |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |       |
| <b>Test Mode:</b>    | TX N(HT40) Mode 2452MHz ANT a+b                                              |                           |       |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |       |

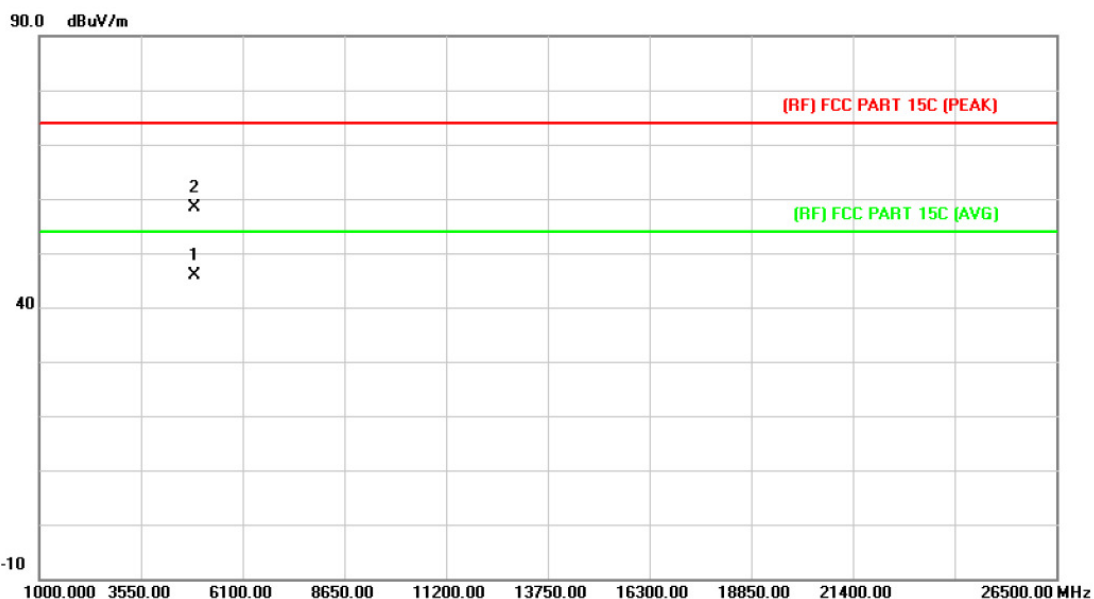

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 4906.548 | 31.93         | 14.05          | 45.98       | 54.00  | -8.02  | AVG      |
| 2   |     | 4907.652 | 44.29         | 14.06          | 58.35       | 74.00  | -15.65 | peak     |

Emission Level= Read Level+ Correct Factor

## 6. Restricted Bands Requirement

### 6.1 Test Standard and Limit


#### 6.1.1 Test Standard

FCC Part 15.209 FCC Part 15.205

#### 6.1.2 Test Limit

| Restricted Frequency<br>Band<br>(MHz) | Distance Meters (at 3m) |                     |
|---------------------------------------|-------------------------|---------------------|
|                                       | Peak<br>(dBuV/m)        | Average<br>(dBuV/m) |
| 2310 ~2390                            | 74                      | 54                  |
| 2483.5 ~2500                          | 74                      | 54                  |

### 6.2 Test Setup

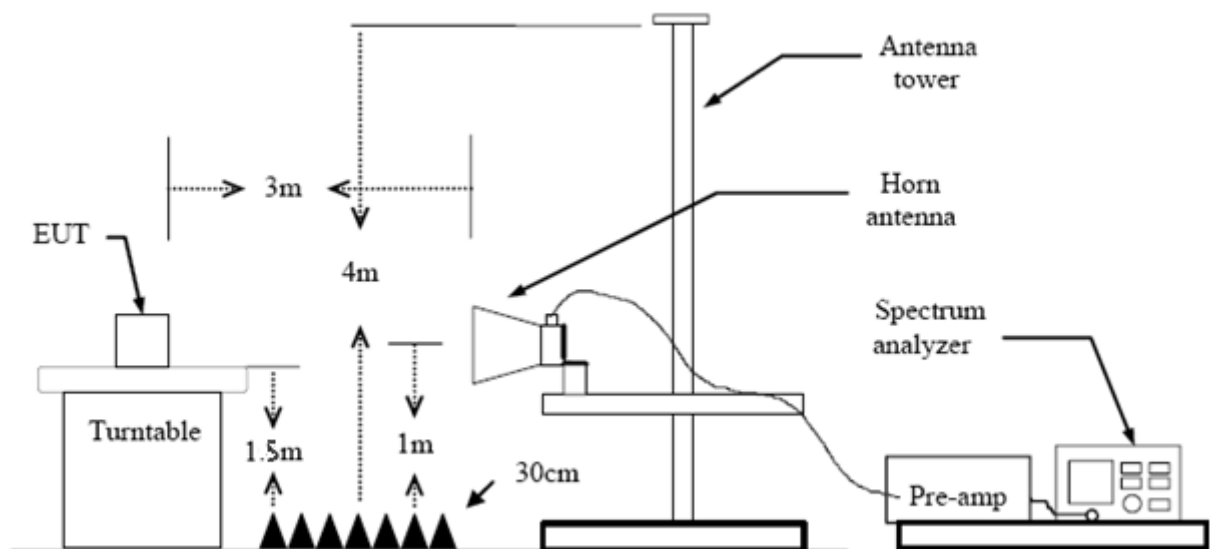

### 6.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are



set to make measurement.

- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

#### 6.4 EUT Operating Condition


The Equipment Under Test was set to Continual Transmitting in maximum power.

#### 6.5 Test Data

Please see the next page.

(1) Radiation Test

|               |                         |                    |       |
|---------------|-------------------------|--------------------|-------|
| EUT:          | omimo WIFI Repeater     | Model:             | RP-R1 |
| Temperature:  | 25 °C                   | Relative Humidity: | 55%   |
| Test Voltage: | AC 120V/60 Hz           |                    |       |
| Ant. Pol.     | Horizontal              |                    |       |
| Test Mode:    | TX B Mode 2412MHz ANT a |                    |       |
| Remark:       | N/A                     |                    |       |

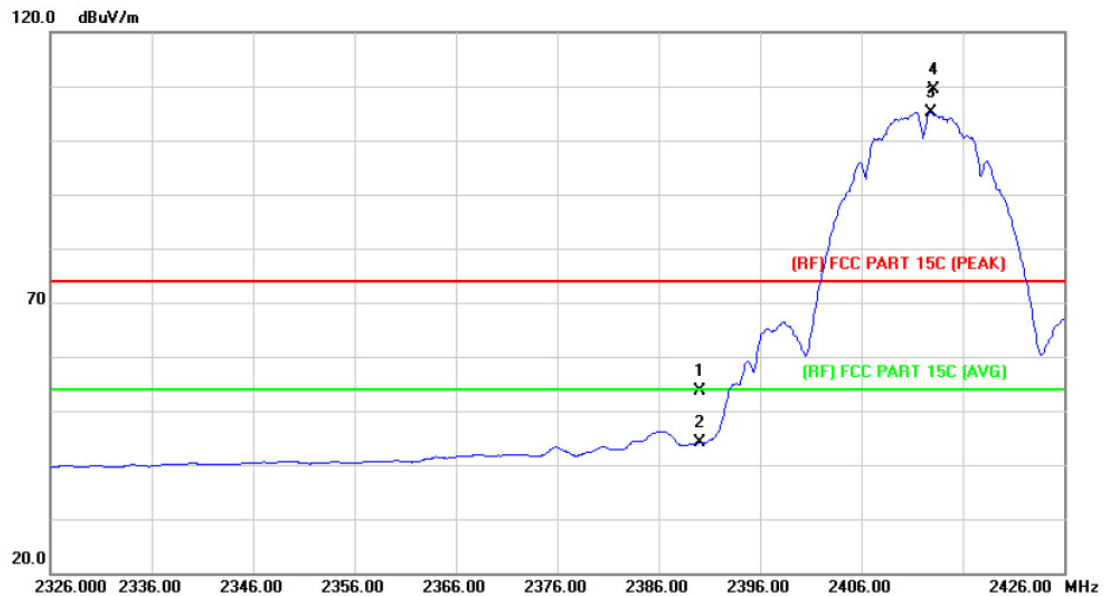


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                 | Over        |
|-----|-----|----------|---------------|----------------|-------------|-----------------------|-------------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                | dB Detector |
| 1   |     | 2390.000 | 52.97         | 0.77           | 53.74       | 74.00                 | -20.26 peak |
| 2   |     | 2390.000 | 43.25         | 0.77           | 44.02       | 54.00                 | -9.98 AVG   |
| 3   | *   | 2412.800 | 104.37        | 0.86           | 105.23      | Fundamental Frequency | AVG         |
| 4   | X   | 2413.200 | 108.54        | 0.86           | 109.40      | Fundamental Frequency | peak        |

Emission Level= Read Level+ Correct Factor




|                      |                         |                           |       |
|----------------------|-------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater     | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                   | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz           |                           |       |
| <b>Ant. Pol.</b>     | Vertical                |                           |       |
| <b>Test Mode:</b>    | TX B Mode 2412MHz ANT a |                           |       |
| <b>Remark:</b>       | N/A                     |                           |       |

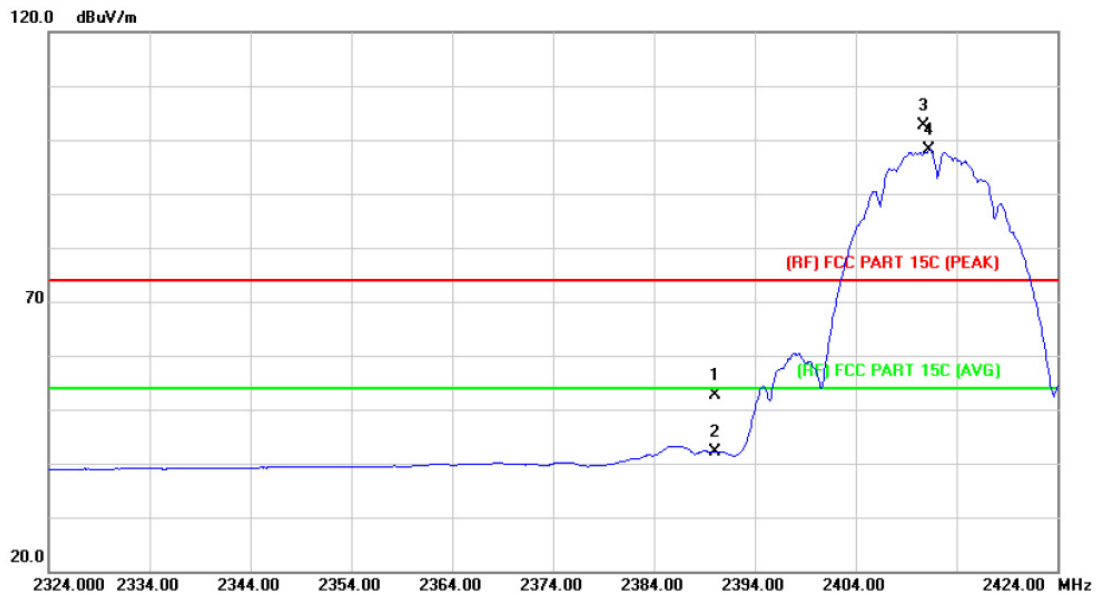

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   |     | 2390.000     | 51.83                    | 0.77                      | 52.60                      | 74.00                 | -21.40     | peak     |
| 2   |     | 2390.000     | 41.31                    | 0.77                      | 42.08                      | 54.00                 | -11.92     | AVG      |
| 3   | X   | 2410.700     | 101.87                   | 0.86                      | 102.73                     | Fundamental Frequency |            | peak     |
| 4   | *   | 2411.300     | 97.28                    | 0.86                      | 98.14                      | Fundamental Frequency |            | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                         |                           |       |
|----------------------|-------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater     | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                   | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz           |                           |       |
| <b>Ant. Pol.</b>     | Horizontal              |                           |       |
| <b>Test Mode:</b>    | TX B Mode 2462MHz ANT a |                           |       |
| <b>Remark:</b>       | N/A                     |                           |       |

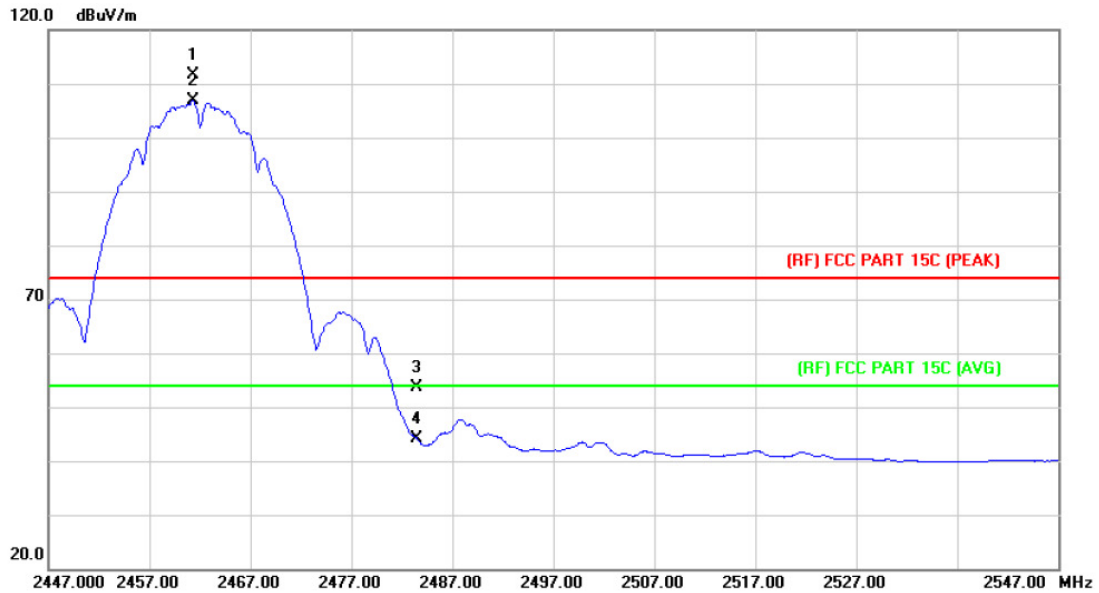


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                 | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|-----------------------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                | dB     | Detector |
| 1   | X   | 2461.300 | 110.46        | 1.07           | 111.53      | Fundamental Frequency |        | peak     |
| 2   | *   | 2461.300 | 105.69        | 1.07           | 106.76      | Fundamental Frequency |        | AVG      |
| 3   |     | 2483.500 | 52.48         | 1.17           | 53.65       | 74.00                 | -20.35 | peak     |
| 4   |     | 2483.500 | 42.94         | 1.17           | 44.11       | 54.00                 | -9.89  | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                         |                           |       |
|----------------------|-------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater     | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                   | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz           |                           |       |
| <b>Ant. Pol.</b>     | Vertical                |                           |       |
| <b>Test Mode:</b>    | TX B Mode 2462MHz ANT a |                           |       |
| <b>Remark:</b>       | N/A                     |                           |       |

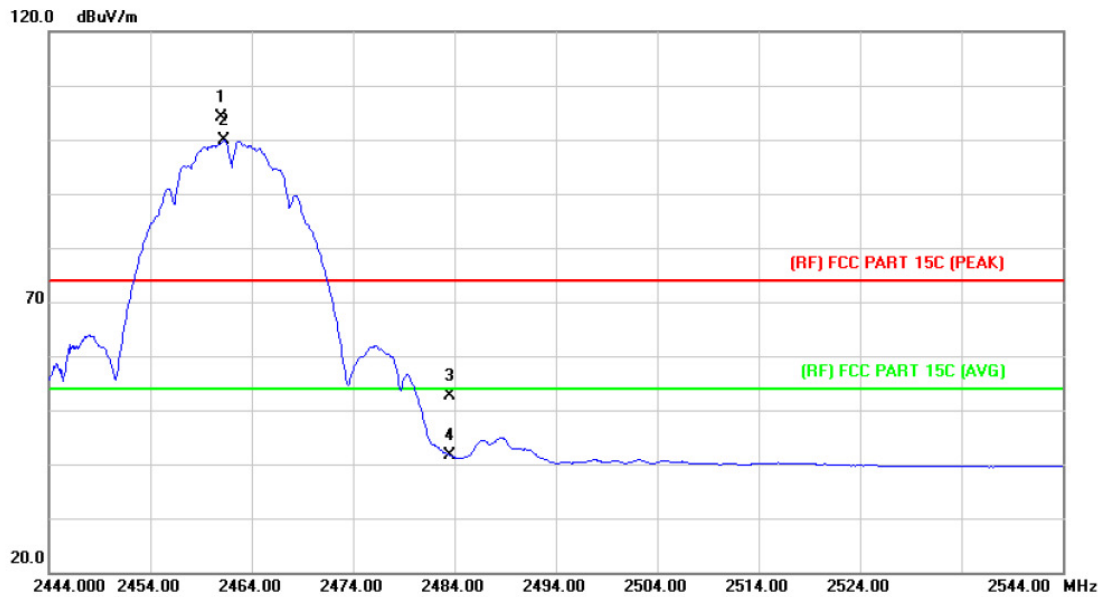

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   | X   | 2461.000     | 103.13                   | 1.06                      | 104.19                     | Fundamental Frequency |            | peak     |
| 2   | *   | 2461.300     | 98.78                    | 1.07                      | 99.85                      | Fundamental Frequency |            | AVG      |
| 3   |     | 2483.500     | 51.50                    | 1.17                      | 52.67                      | 74.00                 | -21.33     | peak     |
| 4   |     | 2483.500     | 40.53                    | 1.17                      | 41.70                      | 54.00                 | -12.30     | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                         |                           |       |
|----------------------|-------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater     | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                   | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz           |                           |       |
| <b>Ant. Pol.</b>     | Horizontal              |                           |       |
| <b>Test Mode:</b>    | TX G Mode 2412MHz ANT a |                           |       |
| <b>Remark:</b>       | N/A                     |                           |       |

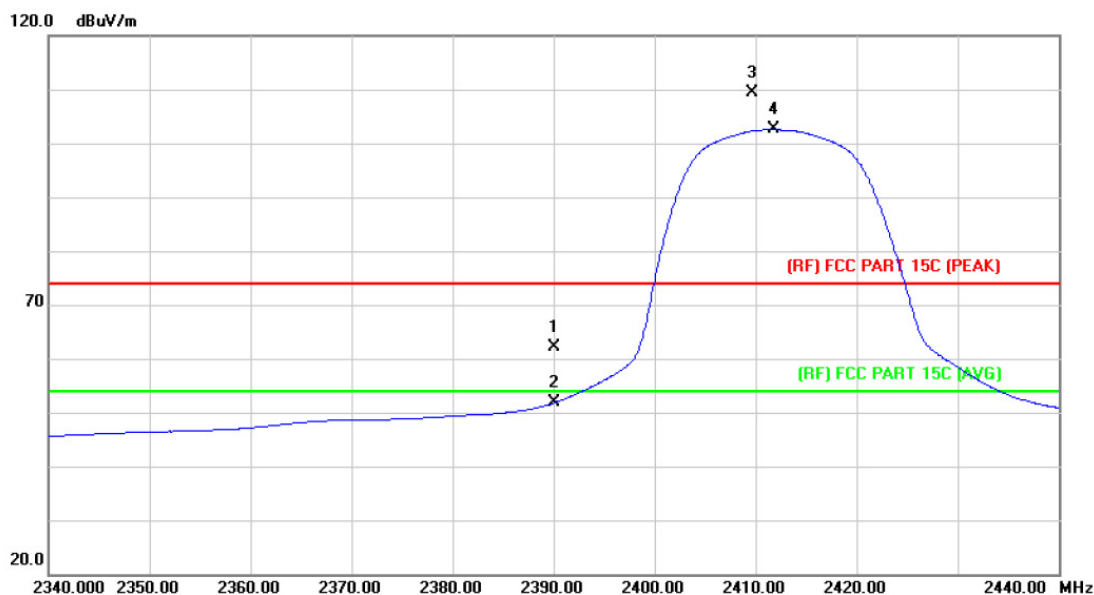


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   |     | 2390.000     | 61.34                    | 0.77                      | 62.11                      | 74.00                 | -11.89     | peak     |
| 2   |     | 2390.000     | 51.06                    | 0.77                      | 51.83                      | 54.00                 | -2.17      | AVG      |
| 3   | X   | 2409.700     | 108.51                   | 0.85                      | 109.36                     | Fundamental Frequency |            | peak     |
| 4   | *   | 2411.800     | 101.69                   | 0.86                      | 102.55                     | Fundamental Frequency |            | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                         |                           |       |
|----------------------|-------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater     | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                   | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz           |                           |       |
| <b>Ant. Pol.</b>     | Vertical                |                           |       |
| <b>Test Mode:</b>    | TX G Mode 2412MHz ANT a |                           |       |
| <b>Remark:</b>       | N/A                     |                           |       |

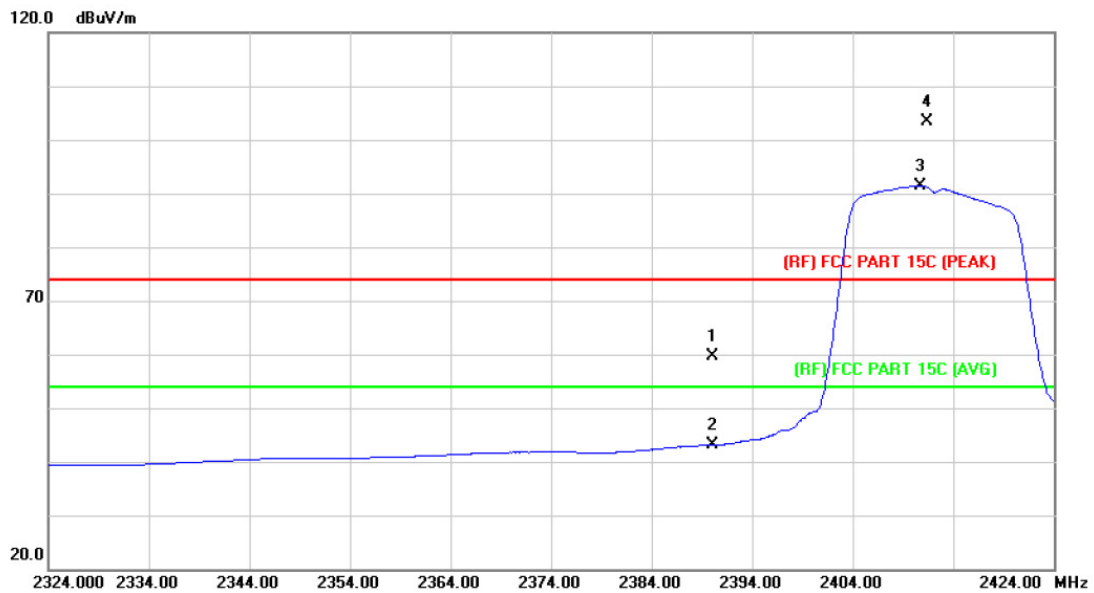

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   |     | 2390.000     | 58.97                    | 0.77                      | 59.74                      | 74.00                 | -14.26     | peak     |
| 2   |     | 2390.000     | 42.36                    | 0.77                      | 43.13                      | 54.00                 | -10.87     | AVG      |
| 3   | *   | 2410.700     | 90.56                    | 0.86                      | 91.42                      | Fundamental Frequency |            | AVG      |
| 4   | X   | 2411.400     | 102.40                   | 0.86                      | 103.26                     | Fundamental Frequency |            | peak     |

Emission Level= Read Level+ Correct Factor

|                      |                         |                           |       |
|----------------------|-------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater     | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                   | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz           |                           |       |
| <b>Ant. Pol.</b>     | Horizontal              |                           |       |
| <b>Test Mode:</b>    | TX G Mode 2462MHz ANT a |                           |       |
| <b>Remark:</b>       | N/A                     |                           |       |

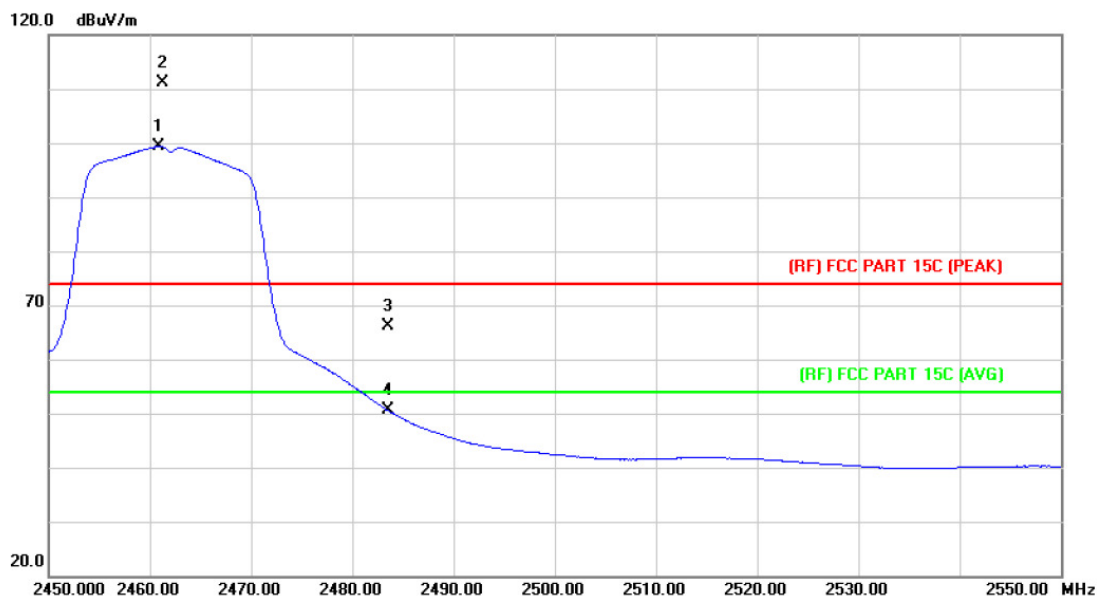


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   | *   | 2460.900     | 98.32                    | 1.06                      | 99.38                      | Fundamental Frequency |            | AVG      |
| 2   | X   | 2461.300     | 110.05                   | 1.07                      | 111.12                     | Fundamental Frequency |            | peak     |
| 3   |     | 2483.500     | 64.86                    | 1.17                      | 66.03                      | 74.00                 | -7.97      | peak     |
| 4   |     | 2483.500     | 49.35                    | 1.17                      | 50.52                      | 54.00                 | -3.48      | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                         |                           |       |
|----------------------|-------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater     | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                   | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz           |                           |       |
| <b>Ant. Pol.</b>     | Vertical                |                           |       |
| <b>Test Mode:</b>    | TX G Mode 2462MHz ANT a |                           |       |
| <b>Remark:</b>       | N/A                     |                           |       |

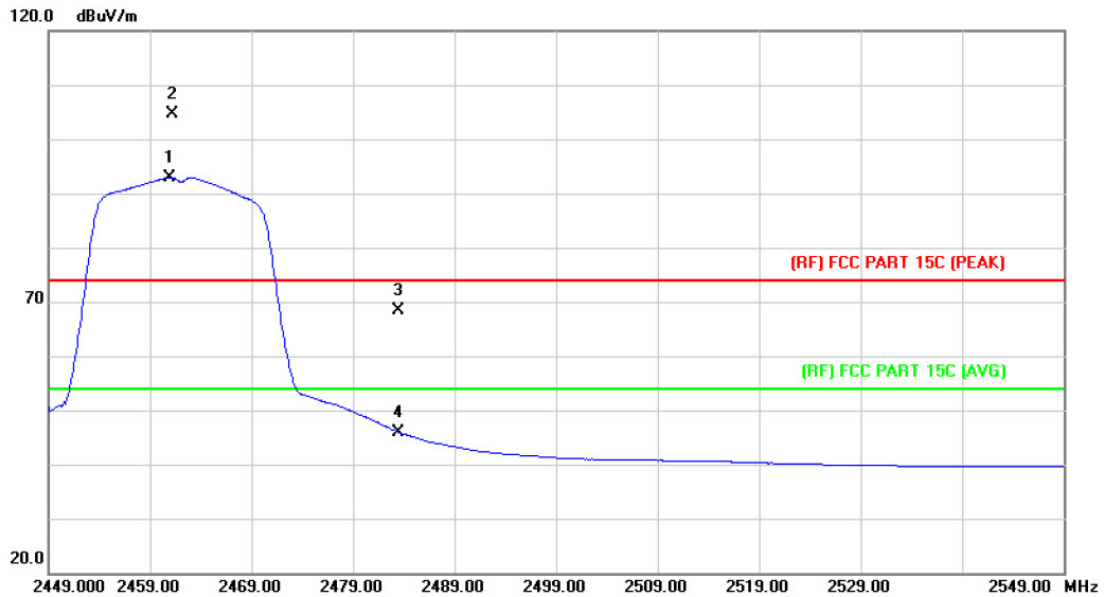

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                 | Over  | Detector |
|-----|-----|----------|---------------|----------------|-------------|-----------------------|-------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                | dB    |          |
| 1   | *   | 2460.900 | 91.89         | 1.06           | 92.95       | Fundamental Frequency |       | AVG      |
| 2   | X   | 2461.200 | 103.66        | 1.07           | 104.73      | Fundamental Frequency |       | peak     |
| 3   |     | 2483.500 | 67.22         | 1.17           | 68.39       | 74.00                 | -5.61 | peak     |
| 4   |     | 2483.500 | 44.77         | 1.17           | 45.94       | 54.00                 | -8.06 | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                                 |                           |       |
|----------------------|---------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater             | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                           | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                   |                           |       |
| <b>Ant. Pol.</b>     | Horizontal                      |                           |       |
| <b>Test Mode:</b>    | TX N(HT20) Mode 2412MHz ANT a+b |                           |       |
| <b>Remark:</b>       | N/A                             |                           |       |

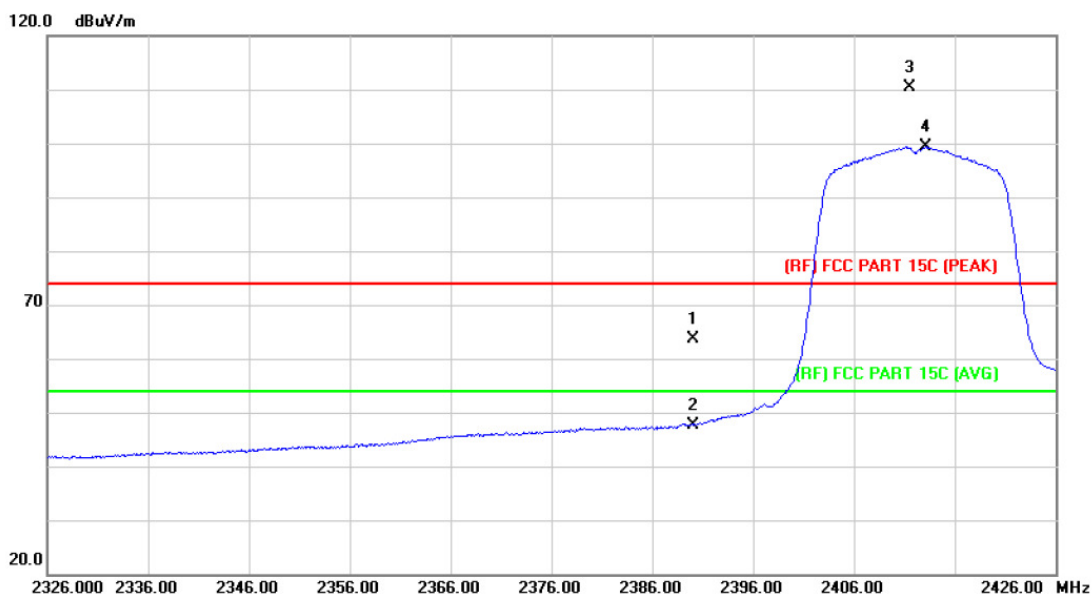


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   |     | 2390.000     | 62.81                    | 0.77                      | 63.58                      | 74.00                 | -10.42     | peak     |
| 2   |     | 2390.000     | 46.96                    | 0.77                      | 47.73                      | 54.00                 | -6.27      | AVG      |
| 3   | X   | 2411.500     | 109.45                   | 0.86                      | 110.31                     | Fundamental Frequency |            | peak     |
| 4   | *   | 2413.100     | 98.47                    | 0.86                      | 99.33                      | Fundamental Frequency |            | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                                 |                           |       |
|----------------------|---------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater             | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                           | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                   |                           |       |
| <b>Ant. Pol.</b>     | Vertical                        |                           |       |
| <b>Test Mode:</b>    | TX N(HT20) Mode 2412MHz ANT a+b |                           |       |
| <b>Remark:</b>       | N/A                             |                           |       |

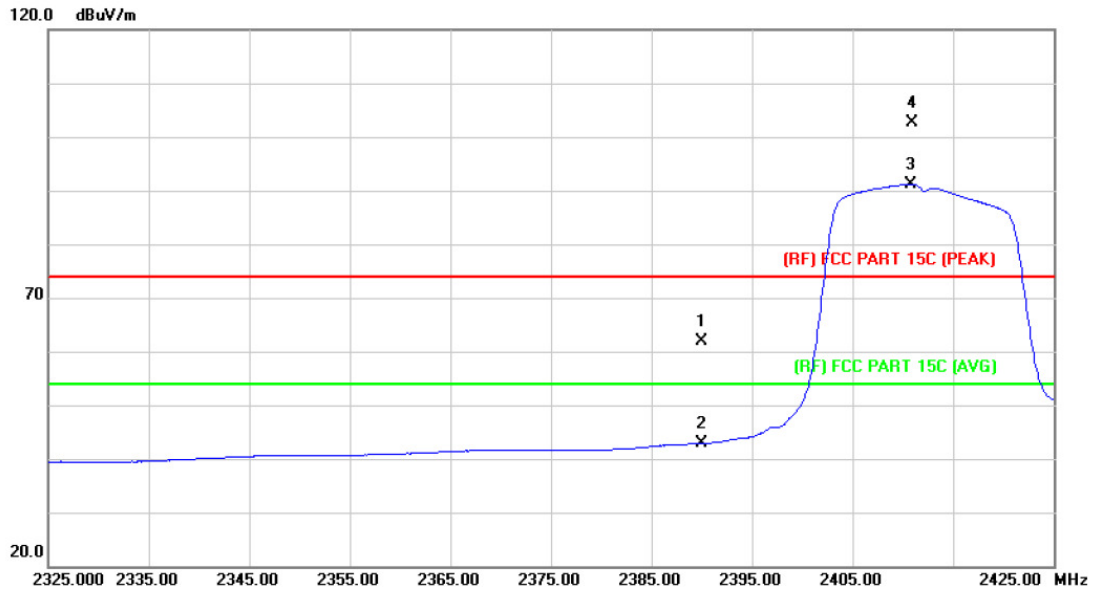

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   |     | 2390.000     | 61.14                    | 0.77                      | 61.91                      | 74.00                 | -12.09     | peak     |
| 2   |     | 2390.000     | 42.12                    | 0.77                      | 42.89                      | 54.00                 | -11.11     | AVG      |
| 3   | *   | 2410.800     | 90.29                    | 0.86                      | 91.15                      | Fundamental Frequency |            | AVG      |
| 4   | X   | 2410.900     | 101.66                   | 0.86                      | 102.52                     | Fundamental Frequency |            | peak     |

Emission Level= Read Level+ Correct Factor

|                      |                                 |                           |       |
|----------------------|---------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater             | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                           | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                   |                           |       |
| <b>Ant. Pol.</b>     | Horizontal                      |                           |       |
| <b>Test Mode:</b>    | TX N(HT20) Mode 2462MHz ANT a+b |                           |       |
| <b>Remark:</b>       | N/A                             |                           |       |

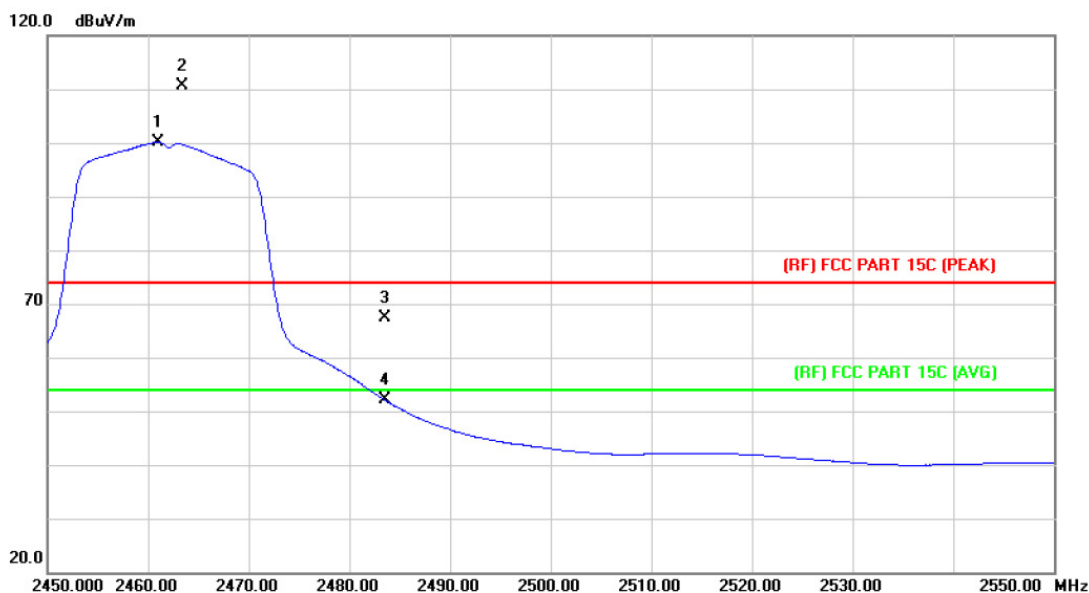


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   | *   | 2461.000     | 99.11                    | 1.06                      | 100.17                     | Fundamental Frequency |            | AVG      |
| 2   | X   | 2463.400     | 109.49                   | 1.08                      | 110.57                     | Fundamental Frequency |            | peak     |
| 3   |     | 2483.500     | 66.11                    | 1.17                      | 67.28                      | 74.00                 | -6.72      | peak     |
| 4   |     | 2483.500     | 50.96                    | 1.17                      | 52.13                      | 54.00                 | -1.87      | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                                 |                           |       |
|----------------------|---------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater             | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                           | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                   |                           |       |
| <b>Ant. Pol.</b>     | Vertical                        |                           |       |
| <b>Test Mode:</b>    | TX N(HT20) Mode 2462MHz ANT a+b |                           |       |
| <b>Remark:</b>       | N/A                             |                           |       |

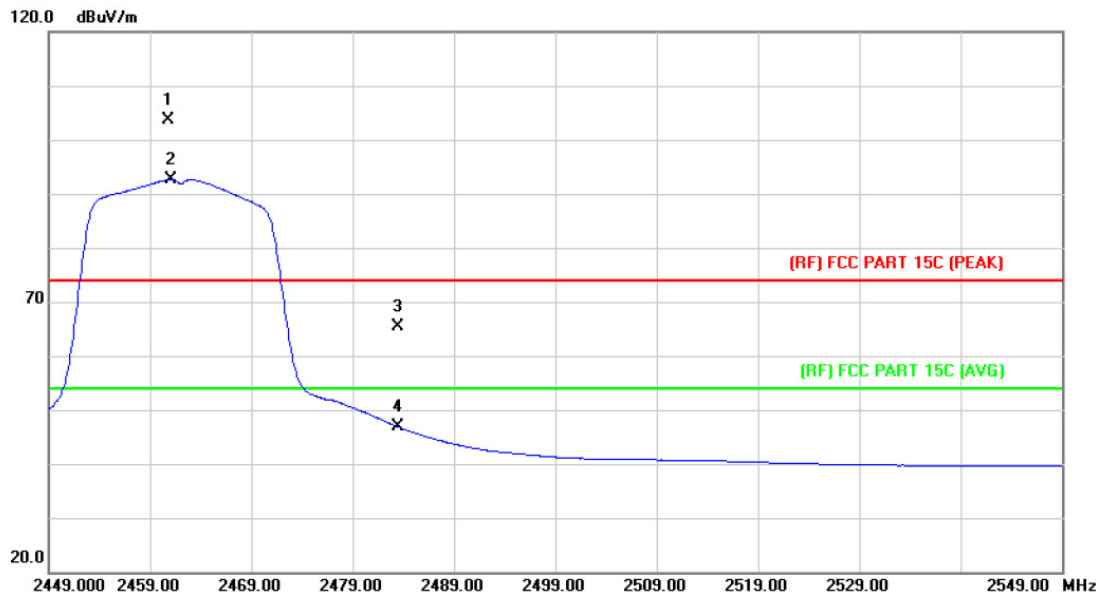

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                 | Over  |          |
|-----|-----|----------|---------------|----------------|-------------|-----------------------|-------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                | dB    | Detector |
| 1   | X   | 2460.800 | 102.69        | 1.06           | 103.75      | Fundamental Frequency |       | peak     |
| 2   | *   | 2461.000 | 91.64         | 1.06           | 92.70       | Fundamental Frequency |       | AVG      |
| 3   |     | 2483.500 | 64.09         | 1.17           | 65.26       | 74.00                 | -8.74 | peak     |
| 4   |     | 2483.500 | 45.66         | 1.17           | 46.83       | 54.00                 | -7.17 | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                                 |                           |       |
|----------------------|---------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater             | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                           | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                   |                           |       |
| <b>Ant. Pol.</b>     | Horizontal                      |                           |       |
| <b>Test Mode:</b>    | TX N(HT40) Mode 2422MHz ANT a+b |                           |       |
| <b>Remark:</b>       | N/A                             |                           |       |

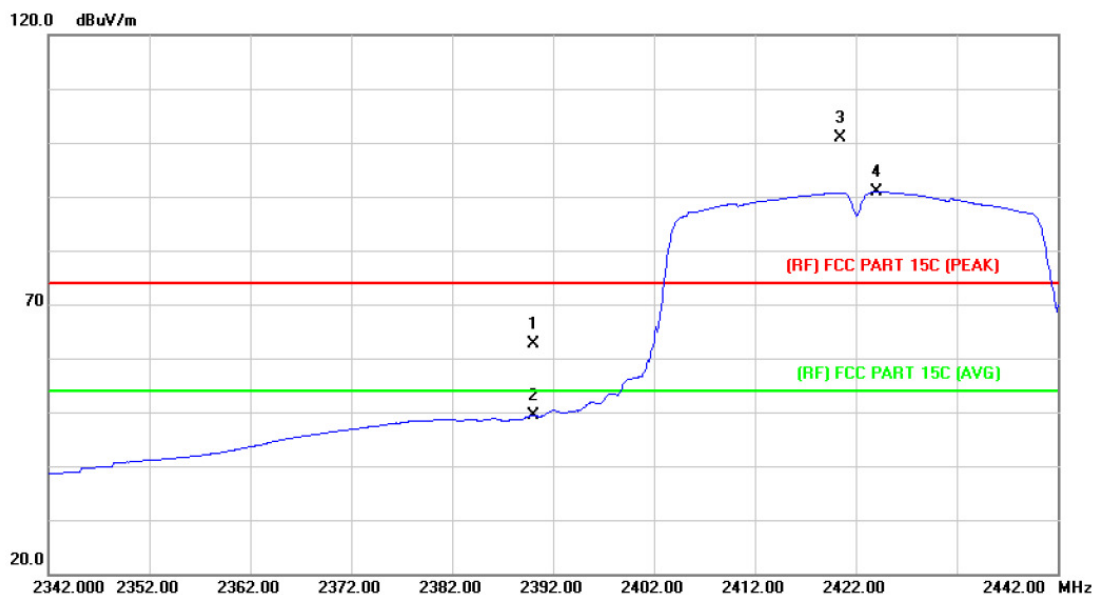


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   |     | 2390.000     | 61.91                    | 0.77                      | 62.68                      | 74.00                 | -11.32     | peak     |
| 2   |     | 2390.000     | 48.57                    | 0.77                      | 49.34                      | 54.00                 | -4.66      | AVG      |
| 3   | X   | 2420.400     | 99.96                    | 0.89                      | 100.85                     | Fundamental Frequency |            | peak     |
| 4   | *   | 2424.100     | 89.95                    | 0.93                      | 90.88                      | Fundamental Frequency |            | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                                 |                           |       |
|----------------------|---------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater             | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                           | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                   |                           |       |
| <b>Ant. Pol.</b>     | Vertical                        |                           |       |
| <b>Test Mode:</b>    | TX N(HT40) Mode 2422MHz ANT a+b |                           |       |
| <b>Remark:</b>       | N/A                             |                           |       |

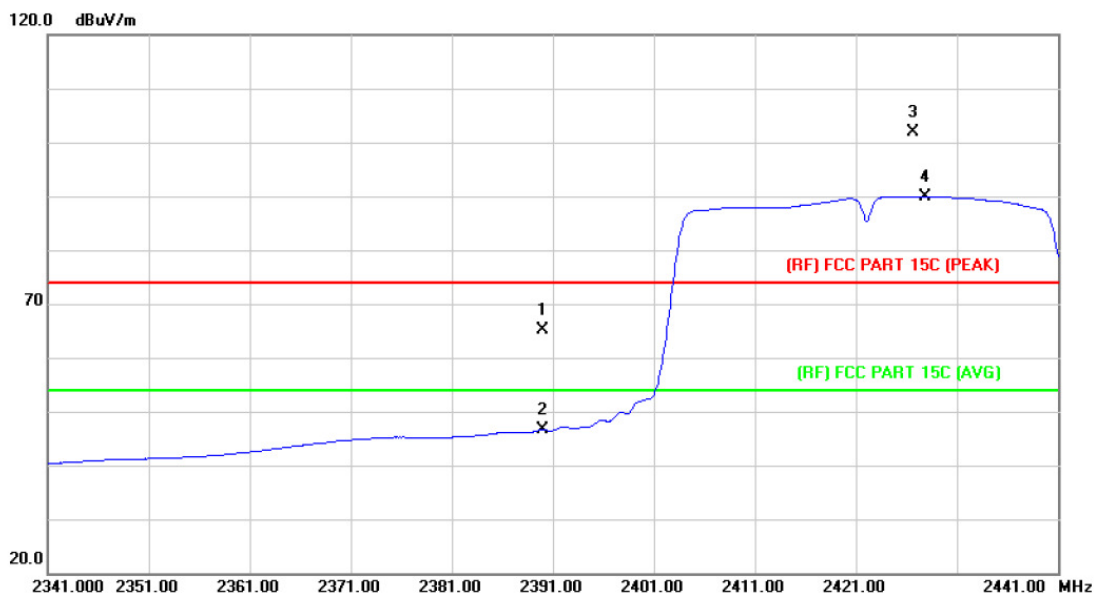

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   |     | 2390.000     | 64.46                    | 0.77                      | 65.23                      | 74.00                 | -8.77      | peak     |
| 2   |     | 2390.000     | 45.82                    | 0.77                      | 46.59                      | 54.00                 | -7.41      | AVG      |
| 3   | X   | 2426.700     | 100.87                   | 0.93                      | 101.80                     | Fundamental Frequency |            | peak     |
| 4   | *   | 2427.800     | 89.02                    | 0.94                      | 89.96                      | Fundamental Frequency |            | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                                 |                           |       |
|----------------------|---------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater             | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                           | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                   |                           |       |
| <b>Ant. Pol.</b>     | Horizontal                      |                           |       |
| <b>Test Mode:</b>    | TX N(HT40) Mode 2452MHz ANT a+b |                           |       |
| <b>Remark:</b>       | N/A                             |                           |       |

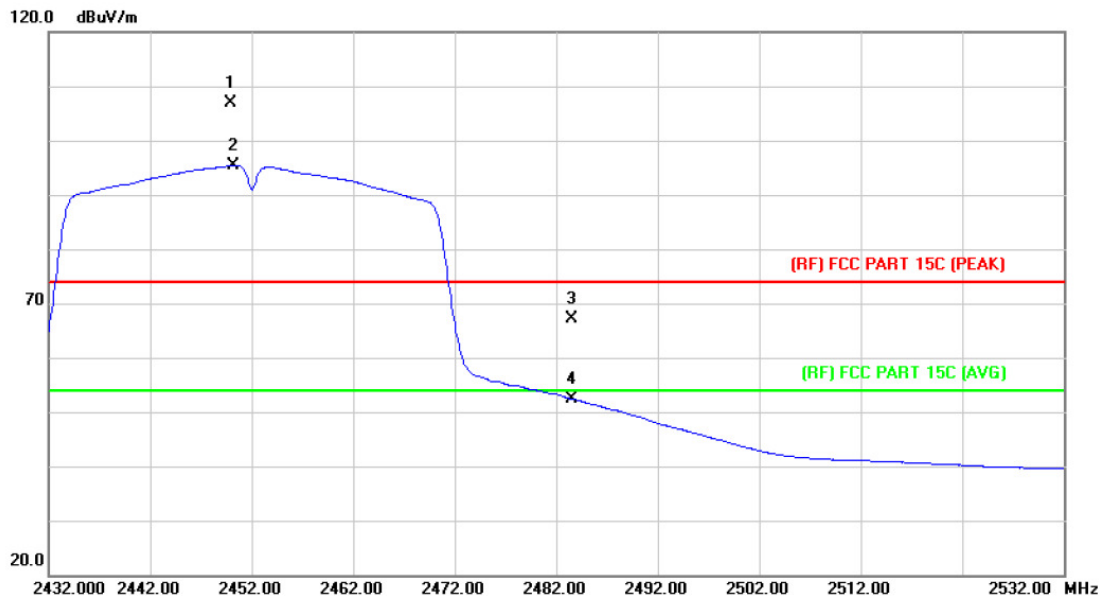


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit                 | Over  |          |
|-----|-----|----------|---------------|----------------|--------------|-----------------------|-------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m       | dBuV/m                | dB    | Detector |
| 1   | X   | 2449.900 | 105.95        | 1.02           | 106.97       | Fundamental Frequency |       | peak     |
| 2   | *   | 2450.200 | 94.45         | 1.02           | 95.47        | Fundamental Frequency |       | AVG      |
| 3   |     | 2483.500 | 66.02         | 1.17           | 67.19        | 74.00                 | -6.81 | peak     |
| 4   |     | 2483.500 | 51.24         | 1.17           | 52.41        | 54.00                 | -1.59 | AVG      |

Emission Level= Read Level+ Correct Factor



|                      |                                 |                           |       |
|----------------------|---------------------------------|---------------------------|-------|
| <b>EUT:</b>          | omimo WIFI Repeater             | <b>Model:</b>             | RP-R1 |
| <b>Temperature:</b>  | 25 °C                           | <b>Relative Humidity:</b> | 55%   |
| <b>Test Voltage:</b> | AC 120V/60 Hz                   |                           |       |
| <b>Ant. Pol.</b>     | Vertical                        |                           |       |
| <b>Test Mode:</b>    | TX N(HT40) Mode 2452MHz ANT a+b |                           |       |
| <b>Remark:</b>       | N/A                             |                           |       |


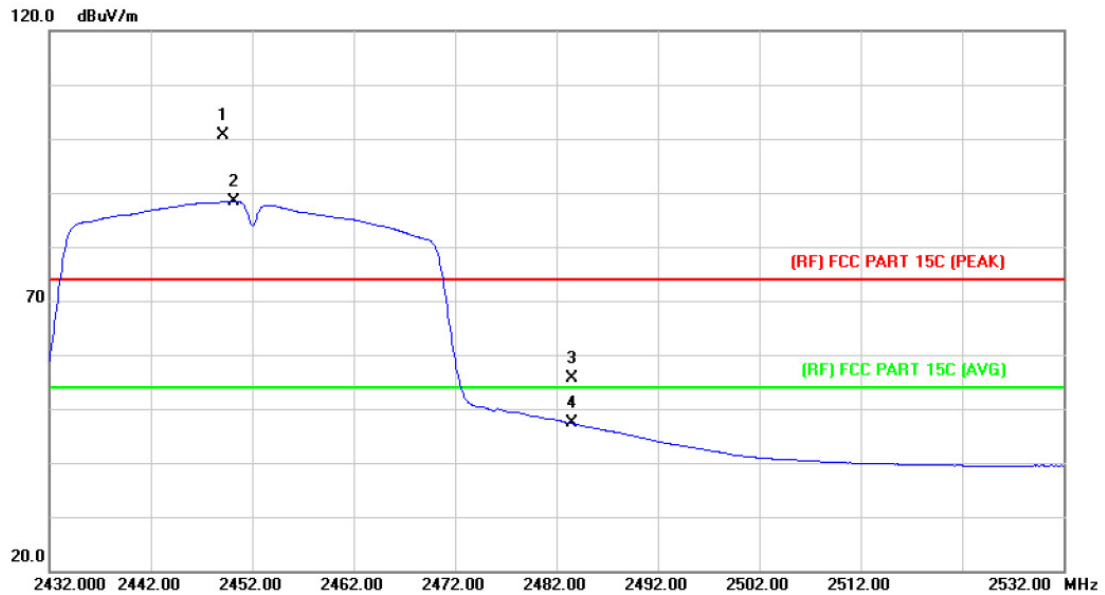


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                 | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|-----------------------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                | dB     | Detector |
| 1   | X   | 2449.100 | 99.50         | 1.02           | 100.52      | Fundamental Frequency |        | peak     |
| 2   | *   | 2450.200 | 87.43         | 1.02           | 88.45       | Fundamental Frequency |        | AVG      |
| 3   |     | 2483.500 | 54.39         | 1.17           | 55.56       | 74.00                 | -18.44 | peak     |
| 4   |     | 2483.500 | 46.11         | 1.17           | 47.28       | 54.00                 | -6.72  | AVG      |

Emission Level= Read Level+ Correct Factor



## (2) Conducted Test

|               |                                                        |                    |       |
|---------------|--------------------------------------------------------|--------------------|-------|
| EUT:          | omimo WIFI Repeater                                    | Model:             | RP-R1 |
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55%   |
| Test Voltage: | AC 120V/60 Hz                                          |                    |       |
| Test Mode:    | TX B Mode 2412MHz / TX B Mode 2462MHz ANT a            |                    |       |
| Remark:       | The EUT is programed in continuously transmitting mode |                    |       |

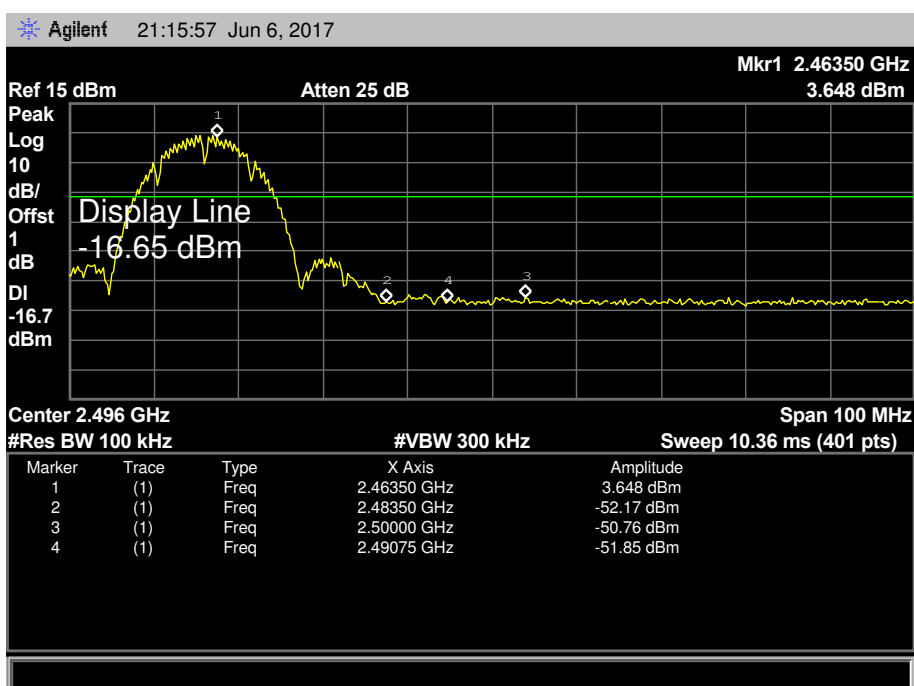
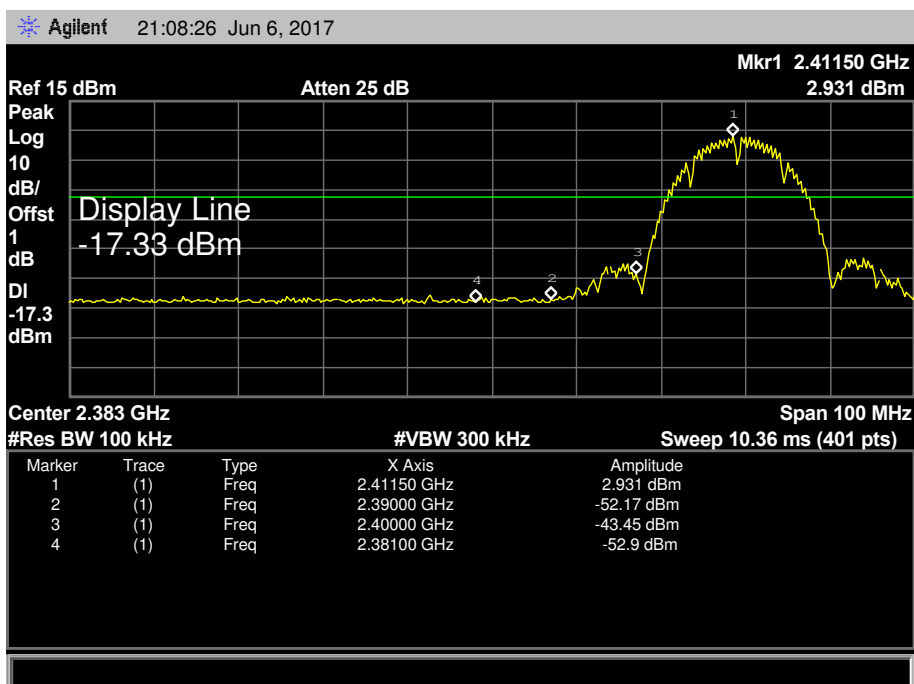




|               |                                                        |                    |       |
|---------------|--------------------------------------------------------|--------------------|-------|
| EUT:          | omimo WIFI Repeater                                    | Model:             | RP-R1 |
| Temperature:  | 25 °C                                                  | Relative Humidity: | 55%   |
| Test Voltage: | AC 120V/60 Hz                                          |                    |       |
| Test Mode:    | TX G Mode 2412MHz / TX G Mode 2462MHz ANT a            |                    |       |
| Remark:       | The EUT is programed in continuously transmitting mode |                    |       |

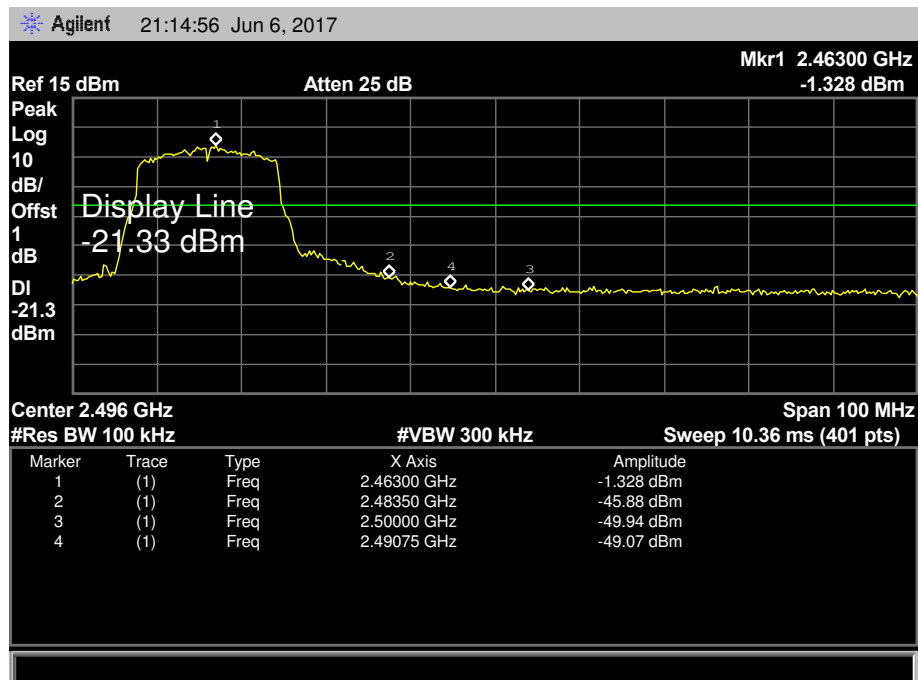
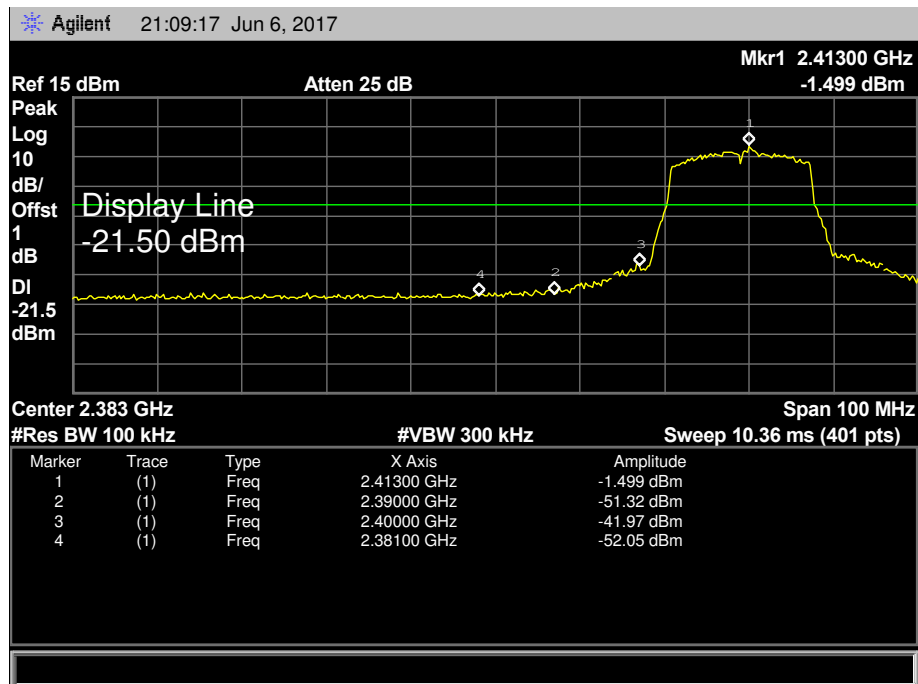


|               |                                                         |                    |       |
|---------------|---------------------------------------------------------|--------------------|-------|
| EUT:          | omimo WIFI Repeater                                     | Model:             | RP-R1 |
| Temperature:  | 25 °C                                                   | Relative Humidity: | 55%   |
| Test Voltage: | AC 120V/60 Hz                                           |                    |       |
| Test Mode:    | TX N(HT20) Mode 2412MHz / TX N(HT20) Mode 2462MHz ANT a |                    |       |
| Remark:       | The EUT is programed in continuously transmitting mode  |                    |       |

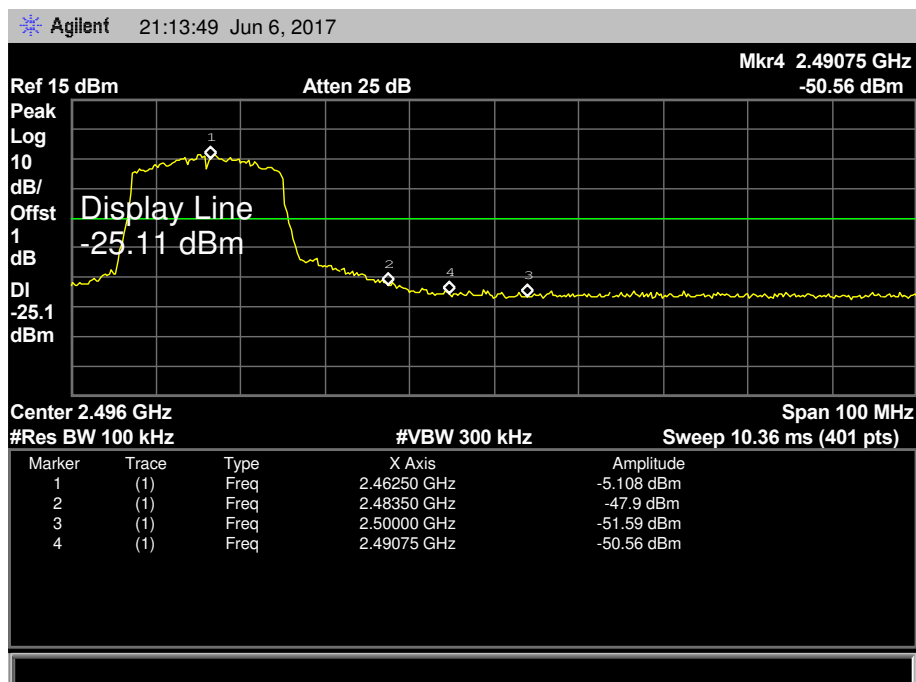
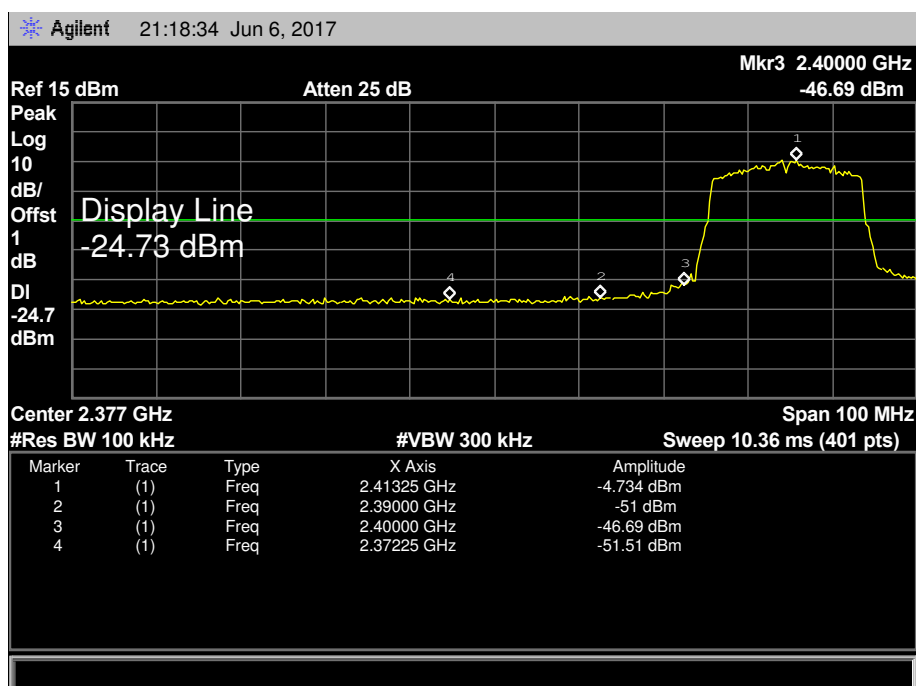




|               |                                                         |                    |       |
|---------------|---------------------------------------------------------|--------------------|-------|
| EUT:          | omimo WIFI Repeater                                     | Model:             | RP-R1 |
| Temperature:  | 25 °C                                                   | Relative Humidity: | 55%   |
| Test Voltage: | AC 120V/60 Hz                                           |                    |       |
| Test Mode:    | TX N(HT20) Mode 2412MHz / TX N(HT20) Mode 2462MHz ANT b |                    |       |
| Remark:       | The EUT is programed in continuously transmitting mode  |                    |       |

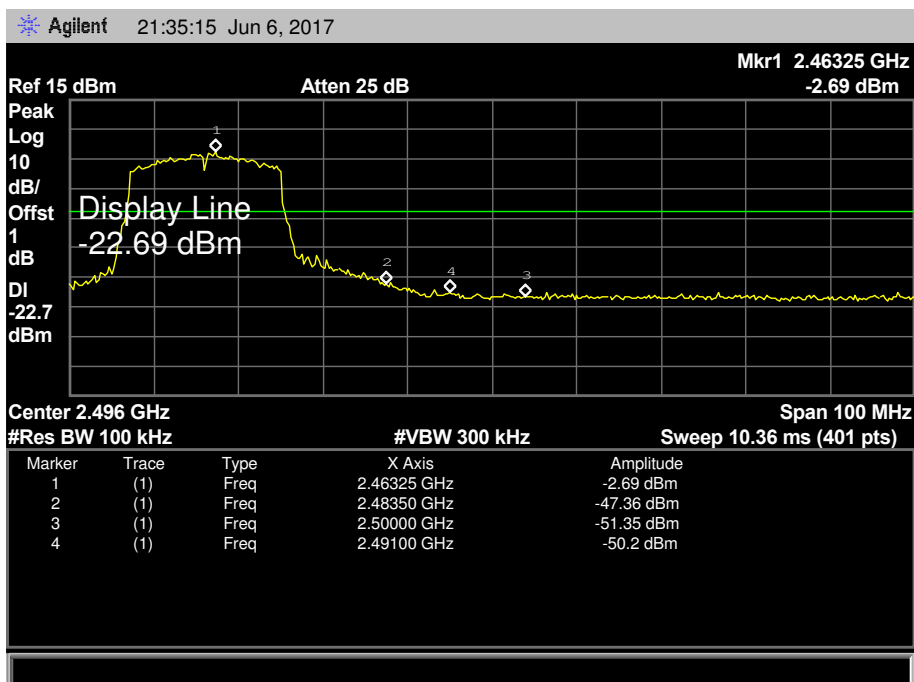
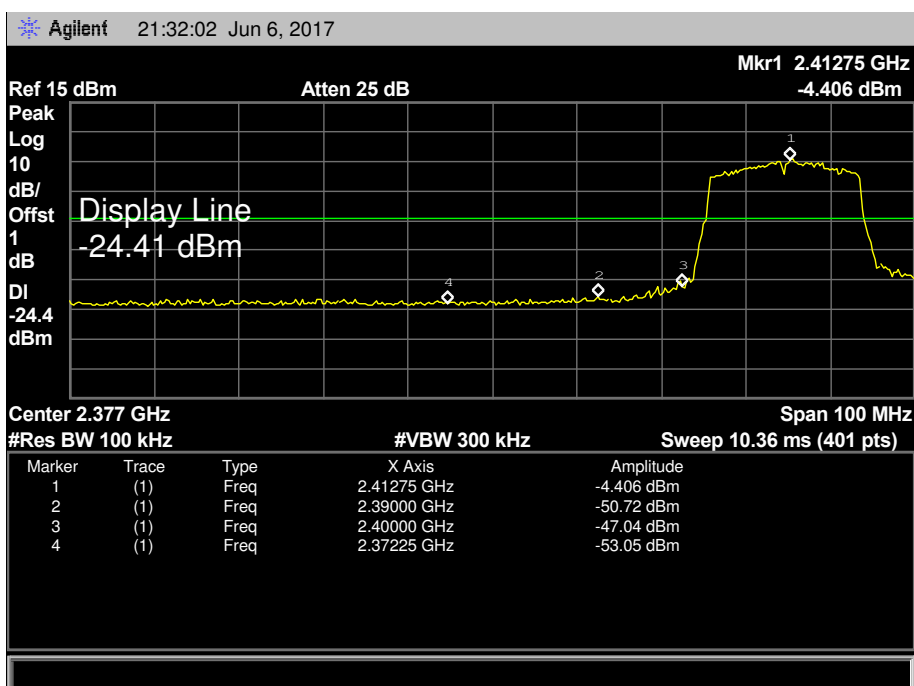


|               |                                                         |                    |       |
|---------------|---------------------------------------------------------|--------------------|-------|
| EUT:          | omimo WIFI Repeater                                     | Model:             | RP-R1 |
| Temperature:  | 25 °C                                                   | Relative Humidity: | 55%   |
| Test Voltage: | AC 120V/60 Hz                                           |                    |       |
| Test Mode:    | TX N(HT40) Mode 2422MHz / TX N(HT40) Mode 2452MHz ANT a |                    |       |
| Remark:       | The EUT is programed in continuously transmitting mode  |                    |       |

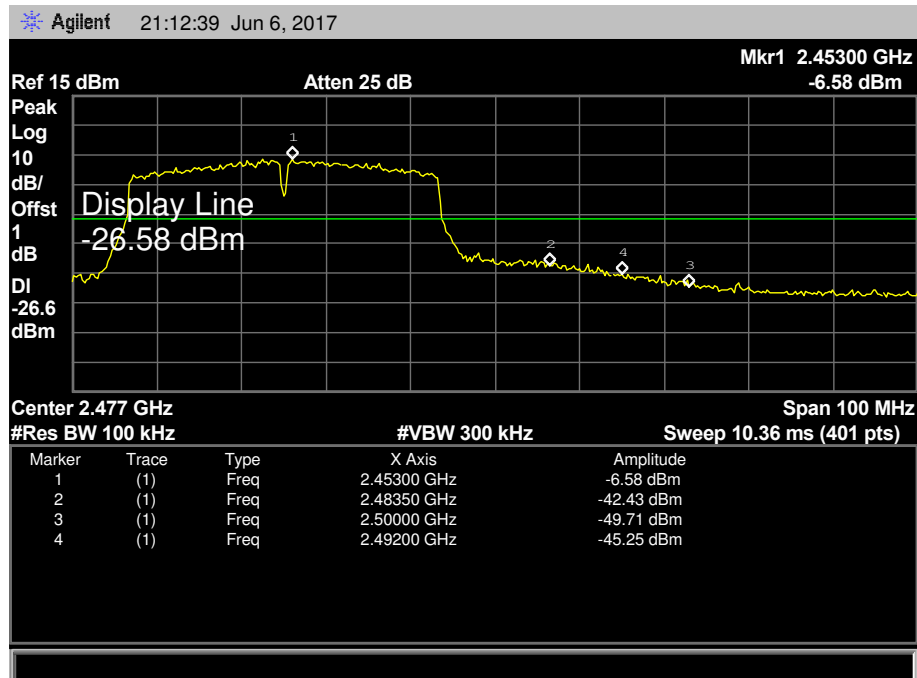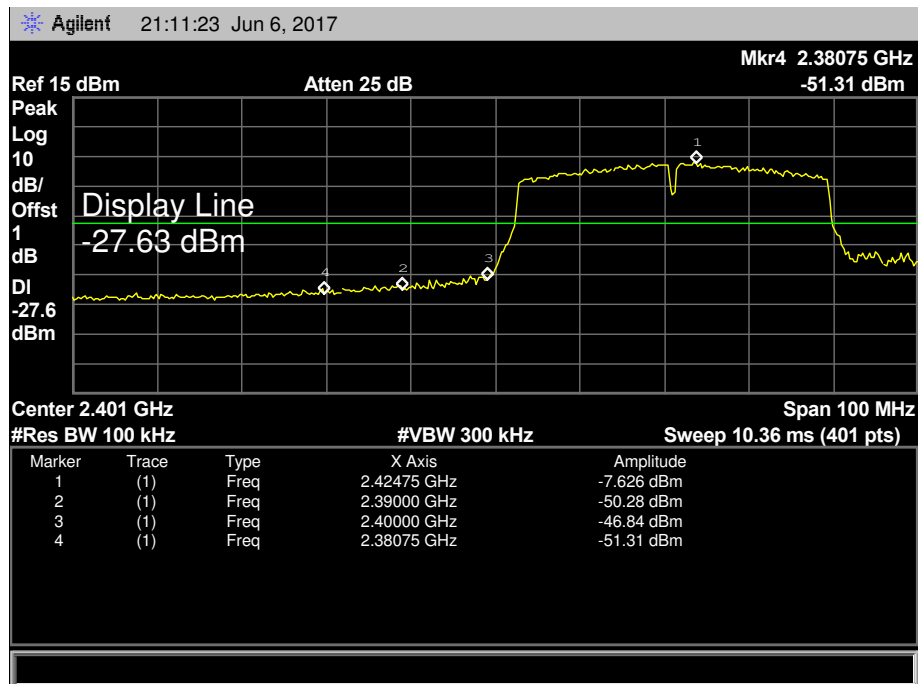



|               |                                                         |                    |       |
|---------------|---------------------------------------------------------|--------------------|-------|
| EUT:          | omimo WIFI Repeater                                     | Model:             | RP-R1 |
| Temperature:  | 25 °C                                                   | Relative Humidity: | 55%   |
| Test Voltage: | AC 120V/60 Hz                                           |                    |       |
| Test Mode:    | TX N(HT40) Mode 2422MHz / TX N(HT40) Mode 2452MHz ANT b |                    |       |
| Remark:       | The EUT is programed in continuously transmitting mode  |                    |       |

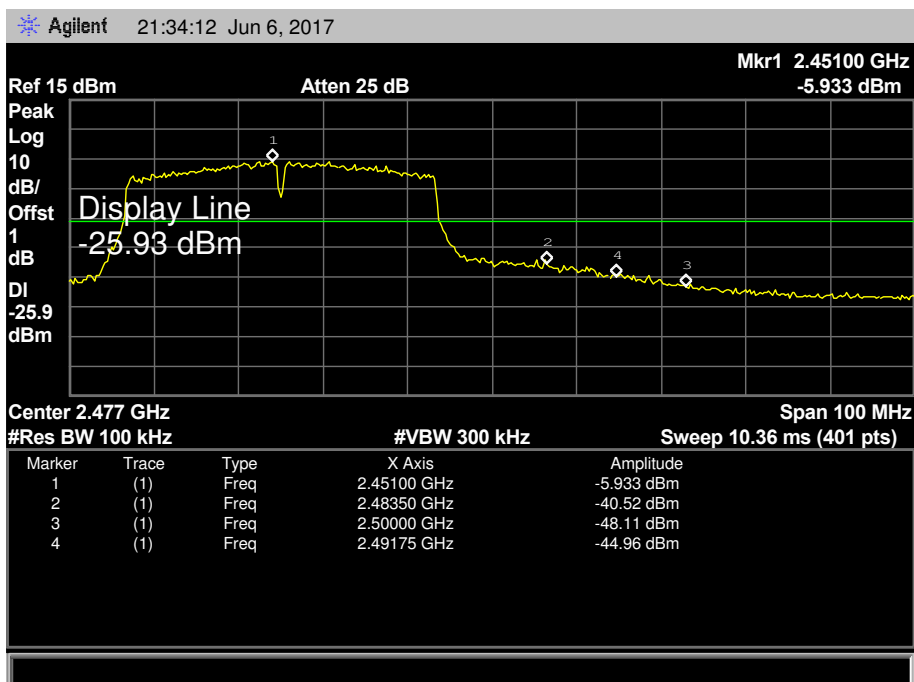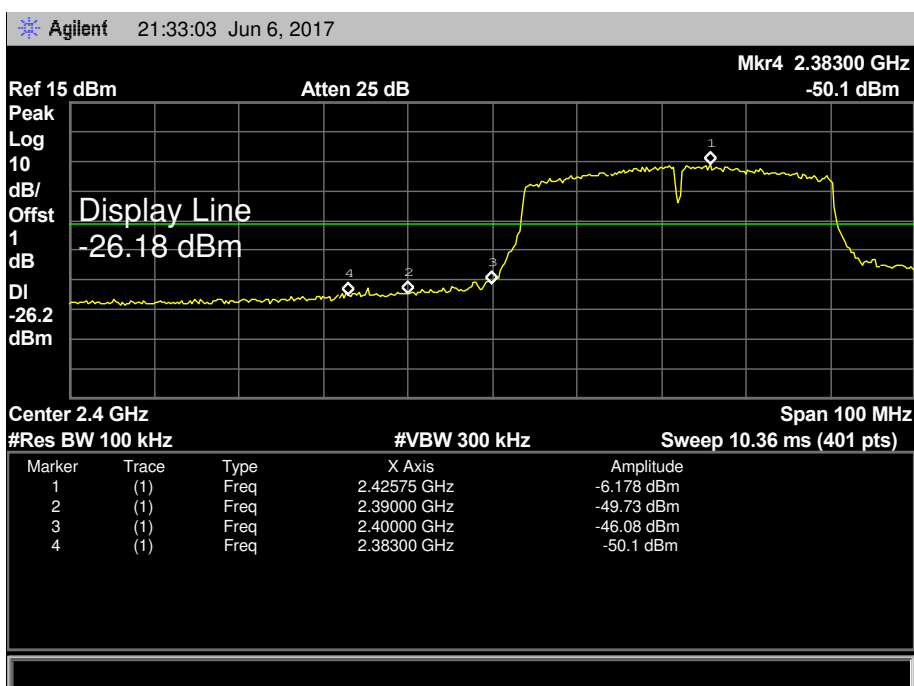

## 7. Bandwidth Test

### 7.1 Test Standard and Limit


#### 7.1.1 Test Standard

FCC Part 15.247 (a)(2)

#### 7.1.2 Test Limit

| FCC Part 15 Subpart C(15.247)/RSS-210 |                                   |                      |
|---------------------------------------|-----------------------------------|----------------------|
| Test Item                             | Limit                             | Frequency Range(MHz) |
| Bandwidth                             | $\geq 500$ KHz<br>(6dB bandwidth) | 2400~2483.5          |

### 7.2 Test Setup



### 7.3 Test Procedure


- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst -case (i.e the widest) bandwidth.
- (3) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:100 kHz, and Video Bandwidth:300 kHz, Detector: Peak, Sweep Time set auto.

### 7.4 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, middle and high channel for the test.




## 7.5 Test Data

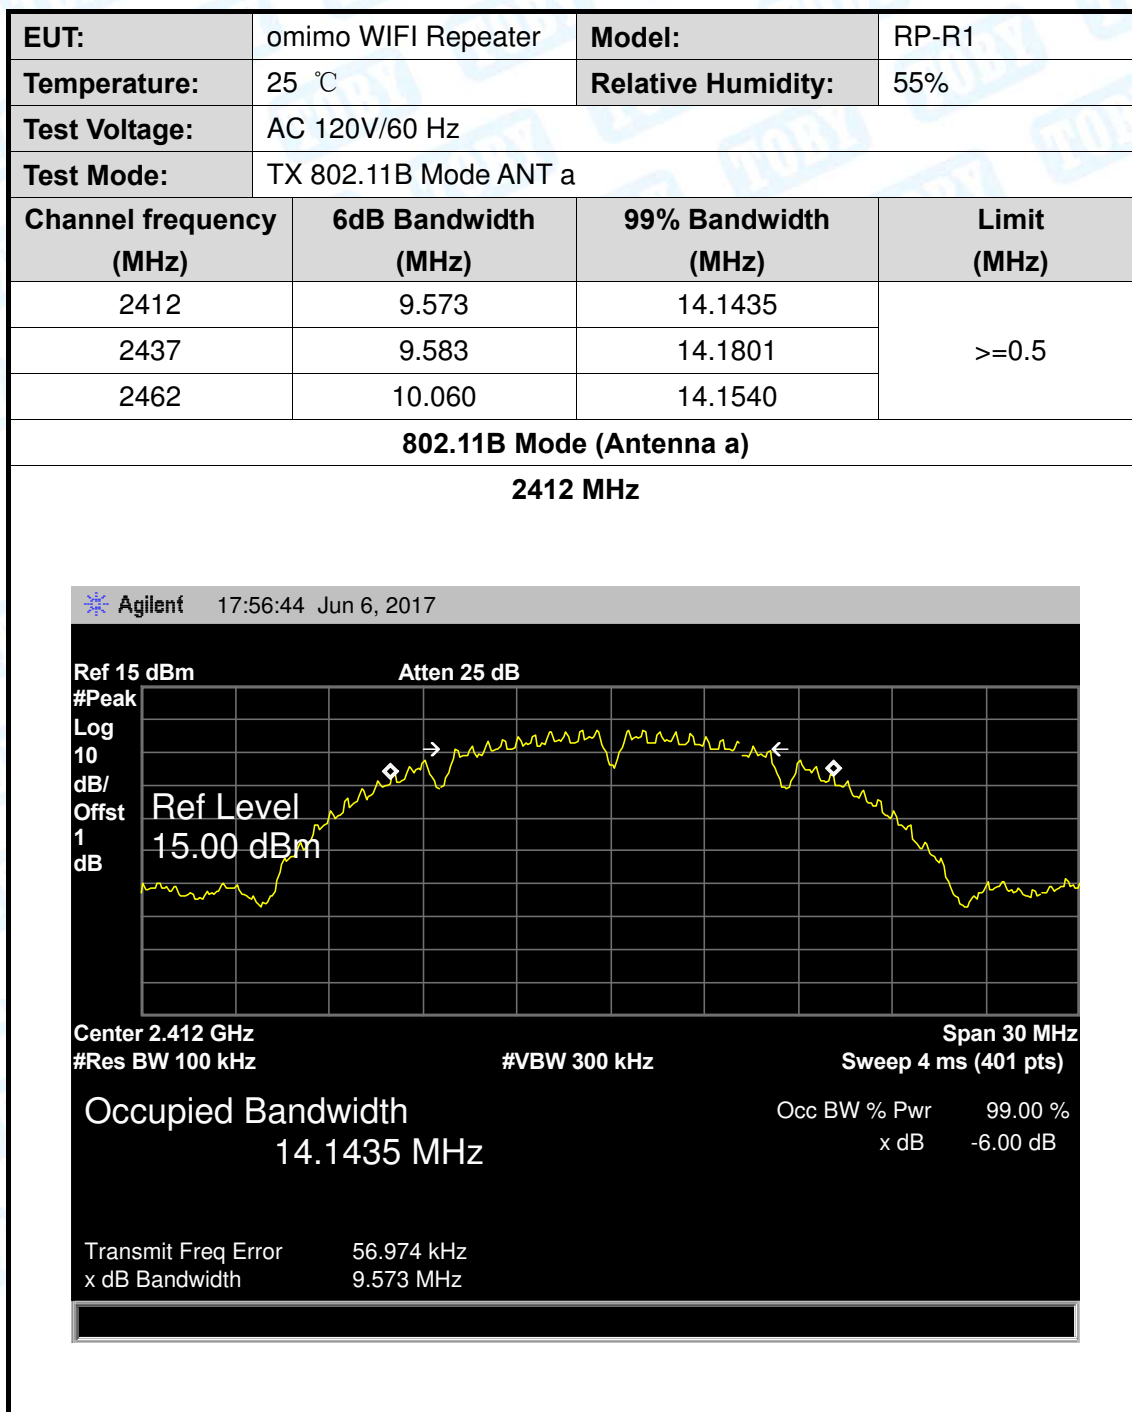


802.11B Mode (Antenna a)

2437 MHz

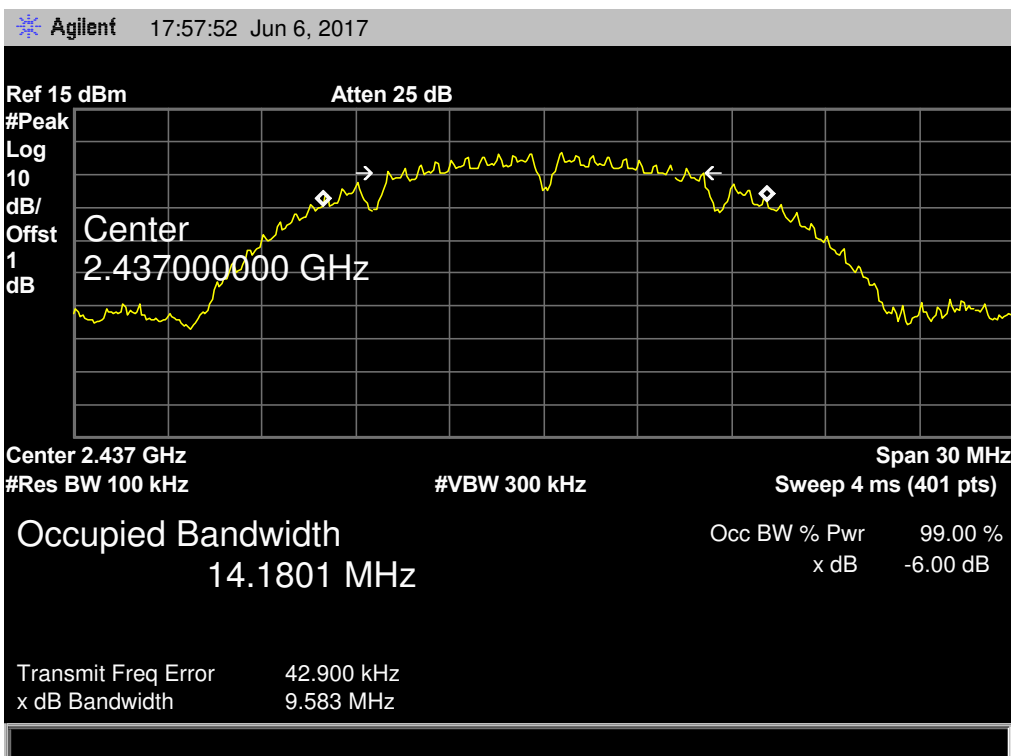

802.11B Mode (Antenna a)

2462 MHz

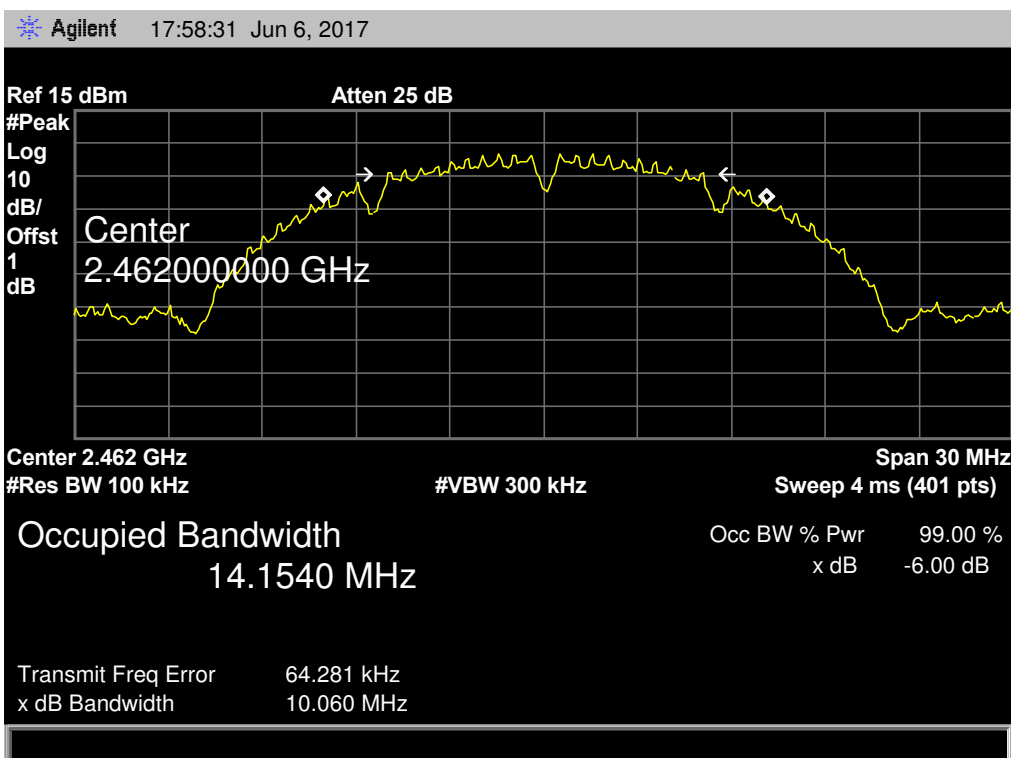



|                          |                       |                     |             |
|--------------------------|-----------------------|---------------------|-------------|
| EUT:                     | omimo WIFI Repeater   | Model:              | RP-R1       |
| Temperature:             | 25 °C                 | Relative Humidity:  | 55%         |
| Test Voltage:            | AC 120V/60 Hz         |                     |             |
| Test Mode:               | TX 802.11B Mode ANT b |                     |             |
| Channel frequency (MHz)  | 6dB Bandwidth (MHz)   | 99% Bandwidth (MHz) | Limit (MHz) |
| 2412                     | 9.556                 | 14.2826             | >=0.5       |
| 2437                     | 9.103                 | 14.2422             |             |
| 2462                     | 9.542                 | 14.1813             |             |
| 802.11B Mode (Antenna b) |                       |                     |             |
| 2412 MHz                 |                       |                     |             |

Agilent22:29:47 Jun 6, 2017

Ref 15 dBm

Atten 25 dB

#Peak

Log

10

dB/

Offst

1

dB

Span

20.00000000 MHz

Center 2.412 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 20 MHz

Sweep 4 ms (401 pts)

Occupied Bandwidth

14.2826 MHz

Occ BW % Pwr

99.00 %

x dB

-6.00 dB

Transmit Freq Error


154.288 kHz

x dB Bandwidth

9.556 MHz


802.11B Mode (Antenna b)

2437 MHz

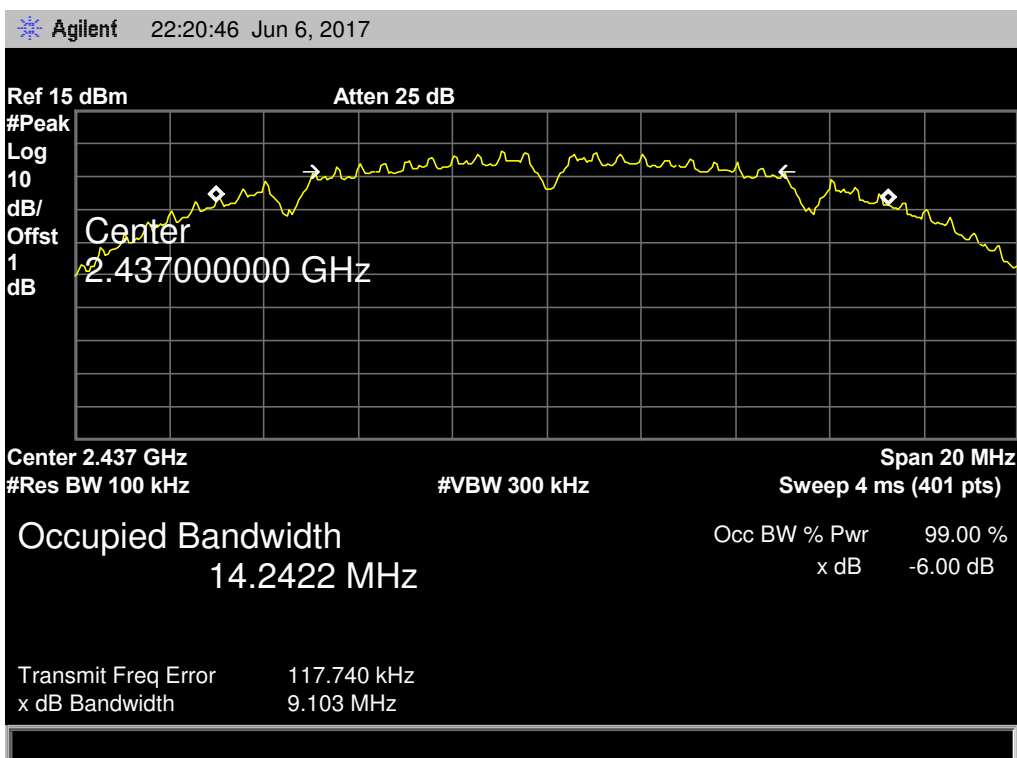

802.11B Mode (Antenna b)

2462 MHz

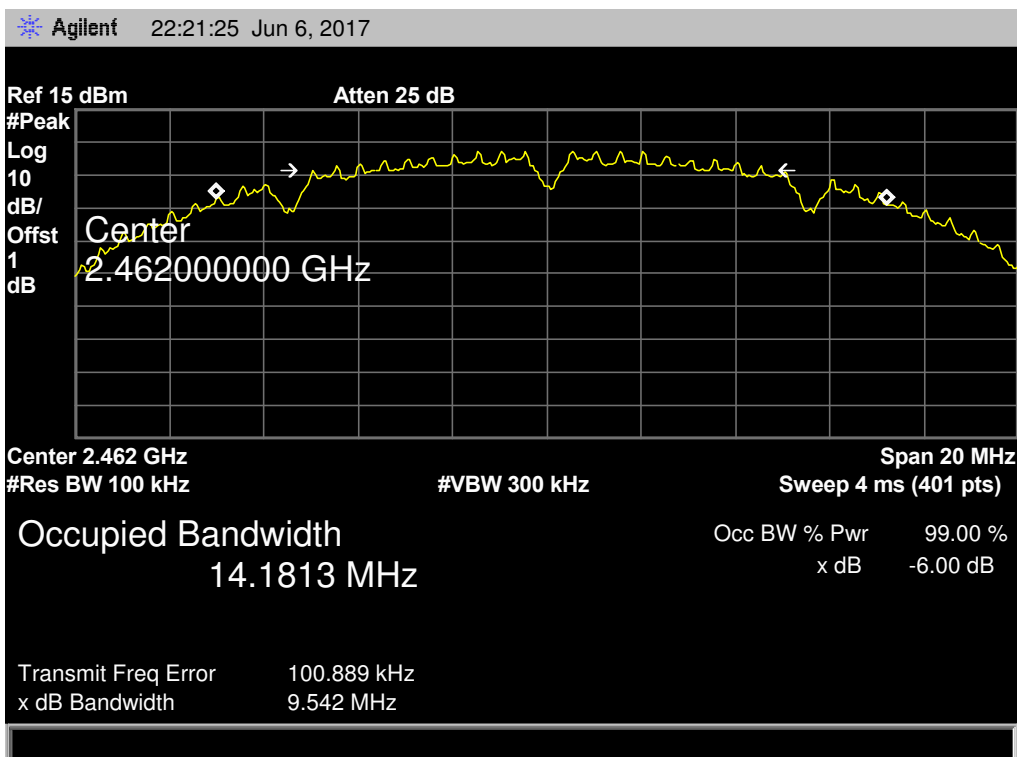



|                          |                       |                     |                    |       |
|--------------------------|-----------------------|---------------------|--------------------|-------|
| EUT:                     | omimo WIFI Repeater   |                     | Model:             | RP-R1 |
| Temperature:             | 25 °C                 |                     | Relative Humidity: | 55%   |
| Test Voltage:            | AC 120V/60 Hz         |                     |                    |       |
| Test Mode:               | TX 802.11G Mode ANT a |                     |                    |       |
| Channel frequency (MHz)  | 6dB Bandwidth (MHz)   | 99% Bandwidth (MHz) | Limit (MHz)        |       |
| 2412                     | 16.340                | 16.3135             | >=0.5              |       |
| 2437                     | 15.972                | 16.3165             |                    |       |
| 2462                     | 16.076                | 16.3094             |                    |       |
| 802.11G Mode (Antenna a) |                       |                     |                    |       |
| 2412 MHz                 |                       |                     |                    |       |

Agilent18:02:27 Jun 6, 2017

Ref 15 dBm

Atten 25 dB

#Peak

Log

10


dB/

Offst

1

dB

Center 2.412000000 GHz

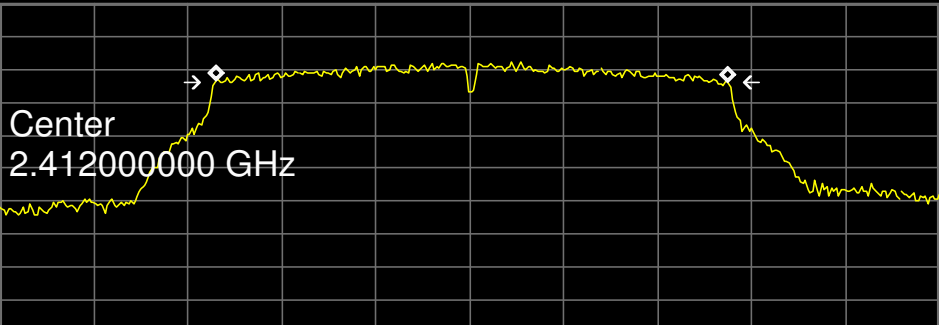

Center 2.412 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 30 MHz

Sweep 4 ms (401 pts)

Occupied Bandwidth

16.3135 MHz

Occ BW % Pwr 99.00 %


x dB -6.00 dB

Transmit Freq Error 67.102 kHz

x dB Bandwidth 16.340 MHz


## 802.11G Mode (Antenna a)

2437 MHz

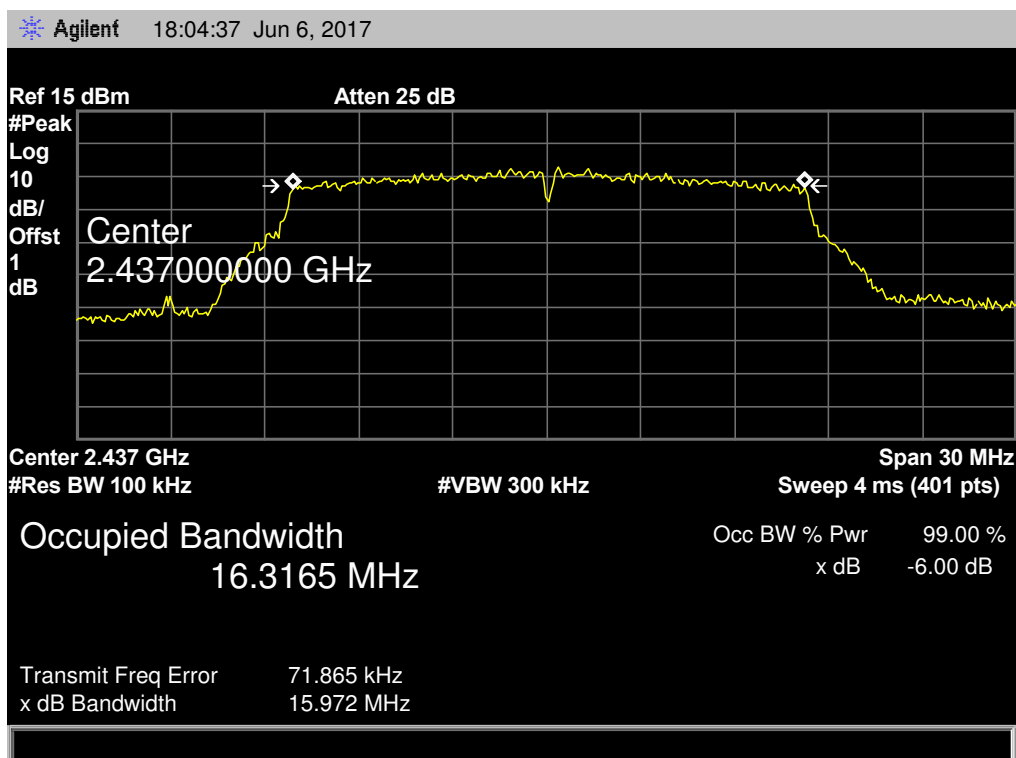

## 802.11G Mode (Antenna a)

2462 MHz

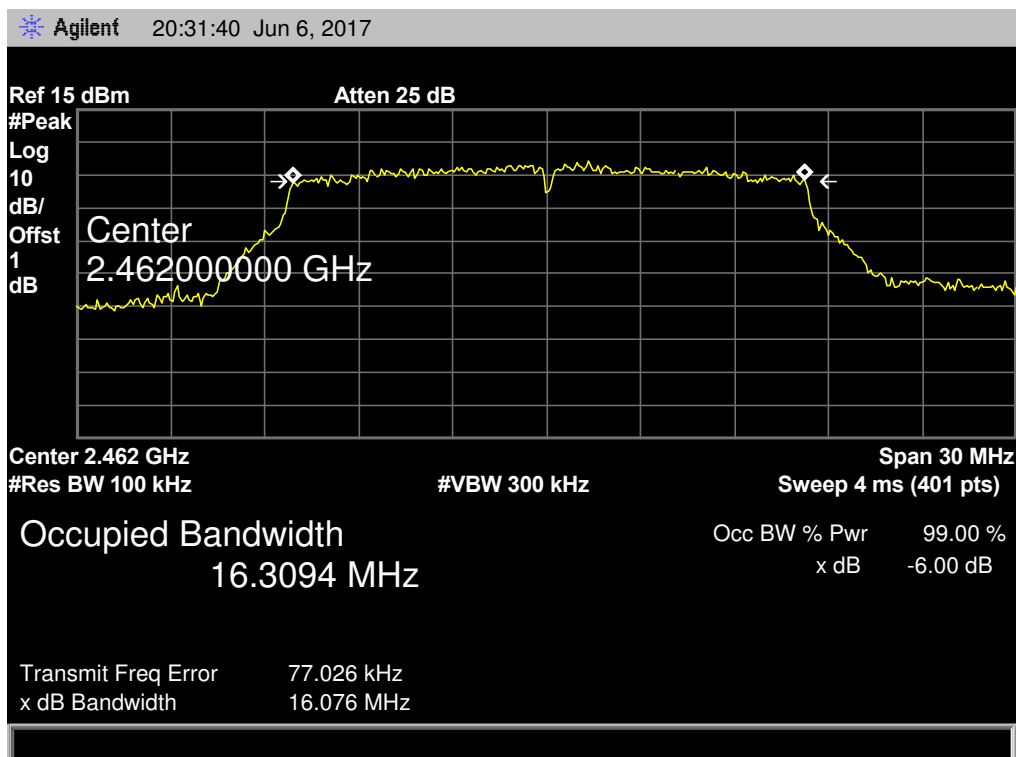



|                          |                       |                     |             |
|--------------------------|-----------------------|---------------------|-------------|
| EUT:                     | omimo WIFI Repeater   | Model:              | RP-R1       |
| Temperature:             | 25 °C                 | Relative Humidity:  | 55%         |
| Test Voltage:            | AC 120V/60 Hz         |                     |             |
| Test Mode:               | TX 802.11G Mode ANT b |                     |             |
| Channel frequency (MHz)  | 6dB Bandwidth (MHz)   | 99% Bandwidth (MHz) | Limit (MHz) |
| 2412                     | 15.964                | 16.2919             | >=0.5       |
| 2437                     | 15.547                | 16.2968             |             |
| 2462                     | 16.393                | 16.3045             |             |
| 802.11G Mode (Antenna b) |                       |                     |             |
| 2412 MHz                 |                       |                     |             |

Agilent22:22:06 Jun 6, 2017

Ref 15 dBm

Atten 25 dB

#Peak

Log

10

dB/

Offst

1

dB

Center

2.412000000 GHz

Center 2.412 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 20 MHz

Sweep 4 ms (401 pts)

Occupied Bandwidth

16.2919 MHz

Occ BW % Pwr

99.00 %

x dB

-6.00 dB

Transmit Freq Error


65.982 kHz

x dB Bandwidth

15.964 MHz


## 802.11G Mode (Antenna b)

2437 MHz

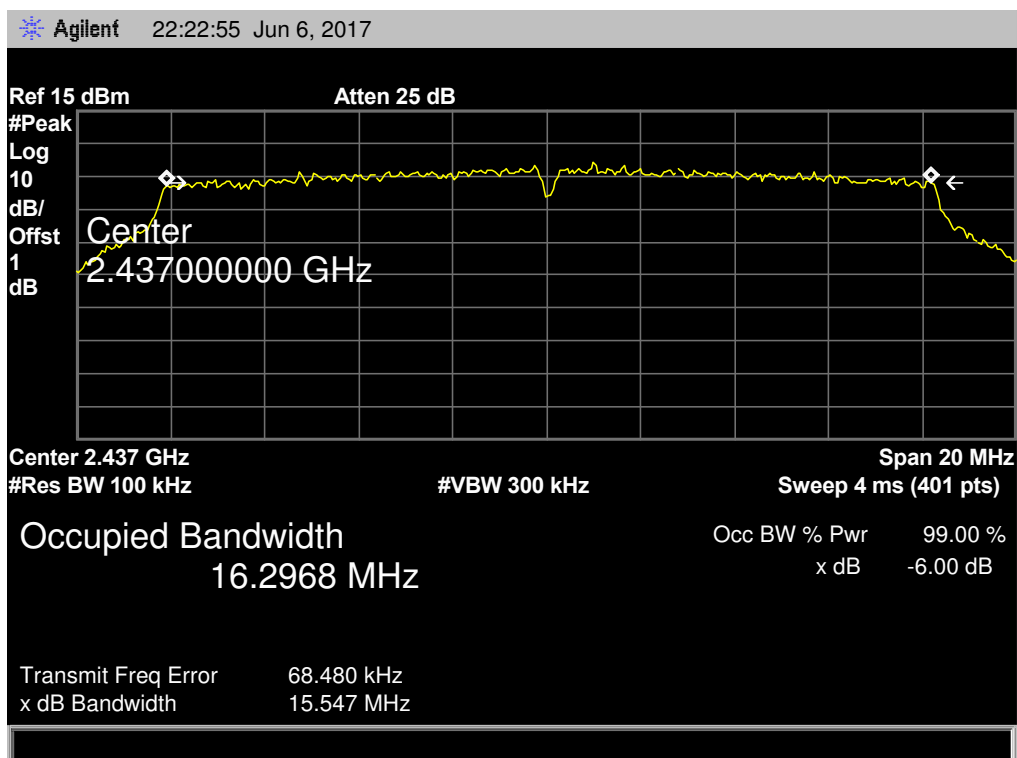


## 802.11G Mode (Antenna b)

2462 MHz

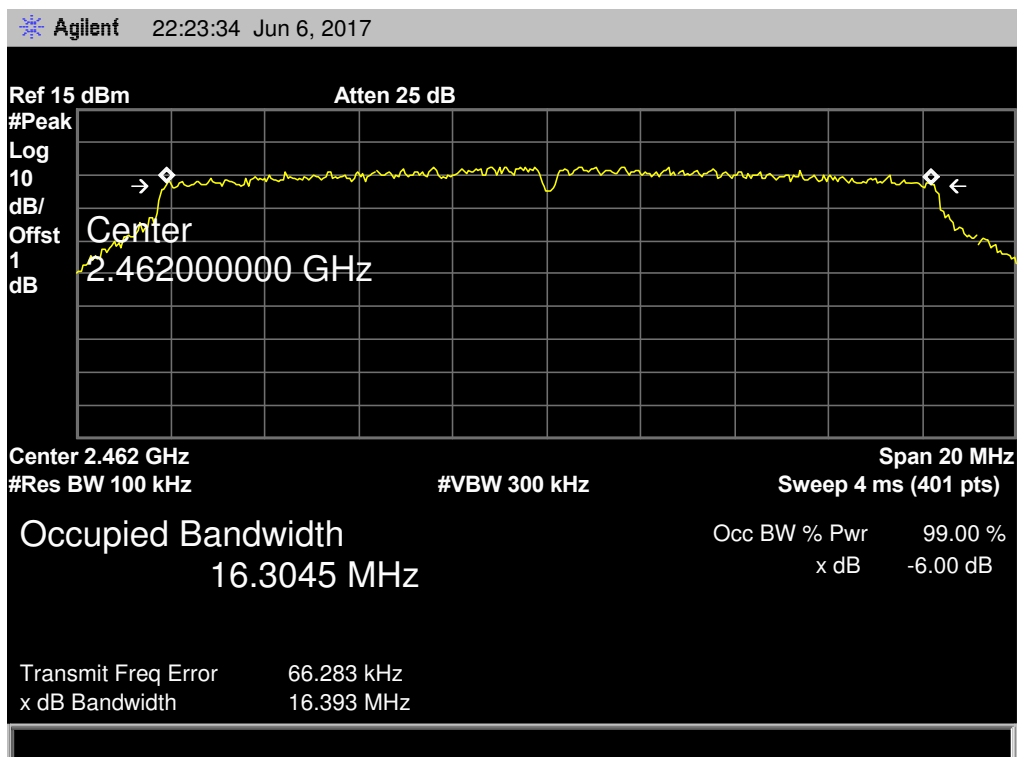




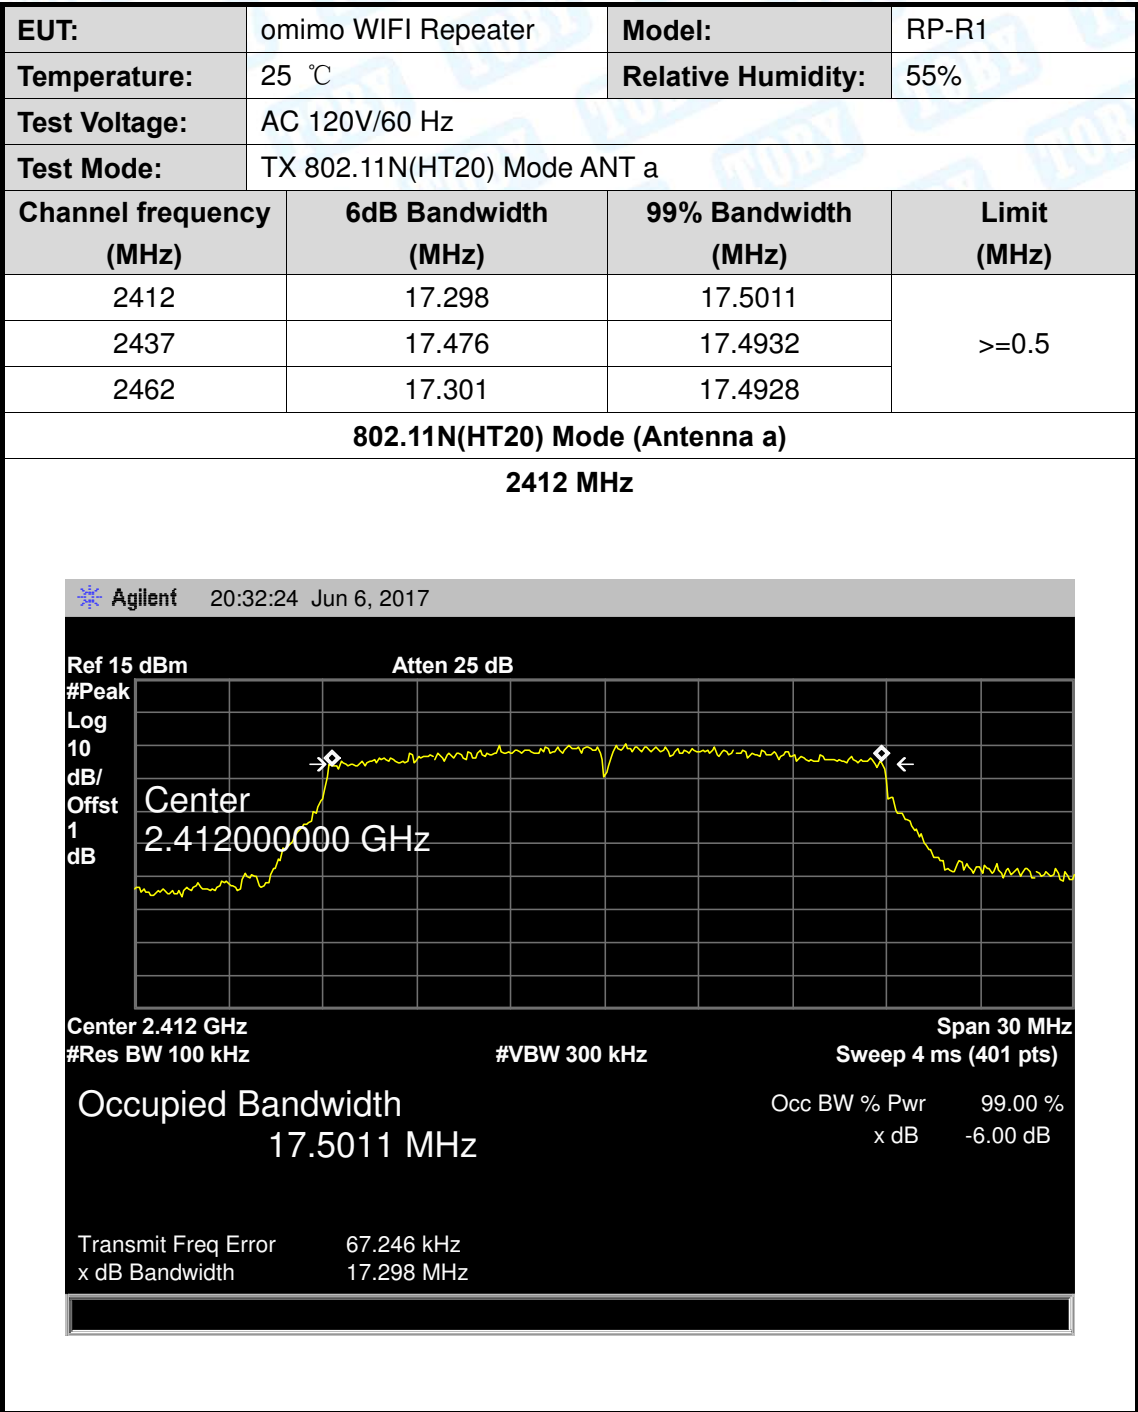


802.11N(HT20) Mode (Antenna a)

2437 MHz

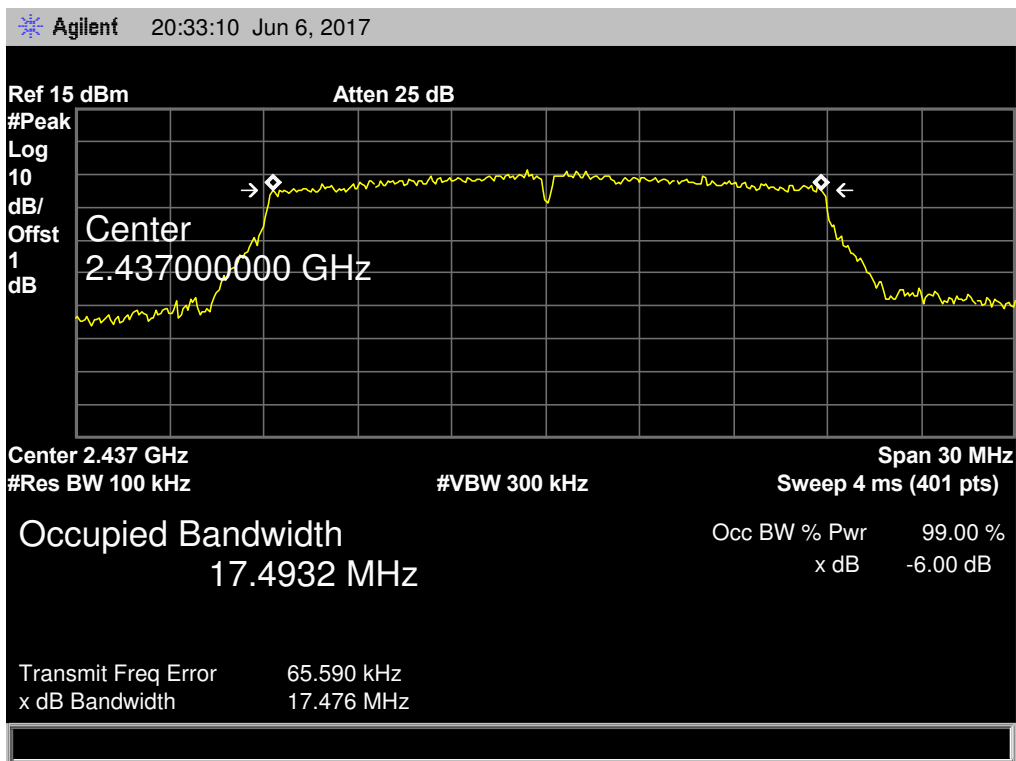

802.11N(HT20) Mode (Antenna a)

2462 MHz

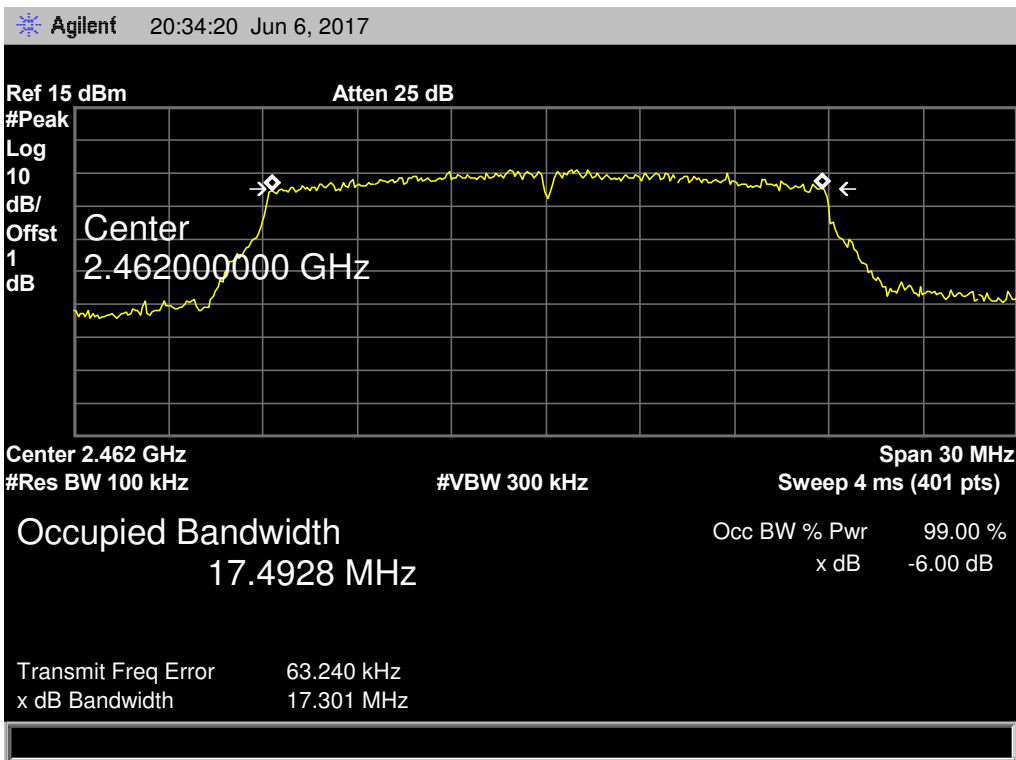



|                                |                             |                     |             |
|--------------------------------|-----------------------------|---------------------|-------------|
| EUT:                           | omimo WIFI Repeater         | Model:              | RP-R1       |
| Temperature:                   | 25 °C                       | Relative Humidity:  | 55%         |
| Test Voltage:                  | AC 120V/60 Hz               |                     |             |
| Test Mode:                     | TX 802.11N(HT20) Mode ANT b |                     |             |
| Channel frequency (MHz)        | 6dB Bandwidth (MHz)         | 99% Bandwidth (MHz) | Limit (MHz) |
| 2412                           | 17.325                      | 17.4876             | >=0.5       |
| 2437                           | 17.335                      | 17.4703             |             |
| 2462                           | 17.317                      | 17.4938             |             |
| 802.11N(HT20) Mode (Antenna b) |                             |                     |             |
| 2412 MHz                       |                             |                     |             |

Agilent22:24:09 Jun 6, 2017

Ref 15 dBm

Atten 25 dB

#Peak

Log

10

dB/

Offst

1

dB

Center

2.412000000 GHz

Center 2.412 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 20 MHz

Sweep 4 ms (401 pts)

Occupied Bandwidth

17.4876 MHz

Occ BW % Pwr

99.00 %

x dB



-6.00 dB

Transmit Freq Error

77.811 kHz

x dB Bandwidth

17.325 MHz

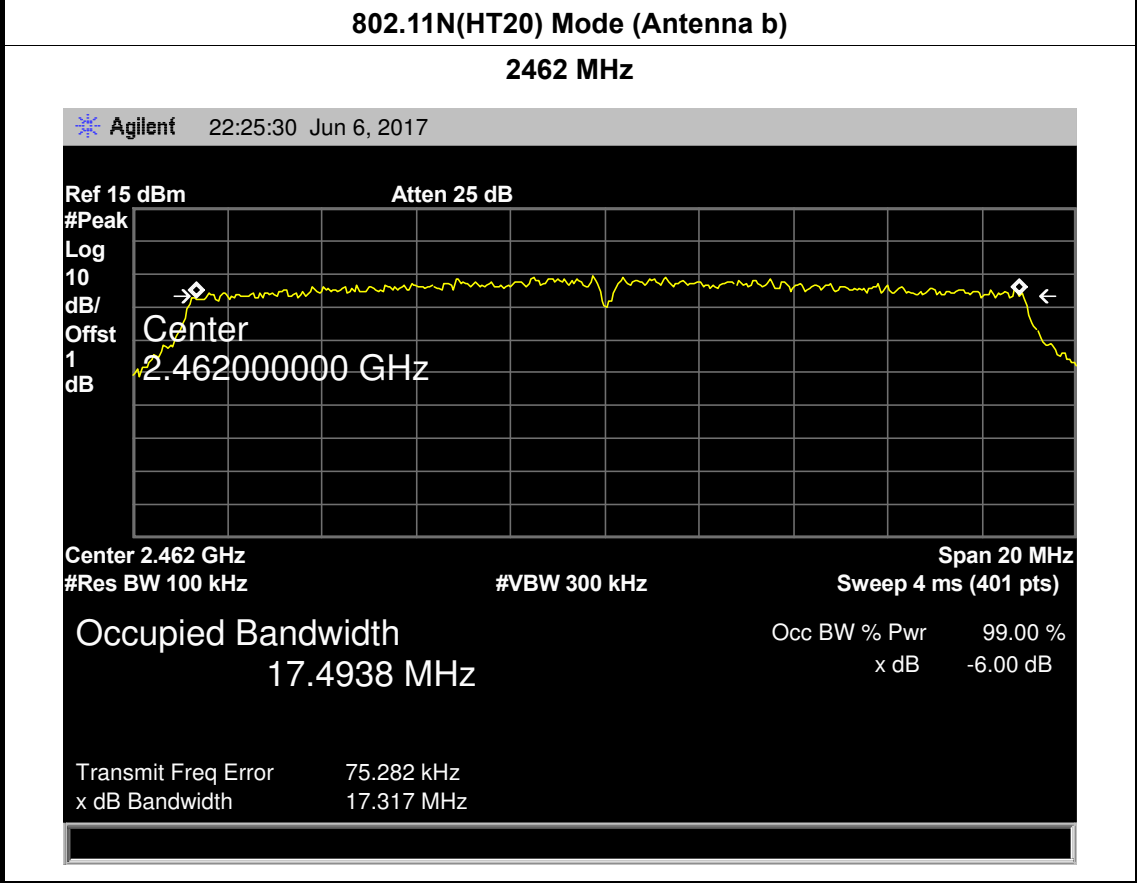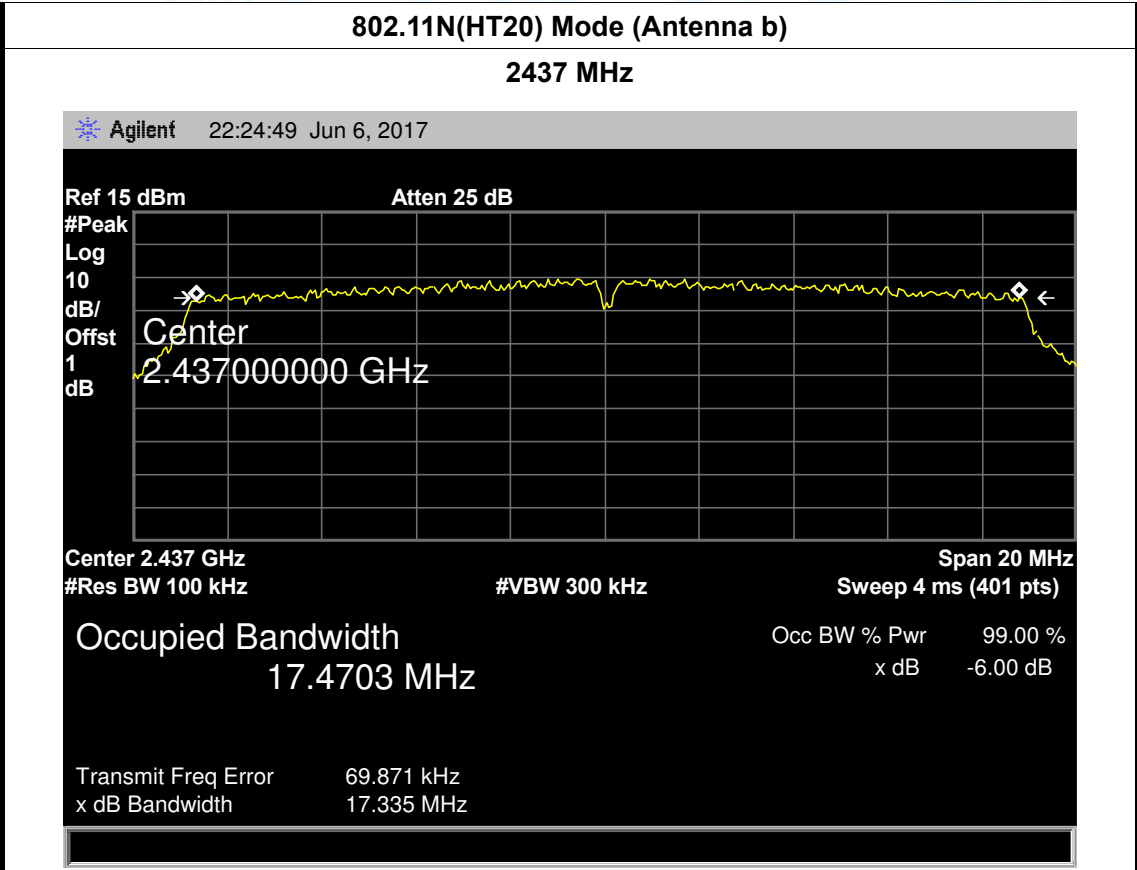



|                                |                             |                     |                    |       |
|--------------------------------|-----------------------------|---------------------|--------------------|-------|
| EUT:                           | omimo WIFI Repeater         |                     | Model:             | RP-R1 |
| Temperature:                   | 25 °C                       |                     | Relative Humidity: | 55%   |
| Test Voltage:                  | AC 120V/60 Hz               |                     |                    |       |
| Test Mode:                     | TX 802.11N(HT40) Mode ANT a |                     |                    |       |
| Channel frequency (MHz)        | 6dB Bandwidth (MHz)         | 99% Bandwidth (MHz) | Limit (MHz)        |       |
| 2422                           | 35.666                      | 35.7502             | >=0.5              |       |
| 2437                           | 35.252                      | 35.7382             |                    |       |
| 2452                           | 35.680                      | 35.7956             |                    |       |
| 802.11N(HT40) Mode (Antenna a) |                             |                     |                    |       |
| 2422 MHz                       |                             |                     |                    |       |

Agilent20:35:24 Jun 6, 2017

Ref 15 dBm

Atten 25 dB

#Peak

Log

10

dB/

Offst

1

dB

Span

50.00000000 MHz

Center 2.422 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 5.18 ms (401 pts)

Span 50 MHz

Occupied Bandwidth

35.7502 MHz

Occ BW % Pwr

99.00 %

x dB

-6.00 dB

Transmit Freq Error


129.150 kHz

x dB Bandwidth

35.666 MHz


802.11N(HT40) Mode (Antenna a)

2437 MHz

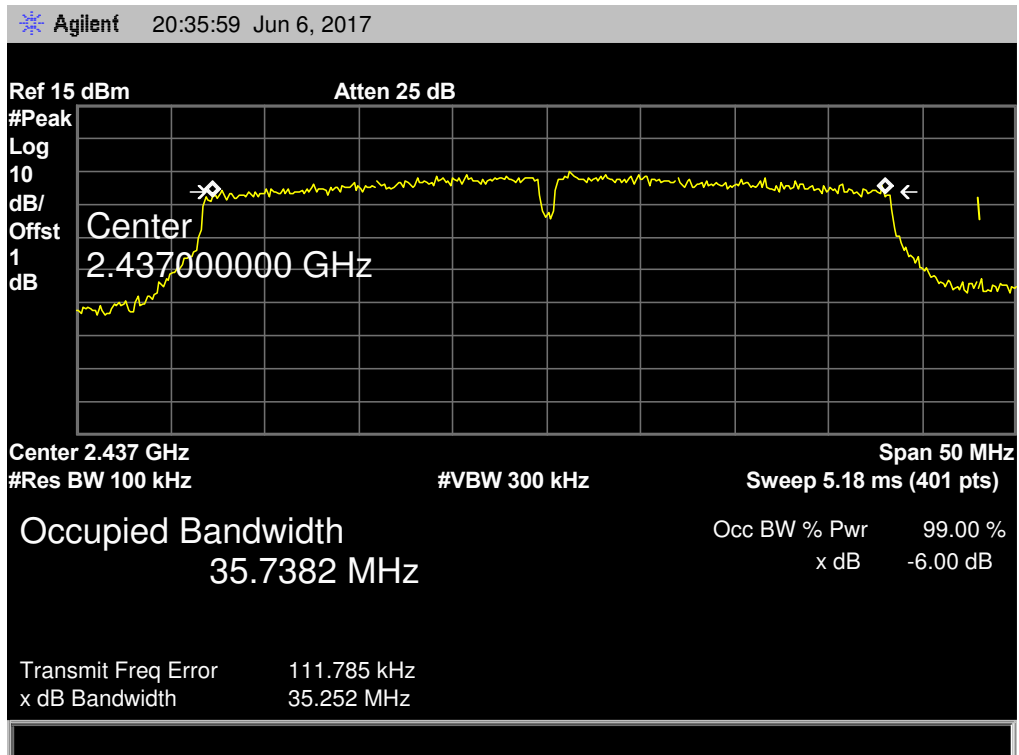

802.11N(HT40) Mode (Antenna a)

2452 MHz

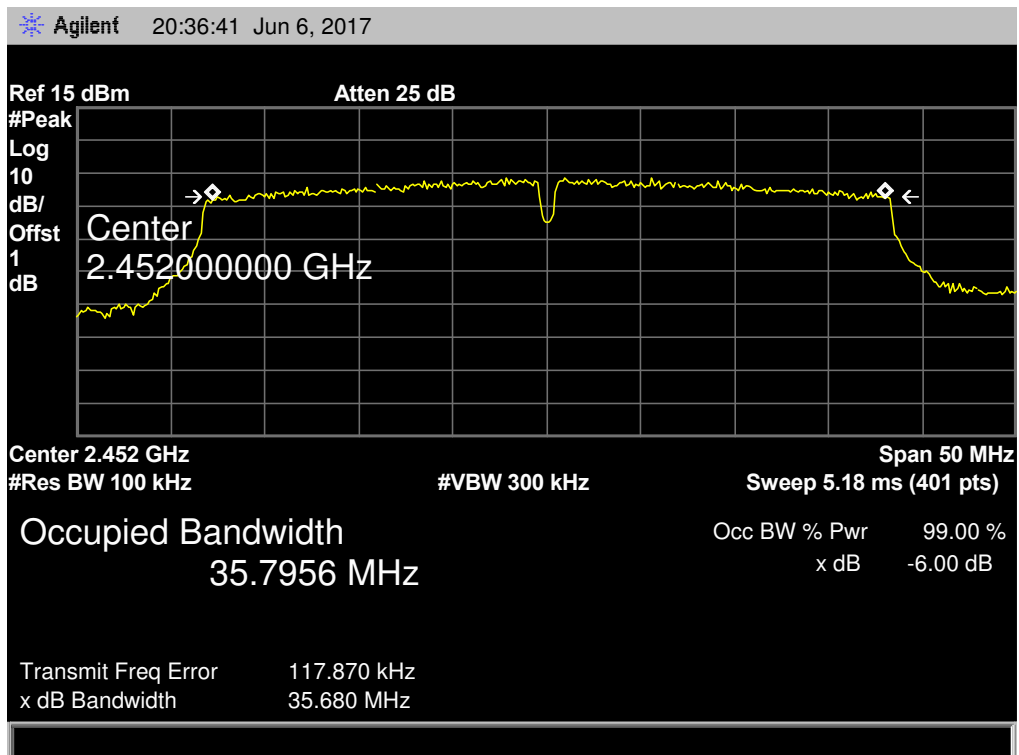



|                                |                             |                     |                    |       |
|--------------------------------|-----------------------------|---------------------|--------------------|-------|
| EUT:                           | omimo WIFI Repeater         |                     | Model:             | RP-R1 |
| Temperature:                   | 25 °C                       |                     | Relative Humidity: | 55%   |
| Test Voltage:                  | AC 120V/60 Hz               |                     |                    |       |
| Test Mode:                     | TX 802.11N(HT40) Mode ANT b |                     |                    |       |
| Channel frequency (MHz)        | 6dB Bandwidth (MHz)         | 99% Bandwidth (MHz) | Limit (MHz)        |       |
| 2422                           | 35.457                      | 35.7287             | >=0.5              |       |
| 2437                           | 36.045                      | 35.7579             |                    |       |
| 2452                           | 33.200                      | 35.7351             |                    |       |
| 802.11N(HT20) Mode (Antenna b) |                             |                     |                    |       |
| 2422 MHz                       |                             |                     |                    |       |

Agilent

22:26:33 Jun 6, 2017

Ref 15 dBm

Atten 25 dB

#Peak

Log

10

dB/

Offst

1

dB

Span

40.00000000 MHz

Center 2.422 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 4.144 ms (401 pts)

Span 40 MHz

Occupied Bandwidth

35.7287 MHz

Occ BW % Pwr

99.00 %

x dB

-6.00 dB

Transmit Freq Error


147.949 kHz

x dB Bandwidth

35.457 MHz


802.11N(HT40) Mode (Antenna b)

2437 MHz

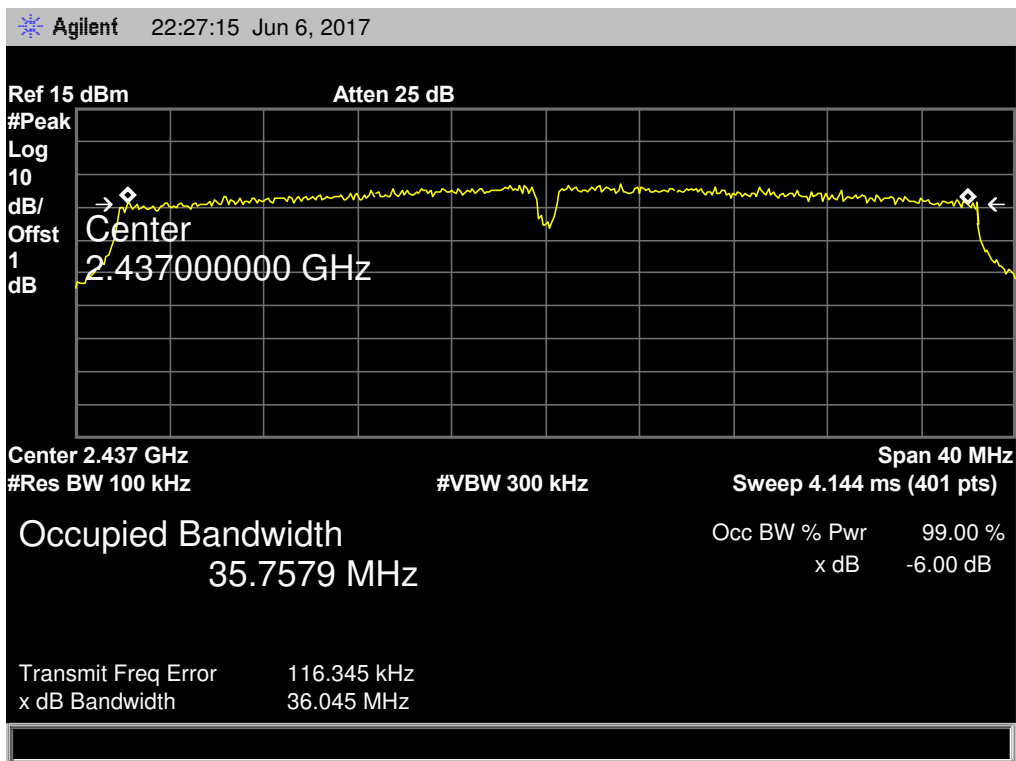

802.11N(HT40) Mode (Antenna b)

2452 MHz

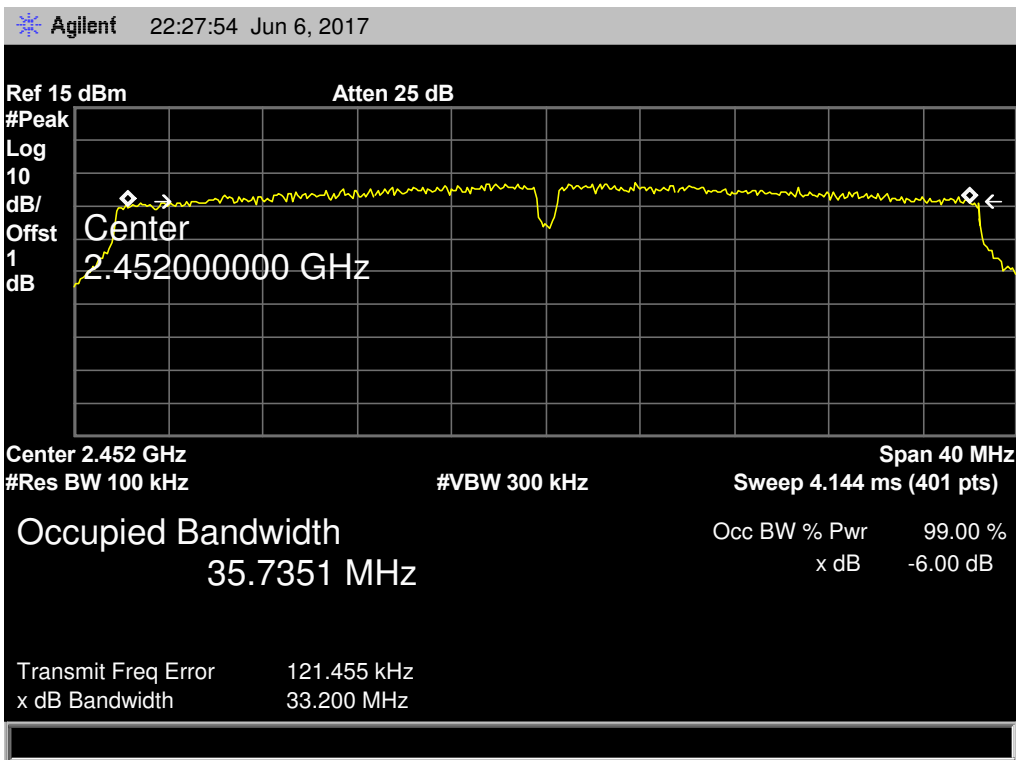



## 8. Peak Output Power Test

### 8.1 Test Standard and Limit


#### 8.1.1 Test Standard

FCC Part 15.247 (b)

#### 8.1.2 Test Limit

| FCC Part 15 Subpart C(15.247)/RSS-210 |                  |                      |
|---------------------------------------|------------------|----------------------|
| Test Item                             | Limit            | Frequency Range(MHz) |
| Peak Output Power                     | 1 Watt or 30 dBm | 2400~2483.5          |

### 8.2 Test Setup

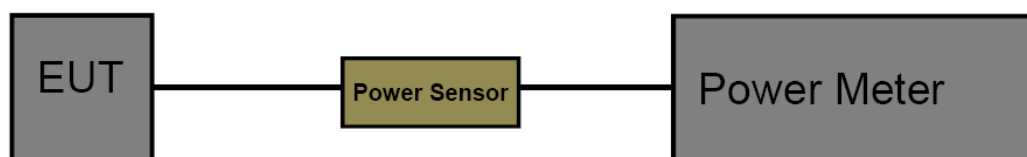

### 8.3 Test Procedure

The measurement is according to section 9.1.2 of KDB 558074 D01 DTS Meas Guidance v04 and KDB 662911 D01 Multiple Transmitter Output v02r01.

The EUT was connected to RF power meter via a broadband power sensor as show the block above. The power sensor video bandwidth is greater than or equal to the DTS bandwidth of the equipment.


### 8.4 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.


## 8.5 Test Data

| Conducted Power                                                                                                                                                 |           |                       |        |       |                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------------------|--------|-------|------------------|
| 802.11b Power                                                                                                                                                   |           |                       |        |       |                  |
| Channel                                                                                                                                                         | Frequency | Conducted Power (dBm) |        |       | Max. Limit (dBm) |
|                                                                                                                                                                 |           | Ant. a                | Ant. b | Total |                  |
| 1                                                                                                                                                               | 2412 MHz  | 14.28                 | 14.34  | ---   | 30               |
| 6                                                                                                                                                               | 2437 MHz  | 14.52                 | 14.48  | ---   |                  |
| 11                                                                                                                                                              | 2462 MHz  | 14.54                 | 14.41  | ---   |                  |
| 802.11g Power                                                                                                                                                   |           |                       |        |       |                  |
| Channel                                                                                                                                                         | Frequency | Conducted Power (dBm) |        |       | Max. Limit (dBm) |
|                                                                                                                                                                 |           | Ant. a                | Ant. b | Total |                  |
| 1                                                                                                                                                               | 2412 MHz  | 14.14                 | 14.34  | ---   | 30               |
| 6                                                                                                                                                               | 2437 MHz  | 14.49                 | 14.14  | ---   |                  |
| 11                                                                                                                                                              | 2462 MHz  | 14.64                 | 14.16  | ---   |                  |
| 802.11n(HT20) Power                                                                                                                                             |           |                       |        |       |                  |
| Channel                                                                                                                                                         | Frequency | Conducted Power (dBm) |        |       | Max. Limit (dBm) |
|                                                                                                                                                                 |           | Ant. a                | Ant. b | Total |                  |
| 1                                                                                                                                                               | 2412 MHz  | 11.14                 | 11.07  | 14.12 | 30               |
| 6                                                                                                                                                               | 2437 MHz  | 11.57                 | 10.91  | 14.26 |                  |
| 11                                                                                                                                                              | 2462 MHz  | 11.17                 | 11.46  | 14.33 |                  |
| 802.11n(HT40) Power                                                                                                                                             |           |                       |        |       |                  |
| Channel                                                                                                                                                         | Frequency | Conducted Power (dBm) |        |       | Max. Limit (dBm) |
|                                                                                                                                                                 |           | Ant. a                | Ant. b | Total |                  |
| 3                                                                                                                                                               | 2422 MHz  | 11.71                 | 10.90  | 14.33 | 30               |
| 6                                                                                                                                                               | 2437 MHz  | 11.35                 | 11.45  | 14.41 |                  |
| 9                                                                                                                                                               | 2452 MHz  | 11.05                 | 11.28  | 14.18 |                  |
| Note: When ANT a and ANT b transmitting simultaneously, the total Antenna Gain=Gain a+Gani b=4.01 dBi< 6 dBi.<br>So P <sub>out</sub> =P <sub>limit</sub> =30dBm |           |                       |        |       |                  |




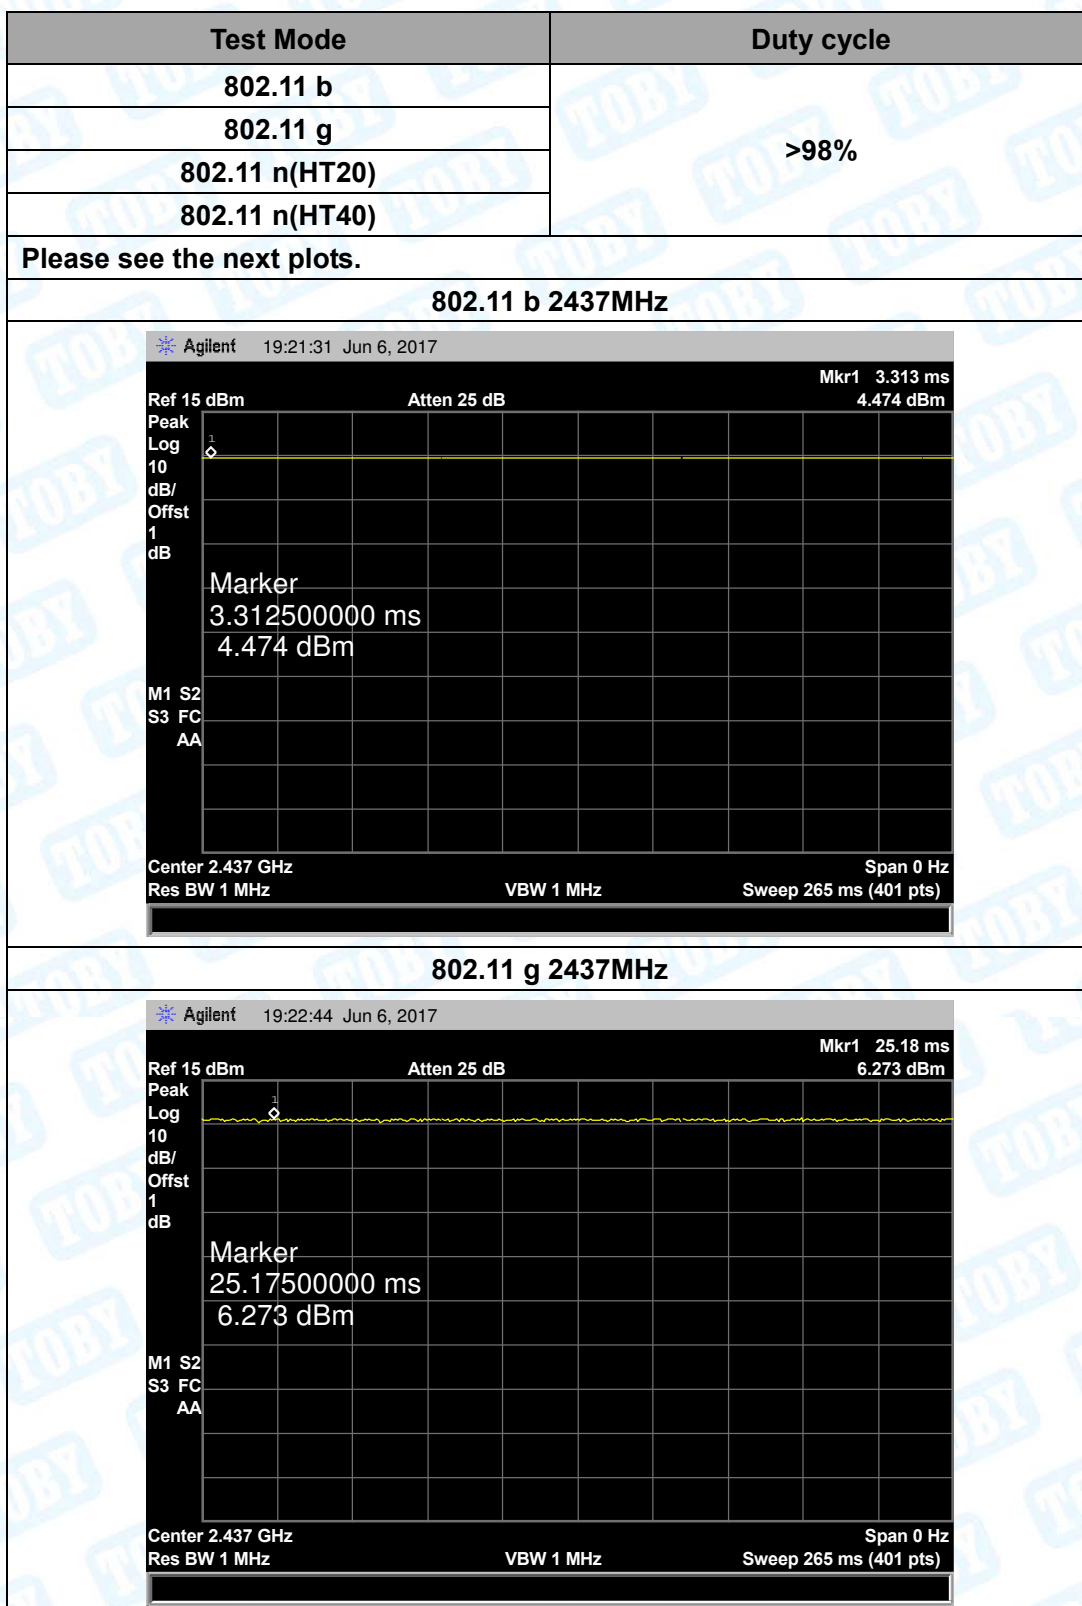

802.11 n(HT20) 2437MHz

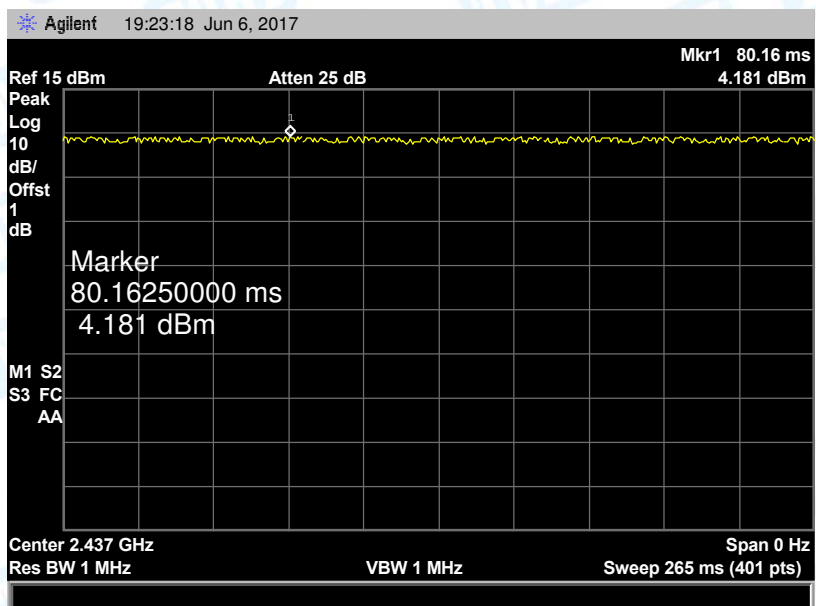

802.11 n(HT40) 2437MHz

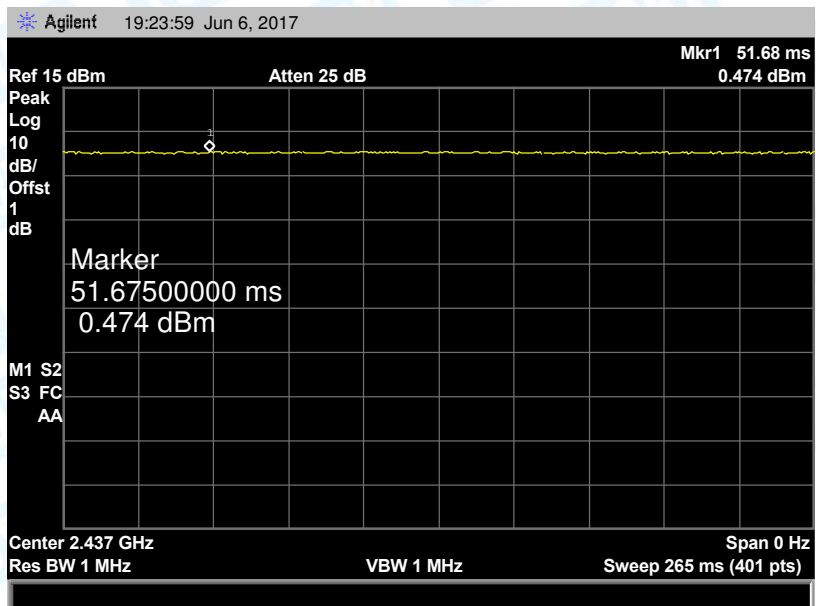



## 9. Power Spectral Density Test

### 9.1 Test Standard and Limit


#### 9.1.1 Test Standard

FCC Part 15.247 (e)

#### 9.1.2 Test Limit

| FCC Part 15 Subpart C(15.247) |                    |                      |
|-------------------------------|--------------------|----------------------|
| Test Item                     | Limit              | Frequency Range(MHz) |
| Power Spectral Density        | 8dBm(in any 3 kHz) | 2400~2483.5          |

### 9.2 Test Setup



### 9.3 Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v04 and KDB 662911 D01 Multiple Transmitter Output v02r01.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyser center frequency to DTS channel center frequency.
- (3) Set the span to 1.5 times the DTS bandwidth.
- (4) Set the RBW to: 3 kHz
- (5) Set the VBW to: 10 kHz
- (6) Detector: peak
- (7) Sweep time: auto
- (8) Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

### 9.4 EUT Operating Condition


The EUT was set to continuously transmitting in each mode and low, middle and high channel for the test.

## 9.5 Test Data


| 802.11b Mode                                                                                                                                             |           |                            |        |        |                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------------------------|--------|--------|-----------------------|
| Channel                                                                                                                                                  | Frequency | Conducted Power (dBm/3KHz) |        |        | Max. Limit (dBm/3KHz) |
|                                                                                                                                                          |           | Ant. a                     | Ant. b | Total  |                       |
| 1                                                                                                                                                        | 2412 MHz  | -9.552                     | -10.97 | ---    | 8                     |
| 6                                                                                                                                                        | 2437 MHz  | -11.63                     | -9.577 | ---    |                       |
| 11                                                                                                                                                       | 2462 MHz  | -10.03                     | -12.03 | ---    |                       |
| 802.11g Mode                                                                                                                                             |           |                            |        |        |                       |
| Channel                                                                                                                                                  | Frequency | Conducted Power (dBm/3KHz) |        |        | Max. Limit (dBm/3KHz) |
|                                                                                                                                                          |           | Ant. a                     | Ant. b | Total  |                       |
| 1                                                                                                                                                        | 2412 MHz  | -14.80                     | -14.99 | ---    | 8                     |
| 6                                                                                                                                                        | 2437 MHz  | -15.20                     | -15.43 | ---    |                       |
| 11                                                                                                                                                       | 2462 MHz  | -13.66                     | -15.16 | ---    |                       |
| 802.11n(HT20) Mode                                                                                                                                       |           |                            |        |        |                       |
| Channel                                                                                                                                                  | Frequency | Conducted Power (dBm/3KHz) |        |        | Max. Limit (dBm/3KHz) |
|                                                                                                                                                          |           | Ant. a                     | Ant. b | Total  |                       |
| 1                                                                                                                                                        | 2412 MHz  | -14.86                     | -19.09 | -13.47 | 8                     |
| 6                                                                                                                                                        | 2437 MHz  | -17.66                     | -19.02 | -15.28 |                       |
| 11                                                                                                                                                       | 2462 MHz  | -16.82                     | -18.74 | -14.66 |                       |
| 802.11n(HT40) Mode                                                                                                                                       |           |                            |        |        |                       |
| Channel                                                                                                                                                  | Frequency | Conducted Power (dBm/3KHz) |        |        | Max. Limit (dBm/3KHz) |
|                                                                                                                                                          |           | Ant. a                     | Ant. b | Total  |                       |
| 3                                                                                                                                                        | 2422 MHz  | -19.99                     | -20.40 | -17.18 | 8                     |
| 6                                                                                                                                                        | 2437 MHz  | -18.72                     | -21.62 | -16.92 |                       |
| 9                                                                                                                                                        | 2452 MHz  | -19.77                     | -22.07 | -17.76 |                       |
| Note: When ANT1 and ANT2 transmitting simultaneously, the total Antenna Gain=Gain 1+Gani 2=4.01 dBi<6 dBi.<br>So P <sub>out</sub> =P <sub>limit</sub> =8 |           |                            |        |        |                       |
| Test plots please refer to below pages:                                                                                                                  |           |                            |        |        |                       |




802.11 b 2412 MHz (ANT a)

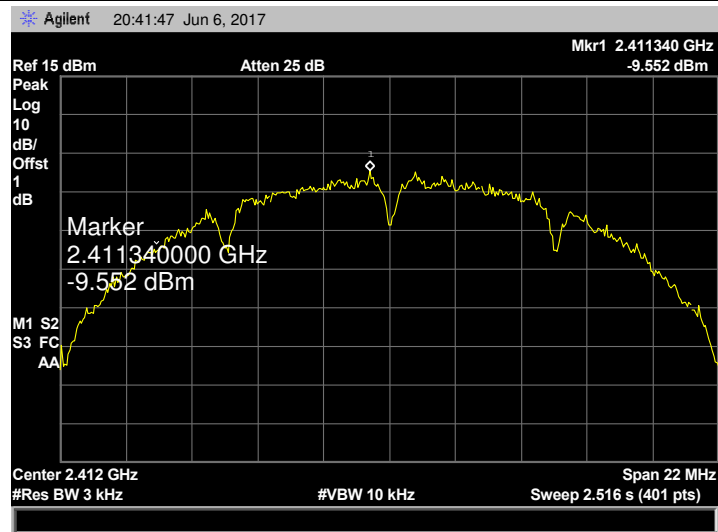


802.11 b 2437 MHz (ANT a)

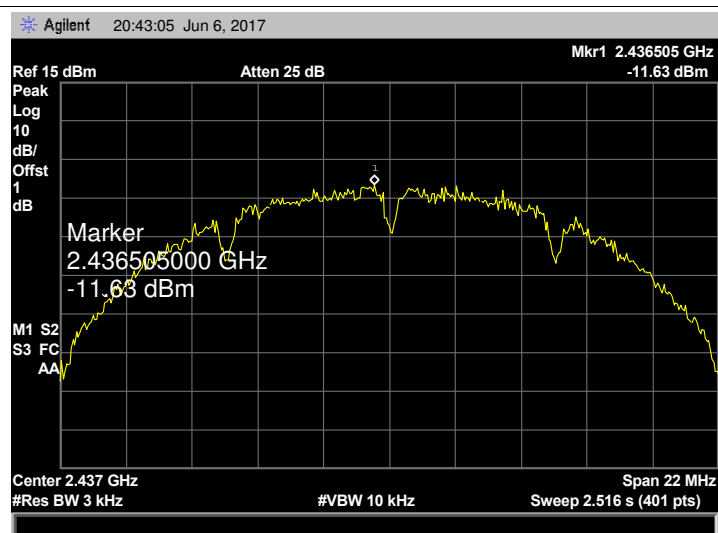


802.11 b 2462MHz (ANT a)

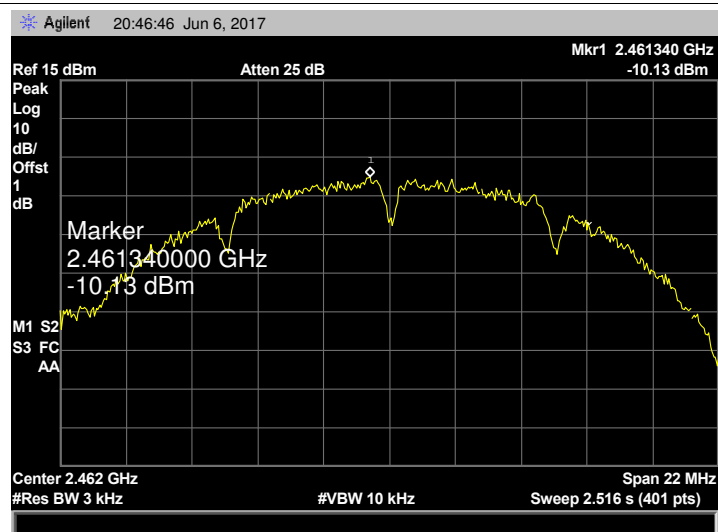


## 802.11 b 2412 MHz (ANT b)

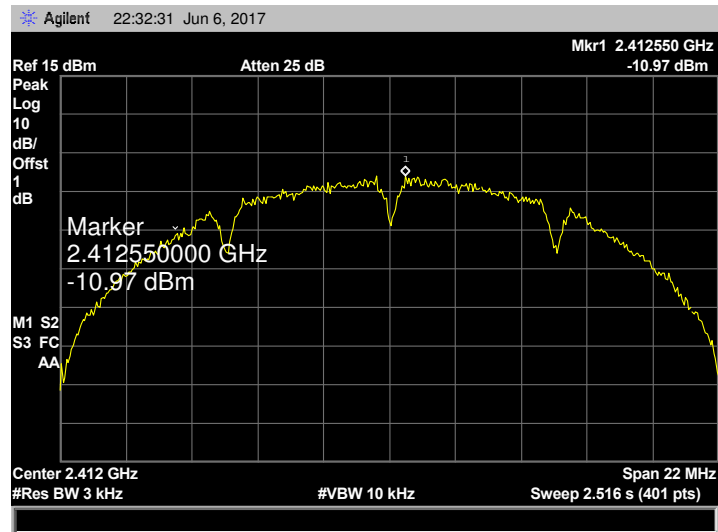

## 802.11 b 2437 MHz (ANT b)

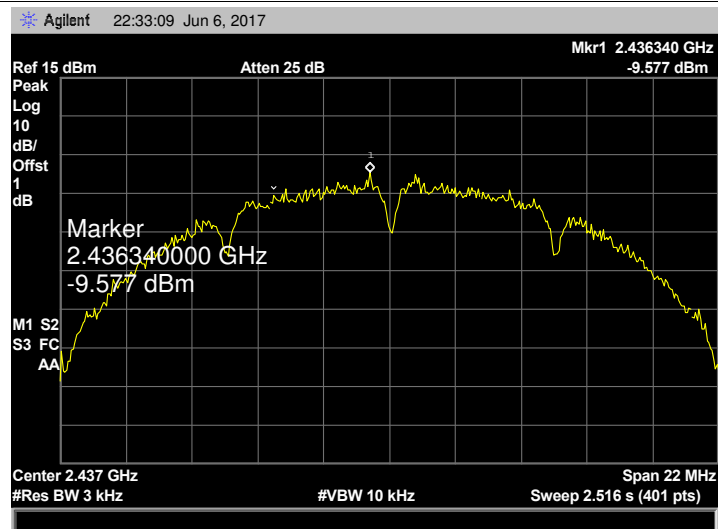


## 802.11 b 2462MHz (ANT b)

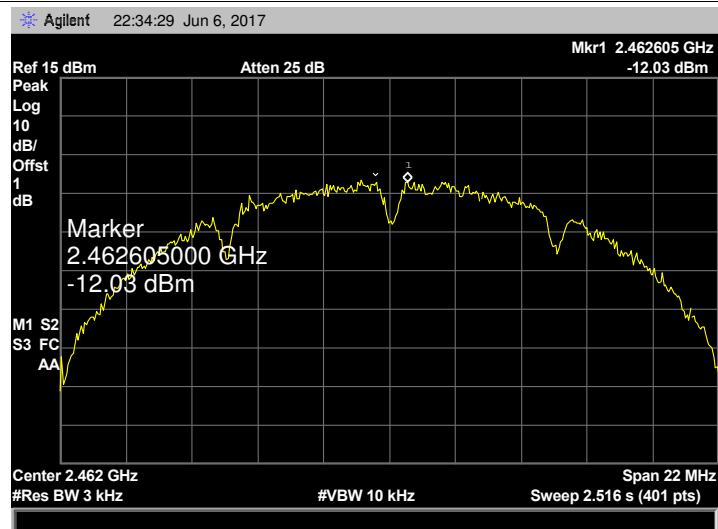





## 802.11 g 2412 MHz (ANT a)

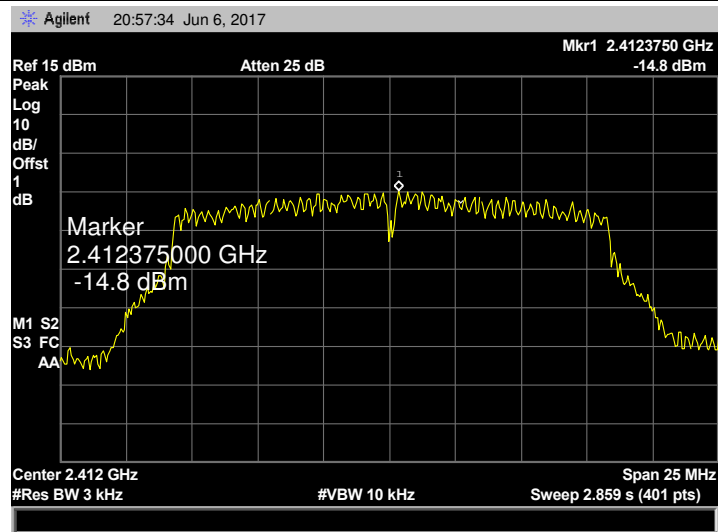


## 802.11 g 2437 MHz (ANT a)

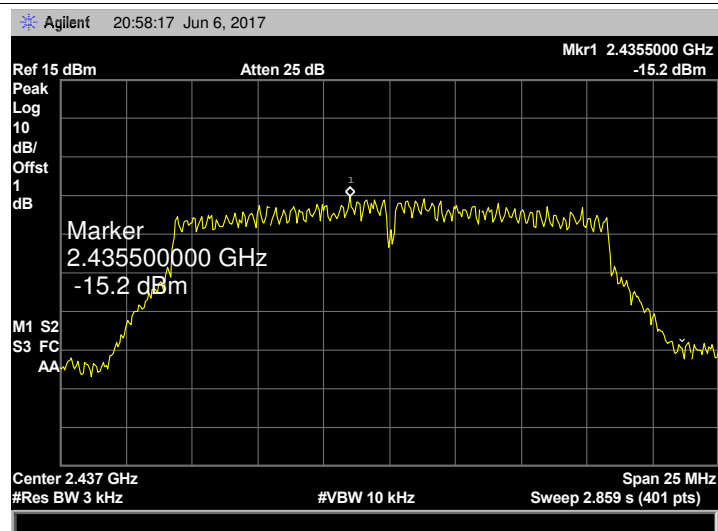


## 802.11 g 2462MHz (ANT a)

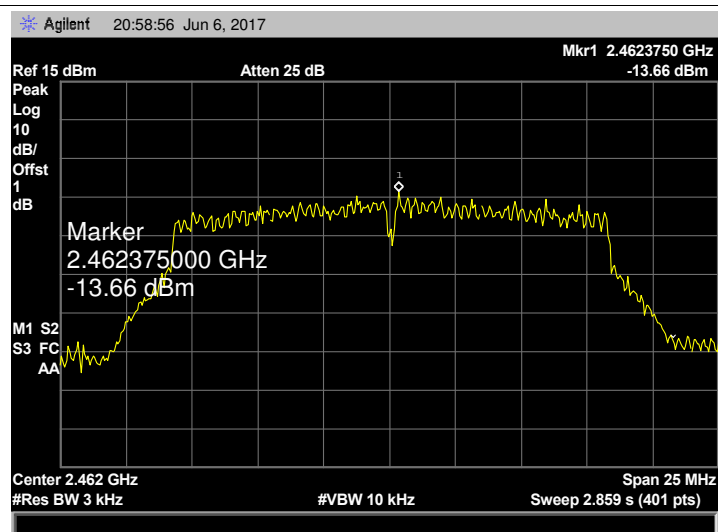


**802.11 g 2412 MHz (ANT b)**

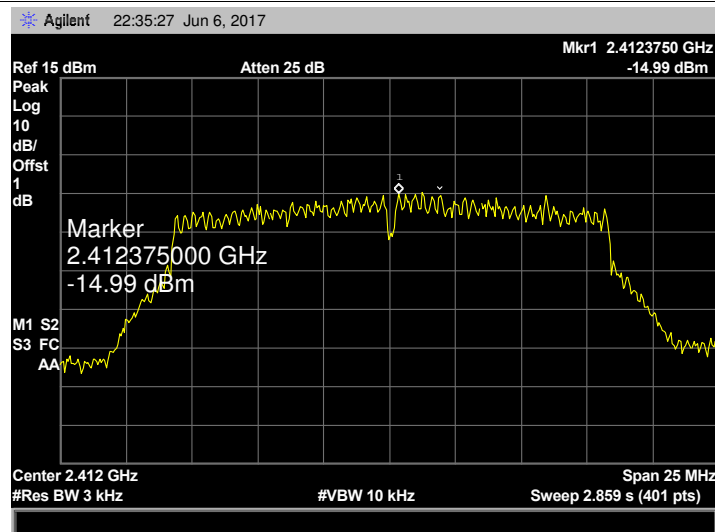

**802.11 g 2437 MHz (ANT b)**

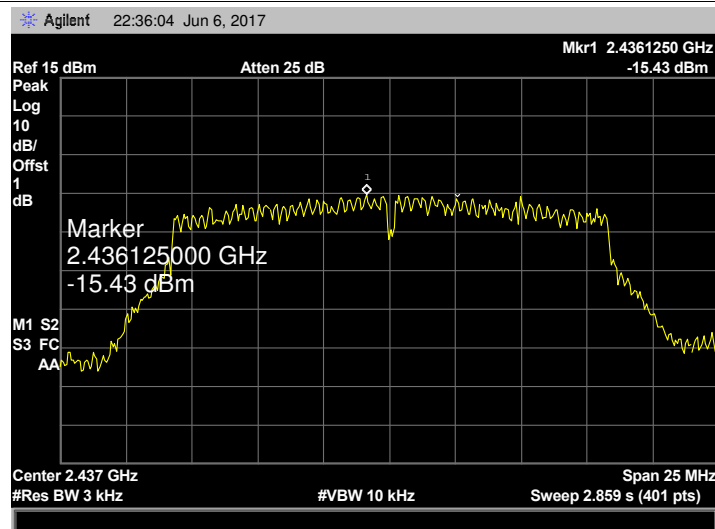


**802.11 g 2462 MHz (ANT b)**

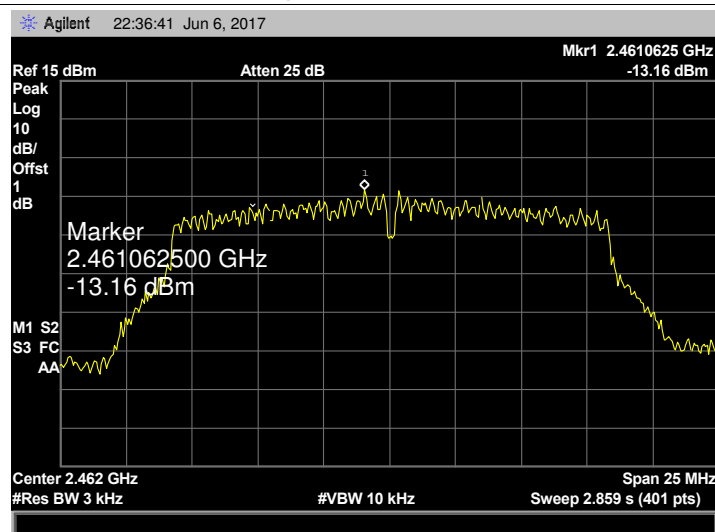





802.11 n(HT20) 2412 MHz (ANT a)

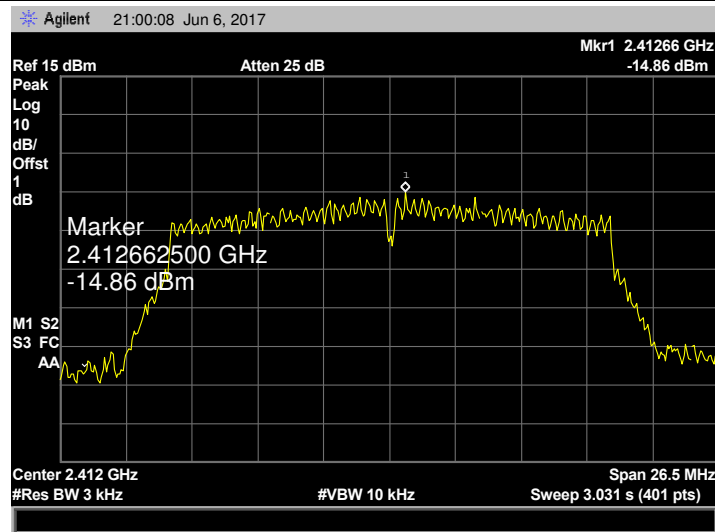


802.11 n(HT20) 2437 MHz (ANT a)

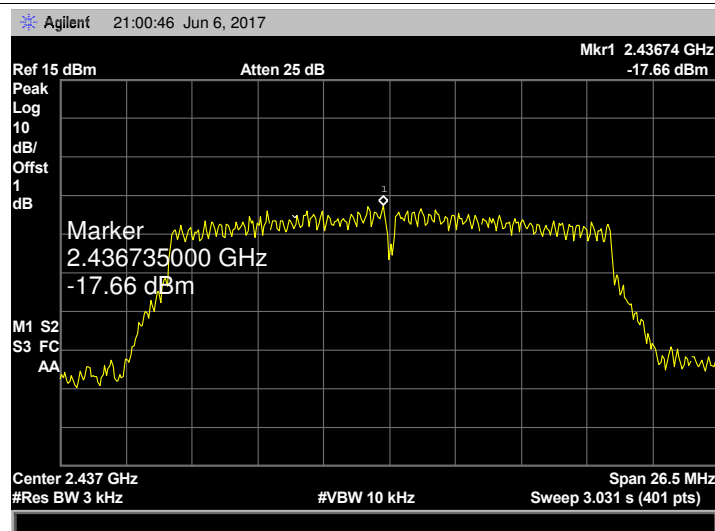


802.11 n(HT20) 2462MHz (ANT a)

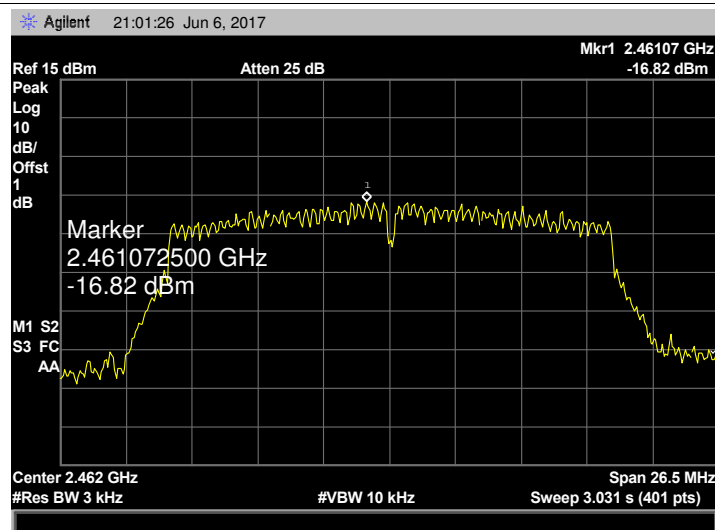


802.11 n(HT20) 2412 MHz (ANT b)

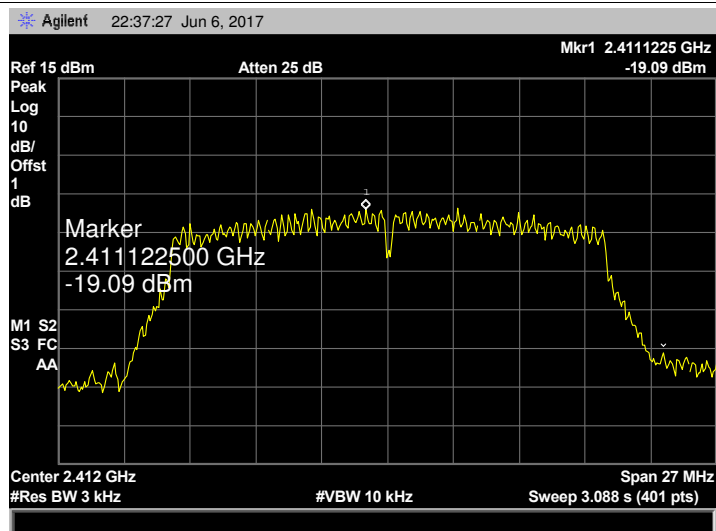

802.11 n(HT20) 2437 MHz (ANT b)

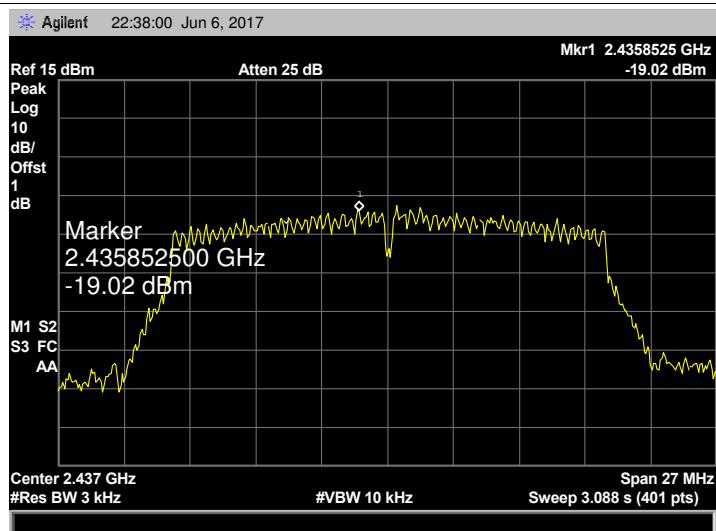


802.11 n(HT20) 2462MHz (ANT b)

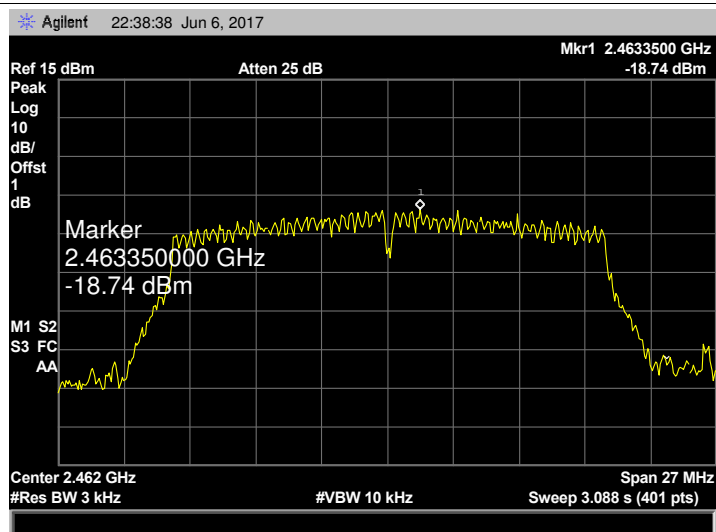





802.11 n(HT40) 2422 MHz (ANT a)

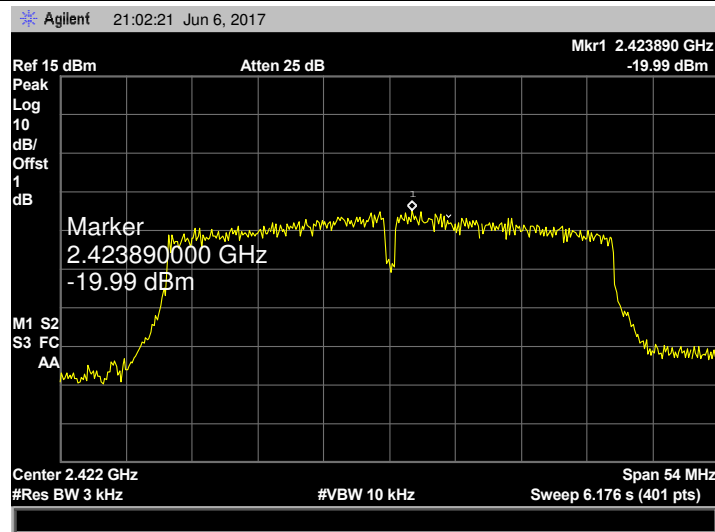


802.11 n(HT40) 2437 MHz (ANT a)

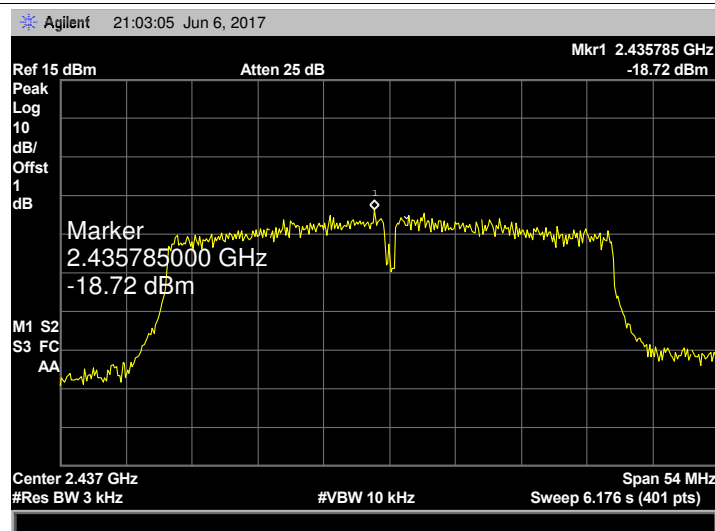


802.11 n(HT40) 2452MHz (ANT a)

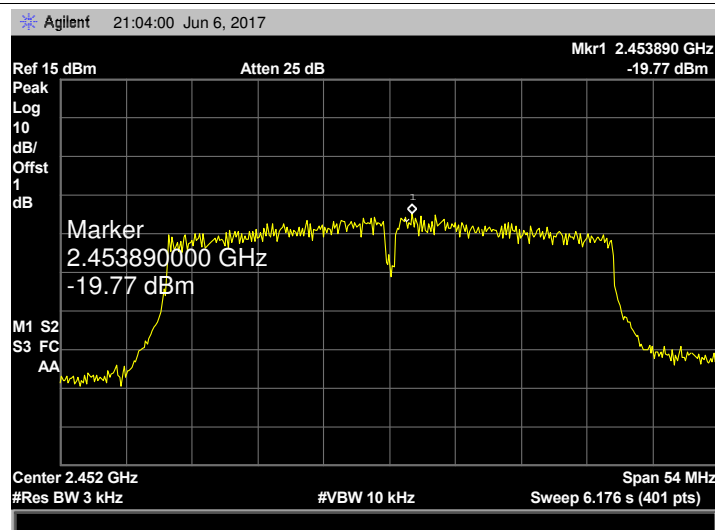


## 802.11 n(HT40) 2422 MHz (ANT b)

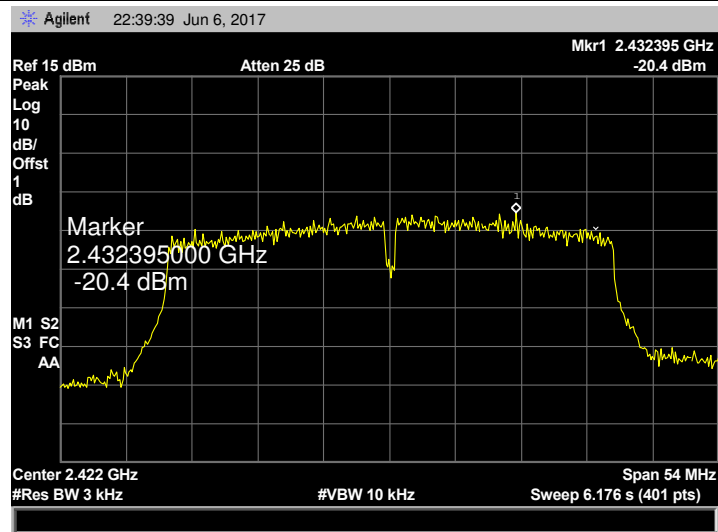

## 802.11 n(HT40) 2437 MHz (ANT b)

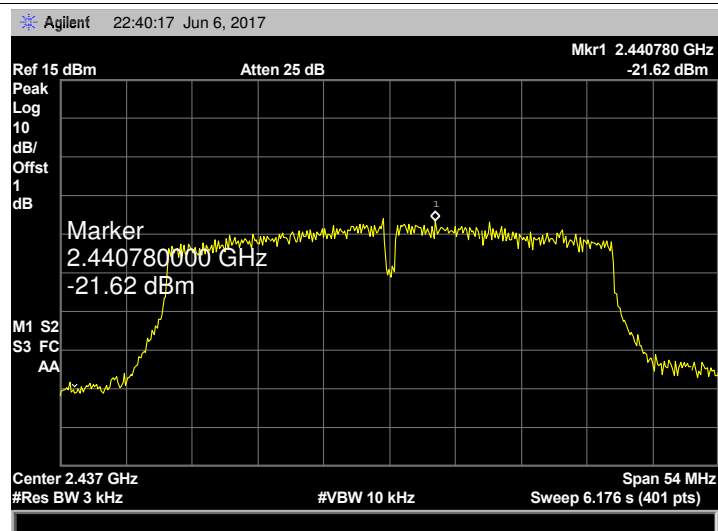

## 802.11 n(HT40) 2452MHz (ANT b)

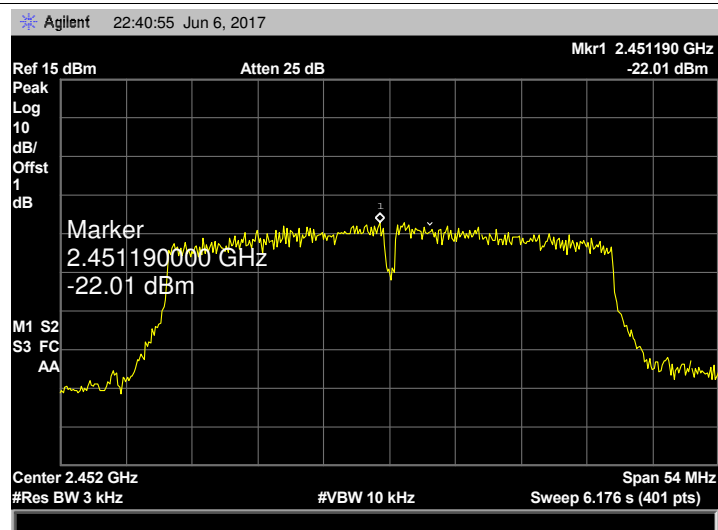



## 10. Antenna Requirement

### 10.1 Standard Requirement

#### 10.1.1 Standard

FCC Part 15.203

#### 10.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 10.2 Antenna Connected Construction

The directional gains of the antenna used for transmitting is 1 dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

#### Result

The EUT antenna is a PCB Antenna. It complies with the standard requirement.

| Antenna Type                                                   |
|----------------------------------------------------------------|
| <input checked="" type="checkbox"/> Permanent attached antenna |
| <input type="checkbox"/> Unique connector antenna              |
| <input type="checkbox"/> Professional installation antenna     |

-----END OF REPORT-----