



8. Unwanted Emission

8.1. Test Setup

Radiated Measurement

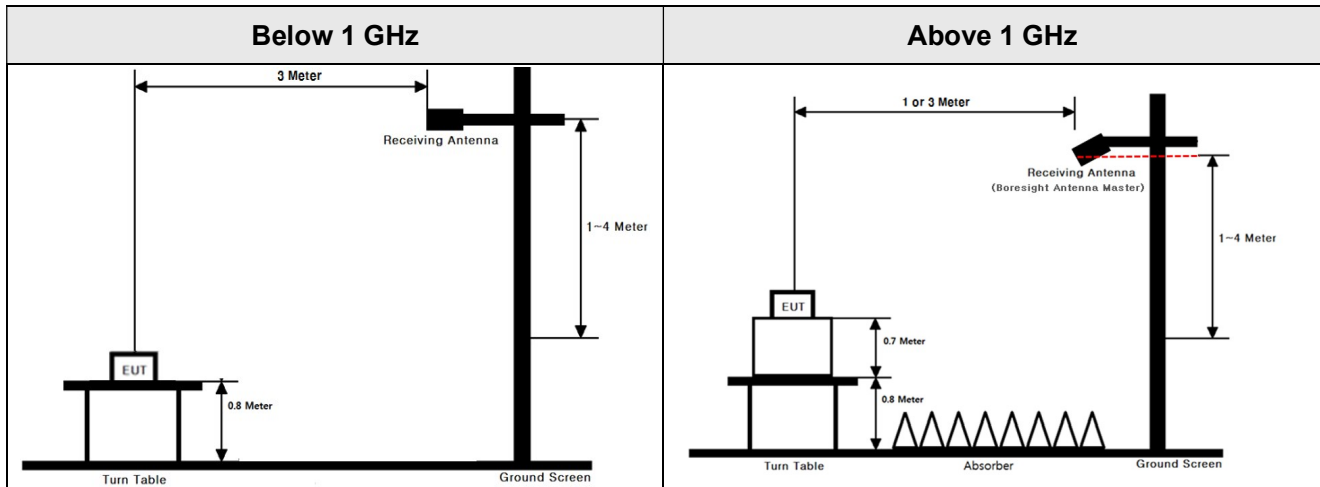

Conducted Measurement

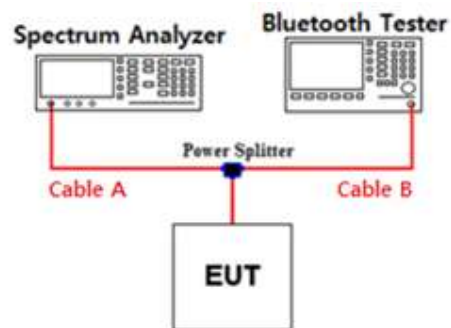

8.2. Limit

Part 15.247(d), Part 15.205, Part 15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of Part 15.247 the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

- Part 15.209: General requirement

Frequency (MHz)	FCC Limit (uV/m)	Measurement Distance (m)
0.009 – 0.490	2 400 / F (kHz)	300
0.490 – 1.705	24 000 / F (kHz)	30
1.705 – 30.0	30	30

Frequency (MHz)	FCC Limit (uV/m)	Measurement Distance (m)
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §15.231 and 15.241.

- Part 15.205(a): Restricted band of operation

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.414 25 ~ 8.414 75	108 ~ 121.94	1 300 ~ 1 427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1 435 ~ 1 626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.173 5 ~ 2.190 5	12.519 75 ~ 12.520 25	149.9 ~ 150.05	1 645.5 ~ 1 646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.576 75 ~ 12.577 25	156.524 75 ~ 156.525 25	1 660 ~ 1 710	8.025 ~ 8.5	22.01 ~ 23.12
4.177 25 ~ 4.177 75	13.36 ~ 13.41	156.7 ~ 156.9	1 718.8 ~ 1 722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.207 25 ~ 4.207 75	16.42 ~ 16.423	162.012 5 ~ 167.17	2 200 ~ 2 300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.694 75 ~ 16.695 25	167.72 ~ 173.2	2 310 ~ 2 390	10.6 ~ 12.7	36.43 ~ 36.5
6.267 75 ~ 6.268 25	16.804 25 ~ 16.804 75	240 ~ 285	2 483.5 ~ 2 500	13.25 ~ 13.4	Above 38.6
6.311 75 ~ 6.312 25	25.5 ~ 25.67	322 ~ 335.4	2 655 ~ 2 900		
8.291 ~ 8.294	37.5 ~ 38.25	399.90 ~ 410	3 260 ~ 3 267		
8.362 ~ 8.366	73 ~ 74.6	608 ~ 614	3 332 ~ 3 339		
8.376 25 ~ 8.386 75	74.8 ~ 75.2	960 ~ 1 240	3 345.8 ~ 3 358		
			3 600 ~ 4 400		

CSA Group Korea Ltd. 155, Osan-Ro, Mohyeon-eup, Cheoin-Gu, Yongin-Si, Gyeonggi-Do 16885 Republic of Korea www.csagroup.org	Report No.: CSA-26-R-0032-R1 Page (36) of (61)	
--	---	---

8.3. Test Procedures

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.
The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 1 or 3 meter away from the interference-receiving antenna.
3. For measurements above 1 GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.
4. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
6. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported.
Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Measurement Instrument Setting

- Frequencies less than or equal to 1 000 MHz
The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.

CSA Group Korea Ltd. 155, Osan-Ro, Mohyeon-eup, Cheoin-Gu, Yongin-Si, Gyeonggi-Do 16885 Republic of Korea www.csagroup.org	Report No.: CSA-26-R-0032-R1 Page (37) of (61)	
--	---	---

- Frequencies above 1 000 MHz

The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.

The result of Average measurement is calculated using PK result and duty correction factor.

For Conducted

- 1 The transmitter output was connected to the spectrum analyzer.
- 2 The reference level of the fundamental frequency was measured with the spectrum analyzer using RBW = 100 kHz, VBW = 300 kHz.
- 3 The conducted spurious emission was tested each ranges were set as below.

Frequency range : 9 kHz ~ 30 MHz

**RBW = 100 kHz, VBW = 300 kHz, SWEEP TIME = AUTO, DETECTOR = PEAK,
TRACE = MAX HOLD, SWEEP POINT : 40 001**

Frequency range : 30 MHz ~ 10 GHz, 10 GHz ~ 25 GHz

**RBW = 1 MHz, VBW = 3 MHz, SWEEP TIME = AUTO, DETECTOR = PEAK,
TRACE = MAX HOLD, SWEEP POINT : 40 001**

**LIMIT LINE = 20 dB below of the reference level of above measurement procedure
Step 2. (RBW = 100 kHz, VBW = 300 kHz)**

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2 001 to get accurate emission level within 100 kHz BW.

Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.

8.4. Test Results

Unwanted emissions(Radiated)

1. The radiated emissions below 1 GHz were investigated 9 kHz to 1 GHz and the worst case data was reported.

2. Information of Distance Correction Factor

For finding emissions, measurements may be performed at a distance closer than that specified in the regulations.

In this case, the distance factor is applied to the result.

- Calculation of distance correction factor

At frequencies below 30 MHz = $40 \log(\text{tested distance} / \text{specified distance})$

At frequencies at or above 30 MHz = $20 \log(\text{tested distance} / \text{specified distance})$

When distance factor is "N/A", the measurements were performed at the specified distance and distance factor is not applied.

3. Sample Calculation.


Margin = Limit – Result / Result = Reading + TF+ DCCF + DCF / TF = AF + CL + HL + AL – AG

Where, TF = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain, HL = High pass filter Loss,

AL = Attenuator Loss, DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

9 kHz ~ 1 GHz Data (Modulation : GFSK)

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
551.86	V	X	QP	43.52	-15.20	N/A	N/A	28.32	46.02	17.70
958.45	H	X	QP	49.46	-10.00	N/A	N/A	39.46	46.02	6.56

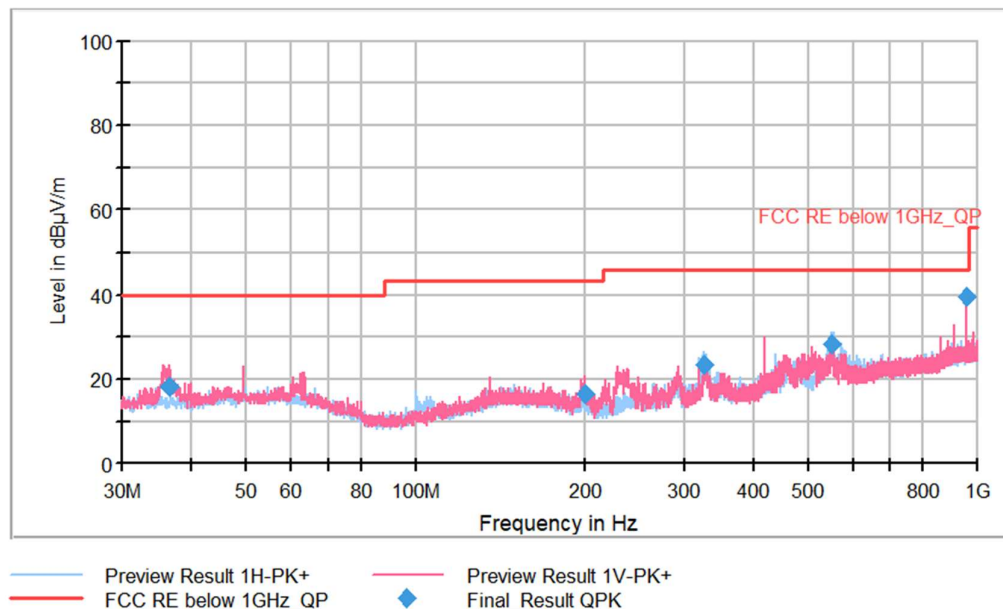

CSA Group Korea Ltd. 155, Osan-Ro, Mohyeon-eup, Cheoin-Gu, Yongin-Si, Gyeonggi-Do 16885 Republic of Korea www.csagroup.org	Report No.: CSA-26-R-0032-R1 Page (39) of (61)	
--	---	---

▪ **Test Notes.**

1. The radiated emissions were investigated 1 GHz to 25 GHz. And no other spurious and harmonic emissions were found below listed frequencies.

2. Information of Distance Correction Factor

For finding emissions, measurements may be performed at a distance closer than that specified in the regulations.

In this case, the distance correction factor is applied to the result.

- Calculation of distance factor

At frequencies below 30 MHz = $40 \log(\text{tested distance} / \text{specified distance})$

At frequencies at or above 30 MHz = $20 \log(\text{tested distance} / \text{specified distance})$

When distance factor is "N/A", the measurements were performed at the specified distance and distance factor is not applied.

3. DCCF Calculation. (DCCF = Duty Cycle Correction Factor)

- Time to cycle through all channels = $\Delta t = T [\text{ms}] \times 20$ minimum hopping channels, where T = pulse width = 2.88 ms

- $100 \text{ ms} / \Delta t [\text{ms}] = H \rightarrow$ Round up to next highest integer, to account for worst case, $H' = 100 / (2.88 \times 20) = 0.44 \approx 1$

- The Worst Case Dwell Time = $T [\text{ms}] \times H' = 2.88 \text{ ms} \times 1 = 2.88 \text{ ms}$

- $\text{DCCF} = 20 \log(\text{The Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = 20 \log(2.9 / 100) = -30.81 \text{ dB}$

4. Sample Calculation.

Margin = Limit – Result / Result = Reading + TF + DCCF + DCF / TF = AF + CL + HL + AL – AG

Where, TF = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain, HL = High pass filter Loss,


AL = Attenuator Loss, DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

1 GHz ~ 25 GHz Data (Modulation : GFSK)


▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 379.73	V	X	PK	52.02	-16.20	N/A	N/A	35.82	74.00	38.18
2 379.73	V	X	AV	36.87	-16.20	-30.81	N/A	-10.14	54.00	64.14

No spurious emission other than Bandedge was detected.

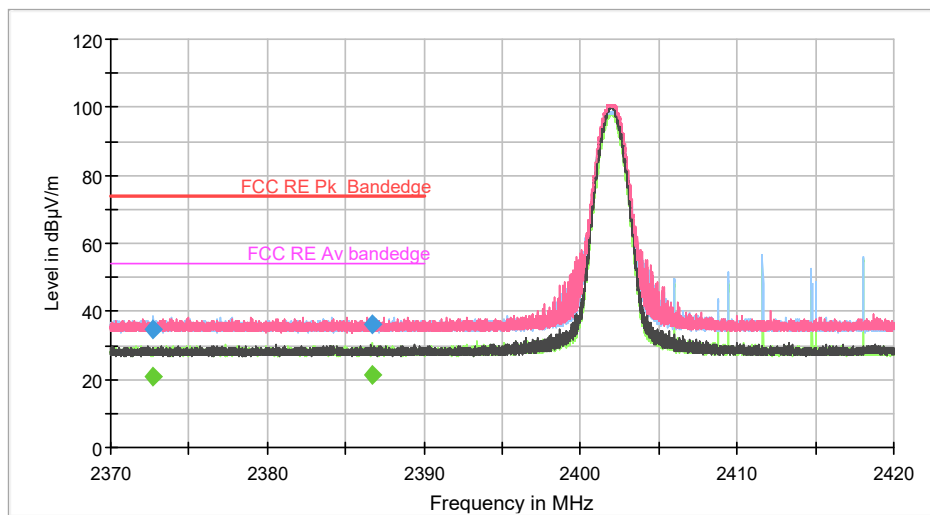

— Preview Result 2H-AVG — Preview Result 1H-PK+ — Preview Result 2V-AVG
— Preview Result 1V-PK+ — FCC RE Pk_Bandedge — FCC RE Av bandedge
◆ Final_Result PK+ ◆ Final_Result CAV

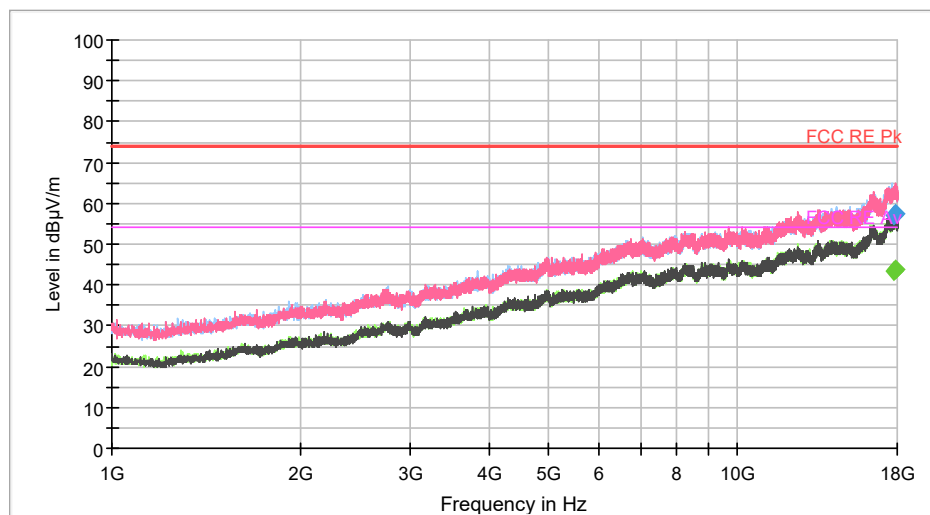


— Preview Result 2H-AVG — Preview Result 1H-PK+ — Preview Result 2V-AVG
— Preview Result 1V-PK+ — FCC RE Pk — FCC RE Av
◆ Final_Result PK+ ◆ Final_Result CAV

1 GHz ~ 25 GHz Data (Modulation : GFSK)

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
No spurious emission other was detected.										

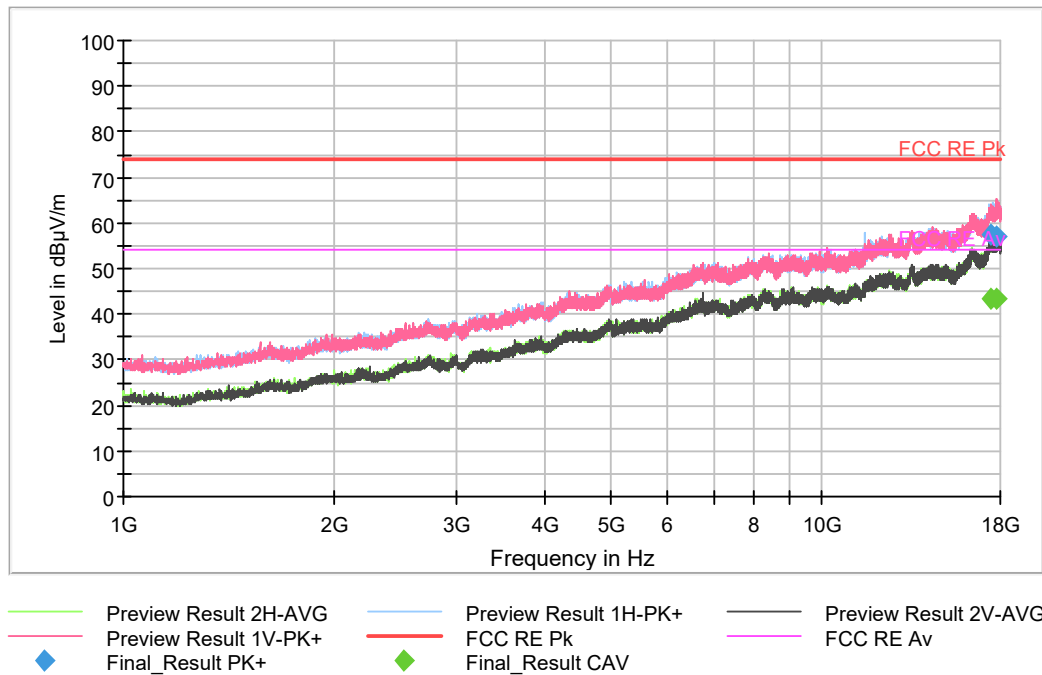


1 GHz ~ 25 GHz Data (Modulation : GFSK)


▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 483.59	H	X	PK	60.73	-16.00	N/A	N/A	44.73	74.00	29.27
2 483.59	H	X	AV	41.40	-16.00	-30.81	N/A	-5.41	54.00	59.41

No spurious emission other than Bandedge was detected.

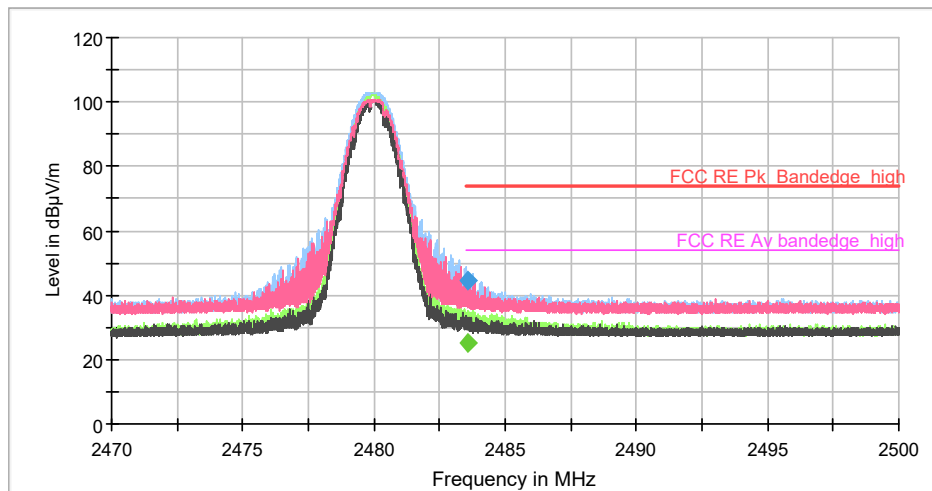

— Preview Result 2H-AVG — Preview Result 1H-PK+
— Preview Result 2V-AVG — Preview Result 1V-PK+
— FCC RE Pk_Bandedge_high — FCC RE Av bandedge_high
◆ Final_Result PK+ ◆ Final_Result CAV

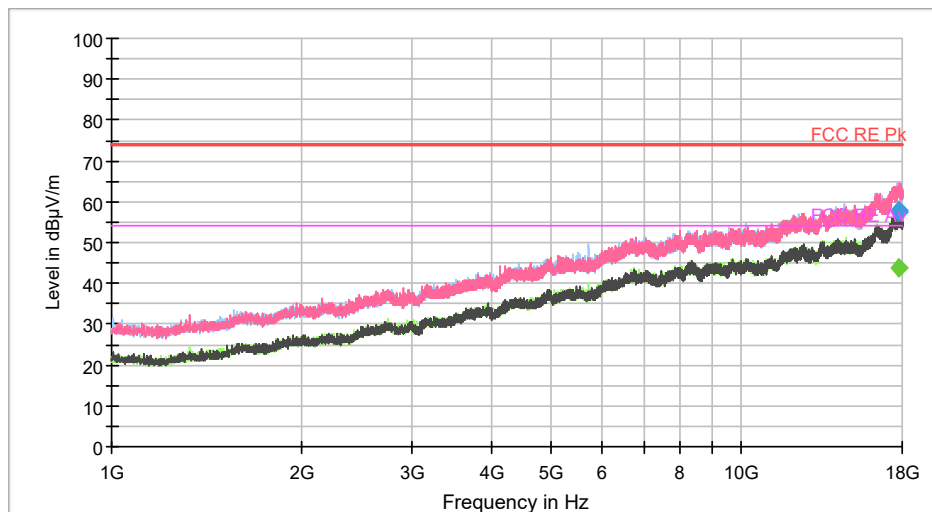


— Preview Result 2H-AVG — Preview Result 1H-PK+ — Preview Result 2V-AVG
— Preview Result 1V-PK+ — FCC RE Pk — FCC RE Av
◆ Final_Result PK+ ◆ Final_Result CAV

1 GHz ~ 25 GHz Data (Modulation : 8DPSK)


▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2 379.73	V	X	PK	52.02	-16.20	N/A	N/A	35.82	74.00	38.18
2 379.73	V	X	AV	36.87	-16.20	-30.81	N/A	-10.14	54.00	64.14

No spurious emission other than Bandedge was detected.

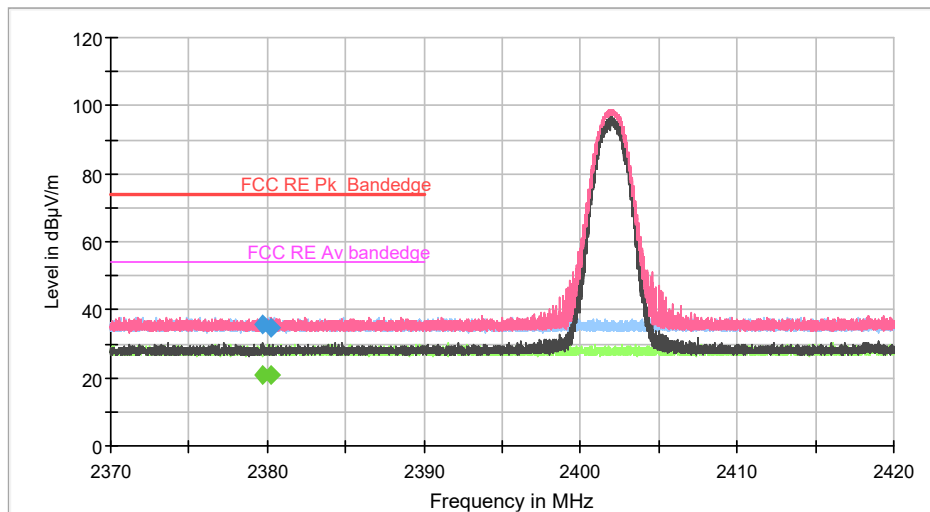

— Preview Result 2H-AVG — Preview Result 1H-PK+ — Preview Result 2V-AVG
— Preview Result 1V-PK+ — FCC RE Pk_Bandedge — FCC RE Av_bandedge
◆ Final_Result PK+ ◆ Final_Result CAV

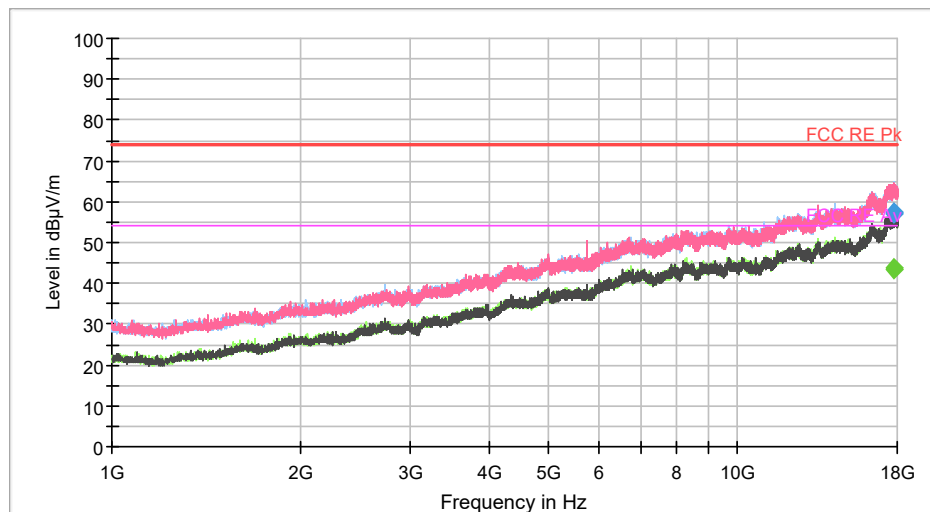


— Preview Result 2H-AVG — Preview Result 1H-PK+ — Preview Result 2V-AVG
— Preview Result 1V-PK+ — FCC RE Pk — FCC RE Av
◆ Final_Result PK+ ◆ Final_Result CAV

1 GHz ~ 25 GHz Data (Modulation : 8DPSK)

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
No spurious emission other was detected.										

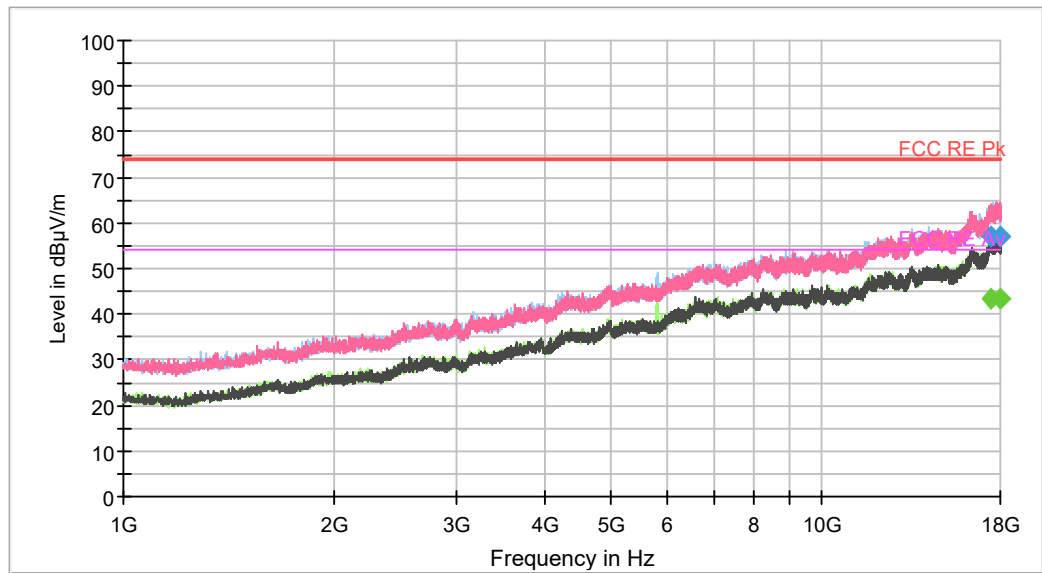


— Preview Result 2H-AVG — Preview Result 1H-PK+ — Preview Result 2V-AVG
— Preview Result 1V-PK+ — FCC RE Pk — FCC RE Av
◆ Final_Result PK+ ◆ Final_Result CAV

1 GHz ~ 25 GHz Data (Modulation : 8DPSK)


▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	TF (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.67	H	V	PK	62.92	-16.00	N/A	N/A	46.92	74.00	27.08
2483.67	H	V	AV	43.41	-16.00	-30.81	N/A	-3.40	54.00	57.40

No spurious emission other than Bandedge was detected.

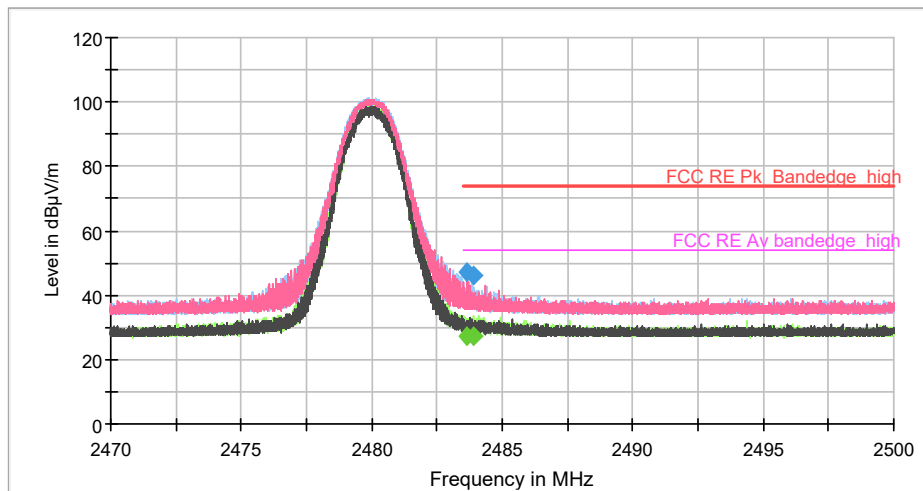

— Preview Result 2H-AVG — Preview Result 1H-PK+
— Preview Result 2V-AVG — Preview Result 1V-PK+
— FCC RE Pk_Bandedge_high — FCC RE Av bandedge_high
◆ Final_Result PK+ ◆ Final_Result CAV

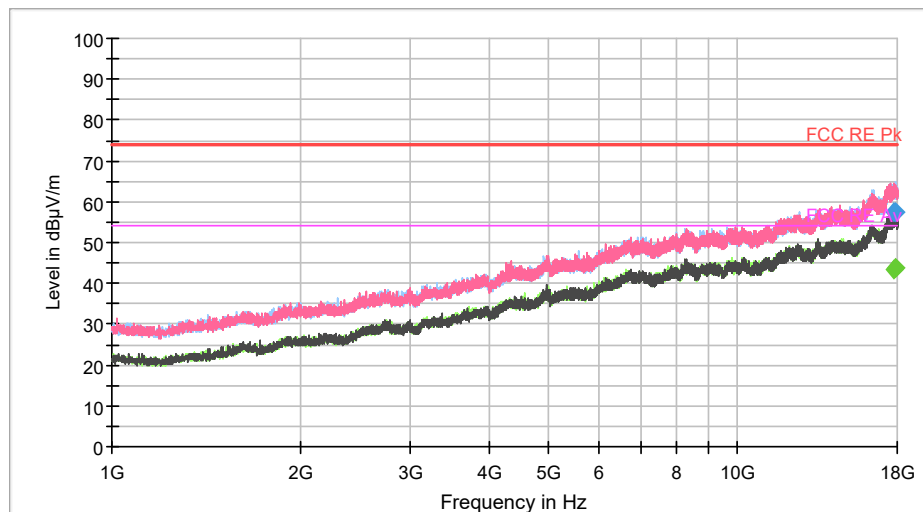


— Preview Result 2H-AVG — Preview Result 1H-PK+ — Preview Result 2V-AVG
— Preview Result 1V-PK+ — FCC RE Pk — FCC RE Av
◆ Final_Result PK+ ◆ Final_Result CAV

Unwanted emissions(Conducted)


Low Band-edge

Lowest Channel & Modulation : GFSK

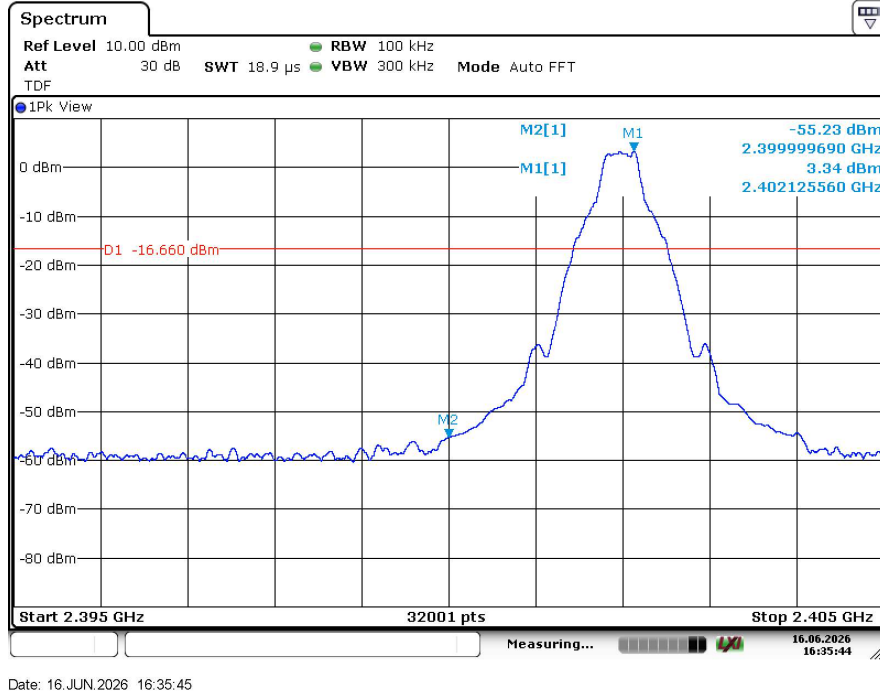


Low Band-edge

Hopping mode & Modulation : GFSK

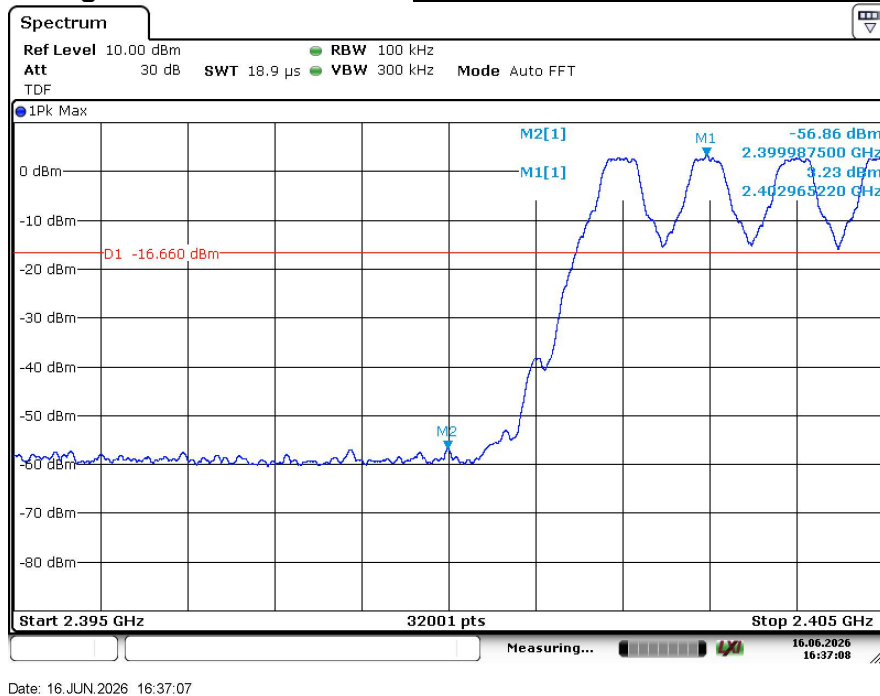


Conducted Spurious Emissions

Lowest Channel & Modulation : GFSK

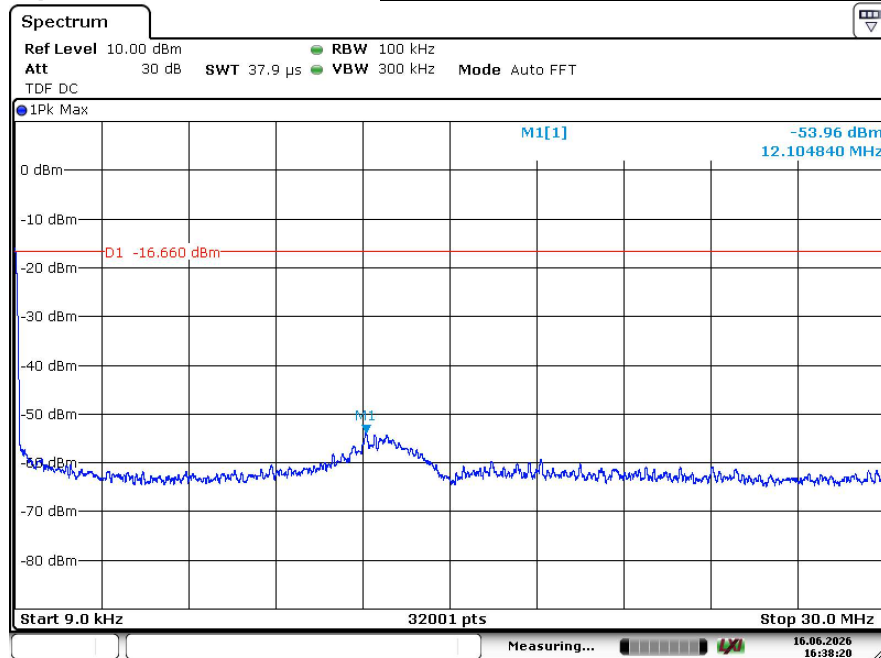


Date: 16.JUN.2026 16:38:20

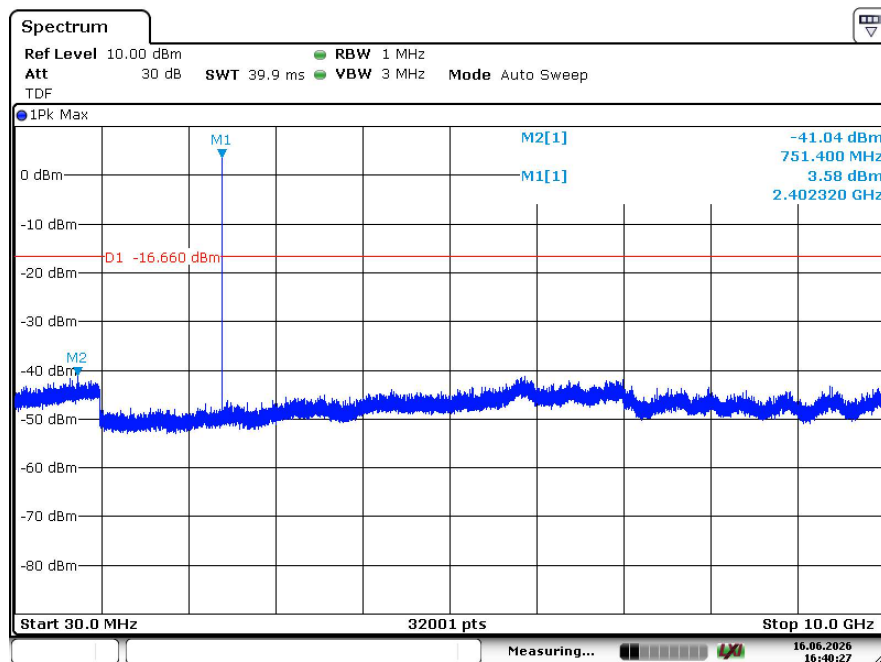

Date: 16.JUN.2026 16:40:27

Conducted Spurious Emissions


Lowest Channel & Modulation : GFSK

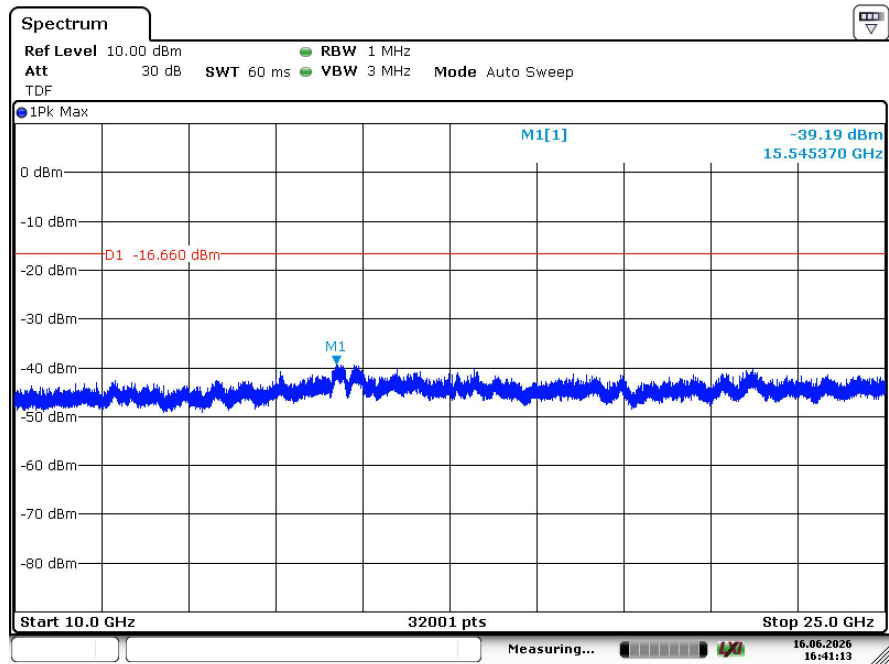

Date: 16.JUN.2026 16:41:13

Reference for limit


Middle Channel & Modulation : GFSK

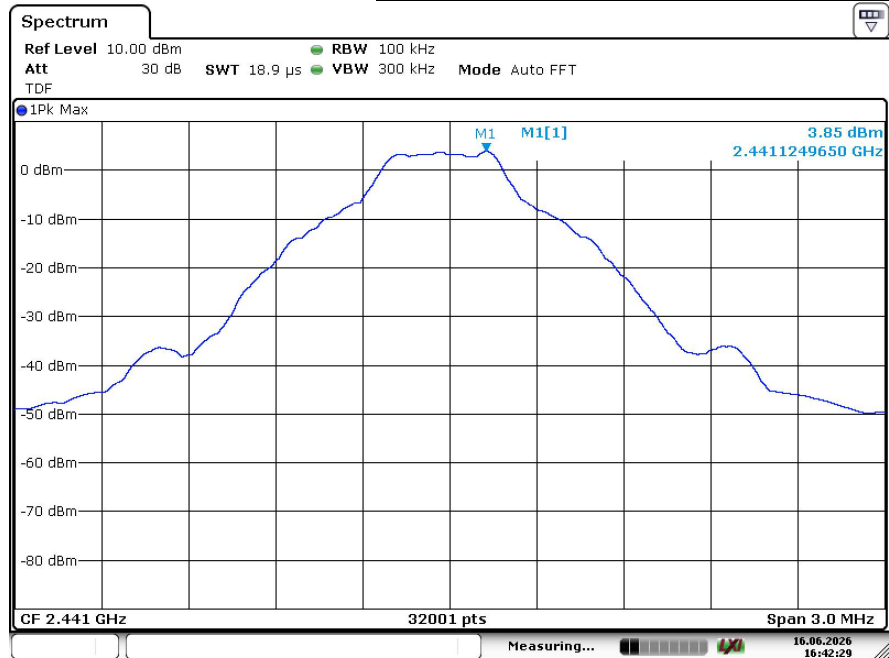

Date: 16 JUN.2026 16:42:29

Conducted Spurious Emissions


Middle Channel & Modulation : GFSK

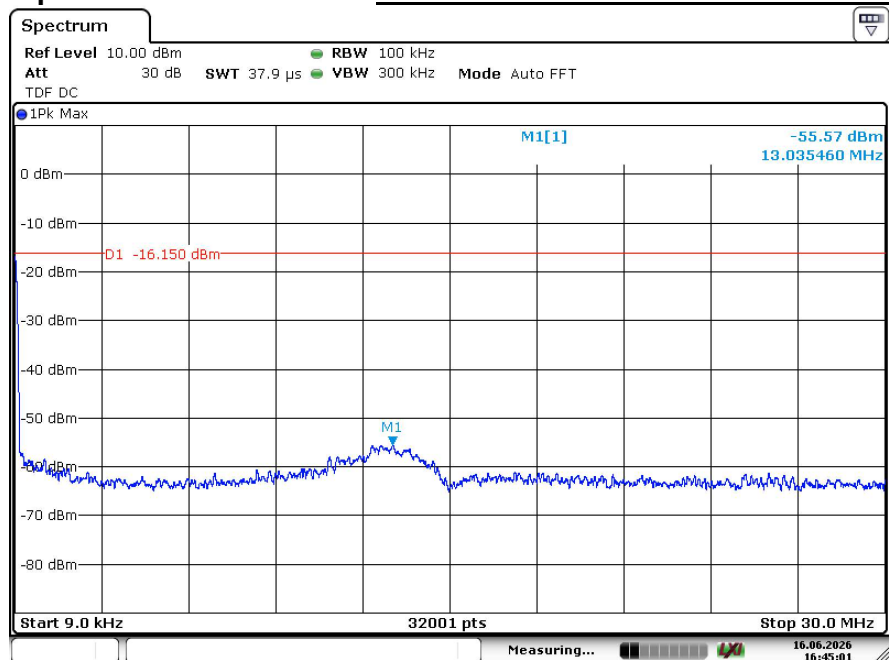


Date: 16 JUN.2026 16:45:02

Conducted Spurious Emissions

Middle Channel & Modulation : GFSK

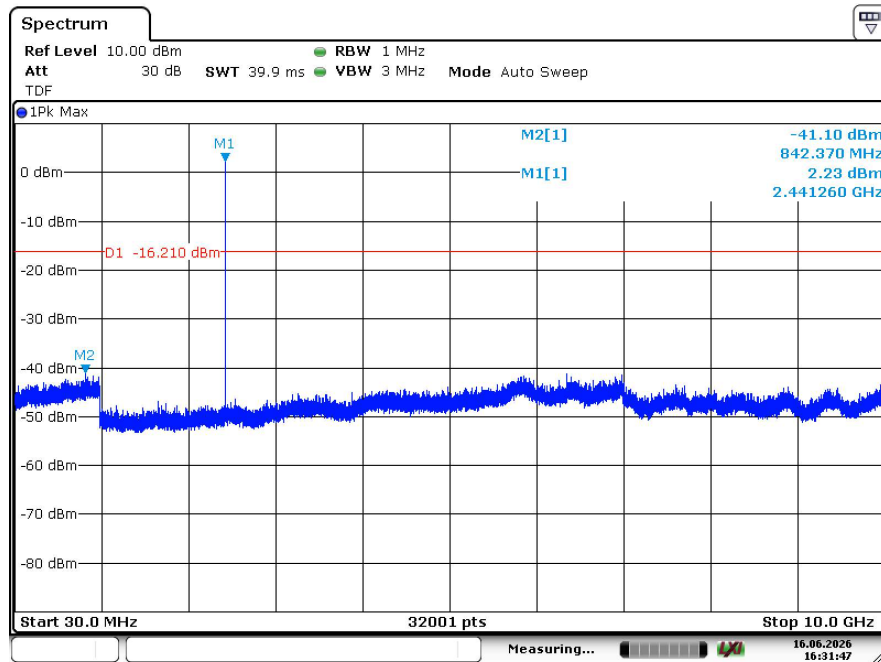


Date: 16.JUN.2026 16:31:47

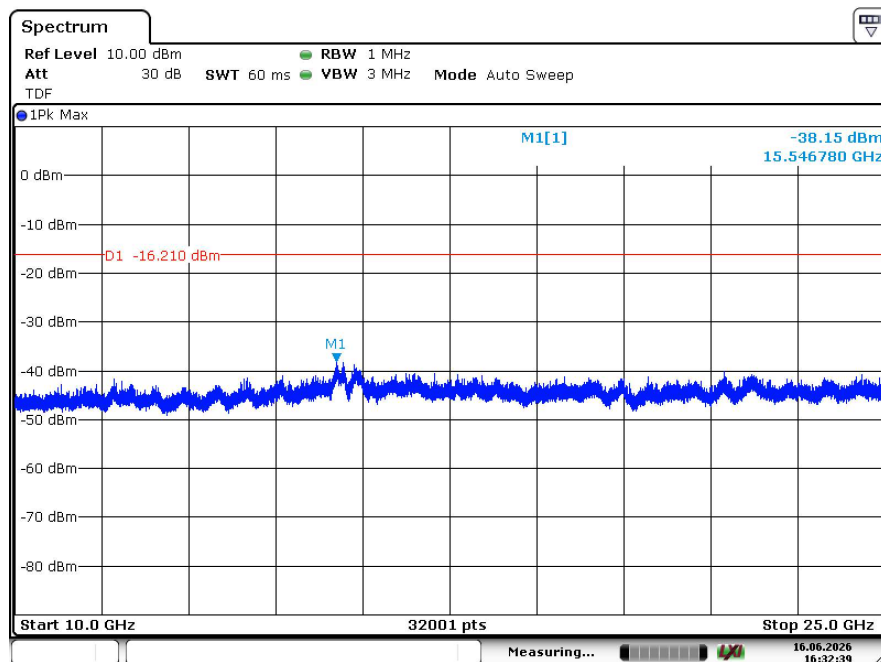

Date: 16.JUN.2026 16:32:39

High Band-edge


Highest Channel & Modulation : GFSK

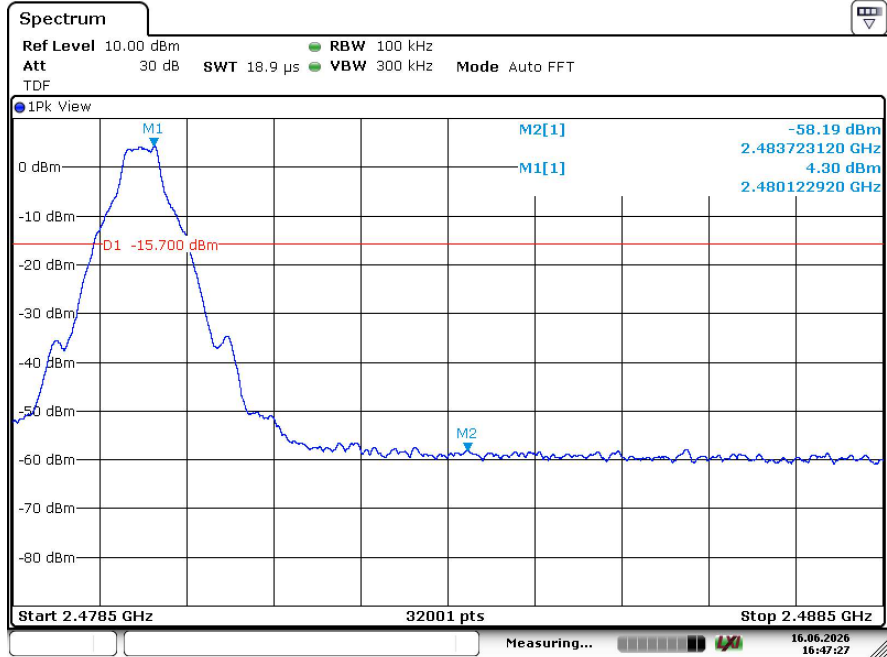

Date: 16.JUN.2026 16:47:28


High Band-edge

Hopping mode & Modulation : GFSK

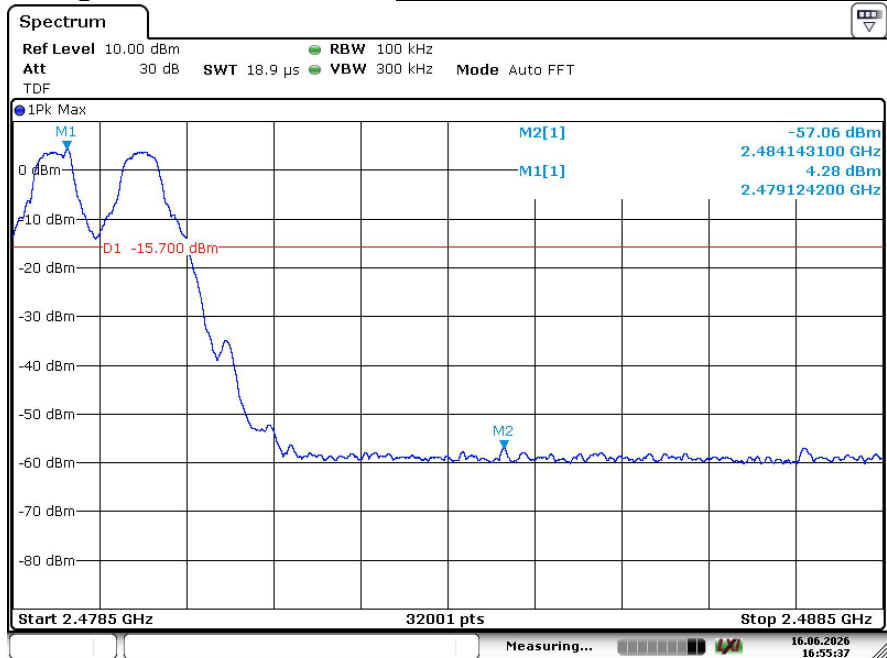


Date: 16.JUN.2026 16:55:37

Conducted Spurious Emissions ***Highest Channel & Modulation : GFSK***

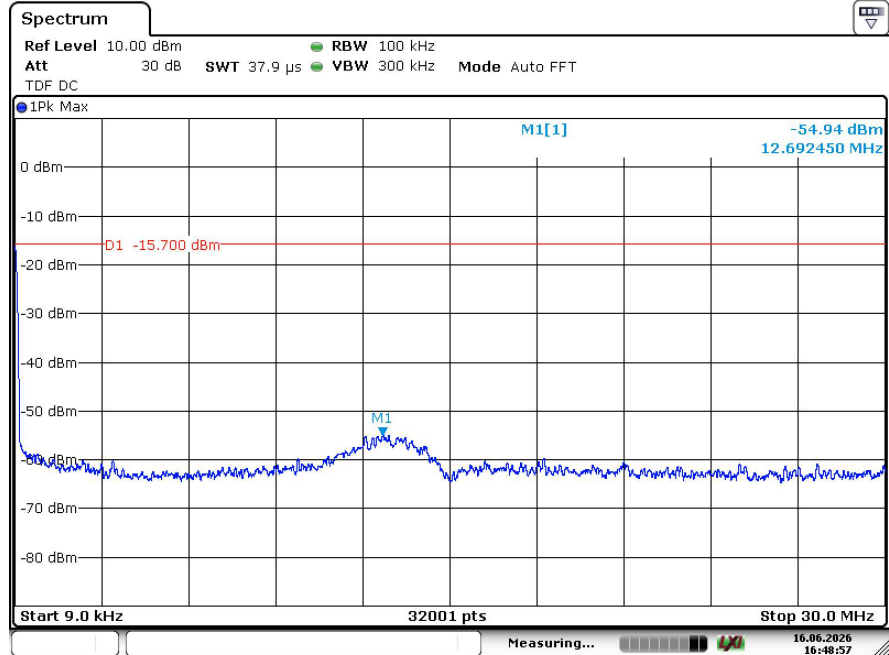


Date: 16. JUN. 2026 16:48:58

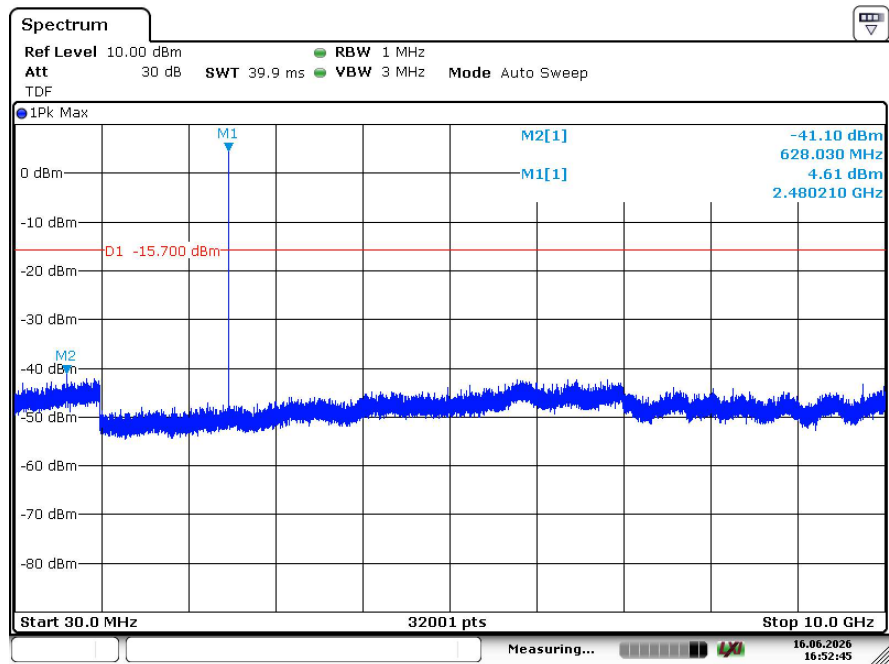

Date: 16. JUN. 2026 16:52:46


Conducted Spurious Emissions ***Highest Channel & Modulation : GFSK***

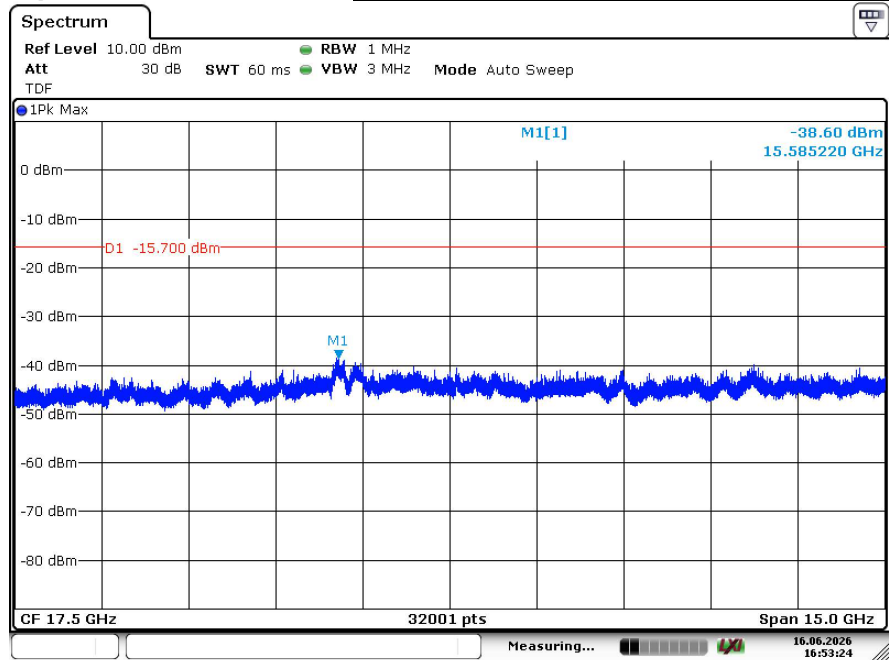

Date: 16.JUN.2026 16:53:25

Low Band-edge


Lowest Channel & Modulation : 8DPSK

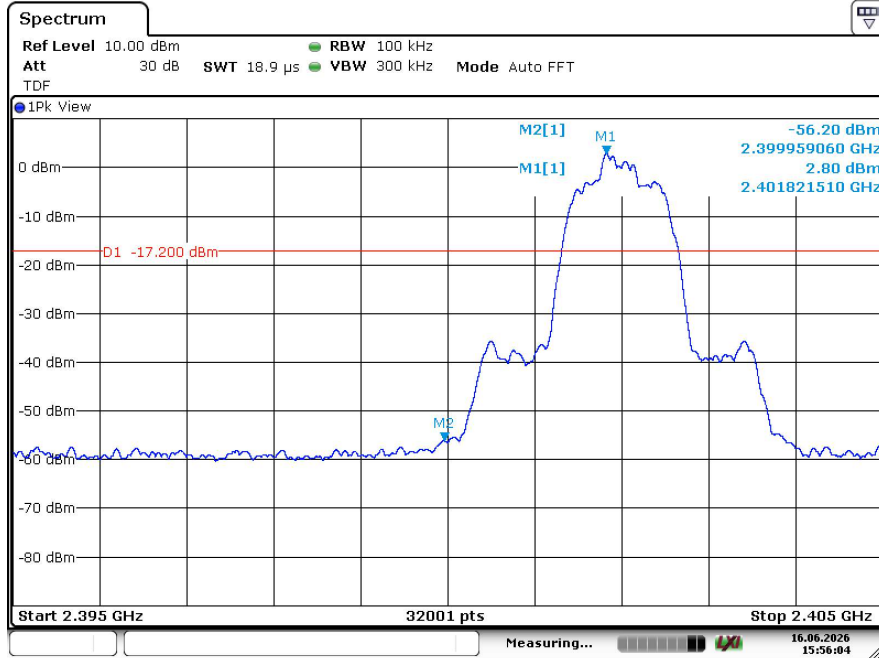

Date: 16 JUN.2026 15:56:04

Low Band-edge


Hopping mode & Modulation : 8DPSK

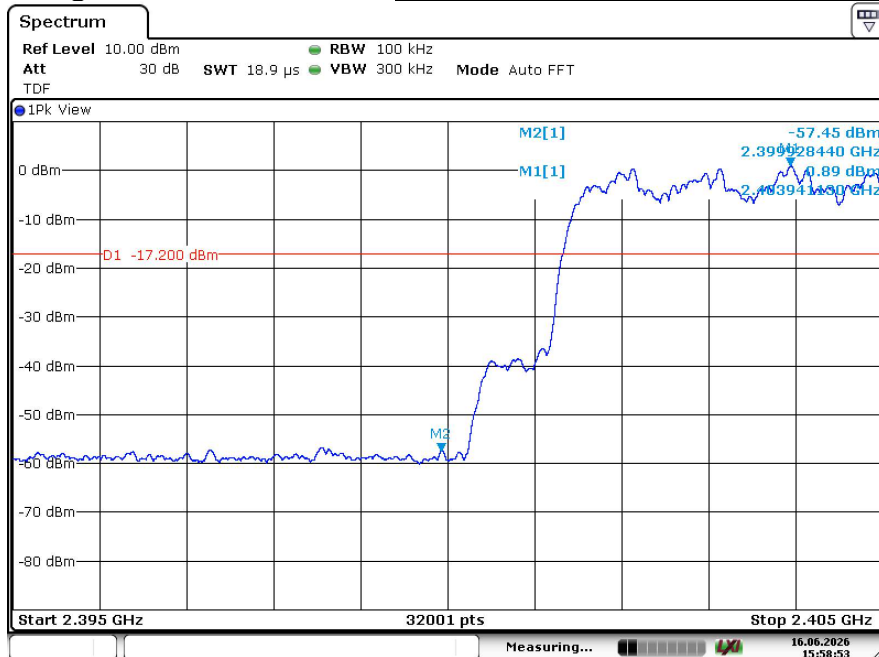


Date: 16 JUN.2026 15:58:53

Conducted Spurious Emissions

Lowest Channel & Modulation : 8DPSK

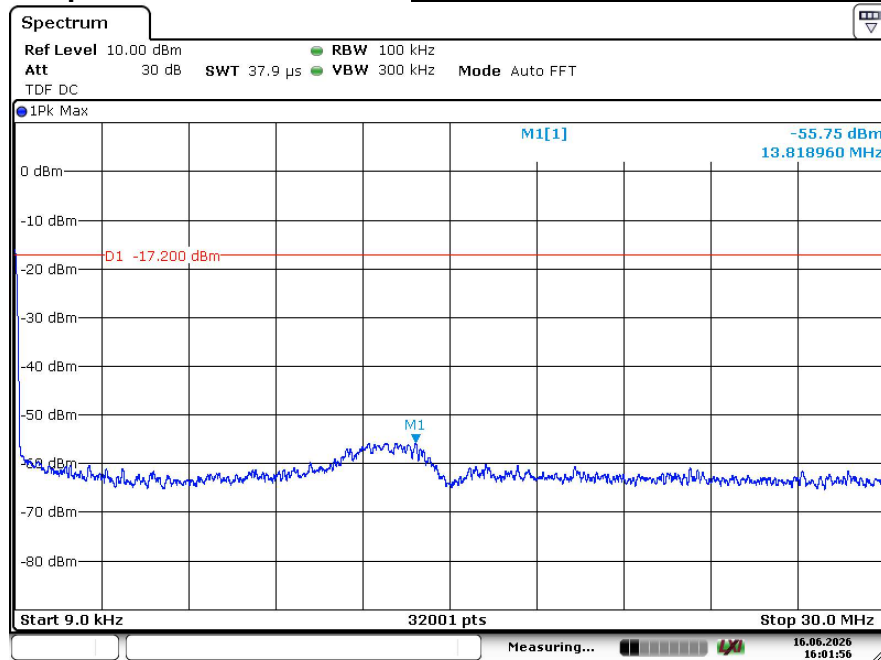


Date: 16.JUN.2026 16:01:57

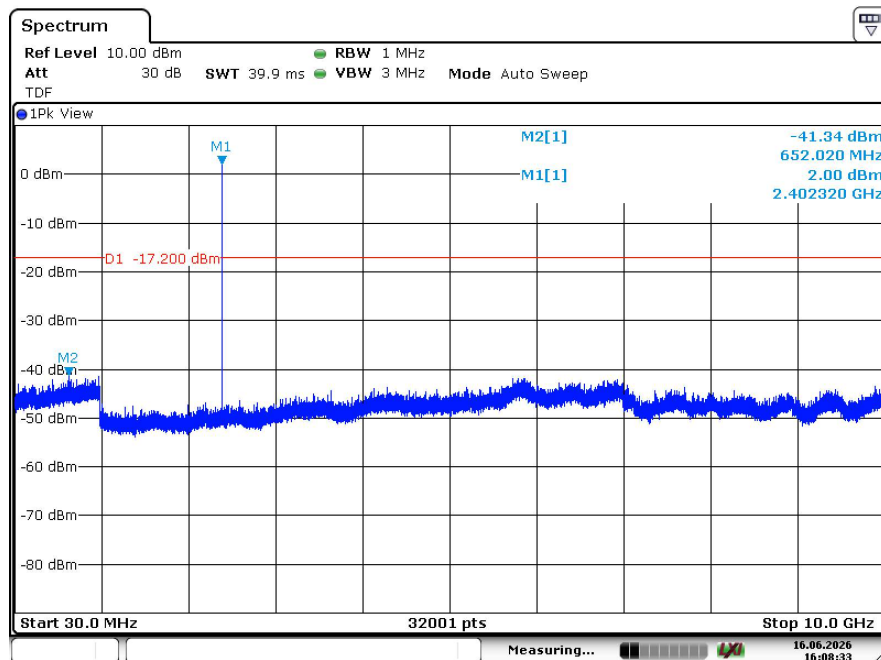

Date: 16.JUN.2026 16:08:33

Conducted Spurious Emissions

Lowest Channel & Modulation : 8DPSK

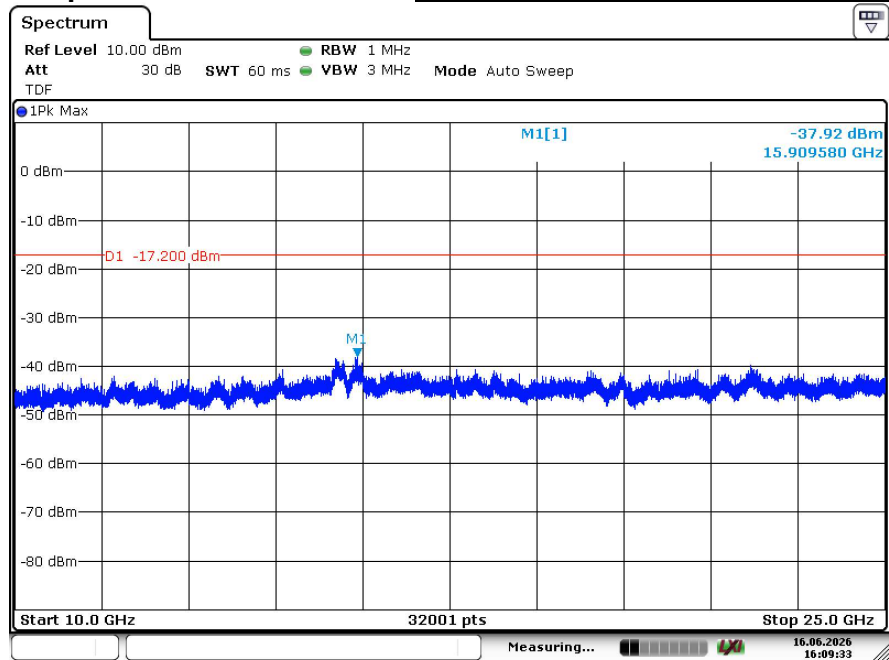

Date: 16.JUN.2026 16:09:32

Reference for limit


Middle Channel & Modulation : 8DPSK



Date: 16 JUN.2026 16:27:46

Conducted Spurious Emissions


Middle Channel & Modulation : 8DPSK

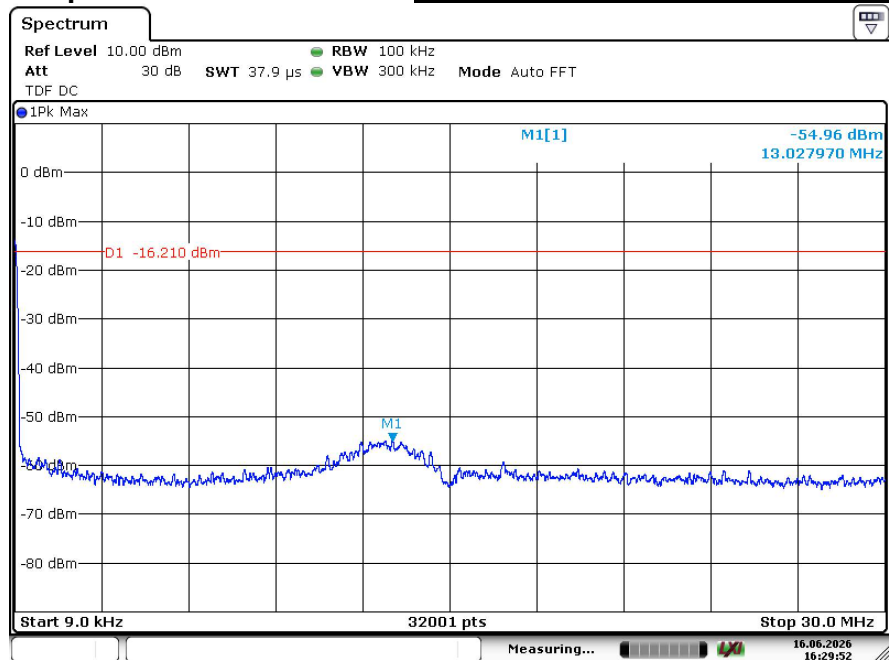


Date: 16 JUN.2026 16:29:51

Conducted Spurious Emissions

Middle Channel & Modulation : 8DPSK

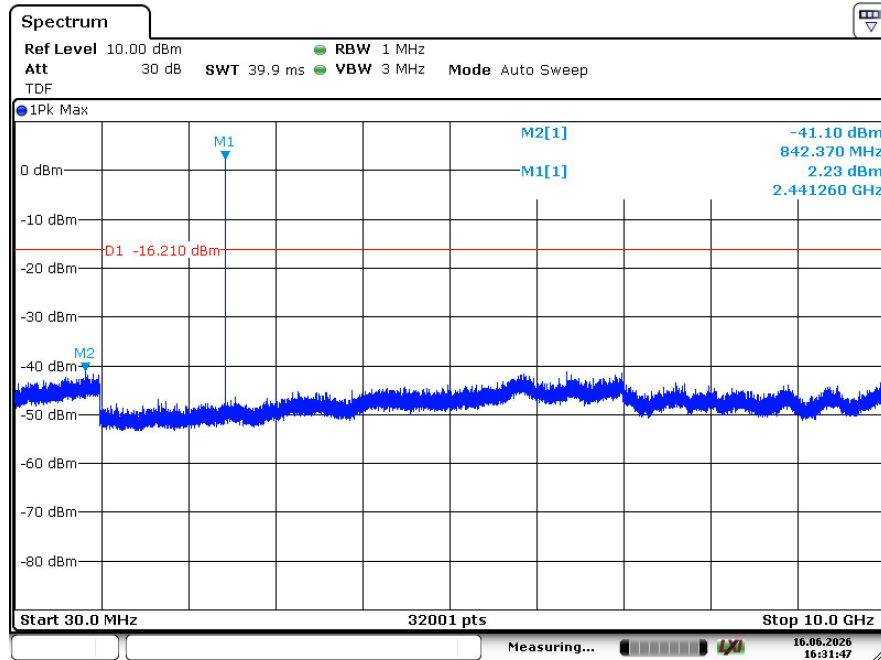


Date: 16.JUN.2026 16:31:47

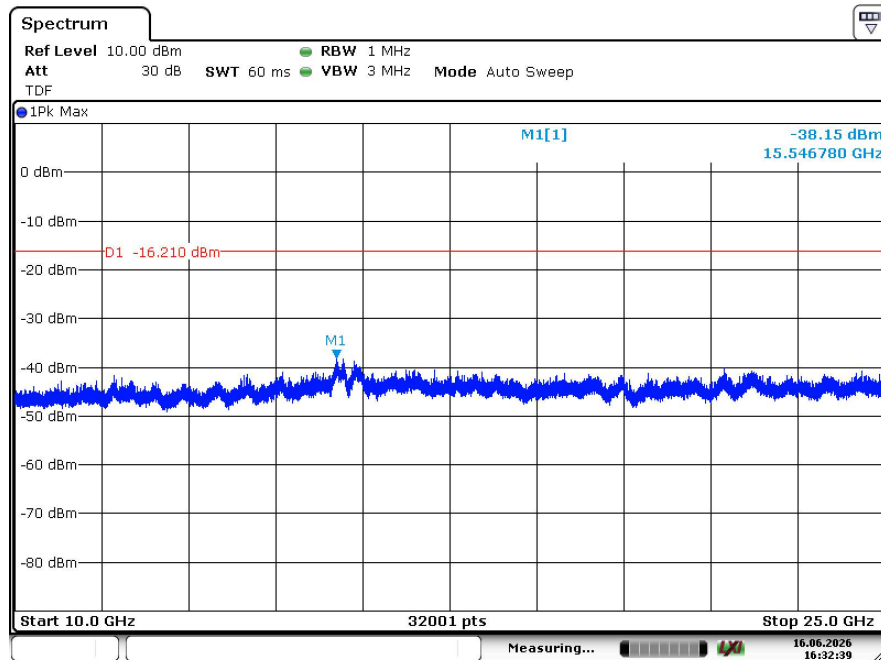

Date: 16.JUN.2026 16:32:39

High Band-edge


Highest Channel & Modulation : 8DPSK

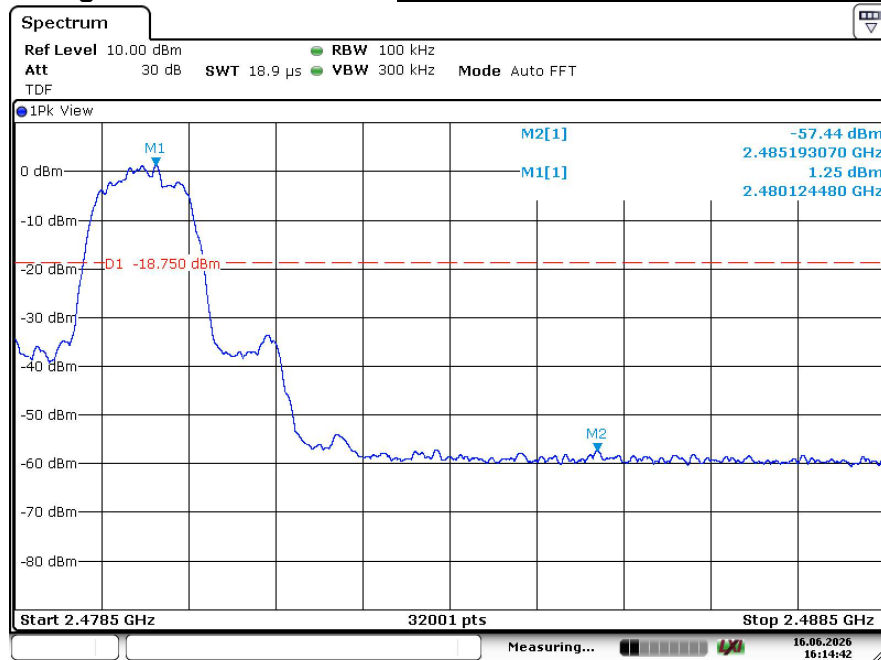

Date: 16 JUN.2026 16:14:42

High Band-edge


Hopping mode & Modulation : 8DPSK

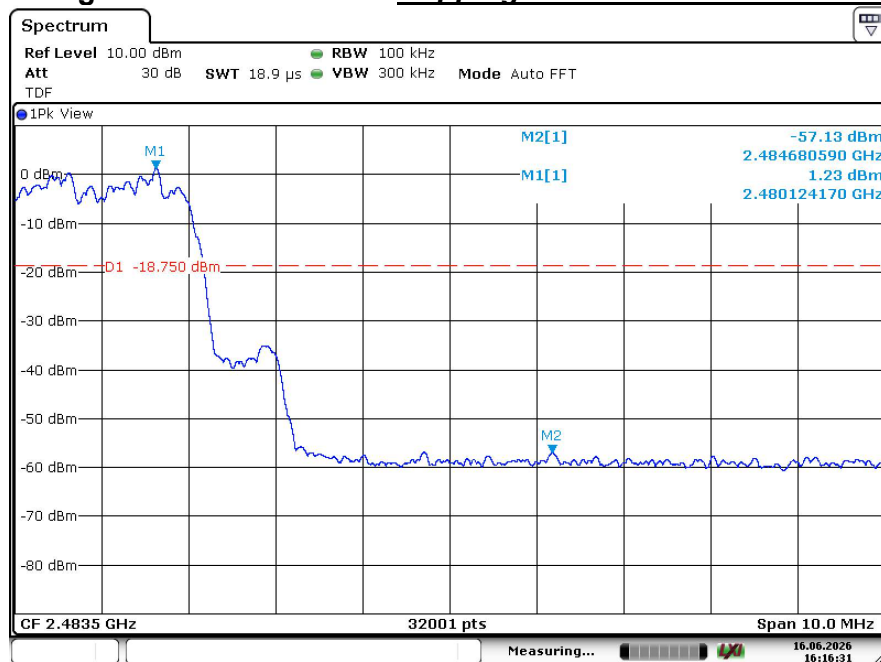


Date: 16 JUN.2026 16:16:31

Conducted Spurious Emissions

Highest Channel & Modulation : 8DPSK

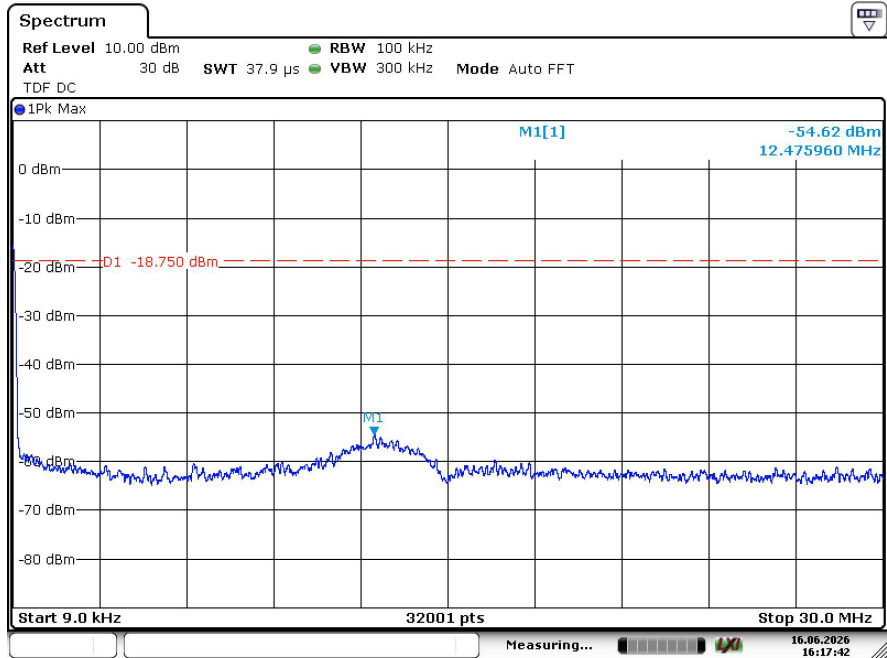


Date: 16.JUN.2026 16:17:43

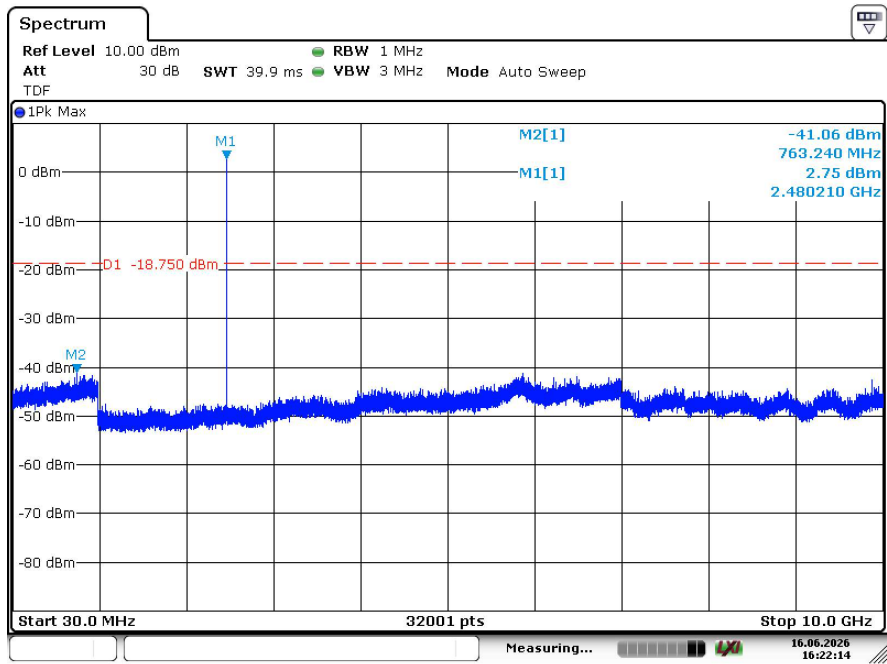

Date: 16.JUN.2026 16:22:14

Conducted Spurious Emissions

Highest Channel & Modulation : 8DPSK

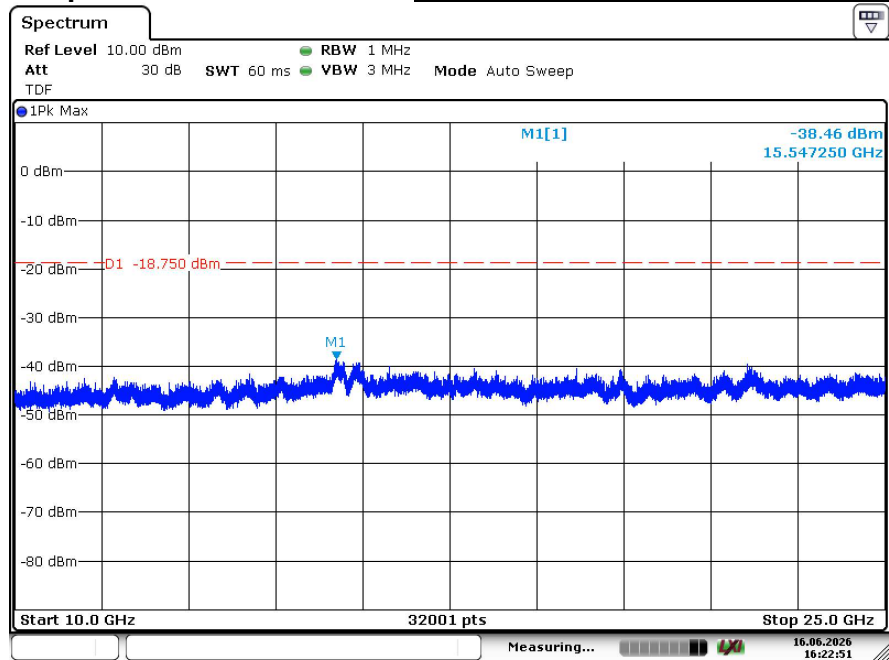

Date: 16.JUN.2026 16:22:51

- END.