



849 NW State Road 45
Newberry, FL 32669 USA

Ph.: 888.472.2424 or
352.472.5500

Fax: 352.472.2030

Email: info@timcoengr.com

Website: www.timcoengr.com

**FCC PART 15.249 & IC RSS-210
UNLICENSED INTENTIONAL RADIATOR
TEST REPORT**

Applicant	IRISS INC.
Address	10306 TECHNOLOGY TERRACE BRADENTON FL 34211
FCC ID	2AE7JDELTATUS
IC Certification Number	20368-DELTATUS
Model Number	DELTA-T-US
Product Description	TRANSMITTER
Date Sample Received	7/16/2015
Final Test Date	8/4/2015
Tested By	Tim Royer
Approved By	Cory Leverett

Report Number	Version Number	Description	Issue Date
1447AUT15TestReport	Rev1	Initial Issue	9/28/2015

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

TABLE OF CONTENTS

GENERAL REMARKS 3

GENERAL INFORMATION..... 4

TEST RESULTS SUMMARY 5

RADIATION INTERFERENCE..... 6

OCCUPIED BANDWIDTH11

BAND-EDGE15

EMC EQUIPMENT LIST17

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

- ☒ Fulfill the general approval requirements as identified in this test report
☐ Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669

Authorized Signatory Name:

Project Manager

Date: 9/28/2015

A handwritten signature in blue ink is written over a circular purple stamp. The stamp contains the text "TIMCO ENGINEERING INC." around the perimeter and a small "TM" symbol in the center.

[Table of Contents](#)

APPLICANT: IRISS INC.
FCC ID: 2AE7JDELTATUS
IC: 20368-DELTATUS
REPORT: 1447AUT15TestReport.docx

GENERAL INFORMATION

EUT Specification

FCC Regulatory Standard	Title 47 CFR Part 2 & 15		
IC Regulatory Standard	RSS-210 (i8) & RSS-GEN (i4)		
FCC ID	2AE7JDELTATUS		
Model	2AE7J		
EUT Description	TRANSMITTER		
Operating Frequency	TX: 908.4 - 916MHz	RX: 908.4 - 916MHz	
EUT Power Source	☐ 110–120Vac/50– 60Hz		
	☐ DC Power		
	☒ Battery Operated Exclusively		
Test Item	☐ Prototype	☐ Pre-Production	☒ Production
Type of Equipment	☒ Fixed	☐ Mobile	☐ Portable
Antenna Connector	None		
Antenna	Integrated on circuit board		
Test Facility	Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA.		
Test Conditions	Temperature: 24-26°C Relative humidity: 50-65%		
Measurement Standards	ANSI C63.10-2013 (test methods) ANSI C63.4-2009 (Site Validation)		
Test Exercise	EUT Powered on and Transmitting Continuously.		

Test Supporting Equipment

Device	Manufacturer	Model	S/N	Supplied By	Use
N / A	N / A	N / A	N / A	N / A	N / A

APPLICANT: IRISS INC.
FCC ID: 2AE7JDELTATUS
IC: 20368-DELTATUS
REPORT: 1447AUT15TestReport.docx

TEST RESULTS SUMMARY

Requirement	FCC Rule Part	IC RSS	Result
Fundamental & Harmonic Emissions	15.249 (a)(c)(e)	210 § A2.9	Pass
Occupied Bandwidth	15.215 (c)	GEN § 6.6	Pass
Bandedge Compliance	15.249 (c)(d)(e) 15.209	210 § A2.9(b) GEN § 8.9	Pass
Spurious Emissions	15.249 (c)(d)(e) 15.209	210 § A2.9(b) GEN § 8.9	Pass
Antenna Requirements	15.203	GEN § 8.3	Pass

Notes:

[Table of Contents](#)

RADIATION INTERFERENCE

Rules Part No.: FCC 15.249, 15.209 & IC RSS-210 ANNEX A2.9(b), GEN § 8.9

Requirements:

Frequency	Limits
Part 15.209 & RSS-GEN 8.9	
9 to 490 kHz	2400/F (kHz) $\mu\text{V/m}$ @ 300 meters
490 to 1705 kHz	24000/F (kHz) $\mu\text{V/m}$ @ 30 meters
1705 kHz to 30 MHz	29.54 dB $\mu\text{V/m}$ @ 30 meters
30 – 88	40.0 dB $\mu\text{V/m}$ @ 3 meters
80 – 216	43.5 dB $\mu\text{V/m}$ @ 3 meters
216 – 960	46.0 dB $\mu\text{V/m}$ @ 3 meters
Above 960	54.0 dB $\mu\text{V/m}$ @ 3 meters
Part 15.249 & RSS-210 (i8) ANNEX A.2.9	
Fundamental 902 – 928 MHz	94.0 dB $\mu\text{V/m}$ @ 3 meters
Fundamental 2.4 – 2.4835 GHz	94.0 dB $\mu\text{V/m}$ @ 3 meters
Harmonics	54.0 dB $\mu\text{V/m}$ @ 3 meters

Method of Measurement: ANSI C63.10 using a spectrum analyzer, a preselector, a quasi-peak adapter, and an appropriate antenna. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz with an appropriate sweep speed and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worst case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental. Emissions were scanned from 30MHz to the tenth harmonic of the fundamental frequency at three places in the band. All emissions greater than 20 dB from the limit are not reported.

Formula of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz)	Meter Reading	+ ACF	+ CL = FS
33	20 dBuV	+ 10.36 dB	+ 0.5 = 30.86 dBuV/m @ 3m

Test Data: Peak Detector Used for all Measurement's unless otherwise noted in table.

APPLICANT: IRISS INC.

FCC ID: 2AE7JDELTATUS

IC: 20368-DELTATUS

REPORT: 1447AUT15TestReport.docx

RADIATION INTERFERENCE

Notes: Only emissions within 20dB of the limit are reported from 9 KHz to 10 GHz, All measurements are peak unless otherwise noted
A – Denotes Average measurement

Test Data: Field Strength table Low End of Band

Tuned Freq MHz	Emission Frequency MHz	Meter Reading dBu V		Antenna Polarity	Coax Loss Db	Correction Factor dB/M	Field Strength dBu V/M	Margin
908.40	31.23	2.00		H	0.18	12.60	14.78	25.22
908.40	133.52	1.60		H	0.67	13.64	15.91	27.59
908.40	71.13	0.00		H	0.44	6.13	6.57	33.43
908.40	381.54	4.30		H	1.34	14.97	20.61	73.39
908.40	681.15	1.00		H	1.91	20.93	23.84	70.16
908.40	932.84	3.00		H	2.43	23.50	28.93	17.07
908.40	940.34	3.00		H	2.44	23.51	28.95	17.05
908.40	995.61	3.00		H	2.52	24.20	29.72	24.28
908.40	908.40	48.49		V	2.39	23.30	74.18	19.82
908.40	908.40	60.23		H	2.39	23.30	85.92	8.08
908.40	1815.30	20.71		H	2.95	30.12	53.78	20.22
908.40	1815.30	10.18	A	H	2.95	30.12	43.26	10.74
908.40	1816.80	21.54		V	2.96	30.13	54.63	19.37
908.40	1816.80	9.61	A	V	2.96	30.13	42.71	11.29
908.40	2722.00	21.31		H	3.41	32.50	57.22	16.78
908.40	2722.00	7.80	A	H	3.41	32.50	43.71	10.29
908.40	2725.20	20.75		V	3.41	32.51	56.67	17.33
908.40	2725.20	10.13	A	V	3.41	32.51	46.05	7.95
908.40	3628.90	18.44		H	4.17	32.99	55.60	18.40

Results Meet Requirements

[Table of Contents](#)

RADIATION INTERFERENCE

Notes: Only emissions within 20dB of the limit are reported from 9 KHz to 10 GHz, All measurements are peak unless otherwise noted
A – Denotes Average measurement

Test Data: Field Strength table Low End of Band

Tuned Freq MHz	Emission Frequency MHz	Meter Reading dBu V		Antenna Polarity	Coax Loss Db	Correction Factor dB/M	Field Strength dBu V/M	Margin
908.40	3628.90	7.59	A	H	4.17	32.99	44.75	9.25
908.40	3633.60	20.21		V	4.17	33.00	57.38	16.62
908.40	3633.60	7.90	A	V	4.17	33.00	45.07	8.93
908.40	4535.68	18.25		H	4.77	34.07	57.09	16.91
908.40	4535.68	7.69	A	H	4.77	34.07	46.54	7.46
908.40	4542.00	18.98		V	4.77	34.07	57.82	16.18
908.40	4542.00	7.78	A	V	4.77	34.07	46.63	7.37
908.40	5450.00	20.60		H	5.14	34.51	60.24	13.76
908.40	5450.00	7.19	A	H	5.14	34.51	46.83	7.17
908.40	5450.40	19.22		V	5.14	34.51	58.87	15.13
908.40	5450.40	7.59	A	V	5.14	34.51	47.25	6.75
908.40	6358.80	18.59		H	5.41	35.59	59.59	14.41
908.40	6358.80	18.98		V	5.41	35.59	59.98	14.02
908.40	6358.80	7.42	A	V	5.41	35.59	48.43	5.57
908.40	6358.80	7.67	A	H	5.41	35.59	48.67	5.33
908.40	7267.20	18.97		V	5.76	36.04	60.77	13.23
908.40	7267.20	7.53	A	V	5.76	36.04	49.34	4.66
908.40	7267.23	19.39		H	5.76	36.04	61.20	12.80
908.40	7267.23	7.36	A	H	5.76	36.04	49.16	4.84
908.40	8175.60	18.94		V	6.27	35.98	61.19	12.81
908.40	8175.60	7.38	A	V	6.27	35.98	49.63	4.37
908.40	8175.70	18.68		H	6.27	35.98	60.93	13.07
908.40	8175.70	7.03	A	H	6.27	35.98	49.28	4.72
908.40	9084.00	18.73		H	6.63	36.23	61.59	12.41
908.40	9084.00	18.04		V	6.63	36.23	60.90	13.10
908.40	9084.00	7.07	A	V	6.63	36.23	49.94	4.06
908.40	9084.00	7.05	A	H	6.63	36.23	49.92	4.08

Results Meet Requirements

[Table of Contents](#)

APPLICANT: IRISS INC.
FCC ID: 2AE7JDELTATUS
IC: 20368-DELTATUS
REPORT: 1447AUT15TestReport.docx

Notes: Only emissions within 20dB of the limit are reported from 9 KHz to 10 GHz, All measurements are peak unless otherwise noted
A – Denotes Average measurement

Test Data: Peak Detector Used for all Measurement's unless otherwise noted in table.

Tuned Freq MHz	Emission Frequency MHz	Meter Reading dBu V		Antenna Polarity	Coax Loss Db	Correction Factor dB/M	Field Strength dBu V/M	Margin
916.00	39.80	3.00		V	0.25	13.09	16.34	23.66
916.00	84.80	1.00		V	0.51	9.64	11.15	28.85
916.00	152.00	1.00		V	0.73	16.46	18.19	25.31
916.00	380.55	3.00		V	1.34	14.99	19.33	74.67
916.00	666.80	2.00		V	1.86	20.54	24.40	69.60
916.00	852.87	3.00		V	2.13	22.69	27.82	66.18
916.00	947.94	3.00		V	2.45	23.66	29.11	16.89
916.00	980.01	2.00		V	2.50	24.10	28.60	25.40
916.00	916.00	58.98		H	2.40	23.36	84.74	9.26
916.00	916.00	43.33		V	2.40	23.36	69.09	24.91
916.00	1832.00	20.78		V	2.99	30.23	54.00	20.00
916.00	1832.00	9.50	A	V	2.99	30.23	42.72	11.28
916.00	1832.08	22.79		H	2.99	30.23	56.01	17.99
916.00	1832.08	11.38	A	H	2.99	30.23	44.60	9.40
916.00	2748.00	21.02		H	3.42	32.52	56.96	17.04
916.00	2748.00	20.96		V	3.42	32.52	56.90	17.10
916.00	2748.00	10.23	A	V	3.42	32.52	46.18	7.82
916.00	2748.11	10.15	A	H	3.42	32.52	46.10	7.90

Results Meet Requirements

[Table of Contents](#)

Test Data: Field Strength table High End of Band

Notes: Only emissions within 20dB of the limit are reported from 9 KHz to 10 GHz, All measurements are peak unless otherwise noted
A – Denotes Average measurement

Tuned Freq MHz	Emission Frequency MHz	Meter Reading dBu V		Antenna Polarity	Coax Loss Db	Correction Factor dB/M	Field Strength dBu V/M	Margin
916.00	3664.16	19.00		V	4.20	33.02	56.22	17.78
916.00	3664.16	9.96	A	V	4.20	33.02	47.18	6.82
916.00	3664.20	18.62		H	4.20	33.02	55.84	18.16
916.00	3664.20	7.73	A	H	4.20	33.02	44.95	9.05
916.00	4579.80	18.76		V	4.79	34.08	57.63	16.37
916.00	4579.80	9.58	A	V	4.79	34.08	48.45	5.55
916.00	4580.00	19.99		H	4.79	34.08	58.86	15.14
916.00	4580.00	7.61	A	H	4.79	34.08	46.49	7.51
916.00	5496.00	19.48		V	5.15	34.55	59.18	14.82
916.00	5496.00	7.76	A	V	5.15	34.55	47.46	6.54
916.00	5496.16	19.99		H	5.15	34.55	59.69	14.31
916.00	5496.16	7.76	A	H	5.15	34.55	47.46	6.54
916.00	6411.80	18.83		H	5.42	35.62	59.87	14.13
916.00	6411.80	7.44	A	H	5.42	35.62	48.48	5.52
916.00	6412.20	18.75		V	5.42	35.62	59.79	14.21
916.00	6412.20	7.76	A	V	5.42	35.62	48.80	5.20
916.00	7328.00	18.45		V	5.80	36.01	60.26	13.74
916.00	7328.00	7.46	A	V	5.80	36.01	49.28	4.72
916.00	7328.16	18.62		H	5.80	36.01	60.43	13.57
916.00	7328.16	7.59	A	H	5.80	36.01	49.41	4.59
916.00	8243.75	20.67		H	6.30	35.99	62.96	11.04
916.00	8243.75	7.44	A	H	6.30	35.99	49.74	4.26
916.00	8243.90	18.28		V	6.30	35.99	60.57	13.43
916.00	8243.90	7.52	A	V	6.30	35.99	49.81	4.19
916.00	9160.00	18.61		H	6.65	36.28	61.54	12.46
916.00	9160.00	17.54		V	6.65	36.28	60.47	13.53
916.00	9160.00	7.05	A	V	6.65	36.28	49.98	4.02
916.00	9160.00	6.96	A	H	6.65	36.28	49.90	4.10

Results Meet Requirements[Table of Contents](#)

APPLICANT: IRISS INC.
FCC ID: 2AE7JDELTATUS
IC: 20368-DELTATUS
REPORT: 1447AUT15TestReport.docx


OCCUPIED BANDWIDTH

Rules Part No.: FCC 15.215(c) & IC RSS-GEN § 6.6

Requirements: FCC requires that the 20 dB bandwidth of the emission shall be contained within the frequency band designated under which the equipment is operated. Industry Canada 99% Bandwidth reporting only

Method of Measurement: ANSI C63.10 § 6.9 Occupied bandwidth tests

Test Data: Low End of Band

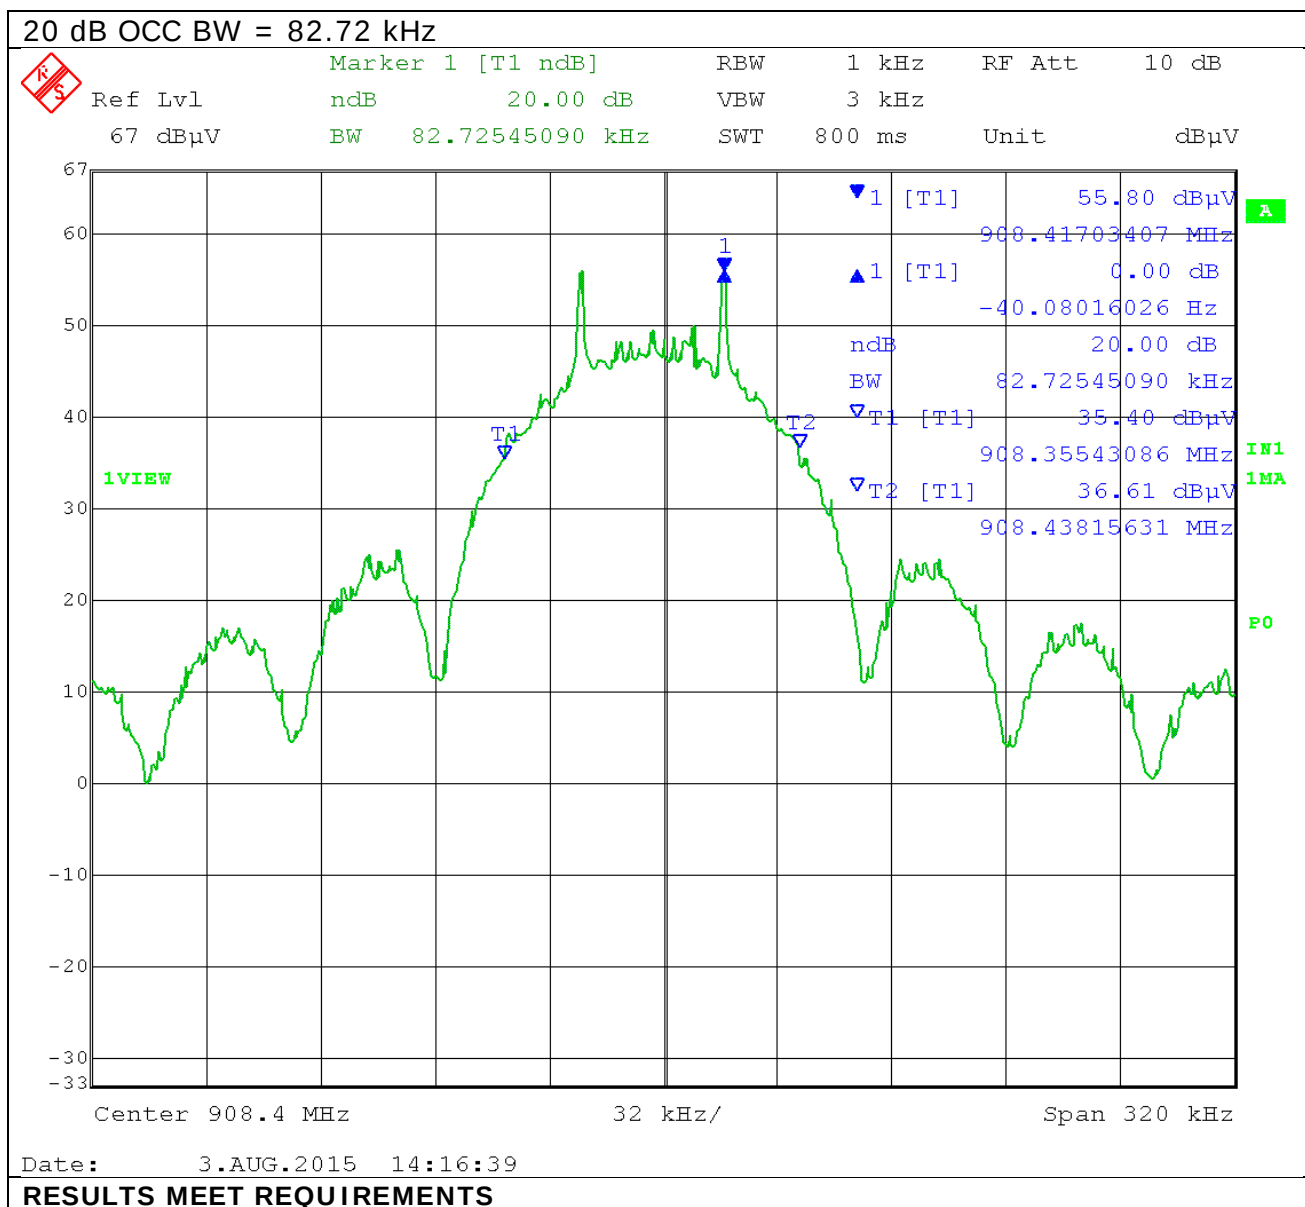


APPLICANT: IRISS INC.
FCC ID: 2AE7JDELTATUS
IC: 20368-DELTATUS
REPORT: 1447AUT15TestReport.docx

[Table of Contents](#)

OCCUPIED BANDWIDTH

Test Data: High End of Band

20 dB OCC BW = 121.20 kHz

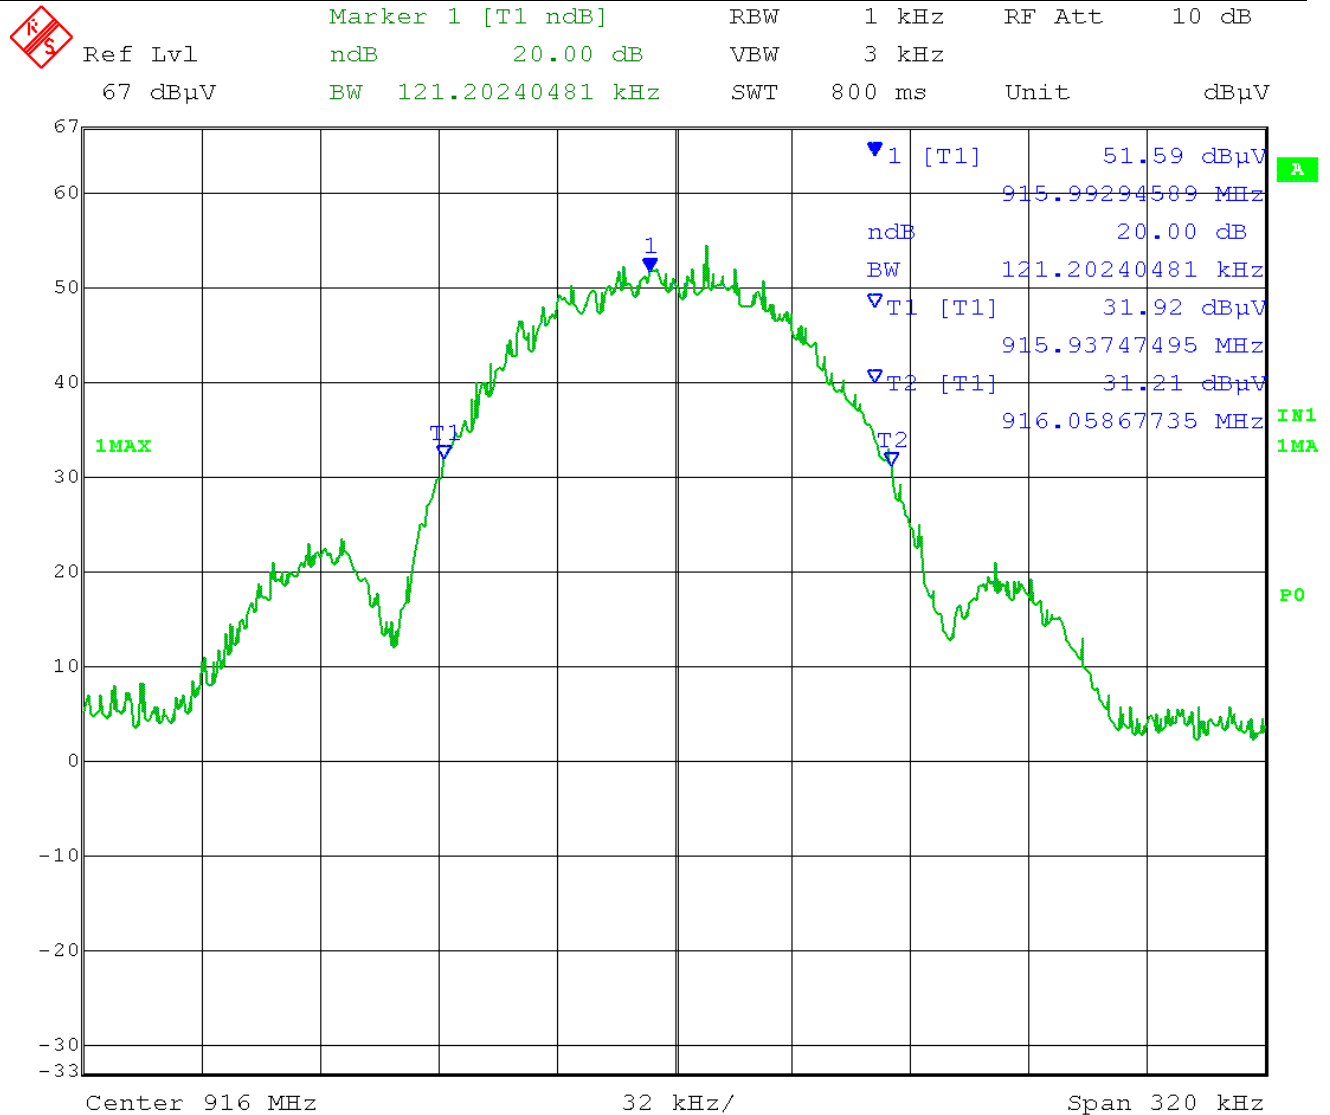

Date: 3.AUG.2015 16:09:23

RESULTS MEET REQUIREMENTS


[Table of Contents](#)

APPLICANT: IRISS INC.
FCC ID: 2AE7JDELTATUS
IC: 20368-DELTATUS
REPORT: 1447AUT15TestReport.docx

OCCUPIED BANDWIDTH

Test Data: Low End of Band

99% OCC BW = 87.21 kHz

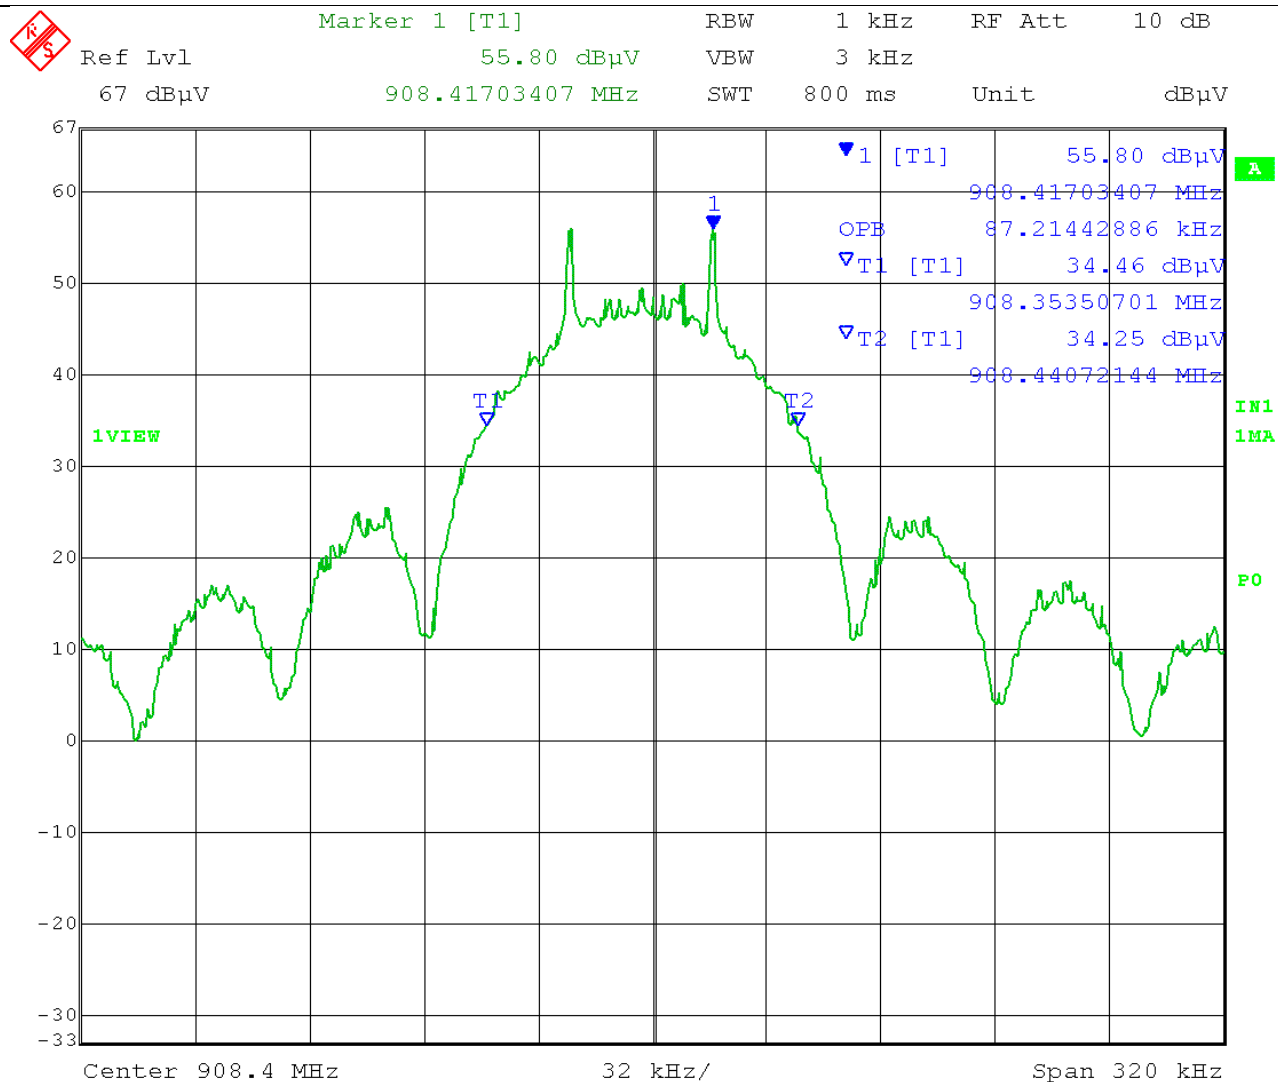

Date: 3.AUG.2015 14:08:07

RESULTS MEET REQUIREMENTS


[Table of Contents](#)

APPLICANT: IRISS INC.
FCC ID: 2AE7JDELTATUS
IC: 20368-DELTATUS
REPORT: 1447AUT15TestReport.docx

OCCUPIED BANDWIDTH

Test Data: High End of Band

99% OCC BW = 109.65 kHz

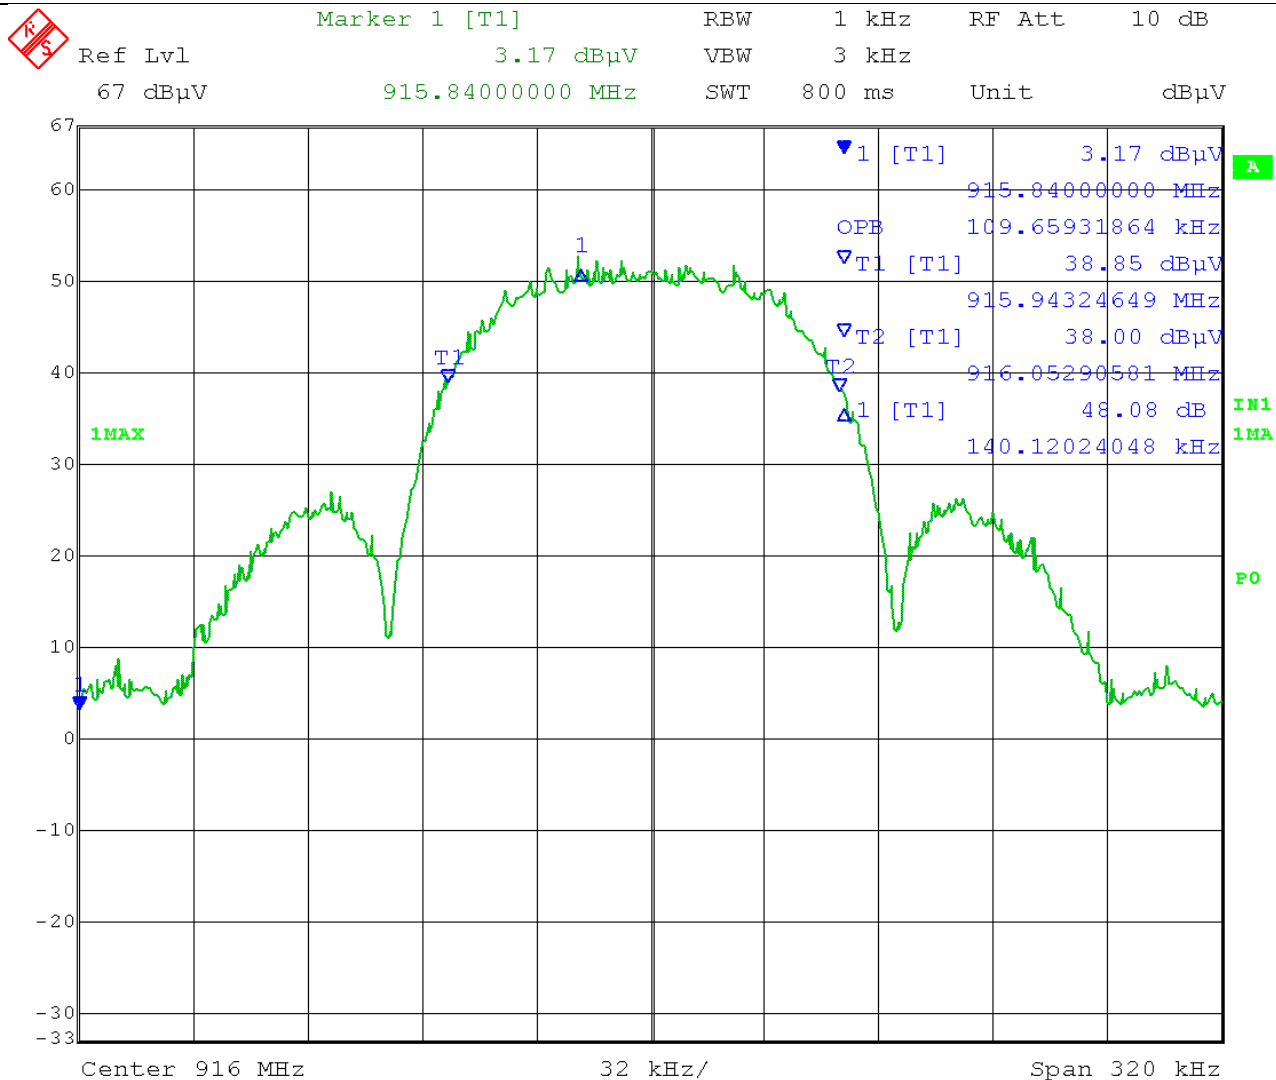

Date: 3.AUG.2015 16:04:50

RESULTS MEET REQUIREMENTS

[Table of Contents](#)

APPLICANT: IRISS INC.
FCC ID: 2AE7JDELTATUS
IC: 20368-DELTATUS
REPORT: 1447AUT15TestReport.docx


BAND-EDGE

Rules Part No.: FCC 15.249(d) & IC RSS-210 § A2.9(b)

Requirements: The field strength of any emissions appearing outside the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.249.

Method of Measurement: ANSI C63.10 § 6.10 Band-edge testing

Test Data: Low End of Band

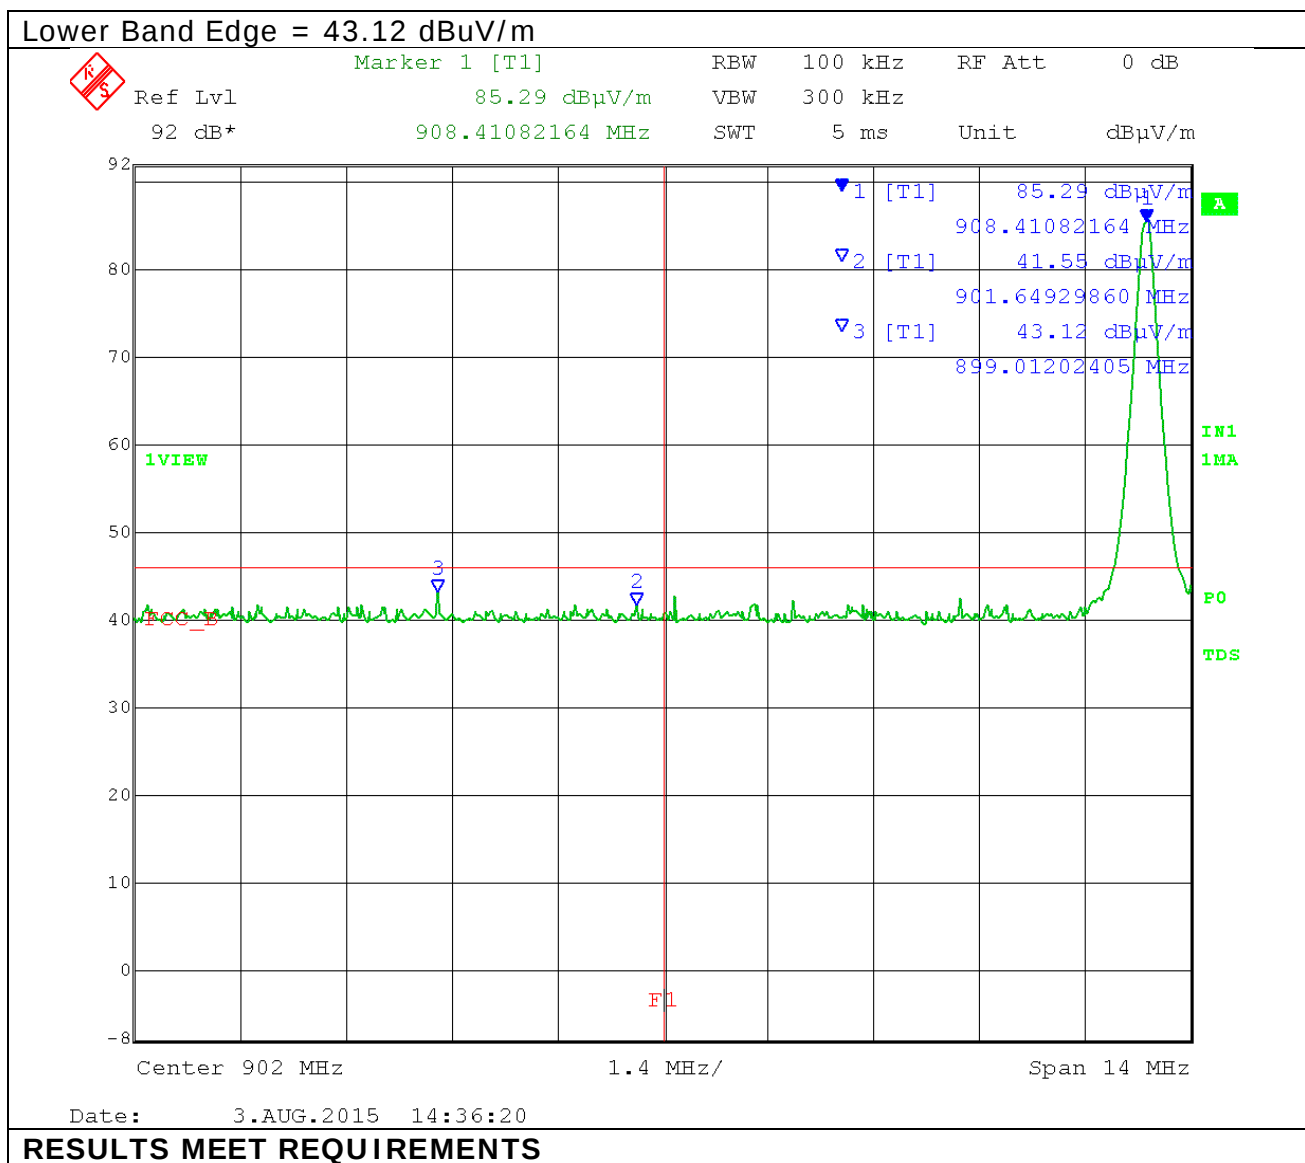

[Table of Contents](#)

APPLICANT: IRISS INC.


FCC ID: 2AE7JDELTATUS

IC: 20368-DELTATUS

REPORT: 1447AUT15TestReport.docx

Page 15 of 17

Test Data: Upper End of Band

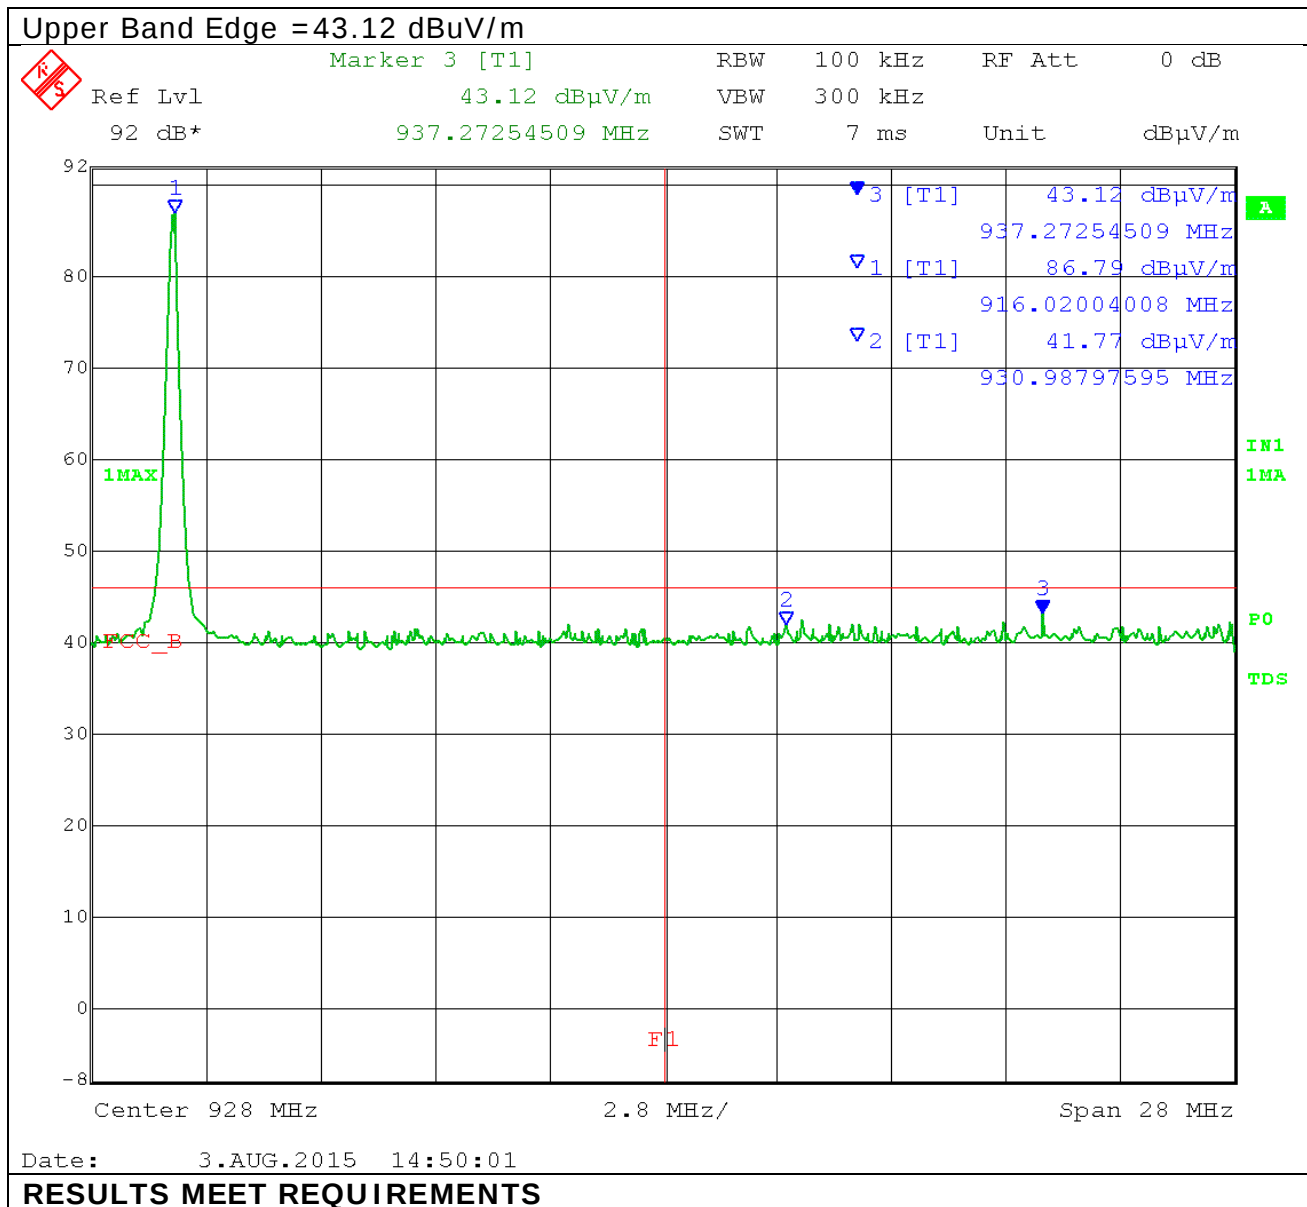

[Table of Contents](#)

APPLICANT: IRISS INC.
 FCC ID: 2AE7JDELTATUS
 IC: 20368-DELTATUS
 REPORT: 1447AUT15TestReport.docx

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconnical Chamber	Eaton Chamber	94455-1	1057	06/14/13	12/14/15
Antenna: Log-Periodic Chamber	Eaton	96005	1243	05/31/13	11/30/15
Antenna: Passive Loop	EMC Test Systems	EMCO 6512	9706-1211	07/09/15	07/09/17
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/13	12/31/15
Ant: Double-Ridged Horn/ETS Horn 1 Ch	ETS-Lindgren Chamber	3117	00035923	06/13/14	06/13/16
EMI Test Receiver R & S ESIB 40 Screen Room	Rohde & Schwarz	ESIB 40	100274	08/12/14	08/12/16
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	03/11/14	03/11/16

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

[Table of Contents](#)