



849 NW State Road 45
Newberry, FL 32669 USA
Ph.: 888.472.2424 or
352.472.5500
Email: info@timcoengr.com
Website: www.timcoengr.com

FCC PART 15.249 & IC RSS-210

UNLICENSED INTENTIONAL RADIATOR

TEST REPORT

Applicant	IRISS INC.
Address	10306 TECHNOLOGY TERRACE BRADENTON FL 34211
FCC ID	2AE7JDTS-PRO-US-01
IC	20368-DTSPROUS01
Model Number	DTS-PRO-US-01
Product Description	LOW POWER TRANSMITTER
Date Sample Received	02/11/2019
Final Test Date	02/26/2019
Tested By	Tim Royer
Approved By	Franklin Rose

Report Number	Version Number	Description	Issue Date
295AUT19TestReport	Rev1	Initial Issue	02/26/2019

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

TABLE OF CONTENTS

GENERAL INFORMATION	4
EUT Specification	4
Test Supporting Equipment	4
RESULTS SUMMARY	5
OCCUPIED BANDWIDTH	6
Test Data: 99% Occupied Bandwidth Measurement Table	6
Test Data: 99% OBW (904.4MHz)	7
Test Data: 99% OBW (911MHz)	8
Test Data: 99% OBW (921.4MHz)	9
Test Data: 20dB OBW (904.4MHz)	10
Test Data: 20dB OBW (911MHz)	11
Test Data: 20dB OBW (921.4MHz)	12
BANDEDGE	13
Test Data: Bandedge Measurement Table	13
Test Data: Lower Band Edge Plot	14
Test Data: Upper Band Edge Plot	15
RADIATED SPURIOUS EMISSIONS	16
Test Data: Field Strength at 3 Meters Measurement Table	18
EMC EQUIPMENT LIST	19

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

- ☒ Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- ☐ Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Sr. EMC Engineer
EMC-003838-NE



Tested by

Name and Title: Tim Royer, Project Manager/Testing Engineer

Date: 02/25/2019

Reviewed and approved by:



Name and Title: Franklin Rose, Project Manager/EMC Specialist

Date: 02/26/2019

Applicant: IRISS INC.
FCC ID: 2AE7JDTS-PRO-US-01
IC: 20368-DTSPROUS01
Report: 295AUT19TestReport_Rev1

GENERAL INFORMATION

EUT Specification

Regulatory Standards	FCC Title 47 CFR Part 15.249 IC RSS-210 Issue 8 A2.9 & RSS-GEN Issue 4		
FCC ID	2AE7JDTS-PRO-US-01		
IC	20368-DTSPROUS01		
Model	DTS-PRO-US-01		
EUT Description	LOW POWER TRANSMITTER		
Operating Frequency	TX: 904.4-921.4 MHz		
EUT Power Source	☐ 110-120Vac/50- 60Hz		
	☒ DC Power		
	☐ Battery Operated Exclusively		
Test Item	☐ Prototype	☒ Pre-Production	☐ Production
Type of Equipment	☐ Fixed	☐ Mobile	☒ Portable
Antenna Connector	None		
Antenna	Integral		
Test Conditions	Temperature: 24-26°C Relative humidity: 50-65%		
Test Facility	Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA. Designation #: US1070 IC Test Site Registration #: 2056A		
Measurement Standard	ANSI C63.10-2013 ANSI C63.4-2014 (Radiated Site Validation)		
Test Mode	Power set to 36		

Test Supporting Equipment

Device	Manufacturer	Model	S / N	Supplied By	Used For
N/A					

Applicant: IRISS INC.
 FCC ID: 2AE7JDTS-PRO-US-01
 IC: 20368-DTSPROUS01
 Report 295AUT19TestReport_Rev1

RESULTS SUMMARY

FCC Rule Part No.	IC Standard Ref.	Requirement	Test Item	Result
2.1049	RSS-GEN 6.6	Occupied Bandwidth	99% Bandwidth	Pass
15.249(a)(c)	RSS-210 § A2.9(a)	Fundamental and Harmonics	Radiated Spurious Emissions	Pass
15.249(d)(e)	RSS-247 § 5.5	Spurious Emissions	Bandedge	Pass
			Radiated Spurious Emissions	Pass

OCCUPIED BANDWIDTH


Rules Part No.: FCC 2.1049, FCC 15.215(c), IC RSS GEN § 6.6

FCC Requirements: FCC requires that the 20 dB bandwidth of the emission shall be contained within the frequency band designated under which the equipment is operated.

IC Requirements: Reporting Only

Test Method: THE TEST PROCEDURES USED ARE DETAILED IN THE STANDARD LISTED ABOVE.

Setup:

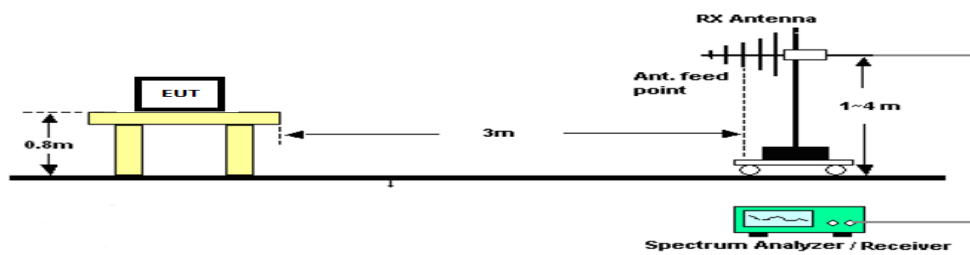

Test Data: 99 % Occupied Bandwidth Measurement Table


Tuned Frequency (MHz)	99 % BW (MHz)	20dB BW (MHz)
904.4	2.9	3.08
911	2.64	3.02
921.4	2.72	3.04

Note: The receiver's automatic 99% Occupied Bandwidth function was used. The function is identical in operation to ANSI C63.26, 5.4.4, Step e).

OCCUPIED BANDWIDTH

Test Data: 99 % OBW (904.4MHz)


 Ref Lvl 87 dB μ V
 Marker 1 [T1] 29.14 dB μ V
 RBW 100 kHz
 VBW 300 kHz
 SWT 5 ms
 RF Att 10 dB
 Unit dB μ V

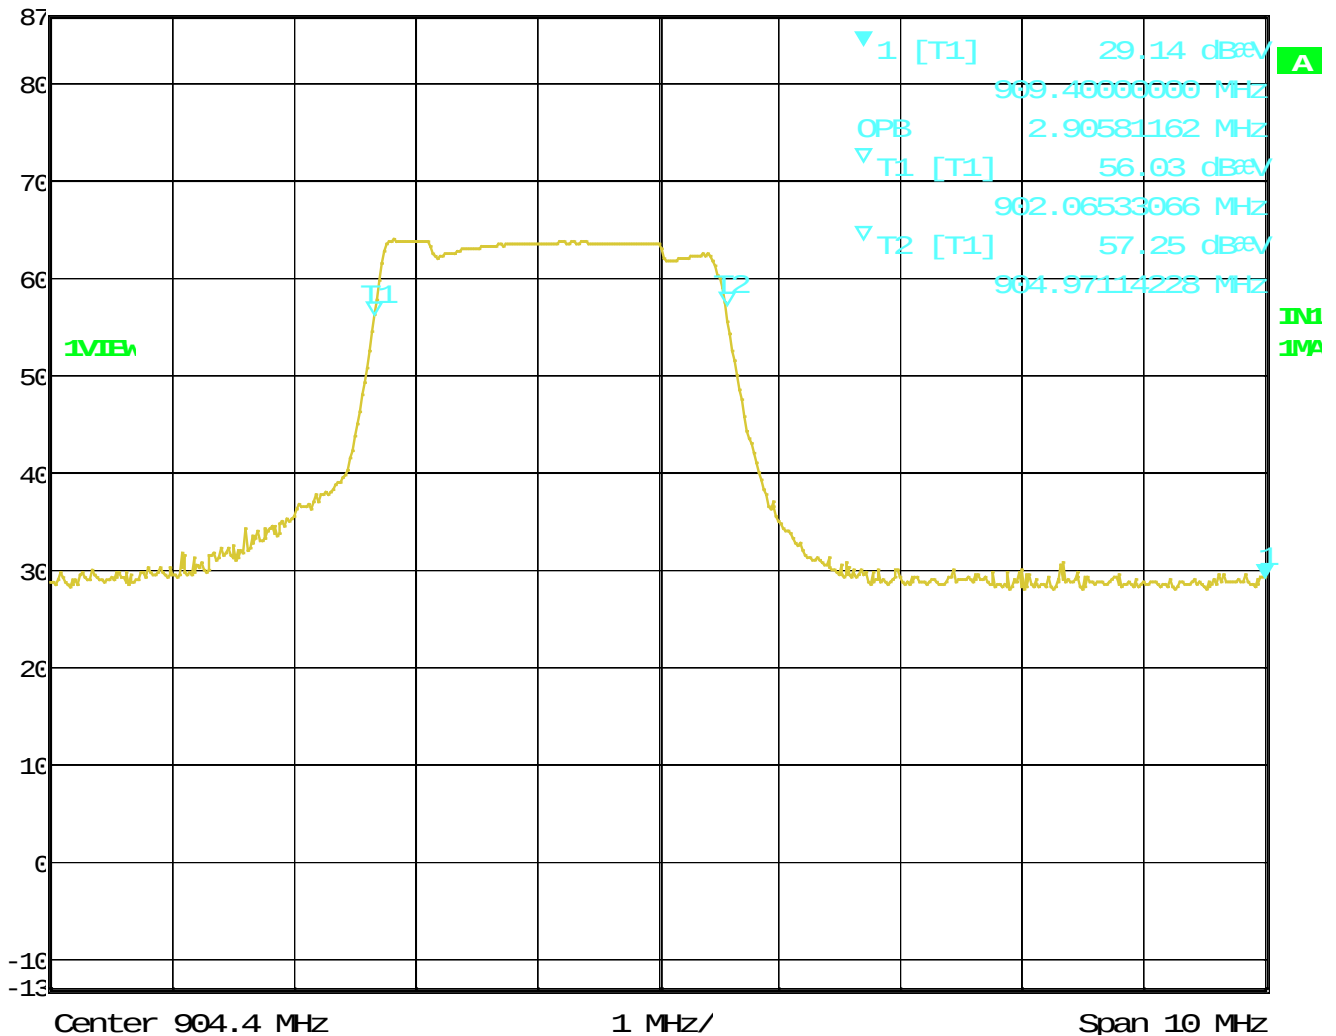

Date: 1.JAN.1997 01:37:20


RESULTS: Meets Requirements

Applicant: IRISS INC.
 FCC ID: 2AE7JDTS-PRO-US-01
 IC: 20368-DTSPROUS01
 Report: 295AUT19TestReport_Rev1

OCCUPIED BANDWIDTH

Test Data: 99 % OBW (911MHz)


 Ref Lvl 87 dB μ V
 Marker 1 [T1] 62.30 dB μ V
 RBW 100 kHz
 VBW 300 kHz
 SWT 5 ms
 RF Att 10 dB
 Unit dB μ V

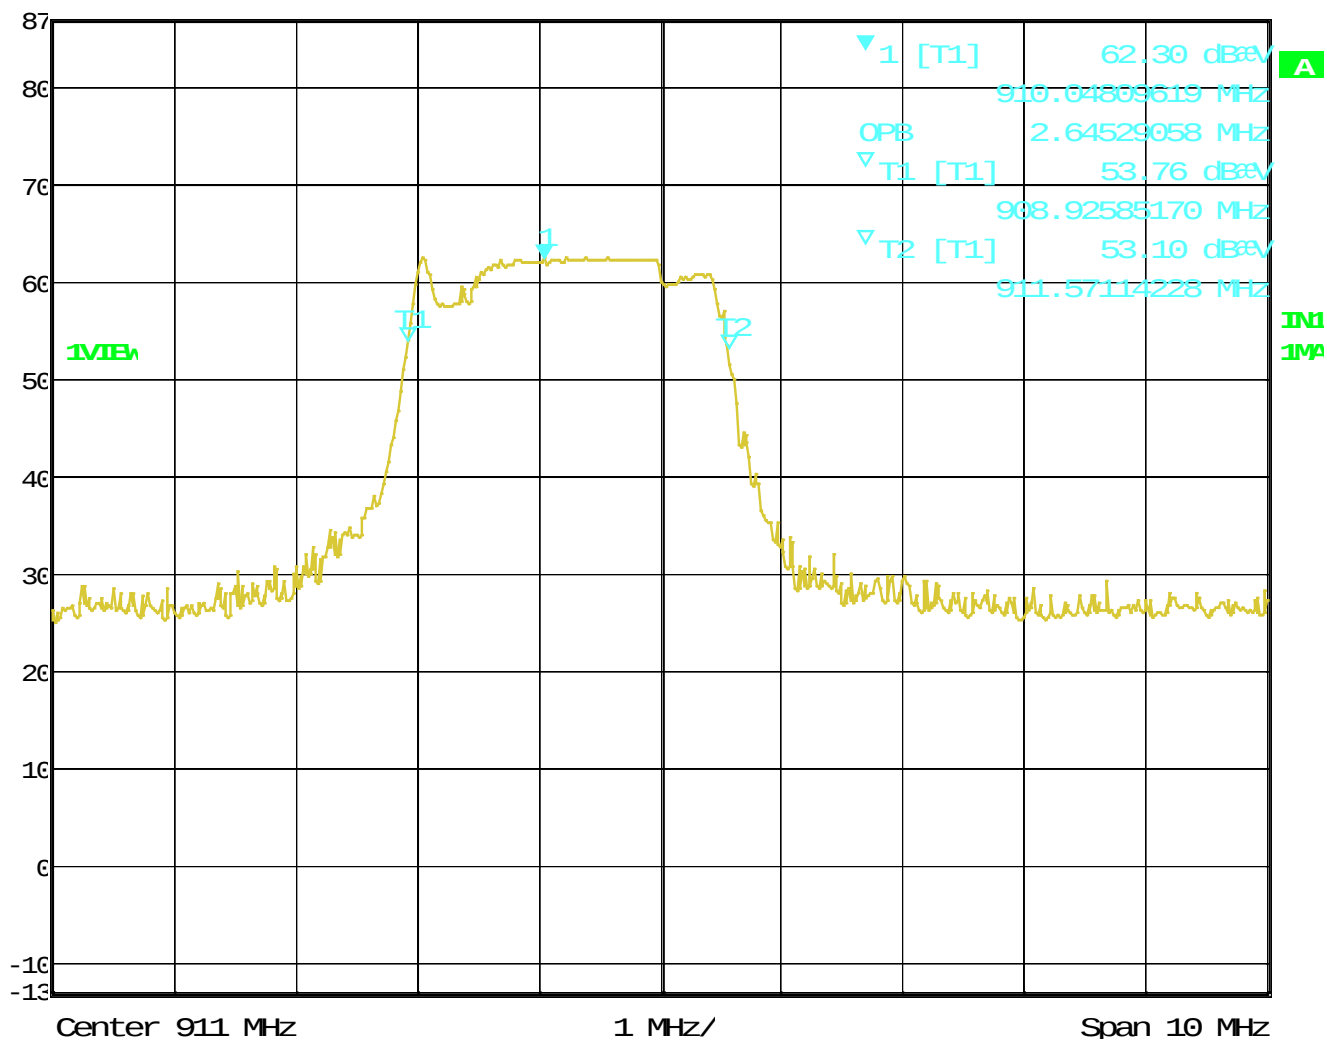

Date: 1.JAN.1997 00:55:56


RESULTS: Meets Requirements

Applicant: IRISS INC.
 FCC ID: 2AE7JDTS-PRO-US-01
 IC: 20368-DTSPROUS01
 Report: 295AUT19TestReport_Rev1

OCCUPIED BANDWIDTH

Test Data: 99 % OBW (921.4MHz)


 Ref Lvl 87 dB μ V
 Marker 1 [T1] 60.72 dB μ V
 RBW 100 kHz
 VBW 300 kHz
 SWT 5 ms
 RF Att 10 dB
 Unit dB μ V

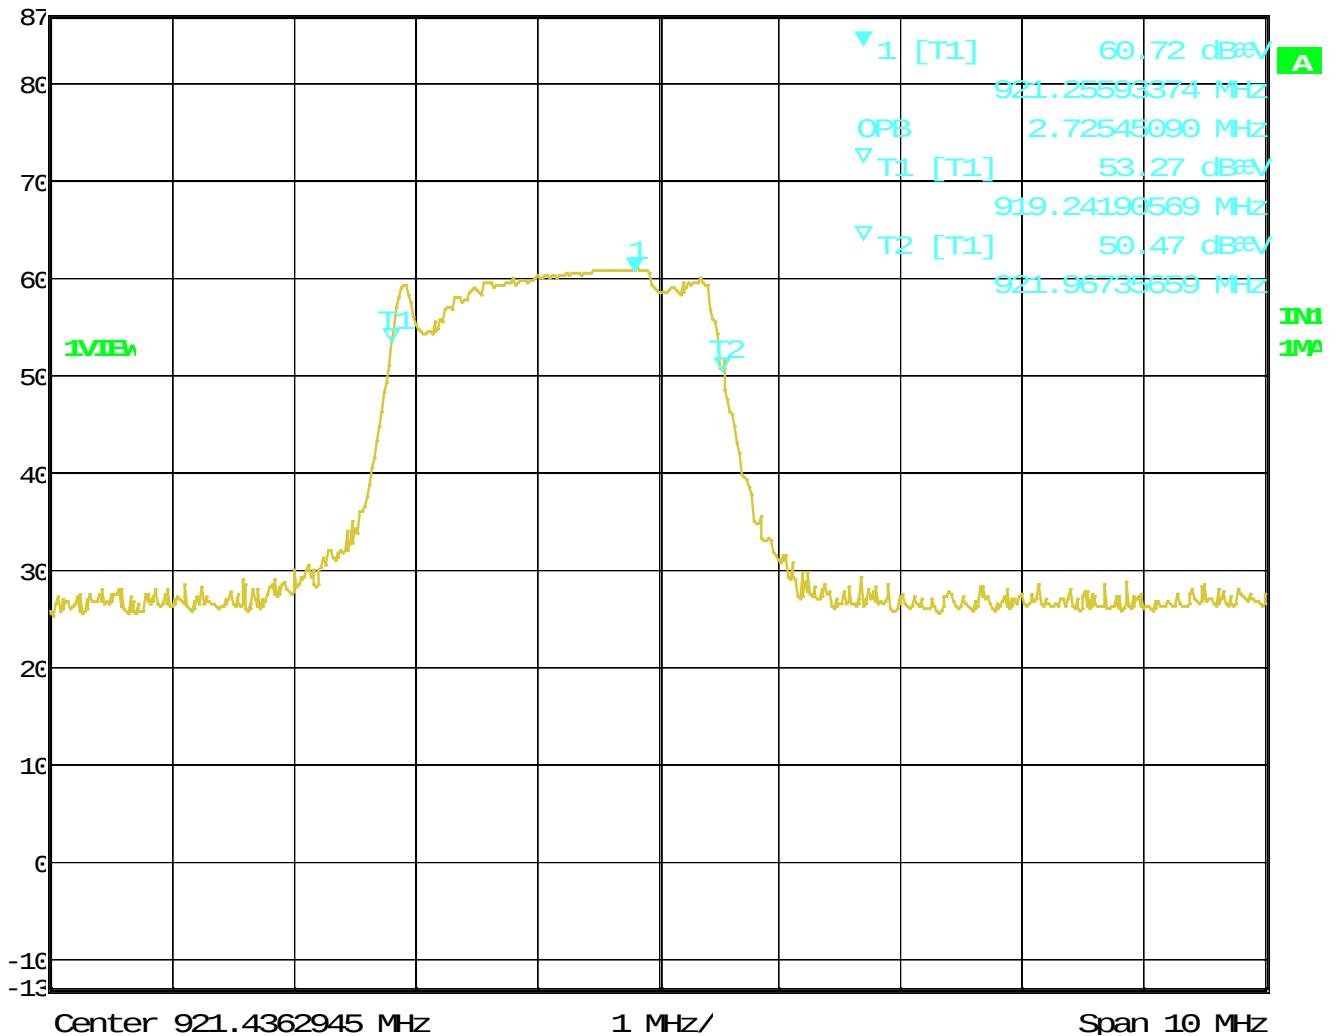

Date: 1.JAN.1997 00:50:01


RESULTS: Meets Requirements

Applicant: IRISS INC.
 FCC ID: 2AE7JDTS-PRO-US-01
 IC: 20368-DTSPROUS01
 Report: 295AUT19TestReport_Rev1

OCCUPIED BANDWIDTH

Test Data: 20dB OBW (904.4MHz)


 Ref Lvl 87 dB μ V
 Delta 1 [T1] -0.22 dB
 3.08617234 MHz
 RBW 100 kHz
 VBW 300 kHz
 SWT 5 ms
 RF Att 10 dB
 Unit dB μ V

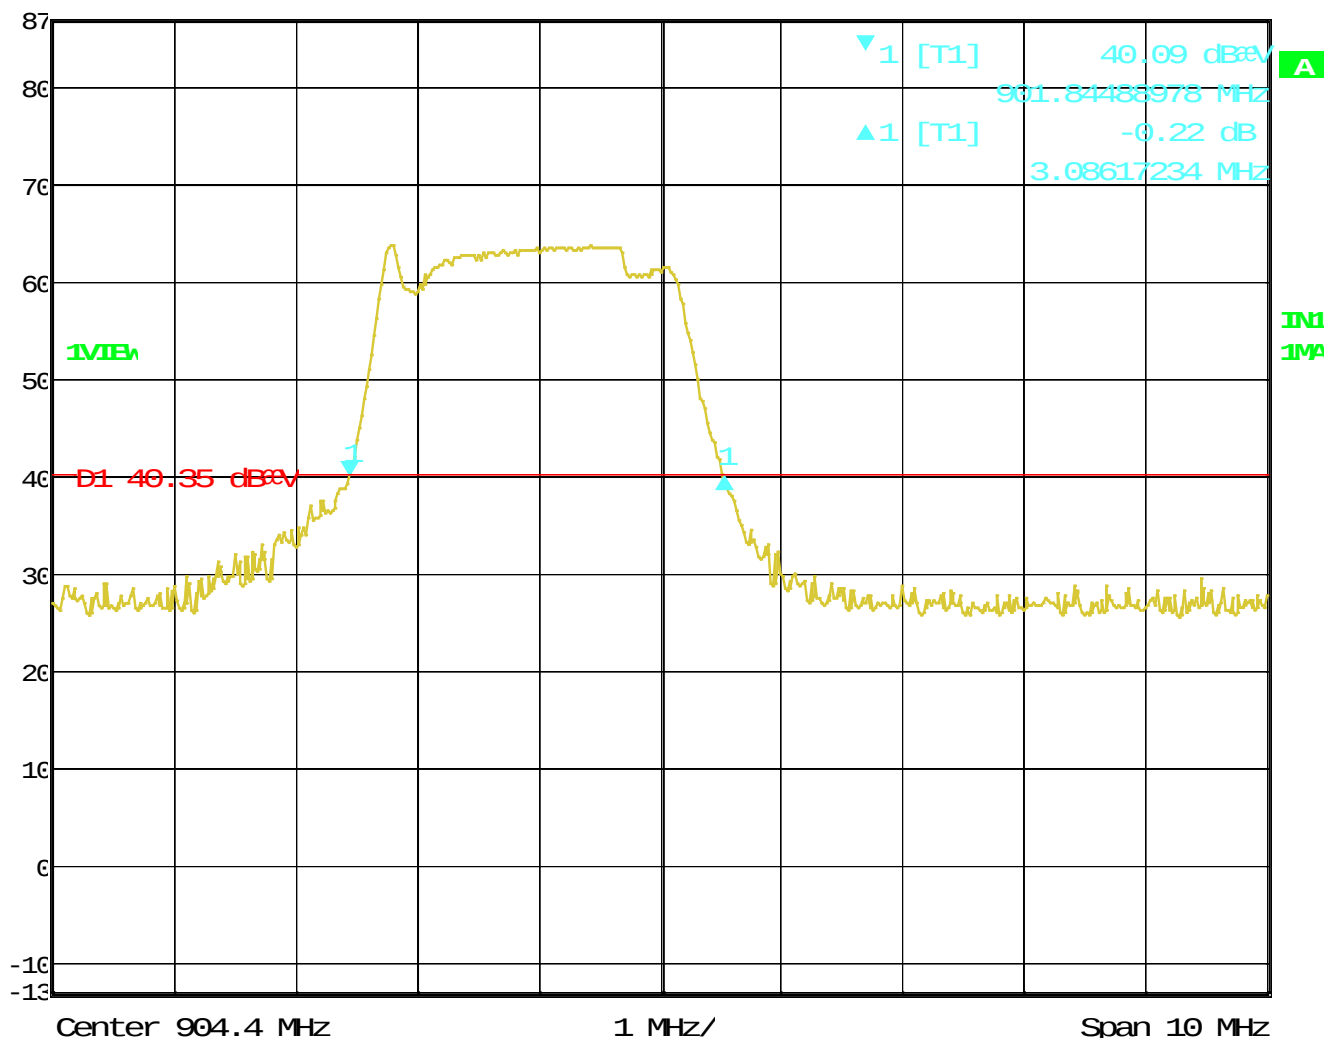

Date: 1.JAN.1997 01:38:06


RESULTS: Meets Requirements

Applicant: IRISS INC.
 FCC ID: 2AE7JDTS-PRO-US-01
 IC: 20368-DTSPROUS01
 Report: 295AUT19TestReport_Rev1

OCCUPIED BANDWIDTH

Test Data: 20dB OBW (911MHz)


 Ref Lvl 87 dB μ V
 Delta 1 [T1] 1.24 dB
 3.02605210 MHz
 RBW 100 kHz
 VBW 300 kHz
 SWT 5 ms
 RF Att 10 dB
 Unit dB μ V

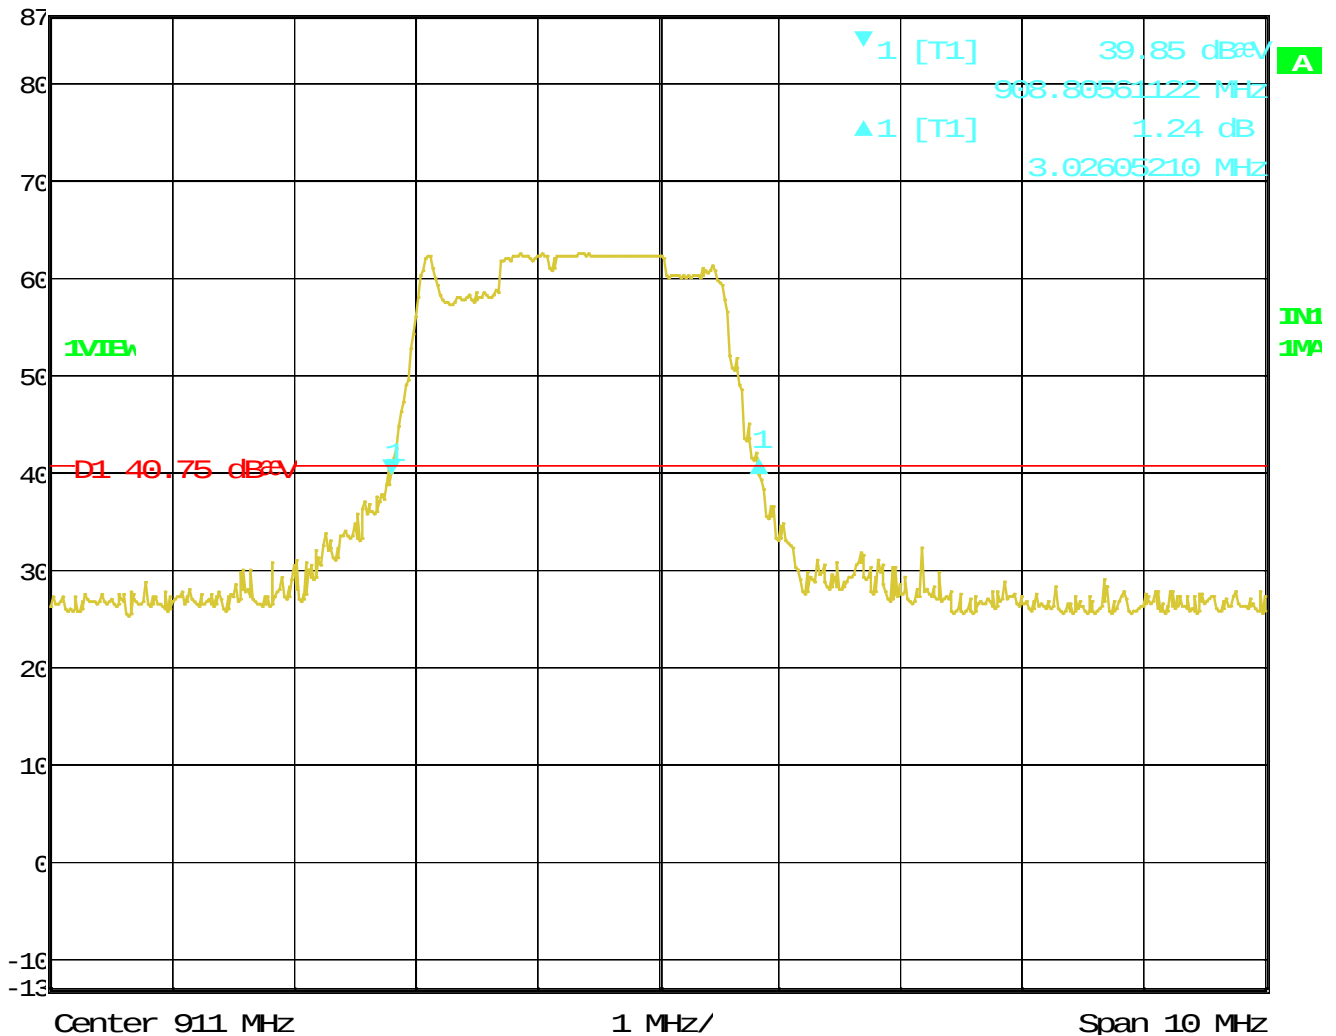

Date: 1.JAN.1997 00:55:24


RESULTS: Meets Requirements

Applicant: IRISS INC.
 FCC ID: 2AE7JDTS-PRO-US-01
 IC: 20368-DTSPROUS01
 Report: 295AUT19TestReport_Rev1

OCCUPIED BANDWIDTH

Test Data: 20dB OBW (921.4MHz)


 Ref Lvl 87 dB μ V
 Delta 1 [T1] 1.45 dB
 3.04609218 MHz
 RBW 100 kHz
 VBW 300 kHz
 SWT 5 ms
 RF Att 10 dB
 Unit dB μ V

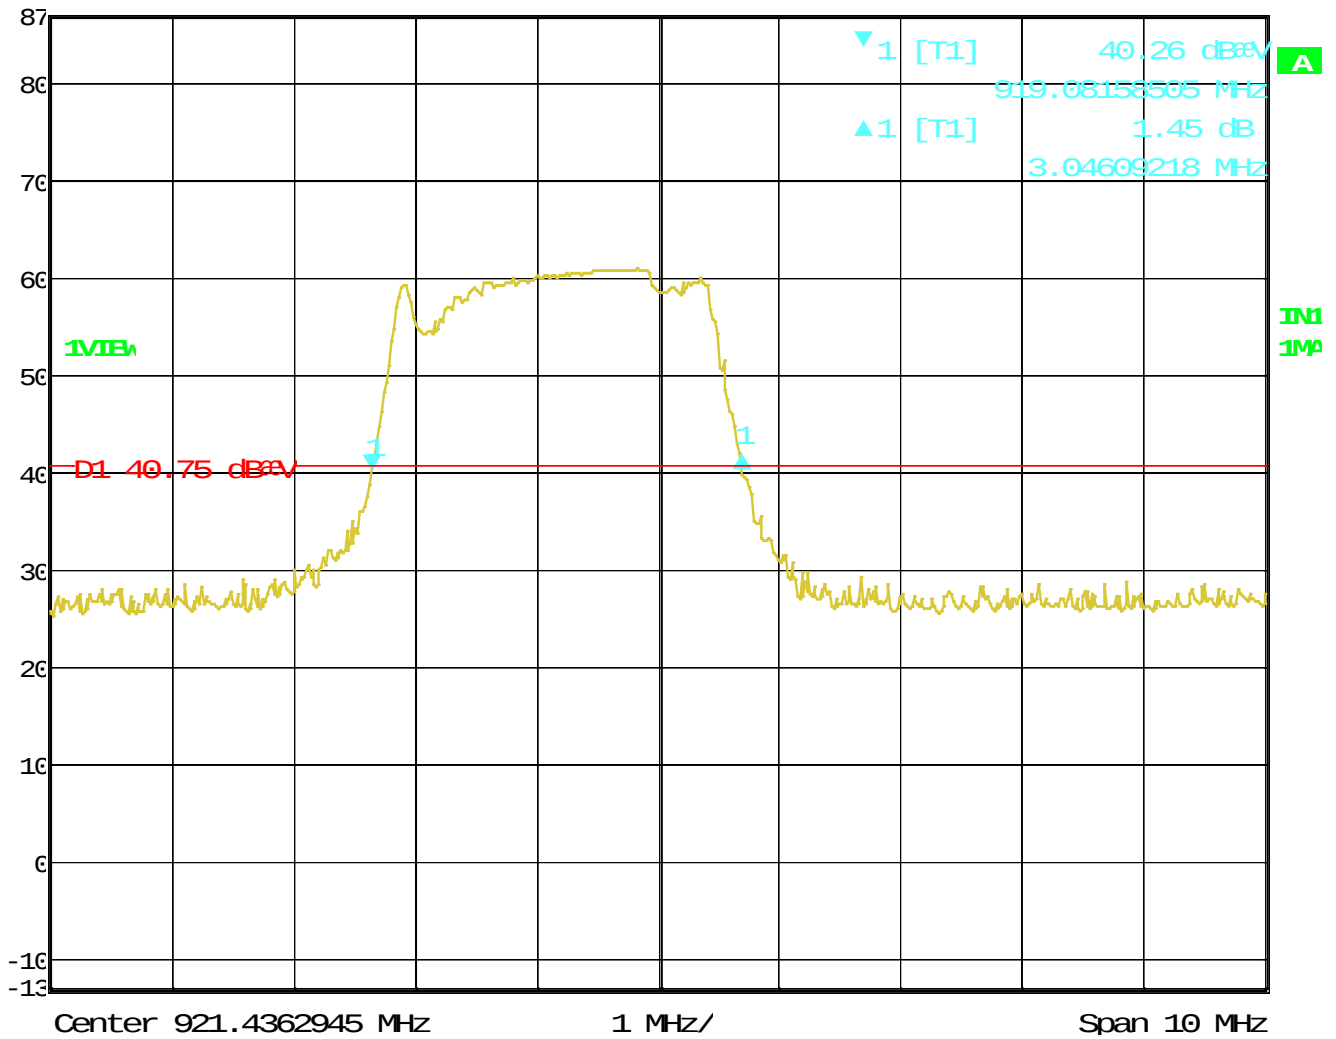

Date: 1.JAN.1997 00:50:37

RESULTS: Meets Requirements

Applicant: IRISS INC.
 FCC ID: 2AE7JDTS-PRO-US-01
 IC: 20368-DTSPROUS01
 Report: 295AUT19TestReport_Rev1

BANDEDGE


Rule Part No.: FCC 15.249(d), IC RSS 210 § A2.9(b)

Requirements: Emissions must be at least 50 dB down from the highest emission level Within the authorized band as measured with a 100 kHz RBW, or to the limits of 15.209.


Test Method: THE TEST PROCEDURES USED ARE DETAILED IN THE STANDARD LISTED ABOVE.

Setup:

Emissions 30 – 1000 MHz

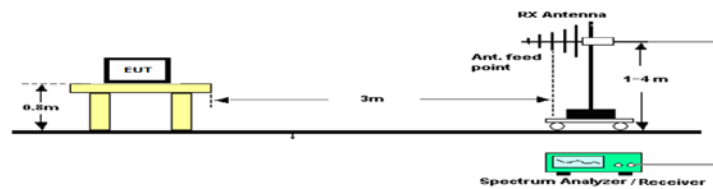

Emissions above 1 GHz

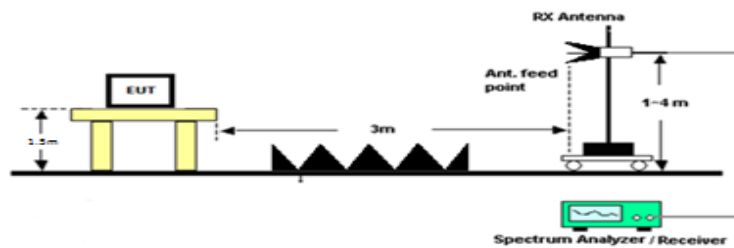


Test Data: Bandedge Measurement Table

Bandedge	Tuned Frequency (MHz)	Measured Level (dBc)	Limit (dBc)	Margin (dB)
Lower	904.4	57.76	50	7.76
Upper	921.4	56.82	50	6.82

Results Meet Requirements

Applicant: IRISS INC.
 FCC ID: 2AE7JDTS-PRO-US-01
 IC: 20368-DTSPROUS01
 Report: 295AUT19TestReport_Rev1


Test Data: Lower Band Edge Plot

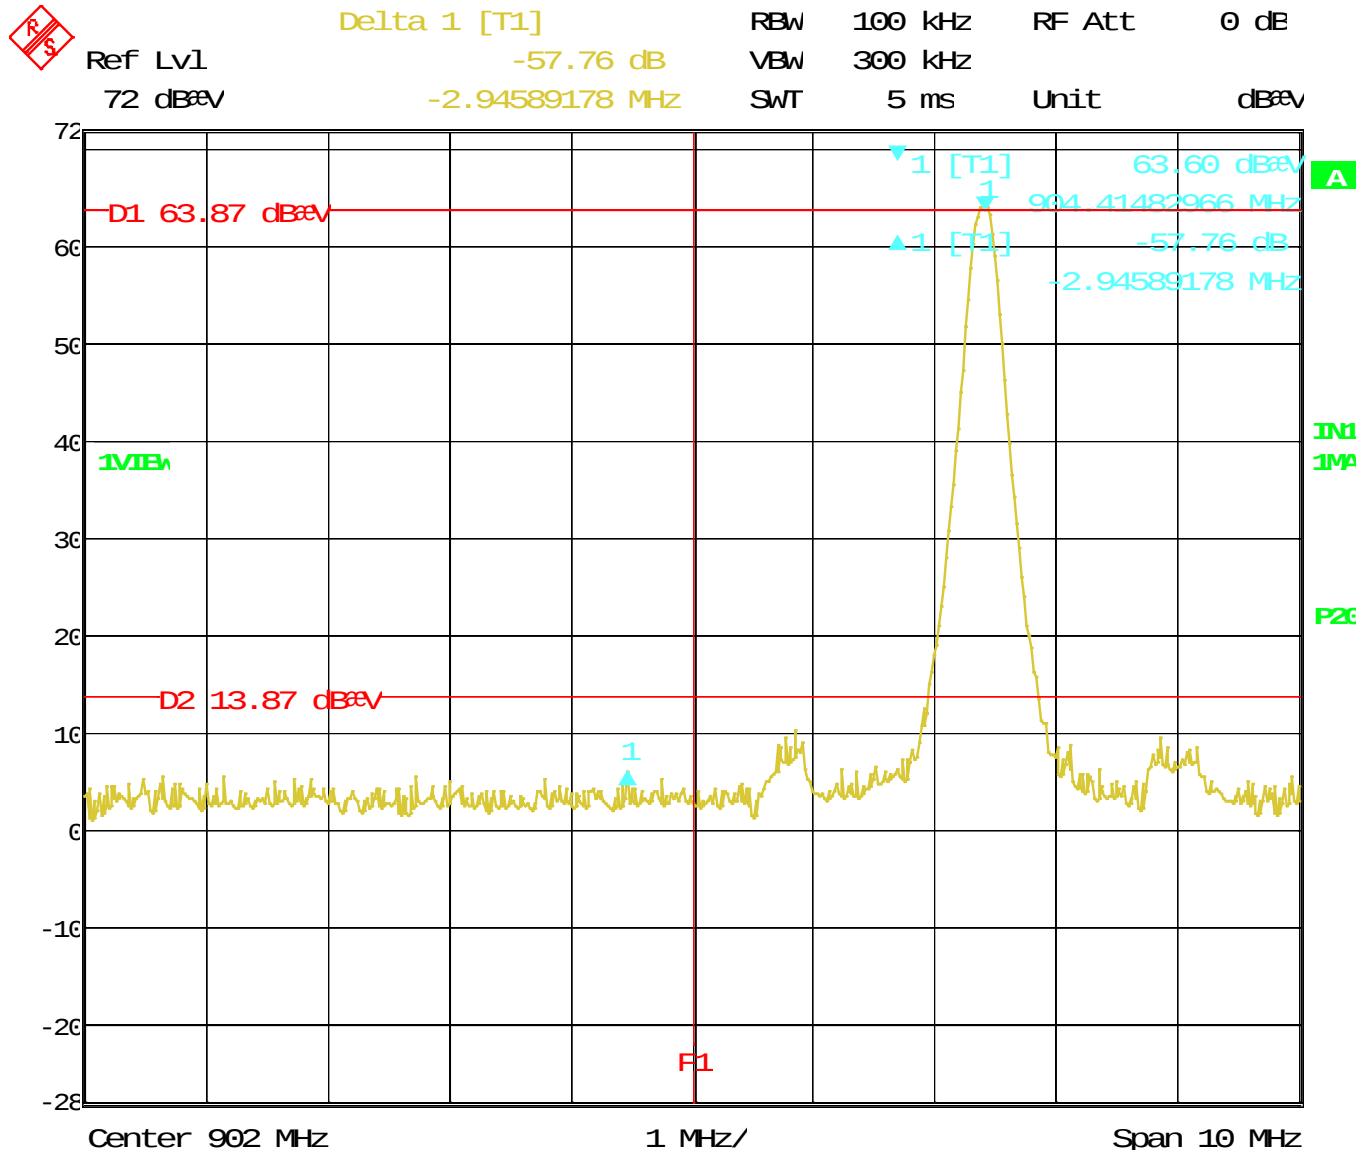

Date: 1.JAN.1997 01:59:02
 RESULTS: Meets Requirements

BANDEDGE

Test Data: Upper Band Edge Plot

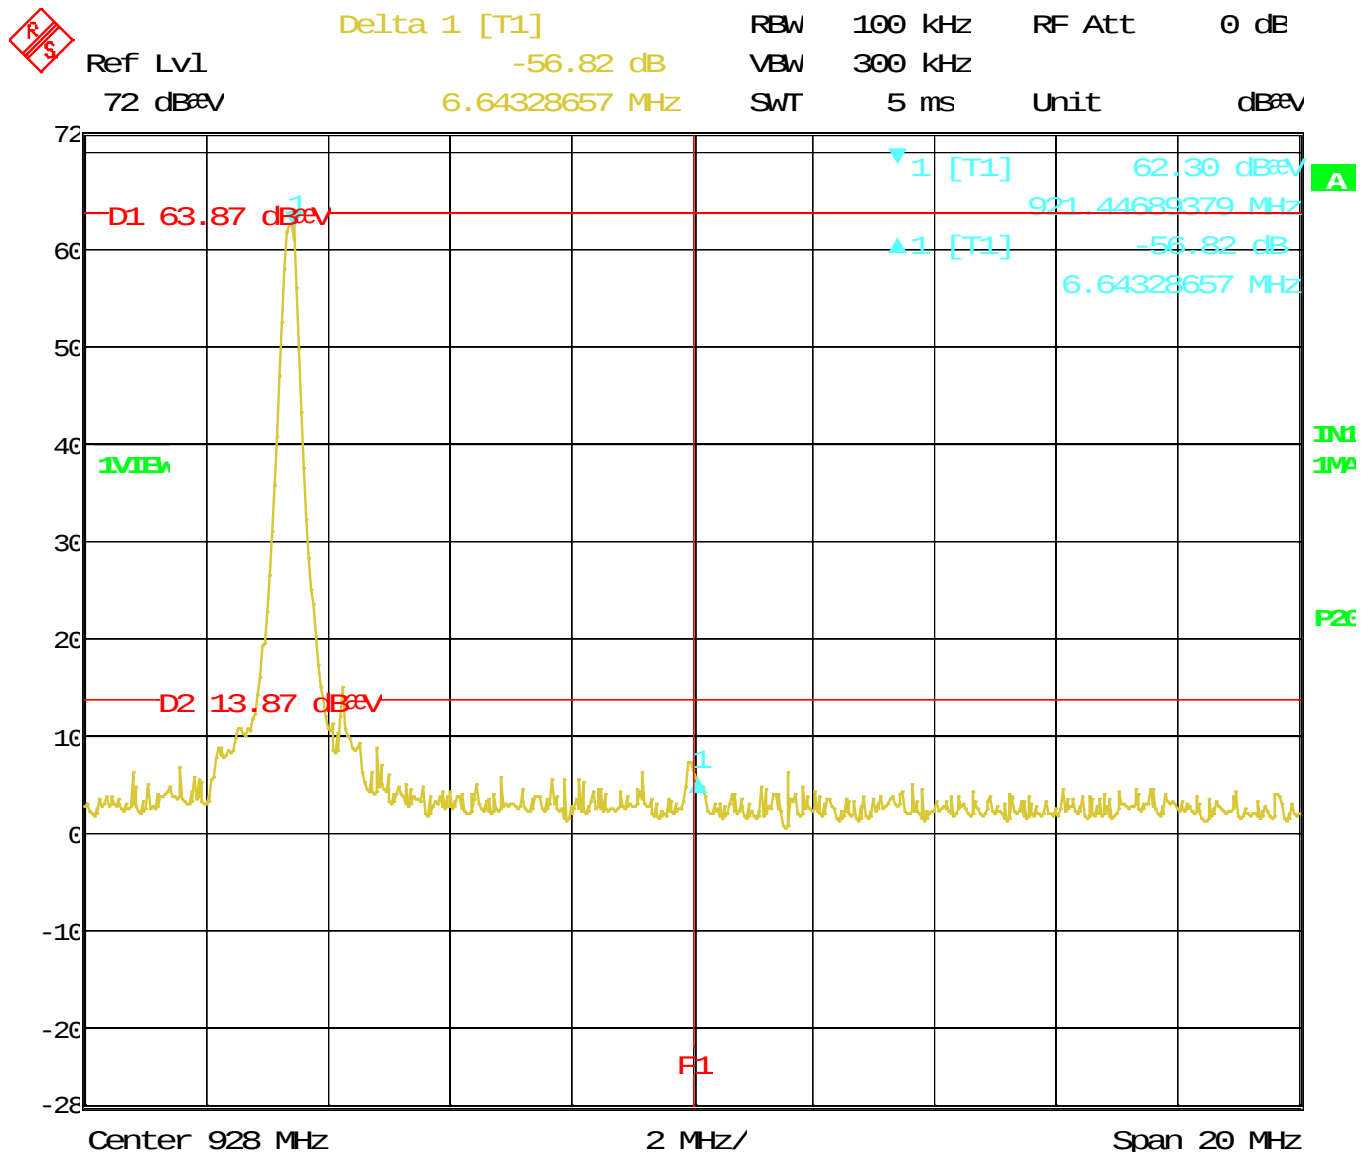

Date: 1.JAN.1997 02:01:58

RESULTS: Meets Requirements

Applicant: IRISS INC.
FCC ID: 2AE7JDTS-PRO-US-01
IC: 20368-DTSPROUS01
Report: 295AUT19TestReport_Rev1

RADIATED SPURIOUS EMISSIONS

Rules Part No.: FCC part 15.249 (a)(c)(d)(e)

Requirements: the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation

Field strength limits are specified at a distance of 3 meters

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Frequency	Limits
Part 15.209	
9 to 490 kHz	2400/F (kHz) μ V/m @ 300 meters
490 to 1705 kHz	24000/F (kHz) μ V/m @ 30 meters
1705 kHz to 30 MHz	29.54 dB μ V/m @ 30 meters
30 – 88	40.0 dB μ V/m @ 3 meters
80 – 216	43.5 dB μ V/m @ 3 meters
216 – 960	46.0 dB μ V/m @ 3 meters
Above 960	54.0 dB μ V/m @ 3 meters
Part 15.249	
Fundamental 902 – 928 MHz	94.0 dB μ V/m @ 3 meters
Fundamental 2.4 – 2.4835 GHz	94.0 dB μ V/m @ 3 meters
Harmonics	54.0 dB μ V/m @ 3 meters

Test Method: ANSI C63.4 § Annex D Validation of radiated emissions standard test sites
 ANSI C63.10 § 6.3 Common requirements radiated emissions
 ANSI C63.10 § 6.4 Emissions below 30 MHz
 ANSI C63.10 § 6.5 Emissions between 30 & 1000 MHz
 ANSI C63.10 § 6.6 Emissions above 1 GHz

Field Strength Calculation:

The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:


Freq (MHz)	Meter Reading	+ ACF	+ CL = FS
33	20 dB μ V	+ 10.36 dB	+ 0.5 = 30.86 dB μ V/m @ 3m

Applicant: IRISS INC.
 FCC ID: 2AE7JDTS-PRO-US-01
 IC: 20368-DTSPROUS01
 Report: 295AUT19TestReport_Rev1


RADIATED SPURIOUS EMISSIONS

Setup:


Emissions below 30 MHz

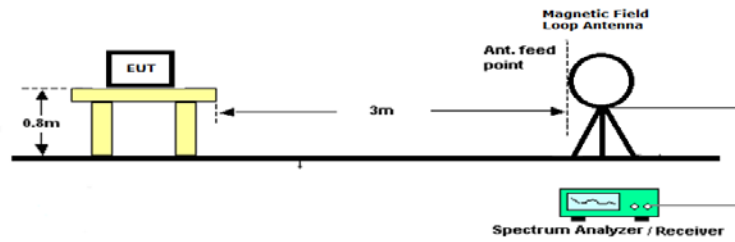

Emissions 30 – 1000 MHz

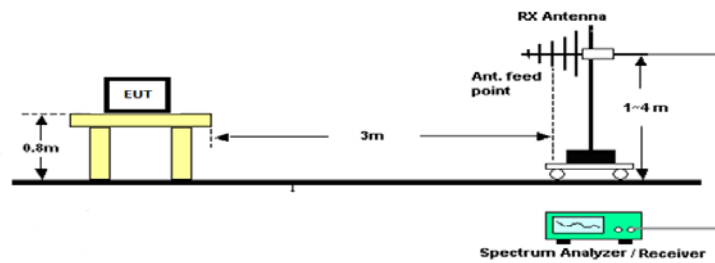

Emissions above 1 GHz

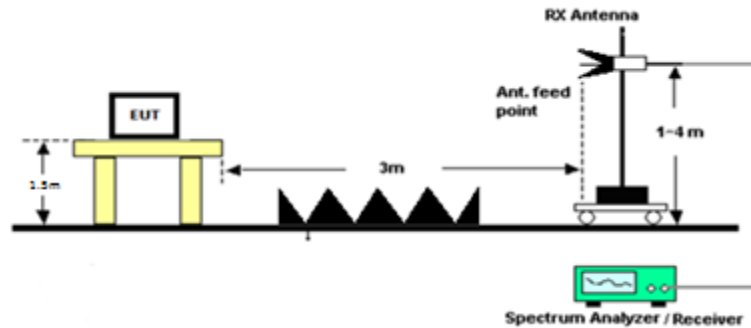

RADIATED SPURIOUS EMISSIONS

Notes: The EUT was checked in three orthogonal planes as required, a setup photo is provided to show the orientation of the worst case position.

Only emissions within 20dB of the limit are reported.

The spectrum was measured from 9 KHz to 10 GHz

Test Data: Field Strength at 3 Meters Measurement Table

Tuned Freq MHz	Emission Frequency MHz	Meter Reading dBu V	Antenna Polarity	Coax Loss Db	Correction Factor dB/M	Field Strength dBu V/M	Margin
908.40	904.40	59.72	V	3.54	22.04	85.30	8.70
908.40	904.40	66.00	H	3.54	22.04	91.58	2.42
921.40	921.40	61.35	H	3.58	23.90	88.83	5.17
921.40	921.40	66.04	V	3.58	23.90	93.52	0.48
911.00	911.00	62.26	H	3.55	22.60	88.41	5.59
911.00	911.00	64.41	V	3.55	22.60	90.56	3.44

Tuned Freq MHz	Emission Frequency MHz	Meter Reading dBu V	Antenna Polarity	Coax Loss Db	Correction Factor dB/M	Field Strength dBu V/M	Margin
921.40	450.10	5.06	V	2.46	16.00	23.52	22.48
921.40	217.60	6.24	H	1.68	10.70	18.62	27.38
921.40	41.24	18.59	V	0.71	13.28	32.58	7.42
921.40	50.44	16.80	V	0.82	11.22	28.84	11.16
921.40	71.61	15.61	V	1.00	6.52	23.13	16.87
921.40	71.61	5.81	H	1.00	6.52	13.33	26.67
921.40	165.93	5.30	H	1.49	16.41	23.20	20.30
911.00	165.93	6.95	H	1.49	16.41	24.85	18.65
911.00	127.09	7.04	H	1.28	12.33	20.65	22.85
911.00	72.92	7.65	H	1.02	6.78	15.45	24.55
911.00	72.92	15.03	V	1.02	6.78	22.83	17.17
911.00	50.10	12.71	V	0.82	11.36	24.89	15.11
911.00	41.58	19.45	V	0.72	13.24	33.41	6.59
911.00	398.00	3.82	V	2.28	15.30	21.40	24.60
911.00	216.03	7.25	H	1.67	10.70	19.62	26.38
908.40	216.00	5.57	H	1.67	10.70	17.94	28.06
908.40	345.89	5.61	V	2.11	14.19	21.91	24.09
908.40	72.58	14.52	V	1.01	6.42	21.95	18.05
908.40	50.44	16.58	V	0.82	11.07	28.47	11.53
908.40	41.24	19.66	V	0.71	13.18	33.55	6.45
908.40	72.92	6.27	H	1.02	6.48	13.77	26.23
908.40	126.75	7.31	H	1.28	12.15	20.74	22.76
908.40	3747.50	12.95	V	7.28	33.68	53.91	0.09
908.40	1775.50	12.31	V	5.01	30.26	47.58	6.42
911.00	2701.40	12.70	V	6.19	32.62	51.51	2.49
911.00	4517.00	11.05	H	8.06	33.86	52.97	1.03
921.40	3771.50	12.89	H	7.31	33.58	53.78	0.22
921.40	1871.70	8.81	V	5.11	31.78	45.70	8.30

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconical 1057	Eaton	94455-1	1057	N/A	N/A
Antenna: Log-Periodic 1243	Eaton	96005	1243	04/20/18	04/20/21
CHAMBER	Panashield	3M	N/A	12/31/17	12/31/19
Antenna: Double-Ridged Horn/ETS Horn 2	ETS-Lindgren	3117	00041534	03/01/17	03/01/19
Software: Field Strength Program	Timco	N/A	Version 4.10.7.0	N/A	N/A
Antenna: Active Loop	ETS-Lindgren	6502	00062529	12/11/17	12/11/19
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	04/01/16	04/01/19
Coaxial Cable - Chamber 3 cable set (Primary)	Micro-Coax	Chamber 3 cable set (Primary)	KMKM-0244-01; KMKM-0670-00; KFKF-0198-01	08/09/16	08/09/18
Bore-sight Antenna Positioning Tower	Sunol Sciences	TLT2	N/A	N/A	N/A
Pre-amp	RF-LAMBDA	RLNA00M45GA	N/A	01/04/16	01/04/19

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

END OF TEST REPORT

Applicant: IRISS INC.
 FCC ID: 2AE7JDTS-PRO-US-01
 IC: 20368-DTSPROUS01
 Report 295AUT19TestReport_Rev1