

FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

For

Damaibox

MODEL No.: D*4*46 (*=A-Z, 0-9)**

FCC ID: 2AE7M-DB4246

Trade Mark: Damai

REPORT NO.: ES170510022E4

ISSUE DATE: June 13, 2017

Prepared for

**Vertex Telecom, Inc.
980 Corporate Center Dr, Pomona, CA91768, USA**

Prepared by

EMTEK(SHENZHEN) CO., LTD.

**Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282**

1 TEST RESULT CERTIFICATION

Applicant:	Vertex Telecom, Inc. 980 Corporate Center Dr, Pomona, CA91768, USA
Manufacturer:	Vertex Telecom, Inc. 980 Corporate Center Dr, Pomona, CA91768, USA
Product Description:	Damaibox
Model Number:	D*4*46** (*=A-Z, 0-9) (Note: all the model numbers are identical in circuitry and electrical, mechanical and physical construction; the only differences are the appearance and colour and model no. , for trading purpose. We take DB4246US to test.)
Trade Mark:	Damai
File Number:	ES170510022E4
Date of Test:	May 10, 2017 to June 12, 2017

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart E	PASS

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD.. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.407

The test results of this report relate only to the tested sample identified in this report.

Date of Test : May 10, 2017 to June 12, 2017

Prepared by : 
Doris Su /Editor

Reviewer : 
Joe Xia/Supervisor

Approve & Authorized Signer : 
Lisa Wang/Manager

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION.....	2
2	EUT TECHNICAL DESCRIPTION	4
3	SUMMARY OF TEST RESULT	5
4	TEST METHODOLOGY	6
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
4.2	MEASUREMENT EQUIPMENT USED	6
4.3	DESCRIPTION OF TEST MODES.....	7
5	FACILITIES AND ACCREDITATIONS	10
5.1	FACILITIES	10
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	10
6	TEST SYSTEM UNCERTAINTY	11
7	SETUP OF EQUIPMENT UNDER TEST	12
7.1	RADIO FREQUENCY TEST SETUP	12
7.2	RADIO FREQUENCY TEST SETUP	12
7.3	CONDUCTED EMISSION TEST SETUP	14
7.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	15
7.5	SUPPORT EQUIPMENT	15
8	TEST REQUIREMENTS.....	16
8.1	BANDWIDTH MEASUREMENT	16
8.2	MAXIMUM CONDUCTED OUTPUT POWER.....	41
8.3	MAXIMUM PEAK POWER DENSITY	48
8.4	FREQUENCY STABILITY	67
8.5	UNDESIRABLE RADIATED SPURIOUS EMISSION.....	72
8.6	POWER LINE CONDUCTED EMISSIONS	104
8.7	ANTENNA APPLICATION	107

2 EUT TECHNICAL DESCRIPTION

Characteristics	Description			
Device Type	Wifi 5.8G Device			
IEEE 802.11 WLAN Mode Supported	☒ 802.11a(20MHz channel bandwidth) ☒ 802.11n(20MHz channel bandwidth) ☒ 802.11n(40MHz channel bandwidth) ☒ 802.11ac(20MHz channel bandwidth) ☒ 802.11ac(40MHz channel bandwidth) ☒ 802.11ac(80MHz channel bandwidth)			
Data Rate	☒ 802.11a:6, 9, 12, 18, 24, 36, 48, 54Mbps; ☒ 802.11n(HT20): MCS0-MCS7; ☒ 802.11n(HT40): MCS0-MCS7; ☒ 802.11ac(HT20): MCS0-MCS7; ☒ 802.11ac(HT40):MCS0-MCS9; ☒ 802.11ac(VHT80):MCS0-MCS9;			
Modulation	☒ OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/g/n; ☒ OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11ac;			
Operating Frequency Range	Band	Mode	Frequency Range(MHz)	Number of channels
	UNII Band I	802.11a/n(HT20)/ac(VHT20)	5180-5240	4
		802.11n(HT40)/ac(VHT40)	5190-5230	2
		802.11 ac(VHT80)	5210	1
	UNII Band III	802.11a/n(HT20)/ac(VHT20)	5745-5825	5
		802.11n(HT40)/ac(VHT40)	5755-5795	2
		802.11 ac(VHT80)	5775	1
Transmit Power Max	UNII Band I for 17.58dBm UNII Band III for 14.29dBm			
Antenna Type	Shrapnel antenna			
Smart system	☒ SISO for 802.11a/n ☒ MIMO for 802.11n/ac			
Antenna Gain	2dBi for UNII Band I 2dBi for UNII Band III			
Direction Gain	5.01dBi for UNII Band I 5.01dBi for UNII Band III			
Power supply	DC 12V from Adapter			
	☒ Adapter: Model: GSCU1000S012V15G AC Input: 100-240V~ 50/60Hz DC Output: 12V 1.0A			

Note: for more details, please refer to the User's manual of the EUT.

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.407 (a) 15.407 (e)	99% , 6dB and 26dB Bandwidth	PASS	
15.407 (a)	Maximum Conducted Output Power	PASS	
15.407 (a)	Peak Power Spectral Density	PASS	
15.407 (b)	Radiated Spurious Emission	PASS	
15.407(g)	Frequency Stability	PASS	
15.407 (b)(6) 15.207	Power Line Conducted Emission	PASS	
15.407(a) 15.203	Antenna Application	PASS	
NOTE1: N/A (Not Applicable) NOTE2: According to FCC OET KDB 789003 D2 General UNII Test Procedures New Rules v01r02, In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AE7M-DB4246 filing to comply with Section 15.247 of the FCC Part 15, Subpart E Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart E

FCC KDB 789033 D2 General UNII Test Procedures New Rules v01r04

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCI	26115-010-0027	May 20, 2017	May 19, 2018
L.I.S.N.	Rohde & Schwarz	ENV216	101161	May 20, 2017	May 19, 2018
50Ω Coaxial Switch	Anritsu	MP59B	6100175589	May 21, 2017	May 20, 2018
Voltage Probe	Rohde & Schwarz	ESH2-Z3	100122	May 21, 2017	May 20, 2018
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	May 20, 2017	May 19, 2018
I.S.N	Teseq GmbH	ISN T800	30327	May 21, 2017	May 20, 2018

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 21, 2017	May 20, 2018
Pre-Amplifier	HP	8447F	2944A07999	May 20, 2017	May 19, 2018
Bilog Antenna	Schwarzbeck	VULB9163	142	May 20, 2017	May 19, 2018
Loop Antenna	ARA	PLA-1030/B	1029	May 20, 2017	May 19, 2018
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	May 21, 2017	May 20, 2018
Horn Antenna	Schwarzbeck	BBHA 9120	D143	May 20, 2017	May 19, 2018
Cable	Schwarzbeck	AK9513	ACRX1	May 21, 2017	May 20, 2018
Cable	Rosenberger	N/A	FP2RX2	May 21, 2017	May 20, 2018
Cable	Schwarzbeck	AK9513	CRPX1	May 21, 2017	May 20, 2018
Cable	Schwarzbeck	AK9513	CRRX2	May 21, 2017	May 20, 2018

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.	DUE CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	May 21, 2017	May 20, 2018
Signal Analyzer	Agilent	N9010A	My53470879	May 21, 2017	May 20, 2018
Power meter	Anritsu	ML2495A	0824006	May 21, 2017	May 20, 2018
Power sensor	Anritsu	MA2411B	0738172	May 21, 2017	May 20, 2018

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (☒802.11a: 6 Mbps; ☒802.11n (HT20): MCS0; ☒802.11n (HT20): MCS7; ☒802.11n (HT40): MCS0; ☒802.11n (HT40): MCS7; ☒802.11ac (HT20): MCS0; ☒802.11ac (HT20): MCS7; ☒802.11ac (HT40): MCS0; ☒802.11ac (HT40): MCS9; ☒802.11ac (HT80): MCS0; ☒802.11ac (HT80): MCS9;) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

☒ Wifi 5G with UNII Band I

Frequency and Channel list for 802.11a/n(HT20)/ac(VHT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220		
40	5200	48	5240		

Frequency and Channel list for 802.11n(HT40)/ac(VHT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190				
46	5230				

Frequency and Channel list for 802.11ac(VHT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210				

Test Frequency and Channel for 802.11a/n(HT20)/ac(VHT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	48	5240

Test Frequency and channel for 802.11n(VHT40)/ac(VHT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	N/A	N/A	46	5230

Test Frequency and channel for 802.11ac(HT80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	N/A	N/A	N/A	N/A

☒ Wifi 5G with UNII Band III

Frequency and Channel list for 802.11a/n(HT20)/ac(VHT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825
153	5765	161	5805		

Frequency and Channel list for 802.11n(HT40)/ac(VHT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755				
159	5795				

Frequency and Channel list for 802.11ac(VHT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				

Test Frequency and Channel for 802.11a/n(HT20)/ac(VHT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785	165	5825

Test Frequency and channel for 802.11n(HT40)/ac(VHT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	N/A	N/A	159	5795

Test Frequency and channel for 802.11ac(VHT80):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: Accredited by CNAS, 2016.10.24

The certificate is valid until 2022.10.28

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2016.5.19

The Laboratory has been assessed according to the requirements ISO/IEC 17025.

Accredited by FCC, July 13, 2016

The Certificate Registration Number is 406365.

Accredited by Industry Canada, November 24, 2015

The Certificate Registration Number is 4480A.

Name of Firm

: EMTEK(SHENZHEN) CO., LTD..

Site Location

: Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

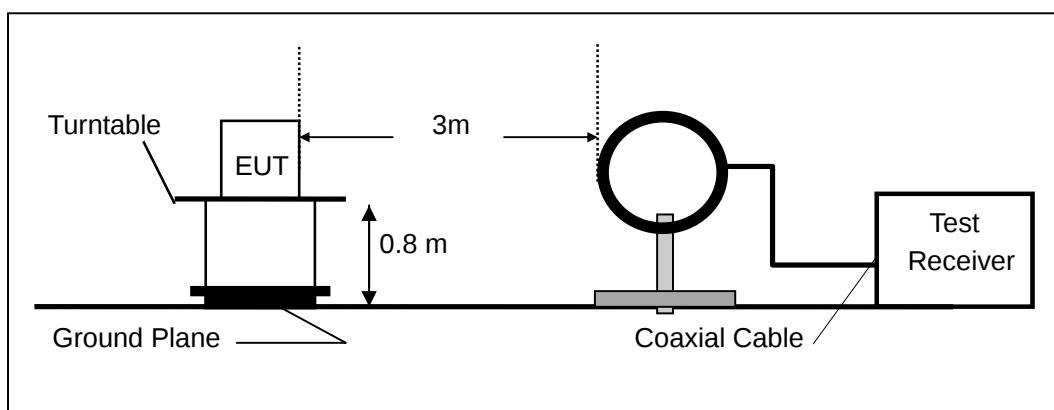

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

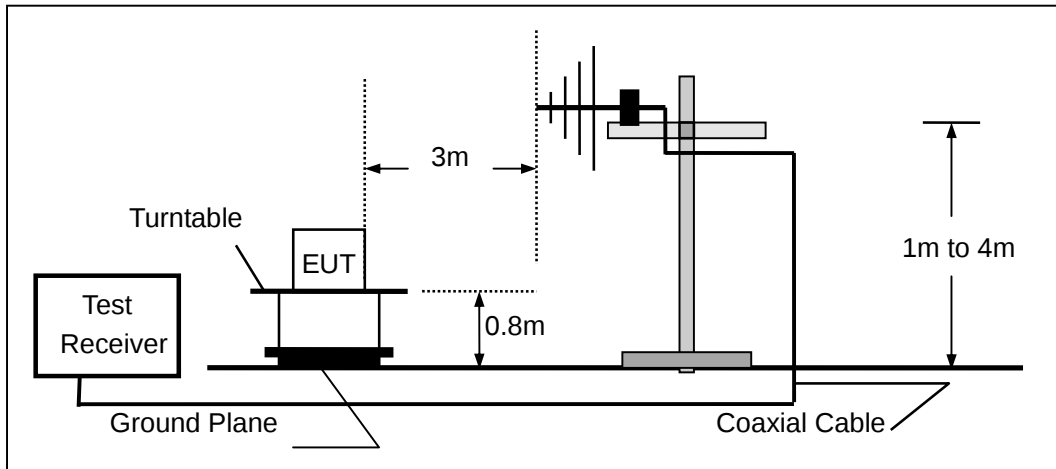

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

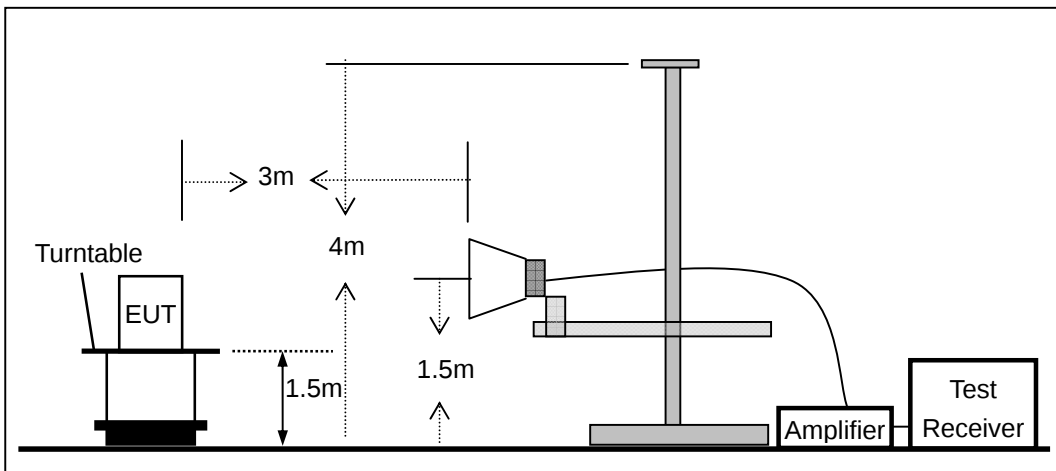


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

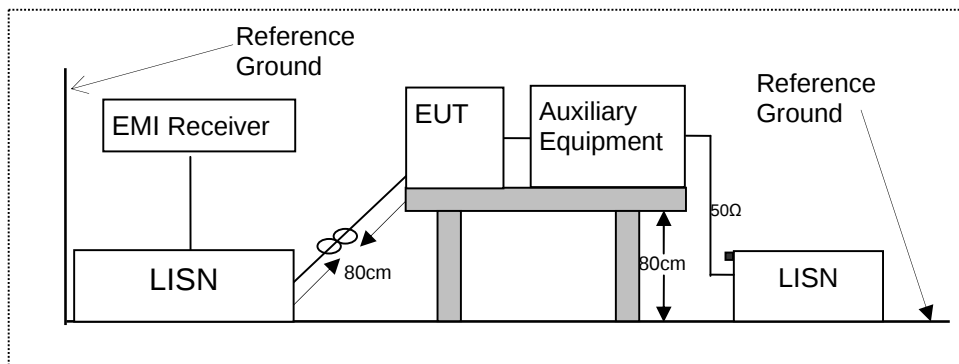

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

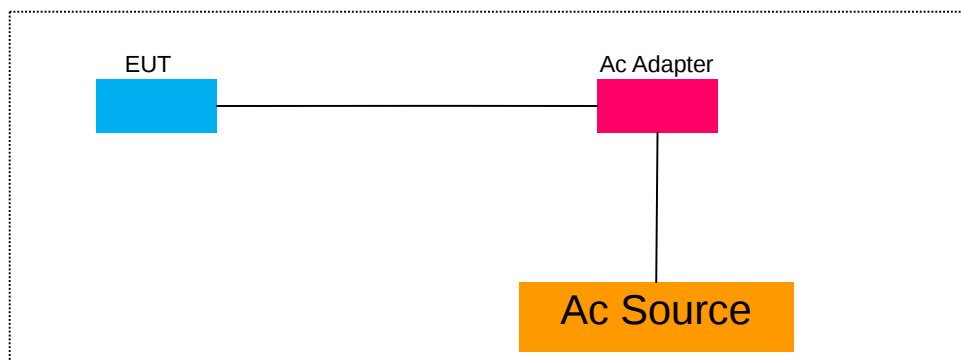

7.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
N/A	N/A	N/A	N/A	N/A	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 BANDWIDTH MEASUREMENT

8.1.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I
According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C
According to FCC Part 15.407(a)(3) for UNII Band III
According to FCC Part 15.407(e) for UNII Band III
According to 789033 D02 Section II(C)
According to 789033 D02 Section II(D)

8.1.2 Conformance Limit

No limit requirement.

The minimum 6 dB emission bandwidth of at least 500 KHz for the UNII Band III.

8.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.1.4 Test Procedure

Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below

■ The following procedure shall be used for measuring (26 dB) power bandwidth:

Center Frequency: test Frequency

Set RBW = approximately 1% of the emission bandwidth.

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

X dB Bandwidth: 26 dB

Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.

Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

■ Minimum Emission Bandwidth for the UNII Band III

Center Frequency: test Frequency

Set RBW = 100 kHz

Set VBW $\geq 3 \cdot$ RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

X dB Bandwidth: 6 dB

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

■ The following procedure shall be used for measuring (99 %) power bandwidth:

Set center frequency to the nominal EUT channel center frequency.

Set span = 1.5 times to 5.0 times the OBW.

Set RBW = 1 % to 5 % of the OBW

Set VBW $\geq 3 \cdot$ RBW

Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

Use the 99 % power bandwidth function of the instrument (if available).

If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

8.1.5 Test Results

☒ 802.11a mode								
Temperature : 28℃			Test Date : May 27, 2017					
Humidity : 65 %			Test By: King Kong					
Band	Channel Number	Channel Freq. (MHz)	26dB EBW(MHz)		99% OBW(MHz)		Limit (MHz)	Verdict
			Ant0	Ant1	Ant0	Ant1		
UNII Band I	CH36	5180	21.54	21.54	16.78	16.81	N/A	N/A
	CH40	5200	21.44	21.52	16.77	16.79	N/A	N/A
	CH48	5240	21.57	21.58	16.73	16.75	N/A	N/A
UNII Band III	CH149	5745	21.28	21.40	16.80	16.79	N/A	N/A
	CH157	5785	21.43	21.44	16.88	16.84	N/A	N/A
	CH165	5825	21.35	21.43	16.77	16.77	N/A	N/A
Note: N/A (Not Applicable)								

☒ 802.11n(VHT20) mode								
Temperature : 28℃			Test Date : May 27, 2017					
Humidity : 65 %			Test By: King Kong					
Band	Channel Number	Channel Freq. (MHz)	26dB EBW(MHz)		99% OBW(MHz)		Limit (MHz)	Verdict
			Ant0	Ant1	Ant0	Ant1		
UNII Band I	CH36	5180	21.49	21.59	17.88	17.92	N/A	N/A
	CH40	5200	21.92	21.92	17.91	17.92	N/A	N/A
	CH48	5240	21.54	21.56	17.93	17.89	N/A	N/A
UNII Band III	CH149	5745	21.34	21.37	17.91	17.94	N/A	N/A
	CH157	5785	21.56	21.56	17.93	17.96	N/A	N/A
	CH165	5825	21.43	21.58	17.89	17.92	N/A	N/A
Note: N/A (Not Applicable)								

☒ 802.11ac(VHT20) mode								
Temperature : 28℃			Test Date : May 27, 2017					
Humidity : 65 %			Test By: King Kong					
Band	Channel Number	Channel Freq. (MHz)	26dB EBW(MHz)		99% OBW(MHz)		Limit (MHz)	Verdict
			Ant0	Ant1	Ant0	Ant1		
UNII Band I	CH36	5180	21.45	21.68	17.89	17.91	N/A	N/A
	CH40	5200	21.73	21.75	17.88	17.91	N/A	N/A
	CH48	5240	21.63	21.63	17.90	17.91	N/A	N/A
UNII Band III	CH149	5745	21.38	21.70	17.91	17.91	N/A	N/A
	CH157	5785	21.45	21.71	17.92	17.93	N/A	N/A
	CH165	5825	21.56	21.57	17.89	17.89	N/A	N/A
Note: N/A (Not Applicable)								

☒ 802.11n(VHT40) mode								
Temperature :		28 °C		Test Date :		May 27, 2017		
Humidity :		65 %		Test By:		King Kong		
Band	Channel Number	Channel Freq. (MHz)	26dB EBW(MHz)		99% OBW(MHz)		Limit (MHz)	Verdict
			Ant0	Ant1	Ant0	Ant1		
UNII Band I	CH38	5190	40.55	40.55	36.55	36.56	N/A	N/A
	CH46	5230	40.39	40.51	36.47	36.49	N/A	N/A
UNII Band III	CH151	5755	40.32	40.47	36.53	36.60	N/A	N/A
	CH159	5795	40.47	40.49	36.60	36.56	N/A	N/A
Note:								
N/A (Not Applicable)								

☒ 802.11ac(VHT40) mode								
Temperature :		28 °C		Test Date :		May 27, 2017		
Humidity :		65 %		Test By:		King Kong		
Band	Channel Number	Channel Freq. (MHz)	26dB EBW(MHz)		99% OBW(MHz)		Limit (MHz)	Verdict
			Ant0	Ant1	Ant0	Ant1		
UNII Band I	CH38	5190	40.26	40.48	36.52	36.53	N/A	N/A
	CH46	5230	40.42	40.52	36.42	36.43	N/A	N/A
UNII Band III	CH151	5755	40.20	40.37	36.50	36.53	N/A	N/A
	CH159	5795	40.42	40.47	36.53	36.57	N/A	N/A
Note:								
N/A (Not Applicable)								

☒ 802.11ac(VHT80) mode								
Temperature :		28 °C		Test Date :		May 27, 2017		
Humidity :		65 %		Test By:		King Kong		
Band	Channel Number	Channel Freq. (MHz)	26dB EBW(MHz)		99% OBW(MHz)		Limit (MHz)	Verdict
			Ant0	Ant1	Ant0	Ant1		
UNII Band I	CH42	5210	82.06	82.21	75.87	75.83	N/A	N/A
UNII Band III	CH155	5775	82.26	82.24	75.90	75.90	N/A	N/A
Note:								
N/A (Not Applicable)								

Temperature :	28℃	☒ UNII Band III	Test Date :	May 27, 2017
Humidity :	65 %		Test By:	King Kong


Operation Mode	Channel Number	Channel Freq. (MHz)	6dB EBW (MHz)		Limit (MHz)	Verdict
			Ant0	Ant1		
802.11a	CH149	5745	16.35	16.37	500	PASS
	CH157	5785	16.39	16.41	500	PASS
	CH165	5825	16.39	16.37	500	PASS
802.11n (VHT20)	CH149	5745	17.61	17.59	500	PASS
	CH157	5785	17.62	17.65	500	PASS
	CH165	5825	17.60	17.62	500	PASS
802.11ac (VHT20)	CH149	5745	17.59	17.62	500	PASS
	CH157	5785	17.63	17.64	500	PASS
	CH165	5825	17.63	17.59	500	PASS
802.11n (VHT40)	CH151	5755	36.38	36.36	500	PASS
	CH159	5795	36.37	36.37	500	PASS
802.11ac (VHT40)	CH151	5755	36.41	36.42	500	PASS
	CH159	5795	36.40	36.40	500	PASS
802.11ac (VHT80)	CH155	5775	75.72	75.85	500	PASS

Note:


N/A (Not Applicable)

Both ANT0 and ANT1 has been tested and show the ANT0 result as following pages


Emission Bandwidth&99% Occupied Bandwidth	UNII Band I
Test Model	802.11a
Frequency(MHz)	5180
Ant0	

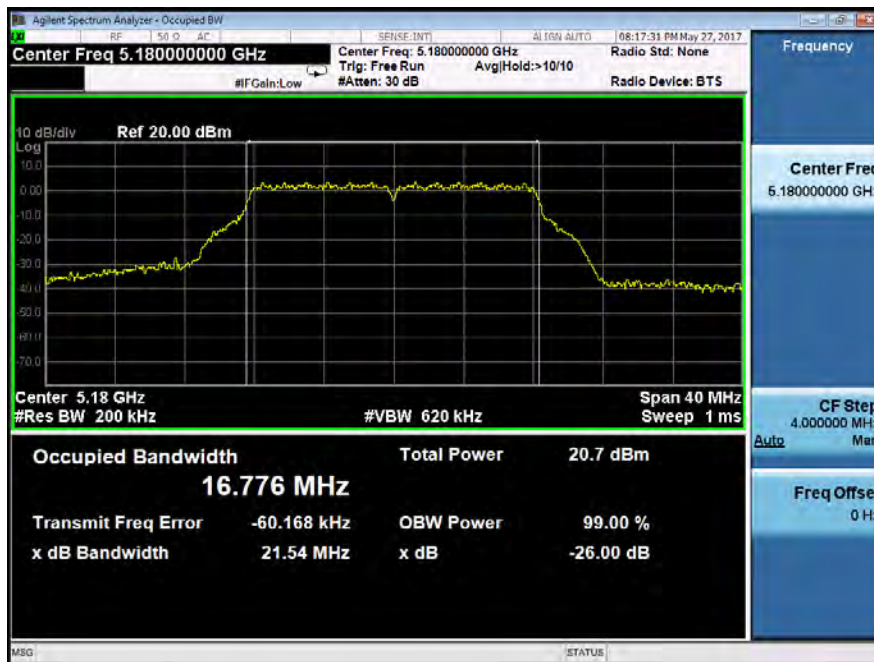


Emission Bandwidth&99% Occupied Bandwidth	UNII Band I
Test Model	802.11a
Frequency(MHz)	5200
Ant0	

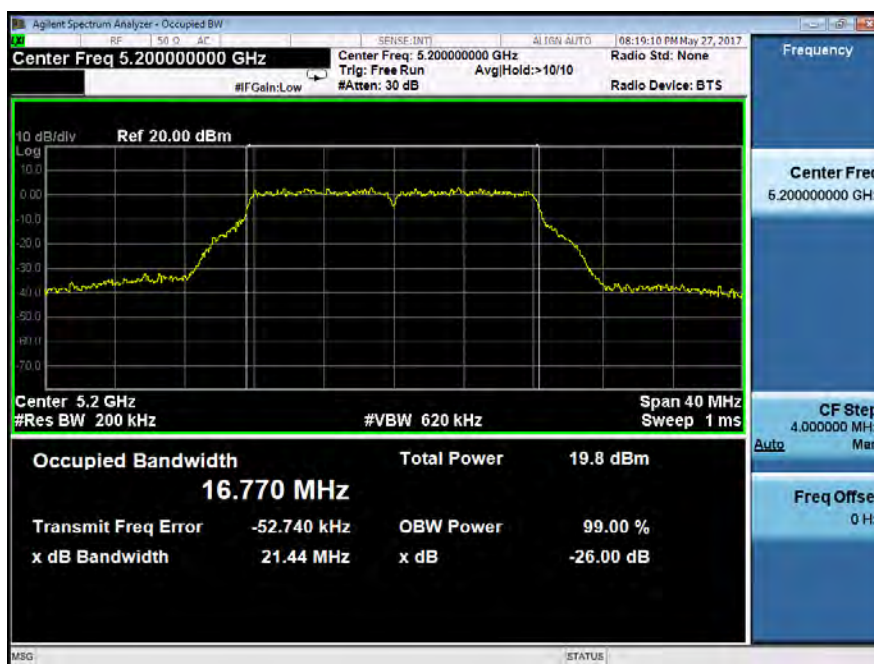


Emission Bandwidth&99% Occupied Bandwidth	UNII Band I	
Test Model	802.11a	Frequency(MHz)
Ant0		5240

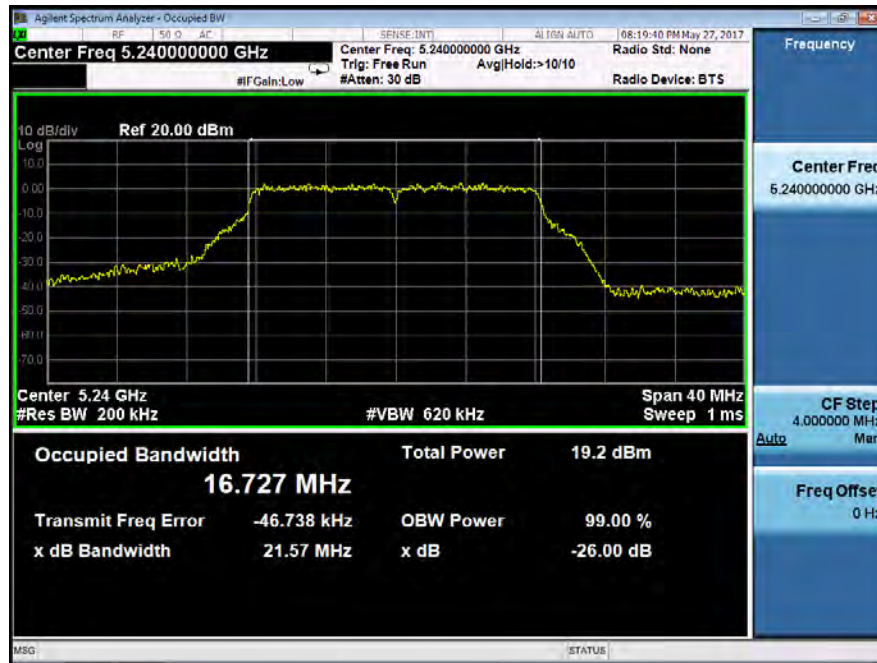


Emission Bandwidth&99% Occupied Bandwidth	UNII Band III	
Test Model	802.11a	Frequency(MHz)
Ant0		5745

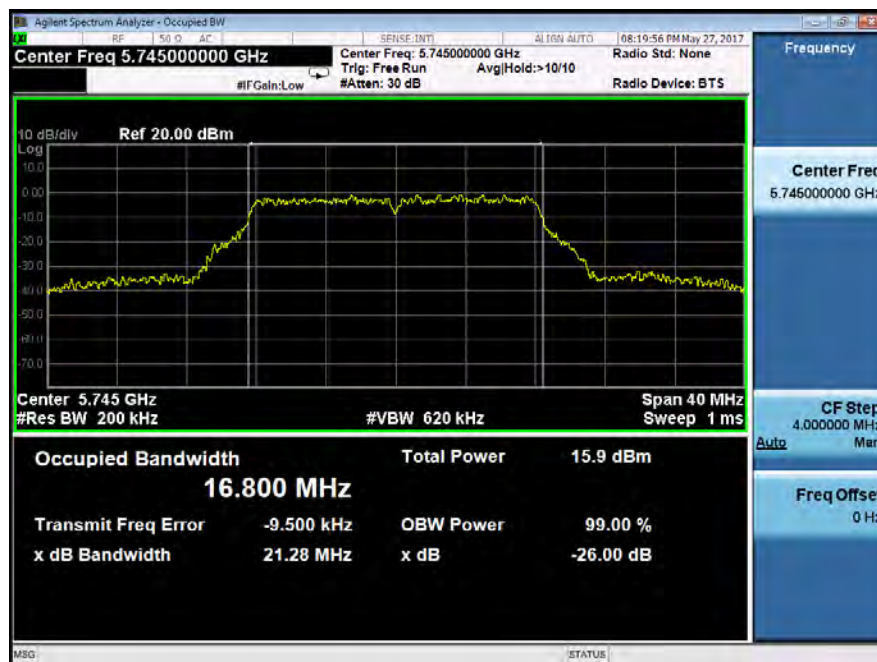


Emission Bandwidth&99% Occupied Bandwidth	UNII Band III	
Test Model	802.11a	Frequency(MHz)
Ant0		5785

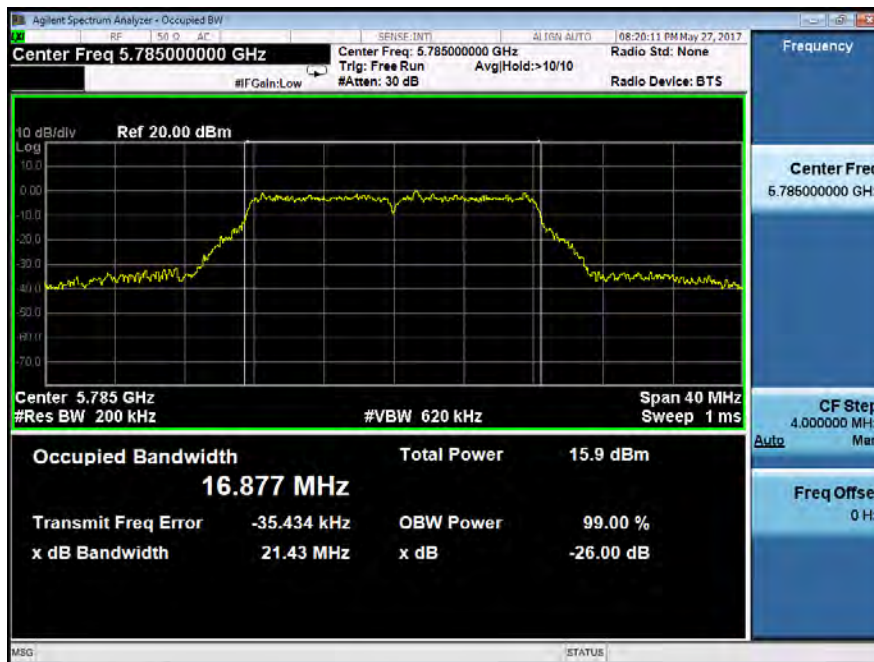

Emission Bandwidth&99% Occupied Bandwidth	UNII Band III	
Test Model	802.11a	Frequency(MHz)
Ant0		5825

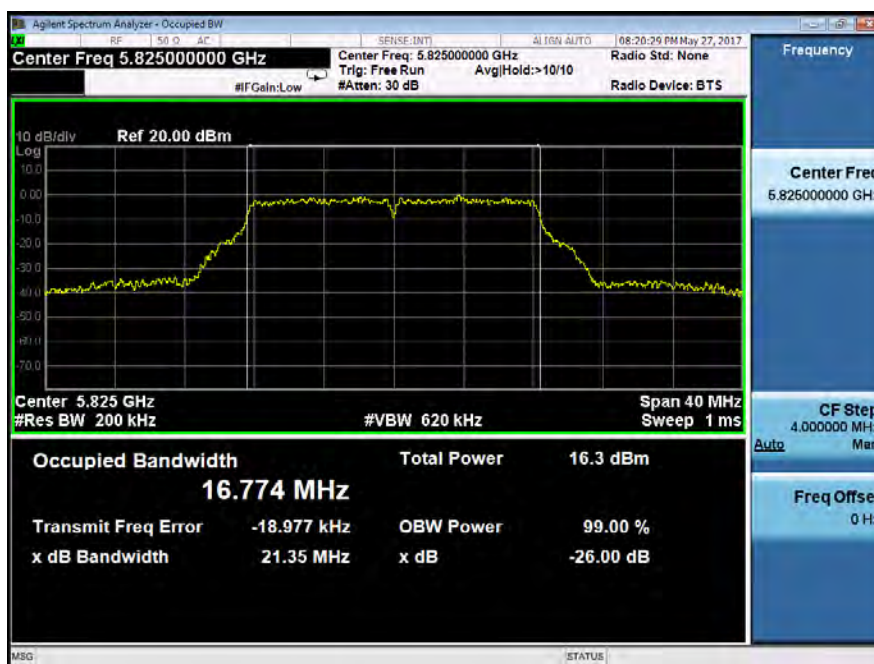


Emission Bandwidth&99% Occupied Bandwidth	UNII Band I	
Test Model	802.11n(VHT20) mode	Frequency(MHz)
Ant0		5180

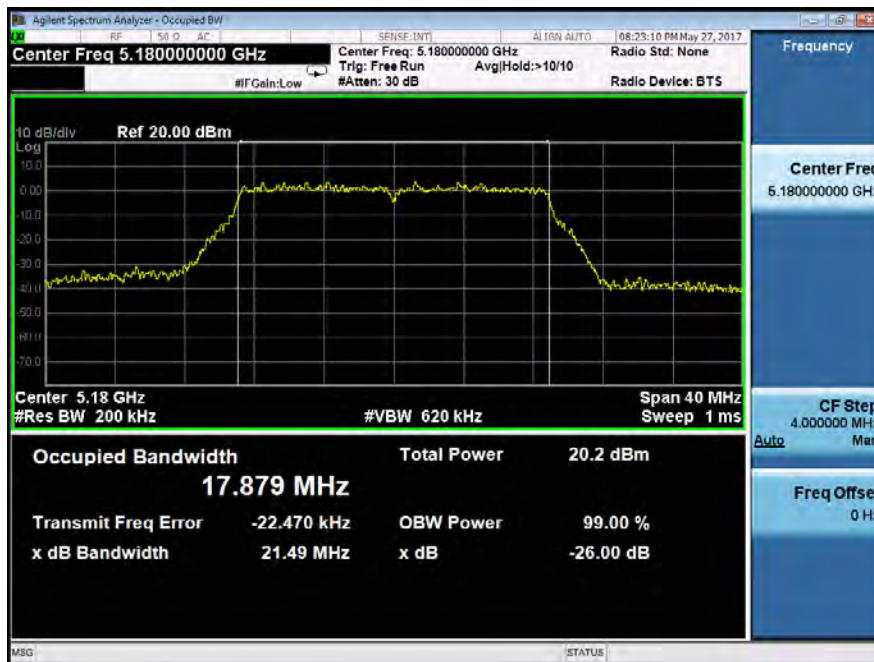


Emission Bandwidth&99% Occupied Bandwidth	UNII Band I	
Test Model	802.11n(VHT20) mode	Frequency(MHz)
Ant0		5200




Emission Bandwidth&99% Occupied Bandwidth	UNII Band I	
Test Model	802.11n(VHT20) mode	Frequency(MHz)
Ant0		5240

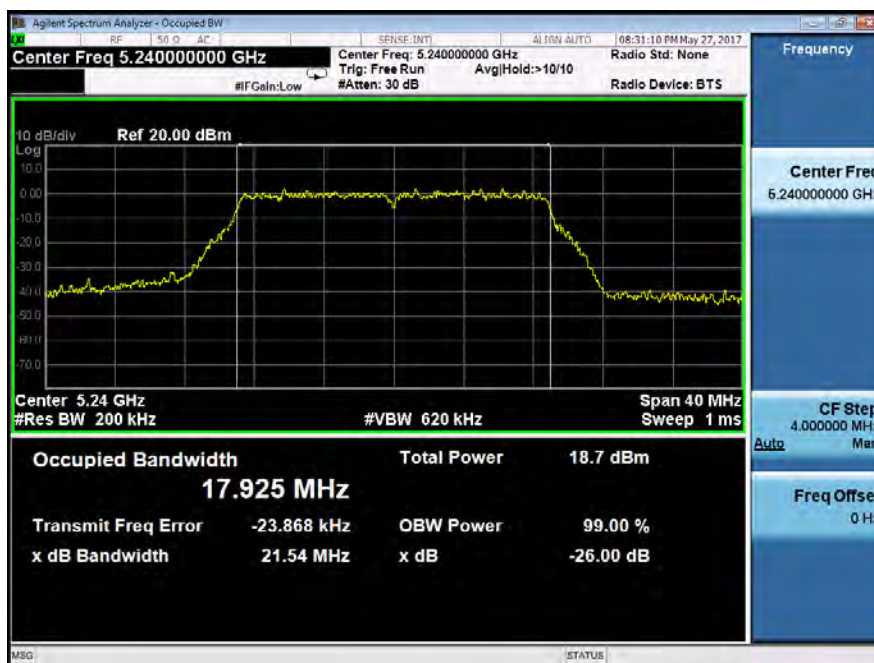


Emission Bandwidth&99% Occupied Bandwidth	UNII Band III	
Test Model	802.11n(VHT20) mode	Frequency(MHz)
Ant0		5745

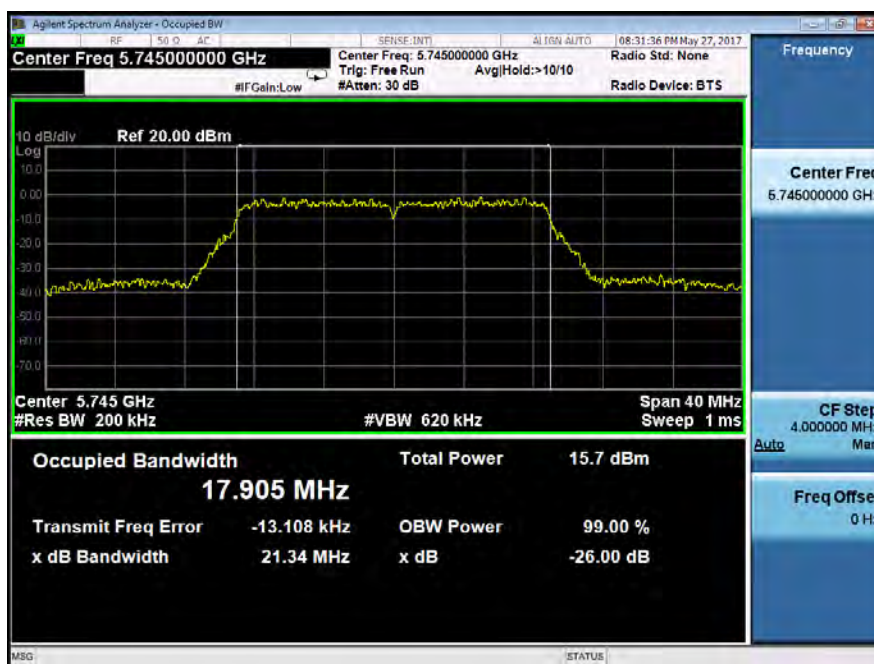


Emission Bandwidth&99% Occupied Bandwidth	UNII Band III	
Test Model	802.11n(VHT20) mode	Frequency(MHz)
Ant0		5785

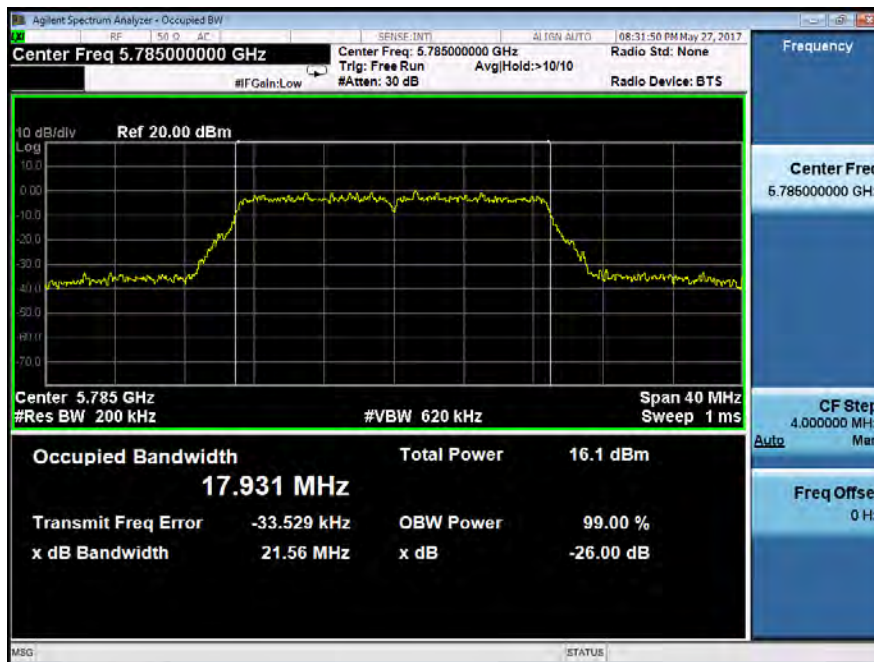


Emission Bandwidth&99% Occupied Bandwidth	UNII Band III	
Test Model	802.11n(VHT20) mode	Frequency(MHz)
Ant0		5825

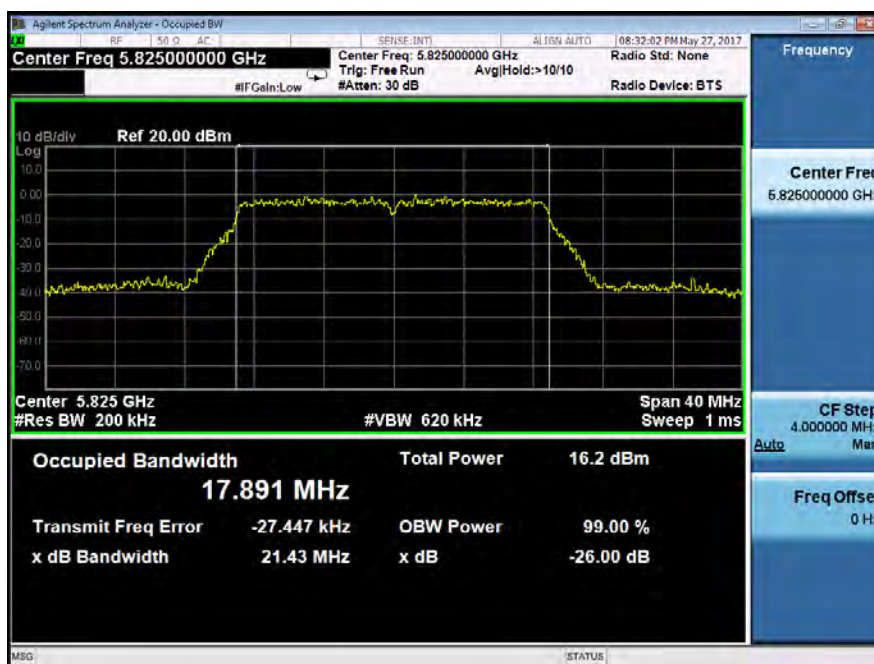


Emission Bandwidth&99% Occupied Bandwidth	UNII Band I	
Test Model	802.11ac(VHT20) mode	Frequency(MHz)
Ant0		5180

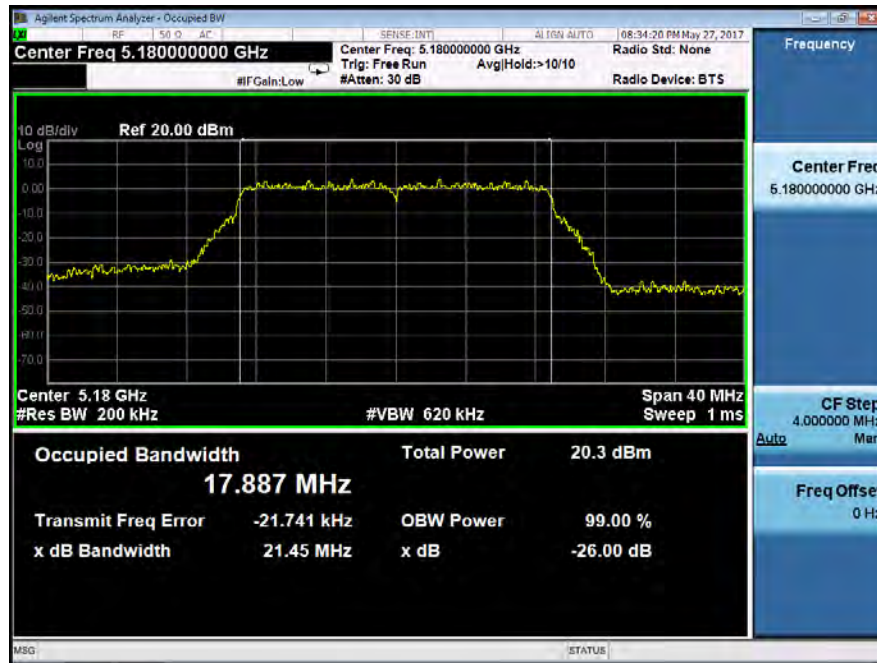


Emission Bandwidth&99% Occupied Bandwidth	UNII Band I	
Test Model	802.11ac(VHT20) mode	Frequency(MHz)
Ant0		5200

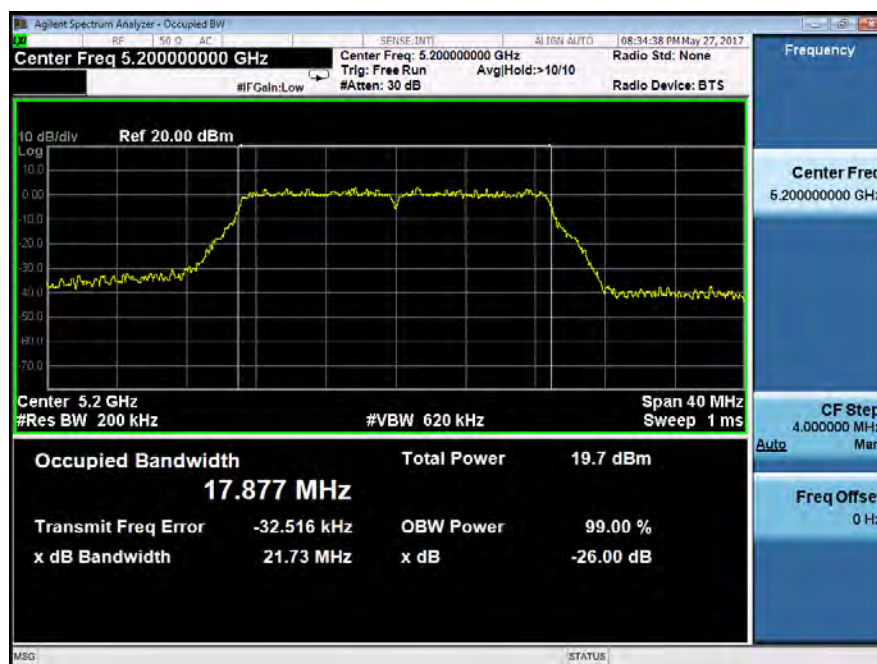


Emission Bandwidth&99% Occupied Bandwidth	UNII Band I	
Test Model	802.11ac(VHT20) mode	Frequency(MHz)
Ant0		5240

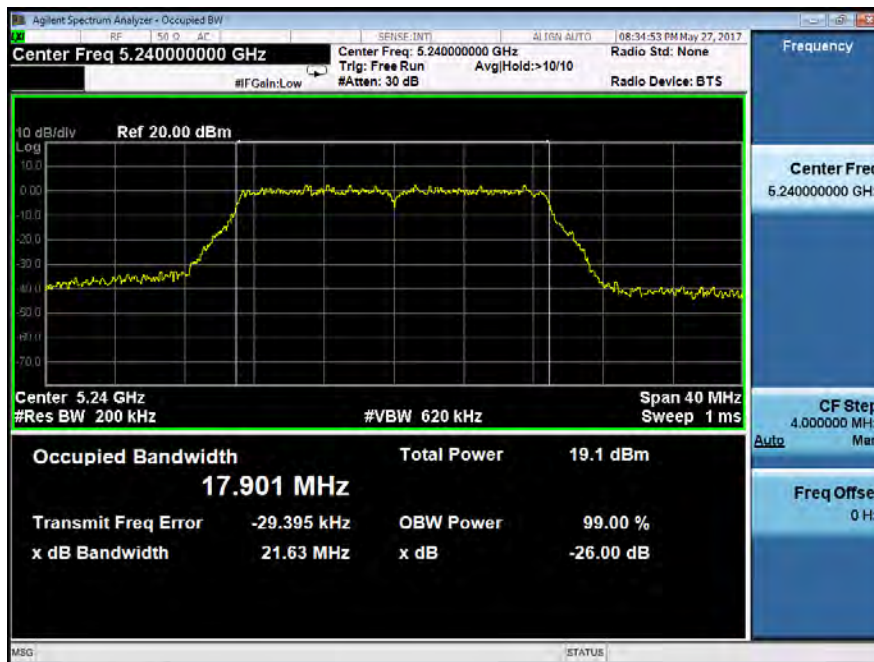


Emission Bandwidth&99% Occupied Bandwidth	UNII Band III	
Test Model	802.11ac(VHT20) mode	Frequency(MHz)
Ant0		5745

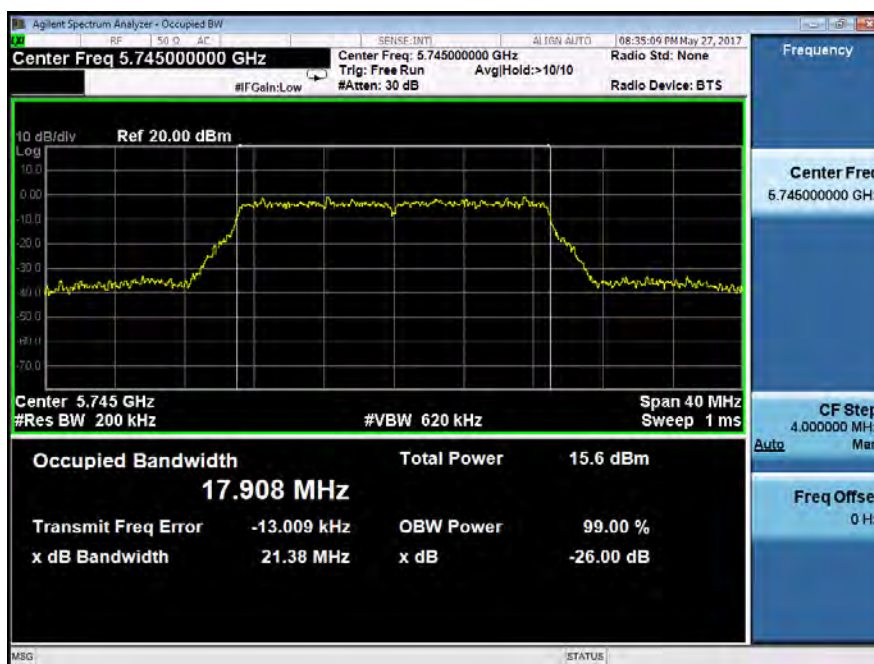


Emission Bandwidth&99% Occupied Bandwidth	UNII Band III	
Test Model	802.11ac(VHT20) mode	Frequency(MHz)
Ant0		5785

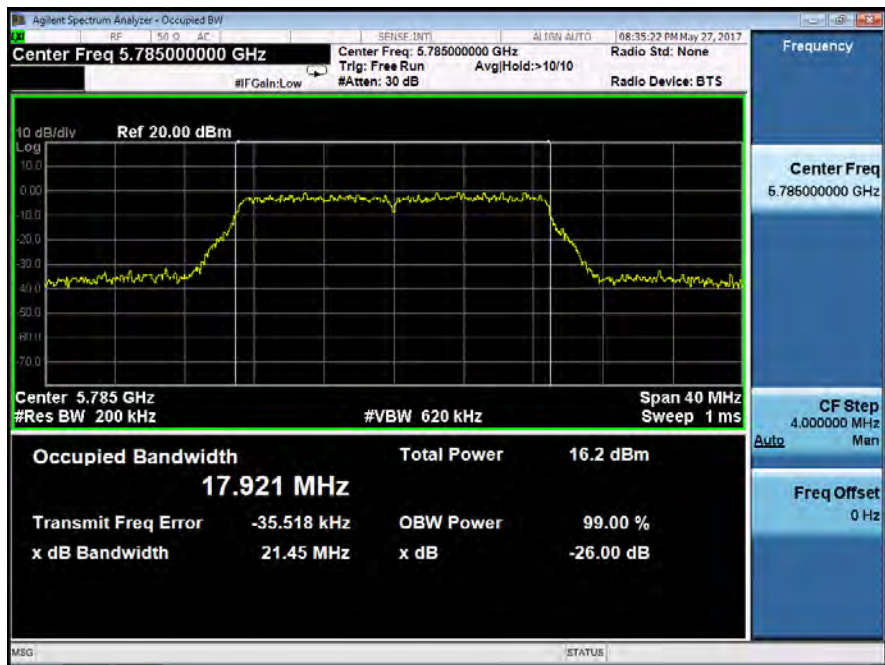

Emission Bandwidth&99% Occupied Bandwidth	UNII Band III	
Test Model	802.11ac(VHT20) mode	Frequency(MHz)
Ant0		5825

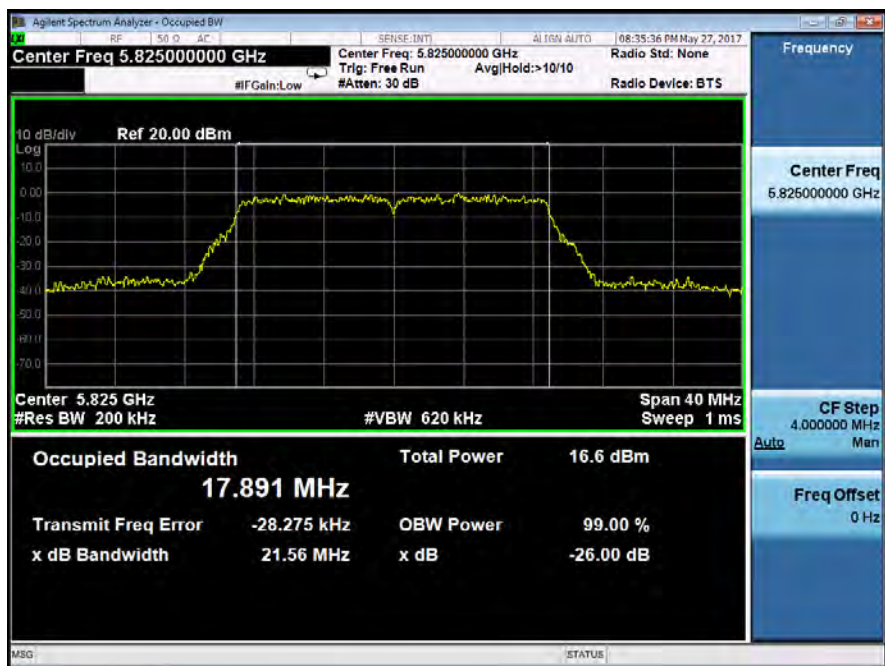


Emission Bandwidth&99% Occupied Bandwidth	UNII Band I	
Test Model	802.11n(VHT40) mode	Frequency(MHz)
Ant0		5190

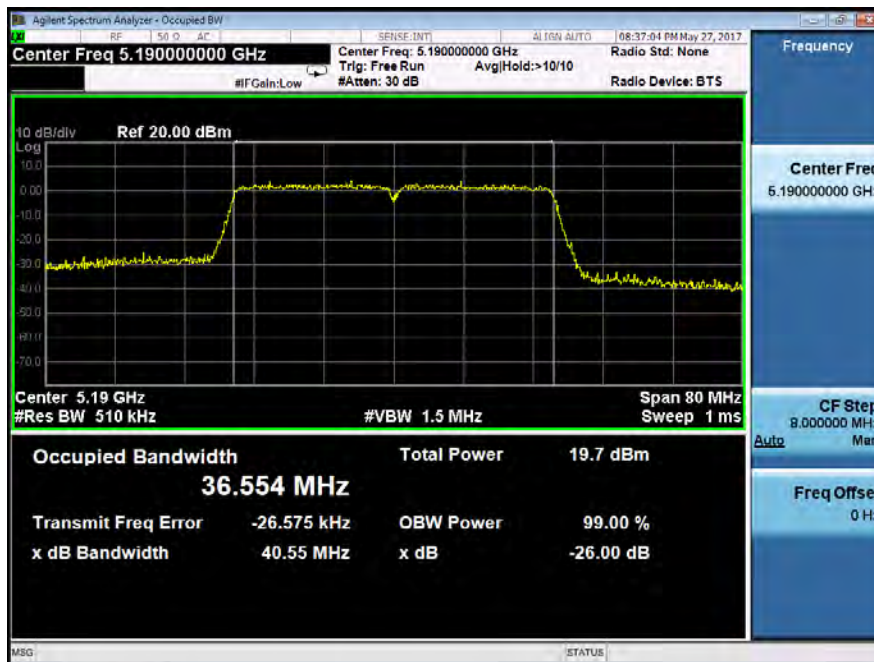


Emission Bandwidth&99% Occupied Bandwidth	UNII Band I	
Test Model	802.11n(VHT40) mode	Frequency(MHz)
Ant0		5230




Emission Bandwidth&99% Occupied Bandwidth	UNII Band III
Test Model	802.11n(VHT40) mode
Frequency(MHz)	5755
Ant0	

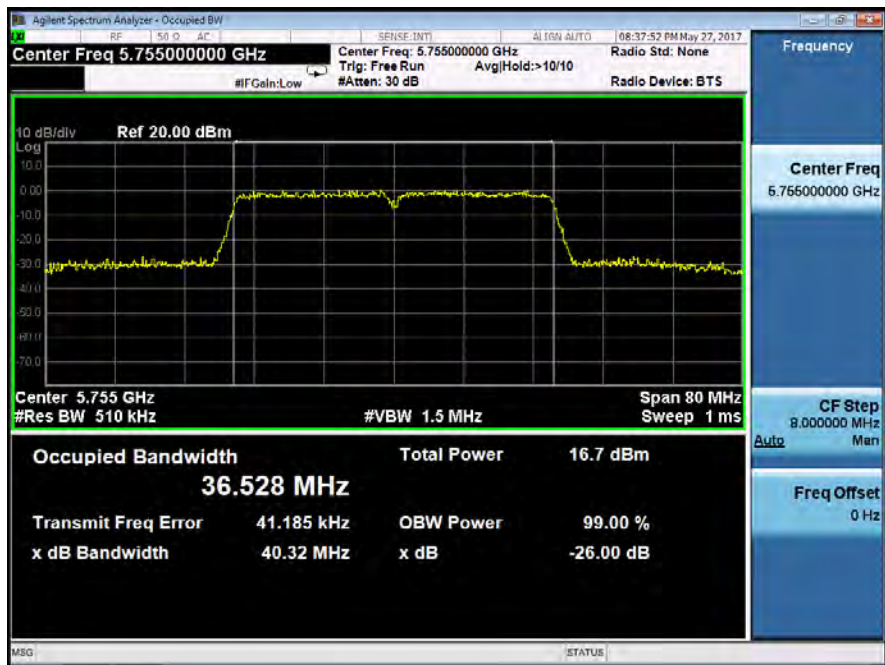


Emission Bandwidth&99% Occupied Bandwidth	UNII Band III
Test Model	802.11n(VHT40) mode
Frequency(MHz)	5795
Ant0	

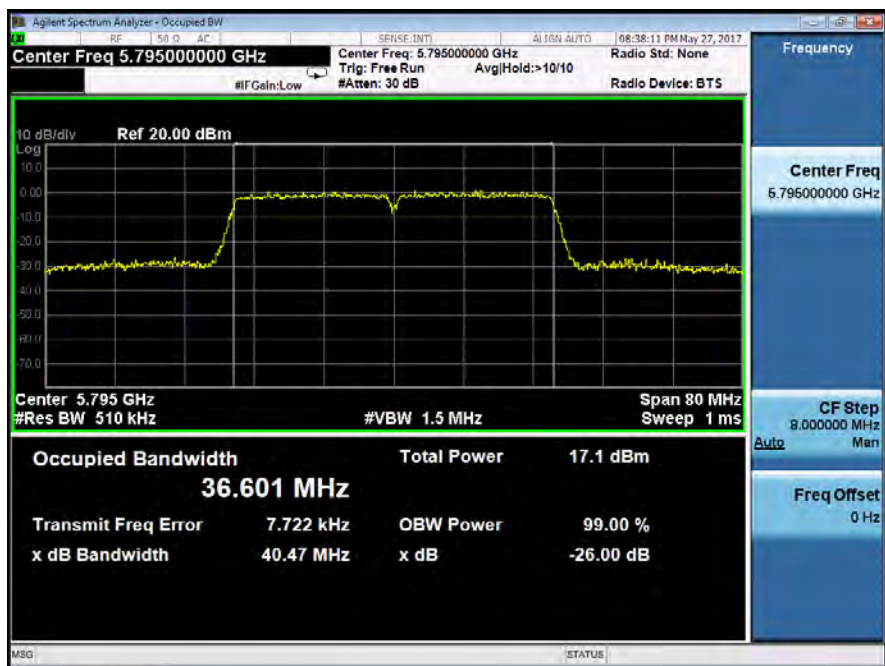


Emission Bandwidth&99% Occupied Bandwidth	UNII Band I	
Test Model	802.11ac(VHT40) mode	Frequency(MHz)
Ant0		5190

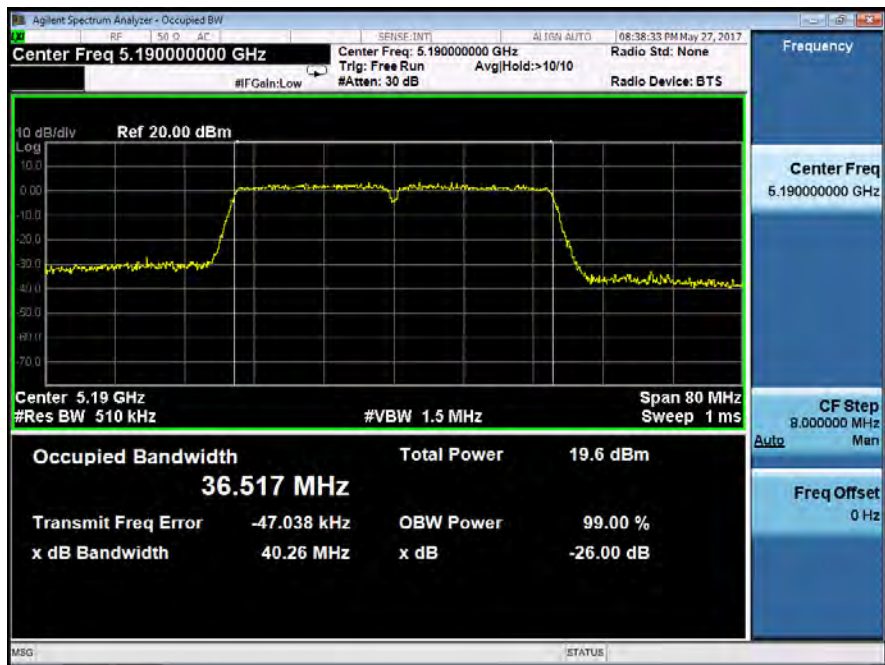


Emission Bandwidth&99% Occupied Bandwidth	UNII Band I	
Test Model	802.11ac(VHT40) mode	Frequency(MHz)
Ant0		5230

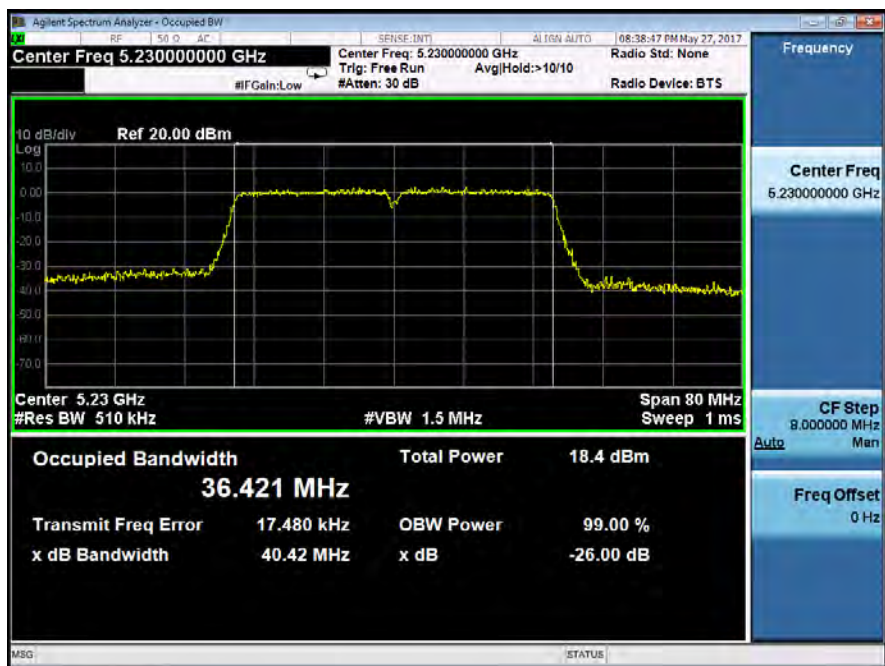


Emission Bandwidth&99% Occupied Bandwidth	UNII Band III	
Test Model	802.11ac(VHT40) mode	Frequency(MHz)
Ant0		5755

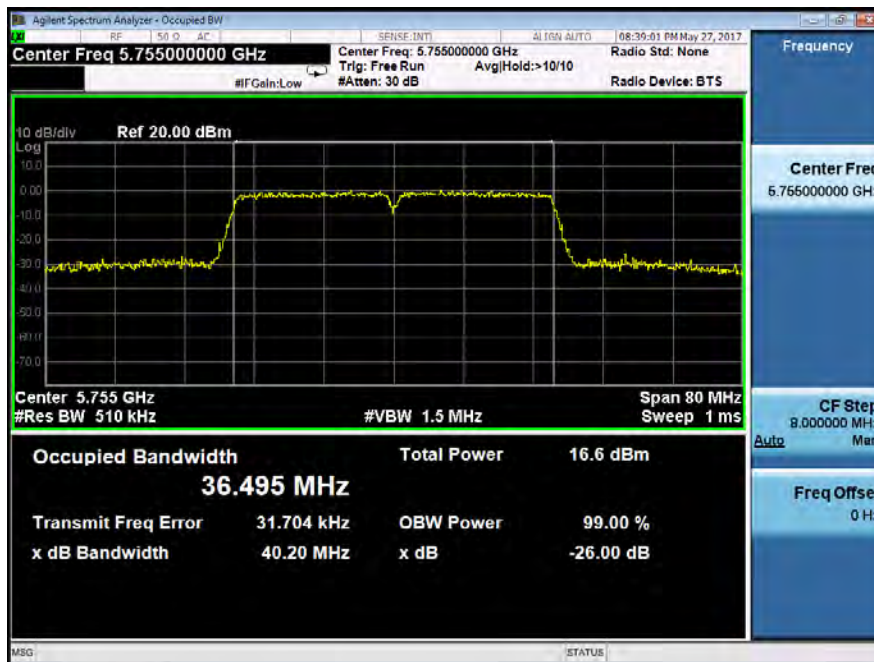


Emission Bandwidth&99% Occupied Bandwidth	UNII Band III	
Test Model	802.11ac(VHT40) mode	Frequency(MHz)
Ant0		5795

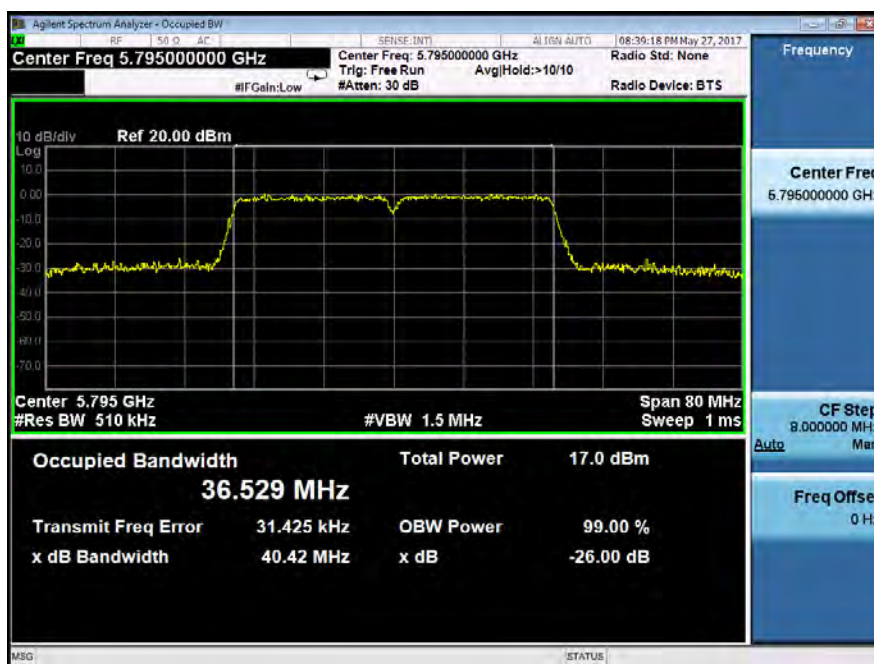


Emission Bandwidth&99% Occupied Bandwidth	UNII Band I	
Test Model	802.11ac(VHT80) mode	Frequency(MHz)
Ant0		5210

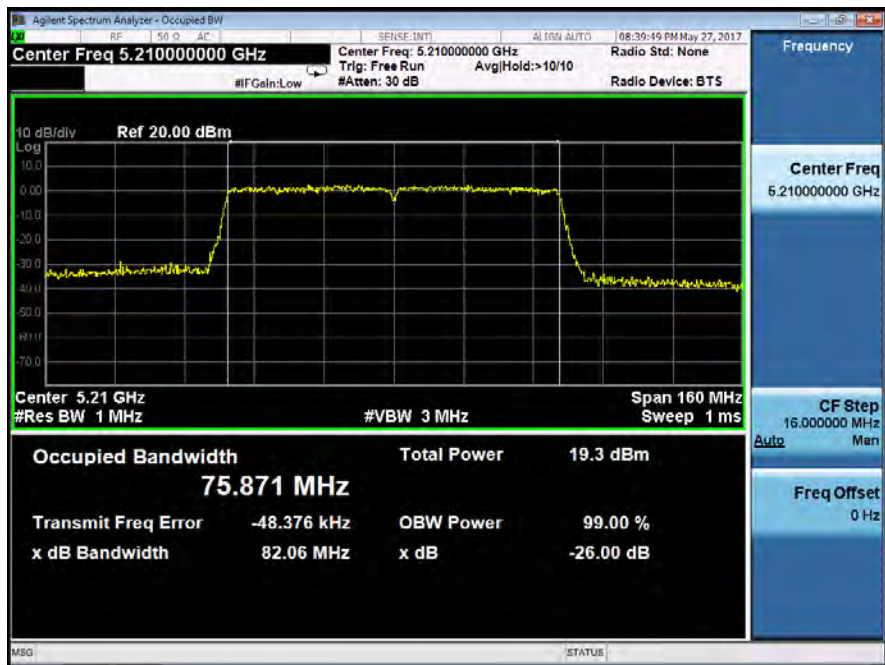


Emission Bandwidth&99% Occupied Bandwidth	UNII Band III	
Test Model	802.11ac(VHT80) mode	Frequency(MHz)
Ant0		5775

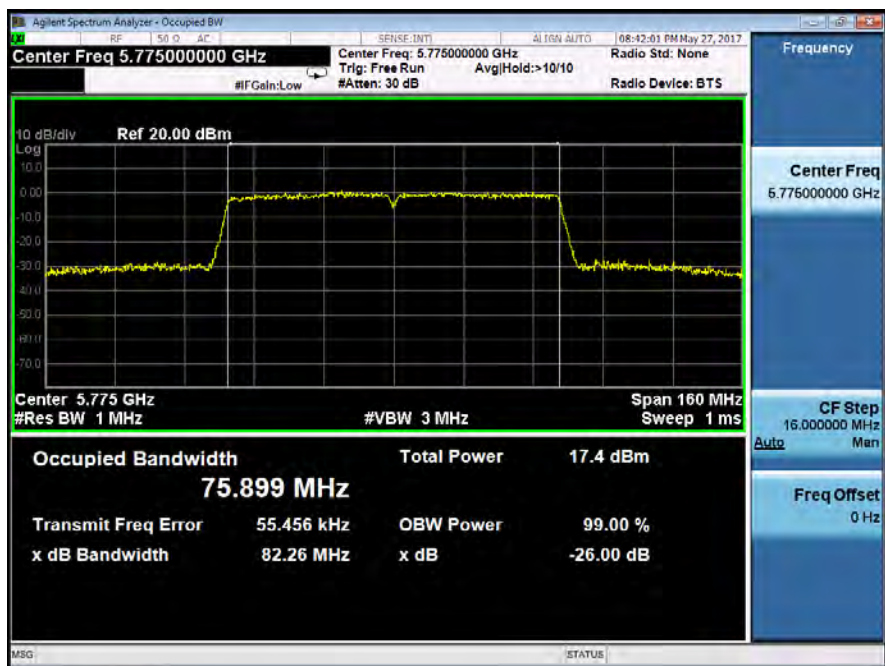


Minimum Emission Bandwidth	UNII Band III
Test Model 802.11a mode	Frequency(MHz) 5745
Ant0	

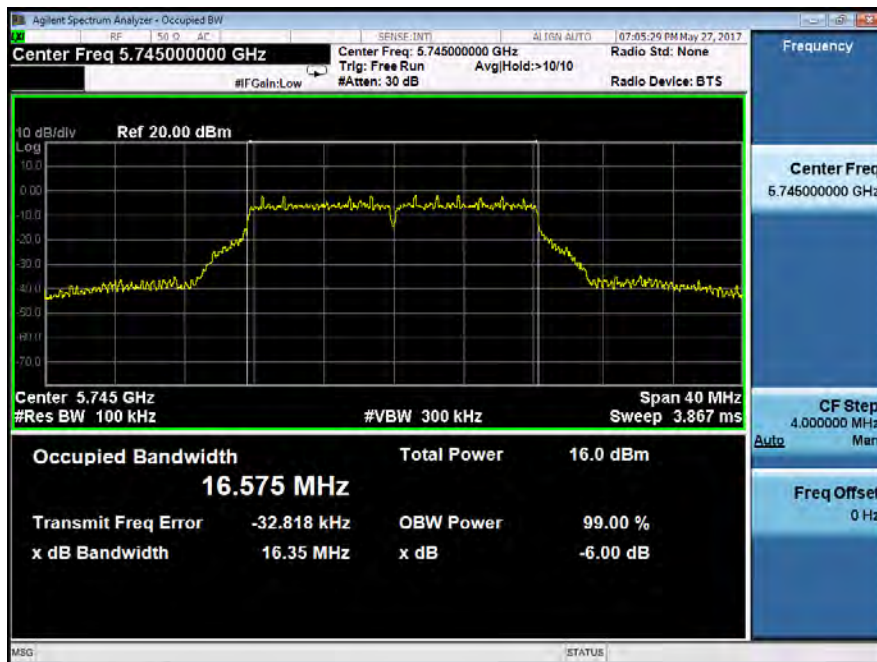


Minimum Emission Bandwidth	UNII Band III
Test Model 802.11a mode	Frequency(MHz) 5785
Ant0	

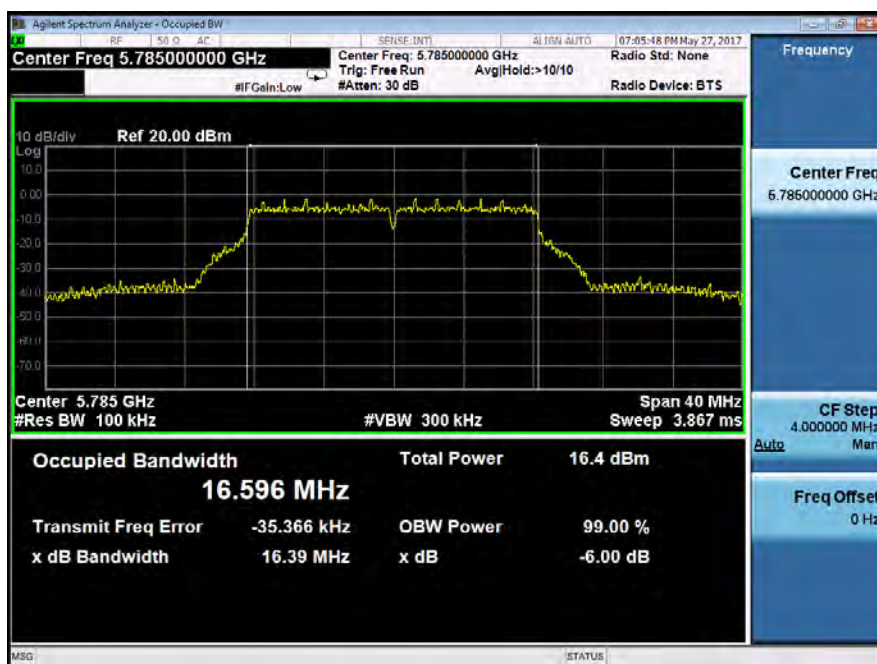


Minimum Emission Bandwidth	UNII Band III	
Test Model	802.11a mode	Frequency(MHz)
Ant0		5825

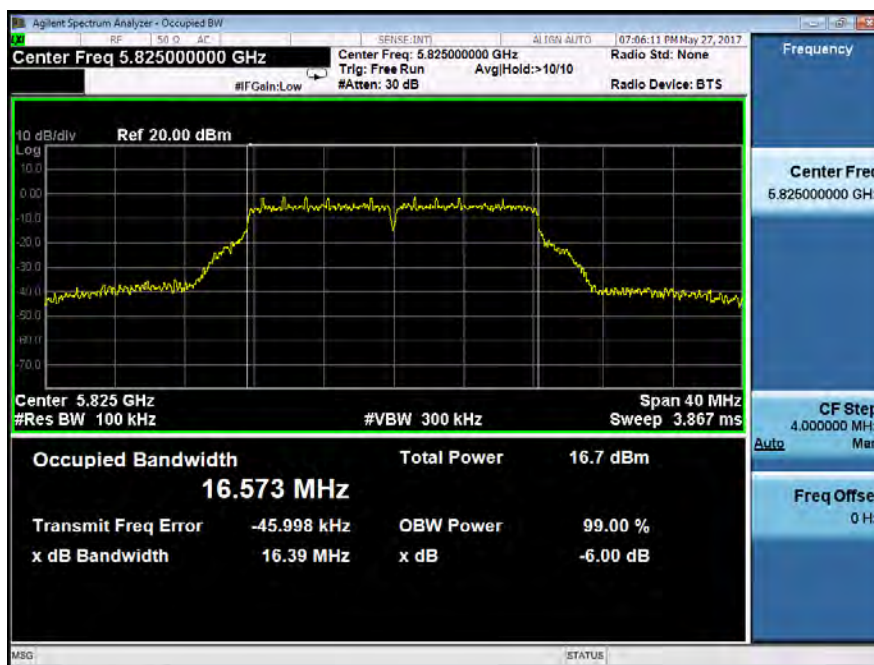


Minimum Emission Bandwidth	UNII Band III	
Test Model	802.11n(VHT20) mode	Frequency(MHz)
Ant0		5745

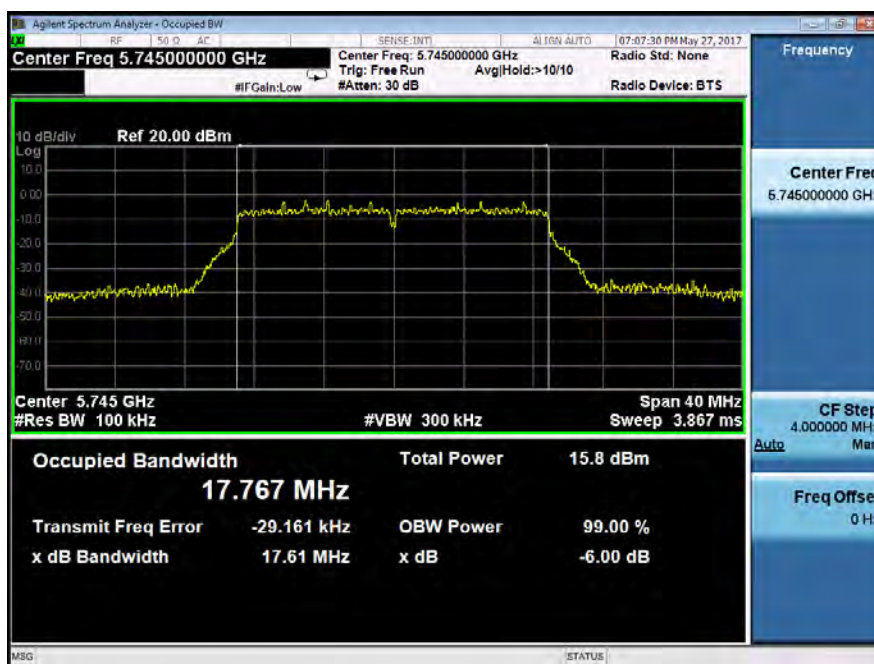


Minimum Emission Bandwidth	UNII Band III		
Test Model	802.11n(VHT20) mode	Frequency(MHz)	5785
Ant0			

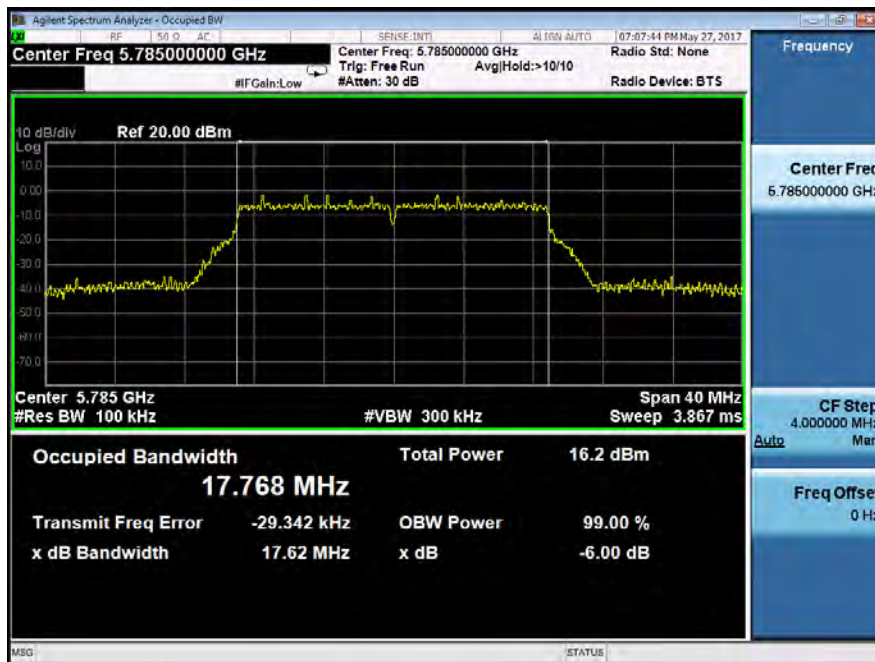


Minimum Emission Bandwidth	UNII Band III		
Test Model	802.11n(VHT20) mode	Frequency(MHz)	5825
Ant0			

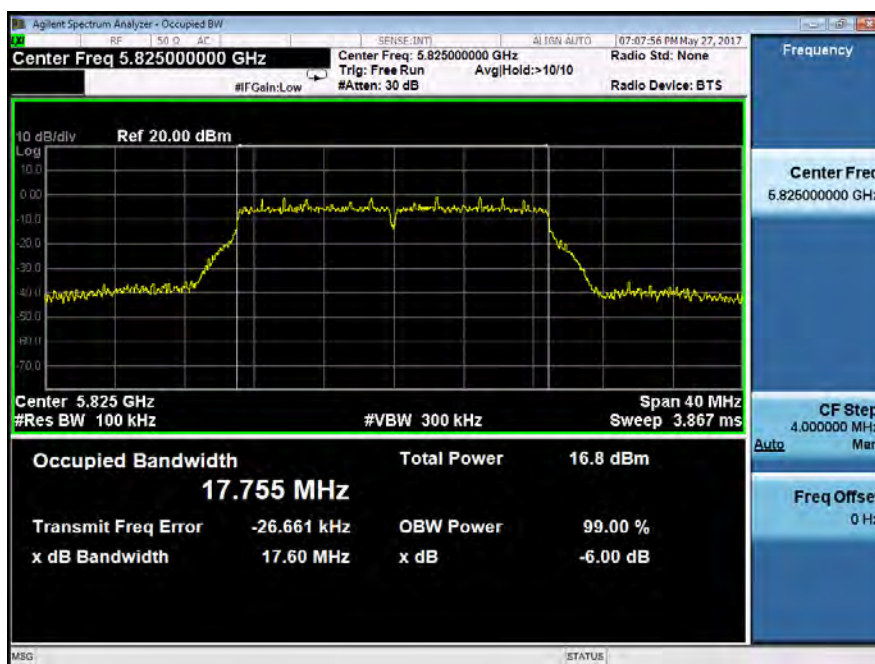


Minimum Emission Bandwidth	UNII Band III		
Test Model	802.11ac(VHT20) mode	Frequency(MHz)	5745
Ant0			

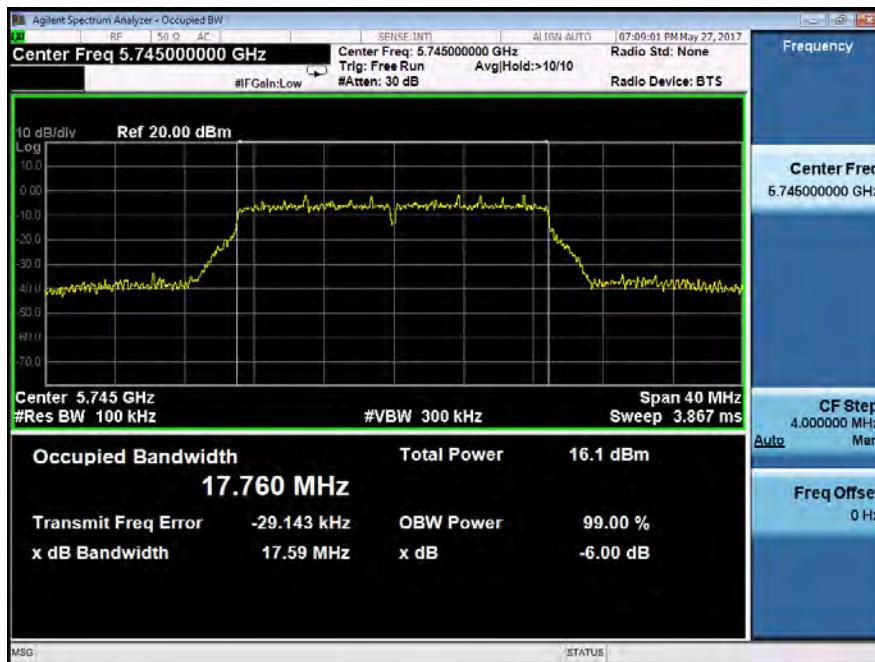


Minimum Emission Bandwidth	UNII Band III		
Test Model	802.11ac(VHT20) mode	Frequency(MHz)	5785
Ant0			

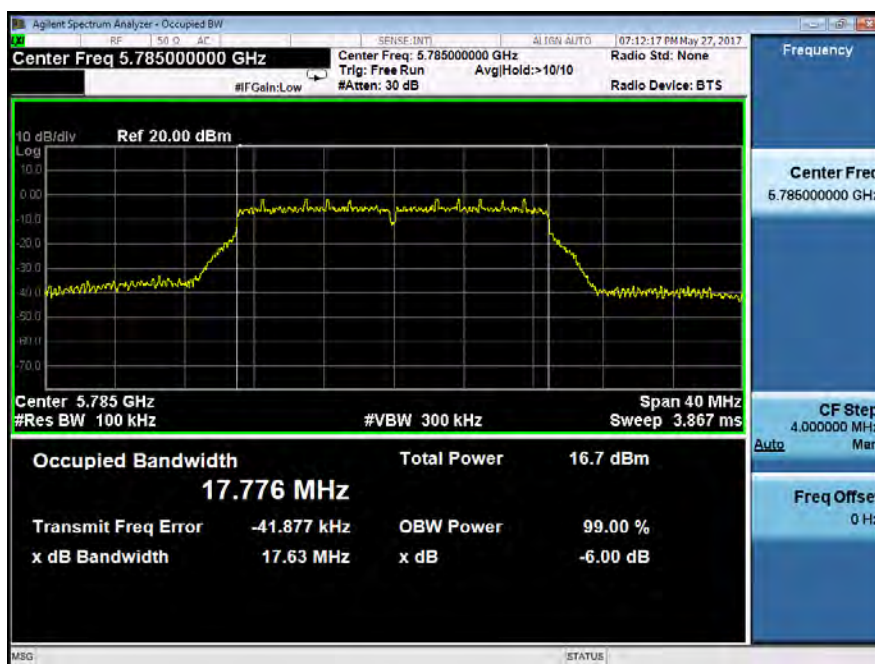


Minimum Emission Bandwidth	UNII Band III		
Test Model	802.11ac(VHT20) mode	Frequency(MHz)	5825
Ant0			

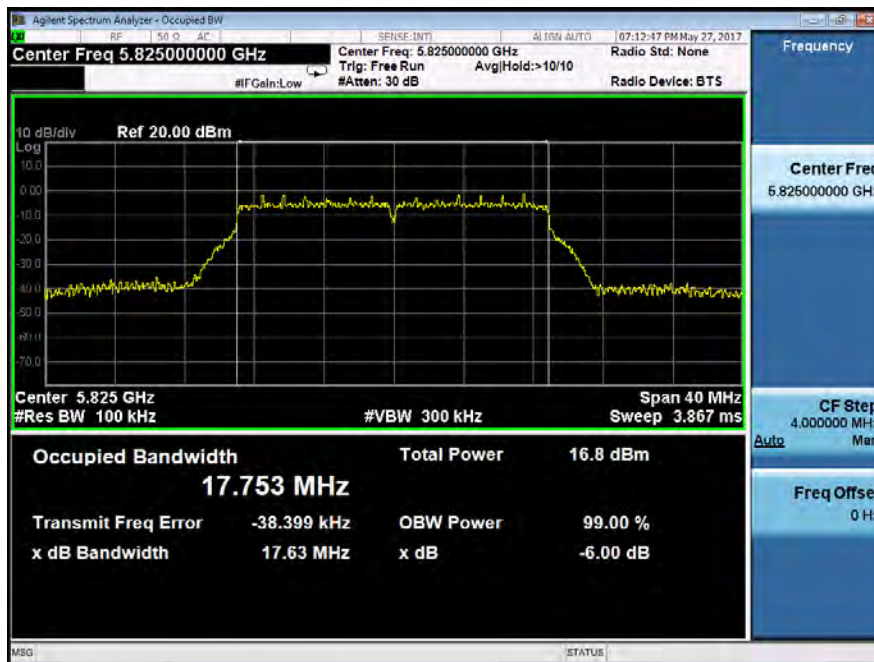


Minimum Emission Bandwidth	UNII Band III		
Test Model	802.11n(VHT40) mode	Frequency(MHz)	5755
Ant0			

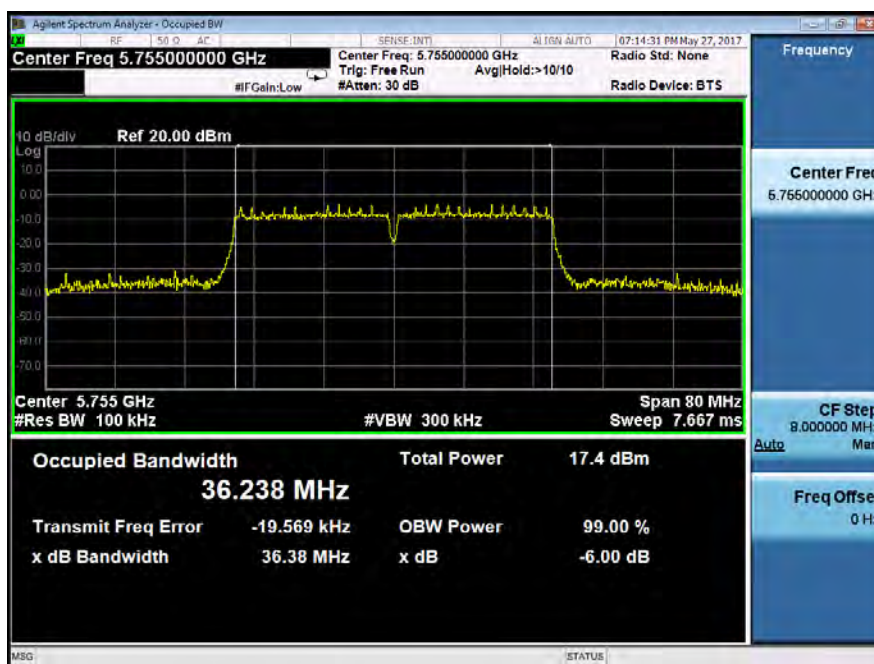


Minimum Emission Bandwidth	UNII Band III		
Test Model	802.11n(VHT40) mode	Frequency(MHz)	5795
Ant0			

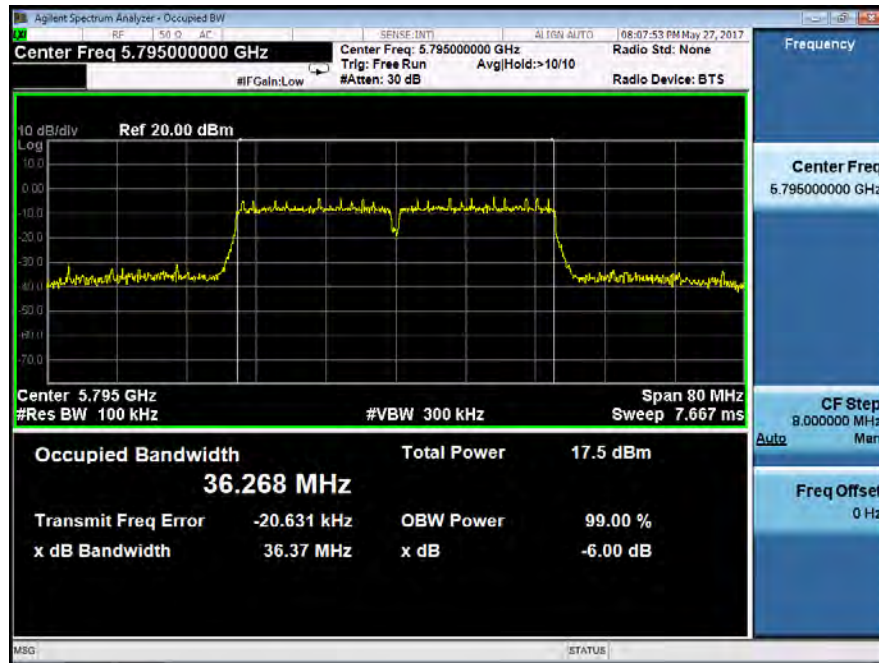


Minimum Emission Bandwidth	UNII Band III		
Test Model	802.11ac(VHT40) mode	Frequency(MHz)	5755
Ant0			

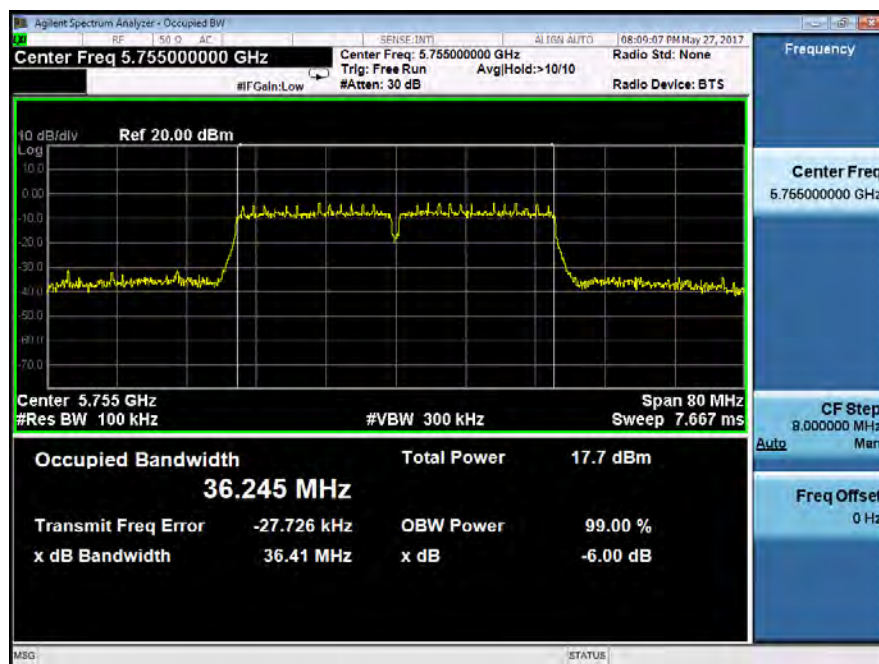

Minimum Emission Bandwidth	UNII Band III		
Test Model	802.11ac(VHT40) mode	Frequency(MHz)	5795
Ant0			

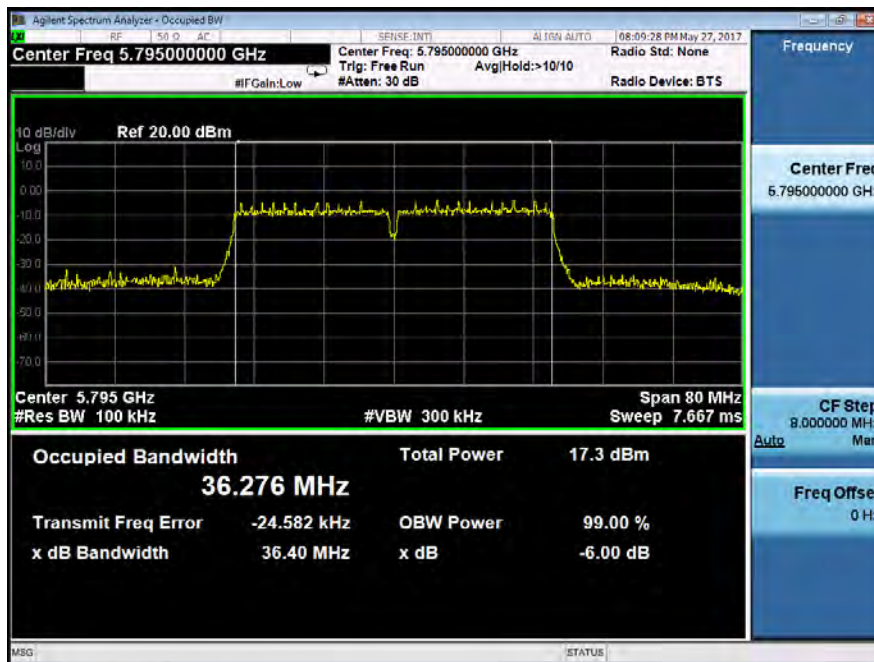

Minimum Emission Bandwidth	UNII Band III		
Test Model	802.11ac(VHT80) mode	Frequency(MHz)	5775
Ant0			

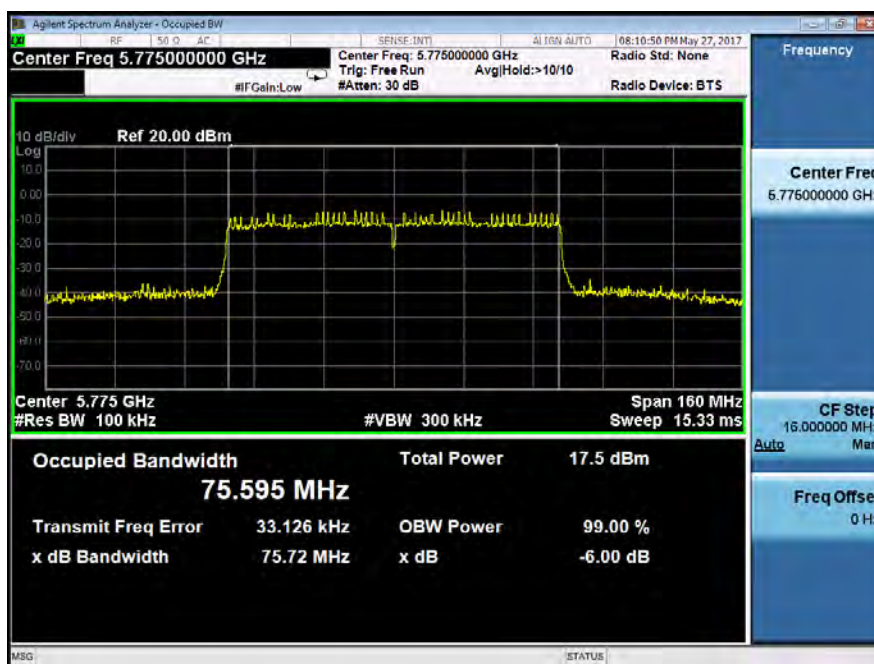

8.2 MAXIMUM CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I

According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C

According to FCC Part 15.407(a)(3) for UNII Band III

According to 789033 D02 Section II(E)

8.2.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

(a) (2) the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.2.4 Test Procedure

The maximum average conducted output power can be measured using Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

- a. The Transmitter output (antenna port) was connected to the power meter.
- b. Turn on the EUT and power meter and then record the power value.
- c. Repeat above procedures on all channels needed to be tested.



8.2.5 Test Results



☒ 802.11a mode Temperature : 28℃ Test Date : May 27, 2017 Humidity : 65 % Test By: King Kong						
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)		Limit (dBm)	Verdict
			Ant0	Ant1		
UNII Band I	CH36	5180	14.95	14.61	24	Pass
	CH40	5200	13.61	13.82	24	Pass
	CH48	5240	13.11	13.08	24	Pass
UNII Band III	CH149	5745	10.79	10.86	30	Pass
	CH157	5785	10.39	10.43	30	Pass
	CH165	5825	11.17	11.11	30	Pass
Note: N/A (Not Applicable)						



802.11n(VHT20) mode Temperature : 28℃ Humidity : 65 % Test Date : May 27, 2017 Test By: King Kong							
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH36	5180	14.65	14.48	17.58	24	Pass
	CH40	5200	13.49	13.41	16.46	24	Pass
	CH48	5240	13.20	13.19	16.21	24	Pass
UNII Band III	CH149	5745	10.70	10.66	13.69	30	Pass
	CH157	5785	10.43	10.32	13.39	30	Pass
	CH165	5825	11.14	11.12	14.14	30	Pass
Note: N/A (Not Applicable)							

☒ 802.11ac(VHT20) mode Temperature : 28℃ Test Date : May 27, 2017 Humidity : 65 % Test By: King Kong							
Band	Channel Number	Channel Freq. (MHz)	Conducted Output Power(dBm)			Limit (dBm)	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH36	5180	14.54	14.50	17.53	24	Pass
	CH40	5200	13.60	13.50	16.56	24	Pass
	CH48	5240	13.07	13.00	16.05	24	Pass
UNII Band III	CH149	5745	10.83	10.79	13.82	30	Pass
	CH157	5785	10.36	10.47	13.43	30	Pass
	CH165	5825	11.16	11.10	14.14	30	Pass
Note: N/A (Not Applicable)							

Duty Cycle:

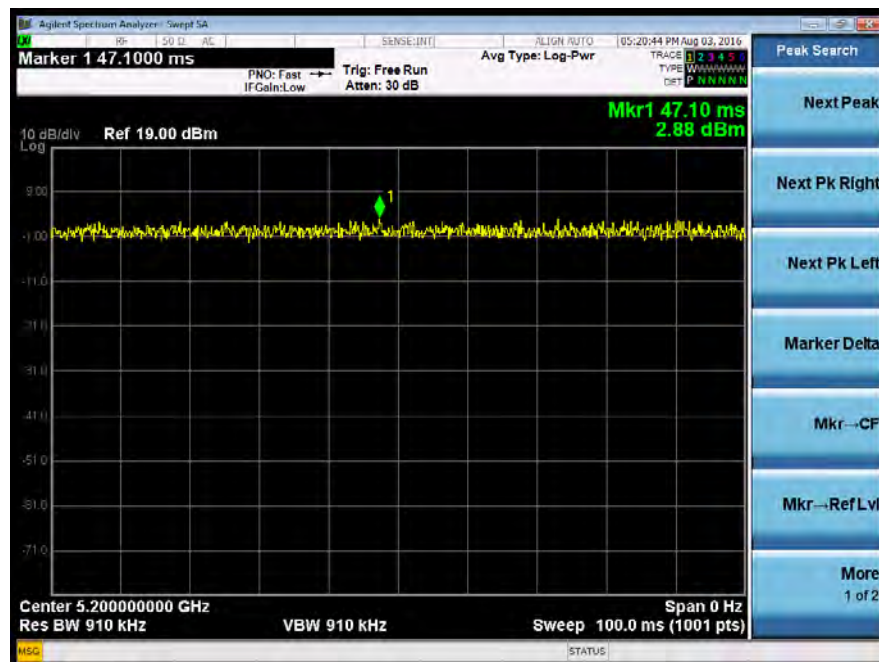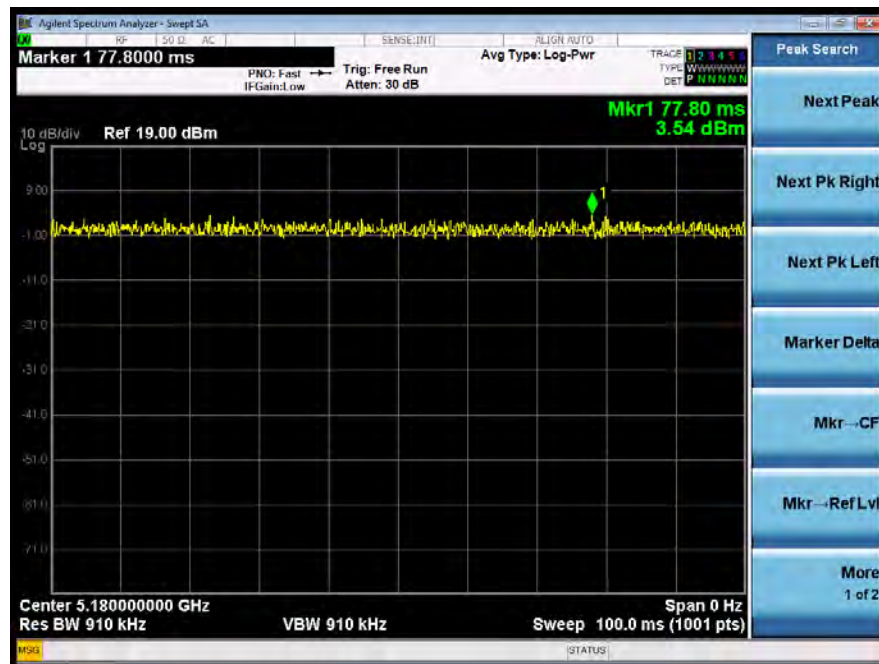

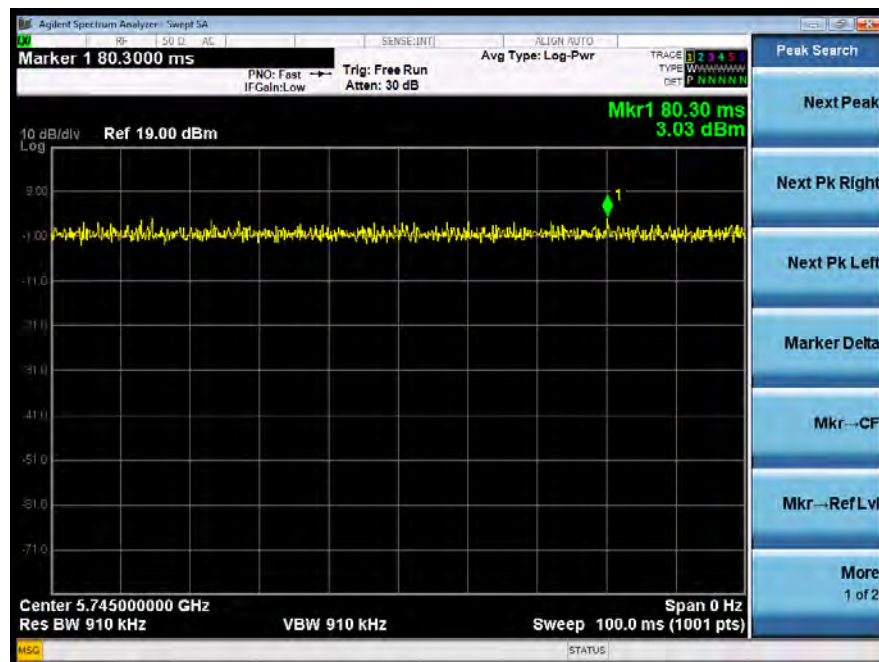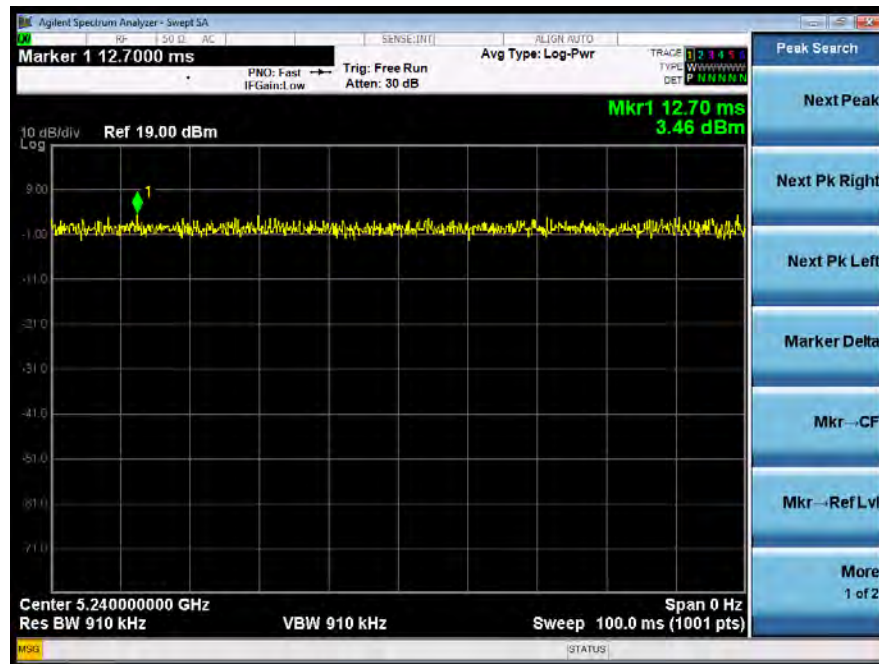

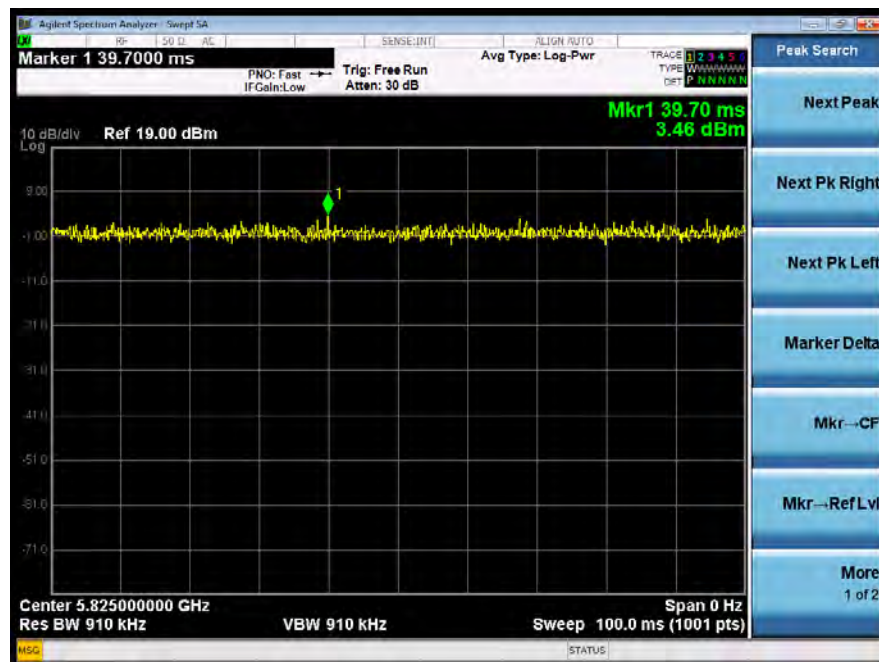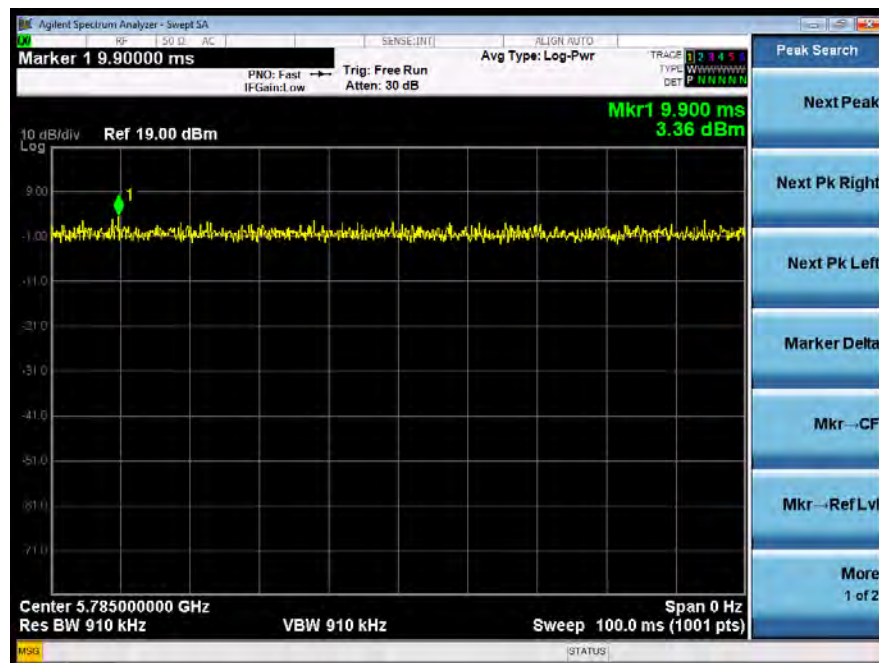

8.3 MAXIMUM PEAK POWER DENSITY

8.3.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I

According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C

According to FCC Part 15.407(a)(3) for UNII Band III

According to 789033 D02 Section II(F)

8.3.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

(b) (2) the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.3.4 Test Procedure

Methods refer to FCC KDB 789033

1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...".

2) Use the peak search function on the instrument to find the peak of the spectrum.

3) The result is the PPSD.

4) The above procedures make use of 500kHz resolution bandwidth to satisfy the 500kHz measurement bandwidth specified in the 15.407(a)(5). That rule section also permits use of resolution bandwidths less than 1 MHz "provided that the measured power is integrated to show the total power over the measurement bandwidth" (i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 500kHz bandwidth

Note: As a practical matter, it is recommended to use reduced RBW of 500 kHz for the sections 5.c) and 5.d) above, since RBW=500 kHz is available on nearly all spectrum analyzers.

8.3.5 Test Results

☒ 802.11a mode						
Temperature :		28℃	Test Date :		May 27, 2017	
Humidity :		65 %	Test By:		King Kong	
Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density		Limit	Verdict
			Ant0	Ant1		
UNII Band I	CH36	5180	2.043	2.008	≤11dBm/1MHz	Pass
	CH40	5200	1.255	1.281	≤11dBm/1MHz	Pass
	CH48	5240	1.079	1.219	≤11dBm/1MHz	Pass
UNII Band III	CH149	5745	-4.861	-5.073	≤30dBm/1MHz	Pass
	CH157	5785	-4.905	-4.935	≤30dBm/1MHz	Pass
	CH165	5825	-4.285	-4.534	≤30dBm/1MHz	Pass
Note: N/A (Not Applicable)						

☒ 802.11n(VHT20) mode							
Temperature :		28℃	Test Date :		May 27, 2017		
Humidity :		65 %	Test By:		King Kong		
Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH36	5180	1.771	1.722	4.76	≤11dBm/1MHz	Pass
	CH40	5200	1.262	0.891	4.09	≤11dBm/1MHz	Pass
	CH48	5240	0.631	0.572	3.61	≤11dBm/1MHz	Pass
UNII Band III	CH149	5745	-5.137	-5.347	-2.23	≤30dBm/1MHz	Pass
	CH157	5785	-5.108	-5.288	-2.19	≤30dBm/1MHz	Pass
	CH165	5825	-4.592	-4.708	-1.64	≤30dBm/1MHz	Pass
Note: N/A (Not Applicable)							

☒ 802.11ac(VHT20) mode							
Temperature :		28℃	Test Date :		May 27, 2017		
Humidity :		65 %	Test By:		King Kong		
Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH36	5180	1.828	1.851	4.85	≤11dBm/1MHz	Pass
	CH40	5200	1.060	1.073	4.08	≤11dBm/1MHz	Pass
	CH48	5240	0.412	0.329	3.38	≤11dBm/1MHz	Pass
UNII Band III	CH149	5745	-5.195	-5.167	-2.17	≤30dBm/1MHz	Pass
	CH157	5785	-4.802	-5.273	-2.02	≤30dBm/1MHz	Pass
	CH165	5825	-4.393	-4.809	-1.59	≤30dBm/1MHz	Pass
Note: N/A (Not Applicable)							

			☒ 802.11n(VHT40) mode		
Temperature :	28 °C	Test Date :		May 27, 2017	
Humidity :	65 %	Test By:		King Kong	

Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH38	5190	-1.650	-1.681	1.34	≤11dBm/1MHz	Pass
	CH46	5230	-3.200	-2.871	-0.02	≤11dBm/1MHz	Pass
UNII Band III	CH151	5670	-7.528	-7.552	-4.53	≤30dBm/1MHz	Pass
	CH159	5795	-6.918	-7.330	-4.11	≤30dBm/1MHz	Pass

Note:

N/A (Not Applicable)

			☒ 802.11ac(VHT40) mode		
Temperature :	28 °C	Test Date :		May 27, 2017	
Humidity :	65 %	Test By:		King Kong	

Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH38	5190	-1.912	-1.816	1.15	≤11dBm/1MHz	Pass
	CH46	5230	-2.846	-2.994	0.09	≤11dBm/1MHz	Pass
UNII Band III	CH151	5670	-7.523	-7.541	-4.52	≤30dBm/1MHz	Pass
	CH159	5795	-7.625	-7.259	-4.43	≤30dBm/1MHz	Pass

Note:

N/A (Not Applicable)

			☒ 802.11ac(VHT80) mode		
Temperature :	28 °C	Test Date :		May 27, 2017	
Humidity :	65 %	Test By:		King Kong	

Band	Channel Number	Channel Freq. (MHz)	Power Spectral Density			Limit	Verdict
			Ant0	Ant1	Ant0+1		
UNII Band I	CH42	5210	-6.660	-6.370	-3.50	≤11dBm/1MHz	Pass
UNII Band III	CH155	5775	-11.440	-11.710	-8.56	≤30dBm/1MHz	Pass

Note:

N/A (Not Applicable)

Both ANT0 and ANT1 has been tested and show the ANT0 result as following pages

Power Spectral Density	UNII Band I	
Test Model	802.11a	Frequency(MHz)
Ant0		5180



Power Spectral Density	UNII Band I	
Test Model	802.11a	Frequency(MHz)
Ant0		5200



Power Spectral Density	UNII Band I	
Test Model 802.11a	Frequency(MHz)	5240
Ant0		



Power Spectral Density	UNII Band III	
Test Model 802.11a	Frequency(MHz)	5745
Ant0		



Power Spectral Density	UNII Band III	
Test Model 802.11a	Frequency(MHz)	5785
Ant0		



Power Spectral Density	UNII Band III	
Test Model 802.11a	Frequency(MHz)	5825
Ant0		



Power Spectral Density	UNII Band I	
Test Model	802.11n(VHT20) mode	Frequency(MHz)
Ant0		5180



Power Spectral Density	UNII Band I	
Test Model	802.11n(VHT20) mode	Frequency(MHz)
Ant0		5200



Power Spectral Density	UNII Band I	
Test Model	802.11n(VHT20) mode	Frequency(MHz)
Ant0		5240



Power Spectral Density	UNII Band III
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5745
Ant0	



Power Spectral Density	UNII Band III
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5785
Ant0	



Power Spectral Density	UNII Band III
Test Model 802.11n(VHT20) mode	Frequency(MHz) 5825
Ant0	



Power Spectral Density	UNII Band I
Test Model 802.11ac(VHT20) mode	Frequency(MHz) 5180
Ant0	



Power Spectral Density	UNII Band I	
Test Model	802.11ac(VHT20) mode	Frequency(MHz)
Ant0		5200



Power Spectral Density	UNII Band I	
Test Model	802.11ac(VHT20) mode	Frequency(MHz)
Ant0		5240



Power Spectral Density	UNII Band III
Test Model 802.11ac(VHT20) mode	Frequency(MHz) 5745
Ant0	



Power Spectral Density	UNII Band III
Test Model 802.11ac(VHT20) mode	Frequency(MHz) 5785
Ant0	



Power Spectral Density	UNII Band III	
Test Model	802.11ac(VHT20) mode	Frequency(MHz)
Ant0		5825




Power Spectral Density	UNII Band I	
Test Model	802.11n(VHT40) mode	Frequency(MHz)
Ant0		5190



Power Spectral Density	UNII Band I	
Test Model	802.11n(VHT40) mode	Frequency(MHz)
Ant0		5230




Power Spectral Density	UNII Band III	
Test Model	802.11n(VHT40) mode	Frequency(MHz)
Ant0		5755

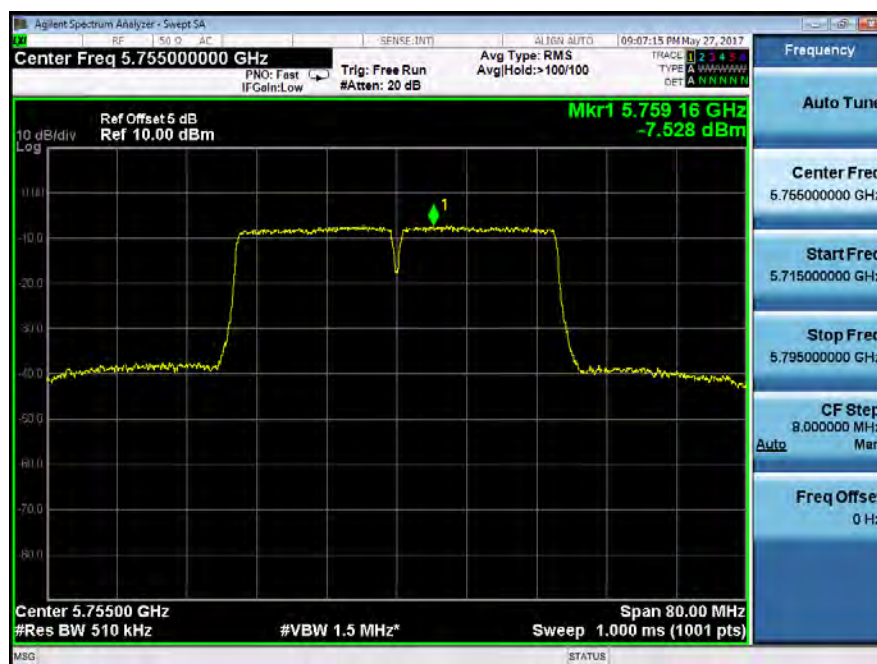

Power Spectral Density	UNII Band III
Test Model 802.11n(VHT40) mode	Frequency(MHz) 5795
Ant0	




Power Spectral Density	UNII Band I
Test Model 802.11ac(VHT40) mode	Frequency(MHz) 5190
Ant0	

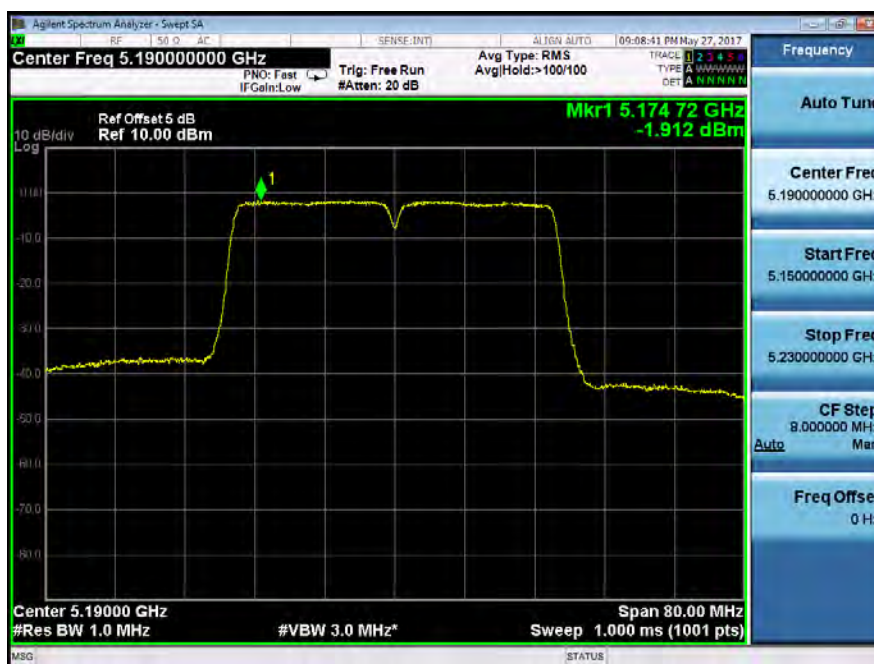

Power Spectral Density	UNII Band I	
Test Model	802.11ac(VHT40) mode	Frequency(MHz)
Ant0		5230



Power Spectral Density	UNII Band III	
Test Model	802.11ac(VHT40) mode	Frequency(MHz)
Ant0		5755

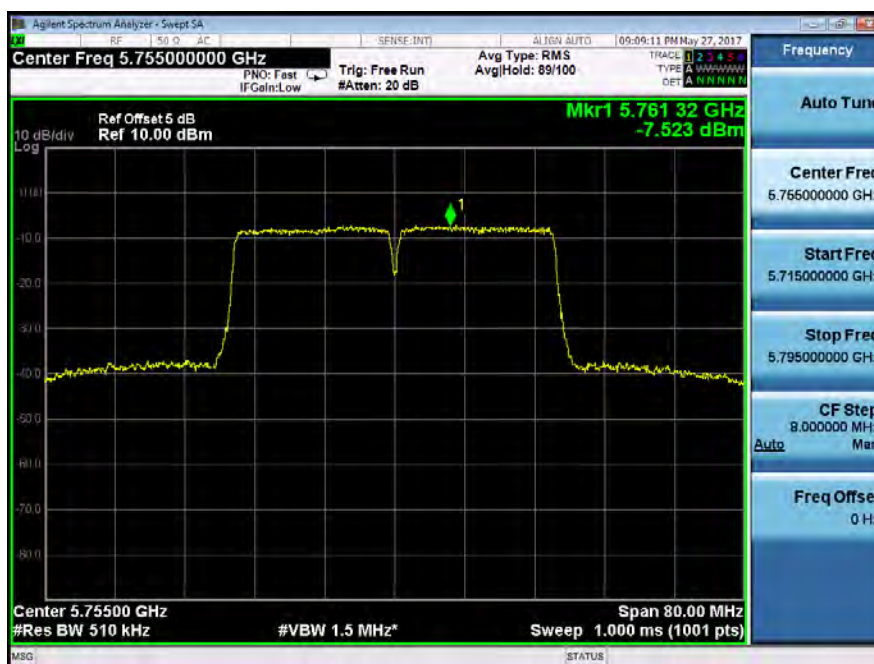

Power Spectral Density	UNII Band III
Test Model 802.11ac(VHT40) mode	Frequency(MHz) 5795
Ant0	



Power Spectral Density	UNII Band I
Test Model 802.11ac(VHT80) mode	Frequency(MHz) 5210
Ant0	



Power Spectral Density	UNII Band III
Test Model 802.11ac(VHT80) mode	Frequency(MHz) 5775
Ant0	



8.4 FREQUENCY STABILITY

8.4.1 Applicable Standard

According to FCC Part 15.407(g)
ANSI C63.10 Section 6.8

8.4.2 Conformance Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

8.4.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.4.4 Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 10 kHz.

Set the video bandwidth (VBW) =30 kHz.

Set Span= Entire absence of modulation emissions bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

Beginning at each temperature level specified in user manual , the frequency shall be measured within one minute after application of primary power to the transmitter and at intervals of no more than one minute thereafter until ten minutes have elapsed or until sufficient measurements are obtained to indicate clearly that the frequency has stabilized within the applicable tolerance, whichever time period is greater. During each test, the ambient temperature shall not be allowed to rise more than 10° centigrade above the respective beginning ambient temperature level
Measure and record the results in the test report.

8.4.5 Test Results

5180				
Temperature :	--	Test Date :	May 27, 2017	
Humidity :	65 %	Test By:	King Kong	
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5179.966389	-33.611	Pass
	-10	5179.966392	-33.608	Pass
	0	5179.964942	-35.058	Pass
	10	5179.964157	-35.843	Pass
	20	5179.965449	-34.551	Pass
	30	5179.965746	-34.254	Pass
	40	5179.965851	-34.149	Pass
	50	5179.965743	-34.257	Pass
85% Vnom	20	5179.96147	-38.530	Pass
115% Vnom	20	5179.966253	-33.747	Pass

5200				
Temperature :	--	Test Date :	May 27, 2017	
Humidity :	65 %	Test By:	King Kong	
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5199.958428	-41.572	Pass
	-10	5199.955487	-44.513	Pass
	0	5199.956224	-43.776	Pass
	10	5199.957423	-42.577	Pass
	20	5199.956512	-43.488	Pass
	30	5199.957415	-42.585	Pass
	40	5199.957751	-42.249	Pass
	50	5199.958182	-41.818	Pass
85% Vnom	20	5199.958535	-41.465	Pass
115% Vnom	20	5199.957914	-42.086	Pass

5240				
Temperature :	--	Test Date :	May 27, 2017	
Humidity :	65 %	Test By:	King Kong	
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5239.977365	-22.635	Pass
	-10	5239.978269	-21.731	Pass
	0	5239.978292	-21.708	Pass
	10	5239.979359	-20.641	Pass
	20	5239.978187	-21.813	Pass
	30	5239.977236	-22.764	Pass
	40	5239.979087	-20.913	Pass
	50	5239.977452	-22.548	Pass
85% Vnom	20	5239.979507	-20.493	Pass
115% Vnom	20	5239.979209	-20.791	Pass

5745				
Temperature :	--	Test Date :	May 27, 2017	
Humidity :	65 %	Test By:	King Kong	
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5744.983678	-16.322	Pass
	-10	5744.985956	-14.044	Pass
	0	5744.986143	-13.857	Pass
	10	5744.985802	-14.198	Pass
	20	5744.984186	-15.814	Pass
	30	5744.984673	-15.327	Pass
	40	5744.98463	-15.37	Pass
	50	5744.98526	-14.74	Pass
85% Vnom	20	5744.984427	-15.573	Pass
115% Vnom	20	5744.984963	-15.037	Pass

5785				
Temperature :	--	Test Date :	May 27, 2017	
Humidity :	65 %	Test By:	King Kong	
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5784.990282	-9.718	Pass
	-10	5784.988302	-11.698	Pass
	0	5784.988212	-11.788	Pass
	10	5784.989453	-10.547	Pass
	20	5784.989604	-10.396	Pass
	30	5784.988962	-11.038	Pass
	40	5784.989335	-10.665	Pass
	50	5784.990184	-9.816	Pass
85% Vnom	20	5784.991032	-8.968	Pass
115% Vnom	20	5784.990042	-9.958	Pass

5825				
Temperature :	--	Test Date :	May 27, 2017	
Humidity :	65 %	Test By:	King Kong	
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5824.982059	-17.941	Pass
	-10	5824.982032	-17.968	Pass
	0	5824.98061	-19.390	Pass
	10	5824.980836	-19.164	Pass
	20	5824.981201	-18.799	Pass
	30	5824.981121	-18.879	Pass
	40	5824.980165	-19.835	Pass
	50	5824.981675	-18.325	Pass
85% Vnom	20	5824.981808	-18.192	Pass
115% Vnom	20	5824.981859	-18.141	Pass

5190				
Temperature :	--	Test Date :	May 27, 2017	
Humidity :	65 %	Test By:	King Kong	
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5189.974422	-25.578	Pass
	-10	5189.976214	-23.786	Pass
	0	5189.976526	-23.474	Pass
	10	5189.977309	-22.691	Pass
	20	5189.975772	-24.228	Pass
	30	5189.975151	-24.849	Pass
	40	5189.977357	-22.643	Pass
	50	5189.974972	-25.028	Pass
85% Vnom	20	5189.977506	-22.494	Pass
115% Vnom	20	5189.976982	-23.018	Pass

5230				
Temperature :	--	Test Date :	May 27, 2017	
Humidity :	65 %	Test By:	King Kong	
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5229.972979	-27.021	Pass
	-10	5229.973128	-26.872	Pass
	0	5229.973143	-26.857	Pass
	10	5229.971326	-28.674	Pass
	20	5229.972109	-27.891	Pass
	30	5229.972293	-27.707	Pass
	40	5229.971947	-28.053	Pass
	50	5229.971107	-28.893	Pass
85% Vnom	20	5229.972599	-27.401	Pass
115% Vnom	20	5229.972624	-27.376	Pass

5755				
Temperature :	--	Test Date :	May 27, 2017	
Humidity :	65 %	Test By:	King Kong	
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5754.992608	-7.392	Pass
	-10	5754.995039	-4.961	Pass
	0	5754.994854	-5.146	Pass
	10	5754.994759	-5.241	Pass
	20	5754.993159	-6.841	Pass
	30	5754.993436	-6.564	Pass
	40	5754.993868	-6.132	Pass
	50	5754.993917	-6.083	Pass
85% Vnom	20	5754.993125	-6.875	Pass
115% Vnom	20	5754.994174	-5.826	Pass

5795				
Temperature :	--	Test Date :	May 27, 2017	
Humidity :	65 %	Test By:	King Kong	
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5794.986300	-13.700	Pass
	-10	5794.986281	-13.719	Pass
	0	5794.983521	-16.479	Pass
	10	5794.983742	-16.258	Pass
	20	5794.98545	-14.550	Pass
	30	5794.985593	-14.407	Pass
	40	5794.983993	-16.007	Pass
	50	5794.984866	-15.134	Pass
85% Vnom	20	5794.985662	-14.338	Pass
115% Vnom	20	5794.986563	-13.437	Pass

5210				
Temperature :	--	Test Date :	May 27, 2017	
Humidity :	65 %	Test By:	King Kong	
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5209.967572	-32.428	Pass
	-10	5209.968948	-31.052	Pass
	0	5209.968931	-31.069	Pass
	10	5209.967888	-32.112	Pass
	20	5209.968729	-31.271	Pass
	30	5209.969117	-30.883	Pass
	40	5209.969929	-30.071	Pass
	50	5209.968963	-31.037	Pass
85% Vnom	20	5209.967702	-32.298	Pass
115% Vnom	20	5209.970452	-29.548	Pass

5775				
Temperature :	--	Test Date :	May 27, 2017	
Humidity :	65 %	Test By:	King Kong	
Voltage(V)	Temp(°C)	Test Frequency (MHz)	Max. Deviation (KHz)	Verdict
Vnom	-20	5774.980808	-19.192	Pass
	-10	5774.980918	-19.082	Pass
	0	5774.979016	-20.984	Pass
	10	5774.979629	-20.371	Pass
	20	5774.980093	-19.907	Pass
	30	5774.980212	-19.788	Pass
	40	5774.97892	-21.080	Pass
	50	5774.980424	-19.576	Pass
85% Vnom	20	5774.980563	-19.437	Pass
115% Vnom	20	5774.980514	-19.486	Pass

8.5 UNDESIRABLE RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.407 (b)

According to 789033 D02 Section II(G)

8.5.2 Conformance Limit

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	2400/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The provisions of §15.205 apply to intentional radiators operating under this section, 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

- Remark:
1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

8.5.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

8.5.4 Test Procedure

■ Unwanted Emissions Measurements below 1000 MHz

Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

The EUT was placed on a turn table which is 0.8m above ground plane.

And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

Repeat above procedures until all frequency measured was complete.

We use software control the EUT, Let EUT hopping on and transmit with highest power, All the modes have been tested and the worst result was reported.

Use the following spectrum analyzer settings:

Set RBW=120kHz for $f < 1$ GHz (30MHz to 1GHz), 200Hz for $f < 150$ KHz (9KHz to 150KHz), 9KHz for < 30 MHz (150KHz to 30KHz).

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Repeat above procedures until all frequency measured was complete.

■ Unwanted Maximum peak Emissions Measurements above 1000 MHz

Maximum emission levels are measured by setting the analyzer as follows:

RBW = 1 MHz.

VBW $\geq$ 3 MHz.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

■ Unwanted Average Emissions Measurements above 1000 MHz

Method VB (Averaging using reduced video bandwidth): Alternative method.

RBW = 1 MHz.

Video bandwidth. • If the EUT is configured to transmit with duty cycle $\geq$ 98 percent, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz.

• If the EUT duty cycle is < 98 percent, set $VBW \geq 1/T$, where T is defined in section II.B.1.a).

Video bandwidth mode or display mode • The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).

• As an alternative, the analyzer may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some analyzers require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle. For example, use at least 200 traces if the duty cycle is 25 percent. (If a specific emission is demonstrated to be continuous—i.e., 100 percent duty cycle—rather than turning on and off with the transmit cycle, at least 50 traces shall be averaged.)

■ Band edge measurements.

Unwanted band-edge emissions may be measured using either of the special band-edge measurement techniques (the marker-delta or integration methods) described below. Note that the marker-delta method is primarily a radiated measurement technique that requires the 99% occupied bandwidth edge to be within 2 MHz of the authorized band edge, whereas the integration method can be used in either a radiated or conducted measurement without any special requirement with regards to the displacement of the unwanted emission(s) relative to the authorized bandwidth.

Marker-Delta Method.

The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level of emissions provided that the 99% occupied bandwidth of the fundamental is within 2 MHz of the authorized band-edge.

8.5.5 Test Results

■ ☒ For Undesirable radiated Spurious Emission in UNII Band I

All the modes 802.11a/n/ac has been tested and the worst result 802.11a recorded as below:

● ☒ Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Temperature :	28℃	Test Date :	June 09, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency(MHz):	5180

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
11200	V	50.35	-44.88	-27	-17.88
13767	V	51.18	-44.05	-27	-17.05
16844	V	52.19	-43.04	-27	-16.04
12033	H	50.66	-44.57	-27	-17.57
14073	H	51.84	-43.39	-27	-16.39
16470	H	52.50	-42.73	-27	-15.73

Temperature :	28℃	Test Date :	June 09, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency(MHz):	5220

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
12203	V	51.03	-44.20	-27	-17.20
15535	V	51.43	-43.80	-27	-16.80
17422	V	51.91	-43.32	-27	-16.32
13393	H	52.02	-43.21	-27	-16.21
15433	H	51.84	-43.39	-27	-16.39
17269	H	52.43	-42.80	-27	-15.80

Temperature :	28℃	Test Date :	June 09, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency(MHz):	5240

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
12101	V	51.04	-44.19	-27	-17.19
16164	V	51.57	-43.66	-27	-16.66
17507	V	52.46	-42.77	-27	-15.77
12493	H	51.67	-43.56	-27	-16.56
15484	H	52.42	-42.81	-27	-15.81
17352	H	52.89	-42.34	-27	-15.34

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Correct Factor +Cable Loss.

(3) Correct Factor= Ant_F + Cab_L - Preamp

(4) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77

d is the measurement distance in 3 meters

● ☒ Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz)

Temperature :	28℃	Test Date :	June 12, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency(MHz):	5180

Freq. (MHz)	Ant.Pol. H/V	PK (dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Margin (dB)	PK (dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Margin (dB)
5148.05	H	50.98	74	-23.02	40.60	54	-13.4
5150.00	V	51.24	74	-22.76	46.30	54	-7.7

Temperature :	28℃	Test Date :	June 12, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency(MHz):	5240

Freq. (MHz)	Ant.Pol. H/V	PK (dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Margin (dB)	PK (dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Margin (dB)
5002.45	H	42.70	74	-31.30	35.20	54	-18.80
5137.00	V	42.61	74	-31.39	34.90	54	-19.10

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

● ☒ Undesirable radiated Spurious Emission in Restricted Band (5350-5460MHz)

Temperature :	28℃	Test Date :	June 12, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency(MHz):	5180

Freq. (MHz)	Ant.Pol. H/V	PK (dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Margin (dB)	PK (dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Margin (dB)
5360.23	H	39.40	74	-34.60	32.50	54	-21.50
5358.69	V	37.44	74	-36.56	30.90	54	-23.10

Temperature :	28℃	Test Date :	December 27, 2016
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency(MHz):	5240

Freq. (MHz)	Ant.Pol. H/V	PK (dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Margin (dB)	PK (dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Margin (dB)
5350.00	H	43.87	74	-30.13	33.90	54	-20.10
5351.98	V	42.07	74	-31.93	35.20	54	-18.80

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Temperature :	28℃	Test Date :	June 12, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency(MHz):	5180


Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5149.30	H	49.16	-46.07	-27	Pass
5149.40	V	49.05	-46.18	-27	Pass

Temperature :	28℃	Test Date :	June 12, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency(MHz):	5240


Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5350.45	H	48.19	-47.04	-27	Pass
5350.20	V	47.78	-47.45	-27	Pass

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77
d is the measurement distance in 3 meters


Test Model	UNII Band I					
	Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz)					
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)	Ant.Pol		
	☒ 5180	☐ 5200	☐ 5240	H		

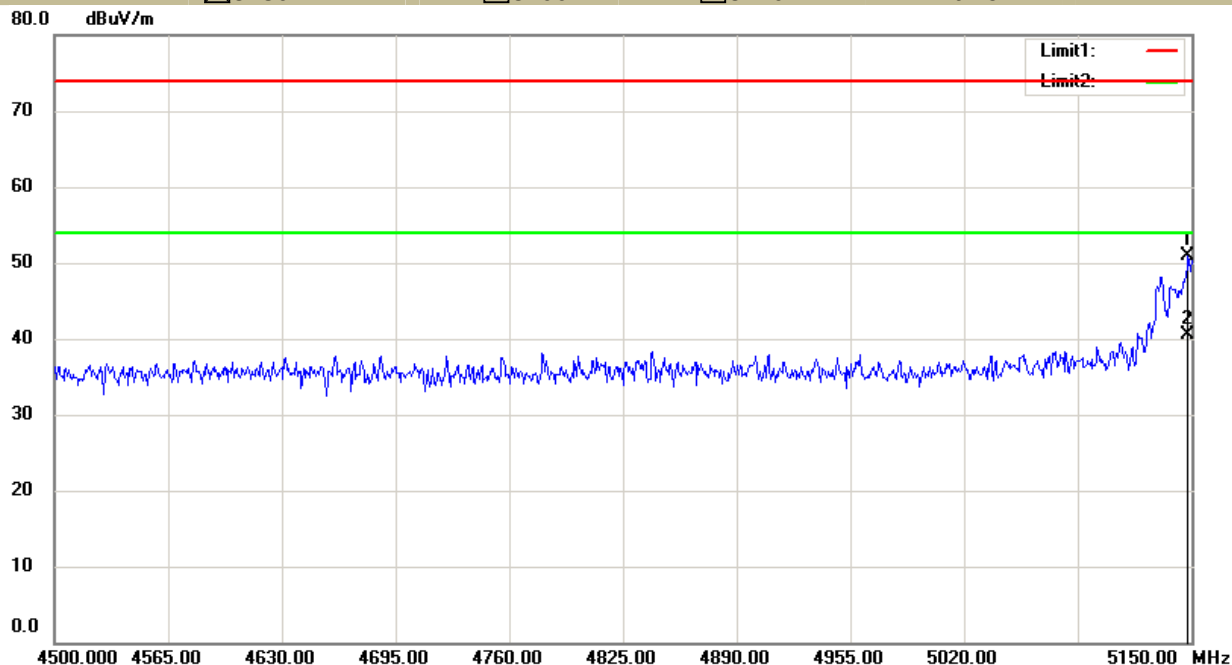


Test Model	UNII Band I					
	Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz)					
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)	Ant.Pol		
	☒ 5180	☐ 5200	☐ 5240	V		

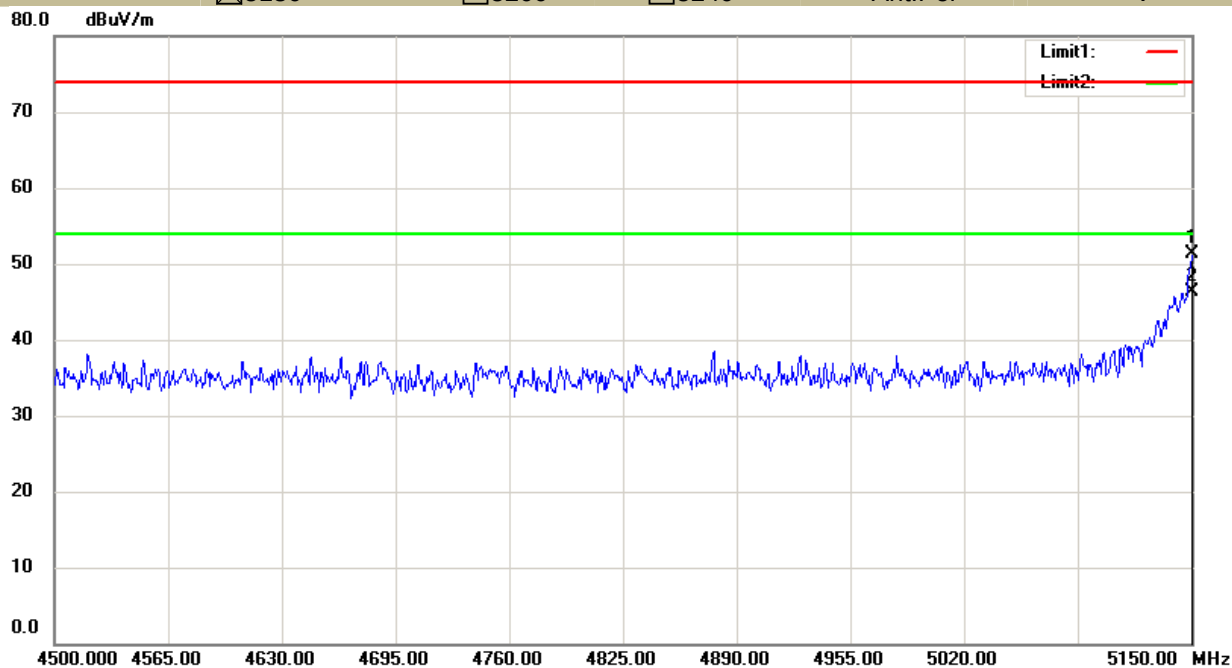


UNII Band I				
Test Model	Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz)			
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)	
	☐ 5180	☐ 5200	☒ 5240	Ant.Pol H

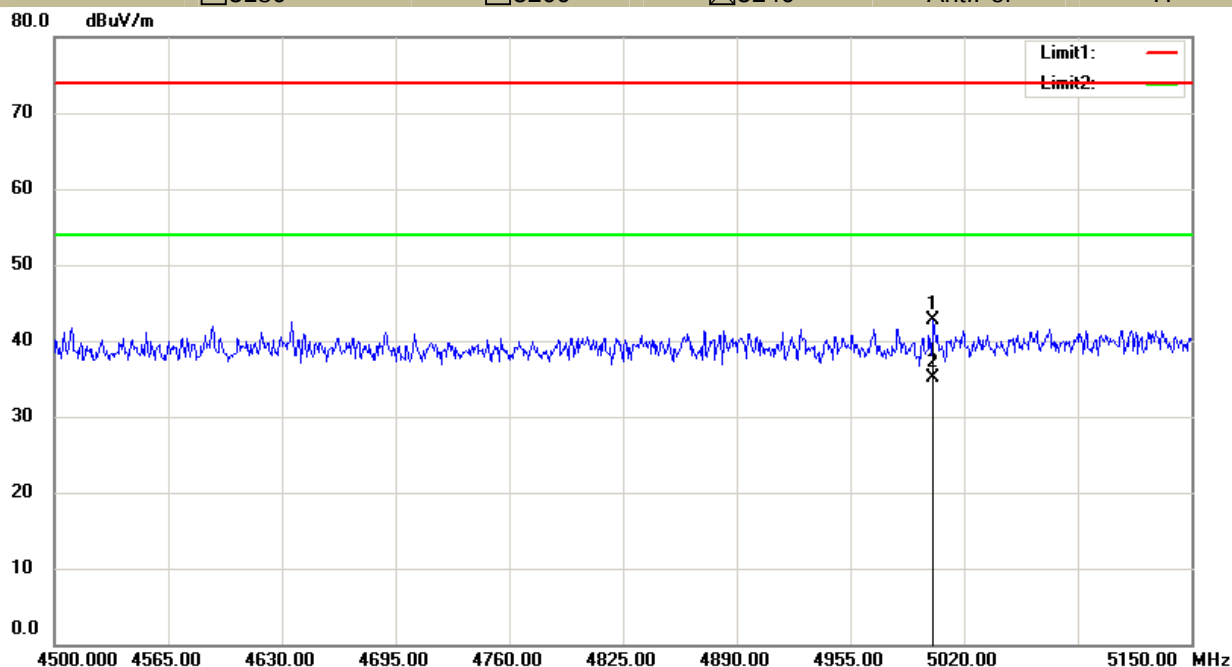


UNII Band I				
Test Model	Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz)			
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)	
	☐ 5180	☐ 5200	☒ 5240	Ant.Pol V

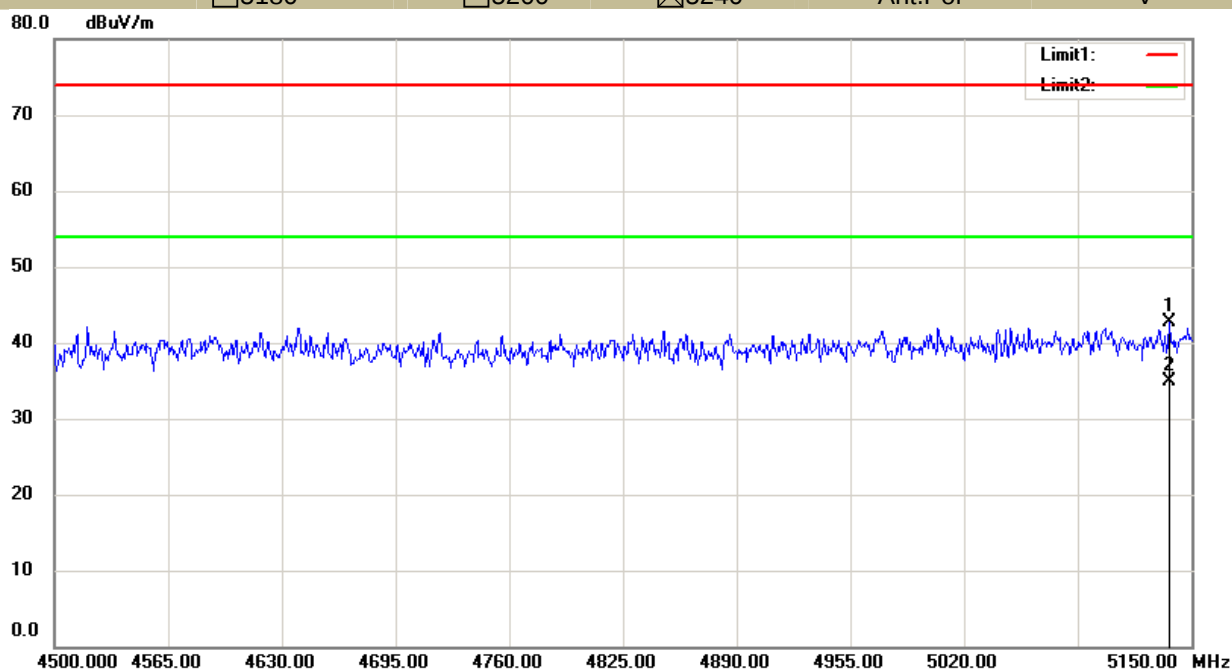


Test Model	UNII Band I					
	Undesirable radiated Spurious Emission in Restricted Band (5350-5460MHz)					
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)	Ant.Pol		H
	☒ 5180	☐ 5200	☐ 5240			

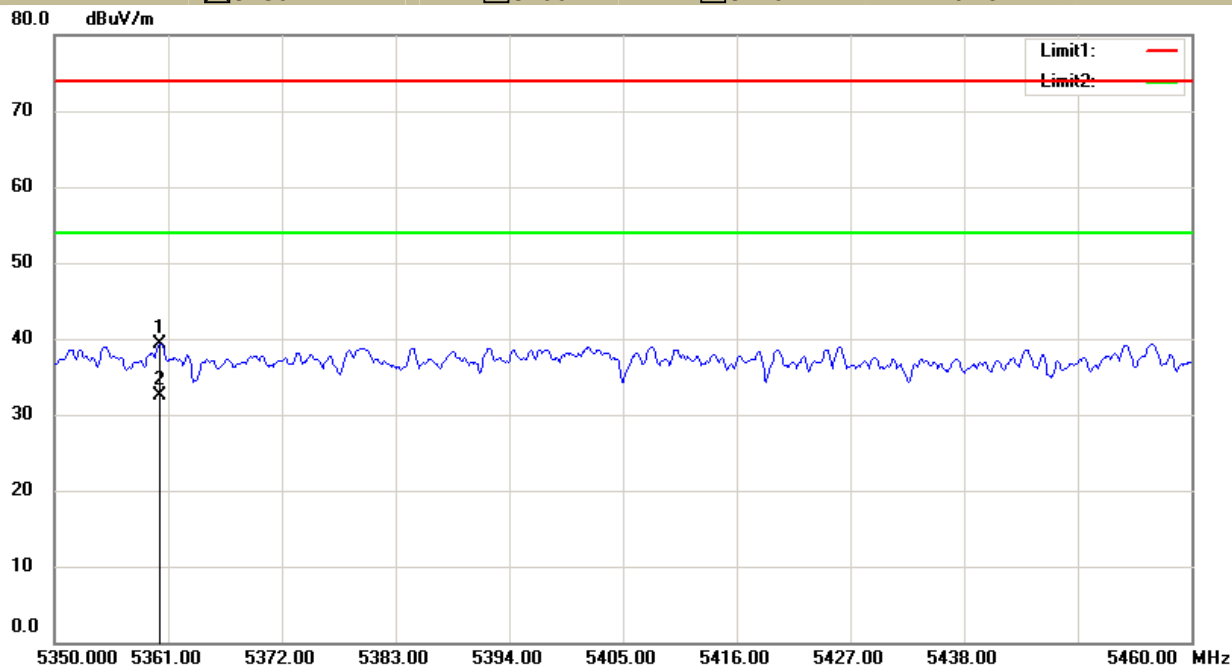


Test Model	UNII Band I					
	Undesirable radiated Spurious Emission in Restricted Band (5350-5460MHz)					
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)	Ant.Pol		V
	☒ 5180	☐ 5200	☐ 5240			

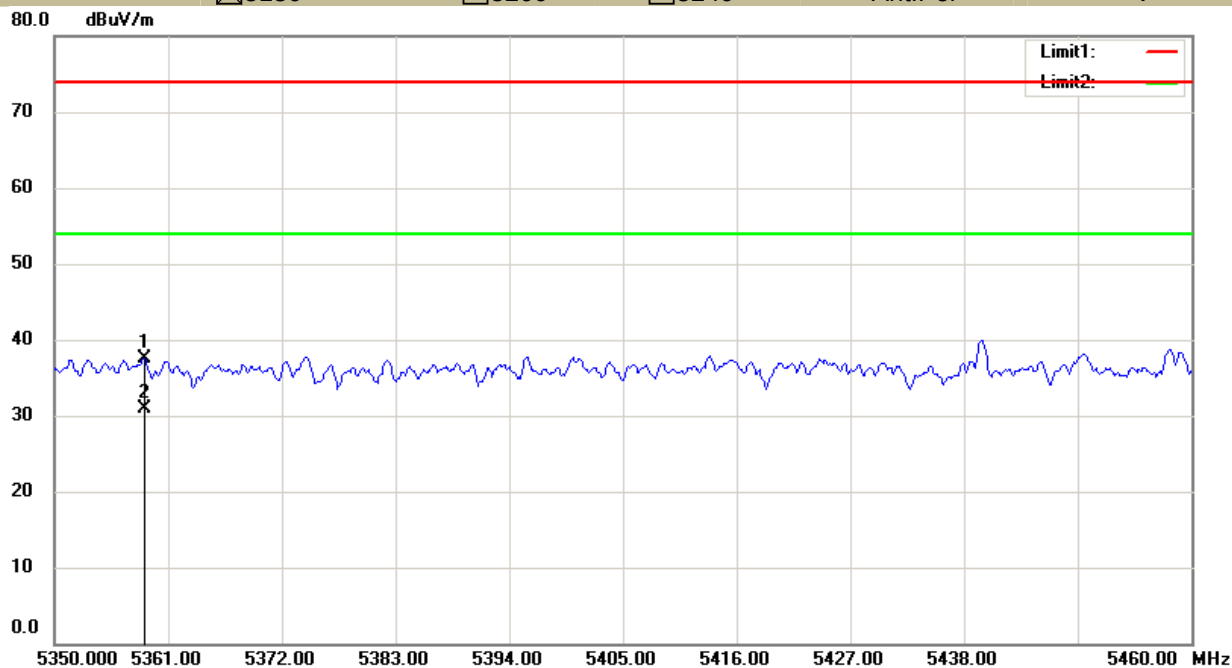


Test Model	UNII Band I				
	Undesirable radiated Spurious Emission in Restricted Band (5350-5460MHz)				
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)	Ant.Pol	H
	☐ 5180	☐ 5200	☒ 5240		

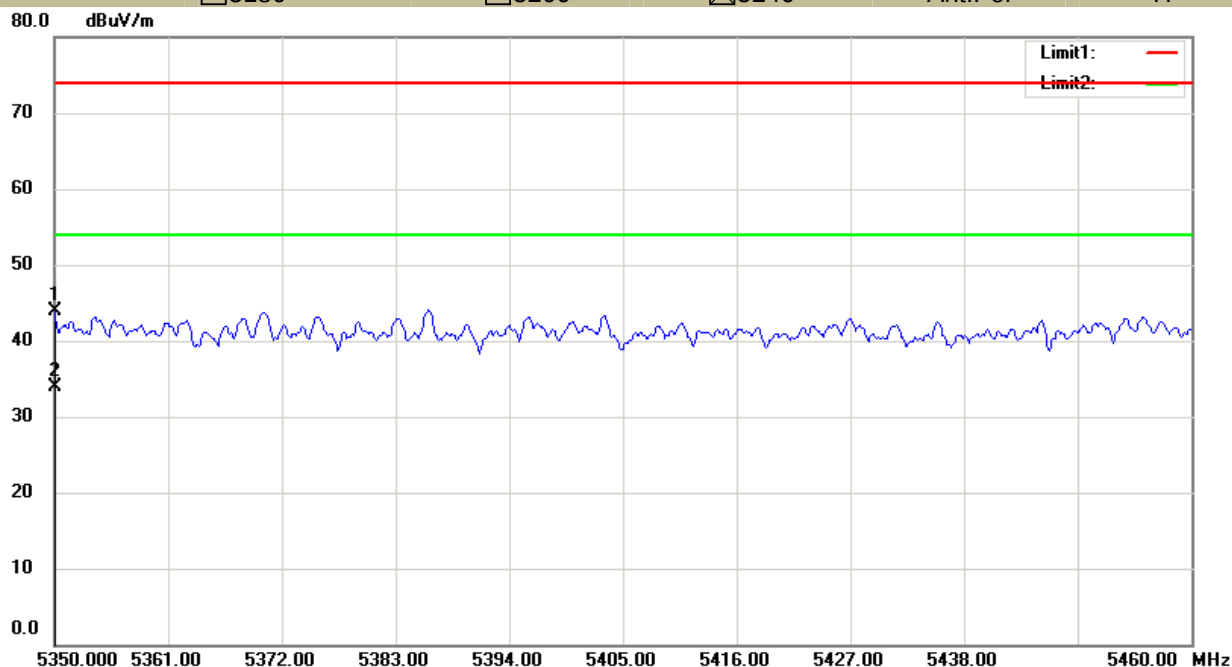


Test Model	UNII Band I				
	Undesirable radiated Spurious Emission in Restricted Band (5350-5460MHz)				
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)	Ant.Pol	V
	☐ 5180	☐ 5200	☒ 5240		

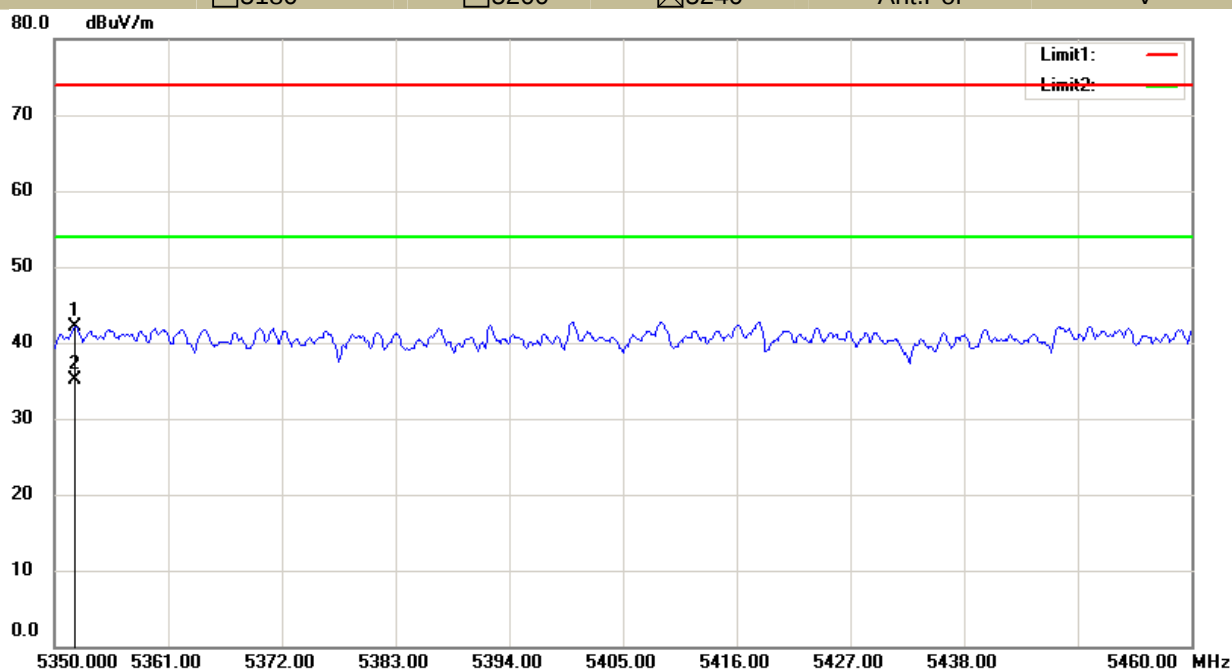


Test Model	UNII Band I			
	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge	
	☒ 802.11a	☒ 5180	☐ 802.11n(HT20)	☐ 802.11n(HT40)
			Ant.Pol	H

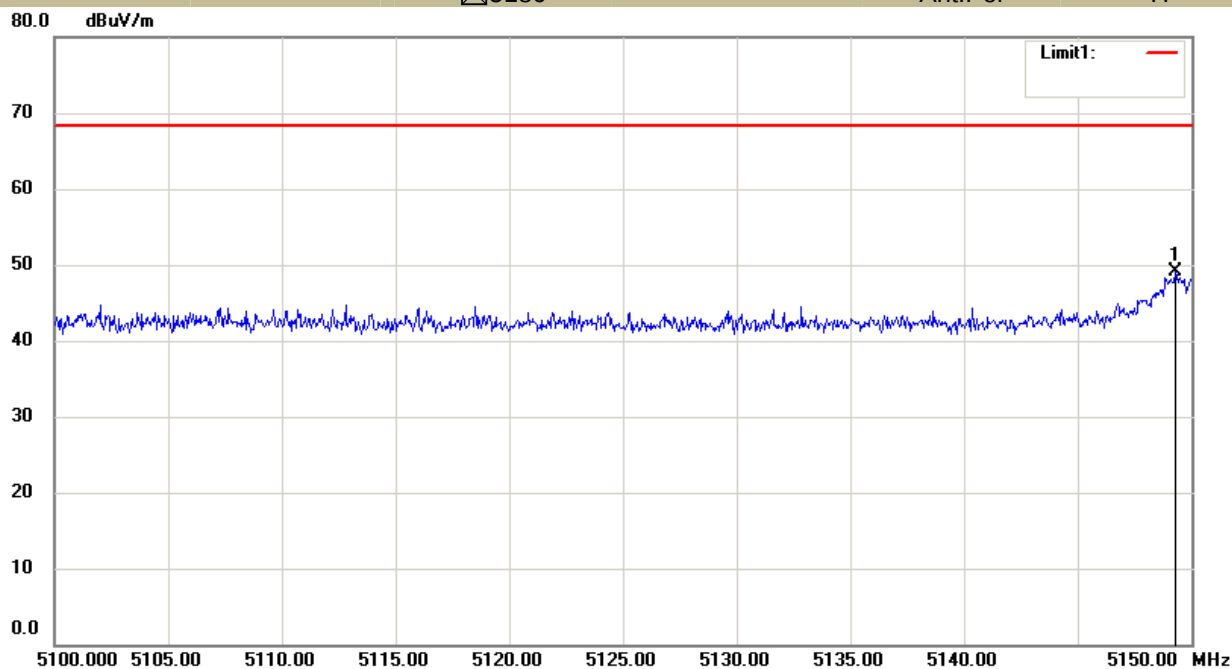


Test Model	UNII Band I			
	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge	
	☒ 802.11a	☒ 5180	☐ 802.11n(HT20)	☐ 802.11n(HT40)
			Ant.Pol	V

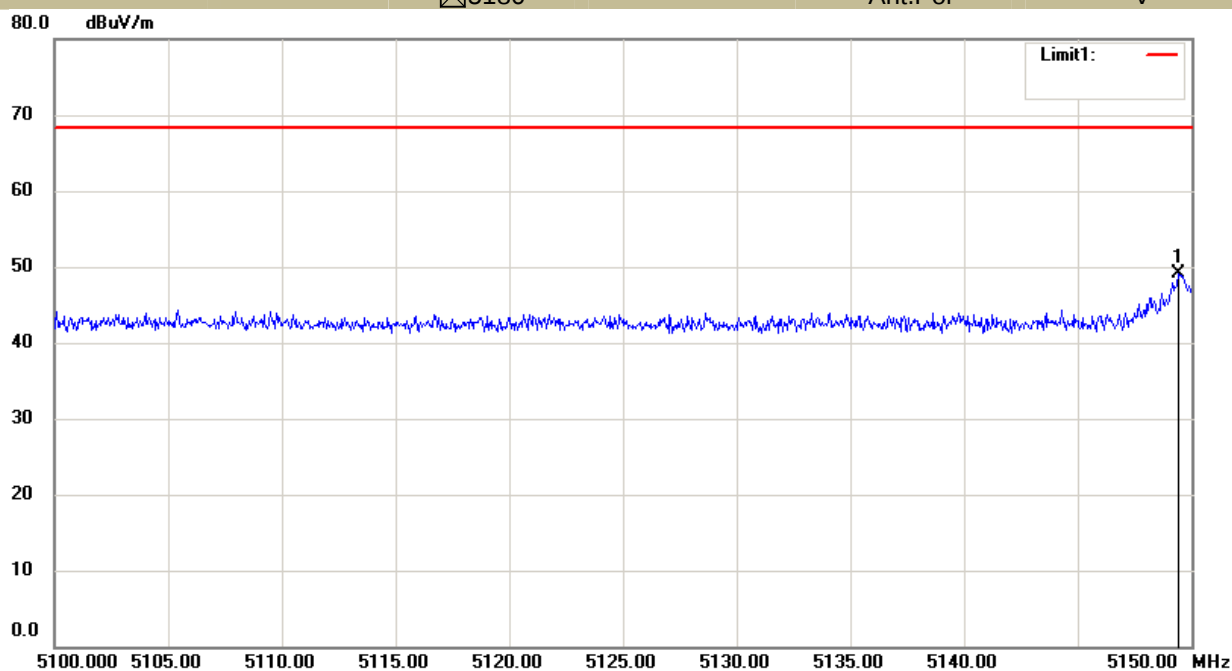

UNII Band I			
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)
	☒ 5240		Ant.Pol
			H

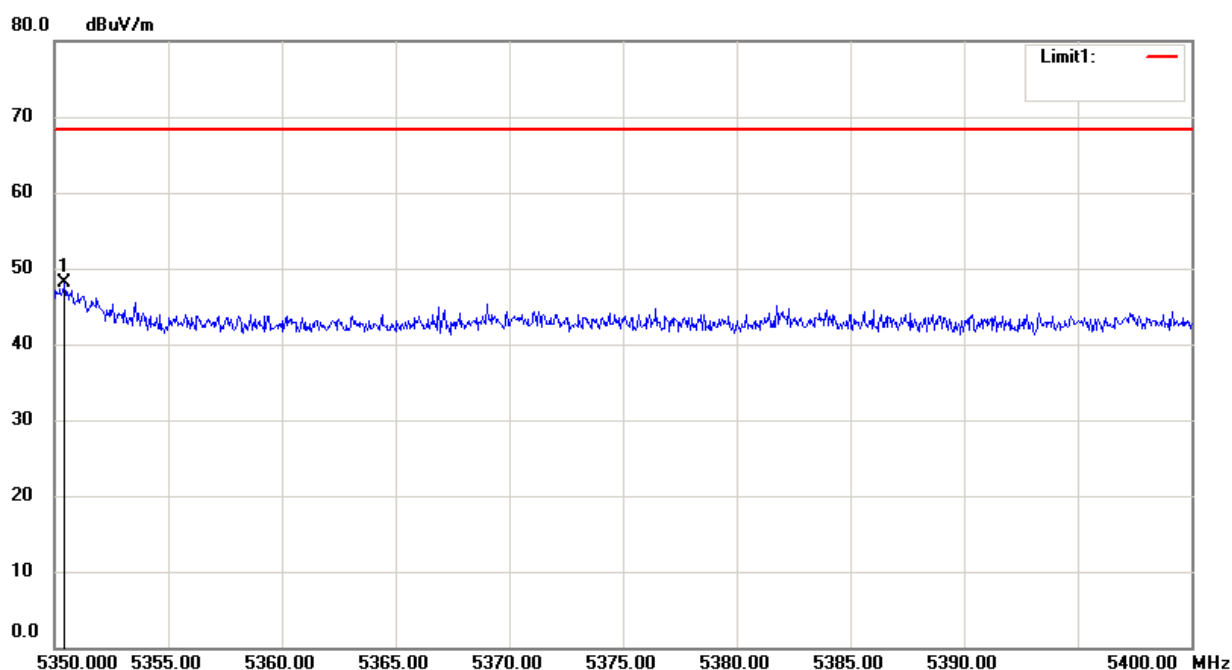

UNII Band I			
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)
	☒ 5240		Ant.Pol
			V

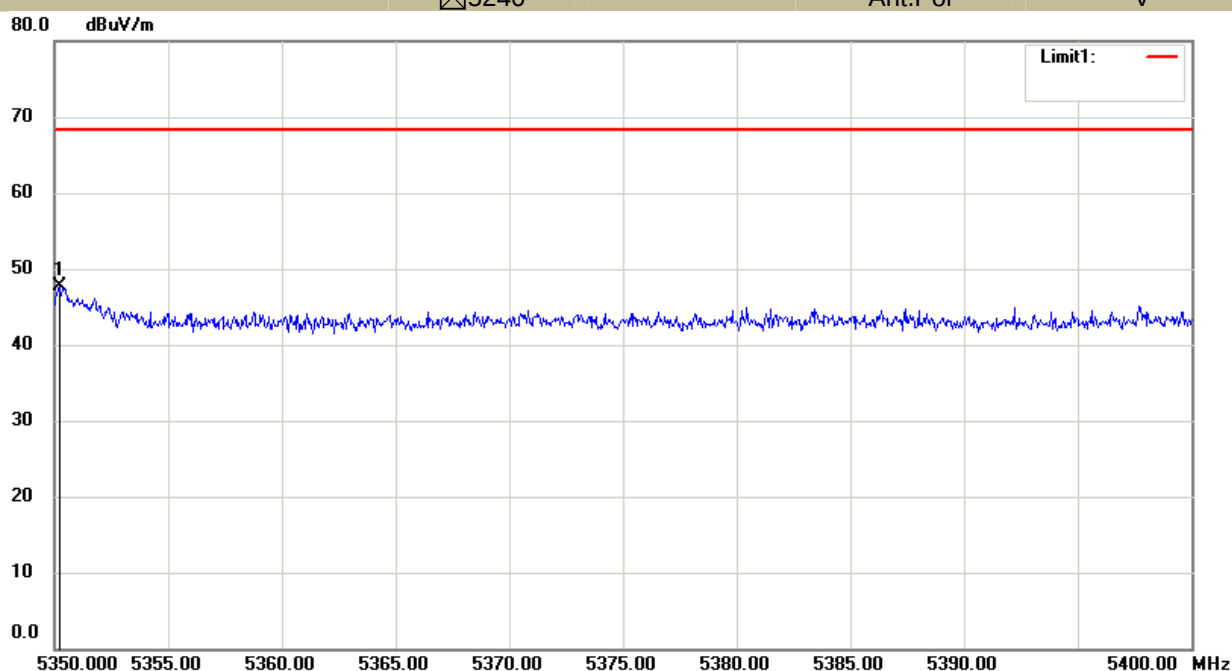

- ☒ For Undesirable radiated Spurious Emission in UNII Band III

All the modes 802.11a/n/ac has been tested and the worst result 802.11a recorded as below:

- ☒ Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Temperature :	28℃	Test Date :	June 09, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency(MHz):	5745

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
12853	V	50.12	-45.11	-27	-18.11
14257	V	51.06	-44.17	-27	-17.17
16502	V	52.65	-42.58	-27	-15.58
11956	H	50.09	-45.14	-27	-18.14
16937	H	51.48	-43.75	-27	-16.75
19358	H	52.32	-42.91	-27	-15.91

Temperature :	28℃	Test Date :	June 09, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency(MHz):	5785

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
12547	V	50.28	-44.95	-27	-17.95
14735	V	51.09	-44.14	-27	-17.14
16357	V	52.52	-42.71	-27	-15.71
12450	H	50.97	-44.26	-27	-17.26
19372	H	51.93	-43.30	-27	-16.30
20301	H	52.89	-42.34	-27	-15.34

Temperature :	28℃	Test Date :	June 09, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency(MHz):	5825

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
12830	V	51.03	-44.20	-27.00	-17.20
14193	V	51.73	-43.50	-27.00	-16.50
16956	V	52.65	-42.58	-27.00	-15.58
12351	H	51.08	-44.15	-27.00	-17.15
16250	H	51.81	-43.42	-27.00	-16.42
19782	H	52.32	-42.91	-27.00	-15.91

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77
d is the measurement distance in 3 meters

- ☒ Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz and 5350-5460MHz)

Temperature :	28℃	Test Date :	June 12, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency(MHz):	5745

Freq. (MHz)	Ant.Pol. H/V	PK (dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Margin (dB)	PK (dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Margin (dB)
5308.14	H	43.27	74	-30.73	32.45	54	-21.55
5320.35	V	41.90	74	-32.10	33.57	54	-20.43

Temperature :	28℃	Test Date :	June 12, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency(MHz):	5825

Freq. (MHz)	Ant.Pol. H/V	PK (dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Margin (dB)	PK (dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Margin (dB)
5322.46	H	42.37	74	-31.63	33.24	54	-20.76
5460.00	V	41.65	74	-32.35	32.68	54	-21.32

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

- ☒ Undesirable radiated Spurious Emission in band edge

Temperature :	28°C	Test Date :	June 12, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	5745


Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Verdict
5724.38	H	56.24	123.43	-67.19	PASS
5724.38	V	64.10	123.43	-59.33	PASS

Temperature :	28°C	Test Date :	June 12, 2017
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	5825


Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Verdict
5850.00	H	67.95	125.23	-57.28	PASS
5850.38	V	59.67	124.15	-64.48	PASS

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77
d is the measurement distance in 3 meters


Test Model	UNII Band III						
	Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz and 5350-5460MHz)						
	☒ 5745	☒ 802.11a	☐ 5785	☐ 802.11n(HT20)	☐ 5825	☐ 802.11n(HT40)	Ant.Pol H

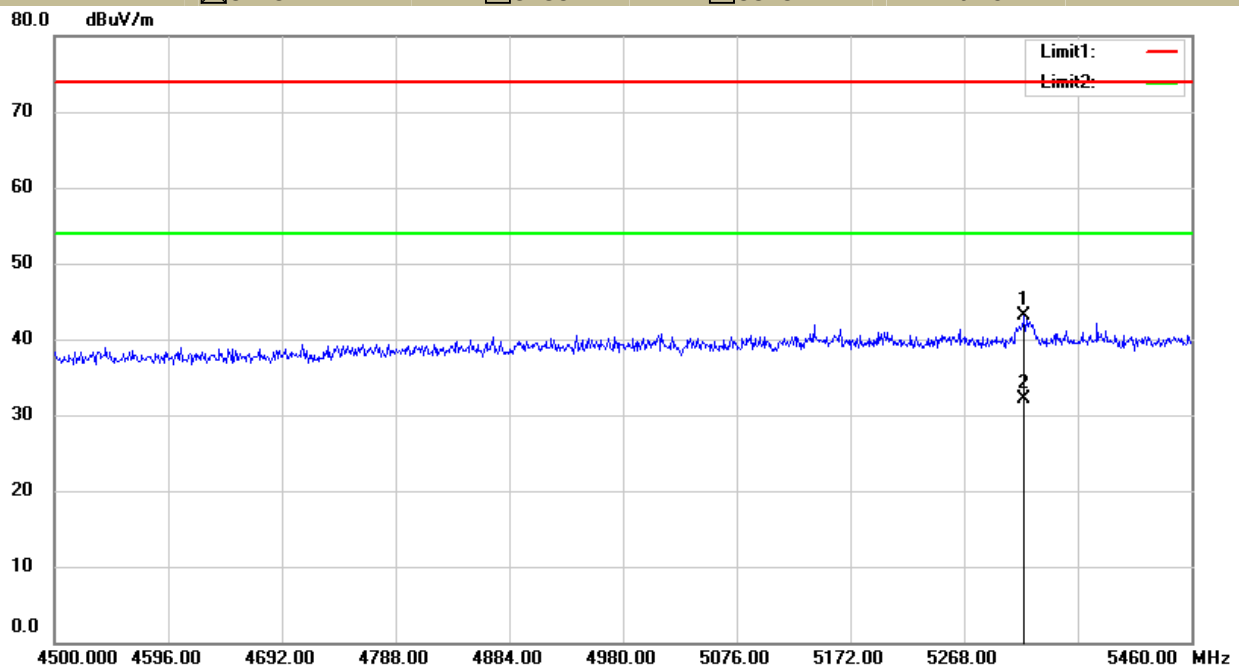


Test Model	UNII Band III						
	Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz and 5350-5460MHz)						
	☒ 5745	☒ 802.11a	☐ 5785	☐ 802.11n(HT20)	☐ 5825	☐ 802.11n(HT40)	Ant.Pol V

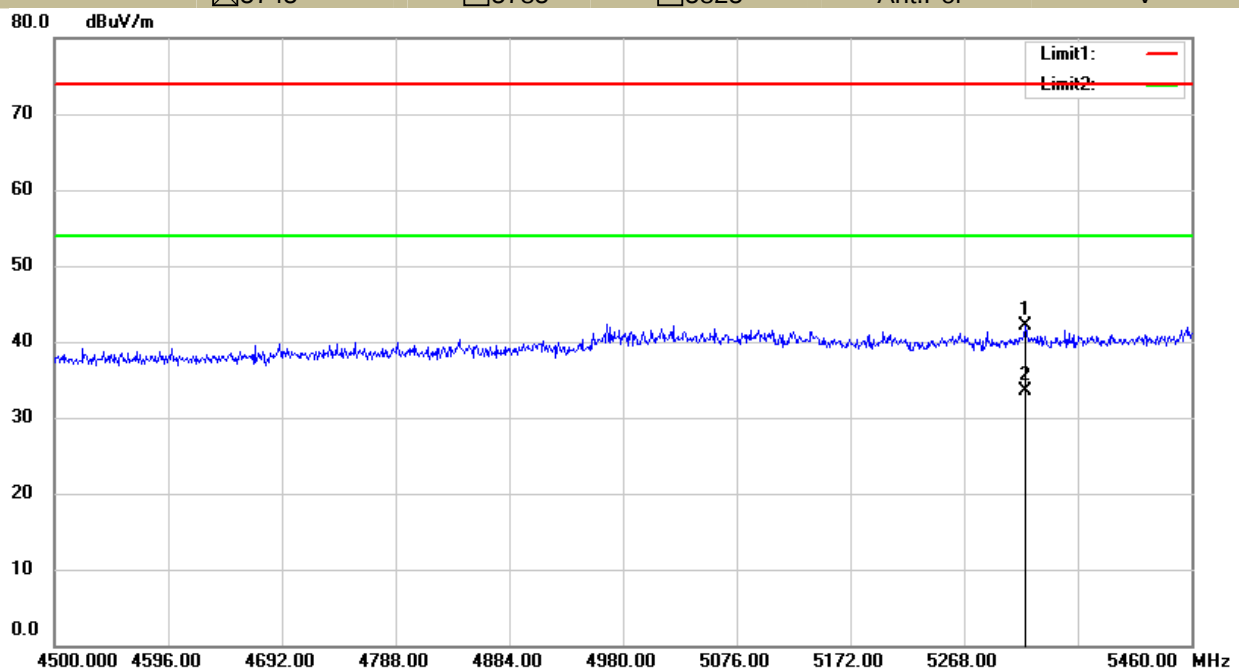


Test Model	UNII Band III					
	Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz and 5350-5460MHz)					
	☒ 5745	☒ 802.11a	☐ 5785	☐ 802.11n(HT20)	☐ 802.11n(HT40)	Ant.Pol H

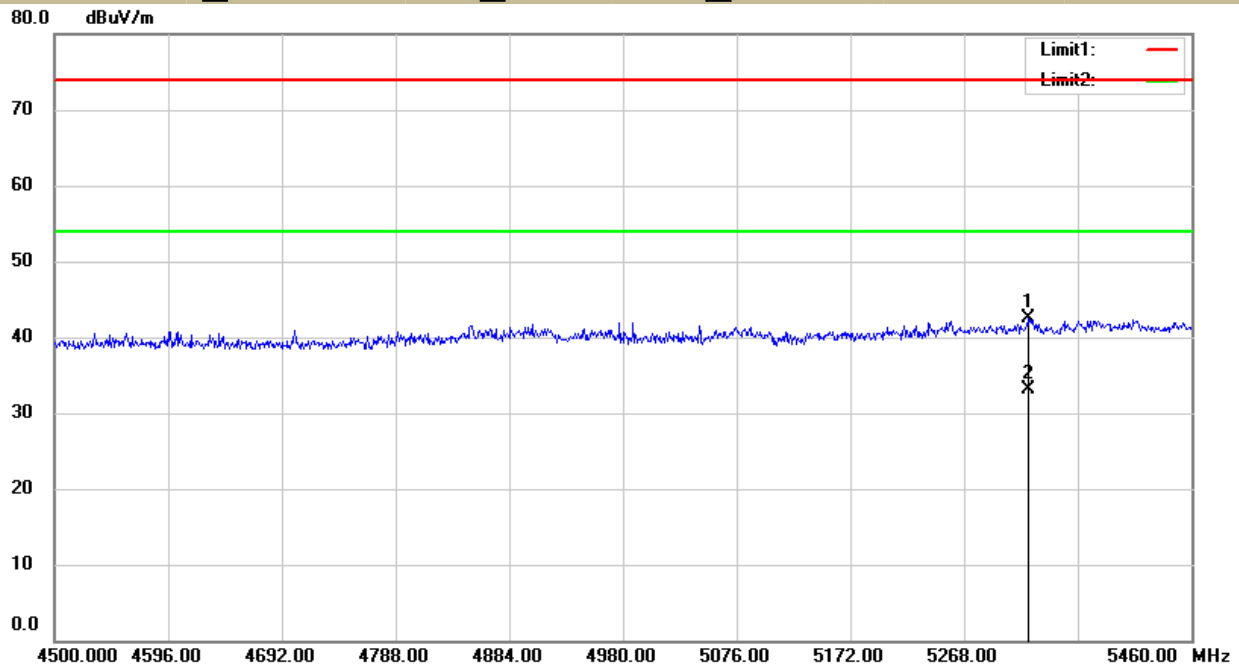


Test Model	UNII Band III					
	Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz and 5350-5460MHz)					
	☒ 5745	☒ 802.11a	☐ 5785	☒ 802.11n(HT20)	☐ 802.11n(HT40)	Ant.Pol V

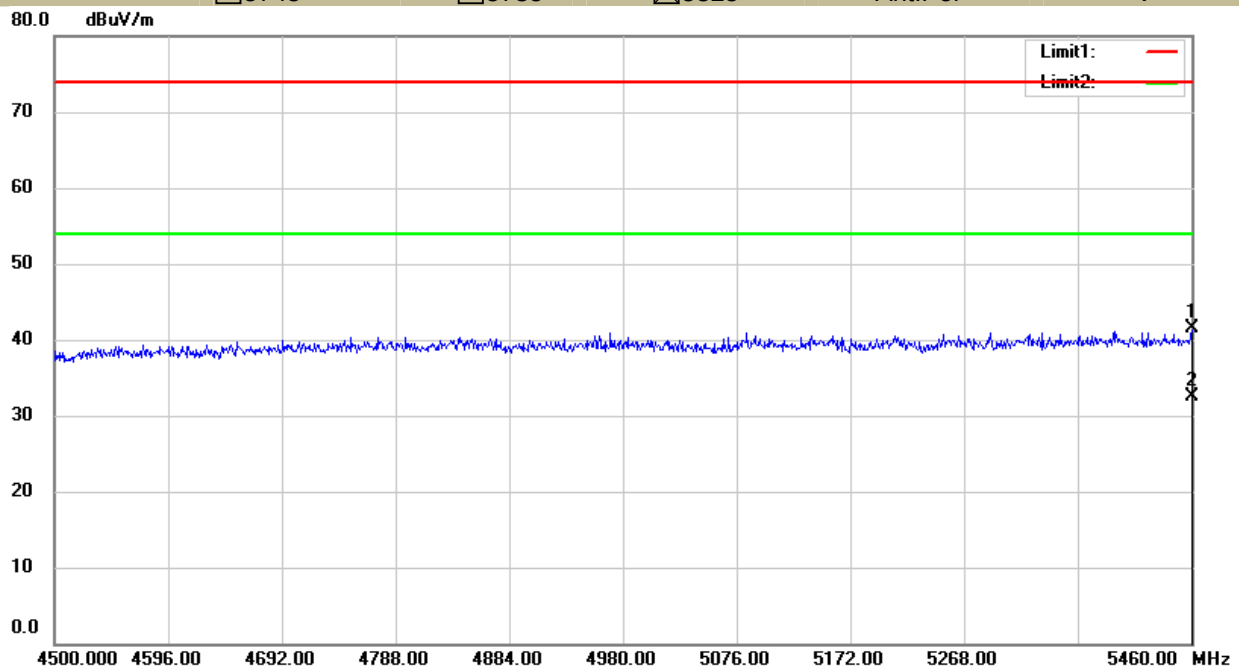


UNII Band III			
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)
	☒ 5745		Ant.Pol
			H

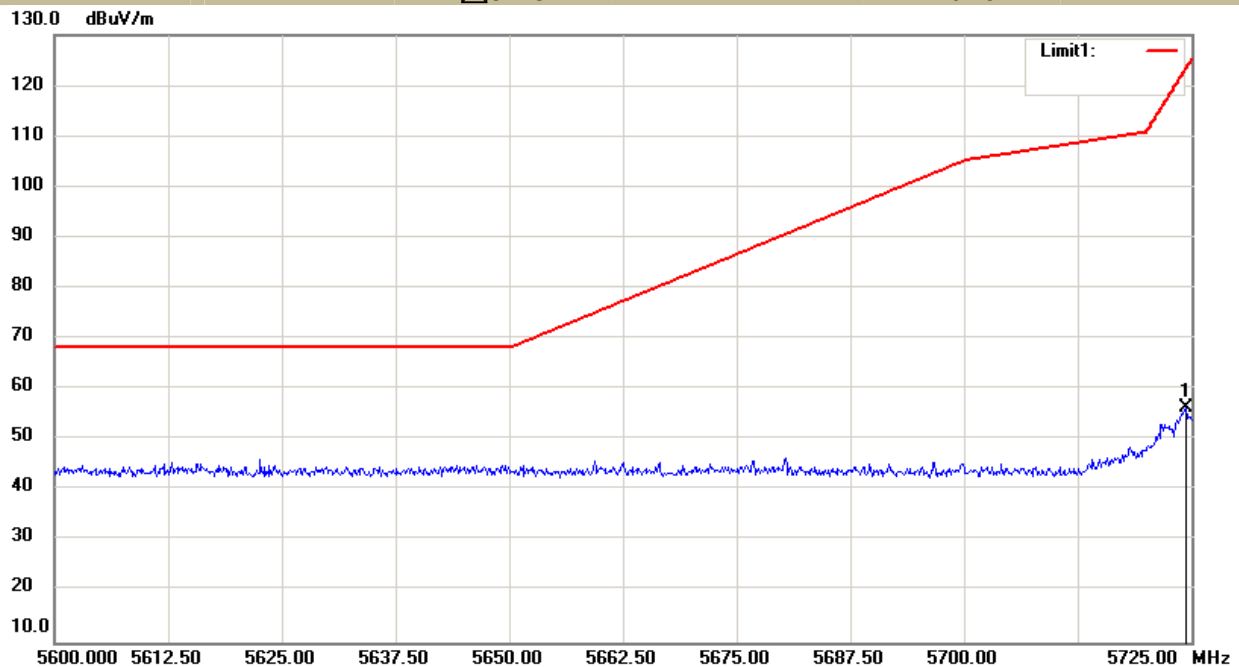

UNII Band III			
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)
	☒ 5745		Ant.Pol
			V

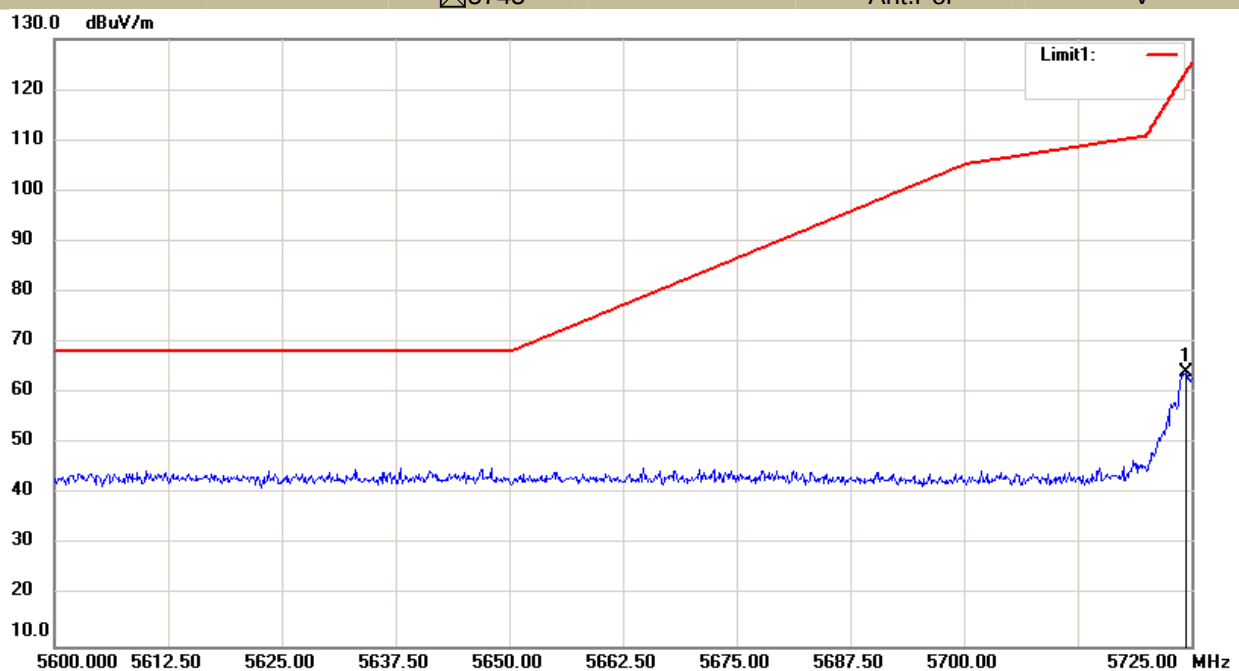


UNII Band III			
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)
	☒ 5825		Ant.Pol
			H

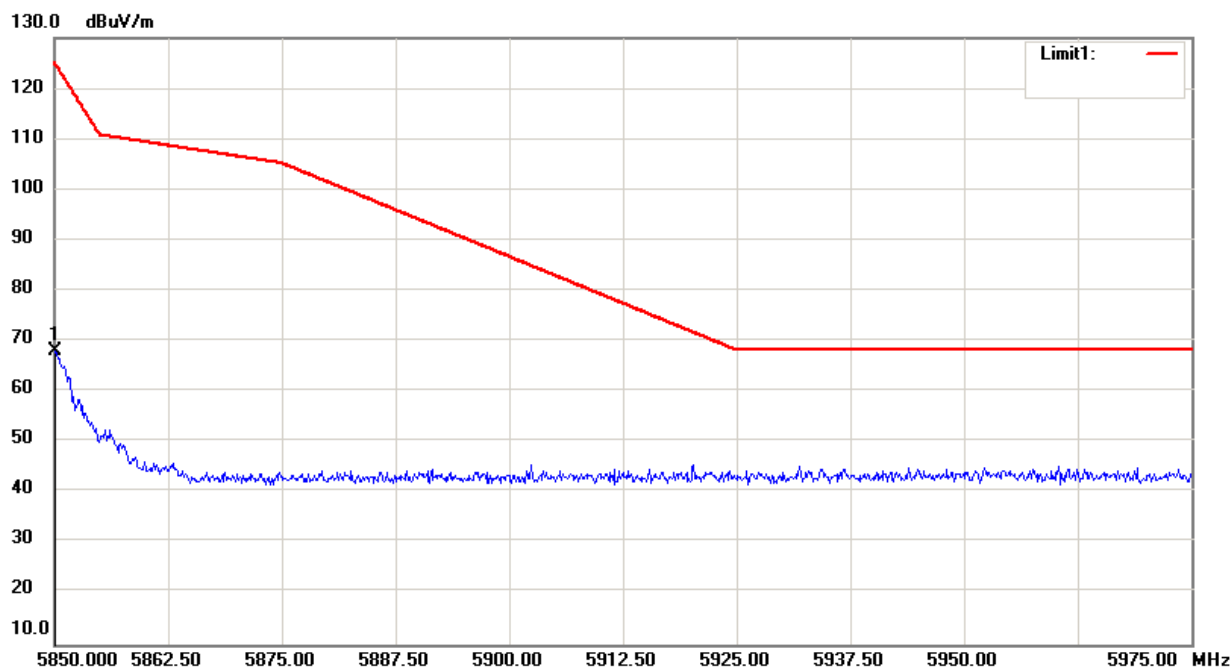

UNII Band III			
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge
	☒ 802.11a	☐ 802.11n(HT20)	☐ 802.11n(HT40)
	☒ 5825		Ant.Pol
			V




● Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)

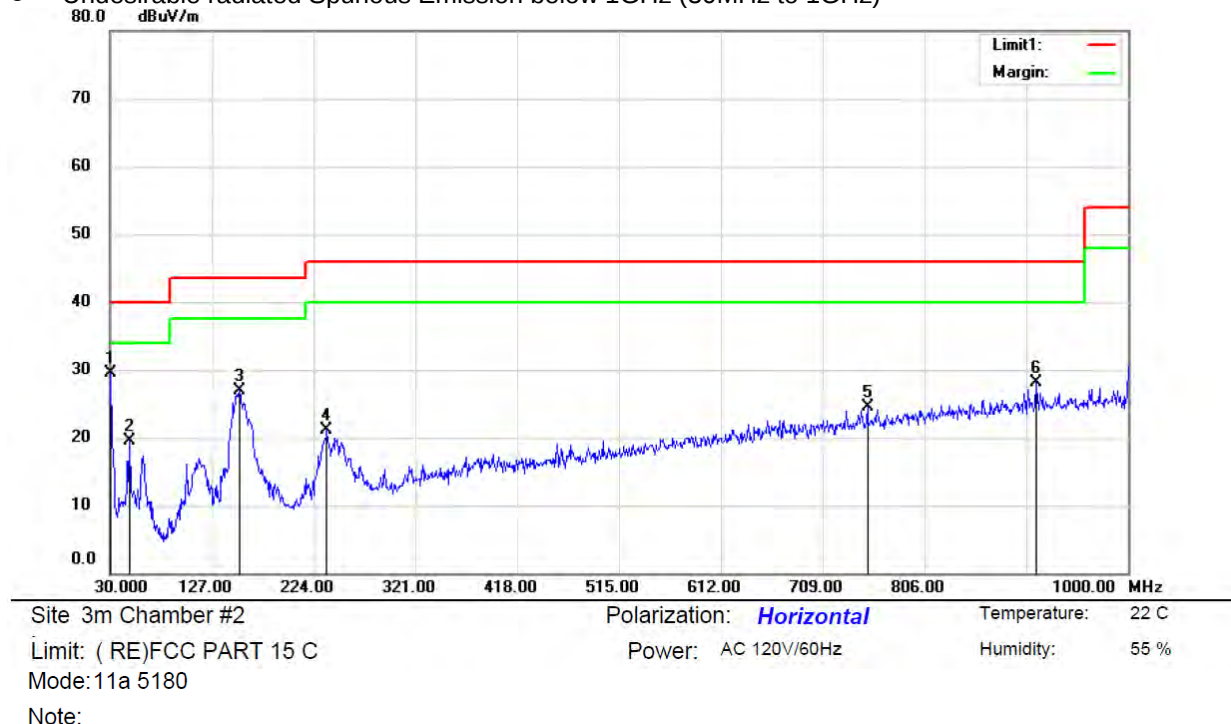

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	
										Comment
1	*	30.9700	46.77	-17.21	29.56	40.00	-10.44	QP		
2		48.4300	32.55	-13.12	19.43	40.00	-20.57	QP		
3		153.1900	44.93	-18.05	26.88	43.50	-16.62	QP		
4		236.6100	34.45	-13.38	21.07	46.00	-24.93	QP		
5		751.6800	26.46	-1.97	24.49	46.00	-21.51	QP		
6		912.7000	27.78	0.28	28.06	46.00	-17.94	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

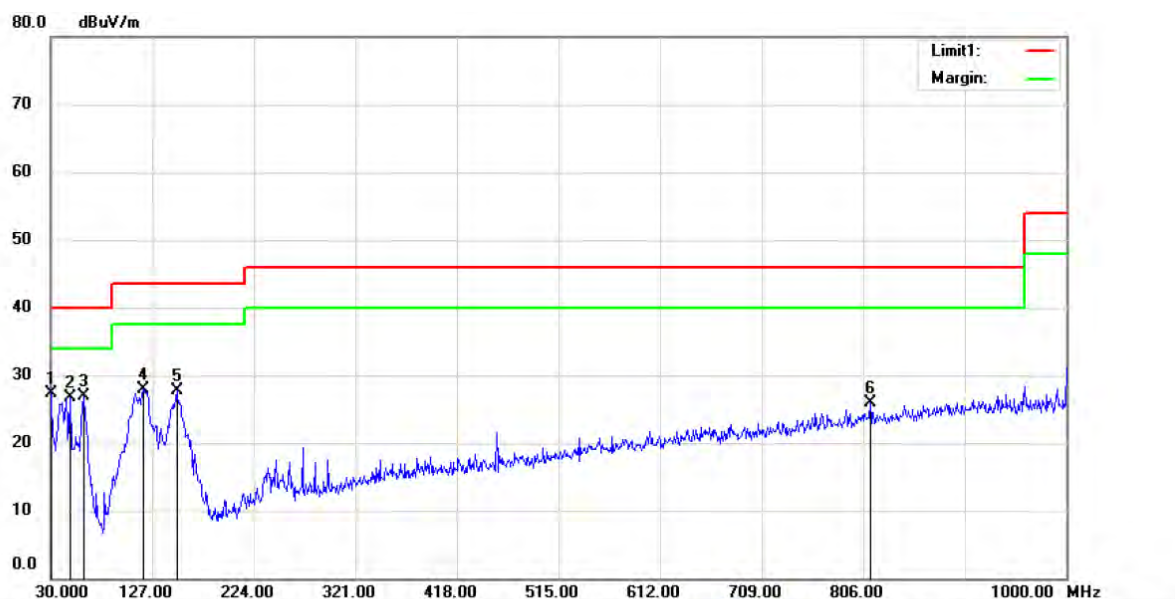


Site 3m Chamber #2
 Limit: (RE)FCC PART 15 C
 Mode: 11a 5180
 Note:

Polarization: *Vertical*
 Power: AC 120V/60Hz
 Temperature: 22 C
 Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	30.0000	44.40	-17.13	27.27	40.00	-12.73	QP		
2		48.4300	39.82	-13.12	26.70	40.00	-13.30	QP		
3		61.0400	42.35	-15.44	26.91	40.00	-13.09	QP		
4		118.2700	44.05	-16.09	27.96	43.50	-15.54	QP		
5		150.2800	45.92	-18.18	27.74	43.50	-15.76	QP		
6		812.7900	26.85	-0.92	25.93	46.00	-20.07	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

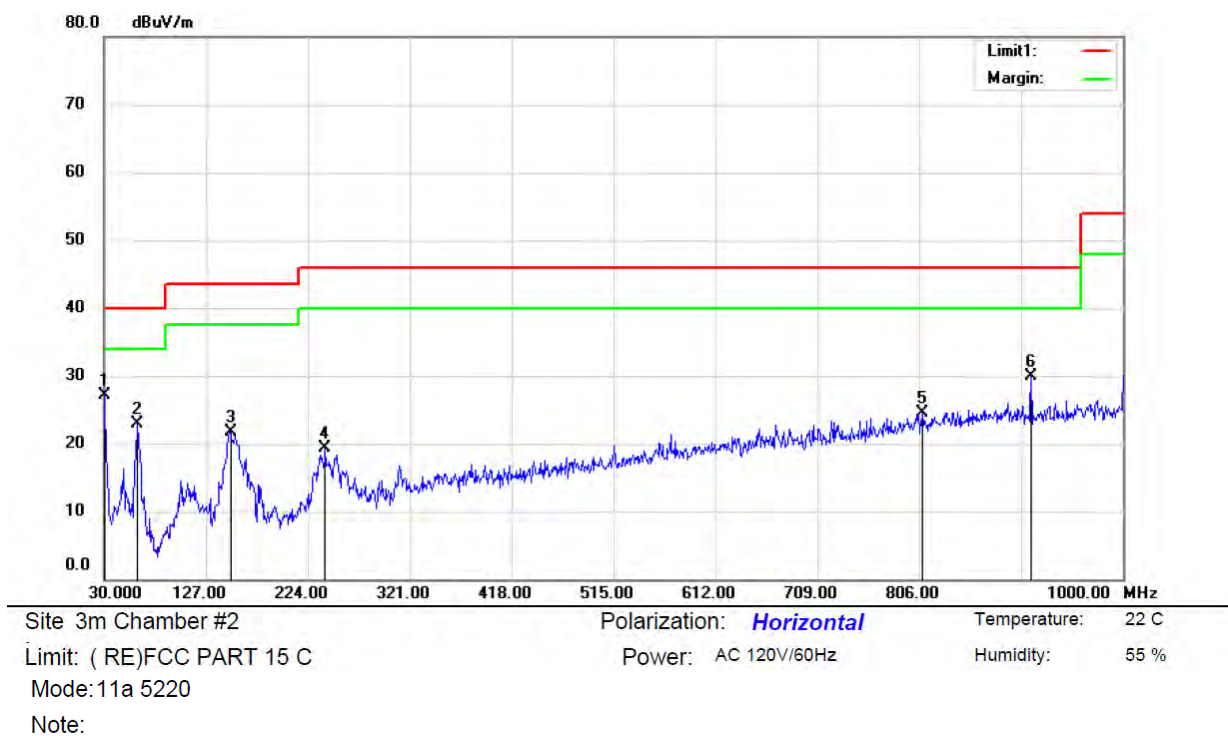

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	44.30	-17.13	27.17	40.00	-12.83	QP		
2		62.0100	38.39	-15.47	22.92	40.00	-17.08	QP		
3		150.2800	39.84	-18.18	21.66	43.50	-21.84	QP		
4		240.4900	32.54	-13.32	19.22	46.00	-26.78	QP		
5		808.9100	25.39	-0.97	24.42	46.00	-21.58	QP		
6		912.7000	29.66	0.28	29.94	46.00	-16.06	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

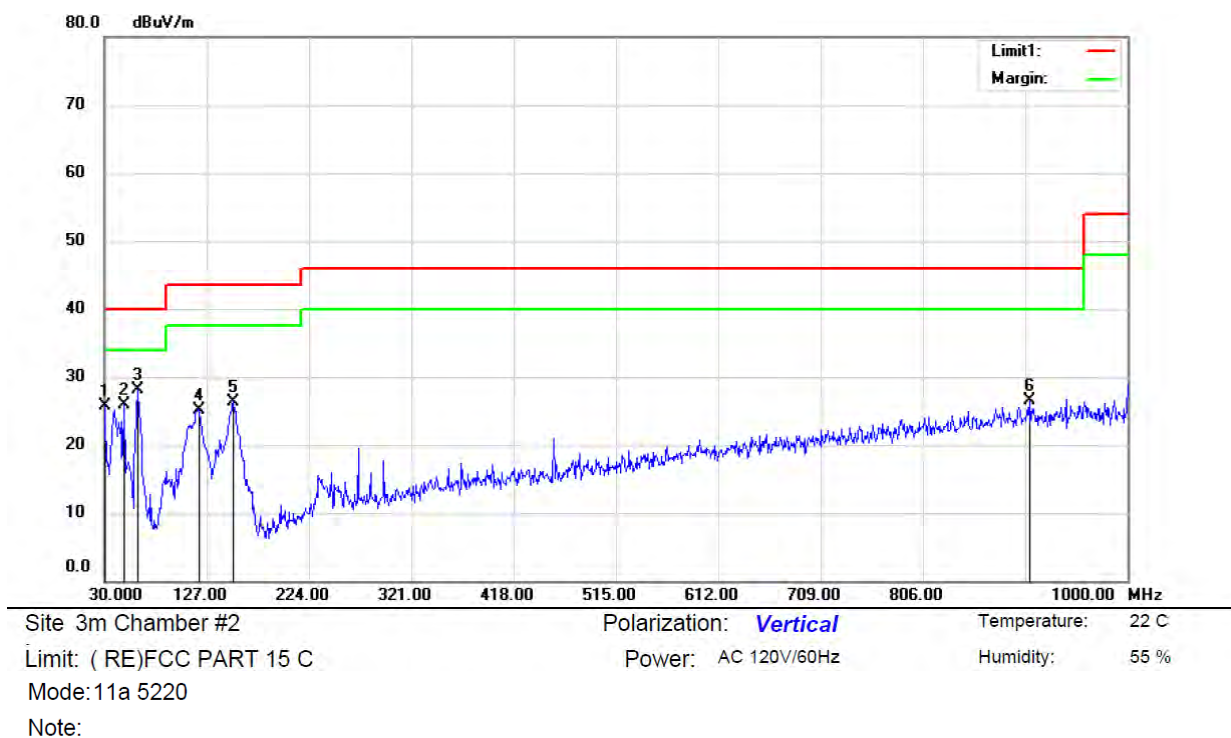

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		30.0000	42.88	-17.13	25.75	40.00	-14.25	QP		
2		48.4300	39.10	-13.12	25.98	40.00	-14.02	QP		
3	*	62.0100	43.49	-15.47	28.02	40.00	-11.98	QP		
4		119.2400	41.36	-16.21	25.15	43.50	-18.35	QP		
5		152.2200	44.34	-18.09	26.25	43.50	-17.25	QP		
6		907.8500	26.35	0.22	26.57	46.00	-19.43	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

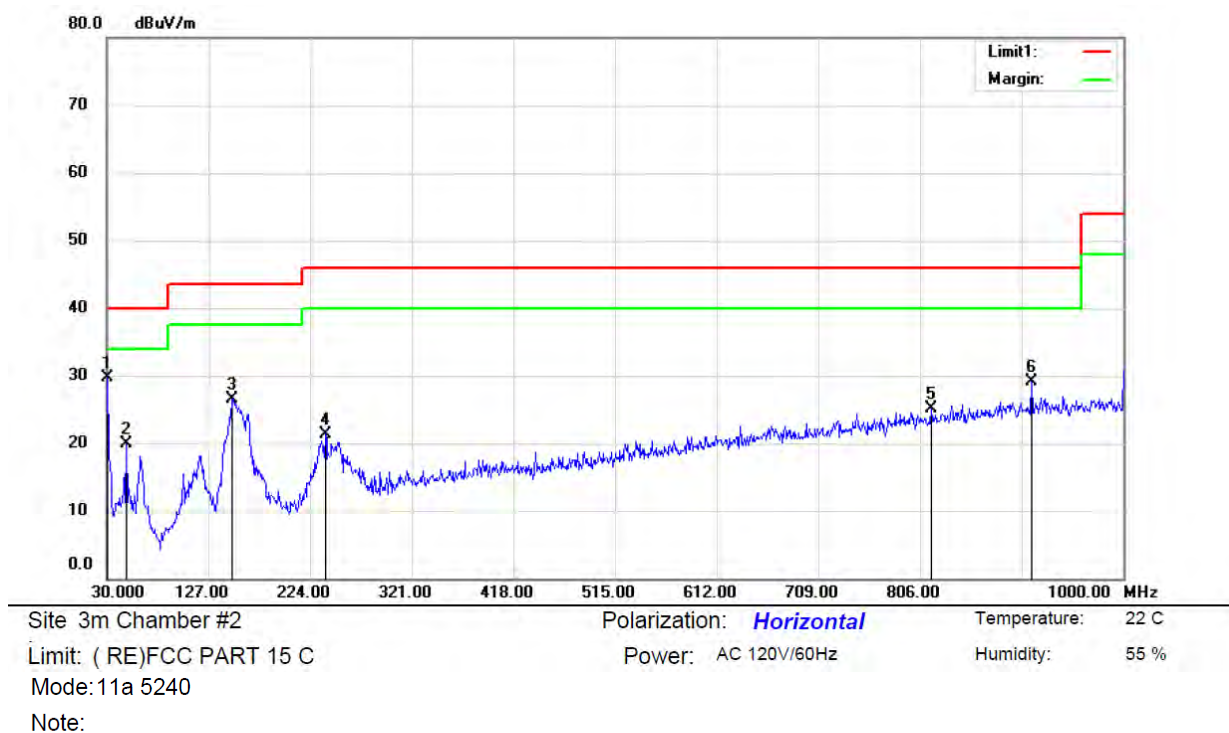

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	30.9700	46.91	-17.21	29.70	40.00	-10.30	QP		
2		48.4300	32.99	-13.12	19.87	40.00	-20.13	QP		
3		149.3100	44.72	-18.21	26.51	43.50	-16.99	QP		
4		238.5500	34.57	-13.34	21.23	46.00	-24.77	QP		
5		816.6700	25.90	-0.88	25.02	46.00	-20.98	QP		
6		912.7000	28.77	0.28	29.05	46.00	-16.95	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

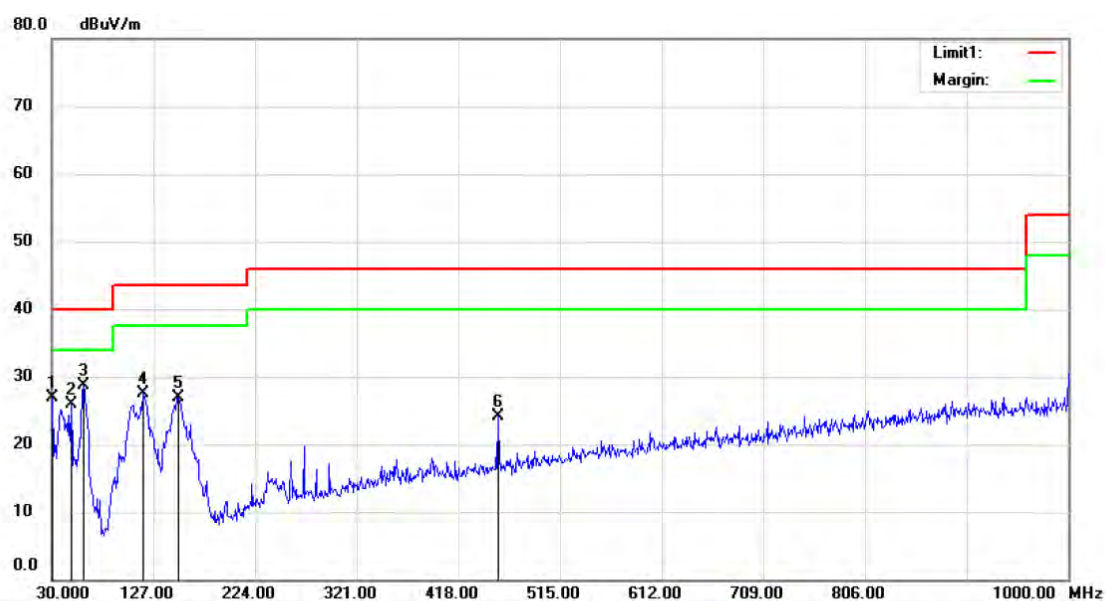


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 55 %
 Mode: 11a 5240
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		30.0000	43.97	-17.13	26.84	40.00	-13.16	QP		
2		48.4300	39.09	-13.12	25.97	40.00	-14.03	QP		
3	*	60.0700	44.16	-15.39	28.77	40.00	-11.23	QP		
4		117.3000	43.49	-15.97	27.52	43.50	-15.98	QP		
5		150.2800	45.14	-18.18	26.96	43.50	-16.54	QP		
6		455.8300	31.83	-7.81	24.02	46.00	-21.98	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

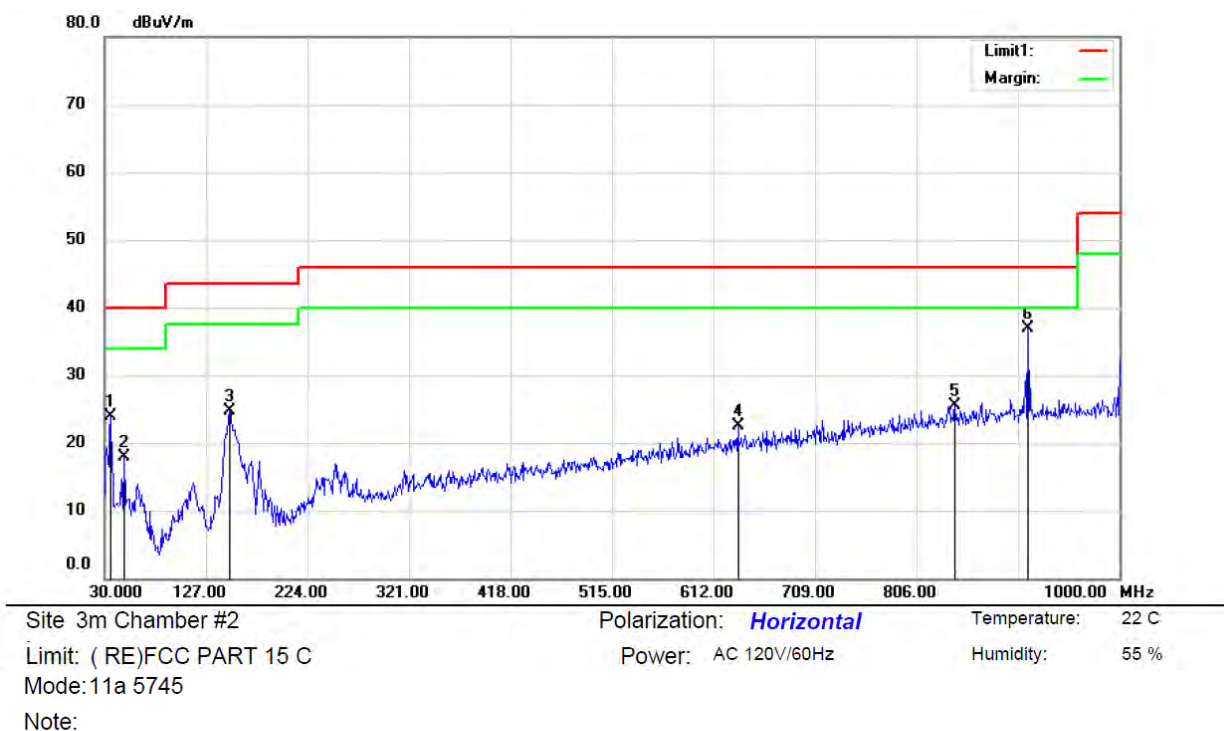

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		35.8200	40.30	-16.45	23.85	40.00	-16.15	QP		
2		48.4300	30.99	-13.12	17.87	40.00	-22.13	QP		
3		149.3100	42.95	-18.21	24.74	43.50	-18.76	QP		
4		635.2800	26.31	-3.90	22.41	46.00	-23.59	QP		
5		842.8600	26.05	-0.55	25.50	46.00	-20.50	QP		
6	*	912.7000	36.59	0.28	36.87	46.00	-9.13	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

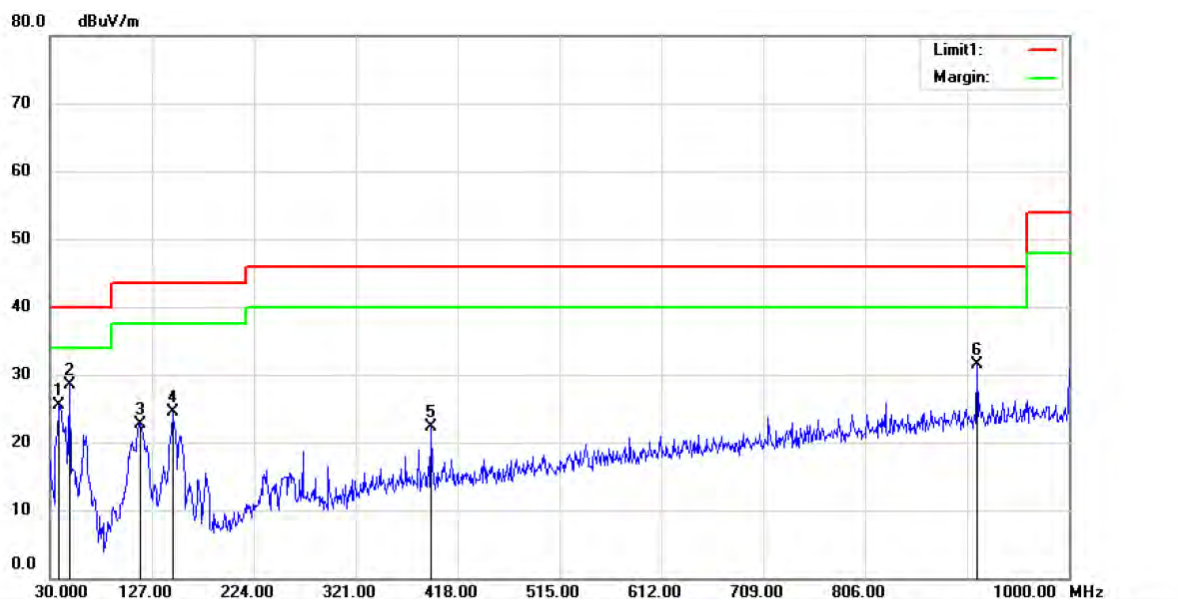


Site 3m Chamber #2
 Limit: (RE)FCC PART 15 C
 Mode:11a 5745
 Note:

Polarization: **Vertical**
 Power: AC 120V/60Hz
 Temperature: 22 C
 Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		38.7300	40.04	-14.50	25.54	40.00	-14.46	QP		
2	*	48.4300	41.72	-13.12	28.60	40.00	-11.40	QP		
3		116.3300	38.60	-15.85	22.75	43.50	-20.75	QP		
4		146.4000	42.79	-18.22	24.57	43.50	-18.93	QP		
5		392.7800	30.91	-8.59	22.32	46.00	-23.68	QP		
6		912.7000	31.15	0.28	31.43	46.00	-14.57	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

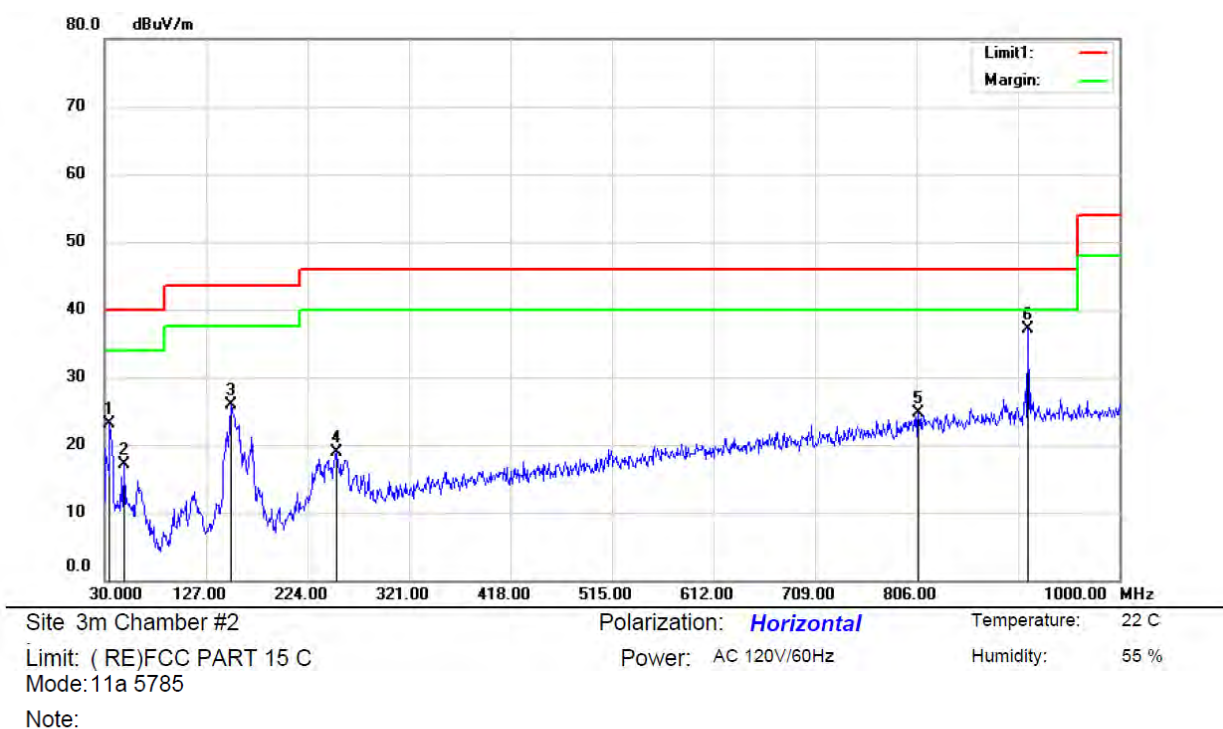

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		34.8500	39.78	-16.66	23.12	40.00	-16.88	QP		
2		48.4300	30.28	-13.12	17.16	40.00	-22.84	QP		
3		151.2500	44.12	-18.14	25.98	43.50	-17.52	QP		
4		252.1300	32.04	-13.06	18.98	46.00	-27.02	QP		
5		807.9400	25.63	-0.98	24.65	46.00	-21.35	QP		
6	*	912.7000	36.82	0.28	37.10	46.00	-8.90	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

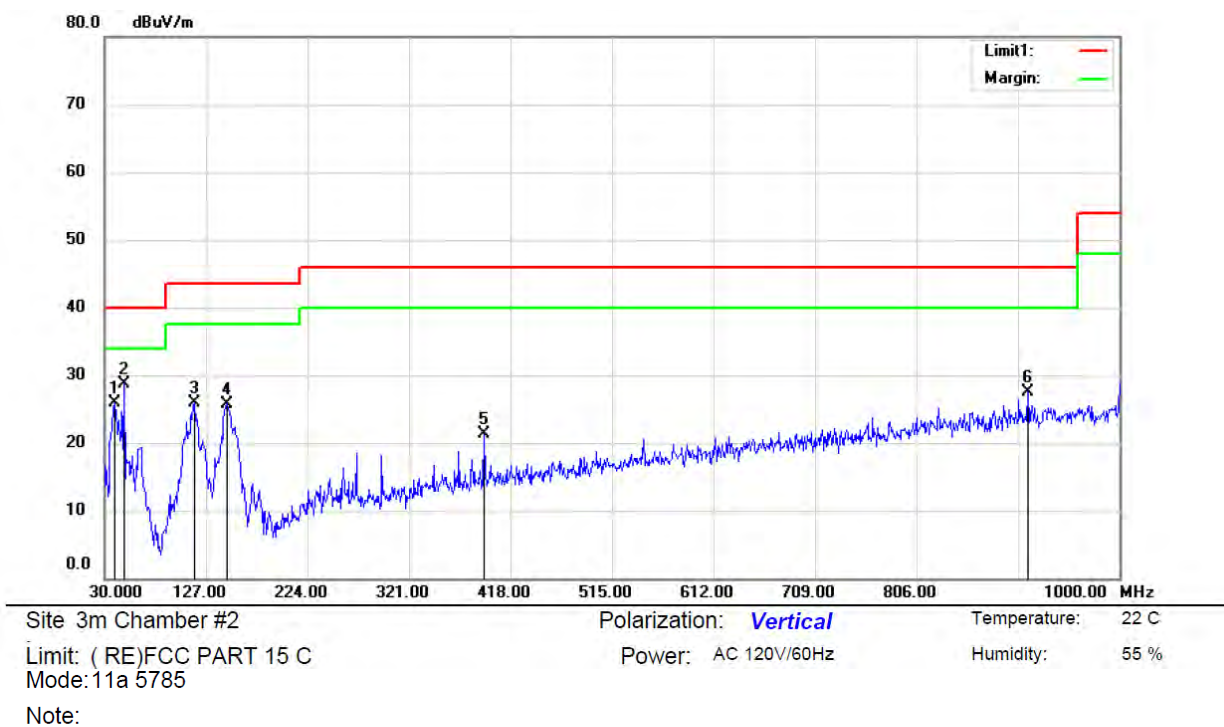

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		39.7000	40.15	-14.30	25.85	40.00	-14.15	QP		
2	*	48.4300	41.87	-13.12	28.75	40.00	-11.25	QP		
3		115.3600	41.68	-15.74	25.94	43.50	-17.56	QP		
4		146.4000	44.02	-18.22	25.80	43.50	-17.70	QP		
5		392.7800	29.97	-8.59	21.38	46.00	-24.62	QP		
6		912.7000	27.17	0.28	27.45	46.00	-18.55	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

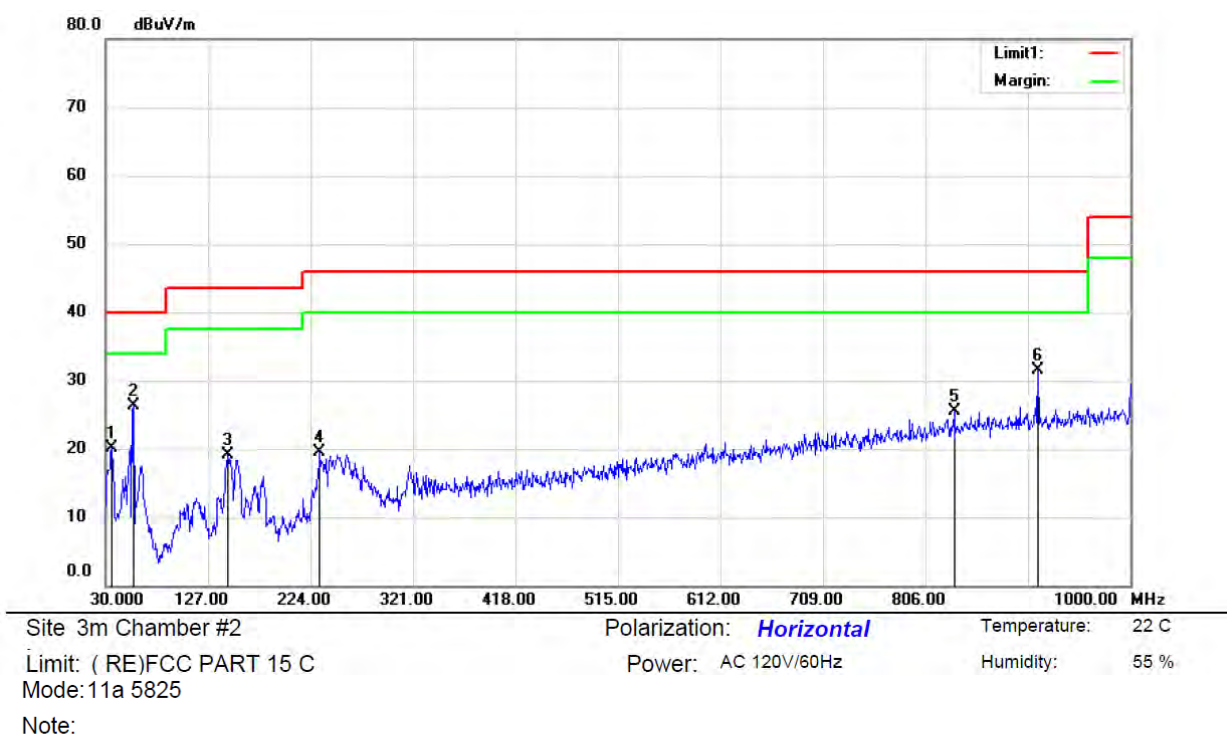

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		35.8200	36.61	-16.45	20.16	40.00	-19.84	QP		
2	*	56.1900	40.96	-14.71	26.25	40.00	-13.75	QP		
3		145.4300	37.32	-18.23	19.09	43.50	-24.41	QP		
4		232.7300	32.99	-13.43	19.56	46.00	-26.44	QP		
5		833.1600	26.14	-0.67	25.47	46.00	-20.53	QP		
6		912.7000	31.27	0.28	31.55	46.00	-14.45	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

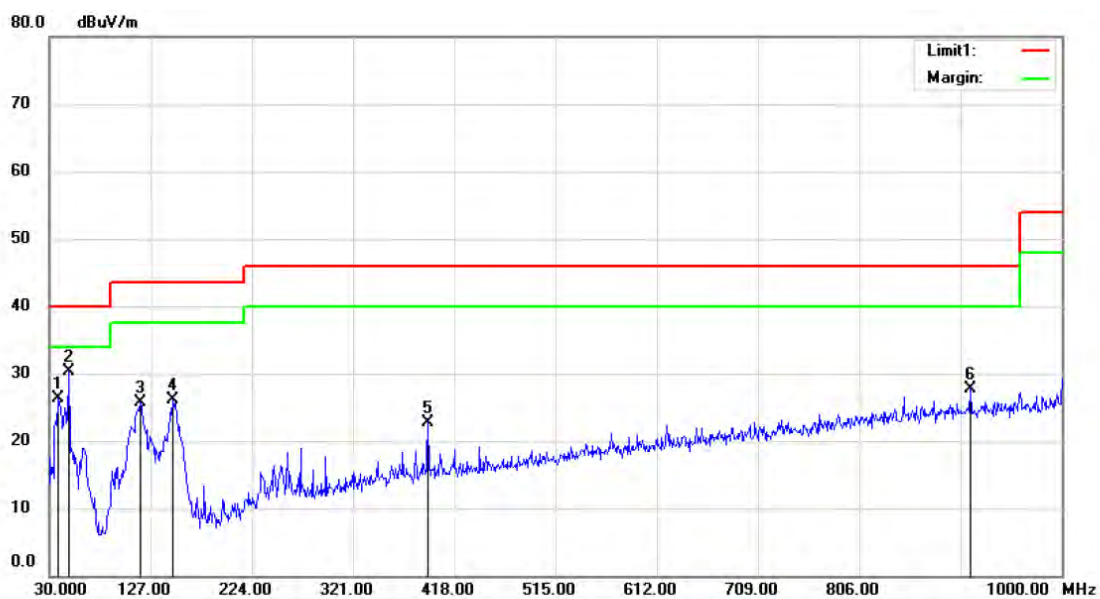

Site 3m Chamber #2

Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 55 %

Mode: 11a 5825

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		38.7300	40.84	-14.50	26.34	40.00	-13.66	QP		
2	*	48.4300	43.49	-13.12	30.37	40.00	-9.63	QP		
3		117.3000	41.63	-15.97	25.66	43.50	-17.84	QP		
4		148.3400	44.33	-18.21	26.12	43.50	-17.38	QP		
5		392.7800	31.35	-8.59	22.76	46.00	-23.24	QP		
6		912.7000	27.40	0.28	27.68	46.00	-18.32	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

8.6 POWER LINE CONDUCTED EMISSIONS

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 6.3 conducted emission test setup

8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.


Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

Pass

We test the EUT at 120V and 240V, and show the worst result as bellow.

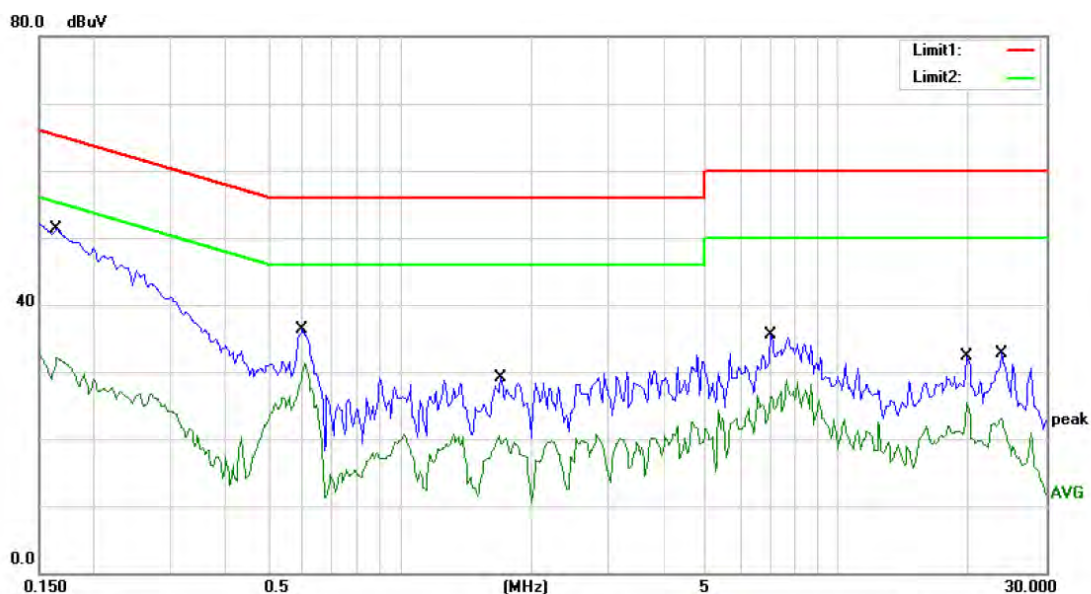

Site Conduction #1

Limit: (CE)FCC PART 15 C

Mode: WIFI 5G

Note:

Phase: **L1**


Power: AC 120V/60Hz

Temperature: 22

Humidity: 55 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1650	51.29	0.00	51.29	65.21	-13.92	QP	
2		0.1650	32.07	0.00	32.07	55.21	-23.14	AVG	
3		0.6000	36.26	0.00	36.26	56.00	-19.74	QP	
4		0.6000	31.37	0.00	31.37	46.00	-14.63	AVG	
5		1.7000	29.05	0.00	29.05	56.00	-26.95	QP	
6		1.7000	20.59	0.00	20.59	46.00	-25.41	AVG	
7		7.0600	35.42	0.00	35.42	60.00	-24.58	QP	
8		7.0600	28.82	0.00	28.82	50.00	-21.18	AVG	
9		19.7100	32.29	0.00	32.29	60.00	-27.71	QP	
10		19.7100	25.46	0.00	25.46	50.00	-24.54	AVG	
11		23.6800	32.61	0.00	32.61	60.00	-27.39	QP	
12		23.6800	23.15	0.00	23.15	50.00	-26.85	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: HE

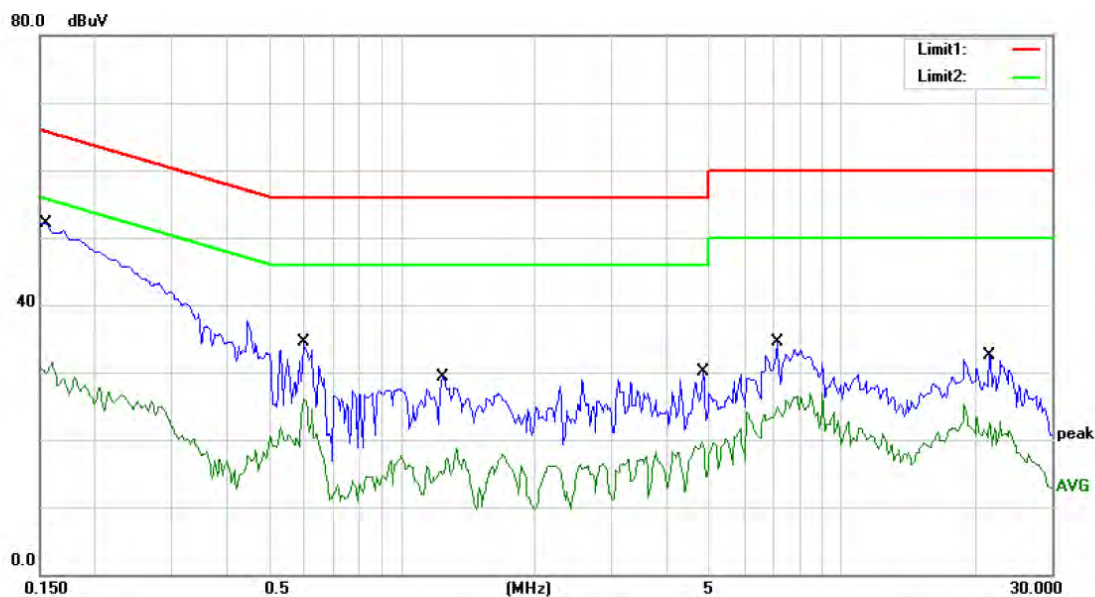

Site Conduction #1

Phase: **N**

Temperature: 22

Limit: (CE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 55 %

Mode: WIFI 5G

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1550	52.17	0.00	52.17	65.73	-13.56	QP	
2		0.1550	31.46	0.00	31.46	55.73	-24.27	AVG	
3		0.5950	34.53	0.00	34.53	56.00	-21.47	QP	
4		0.5950	26.18	0.00	26.18	46.00	-19.82	AVG	
5		1.2400	29.30	0.00	29.30	56.00	-26.70	QP	
6		1.2400	18.64	0.00	18.64	46.00	-27.36	AVG	
7		4.8300	30.06	0.00	30.06	56.00	-25.94	QP	
8		4.8300	20.13	0.00	20.13	46.00	-25.87	AVG	
9		7.1100	34.42	0.00	34.42	60.00	-25.58	QP	
10		7.1100	27.00	0.00	27.00	50.00	-23.00	AVG	
11		21.7000	32.54	0.00	32.54	60.00	-27.46	QP	
12		21.7000	25.39	0.00	25.39	50.00	-24.61	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: HE

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

PASS.

The two EUT'S antenna are Shrapnel antenna. The antenna's gain is 2 dBi, and the antenna can't be replaced by the user which in accordance to section 15.203, please refer to the photos.