


FORMAT FOR SPECIFICATION AND DRAWING

REVISIONS ARE INDICATED BY TRIANGLED LETTERS			3RD ANGLE 	MATERIAL OR SOURCE SEE NOTE	GENERAL TOLERANCE ± -	REV	DESCRIPTION	DATE
			SCALE N.T.S.	FINISH SEE NOTE	ONE DECIMAL PL ± -			
					TWO DECIMAL PL ± -			
					ANGULAR ± -			
ALL DIMENSIONS IN MILLIMETRES						A	INITIAL ISSUE	28 SEP 2018
						B	UPDATED BUILD NUMBER	08 NOV 2018
						C	UPDATED MODEL NAME	08 FEB 2019
						D	ADDED CERTIFICATION NUMBERS AND UPDATED PRINTING LAYOUT	16 APR 2019
						E	UPDATED MODEL NAME TO NUMBER, 'CONTAINS' TEXT.	02 MAY 2019
						DRAWN BY SYED SHARFUDEEN		DATE 02 MAY 2019
						APPROVED BY (ORIGINATOR'S DEPT HEAD) NATHAN		
						RELEASED BY (ORIGINATOR) SYED SHARFUDEEN		
								
						TITLE PRODUCT ID LABEL, BB		
						CUSTOMER OMNITRACS		
						SPEC OR DWG NUMBER -		SHT 1 1 SHT

QCLB003500
(LABEL WITH OMNITRACS, NOM, NYCE LOGO)

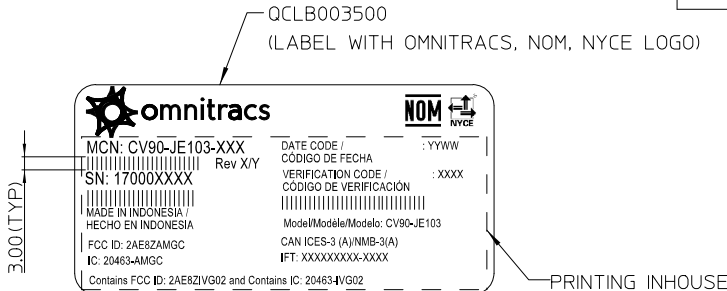

PRINTING INHOUSE

OMNITRACS PART NUMBER FOR IVG LTE — MCN: CV90-JE103-XXX
(ONLY PART NUMBER, NOT INLCUDE REV) — : YYWW

MCN BARCODE —
SN: 17000XXXX

SN BARCODE —

FCC AND IC CERTIFICATION —
FCC ID: 2AE8ZAMGC
IC: 20463-AMGC
Contains FCC ID: 2AE8ZIVG02 and Contains IC: 20463-IVG02

DATE CODE / CÓDIGO DE FECHA : YYWW
VERIFICATION CODE / CÓDIGO DE VERIFICACIÓN : XXXX
Model/Modèle/Modelo: CV90-JE103

CAN ICES-3 (A)/NMB-3(A)
IFT: XXXXXXXX-XXXX

2 DIGIT YEAR
2 DIGIT WEEK

VERIFICATION CODE NO.
4 DIGIT VERIFICATION CODE DERIVE FROM ALGORITHM APPLIED ON 9 DIGIT SERIAL NUMBER

BARCODE (VERIFICATION CODE NO.)

FCC AND IC CERTIFICATION

NOTES :

1. BAR CODE SHALL BE CODE 39. BAR WIDTH RATIO 2:1 HEIGHT 3.00 MINIMUM.
THERE SHALL BE NO VOIDS OR SPOTS GREATER THAN .05 WIDE.
QUIET ZONE OF 1.90 MINIMUM MUST BE MAINTAINED FROM START AND END OF BARCODE IMAGE.

2. PRINT LABEL TEXT SCALEABLE, COLOR BLACK, TEXT TYPE : ARIAL, HELVETICA.

3. REVISION LETTER/NUMBER MUST BE "HUMAN READABLE".

4. ALL PRINTED TEXT AND BAR CODE SHALL BE PERMANENT, RESISTANT TO SMEARING.

5. REFER TO SEPARATE DRAWING FOR BLANK LABEL MATERIAL SPEC.

6. THIS PART MUST COMPLY WITH ROHS 2011/65/EU.

NOTES :

1. BAR CODE SHALL BE CODE 39. BAR WIDTH RATIO 2:1 HEIGHT 3.00 MINIMUM. THERE SHALL BE NO VOIDS OR SPOTS GREATER THAN .05 WIDE. QUIET ZONE OF 1.90 MINIMUM MUST BE MAINTAINED FROM START AND END OF BARCODE IMAGE.
2. PRINT LABEL TEXT SCALEABLE, COLOR BLACK, TEXT TYPE : ARIAL, HELVETICA.
3. REVISION LETTER/NUMBER MUST BE "HUMAN READABLE".
4. ALL PRINTED TEXT AND BAR CODE SHALL BE PERMANENT, RESISTANT TO SMEARING.
5. REFER TO SEPARATE DRAWING FOR BLANK LABEL MATERIAL SPEC.
6. THIS PART MUST COMPLY WITH ROHS 2011/65/EU.