



# FCC Test Report

## Part 15 subpart C

### Client Information:

Applicant : Shenzhen Pakesen Electronics Co.,Ltd.  
Applicant add. : No.15,the First Industrial Park,Junquan Street,  
Xikeng Community,Shenzhen,China.

### EUT Information:

EUT Name : Bluetooth headset  
Model No. : M517-BT  
Brand Name : Pakesn  
FCC ID : 2AE9WM517-BT

### Prepared By:

ATS Electronic Technology Co., Ltd.  
Add. : 3/F, Building A, No. 1 Hedong Three Road, Jinxia Communityt, Changan Town,  
DongGuan City, GuangDong, P.R.China  
Date of Receipt: Mar. 12, 2016      Date of Test: Mar. 12~17, 2016  
Date of Issue: Mar. 18, 2016      Test Result: **Pass**

### Test procedure used: ANSI C63.4-2009

This device described above has been tested by ATS Electronic Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

\*This test report must not be used by the client to claim product endorsement by any agency of the U.S. government.

Reviewed by: Vera Wang

Approved by: Simon Zeng



# 1 Contents

|                                                          | Page      |
|----------------------------------------------------------|-----------|
| <b>COVER PAGE</b>                                        |           |
| <b>1 CONTENTS .....</b>                                  | <b>2</b>  |
| <b>2 TEST SUMMARY .....</b>                              | <b>4</b>  |
| 2.1 COMPLIANCE WITH FCC PART 15 SUBPART C .....          | 4         |
| 2.2 MEASUREMENT UNCERTAINTY .....                        | 4         |
| <b>3 GENERAL INFORMATION .....</b>                       | <b>5</b>  |
| 3.1 GENERAL DESCRIPTION OF EUT .....                     | 5         |
| 3.2 TEST LOCATION .....                                  | 6         |
| 3.3 DESCRIPTION OF TEST CONDITIONS .....                 | 7         |
| 3.4 EUT PERIPHERAL LIST .....                            | 8         |
| 3.5 TEST PERIPHERAL LIST .....                           | 8         |
| <b>4 EQUIPMENTS LIST FOR ALL TEST ITEMS .....</b>        | <b>9</b>  |
| <b>5 TEST RESULT .....</b>                               | <b>10</b> |
| 5.1 ANTENNA REQUIREMENT .....                            | 10        |
| 5.1.1 Standard requirement .....                         | 10        |
| 5.1.2 EUT Antenna .....                                  | 10        |
| 5.2 CONDUCTION EMISSIONS MEASUREMENT .....               | 11        |
| 5.2.1 Applied procedures / Limit .....                   | 11        |
| 5.2.2 Test procedure .....                               | 11        |
| 5.2.3 Test setup .....                                   | 11        |
| 5.2.4 Test results .....                                 | 12        |
| 5.3 RADIATED EMISSIONS MEASUREMENT .....                 | 14        |
| 5.3.1 Applied procedures / Limit .....                   | 14        |
| 5.3.2 Test setup .....                                   | 15        |
| 5.3.3 Test procedure .....                               | 17        |
| 5.3.4 Test Result .....                                  | 18        |
| 5.3.5 TEST RESULTS (Restricted Bands Requirements) ..... | 27        |
| 5.4 BANDWIDTH TEST .....                                 | 29        |
| 5.4.1 Applied procedures / Limit .....                   | 29        |
| 5.4.2 Test procedure .....                               | 29        |
| 5.4.3 Deviation from standard .....                      | 29        |
| 5.4.4 Test setup .....                                   | 29        |
| 5.4.5 Test results .....                                 | 30        |
| 5.5 CARRIER FREQUENCIES SEPARATED .....                  | 34        |
| 5.5.1 Applied procedures / Limit .....                   | 34        |
| 5.5.2 Test procedure .....                               | 34        |



|          |                                                          |           |
|----------|----------------------------------------------------------|-----------|
| 5.5.3    | Deviation from standard .....                            | 34        |
| 5.5.4    | Test setup .....                                         | 34        |
| 5.5.5    | Test results .....                                       | 35        |
| 5.6      | HOPPING CHANNEL NUMBER .....                             | 39        |
| 5.6.1    | Applied procedures / Limit .....                         | 39        |
| 5.6.2    | Test procedure .....                                     | 39        |
| 5.6.3    | Deviation from standard .....                            | 39        |
| 5.6.4    | Test setup .....                                         | 39        |
| 5.6.5    | Test result .....                                        | 39        |
| 5.7      | DWELL TIME .....                                         | 42        |
| 5.7.1    | Applied procedures / Limit .....                         | 42        |
| 5.7.2    | Test procedure .....                                     | 42        |
| 5.7.3    | Deviation from standard .....                            | 42        |
| 5.7.4    | TEST SETUP .....                                         | 42        |
| 5.7.5    | Test result .....                                        | 43        |
| 5.8      | MAXIMUM PEAK OUTPUT POWER .....                          | 47        |
| 5.8.1    | Applied procedures / Limit .....                         | 47        |
| 5.8.2    | Test procedure .....                                     | 47        |
| 5.8.3    | Deviation from standard .....                            | 47        |
| 5.8.4    | Test setup .....                                         | 47        |
| 5.8.5    | Test results .....                                       | 48        |
| 5.9      | BAND EDGE .....                                          | 49        |
| 5.9.1    | Applied procedures / Limit .....                         | 49        |
| 5.9.2    | Test procedure .....                                     | 49        |
| 5.9.3    | Deviation from standard .....                            | 49        |
| 5.9.4    | Test setup .....                                         | 49        |
| 5.9.5    | Test results .....                                       | 50        |
| 5.10     | CONDUCTED SPURIOUS EMISSIONS .....                       | 55        |
| 5.10.1   | Applied procedures / Limit .....                         | 55        |
| 5.10.2   | Test procedure .....                                     | 55        |
| 5.10.3   | Deviation from standard .....                            | 55        |
| 5.10.4   | Test setup .....                                         | 55        |
| 5.10.5   | Test results .....                                       | 56        |
| <b>6</b> | <b>PHOTOGRAPHS .....</b>                                 | <b>68</b> |
| 6.1      | CONDUCTED EMISSIONS TEST SETUP .....                     | 68        |
| 6.2      | RADIATED SPURIOUS EMISSIONS TEST SETUP(BELOW 1GHz) ..... | 68        |
| 6.3      | RADIATED SPURIOUS EMISSIONS TEST SETUP(ABOVE 1GHz) ..... | 69        |
| 6.4      | EUT CONSTRUCTIONAL DETAILS .....                         | 70        |

## 2 Test Summary

### 2.1 Compliance with FCC Part 15 subpart C

| Test                                               | Test Requirement   | Standard Paragraph         | Result      |
|----------------------------------------------------|--------------------|----------------------------|-------------|
| Antenna Requirement                                | FCC Part 15 C:2016 | Section 15.247(c)          | <b>PASS</b> |
| Conduction Emissions                               | FCC Part 15 C:2016 | Section 15.207(a)          | <b>PASS</b> |
| Radiated Emissions                                 | FCC Part 15 C:2016 | Section 15.247(d)          | <b>PASS</b> |
| Carrier Frequencies Separated                      | FCC Part 15 C:2016 | Section 15.247(a)(1)       | <b>PASS</b> |
| Hopping Channel Number                             | FCC Part 15 C:2016 | Section 15.247(a)(1) (iii) | <b>PASS</b> |
| Dwell Time                                         | FCC Part 15 C:2016 | Section 15.247(a)(1) (iii) | <b>PASS</b> |
| Maximum Peak Output Power                          | FCC Part 15 C:2016 | Section 15.247(b)          | <b>PASS</b> |
| Band edge                                          | FCC Part 15 C:2016 | Section 15.247(d)          | <b>PASS</b> |
| Conducted Spurious Emissions                       | FCC Part 15 C:2016 | Section 15.247(d)          | <b>PASS</b> |
| Note: Reference to the FCC Public Notice DA 00-705 |                    |                            |             |

### 2.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, The following measurements uncertainty Levels have estimated based on ANSI C63.4:2009, the maximum value of the uncertainty as below

| No. | Item                    | Uncertainty         |
|-----|-------------------------|---------------------|
| 1   | Conducted Emission Test | $\pm 1.38\text{dB}$ |
| 2   | Radiated Emission Test  | $\pm 3.57\text{dB}$ |

### 3 General Information

#### 3.1 General Description of EUT

|                                                 |                                                                                   |               |
|-------------------------------------------------|-----------------------------------------------------------------------------------|---------------|
| <b>Manufacturer:</b>                            | Shenzhen Pakesen Electronics Co.,Ltd.                                             |               |
| <b>Address:</b>                                 | No.15,the First Industrial Park,Junquan Street, Xikeng Community, Shenzhen,China. |               |
| <b>EUT Name:</b>                                | Bluetooth headset                                                                 |               |
| <b>Model No:</b>                                | M517-BT                                                                           |               |
| <b>Derivative model No.:</b>                    | N/A                                                                               |               |
| <b>Operation frequency:</b>                     | 2402MHz to 2480MHz                                                                |               |
| <b>Channel Number:</b>                          | 79                                                                                |               |
| <b>Modulation Technology:</b>                   | GFSK, ( $\pi/4$ )DQPSK, 8DPSK                                                     |               |
| <b>Bluetooth version:</b>                       | Bluetooth 3.0                                                                     |               |
| <b>H/W No.:</b>                                 | V1.2B                                                                             |               |
| <b>S/W No.:</b>                                 | V0.1                                                                              |               |
| <b>AntennaType:</b>                             | Integral                                                                          |               |
| <b>Antenna Gain:</b>                            | maximum: 0 dBi                                                                    |               |
| <b>Brand Name:</b>                              | Pakesn                                                                            |               |
| <b>Serial No:</b>                               | N/A                                                                               |               |
| <b>Power Supply Range:</b>                      | DC 5V from Host unit<br>DC 3.7V from Battery                                      |               |
| <b>Power Supply:</b>                            | DC 5V from adapter<br>DC 3.7V from Battery                                        |               |
| <b>Power Cord:</b>                              | 0.6 m x 2 wires unscreened micro-USB cable                                        |               |
| <b>Signal Cord:</b>                             | N/A                                                                               |               |
| <b>Effective Isotropic Radiated Power(max):</b> | 1Mbps: 0.19dBm                                                                    | Peak detector |
|                                                 | 3Mbps: -1.51dBm                                                                   |               |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

| Channel List |                 |         |                 |         |                 |
|--------------|-----------------|---------|-----------------|---------|-----------------|
| Channel      | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 00           | 2402            | 27      | 2429            | 54      | 2456            |
| 01           | 2403            | 28      | 2430            | 55      | 2457            |
| 02           | 2404            | 29      | 2431            | 56      | 2458            |
| 03           | 2405            | 30      | 2432            | 57      | 2459            |
| 04           | 2406            | 31      | 2433            | 58      | 2460            |
| 05           | 2407            | 32      | 2434            | 59      | 2461            |
| 06           | 2408            | 33      | 2435            | 60      | 2462            |
| 07           | 2409            | 34      | 2436            | 61      | 2463            |
| 08           | 2410            | 35      | 2437            | 62      | 2464            |
| 09           | 2411            | 36      | 2438            | 63      | 2465            |
| 10           | 2412            | 37      | 2439            | 64      | 2466            |
| 11           | 2413            | 38      | 2440            | 65      | 2467            |
| 12           | 2414            | 39      | 2441            | 66      | 2468            |
| 13           | 2415            | 40      | 2442            | 67      | 2469            |
| 14           | 2416            | 41      | 2443            | 68      | 2470            |
| 15           | 2417            | 42      | 2444            | 69      | 2471            |
| 16           | 2418            | 43      | 2445            | 70      | 2472            |
| 17           | 2419            | 44      | 2446            | 71      | 2473            |
| 18           | 2420            | 45      | 2447            | 72      | 2474            |
| 19           | 2421            | 46      | 2448            | 73      | 2475            |
| 20           | 2422            | 47      | 2449            | 74      | 2476            |
| 21           | 2423            | 48      | 2450            | 75      | 2477            |
| 22           | 2424            | 49      | 2451            | 76      | 2478            |
| 23           | 2425            | 50      | 2452            | 77      | 2479            |
| 24           | 2426            | 51      | 2453            | 78      | 2480            |
| 25           | 2427            | 52      | 2454            |         |                 |
| 26           | 2428            | 53      | 2455            |         |                 |

3. The USB port only can connect to PC for charging. It can't transfer data.

## 3.2 Test Location

All tests were performed at:

Dongguan Yaxu (AiT) Technology Limited


No.22, Jinqianling Third Street, Jitigang, Huangjiang, Dongguan, Guangdong, China

Tel.: +86.769.82020499 Fax: +86.769.82020495

The FCC Registration No. of Dongguan Yaxu (AiT) Technology Limited is 248337.

### 3.3 Description of Test conditions

- (1) EUT was tested in normal configuration (Please See following Block diagram)

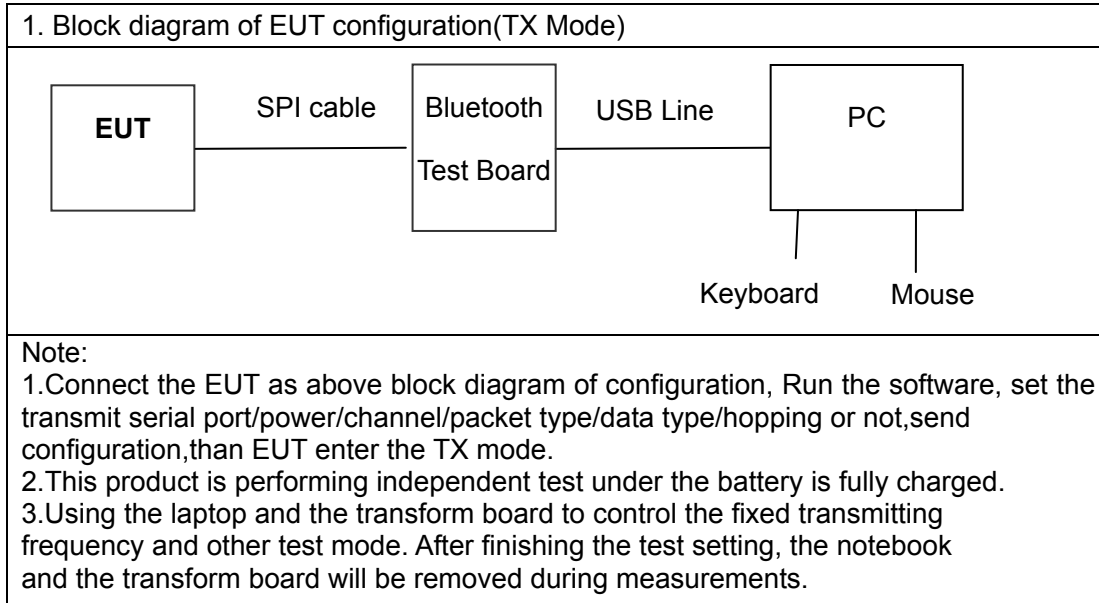

- (2) E.U.T. test conditions:

15.31(e): For intentional radiators, measurements of the variation of the input power or the adiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

- (3) Test frequencies:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and. If required reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

| Frequency range over which device operates | Number of frequencies | Location in the range of operation          |
|--------------------------------------------|-----------------------|---------------------------------------------|
| 1 MHz or less                              | 1                     | Middle                                      |
| 1 to 10 MHz                                | 2                     | 1 near top and 1 near bottom                |
| More than 10 MHz                           | 3                     | 1 near top, 1 near middle and 1 near bottom |

- (4) Frequency range of radiated measurements:

According to the 15.33, The test range will be up to the tenth harmonic of the highest fundamental frequency .

- (5) Pre-test the EUT in all transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet and conducted to determine the worst-case mode, only the worst-case results(1Mbps/3Mbps) are recorded in this report.
- (6) The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.

### 3.4 EUT Peripheral List

| No. | Equipment       | Manufacturer | Model No. | Serial No. | Power cord                    | signal cable |
|-----|-----------------|--------------|-----------|------------|-------------------------------|--------------|
| 1   | micro-USB cable | N/A          | N/A       | N/A        | 0.6 m x 2 wires<br>unscreened | N/A          |

### 3.5 Test Peripheral List

| No. | Equipment         | Manufacturer                                      | EMC Compliance | Model No.          | Serial No.                       | Power cord                     | signal cable                     |
|-----|-------------------|---------------------------------------------------|----------------|--------------------|----------------------------------|--------------------------------|----------------------------------|
| 1   | Personal computer | H P                                               | CE 、 FCC       | DX2310             | CNG8250MZ3                       | 1.8m/unshielded<br>/detachable | N/A                              |
| 2   | Keyboard          | DELL                                              | CE             | SK-8115            | CN-ONM432-<br>71616-81M-OLK<br>B | N/A                            | 1.5m/unshielded<br>/undetachable |
| 3   | Mouse             | Microsoft                                         | CE             | X800898            | 30603                            | N/A                            | 1.5m/unshielded<br>/undetachable |
| 4   | Adapter           | Shenzhen<br>Wei Yi Tong<br>Electronic<br>Co., Ltd | FCC            | WTA0502<br>000USB2 | N/A                              | 1.2m/unshielded<br>/detachable | N/A                              |
| 5   | USB cable         | N/A                                               | N/A            | N/A                | N/A                              | N/A                            | 0.6m /unshielded<br>/detachable  |

## 4 Equipments List for All Test Items

| No | Test Equipment                                             | Manufacturer    | Model No         | Serial No   | Cal. Date  | Cal. Due Date |
|----|------------------------------------------------------------|-----------------|------------------|-------------|------------|---------------|
| 1  | Spectrum Analyzer                                          | ADVANTEST       | R3182            | 150900201   | 2015.06.29 | 2016.06.28    |
| 2  | EMI Measuring Receiver                                     | Schaffner       | SCR3501          | 235         | 2015.06.29 | 2016.06.28    |
| 3  | Low Noise Pre Amplifier                                    | Tsj             | MLA-10K01-B01-27 | 1205323     | 2015.06.29 | 2016.06.28    |
| 4  | Low Noise Pre Amplifier                                    | Tsj             | MLA-0120-A02-34  | 2648A04738  | 2015.06.29 | 2016.06.28    |
| 5  | TRILOG Super Broadband test Antenna                        | SCHWARZBECK     | VULB9160         | 9160-3206   | 2015.06.29 | 2016.06.28    |
| 6  | Broadband Horn Antenna                                     | SCHWARZBECK     | BBHA9120D        | 452         | 2015.06.29 | 2016.06.28    |
| 7  | SHF-EHF Horn Antenna                                       | SCHWARZBECK     | BBHA9170         | BBHA9170367 | 2015.06.29 | 2016.06.28    |
| 8  | 50Ω Coaxial Switch                                         | Anritsu         | MP59B            | 6200264416  | 2015.06.29 | 2016.06.28    |
| 9  | EMI Test Receiver                                          | R&S             | ESCI             | 100124      | 2015.06.29 | 2016.06.28    |
| 10 | LISN                                                       | Kyoritsu        | KNW-242          | 8-837-4     | 2015.06.29 | 2016.06.28    |
| 11 | LISN                                                       | Kyoritsu        | KNW-407          | 8-1789-3    | 2015.06.29 | 2016.06.28    |
| 12 | 50Ω Coaxial Switch                                         | Anritsu         | MP59B            | 6200264417  | 2015.06.29 | 2016.06.28    |
| 13 | Loop Antenna                                               | ARA             | PLA-1030/B       | 1029        | 2015.06.29 | 2016.06.28    |
| 14 | Power Meter                                                | R&S             | NRVS             | 101336      | 2015.06.29 | 2016.06.28    |
| 15 | EMI Test Receiver                                          | Rohde & Schwarz | ESIB26           | 100394      | 2015.06.29 | 2016.06.28    |
| 16 | Radiated Cable 1# (30MHz-1GHz)                             | FUJIKURA        | 5D-2W            | 01          | 2016.01.04 | 2017.01.03    |
| 17 | Radiated Cable 2# (1GHz -25GHz)                            | FUJIKURA        | 10D2W            | 02          | 2015.12.25 | 2016.12.24    |
| 18 | Conducted Cable 1#(9KHz-30MHz)                             | FUJIKURA        | 1D-2W            | 01          | 2016.01.04 | 2017.01.03    |
| 19 | SMA Antenna connector (Impedance:50OHM, cable loss:0.5dBm) | Dosin           | Dosin-SMA        | N/A         | N/A        | N/A           |
| 20 | Power sensor                                               | Anritsu         | MA2411B          | 1126168     | 2015.06.29 | 2016.06.28    |

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.



## 5 Test Result

### 5.1 Antenna Requirement

#### 5.1.1 Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### 5.1.2 EUT Antenna

The antenna is integrated on the main PCB and no consideration of replacement. Antenna gain is maximum 0 dBi from 2.4GHz to 2.5GHz.

## 5.2 Conduction Emissions Measurement

### 5.2.1 Applied procedures / Limit


| Frequency of Emission (MHz) | Conducted Limit (dB $\mu$ V) |            |
|-----------------------------|------------------------------|------------|
|                             | Quasi-peak                   | Average    |
| 0.15-0.5                    | 66 to 56 *                   | 56 to 46 * |
| 0.5-5                       | 56                           | 46         |
| 5-30                        | 60                           | 50         |

Note: Decreases with the logarithm of the frequency.

### 5.2.2 Test procedure

EUT was placed upon a wooden test table 0.8m above the horizontal metal reference plane and 0.4m from the vertical ground plane, and it was connected to an AMN. The closest distance between the boundary of the EUT and the surface of the AMN is 0.8m. All peripherals were connected to another AMN, and placed at a distance of 10cm from each other. A spectrum and receiver was connected to the RF output port of the AMN. Both average and quasi-peak value were detected.

### 5.2.3 Test setup

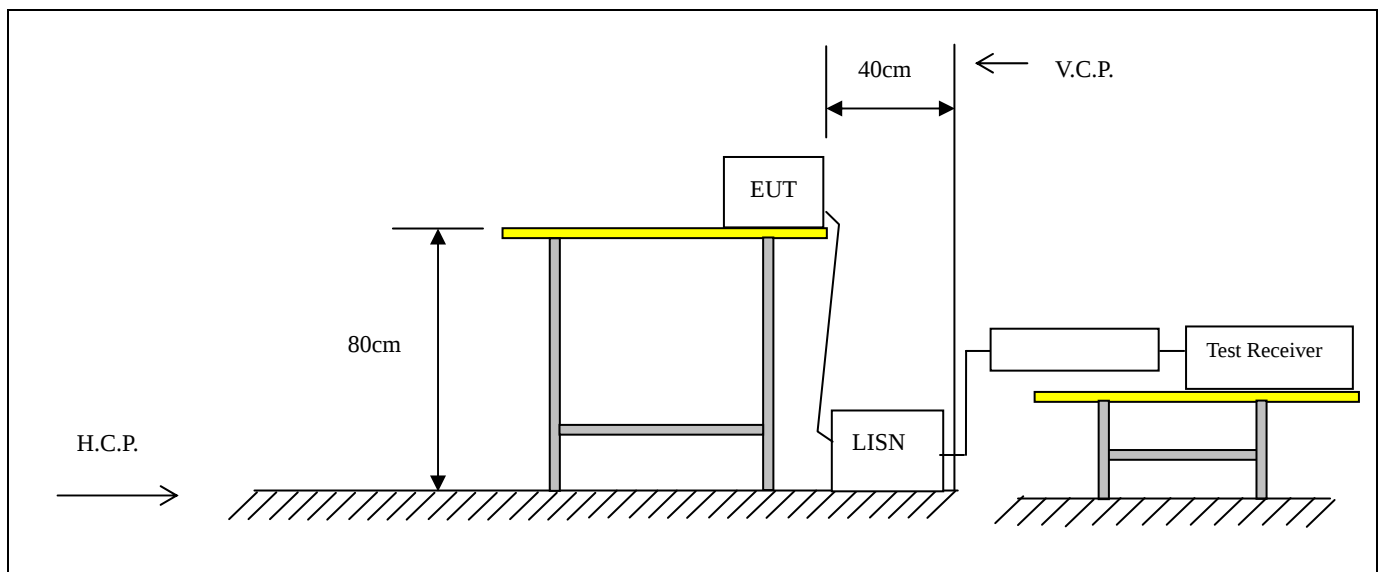


## 5.2.4 Test results

|                       |                                              |                    |            |
|-----------------------|----------------------------------------------|--------------------|------------|
| EUT:                  | Bluetooth headset                            | Model Name. :      | M517-BT    |
| Temperature:          | 26 °C                                        | Relative Humidity: | 54%        |
| Pressure:             | 1010hPa                                      | Test Date :        | 2016-03-15 |
| Test Mode:            | TX (1Mbps) CH00 (worst case)                 | Phase :            | Line       |
| <b>Test Voltage :</b> | DC 5V from adapter, AC 120V/60Hz for adapter |                    |            |

Level(dBμV)

100.0 dBμV

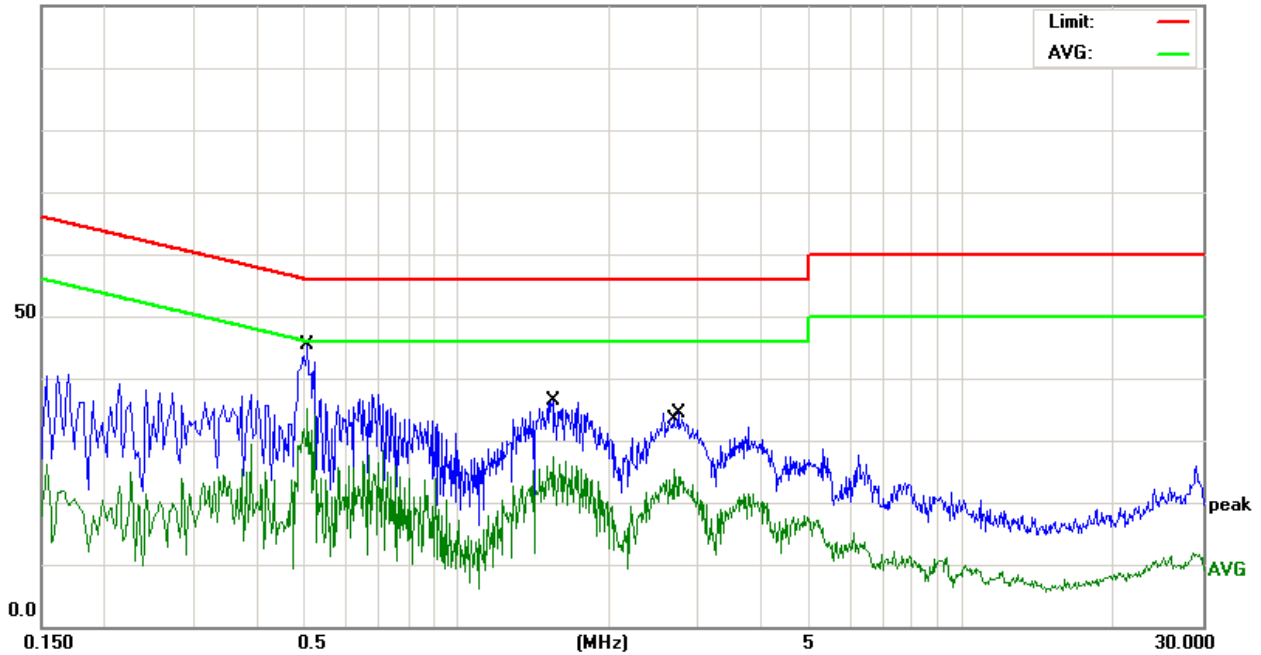


Measure data:

| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measure-ment | Limit | Over   |          |
|-----|-----|--------|---------------|----------------|--------------|-------|--------|----------|
|     |     | MHz    | dBμV          | dB             | dBμV         | dBμV  | dB     | Detector |
| 1   | *   | 0.5060 | 35.35         | 10.01          | 45.36        | 56.00 | -10.64 | QP       |
| 2   |     | 0.5060 | 25.10         | 10.01          | 35.11        | 46.00 | -10.89 | AVG      |
| 3   |     | 1.5500 | 26.32         | 9.97           | 36.29        | 56.00 | -19.71 | QP       |
| 4   |     | 1.5500 | 17.33         | 9.97           | 27.30        | 46.00 | -18.70 | AVG      |
| 5   |     | 2.6860 | 15.41         | 10.02          | 25.43        | 46.00 | -20.57 | AVG      |
| 6   |     | 2.7420 | 24.37         | 10.03          | 34.40        | 56.00 | -21.60 | QP       |

|                       |                                              |                    |            |
|-----------------------|----------------------------------------------|--------------------|------------|
| EUT:                  | Bluetooth headset                            | Model Name. :      | M517-BT    |
| Temperature:          | 26 °C                                        | Relative Humidity: | 54%        |
| Pressure:             | 1010hPa                                      | Test Date :        | 2016-03-15 |
| Test Mode:            | TX (1Mbps) CH00 (worst case)                 | Phase :            | Neutral    |
| <b>Test Voltage :</b> | DC 5V from adapter, AC 120V/60Hz for adapter |                    |            |

Level(dBμV)

100.0 dBμV

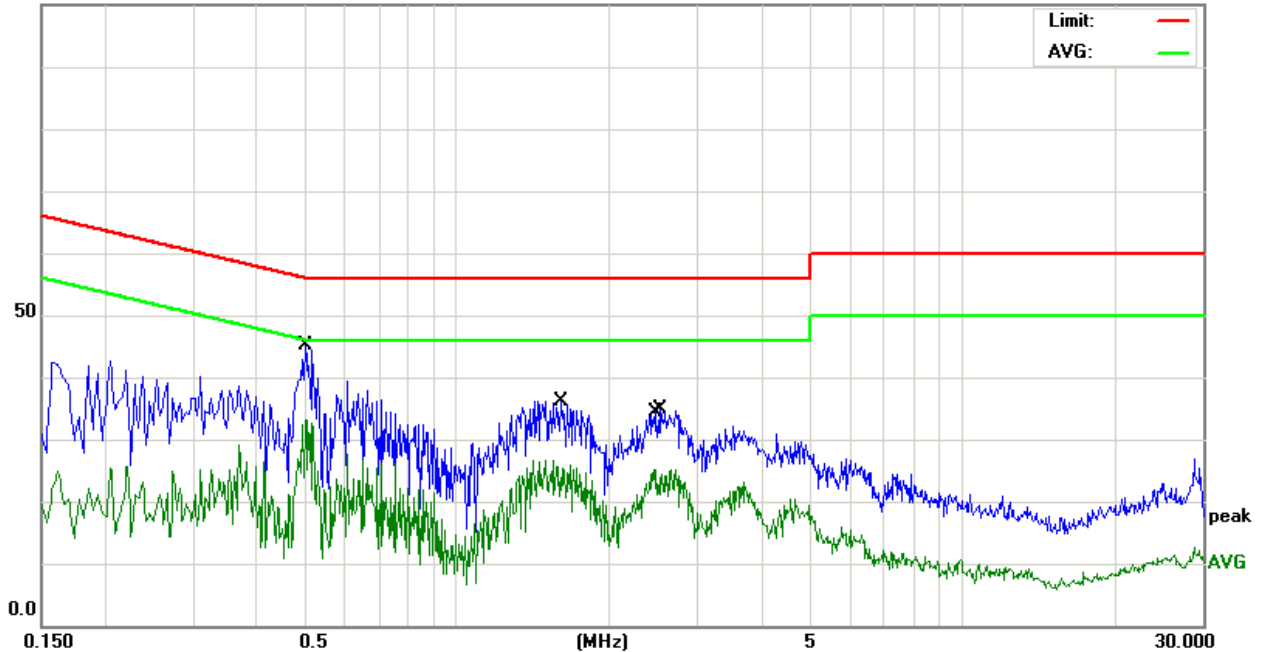

Measure result:

| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit | Over   |          |
|-----|-----|--------|---------------|----------------|-------------|-------|--------|----------|
|     |     | MHz    | dBμV          | dB             | dBμV        | dBμV  | dB     | Detector |
| 1   | *   | 0.5020 | 35.08         | 10.01          | 45.09       | 56.00 | -10.91 | QP       |
| 2   |     | 0.5020 | 23.06         | 10.01          | 33.07       | 46.00 | -12.93 | AVG      |
| 3   |     | 1.5900 | 15.73         | 9.97           | 25.70       | 46.00 | -20.30 | AVG      |
| 4   |     | 1.6060 | 26.27         | 9.97           | 36.24       | 56.00 | -19.76 | QP       |
| 5   |     | 2.4860 | 15.15         | 10.01          | 25.16       | 46.00 | -20.84 | AVG      |
| 6   |     | 2.5140 | 24.86         | 10.01          | 34.87       | 56.00 | -21.13 | QP       |

Factor = LISN factor + Cable Loss + Pulse limiter factor.

## 5.3 Radiated Emissions Measurement

### 5.3.1 Applied procedures / Limit


15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

| Frequency of Emission (MHz) | Field Strength  |                          | Measurement Distance (meters) |
|-----------------------------|-----------------|--------------------------|-------------------------------|
|                             | $\mu\text{V/m}$ | $\text{dB}\mu\text{V/m}$ |                               |
| 0.009-0.49                  | 2400/F(kHz)     |                          | 300                           |
| 0.49-1.705                  | 24000/F(kHz)    |                          | 30                            |
| 1.705-30                    | 30              |                          | 30                            |
| 30-88                       | 100             | 40                       | 3                             |
| 88-216                      | 150             | 43.5                     | 3                             |
| 216-960                     | 200             | 46                       | 3                             |
| Above 960                   | 500             | 54                       | 3                             |


### 5.3.2 Test setup

#### Test Configuration:


- 1) 9 kHz to 30 MHz emissions:

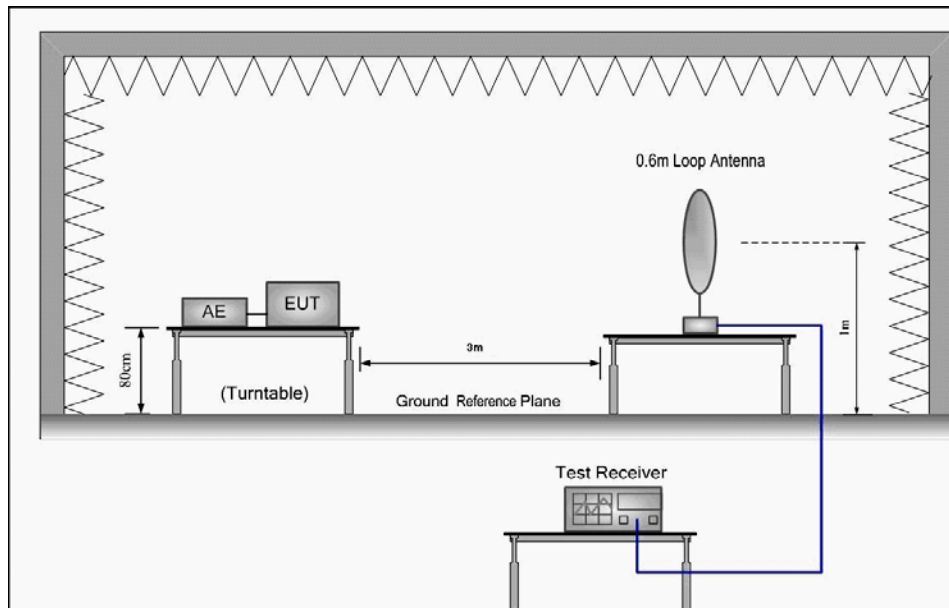

- 2) 30 MHz to 1 GHz emissions:

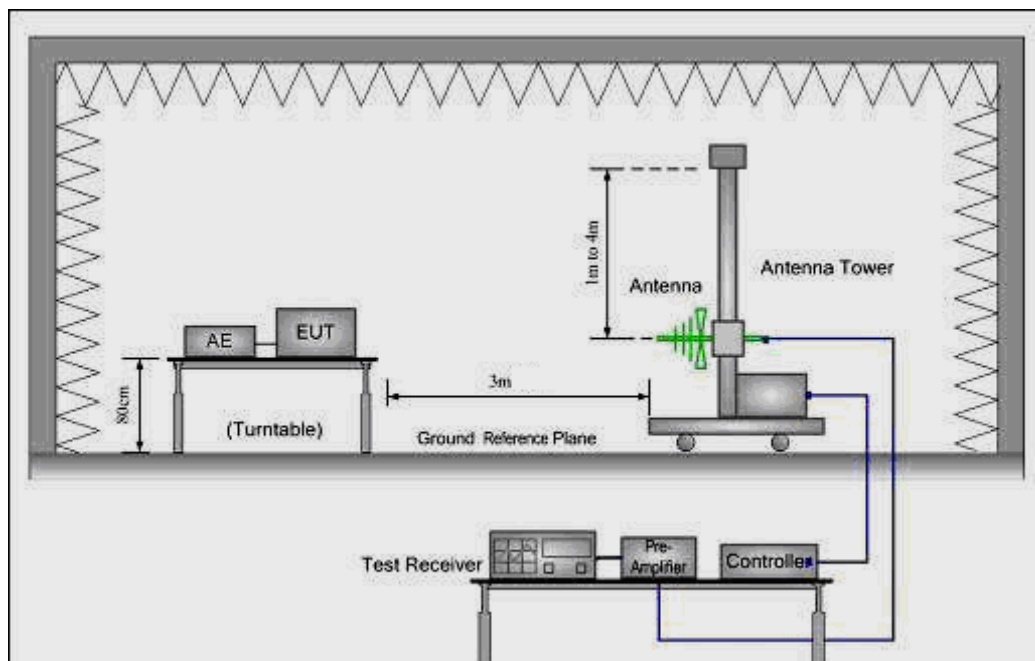

## 3) 1 GHz to 25 GHz emissions:

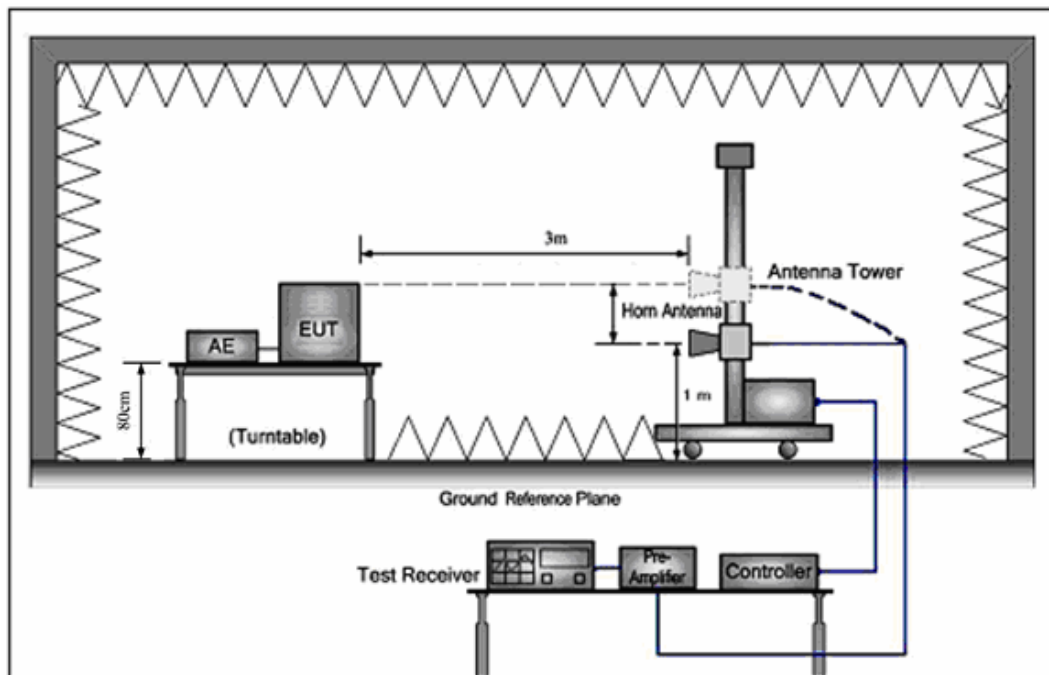



### 5.3.3 Test procedure

EUT was placed upon a wooden test table which was placed on the turn table 0.8m above the horizontal metal ground plane, and operating in the mode as mentioned above. A receiving antenna was placed 3m away from the EUT. During testing, turn around the turn table and move the antenna from 1m to 4m to find the maximum field-strength reading. All peripherals were placed at a distance of 10cm between each other. Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

For measurement at frequency above 1GHz

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.



### 5.3.4 Test Result

#### Radiated Emissions Test Data Below 30MHz

|                      |                                                          |                    |                      |
|----------------------|----------------------------------------------------------|--------------------|----------------------|
| EUT:                 | Bluetooth headset                                        | Model Name :       | M517-BT              |
| Temperature:         | 25 °C                                                    | Test Data          | 2016-03-15           |
| Pressure:            | 1010 hPa                                                 | Relative Humidity: | 60%                  |
| Test Mode :          | TX                                                       | Test Voltage :     | DC 3.7V from battery |
| Measurement Distance | 3 m                                                      | Frenqucy Range     | 9KHz to 30MHz        |
| RBW/VBW              | 9KHz~150KHz/RB 200Hz for QP, 150KHz~30MHz/RB 9KHz for QP |                    |                      |

No emission found between lowest internal used/generated frequencies to 30MHz.


## Radiated Emissions Test Data Below 1GHz

|                      |                                                        |                    |                      |
|----------------------|--------------------------------------------------------|--------------------|----------------------|
| EUT:                 | Bluetooth headset                                      | Model Name :       | M517-BT              |
| Temperature:         | 25 °C                                                  | Test Data          | 2016-03-15           |
| Pressure:            | 1010 hPa                                               | Relative Humidity: | 60%                  |
| Test Mode :          | TX (1Mbps) CH00 (worst case)                           | Test Voltage :     | DC 3.7V from battery |
| Measurement Distance | 3 m                                                    | Frequency Range    | 30MHz to 1GHz        |
| RBW/VBW              | 100KHz / 300KHz for spectrum, RBW=120KHz for receiver. |                    |                      |

(a) Antenna polarization: Horizontal

Peak scan

Level (dBμV/m)

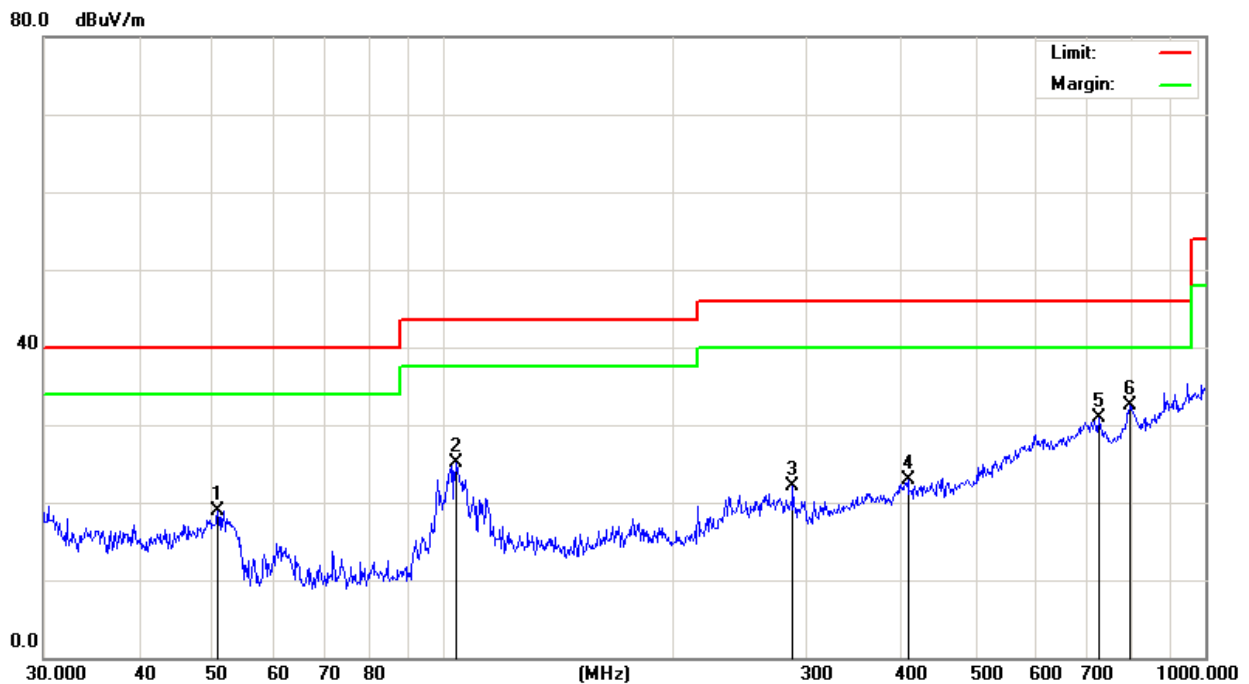


Quasi-peak measurement

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBμV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBμV/m | Limit<br>dBμV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 50.7637      | 37.92                    | -18.92                  | 19.00                      | 40.00           | -21.00     | QP       |
| 2   |     | 104.1701     | 38.70                    | -13.63                  | 25.07                      | 43.50           | -18.43     | QP       |
| 3   |     | 287.9904     | 31.90                    | -9.85                   | 22.05                      | 46.00           | -23.95     | QP       |
| 4   |     | 407.5144     | 29.27                    | -6.45                   | 22.82                      | 46.00           | -23.18     | QP       |
| 5   |     | 724.2611     | 31.27                    | -0.46                   | 30.81                      | 46.00           | -15.19     | QP       |
| 6   | *   | 796.1829     | 29.43                    | 3.01                    | 32.44                      | 46.00           | -13.56     | QP       |

(b) Antenna polarization: vertical

Peak scan

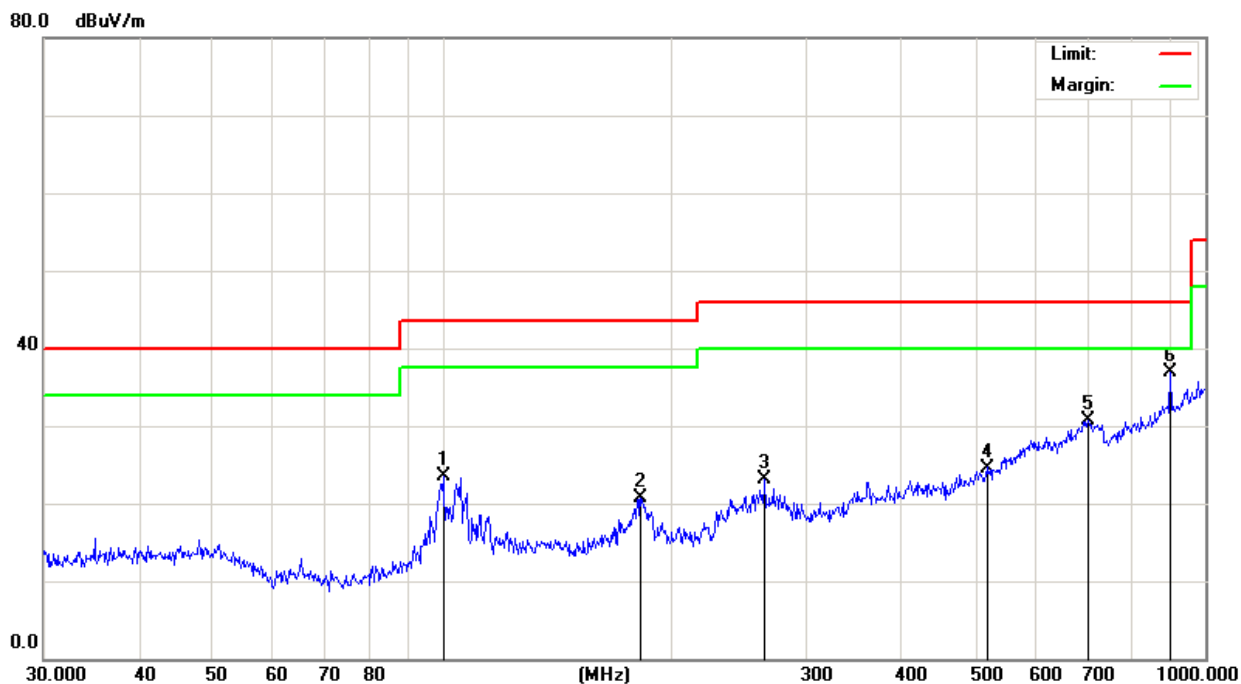Level (dB $\mu$ V/m)

Quasi-peak measurement

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dB $\mu$ V | Correct<br>Factor<br>dB | Measure-<br>ment<br>dB $\mu$ V/m | Limit<br>dB $\mu$ V/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------------|-------------------------|----------------------------------|-----------------------|------------|----------|
| 1   |     | 100.2286     | 39.46                          | -15.99                  | 23.47                            | 43.50                 | -20.03     | QP       |
| 2   |     | 181.9201     | 31.53                          | -10.82                  | 20.71                            | 43.50                 | -22.79     | QP       |
| 3   |     | 264.7456     | 34.36                          | -11.16                  | 23.20                            | 46.00                 | -22.80     | QP       |
| 4   |     | 517.2480     | 29.60                          | -5.00                   | 24.60                            | 46.00                 | -21.40     | QP       |
| 5   |     | 701.7607     | 30.42                          | 0.32                    | 30.74                            | 46.00                 | -15.26     | QP       |
| 6   | *   | 900.1473     | 34.08                          | 2.80                    | 36.88                            | 46.00                 | -9.12      | QP       |

Note: '\*' means the worst case

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss-Preamplifier Factor

### Radiated Emissions Test Data Above 1GHz

|                      |                                            |                    |                      |
|----------------------|--------------------------------------------|--------------------|----------------------|
| EUT:                 | Bluetooth headset                          | Model Name :       | M517-BT              |
| Temperature:         | 25 °C                                      | Test Data          | 2016-03-15           |
| Pressure:            | 1010 hPa                                   | Relative Humidity: | 60%                  |
| Test Mode :          | 1Mbps                                      | Test Voltage :     | DC 3.7V from battery |
| Measurement Distance | 3 m                                        | Frenqucy Range     | 1GHz to 25GHz        |
| RBW/VBW              | 1MHz/1MHz for Peak, 1MHz/10Hz for Average. |                    |                      |

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

#### Vertical Measurement:

| Frequency (MHz) | Reading Level (dB $\mu$ V) | factor (dB) | Emission Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Antenna polarization |
|-----------------|----------------------------|-------------|-------------------------------|----------------------|-------------|----------------------|
| 4804.000        | 50.86                      | 5.06        | 55.92                         | 74.00                | -18.08      | peak                 |
| 4804.000        | 36.07                      | 5.06        | 41.13                         | 54.00                | -12.87      | AVG                  |
| 7206.000        | 48.76                      | 7.03        | 55.79                         | 74.00                | -18.21      | peak                 |
| 7206.000        | 31.81                      | 7.03        | 38.84                         | 54.00                | -15.16      | AVG                  |
| 9608.000        | 42.33                      | 10.63       | 52.96                         | 74.00                | -21.04      | peak                 |
| 9608.000        | 28.92                      | 10.63       | 39.55                         | 54.00                | -14.45      | AVG                  |

#### Horizontal Measurement:

| Frequency (MHz) | Reading Level (dB $\mu$ V) | factor (dB) | Emission Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Antenna polarization |
|-----------------|----------------------------|-------------|-------------------------------|----------------------|-------------|----------------------|
| 4804.000        | 52.42                      | 5.06        | 57.48                         | 74.00                | -16.52      | peak                 |
| 4804.000        | 36.54                      | 5.06        | 41.60                         | 54.00                | -12.40      | AVG                  |
| 7206.000        | 49.87                      | 7.03        | 56.90                         | 74.00                | -17.10      | peak                 |
| 7206.000        | 33.79                      | 7.03        | 40.82                         | 54.00                | -13.18      | AVG                  |
| 9608.000        | 43.56                      | 10.63       | 54.19                         | 74.00                | -19.81      | peak                 |
| 9608.000        | 28.41                      | 10.63       | 39.04                         | 54.00                | -14.96      | AVG                  |

Note:

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss-Preamplifier Factor

Low Channel 00: 2402 MHz

Data rate: 1Mbps

## 1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Vertical Measurement:**

| Frequency (MHz) | Reading Level (dB $\mu$ V) | factor (dB) | Emission Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Antenna polarization |
|-----------------|----------------------------|-------------|-------------------------------|----------------------|-------------|----------------------|
| 4882.000        | 51.07                      | 5.14        | 56.21                         | 74.00                | -17.79      | peak                 |
| 4882.000        | 36.25                      | 5.14        | 41.39                         | 54.00                | -12.61      | AVG                  |
| 7323.000        | 45.65                      | 7.54        | 53.19                         | 74.00                | -20.81      | peak                 |
| 7323.000        | 31.45                      | 7.54        | 38.99                         | 54.00                | -15.01      | AVG                  |
| 9764.000        | 40.96                      | 11.39       | 52.35                         | 74.00                | -21.65      | peak                 |
| 9764.000        | 28.66                      | 11.39       | 40.05                         | 54.00                | -13.95      | AVG                  |

**Horizontal Measurement:**

| Frequency (MHz) | Reading Level (dB $\mu$ V) | factor (dB) | Emission Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Antenna polarization |
|-----------------|----------------------------|-------------|-------------------------------|----------------------|-------------|----------------------|
| 4882.000        | 52.01                      | 5.14        | 57.15                         | 74.00                | -16.85      | peak                 |
| 4882.000        | 35.48                      | 5.14        | 40.62                         | 54.00                | -13.38      | AVG                  |
| 7323.000        | 45.99                      | 7.54        | 53.53                         | 74.00                | -20.47      | peak                 |
| 7323.000        | 32.72                      | 7.54        | 40.26                         | 54.00                | -13.74      | AVG                  |
| 9764.000        | 42.07                      | 11.39       | 53.46                         | 74.00                | -20.54      | peak                 |
| 9764.000        | 26.31                      | 11.39       | 37.70                         | 54.00                | -16.30      | AVG                  |

## Note:

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss-Preamp Factor

Middle Channel 39: 2441 MHz

Data rate: 1Mbps

## 1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Vertical Measurement:**

| Frequency (MHz) | Reading Level (dB $\mu$ V) | factor (dB) | Emission Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Antenna polarization |
|-----------------|----------------------------|-------------|-------------------------------|----------------------|-------------|----------------------|
| 4960.000        | 50.88                      | 5.22        | 56.10                         | 74.00                | -17.90      | peak                 |
| 4960.000        | 35.53                      | 5.22        | 40.75                         | 54.00                | -13.25      | AVG                  |
| 7440.000        | 46.49                      | 8.06        | 54.55                         | 74.00                | -19.45      | peak                 |
| 7440.000        | 33.06                      | 8.06        | 41.12                         | 54.00                | -12.88      | AVG                  |
| 9920.000        | 42.78                      | 12.10       | 54.88                         | 74.00                | -19.12      | peak                 |
| 9920.000        | 28.16                      | 12.10       | 40.26                         | 54.00                | -13.74      | AVG                  |

**Horizontal Measurement:**

| Frequency (MHz) | Reading Level (dB $\mu$ V) | factor (dB) | Emission Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Antenna polarization |
|-----------------|----------------------------|-------------|-------------------------------|----------------------|-------------|----------------------|
| 4960.000        | 52.09                      | 5.22        | 57.31                         | 74.00                | -16.69      | peak                 |
| 4960.000        | 37.11                      | 5.22        | 42.33                         | 54.00                | -11.67      | AVG                  |
| 7440.000        | 45.97                      | 8.06        | 54.03                         | 74.00                | -19.97      | peak                 |
| 7440.000        | 32.28                      | 8.06        | 40.34                         | 54.00                | -13.66      | AVG                  |
| 9920.000        | 40.19                      | 12.10       | 52.29                         | 74.00                | -21.71      | peak                 |
| 9920.000        | 25.86                      | 12.10       | 37.96                         | 54.00                | -16.04      | AVG                  |

**Note:**

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss-Preamp Factor

High Channel 78: 2480 MHz

Data rate: 1Mbps

|                      |                                            |                    |                      |
|----------------------|--------------------------------------------|--------------------|----------------------|
| EUT:                 | Bluetooth headset                          | Model Name :       | M517-BT              |
| Temperature:         | 25 °C                                      | Test Data          | 2016-03-15           |
| Pressure:            | 1010 hPa                                   | Relative Humidity: | 60%                  |
| Test Mode :          | 3Mbps                                      | Test Voltage :     | DC 3.7V from battery |
| Measurement Distance | 3 m                                        | Frenqucy Range     | 1GHz to 25GHz        |
| RBW/VBW              | 1MHz/1MHz for Peak, 1MHz/10Hz for Average. |                    |                      |

## 1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Vertical Measurement:**

| Frequency (MHz) | Reading Level (dB $\mu$ V) | factor (dB) | Emission Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Antenna polarization |
|-----------------|----------------------------|-------------|-------------------------------|----------------------|-------------|----------------------|
| 4804.000        | 50.63                      | 5.06        | 55.69                         | 74.00                | -18.31      | peak                 |
| 4804.000        | 35.47                      | 5.06        | 40.53                         | 54.00                | -13.47      | AVG                  |
| 7206.000        | 44.82                      | 7.03        | 51.85                         | 74.00                | -22.15      | peak                 |
| 7206.000        | 28.96                      | 7.03        | 35.99                         | 54.00                | -18.01      | AVG                  |
| 9608.000        | 40.21                      | 10.63       | 50.84                         | 74.00                | -23.16      | peak                 |
| 9608.000        | 24.85                      | 10.63       | 35.48                         | 54.00                | -18.52      | AVG                  |

**Horizontal Measurement:**

| Frequency (MHz) | Reading Level (dB $\mu$ V) | factor (dB) | Emission Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Antenna polarization |
|-----------------|----------------------------|-------------|-------------------------------|----------------------|-------------|----------------------|
| 4804.000        | 52.02                      | 5.06        | 57.08                         | 74.00                | -16.92      | peak                 |
| 4804.000        | 36.87                      | 5.06        | 41.93                         | 54.00                | -12.07      | AVG                  |
| 7206.000        | 46.73                      | 7.03        | 53.76                         | 74.00                | -20.24      | peak                 |
| 7206.000        | 33.28                      | 7.03        | 40.31                         | 54.00                | -13.69      | AVG                  |
| 9608.000        | 42.15                      | 10.63       | 52.78                         | 74.00                | -21.22      | peak                 |
| 9608.000        | 26.69                      | 10.63       | 37.32                         | 54.00                | -16.68      | AVG                  |

## Note:

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss-Preamp Factor

Low Channel 00: 2402 MHz

Data rate: 3Mbps

## 1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Vertical Measurement:**

| Frequency (MHz) | Reading Level (dB $\mu$ V) | factor (dB) | Emission Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Antenna polarization |
|-----------------|----------------------------|-------------|-------------------------------|----------------------|-------------|----------------------|
| 4882.000        | 50.56                      | 5.06        | 55.62                         | 74.00                | -18.38      | peak                 |
| 4882.000        | 37.08                      | 5.06        | 42.14                         | 54.00                | -11.86      | AVG                  |
| 7323.000        | 43.26                      | 7.03        | 50.29                         | 74.00                | -23.71      | peak                 |
| 7323.000        | 32.98                      | 7.03        | 40.01                         | 54.00                | -13.99      | AVG                  |
| 9764.000        | 40.55                      | 10.63       | 51.18                         | 74.00                | -22.82      | peak                 |
| 9764.000        | 27.13                      | 10.63       | 37.76                         | 54.00                | -16.24      | AVG                  |

**Horizontal Measurement:**

| Frequency (MHz) | Reading Level (dB $\mu$ V) | factor (dB) | Emission Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Antenna polarization |
|-----------------|----------------------------|-------------|-------------------------------|----------------------|-------------|----------------------|
| 4882.000        | 51.22                      | 5.06        | 56.28                         | 74.00                | -17.72      | peak                 |
| 4882.000        | 36.89                      | 5.06        | 41.95                         | 54.00                | -12.05      | AVG                  |
| 7323.000        | 47.61                      | 7.03        | 54.64                         | 74.00                | -19.36      | peak                 |
| 7323.000        | 32.85                      | 7.03        | 39.88                         | 54.00                | -14.12      | AVG                  |
| 9764.000        | 43.57                      | 10.63       | 54.20                         | 74.00                | -19.80      | peak                 |
| 9764.000        | 28.09                      | 10.63       | 38.72                         | 54.00                | -15.28      | AVG                  |

## Note:

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss-Preamp Factor

Middle Channel 39: 2441 MHz

Data rate: 3Mbps

## 1~25 GHz Harmonics &amp; Spurious Emissions. Peak &amp; Average Measurement

**Vertical Measurement:**

| Frequency (MHz) | Reading Level (dB $\mu$ V) | factor (dB) | Emission Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Antenna polarization |
|-----------------|----------------------------|-------------|-------------------------------|----------------------|-------------|----------------------|
| 4960.000        | 49.68                      | 5.22        | 54.90                         | 74.00                | -19.10      | peak                 |
| 4960.000        | 36.46                      | 5.22        | 41.68                         | 54.00                | -12.32      | AVG                  |
| 7440.000        | 46.56                      | 8.06        | 54.62                         | 74.00                | -19.38      | peak                 |
| 7440.000        | 31.42                      | 8.06        | 39.48                         | 54.00                | -14.52      | AVG                  |
| 9920.000        | 40.89                      | 12.10       | 52.99                         | 74.00                | -21.01      | peak                 |
| 9920.000        | 28.41                      | 12.10       | 40.51                         | 54.00                | -13.49      | AVG                  |

**Horizontal Measurement:**

| Frequency (MHz) | Reading Level (dB $\mu$ V) | factor (dB) | Emission Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Antenna polarization |
|-----------------|----------------------------|-------------|-------------------------------|----------------------|-------------|----------------------|
| 4960.000        | 50.12                      | 5.22        | 55.34                         | 74.00                | -18.66      | peak                 |
| 4960.000        | 36.42                      | 5.22        | 41.64                         | 54.00                | -12.36      | AVG                  |
| 7440.000        | 48.13                      | 8.06        | 56.19                         | 74.00                | -17.81      | peak                 |
| 7440.000        | 34.63                      | 8.06        | 42.69                         | 54.00                | -11.31      | AVG                  |
| 9920.000        | 42.37                      | 12.10       | 54.47                         | 74.00                | -19.53      | peak                 |
| 9920.000        | 25.84                      | 12.10       | 37.94                         | 54.00                | -16.06      | AVG                  |

**Note:**

Measurement Level = Reading Level + Factor

Factor=Ant Factor + Cable Loss-Preamp Factor

High Channel 78: 2480 MHz

Data rate: 3Mbps

### 5.3.5 TEST RESULTS (Restricted Bands Requirements)

|              |                                                                                                                                                                                                                                                                                                                          |                    |                      |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------|
| EUT:         | Bluetooth headset                                                                                                                                                                                                                                                                                                        | Model Name :       | M517-BT              |
| Temperature: | 26 °C                                                                                                                                                                                                                                                                                                                    | Relative Humidity: | 60%                  |
| Pressure:    | 1010 hPa                                                                                                                                                                                                                                                                                                                 | Test Voltage :     | DC 3.7V from battery |
| Test Mode :  | TX 2402MHz/2480MHz (1Mbps)                                                                                                                                                                                                                                                                                               |                    |                      |
| Note:        | 1. The transmitter was setup to transmit at the lowest channel (CH00). Then the field strength was measured at 2310-2390 MHz.<br>2. The transmitter was setup to transmit at the highest channel (CH78). Then the field strength was measured at 2483.5-2500 MHz.<br>3. The data of 2390MHz and 2483.5MHz was the worst. |                    |                      |

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Reading        |              | Ant/CF<br>CF(dB) | Act              |                | Limit            |                | Note |
|----------------|-----------------|----------------|--------------|------------------|------------------|----------------|------------------|----------------|------|
|                |                 | Peak<br>(dBuv) | AV<br>(dBuv) |                  | Peak<br>(dBuv/m) | AV<br>(dBuv/m) | Peak<br>(dBuv/m) | AV<br>(dBuv/m) |      |
| 2390.00        | V               | 39.85          | 26.86        | -5.79            | 34.06            | 21.07          | 74.00            | 54.00          | CH00 |
| 2390.00        | H               | 39.67          | 26.75        | -5.79            | 33.88            | 20.96          | 74.00            | 54.00          | CH00 |
| 2483.50        | V               | 39.97          | 29.19        | -4.98            | 34.99            | 24.21          | 74.00            | 54.00          | CH78 |
| 2483.50        | H               | 38.43          | 29.27        | -4.98            | 33.45            | 24.29          | 74.00            | 54.00          | CH78 |

**Remark:**

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode
- (2) EUT Orthogonal Axis:  
 "X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand
- (3) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (4) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.

|              |                                                                                                                                                                                                                                                                                                                          |                    |                      |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------|
| EUT:         | Bluetooth headset                                                                                                                                                                                                                                                                                                        | Model Name :       | M517-BT              |
| Temperature: | 26℃                                                                                                                                                                                                                                                                                                                      | Relative Humidity: | 60%                  |
| Pressure:    | 1010 hPa                                                                                                                                                                                                                                                                                                                 | Test Voltage :     | DC 3.7V from battery |
| Test Mode :  | TX 2402MHz/2480MHz (3Mbps)                                                                                                                                                                                                                                                                                               |                    |                      |
| Note:        | 1. The transmitter was setup to transmit at the lowest channel (CH00). Then the field strength was measured at 2310-2390 MHz.<br>2. The transmitter was setup to transmit at the highest channel (CH78). Then the field strength was measured at 2483.5-2500 MHz.<br>3. The data of 2390MHz and 2483.5MHz was the worst. |                    |                      |

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Reading        |              | Ant/CF<br>CF(dB) | Act              |                | Limit            |                | Note |
|----------------|-----------------|----------------|--------------|------------------|------------------|----------------|------------------|----------------|------|
|                |                 | Peak<br>(dBuv) | AV<br>(dBuv) |                  | Peak<br>(dBuv/m) | AV<br>(dBuv/m) | Peak<br>(dBuv/m) | AV<br>(dBuv/m) |      |
| 2390.00        | V               | 40.56          | 26.46        | -5.79            | 34.77            | 20.67          | 74.00            | 54.00          | CH00 |
| 2390.00        | H               | 39.96          | 27.21        | -5.79            | 34.17            | 21.42          | 74.00            | 54.00          | CH00 |
| 2483.50        | V               | 41.05          | 29.11        | -4.98            | 36.07            | 24.13          | 74.00            | 54.00          | CH78 |
| 2483.50        | H               | 39.12          | 29.31        | -4.98            | 34.14            | 24.33          | 74.00            | 54.00          | CH78 |

## Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode
- (2) EUT Orthogonal Axis:  
 "X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand
- (3) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (4) Corr.Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: No any other emission which falls in restricted bands can be detected and be reported.

**Test result: The unit does meet the FCC requirements.**

## 5.4 BANDWIDTH TEST

### 5.4.1 Applied procedures / Limit

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

### 5.4.2 Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100KHz, VBW $\geq$ RBW, Sweep time = Auto.

### 5.4.3 Deviation from standard

No deviation.

### 5.4.4 Test setup



### 5.4.5 Test results

|              |                   |                    |                      |
|--------------|-------------------|--------------------|----------------------|
| EUT:         | Bluetooth headset | Model Name :       | M517-BT              |
| Temperature: | 26 °C             | Relative Humidity: | 53%                  |
| Pressure:    | 1010 hPa          | Test Power :       | DC 3.7V from battery |
| Test Mode :  | TX 1Mbps\ 3Mbps   |                    |                      |

**Test result:****Normal mode:**


| Test Channel | Bandwidth(MHz) | 2/3 bandwidth(MHz) |
|--------------|----------------|--------------------|
| Lowest       | 1.1027         | 0.735              |
| Middle       | 1.0984         | 0.732              |
| Highest      | 1.0941         | 0.729              |

**3EDR mode:**


| Test Channel | bandwidth | 2/3 bandwidth |
|--------------|-----------|---------------|
| Lowest       | 1.3415    | 0.894         |
| Middle       | 1.3459    | 0.897         |
| Highest      | 1.3415    | 0.894         |



CH00-1Mbps

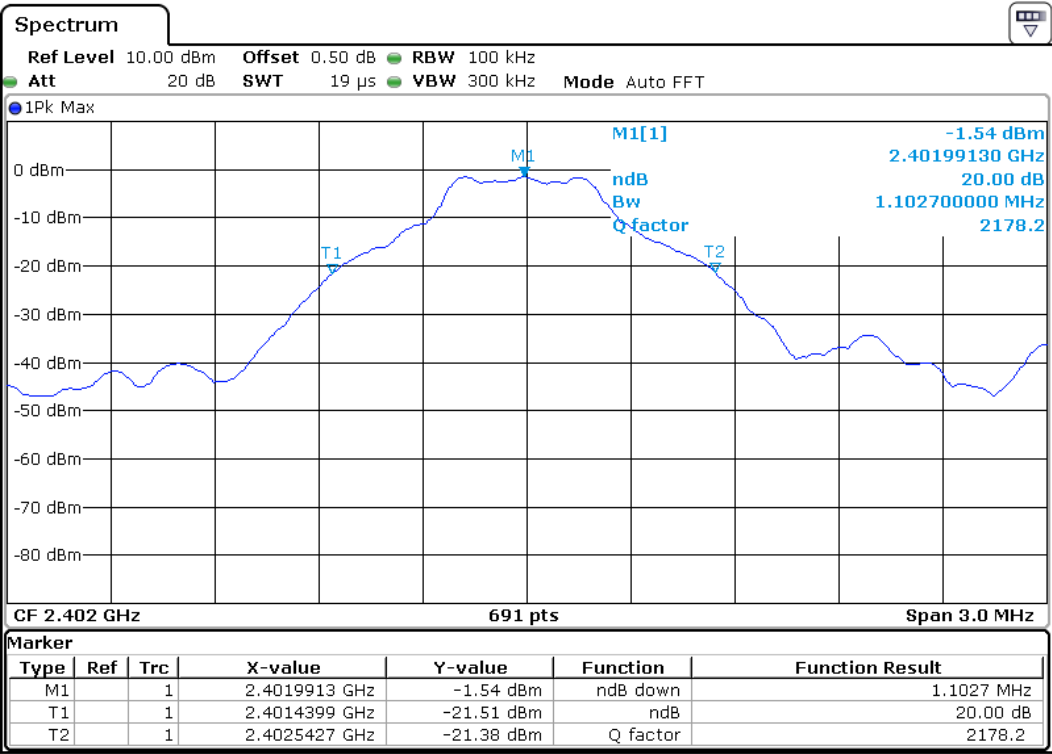


CH 39-1Mbps

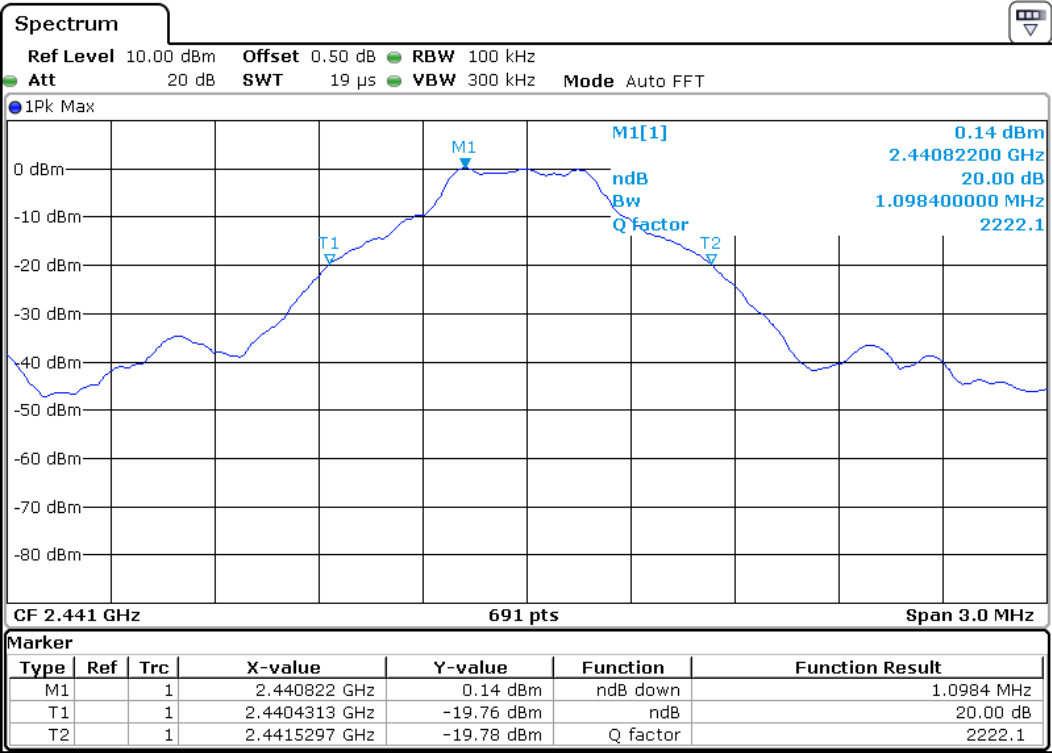





CH 78-1Mbps

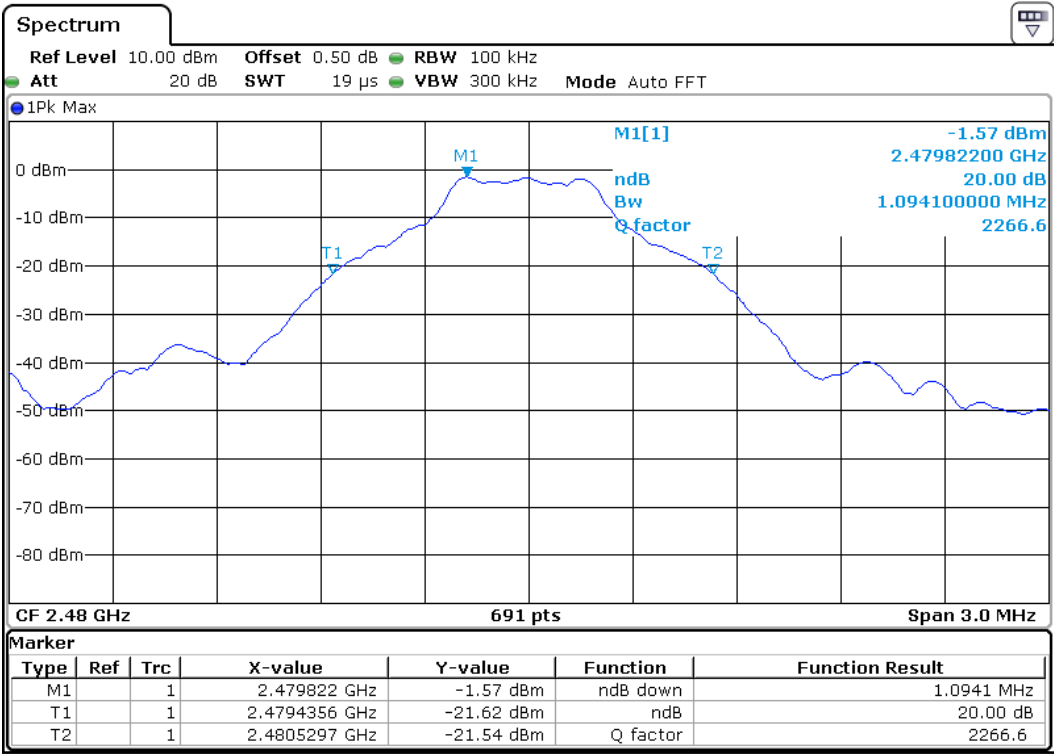


CH 00-3Mbps

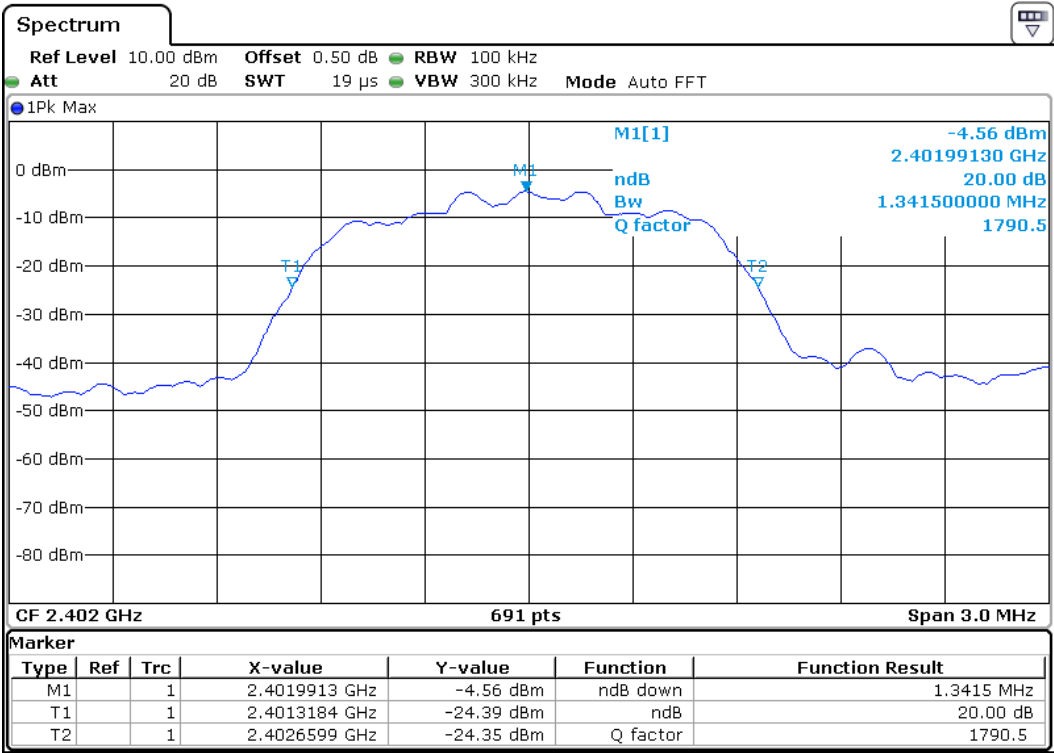

## CH 39-3Mbps

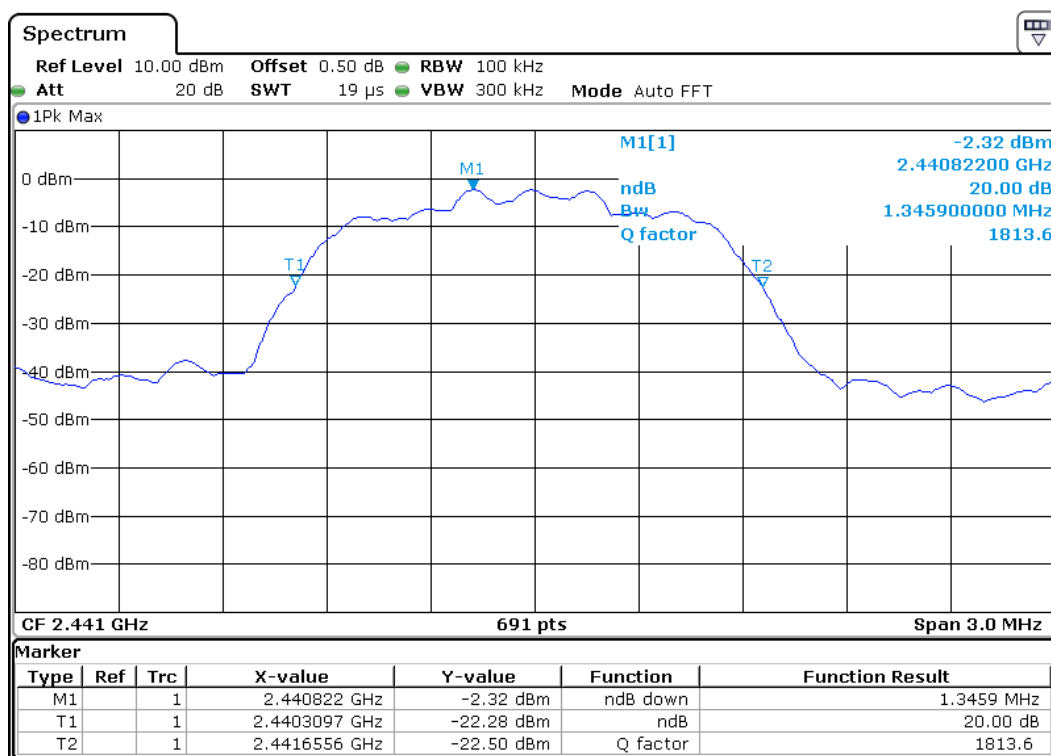

## CH 78-3Mbps

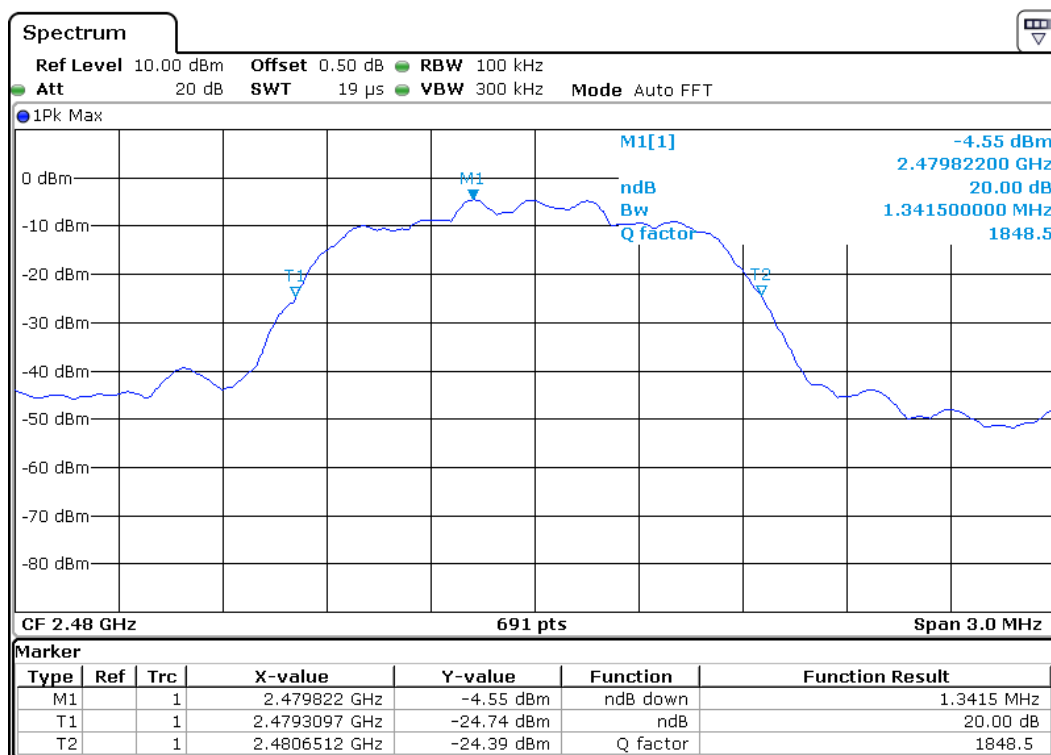

## 5.5 Carrier Frequencies Separated

### 5.5.1 Applied procedures / Limit

15.247(a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


### 5.5.2 Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer, set the Spectrum Analyzer as RBW=100kHz, VBW $\geq$ RBW, Sweep time=Auto, Detector Function=Peak.
- (2) The EUT should be transmitting at its maximum data rate. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. also shall be performed at different modes of operation.

### 5.5.3 Deviation from standard

No deviation.

### 5.5.4 Test setup

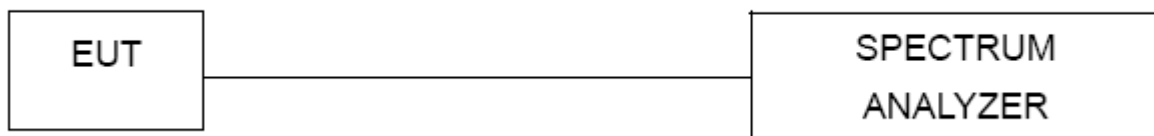

### 5.5.5 Test results

|              |                   |                    |                      |
|--------------|-------------------|--------------------|----------------------|
| EUT:         | Bluetooth headset | Model Name :       | M517-BT              |
| Temperature: | 22 °C             | Relative Humidity: | 53%                  |
| Pressure:    | 1010 hPa          | Test Power :       | DC 3.7V from battery |
| Test Mode :  | TX 1Mbps/ 3Mbps   |                    |                      |

#### Test result:

1Mbps

| Test Channel                                   | Carrier Frequencies Separated | Pass/Fail |
|------------------------------------------------|-------------------------------|-----------|
| Lower Channels<br>(channel 0 and channel 1)    | 998.6 KHz                     | Pass      |
| Middle Channels<br>(channel 39 and channel 40) | 998.6 KHz                     | Pass      |
| Upper Channels<br>(channel 77 and channel 78)  | 998.6 KHz                     | Pass      |

3Mbps


| Test Channel                                   | Carrier Frequencies Separated | Pass/Fail |
|------------------------------------------------|-------------------------------|-----------|
| Lower Channels<br>(channel 0 and channel 1)    | 998.6 KHz                     | Pass      |
| Middle Channels<br>(channel 39 and channel 40) | 998.6 KHz                     | Pass      |
| Upper Channels<br>(channel 77 and channel 78)  | 998.6 KHz                     | Pass      |

#### Remark:


The limit is maximum two-thirds of the 20 dB bandwidth: 920 KHz.



CH 00-1Mbps

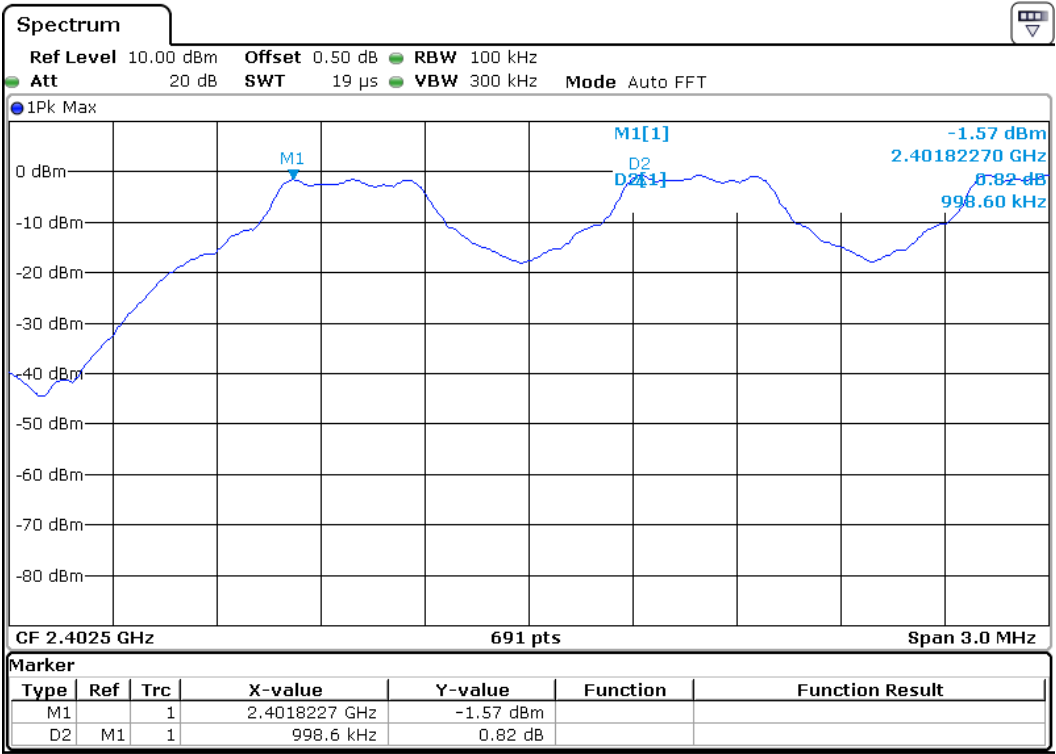


CH 39-1Mbps

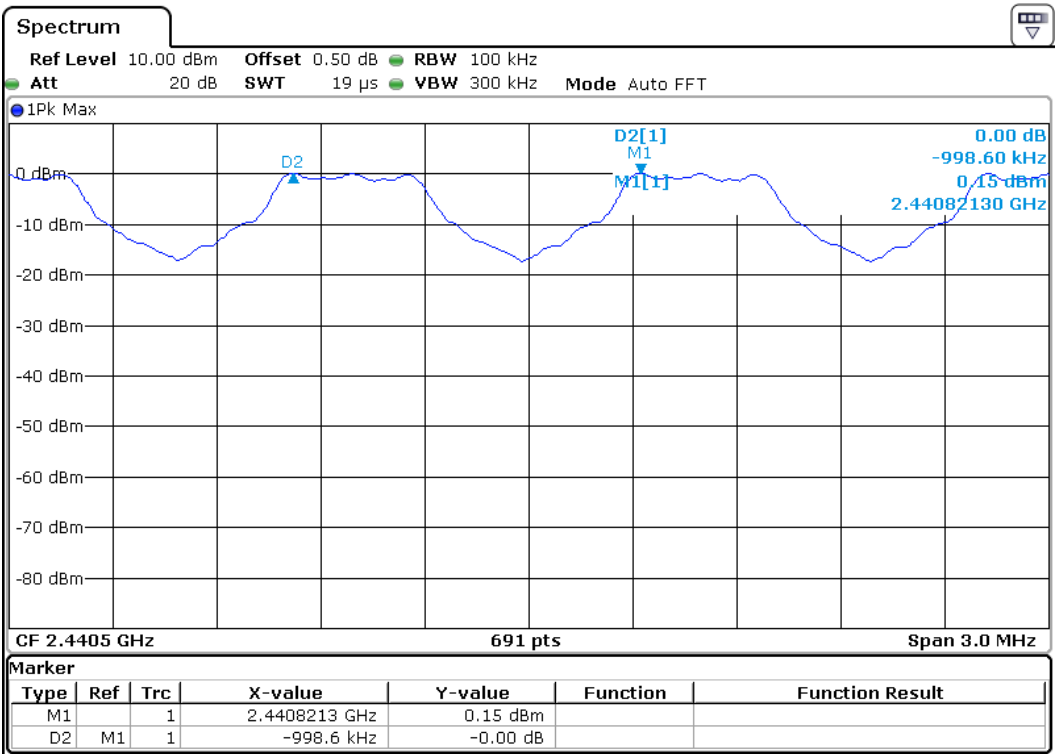




CH 78-1Mbps

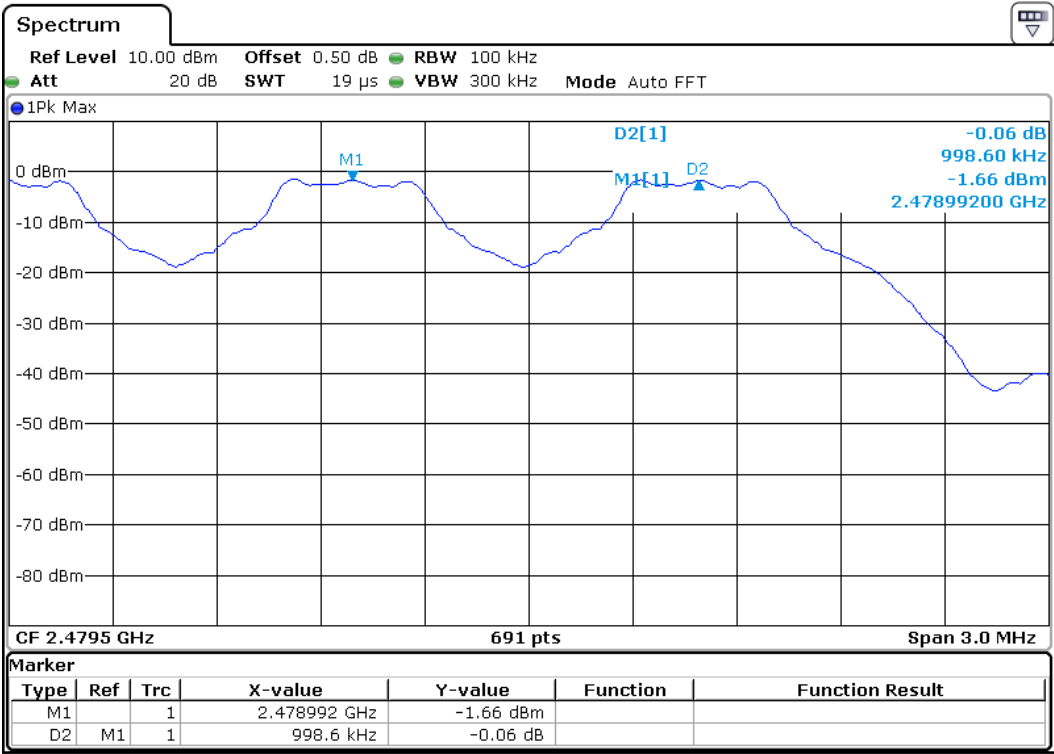


CH00 -3Mbps

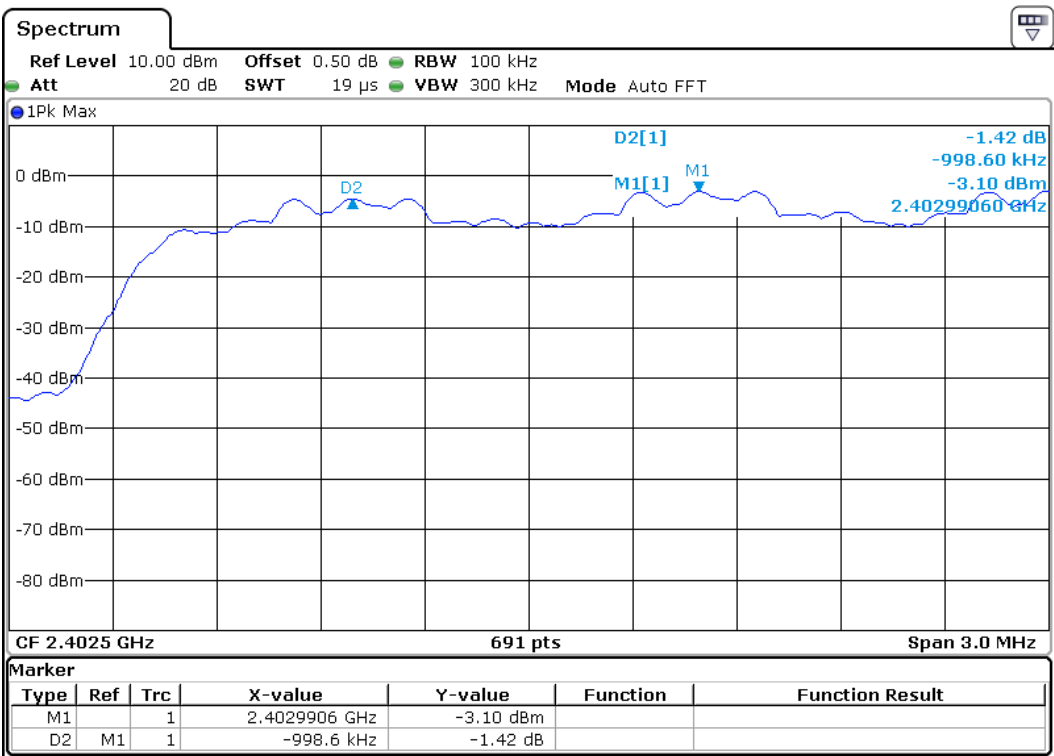




CH39 -3Mbps

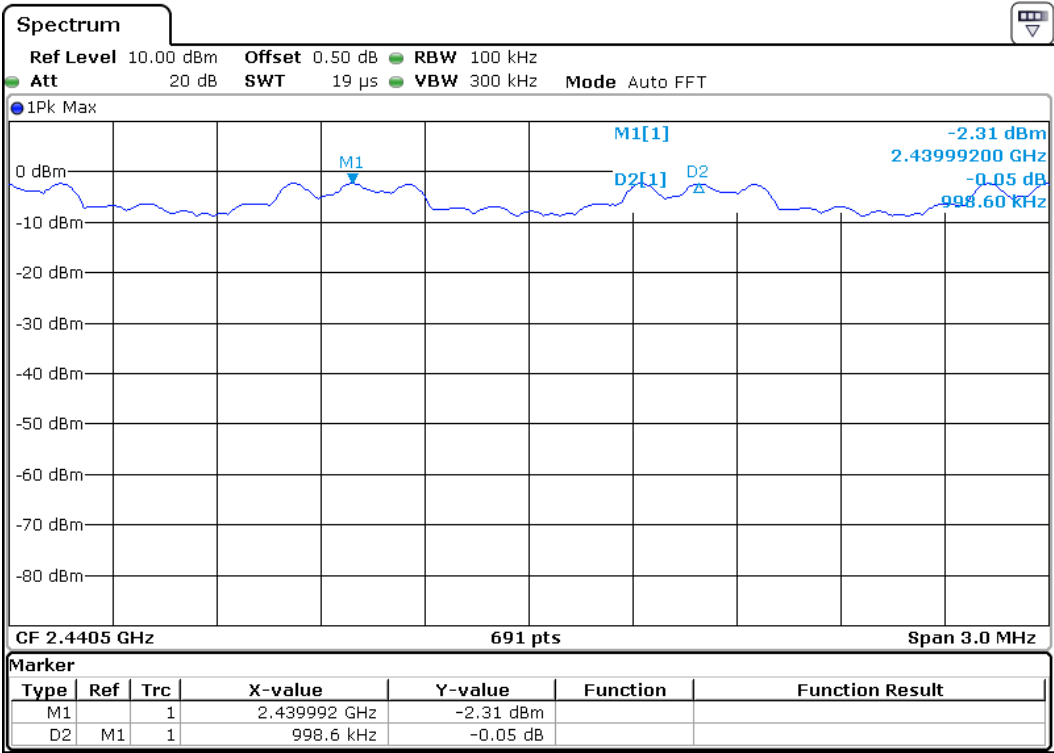

CH78 -3Mbps

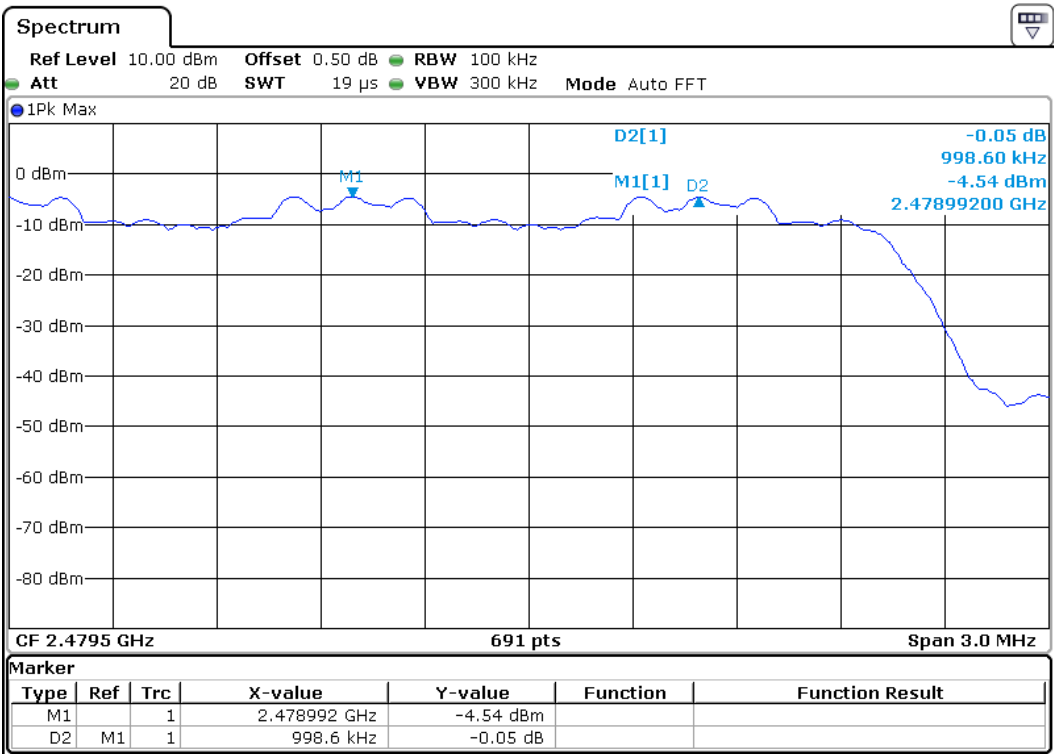

Test result: The unit does meet the FCC requirements.

## 5.6 Hopping Channel Number

### 5.6.1 Applied procedures / Limit

15.247(a) (1) (iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 5.6.2 Test procedure

- (1) Connected the antenna port to the Spectrum Analyzer , set the Spectrum Analyzer as RBW=100kHz,VBW $\geq$ RBW, Sweep time=Auto, Detector Function=Peak Trace=Maxhold.
- (2) The EUT should be have its hopping function enabled. Maxhold and record hopping channels It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

### 5.6.3 Deviation from standard

No deviation.

### 5.6.4 Test setup




### 5.6.5 Test result

| Hopping Channel Number result     |       |                      |
|-----------------------------------|-------|----------------------|
| Operating Mode: 1Mbps\ 3Mbps Mode |       | Test date:2016-03-15 |
| Result                            | Limit | Conclusion           |
| 79                                | 15    | Pass                 |




|              |                   |                    |                      |
|--------------|-------------------|--------------------|----------------------|
| EUT:         | Bluetooth headset | Model Name :       | M517-BT              |
| Temperature: | 22 °C             | Relative Humidity: | 53%                  |
| Pressure:    | 1010 hPa          | Test Power :       | DC 3.7V from battery |
| Test Mode :  | TX 1Mbps/ 3Mbps   |                    |                      |

1Mbps

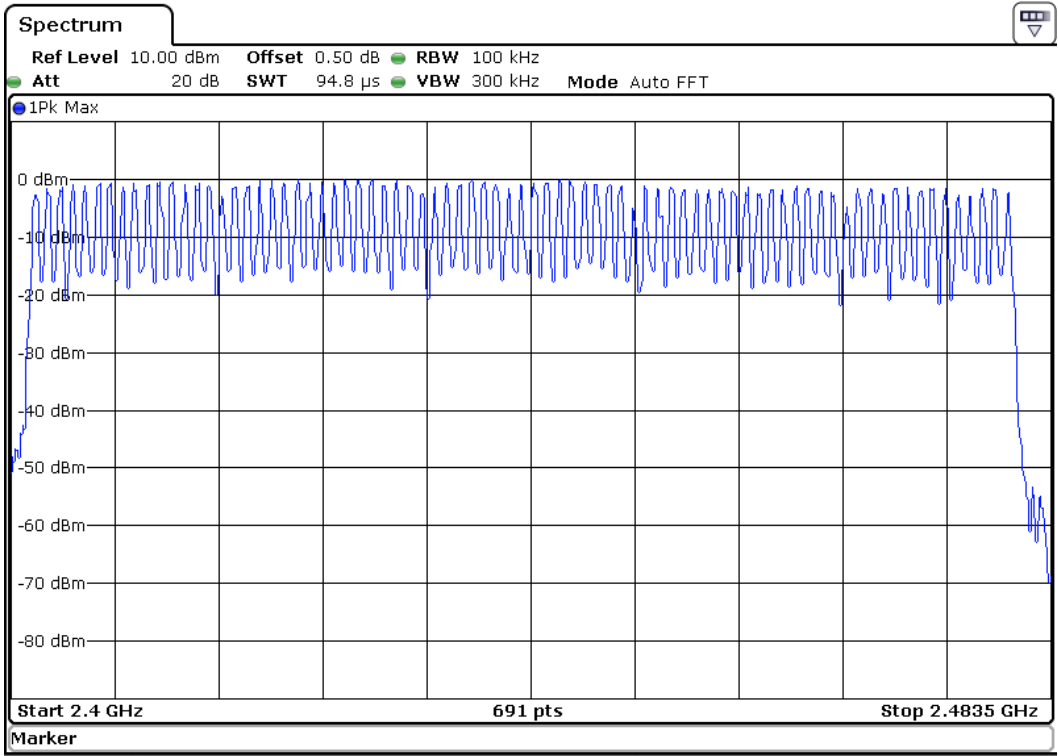

3Mbps

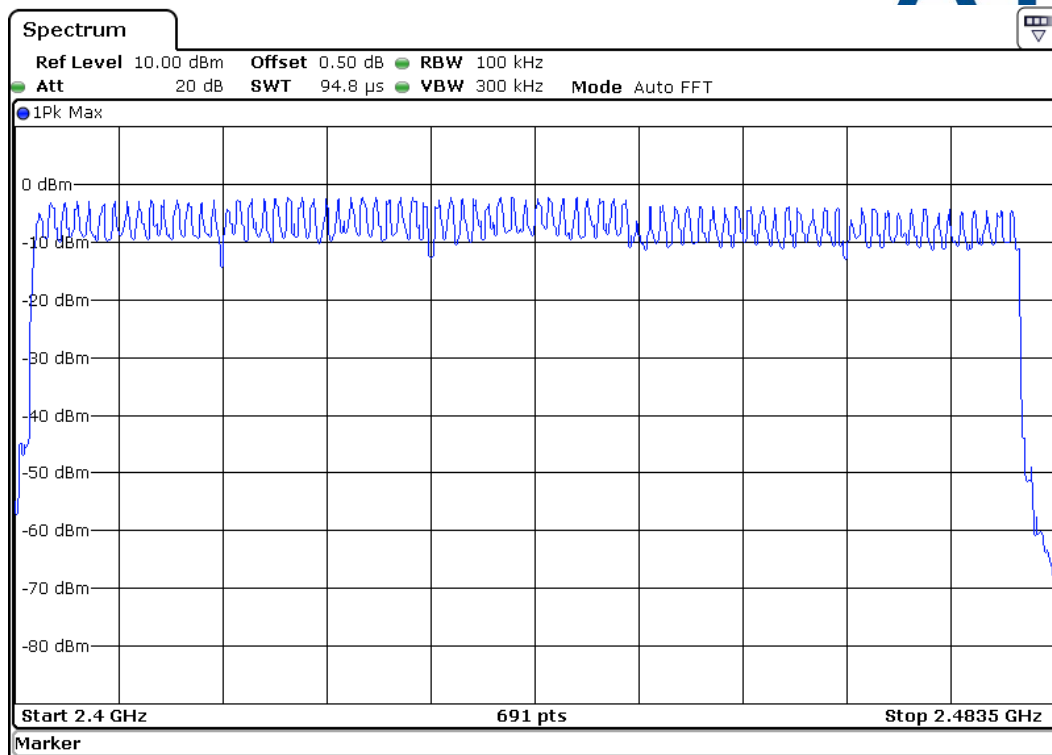

**Test result: The unit does meet the FCC requirements.**

## 5.7 Dwell time

### 5.7.1 Applied procedures / Limit

15.247(a) (1) (iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 5.7.2 Test procedure

- (1) Place the EUT on the table in the chamber or connect the antenna port of the EUT to spectrum analyzer and set it in transmitting mode.
- (2) Set RBW of spectrum analyzer to 1MHz, VBW  $\geq$  RBW
- (3) Use a video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for DH5, DH3 and DH1 packet transmitting.
- (8) Measure the maximum time duration of one single pulse.
- (9) A Period Time =  $79 \times 0.4 = 31.6$  S  
DH1 Time Slot: Reading \*  $(1600/2) \times 31.6/79$   
DH3 Time Slot: Reading \*  $(1600/4) \times 31.6/79$   
DH5 Time Slot: Reading \*  $(1600/6) \times 31.6/79$

### 5.7.3 Deviation from standard

No deviation.


### 5.7.4 TEST SETUP




### 5.7.5 Test result

|              |                              |                    |                      |
|--------------|------------------------------|--------------------|----------------------|
| EUT:         | Bluetooth headset            | Model Name :       | M517-BT              |
| Temperature: | 26 °C                        | Relative Humidity: | 60%                  |
| Pressure:    | 1012 hPa                     | Test Voltage :     | DC 3.7V from battery |
| Test Mode :  | CH0-DH1/DH3/DH5 (1Mbps Mode) |                    |                      |


| Data Packet | Frequency | Pulse Duration (ms) | Dwell Time (s) | Limits (s) |
|-------------|-----------|---------------------|----------------|------------|
| DH1         | 2402 MHz  | 0.435               | 0.1283         | 0.4000     |
| DH3         | 2402 MHz  | 1.691               | 0.2595         | 0.4000     |
| DH5         | 2402 MHz  | 2.943               | 0.3085         | 0.4000     |

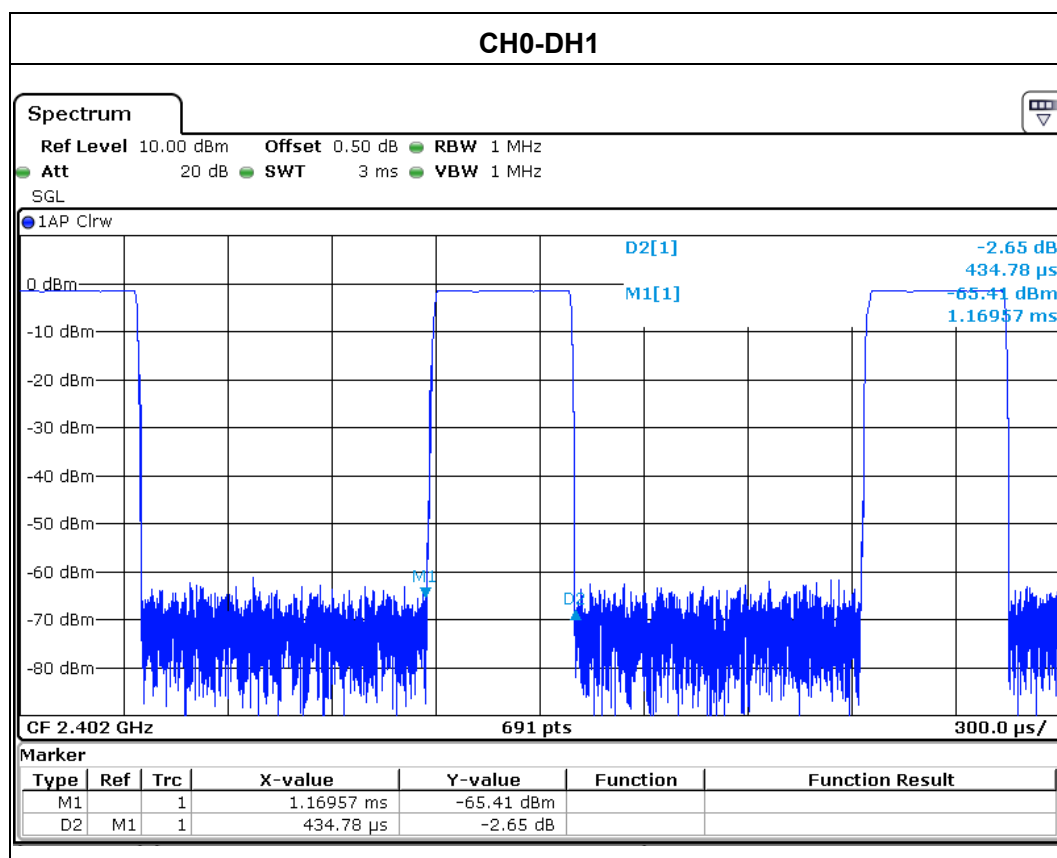


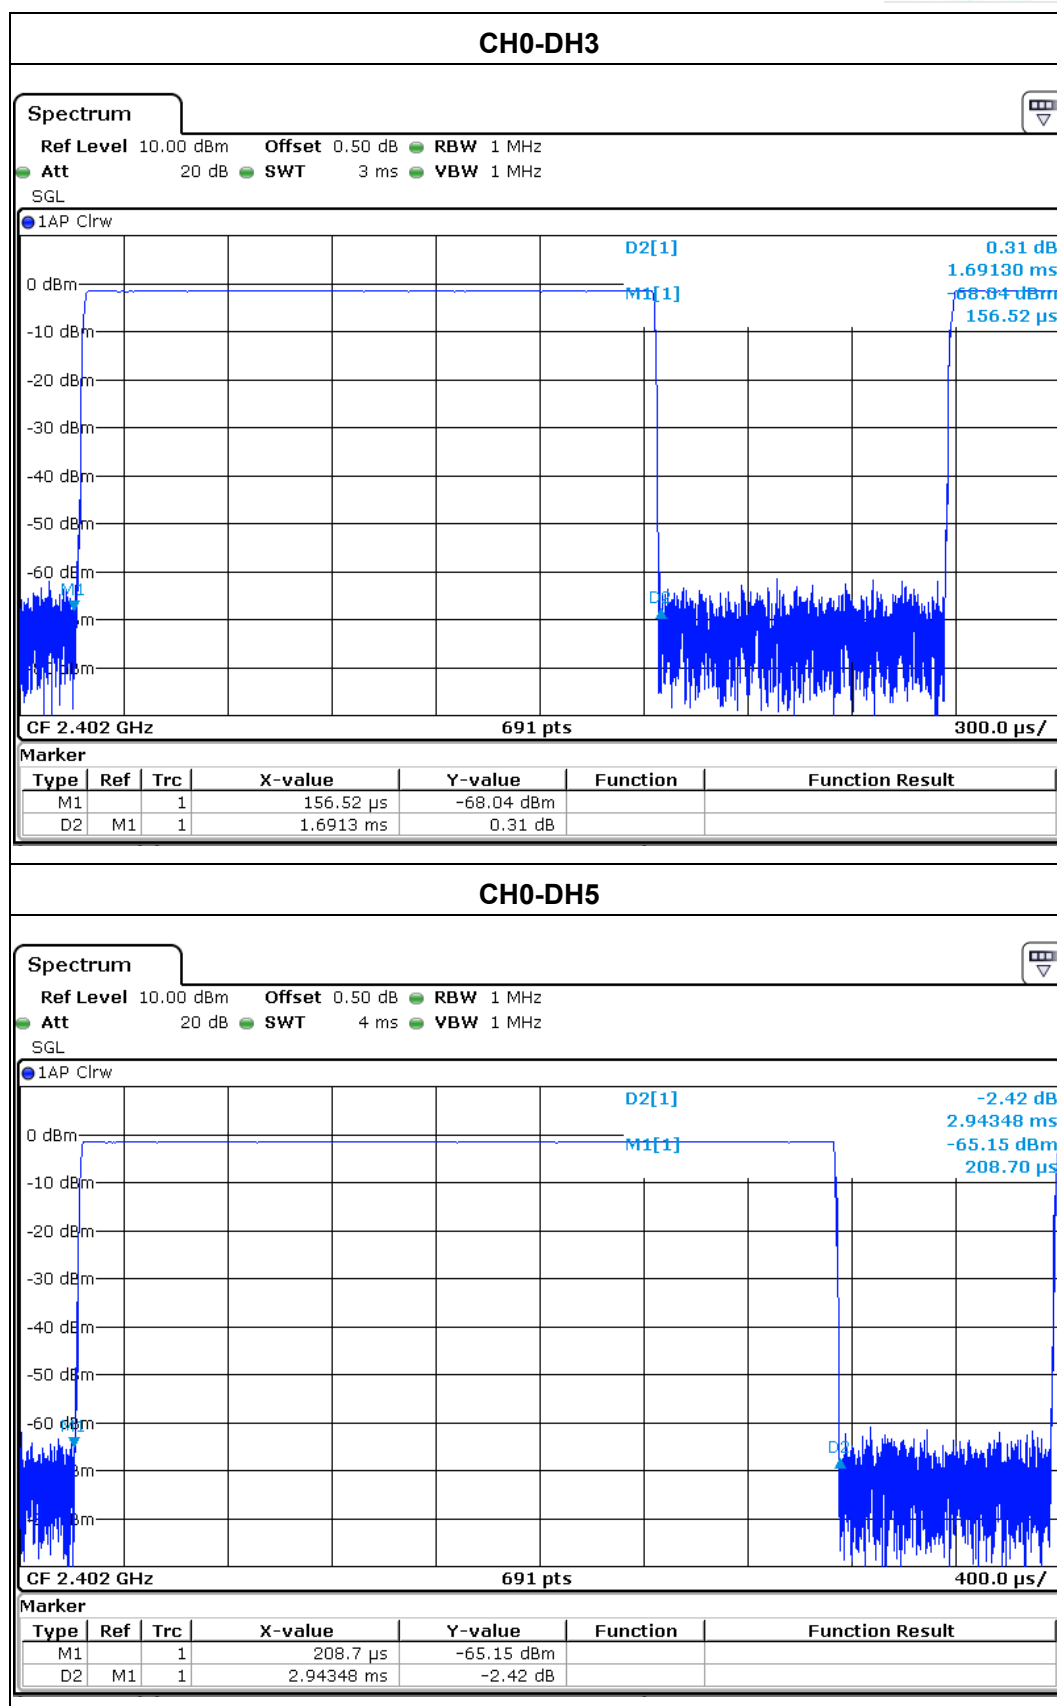

|              |                                 |                    |                      |
|--------------|---------------------------------|--------------------|----------------------|
| EUT:         | Bluetooth headset               | Model Name :       | M517-BT              |
| Temperature: | 26 °C                           | Relative Humidity: | 60%                  |
| Pressure:    | 1012 hPa                        | Test Voltage :     | DC 3.7V from battery |
| Test Mode :  | CH0-3DH1/3DH3/3DH5 (3Mbps Mode) |                    |                      |

| Data Packet | Frequency | Pulse Duration (ms) | Dwell Time (s) | Limits (s) |
|-------------|-----------|---------------------|----------------|------------|
| DH1         | 2402 MHz  | 0.443               | 0.1283         | 0.4000     |
| DH3         | 2402 MHz  | 1.704               | 0.2595         | 0.4000     |
| DH5         | 2402 MHz  | 2.962               | 0.3085         | 0.4000     |

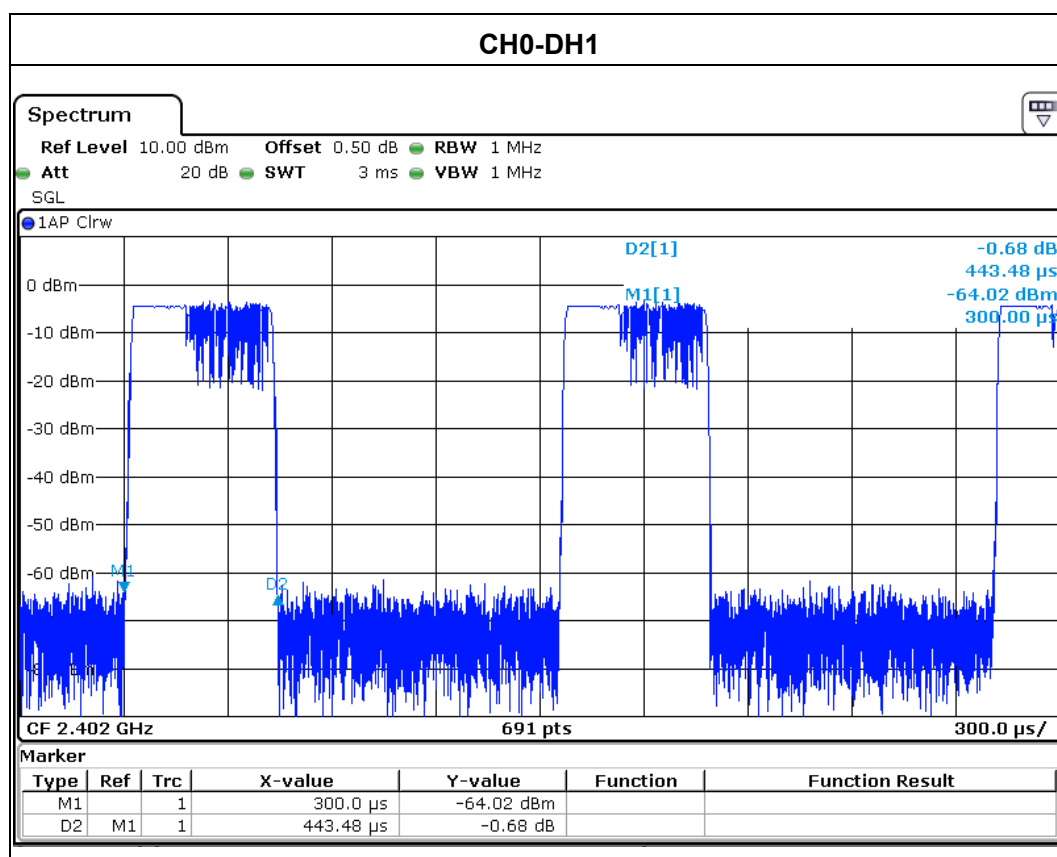

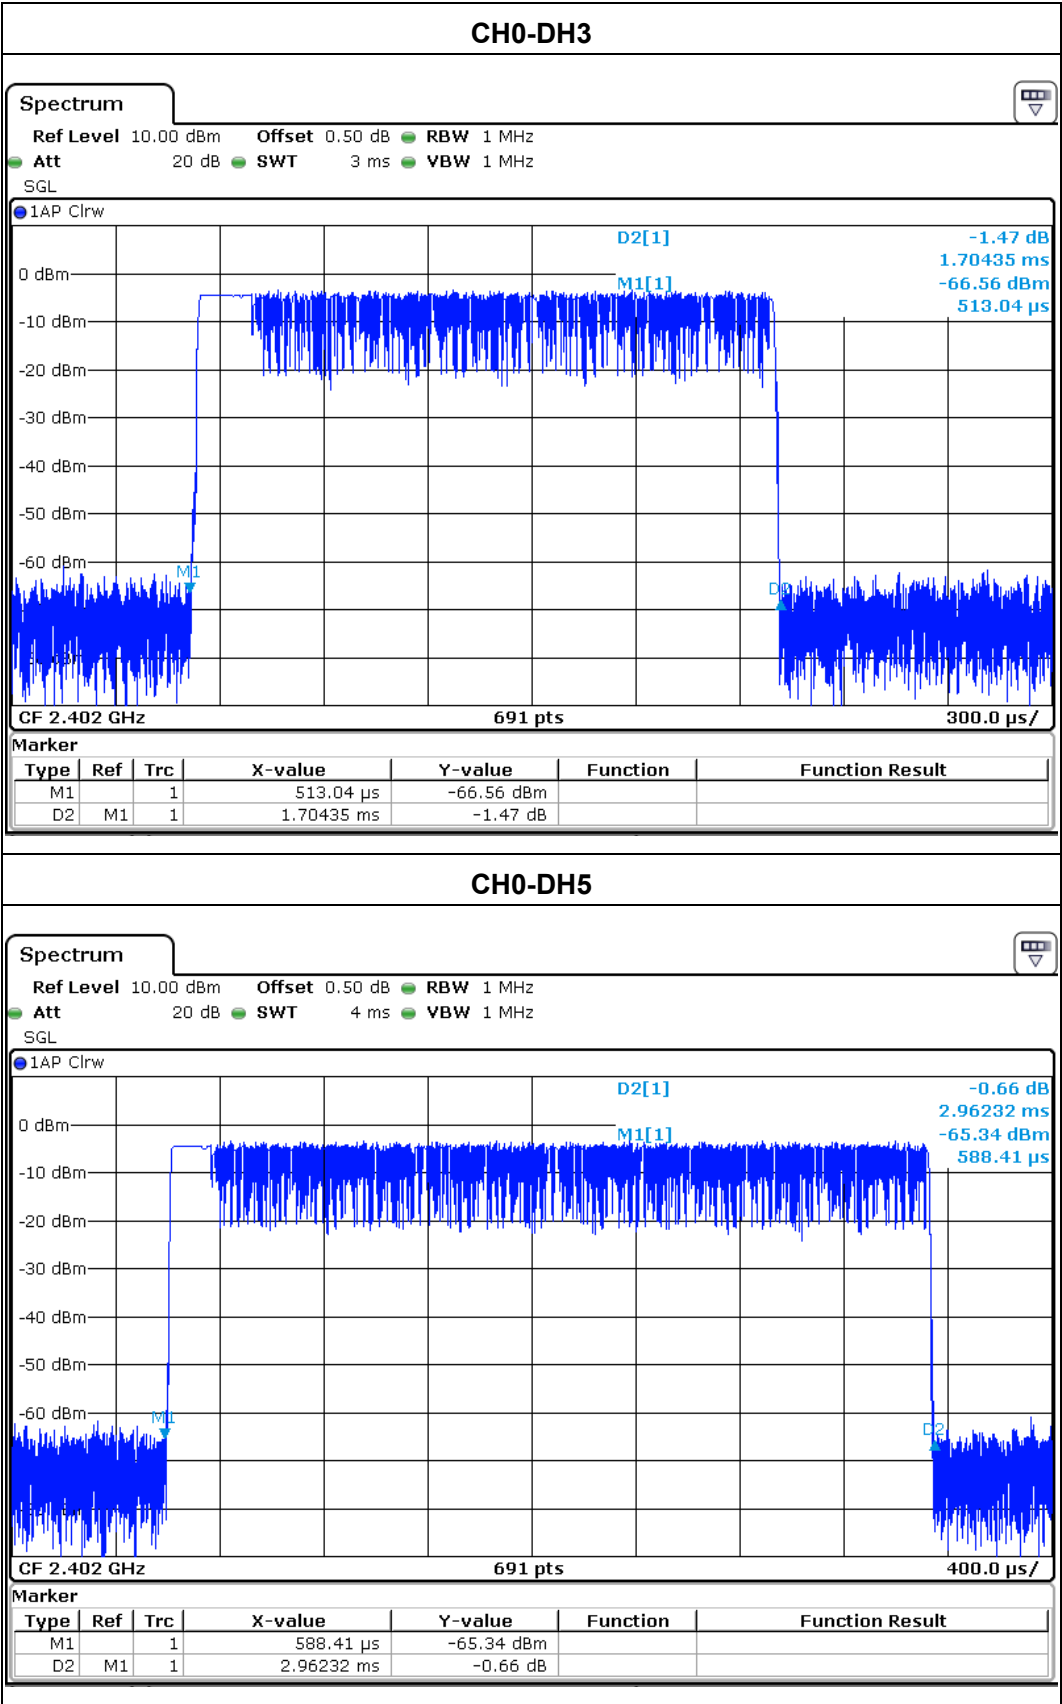

## 5.8 Maximum Peak Output Power

### 5.8.1 Applied procedures / Limit

5.247(a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

15.247(b) (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


### 5.8.2 Test procedure

- (1) Connected the antenna port to the broadband peak RF power meter, Allow the transmitted power to stabilize, record the max peak value.
- (2) The EUT should be transmitting at its maximum data rate.
- (3) The above procedure shall be repeated at the lowest, the middle, and the highest frequency of the stated frequency range with modulated mode. also shall be performed at different modes of operation.

### 5.8.3 Deviation from standard

No deviation.

### 5.8.4 Test setup

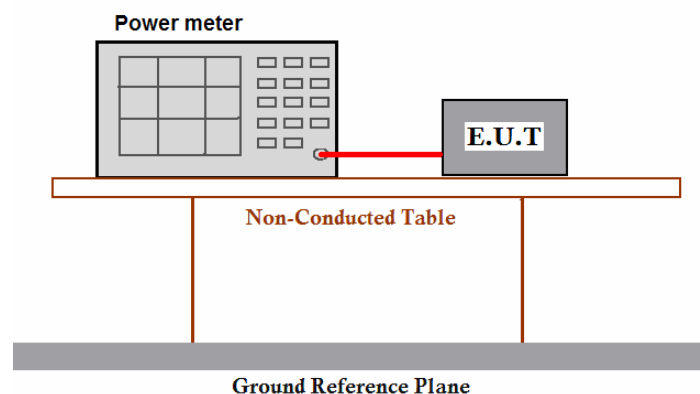

### 5.8.5 Test results

|                                                                                |                   |                    |                      |
|--------------------------------------------------------------------------------|-------------------|--------------------|----------------------|
| EUT:                                                                           | Bluetooth headset | Model Name :       | M517-BT              |
| Temperature:                                                                   | 22 °C             | Relative Humidity: | 60%                  |
| Pressure:                                                                      | 1010 hPa          | Test Voltage :     | DC 3.7V from battery |
| Test Mode :                                                                    | TX                |                    |                      |
| Note: All the data rates have be tested and the worst-case as the table below. |                   |                    |                      |

| <b>Test Result:</b>                                          |                             |                    |             |        |
|--------------------------------------------------------------|-----------------------------|--------------------|-------------|--------|
| <b>Normal mode:</b>                                          |                             |                    |             |        |
| Test Channel                                                 | Fundamental Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Result |
| Lowest                                                       | 2402                        | -1.42              | 30.0        | Pass   |
| Middle                                                       | 2441                        | 0.19               | 30.0        | Pass   |
| Highest                                                      | 2480                        | -1.47              | 30.0        | Pass   |
| <b>3EDR mode:</b>                                            |                             |                    |             |        |
| Test Channel                                                 | Fundamental Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Result |
| Lowest                                                       | 2402                        | -3.23              | 21.0        | Pass   |
| Middle                                                       | 2441                        | -1.51              | 21.0        | Pass   |
| Highest                                                      | 2480                        | -3.52              | 21.0        | Pass   |
| <b>Test result: The unit does meet the FCC requirements.</b> |                             |                    |             |        |

## 5.9 Band edge

### 5.9.1 Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


### 5.9.2 Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation,  $RBW \geq 1\%$  of the span,  $VBW \geq RBW$ , Sweep = auto, Detector function = peak, Trace = max hold

### 5.9.3 Deviation from standard

No deviation.


### 5.9.4 Test setup

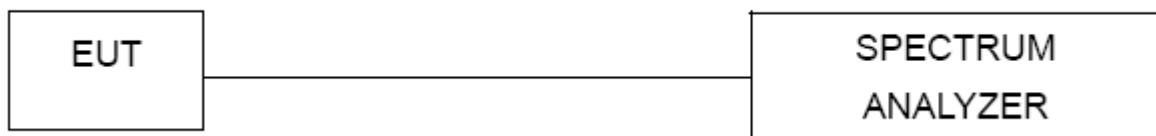




5.9.5 Test results


CH00 (Lower) Data rate 1Mbps

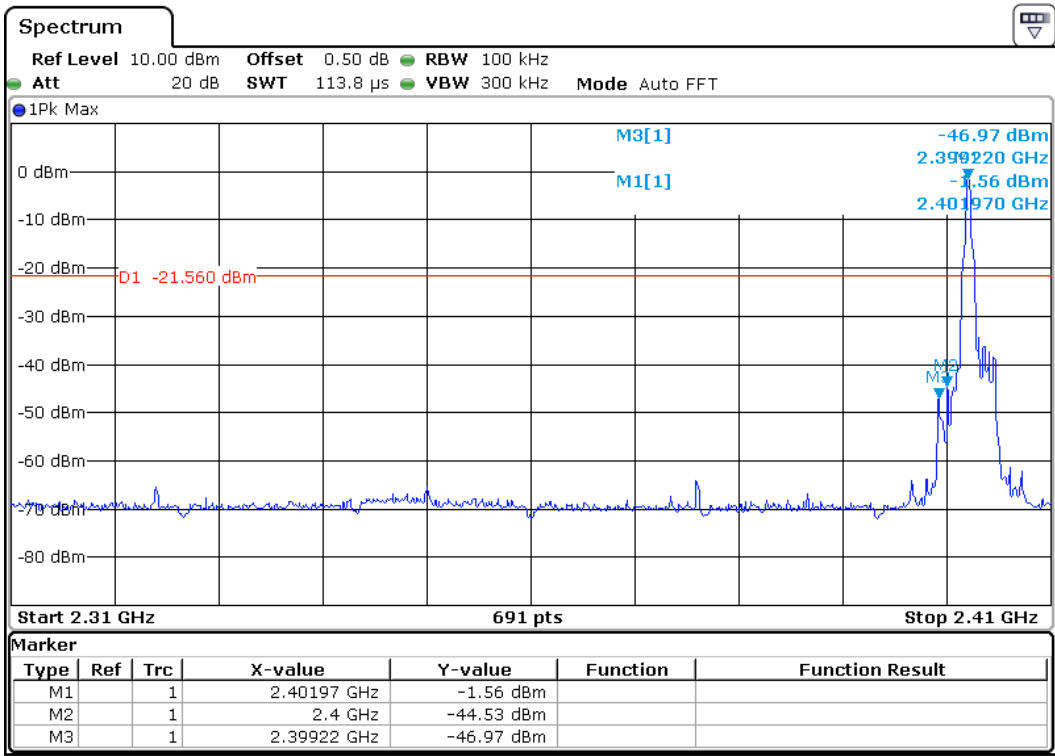


CH 78 (Upper) Data rate 1Mbps

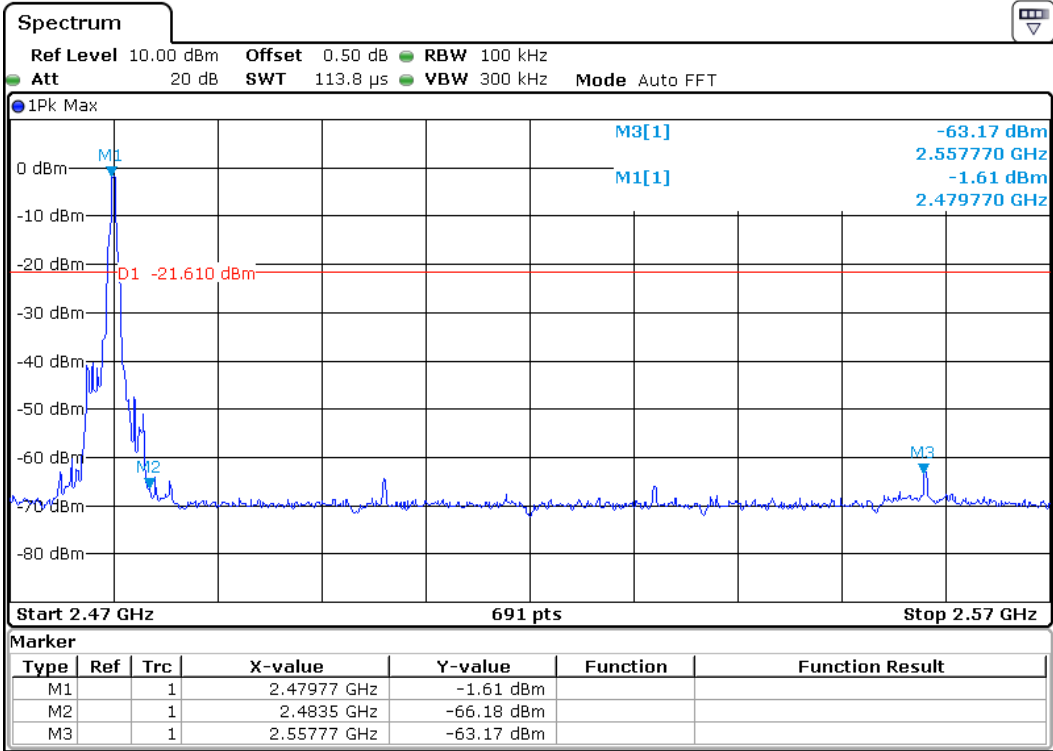

## CH00 (Lower) Data rate 3Mbps

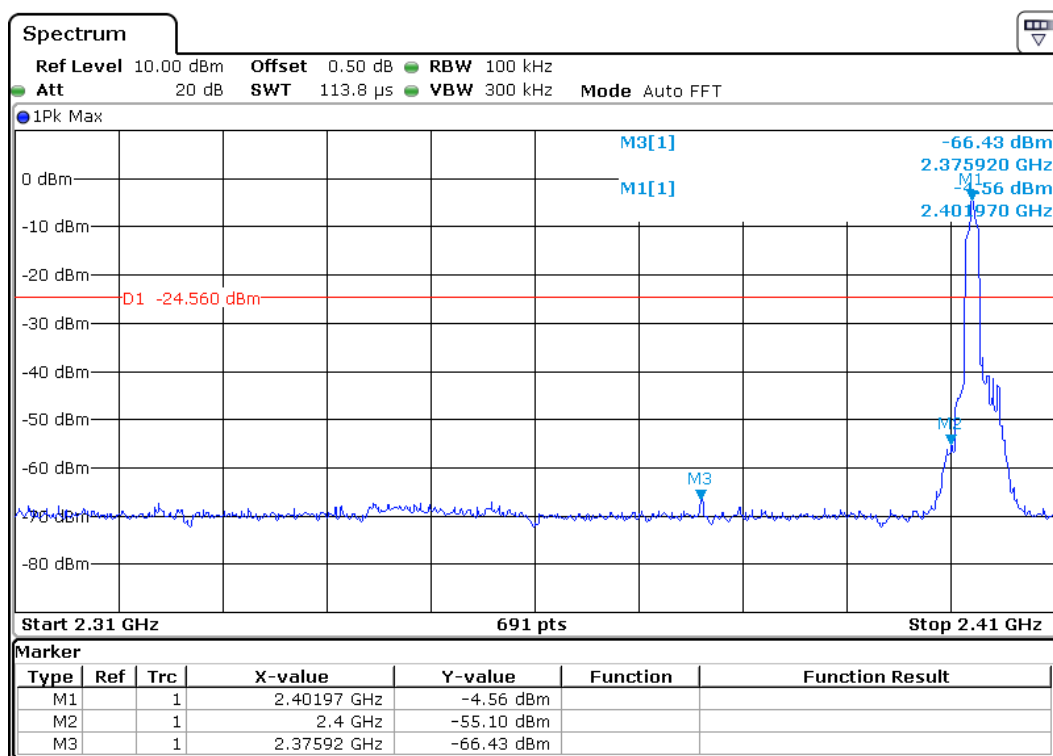


## CH 78 (Upper) Data rate 3Mbps

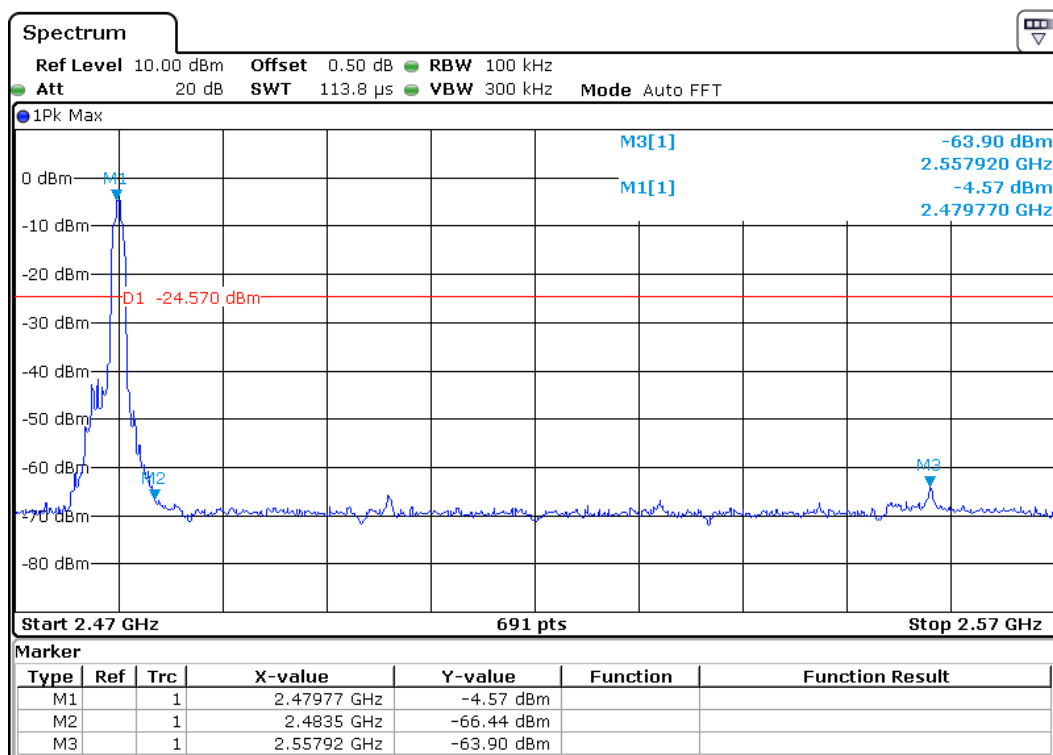




CH00 (Lower) Data rate 1Mbps

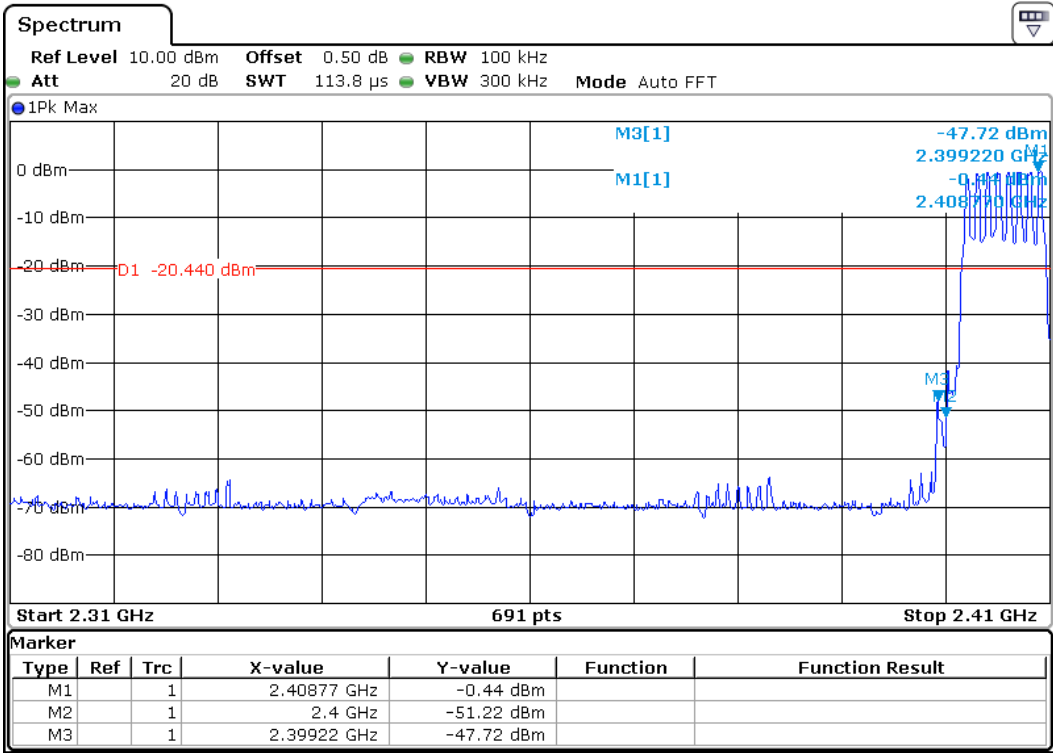


CH 78 (Upper) Data rate 1Mbps

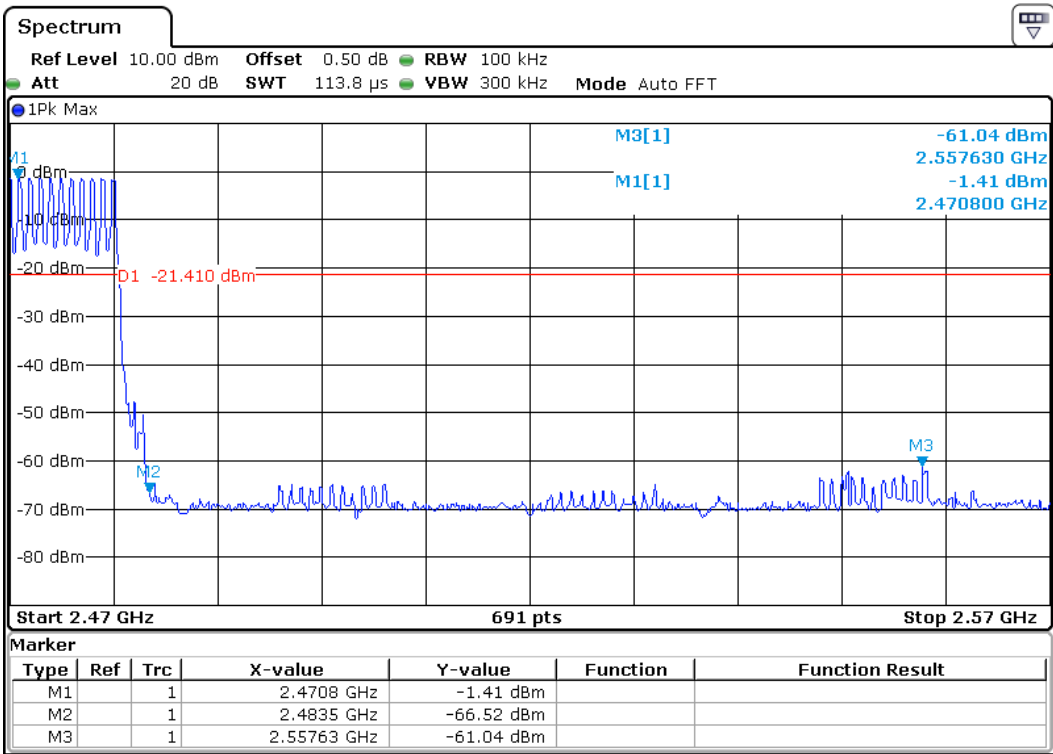




CH00 (Lower) Data rate 3Mbps

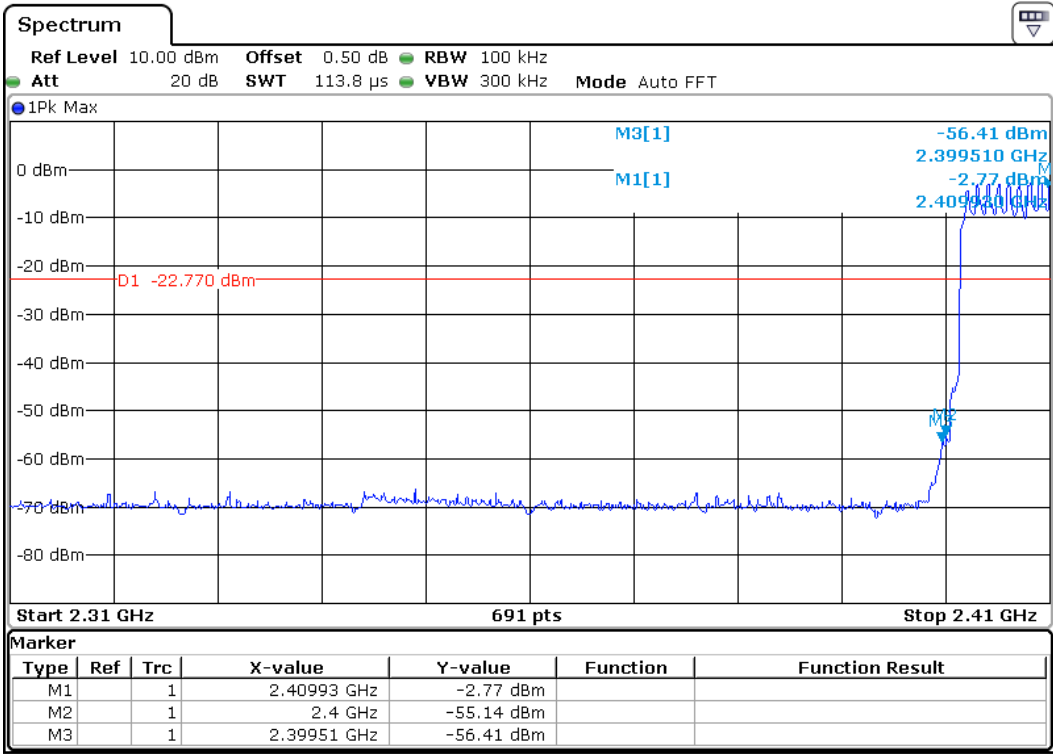

CH 78 (Upper) Data rate 3Mbps

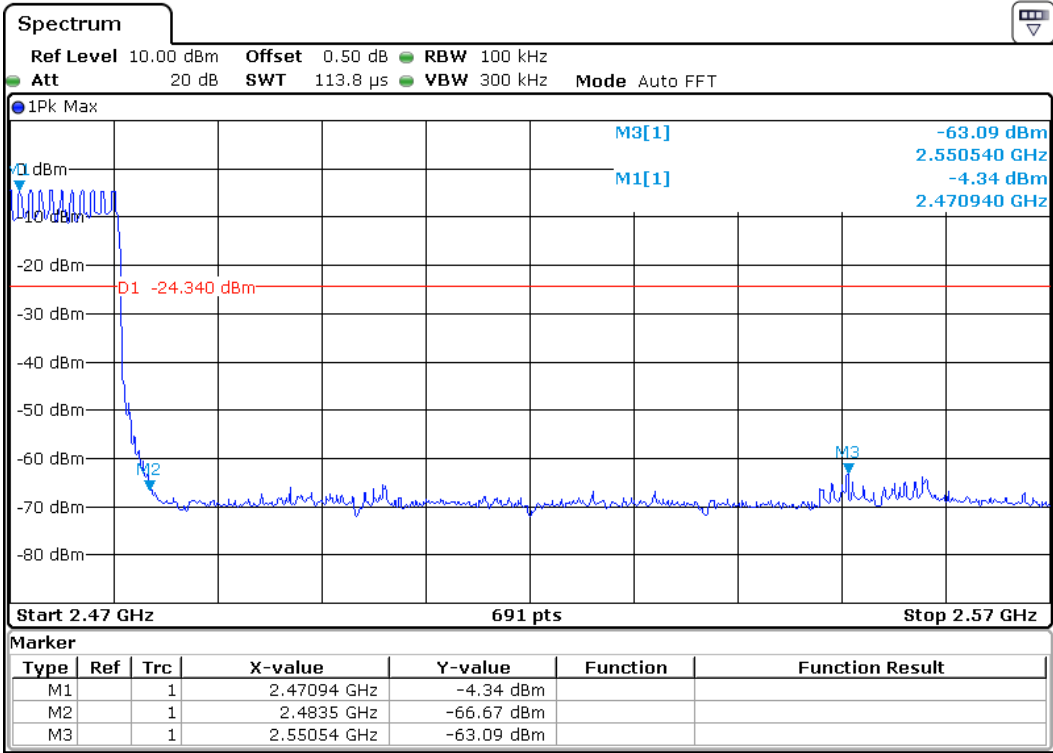

## 5.10 Conducted Spurious Emissions

### 5.10.1 Applied procedures / Limit

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


### 5.10.2 Test procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10<sup>th</sup> harmonic. Typically, several plots are required to cover this entire span. RBW = 100 kHz  
VBW  $\geq$  RBW, Sweep = auto, Detector function = peak, Trace = max hold  
sweep points  $\geq$  investigated frequency range/RBW.

### 5.10.3 Deviation from standard

No deviation.


### 5.10.4 Test setup

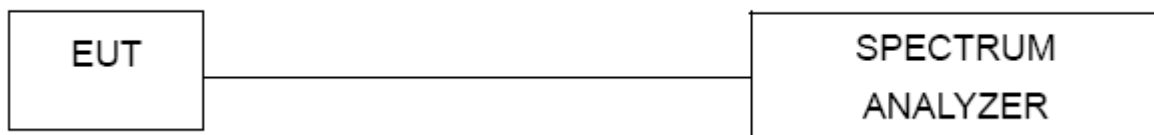




5.10.5 Test results


CH00 Data rate 1Mbps 30MHz to 25GHz

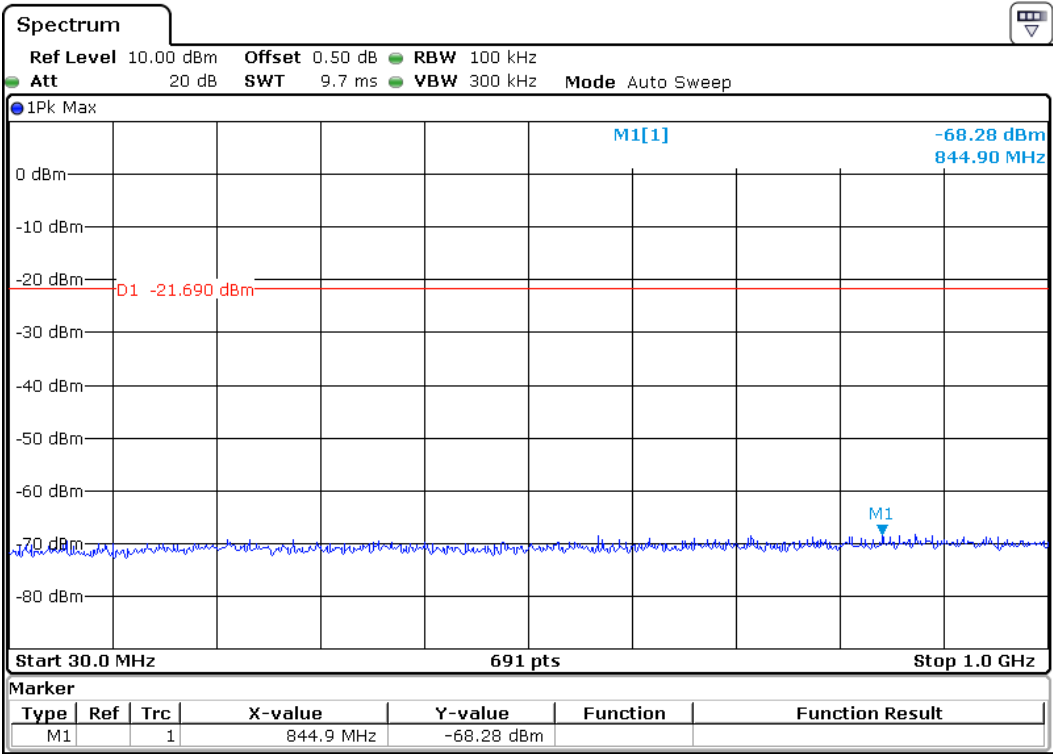


Note: Sweep Points=9700

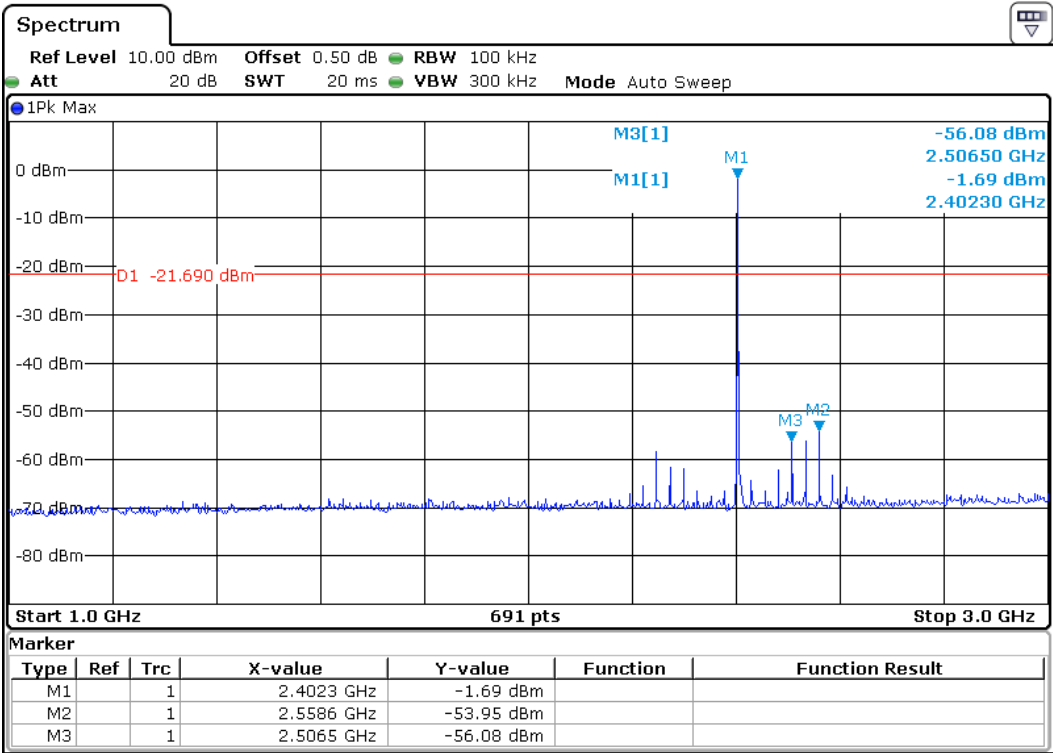

Note: Sweep Points=20000

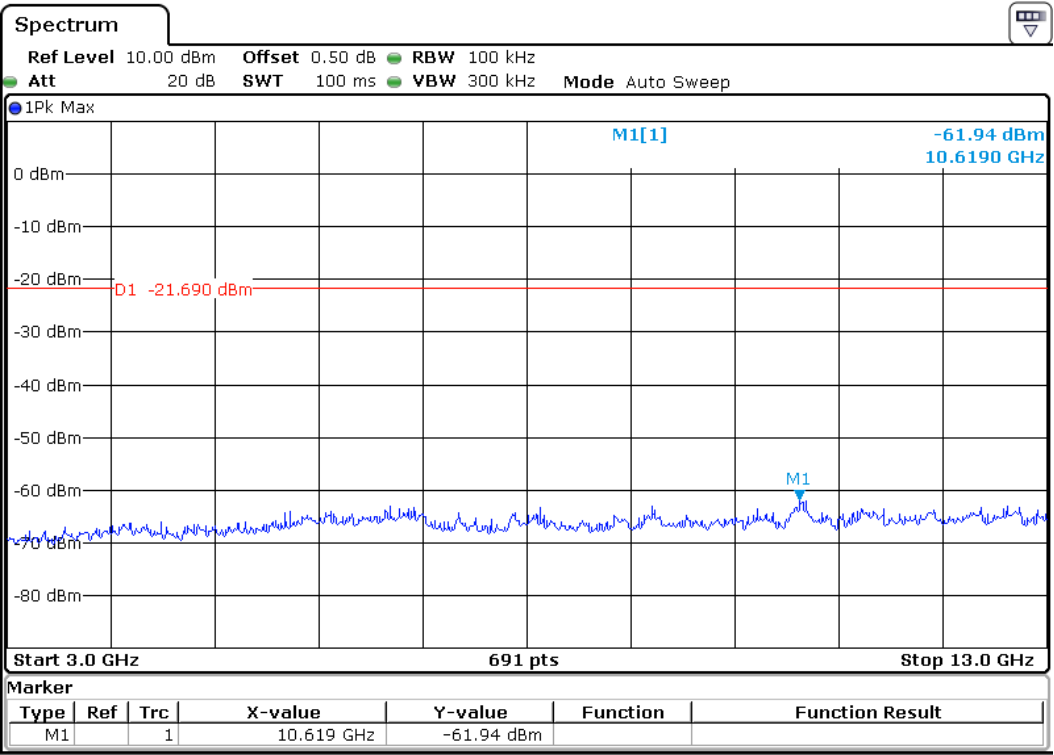


Note: Sweep Points=100000

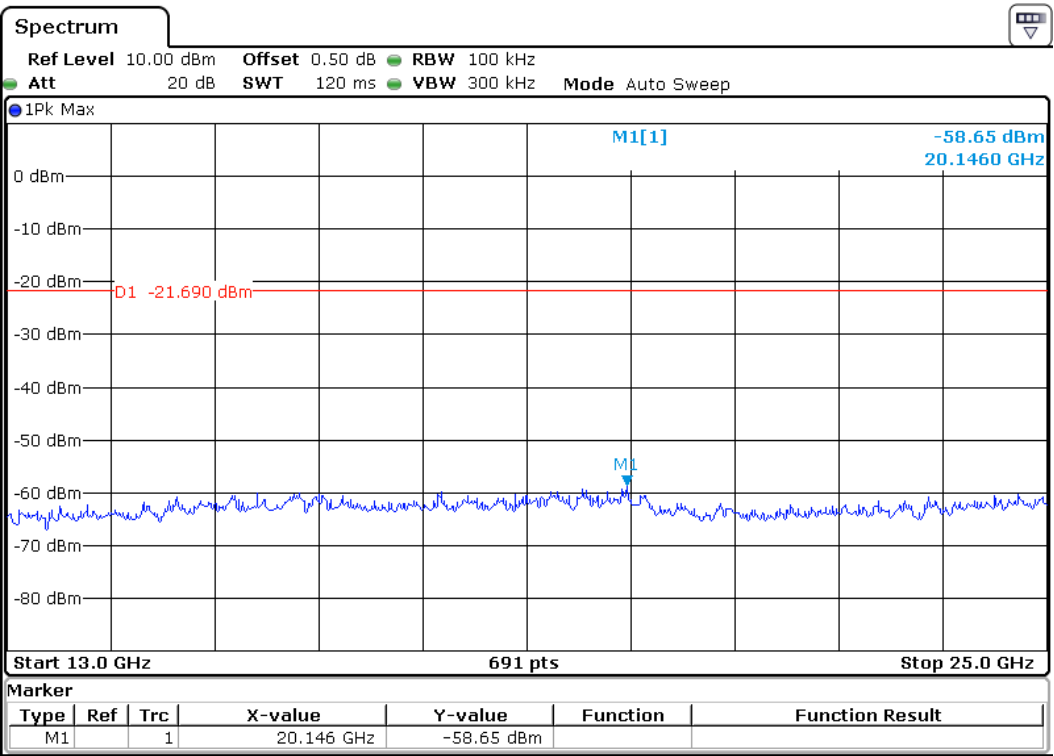


Note: Sweep Points=120000




CH39 Data rate 1Mbps 30MHz to 25GHz

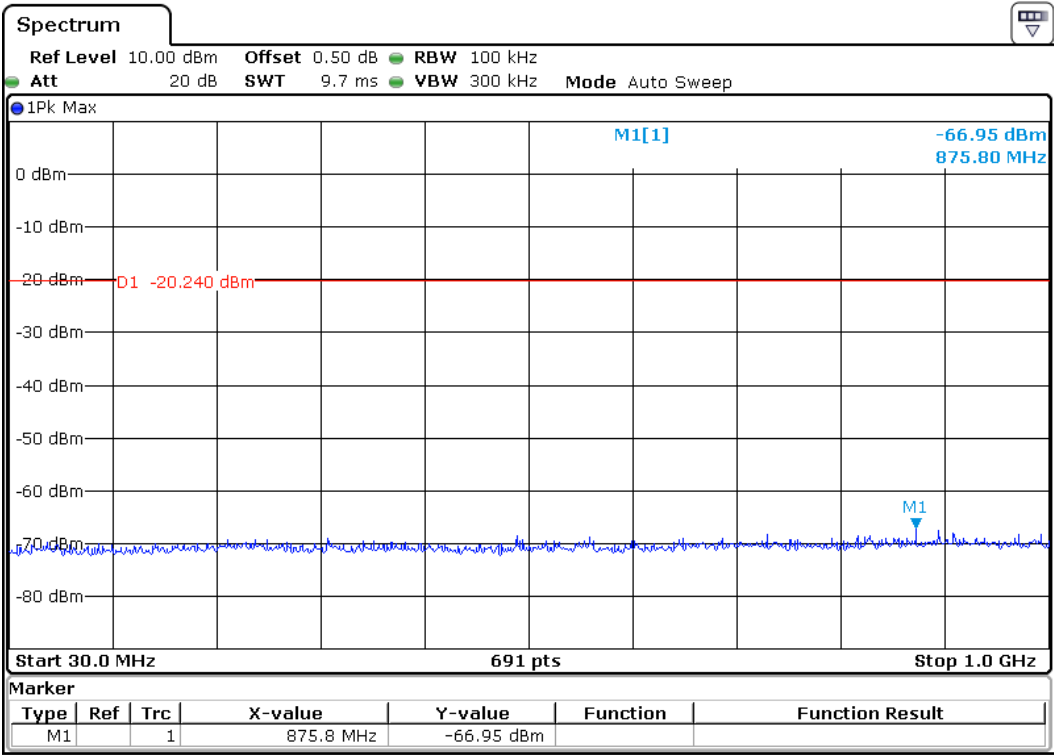


Note: Sweep Points=9700

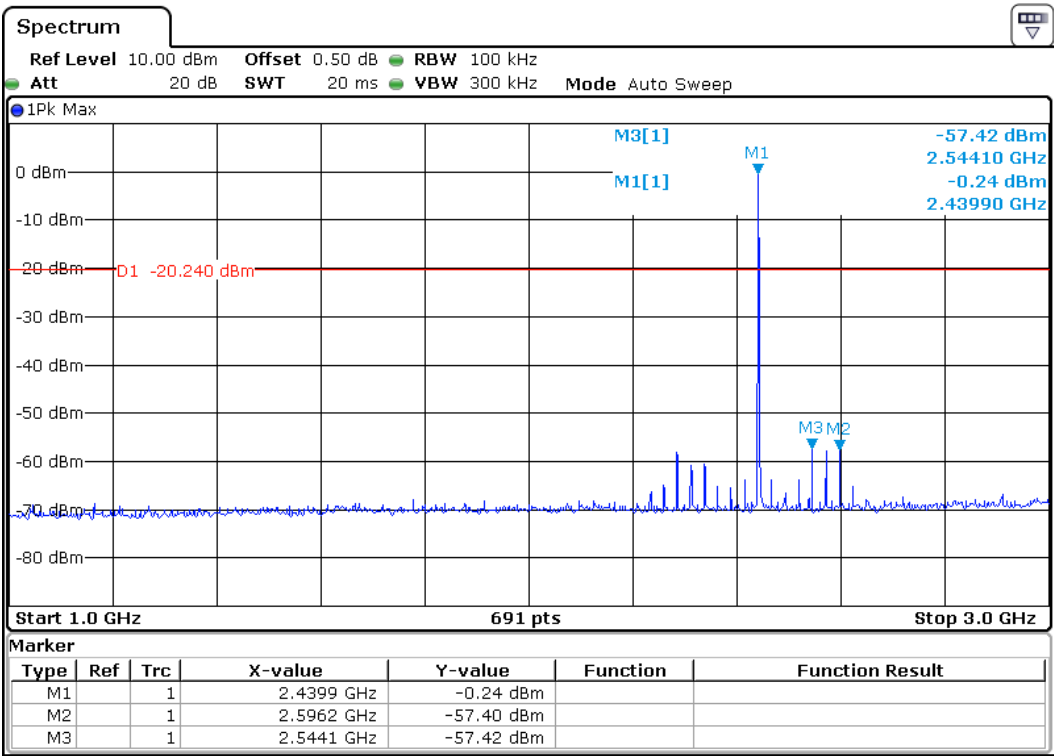

Note: Sweep Points=20000

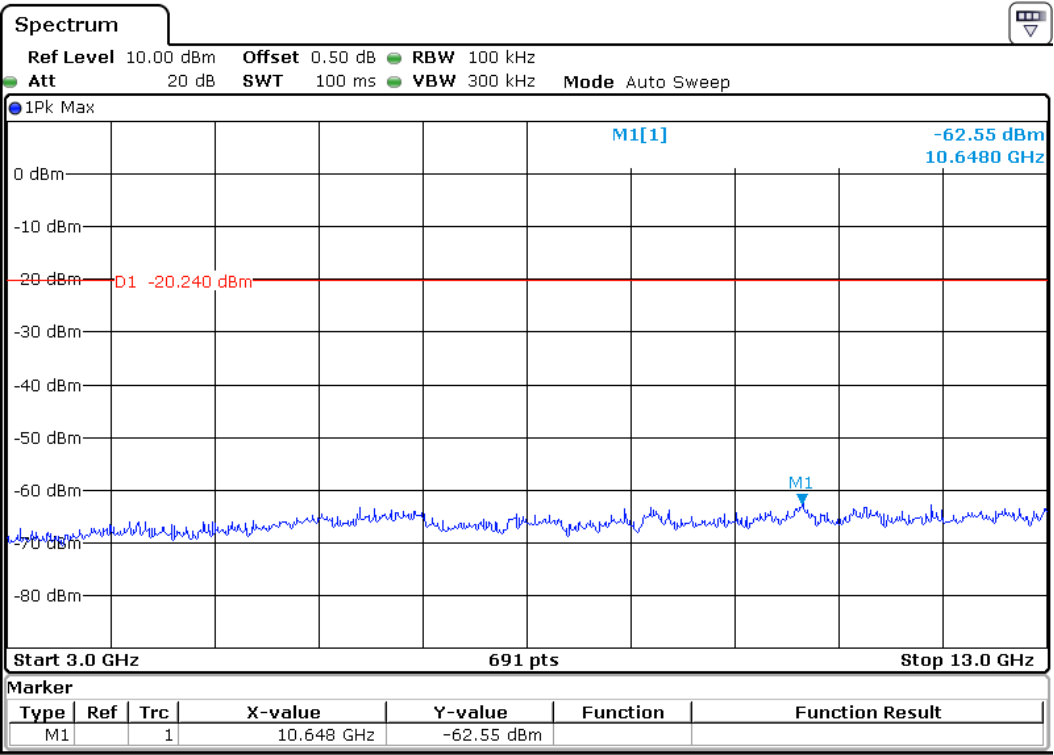


Note: Sweep Points=100000

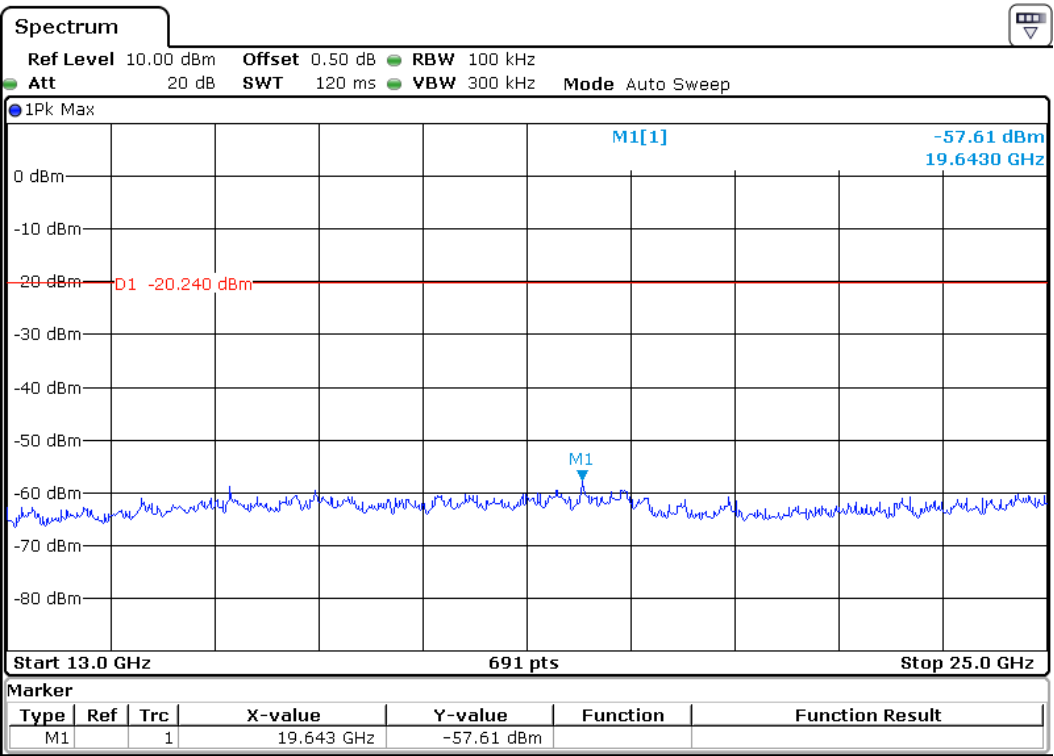


Note: Sweep Points=120000


## CH78 Data rate 1Mbps 30MHz to 25GHz

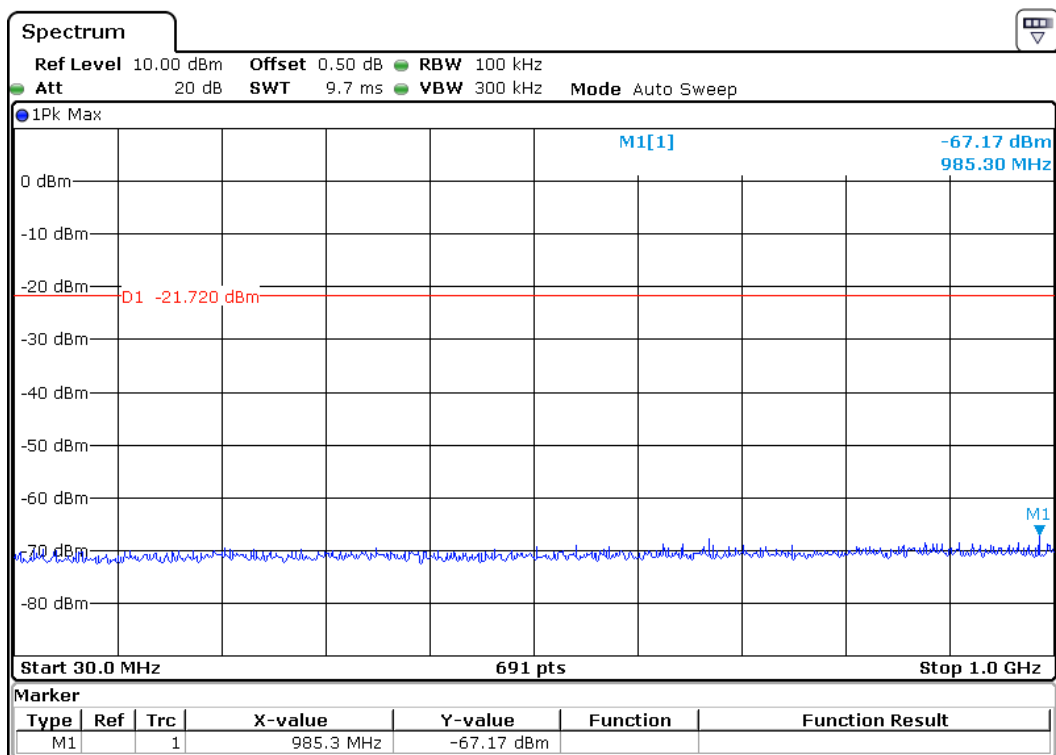


Note: Sweep Points=9700

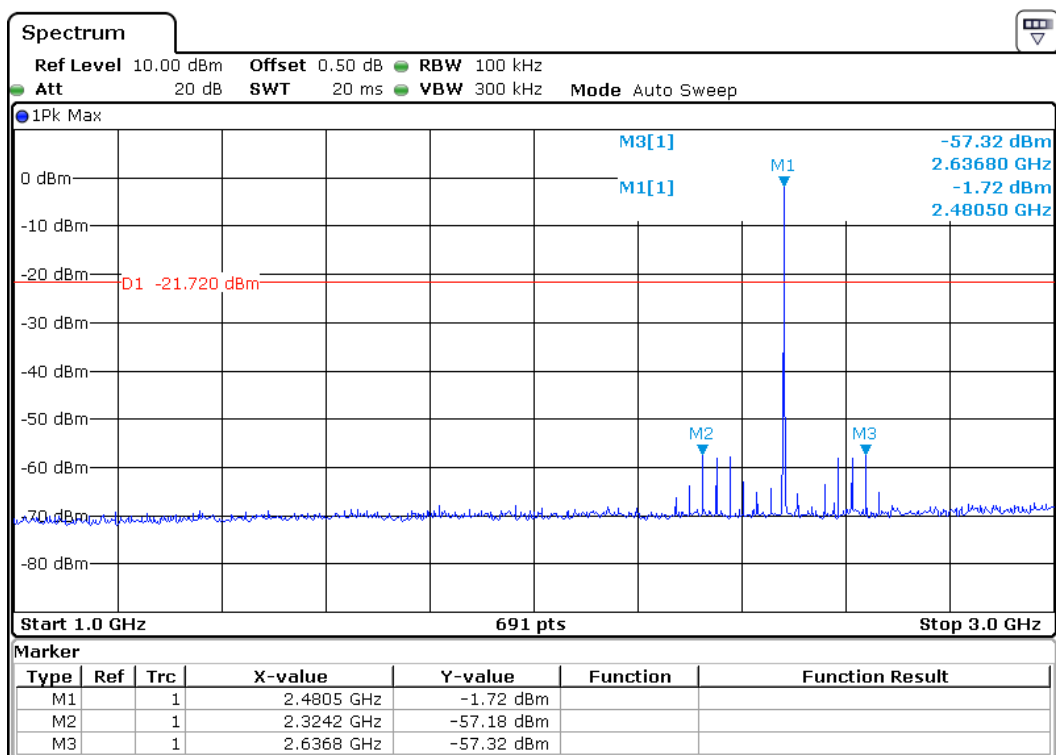

Note: Sweep Points=20000

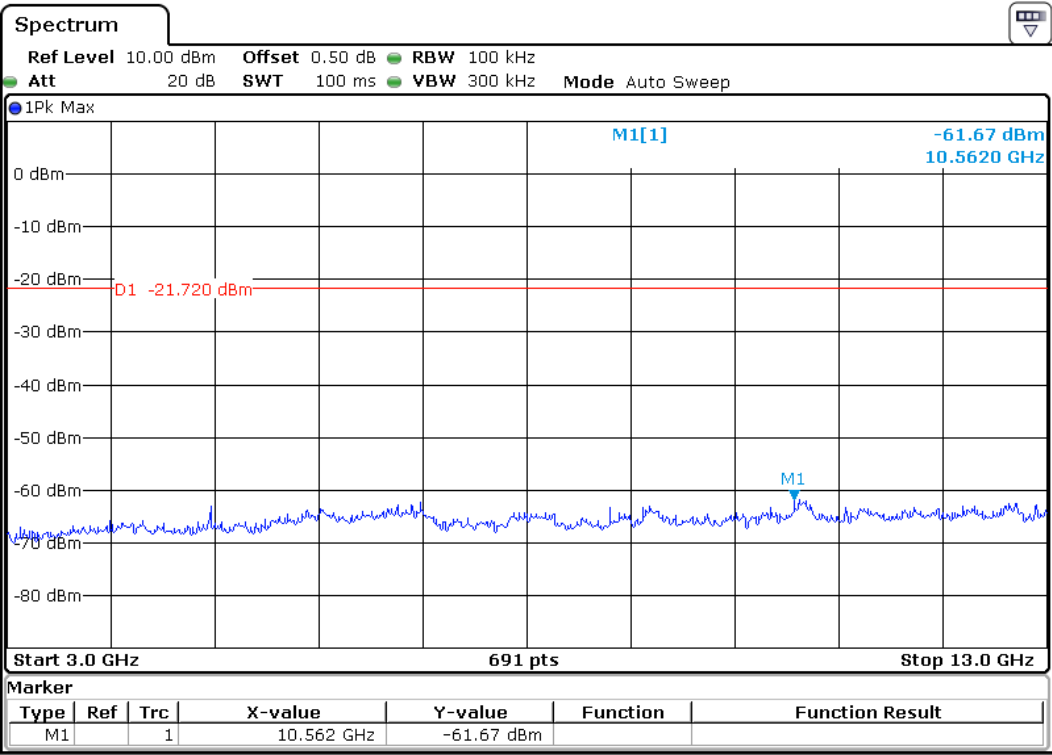


Note: Sweep Points=100000

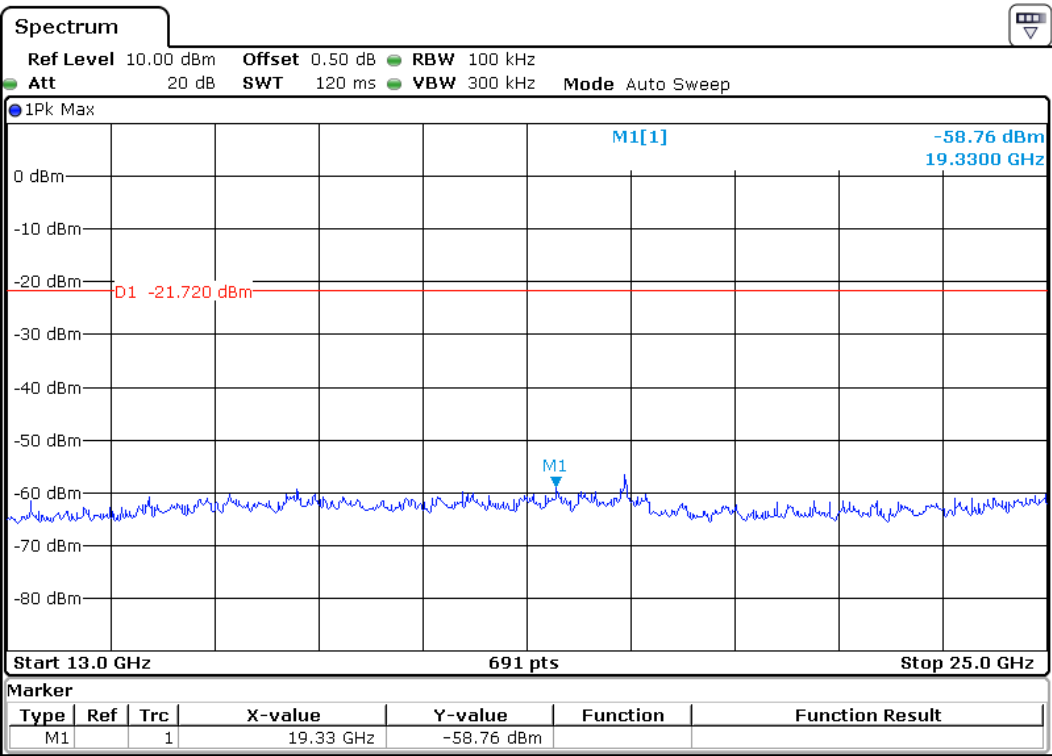


Note: Sweep Points=120000




CH00 Data rate 3Mbps 30MHz to 25GHz

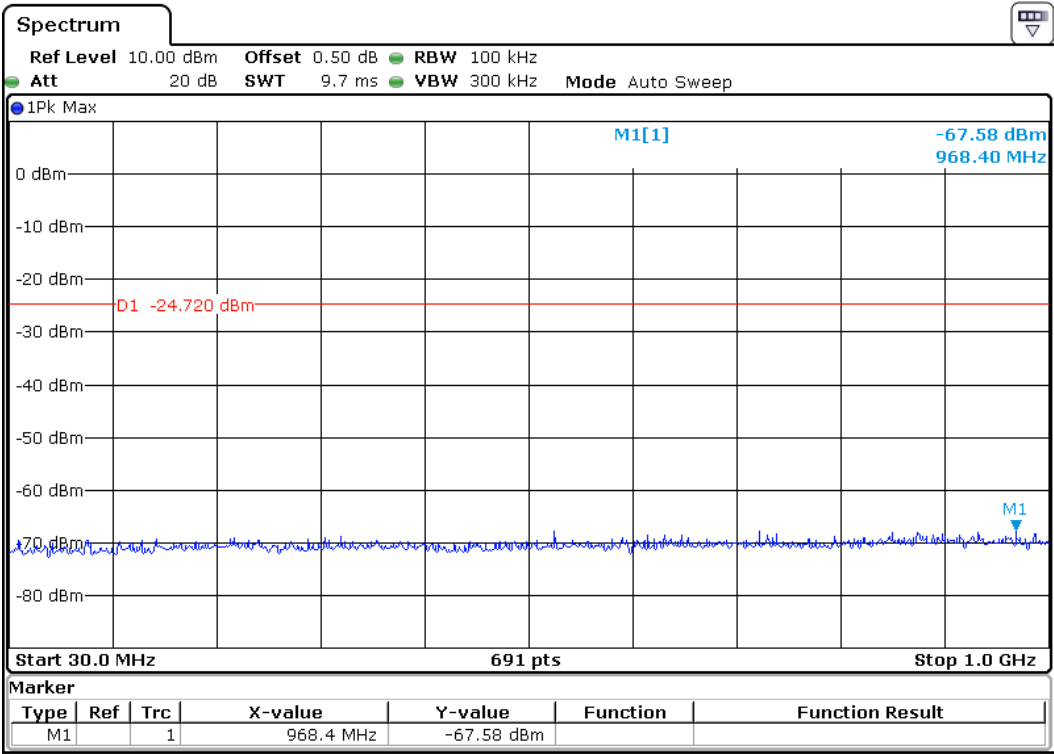


Note: Sweep Points=9700

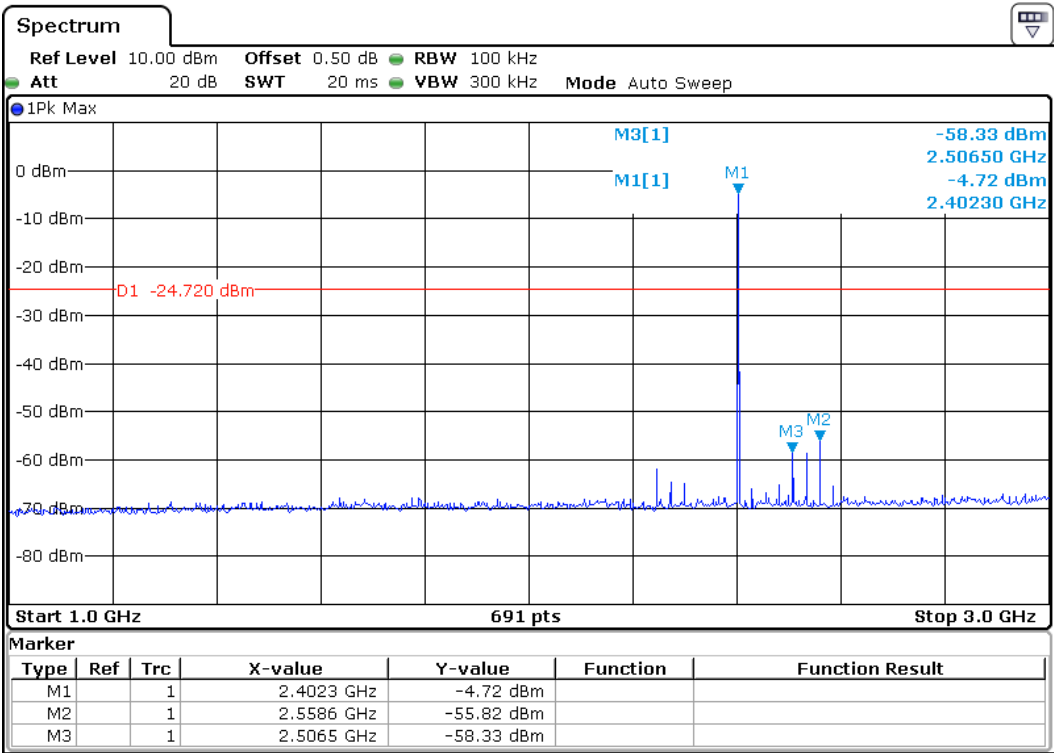

Note: Sweep Points=20000

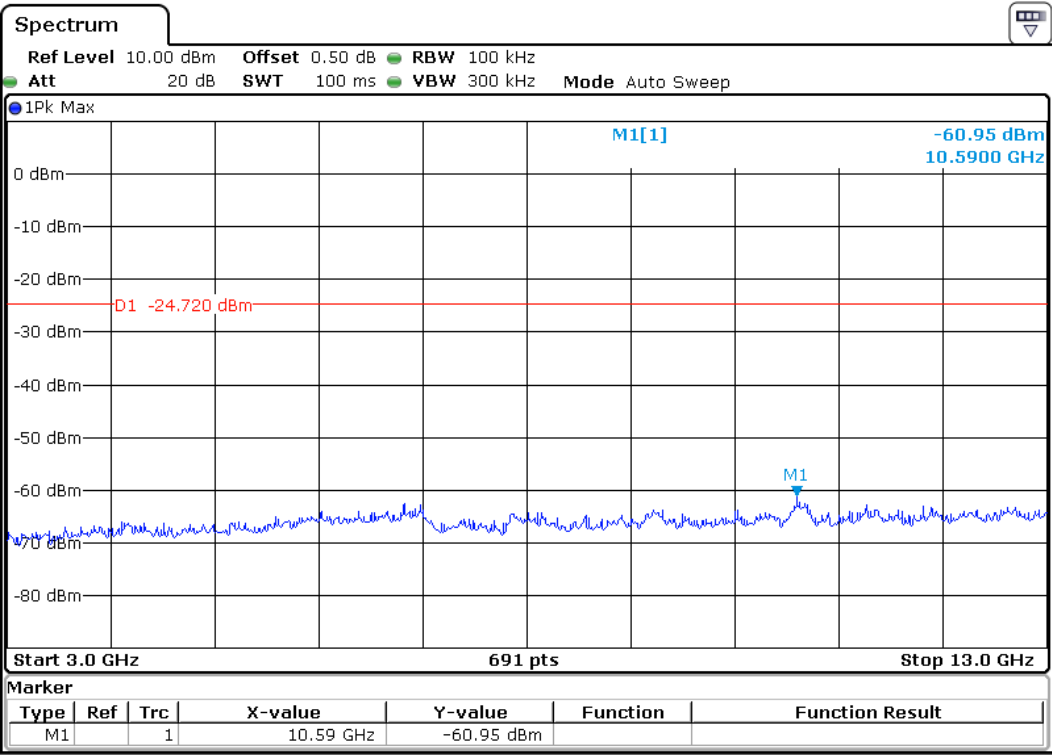


Note: Sweep Points=100000

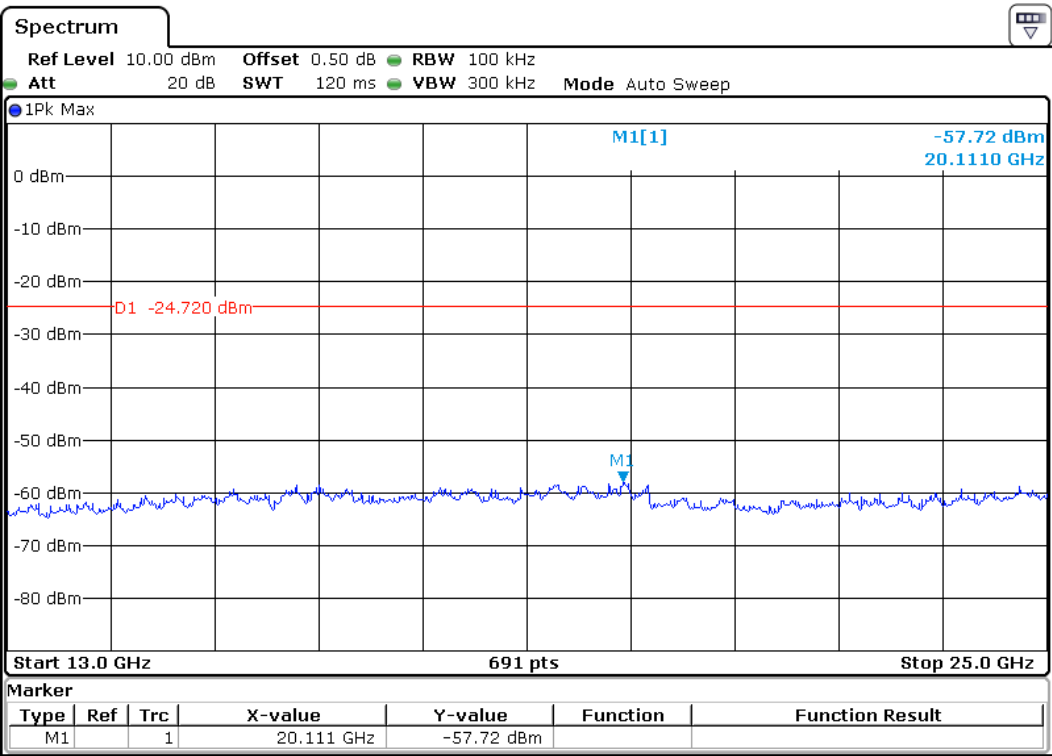


Note: Sweep Points=120000




CH39 Data rate 3Mbps 30MHz to 25GHz

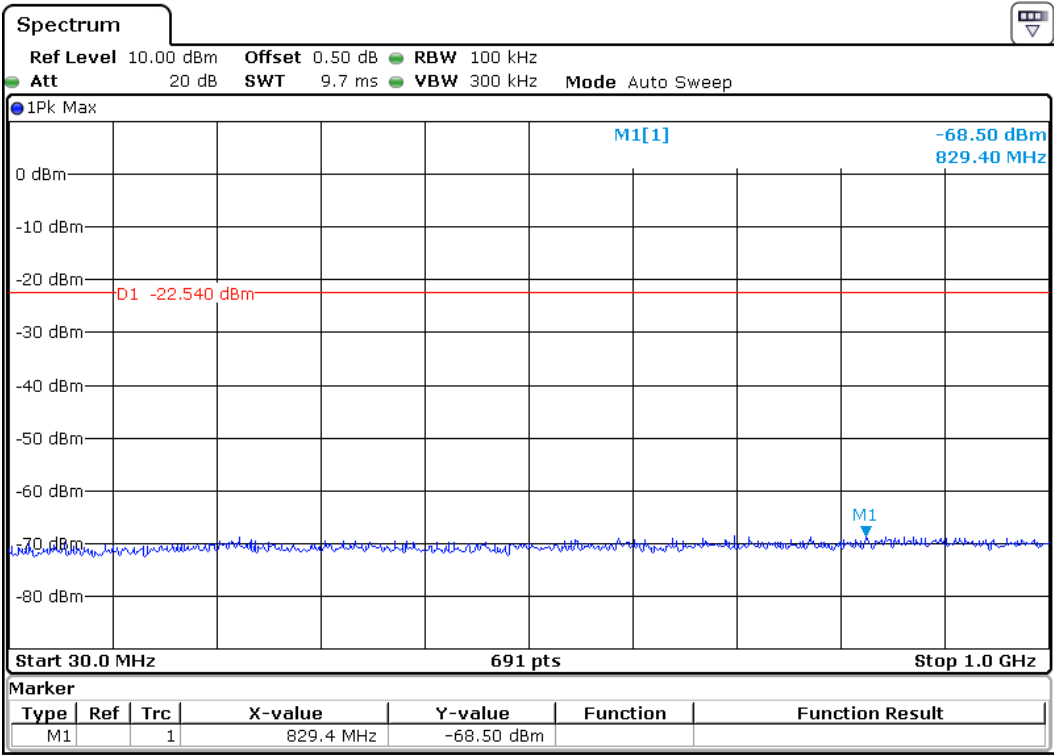


Note: Sweep Points=9700

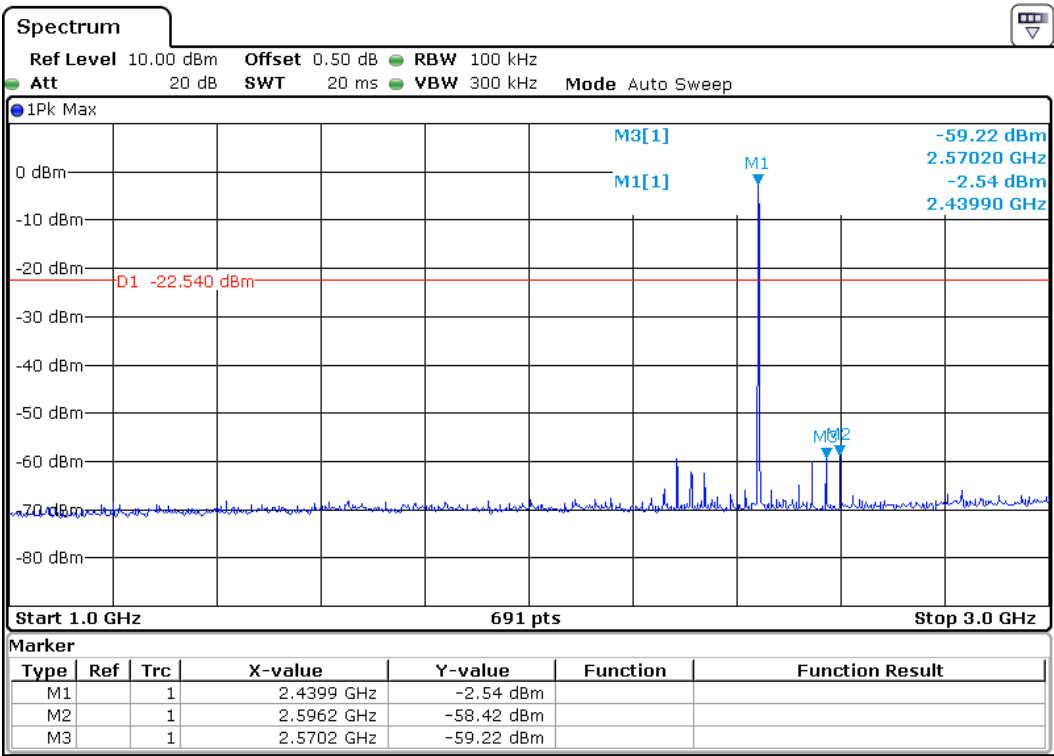

Note: Sweep Points=20000

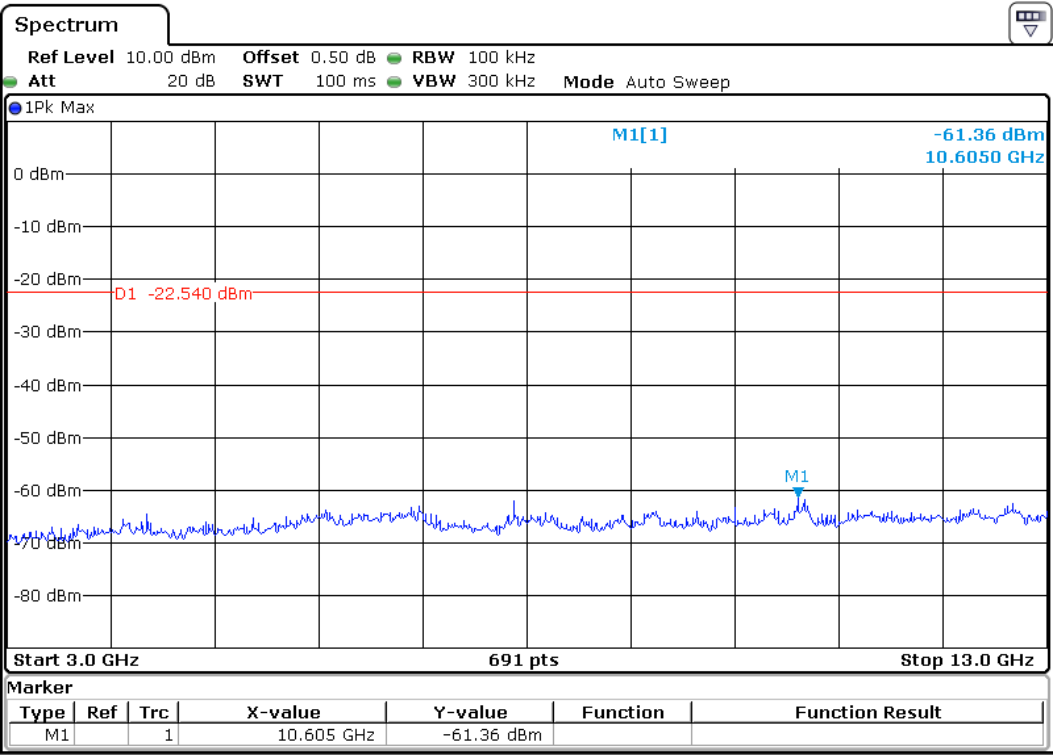


Note: Sweep Points=100000

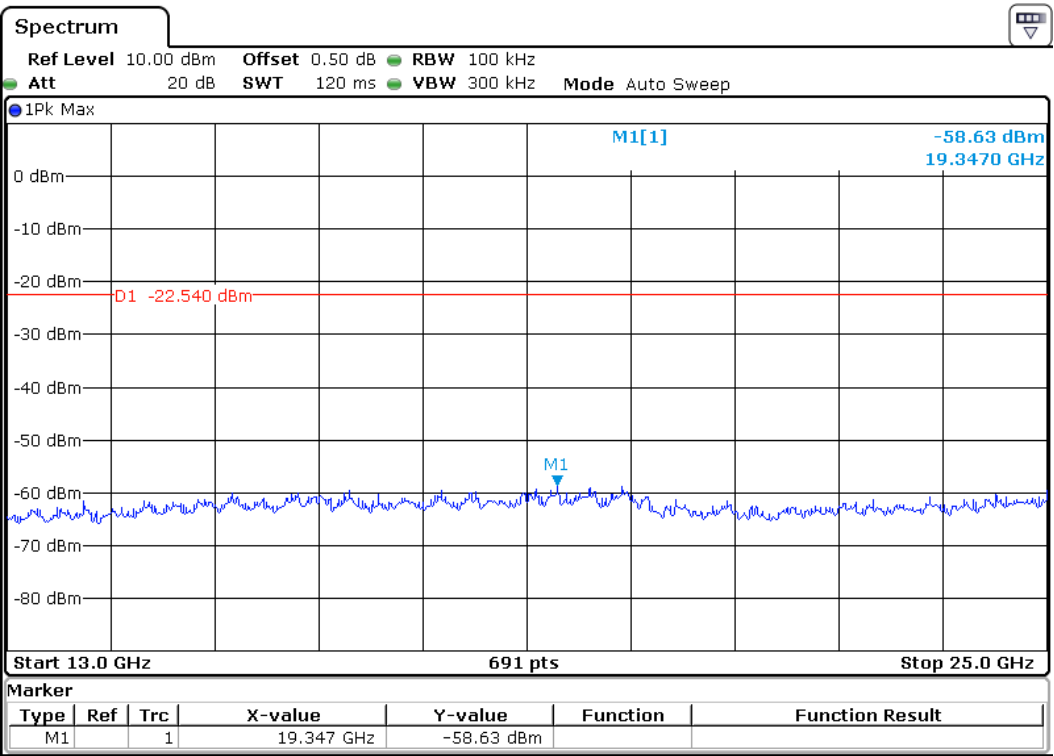


Note: Sweep Points=120000


CH78 Data rate 3Mbps 30MHz to 25GHz

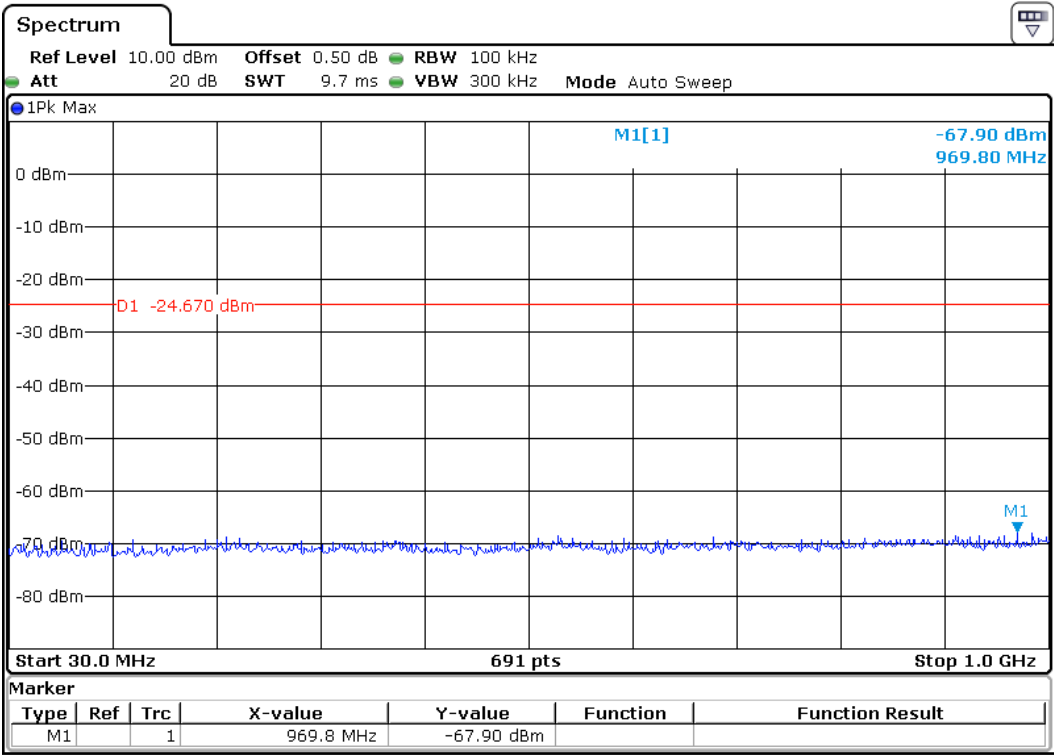


Note: Sweep Points=9700

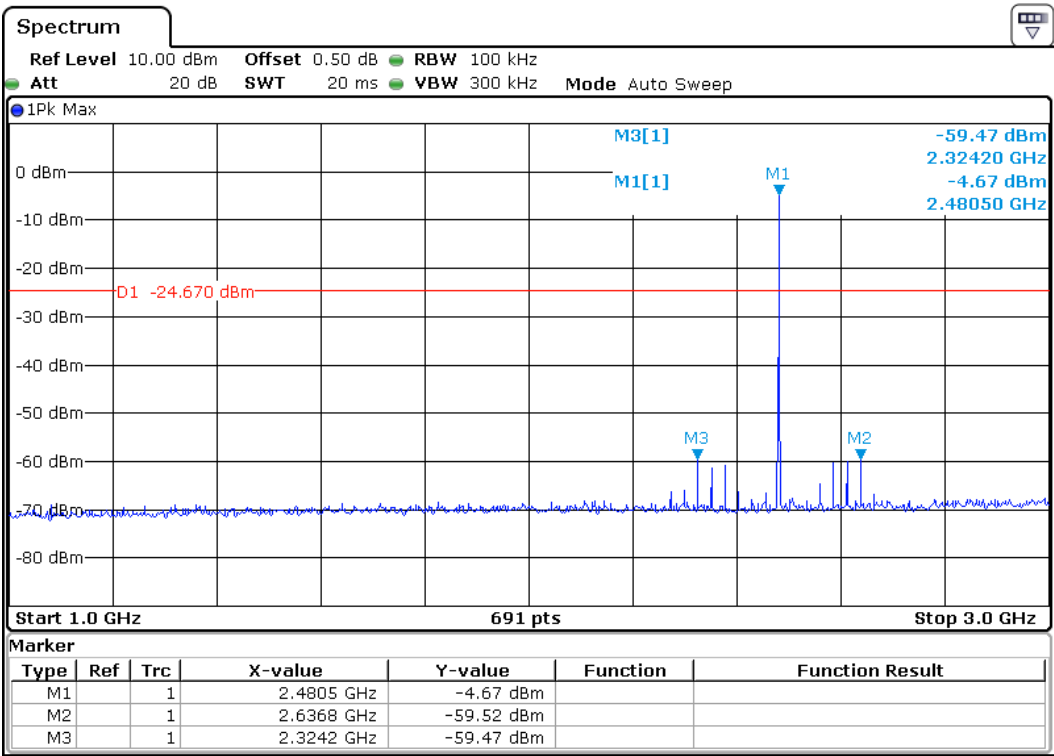

Note: Sweep Points=20000

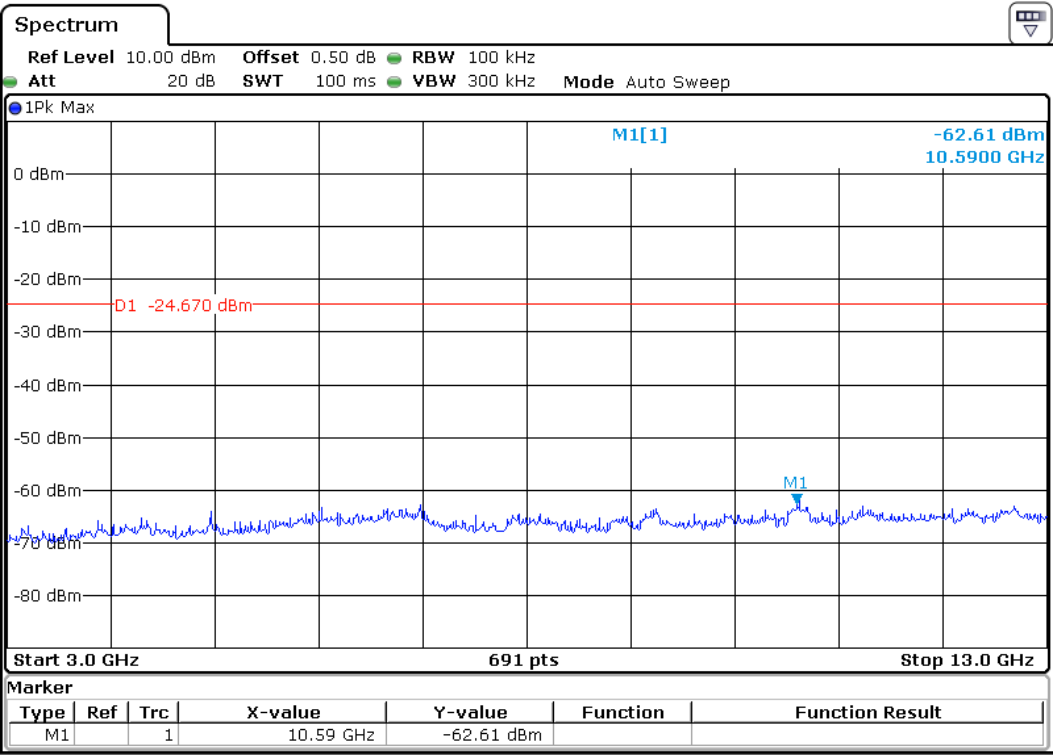

Note: Sweep Points=100000

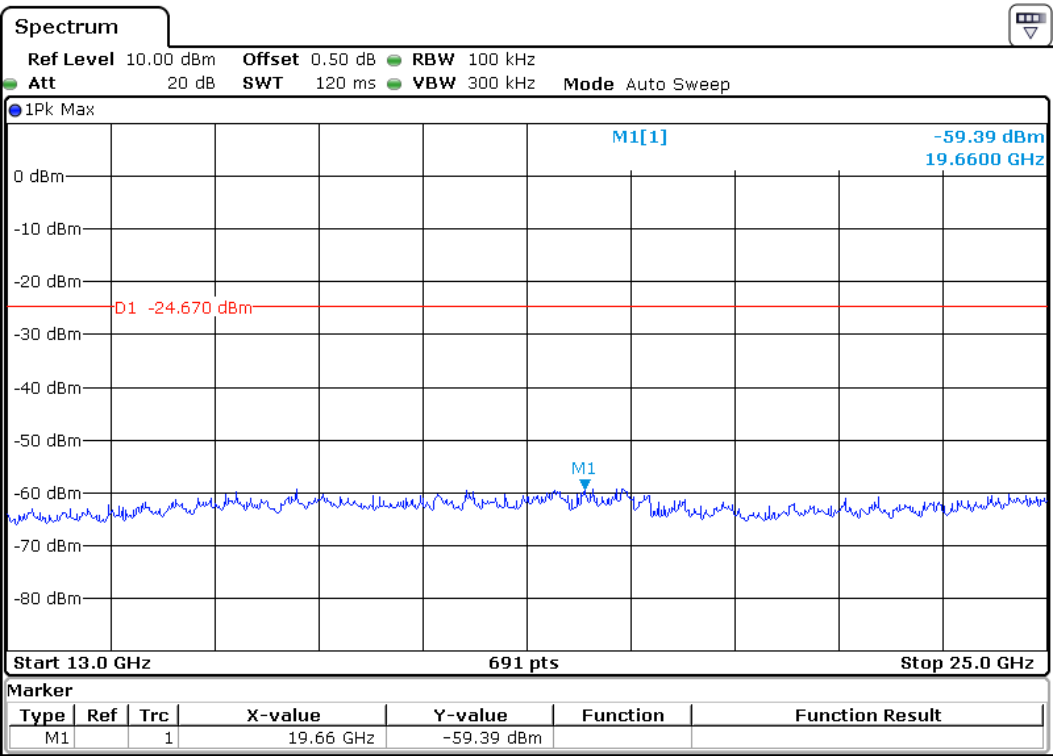


Note: Sweep Points=120000

## 6 Photographs


### 6.1 Conducted emissions Test Setup



### 6.2 Radiated spurious emissions Test Setup(below 1GHz)

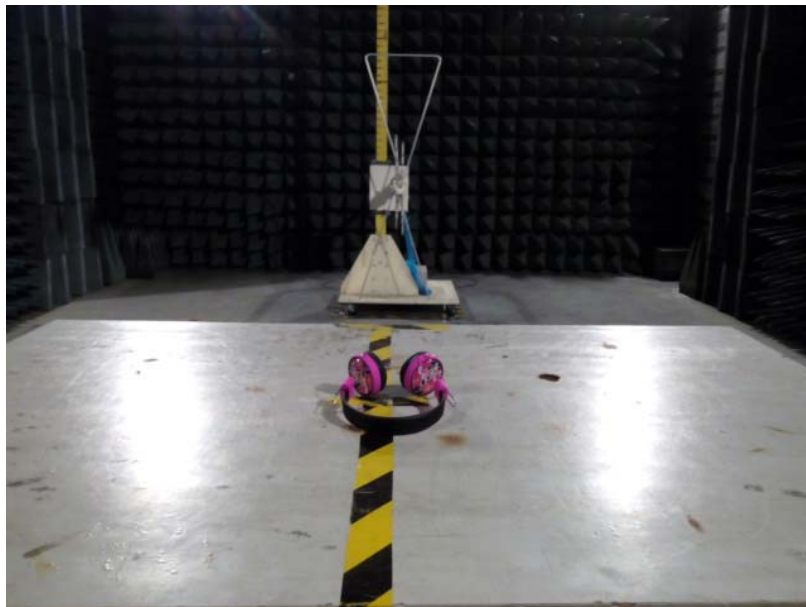

### 6.3 Radiated spurious emissions Test Setup(above 1GHz)

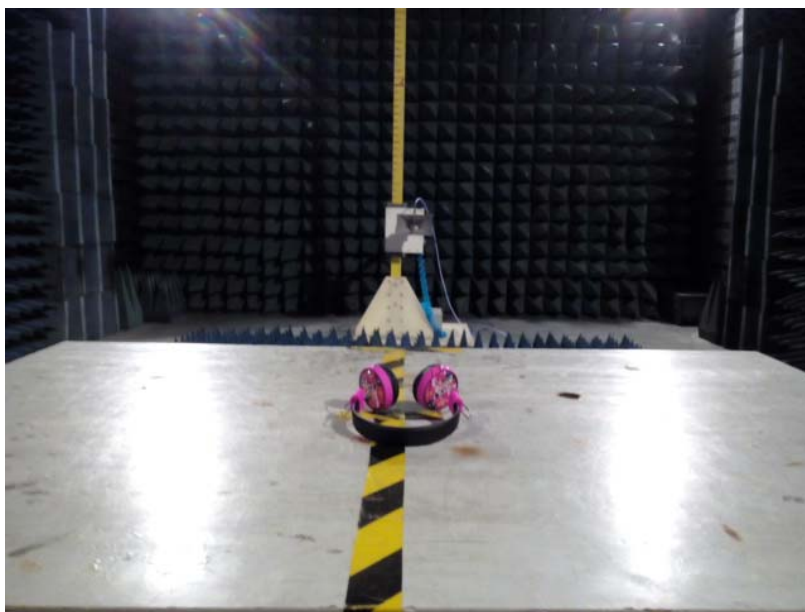

## 6.4 EUT Constructional Details





