

RF TEST REPORT



Report No.: 15020148-FCC-R2

Supersede Report No.: N/A

Applicant	Jiangsu SWR Science & Technology Co.,Ltd		
Product Name	SenseDisc Data Logger		
Main Model	SD00		
Test Standard	FCC Part 15.247: 2014, ANSI C63.10: 2013		
Test Date	April 11 to April 15, 2015		
Issue Date	April 15, 2015		
Test Result	☒ Pass ☐ Fail		
Equipment complied with the specification	☒		
Equipment did not comply with the specification	☐		
			
Deon Dai Test Engineer	Herve Idoko Checked By		
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only			

Issued by:

SIEMIC (Nanjing-China) Laboratories

2-1 Longcang Avenue Yuhua Economic and
Technology Development Park, Nanjing, China

Tel: +86(25)86730128/86730129 Fax: +86(25)86730127 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	15020148-FCC-R2
Page	3 of 46

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION.....	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	8
6.1 RF EXPOSURE	8
6.2 ANTENNA REQUIREMENT	9
6.3 DTS (6 DB&20 DB) CHANNEL BANDWIDTH	10
6.4 MAXIMUM OUTPUT POWER.....	13
6.5 POWER SPECTRAL DENSITY	15
6.6 BAND-EDGE & UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS	17
6.7 AC POWER LINE CONDUCTED EMISSIONS.....	19
6.8 RADIATED SPURIOUS EMISSIONS	25
ANNEX A. TEST INSTRUMENT	30
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	31
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT	42
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	45
ANNEX E. DECLARATION OF SIMILARITY	46

Test Report No.	15020148-FCC-R2
Page	5 of 46

1. Report Revision History

Report No.	Report Version	Description	Issue Date
15020148-FCC-R2	NONE	Original	April 15, 2015

2. Customer information

Applicant Name	Jiangsu SWR Science & Technology Co.,Ltd
Applicant Add	NO.14 Junnong Road,Qinhuai District ,Nanjing,Jiangsu Province,China
Manufacturer	Jiangsu SWR Science & Technology Co.,Ltd
Manufacturer Add	NO.14 Junnong Road,Qinhuai District ,Nanjing,Jiangsu Province,China

3. Test site information

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	986914
IC Test Site No.	4842B-1
Test Software	Labview of SIEMIC version 1.0

4. Equipment under Test (EUT) Information

Description of EUT:	SenseDisc Data Logger
Main Model:	SD00
Serial Model:	SD0010, SD0020, SD0030, SD0040, SD0050
Date EUT received:	March 20, 2015
Test Date(s):	April 11 to April 15, 2015
Output Max power	-0.093 dBm (0.98mW)
Antenna Gain:	Bluetooth&BLE: 2 dBi
Type of Modulation:	Bluetooth: GFSK& $\pi/4$ -DQPSK&8DPSK BLE: GFSK
RF Operating Frequency (ies):	Bluetooth&BLE: 2402-2480 MHz(TX/RX)
Number of Channels:	Bluetooth: 79CH BLE: 40CH
Port:	USB Port, Sensor Port*7
Input Power:	Adapter: Model: XHY050100UCB Input: AC 100-240V 50/60Hz 0.3A MAX Output: DC 5V 1.0A Battery: 3.7V 1800mAh
Trade Name :	SenseDisc
FCC ID:	2AEEJ-SD
Note: the difference between these models please refer to Annex E. DECLARATION OF SIMILARITY.	

5. Test Summary

The product was tested in accordance with the following specifications.
All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.247 (a)(2)	DTS (6 dB&20 dB) CHANNEL BANDWIDTH	Compliance
§15.247(b)(3)	Conducted Maximum Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands	Compliance
§15.207 (a),	AC Power Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands	Compliance

Measurement Uncertainty

Test Item	Description	Uncertainty
Radiated Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	3.952dB

Test Report No.	15020148-FCC-R2
Page	8 of 46

6. Measurements, Examination And Derived Results

6.1 RF Exposure

The EUT is a portable device, thus requires RF exposure evaluation;
Please refer to SIEMIC RF Exposure Report: 15020148-FCC-H1.

6.2 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules.

§15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction


The EUT has 1 antenna:

A PIFA antenna for Bluetooth/BLE, the gain is 2 dBi for Bluetooth/BLE/WIFI.

Result: Compliance.

6.3 DTS (6 dB&20 dB) Channel Bandwidth

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	April 10, 2015
Tested By :	Deon Dai

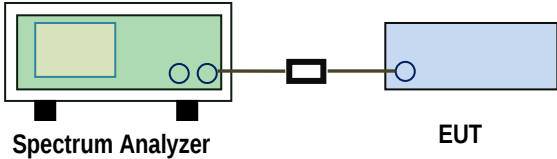Spec	Item	Requirement	Applicable
§ 15.247(a)(2) RSSGen (4.6.1)	a)	6dB BW≥500kHz;	☒
	b)	20dB BW: For FCC reference only; required by IC.	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	558074 D01 DTS Meas Guidance v03r02, 8.1 DTS bandwidth <u>6dB Emission bandwidth measurement procedure</u> - Set RBW = 100 kHz. - Set the video bandwidth (VBW) ≥ 3 x RBW. - Detector = Peak. - Trace mode = max hold. - Sweep = auto couple. - Allow the trace to stabilize. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. <u>20dB bandwidth</u> C63.10 Occupied Bandwidth (OBW=20dB bandwidth) - Set RBW = 1%-5% OBW. - Set the video bandwidth (VBW) ≥ 3 x RBW. - Set the span range between 2 times and 5 times of the OBW. - Sweep time=Auto, Detector=PK, Trace=Max hold. - Once reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e., the widest) bandwidth. Unless otherwise specified for an unlicensed wireless device, measure the bandwidth at the 20 dB level with respect to the reference level.		
Remark			
Result	☒ Pass ☐ Fail		
Test Data	☒ Yes ☐ N/A		
Test Plot	☒ Yes (See below) ☐ N/A		

6dB Bandwidth measurement result


Type	Test mode	CH	Freq (MHz)	Result (MHz)	Limit (MHz)	Result
6dB BW	BLE	Low	2402	0.516	≥ 0.5	Pass
		Mid	2440	0.534	≥ 0.5	Pass
		High	2480	0.522	≥ 0.5	Pass

20 dB Bandwidth measurement result


Type	Test mode	CH	Freq (MHz)	Result (MHz)	Limit (MHz)	Result
20dB BW	BLE	Low	2402	1.239	≥ 0.5	Pass
		Mid	2440	1.245	≥ 0.5	Pass
		High	2480	1.239	≥ 0.5	Pass

Test Plots

6dB Bandwidth measurement result

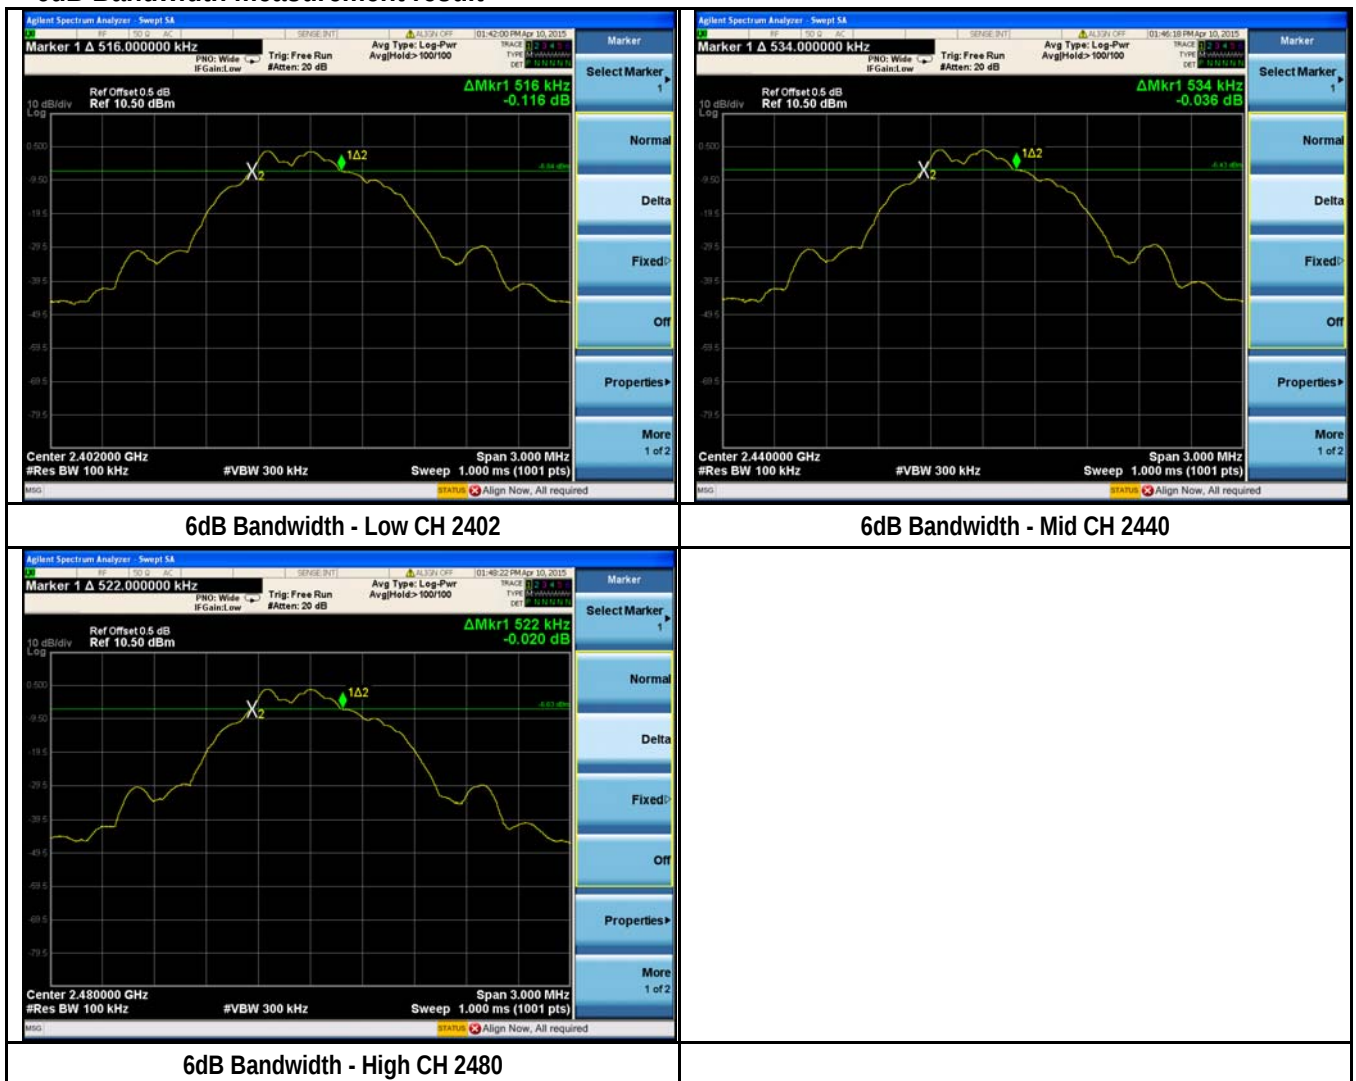

20dB Bandwidth measurement result

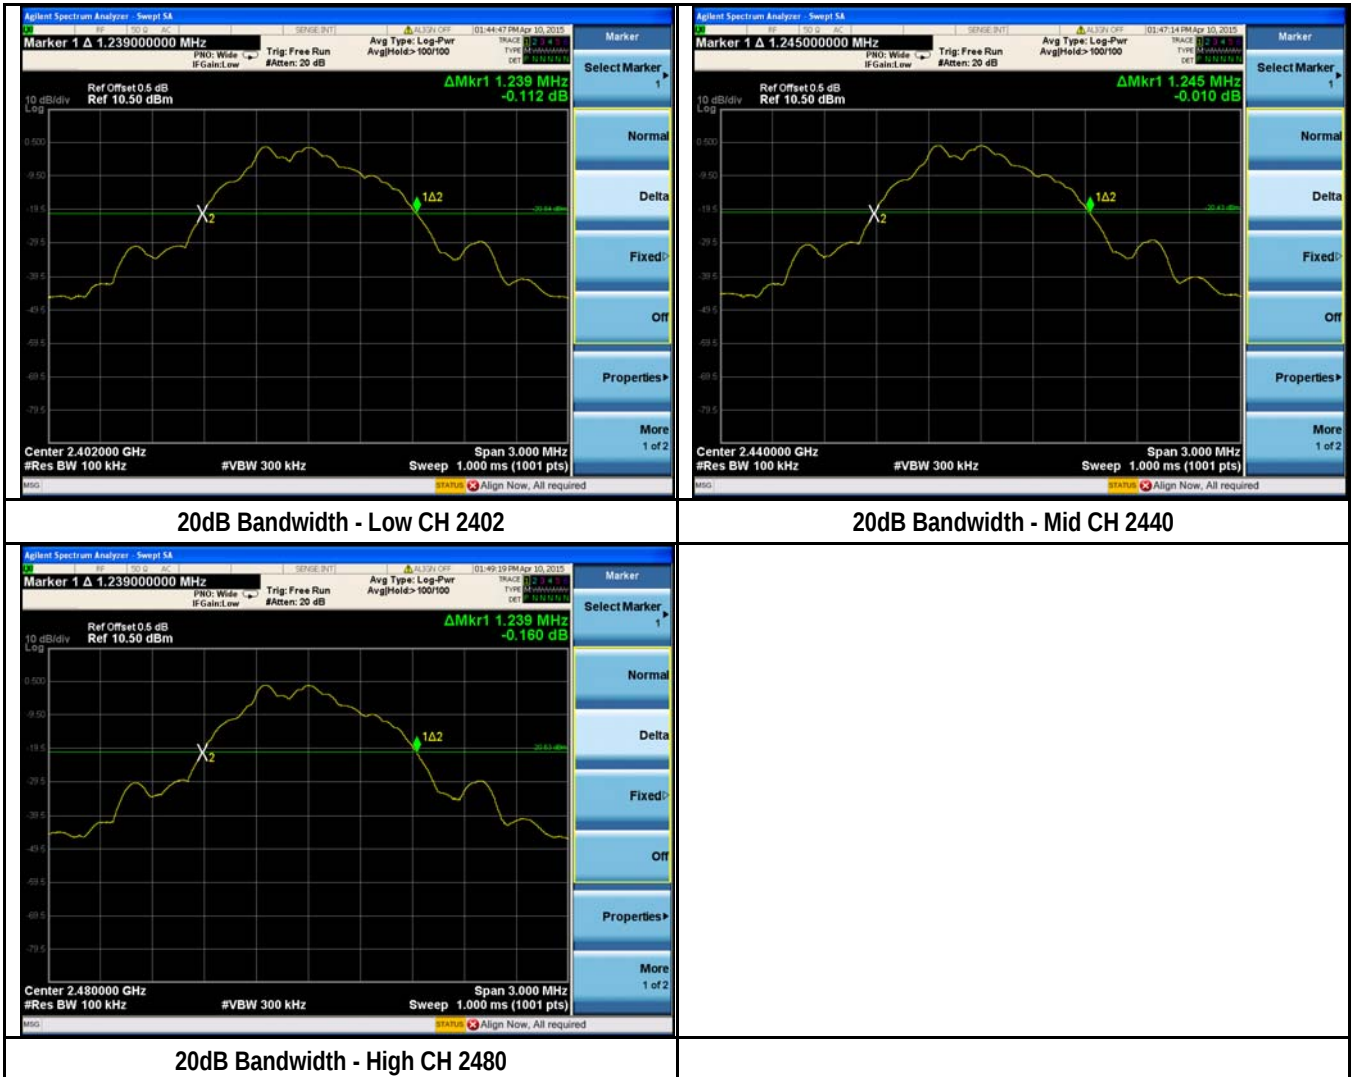


6.4 Maximum Output Power

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	April 10, 2015
Tested By :	Deon Dai

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (2),RSS210 (A8.4)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	☐
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	☐
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	☐
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	☐
	e)	FHSS in 902-928MHz with ≥ 25 & < 50 channels: ≤ 0.25 Watt	☐
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: ≤ 1 Watt	☒

Test Setup	 Spectrum Analyzer EUT
------------	---

Test Procedure	558074 D01 DTS Meas Guidance v03r02, 9.1.2 Integrated band power method Maximum output power measurement procedure a) Set the RBW $\geq$ DTS bandwidth. b) Set VBW $\geq 3 \times$ RBW. c) Set span $\geq 3 \times$ RBW d) Sweep time = auto couple. e) Detector = peak. f) Trace mode = max hold. g) Allow trace to fully stabilize. h) Use peak marker function to determine the peak amplitude level.
----------------	---


Remark	
Result	☒ Pass ☐ Fail
Test Data	☒ Yes ☐ N/A
Test Plot	☒ Yes (See below) ☐ N/A

Output Power measurement result

Type	Test mode	CH	Freq (MHz)	Conducted AV Power (dBm)	Limit (dBm)	Result
Output power	BLE	Low	2402	-0.554	30	Pass
		Mid	2440	-0.093	30	Pass
		High	2480	-0.269	30	Pass


Test Plots

Output Power measurement result

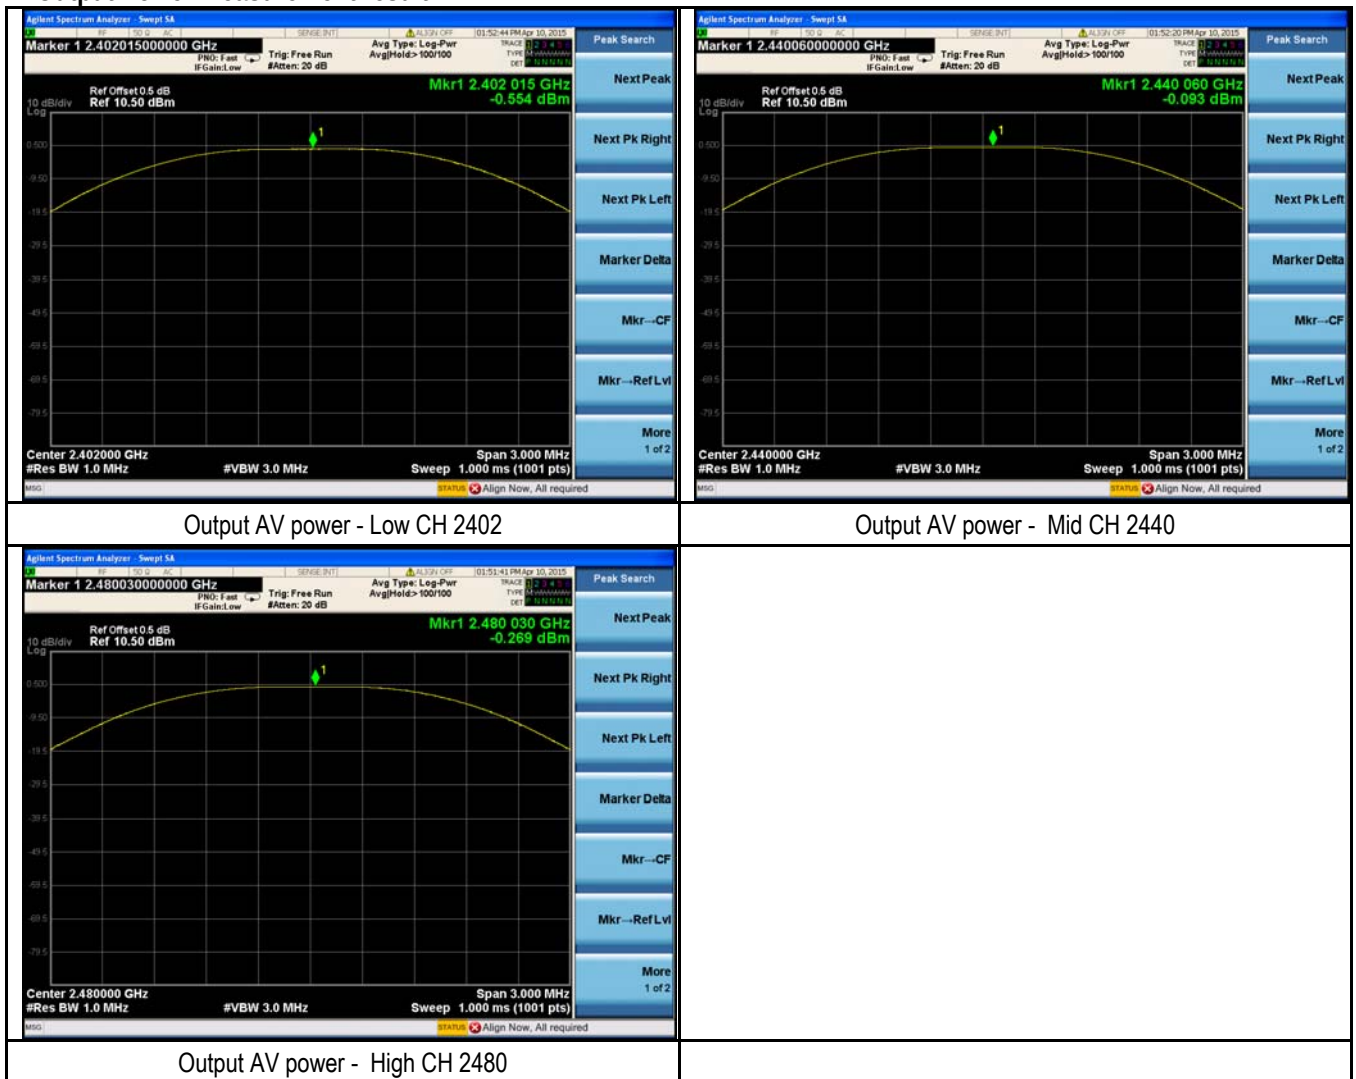

6.5 Power Spectral Density

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	April 10, 2015
Tested By :	Deon Dai

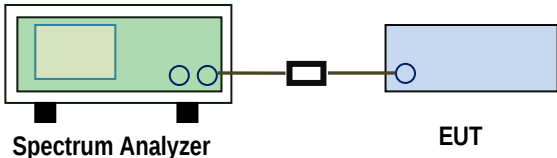
Spec	Item	Requirement	Applicable
§15.247(e)	a)	The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	558074 D01 DTS MEAS Guidance v03r02, 10.2 power spectral density method power spectral density measurement procedure a) Set analyzer center frequency to DTS channel center frequency. b) Set the span to 1.5 times the DTS bandwidth. c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. d) Set the VBW $\geq 3 \times \text{RBW}$. e) Detector = peak. f) Sweep time = auto couple. g) Trace mode = max hold. h) Allow trace to fully stabilize. i) Use the peak marker function to determine the maximum amplitude level within the RBW. j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.		
Remark			
Result	☒ Pass ☐ Fail		
Result	☒ Pass ☐ Fail		
Test Data	☒ Yes ☐ N/A		

Power Spectral Density measurement result

Type	Test mode	CH	Freq (MHz)	PSD (dBm)	Limit (dBm)	Result
PSD	BLE	Low	2402	-0.924	8	Pass
		Mid	2440	-0.457	8	Pass
		High	2480	-0.649	8	Pass

Test Plots

Power Spectral Density measurement result

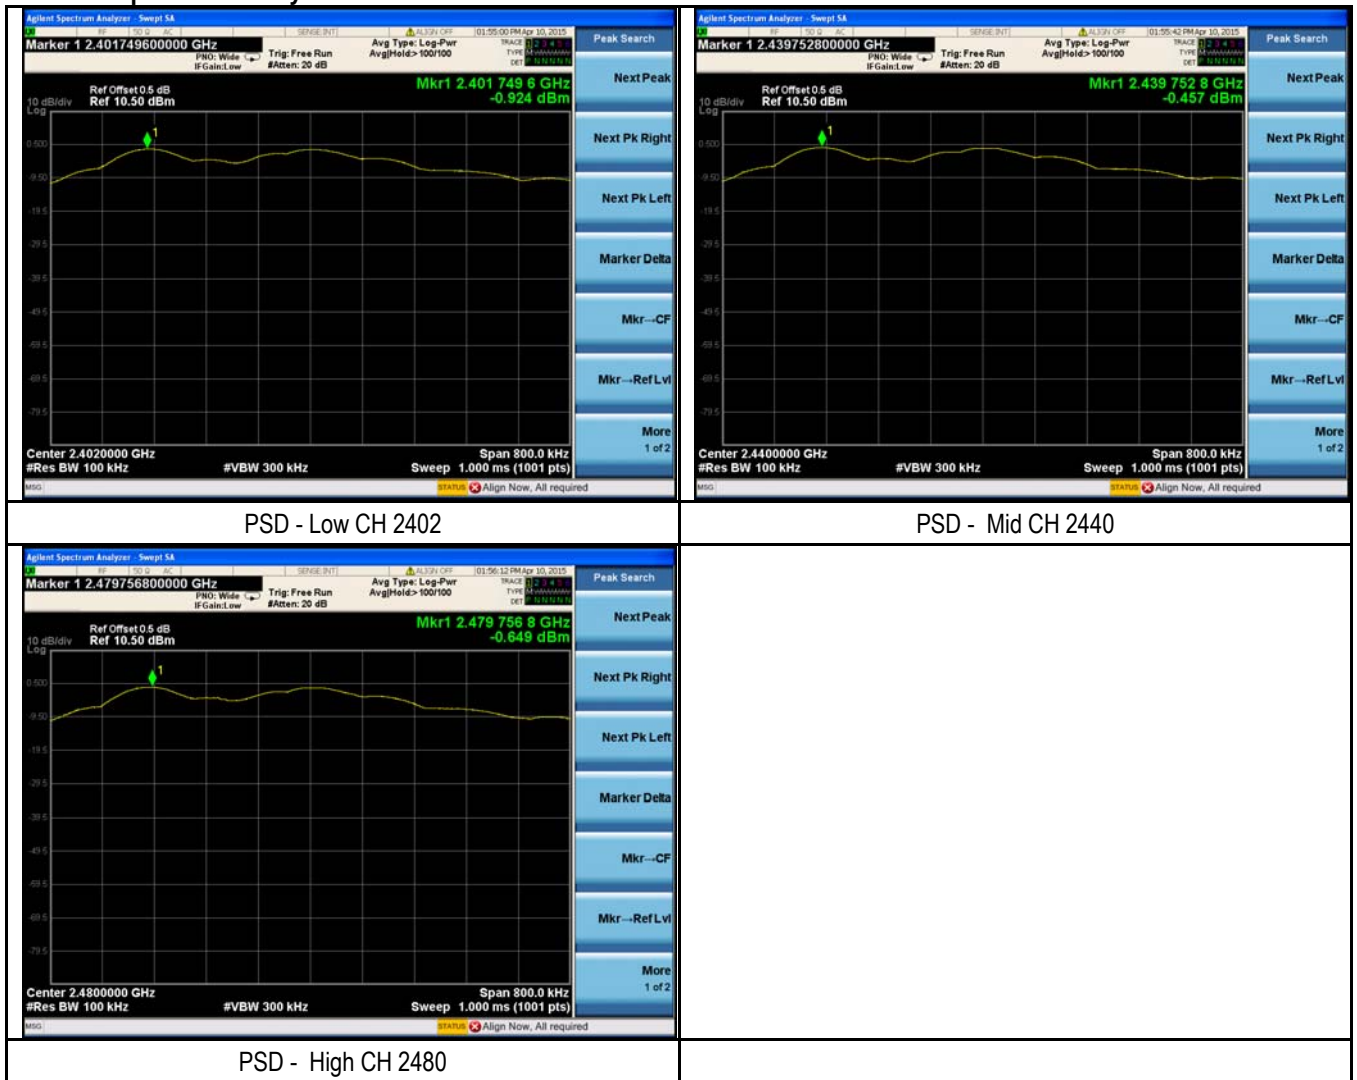


6.6 Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	April 15, 2015
Tested By :	Deon Dai

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(d)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	☒

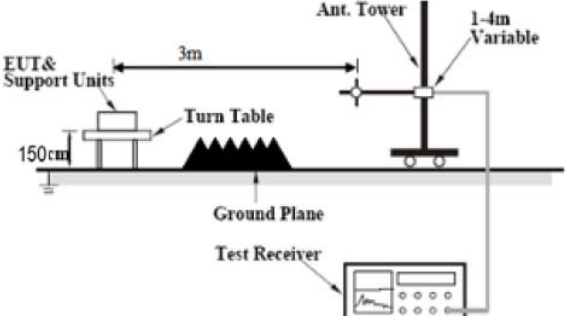
Test Setup	
------------	---

Test Procedure	Radiated Method Only 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range. 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth for Average detection (AV) as below at frequency above 1GHz. ■ 1/T kHz (Duty cycle < 98%) □ 10 Hz (Duty cycle > 98%) 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. 5. Repeat above procedures until all measured frequencies were complete.
----------------	---

Remark	
Result	☒ Pass ☐ Fail
Test Data	☐ Yes ☒ N/A
Test Plot	☒ Yes (See below) ☐ N/A

Test Plots


Band Edge measurement result

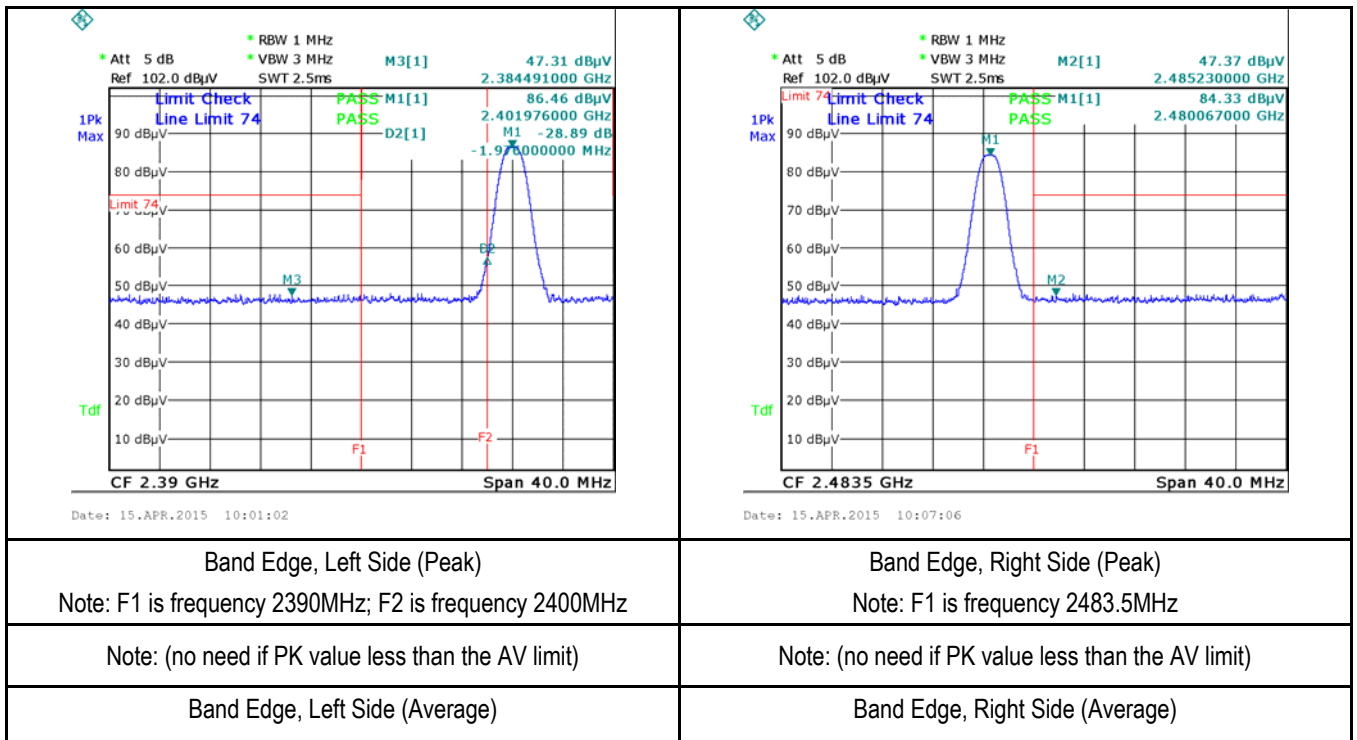

6.7 AC Power Line Conducted Emissions

Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	April 10, 2015
Tested By :	Deon Dai

Requirement(s):

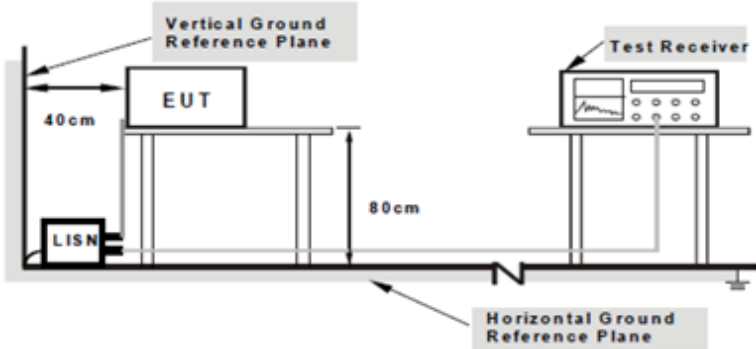Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [μ]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	☒														
		<table><tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>QP</th><th>Average</th></tr><tr><td>0.15 ~ 0.5</td><td>66 – 56</td><td>56 – 46</td></tr><tr><td>0.5 ~ 5</td><td>56</td><td>46</td></tr><tr><td>5 ~ 30</td><td>60</td><td>50</td></tr></table>		Frequency ranges (MHz)	Limit (dBμV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBμV)												
				QP	Average												
		0.15 ~ 0.5		66 – 56	56 – 46												
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup	 Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.																
		Procedure	1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.														
			2. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.														
Remark	Result	3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.	☒ Pass ☐ Fail														
		4. All other supporting equipment were powered separately from another main supply.															
Test Data	Test Plot	5. The EUT was switched on and allowed to warm up to its normal operating condition.	☒ Yes ☐ N/A														
		6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.															
Test Data	Test Plot	7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.	☒ Yes (See below) ☐ N/A														
		8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).															

Data sample

Frequency (MHz)	Quasi-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Factors (dB)
xxx	56.21	66.00	-9.79	39.20	56.00	-16.80	12.22

Frequency (MHz) = Emission frequency in MHz

Quais-Peak/Average (dBμV/m)=Receiver Reading(dBμV/m)+ Factor(dB)


Limit(dBμV/m)=Limit stated in standard

Factor (dB)= cable loss+ Insertion loss of LISN+ Insertion loss of transient limiter (The transient limiter included 10dB attenuation)

Calculation Formula:

Margin (dB)=Quasi Peak / Average (dBμV/m) – limit (dBμV/m)

Test Mode: Transmitting Mode

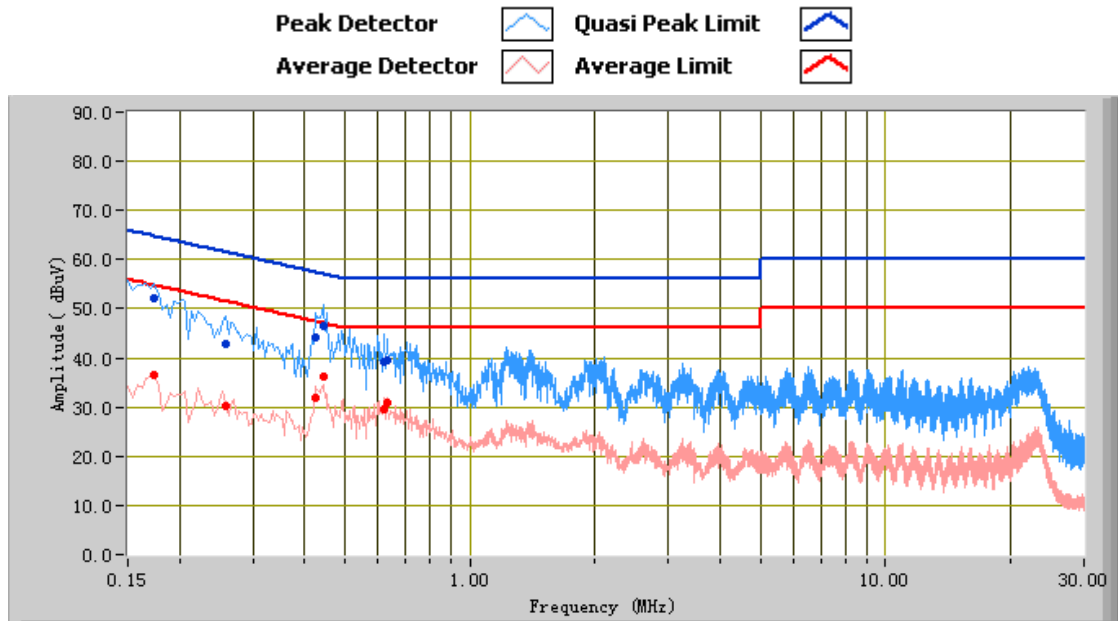


Test Data

Phase Line Plot at 120Vac, 60Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.44	46.56	57.02	-10.46	36.08	47.02	-10.94	11.17
0.43	44.06	57.33	-13.27	31.99	47.33	-15.34	11.20
0.17	51.99	64.77	-12.78	36.65	54.77	-18.12	11.87
0.62	39.07	56.00	-16.93	29.68	46.00	-16.32	10.99
0.63	39.64	56.00	-16.36	30.87	46.00	-15.13	10.98
0.26	42.96	61.50	-18.53	30.13	51.50	-21.37	11.44

Test Mode: Transmitting Mode

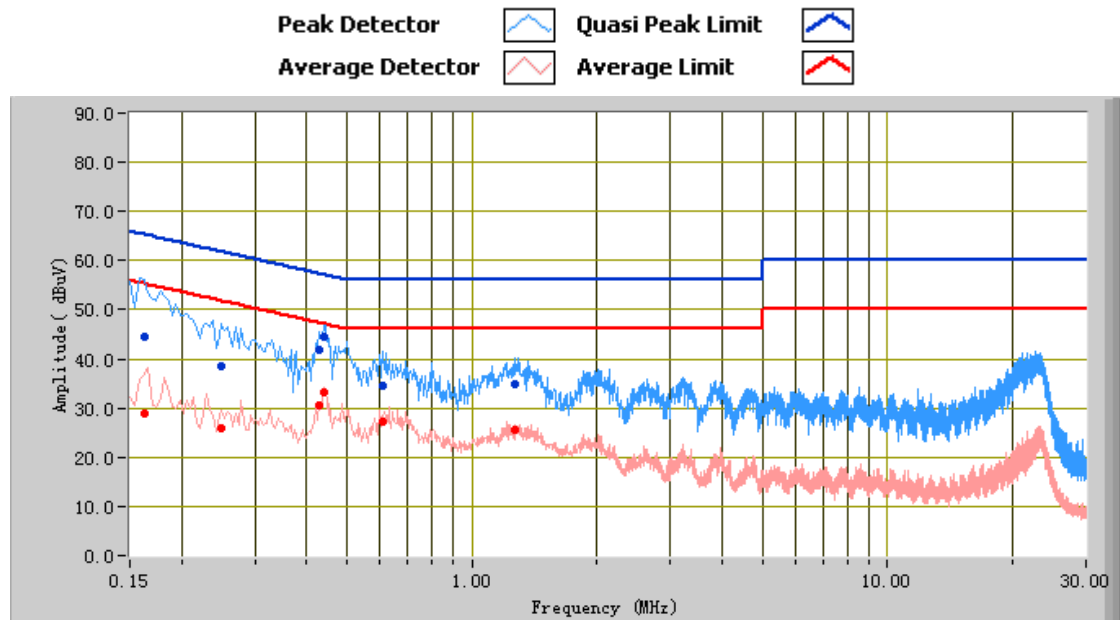


Test Data

Phase Neutral Plot at 120Vac, 60Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.16	44.48	65.36	-20.88	28.98	55.36	-26.38	12.04
0.44	44.39	57.10	-12.71	33.15	47.10	-13.95	11.16
0.43	41.83	57.25	-15.43	30.39	47.25	-16.86	11.17
0.61	34.58	56.00	-21.42	27.13	46.00	-18.87	10.98
0.25	38.43	61.76	-23.32	25.97	51.76	-25.79	11.46
1.27	35.02	56.00	-20.98	25.60	46.00	-20.40	10.76

Test Mode: Transmitting Mode

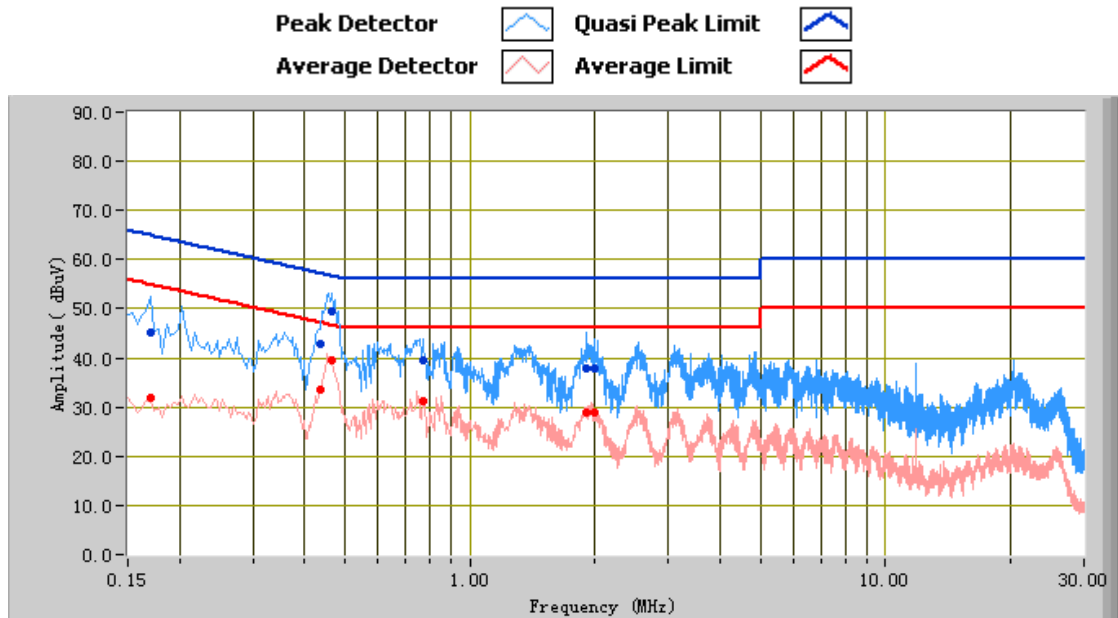


Test Data

Phase Line Plot at 230Vac, 50Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.47	49.64	56.59	-6.95	39.36	46.59	-7.22	11.14
1.91	37.78	56.00	-18.22	29.00	46.00	-17.00	10.86
0.43	42.72	57.18	-14.46	33.66	47.18	-13.52	11.18
0.77	39.52	56.00	-16.48	31.30	46.00	-14.70	10.87
1.99	38.01	56.00	-17.99	29.05	46.00	-16.95	10.88
0.17	45.16	64.96	-19.80	31.77	54.96	-23.19	11.93

Test Mode: Transmitting Mode

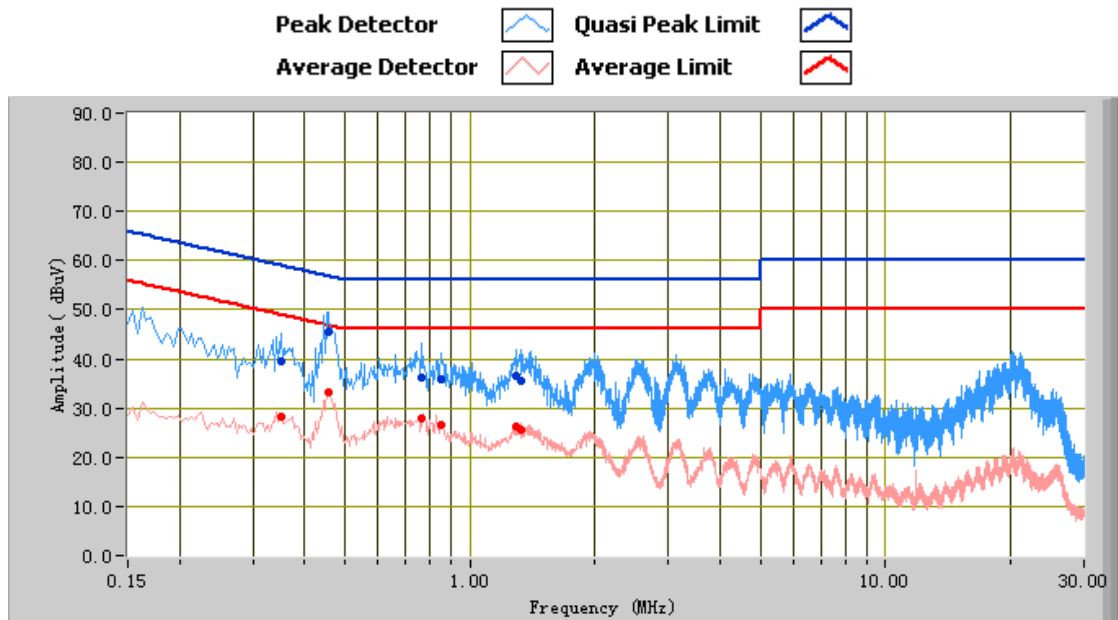

Test Data

Phase Neutral Plot at 230Vac, 50Hz

Frequency (MHz)	Quasi Peak (dBμV)	Limit (dBμV)	Margin (dB)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Factors (dB)
0.46	45.54	56.73	-11.19	33.20	46.73	-13.53	11.12
0.77	36.05	56.00	-19.95	27.78	46.00	-18.22	10.87
0.35	39.41	58.96	-19.55	28.19	48.96	-20.77	11.30
1.29	36.60	56.00	-19.40	26.22	46.00	-19.78	10.76
1.32	35.53	56.00	-20.47	25.44	46.00	-20.56	10.77
0.85	35.97	56.00	-20.03	26.49	46.00	-19.51	10.81

6.8 Radiated Spurious Emissions


Temperature	20°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	April 10, 2015
Tested By :	Deon Dai

Requirement(s):


Spec	Item	Requirement	Applicable										
47CFR§15.24 7(d), RSS210 (A8.5)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges <table><tr><th>Frequency range (MHz)</th><th>Field Strength (µV/m)</th></tr><tr><td>30 – 88</td><td>100</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 960</td><td>200</td></tr><tr><td>Above 960</td><td>500</td></tr></table>	Frequency range (MHz)	Field Strength (µV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	☒
	Frequency range (MHz)	Field Strength (µV/m)											
	30 – 88	100											
	88 – 216	150											
216 960	200												
Above 960	500												
b)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required ☒ 20 dB down ☐ 30 dB down	☒											
c)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	☒											

Test Setup

A: Frequency Below 1000MHz:

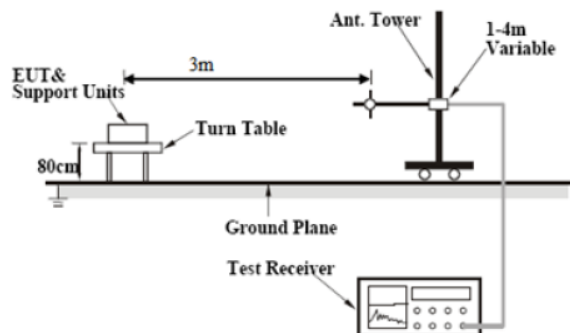

B: Frequency Above 1000MHz:

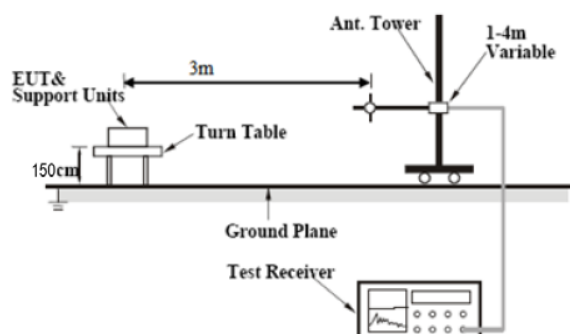

Test Report No.	15020148-FCC-R2
Page	26 of 46

Procedure	- The EUT was switched on and allowed to warm up to its normal operating condition. - The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: - Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen. - The EUT was then rotated to the direction that gave the maximum emission. - Finally, the antenna height was adjusted to the height that gave the maximum emission. - The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz. - The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz. ☒ 1/T kHz (Duty cycle < 98%) ☐ 10 Hz (Duty cycle > 98%) - Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	
Result	☒ Pass ☐ Fail
Test Data	☒ Yes ☐ N/A
Test Plot	☒ Yes (See below) ☐ N/A

Data sample

Frequency (MHz)	Quasi Peak (dBμV/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dBμV/m)	Margin (dB)
xxx	32.23	181.00	H	350.00	-38.23	40.00	-7.77

Frequency (MHz) = Emission frequency in MHz

Quais-Peak (dBμV/m)= Receiver Reading(dBμV/m)+ Factor(dB)

Azimuth=Position of turn table

Polarity=Polarity of Receiver antenna

Height(cm)= Height of Receiver antenna

Factor (dB)=Antenna factor + cable loss- antenna gain

Limit (dBμV/m)=Limit stated in standard


Calculation Formula:

Margin (dB)=Quasi Peak (dBμV/m) – limit (dBμV/m)

Test Mode: Transmitting Mode

(Below 1GHz)

Peak Detector 
Quasi Peak Limit 

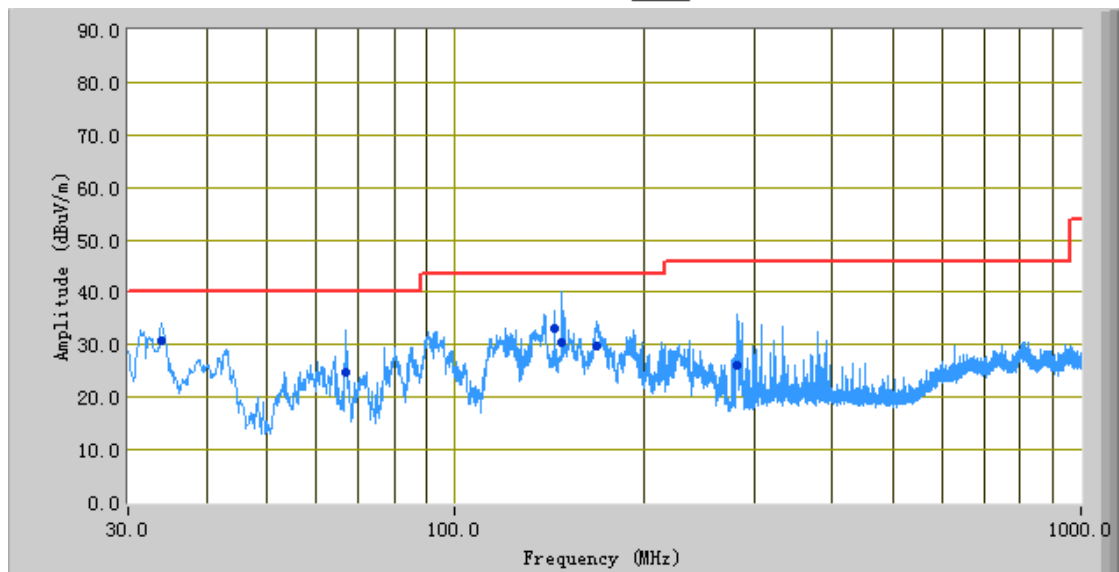

Test Data


Vertical Polarity Plot @3m

Frequency (MHz)	Quasi Peak (dBμV/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dBμV/m)	Margin (dB)
148.24	30.58	355.00	V	155.00	-31.18	43.50	-12.92
33.98	30.94	181.00	V	100.00	-26.23	40.00	-9.06
144.02	33.10	0.00	V	124.00	-31.11	43.50	-10.40
66.90	24.79	247.00	V	219.00	-37.44	40.00	-15.21
168.62	29.82	182.00	V	100.00	-31.52	43.50	-13.68
282.95	26.05	233.00	V	118.00	-29.71	46.00	-19.95

Test Mode: Transmitting Mode

(Below 1GHz)

Peak Detector 
Quasi Peak Limit 

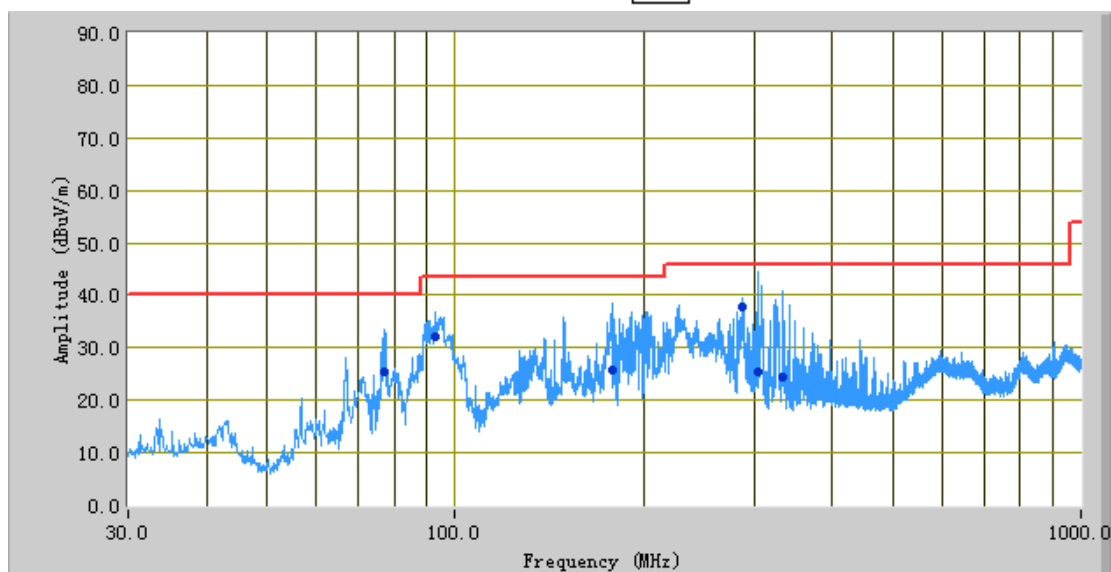

Test Data

Horizontal Polarity Plot @3m

Frequency (MHz)	Quasi Peak (dBμV/m)	Azimuth	Polarity (H/V)	Height (cm)	Factors (dB)	Limit (dBμV/m)	Margin (dB)
304.97	25.67	358.00	H	194.00	-29.24	46.00	-20.33
177.93	25.81	132.00	H	126.00	-31.50	43.50	-17.69
334.20	24.31	229.00	H	252.00	-29.93	46.00	-21.69
288.00	37.74	99.00	H	157.00	-29.00	46.00	-8.26
93.13	32.08	179.00	H	185.00	-34.46	43.50	-11.42
76.80	25.38	47.00	H	365.00	-37.52	40.00	-14.62

Test Mode:	Transmitting Mode
------------	-------------------

Low Channel (2402 MHz)

Frequency (MHz)	Substituted level (dBμV/m)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4804	34.16	AV	V	33.83	4.87	27.32	45.54	54	-8.46
4804	34.20	AV	H	33.83	4.87	27.32	45.58	54	-8.42
4804	43.09	PK	V	33.83	4.87	27.32	54.47	74	-19.53
4804	44.53	PK	H	33.83	4.87	27.32	55.91	74	-18.09

Middle Channel (2440 MHz)

Frequency (MHz)	Substituted level (dBμV/m)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4880	34.17	AV	V	33.86	4.87	26.32	46.58	54	-7.42
4880	34.27	AV	H	33.86	4.87	26.32	46.68	54	-7.32
4880	43.70	PK	V	33.86	4.87	26.32	56.11	74	-17.89
4880	43.26	PK	H	33.86	4.87	26.32	55.67	74	-18.33

High Channel (2480 MHz)

Frequency (MHz)	Substituted level (dBμV/m)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4960	33.91	AV	V	33.9	4.87	26.72	45.96	54	-8.04
4960	34.24	AV	H	33.9	4.87	26.72	46.29	54	-7.71
4960	43.09	PK	V	33.9	4.87	26.72	55.14	74	-18.86
4960	43.59	PK	H	33.9	4.87	26.72	55.64	74	-18.36

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emissions					
R&S EMI Test Receiver	ESPI3	101216	11/04/2014	11/03/2015	☒
V-LISN	ESH3-Z5	838979/005	09/27/2014	09/26/2015	☒
INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120092	10/09/2014	10/08/2015	☒
SIEMIC Labview Conducted Emissions software	V1.0	N/A	N/A	N/A	☒
RF conducted test					
R&S EMI Receiver	ESPI3	101216	11/04/2014	11/03/2015	☒
Power Splitter	1#	1#	02/02/2015	02/01/2016	☒
Hp Spectrum Analyzer	8563E	3821A09023	09/27/2014	09/26/2015	☒
Temperature/Humidity Chamber	1007H	N/A	01/07/2015	01/06/2016	☒
Radiated Emissions					
Hp Spectrum Analyzer	8563E	3821A09023	10/09/2014	10/08/2015	☒
R&S EMI Receiver	ESPI3	101216	11/04/2014	11/03/2015	☒
Antenna (30MHz~6GHz)	JB6	A121411	04/14/2015	04/13/2016	☒
EMCO Horn Antenna (1 ~18GHz)	3115	N/A	11/15/2014	11/14/2015	☒
INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J2031081120092	10/09/2014	10/08/2015	☒
Horn Antenna (18~40GHz)	AH-840	101013	04/22/2014	04/21/2015	☒
Microwave Pre-Amp (18~40GHz)	PA-840	181250	05/29/2014	05/28/2015	☒
Hp Agilent Pre-Amplifier	8447F	1937A01160	10/27/2014	10/26/2015	☒
MITEQ Pre-Amplifier (0.1 ~ 18GHz)	AMF-7D-00101800-	1451709	10/27/2014	10/26/2015	☒
SIEMIC Labview Radiated Emissions software	V1.0	N/A	N/A	N/A	☒

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo




Whole Package - Top View 1



Whole Package - Top View 2



EUT - Front View

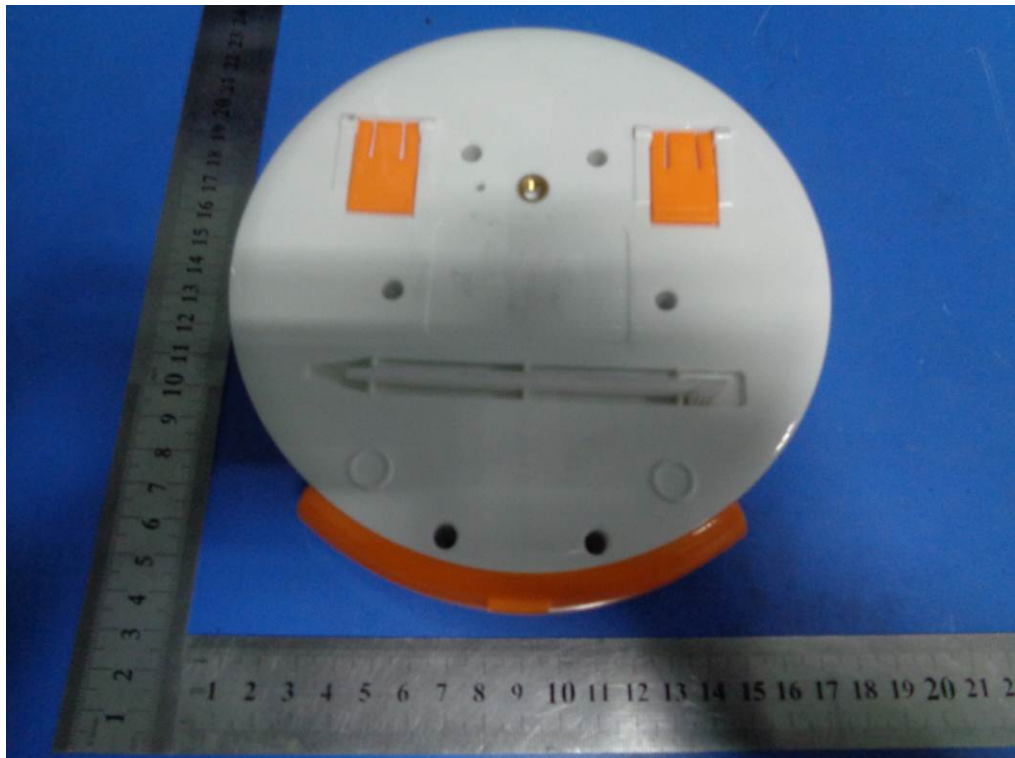


EUT - Rear View

Test Report No.	15020148-FCC-R2
Page	33 of 46




EUT - Top View

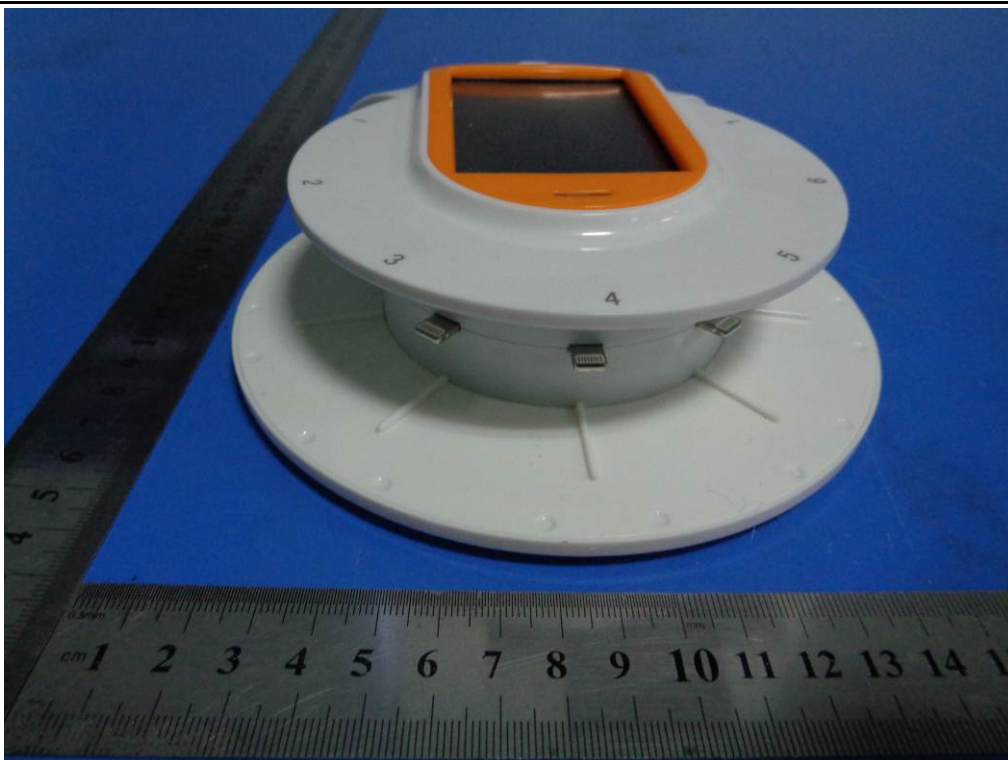

EUT - Bottom View




EUT – Left View

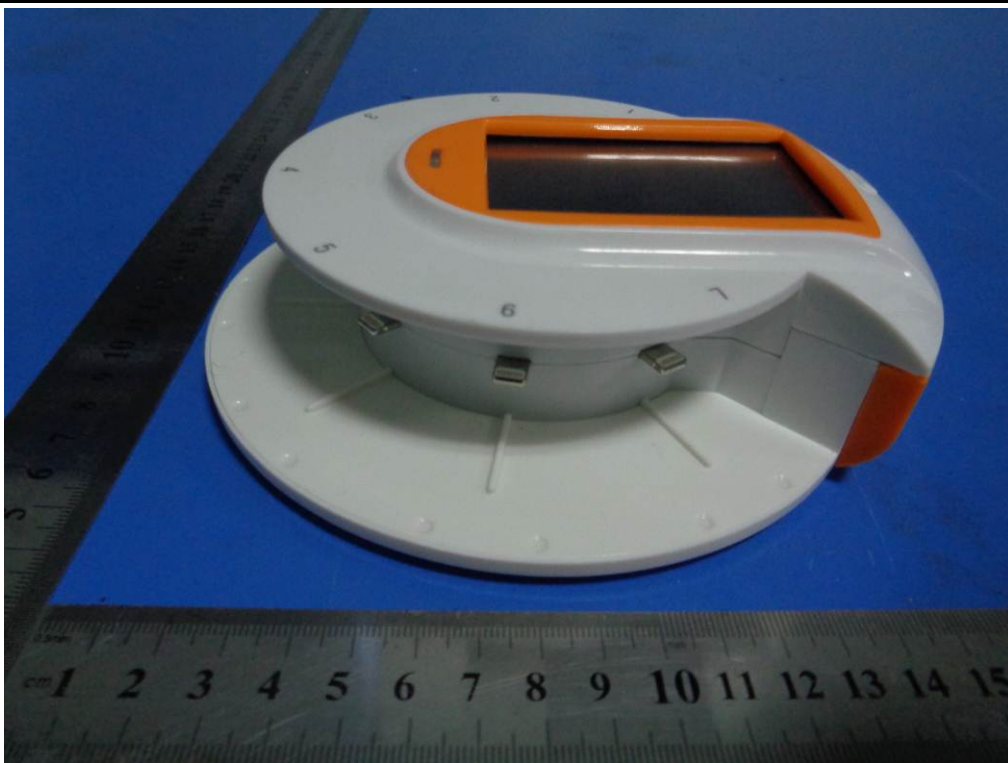

EUT – Right View


Annex B.ii. Photograph: EUT Internal Photo

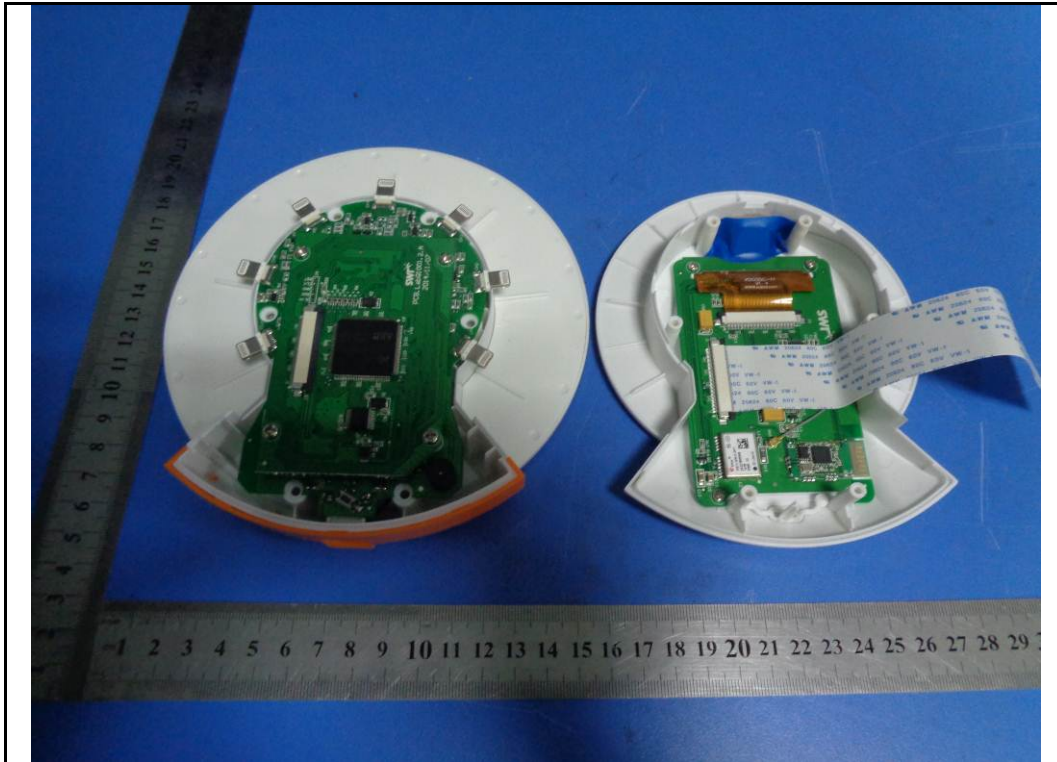


EUT – Uncover Front View




EUT – Battrey Front View

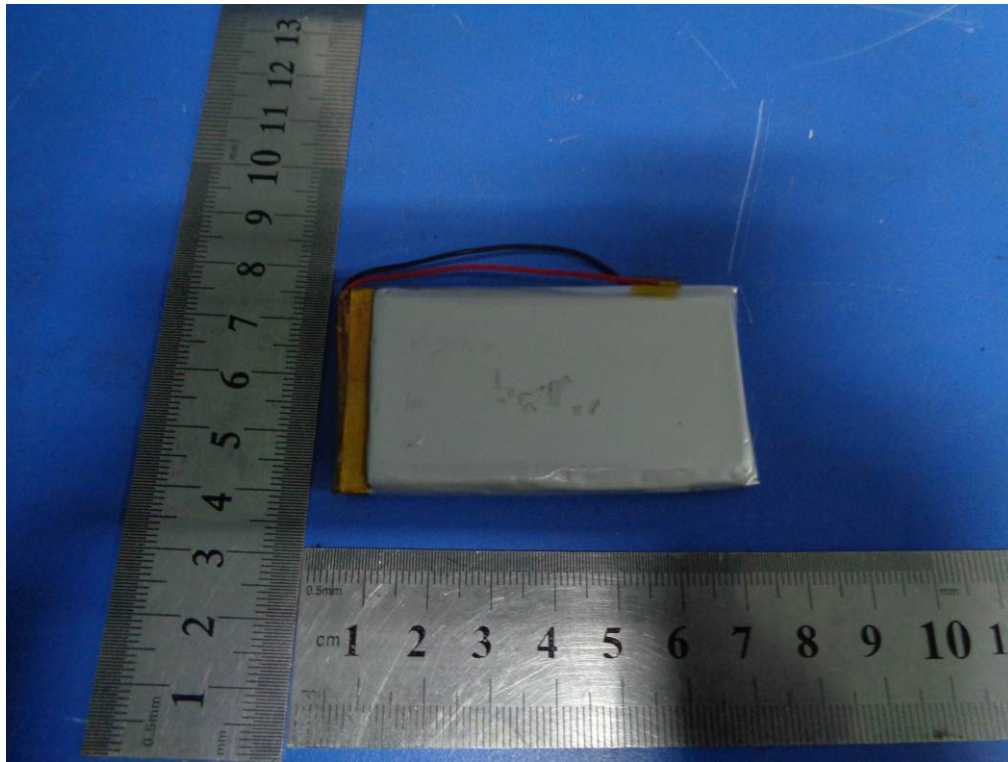

EUT – Battrey Rear View

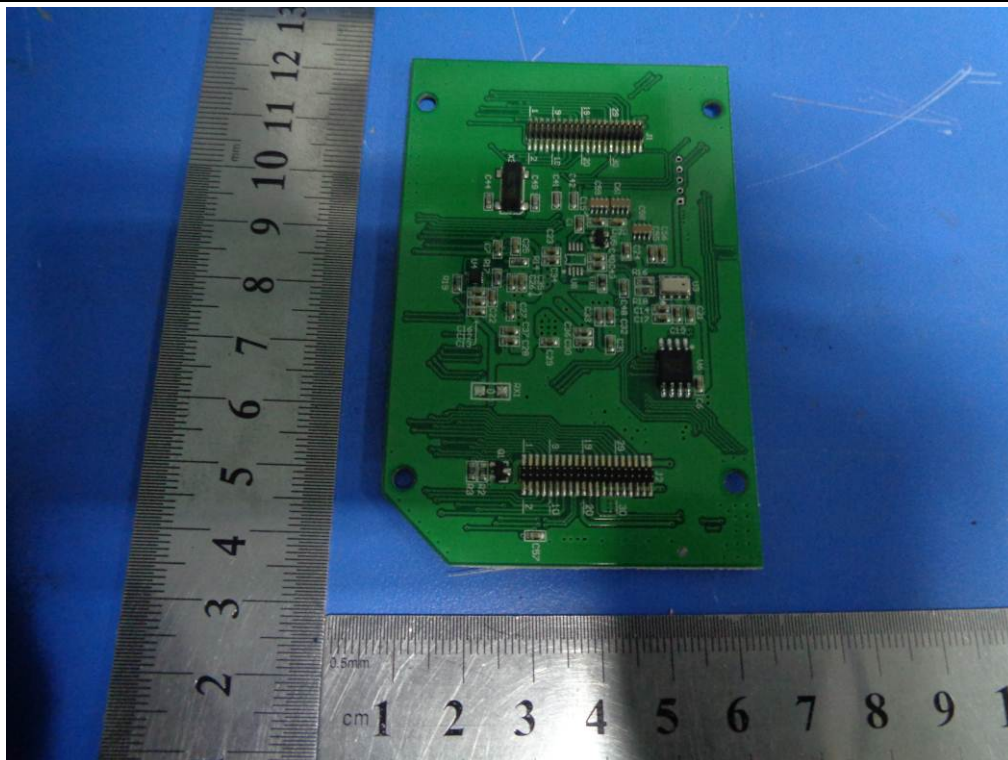

EUT – PCBA 1 Front View

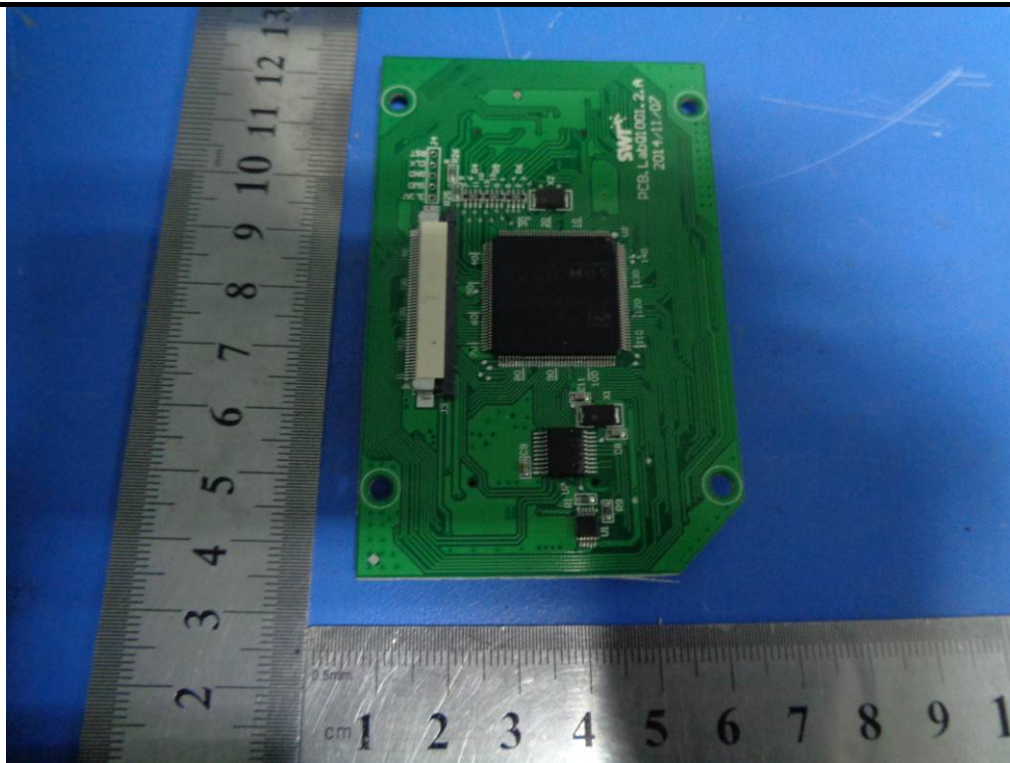

EUT – PCBA 1 Rear View



EUT – PCBA 2 Front View



EUT – PCBA 2 Rear View



EUT – PCBA 3 Front View



EUT – PCBA 3 Rear View



GPS Antenna

BLE/Bluetooth Antenna

Antenna – Front View

Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup – Front View



Conducted Emissions Test Setup – Side View



Radiated Spurious Emissions Test Setup Below 1GHz

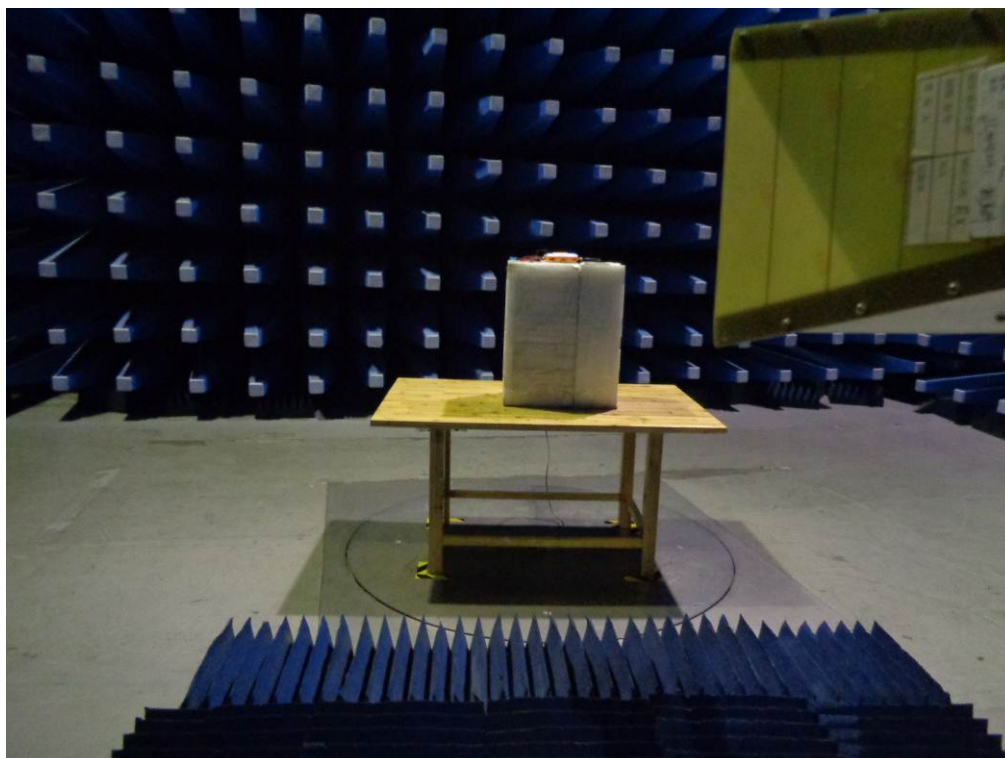


Radiated Spurious Emissions Test Setup Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.i. TEST SET UP BLOCK

Block Configuration Diagram for AC Line Conducted Emissions

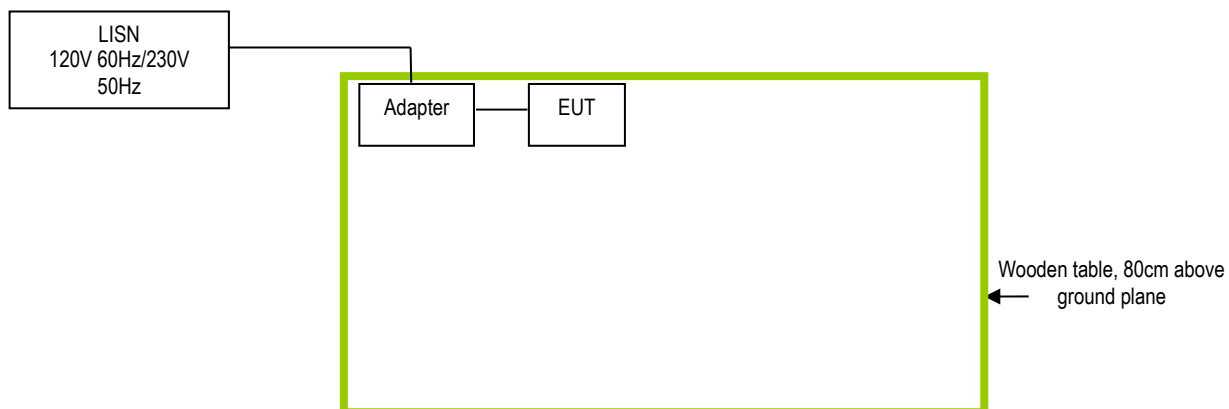

Block Configuration Diagram for Radiated Emissions

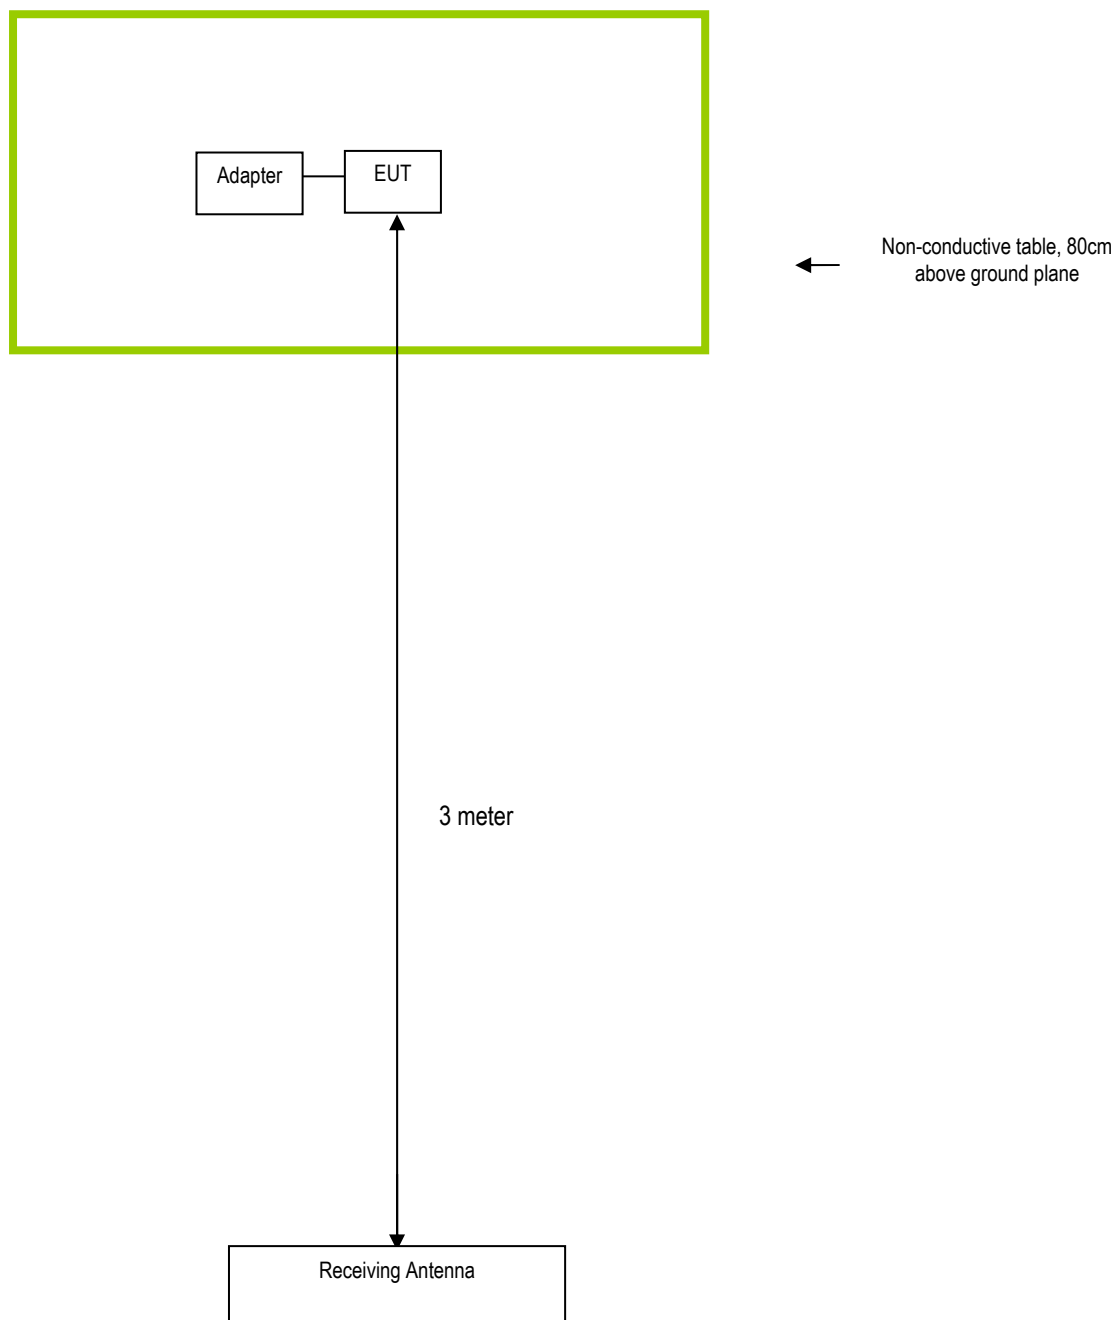

Test Report No.	15020148-FCC-R2
Page	44 of 46

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
N/A	N/A	N/A	N/A	N/A

Test Report No.	15020148-FCC-R2
Page	45 of 46

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Annex E. DECLARATION OF SIMILARITY

Five Models of SenseDisc							
Sensors			Models				
No.	Name	SD00	SD0010 Basic	SD0020 Advanced	SD0030 Physics	SD0040 Biochemistry	SD0050 Environment
			(yellow)	(orange)	(grey)	(blue)	(green)
1	Voltage sensor						
2	Current sensor						
3	Temperature sensor						
4	Motion sensor						
5	Force sensor						
6	Photogate sensor						
7	Sound level sensor						
8	Air pressure sensor						
9	Humidity sensor						
10	Light sensor						
11	DO sensor						
12	pH sensor						
13	Conductivity sensor						
14	Heart rate sensor						
15	Thermocouple sensor						
16	mV sensor						
17	UV sensor						
18	UI						
Built-in sensors	GPS						
	Ambient temperature						
	Barometer						
	Accelerometer(3 Axis)						

For our business issue and marketing requirement, we would like to list different model numbers on the FCC reports and certification as following: model SD00, model SD0010, model SD0020, model SD0030, model SD0040 model SD0050. The five models have the same Circuits, and PCB. The difference of these models are have different sensor and color, the different sensor does not affect the RF power. FCC ID: 2AEEJ-SD

Client's signature



Client's name / title Ningjiang Xiao /Manager

Contact information / address Jiangsu SWR Science & Technology Co.,Ltd
NO.14 Junnong Road,Qinhuai District ,Nanjing, Jiangsu Province,China