



FCC Test Report

FCC ID:2AEHF-SMART

Product : NOBUX™ SMART PLUS-PRO

Trade Name : NOBUX™

Model Number : SMART PLUS-PRO

Serial Model : N/A

Report No. : NTEK-2015NT04131459F1

Prepared for

NOBUX, LLC

8600 NW SOUTH RIVER DR #103 MIAMI, FLORIDA 33166, United States

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599

Website: www.ntek.org.cn

TEST RESULT CERTIFICATION

Applicant's name : NOBUX, LLC
Address : 8600 NW SOUTH RIVER DR #103 MIAMI, FLORIDA 33166,
United States
Manufacturer's Name : NOBUX, LLC
Address : 8600 NW SOUTH RIVER DR #103 MIAMI, FLORIDA 33166,
United States

Product description

Product name : NOBUX™ SMART PLUS-PRO
Model and/or type reference : SMART PLUS-PRO
FCC Part15B:01 Oct.2014
Standards : ANSI C63.4:2009

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with Part 15 of FCC Rules. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test :
Date (s) of performance of tests : 13 Apr. 2015~11 Jun. 2015
Date of Issue..... : 11 Jun. 2015
Test Result..... : **Pass**

Testing Engineer : Jason chen
(Jason Chen)

Technical Manager : Brown Lu
(Brown Lu)

Authorized Signatory : Bin
(Bill Yao)

Table of Contents	Page
1 . TEST SUMMARY	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST SETUP	8
2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	9
2.4 MEASUREMENT INSTRUMENTS LIST	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION	11
3.1.2 TEST PROCEDURE	12
3.1.3 TEST SETUP	12
3.1.4 EUT OPERATING CONDITIONS	12
3.1.5 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	21
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	21
3.2.2 TEST PROCEDURE	21
3.2.3 TEST SETUP	22
3.2.4 EUT OPERATING CONDITIONS	23
3.2.5 TEST RESULTS	24
3.2.6 TEST RESULTS(1000~12400MHz)	26
4 . EUT TEST PHOTO	27

1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
FCC Part15B:2014 ANSI C63.4: 2009	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report
- (2) For client's request and manual description, the test will not be executed.

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration Number:238937; IC Registration Number:9270A-1

CNAS Registration Number:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
NTEKC01	ANSI	150 KHz ~ 30MHz	3.2	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
NTEKA01	ANSI	30MHz ~ 1000MHz	4.7	
		1GHz ~12.4GHz	5.0	

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	NOBUX™ SMART PLUS-PRO	
Model Name	SMART PLUS-PRO	
Additional Model Number(s)	N/A	
Model Difference	N/A	
Product Description	The EUT is a NOBUX™ SMART PLUS-PRO.	
	Connecting I/O port:	USB, DC in
	Operation Frequency:	BT:2402~2480 MHz WIFI: 802.11b/g/n(20MHz): 2412~2462MHz 802.11n(40MHz):2422~2452MHz GSM: 824.2-848.8MHz/1850.2-1909.8MHz WCDMA: 826.4-846.6MHz/ 1852.4-1907.6MHz
	Modulation Type:	BT(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8-DPSK IEEE 802.11b : DSSS (CCK, QPSK, DBPSK) IEEE 802.11g/n (HT20/HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK) GSM / DCS: GMSK WCDMA:QPSK
Power Source	AC Voltage	
Adapter	Input: 100-240V~, 50/60Hz,150mA Output: 5.0V $\overline{\text{---}}$, 500mA	
Battery	DC 3.7V, 1400mAh	

2.1.1 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Data Exchange Mode
Mode 2	REC Mode
Mode 3	TF Card Playing Mode+Charging
Mode 4	GPS Mode


For Conducted Test	
Final Test Mode	Description
Mode 1	Data Exchange Mode
Mode 3	TF Card Playing Mode+Charging

For Radiated Test	
Final Test Mode	Description
Mode 1	Data Exchange Mode


Note: Final Test Mode: Through Pre-scan, find the mode 1 is the worse case.
Only the worst case mode is recorded in the report.

2.2 DESCRIPTION OF TEST SETUP

RE

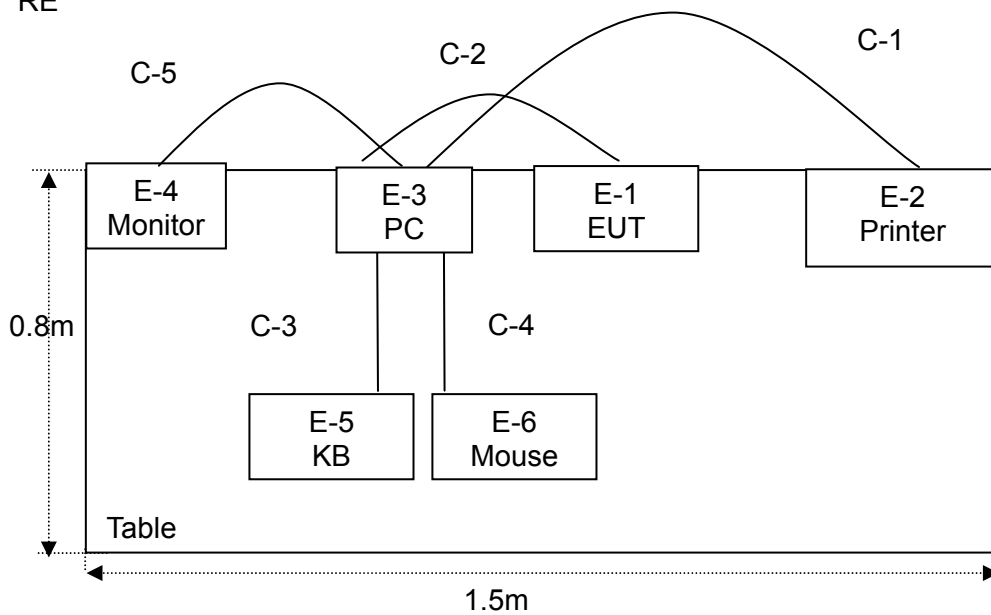

CE

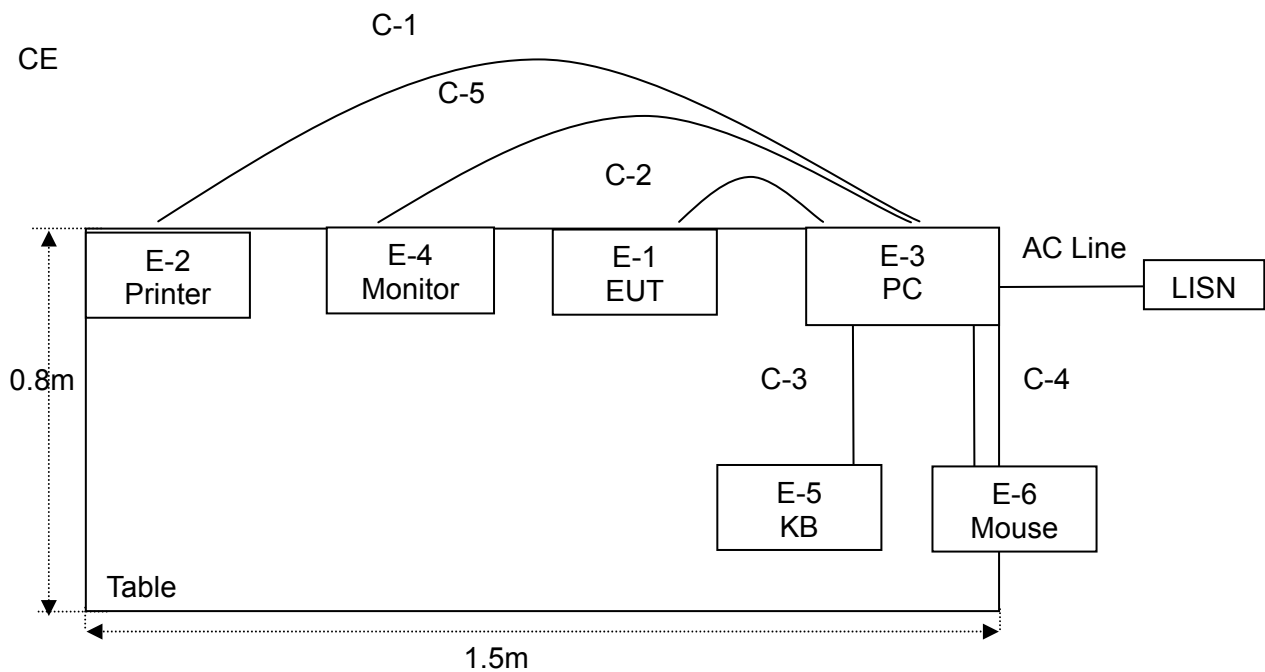

2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	NOBUX™ SMART PLUS-PRO	NOBUX™	SMART PLUS-PRO	N/A	EUT
E-2	Printer	Canon	L11121E	LBP2900	
E-3	Personal computer	DELL	FT4Y23X	34413561645	
E-4	Monitor	DELL	IN2020MB	cn-0y6mhx-74261-11f- 67es	
E-5	Keyboard	DELL	SK-8185	OY526KUS	
E-6	Mouse	DELL	MS111-P	cn-011d3v-71581-11e- 1th7	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.2m	
C-2	NO	NO	1.0m	
C-3	NO	NO	1.0m	
C-4	NO	NO	1.0m	
C-5	NO	NO	1.0m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” “with core”; “NO” means “unshielded” “without core”.

2.4 MEASUREMENT INSTRUMENTS LIST

2.4.1 CONDUCTED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	LISN	R&S	ENV216	101313	Jul. 06, 2014	Jul. 05, 2015	1 year
2	LISN	SCHWARZBECK	NNLK 8129	8129245	Dec. 25, 2014	Dec. 24, 2015	1 year
3	Pulse Limiter	SCHWARZBECK	VTSD 9561F	9716	Dec. 25, 2014	Dec. 24, 2015	1 year
4	50Ω Switch	ANRITSU CORP	MP59B	6200983704	Jul. 06, 2014	Jul. 05, 2015	1 year
5	Test Cable	N/A	C01	N/A	Jul. 06, 2014	Jul. 05, 2015	1 year
6	Test Cable	N/A	C02	N/A	Jul. 06, 2014	Jul. 05, 2015	1 year
7	Test Cable	N/A	C03	N/A	Jul. 06, 2014	Jul. 05, 2015	1 year
8	EMI Test Receiver	R&S	ESCI	101160	Jul. 06, 2014	Jul. 05, 2015	1 year
9	Passive Voltage Probe	ESH2-Z3	R&S	100196	Jul. 06, 2014	Jul. 05, 2015	1 year
10	Absorbing Clamp	R&S	MDS-21	100423	Jul. 08, 2014	Jul. 07, 2015	1 year

2.4.2 RADIATED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Bilog Antenna	TESEQ	CBL6111D	31216	Jul. 06, 2014	Jul. 05, 2015	1 year
2	Test Cable	N/A	R-01	N/A	Dec. 25, 2014	Dec. 24, 2015	1 year
3	Test Cable	N/A	R-02	N/A	Dec. 25, 2014	Dec. 24, 2015	1 year
4	EMI Test Receiver	R&S	ESCI-7	101318	Jul. 06, 2014	Jul. 05, 2015	1 year
5	Antenna Mast	EM	SC100_1	N/A	N/A	N/A	N/A
6	Turn Table	EM	SC100	060531	N/A	N/A	N/A
7	50Ω Switch	Anritsu Corp	MP59B	6200983705	Jul. 06, 2014	Jul. 05, 2015	1 year
8	Spectrum Analyzer	Aglient	E4407B	MY45108040	Jul. 06, 2014	Jul. 05, 2015	1 year
9	Horn Antenna	EM	EM-AH-10180	2011071402	Jul. 06, 2014	Jul. 05, 2015	1 year
10	Amplifier	EM	EM-30180	060538	Jul. 06, 2014	Jul. 05, 2015	1 year
11	Loop Antenna	ARA	PLA-1030/B	1029	Jul. 06, 2014	Jul. 05, 2015	1 year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

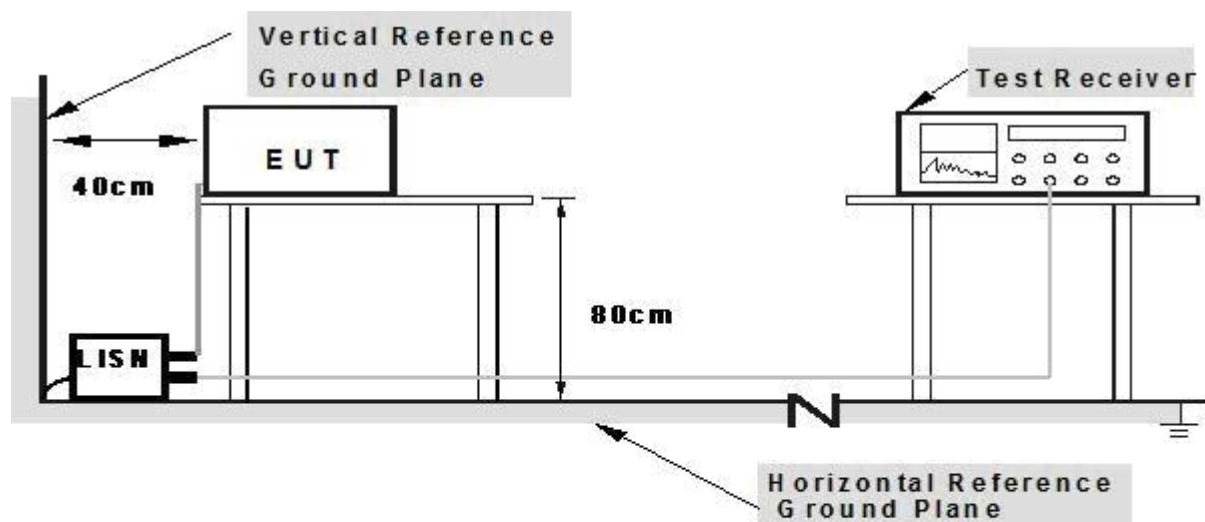

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.


3.1.5 TEST RESULTS

EUT :	NOBUX™ SMART PLUS-PRO	Model Name. :	SMART PLUS-PRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2015-06-10
Test Mode :	Mode 1	Phase :	L
Test Voltage :	DC 5V form PC AC 120V/60Hz		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1620	39.90	9.62	49.52	65.36	-15.84	QP
0.1620	27.82	9.62	37.44	55.36	-17.92	AVG
0.2300	35.56	9.50	45.06	62.45	-17.39	QP
0.2300	25.57	9.50	35.07	52.45	-17.38	AVG
0.4540	36.63	9.38	46.01	56.80	-10.79	QP
0.4540	31.18	9.38	40.56	46.80	-6.24	AVG
0.8219	35.37	9.59	44.96	56.00	-11.04	QP
0.8219	22.82	9.59	32.41	46.00	-13.59	AVG
1.8900	35.27	9.57	44.84	56.00	-11.16	QP
1.8900	22.01	9.57	31.58	46.00	-14.42	AVG
2.8740	32.89	9.60	42.49	56.00	-13.51	QP
2.8740	19.79	9.60	29.39	46.00	-16.61	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

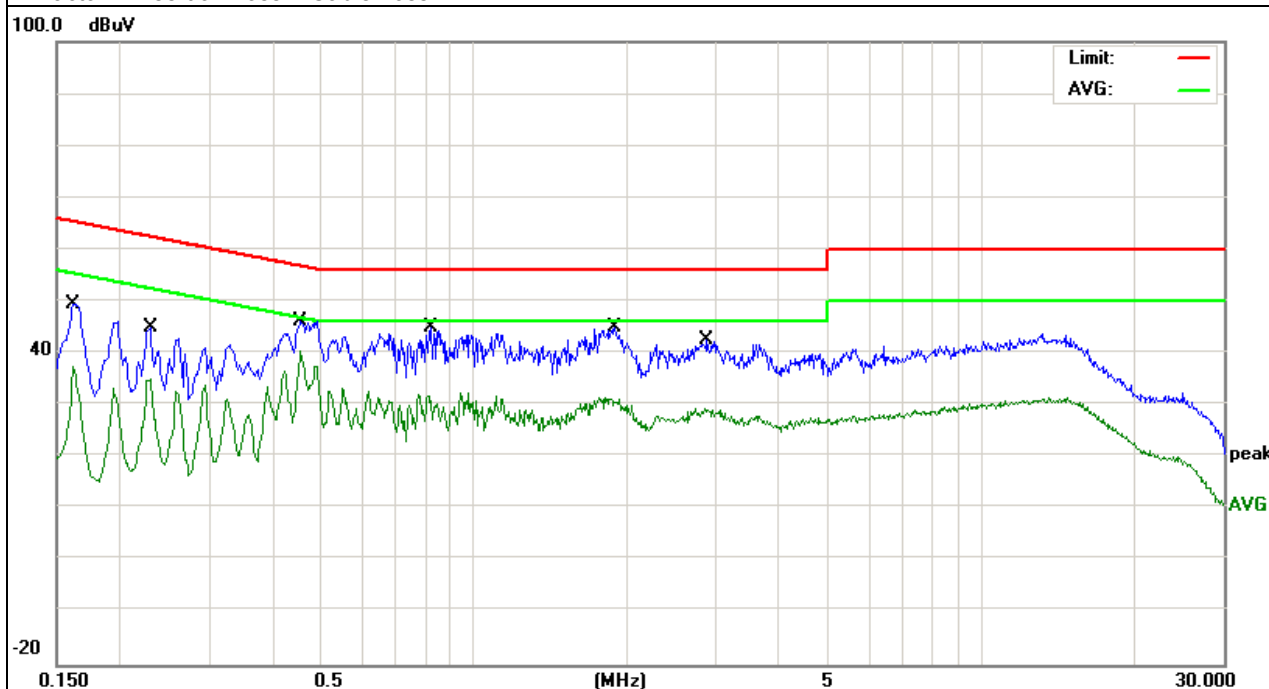


EUT :	NOBUX™ SMART PLUS-PRO	Model Name. :	SMART PLUS-PRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2015-06-10
Test Mode :	Mode 1	Phase :	N
Test Voltage :	DC 5V form PC AC 120V/60Hz		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1620	41.96	9.60	51.56	65.36	-13.80	QP
0.1620	25.29	9.60	34.89	55.36	-20.47	AVG
0.1940	37.84	9.49	47.33	63.86	-16.53	QP
0.1940	21.45	9.49	30.94	53.86	-22.92	AVG
0.4860	33.99	9.47	43.46	56.24	-12.78	QP
0.4860	22.90	9.47	32.37	46.24	-13.87	AVG
0.9100	33.90	9.46	43.36	56.00	-12.64	QP
0.9100	21.29	9.46	30.75	46.00	-15.25	AVG
1.9060	33.48	9.46	42.94	56.00	-13.06	QP
1.9060	20.39	9.46	29.85	46.00	-16.15	AVG
2.9100	31.15	9.45	40.60	56.00	-15.40	QP
2.9100	18.27	9.45	27.72	46.00	-18.28	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

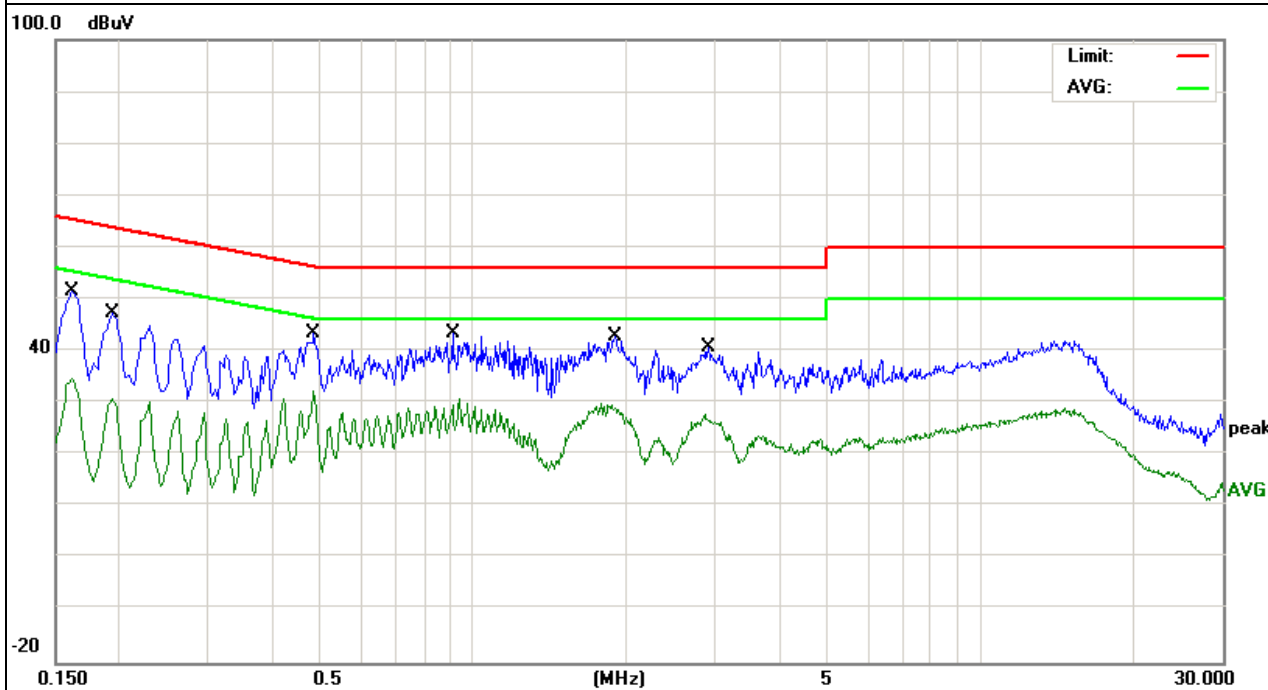


EUT :	NOBUX™ SMART PLUS-PRO	Model Name. :	SMART PLUS-PRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2015-06-10
Test Mode :	Mode 1	Phase :	L
Test Voltage :	DC 5V form PC AC 240V/60Hz		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1580	32.17	9.60	41.77	65.56	-23.79	QP
0.1580	21.08	9.60	30.68	55.56	-24.88	AVG
0.2260	33.10	9.49	42.59	62.59	-20.00	QP
0.2260	25.93	9.49	35.42	52.59	-17.17	AVG
0.3740	34.25	9.50	43.75	58.41	-14.66	QP
0.3740	25.79	9.50	35.29	48.41	-13.12	AVG
0.4860	41.35	9.51	50.86	56.24	-5.38	AVG
0.4860	32.81	9.51	42.32	46.24	-3.92	QP
1.0700	33.22	9.53	42.75	56.00	-13.25	QP
1.0700	26.00	9.53	35.53	46.00	-10.47	AVG
1.7180	32.96	9.54	42.50	56.00	-13.50	QP
1.7180	24.62	9.54	34.16	46.00	-11.84	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

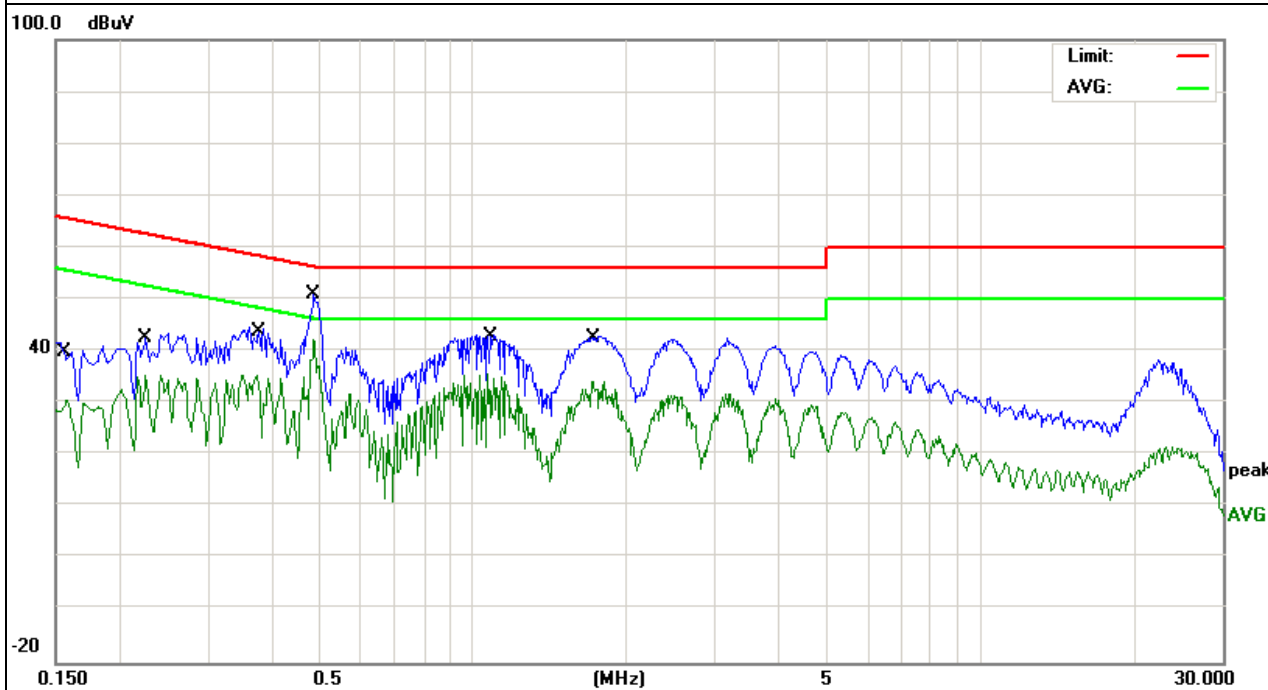


EUT :	NOBUX™ SMART PLUS-PRO	Model Name. :	SMART PLUS-PRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2015-06-10
Test Mode :	Mode 1	Phase :	N
Test Voltage :	DC 5V form PC AC 240V/60Hz		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1819	34.37	9.56	43.93	64.39	-20.46	QP
0.1819	26.21	9.56	35.77	54.39	-18.62	AVG
0.2180	34.40	9.50	43.90	62.89	-18.99	QP
0.2180	29.02	9.50	38.52	52.89	-14.37	AVG
0.4940	42.43	9.53	51.96	56.10	-4.14	QP
0.4940	32.07	9.53	41.60	46.10	-4.50	AVG
1.0780	35.57	9.55	45.12	56.00	-10.88	AVG
1.0780	26.06	9.55	35.61	46.00	-10.39	QP
1.7580	36.06	9.57	45.63	56.00	-10.37	QP
1.7580	25.66	9.57	35.23	46.00	-10.77	AVG
2.3580	34.50	9.57	44.07	56.00	-11.93	QP
2.3580	23.89	9.57	33.46	46.00	-12.54	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

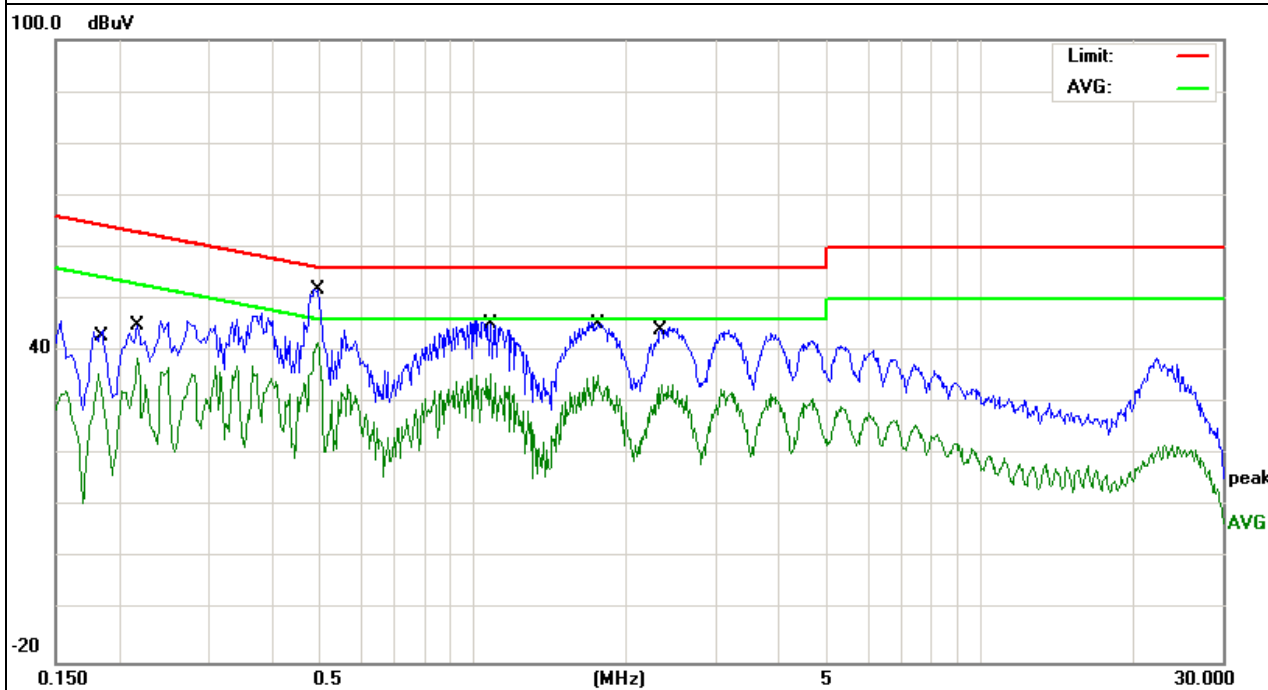


EUT :	NOBUX™ SMART PLUS-PRO	Model Name. :	SMART PLUS-PRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2015-06-10
Test Mode :	Mode 3	Phase :	L
Test Voltage :	DC 5V form adapter AC 120V/60Hz		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.2020	34.05	9.60	43.65	63.52	-19.87	QP
0.2020	26.24	9.60	35.84	53.52	-17.68	AVG
0.3019	26.96	9.74	36.70	60.19	-23.49	QP
0.3019	19.17	9.74	28.91	50.19	-21.28	AVG
0.8378	40.53	9.76	50.29	56.00	-5.71	QP
0.8378	28.60	9.76	38.36	46.00	-7.64	AVG
3.6299	29.24	9.69	38.93	46.00	-7.07	AVG
3.6299	40.37	9.69	50.06	56.00	-5.94	QP
5.3059	46.72	9.70	56.42	60.00	-3.58	QP
5.3059	33.78	9.70	43.48	50.00	-6.52	AVG
24.8538	34.89	9.92	44.81	60.00	-15.19	QP
24.8538	22.99	9.92	32.91	50.00	-17.09	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

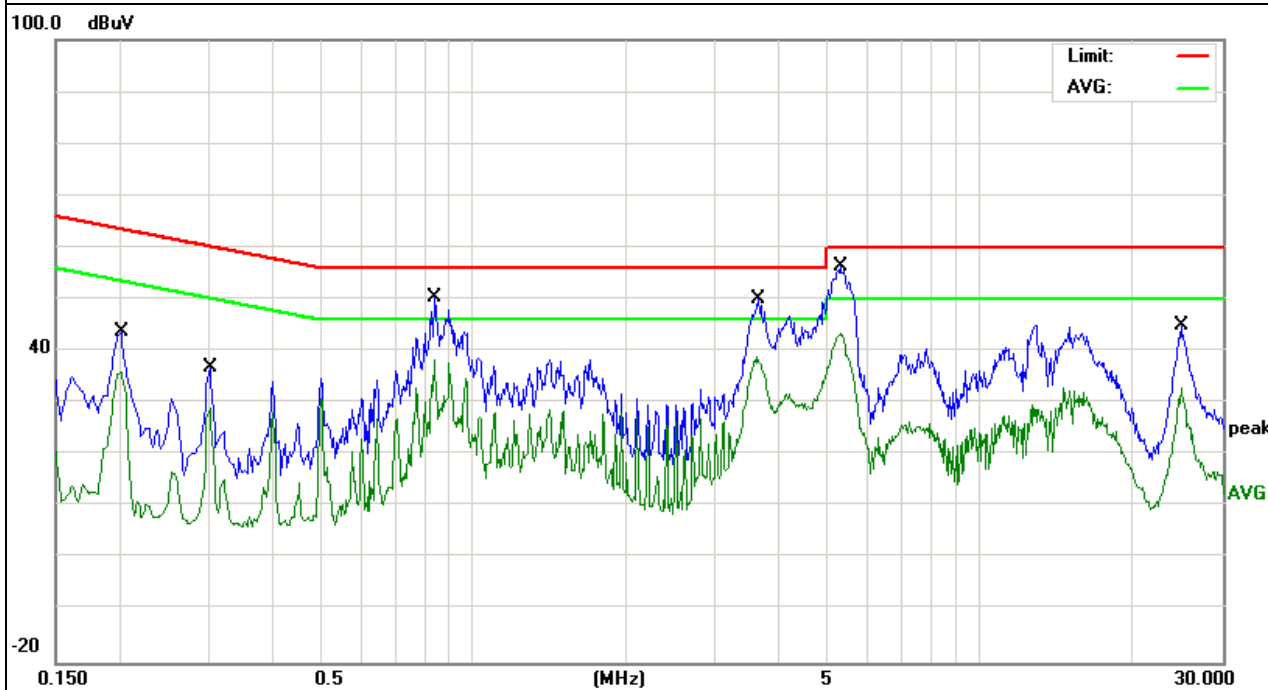


EUT :	NOBUX™ SMART PLUS-PRO	Model Name. :	SMART PLUS-PRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2015-06-10
Test Mode :	Mode 3	Phase :	N
Test Voltage :	DC 5V form adapter AC 120V/60Hz		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.2020	32.75	9.61	42.36	63.52	-21.16	QP
0.2020	29.81	9.61	39.42	53.52	-14.10	AVG
0.3019	21.16	9.62	30.78	60.19	-29.41	QP
0.3019	16.45	9.62	26.07	50.19	-24.12	AVG
0.8378	39.67	9.62	49.29	56.00	-6.71	QP
0.8378	28.47	9.62	38.09	46.00	-7.91	AVG
3.6339	28.85	9.52	38.37	46.00	-7.63	AVG
3.6339	40.15	9.52	49.67	56.00	-6.33	QP
5.2659	46.62	9.51	56.13	60.00	-3.87	QP
5.2659	33.52	9.51	43.03	50.00	-6.97	AVG
24.7300	33.60	9.95	43.55	60.00	-16.45	QP
24.7300	22.41	9.95	32.36	50.00	-17.64	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

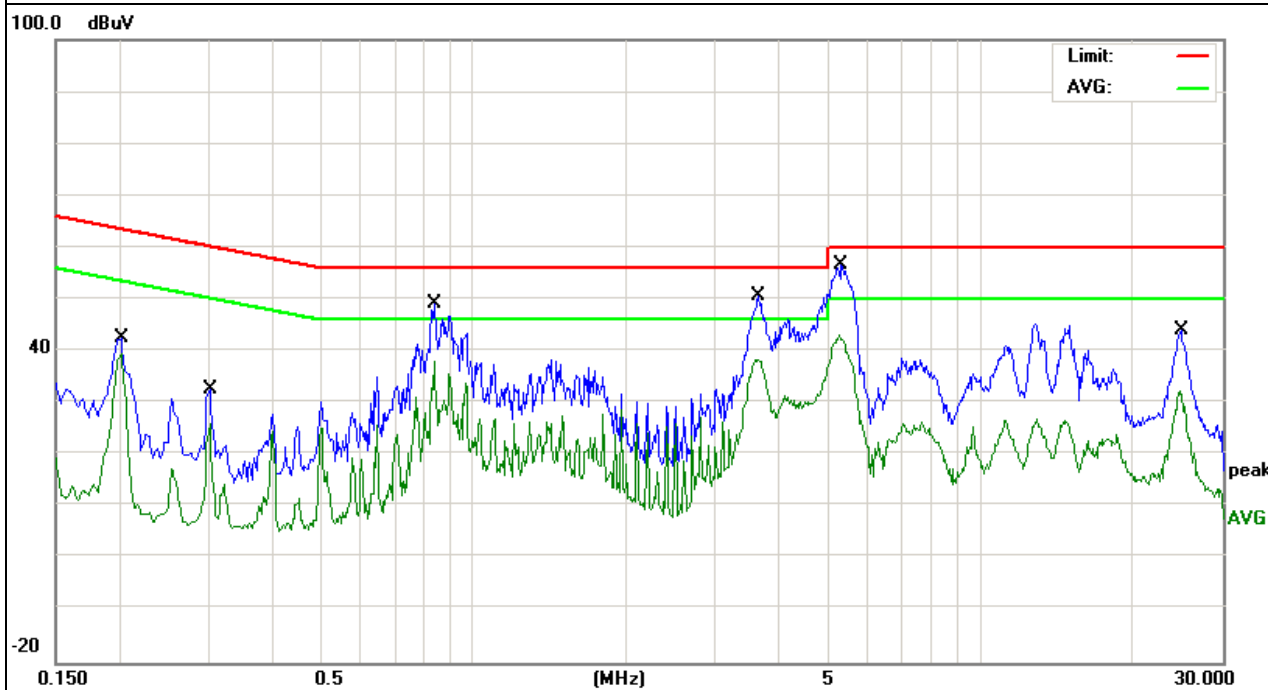


EUT :	NOBUX™ SMART PLUS-PRO	Model Name. :	SMART PLUS-PRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2015-06-10
Test Mode :	Mode 3	Phase :	L
Test Voltage :	DC 5V form adapter AC 240V/60Hz		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1819	50.25	9.61	59.86	64.39	-4.53	QP
0.1819	35.38	9.61	44.99	54.39	-9.40	AVG
0.2419	43.43	9.66	53.09	62.03	-8.94	QP
0.2419	29.24	9.66	38.90	52.03	-13.13	AVG
0.3099	38.37	9.71	48.08	59.97	-11.89	QP
0.3099	24.26	9.71	33.97	49.97	-16.00	AVG
0.5180	37.98	9.77	47.75	56.00	-8.25	AVG
0.5180	25.55	9.77	35.32	46.00	-10.68	QP
1.1699	35.16	9.72	44.88	56.00	-11.12	QP
1.1699	20.14	9.72	29.86	46.00	-16.14	AVG
21.1060	42.26	9.96	52.22	60.00	-7.78	QP
21.1060	31.19	9.96	41.15	50.00	-8.85	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

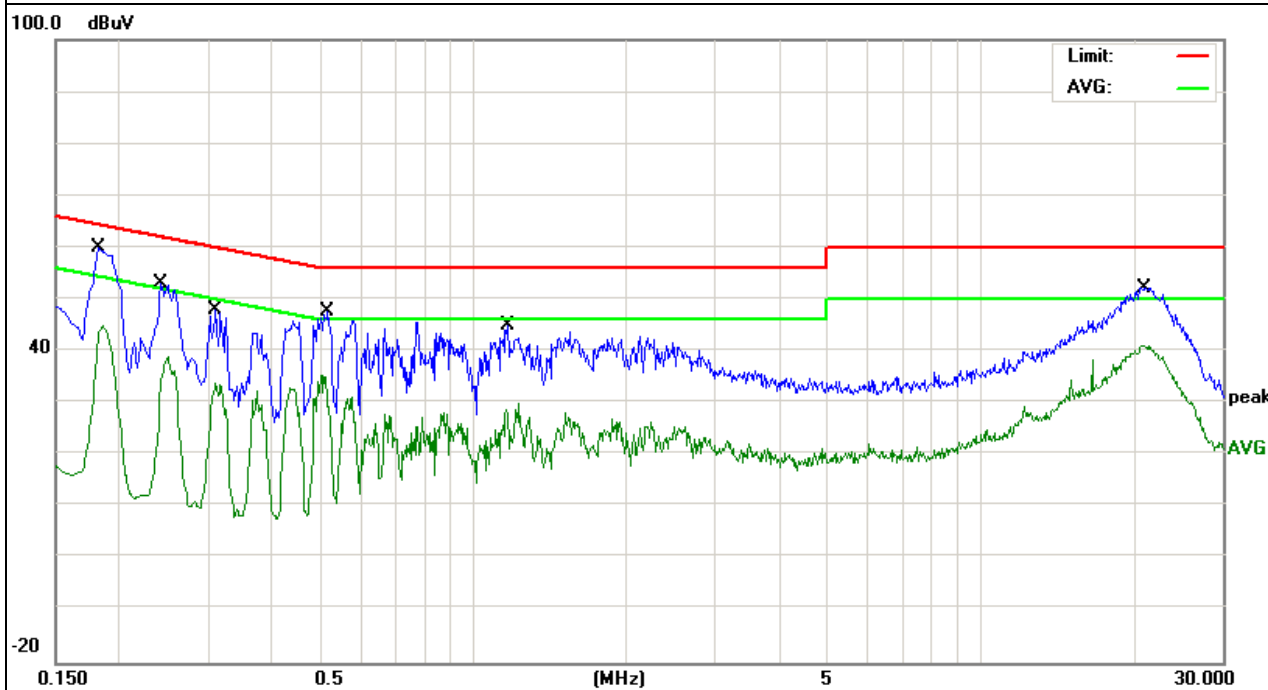


EUT :	NOBUX™ SMART PLUS-PRO	Model Name. :	SMART PLUS-PRO
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2015-06-10
Test Mode :	Mode 3	Phase :	N
Test Voltage :	DC 5V form adapter AC 240V/60Hz		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1860	49.63	9.61	59.24	64.21	-4.97	QP
0.1860	35.82	9.61	45.43	54.21	-8.78	AVG
0.2419	43.84	9.61	53.45	62.03	-8.58	QP
0.2419	29.38	9.61	38.99	52.03	-13.04	AVG
0.4500	38.16	9.66	47.82	56.87	-9.05	QP
0.4500	26.36	9.66	36.02	46.87	-10.85	AVG
0.5180	39.16	9.68	48.84	56.00	-7.16	AVG
0.5180	26.79	9.68	36.47	46.00	-9.53	QP
1.5460	36.36	9.57	45.93	56.00	-10.07	QP
1.5460	21.48	9.57	31.05	46.00	-14.95	AVG
20.2780	43.18	9.83	53.01	60.00	-6.99	QP
20.2780	31.31	9.83	41.14	50.00	-8.86	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

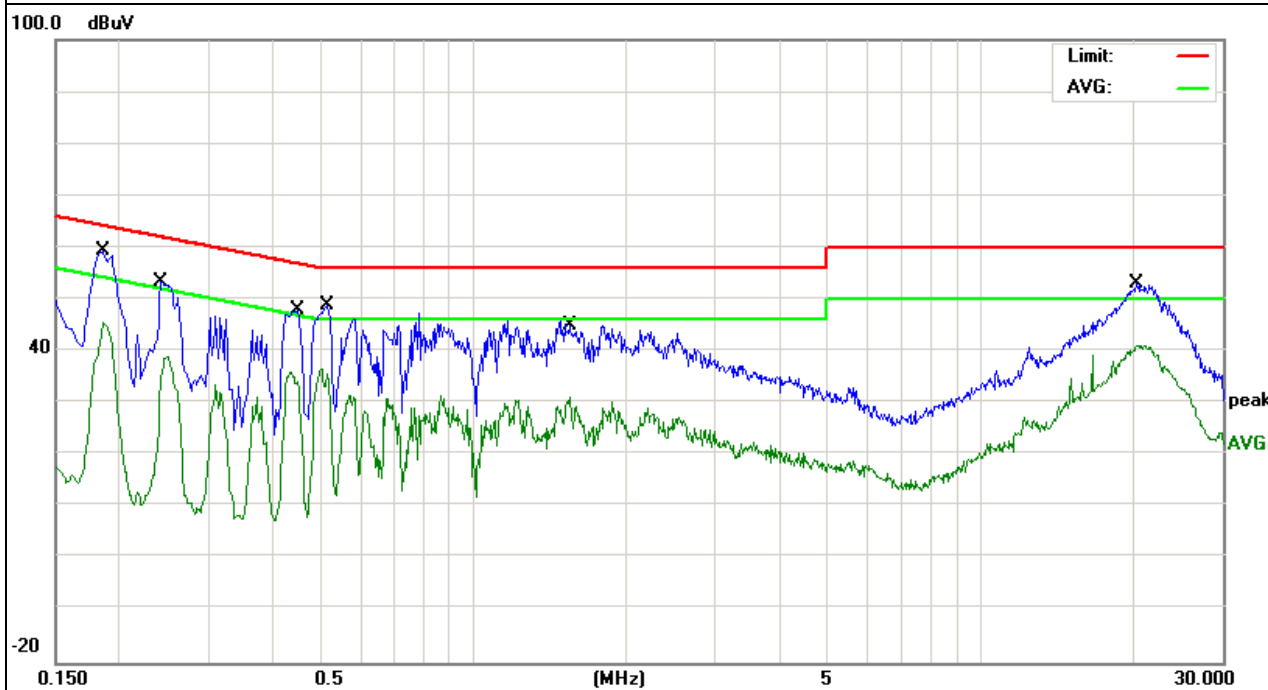

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 3m)
	dBuV/m	dBuV/m
30 ~ 88	39.0	40.0
88 ~ 216	43.5	43.5
216 ~ 960	46.5	46.0
Above 960	49.5	54.0

Notes:

- (1) The limit for radiated test was performed according to as following:
FCC PART 15B /ICES-003.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

3.2.2 TEST PROCEDURE

Test Arrangement for Radiated Emissions up to 1 GHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency below 1GHz.

Test Arrangement for Radiated Emissions above 1 GHz.

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength.Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.


Note: For the hand-held device, the EUT should be measured for all 3 axes and only the worst case is recorded in the report
During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Peak	1 MHz	10 Hz


3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

For Radiated Emission 30~1000MHz

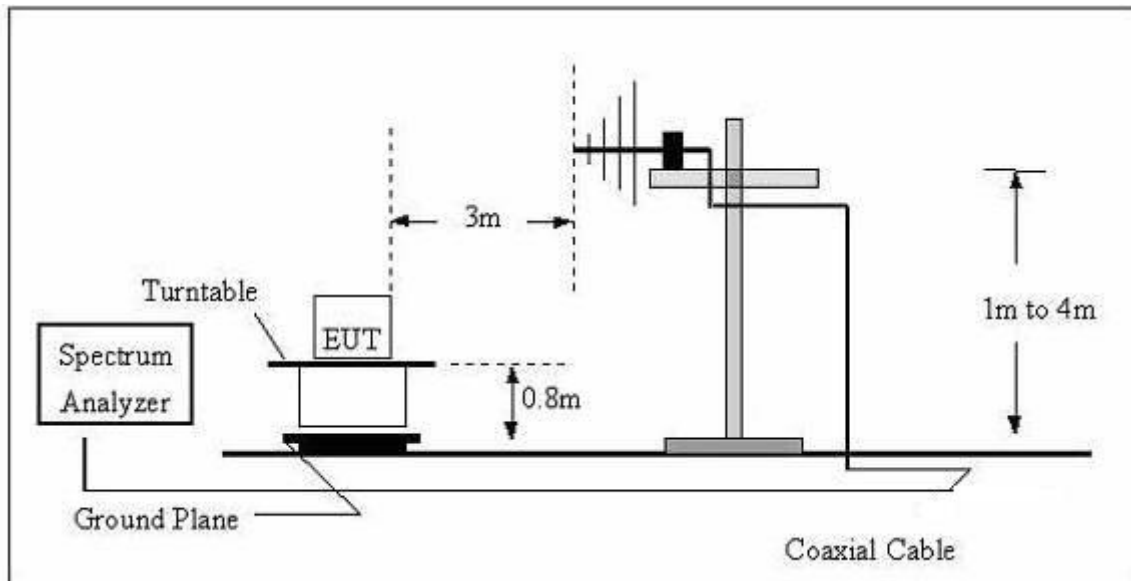

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

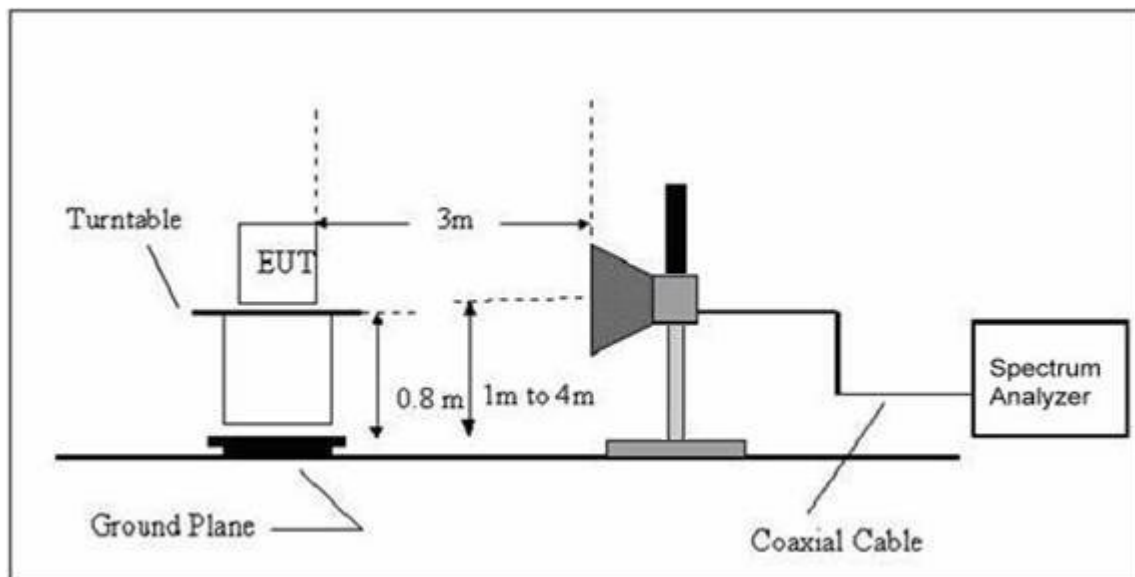

3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 TEST RESULTS


TEST RESULTS (30~1000 MHz)

EUT :	NOBUX™ SMART PLUS-PRO	Model Name :	SMART PLUS-PRO
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2015-06-10
Test Mode :	Mode 1	Polarization :	Horizontal
Test Power :	AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Remark
80.9275	19.51	6.04	25.55	40.00	-14.45	QP
140.8351	20.47	11.32	31.79	43.50	-11.71	QP
155.9100	18.95	10.45	29.40	43.50	-14.10	QP
261.9753	16.74	13.73	30.47	46.00	-15.53	QP
426.5210	13.18	18.84	32.02	46.00	-13.98	QP
640.6110	10.93	23.22	34.15	46.00	-11.85	QP

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

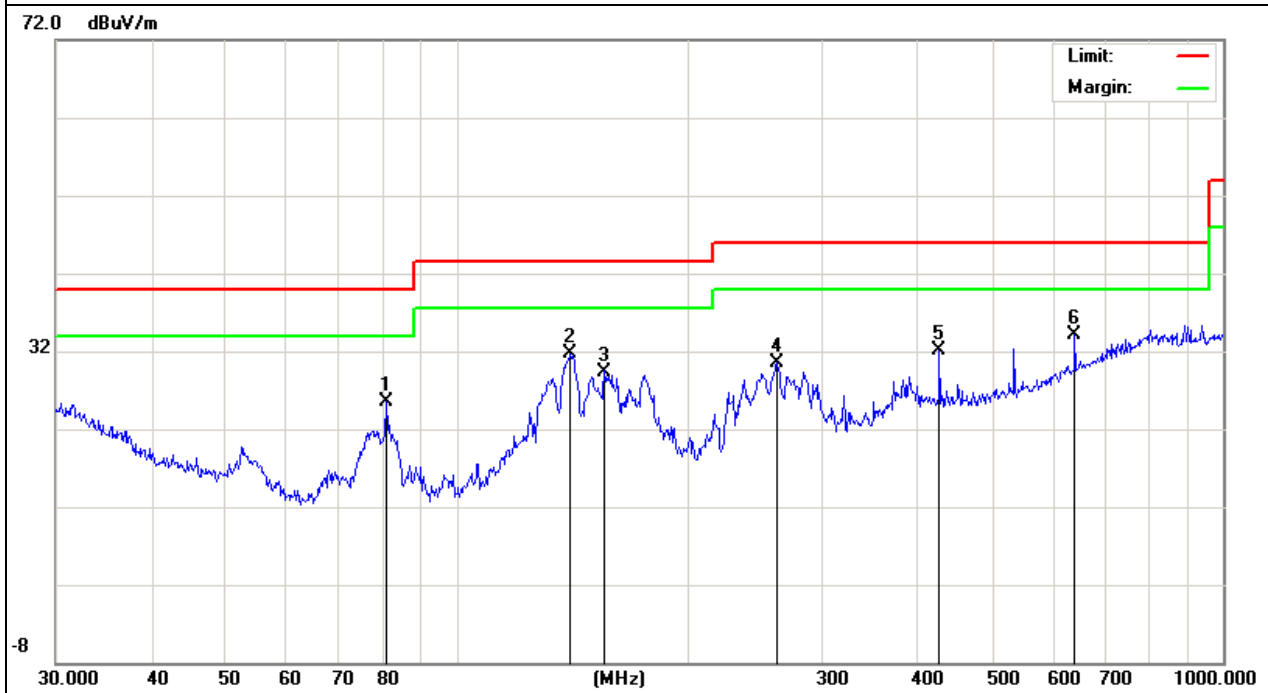


EUT :	NOBUX™ SMART PLUS-PRO	Model Name :	SMART PLUS-PRO
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2015-06-10
Test Mode :	Mode 1	Polarization :	Vertical
Test Power :	AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Remark
31.6202	14.79	18.54	33.33	40.00	-6.67	QP
133.6187	26.36	11.71	38.07	43.50	-5.43	QP
141.8262	28.10	11.23	39.33	43.50	-4.17	QP
167.8242	23.86	10.54	34.40	43.50	-9.10	QP
533.8320	11.99	21.00	32.99	46.00	-13.01	QP
640.6110	10.81	23.22	34.03	46.00	-11.97	QP

Remark:

1. All readings are Peak and Average values.
2. Factor = Antenna Factor + Cable Loss - Amplifier.
3. N/A means All Data have pass Limit

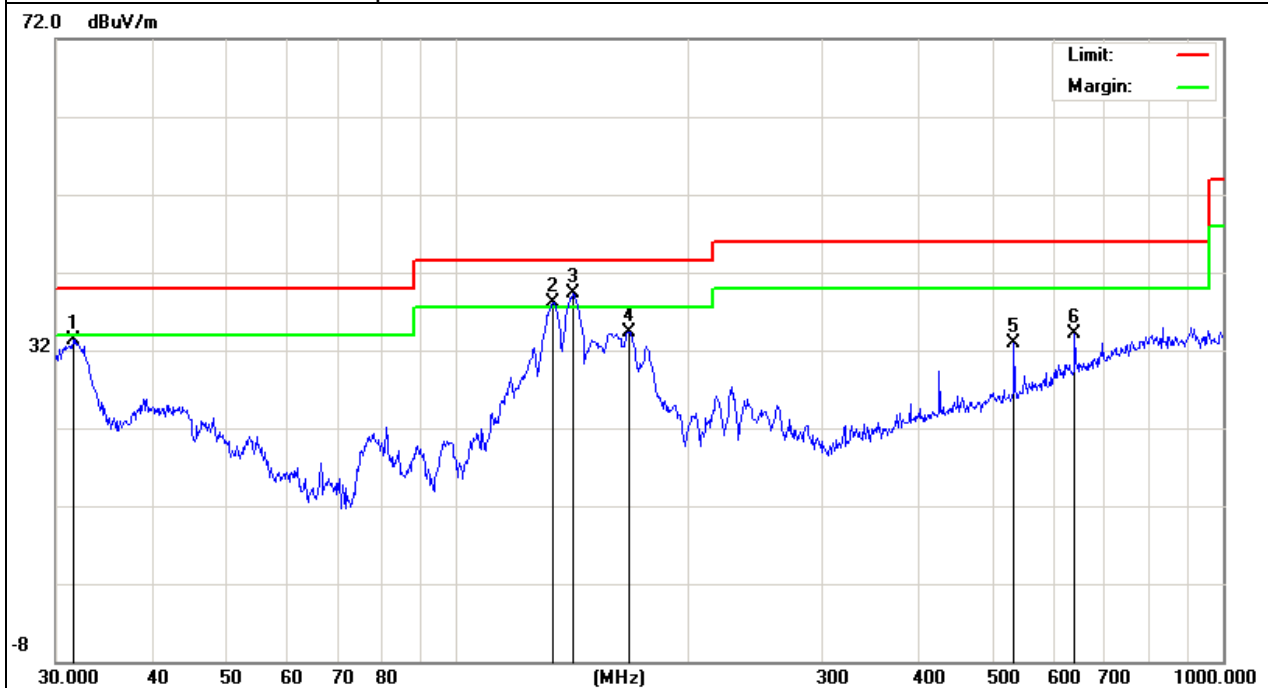

3.2.6 TEST RESULTS(1000~12400MHz)


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	1089.811	57.55	-19.58	37.97	74.00	-36.03	peak
V	1551.126	70.47	-16.84	53.63	74.00	-20.37	peak
V	1551.126	53.34	-16.84	36.50	54.00	-17.50	AVG
V	1872.203	60.29	-14.46	45.83	74.00	-28.17	peak
V	2184.107	60.71	-12.40	48.31	74.00	-25.69	peak
V	3125.390	55.91	-11.42	44.49	74.00	-29.51	peak
V	4052.622	49.30	-5.99	43.31	74.00	-30.69	peak
H	1087.86	60.73	-19.58	41.15	74.00	-32.85	peak
H	1559.486	71.23	-16.76	54.47	74.00	-19.53	peak
H	1559.486	53.46	-16.76	36.70	54.00	-17.30	AVG
H	1717.915	64.61	-15.51	49.10	74.00	-24.90	peak
H	2801.799	58.22	-11.67	46.55	74.00	-27.45	peak
H	3130.995	54.89	-11.41	43.48	74.00	-30.52	peak
H	5615.128	45.35	-4.25	41.10	74.00	-32.90	peak

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

4. EUT TEST PHOTO

Radiated Measurement Photos

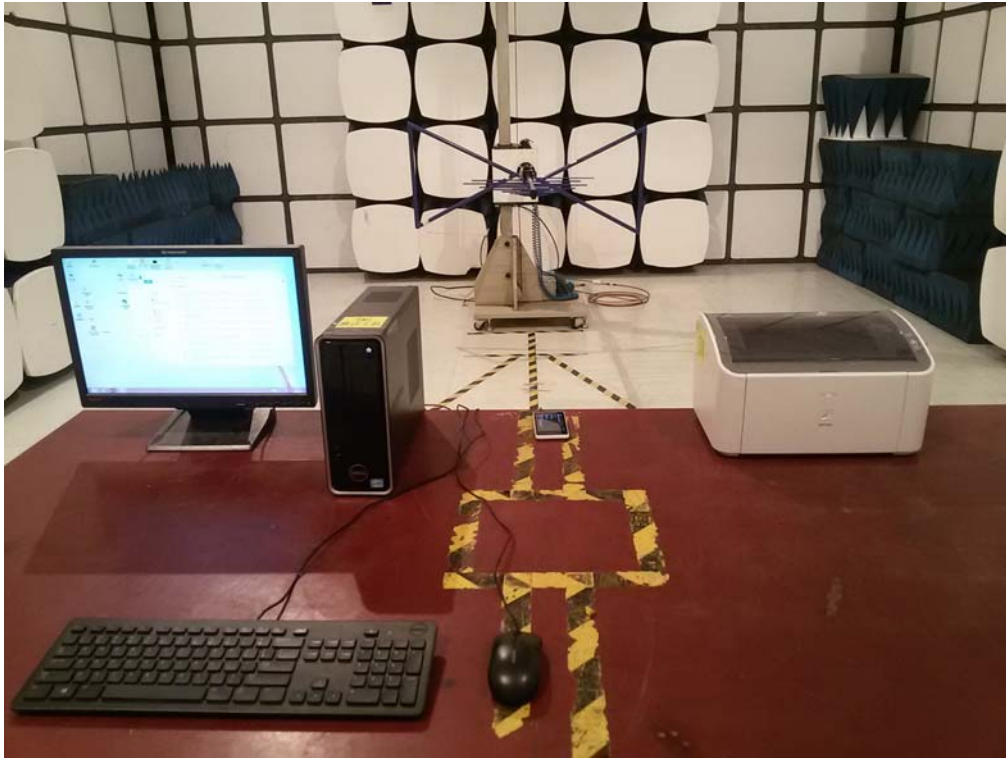

Conducted Measurement Photos

