



# FCC PART 15, SUBPART C TEST REPORT

For

**Tesla Motors, Inc.**

3500 Deer Creek Road,  
Palo Alto, CA 94304, USA

**FCC ID: 2AEIM-1616631**

|                                                                                                                                              |                                                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                       | <b>Product Type:</b><br>Vehicle Millimeter-wave Radar<br>Sensor |
| Zhao Zhao                                                                                                                                    |                                                                 |
| <b>Prepared By:</b> RF Project Engineer                                                                                                      |                                                                 |
| <b>Report Number:</b> R2012144-255                                                                                                           |                                                                 |
| <b>Report Date:</b> 2021-05-24                                                                                                               |                                                                 |
| Simon Ma                                                                                                                                     |                                                                 |
| <b>Reviewed By:</b> RF Supervisor                                                                                                            |                                                                 |
| Bay Area Compliance Laboratories Corp.<br>1274 Anvilwood Ave.,<br>Sunnyvale, CA 94089, USA<br>Tel: +1 (408) 732-9162, Fax: +1 (408) 732-9164 |                                                                 |



**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA\*, NIST, or any agency of the Federal Government.

\* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”

## TABLE OF CONTENTS

|                                                                                             |           |
|---------------------------------------------------------------------------------------------|-----------|
| <b>1 General Description.....</b>                                                           | <b>5</b>  |
| 1.1 Product Description for Equipment Under Test (EUT) .....                                | 5         |
| 1.2 Objective.....                                                                          | 5         |
| 1.3 Related Submittal(s)/Grant(s) .....                                                     | 5         |
| 1.4 Test Methodology .....                                                                  | 5         |
| 1.5 Measurement Uncertainty .....                                                           | 5         |
| 1.6 Test Facility Registrations .....                                                       | 6         |
| 1.7 Test Facility Accreditations .....                                                      | 6         |
| <b>2 System Test Configuration.....</b>                                                     | <b>9</b>  |
| 2.1 Justification.....                                                                      | 9         |
| 2.2 EUT Exercise Software.....                                                              | 9         |
| 2.3 Duty Cycle.....                                                                         | 9         |
| 2.4 Equipment Modifications.....                                                            | 11        |
| 2.5 Local Support Equipment .....                                                           | 11        |
| 2.6 Remote Support Equipment.....                                                           | 11        |
| 2.7 Interface Ports and Cabling.....                                                        | 12        |
| <b>3 Summary of Test Results .....</b>                                                      | <b>13</b> |
| <b>4 FCC §15.203 - Antenna Requirements .....</b>                                           | <b>14</b> |
| 4.1 Applicable Standards .....                                                              | 14        |
| 4.2 Antenna Description .....                                                               | 14        |
| <b>5 FCC §2.1091 &amp; §15.255(g) - RF Exposure .....</b>                                   | <b>15</b> |
| 5.1 Applicable Standards .....                                                              | 15        |
| 5.2 MPE Prediction.....                                                                     | 15        |
| 5.3 MPE Results .....                                                                       | 16        |
| <b>6 FCC §15.209 &amp; §15.255(d) - Spurious Radiated Emissions.....</b>                    | <b>17</b> |
| 6.1 Applicable Standards .....                                                              | 17        |
| 6.2 Test Setup .....                                                                        | 18        |
| 6.3 Test Procedure .....                                                                    | 18        |
| 6.4 Corrected Amplitude and Margin Calculation.....                                         | 19        |
| 6.5 Test Equipment List and Details.....                                                    | 20        |
| 6.6 Test Environmental Conditions .....                                                     | 20        |
| 6.7 Summary of Test Results .....                                                           | 21        |
| 6.8 Spurious Emissions Test Results .....                                                   | 21        |
| <b>7 FCC §15.215 - Emission Bandwidth .....</b>                                             | <b>25</b> |
| 7.1 Applicable Standards .....                                                              | 25        |
| 7.2 Measurement Procedure.....                                                              | 25        |
| 7.3 Test Equipment List and Details.....                                                    | 25        |
| 7.4 Test Environmental Conditions .....                                                     | 25        |
| 7.5 Test Results.....                                                                       | 26        |
| <b>8 FCC §15.255(c)(3) &amp; DA 21-407 - Fundamental EIRP Output Power Measurement.....</b> | <b>27</b> |
| 8.1 Applicable Standards .....                                                              | 27        |
| 8.2 Measurement Procedure.....                                                              | 27        |
| 8.3 Test Equipment List and Details.....                                                    | 28        |
| 8.4 Test Environmental Conditions .....                                                     | 28        |
| 8.5 Test Results.....                                                                       | 29        |
| <b>9 FCC §15.255(f) - Frequency Stability .....</b>                                         | <b>31</b> |
| 9.1 Applicable Standards .....                                                              | 31        |
| 9.2 Measurement Procedure.....                                                              | 31        |
| 9.3 Test Equipment List and Details.....                                                    | 31        |
| 9.4 Test Environmental Conditions .....                                                     | 32        |

9.5 Test Results..... 32

10 Annex A - EUT Test Setup Photographs ..... 38

11 Annex B - EUT External Photographs ..... 39

12 Annex C - EUT Internal Photographs ..... 40

13 Annex D (Normative) - A2LA Electrical Testing Certificate..... 41

**DOCUMENT REVISION HISTORY**

| <b>Revision Number</b> | <b>Report Number</b> | <b>Description of Revision</b> | <b>Date of Revision</b> |
|------------------------|----------------------|--------------------------------|-------------------------|
| 0                      | R2012144-255         | Original Report                | 2021-05-24              |

## 1 General Description

### 1.1 Product Description for Equipment Under Test (EUT)

This test report was prepared on behalf of *Tesla Motors, Inc.* and their product *model: 1616631, FCC ID: 2AEIM-1616631*, or the “EUT” as referred to in this report. The equipment under test (EUT) was a Vehicle Millimeter-wave Radar Sensor operating in 60 GHz band (60-64 GHz).

The EUT measures approximately 67mm (L) x 48mm (W) x 11mm (H) and weighs approximately 0.1 kg.

Serial Number: R2012144-001 assigned by BACL

### 1.2 Objective

This report was prepared on behalf of *Tesla Motors, Inc.* in accordance with Part 2, Subpart J, Part 15, Subpart C of the Federal Communication Commission’s rules, and FCC waiver DA-21-407.

The objective was to determine compliance with FCC Part 15.255 for Output Power, Antenna Requirements, 20 dB Bandwidth, Fundamental EIRP, Duty Cycle, Power Spectrum Density and Radiated Spurious Emissions.

### 1.3 Related Submittal(s)/Grant(s)

N/A

### 1.4 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

### 1.5 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

| Parameter                         | Measurement uncertainty |
|-----------------------------------|-------------------------|
| Occupied Channel Bandwidth        | ±5 %                    |
| RF output power, conducted        | ±0.57 dB                |
| Power Spectral Density, conducted | ±1.48dB                 |
| Unwanted Emissions, conducted     | ±1.57dB                 |
| All emissions, radiated           | ±4.0 dB                 |
| AC power line Conducted Emission  | ±2.0 dB                 |
| Temperature                       | ±2 ° C                  |
| Humidity                          | ±5 %                    |
| DC and low frequency voltages     | ±1.0 %                  |
| Time                              | ±2 %                    |
| Duty Cycle                        | ±3 %                    |

## 1.6 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

## 1.7 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

**A- An independent, 3<sup>rd</sup>-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3297.02),** in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (\*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report.

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

**B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.03)** to certify

- For the USA (Federal Communications Commission):

- 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
- 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
- 3- All Telephone Terminal Equipment within FCC Scope C.

- For the Canada (Industry Canada):

- 1- All Scope 1-Licence-Exempt Radio Frequency Devices;
- 2- All Scope 2-Licensed Personal Mobile Radio Services;
- 3- All Scope 3-Licensed General Mobile & Fixed Radio Services;
- 4- All Scope 4-Licensed Maritime & Aviation Radio Services;
- 5- All Scope 5-Licensed Fixed Microwave Radio Services
- 6- All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.

- For Singapore (Info-Communications Development Authority (IDA)):

- 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2

- For the Hong Kong Special Administrative Region:

- 1 All Radio Equipment, per KHCA 10XX-series Specifications;
- 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
- 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.

## - For Japan:

- 1 MIC Telecommunication Business Law (Terminal Equipment):
  - All Scope A1 - Terminal Equipment for the Purpose of Calls;
  - All Scope A2 - Other Terminal Equipment
- 2 Radio Law (Radio Equipment):
  - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
  - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
  - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

**C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:**

- 1 Electronics and Office Equipment:
  - for Telephony (ver. 3.0)
  - for Audio/Video (ver. 3.0)
  - for Battery Charging Systems (ver. 1.1)
  - for Set-top Boxes & Cable Boxes (ver. 4.1)
  - for Televisions (ver. 6.1)
  - for Computers (ver. 6.0)
  - for Displays (ver. 6.0)
  - for Imaging Equipment (ver. 2.0)
  - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
  - for Commercial Dishwashers (ver. 2.0)
  - for Commercial Ice Machines (ver. 2.0)
  - for Commercial Ovens (ver. 2.1)
  - for Commercial Refrigerators and Freezers
- 3 Lighting Products
  - For Decorative Light Strings (ver. 1.5)
  - For Luminaires (including sub-components) and Lamps (ver. 1.2)
  - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
  - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
  - for Residential Ceiling Fans (ver. 3.0)
  - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
  - For Water Coolers (ver. 3.0)

**D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:**

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Innovation, Science and Economic development Canada - ISED) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
  - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
  - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
  - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
  - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
  - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Media Development Authority - IMDA) APEC Tel MRA -Phase I & Phase II;

- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
  - o ENERGY STAR Recognized Test Laboratory – US EPA
  - o Telecommunications Certification Body (TCB) – US FCC;
  - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;

## 2 System Test Configuration

### 2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

### 2.2 EUT Exercise Software

The test firmware was provided by Tesla Motors, Inc. Two modes were made available, sweeping mode and Sweeping-stop mode. Sweeping mode is FM-CW signal sweeping in the operating band. Sweeping-stop mode is one carrier signal operating at fixed frequency.

| Mode          | Frequency (GHz) | Power Setting |
|---------------|-----------------|---------------|
| Sweeping      | 60-64           | 6             |
| Sweeping-stop | 60, 62, 64      | 6             |

### 2.3 Duty Cycle

According to the Tesla Waiver DA-21-407 section 53, Waiver Conditions, to ensure that harmful interference to authorized operations and other spectrum users will not occur, we impose explicit conditions on the installation, operation, and certification of the device(s) under this waiver, as follows:


- Each individual radar device shall not exceed a maximum transmit duty cycle of 10% in any 33 milliseconds (ms) interval (i.e., the device will not transmit longer than a total of 3.3 ms in any 33 ms time period).

| Pulse Width (uS) | Pulse No. per Chirp | On Time per Chirp Period (ms) | Chirp Period (ms) | Duty Cycle (%) |
|------------------|---------------------|-------------------------------|-------------------|----------------|
| 32               | 96                  | 3.072                         | 50                | 6.144          |


| Pulse Width (uS) | Pulse No. per 33ms | On Time per 33ms (ms) | Duty Cycle in any 33 ms (%) |
|------------------|--------------------|-----------------------|-----------------------------|
| 32               | 96                 | 3.072                 | 9.31                        |

Please refer to the following plots for details.


### Pulse Width

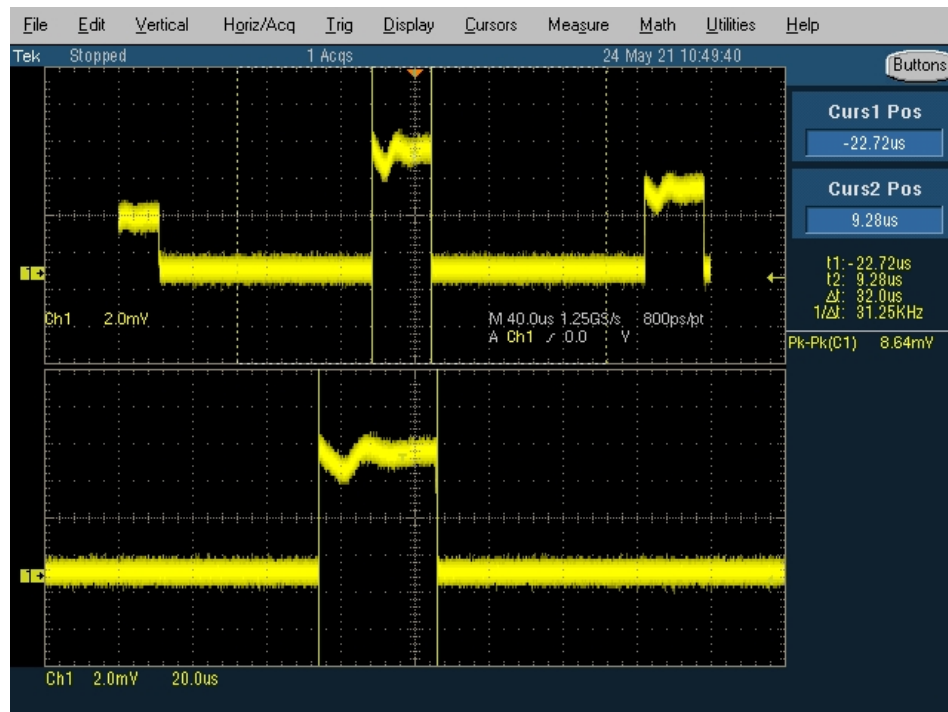

### Pulse numbers per chirp period

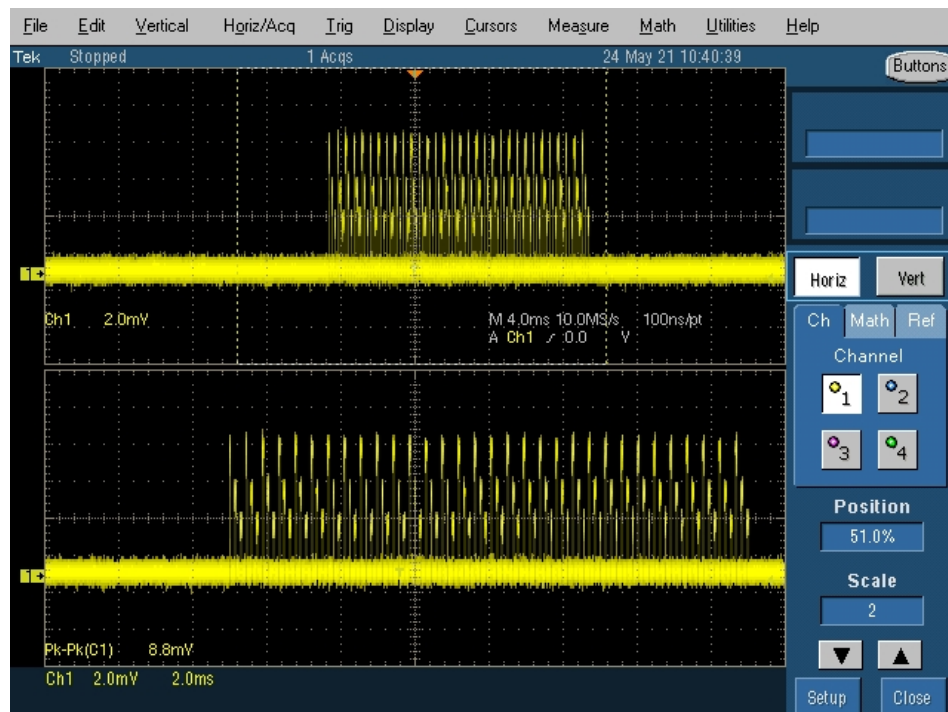

### Chirp Period

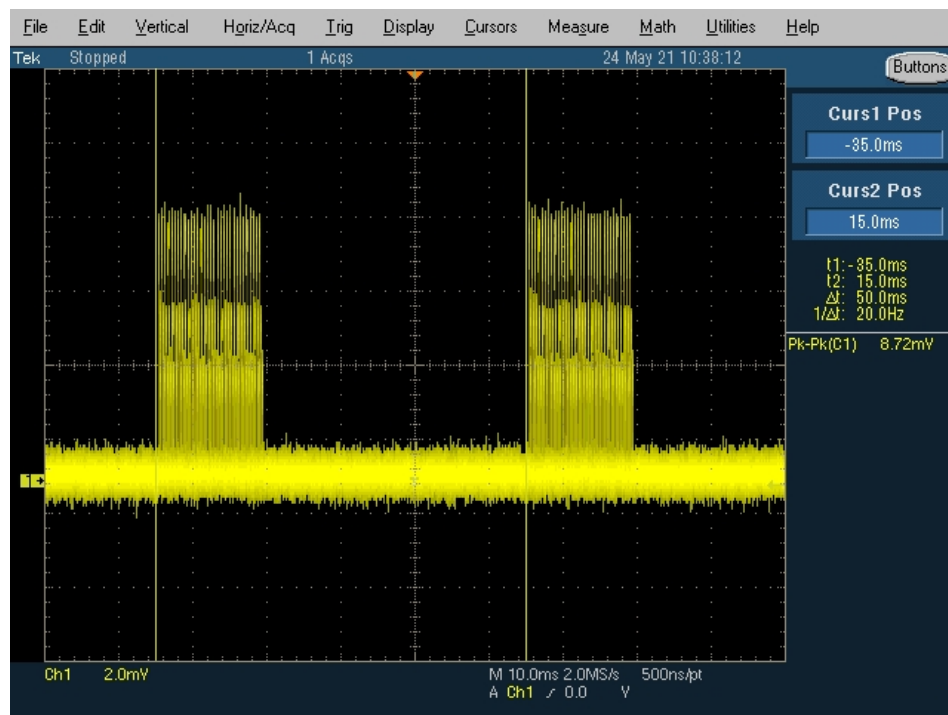

## 2.4 Equipment Modifications

No equipment modifications were made to the EUT

## 2.5 Local Support Equipment

| Manufacturer | Description  | Model          | Serial Number |
|--------------|--------------|----------------|---------------|
| Dell         | Laptop       | Latitude E6410 | 3CKRAQ1       |
| Volteq       | Power Supply | HY5003D        | 180100168     |

## 2.6 Remote Support Equipment

| Manufacturer | Description                  | Model               | Serial Number |
|--------------|------------------------------|---------------------|---------------|
| PEAK-SYSTEM  | PCAN-USB adapter             | IPEH-002022-267801  | -             |
| Tesla        | Serial to serial debug board | 1020358-00-A Rev 01 | -             |

## 2.7 Interface Ports and Cabling

| Cable Description | Length (m) | To  | From         |
|-------------------|------------|-----|--------------|
| Power cord        | < 1        | EUT | Power Supply |
| Serial Cable      | < 1        | EUT | Laptop       |

### 3 Summary of Test Results

Results reported relate only to the product tested.

| FCC Rules                                      | Description of Test           | Results                |
|------------------------------------------------|-------------------------------|------------------------|
| §15.203                                        | Antenna Requirement           | Compliant              |
| §2.1091, §15.255(g)                            | RF Exposure                   | Compliant              |
| §15.207                                        | AC Line Conducted Emissions   | N/A <sup>1</sup>       |
| §2.1053, §15.205, §15.209, §15.255(d)          | Radiated Spurious Emissions   | Compliant              |
| §15.215                                        | Emission Bandwidth            | Compliant              |
| §15.255(c)(3), §15.255(e)<br>FCC DA 21-407 §53 | Fundamental EIRP Output Power | Compliant              |
| §15.255(c)(3), §15.255(e)<br>FCC DA 21-407 §53 | Conducted Peak Output Power   | Compliant <sup>2</sup> |
| FCC DA 21-407 §53                              | Peak Power Spectrum Density   | Compliant              |
| FCC DA 21-407 §53                              | Transmit Duty Cycle           | Compliant              |
| §15.255(f)                                     | Frequency Stability           | Compliant              |

Note<sup>1</sup>: The EUT was powered by battery.

Note<sup>2</sup>: Conducted Peak Output Power was not tested because the EUT does not have a conducted antenna port. The conducted output power recorded in this report to compare with the limit was derived from the measured e.i.r.p. and antenna gain.

## 4 FCC §15.203 - Antenna Requirements

### 4.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 4.2 Antenna Description

| Antenna usage                                          | Band of Operation (GHz) | Maximum Antenna Gain (dBi) |
|--------------------------------------------------------|-------------------------|----------------------------|
| Integral antenna within the Integrated Circuit package | 60-64                   | 9.2                        |

Note: The maximum antenna gain was provided by the manufacturer

## 5 FCC §2.1091 & §15.255(g) - RF Exposure

### 5.1 Applicable Standards

As per FCC §1.1310(d) (3), At operating frequencies above 6 GHz, the MPE limits listed in Table 1 in paragraph (e)(1) of this section shall be used in all cases to evaluate the environmental impact of human exposure to RF radiation as specified in §1.1307(b) of this part.

**TABLE 1 TO §1.1310(E)(1)—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

| Frequency Range (MHz)                                           | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm <sup>2</sup> ) | Averaging Time (minutes) |
|-----------------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| <b>(i) Limits for Occupational/Controlled Exposure</b>          |                               |                               |                                     |                          |
| 0.3-3.0                                                         | 614                           | 1.63                          | *(100)                              | ≤6                       |
| 3.0-30                                                          | 1842/f                        | 4.89/f                        | *(900/f <sup>2</sup> )              | <6                       |
| 30-300                                                          | 61.4                          | 0.163                         | 1.0                                 | <6                       |
| 300-1,500                                                       |                               |                               | f/300                               | <6                       |
| 1,500-100,000                                                   |                               |                               | 5                                   | <6                       |
| <b>(ii) Limits for General Population/Uncontrolled Exposure</b> |                               |                               |                                     |                          |
| 0.3-1.34                                                        | 614                           | 1.63                          | *(100)                              | <30                      |
| 1.34-30                                                         | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | <30                      |
| 30-300                                                          | 27.5                          | 0.073                         | 0.2                                 | <30                      |
| 300-1,500                                                       |                               |                               | f/1500                              | <30                      |
| 1,500-100,000                                                   |                               |                               | 1.0                                 | <30                      |

f = frequency in MHz

\* = Plane-wave equivalent power density

### 5.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

### 5.3 MPE Results

Maximum E.I.R.P (dBm): 12.90

Maximum E.I.R.P (mW): 15.49

Prediction distance (cm): 20

Prediction frequency (MHz): 64000

Power density of prediction frequency at 20.0 cm (mW/cm<sup>2</sup>): 0.0039

FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm<sup>2</sup>): 1.0

The device is compliant with the FCC requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.0039 mW/cm<sup>2</sup>. Limit is 1.0 mW/cm<sup>2</sup>.

## 6 FCC §15.209 & §15.255(d) - Spurious Radiated Emissions

### 6.1 Applicable Standards

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) and RSS-Gen except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                 | MHz                   | MHz             | GHz           |
|---------------------|-----------------------|-----------------|---------------|
| 0.090 – 0.110       | 16.42 – 16.423        | 960 – 1240      | 4. 5 – 5. 15  |
| 0.495 – 0.505       | 16.69475 – 16.69525   | 1300 – 1427     | 5. 35 – 5. 46 |
| 2.1735 – 2.1905     | 25.5 – 25.67          | 1435 – 1626.5   | 7.25 – 7.75   |
| 4.125 – 4.128       | 37.5 – 38.25          | 1645.5 – 1646.5 | 8.025 – 8.5   |
| 4.17725 – 4.17775   | 73 – 74.6             | 1660 – 1710     | 9.0 – 9.2     |
| 4.20725 – 4.20775   | 74.8 – 75.2           | 1718.8 – 1722.2 | 9.3 – 9.5     |
| 6.215 – 6.218       | 108 – 121.94          | 2200 – 2300     | 10.6 – 12.7   |
| 6.26775 – 6.26825   | 123 – 138             | 2310 – 2390     | 13.25 – 13.4  |
| 6.31175 – 6.31225   | 149.9 – 150.05        | 2483.5 – 2500   | 14.47 – 14.5  |
| 8.291 – 8.294       | 156.52475 – 156.52525 | 2690 – 2900     | 15.35 – 16.2  |
| 8.362 – 8.366       | 156.7 – 156.9         | 3260 – 3267     | 17.7 – 21.4   |
| 8.37625 – 8.38675   | 162.0125 – 167.17     | 3.332 – 3.339   | 22.01 – 23.12 |
| 8.41425 – 8.41475   | 167.72 – 173.2        | 3 3458 – 3 358  | 23.6 – 24.0   |
| 12.29 – 12.293      | 240 – 285             | 3.600 – 4.400   | 31.2 – 31.8   |
| 12.51975 – 12.52025 | 322 – 335.4           |                 | 36.43 – 36.5  |
| 12.57675 – 12.57725 | 399.9 – 410           |                 | Above 38.6    |
| 13.36 – 13.41       | 608 – 614             |                 |               |

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

| Frequency (MHz) | Field Strength (micro volts/meter) | Measurement Distance (meters) |
|-----------------|------------------------------------|-------------------------------|
| 0.009 - 0.490   | 2400/F(kHz)                        | 300                           |
| 0.490 - 1.705   | 24000/F(kHz)                       | 30                            |
| 1.705 - 30.0    | 30                                 | 30                            |
| 30 - 88         | 100**                              | 3                             |
| 88 - 216        | 150**                              | 3                             |
| 216 - 960       | 200**                              | 3                             |
| Above 960       | 500                                | 3                             |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.255(d):

- (1) The power density of any emissions outside the 57-71 GHz band shall consist solely of spurious emissions.
- (2) Radiated emissions below 40 GHz shall not exceed the general limits in §15.209.
- (3) Between 40 GHz and 200 GHz, the level of these emissions shall not exceed  $90 \text{ pW/cm}^2$  at a distance of 3 meters.
- (4) The levels of the spurious emissions shall not exceed the level of the fundamental emission.

## 6.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15 Subpart C.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

## 6.3 Test Procedure

The EUT was connected to DC power supply, and all support equipment power cords were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Using equation  $2D^2/\lambda$  to calculate the far-field boundary distance. D is the largest antenna dimension and  $\lambda$  is wavelength.

D is 0.002 meter, and  $\lambda$  is about 0.0048 meter. Therefore, the far-field boundary is 0.0016 meter.

The EUT was placed on a turntable, which was 0.8 meter (for measurements below 1 GHz and above 40 GHz) or 1.5 meters (for measurements between 1 GHz and 40 GHz) in height, and 3 meters (for measurements below 1 GHz) or 1 meter (for measurements above 1 GHz) away from measurement antenna. To find the highest emission, the antenna height was varied between 1 and 4 meters, and the turntable was rotated for 360 degrees. The measurement antenna's polarity was also changed between horizontal and vertical.

The spectrum analyzer or receiver was set as:

Below 1000 MHz:

- (1) CISPR Quasi-Peak detector and the related measurement bandwidths

Above 1000 MHz:

- (2) Peak: RBW = 1MHz / VBW = 3MHz / Sweep = 100 ms
- (3) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

## 6.4 Corrected Amplitude and Margin Calculation

For the emissions from 30 MHz to 40 GHz:

The Corrected Amplitude (CA) is calculated by adding the Correction Factor to the S.A. Reading. The basic equation is as follows:

$$CA = \text{S.A. Reading} + \text{Correction Factor}$$

For example, a corrected amplitude of 40.3 dBuV/m = S.A. Reading (32.5 dBuV) + Correction Factor (7.8 dB/m)

The Correction Factor is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) together. This calculation is done in the measurement software, and reported in the test result section. The basic equation is as follows:

$$\text{Correction Factor} = AF + CL + \text{Atten} - Ga$$

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

For the emissions from 40 GHz to 200 GHz:

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + \text{Atten} - Ga$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The e.i.r.p. is calculated from the corrected field strength by using the following formula,

$$\text{EIRP} = E\text{-meas} + 20\log(d\text{-meas}) - 104.7$$

Where:

EIRP: is the equivalent isotropically radiated power in dBm

E-meas: is the field strength of the emission at the measurement distance, in dBuV/m

d-meas: is the measurement distance, in m

Finally, use the formula below to calculate the power density and compare the result with the limit.

$$PD = \text{EIRP}_{\text{Linear}} / 4\pi d^2$$

Where:

PD: is the power density at the distance specified by the limit, in W/m<sup>2</sup>

EIRP<sub>linear</sub>: is the equivalent isotropically radiated power, in watts

d: is the distance at which the power density limit is specified, in m

The specified distance is 3m.

## 6.5 Test Equipment List and Details

| Manufacturer       | Description                                                   | Model No.                                          | Serial No. | Calibration Date       | Calibration Interval |
|--------------------|---------------------------------------------------------------|----------------------------------------------------|------------|------------------------|----------------------|
| Agilent            | Analyzer, Spectrum                                            | E4446A                                             | US44300386 | 2019-08-24             | 1.5 years            |
| Sunol Sciences     | System Controller                                             | SC99V                                              | 011003-1   | N/R                    | N/A                  |
| Rohde & Schwarz    | Receiver, EMI Test                                            | ESCI 1166.5950.03                                  | 100338     | 2020-03-17             | 1 year               |
| OML                | Harmonic Mixer and Horn Antenna Set                           | M03HWA;<br>M05HWA;<br>M08HWA;<br>M12HWA;<br>M19HWA | 170615-1   | N/R                    | N/R                  |
| Sonoma Instruments | Amplifier, Pre                                                | 315                                                | 303125     | 2020-07-20             | 1 year               |
| IW                 | 157 Series Cable Armored with 2.92mm Male Plugs on Both Sides | KPS-1571AN-2400                                    | DC 1922    | 2020-06-06             | 1 year               |
| -                  | RF cable                                                      | -                                                  | -          | Each time <sup>1</sup> | N/A                  |
| Times Microwave    | Coaxial Cable                                                 | LMR400-UF                                          | 1          | 2020-03-27             | 1 year               |
| BACL               | 5m3 Sensitivity Box                                           | 1                                                  | 2          | 2020-10-27             | 1 year               |
| Sunol Sciences     | Antenna, Biconi-Log                                           | JB3                                                | A020106-3  | 2020-03-02             | 2 years              |
| Wisewave           | Antenna, Horn                                                 | ARH-2823-02                                        | 10555-02   | 2020-02-05             | 2 years              |
| Wisewave           | Antenna, Horn                                                 | ARH-4223-02                                        | 10555-01   | 2020-02-27             | 2 years              |
| AH Systems         | 18-40GHz Pre-Amplifier                                        | PAM-1840VH                                         | 170        | 2020-10-27             | 1 year               |
| ETS Lindgren       | Horn Antenna                                                  | 3117                                               | 00218973   | 2019-02-13             | 2 years              |

Note<sup>1</sup>: cables included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".*

## 6.6 Test Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 22 °C     |
| Relative Humidity: | 57 %      |
| ATM Pressure:      | 102.1 kPa |

The testing was performed by Zhao Zhao on 2021-02-08 in 5m chamber 3.

## 6.7 Summary of Test Results


According to the data hereinafter, the EUT complied with FCC Title 47, Part 15C's standard's radiated emissions limits, and had the worst margin of:

| Margin (dB) | Frequency (MHz) | Mode        |
|-------------|-----------------|-------------|
| -8.51       | 17401.56        | TX @ 64 GHz |

## 6.8 Spurious Emissions Test Results


EUT test mode: sweeping-stop. Both low, middle, and high channels were pre-scanned, and high channel was determined to be the worst case for final testing.

### 1) 30 MHz to 1GHz measured at 3 meters


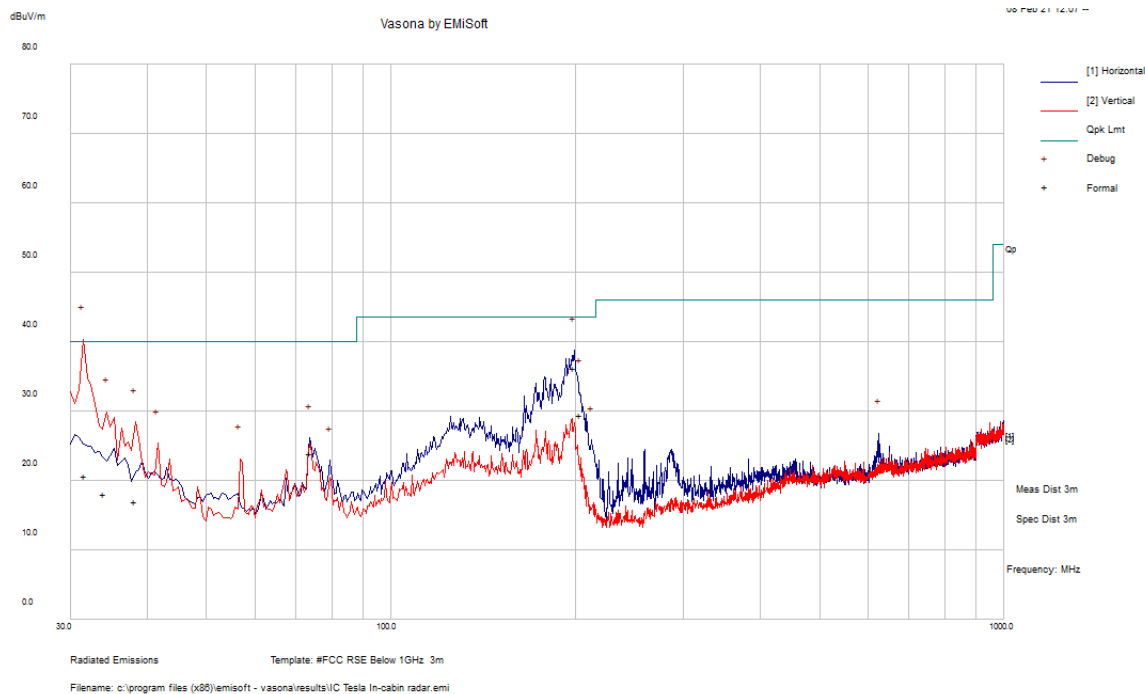


| Frequency (MHz) | S.A. Reading (dBuV) | Correction Factor (dB/m) | Corrected Amplitude (dBuV/m) | Antenna Height (cm) | Antenna Polarity (H/V) | Turntable Azimuth (degrees) | Limit (dBuV/m) | Margin (dB) | Comment |
|-----------------|---------------------|--------------------------|------------------------------|---------------------|------------------------|-----------------------------|----------------|-------------|---------|
| 31.455          | 43.8                | 2.62                     | 11.64                        | 132                 | H                      | 144                         | 40             | -28.36      | QP      |
| 198.78          | 50.17               | 1.4                      | 9.66                         | 193                 | V                      | 14                          | 40             | -30.34      | QP      |
| 34.365          | 35.67               | -1.22                    | 9.06                         | 261                 | H                      | 101                         | 40             | -30.94      | QP      |
| 203.145         | 44.8                | -4.39                    | 31.31                        | 243                 | H                      | 255                         | 43.5           | -12.19      | QP      |
| 38.245          | 37.17               | 0.54                     | 8.76                         | 261                 | H                      | 131                         | 40             | -31.24      | QP      |
| 73.65           | 42.04               | 1.03                     | 33.67                        | 174                 | H                      | 201                         | 46             | -12.33      | QP      |

2) 1–18 GHz Measured at 1 meter

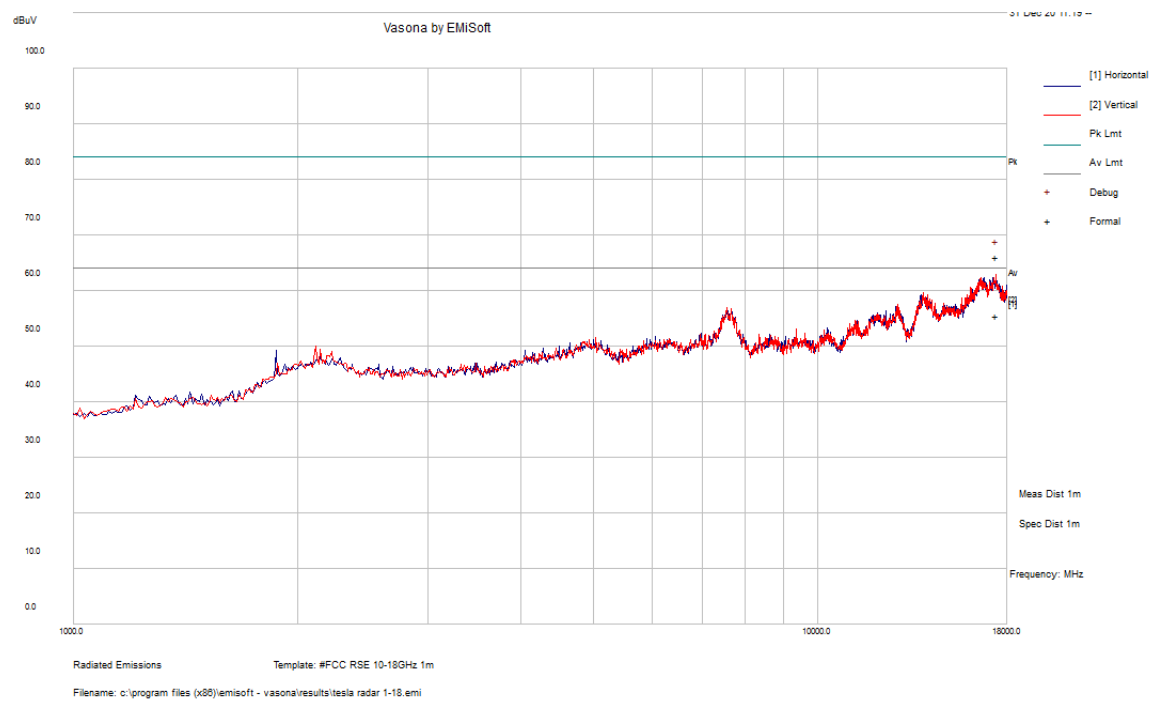

| Frequency (MHz) | S.A. Reading (dBμV) | Correction Factor (dB/m) | Corrected Amplitude (dBμV/m) | Antenna Height (cm) | Antenna Polarity (H/V) | Turntable Azimuth (degrees) | Limit (dBμV/m) | Margin (dB) | Comment |
|-----------------|---------------------|--------------------------|------------------------------|---------------------|------------------------|-----------------------------|----------------|-------------|---------|
| 17401.56        | 41.87               | 24.28                    | 66.14                        | 132                 | H                      | 130                         | 84             | -17.86      | Peak    |
| 17401.56        | 31.21               | 24.28                    | 55.49                        | 132                 | H                      | 130                         | 64             | -8.51       | Ave     |

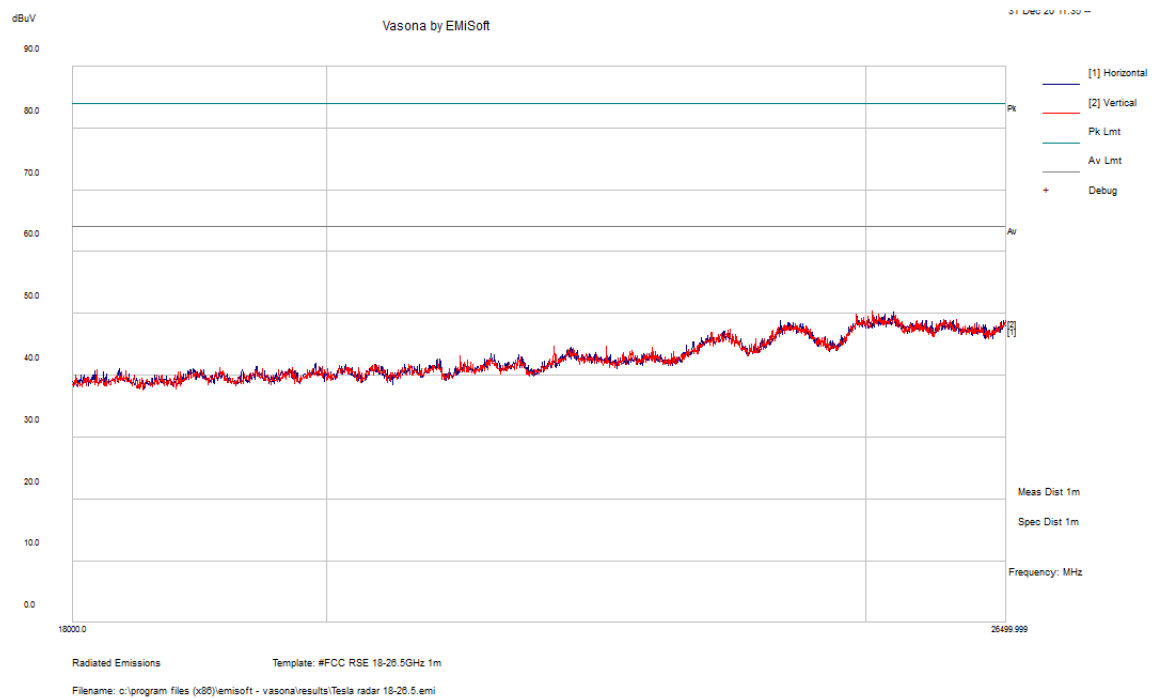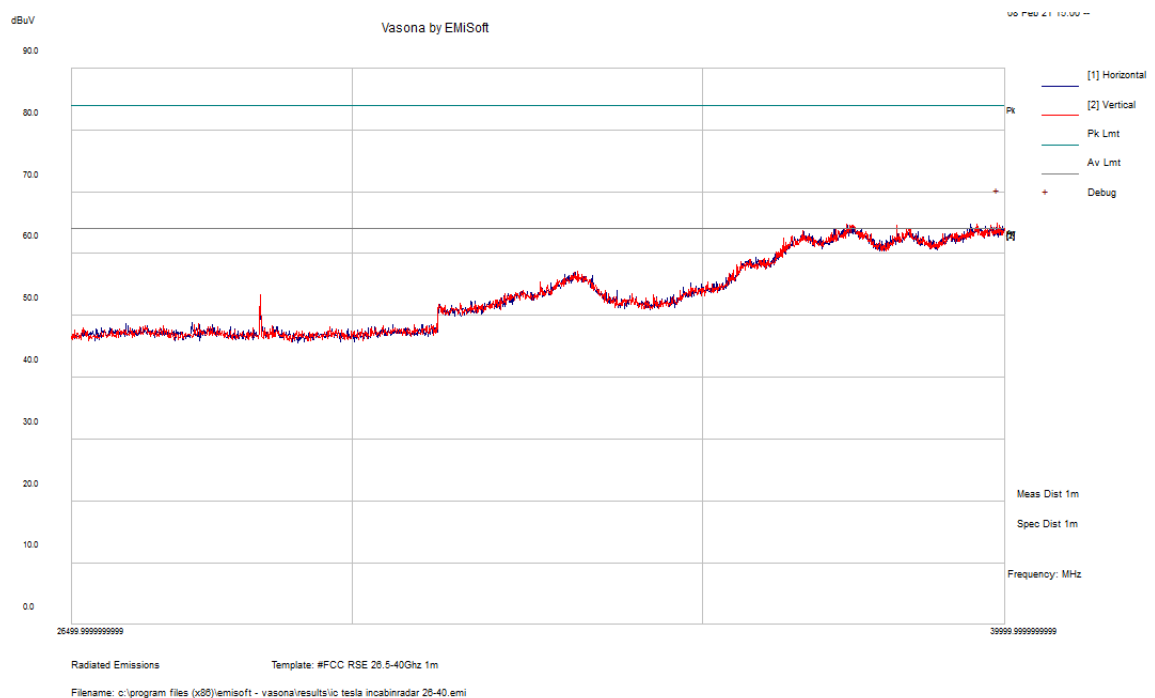**3) 18-26.5 GHz Measured at 1 meter****4) 26.5-40 GHz Measured at 1 meter**

**5) 40-200 GHz Measured at 1 meter**

| Frequency<br>(MHz) | S.A.<br>Reading<br>(dBμV) | Turntable<br>Azimuth<br>(degrees) | Test Antenna   |                  | Cord.<br>Reading<br>(dBμV/m) | EIRP<br>(dBm) | Power<br>Density<br>(pW/cm <sup>2</sup> )<br>@3m | FCC                            |                                 |
|--------------------|---------------------------|-----------------------------------|----------------|------------------|------------------------------|---------------|--------------------------------------------------|--------------------------------|---------------------------------|
|                    |                           |                                   | Height<br>(cm) | Factor<br>(dB/m) |                              |               |                                                  | Limit<br>(pW/cm <sup>2</sup> ) | Margin<br>(pW/cm <sup>2</sup> ) |
| 40330              | 27.14                     | 0                                 | 100            | 33.64            | 60.78                        | -43.92        | 0.04                                             | 90                             | -89.96                          |
| 65.26              | 26.16                     | 0                                 | 100            | 40.52            | 66.68                        | -38.02        | 0.14                                             | 90                             | -89.86                          |
| 92670              | 29.56                     | 0                                 | 100            | 51.24            | 80.8                         | -23.90        | 3.60                                             | 90                             | -86.40                          |
| 128000             | 19.51                     | 0                                 | 100            | 51.24            | 70.75                        | -33.95        | 0.36                                             | 90                             | -89.64                          |
| 144000             | 29.48                     | 0                                 | 100            | 58.57            | 88.05                        | -16.65        | 19.12                                            | 90                             | -70.88                          |
| 192000             | 22.18                     | 0                                 | 100            | 58.57            | 80.75                        | -23.95        | 3.56                                             | 90                             | -86.44                          |

## 7 FCC §15.215 - Emission Bandwidth

### 7.1 Applicable Standards

According to ECFR §15.215 Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 7.2 Measurement Procedure

The measurements are based on ANSI C63.10-2013.

### 7.3 Test Equipment List and Details

| Manufacturer            | Description                                | Model No.    | Serial No. | Calibration Date       | Calibration Interval |
|-------------------------|--------------------------------------------|--------------|------------|------------------------|----------------------|
| Rhode and Schwarz       | Analyzer, Spectrum                         | FSU67        | 101360     | 2020-06-04             | 2 years              |
| JUNKOSHA<br>JUNFLOW MXW | RF cable                                   | MWX261/B     | 1608T001   | Each time <sup>1</sup> | N/A                  |
| LNF                     | Low Noise<br>Amplifier 44 GHz to<br>77 GHz | LNR4577WA    | 022A       | N/R                    | N/R                  |
| Millitech               | Antenna Horn                               | 56H-15-RA000 | A17928     | N/R                    | N/R                  |

Note<sup>1</sup>: cable included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".


### 7.4 Test Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 22 °C     |
| Relative Humidity: | 55 %      |
| ATM Pressure:      | 101.9 kPa |

The testing was performed by Zhao Zhao on 2020-12-20 at RF site.

7.5 Test Results

The 99% emission bandwidth is 3.666 GHz.

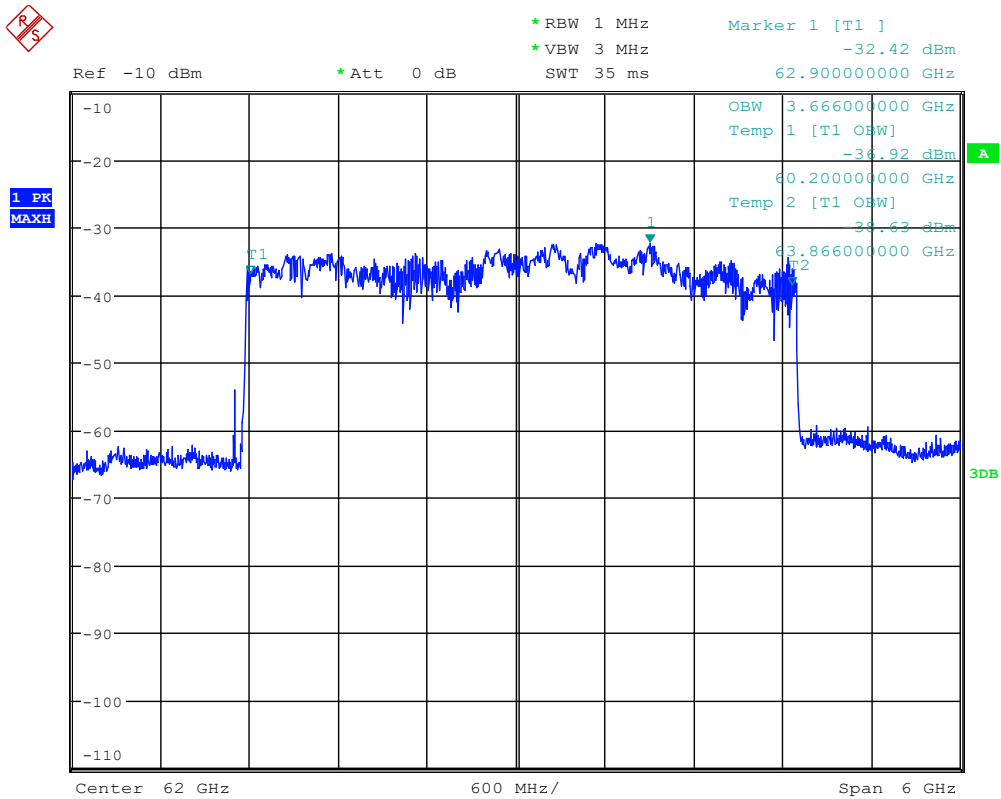

Date: 20.DEC.2020 13:20:53

## 8 FCC §15.255(c)(3) & DA 21-407 - Fundamental EIRP Output Power Measurement

---

### 8.1 Applicable Standards

According to Tesla Waiver FCC DA 21-407 §53. Waiver Conditions, to ensure that harmful interference to authorized operations and other spectrum users will not occur, we impose explicit conditions on the installation, operation, and certification of the device(s) under this waiver, as follows:

- The radar shall be certified for compliance with all the technical specifications applicable to operation under 47 CFR Part 15, with the exception of the following provisions in 47 CFR §§ 15.255(a)(2) and (c)(3), which are waived to allow the device to operate as a radar on new passenger motor vehicles in the 57-64 GHz band at a maximum +13 dBm EIRP, +10 dBm transmitter conducted output power, and +13 dBm/MHz power spectral density.

### 8.2 Measurement Procedure

The measurements for Fundamental E.I.R.P Output Power where done by following the procedure in ANSI C63.10-2013 Clause 9.11 Measurement of the fundamental emission using an RF detector.

The Setup was performed as follows:

- 1) Using equation  $2D^2/\lambda$  to calculate the far-field boundary distance. D is the largest antenna dimension and  $\lambda$  is wavelength. D is 0.012 meter, and  $\lambda$  is about 0.0048 meter. Therefore the far-field boundary is 0.06 meter.
- 2) The measurement instrument shall be a mm-wave RF detector that has an RF bandwidth encompassing the entire authorized frequency band. The input VSWT of the mm-wave detector shall be less than 3:1.
- 3) For radiated emissions measurements of transmitter output power, connect the test antenna for the fundamental frequency band to the mm-wave RF detector. Place the test horn in the main beam of the EUT at a distance that will provide a signal within the operating range of the RF detector.
- 4) Connect the video output of the detector to the 50  $\Omega$  input of a DSO.
- 5) Set the sampling rate of the DSO to at least twice the cutoff frequency of any LPF used or to at least twice the signal bandwidth without a LPF. Adjust the memory depth, the triggering, and the sweep speed to obtain a display that is representative of the signal considering the type of modulation.
- 6) Determine the maximum measurement distance and set the EUT within the distance.

The Test procedure was performed as follows:

- 1) Record the average and peak voltages from the DSO.
- 2) Disconnect the test antenna or EUT (as applicable for radiated or conducted tests) from the RF input port of the instrumentation system.
- 3) Connect an mm-wave source to the RF input port of the instrumentation system via a waveguide variable attenuator.
- 4) The mm-wave source shall be unmodulated.
- 5) Adjust the frequency of the mm-wave source to the center of the frequency range occupied by the transmitter.
- 6) Adjust the amplitude of the mm-wave source and/or the variable attenuator such that the DSO indicates a voltage equal to the peak voltage recorded
- 7) Disconnect the waveguide variable attenuator from the RF input port of the instrumentation system.
- 8) Without changing any settings, connect the waveguide variable attenuator to a wideband mm-wave power meter with a thermocouple detector or equivalent.
- 9) Measure and note the power.
- 10) Repeat the measurement for the average voltage.
- 11) Do calculation using the equations in ANSI C63010-2013 Clause 9

### 8.3 Test Equipment List and Details

| Manufacturer            | Description                               | Model No.    | Serial No. | Calibration Date       | Calibration Interval |
|-------------------------|-------------------------------------------|--------------|------------|------------------------|----------------------|
| Rhode and Schwarz       | Analyzer, Spectrum                        | FSU67        | 101360     | 2020-06-04             | 2 years              |
| Agilent                 | Power Meter                               | N1914A       | MY5000822  | 2019-07-28             | 2 years              |
| Keysight                | UXA Signal Analyzer                       | N9041B       | US57220104 | 2020-06-17             | 1 year               |
| Centric RF              | Waveguide Adaptor                         | CWR120       | N/A        | N/A                    | N/A                  |
| Centric RF              | RF Cable                                  | C511-047-06  | N/A        | N/A                    | N/A                  |
| OML                     | Standard Gain Antenna                     | WR-12        | N/A        | N/A                    | N/A                  |
| HP                      | Power Sensor                              | V8488A       | US39010099 | 2019-10-12             | 2 years              |
| OML                     | Harmonic Mixer/Multiplier                 | S12MS        | 130423-1   | N/A                    | N/A                  |
| Vaunix                  | Signal Generator 6 GHz to 18 GHz          | LMS-183DX    | 19760      | 2020-08-05             | 2 years              |
| A-InfoMW                | 20 dBi Standard Gain Horn Antenna         | LB-15-20-A   | 5202062579 | N/R                    | N/R                  |
| LNF                     | Low Noise Amplifier 44 GHz to 77 GHz      | LNR4577WA    | 022A       | N/R                    | N/R                  |
| Millitech               | Variable Level Set Attenuator 0 to 25 dBm | LSA-15-R0000 | 248-A17928 | Each time <sup>1</sup> | N/R                  |
| Tektronix               | Oscilloscope                              | TDS2024B     | C047044    | 2019-10-17             | 2 years              |
| Millitech               | RF Detector                               | DET-15       | -          | N/R                    | N/R                  |
| JUNKOSHA<br>JUNFLOW MXW | RF cable                                  | MWX261/B     | 1608T001   | Each time <sup>1</sup> | N/A                  |

Note<sup>1</sup>: cable included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

### 8.4 Test Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 22° C     |
| Relative Humidity: | 50 %      |
| ATM Pressure:      | 102.1 kPa |

The testing was performed by Zhao Zhao on 2021-02-05 at RF site.

## 8.5 Test Results

The fundamental was measured at 0.5 meter.

| DSO Reading (mV) | P (dBm) | G (dBi)      |              | E-field (dBuV/m) | EIRP (dBm) | Limit <sup>1</sup> (dBm) | Margin (dB) | Detector |
|------------------|---------|--------------|--------------|------------------|------------|--------------------------|-------------|----------|
|                  |         | Antenna Gain | Pre-amp Gain |                  |            |                          |             |          |
| 60 GHz           |         |              |              |                  |            |                          |             |          |
| 44.8             | 0.28    | 20           | 31.27        | 121.83           | 11.11      | 13                       | -1.89       | Peak     |
| 62 GHz           |         |              |              |                  |            |                          |             |          |
| 31.2             | -1.99   | 20           | 31.27        | 119.85           | 9.12       | 13                       | -3.88       | Peak     |
| 64 GHz           |         |              |              |                  |            |                          |             |          |
| 68.0             | 1.51    | 20           | 31.27        | 123.62           | 12.90      | 13                       | -0.10       | Peak     |

$$E = 126.8 - 20 \log(\lambda) + P - G \quad (19)$$

where

$E$  is the field strength of the emission at the measurement distance, in dBuV/m

$P$  is the power measured at the output of the test antenna, in dBm

$\lambda$  is the wavelength of the emission under investigation  $[300/f_{\text{MHz}}]$ , in m

$G$  is the gain of the test antenna, in dBi

NOTE—The measured power  $P$  includes all applicable instrument correction factors up to the connection to the test antenna.

$$\text{EIRP} = E_{\text{Meas}} + 20 \log(d_{\text{Meas}}) - 104.7 \quad (22)$$

where

EIRP is the equivalent isotropically radiated power, in dBm

$E_{\text{Meas}}$  is the field strength of the emission at the measurement distance, in dBuV/m

$d_{\text{Meas}}$  is the measurement distance, in m

NOTE—Because this equation yields the identical result whether the field strength is extrapolated using the default 20 dB/decade of distance extrapolation factor, or the field strength is not extrapolated for distance, this equation can generally be applied directly (with no further correction) to determine EIRP. In some cases, a different distance correction factor may be required; see 9.1.

### Calculated Peak Conducted Output Power

| Peak EIRP (dBm) | Antenna Gain (dBi) | Peak Conducted Output Power (dBm) | Limit <sup>1</sup> (dBm) | Margin (dB) | Result |
|-----------------|--------------------|-----------------------------------|--------------------------|-------------|--------|
| 12.90           | 9.2                | 3.70                              | 10                       | 6.30        | Pass   |

Note<sup>1</sup>: limit selected from FCC waiver approval DA 21-407.

**Peak Power Density Measured with PSA**

| Frequency (GHz) | PSA Reading (dBuV/MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Measurement Distance (m) | Corr'd E-field (dBuV/m) | PSD (dBm/MHz) | Limit <sup>1</sup> (dBm/MHz) | Margin (dB) |
|-----------------|------------------------|-----------------------|-----------------|--------------------------|-------------------------|---------------|------------------------------|-------------|
| 64              | 78.50                  | 43.60                 | 2.8             | 0.15                     | 124.90                  | 3.62          | 13                           | -9.38       |

Note:  $E \text{ (dB}\mu\text{V/m)} = \text{Measured amplitude level (dB}\mu\text{V)} + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$ .

$\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$ ; where D is the measurement distance (in the far field region) in m.

Note<sup>1</sup>: limit selected from FCC wavier approval DA 21-407.

## 9 FCC §15.255(f) - Frequency Stability

### 9.1 Applicable Standards

According to FCC §15.255(f) *Frequency stability*. Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to + 50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

### 9.2 Measurement Procedure

1. EUT was set to Sweeping mode.
  - PSA setting:
  - RBW = 1 MHz
  - VBW = 3 MHz
  - Detector: Peak
  - Trace: Max Hold
2. A marker was placed at the maximum emission after trace was stable.
3. Two markers 20 dBc from the peak emission level were placed on each side of the spectrum.
4. Frequency of the marker on the left side of the peak point was recorded as Low Frequency.
5. Frequency of the marker on the right side of the peak point was recorded as High Frequency.
6. Compare the Low Frequency and High Frequency of the spectrum with the allocated frequency range.

### 9.3 Test Equipment List and Details

| Manufacturer            | Description                                | Model No.  | Serial No. | Calibration Date       | Calibration Interval |
|-------------------------|--------------------------------------------|------------|------------|------------------------|----------------------|
| Rhode and Schwarz       | Analyzer, Spectrum                         | FSU67      | 101360     | 2020-06-04             | 2 years              |
| JUNKOSHA<br>JUNFLOW MXW | RF cable                                   | MWX261/B   | 1608T001   | Each time <sup>1</sup> | N/A                  |
| A-InfoMW                | 20 dBi Standard<br>Gain Horn Antenna       | LB-15-20-A | 5202062579 | N/R                    | N/R                  |
| LNF                     | Low Noise<br>Amplifier 44 GHz to<br>77 GHz | LNR4577WA  | 022A       | N/R                    | N/R                  |
| Volteq                  | Power Source                               | HY5003D    | 180100168  | N/R                    | N/R                  |
| BACL                    | Chamber, Humidity                          | BTH-150-40 | 30078      | 2020-06-25             | 1 year               |

Note<sup>1</sup>: cable included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".*

## 9.4 Test Environmental Conditions

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 22° C     |
| <b>Relative Humidity:</b> | 55 %      |
| <b>ATM Pressure:</b>      | 101.9 KPa |

The testing was performed by Zhao Zhao on-2020-12-20 in temperature chamber.

## 9.5 Test Results

### Extreme Temperature


| Voltage (V <sub>DC</sub> ) | Temperature (°C) | Low Frequency (GHz) | High Frequency (GHz) | Limit (GHz) | Results |
|----------------------------|------------------|---------------------|----------------------|-------------|---------|
| 16 V                       | -20              | 60.172              | 63.906               | 57-71       | pass    |
|                            | -10              | 60.172              | 63.906               | 57-71       | pass    |
|                            | 0                | 60.172              | 63.908               | 57-71       | pass    |
|                            | 10               | 60.170              | 63.906               | 57-71       | pass    |
|                            | 20               | 60.168              | 63.908               | 57-71       | pass    |
|                            | 30               | 60.170              | 63.900               | 57-71       | pass    |
|                            | 40               | 60.168              | 63.908               | 57-71       | pass    |
|                            | 50               | 60.166              | 63.906               | 57-71       | pass    |

### Extreme Voltage

| Temperature (°C) | Voltage (V <sub>DC</sub> ) | Low Frequency (GHz) | High Frequency (GHz) | Limit (GHz) | Results |
|------------------|----------------------------|---------------------|----------------------|-------------|---------|
| 20               | 13.6                       | 60.166              | 63.904               | 57-71       | pass    |
|                  | 18.4                       | 60.166              | 63.902               | 57-71       | pass    |


Please refer to the following plots for details

-20 °C

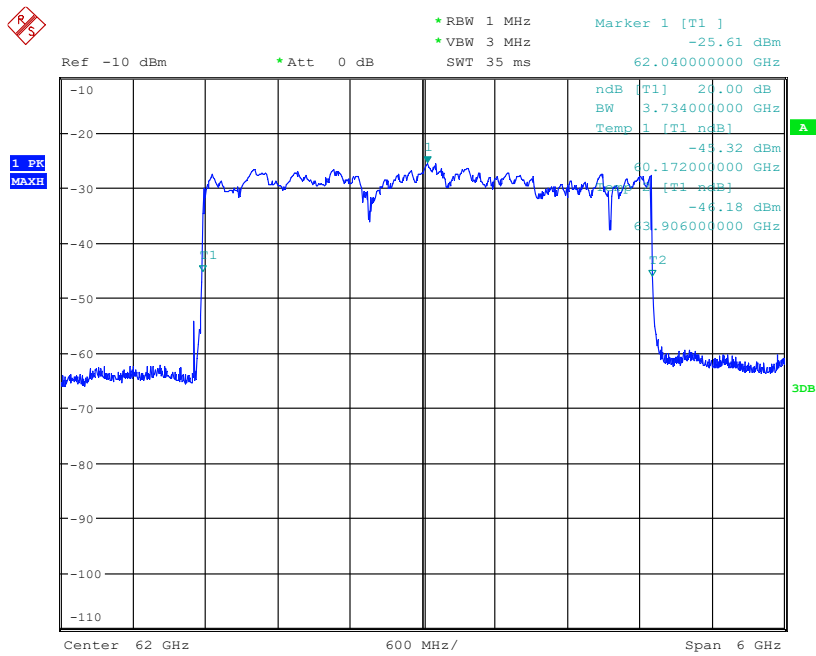


Date: 20.DEC.2020 10:08:05

-10 °C

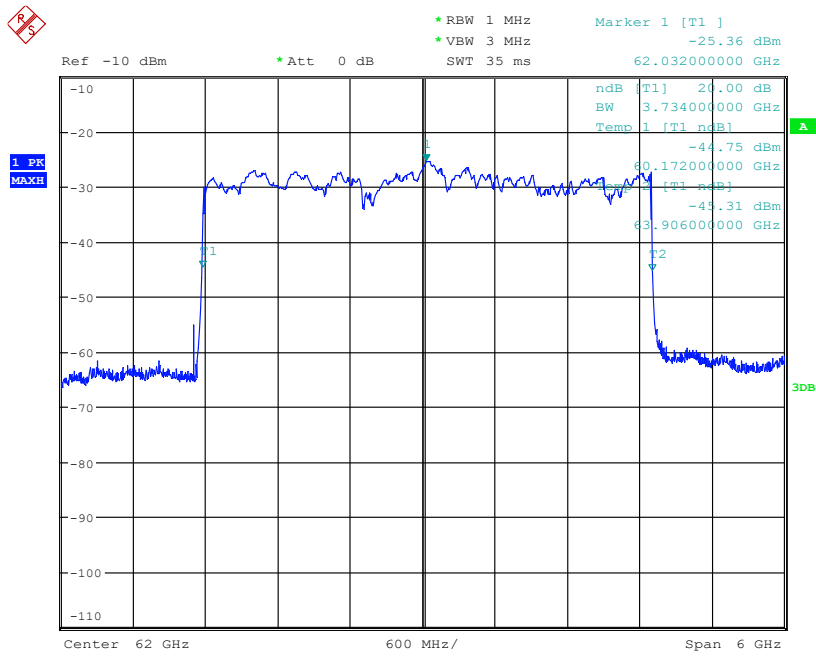


Date: 20.DEC.2020 10:32:39

0 °C

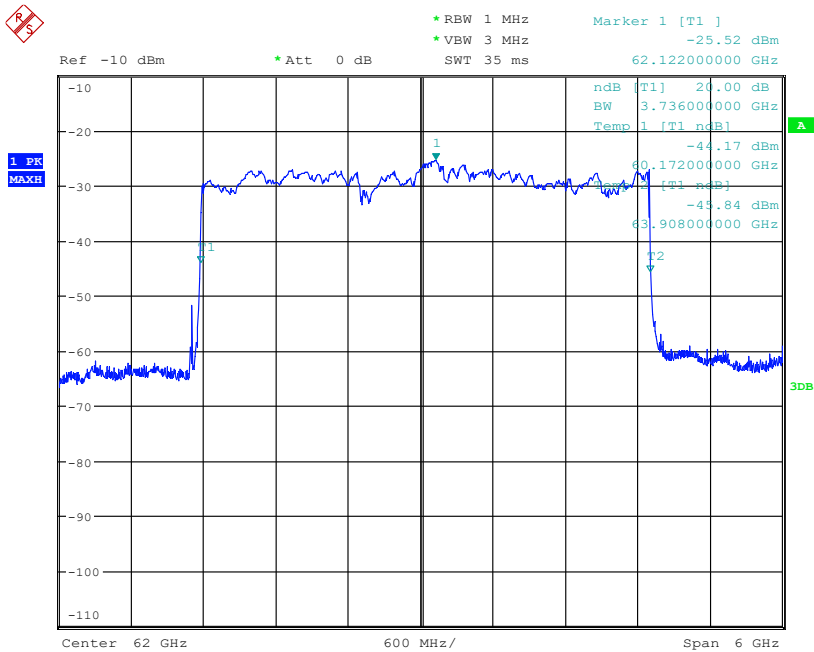


Date: 20.DEC.2020 10:45:07

10 °C

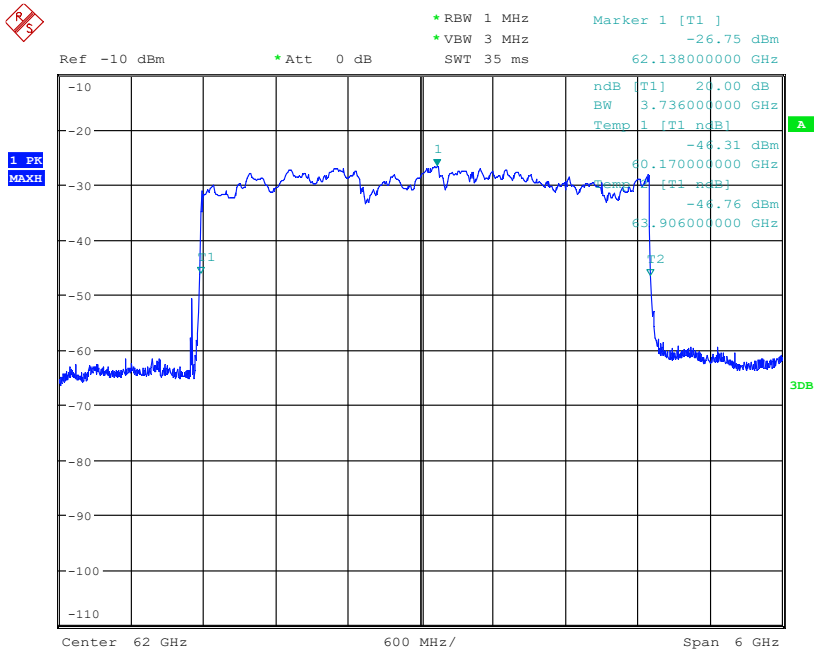


Date: 20.DEC.2020 11:26:27

20 °C

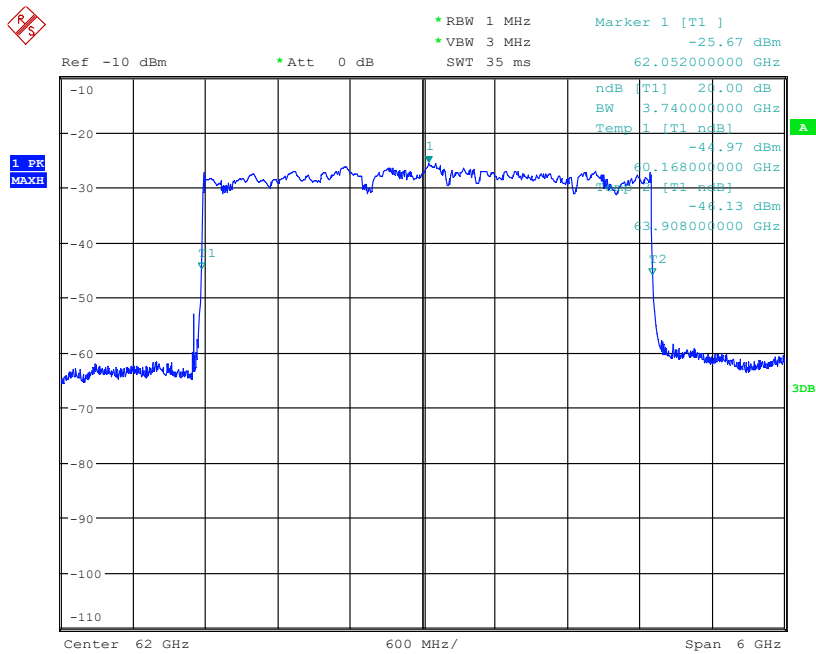


Date: 20.DEC.2020 13:11:15

30 °C

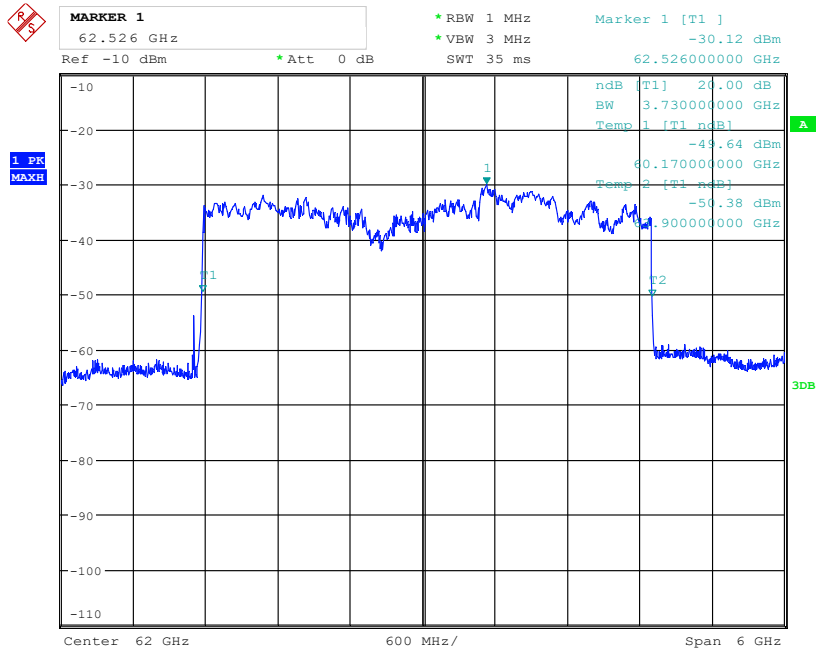


Date: 20.DEC.2020 13:35:28

40 °C

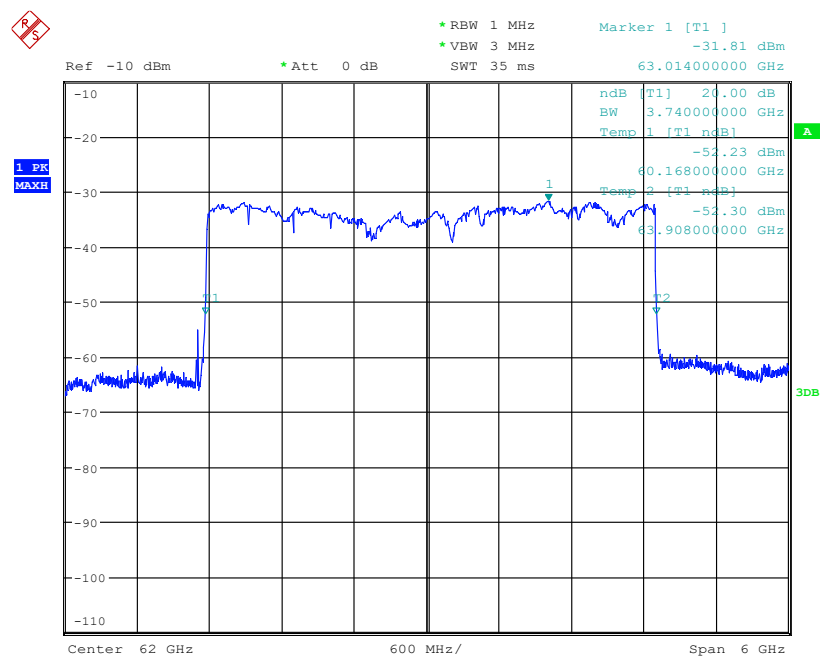


Date: 20.DEC.2020 13:53:06

50 °C

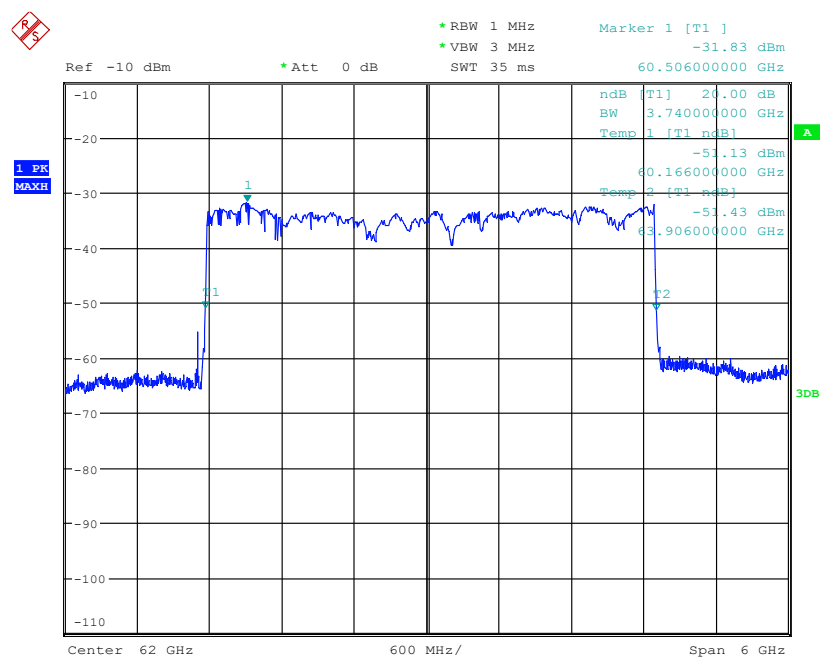


Date: 20.DEC.2020 13:59:22

13.6 V<sub>DC</sub>

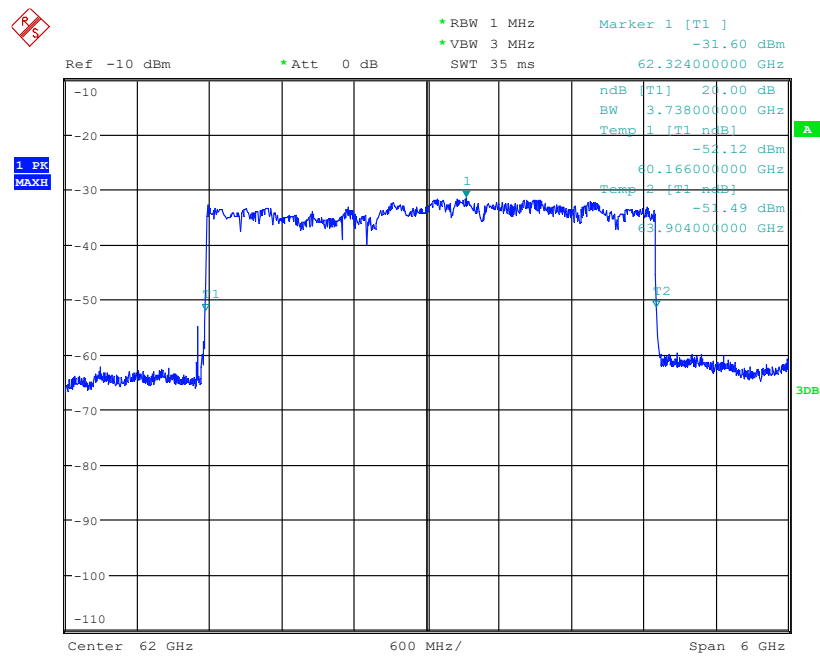

Date: 20.DEC.2020 14:04:22

18.4 V<sub>DC</sub>

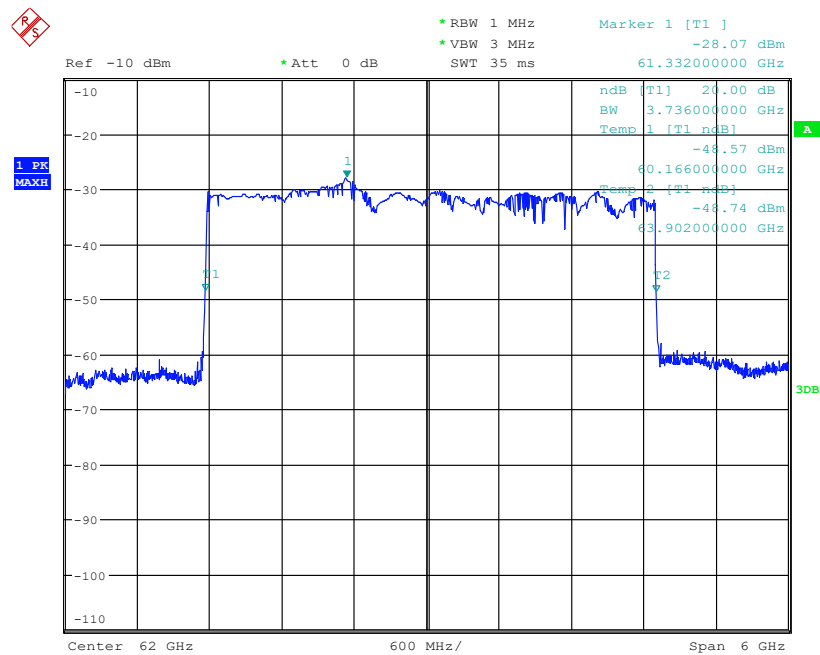

Date: 20.DEC.2020 14:13:34

---

## **10 Annex A - EUT Test Setup Photographs**

---

Please refer to the attachment.

---

## **11 Annex B - EUT External Photographs**

---

Please refer to the attachment.

---

## **12 Annex C - EUT Internal Photographs**

---

Please refer to the attachment.

### 13 Annex D (Normative) - A2LA Electrical Testing Certificate



## Accredited Laboratory

A2LA has accredited

### BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This laboratory also meets A2LA R222 - Specific Requirements EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

Presented this 10<sup>th</sup> day of March 2021.



A blue ink signature of Trace McInturf.

Trace McInturf, Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 3297.02  
Valid to September 30, 2022

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

Please follow the web link below for a full ISO 17025 scope

<https://www.a2la.org/scopepdf/3297-02.pdf>

--- END OF REPORT ---