FCC RADIO TEST REPORT

FCC ID	:	**2AEIM-1735511**
Equipment	:	**Universal Wall Connector**
Brand Name	:	**Tesla**
Model Name	:	**1734412-XX-Y** **Note: For internal purposes, the X will be the style code and Y will be the revision. X and Y can be any from 0~9 or A~Z**
Applicant	:	**Tesla, Inc.** **3500 DEER CREEK ROAD PALO ALTO, CA 94304**
Manufacturer	:	**Tesla, Inc.** **3500 DEER CREEK ROAD PALO ALTO, CA 94304**
Standard	:	**FCC Part 15 Subpart C §15.247**

The product was received on Jul. 06, 2023 and testing was performed from Jul. 11, 2023 to Oct. 02, 2023. We, Sporton International (USA) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International (USA) Inc., the test report shall not be reproduced except in full.

Approved by: Abi Lin

Sporton International (USA) Inc.

1175 Montague Expressway, Milpitas, CA 95035

Table of Contents

History of this test report **3**
Summary of Test Result **4**
1 General Description **5**
1.1 Product Feature of Equipment Under Test 5
1.2 Product Specification of Equipment Under Test 5
1.3 Modification of EUT 5
1.4 Testing Location 5
1.5 Applicable Standards 6
2 Test Configuration of Equipment Under Test **7**
2.1 Carrier Frequency Channel 7
2.2 Test Mode 8
2.3 Connection Diagram of Test System 9
2.4 Support Unit used in test configuration and system 10
2.5 EUT Operation Test Setup 10
2.6 Measurement Results Explanation Example 10
3 Test Result **11**
3.1 6dB and 99% Bandwidth Measurement 11
3.2 Output Power Measurement 16
3.3 Power Spectral Density Measurement 17
3.4 Conducted Band Edges and Spurious Emission Measurement 22
3.5 Radiated Band Edges and Spurious Emission Measurement 28
3.6 AC Conducted Emission Measurement 32
3.7 Antenna Requirements 34
4 List of Measuring Equipment **35**
5 Measurement Uncertainty **36**
Appendix A. Conducted Test Results
Appendix B. AC Conducted Emission Test Result
Appendix C. Radiated Spurious Emission
Appendix D. Radiated Spurious Emission Plots
Appendix E. Duty Cycle Plots
Appendix F. Setup Photographs

History of this test report

Report No.	Version	Description	Issue Date
FR230315009A	01	Initial issue of report	Oct. 04, 2023
FR230315009A	02	Revise Equipment Name This report is an updated version, replacing the report issued on Oct. 04, 2023.	Oct. 05, 2023
FR230315009A	03	Revise appendix D This report is an updated version, replacing the report issued on Oct. 05, 2023.	Oct. 13, 2023

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	2.84 dB under the limit at 53.28 MHz
3.6	15.207	AC Conducted Emission	Pass	15.10 dB under the limit at 13.56 MHz
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”.

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Universal Wall Connector
Brand Name	Tesla
Model Name	1734412-XX-Y Note: For internal purposes, the X will be the style code and Y will be the revision. X and Y can be any from 0~9 or A~Z
FCC ID	2AEIM-1735511
EUT supports Radios application	Bluetooth-LE, NFC and UHF.

Remark: The EUT's information above is declared by manufacturer.

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Antenna Type	PCB antenna
Antenna Gain	2.3 dBi
Type of Modulation	GFSK

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

Test Site	Sporton International (USA) Inc.
Test Site Location	1175 Montague Expressway, Milpitas, CA 95035 TEL : 408 9043300
Test Site No.	**Sporton Site No.**
	03CH01-CA, CO01-CA, TH01-CA

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: US1250

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- FCC KDB 414788 D01 Radiated Test Site v01r01
- ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	**Data Rate / Modulation**
Conducted Test Cases	**Bluetooth – LE / GFSK**
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: Bluetooth - LE + AC power
Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

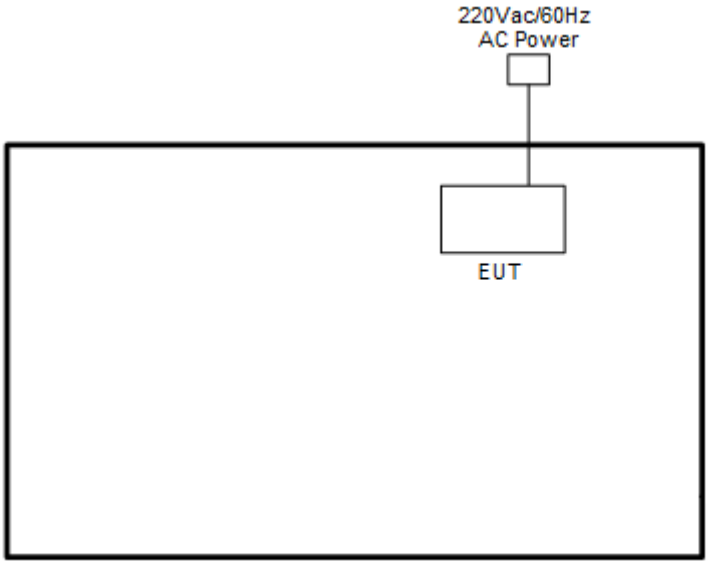

<Bluetooth-LE Tx Mode>

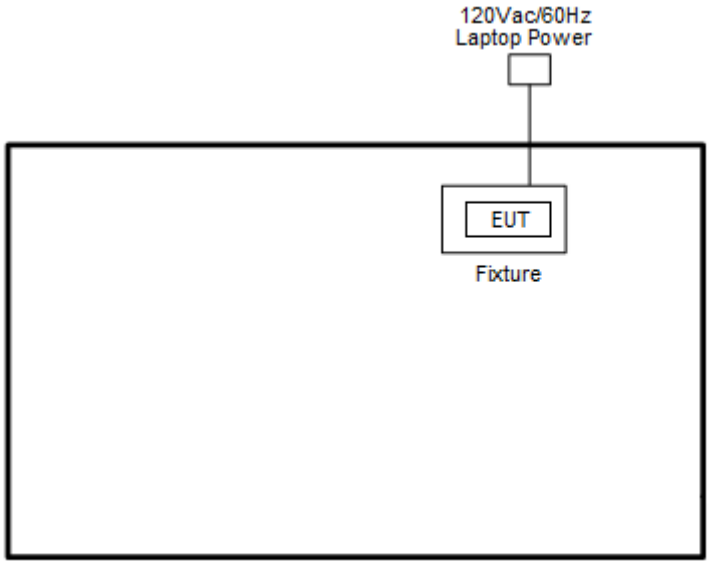

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Laptop	Dell	N/A	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	Fixture	TI	CC1352R	N/A	Unshielded, 1.0 m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “SmartRF Studio 7 Version 2.28.0” was installed in Laptop which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

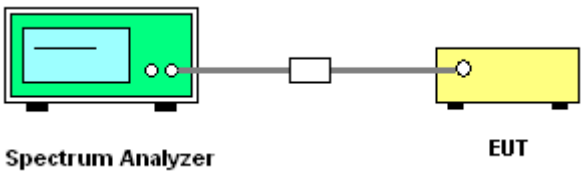

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

<1Mbps>

6 dB Bandwidth Plot on Channel 00	6 dB Bandwidth Plot on Channel 19
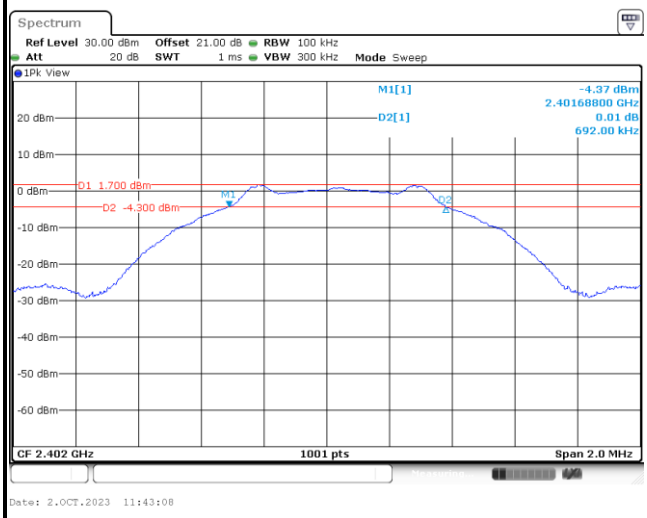	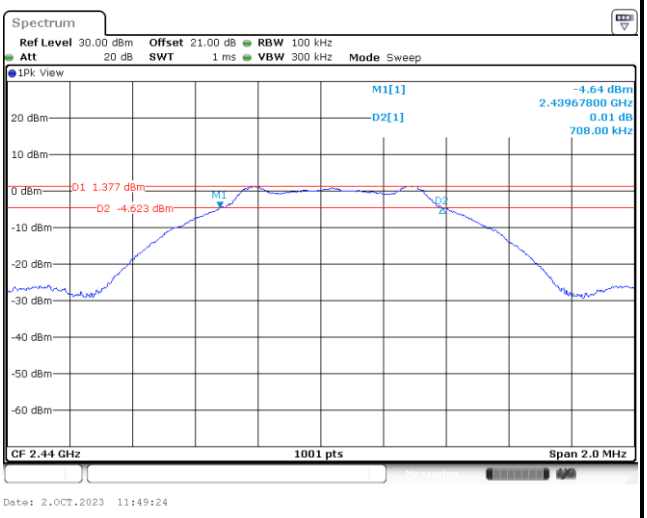
6 dB Bandwidth Plot on Channel 39	**N/A**
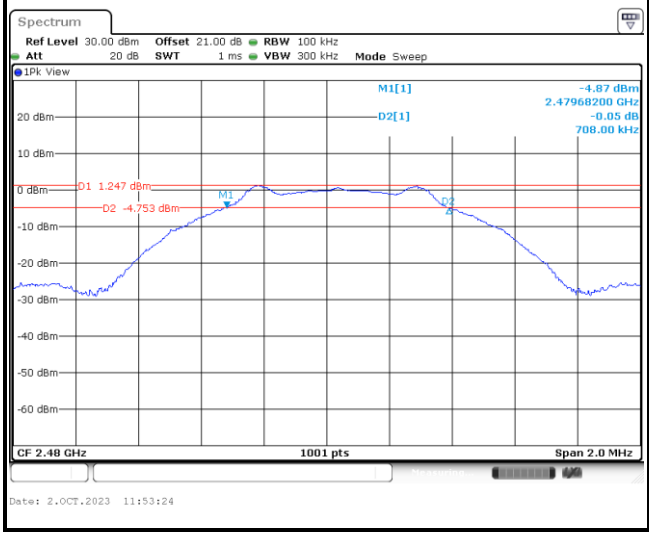	

<2Mbps>

6 dB Bandwidth Plot on Channel 00	6 dB Bandwidth Plot on Channel 19
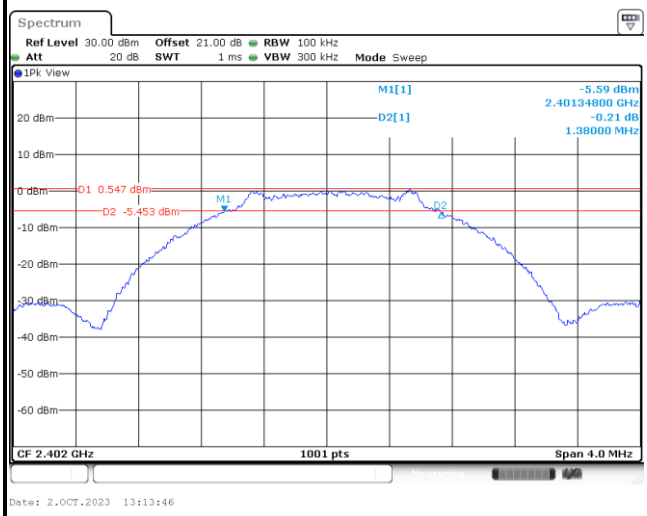	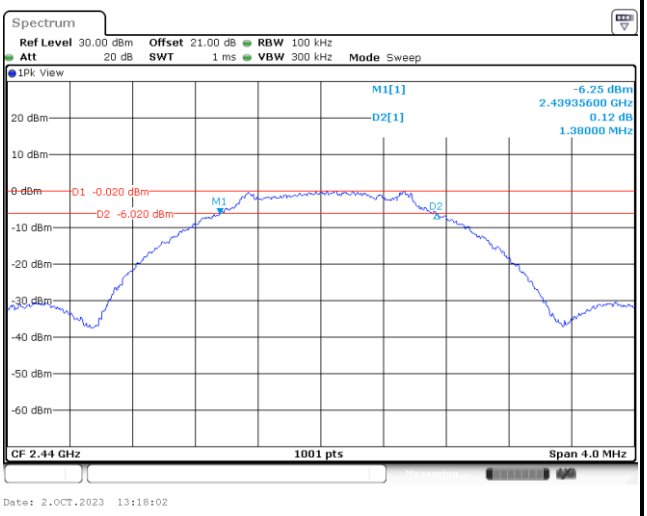
6 dB Bandwidth Plot on Channel 39	**N/A**
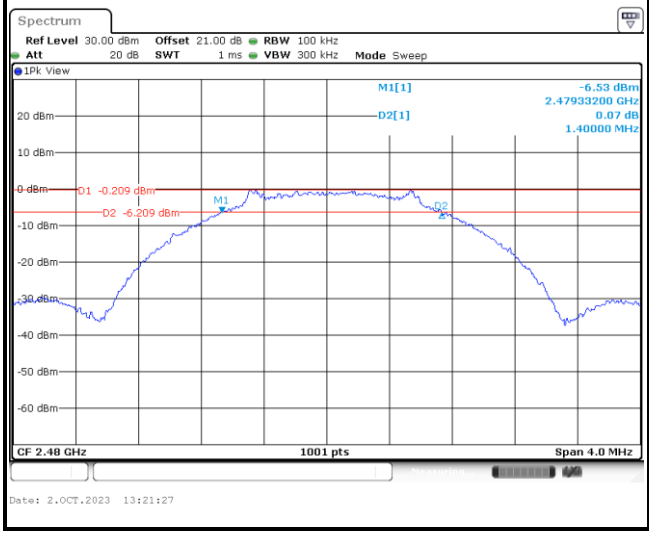	

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

<1Mbps>

99% Bandwidth Plot on Channel 00	99% Occupied Bandwidth Plot on Channel 19
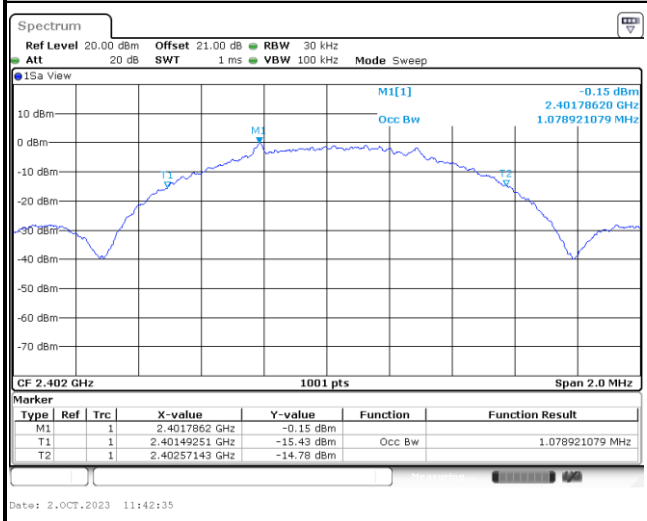	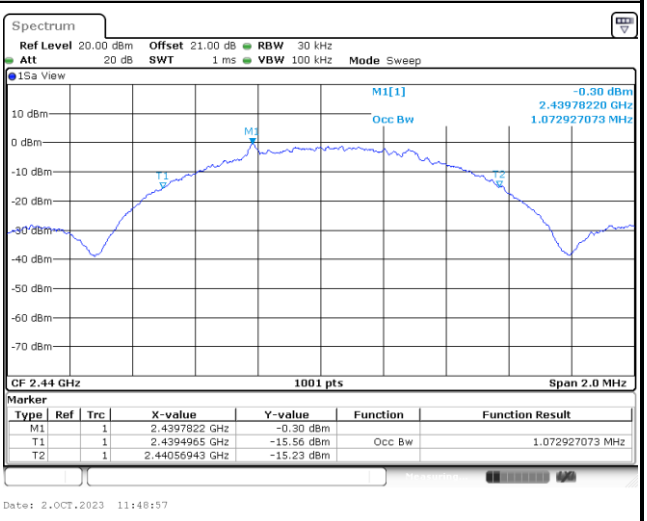
99% Occupied Bandwidth Plot on Channel 39	**N/A**
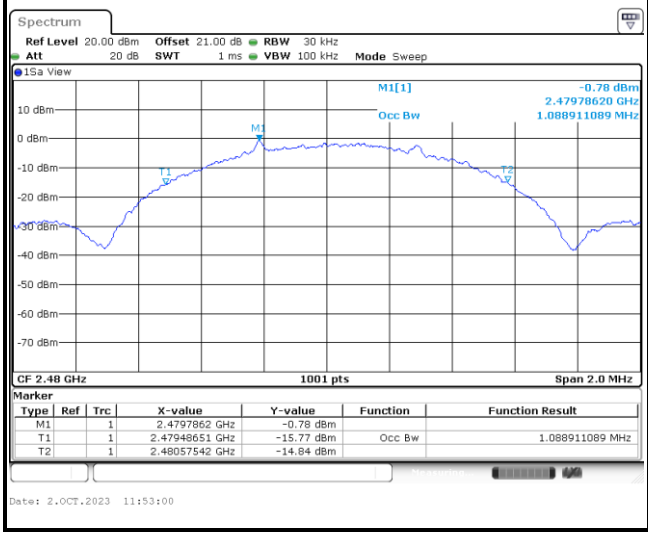	

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<2Mbps>

99% Bandwidth Plot on Channel 00	99% Occupied Bandwidth Plot on Channel 19
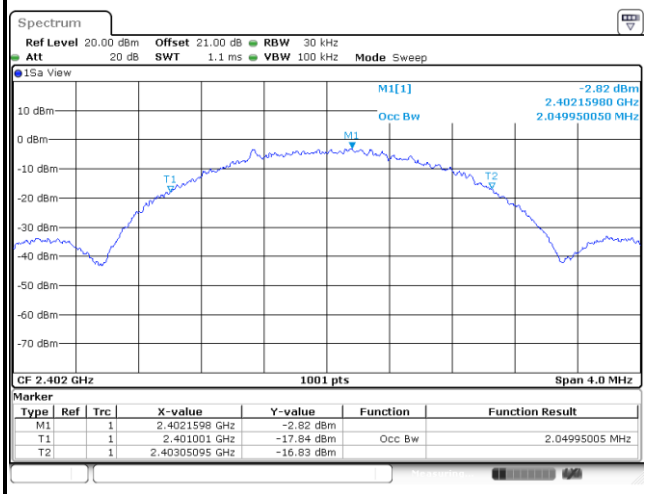	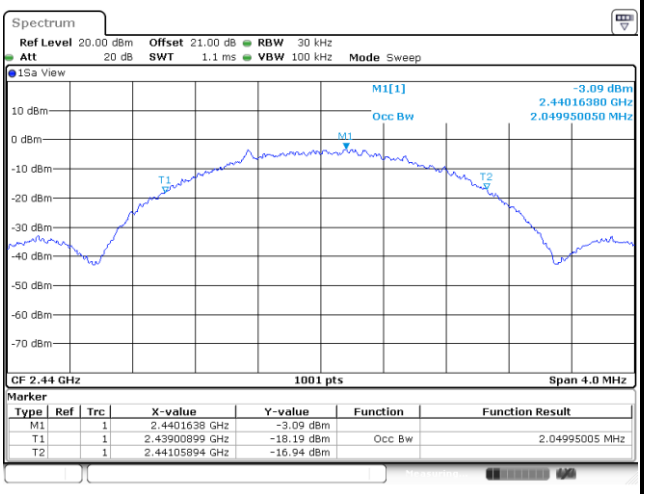
99% Occupied Bandwidth Plot on Channel 39	**N/A**
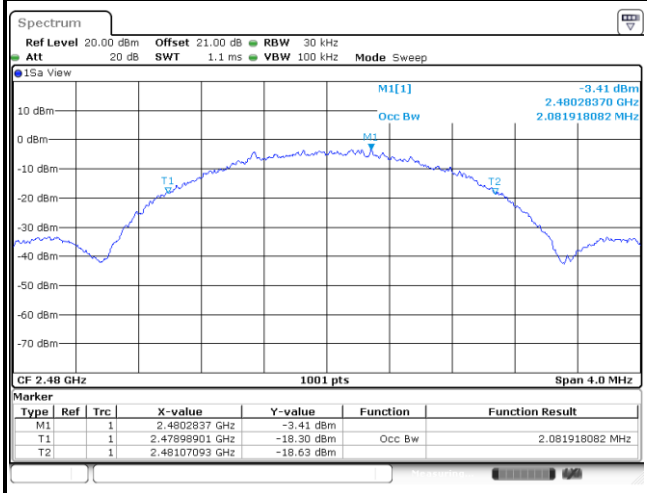	

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

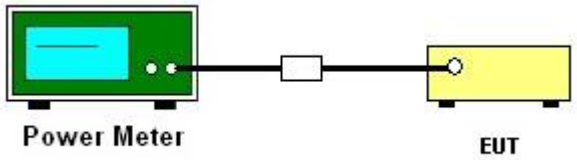

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

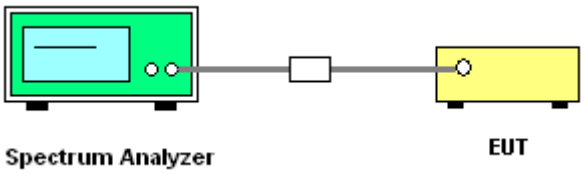

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.3.6 Test Result of Power Spectral Density Plots (100kHz)

<1Mbps>

PSD 100kHz Plot on Channel 00	PSD 100kHz Plot on Channel 19
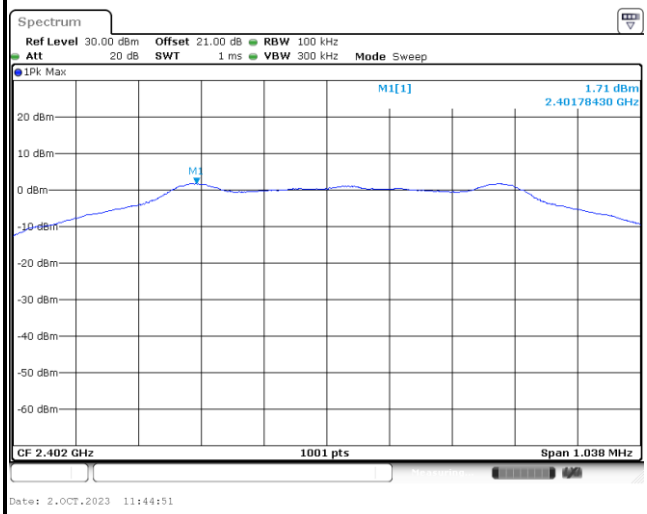	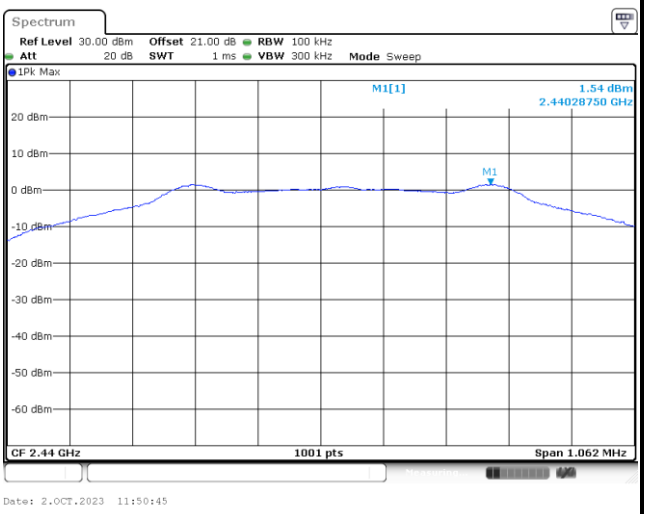
PSD 100kHz Plot on Channel 39	**N/A**
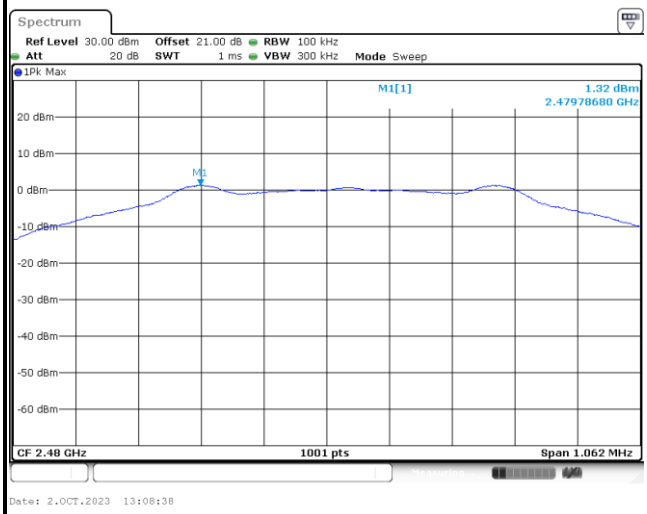	

<2Mbps>

PSD 100kHz Plot on Channel 00	PSD 100kHz Plot on Channel 19
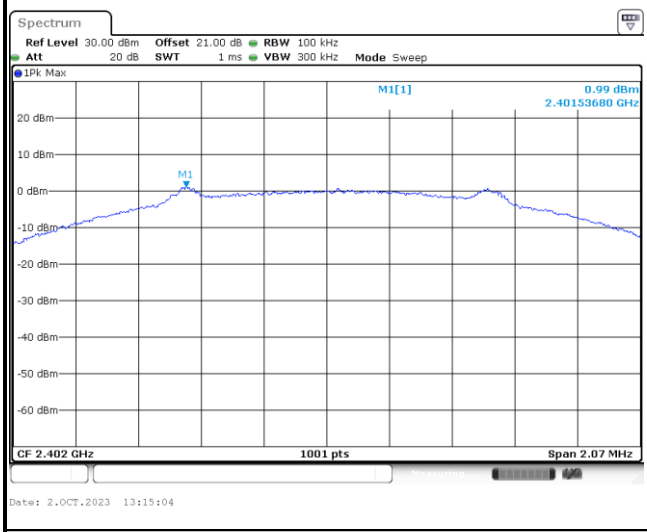	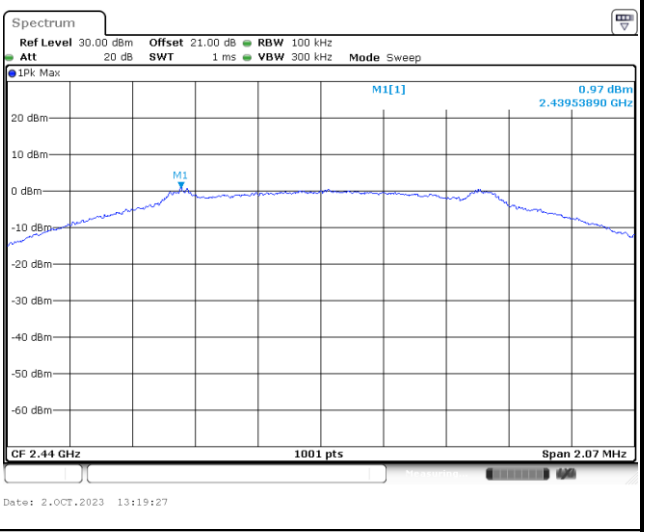
PSD 100kHz Plot on Channel 39	**N/A**
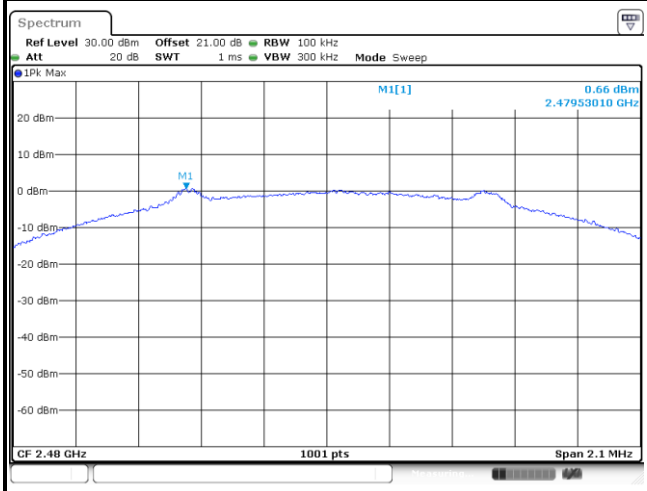	

3.3.7 Test Result of Power Spectral Density Plots (3kHz)

<1Mbps>

PSD 3kHz Plot on Channel 00	PSD 3kHz Plot on Channel 19
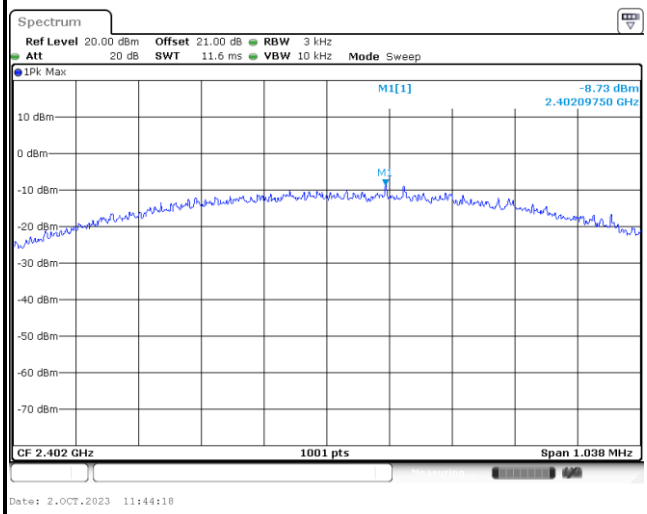	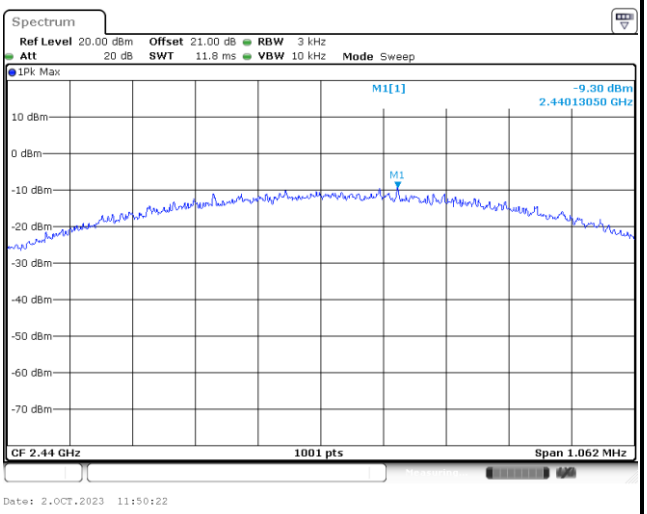
PSD 3kHz Plot on Channel 39	**N/A**
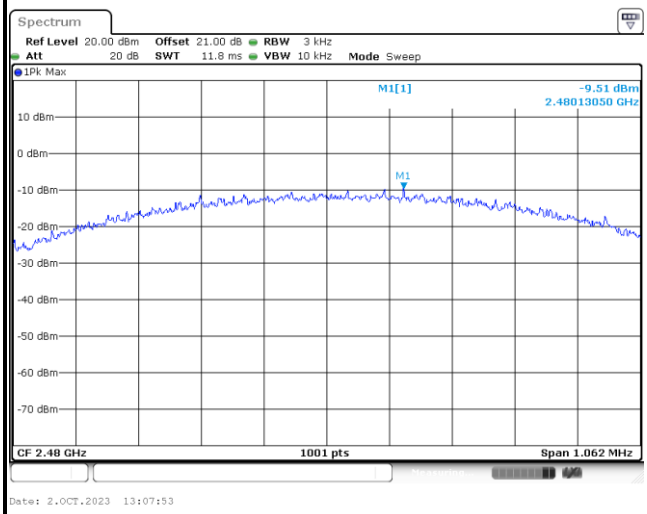	

<2Mbps>

PSD 3kHz Plot on Channel 00	PSD 3kHz Plot on Channel 19
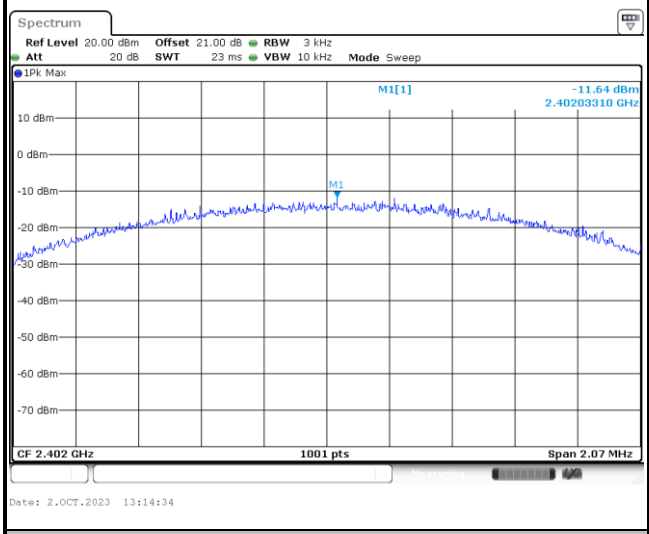	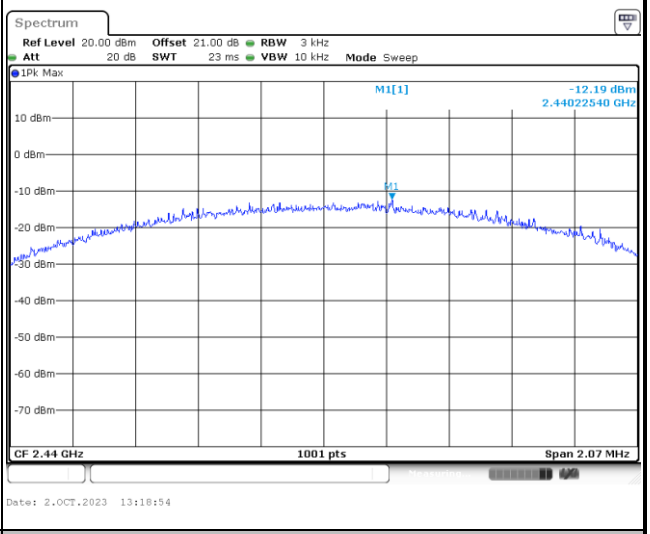
PSD 3kHz Plot on Channel 39	**N/A**
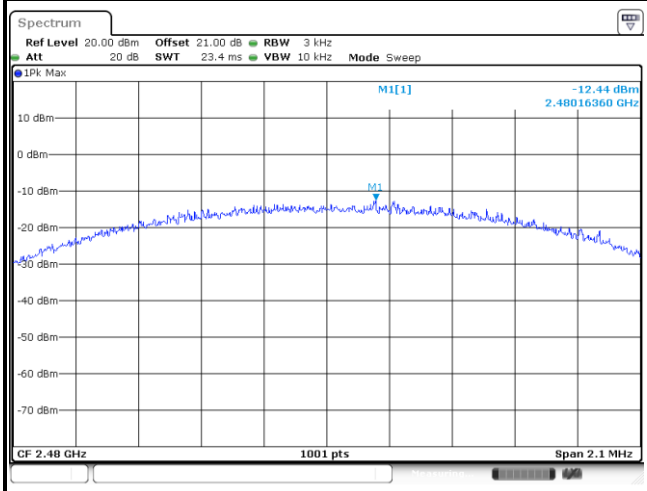	

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

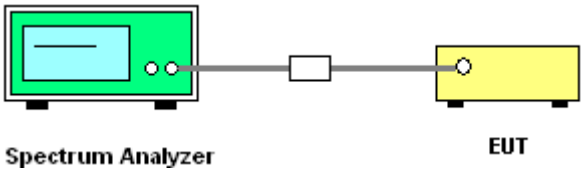

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

<1Mbps>

Low Band Edge Plot on Channel 00	High Band Edge Plot on Channel 39
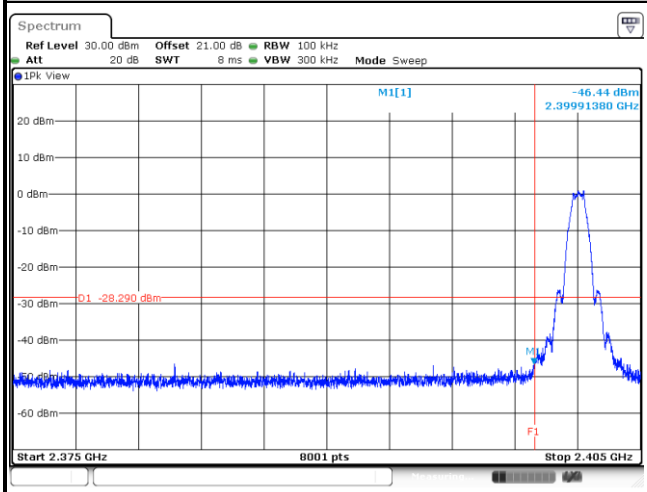	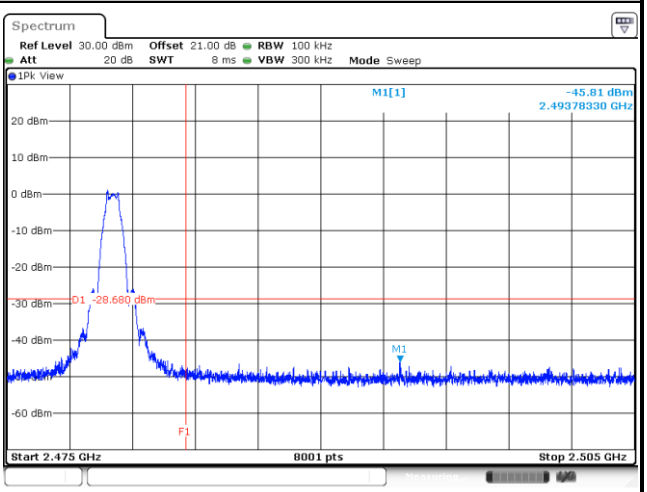

<2Mbps>

Low Band Edge Plot on Channel 00	High Band Edge Plot on Channel 39
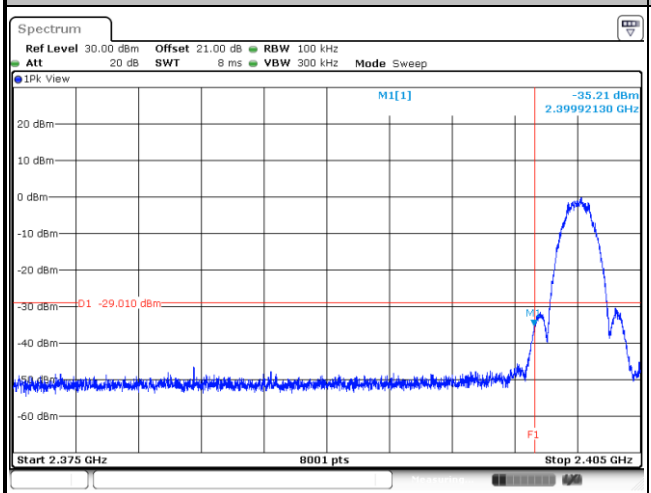	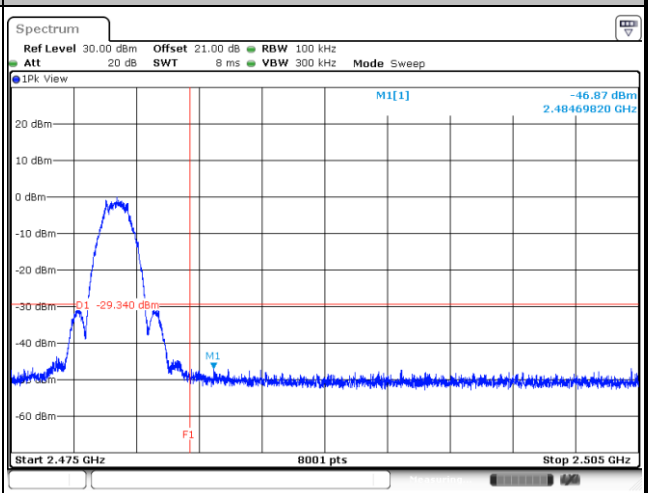

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.

<1Mbps>

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00	Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00
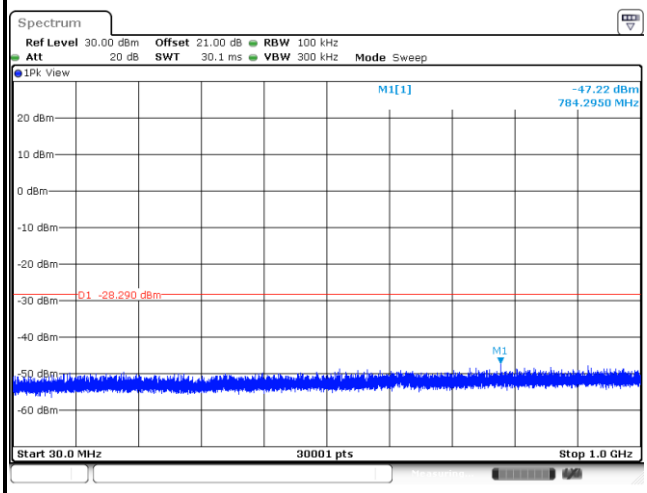	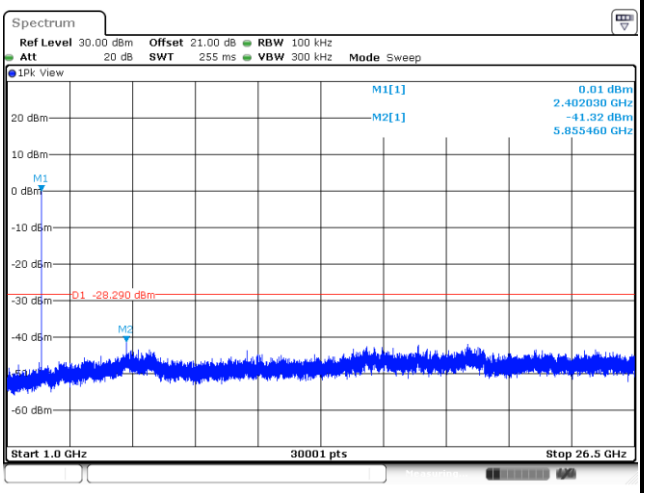
Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19	**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19**
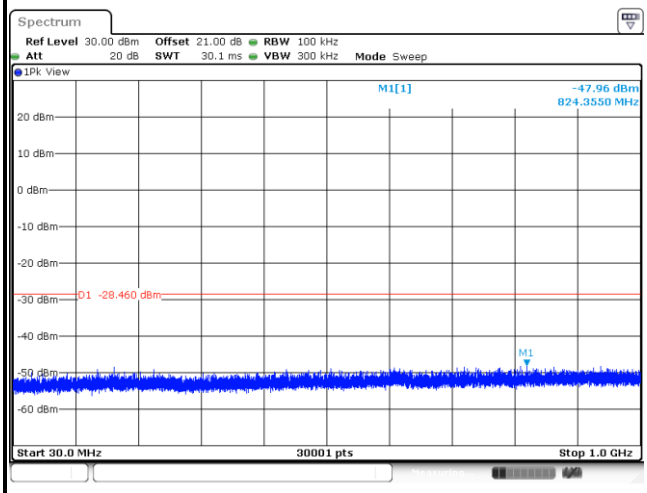	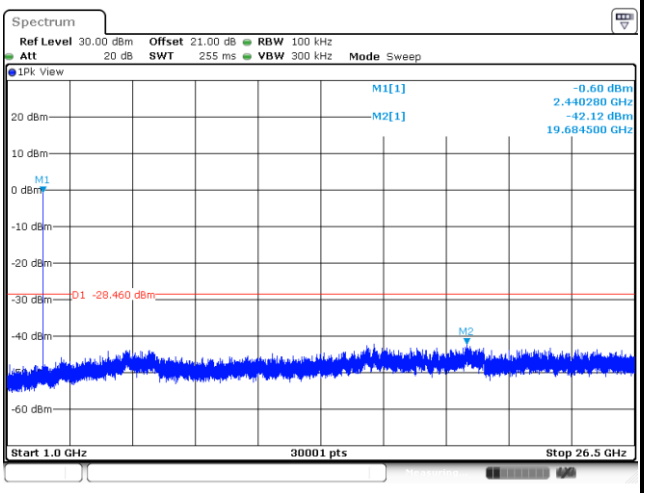

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39	Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39
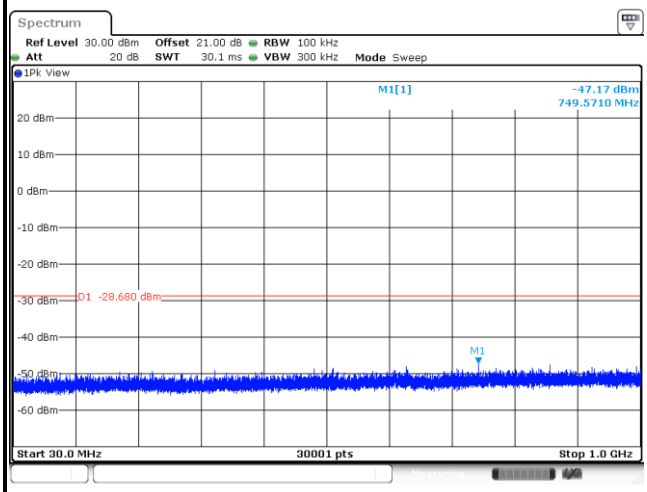	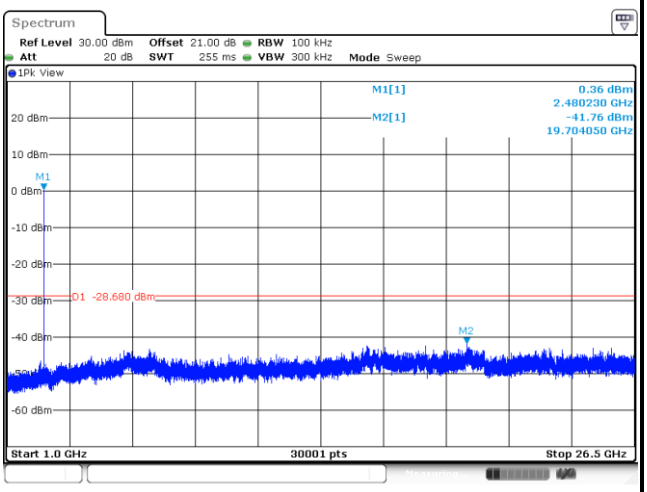

<2Mbps>

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 00	Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 00
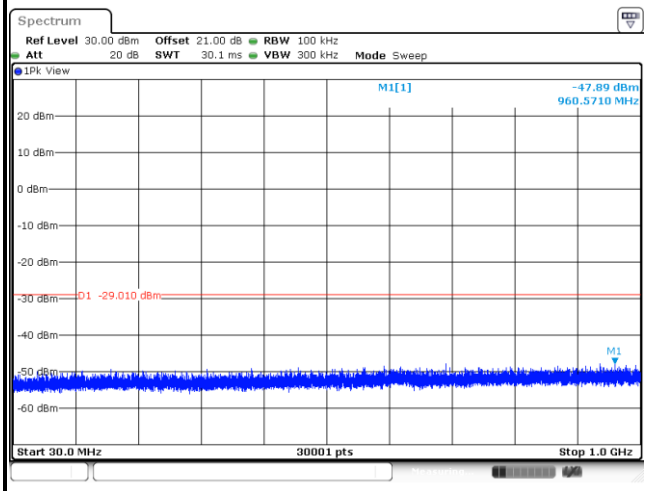	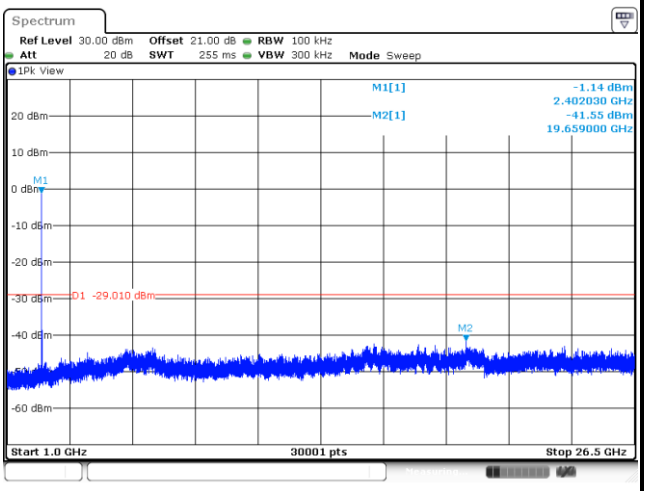
Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 19	**Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 19**
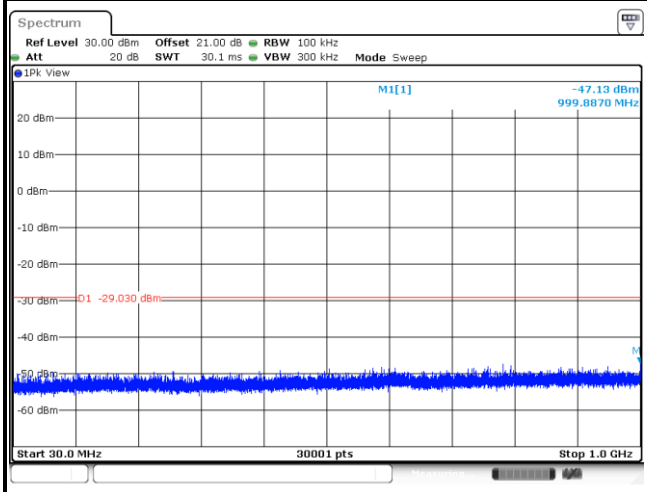	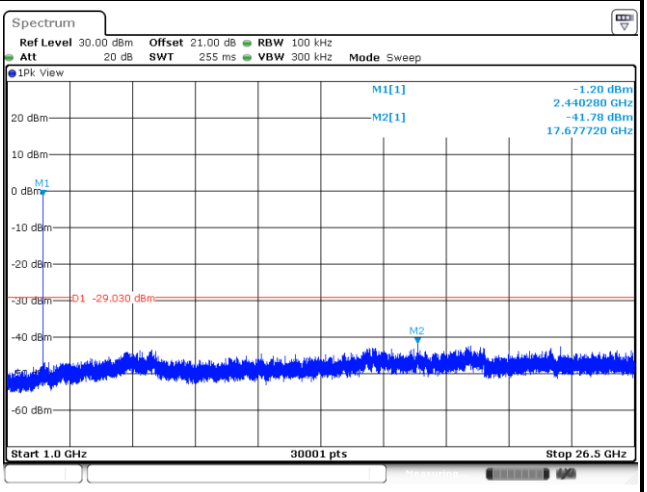

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 39	Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 39
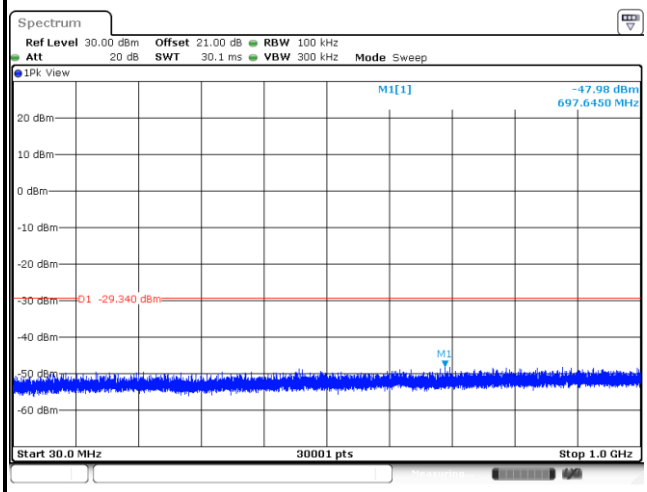	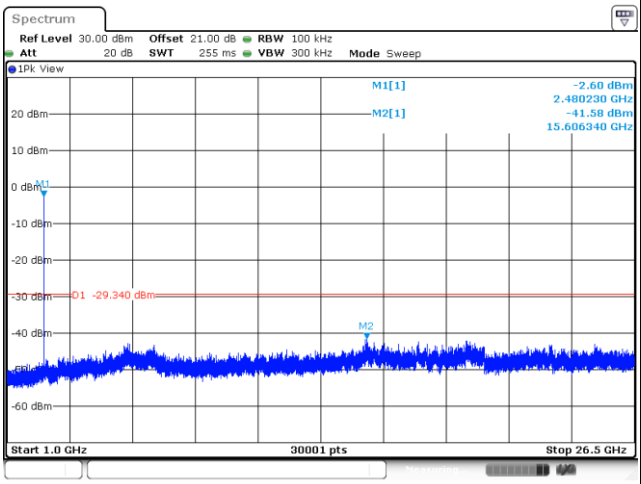

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as "-".
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as "-".
8. Use the following spectrum analyzer settings:
   (1) Span shall wide enough to fully capture the emission being measured;
   (2) Set RBW = 100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
   (3) Set RBW = 1 MHz, VBW = 3 MHz for f ≥ 1 GHz for peak measurement.
   For average measurement:
   - VBW = 10 Hz, when duty cycle is no less than 98 percent.
   - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup

For radiated test below 30MHz

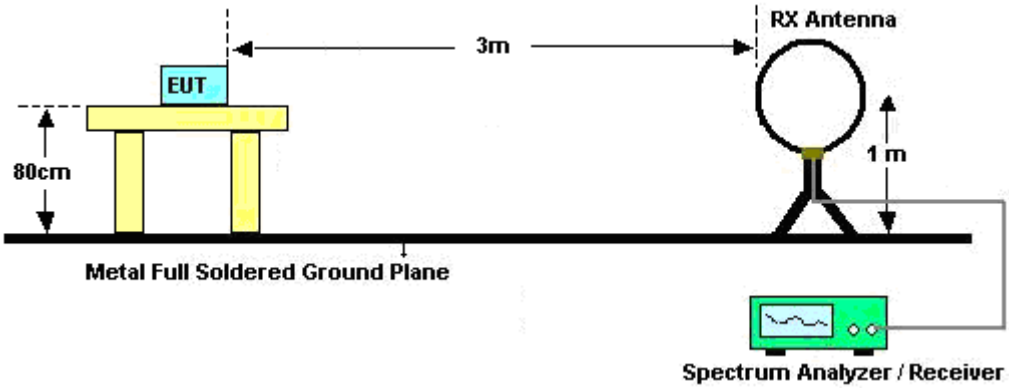

For radiated test from 30MHz to 1GHz

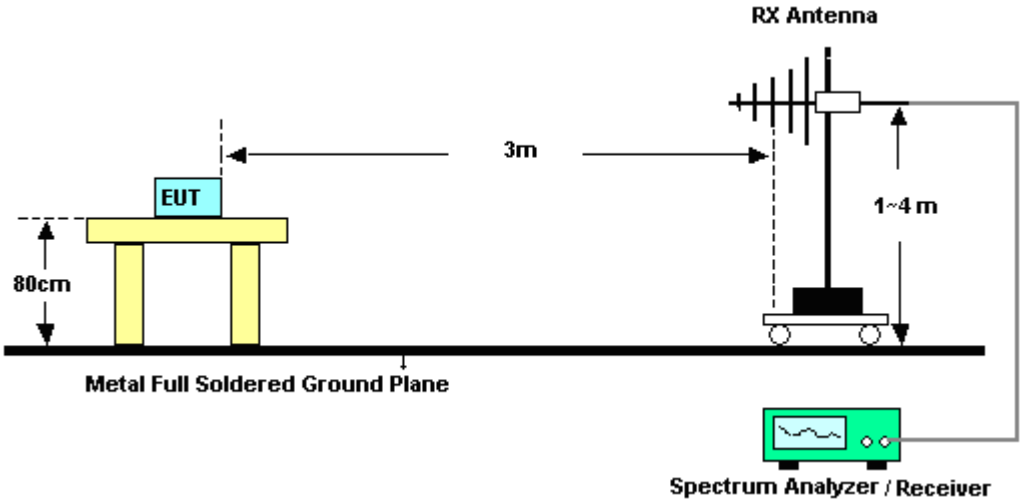

For radiated test from 1GHz to 18GHz

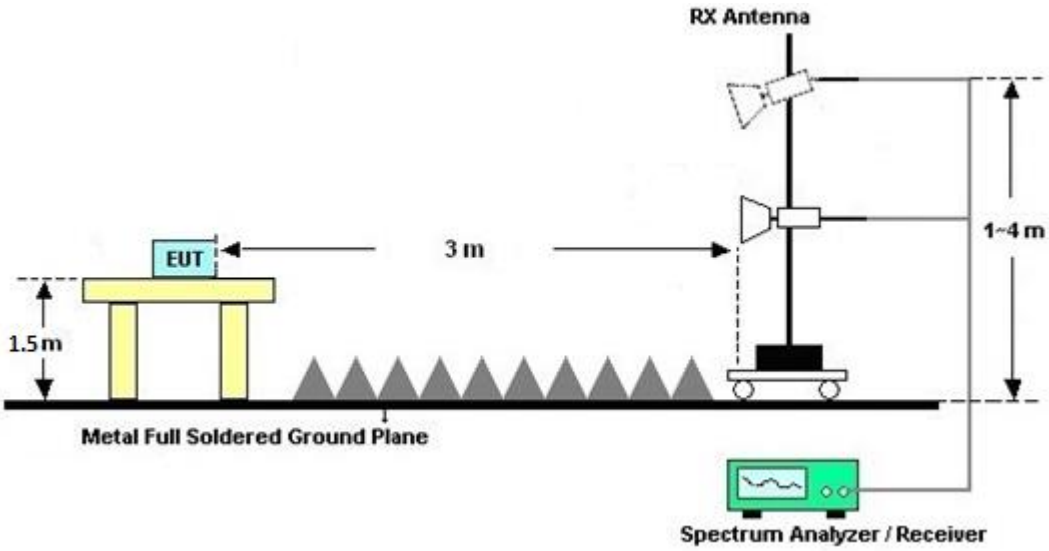

For radiated test above 18GHz

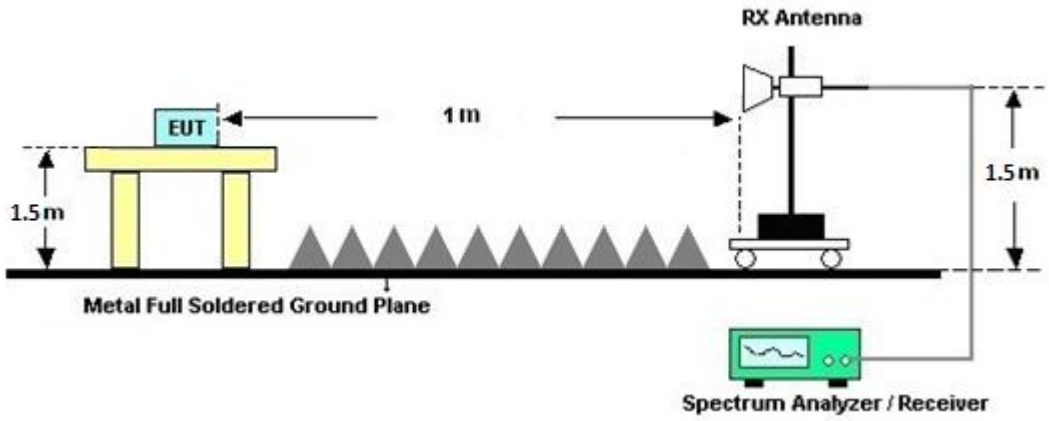

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

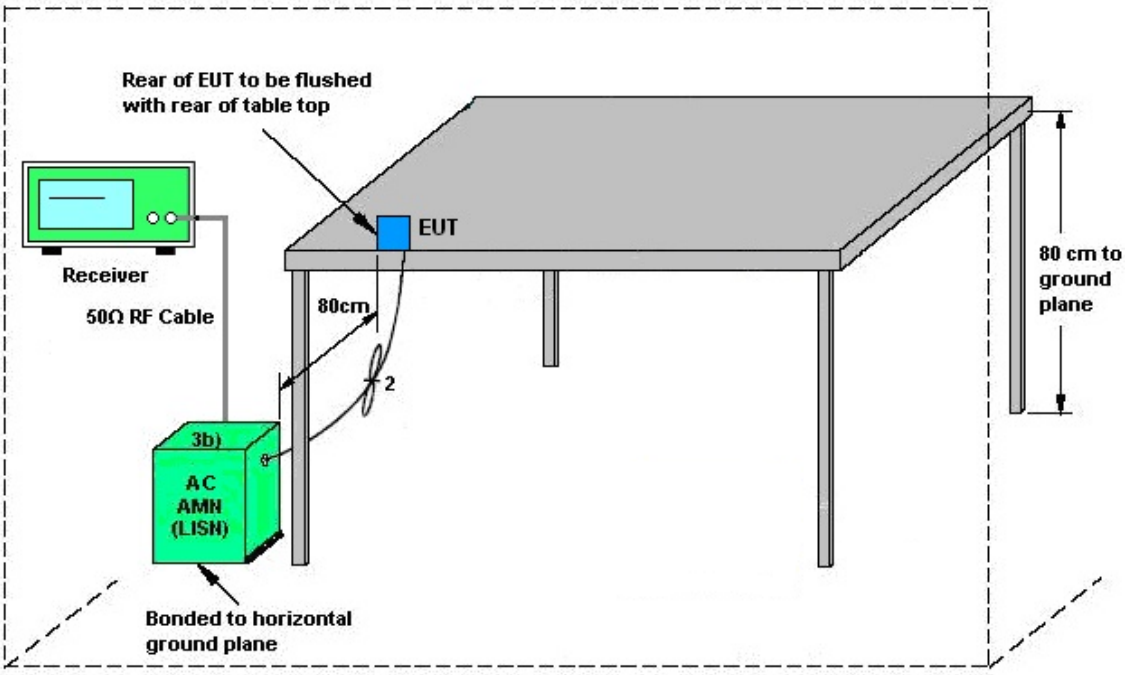

AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.7 Antenna Requirements

3.7.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	45141354	N/A	Jul. 26, 2023	Oct. 02, 2023	Jul. 25, 2024	Conducted (TH01-CA)
Power Sensor	DARE!!	RPR3006W	RPR8W-2301002	10MHz ~8GHz	Feb. 08, 2023	Oct. 02, 2023	Feb. 07, 2024	Conducted (TH01-CA)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101545	10Hz ~40GHz	May 03, 2023	Oct. 02, 2023	May 02, 2024	Conducted (TH01-CA)
LISN	TESEQ	NNB51	47407	N/A	May 16, 2023	Aug. 01, 2023	May 15, 2024	Conduction (CO01-CA)
EMI Test Receiver	R&S	ESR7	102177	9kHz~7GHz	May 23, 2023	Aug. 01, 2023	May 22, 2024	Conduction (CO01-CA)
Pulse limiter with 10dB attenuation	R&S	VTSD 9561-F N	9561-F- N00412	N/A	Jun. 05, 2023	Aug. 01, 2023	Jun. 04, 2024	Conduction (CO01-CA)
Test Software	R&S	EMC32 V10.30.0	N/A	N/A	N/A	Aug. 01, 2023	N/A	Conduction (CO01-CA)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100840	9kHz~30MHz	Jun. 29, 2023	Jul. 11, 2023~ Jul. 14, 2023	Jun. 28, 2024	Radiation (03CH01-CA)
Bilog Antenna	TESEQ	6111D	54683	30MHz~1GHz	Nov. 01, 2022	Jul. 11, 2023~ Jul. 14, 2023	Oct. 31, 2023	Radiation (03CH01-CA)
Horn Antenna	SCHWARZBECK	BBHA 9120D	02115	1GHz~18GHz	Aug. 16, 2022	Jul. 11, 2023~ Jul. 14, 2023	Aug. 15, 2023	Radiation (03CH01-CA)
Horn Antenna	SCHWARZBECK	BBHA 9170D	00841	18GHz~40GHz	Sep. 12, 2022	Jul. 11, 2023~ Jul. 14, 2023	Sep. 11, 2023	Radiation (03CH01-CA)
Amplifier	SONOMA	310N	372241	N/A	May 03, 2023	Jul. 11, 2023~ Jul. 14, 2023	May 02, 2024	Radiation (03CH01-CA)
EMI Test Receiver	Rohde & Schwarz	ESU26	100049	4.73 SP5	May 02, 2023	Jul. 11, 2023~ Jul. 14, 2023	May 01, 2024	Radiation (03CH01-CA)
Spectrum Analyzer	Keysight	N9010B	MY63440343	10Hz - 44GHz	Jan. 15, 2023	Jul. 11, 2023~ Jul. 14, 2023	Jan. 14, 2024	Radiation (03CH01-CA)
Preamplifier	Keysight	83017A	MY53270321	1GHz~26.5GHz	May 04, 2023	Jul. 11, 2023~ Jul. 14, 2023	May 03, 2024	Radiation (03CH01-CA)
Preamplifier	E-instrument	ERA-100M-18G-56-01-A70	EC1900252	1GHz~18GHz	May 23, 2023	Jul. 11, 2023~ Jul. 14, 2023	May 22, 2024	Radiation (03CH01-CA)
Preamplifier	EMEC	EMC18G40G	060725	18GHz-40GHz	May 04, 2023	Jul. 11, 2023~ Jul. 14, 2023	May 03, 2024	Radiation (03CH01-CA)
RF Cable	HUBER+SUHNER	SUCOFLEX 102	8015932/2, 8015762/2, 804938/2	N/A	Mar. 06, 2023	Jul. 11, 2023~ Jul. 14, 2023	Mar. 05, 2024	Radiation (03CH01-CA)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN9	3GHz High Pass Filter	Jun. 05, 2023	Jul. 11, 2023~ Jul. 14, 2023	Jun. 04, 2024	Radiation (03CH01-CA)
Filter	Wainwright	WLK12-1200-1272-11000-40SS	SN1	1.2GHz Low Pass Filter	Jun. 05, 2023	Jul. 11, 2023~ Jul. 14, 2023	Jun. 04, 2024	Radiation (03CH01-CA)
Hygrometer	TESEO	608-H1	45142559	N/A	Sep.12, 2022	Jul. 11, 2023~ Jul. 14, 2023	Sep. 11, 2023	Radiation (03CH01-CA)
Controller	ChainTek	EM-1000	060811	5.11	N/A	Jul. 11, 2023~ Jul. 14, 2023	N/A	Radiation (03CH01-CA)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jul. 11, 2023~ Jul. 14, 2023	N/A	Radiation (03CH01-CA)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jul. 11, 2023~ Jul. 14, 2023	N/A	Radiation (03CH01-CA)
Test Software	Audix E3	E6.2009-8-24d	PK-002093	N/A	N/A	Jul. 11, 2023~ Jul. 14, 2023	N/A	Radiation (03CH01-CA)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**2.7 dB**

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**4.6 dB**

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**5.2 dB**

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**5.1 dB**

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Liliana Gonzalez	Temperature:	19.6	°C
Test Date:	2023/10/2	Relative Humidity:	52.1	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.079	0.692	0.50	Pass
BLE	1Mbps	1	19	2440	1.073	0.708	0.50	Pass
BLE	1Mbps	1	39	2480	1.089	0.708	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	1.84	30.00	2.30	4.14	36.00	Pass
BLE	1Mbps	1	19	2440	1.74	30.00	2.30	4.04	36.00	Pass
BLE	1Mbps	1	39	2480	1.62	30.00	2.30	3.92	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.71	-8.73	2.30	8.00	Pass
BLE	1Mbps	1	19	2440	1.54	-9.30	2.30	8.00	Pass
BLE	1Mbps	1	39	2480	1.32	-9.51	2.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.050	1.380	0.50	Pass
BLE	2Mbps	1	19	2440	2.050	1.380	0.50	Pass
BLE	2Mbps	1	39	2480	2.082	1.400	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	1.83	30.00	2.30	4.13	36.00	Pass
BLE	2Mbps	1	19	2440	1.72	30.00	2.30	4.02	36.00	Pass
BLE	2Mbps	1	39	2480	1.60	30.00	2.30	3.90	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	0.99	-11.64	2.30	8.00	Pass
BLE	2Mbps	1	19	2440	0.97	-12.19	2.30	8.00	Pass
BLE	2Mbps	1	39	2480	0.66	-12.44	2.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Fu Chen	**Temperature :**	21.2~24.1℃
		Relative Humidity :	41.2~48.5%

EUT Information

Site: CO01-CA
Project 230315009

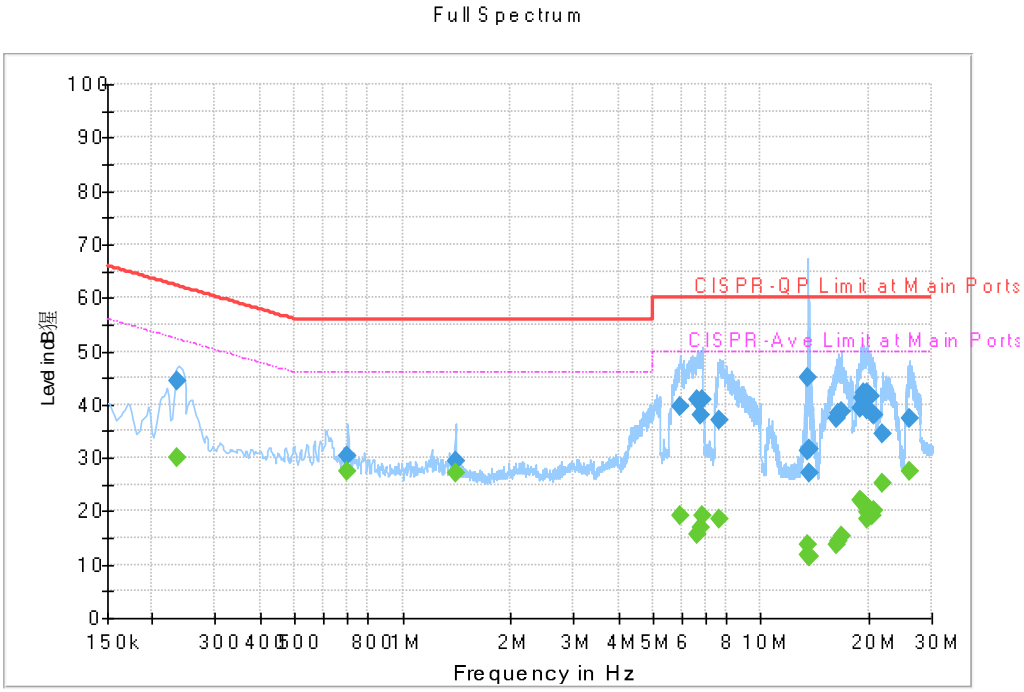

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.235860	44.55	---	62.24	17.69	N	OFF	20.3
0.235860	---	29.89	52.24	22.35	N	OFF	20.3
0.701538	30.26	---	56.00	25.74	N	OFF	20.3
0.701538	---	27.47	46.00	18.53	N	OFF	20.3
1.401927	29.24	---	56.00	26.76	N	OFF	20.3
1.401927	---	27.06	46.00	18.94	N	OFF	20.3
5.981622	39.49	---	60.00	20.51	N	OFF	20.4
5.981622	---	19.07	50.00	30.93	N	OFF	20.4
6.663084	40.74	---	60.00	19.26	N	OFF	20.4
6.663084	---	15.55	50.00	34.45	N	OFF	20.4
6.762768	37.97	---	60.00	22.03	N	OFF	20.4
6.762768	---	17.06	50.00	32.94	N	OFF	20.4
6.841392	41.03	---	60.00	18.97	N	OFF	20.4
6.841392	---	19.15	50.00	30.85	N	OFF	20.4
7.690686	37.11	---	60.00	22.89	N	OFF	20.4
7.690686	---	18.43	50.00	31.57	N	OFF	20.4
13.500933	31.24	---	60.00	28.76	N	OFF	20.5
13.500933	---	11.83	50.00	38.17	N	OFF	20.5
13.559838	44.90	---	60.00	15.10	N	OFF	20.5
13.559838	---	13.77	50.00	36.23	N	OFF	20.5
13.616763	31.68	---	60.00	28.32	N	OFF	20.5
13.616763	---	11.64	50.00	38.36	N	OFF	20.5
13.661943	27.17	---	60.00	32.83	N	OFF	20.5
13.661943	---	11.57	50.00	38.43	N	OFF	20.5
16.189476	37.40	---	60.00	22.60	N	OFF	20.6
16.189476	---	13.76	50.00	36.24	N	OFF	20.6
16.399797	38.35	---	60.00	21.65	N	OFF	20.6
16.399797	---	14.45	50.00	35.55	N	OFF	20.6
16.791792	38.52	---	60.00	21.48	N	OFF	20.6
16.791792	---	15.20	50.00	34.80	N	OFF	20.6
18.938319	39.27	---	60.00	20.73	N	OFF	20.7

18.938319	---	21.92	50.00	28.08	N	OFF	20.7
19.145139	41.11	---	60.00	18.89	N	OFF	20.7
19.145139	---	21.62	50.00	28.38	N	OFF	20.7
19.341510	42.08	---	60.00	17.92	N	OFF	20.7
19.341510	---	21.32	50.00	28.68	N	OFF	20.7
19.728366	42.16	---	60.00	17.84	N	OFF	20.7
19.728366	---	19.75	50.00	30.25	N	OFF	20.7
19.877433	38.82	---	60.00	21.18	N	OFF	20.7
19.877433	---	18.38	50.00	31.62	N	OFF	20.7
20.309838	41.62	---	60.00	18.38	N	OFF	20.7
20.309838	---	19.41	50.00	30.59	N	OFF	20.7
20.512086	38.18	---	60.00	21.82	N	OFF	20.7
20.512086	---	19.27	50.00	30.73	N	OFF	20.7
20.710617	37.98	---	60.00	22.02	N	OFF	20.7
20.710617	---	20.21	50.00	29.79	N	OFF	20.7
21.903576	34.45	---	60.00	25.55	N	OFF	20.6
21.903576	---	25.34	50.00	24.66	N	OFF	20.6
25.950228	37.33	---	60.00	22.67	N	OFF	20.7
25.950228	---	27.49	50.00	22.51	N	OFF	20.7

EUT Information

Site: CO01-CA
Project 230315009

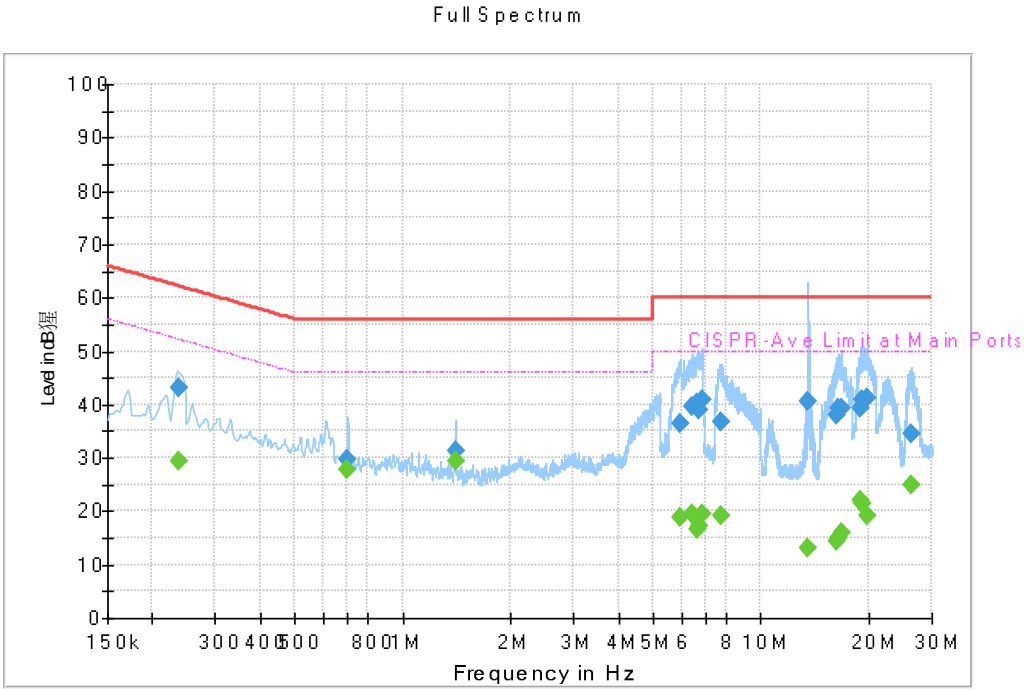

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.237030	---	29.54	52.20	22.66	L1	OFF	20.3
0.237030	43.20	---	62.20	19.00	L1	OFF	20.3
0.702780	---	27.64	46.00	18.36	L1	OFF	20.3
0.702780	29.84	---	56.00	26.16	L1	OFF	20.3
1.402107	---	29.46	46.00	16.54	L1	OFF	20.3
1.402107	31.31	---	56.00	24.69	L1	OFF	20.3
5.964297	---	18.77	50.00	31.23	L1	OFF	20.4
5.964297	36.32	---	60.00	23.68	L1	OFF	20.4
6.444195	---	19.43	50.00	30.57	L1	OFF	20.4
6.444195	39.49	---	60.00	20.51	L1	OFF	20.4
6.663237	---	16.47	50.00	33.53	L1	OFF	20.4
6.663237	40.32	---	60.00	19.68	L1	OFF	20.4
6.715482	---	17.39	50.00	32.61	L1	OFF	20.4
6.715482	38.98	---	60.00	21.02	L1	OFF	20.4
6.841716	---	19.37	50.00	30.63	L1	OFF	20.4
6.841716	40.78	---	60.00	19.22	L1	OFF	20.4
7.718361	---	19.04	50.00	30.96	L1	OFF	20.4
7.718361	36.78	---	60.00	23.22	L1	OFF	20.4
13.559811	---	12.96	50.00	37.04	L1	OFF	20.5
13.559811	40.64	---	60.00	19.36	L1	OFF	20.5
16.185993	37.96	---	60.00	22.04	L1	OFF	20.6
16.185993	---	14.44	50.00	35.56	L1	OFF	20.6
16.400913	---	15.08	50.00	34.92	L1	OFF	20.6
16.400913	39.15	---	60.00	20.85	L1	OFF	20.6
16.788858	39.22	---	60.00	20.78	L1	OFF	20.6
16.788858	---	16.06	50.00	33.94	L1	OFF	20.6
18.938274	39.19	---	60.00	20.81	L1	OFF	20.6
18.938274	---	22.00	50.00	28.00	L1	OFF	20.6
19.143582	---	21.25	50.00	28.75	L1	OFF	20.6
19.143582	41.03	---	60.00	18.97	L1	OFF	20.6
19.730382	---	19.13	50.00	30.87	L1	OFF	20.7

19.730382	**41.15**	**---**	**60.00**	**18.85**	**L1**	**OFF**	**20.7**
26.271267	**---**	**24.98**	**50.00**	**25.02**	**L1**	**OFF**	**20.7**
26.271267	**34.46**	**---**	**60.00**	**25.54**	**L1**	**OFF**	**20.7**

Appendix C. Radiated Spurious Emission

Test Engineer :	Fu Chen	Temperature :	22.1~24.2°C
		Relative Humidity :	44.1~48.9%

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		2334.99	54.16	-19.84	74	40.31	27.18	17.51	30.84	263	219	P	H
		2389.59	43.43	-10.57	54	29.35	27.28	17.58	30.78	263	219	A	H
	*	2402	97.86	-	-	83.8	27.24	17.6	30.78	263	219	P	H
	*	2402	97.2	-	-	83.14	27.24	17.6	30.78	263	219	A	H
													H
		2385.495	54.81	-19.19	74	40.54	27.48	17.58	30.79	300	205	P	V
		2388.435	43.49	-10.51	54	29.23	27.46	17.58	30.78	300	205	A	V
	*	2402	95.31	-	-	81.02	27.47	17.6	30.78	300	205	P	V
	*	2402	94.6	-	-	80.31	27.47	17.6	30.78	300	205	A	V
													V
BLE CH 19 2440MHz		2380.08	54.51	-19.49	74	40.42	27.33	17.57	30.81	230	218	P	H
		2387.44	43.17	-10.83	54	29.09	27.29	17.58	30.79	230	218	A	H
	*	2440	98.26	-	-	83.92	27.42	17.66	30.74	230	218	P	H
	*	2440	97.67	-	-	83.33	27.42	17.66	30.74	230	218	A	H
		2487.92	54.93	-19.07	74	40.14	27.74	17.74	30.69	230	218	P	H
		2488.08	44.62	-9.38	54	29.83	27.74	17.74	30.69	230	218	A	H
		2349.68	54.97	-19.03	74	40.91	27.35	17.53	30.82	100	192	P	V
		2385.04	43.3	-10.7	54	29.03	27.48	17.58	30.79	100	192	A	V
	*	2440	95.23	-	-	80.7	27.61	17.66	30.74	100	192	P	V
	*	2440	94.62	-	-	80.09	27.61	17.66	30.74	100	192	A	V
		2488.24	55.39	-18.61	74	40.48	27.86	17.74	30.69	100	192	P	V
		2488	44.51	-9.49	54	29.6	27.86	17.74	30.69	100	192	A	V

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz	*	2480	97.87	-	-	83.14	27.7	17.73	30.7	244	218	P	H
	*	2480	97.17	-	-	82.44	27.7	17.73	30.7	244	218	A	H
		2483.68	55.9	-18.1	74	41.15	27.72	17.73	30.7	244	218	P	H
		2483.52	46.18	-7.82	54	31.43	27.72	17.73	30.7	244	218	A	H
													H
	*	2480	95.58	-	-	80.74	27.81	17.73	30.7	100	195	P	V
	*	2480	94.9	-	-	80.06	27.81	17.73	30.7	100	195	A	V
		2484.24	55.41	-18.59	74	40.54	27.84	17.73	30.7	100	195	P	V
		2483.52	45.47	-8.53	54	30.61	27.83	17.73	30.7	100	195	A	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	42.57	-31.43	74	65.39	32.49	11.47	66.78	-	-	P	H
		7206	51.28	-22.72	74	65.18	36.92	13.68	64.5	280	210	P	H
		12010	53.28	-20.72	74	63.37	39.02	17.29	66.4	198	47	P	H
		12010	46.56	-7.44	54	56.65	39.02	17.29	66.4	198	47	A	H
													H
													H
													H
													H
													H
													H
													H
													H
		4804	43.25	-30.75	74	65.94	32.62	11.47	66.78	-	-	P	V
		7206	51.21	-22.79	74	65.12	36.91	13.68	64.5	400	128	P	V
		12010	54.68	-19.32	74	64.67	39.12	17.29	66.4	301	143	P	V
		12010	47.43	-6.57	54	57.42	39.12	17.29	66.4	301	143	A	V
													V
													V
													V
													V
													V
													V
													V
													V

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	44.34	-29.66	74	66.9	32.68	11.54	66.78	100	122	P	H
		4880	40.24	-13.76	54	62.8	32.68	11.54	66.78	100	122	A	H
		7320	52.14	-21.86	74	67.5	36.82	13.77	65.95	299	212	P	H
		7320	45.8	-8.2	54	61.16	36.82	13.77	65.95	299	212	A	H
		12200	55.28	-18.72	74	64.91	39.23	17.48	66.34	300	208	P	H
		12200	46.75	-7.25	54	56.38	39.23	17.48	66.34	300	208	A	H
													H
													H
													H
													H
													H
													H
		4880	44.66	-29.34	74	67.1	32.8	11.54	66.78	113	265	P	V
		4880	40.19	-13.81	54	62.63	32.8	11.54	66.78	113	265	A	V
		7320	51.87	-22.13	74	67.13	36.92	13.77	65.95	107	0	P	V
		7320	45.19	-8.81	54	60.45	36.92	13.77	65.95	107	0	A	V
		12200	56.03	-17.97	74	65.54	39.35	17.48	66.34	300	153	P	V
		12200	48.06	-5.94	54	57.57	39.35	17.48	66.34	300	153	A	V
													V
													V
													V
													V
													V
													V

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	49.92	-24.08	74	72.36	32.95	11.6	66.99	400	104	P	H
		4960	45.19	-8.81	54	67.63	32.95	11.6	66.99	400	104	A	H
		7440	52.17	-21.83	74	68.18	36.51	13.89	66.41	300	210	P	H
		7440	45.98	-8.02	54	61.99	36.51	13.89	66.41	300	210	A	H
		12400	53.02	-20.98	74	63.2	38.88	17.68	66.74	299	149	P	H
		12400	45.19	-8.81	54	55.37	38.88	17.68	66.74	299	149	A	H
													H
													H
													H
													H
													H
													H
		4960	47.75	-26.25	74	70.09	33.05	11.6	66.99	400	147	P	V
		4960	42.17	-11.83	54	64.51	33.05	11.6	66.99	400	147	A	V
		7440	51.87	-22.13	74	67.88	36.51	13.89	66.41	400	205	P	V
		7440	44.8	-9.2	54	60.81	36.51	13.89	66.41	400	205	A	V
		12400	53.19	-20.81	74	63.22	39.03	17.68	66.74	300	344	P	V
		12400	45.14	-8.86	54	55.17	39.03	17.68	66.74	300	344	A	V
													V
													V
													V
													V
													V
													V

Remark

1. No other spurious found.
2. All results are PASS against Peak and Average limit line.
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.

Emission above 18GHz

2.4GHz BLE (SHF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE SHF		22564.5	42.44	-31.56	74	37.57	38.61	14.91	48.65	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		22496.5	41.98	-32.02	74	37.44	38.48	14.85	48.79	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												

Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		64.92	25.1	-14.9	40	43.92	11.89	1.44	32.15	-	-	P	H
		143.49	32.09	-11.41	43.5	44.74	17.45	2.07	32.17	-	-	P	H
		242.43	30.14	-15.86	46	42.12	17.69	2.56	32.23	-	-	P	H
		477.17	32.19	-13.81	46	37.32	23.6	3.54	32.27	-	-	P	H
		770.11	31.43	-14.57	46	30.55	28.2	4.55	31.87	-	-	P	H
		960.23	38.46	-15.54	54	32.82	31.4	4.98	30.74	-	-	P	H
													H
													H
													H
													H
													H
													H
		53.28	37.16	-2.84	40	55.07	12.92	1.29	32.12	-	-	P	V
		72.68	28.67	-11.33	40	46.55	12.77	1.5	32.15	-	-	P	V
		419.94	28.29	-17.71	46	34.6	22.7	3.31	32.32	-	-	P	V
		475.23	30.07	-15.93	46	35.21	23.6	3.54	32.28	-	-	P	V
		858.38	32.45	-13.55	46	30.1	29.1	4.77	31.52	-	-	P	V
		960.23	36.41	-17.59	54	30.77	31.4	4.98	30.74	-	-	P	V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as “-” means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.												

<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2355.675	54.65	-19.35	74	40.65	27.28	17.54	30.82	100	227	P	H
		2388.54	43.45	-10.55	54	29.37	27.28	17.58	30.78	100	227	A	H
	*	2402	98.59	-	-	84.53	27.24	17.6	30.78	100	227	P	H
	*	2402	96.99	-	-	82.93	27.24	17.6	30.78	100	227	A	H
													H
													H
		2383.815	54.25	-19.75	74	39.98	27.49	17.58	30.8	300	206	P	V
		2388.855	43.46	-10.54	54	29.2	27.46	17.58	30.78	300	206	A	V
	*	2402	95.56	-	-	81.27	27.47	17.6	30.78	300	206	P	V
	*	2402	94	-	-	79.71	27.47	17.6	30.78	300	206	A	V
													V
													V
BLE CH 19 2440MHz		2344.4	54.22	-19.78	74	40.33	27.2	17.52	30.83	247	219	P	H
		2387.44	43.34	-10.66	54	29.26	27.29	17.58	30.79	247	219	A	H
	*	2440	99.22	-	-	84.88	27.42	17.66	30.74	247	219	P	H
	*	2440	97.93	-	-	83.59	27.42	17.66	30.74	247	219	A	H
		2487.04	55.78	-18.22	74	41	27.73	17.74	30.69	247	219	P	H
		2488.16	45.01	-8.99	54	30.22	27.74	17.74	30.69	247	219	A	H
		2361.52	54.49	-19.51	74	40.35	27.42	17.54	30.82	300	212	P	V
		2387.28	43.44	-10.56	54	29.18	27.47	17.58	30.79	300	212	A	V
	*	2440	94.6	-	-	80.07	27.61	17.66	30.74	300	212	P	V
	*	2440	93.1	-	-	78.57	27.61	17.66	30.74	300	212	A	V
		2497.28	55.24	-18.76	74	40.26	27.91	17.76	30.69	300	212	P	V
		2488.4	44.27	-9.73	54	29.36	27.86	17.74	30.69	300	212	A	V

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz	*	2480	99.06	-	-	84.33	27.7	17.73	30.7	246	220	P	H
	*	2480	97.45	-	-	82.72	27.7	17.73	30.7	246	220	A	H
		2484.16	57.12	-16.88	74	42.37	27.72	17.73	30.7	246	220	P	H
		2483.52	48.16	-5.84	54	33.41	27.72	17.73	30.7	246	220	A	H
													H
													H
	*	2480	95.04	-	-	80.2	27.81	17.73	30.7	100	197	P	V
	*	2480	93.43	-	-	78.59	27.81	17.73	30.7	100	197	A	V
		2483.8	57.64	-16.36	74	42.78	27.83	17.73	30.7	100	197	P	V
		2483.52	46.24	-7.76	54	31.38	27.83	17.73	30.7	100	197	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	42.29	-31.71	74	65.11	32.49	11.47	66.78	-	-	P	H
		7206	51.95	-22.05	74	65.85	36.92	13.68	64.5	300	212	P	H
		12010	53.83	-20.17	74	63.92	39.02	17.29	66.4	300	212	P	H
		12010	45.68	-8.32	54	55.77	39.02	17.29	66.4	300	212	A	H
													H
													H
													H
													H
													H
													H
													H
													H
		4804	43.57	-30.43	74	66.26	32.62	11.47	66.78	-	-	P	V
		7206	53.34	-20.66	74	67.25	36.91	13.68	64.5	300	137	P	V
		12010	53.8	-20.2	74	63.79	39.12	17.29	66.4	299	147	P	V
		12010	46.02	-7.98	54	56.01	39.12	17.29	66.4	299	147	A	V
													V
													V
													V
													V
													V
													V
													V
													V

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 19 2440MHz		4880	46.93	-27.07	74	69.49	32.68	11.54	66.78	300	136	P	H
		4880	38.77	-15.23	54	61.33	32.68	11.54	66.78	300	136	A	H
		7320	52.41	-21.59	74	67.77	36.82	13.77	65.95	299	211	P	H
		7320	45.48	-8.52	54	60.84	36.82	13.77	65.95	299	211	A	H
		12200	53.8	-20.2	74	63.43	39.23	17.48	66.34	300	208	P	H
		12200	45.82	-8.18	54	55.45	39.23	17.48	66.34	300	208	A	H
													H
													H
													H
													H
													H
													H
		4880	45.88	-28.12	74	68.32	32.8	11.54	66.78	100	266	P	V
		4880	37.8	-16.2	54	60.24	32.8	11.54	66.78	100	266	A	V
		7320	52.13	-21.87	74	67.39	36.92	13.77	65.95	300	126	P	V
		7320	44.56	-9.44	54	59.82	36.92	13.77	65.95	300	126	A	V
		12200	54.67	-19.33	74	64.18	39.35	17.48	66.34	300	150	P	V
		12200	46.9	-7.1	54	56.41	39.35	17.48	66.34	300	150	A	V
													V
													V
													V
													V
													V
													V

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	49.75	-24.25	74	72.19	32.95	11.6	66.99	399	100	P	H
		4960	43.04	-10.96	54	65.48	32.95	11.6	66.99	399	100	A	H
		7440	52.07	-21.93	74	68.08	36.51	13.89	66.41	300	211	P	H
		7440	44.67	-9.33	54	60.68	36.51	13.89	66.41	300	211	A	H
		12400	53.67	-20.33	74	63.85	38.88	17.68	66.74	324	148	P	H
		12400	45.15	-8.85	54	55.33	38.88	17.68	66.74	324	148	A	H
													H
													H
													H
													H
													H
													H
		4960	47.05	-26.95	74	69.39	33.05	11.6	66.99	399	147	P	V
		4960	39.96	-14.04	54	62.3	33.05	11.6	66.99	399	147	A	V
		7440	51.11	-22.89	74	67.12	36.51	13.89	66.41	300	127	P	V
		7440	43.74	-10.26	54	59.75	36.51	13.89	66.41	300	127	A	V
		12400	53.11	-20.89	74	63.14	39.03	17.68	66.74	300	338	P	V
		12400	44.57	-9.43	54	54.6	39.03	17.68	66.74	300	338	A	V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												

Note symbol

*	**Fundamental Frequency** which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is **over limit** line.
P/A	**P**eak or **A**verage
H/V	**H**orizontal or **V**ertical

A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Margin(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Margin(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Margin(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Fu Chen	**Temperature :**	22.1~24.2°C
		Relative Humidity :	44.1~48.9%

Note symbol

-L	**Low channel location**
-R	**High channel location**

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	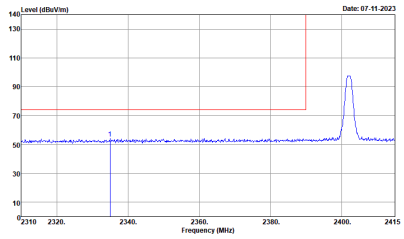	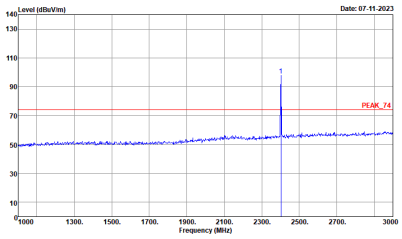
Avg.	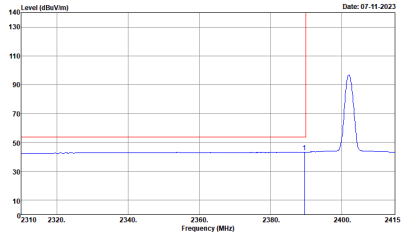	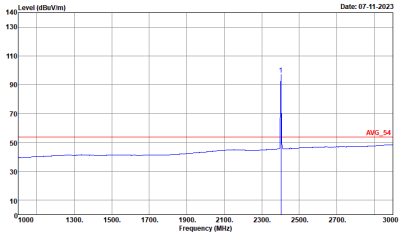

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	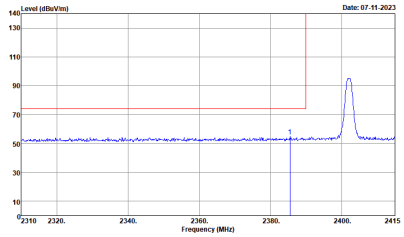 Site : 03CH01-CA Condition : PEAK_BE_74 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	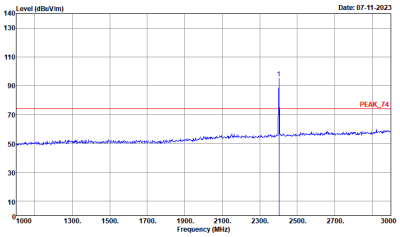 Site : 03CH01-CA Condition : PEAK_74 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	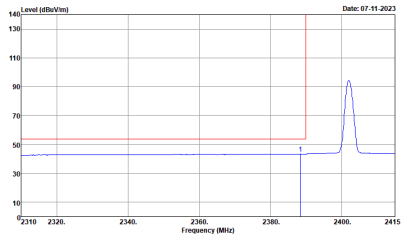 Site : 03CH01-CA Condition : AVG_BE_54 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	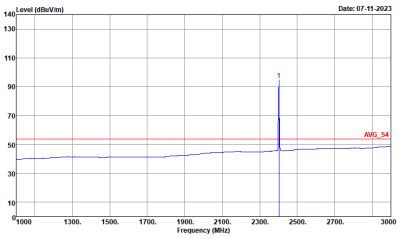 Site : 03CH01-CA Condition : AVG_54 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	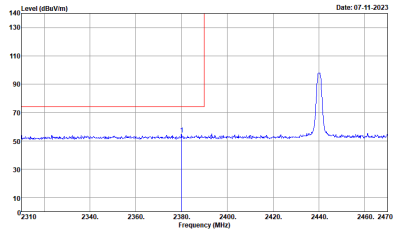 Site : 03CH01-CA Condition : PEAK_BE_74 3m HORN_02115_220816 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	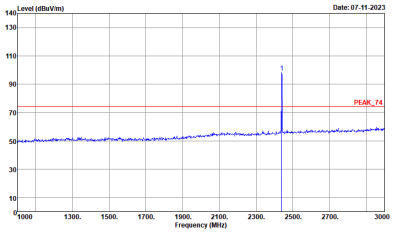 Site : 03CH01-CA Condition : PEAK_74 3m HORN_02115_220816 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	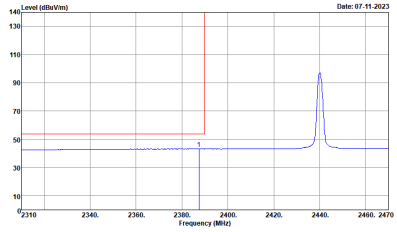 Site : 03CH01-CA Condition : AVG_BE_54 3m HORN_02115_220816 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	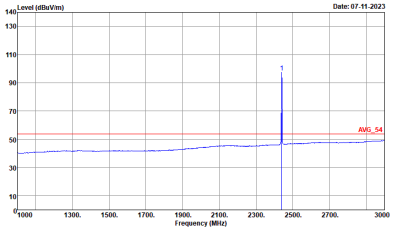 Site : 03CH01-CA Condition : AVG_54 3m HORN_02115_220816 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	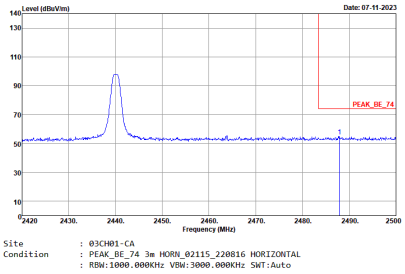	Left blank
Avg.	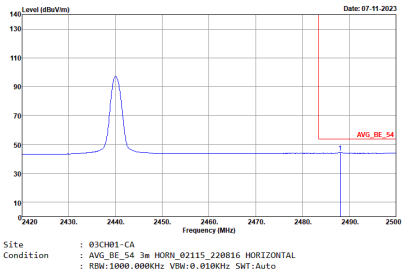	Left blank

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	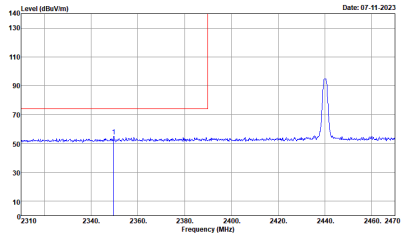 Site : 03CH01-CA Condition : PEAK_BE_74 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	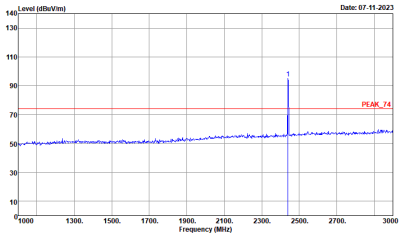 Site : 03CH01-CA Condition : PEAK_74 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	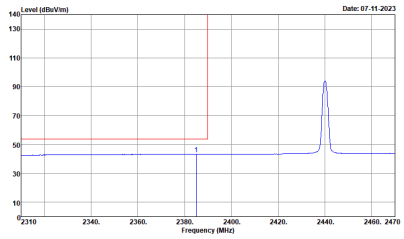 Site : 03CH01-CA Condition : AVG_BE_54 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	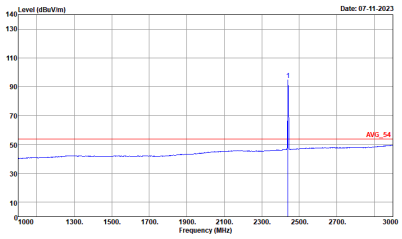 Site : 03CH01-CA Condition : AVG_54 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	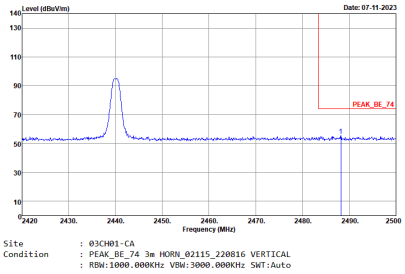	Left blank
Avg.	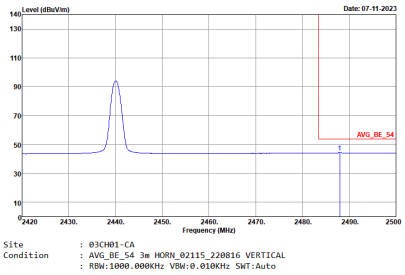	Left blank

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	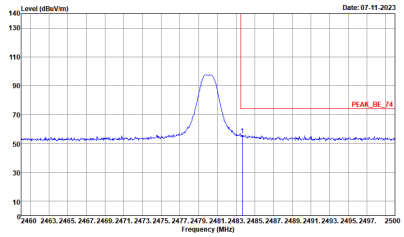 Site : 03CH01-CA Condition : PEAK_BE_74 3m HORN_02115_220816 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	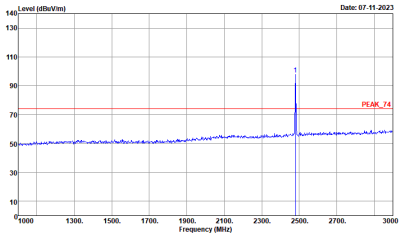 Site : 03CH01-CA Condition : PEAK_74 3m HORN_02115_220816 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	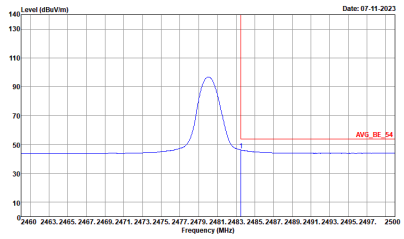 Site : 03CH01-CA Condition : AVG_BE_54 3m HORN_02115_220816 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	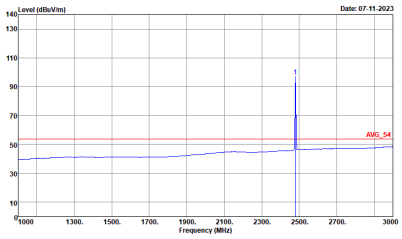 Site : 03CH01-CA Condition : AVG_54 3m HORN_02115_220816 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	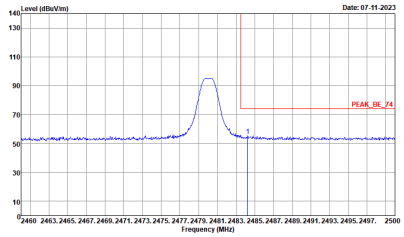 Site : 03CH01-CA Condition : PEAK_BE_74 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	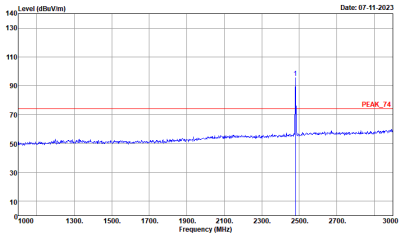 Site : 03CH01-CA Condition : PEAK_74 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	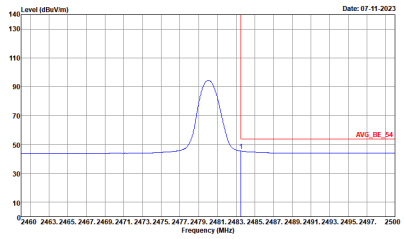 Site : 03CH01-CA Condition : AVG_BE_54 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	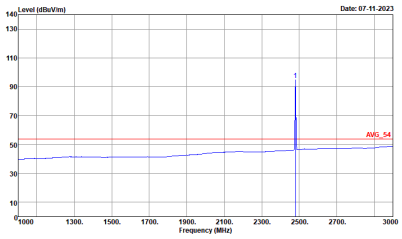 Site : 03CH01-CA Condition : AVG_54 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	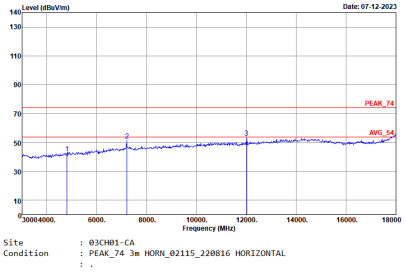	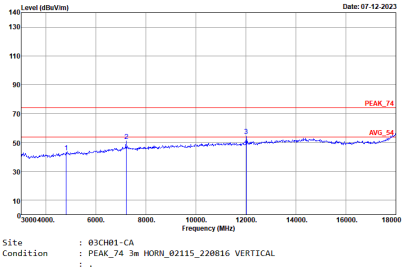

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
10.6G ~18G Avg.	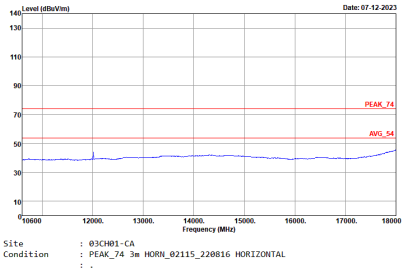	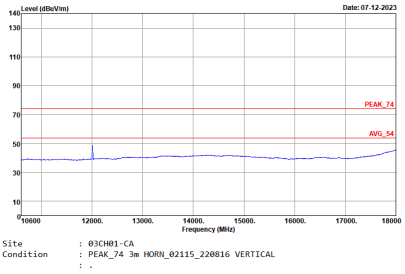

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	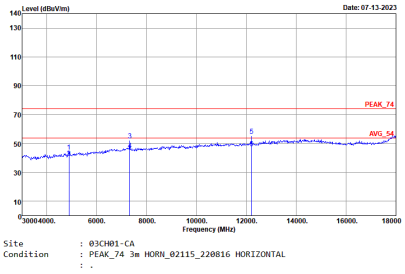	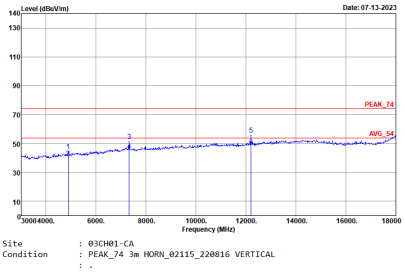

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
10.6G ~18G Avg.	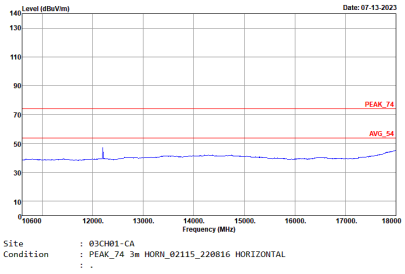	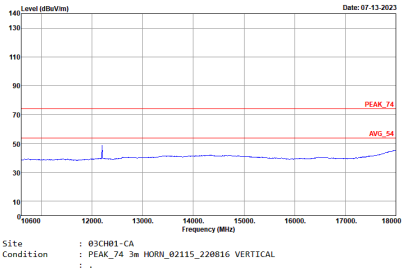

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	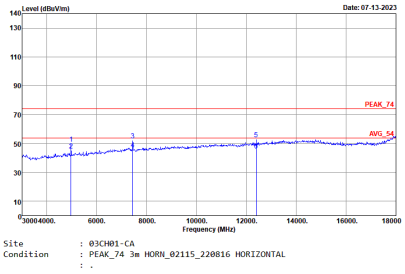	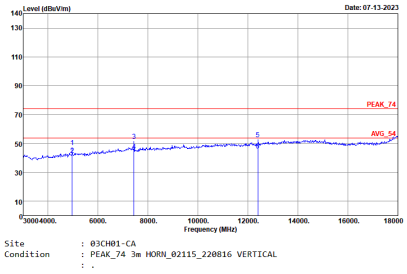

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
10.6G ~18G Avg.	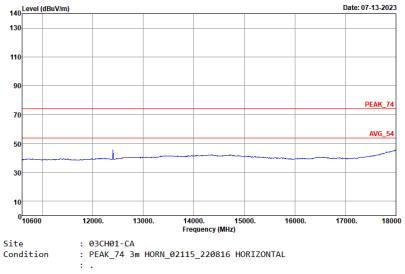	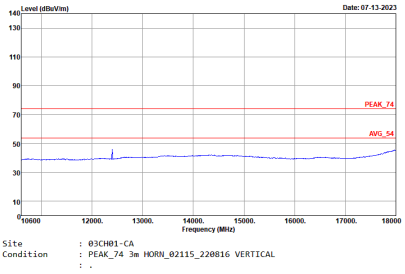

Emission above 18GHz

2.4GHz BLE (SHF @ 1m)

BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
Peak Avg.	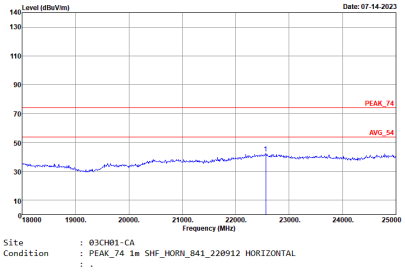	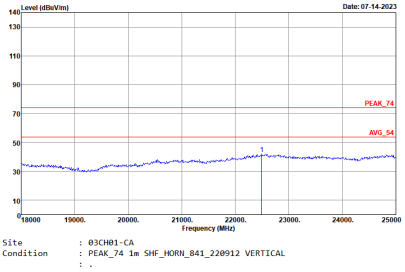

Emission below 1GHz

2.4GHz BLE (LF)

BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	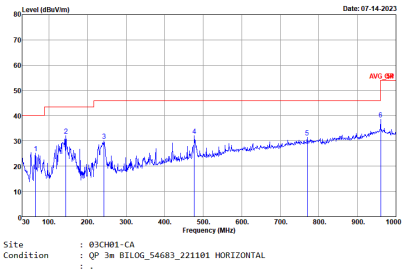	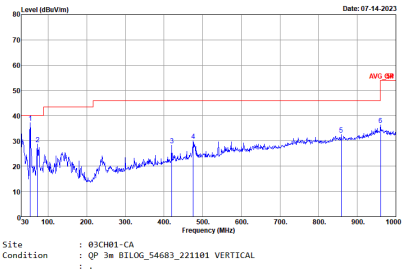

<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	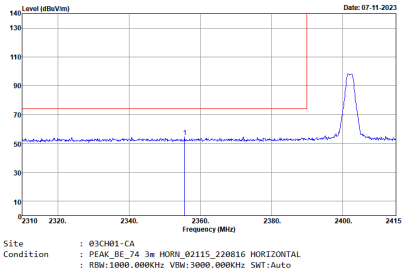	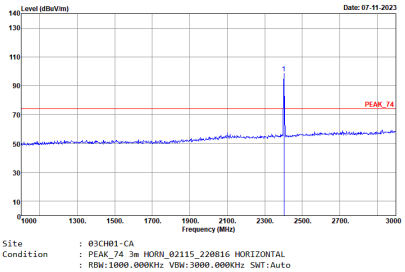
Avg.	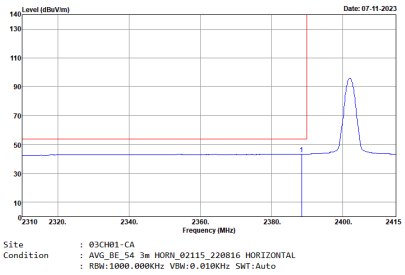	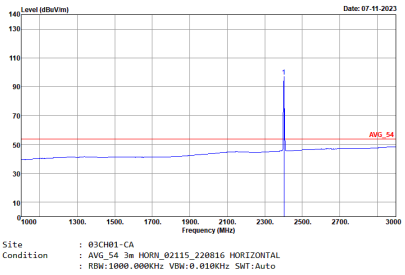

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	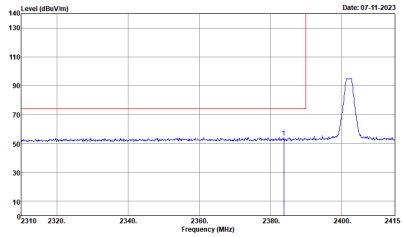 Site : 03CH01-CA Condition : PEAK_BE_74 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	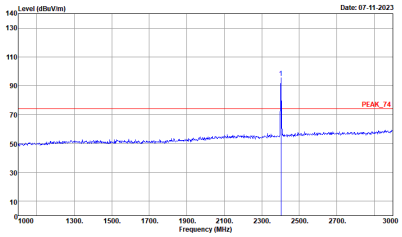 Site : 03CH01-CA Condition : PEAK_74 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	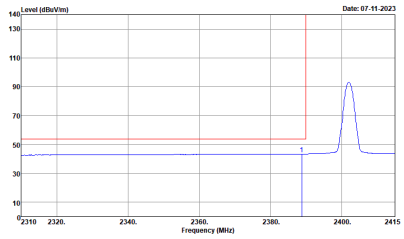 Site : 03CH01-CA Condition : AVG_BE_54 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	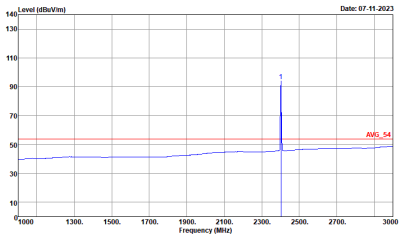 Site : 03CH01-CA Condition : AVG_54 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	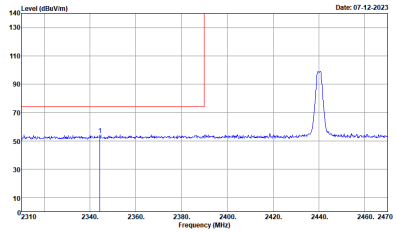 Site : 03CH01-CA Condition : PEAK_BE_74 3m HORN_02115_220816 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	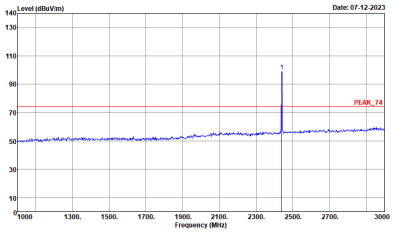 Site : 03CH01-CA Condition : PEAK_74 3m HORN_02115_220816 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	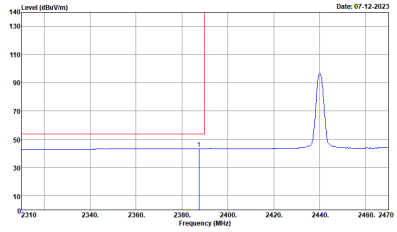 Site : 03CH01-CA Condition : AVG_BE_54 3m HORN_02115_220816 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	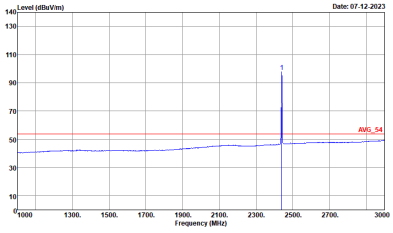 Site : 03CH01-CA Condition : AVG_54 3m HORN_02115_220816 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	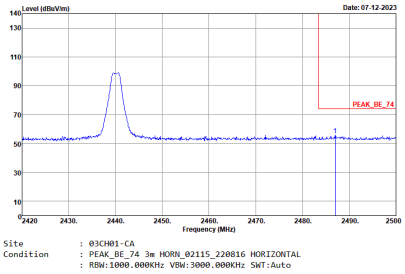	Left blank
Avg.	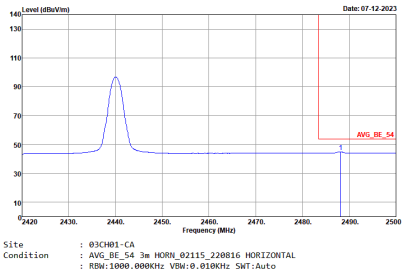	Left blank

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	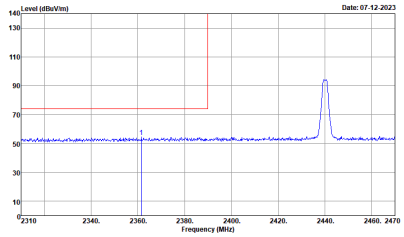 Site : 03CH01-CA Condition : PEAK_BE_74 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	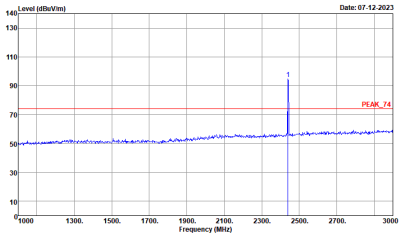 Site : 03CH01-CA Condition : PEAK_74 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	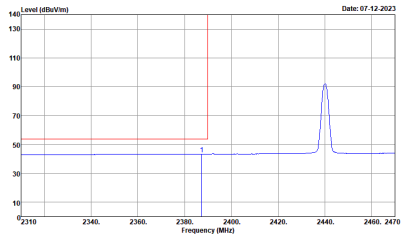 Site : 03CH01-CA Condition : AVG_BE_54 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	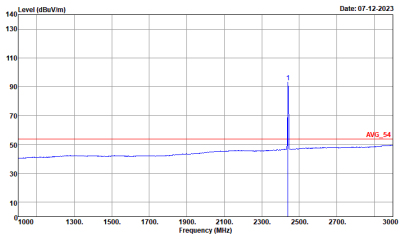 Site : 03CH01-CA Condition : AVG_54 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	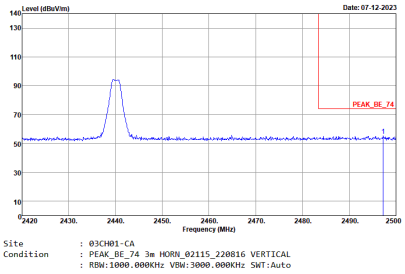	Left blank
Avg.	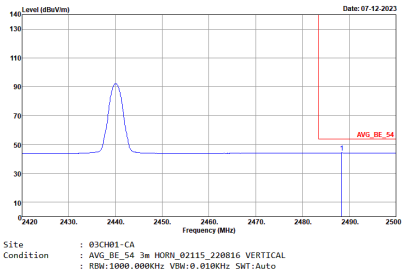	Left blank

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	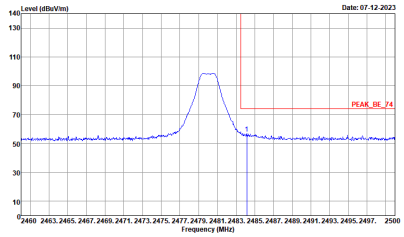 Site : 03CH01-CA Condition : PEAK_BE_74 3m HORN_02115_220816 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	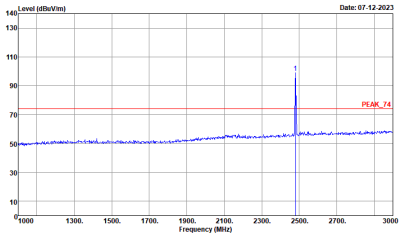 Site : 03CH01-CA Condition : PEAK_74 3m HORN_02115_220816 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	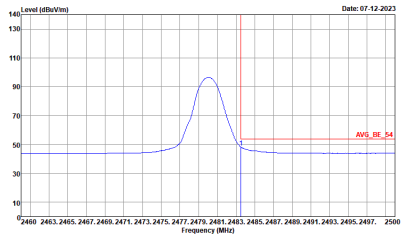 Site : 03CH01-CA Condition : AVG_BE_54 3m HORN_02115_220816 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	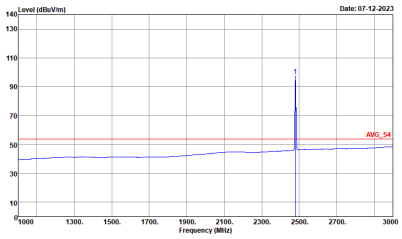 Site : 03CH01-CA Condition : AVG_54 3m HORN_02115_220816 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	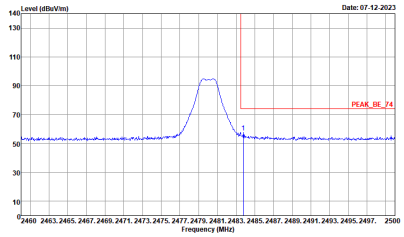 Site : 03CH01-CA Condition : PEAK_BE_74 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	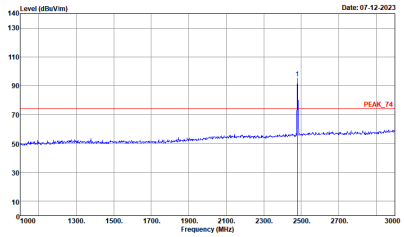 Site : 03CH01-CA Condition : PEAK_74 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	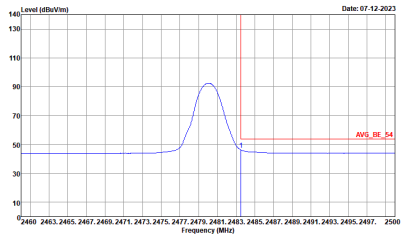 Site : 03CH01-CA Condition : AVG_BE_54 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	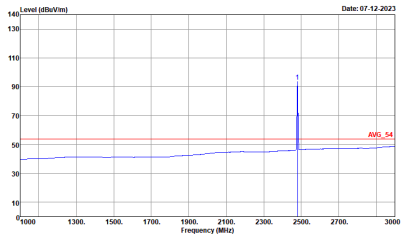 Site : 03CH01-CA Condition : AVG_54 3m HORN_02115_220816 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	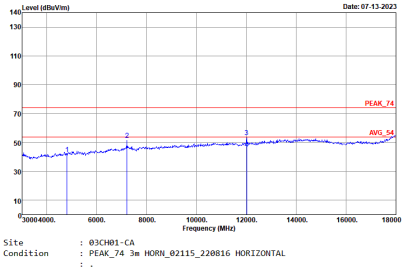	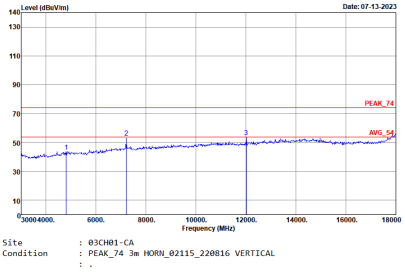

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
10.6G ~18G Avg.	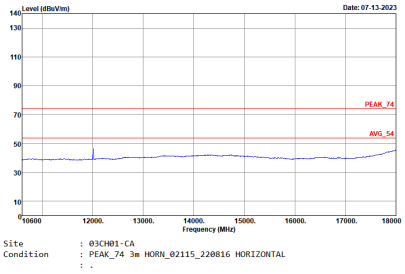	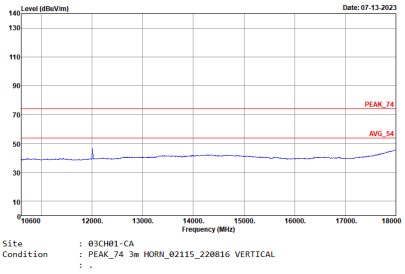

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	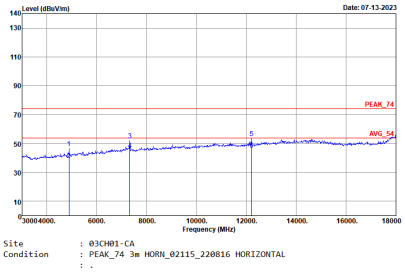	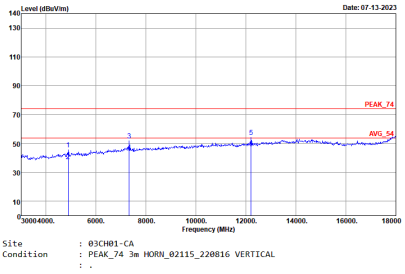

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
10.6G ~18G Avg.	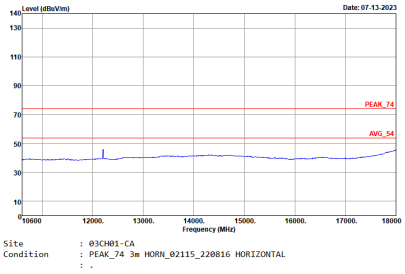	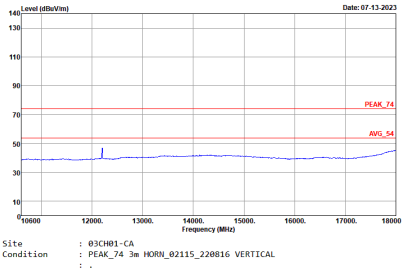

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	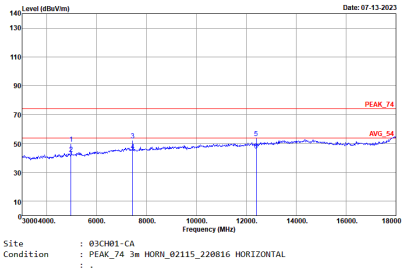	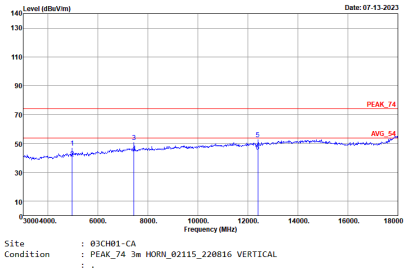

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
10.6G ~18G Avg.	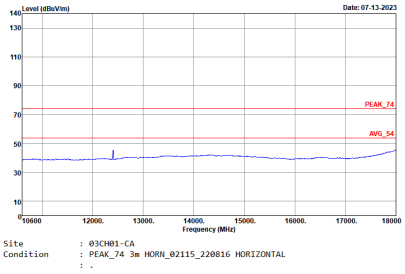	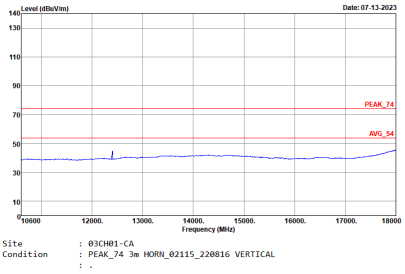

Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth – LE for 1Mbps	100	-	-	10Hz
Bluetooth – LE for 2Mbps	100	-	-	10Hz

Bluetooth – LE for 1Mbps

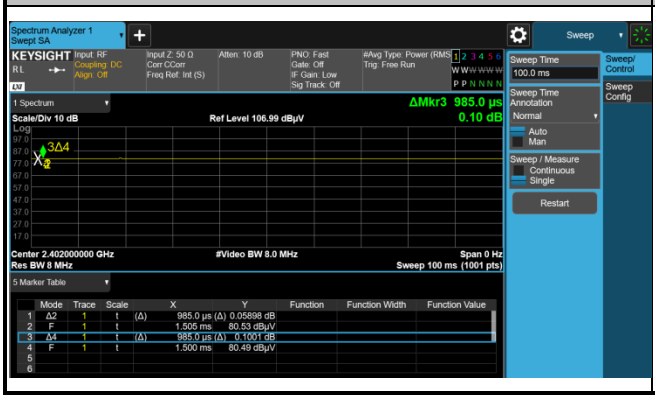

Bluetooth – LE for 2Mbps