


TEST REPORT

Part 15 Subpart C 15.225

1. Applicant	
Name	: KORECEN Co., Ltd.
Address	: 603, 168 Woolim Lions Valley B, Gasan digital 1-ro, Geumcheon-gu, Seoul, Korea
FCC ID	: 2AEIQFV-100
2. Products	
Name	: Finger-vein
Model/Type	: FV-100/RFID
Manufacturer	: KORECEN Co., Ltd.
3. Test Standard	: 47 CFR FCC Part 15 Subpart C:2011 section 15.225
4. Test Method	: ANSI C63.10:2009
5. Test Result	: Positive
6. Dates of Test	: March 16, 2015 to March 19, 2015
7. Date of Issue	: March 26, 2015
8. Test Laboratory	: Standard Engineering Co. Ltd. FCC Designation Number : 624439

Tested by	Approved by
	
SoonHo, Kim / Test Engineer	SeongSeok, Seo / Compliance Engineer

This report may not be reproduced without the full written consent of Standard Engineering Laboratory.

	Standard Engineering Co. Ltd. 145, Hwanggeumteo-gil, Eumam-myeon, Seosan-si, Chungcheongnam-do 356-844, Republic of Korea Tel.: +82-41-663-9436, Fax :+82-41-663-9434 www.stdeng.com
---	---

CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE.....	5
2. GENERAL INFORMATION.....	6
2.1 PRODUCT DESCRIPTION.....	6
2.2 MODEL DIFFERENCES:	6
2.3 RELATED SUBMITTAL(S) /GRANT(S).....	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
3. SYSTEM TEST CONFIGURATION.....	7
3.1 JUSTIFICATION	7
3.2 PERIPHERAL EQUIPMENT.....	7
3.3 MODE OF OPERATION DURING THE TEST.....	7
3.4 CABLE DESCRIPTION FOR THE EUT	7
3.5 EQUIPMENT MODIFICATIONS	7
3.6 CONFIGURATION OF TEST SYSTEM	8
3.7 ANTENNA REQUIREMENT	8
4. PRELIMINARY TEST.....	8
4.1 ACPOWER LINE CONDUCTED EMISSIONS TESTS.....	8
4.2 RADIATED EMISSIONS TESTS	8
5. FINAL RESULT OF MEASUREMENT.....	9
5.1 CONDUCTED EMISSION TEST.....	9
5.2 Emission Test	12
5.2.1 Radiated Emissions	12
5.2.1.1 Regulation.....	12
5.2.1.2 Measurement Procedure	12
5.2.1.3 Test Configuration.....	13
5.2.1.4 Test Results	14
5.3 Occupied bandwidth	18
5.3.1 Regulation	18
5.3.2 Measurement Procedure	18
5.3.3 Test Results.....	18
5.4 Frequency Tolerance of Carrier Signal	19



5.4.1 Regulation	19
5.4.2 Measurement Procedure	19
5.4.3 Test Results.....	20
 6. LIST OF TEST EQUIPMENT.....	 21

Revision History

Issue Report No.	Issued Date	Revisions	Effect Section
STD-FCC-15016	March 26, 2015	Initial Release	All

1. VERIFICATION OF COMPLIANCE

- APPLICANT : KORECEN Co., Ltd.
- ADDRESS : 603, 168 Woolim Lions Valley B, Gasan digital 1-ro, Geumcheon-gu, Seoul, Korea
- CONTACT PERSON : ChulJun, Park / Vice president
- TELEPHONE NO : +82-2-867-0860
- FCC ID : 2AEIQFV-100

DEVICE TYPE	FCC: DXX – Low Power Communication Device Transmitter
E.U.T. DESCRIPTION	Finger-vein
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	FCC: ANSI C63.10: 2009
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C:2011, Section 15.225
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	N/A
FINAL TEST WAS CONDUCTED ON	3 m open area test site

2. GENERAL INFORMATION

2.1 Product Description

The KORECEN Co., Ltd., Model FV-100 (referred to as the EUT in this report) is a Finger-vein that is included a RF card reader. The product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Non-Metal
TX FREQUENCY	13.561 MHz
MODULATION	ASK
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1 MHz)	Main Board: 10MHz, Camera Connector Board: 25MHz, USB Board: 24 MHz, RCD Board: 32.768kHz RFID Board: 13.56MHz
ANTENNA TYPE	Inserted into the main board (Pattern Antenna)
RATED SUPPLY VOLTAGE	Input: AC100-240V~50/60Hz, 1.4A Output: DC12.0V, 5A
NUMBER OF PCB LAYERS	8 Layers: Main Board 4 Layers: Connector Board, RCD Board, 2 Layers: RF Board, Sensor Board, Camera Board

2.2 Model Differences:

-. None

2.3 Related Submittal(s) / Grant(s)

-. Original

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 15.225

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2009
Radiated testing was performed at a distance of 3 m from EUT to the antenna.

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	KORECEN	FV100-M	N/A
Module Board	KORECEN	MTL-M	N/A
Sensor Board	KORECEN	1229	N/A
RF Board	KORECEN	FV100-A	N/A
Camera Board	KORECEN	MTL-D	N/A

3.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	FCC ID	Description	Connected to
-	-	-	-	-
-	-	-	-	-

3.3 Mode of operation during the test

-. To get a maximum radiated emission from the EUT, the EUT was continuously transmitted RF carrier and the card shall be used with the EUT and tested with together. And the ping testing mode was performed at the same time during the test.

3.4 Cable Description for the EUT

Ports Name	Shielded	Ferrite Bead	Metal Shell	Length (m)	Connected to
-	-	-	-	-	-

3.5 Equipment Modifications

N/A

3.6 Configuration of Test System

- Line Conducted Test:** The power of EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission tests were performed by using the procedure in ANSI C63.10: 2009 7.3.3 to determine the worse operating conditions.
- Radiated Emission Test:** Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2009 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. The radiated emissions measurements were performed on the 3 m, EMI chamber and open-field test site. The EUT was placed on the ground plane as typical applications. For frequencies from 150 kHz to 30 MHz measurements were made of the magnetic H field. The measuring antenna is an electrically screened loop antenna. The frequency spectrum from 30 MHz to 1 000 MHz was scanned and maximum emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

3.7 Antenna Requirement

For intentional device, according to §15.203 intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is a PCB pattern antenna in the EUT, so there is no consideration of replacement by the user.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Standby Mode	–
TX mode	X

4.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Standby Mode	–
TX mode	X

5. FINAL RESULT OF MEASUREMENT

5.1 Conducted Emission Test

Humidity Level : 48 % R.H.

Temperature: 19°C

Limits apply to : FCC CFR 47, PART 15 Section 15.207

Result : PASS

EUT Operating : Finger-vein

Date: March 17, 2015


Condition : Transmitting Mode

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Limits for conducted disturbance at the mains ports of class B

Frequency Range (MHz)	Class B Limit dB(μV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

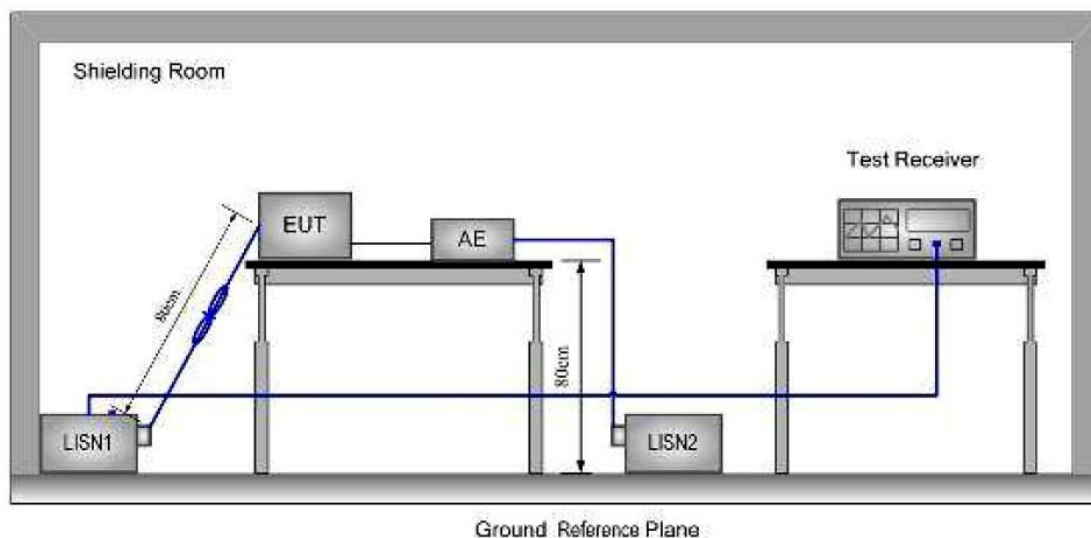Test
duration:


Confi

Test procedure:

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50/50μH + 5linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane.

And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.

4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

Measured values of the Conducted Emissions								
Frequency (MHz)	Correction Factor	Line	Quasi-Peak			Average		
			Limit [dBuV]	Reading [dBuV]	Result [dBuV]	Limit [dBuV]	Reading [dBuV]	Result [dBuV]
0.175	10.12	H	64.96	44.15	54.27	54.96	32.52	42.64
0.236	10.12	H	62.45	34.09	44.21	52.45	21.57	31.69
0.471	10.16	H	56.51	24.41	34.57	46.51	14.51	24.67
24.737	14.21	H	60.00	18.82	33.03	50.00	14.22	28.43
0.176	10.10	N	64.96	43.34	53.44	54.96	31.71	41.81
0.236	10.11	N	62.45	33.53	43.64	52.45	22.13	32.24
0.353	10.13	N	58.96	28.88	39.01	48.96	17.15	27.28
24.321	13.67	N	60.00	21.25	34.92	50.00	17.64	31.31


Line Conducted Emission Tabulated Data

Remark : "H": Hot Line, "N": Neutral Line.

See next page for an overview sweep performed with peak and average detector.




Scan Measurement Mode

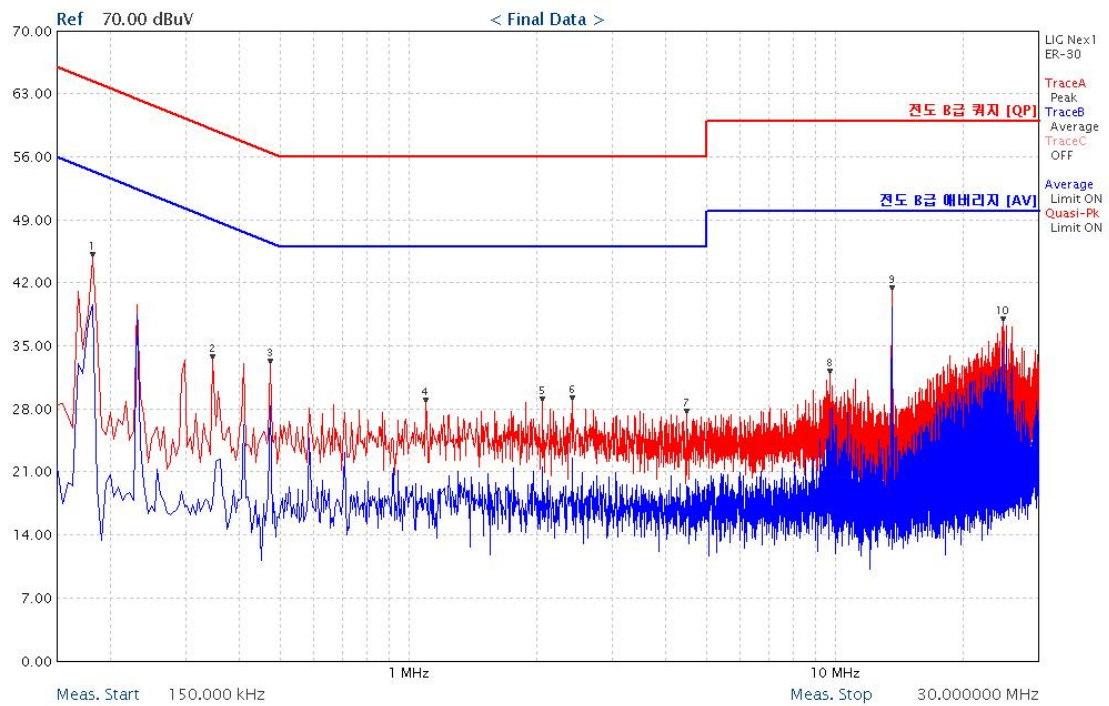

HOT LINE

Scan Measurement Mode

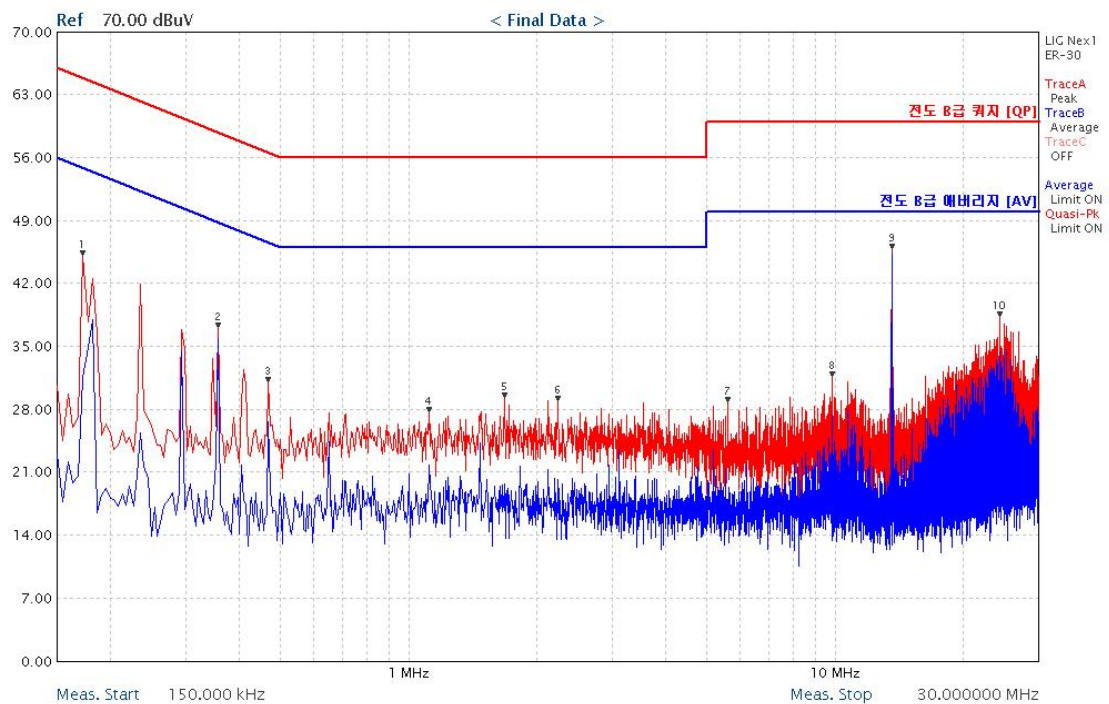

NEUTRAL LINE

5.2 Emission Test

5.2.1 Radiated Emissions

5.2.1.1 Regulation

the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

15.225(a): The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters, i.e. 124.0dB μ V/m @ 3 m.

15.225(b): Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters, i.e. 90.5dB μ V/m @ 3 m.

15.225(c): Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters, i.e. 80.5dB μ V/m @ 3 m.

15.225(d) :The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209

Out of band emissions shall not exceed:

Frequency (MHz)	Quasi-peak limits (dB μ V/m)
1.705 – 30.0	69.5
30 – 88	40
88 – 216	43.5
216 – 960	46
Above 960	54
At transitional frequencies the lower limit applies.	

5.2.1.2 Measurement Procedure

1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna. The center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:


For testing performed with the bi-log type antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

Detector Peak for pre-scan


Test Receiver test setup	Detector		
	9 kHz–150 kHz	150 kHz–30 MHz	30 MHz–1000 MHz
RBW	200 Hz	9 kHz	120 kHz
VBW	³ RBW	³ RBW	³ RBW
Sweep	auto	auto	auto
Detector function	QP	QP	AV
Trace	max hold	max hold	max hold

5.2.1.3 Test Configuration

1) 9 kHz to 30 MHz emissions:

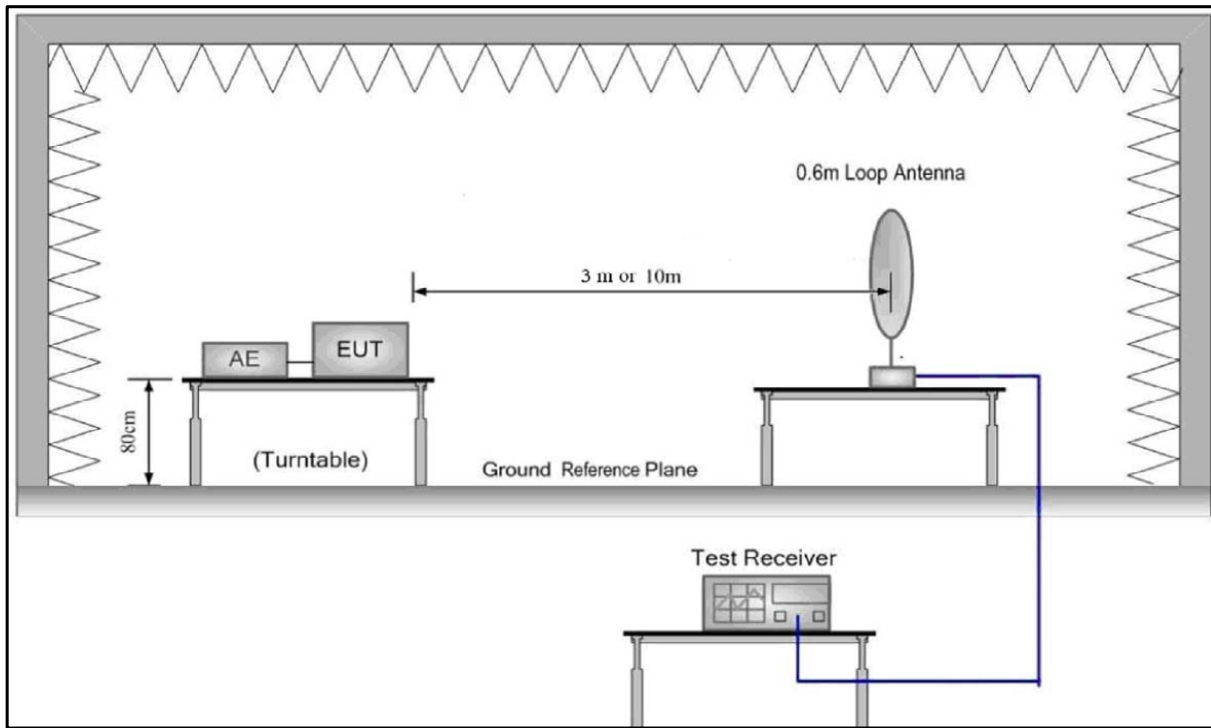

2) 30 MHz to 1 GHz emissions:

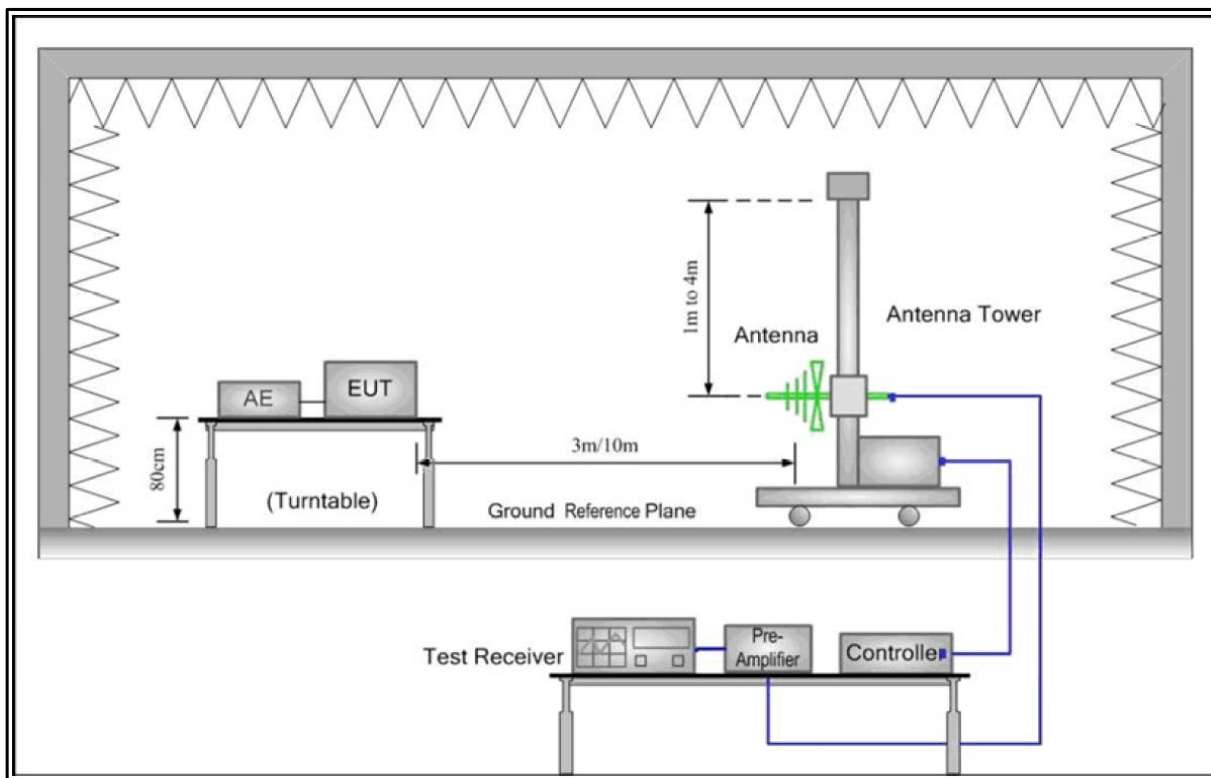


5.2.1.4 Test Configuration

1) Intentional Emission and Spectrum Mask

Test Frequency (MHz)	Quasi-Peak (dBμV/m)	Limits (dBμV/m)	Margin (dB)
13.1385	28.58	80.5	51.92
13.345	32.72	80.5	47.78
13.4262	34.59	90.5	55.91
13.5607	56.13	124	67.87
13.628	33.66	90.5	56.84
13.699	30.52	90.5	59.98
13.772	28.78	80.5	51.72

2) Spurious Emission: below 30 MHz

Test Frequency (MHz)	Detect Mode	Quasi-Peak (dBμV/m)	Limits (dBμV/m)	Margin (dB)
1.463	H	50.49	69.5	19.01
1.457	V	51.31	69.5	18.19
2.214	H	46.23	69.5	23.27
2.237	V	42.74	69.5	26.76
9.746	H	52.16	69.5	17.34
10.593	V	50.44	69.5	19.06
27.527	H	49.58	69.5	19.92
27.622	V	50.74	69.5	18.76

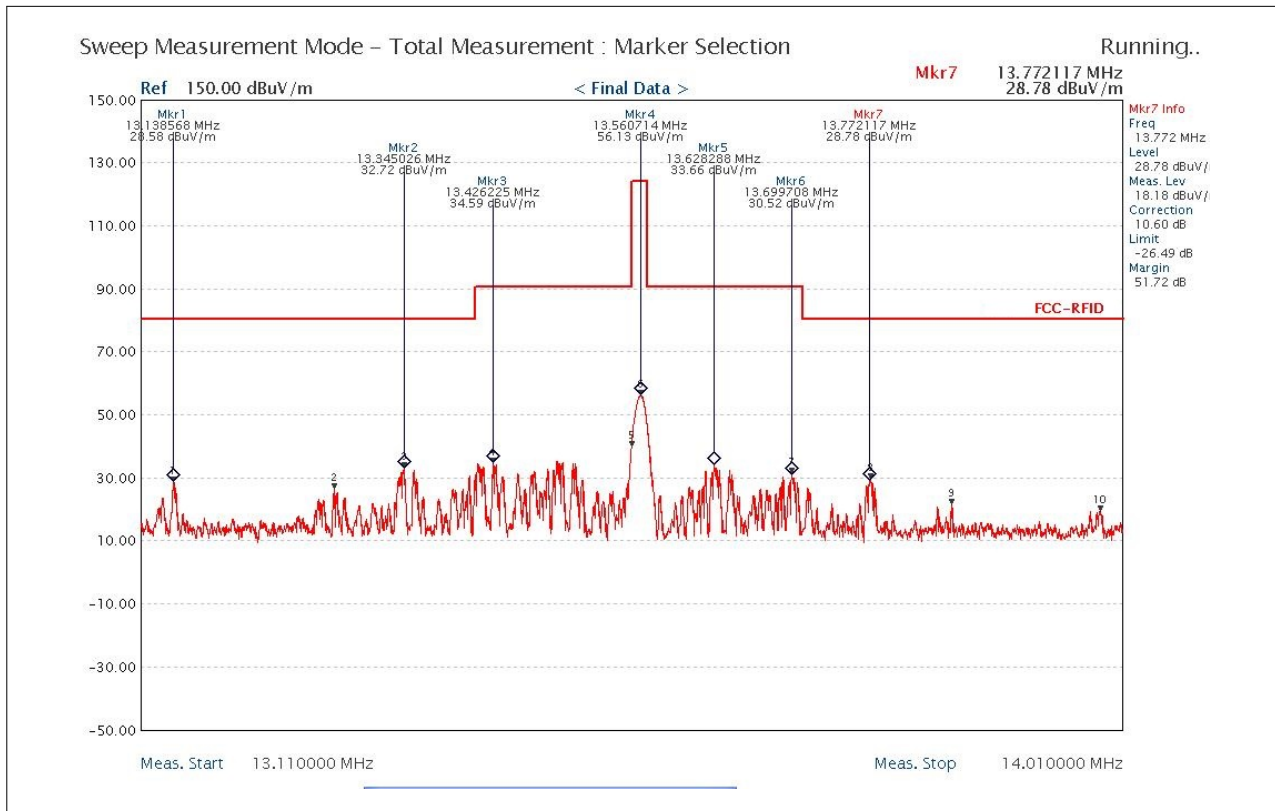

[Intentional Emission and Spectrum Mask]

3) Spurious Emission: above 30 MHz


The following test results were performed on the EUT.

Horizontal:

Peak scan

Level (dB μ V/m)

Sweep Measurement Mode

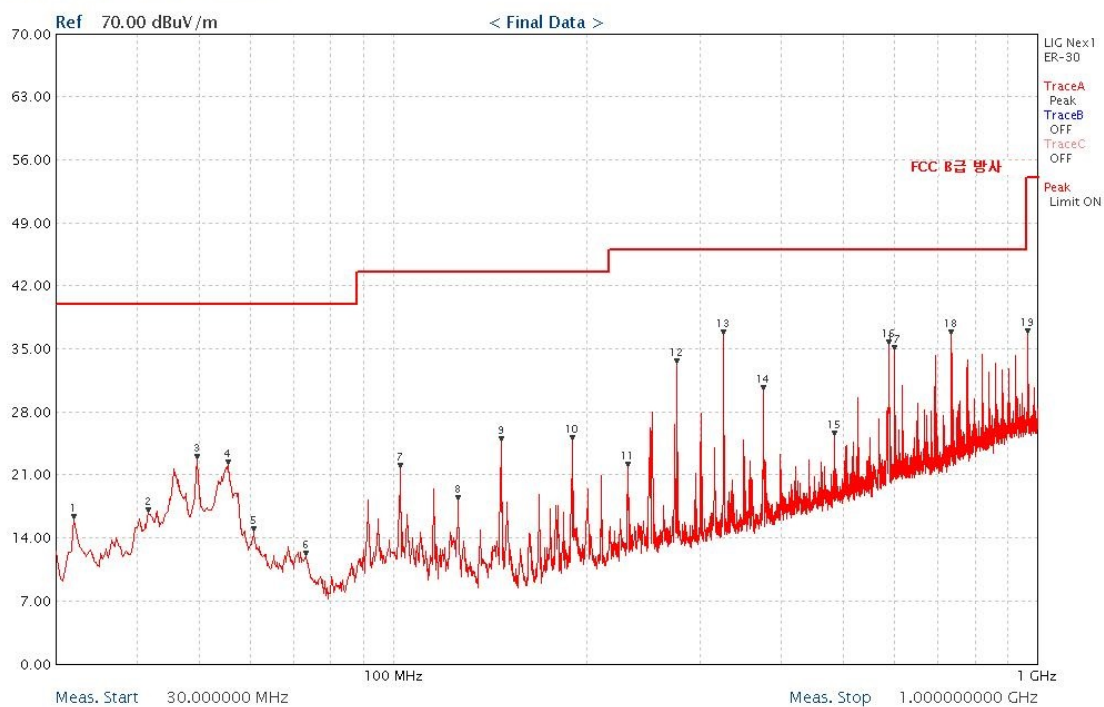


REDUCTION TABLE

Freq (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Reference
49.65	22.65	40.0	17.35	QK
147.00	24.62	43.5	18.88	QK
275.37	33.32	46.0	12.68	QK
325.58	36.52	46.0	9.48	QK
375.55	30.27	46.0	15.73	QK
587.88	35.42	46.0	10.58	QK
733.78	36.43	46.0	9.57	QK
966.13	36.62	54.0	17.38	QK

Vertical:
Peak scan
Level (dB μ V/m)

Sweep Measurement Mode

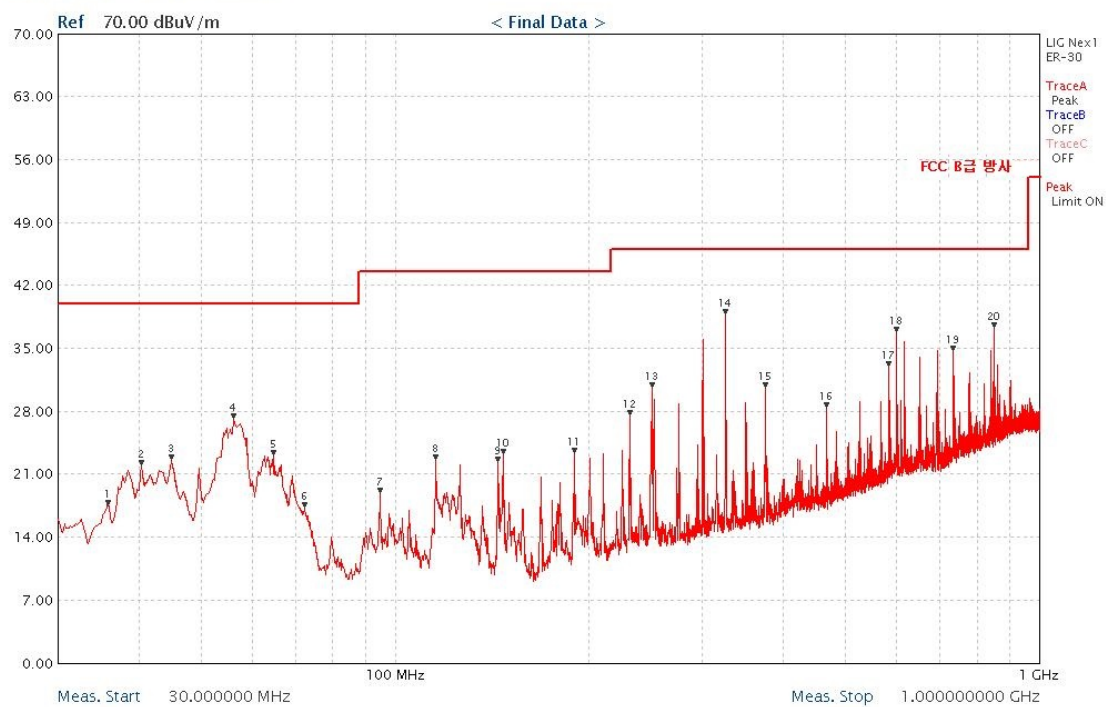

REDUCTION TABLE

Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reference
56.17	27.08	40.0	12.92	QK
250.62	30.60	46.0	15.40	QK
287.56	36.41	46.0	15.40	QK
325.58	38.68	46.0	7.32	QK
600.20	36.79	46.0	9.21	QK
848.41	37.25	46.0	8.75	QK

5.3 Occupied bandwidth

5.3.1 Regulation

FCC 47CFR15 – 15.225

15.215(c), Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

5.3.2 Measurement Procedure

The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector. Record the 20 dB bandwidth of the carrier.

The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector. The vertical Scale is set to 10dB per division. The horizontal scale is set to 20 kHz per division. Read the down 20dB bandwidth of the carrier.


Set the spectrum analyzer: Span = 15 kHz

Set the spectrum analyzer: RBW = 500 Hz, VBW = 500 Hz

Sweep = auto; Detector Function = Peak. Trace = Max Hold.

Mark the peak frequency and -20dB points bandwidth.

5.3.3 Test Results

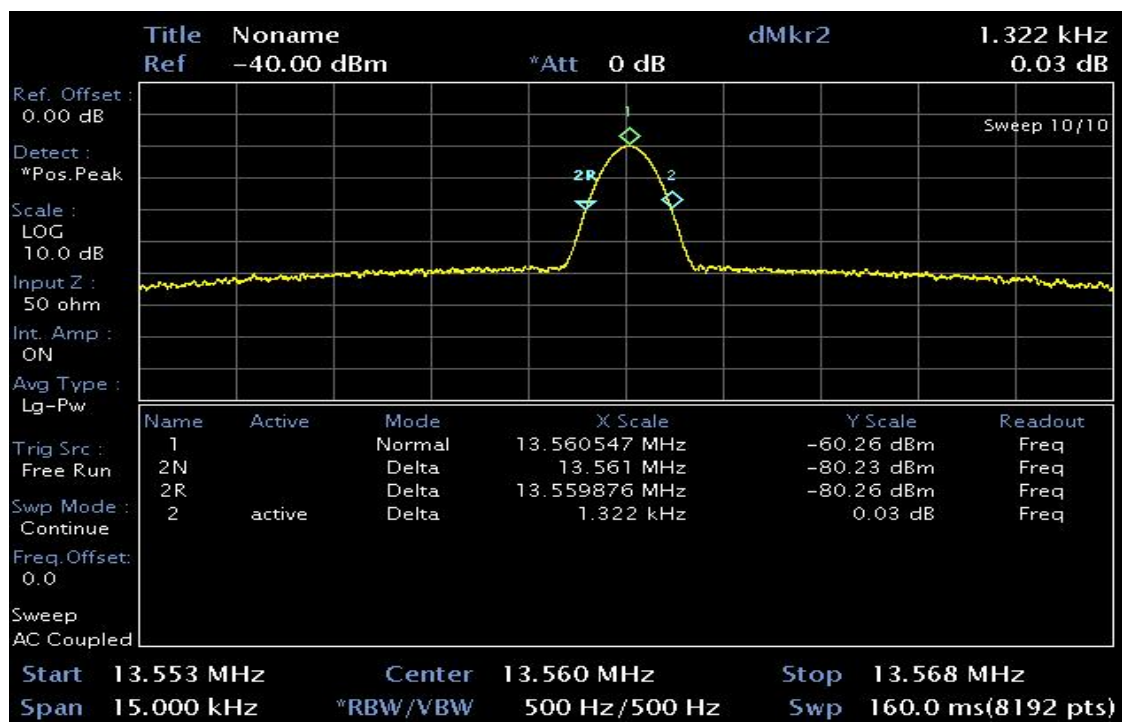

5.4 Frequency Stability

5.4.1 Regulation

FCC 47CFR15 – 15.225(e)

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery-operated equipment, the equipment tests shall be performed using a new battery.

5.4.2 Measurement Procedure

Frequency stability versus environmental temperature

1. Supply the EUT with nominal AC voltage.
2. Turn the EUT off, and place it inside an environmental temperature chamber. For devices that are normally operated continuously, the EUT may be energized while inside the test chamber. For devices that have oscillator heaters, energize only the heater circuit while the EUT is inside the chamber.
3. RF output was connected to a frequency counter or other frequency-measuring instrument via feed through attenuators.
4. Set the temperature control on the chamber to the highest specified EUT operating temperature, and allow the temperature inside the chamber to stabilize at the set temperature before starting frequency measurements.
5. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at startup and two, five, and ten minutes after the EUT is energized.
6. After all measurements have been made at the highest specified temperature turn the EUT off.
7. Repeat the above measurement process for the EUT with the test chamber set at the appropriate temperature.

Frequency Stability versus Input Voltage

1. At temperature $(20 \pm 5^{\circ}\text{C})$, supply the EUT with nominal AC voltage
2. Couple RF output to a frequency counter or other frequency-measuring instrument.
3. Turn the EUT on, and measure the EUT operating frequency at startup and two, five, and ten minutes after startup
4. Supply it with 85% of the nominal AC voltage and repeat above procedure.
5. Supply it with 115% of the nominal AC voltage and repeat above procedure.

5.4.3 Test Results:

PASS

TEST MODE : TX on

Table 6: Test Data, Frequency Tolerance of carrier signal									
Operating Frequency : 13.5610 MHz, LIMIT : within 1.3561 KHz (+/- 0.01% of the operating frequency)									
Environment Temperature [C]	Power Supplied [AC]	Carrier Frequency Measured with Time Elapsed							
		STARTUP		2 minutes		5 minutes		10 minutes	
		[MHz]	Err[KHz]	[MHz]	Err[KHz]	[MHz]	Err[KHz]	[MHz]	Err[KHz]
+50	120	13.5607	-0.0003	13.5607	-0.0003	13.5608	-0.0002	13.5608	-0.0002
+40	120	13.5607	-0.0003	13.5607	-0.0003	13.5608	-0.0002	13.5608	-0.0002
+30	120	13.5608	-0.0002	13.5608	-0.0002	13.5608	-0.0002	13.5608	-0.0002
+20	120	13.5608	-0.0002	13.5608	-0.0002	13.5608	-0.0002	13.5608	-0.0002
+10	120	13.5609	-0.0001	13.5609	-0.0001	13.5609	-0.0001	13.5609	-0.0001
0	120	13.5611	-0.0001	13.5611	-0.0001	13.5611	-0.0001	13.5611	-0.0001
-10	120	13.5613	+0.0003	13.5613	+0.0003	13.5612	+0.0002	13.5612	+0.0002
-20	120	13.5614	+0.0004	13.5604	+0.0004	13.5604	+0.0004	13.5603	+0.0003

Operating Frequency : 13.5610 MHz, LIMIT : within 1.3561 KHz (+/- 0.01% of the operating frequency)								
Power Supplied [AC]	Carrier Frequency Measured with Time Elapsed							
	STARTUP		2 minutes		5 minutes		10 minutes	
	[MHz]	Err[KHz]	[MHz]	Err[Hz]	[MHz]	Err[Hz]	[MHz]	Err[Hz]
85 %	13.5611	+0.0001	13.5611	+0.0001	13.5611	+0.0001	13.5611	+0.0001
100 %	13.5613	+0.0003	13.5613	+0.0003	13.5613	+0.0003	13.5613	+0.0003
115 %	13.5614	+0.0004	13.5614	+0.0004	13.5614	+0.0004	13.5614	+0.0004

Err[Hz] = Measured carrier frequency (MHz) – Reference Frequency (13.5610MHz)

6. LIST OF TEST EQUIPMENT

No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Data	Used equipment
1	EMI Test Receiver	LIG	ER-265	L1009B016	03/04/2015	03/04/2016	■
2	EMI Test Receiver	Rhode & Schwarz	ESIB7	100109	02/11/2015	02/11/2016	□
3	Bi-log Antenna	Schwarzbeck	VULB9163	164	09/15/2014	09/15/2016	■
4	Loop Antenna	EMCO	6502	9206-2769	02/13/2014	02/13/2016	■
5	Spectrum Analyzer	Agilent	E4440A	US45303130	01/26/2015	01/26/2016	■
6	Frequency Counter	HP	5347A	3009A02742	01/26/2015	01/26/2016	■
7	Attenuator	Agilent	8495B	3308A22485	01/26/2015	01/26/2016	□
8	Power Meter	Agilent	E4418B	MY405111655	01/26/2015	01/26/2016	□
9	Power Sensor	HP	8485A	2347A02746	01/26/2015	01/26/2016	□
10	RF Cable	Gigalane	SMS102-MF1 41-SMS102-1.0 M	PB1252301285	N/A	N/A	■
11	Signal Generator	HP	83630A	3420A00728	01/26/2015	01/26/2016	■
12	Oscilloscope	HP	54815A	US38380122	01/26/2015	01/26/2016	□
13	Pre Amplifier	Agilent	8449B	3008A02105	01/26/2015	01/26/2016	■
14	Signal Generator	Rhode & Schwarz	SML03	102330	01/26/2015	01/26/2016	■
15	POWER DIVIDER	Agilent	11636B	50309	01/26/2015	01/26/2016	□
16	Power Sensor	Agilent	8482B	3318A05111	01/26/2015	01/26/2016	□
17	Temp & Humidity Chamber	Seoksan Tech	SE-CT-02	S7400JD53406 18	01/26/2015	01/26/2016	■
18	Slidacs	Sunchang Electrics	5KV	N/A	01/26/2015	01/26/2016	■
19	Bandreject Filter	K&L Microwave	50140	555	01/26/2015	01/26/2016	□
20	Horn Antenna	SCHWARZBECK	BBHA9120A	346	01/27/2014	01/27/2016	□
21	Horn Antenna	A.H. SYSTEMS	SAS-572	269	09/07/2013	09/07/2015	□
22	DC Power Supply	Provice	PWS-5005D	205050	01/26/2015	01/26/2016	■
23	LISN	Rhode & Schwarz	ESH2-Z5	100064	12/01/2014	12/01/2015	■
24	Pulse Limiter	Rhode & Schwarz	ESH3-Z2	100137	11/12/2014	11/12/2015	■

APPENDIX

1. EUT photo

