

Appendix B**Test Information:**

Sample No.:	386E-4	Test Date:	2025/09/01
Test Site:	RF	Test Mode:	Transmitting
Tester:	Usain Ou	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.1	Relative Humidity: (%)	46	ATM Pressure: (kPa)	100.9
-------------------------------	------	---------------------------------------	----	------------------------------------	-------

Transmitter Conducted Output Power And ERP/EIRP



Band	Channel	Freq (MHz)	Connection Type	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP(Limit) (dBm)	Verdict
2	9538	1907.6	RMC	23.1	24.06	33.01	PASS
2	9538	1907.6	HSDPA Subtest-1	22.37	23.33	33.01	PASS
2	9538	1907.6	HSDPA Subtest-2	22.25	23.21	33.01	PASS
2	9538	1907.6	HSDPA Subtest-3	21.37	22.33	33.01	PASS
2	9538	1907.6	HSDPA Subtest-4	21.06	22.02	33.01	PASS
2	9538	1907.6	HSUPA Subtest-1	21.72	22.68	33.01	PASS
2	9538	1907.6	HSUPA Subtest-2	21.56	22.52	33.01	PASS
2	9538	1907.6	HSUPA Subtest-3	21.53	22.49	33.01	PASS
2	9538	1907.6	HSUPA Subtest-4	21.47	22.43	33.01	PASS
2	9538	1907.6	HSUPA Subtest-5	21.41	22.37	33.01	PASS
2	9538	1907.6	HSPA+	21.65	22.61	33.01	PASS
2	9400	1880.0	RMC	23.11	24.07	33.01	PASS
2	9400	1880.0	HSDPA Subtest-1	21.79	22.75	33.01	PASS
2	9400	1880.0	HSDPA Subtest-2	21.73	22.69	33.01	PASS
2	9400	1880.0	HSDPA Subtest-3	20.85	21.81	33.01	PASS
2	9400	1880.0	HSDPA Subtest-4	20.56	21.52	33.01	PASS
2	9400	1880.0	HSUPA Subtest-1	21.05	22.01	33.01	PASS
2	9400	1880.0	HSUPA Subtest-2	20.91	21.87	33.01	PASS
2	9400	1880.0	HSUPA Subtest-3	20.96	21.92	33.01	PASS
2	9400	1880.0	HSUPA Subtest-4	20.89	21.85	33.01	PASS
2	9400	1880.0	HSUPA Subtest-5	20.93	21.89	33.01	PASS
2	9400	1880.0	HSPA+	21.33	22.29	33.01	PASS
2	9262	1852.4	RMC	23.07	24.03	33.01	PASS
2	9262	1852.4	HSDPA Subtest-1	22.77	23.73	33.01	PASS
2	9262	1852.4	HSDPA Subtest-2	22.66	23.62	33.01	PASS
2	9262	1852.4	HSDPA Subtest-3	22.83	23.79	33.01	PASS
2	9262	1852.4	HSDPA Subtest-4	22.53	23.49	33.01	PASS
2	9262	1852.4	HSUPA Subtest-1	22.94	23.9	33.01	PASS
2	9262	1852.4	HSUPA Subtest-2	23.0	23.96	33.01	PASS
2	9262	1852.4	HSUPA Subtest-3	22.95	23.91	33.01	PASS
2	9262	1852.4	HSUPA Subtest-4	22.85	23.81	33.01	PASS
2	9262	1852.4	HSUPA Subtest-5	22.99	23.95	33.01	PASS
2	9262	1852.4	HSPA+	22.46	23.42	33.01	PASS
5	4233	846.6	RMC	22.51	17.5	38.45	PASS
5	4233	846.6	HSDPA Subtest-1	22.2	17.19	38.45	PASS
5	4233	846.6	HSDPA Subtest-2	21.37	16.36	38.45	PASS
5	4233	846.6	HSDPA Subtest-3	20.52	15.51	38.45	PASS
5	4233	846.6	HSDPA Subtest-4	20.07	15.06	38.45	PASS
5	4233	846.6	HSUPA Subtest-1	21.4	16.39	38.45	PASS
5	4233	846.6	HSUPA Subtest-2	21.34	16.33	38.45	PASS
5	4233	846.6	HSUPA Subtest-3	21.34	16.33	38.45	PASS
5	4233	846.6	HSUPA Subtest-4	21.23	16.22	38.45	PASS
5	4233	846.6	HSUPA Subtest-5	21.33	16.32	38.45	PASS
5	4233	846.6	HSPA+	21.37	16.36	38.45	PASS
5	4182	836.4	RMC	22.8	17.79	38.45	PASS
5	4182	836.4	HSDPA Subtest-1	22.41	17.4	38.45	PASS
5	4182	836.4	HSDPA Subtest-2	21.52	16.51	38.45	PASS
5	4182	836.4	HSDPA Subtest-3	20.66	15.65	38.45	PASS
5	4182	836.4	HSDPA Subtest-4	20.23	15.22	38.45	PASS
5	4182	836.4	HSUPA Subtest-1	21.57	16.56	38.45	PASS
5	4182	836.4	HSUPA Subtest-2	21.5	16.49	38.45	PASS
5	4182	836.4	HSUPA Subtest-3	21.46	16.45	38.45	PASS
5	4182	836.4	HSUPA Subtest-4	21.38	16.37	38.45	PASS
5	4182	836.4	HSUPA Subtest-5	21.39	16.38	38.45	PASS
5	4182	836.4	HSPA+	21.52	16.51	38.45	PASS
5	4132	826.4	RMC	22.5	17.49	38.45	PASS
5	4132	826.4	HSDPA Subtest-1	22.47	17.46	38.45	PASS
5	4132	826.4	HSDPA Subtest-2	21.67	16.66	38.45	PASS
5	4132	826.4	HSDPA Subtest-3	20.8	15.79	38.45	PASS
5	4132	826.4	HSDPA Subtest-4	20.21	15.2	38.45	PASS
5	4132	826.4	HSUPA Subtest-1	21.69	16.68	38.45	PASS
5	4132	826.4	HSUPA Subtest-2	21.6	16.59	38.45	PASS
5	4132	826.4	HSUPA Subtest-3	21.68	16.67	38.45	PASS
5	4132	826.4	HSUPA Subtest-4	21.57	16.56	38.45	PASS
5	4132	826.4	HSUPA Subtest-5	21.65	16.64	38.45	PASS
5	4132	826.4	HSPA+	21.63	16.62	38.45	PASS

Peak to Average Ratio


Band	Channel	Freq (MHz)	Result (dB)	Limit (dB)	Verdict
2	9538	1907.6	2.90	13	PASS
2	9400	1880.0	2.87	13	PASS
2	9262	1852.4	2.90	13	PASS
5	4233	846.6	3.13	13	PASS
5	4182	836.4	3.07	13	PASS
5	4132	826.4	3.13	13	PASS

Occupied Bandwidth


Band	Channel	Freq (MHz)	OBW (MHz)	26dB BW (MHz)	Verdict
2	9400	1880.0	4.1968	4.660	PASS
5	4182	836.4	4.1534	4.689	PASS

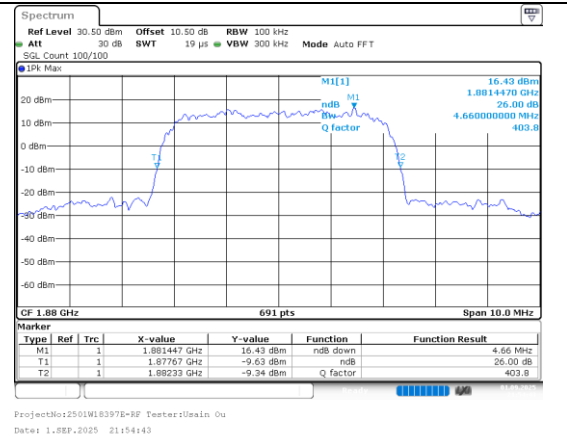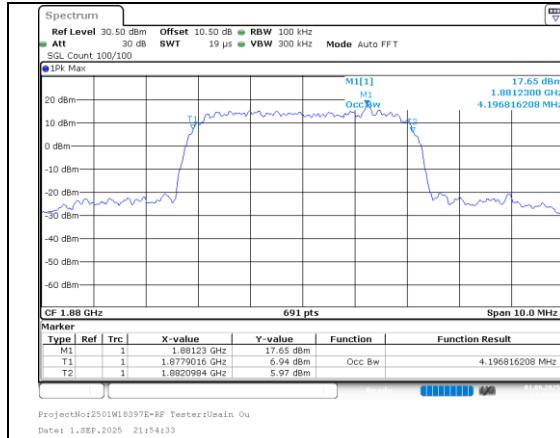

99%OBW
 Band 2 4.2MHz/1880.0/Mid

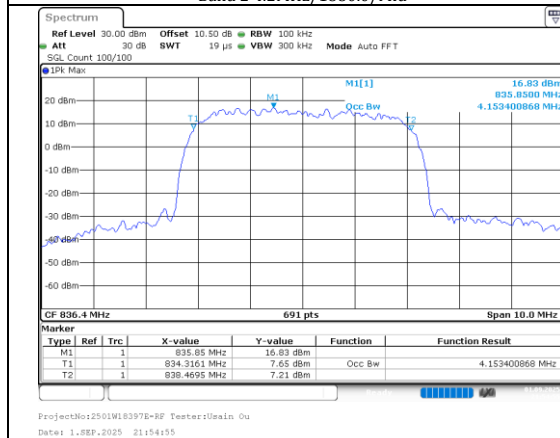

26%OBW
 Band 2 4.2MHz/1880.0/Mid


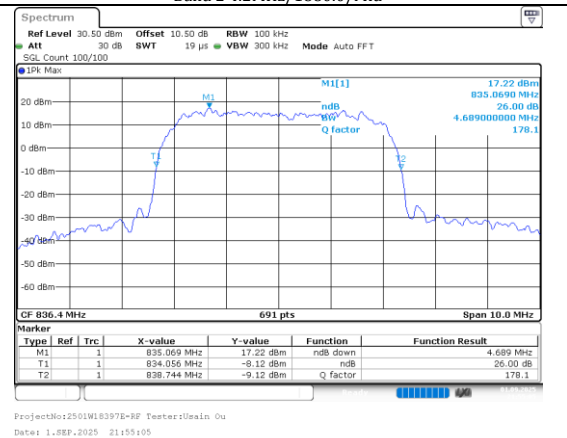


99%OBW
 Band 5 4.2MHz/836.4/Mid


26%OBW
 Band 5 4.2MHz/836.4/Mid

Conducted Spurious Emissions

Band	Channel	Freq (MHz)	StartFreq (MHz)	StopFreq (MHz)	Result (dBm)	Limit (dBm)	Verdict
2	9538	1907.6	30.0	1000.0	-46.7	-13	PASS
2	9538	1907.6	1000.0	20000.0	-25.92	-13	PASS
2	9400	1880.0	30.0	1000.0	-46.55	-13	PASS
2	9400	1880.0	1000.0	20000.0	-26.75	-13	PASS
2	9262	1852.4	30.0	1000.0	-46.14	-13	PASS
2	9262	1852.4	1000.0	20000.0	-26.36	-13	PASS
5	4233	846.6	30.0	1000.0	-42.12	-13	PASS
5	4233	846.6	1000.0	10000.0	-37.73	-13	PASS
5	4182	836.4	30.0	1000.0	-40.84	-13	PASS
5	4182	836.4	1000.0	10000.0	-36.51	-13	PASS
5	4132	826.4	30.0	1000.0	-41.74	-13	PASS
5	4132	826.4	1000.0	10000.0	-35.07	-13	PASS

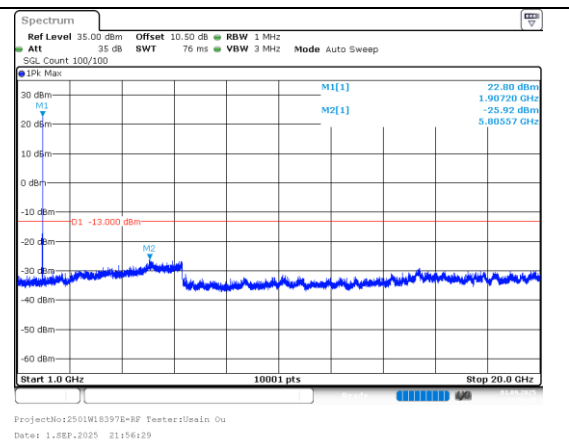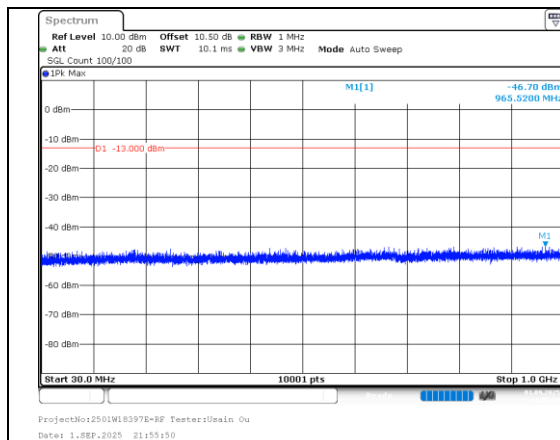


30.0MHz-1000.0MHz
Band 2 5MHz/1907.6/High

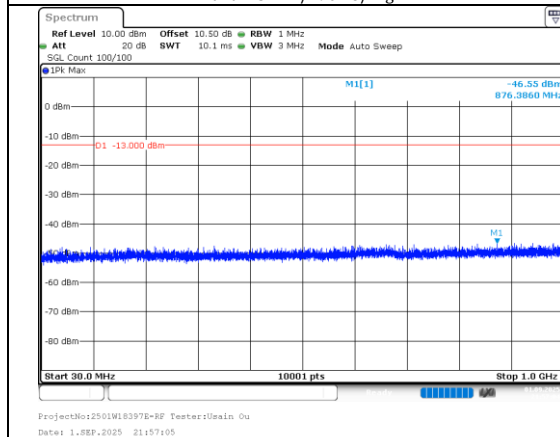



30.0MHz-1000.0MHz
Band 2 5MHz/1880.0/Mid

1000.0MHz-20000.0MHz
Band 2 5MHz/1907.6/High

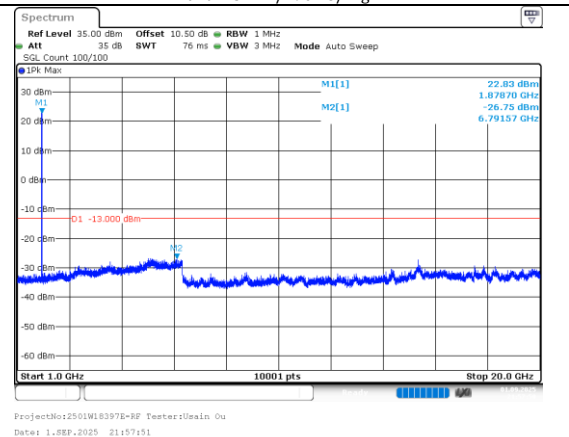

1000.0MHz-20000.0MHz
Band 2 5MHz/1880.0/Mid

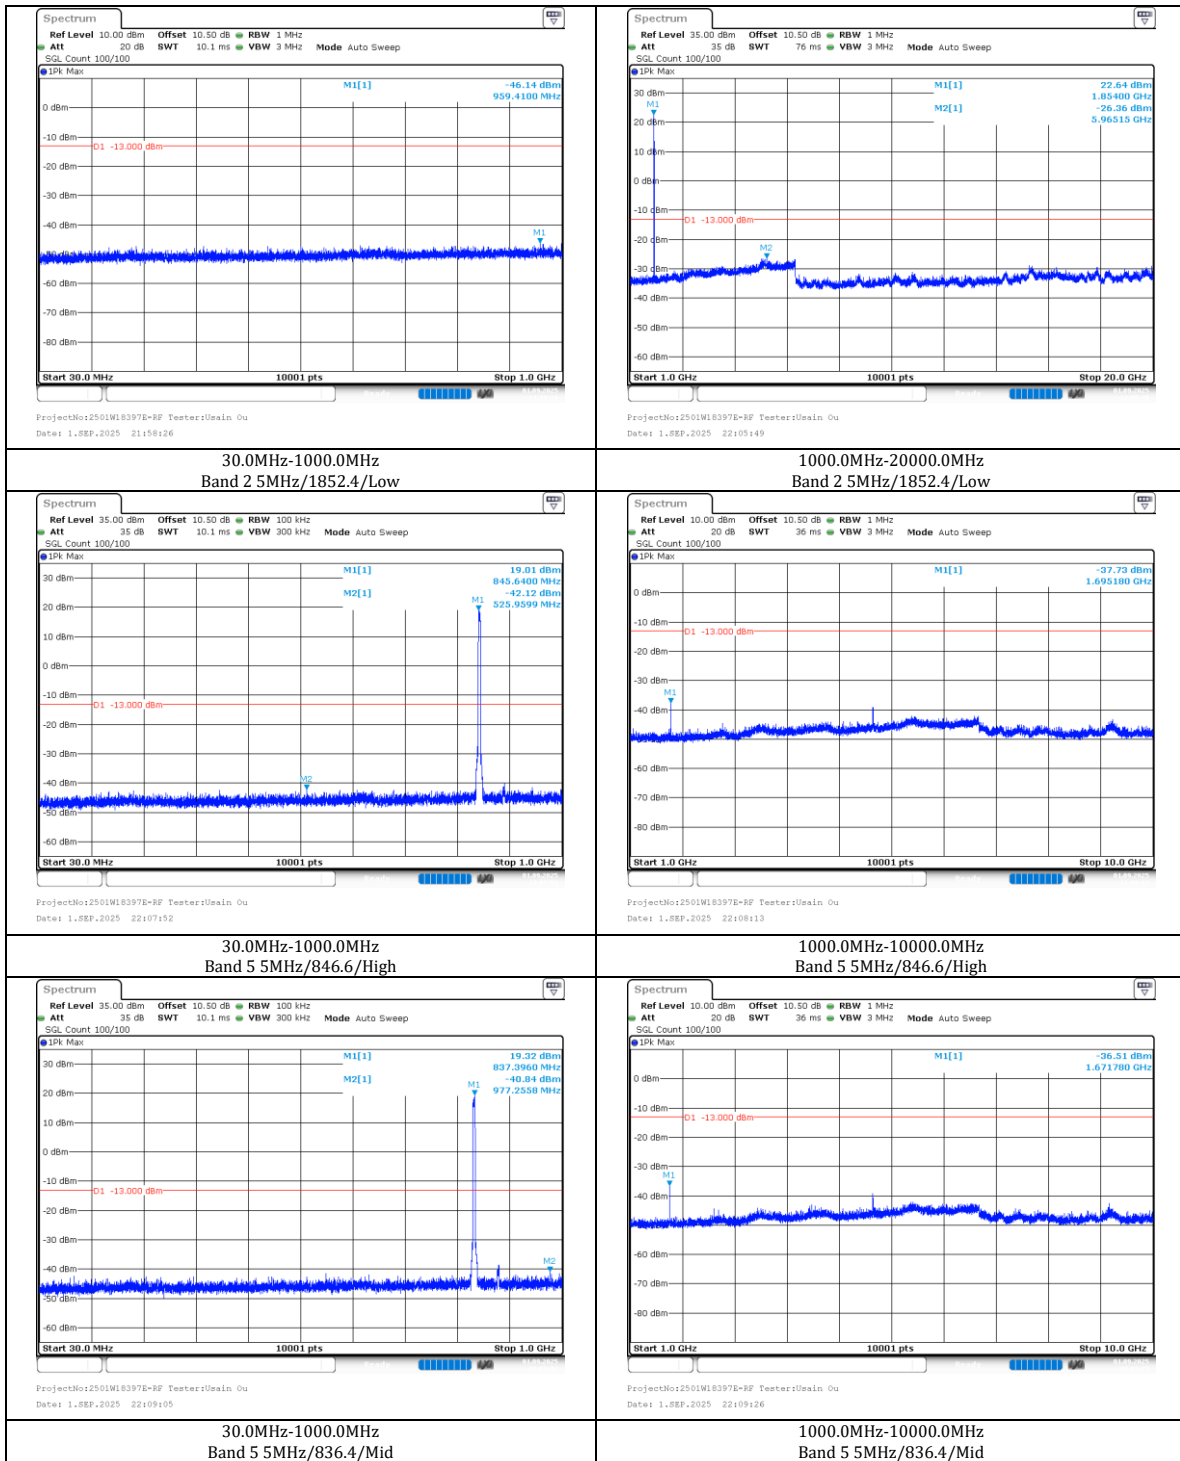

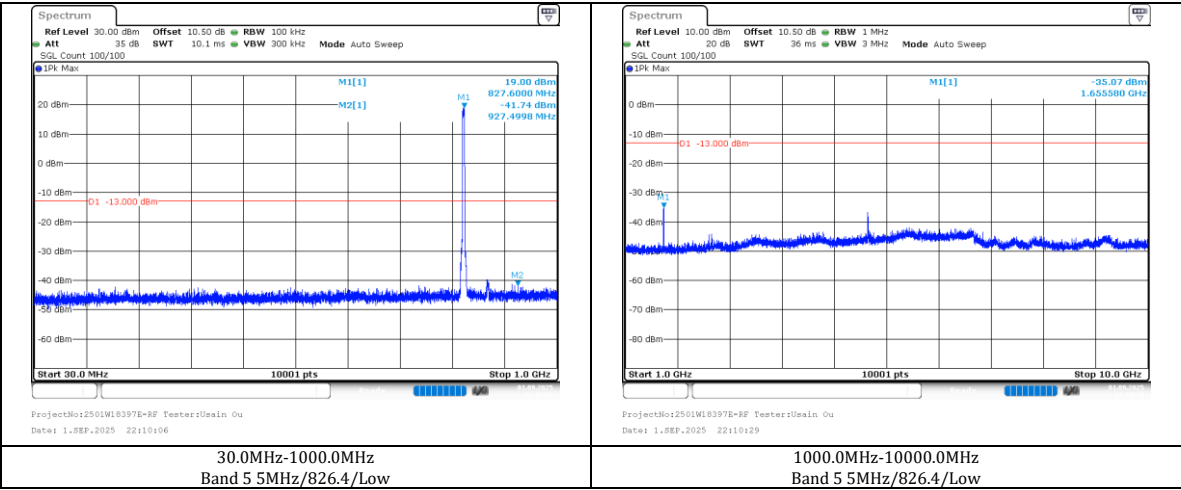

Frequency Stability Error

Band	Channel	Freq (MHz)	Deviation (Hz)	Deviation (ppm)	Limit(ppm)	Verdict	Environment
5	4233	846.6	1.25	0.00148	± 2.5	PASS	20°C/4.2V
5	4233	846.6	-3.39	-0.00400	± 2.5	PASS	20°C/3.4V
5	4233	846.6	-5.07	-0.00599	± 2.5	PASS	50°C/3.7V
5	4233	846.6	1.04	0.00123	± 2.5	PASS	40°C/3.7V
5	4233	846.6	-3.67	-0.00433	± 2.5	PASS	30°C/3.7V
5	4233	846.6	4.81	0.00568	± 2.5	PASS	20°C/3.7V
5	4233	846.6	5.32	0.00628	± 2.5	PASS	10°C/3.7V
5	4233	846.6	0.14	0.00017	± 2.5	PASS	0°C/3.7V
5	4233	846.6	7.37	0.00871	± 2.5	PASS	-10°C/3.7V
5	4233	846.6	6.22	0.00735	± 2.5	PASS	-20°C/3.7V
5	4233	846.6	-0.12	-0.00014	± 2.5	PASS	-30°C/3.7V
5	4182	836.4	2.37	0.00283	± 2.5	PASS	20°C/4.2V
5	4182	836.4	-4.18	-0.00500	± 2.5	PASS	20°C/3.4V
5	4182	836.4	1.24	0.00148	± 2.5	PASS	50°C/3.7V
5	4182	836.4	3.65	0.00436	± 2.5	PASS	40°C/3.7V
5	4182	836.4	-0.52	-0.00062	± 2.5	PASS	30°C/3.7V
5	4182	836.4	2.35	0.00281	± 2.5	PASS	20°C/3.7V
5	4182	836.4	2.63	0.00314	± 2.5	PASS	10°C/3.7V
5	4182	836.4	-3.92	-0.00469	± 2.5	PASS	0°C/3.7V
5	4182	836.4	5.57	0.00666	± 2.5	PASS	-10°C/3.7V
5	4182	836.4	1.07	0.00128	± 2.5	PASS	-20°C/3.7V
5	4182	836.4	-0.90	-0.00108	± 2.5	PASS	-30°C/3.7V
5	4132	826.4	-8.67	-0.01049	± 2.5	PASS	20°C/4.2V
5	4132	826.4	7.56	0.00915	± 2.5	PASS	20°C/3.4V
5	4132	826.4	1.83	0.00221	± 2.5	PASS	50°C/3.7V
5	4132	826.4	-0.11	-0.00013	± 2.5	PASS	40°C/3.7V
5	4132	826.4	3.73	0.00451	± 2.5	PASS	30°C/3.7V
5	4132	826.4	4.18	0.00506	± 2.5	PASS	20°C/3.7V
5	4132	826.4	-5.72	-0.00692	± 2.5	PASS	10°C/3.7V
5	4132	826.4	0.92	0.00111	± 2.5	PASS	0°C/3.7V
5	4132	826.4	-3.10	-0.00375	± 2.5	PASS	-10°C/3.7V
5	4132	826.4	0.65	0.00079	± 2.5	PASS	-20°C/3.7V
5	4132	826.4	-3.60	-0.00436	± 2.5	PASS	-30°C/3.7V

Frequency Stability Range

Band	Channel (Low/High)	Freq (MHz)	Lower Edge (MHz) (Result)	Limit (1850MHz)	Upper Edge (MHz) (Result)	Limit (1910MHz)	Environment
2	9262/9538	1852.4/1907.6	1850.176	1850.000	1909.648	1910.000	20°C/4.2V
2	9262/9538	1852.4/1907.6	1850.023	1850.000	1909.672	1910.000	20°C/3.4V
2	9262/9538	1852.4/1907.6	1850.111	1850.000	1909.718	1910.000	50°C/3.7V
2	9262/9538	1852.4/1907.6	1850.163	1850.000	1909.711	1910.000	40°C/3.7V
2	9262/9538	1852.4/1907.6	1850.039	1850.000	1909.694	1910.000	30°C/3.7V
2	9262/9538	1852.4/1907.6	1850.167	1850.000	1909.701	1910.000	20°C/3.7V
2	9262/9538	1852.4/1907.6	1850.120	1850.000	1909.683	1910.000	10°C/3.7V
2	9262/9538	1852.4/1907.6	1850.066	1850.000	1909.681	1910.000	0°C/3.7V
2	9262/9538	1852.4/1907.6	1850.090	1850.000	1909.674	1910.000	-10°C/3.7V
2	9262/9538	1852.4/1907.6	1850.101	1850.000	1909.690	1910.000	-20°C/3.7V
2	9262/9538	1852.4/1907.6	1850.130	1850.000	1909.610	1910.000	-30°C/3.7V