

FCC PART 15.247

TEST REPORT

For

Hallmark Global LTD. dba HEXA.

Suite 1801 1 Yonge Street, Toronto Ontario, Canada

FCC ID: 2AEJLSRING8

Report Type: Original Report	Product Type: Windows tablet PC
Test Engineer: Scott Lee	<i>Scott Lee</i>
Report Number: RSZ151019002-00C	
Report Date: 2015-11-11	
Reviewed By: RF Engineer	<i>Jimmy Xiao</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE	10
APPLICABLE STANDARD	10
FCC §15.203 - ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
MEASUREMENT UNCERTAINTY.....	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
TEST EQUIPMENT LIST AND DETAILS.....	13
CORRECTED FACTOR & MARGIN CALCULATION	13
TEST RESULTS SUMMARY	14
TEST DATA	14
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	19
APPLICABLE STANDARD	19
MEASUREMENT UNCERTAINTY.....	19
EUT SETUP	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
TEST EQUIPMENT LIST AND DETAILS.....	21
CORRECTED AMPLITUDE & MARGIN CALCULATION	21
TEST RESULTS SUMMARY	21
TEST DATA	22
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST DATA	32
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	42

APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST EQUIPMENT LIST AND DETAILS.....	42
TEST DATA	43
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST EQUIPMENT LIST AND DETAILS.....	44
TEST DATA	45
FCC §15.247(e) - POWER SPECTRAL DENSITY	51
APPLICABLE STANDARD	51
TEST PROCEDURE	51
TEST EQUIPMENT LIST AND DETAILS.....	51
TEST DATA	52
PRODUCT SIMILARITY DECLARATION LETTER.....	61

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Hallmark Global LTD. dba HEXA.* 's product, model number: *HEXA Spring 8 (FCC ID: 2AEJLSPRING8)* or the "EUT" in this report was a *Windows tablet PC*, which was measured approximately: 204 mm (L) × 119 mm (W) × 10 mm (H), rated with input voltage: DC 3.7 V rechargeable Li-ion battery or DC5.0 V from adapter.

Adapter Information:

Model: THX-050200KE

Input: AC100-240V~50/60Hz, 0.65A MAX

Output: DC 5V, 2000mA

Note: The series product, model HEXA and HEXA Spring 8, they are electrically identical and the difference between them is only the model number. Model HEXA Spring 8 was selected for fully testing, which was explained in the attached product similarity declaration letter.

**All measurement and test data in this report was gathered from production sample serial number: 1506819 (Assigned by Shenzhen BACL). The EUT supplied by the applicant was received on 2015-10-19.*

Objective

This report is prepared on behalf of *Hallmark Global LTD. dba HEXA.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP and Part 15.247 DSS (BT3.0) submissions with FCC ID: 2AEJLSPRING8.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with RF radiated emission is 5.91 dB for 30MHz-1GHz.and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2013. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.10-2013.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g and 802.11n-HT20 mode, 13 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	/
6	2437	13	/
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40 mode, 9 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2447
2	2427	7	2452
3	2432	8	/
4	2437	9	/
5	2442	/	/

EUT was tested with Channel 1, 4 and 7.

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

REALTEK

The test was performed under:

802.11b: Data rate: 1 Mbps, Power level: 31

802.11g: Data rate: 6 Mbps, Power level: 43

802.11n-HT20: Data rate: MCS0, Power level: 43


802.11n-HT40: Data rate: MCS0, Power level: 45

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Un-detachable DC Cable	1.0	EUT	Adapter
Un-shielding Detachable Earphone Cable	1.2	EUT	Earphone

Block Diagram of Test Setup

For conducted emission

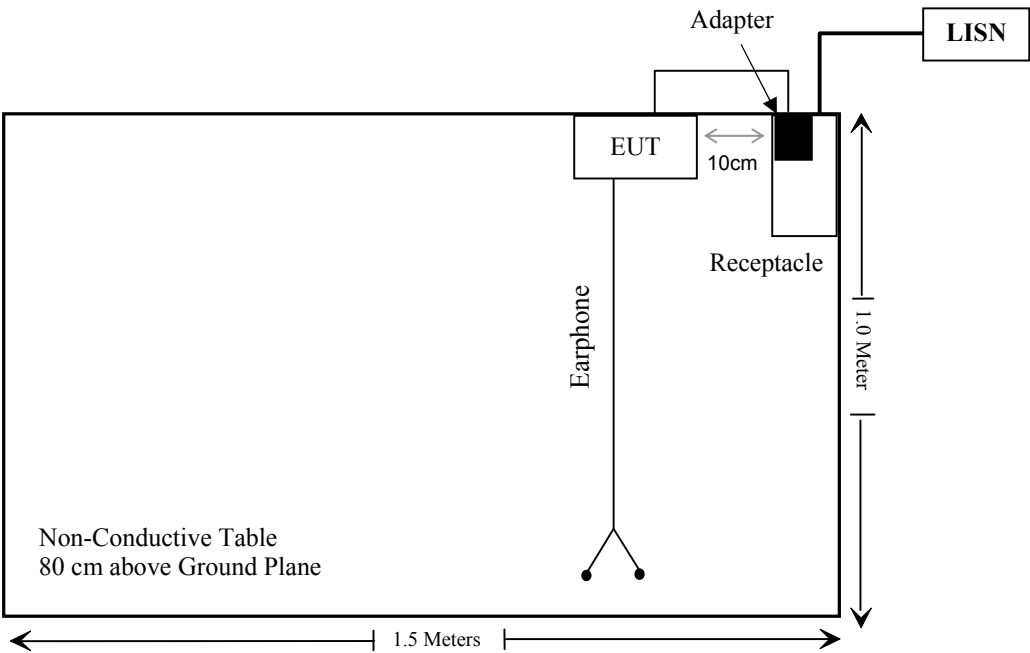

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

For worst case:

Mode	Frequency (MHz)	P (dBm)	P (mW)	Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
BLE	2480	4.70	2.95	5	0.93	3.0	Yes
WIFI	2462	9.60	8.99	5	2.86	3.0	Yes

Result: No SAR test is required

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an internal antenna arrangement, which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements may be receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Port	Expanded Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2015-06-03	2016-06-03
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2014-12-01	2015-12-01
Rohde & Schwarz	LISN	ESH2-Z5	892107/021	2015-06-09	2016-06-09
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2015-05-14	2016-05-13
Rohde & Schwarz	CE Test software	EMC 32	V8.53	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, the worst margin reading as below:

9.1 dB at 0.150000 MHz in the Neutral conducted for WIFI Mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	24 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Scott Lee on 2015-10-21.

EUT operation mode: Transmitting & Charging

WIFI Mode:**AC 120V/60 Hz, Line**


EMI Auto Test L

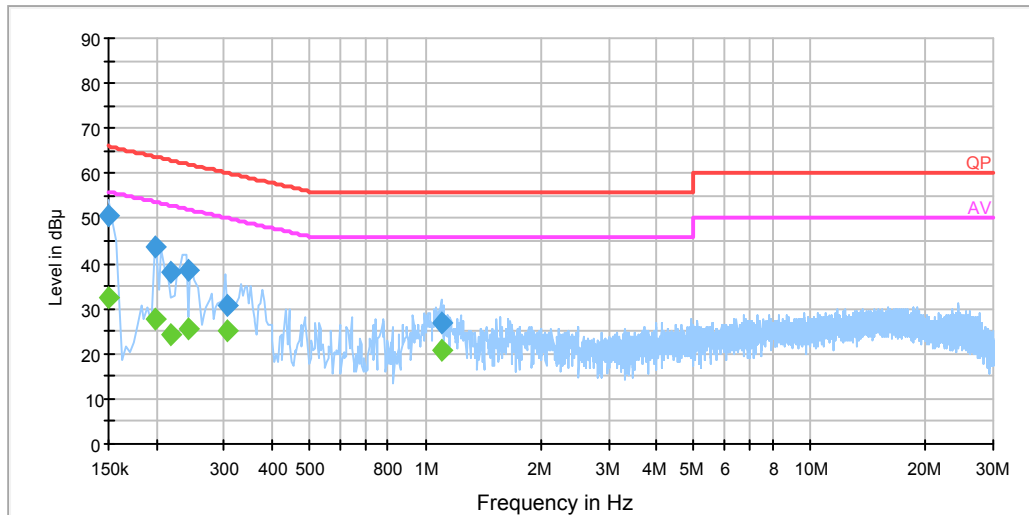

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.150000	50.7	20.0	66.0	15.3	QP
0.150000	32.3	20.0	56.0	23.7	Ave.
0.197500	43.5	20.0	63.7	20.2	QP
0.197500	27.7	20.0	53.7	26.0	Ave.
0.218501	38.1	20.0	62.9	24.8	QP
0.218501	24.0	20.0	52.9	28.9	Ave.
0.242501	38.7	20.0	62.0	23.3	QP
0.242501	25.6	20.0	52.0	26.4	Ave.
0.305470	30.7	19.9	60.1	29.4	QP
0.305470	25.1	19.9	50.1	25.0	Ave.
1.101530	26.9	20.0	56.0	29.1	QP
1.101530	20.7	20.0	46.0	25.3	Ave.

AC 120V/60 Hz, Neutral


EMI Auto Test N

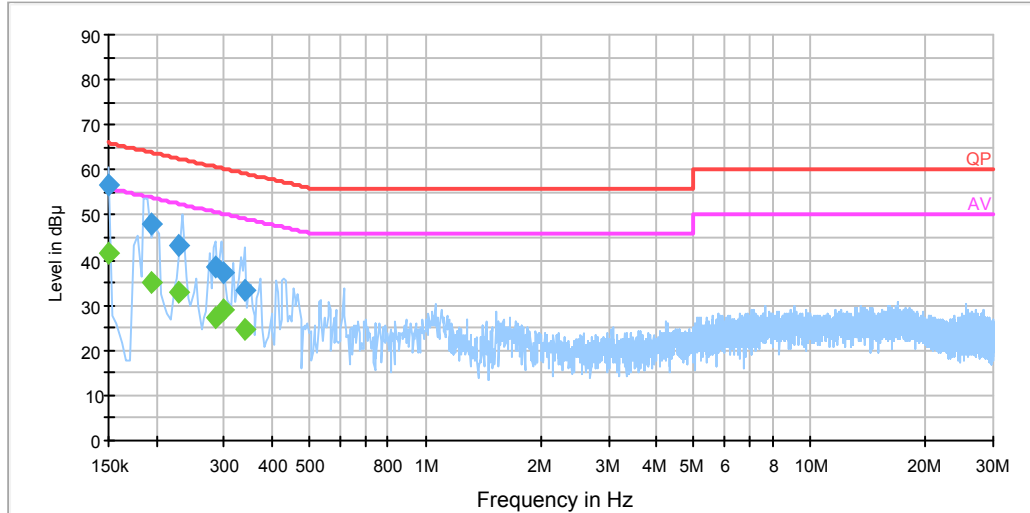

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.150000	56.9	20.0	66.0	9.1	QP
0.150000	41.4	20.0	56.0	14.6	Ave.
0.193500	48.2	20.0	63.9	15.7	QP
0.193500	34.9	20.0	53.9	19.0	Ave.
0.229500	43.2	20.0	62.5	19.2	QP
0.229500	33.0	20.0	52.5	19.5	Ave.
0.286500	38.3	19.9	60.6	22.3	QP
0.286500	27.0	19.9	50.6	23.6	Ave.
0.297500	37.3	19.9	60.3	23.0	QP
0.297500	29.1	19.9	50.3	21.2	Ave.
0.340930	33.1	19.9	59.2	26.1	QP
0.340930	24.8	19.9	49.2	24.3	Ave.

BLE Mode:**AC 120 V, 60 Hz, Line:**


EMI Auto Test L

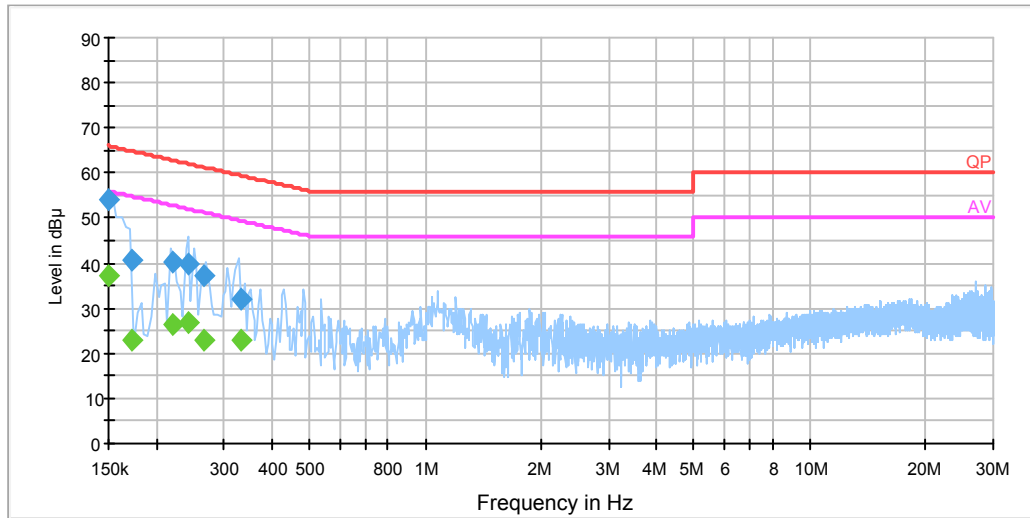

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.150000	54.2	20.0	66.0	11.8	QP
0.150000	37.2	20.0	56.0	18.8	Ave.
0.173500	40.9	20.0	64.8	23.9	QP
0.173500	22.7	20.0	54.8	32.1	Ave.
0.221500	40.1	20.0	62.8	22.7	QP
0.221500	26.5	20.0	52.8	26.3	Ave.
0.241500	40.0	20.0	62.0	22.0	QP
0.241500	26.9	20.0	52.0	25.1	Ave.
0.265500	37.0	19.9	61.3	24.2	QP
0.265500	22.8	19.9	51.3	28.5	Ave.
0.330890	32.1	19.9	59.4	27.3	QP
0.330890	23.0	19.9	49.4	26.4	Ave.

AC 120V, 60 Hz, Neutral:

EMI Auto Test N

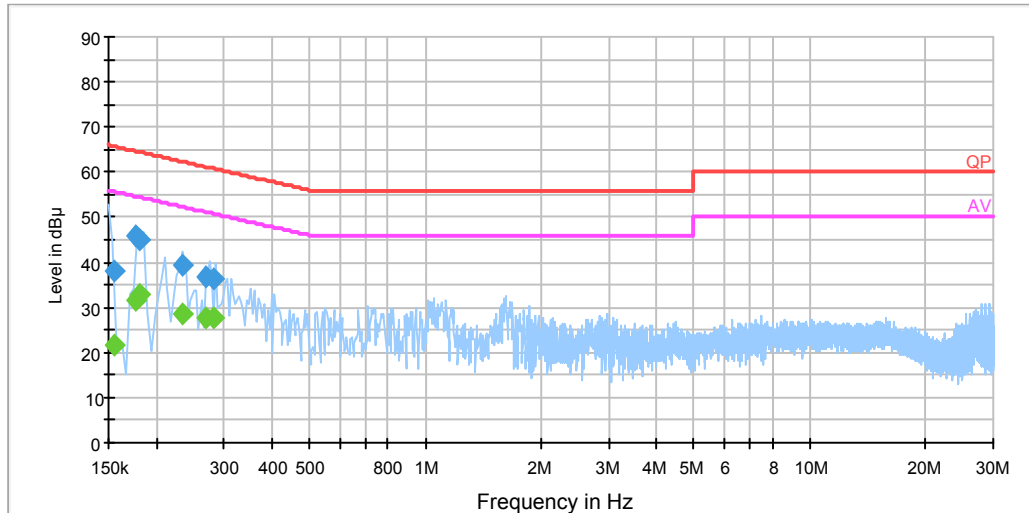

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.154500	38.1	20.0	65.8	27.7	QP
0.154500	21.6	20.0	55.8	34.2	Ave.
0.177500	45.8	20.0	64.6	18.8	QP
0.177500	31.4	20.0	54.6	23.2	Ave.
0.181500	45.2	20.0	64.4	19.2	QP
0.181500	33.0	20.0	54.4	21.4	Ave.
0.233500	39.3	20.0	62.3	23.0	QP
0.233500	28.4	20.0	52.3	23.9	Ave.
0.269500	36.9	19.9	61.1	24.2	QP
0.269500	27.7	19.9	51.1	23.4	Ave.
0.281500	36.2	19.9	60.8	24.6	QP
0.281500	27.5	19.9	50.8	23.3	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement at antenna port. And the uncertainty will not be taken into consideration for the test data recorded in the report

EUT Setup

Below 1 GHz:

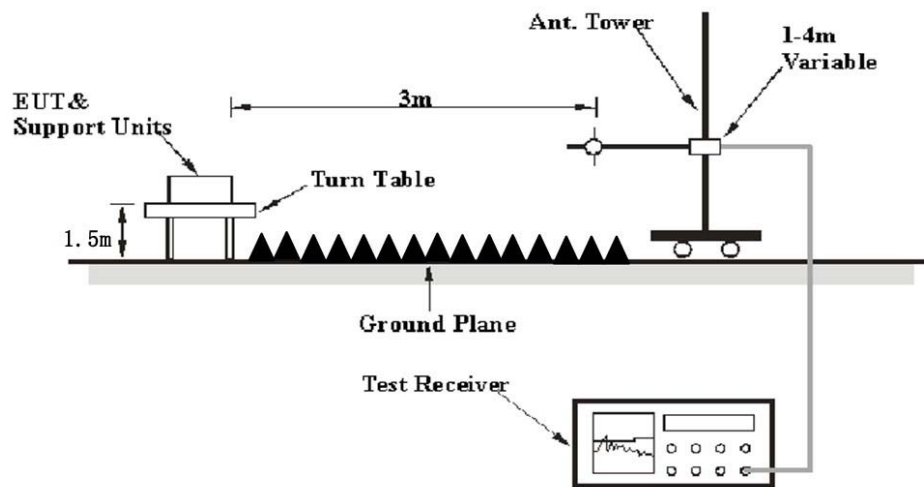

Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447E	1937A01046	2015-05-06	2016-05-05
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-11-03	2016-11-03
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
Mini	Amplifier	ZVA-183-S+	5969001149	2015-04-23	2016-04-22
A.H. System	Horn Antenna	SAS-200/571	135	2015-02-10	2016-02-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
TDK	Chamber	Chamber A	2#	2015-10-15	2018-10-15
TDK	Chamber	Chamber B	1#	2015-07-22	2016-07-22
DUCOMMUN	Pre-amplifier	ALN-22093530-01	991373-01	2015-08-03	2016-08-03
Rohde & Schwarz	Auto test Software	EMC32	V9.10	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

4.48 dB at 2484.46 MHz in the Horizontal polarization in High channel by WiFi Mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	49 %
ATM Pressure:	101.0 kPa

The testing was performed by Scott Lee on 2015-11-06.

EUT operation mode: Transmitting

30 MHz-25 GHz:**For WiFi:****802.11b Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
143.98	41.23	QP	150	2.0	H	-13.50	27.73	43.5	15.77
2412.00	86.04	PK	150	1.7	H	4.97	91.01	/	/
2412.00	77.07	Ave.	150	1.7	H	4.97	82.04	/	/
2412.00	80.03	PK	21	2.0	V	4.97	85.00	/	/
2412.00	71.76	Ave.	21	2.0	V	4.97	76.73	/	/
2378.78	35.57	PK	142	2.4	H	4.97	40.54	74	33.46
2378.78	18.36	Ave.	142	2.4	H	4.97	23.33	54	30.67
2381.56	36.43	PK	310	2.0	H	4.97	41.40	74	32.60
2381.56	18.39	Ave.	310	2.0	H	4.97	23.36	54	30.64
2493.16	37.43	PK	161	2.3	H	6.29	43.72	74	30.28
2493.16	19.53	Ave.	161	2.3	H	6.29	25.82	54	28.18
4824.00	42.01	PK	138	1.2	H	16.92	58.93	74	15.07
4824.00	23.02	Ave.	138	1.2	H	16.92	39.94	54	14.06
7236.00	35.12	PK	243	1.7	V	19.08	54.20	74	19.80
7236.00	24.46	Ave.	243	1.7	V	19.08	43.54	54	10.46
9648.00	30.02	PK	304	2.1	H	22.72	52.74	74	21.26
9648.00	19.45	Ave.	304	2.1	H	22.72	42.17	54	11.83

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Middle Channel (2437 MHz)									
143.98	40.53	QP	74	2.9	H	-13.50	27.03	43.5	16.47
2437.00	85.91	PK	245	2.0	H	4.97	90.88	/	/
2437.00	77.41	Ave.	245	2.0	H	4.97	82.38	/	/
2437.00	80.21	PK	210	1.1	V	4.97	85.18	/	/
2437.00	71.13	Ave.	210	1.1	V	4.97	76.10	/	/
2384.07	36.05	PK	59	2.2	H	4.97	41.02	74	32.98
2384.07	18.31	Ave.	59	2.2	H	4.97	23.28	54	30.72
2379.10	35.41	PK	150	1.8	H	4.97	40.38	74	33.62
2379.10	18.39	Ave.	150	1.8	H	4.97	23.36	54	30.64
2487.93	37.36	PK	335	1.3	H	6.29	43.65	74	30.35
2487.93	19.61	Ave.	335	1.3	H	6.29	25.90	54	28.10
4874.00	42.24	PK	18	2.4	H	16.91	59.15	74	14.85
4874.00	24.36	Ave.	18	2.4	H	16.91	41.27	54	12.73
7311.00	36.21	PK	61	1.8	V	19.40	55.61	74	18.39
7311.00	24.23	Ave.	61	1.8	V	19.40	43.63	54	10.37
9748.00	31.23	PK	258	1.9	H	22.72	53.95	74	20.05
9748.00	20.41	Ave.	258	1.9	H	22.72	43.13	54	10.87
High Channel (2462 MHz)									
143.98	42.94	QP	39	1.3	H	-13.50	29.44	43.5	14.06
2462.00	85.64	PK	300	1.9	H	6.29	91.93	/	/
2462.00	76.97	Ave.	300	1.9	H	6.29	83.26	/	/
2462.00	80.50	PK	248	2.4	V	6.29	86.79	/	/
2462.00	71.89	Ave.	248	2.4	V	6.29	78.18	/	/
2383.91	36.62	PK	134	2.4	H	4.97	41.59	74	32.41
2383.91	18.43	Ave.	134	2.4	H	4.97	23.40	54	30.60
2485.56	36.81	PK	21	1.2	H	6.29	43.10	74	30.90
2485.56	19.52	Ave.	21	1.2	H	6.29	25.81	54	28.19
2486.78	37.49	PK	299	1.9	H	6.29	43.78	74	30.22
2486.78	19.97	Ave.	299	1.9	H	6.29	26.26	54	27.74
4924.00	37.86	PK	287	1.7	H	16.91	54.77	74	19.23
4924.00	18.21	Ave.	287	1.7	H	16.91	35.12	54	18.88
7386.00	35.21	PK	157	1.1	V	18.34	53.55	74	20.45
7386.00	23.45	Ave.	157	1.1	V	18.34	41.79	54	12.21
9848.00	32.54	PK	275	2.1	V	23.79	56.33	74	17.67
9848.00	21.89	Ave.	275	2.1	V	23.79	45.68	54	8.32

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
143.98	41.88	QP	276	1.7	H	-13.50	28.38	43.5	15.12
2412.00	91.98	PK	65	2.3	H	4.97	96.95	/	/
2412.00	78.61	Ave.	65	2.3	H	4.97	83.58	/	/
2412.00	90.84	PK	1	1.0	V	4.97	95.81	/	/
2412.00	77.23	Ave.	1	1.0	V	4.97	82.20	/	/
2388.88	50.04	PK	149	2.5	H	4.97	55.01	74	18.99
2388.88	32.32	Ave.	149	2.5	H	4.97	37.29	54	16.71
2390.00	50.86	PK	75	1.5	H	4.97	55.83	74	18.17
2390.00	32.56	Ave.	75	1.5	H	4.97	37.53	54	16.47
2491.99	37.70	PK	276	1.5	H	6.29	43.99	74	30.01
2491.99	21.43	Ave.	276	1.5	H	6.29	27.72	54	26.28
4824.00	38.06	PK	44	2.2	H	16.92	54.98	74	19.02
4824.00	19.50	Ave.	44	2.2	H	16.92	36.42	54	17.58
7236.00	35.98	PK	348	1.1	V	19.08	55.06	74	18.94
7236.00	22.78	Ave.	348	1.1	V	19.08	41.86	54	12.14
9648.00	31.01	PK	245	1.5	H	22.72	53.73	74	20.27
9648.00	21.39	Ave.	245	1.5	H	22.72	44.11	54	9.89
Middle Channel (2437 MHz)									
143.98	40.73	QP	31	1.0	H	-13.50	27.23	43.5	16.27
2437.00	92.97	PK	33	1.7	H	4.97	97.94	/	/
2437.00	79.61	Ave.	33	1.7	H	4.97	84.58	/	/
2437.00	90.57	PK	88	1.3	V	4.97	95.54	/	/
2437.00	76.25	Ave.	88	1.3	V	4.97	81.22	/	/
2378.14	35.93	PK	265	1.6	H	4.97	40.90	74	33.10
2378.14	19.34	Ave.	265	1.6	H	4.97	24.31	54	29.69
2386.63	35.11	PK	301	1.6	H	4.97	40.08	74	33.92
2386.63	19.36	Ave.	301	1.6	H	4.97	24.33	54	29.67
2483.50	39.96	PK	357	2.3	H	6.29	46.25	74	27.75
2483.50	21.43	Ave.	357	2.3	H	6.29	27.72	54	26.28
4874.00	37.64	PK	348	2.2	H	16.91	54.55	74	19.45
4874.00	18.12	Ave.	348	2.2	H	16.91	35.03	54	18.97
7311.00	34.75	PK	274	1.8	V	19.40	54.15	74	19.85
7311.00	23.23	Ave.	274	1.8	V	19.40	42.63	54	11.37
9748.00	32.88	PK	71	1.4	H	22.72	55.60	74	18.40
9748.00	22.41	Ave.	71	1.4	H	22.72	45.13	54	8.87

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
143.98	40.35	QP	153	2.2	H	-13.50	26.85	43.5	16.65
2462.00	94.03	PK	93	1.4	H	6.29	100.32	/	/
2462.00	80.30	Ave.	93	1.4	H	6.29	86.59	/	/
2462.00	91.34	PK	269	1.1	V	6.29	97.63	/	/
2462.00	78.01	Ave.	269	1.1	V	6.29	84.30	/	/
2382.15	35.10	PK	257	1.2	H	4.97	40.07	74	33.93
2382.15	18.19	Ave.	257	1.2	H	4.97	23.16	54	30.84
2483.50	53.05	PK	110	1.5	H	6.29	59.34	74	14.66
2483.50	34.30	Ave.	110	1.5	H	6.29	40.59	54	13.41
2483.63	52.77	PK	189	1.9	H	6.29	59.06	74	14.94
2483.63	34.10	Ave.	189	1.9	H	6.29	40.39	54	13.61
4924.00	37.12	PK	309	1.1	H	16.91	54.03	74	19.97
4924.00	18.34	Ave.	309	1.1	H	16.91	35.25	54	18.75
7386.00	34.87	PK	142	1.6	V	18.34	53.21	74	20.79
7386.00	22.45	Ave.	142	1.6	V	18.34	40.79	54	13.21
9848.00	30.45	PK	345	1.5	V	23.79	54.24	74	19.76
9848.00	22.12	Ave.	345	1.5	V	23.79	45.91	54	8.09

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
143.98	42.03	QP	358	3.1	H	-13.50	28.53	43.5	14.97
2412.00	92.37	PK	348	1.9	H	4.97	97.34	/	/
2412.00	78.26	Ave.	348	1.9	H	4.97	83.23	/	/
2412.00	93.66	PK	275	2.2	V	4.97	98.63	/	/
2412.00	80.04	Ave.	275	2.2	V	4.97	85.01	/	/
2389.36	56.86	PK	135	1.8	V	4.97	61.83	74	12.17
2389.36	36.87	Ave.	135	1.8	V	4.97	41.84	54	12.16
2389.84	58.98	PK	156	2.4	V	4.97	63.95	74	10.05
2389.84	37.14	Ave.	156	2.4	V	4.97	42.11	54	11.89
2483.97	38.61	PK	328	1.1	V	6.29	44.90	74	29.10
2483.97	22.26	Ave.	328	1.1	V	6.29	28.55	54	25.45
4824.00	37.78	PK	34	1.7	H	16.92	54.70	74	19.30
4824.00	18.34	Ave.	34	1.7	H	16.92	35.26	54	18.74
7236.00	34.66	PK	339	2.1	V	19.08	53.74	74	20.26
7236.00	23.44	Ave.	339	2.1	V	19.08	42.52	54	11.48
9648.00	32.12	PK	223	2.2	V	22.72	54.84	74	19.16
9648.00	20.79	Ave.	223	2.2	V	22.72	43.51	54	10.49
Middle Channel (2437 MHz)									
143.98	42.93	QP	287	2.9	H	-13.50	29.43	43.5	14.07
2437.00	93.67	PK	308	2.4	H	4.97	98.64	/	/
2437.00	79.37	Ave.	308	2.4	H	4.97	84.34	/	/
2437.00	94.78	PK	127	1.3	V	4.97	99.75	/	/
2437.00	80.18	Ave.	127	1.3	V	4.97	85.15	/	/
2389.67	39.67	PK	101	2.0	V	4.97	44.64	74	29.36
2389.67	21.43	Ave.	101	2.0	V	4.97	26.40	54	27.60
2390.00	39.89	PK	229	1.6	V	4.97	44.86	74	29.14
2390.00	21.43	Ave.	229	1.6	V	4.97	26.40	54	27.60
2484.69	43.39	PK	266	1.4	V	6.29	49.68	74	24.32
2484.69	22.26	Ave.	266	1.4	V	6.29	28.55	54	25.45
4874.00	36.89	PK	232	1.1	H	16.91	53.80	74	20.20
4874.00	17.00	Ave.	232	1.1	H	16.91	33.91	54	20.09
7311.00	35.12	PK	161	1.3	V	19.40	54.52	74	19.48
7311.00	23.12	Ave.	161	1.3	V	19.40	42.52	54	11.48
9748.00	31.45	PK	326	2.1	H	22.72	54.17	74	19.83
9748.00	22.89	Ave.	326	2.1	H	22.72	45.61	54	8.39

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
143.98	41.48	QP	246	1.6	H	-13.50	27.98	43.5	15.52
2462.00	90.59	PK	116	1.5	H	6.29	96.88	/	/
2462.00	76.15	Ave.	116	1.5	H	6.29	82.44	/	/
2462.00	85.84	PK	49	1.4	V	6.29	92.13	/	/
2462.00	72.30	Ave.	49	1.4	V	6.29	78.59	/	/
2384.07	35.16	PK	325	1.2	H	4.97	40.13	74	33.87
2384.07	19.50	Ave.	325	1.2	H	4.97	24.47	54	29.53
2483.86	57.53	PK	103	1.6	H	6.29	63.82	74	10.18
2483.86	36.85	Ave.	103	1.6	H	6.29	43.14	54	10.86
2484.29	57.09	PK	228	1.7	H	6.29	63.38	74	10.62
2484.29	35.79	Ave.	228	1.7	H	6.29	42.08	54	11.92
4924.00	37.56	PK	282	1.3	H	16.91	54.47	74	19.53
4924.00	18.43	Ave.	282	1.3	H	16.91	35.34	54	18.66
7386.00	35.78	PK	232	1.5	V	18.34	54.12	74	19.88
7386.00	21.76	Ave.	232	1.5	V	18.34	40.10	54	13.90
9848.00	31.24	PK	324	1.2	V	23.79	55.03	74	18.97
9848.00	23.41	Ave.	324	1.2	V	23.79	47.20	54	6.80

802.11n-HT40 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2422 MHz)									
143.98	42.99	QP	353	1.8	H	-13.50	29.49	43.5	14.01
2422.00	86.88	PK	133	2.1	H	4.97	91.85	/	/
2422.00	72.39	Ave.	133	2.1	H	4.97	77.36	/	/
2422.00	83.01	PK	359	2.1	V	4.97	87.98	/	/
2422.00	68.36	Ave.	359	2.1	V	4.97	73.33	/	/
2384.07	53.68	PK	116	1.0	H	4.97	58.65	74	15.35
2384.07	35.67	Ave.	116	1.0	H	4.97	40.64	54	13.36
2388.88	54.40	PK	162	1.9	H	4.97	59.37	74	14.63
2388.88	36.55	Ave.	162	1.9	H	4.97	41.52	54	12.48
2484.69	38.50	PK	221	1.7	H	6.29	44.79	74	29.21
2484.69	22.26	Ave.	221	1.7	H	6.29	28.55	54	25.45
4844.00	38.23	PK	301	2.4	H	16.92	55.15	74	18.85
4844.00	18.43	Ave.	301	2.4	H	16.92	35.35	54	18.65
7266.00	35.87	PK	155	2.2	V	19.08	54.95	74	19.05
7266.00	22.96	Ave.	155	2.2	V	19.08	42.04	54	11.96
9648.00	30.46	PK	36	1.9	H	22.72	53.18	74	20.82
9648.00	21.65	Ave.	36	1.9	H	22.72	44.37	54	9.63
Middle Channel (2437 MHz)									
143.98	40.26	QP	220	1.3	H	-13.50	26.76	43.5	16.74
2437.00	87.01	PK	128	1.9	H	4.97	91.98	/	/
2437.00	73.15	Ave.	128	1.9	H	4.97	78.12	/	/
2437.00	83.95	PK	131	1.8	V	4.97	88.92	/	/
2437.00	69.52	Ave.	131	1.8	V	4.97	74.49	/	/
2389.68	41.85	PK	112	1.7	H	4.97	46.82	74	27.18
2389.68	23.02	Ave.	112	1.7	H	4.97	27.99	54	26.01
2390.00	42.06	PK	232	1.9	H	4.97	47.03	74	26.97
2390.00	23.71	Ave.	232	1.9	H	4.97	28.68	54	25.32
2486.14	53.43	PK	339	1.4	H	6.29	59.72	74	14.28
2486.14	34.10	Ave.	339	1.4	H	6.29	40.39	54	13.61
4874.00	37.64	PK	128	2.2	H	16.91	54.55	74	19.45
4874.00	17.43	Ave.	128	2.2	H	16.91	34.34	54	19.66
7311.00	36.21	PK	98	1.1	V	19.40	55.61	74	18.39
7311.00	21.46	Ave.	98	1.1	V	19.40	40.86	54	13.14
9748.00	30.45	PK	188	2.3	H	22.72	53.17	74	20.83
9748.00	23.15	Ave.	188	2.3	H	22.72	45.87	54	8.13

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2452 MHz)									
143.98	41.79	QP	322	1.1	H	-13.50	28.29	43.5	15.21
2452.00	87.84	PK	309	1.2	H	6.29	94.13	/	/
2452.00	74.21	Ave.	309	1.2	H	6.29	80.50	/	/
2452.00	83.17	PK	342	2.5	V	6.29	89.46	/	/
2452.00	69.96	Ave.	342	2.5	V	6.29	76.25	/	/
2390.00	34.91	PK	10	1.7	H	4.97	39.88	74	34.12
2390.00	19.50	Ave.	10	1.7	H	4.97	24.47	54	29.53
2484.46	58.93	PK	116	1.0	H	6.29	65.22	74	8.78
2484.46	43.23	Ave.	116	1.0	H	6.29	49.52	54	4.48
2485.02	59.55	PK	142	2.3	H	6.29	65.84	74	8.16
2485.02	42.97	Ave.	142	2.3	H	6.29	49.26	54	4.74
4904.00	33.17	PK	316	2.1	H	16.91	50.08	74	23.92
4904.00	17.00	Ave.	316	2.1	H	16.91	33.91	54	20.09
7356.00	36.45	PK	280	1.5	V	18.34	54.79	74	19.21
7356.00	22.12	Ave.	280	1.5	V	18.34	40.46	54	13.54
9808.00	31.56	PK	42	2.4	H	23.79	55.35	74	18.65
9808.00	21.86	Ave.	42	2.4	H	23.79	45.65	54	8.35

BLE Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2402 MHz)									
143.98	42.96	QP	74	2.3	H	-13.50	29.46	43.5	14.04
2402.00	86.49	PK	85	2.3	H	4.97	91.46	/	/
2402.00	73.81	Ave.	85	2.3	H	4.97	78.78	/	/
2402.00	84.22	PK	255	1.0	V	4.97	89.19	/	/
2402.00	71.03	Ave.	255	1.0	V	4.97	76.00	/	/
2381.89	38.41	PK	246	1.4	H	4.97	43.38	74	30.62
2381.89	19.24	Ave.	246	1.4	H	4.97	24.21	54	29.79
2389.99	39.02	PK	75	1.1	H	4.97	43.99	74	30.01
2389.99	19.55	Ave.	75	1.1	H	4.97	24.52	54	29.48
2483.50	17.42	PK	125	1.8	H	6.29	23.71	74	50.29
2483.50	19.43	Ave.	125	1.8	H	6.29	25.72	54	28.28
4804.00	42.16	PK	27	2.3	H	16.92	59.08	74	14.92
4804.00	22.01	Ave.	27	2.3	H	16.92	38.93	54	15.07
7206.00	39.86	PK	48	2.1	H	19.08	58.94	74	15.06
7206.00	19.55	Ave.	48	2.1	H	19.08	38.63	54	15.37
9608.00	39.42	PK	238	1.6	V	22.72	62.14	74	11.86
9608.00	18.46	Ave.	238	1.6	V	22.72	41.18	54	12.82
Middle Channel (2440 MHz)									
143.98	40.96	QP	198	2.3	H	-13.50	27.46	43.5	16.04
2440.00	86.09	PK	42	1.0	H	4.97	91.06	/	/
2440.00	73.11	Ave.	42	1.0	H	4.97	78.08	/	/
2440.00	84.21	PK	239	1.8	V	4.97	89.18	/	/
2440.00	71.02	Ave.	239	1.8	V	4.97	75.99	/	/
2381.89	36.84	PK	137	2.0	H	4.97	41.81	74	32.19
2381.89	20.22	Ave.	137	2.0	H	4.97	25.19	54	28.81
2389.99	26.14	PK	270	1.7	H	4.97	31.11	74	42.89
2389.99	19.06	Ave.	270	1.7	H	4.97	24.03	54	29.97
2483.50	37.46	PK	60	1.9	H	6.29	43.75	74	30.25
2483.50	19.88	Ave.	60	1.9	H	6.29	26.17	54	27.83
4880.00	40.24	PK	341	1.4	H	16.91	57.15	74	16.85
4880.00	21.06	Ave.	341	1.4	H	16.91	37.97	54	16.03
7320.00	40.34	PK	3	2.5	H	19.40	59.74	74	14.26
7320.00	20.77	Ave.	3	2.5	H	19.40	40.17	54	13.83
9760.00	35.06	PK	175	1.2	H	23.79	58.85	74	15.15
9760.00	19.24	Ave.	175	1.2	H	23.79	43.03	54	10.97

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2480 MHz)									
143.98	42.27	QP	220	3.8	H	-13.50	28.77	43.5	14.73
2480.00	85.44	PK	249	1.9	H	6.29	91.73	/	/
2480.00	72.64	Ave.	249	1.9	H	6.29	78.93	/	/
2480.00	81.09	PK	279	2.2	V	6.29	87.38	/	/
2480.00	70.41	Ave.	279	2.2	V	6.29	76.70	/	/
2381.89	36.24	PK	58	1.7	H	4.97	41.21	74	32.79
2381.89	19.46	Ave.	58	1.7	H	4.97	24.43	54	29.57
2389.99	36.42	PK	327	2.5	H	4.97	41.39	74	32.61
2389.99	19.54	Ave.	327	2.5	H	4.97	24.51	54	29.49
2483.50	52.49	PK	263	1.1	H	6.29	58.78	74	15.22
2483.50	28.34	Ave.	263	1.1	H	6.29	34.63	54	19.37
4960.00	40.43	PK	206	2.1	H	17.91	58.34	74	15.66
4960.00	20.79	Ave.	206	2.1	H	17.91	38.70	54	15.30
7440.00	40.51	PK	343	2.2	H	18.34	58.85	74	15.15
7440.00	20.56	Ave.	343	2.2	H	18.34	38.90	54	15.10
9920.00	38.76	PK	333	1.2	H	23.79	62.55	74	11.45
9920.00	19.04	Ave.	333	1.2	H	23.79	42.83	54	11.17

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24~26 °C
Relative Humidity:	49~52 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Scott Lee from 2015-11-04 to 2015-11-05.

Test Result: Pass.

Please refer to the following table and plots.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
802.11b mode			
Low	2412	10.10	≥ 500
Middle	2437	10.18	≥ 500
High	2462	10.10	≥ 500
802.11g mode			
Low	2412	16.59	≥ 500
Middle	2437	16.59	≥ 500
High	2462	16.59	≥ 500
802.11n-HT20 mode			
Low	2412	17.88	≥ 500
Middle	2437	17.88	≥ 500
High	2462	17.88	≥ 500
802.11n-HT40 mode			
Low	2422	36.87	≥ 500
Middle	2437	36.71	≥ 500
High	2452	36.71	≥ 500
BLE mode			
Low	2402	0.79	≥ 500
Middle	2440	0.79	≥ 500
High	2480	0.79	≥ 500

Delta 1 [T1] -1.16 dB

RBW 100 kHz RF Att 30 dB

Ref Lvl 30 dBm

SWT 10 ms Unit dBm

10.5 dB Offset

10.10020040 MHz

CH PWR 15.09 dBm

CH BW 20.00000000 MHz

1 [T1] -7.00 dBm

2 [T1] -1.53 dBm

D1 -1.53 dBm

D2 -7.53 dBm

1MAX

1

2

1

CO

CO

Center 2.412 GHz

4 MHz/

Span 40 MHz

Date: 4. NOV. 2015 16:04:26

Ref Lvl 30 dBm

Delta 1 [T1] -0.04 dB

10.18036072 MHz

RBW 100 kHz

VBW 300 kHz

SWT 10 ms

RF Att 30 dB

Unit dBm

10.5 dB Offset

▼1 [T1] -7.84 dBm

2.43190982 GHz

▲1 [T1] -0.04 dB

10.18036072 MHz

▼2 [T1] -1.37 dBm

2.43647896 GHz

D1 -1.37 dBm

1MAX

D2 -7.37 dBm

1MA


Center 2.437 GHz

4 MHz/


Span 40 MHz

Date: 4. NOV. 2015 16:10:35

802.11b High Channel

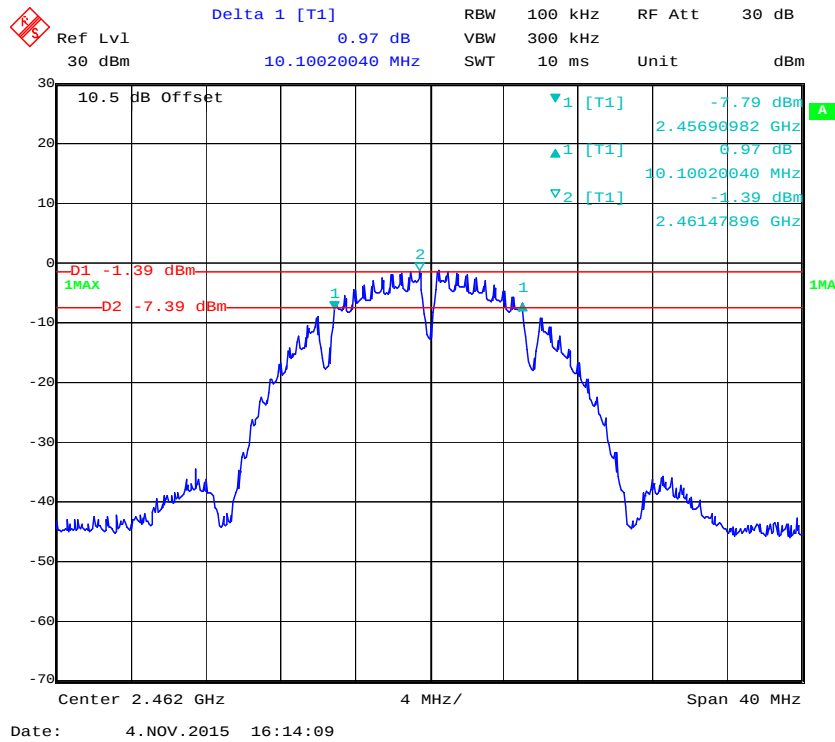

802.11g Low Channel

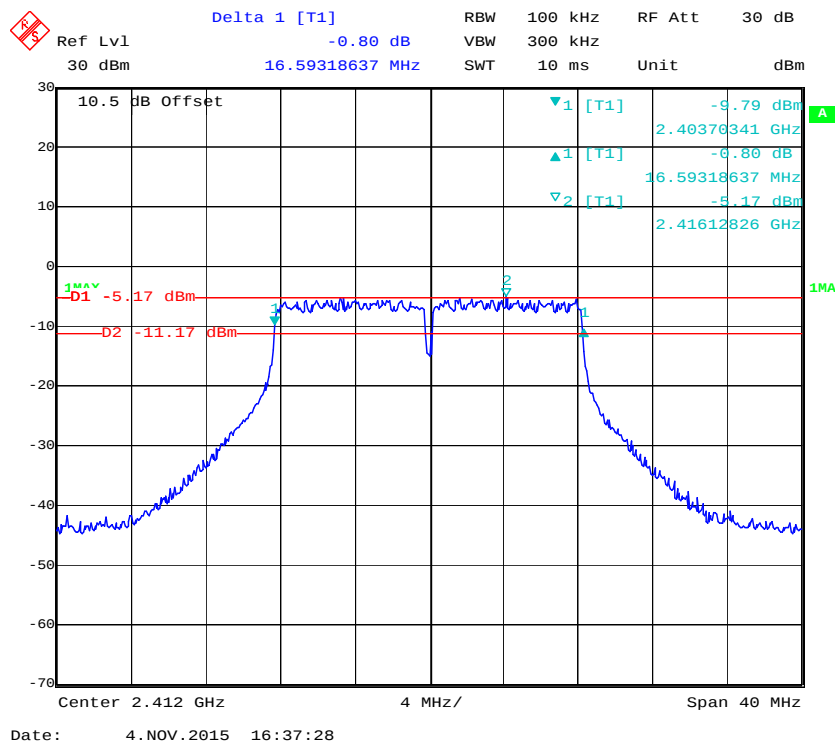

Ref Lvl 30 dBm Delta 1 [T1] -0.87 dB RBW 100 kHz RF Att 30 dB Unit dBm

30 dBm 16.59318637 MHz SWT 10 ms

Cursor	Type	Frequency	Amplitude
1	[T1]	2.42870341 GHz	-5.46 dBm
2	[T1]	16.59318637 MHz	-6.87 dBm
3	[T1]	2.44112826 GHz	-4.92 dBm

Center 2.437 GHz 4 MHz/ Span 40 MHz

Date: 4. NOV. 2015 16:35:32

Ref Lvl 30 dBm

Delta 1 [T1] -0.94 dB

16.59318637 MHz

RBW 100 kHz

VBW 300 kHz

SWT 10 ms

RF Att 30 dB

Unit dBm

10.5 dB Offset

▼1 [T1] -9.58 dBm 2.45370341 GHz

▲1 [T1] -0.94 dB 16.59318637 MHz

▼2 [T1] -5.07 dBm 2.45739078 GHz

1MAV

D1 -5.07 dBm

D2 -11.07 dBm

1MA


Center 2.462 GHz

4 MHz/


Span 40 MHz

Date: 4. NOV. 2015 16:33:23


802.11n-HT20 Low Channel

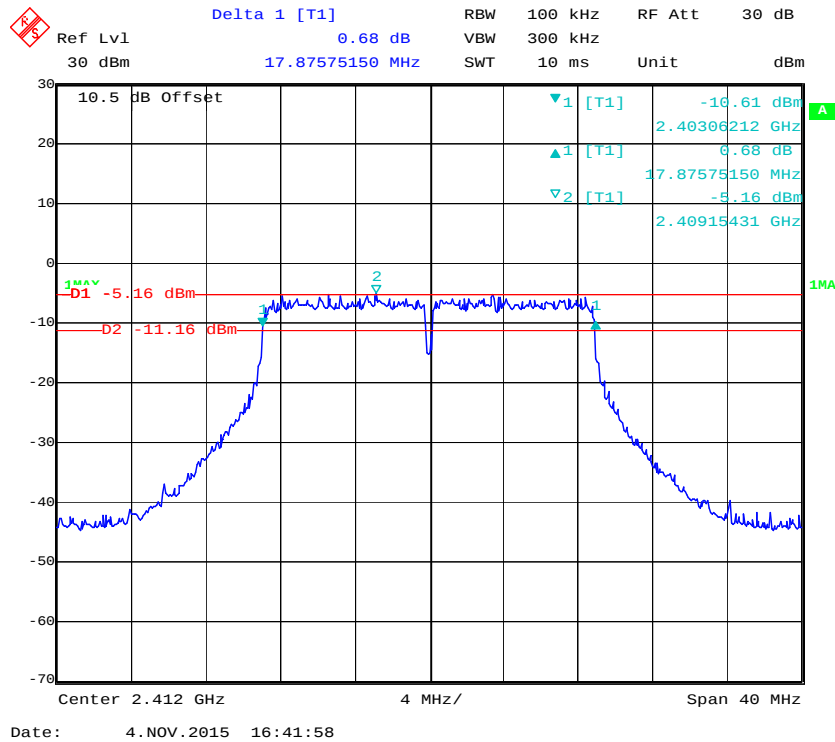


802.11n-HT20 Middle Channel

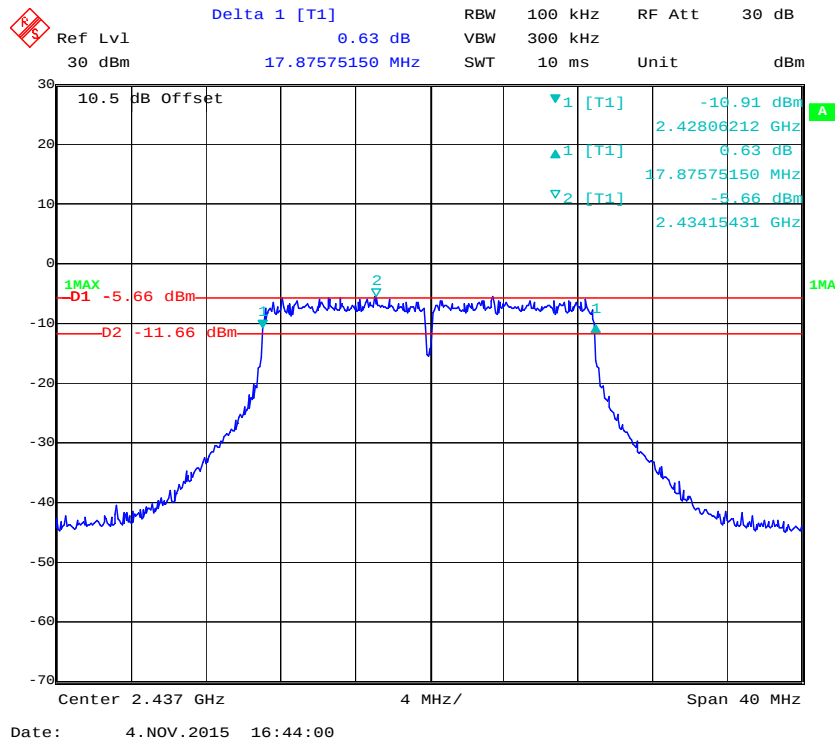

802.11n-HT20 High Channel

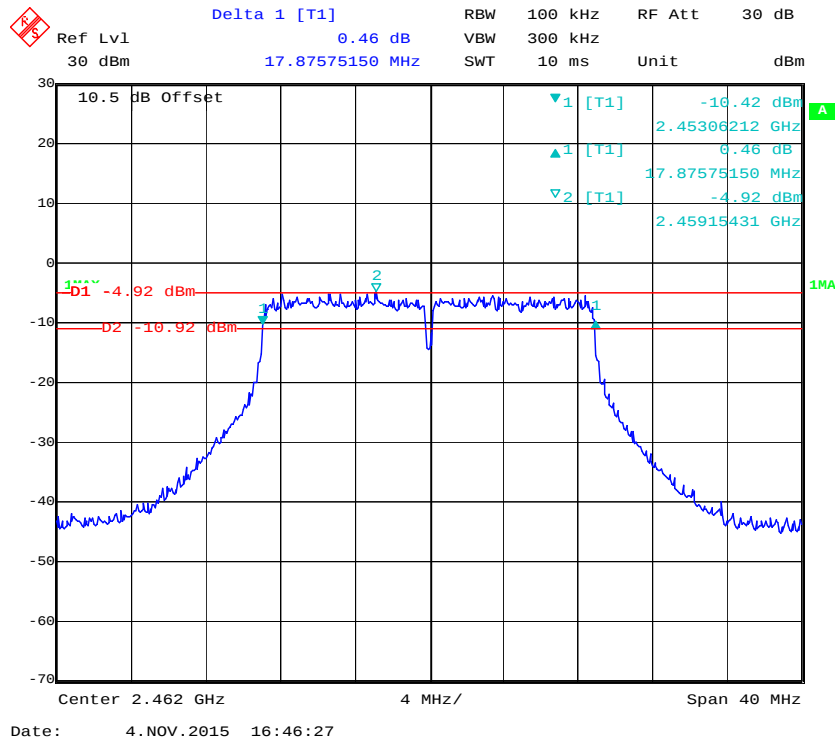

802.11n-HT40 Low Channel

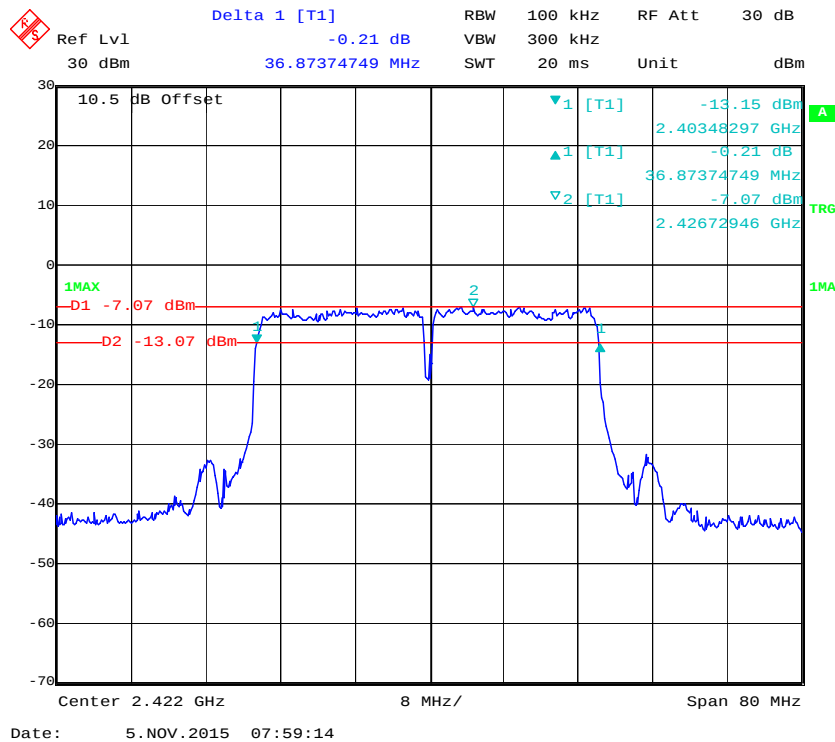

Delta 1 [T1] -0.14 dB
 Ref Lvl 30 dBm 36.71342685 MHz
 RBW 100 kHz VBW 300 kHz
 SWT 20 ms Unit dBm

10.5 dB Offset
 1 [T1] -11.81 dBm 2.41864329 GHz
 1 [T1] -6.14 dBm 36.71342685 MHz
 2 [T1] -4.95 dBm 2.43804208 GHz

D1 -4.95 dBm
 D2 -10.95 dBm

Center 2.437 GHz 8 MHz/ Span 80 MHz

Date: 5. NOV. 2015 08:02:28

Delta 1 [T1]

Ref Lvl 0.18 dB

30 dBm 36.71342685 MHz

RBW 100 kHz

VBW 300 kHz

SWT 20 ms

Unit dBm

10.5 dB Offset

1 [T1] -13.59 dBm

2 [T1] 0.18 dB

3 [T1] -6.79 dBm

4 [T1] 2.44422445 GHz

1MAX

D1 -6.79 dBm

D2 -12.79 dBm

1MAX


Center 2.452 GHz

8 MHz/


Span 80 MHz

Date: 5. NOV. 2015 08:04:26


BLE Low Channel

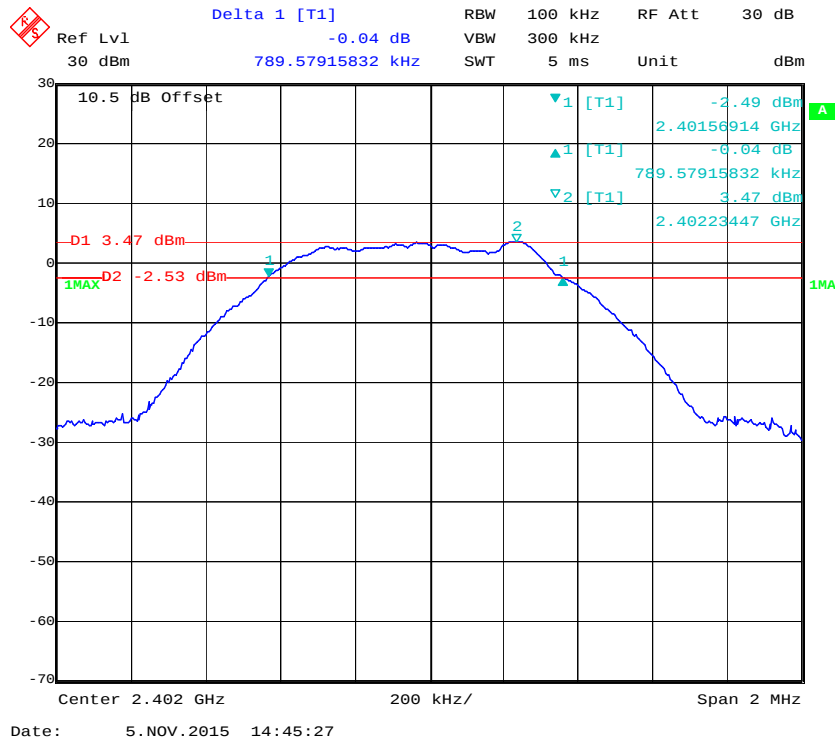

BLE Middle Channel

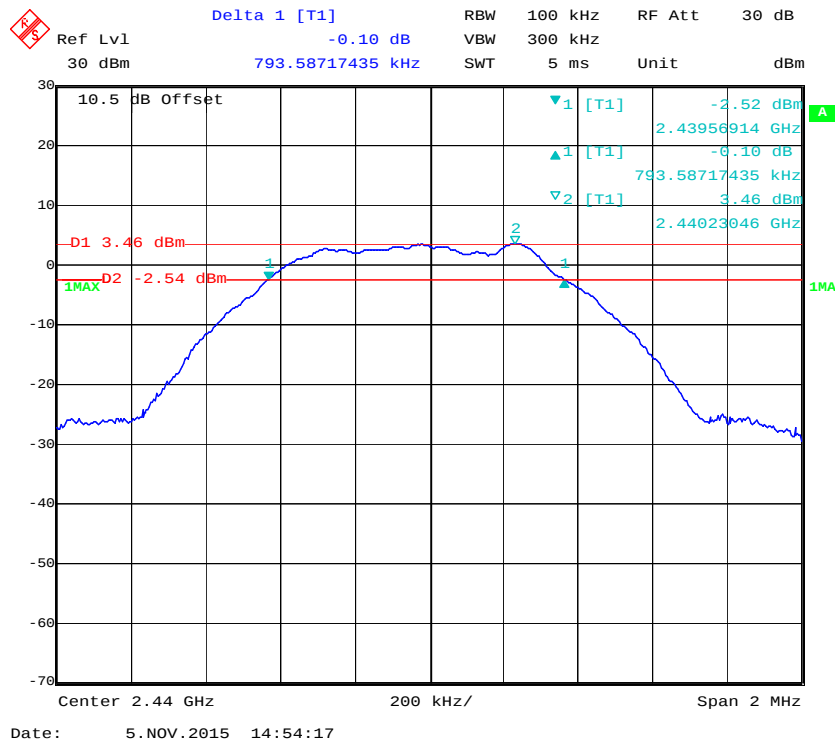

BLE High Channel

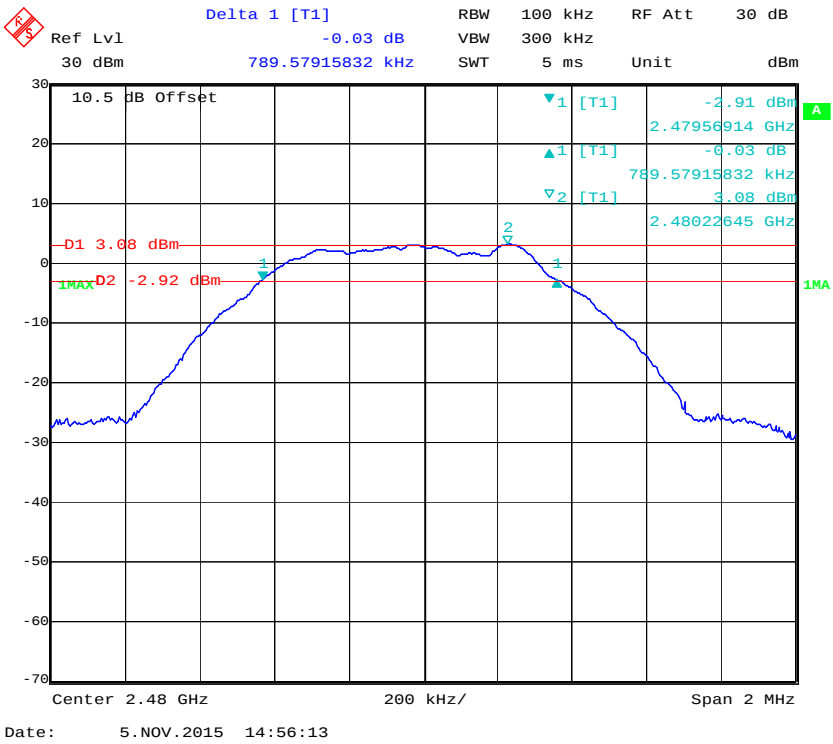


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Power Meter	N1912A	MY5000448	2014-11-03	2015-11-03
HP	Power Sensor	N1921A	MY54210016	2014-11-03	2015-11-03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Scott Lee on 2015-11-03.

EUT operation mode: Transmitting:

WIFI mode

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Max Conducted Average Output Power (dBm)	Limit (dBm)
802.11b				
Low	2412	11.95	9.06	30
Middle	2437	12.09	9.26	30
High	2462	12.02	9.37	30
802.11g				
Low	2412	15.11	9.25	30
Middle	2437	15.43	9.53	30
High	2462	15.28	9.54	30
802.11n HT20				
Low	2412	15.05	9.48	30
Middle	2437	14.76	9.50	30
High	2462	15.32	9.41	30
802.11n HT40				
Low	2422	17.56	9.44	30
Middle	2437	17.68	9.31	30
High	2452	17.64	9.32	30

BLE mode

Channel	Frequency (MHz)	Max Peak Output Power (dBm)	Limit (dBm)	Result
Low	2402	4.70	30	Pass
Middle	2440	4.70	30	Pass
High	2480	4.44	30	Pass


FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03 -101746-zn	2015-06-13	2016-06-13
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24~26 °C
Relative Humidity:	49~52 %
ATM Pressure:	100.0~101.0 kPa


The testing was performed by Scott Lee from 2015-11-01 to 2015-11-09.

EUT operation mode: Transmitting

Test Result: *Compliance*


Please refer to the following plots.

802.11b: Band Edge, Left Side

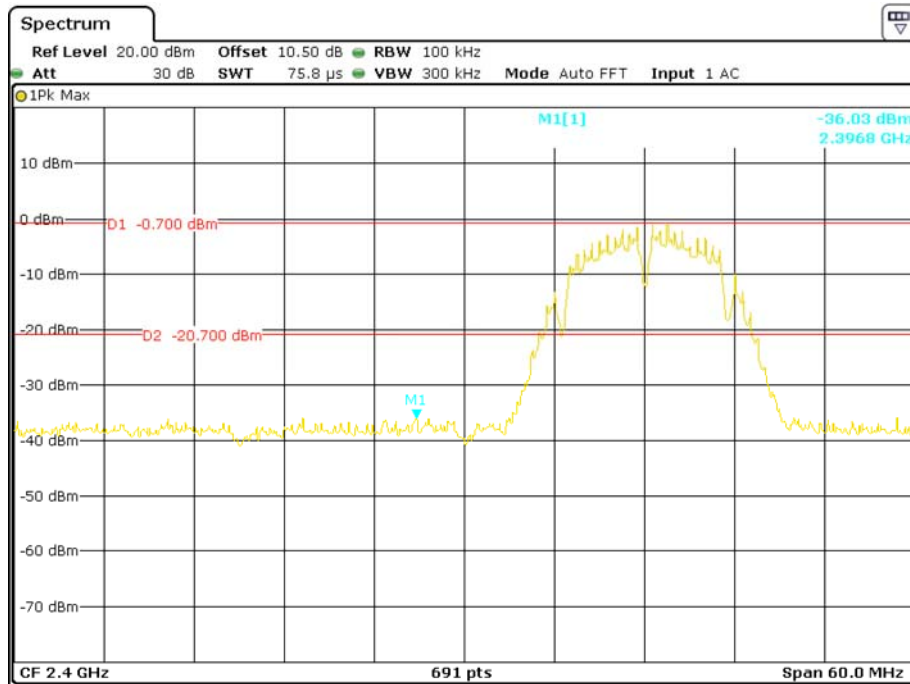


Date: 1.NOV.2015 16:51:17

802.11b: Band Edge, Right Side

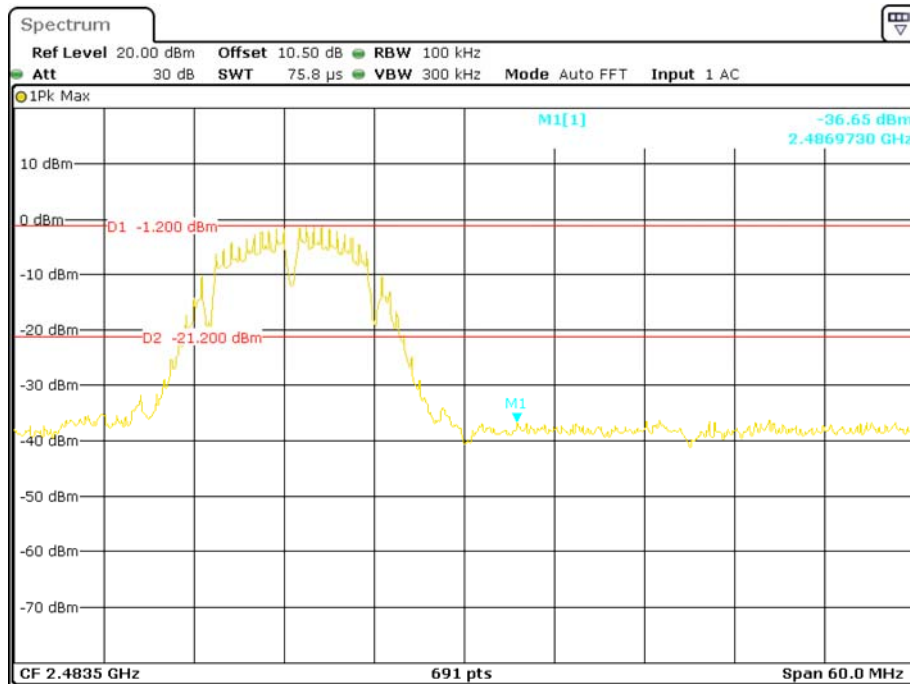


Date: 1.NOV.2015 16:52:13

802.11g: Band Edge, Left Side

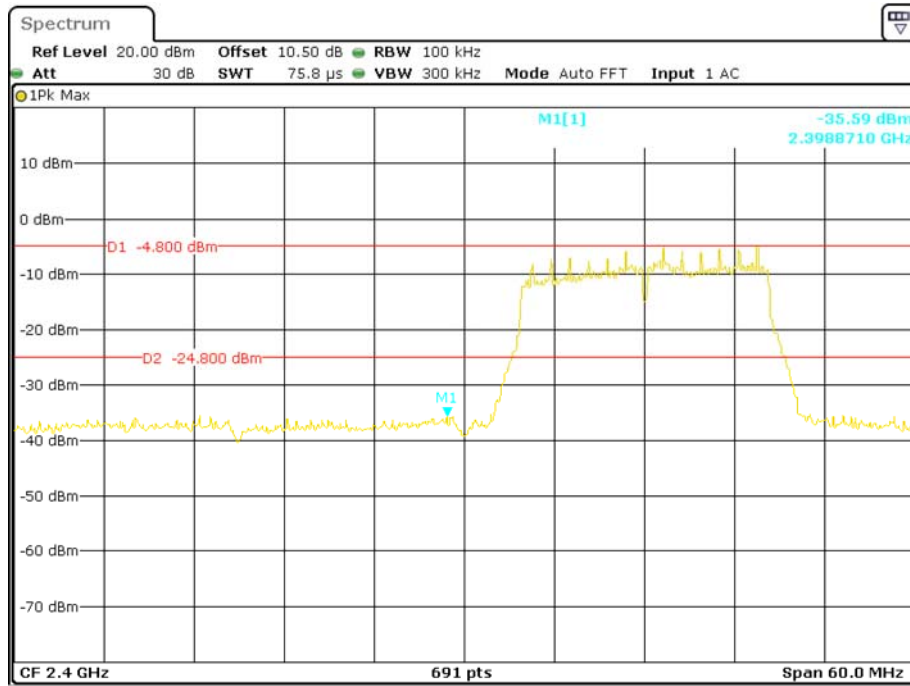


Date: 1.NOV.2015 17:06:56

802.11g: Band Edge, Right Side

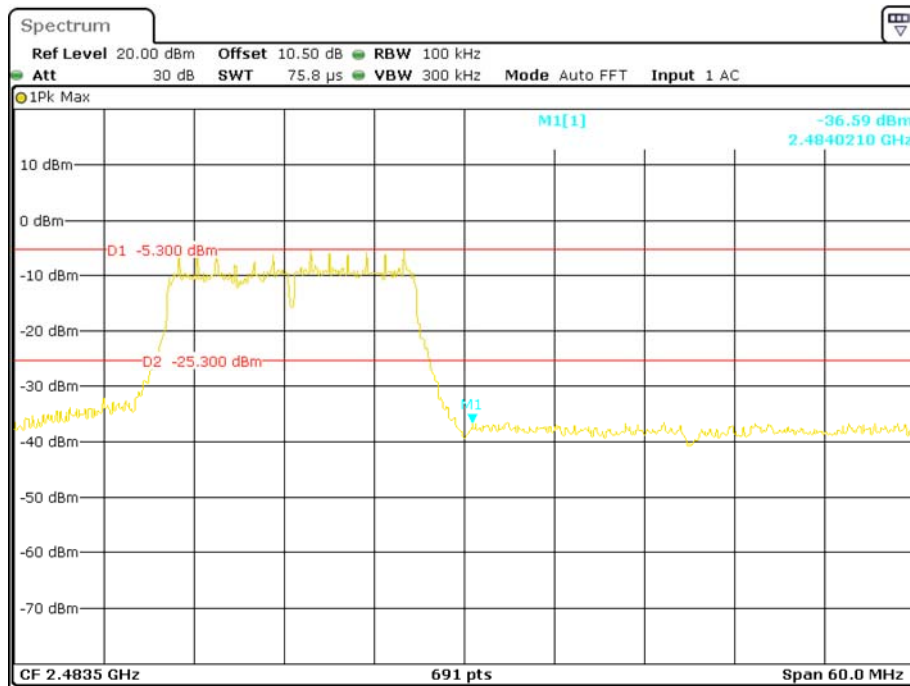


Date: 1.NOV.2015 17:08:26

802.11n-HT20: Band Edge, Left Side

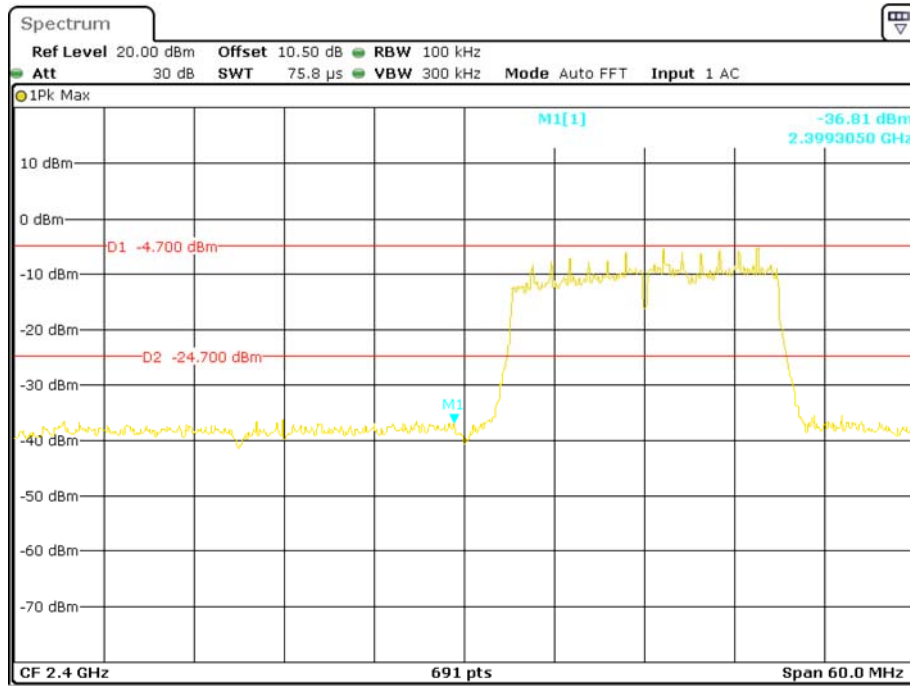


Date: 1.NOV.2015 17:05:49

802.11n-HT20: Band Edge, Right Side

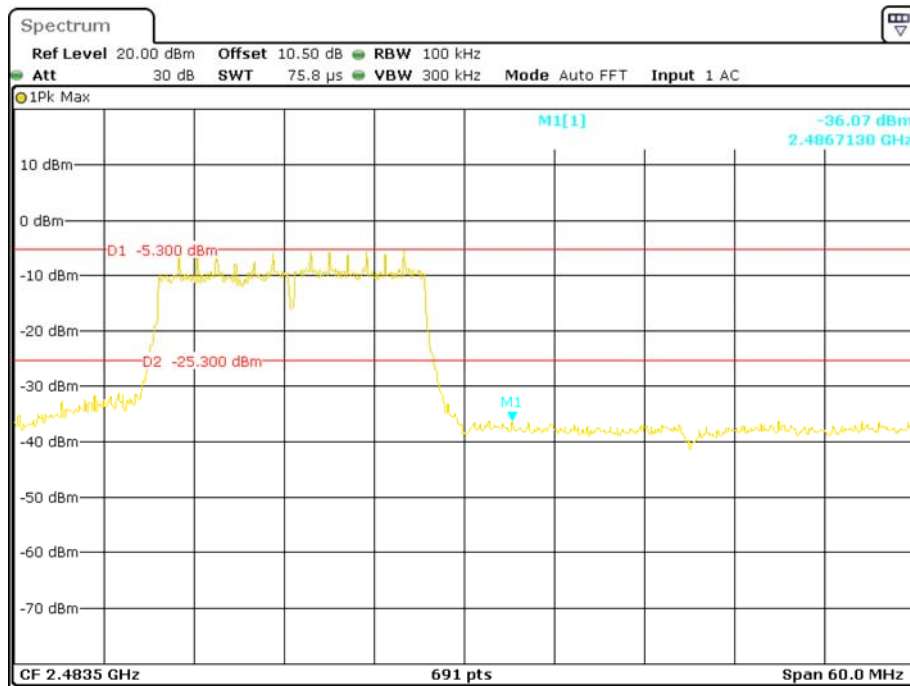


Date: 1.NOV.2015 17:04:46


802.11n-HT40: Band Edge, Left Side

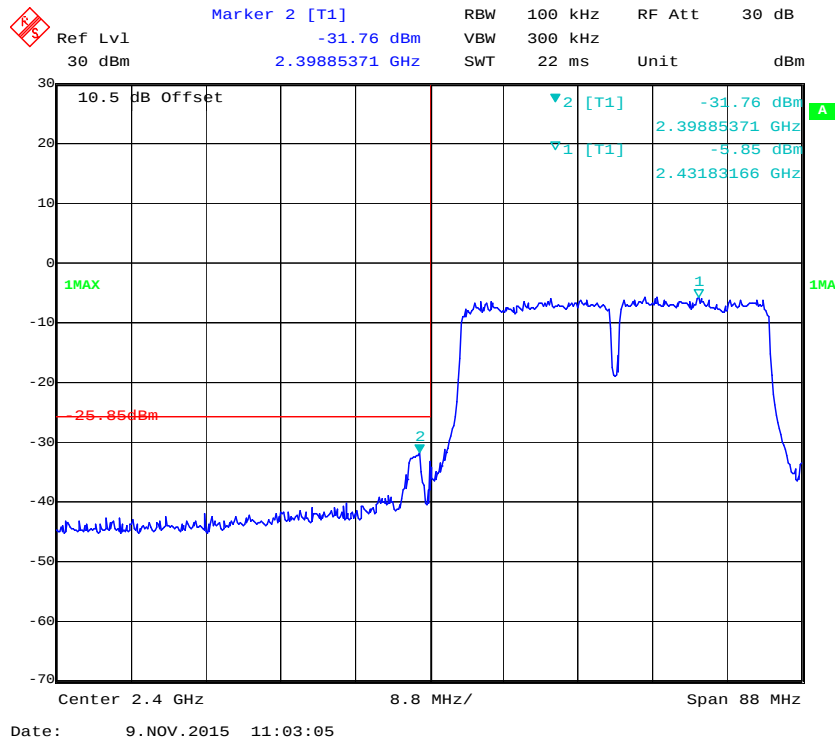


802.11n-HT40: Band Edge, Right Side

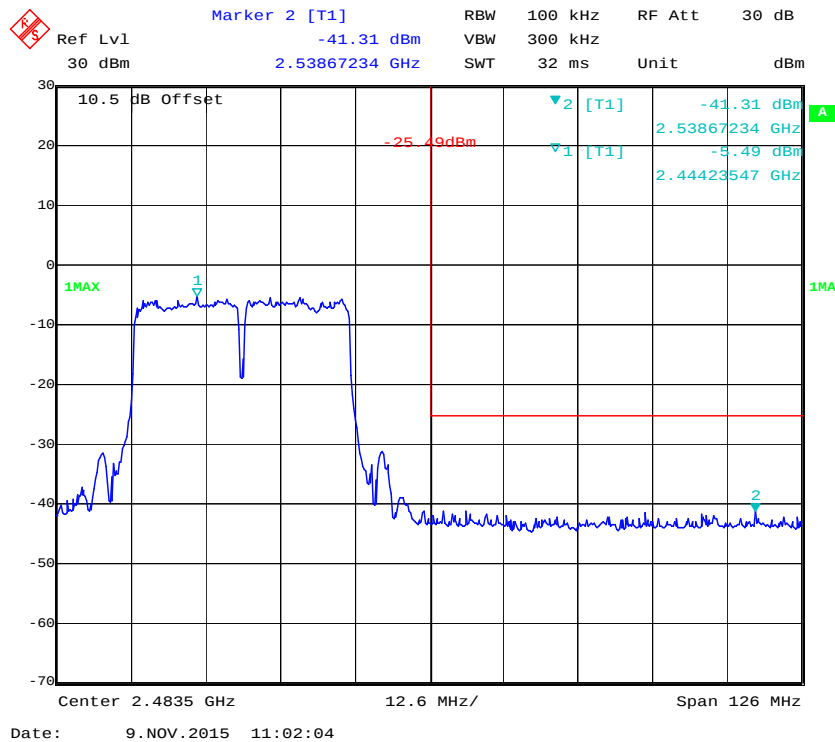

BLE: Band Edge, Left Side

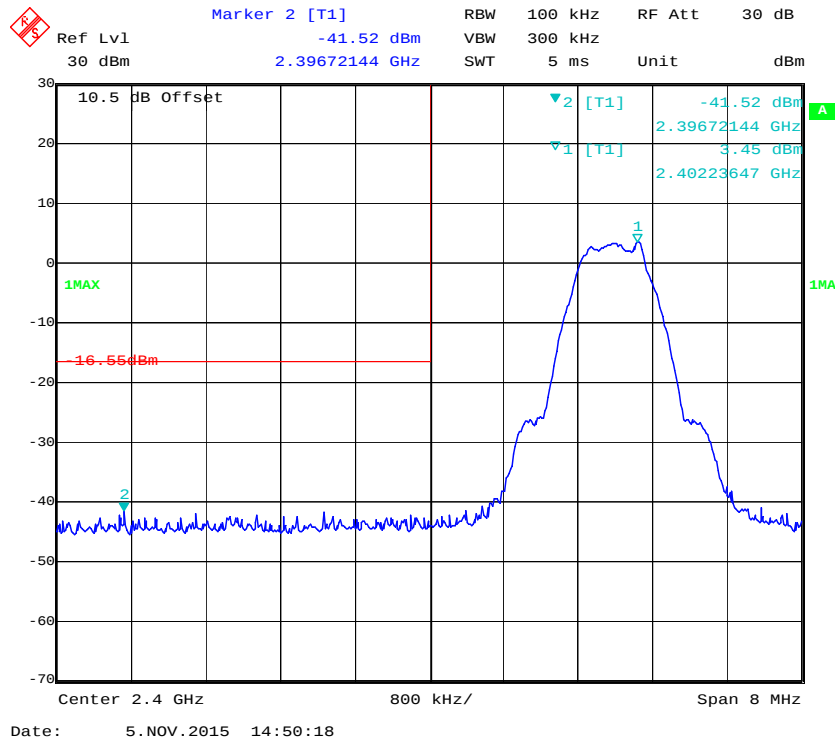

BLE: Band Edge, Right Side

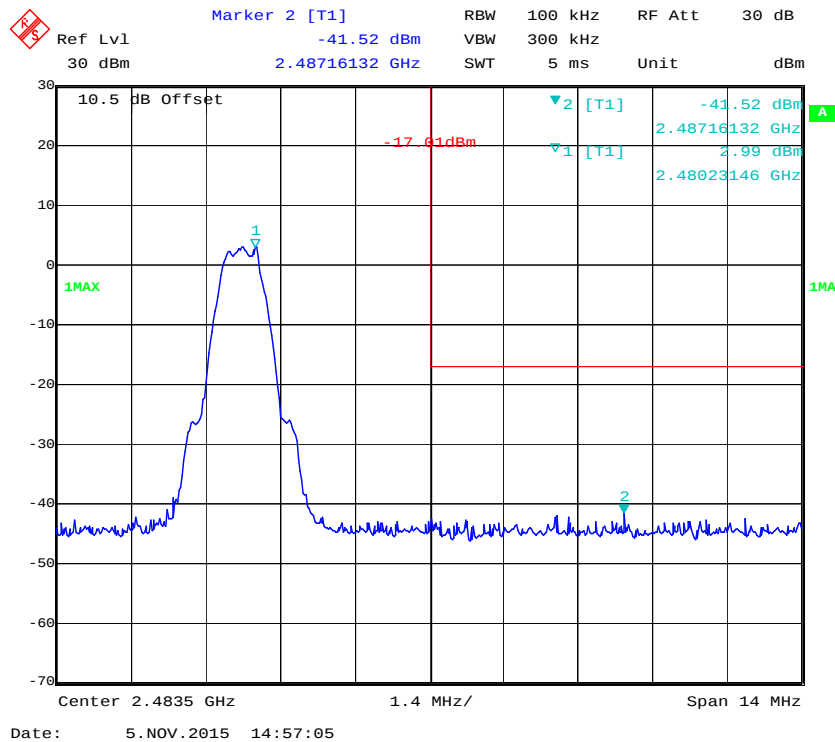

FCC §15.247(e) - POWER SPECTRAL DENSITY


Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v03r03 sub-clause 10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-12-11	2015-12-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	100.0 kPa


The testing was performed by Scott Lee on 2015-11-05.

EUT operation mode: Transmitting


Test Result: Pass:

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b mode			
Low	2412	-22.00	≤ 8
Middle	2437	-21.67	≤ 8
High	2462	-21.55	≤ 8
802.11g mode			
Low	2412	-20.54	≤ 8
Middle	2437	-20.28	≤ 8
High	2462	-18.87	≤ 8
802.11n-HT20 mode			
Low	2412	-20.27	≤ 8
Middle	2437	-19.87	≤ 8
High	2462	-19.65	≤ 8
802.11n-HT40 mode			
Low	2422	-20.56	≤ 8
Middle	2437	-18.44	≤ 8
High	2452	-20.27	≤ 8
BLE mode			
Low	2402	-12.09	≤ 8
Middle	2440	12.11	≤ 8
High	2480	-12.36	≤ 8


Power Spectral Density, 802.11b Low Channel

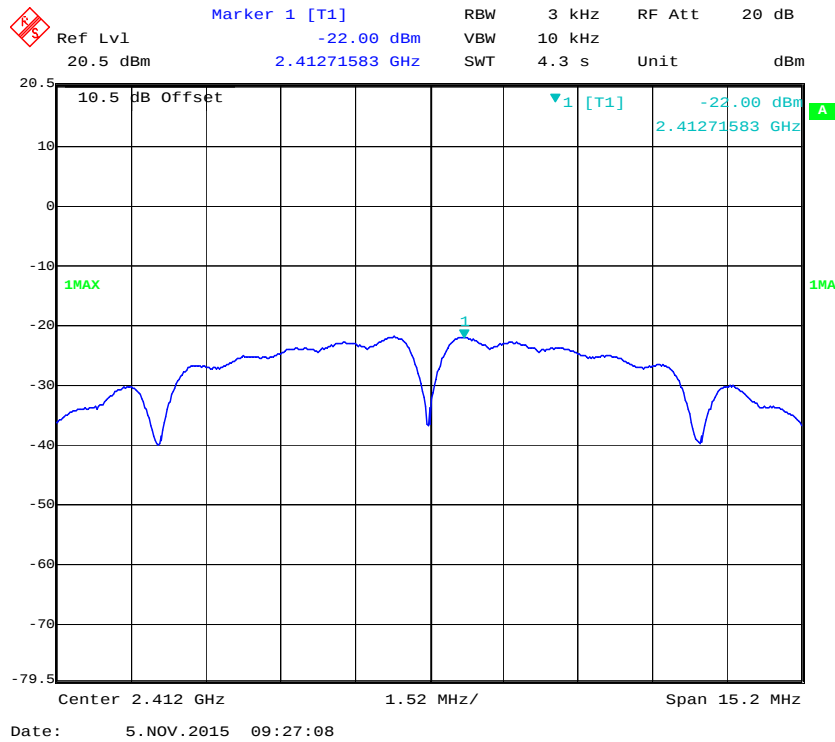


Power Spectral Density, 802.11b Middle Channel

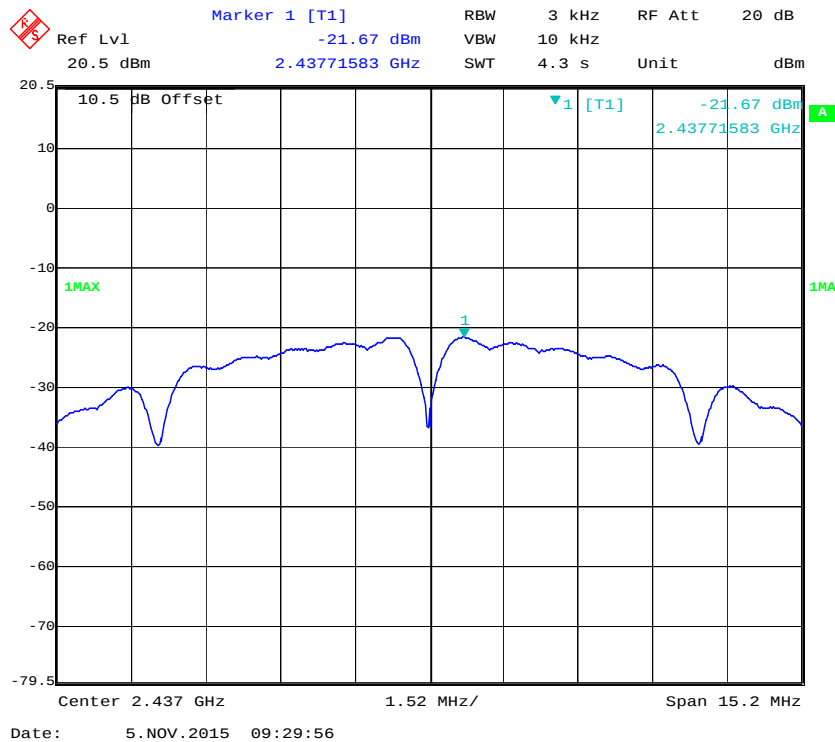


Power Spectral Density, 802.11b High Channel

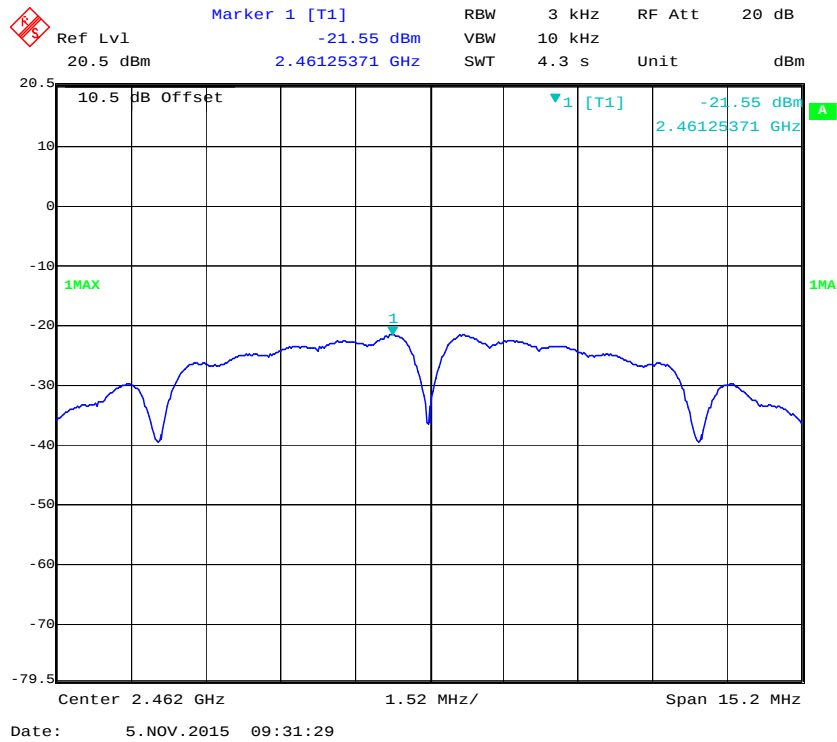


Power Spectral Density, 802.11g Low Channel

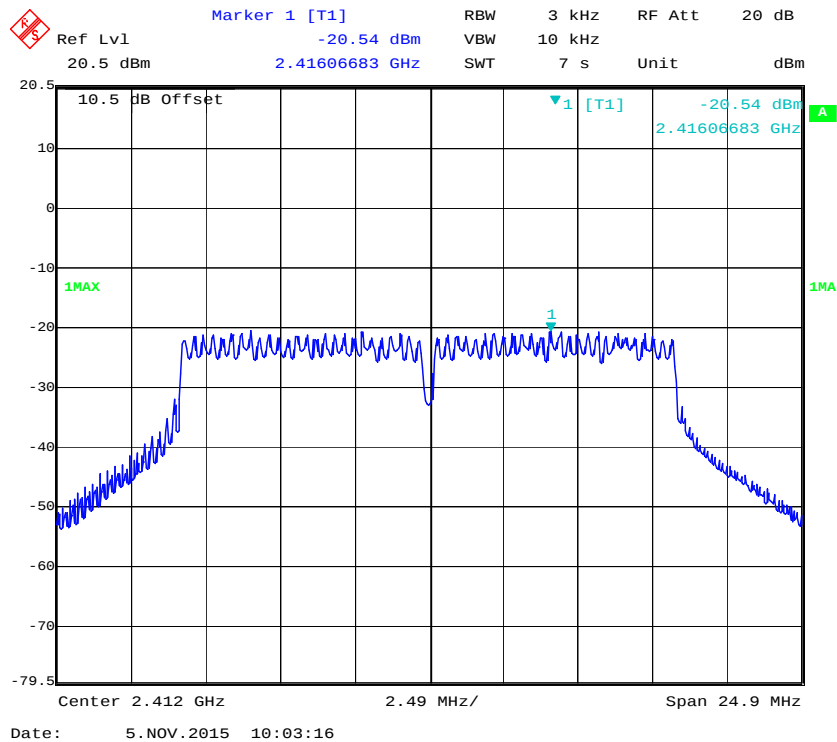


Power Spectral Density, 802.11g Middle Channel

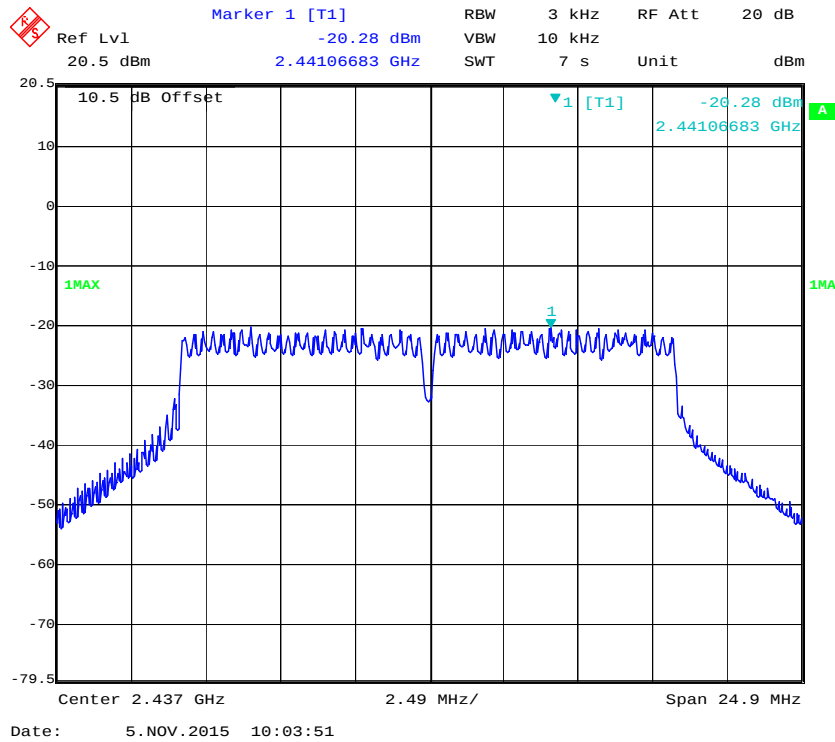


Power Spectral Density, 802.11g High Channel


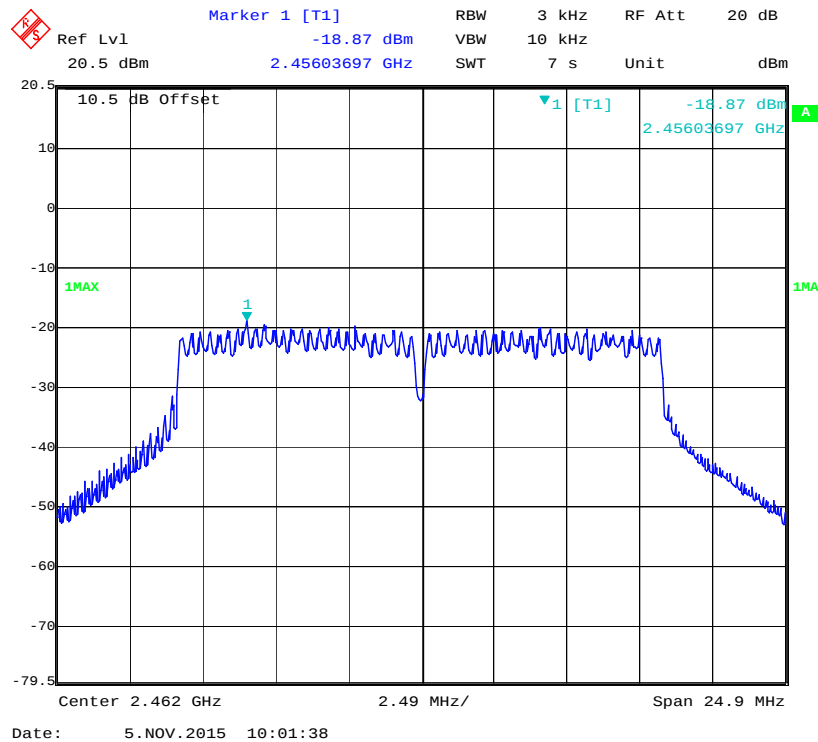


Power Spectral Density, 802.11n-HT20 Low Channel

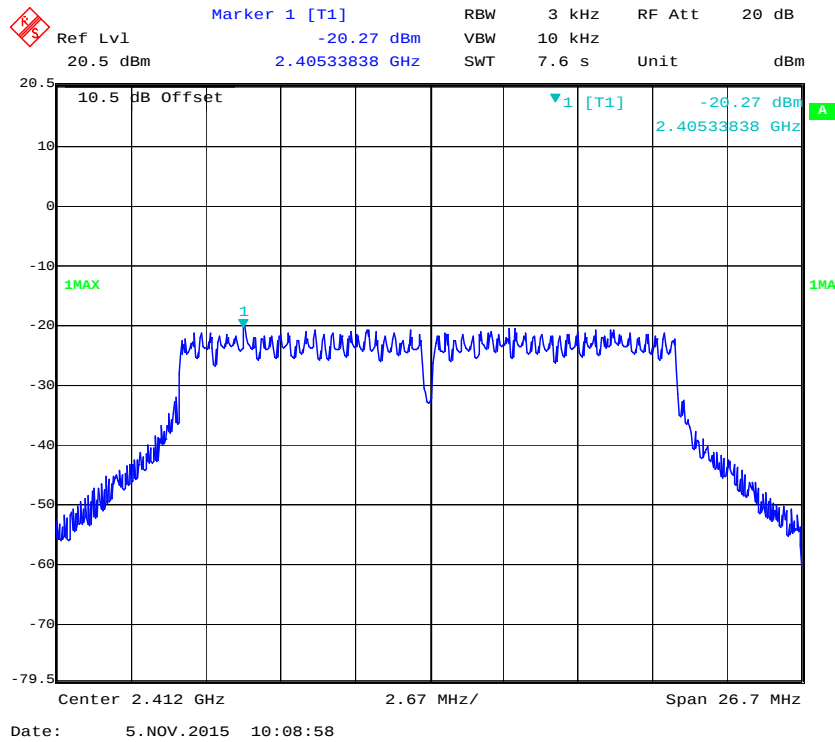


Power Spectral Density, 802.11n-HT20 Middle Channel

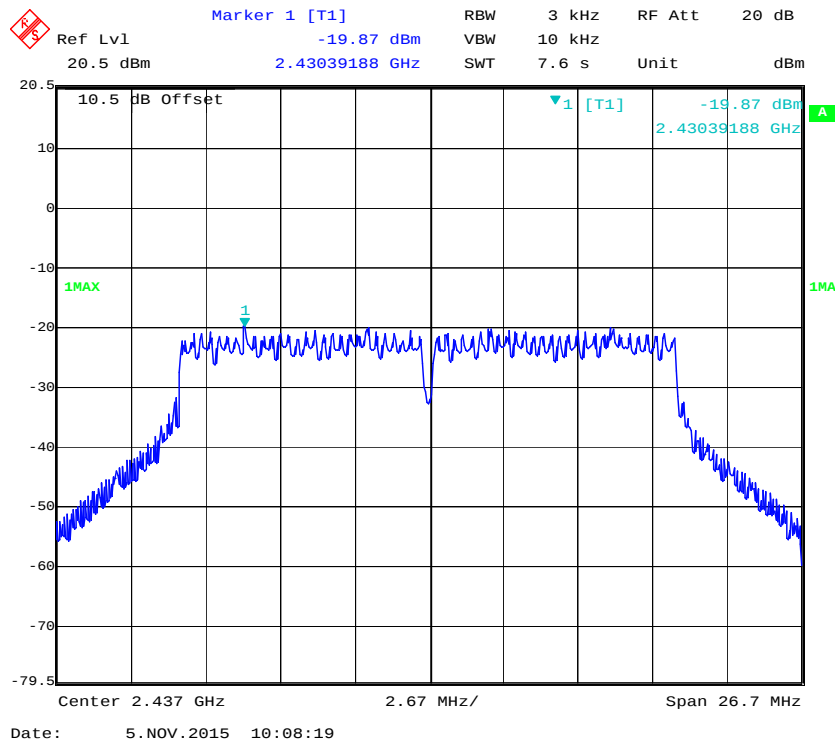


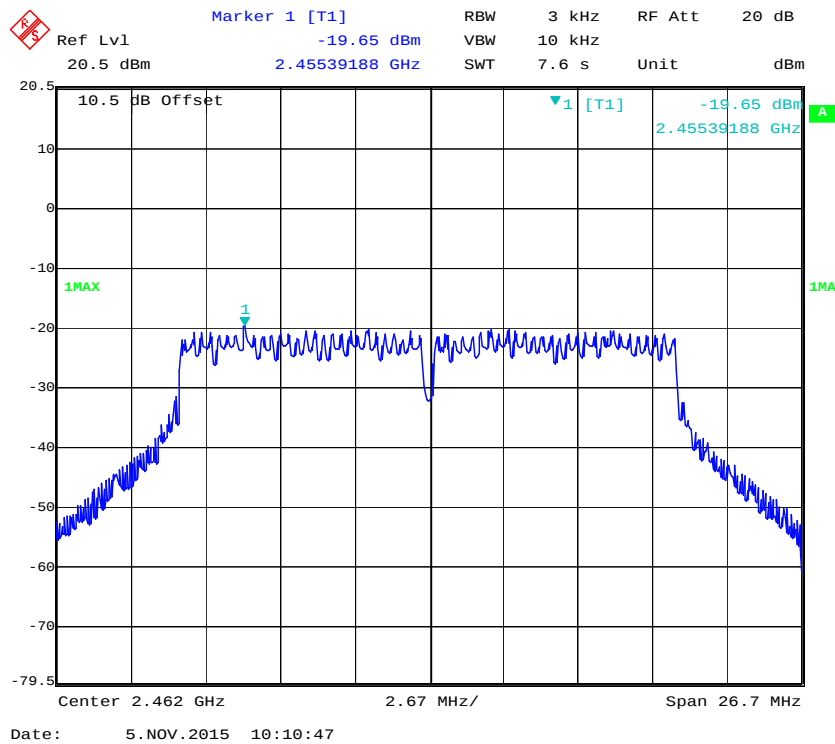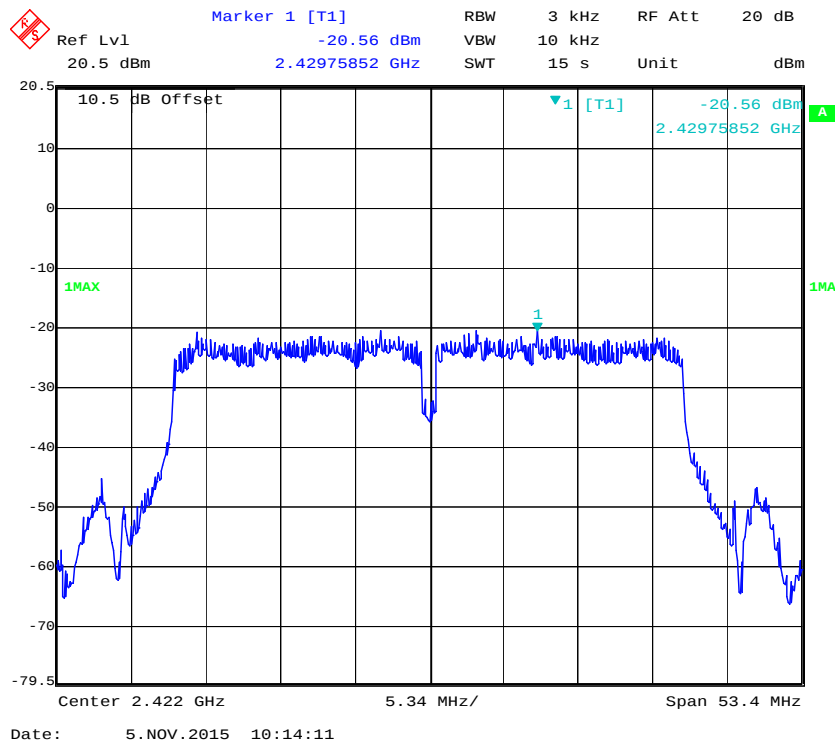Power Spectral Density, 802.11n-HT20 High Channel**Power Spectral Density, 802.11n-HT40 Low Channel**


Power Spectral Density, 802.11n-HT40 Middle Channel

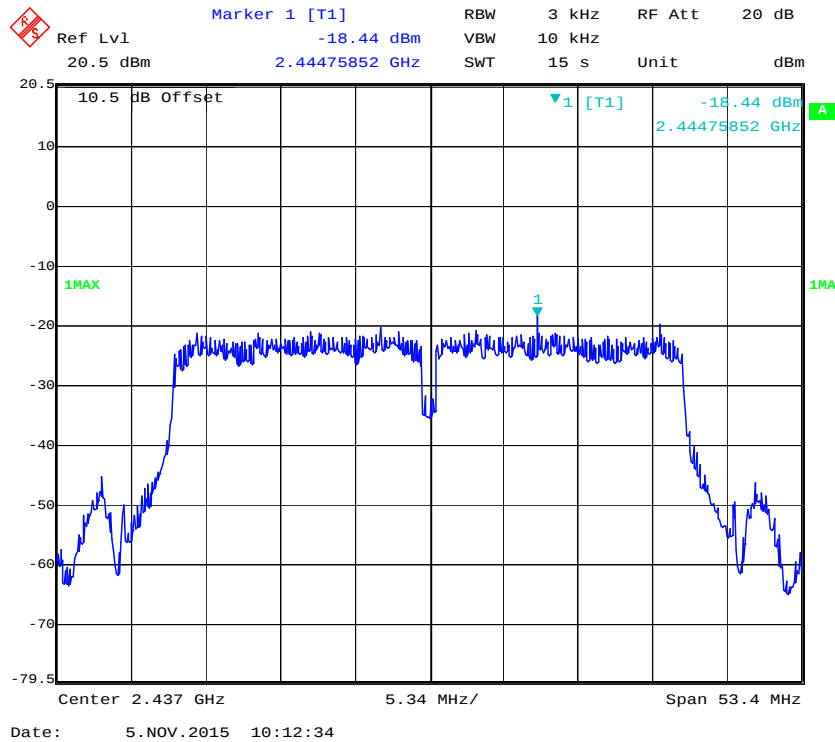


Power Spectral Density, 802.11n-HT40 High Channel

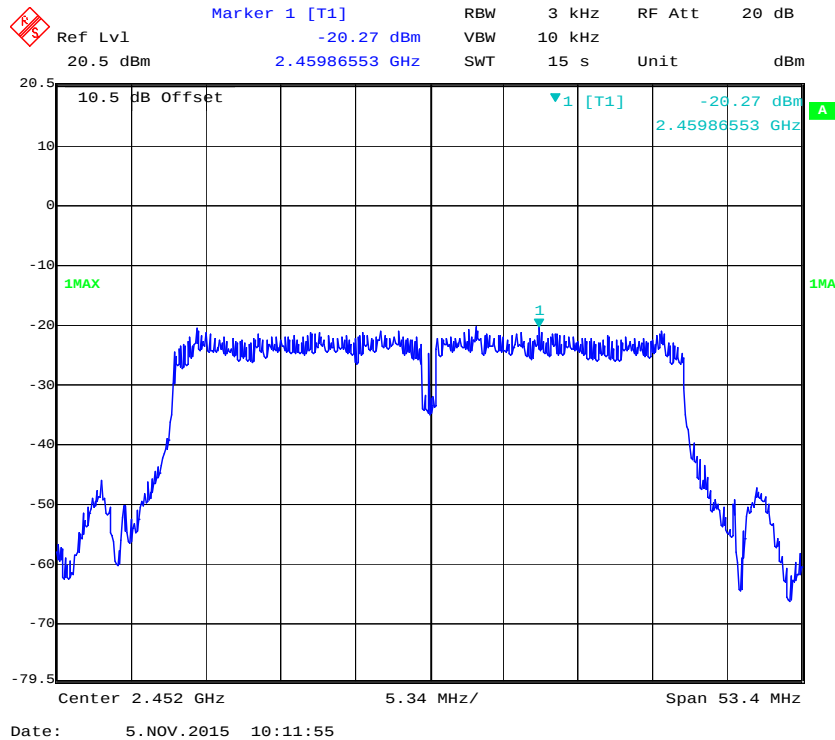


Power Spectral Density, BLE Low Channel

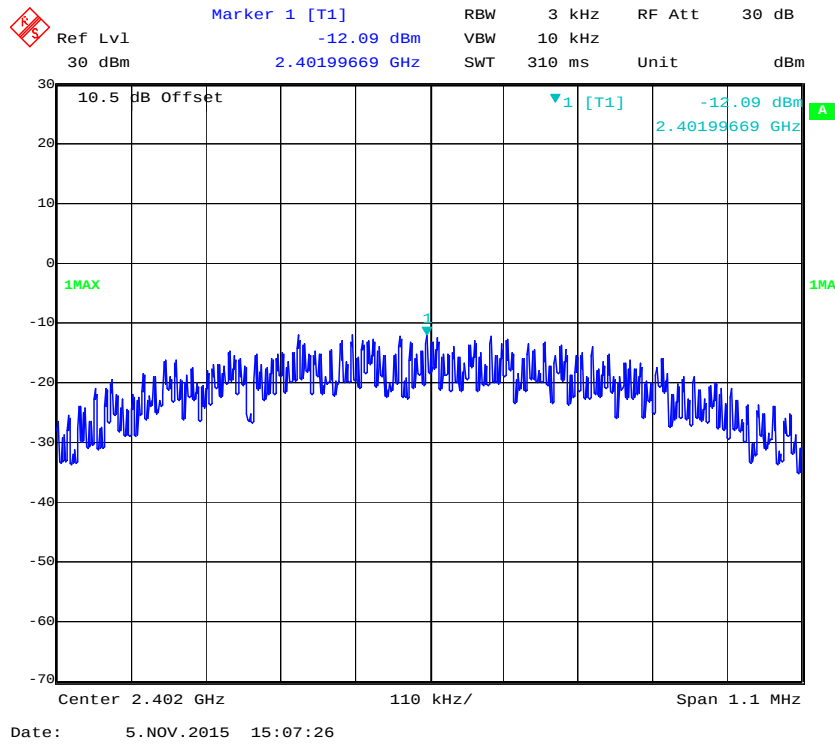

Power Spectral Density, BLE Middle Channel

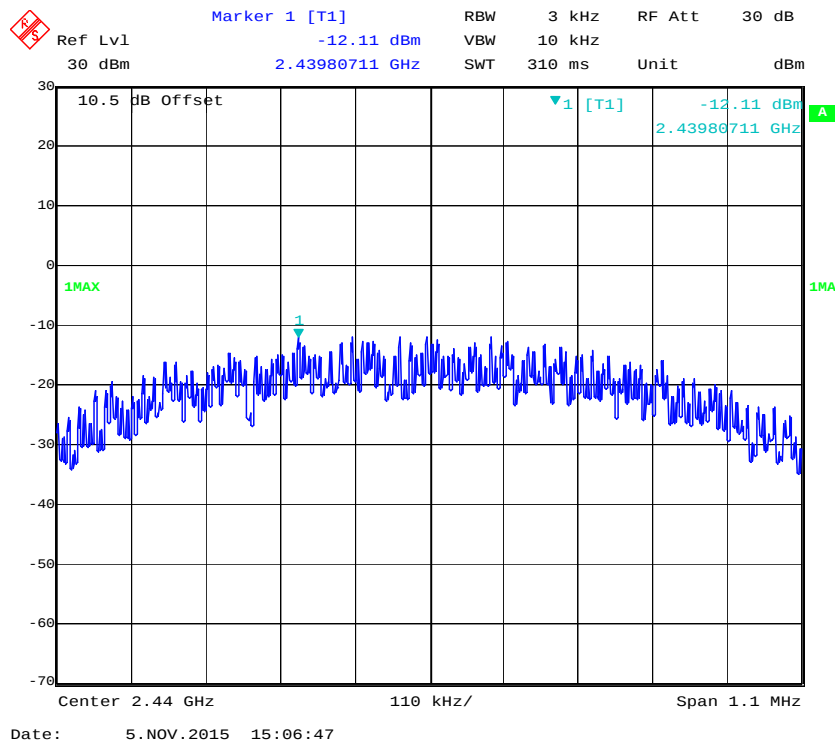

Power Spectral Density, BLE High Channel

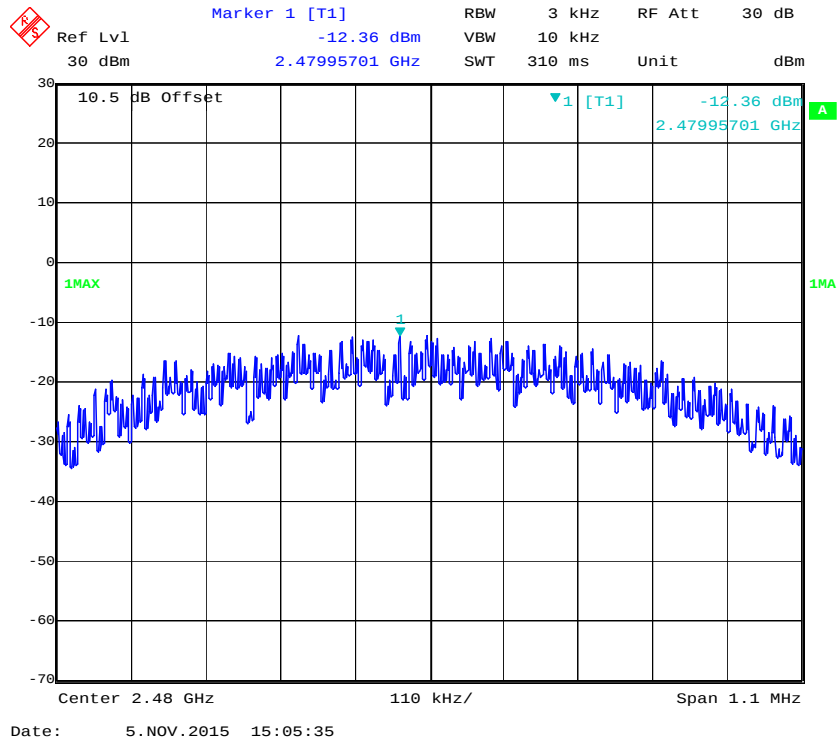

PRODUCT SIMILARITY DECLARATION LETTER

Hallmark Global LTD. dba HEXA.
Suite 1801 1 Yonge Street, Toronto Ontario, Canada
Tel: 1-(416) 833-5478 Fax: 1-(416) 369-0515

11/05/2015

Product Similarity Declaration

To Whom It May Concern,

We, Hallmark Global LTD. dba HEXA., hereby declare that we have a product named as Windows tablet PC (Model no: HEXA Spring 8) was tested by BACL, meanwhile, for our marketing purpose, we would like to list a series models (HEXA) on reports and certificate, all the models are identical schematics, except for the differences as below,
1, Only different Model No.

No other changes are made to them.

We confirm that all information above is true, and we'll be responsible for all the consequences. Please contact me if you have any question.

Signature:

Signature:

Ali S Fard

Manager



******* END OF REPORT *******