


FCC PART 15.247 TEST REPORT

For

Alinket Electronic Technology (Shanghai) Co., Ltd.

Room 403, No. 10, Lane 198, Zhangheng Road, Pudong, Shanghai, China

FCC ID: 2AELJ-ALXCOMBO

Report Type: Original Report	Product Type: Alinket Wireless Controller
Test Engineer: Matt Yao	
Report Number: RKS160504002-00N	
Report Date: 2016-06-22	
Reviewed By: EMC Manager	Jesse Huang 
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) Chenghu Road, Kunshan Development Zone No. 248, Kunshan, Jiangsu, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	8
FCC§15.247 (i), §1.1310& §2.1091 –MAXIMUM PERMISSIBLE.....	9
EXPOSURE (MPE).....	9
APPLICABLE STANDARD	9
MEASUREMENT RESULT	9
FCC §15.203 – ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED FACTOR & MARGIN CALCULATION	12
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	16
APPLICABLE STANDARD	16
MEASUREMENT UNCERTAINTY.....	16
EUT SETUP.....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST RESULTS SUMMARY	18
TEST DATA	19
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	24
APPLICABLE STANDARD	24

TEST PROCEDURE	24
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST DATA	24
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST EQUIPMENT LIST AND DETAILS.....	31
TEST DATA	31
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST DATA	37
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST EQUIPMENT LIST AND DETAILS.....	40
TEST DATA	40
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	56
APPLICABLE STANDARD	56
TEST PROCEDURE	56
TEST EQUIPMENT LIST AND DETAILS.....	56
TEST DATA	56
FCC §15.247(d) - BAND EDGES TESTING	62
APPLICABLE STANDARD	62
TEST PROCEDURE	62
TEST EQUIPMENT LIST AND DETAILS.....	62
TEST DATA	62

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Alinket Electronic Technology (Shanghai) Co., Ltd.'s product, model number: ALXC2X (the last "X" is from 0A to 9Z based on deferent software configurations for product marketing purpose) or the "EUT" in this report was a Alinket Wireless Controller, which was measured approximately:28mm (L) x14.3 mm (W) x2.2mm(H). Rated input voltage: 3.3VDC.

**All measurement and test data in this report was gathered from production sample serial number: 20160120012 (Assigned by the BACL. The EUT supplied by the applicant was received on 2016-01-20)*

Objective

This test report is prepared on behalf of Alinket Electronic Technology (Shanghai) Co., Ltd. in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC part 15.247 DTS and FCC part 15.407 NII submission with FCC ID: 2AELJ-ALXCOMBO.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB558074 D01 DTS Meas Guidance v03r04.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.87 dB for 30MHz-1GHz, and 4.84 dB for above 1GHz, 1.85dB for conducted measurement.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the Chenghu Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China.

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode which was controlled by the software.

EUT Exercise Software

Bluetooth

GFSK :Power level 7

$\pi/4$ -DQPSK :Power level 7

8DPSK :Power level 7

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Lenovo	Notebook	T400	N/A
Alinket	Control Board	N/A	N/A

External I/O Cable

Cable Description	Shielding Type	Length (m)	From Port	To
USB Cable	Unshielding	0.9	Control Board	PC

Block Diagram of Test Setup

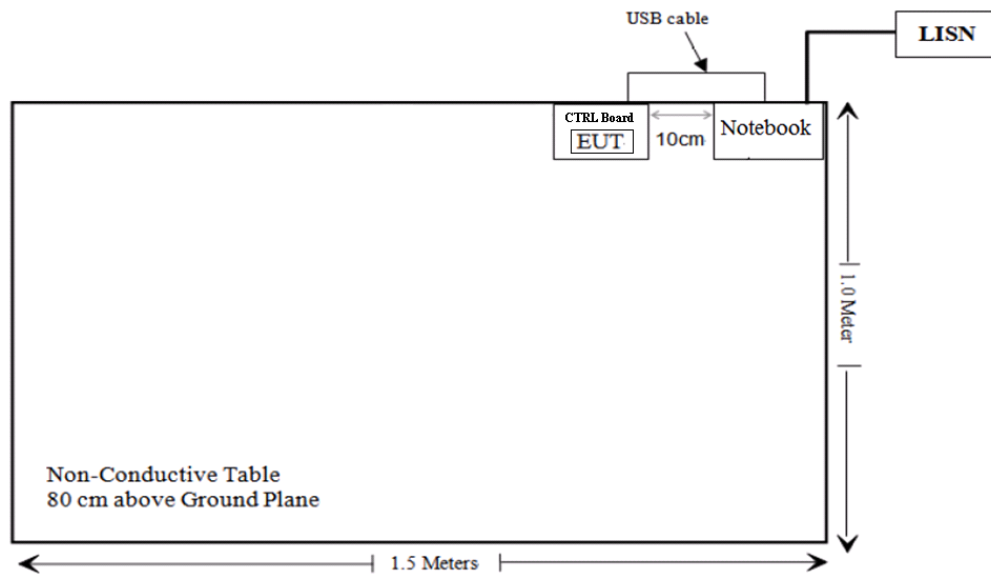

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

FCC§15.247 (i), §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/		f/1500	30
1500-100,000	/		1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Measurement Result

Model	Frequency	Antenna Gain		Target Power		Target Power	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
BDR (GFSK)	2441	1	1.259	10.5	11.22	20	0.003	1.0

Note: The target output power: 9 dBm ± 1.5dBm, which declared by the Manufacturer.

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has an IPEX connector to attach an external antenna arrangement for Bluetooth, which the antenna gain is 1 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Kunshan) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Port	Expanded Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup



- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	934115/007	2015-11-12	2016-11-11
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2015-11-12	2016-11-11
Rohde & Schwarz	LISN	ESH3-Z5	892239/018	2015-6-23	2016-6-22
Rohde & Schwarz	Pulse limiter	ESH3-Z2	879940/0058	2015-6-19	2016-6-18
HP	Current probe	8710-1744	636	2015-6-19	2016-6-18
FCC	ISN	FCC-TLISN-T8-02	20376	2015-6-23	2016-6-22
Rohde & Schwarz	CE Test software	EMC 32	V 09.10.0	--	--
MICRO-COAX	Coaxial line	UFB-293B-1-0480-50X50	97F0173	2015-10-1	2016-10-1

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, the worst margin reading as below:

11.50dB at 0.170000MHz in the **Line** conducted mode

Refer to CISPR16-4-2 and CISPR 16-4-1, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cisp}$$

In BACL, $U_{(Lm)}$ is less than U_{cisp} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.


Test Data

Environmental Conditions


Temperature:	27 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-03-18.

EUT operation mode: Transmitting

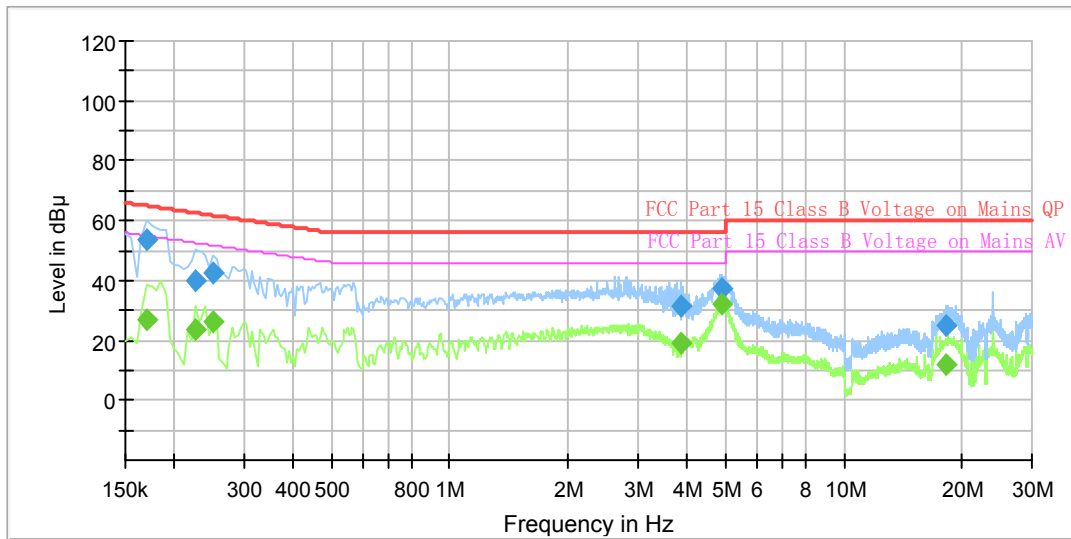AC 120V/60 Hz, Line

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.170000	---	26.62	9.000	L1	11.0	28.34	54.96	Compliance
0.170000	53.46	---	9.000	L1	11.0	11.50	64.96	Compliance
0.225000	---	23.83	9.000	L1	11.0	28.80	52.63	Compliance
0.225000	39.61	---	9.000	L1	11.0	23.02	62.63	Compliance
0.250000	---	26.50	9.000	L1	11.0	25.26	51.76	Compliance
0.250000	42.58	---	9.000	L1	11.0	19.18	61.76	Compliance
3.870000	---	18.87	9.000	L1	11.3	27.13	46.00	Compliance
3.870000	31.75	---	9.000	L1	11.3	24.25	56.00	Compliance
4.915000	---	31.86	9.000	L1	11.3	14.14	46.00	Compliance
4.915000	37.50	---	9.000	L1	11.3	18.50	56.00	Compliance
18.230000	---	12.23	9.000	L1	11.4	37.77	50.00	Compliance
18.230000	25.21	---	9.000	L1	11.0	28.34	60.00	Compliance

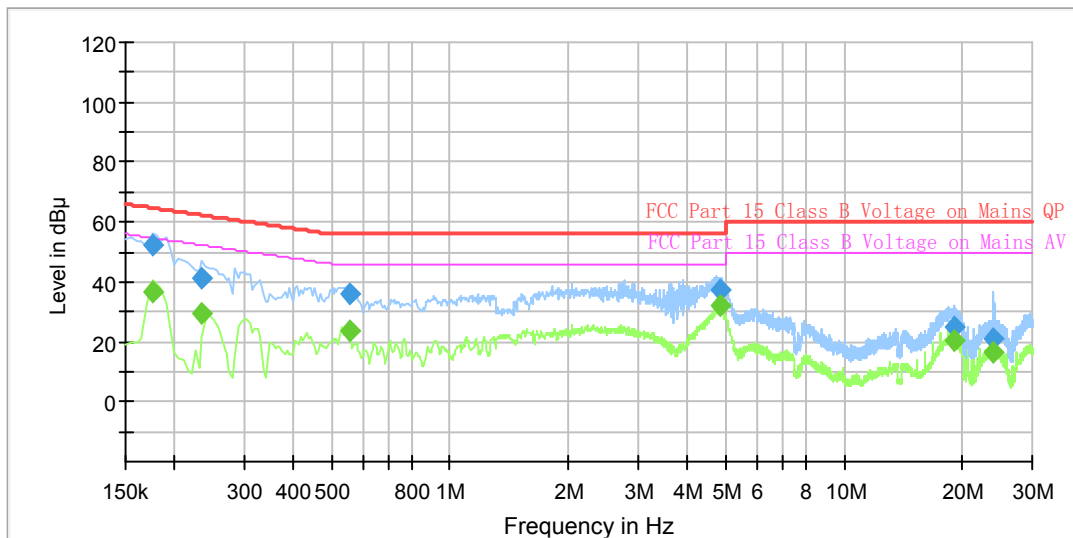AC 120V/60 Hz, Neutral

Frequency (MHz)	QuasiPeak (dBμV)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.175000	---	36.84	9.000	N	11.0	17.88	54.72	Compliance
0.175000	52.50	---	9.000	N	11.0	12.22	64.72	Compliance
0.235000	---	29.71	9.000	N	11.0	22.56	52.27	Compliance
0.235000	41.49	---	9.000	N	11.0	20.78	62.27	Compliance
0.555000	---	23.66	9.000	N	11.0	22.34	46.00	Compliance
0.555000	36.07	---	9.000	N	11.0	19.93	56.00	Compliance
4.845000	---	31.84	9.000	N	11.4	14.16	46.00	Compliance
4.845000	37.49	---	9.000	N	11.4	18.51	56.00	Compliance
19.115000	---	20.19	9.000	N	11.4	29.81	50.00	Compliance
19.115000	24.98	---	9.000	N	11.4	35.02	60.00	Compliance
24.000000	---	16.28	9.000	N	11.4	33.72	50.00	Compliance
24.000000	21.29	---	9.000	N	11.4	38.71	60.00	Compliance

Note:

- 1) Corr.=LISN VDF (Voltage Division Factor) + Cable Loss
- 2) Corrected Amplitude = Reading + Corr.
- 3) Margin = Limit –Corrected Amplitude

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard

FCC §15.205; §15.209; §15.247(d)

Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Kunshan) is 5.91 dB for 30MHz-1GHz, and 4.92 dB for above 1GHz. And this uncertainty will not be taken into consideration for the test data recorded in the report.

EUT Setup

Below 1 GHz:

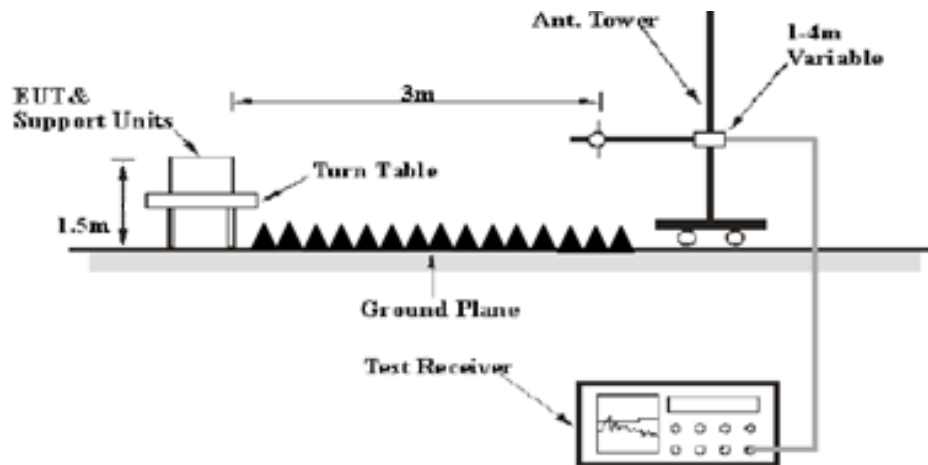

Above 1GHz:

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sonoma Instrument	Amplifier	330	171377	2015-09-16	2016-09-16
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2015-11-12	2016-11-11
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2015-11-07	2016-11-06
ETS	Horn Antenna	3115	6229	2015-11-07	2016-11-06
EMCO	Horn Antenna	3116	9510-2384	2015-11-07	2016-11-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2015-09-02	2016-09-02
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2015-09-02	2016-09-02
Mini	Pre-amplifier	ZVA-183-S+	857001418	2015-09-16	2016-09-16
DUCOMMUN	Pre-amplifier	ALN-22093530-01	990147	2015-09-16	2016-09-16
champrotek	Chamber	Chamber A	1#	2015-09-17	2016-09-17
R&S	Auto test Software	EMC32	V 09.10.0	-	-
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-06-16	2016-12-15
BACL	RF cable	KS-LAB-010	KS-LAB-010	2015-06-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

8.06dB at 4882MHz in the Horizontal polarization

Refer to CISPR16-4-2 and CISPR 16-4-1, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$


In BACL, $U_{(L_m)}$ is less than $+U_{cispr}$, if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data**Environmental Conditions**

Temperature:	27 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-03-17&2016-03-21.

EUT operation mode: Normal operation

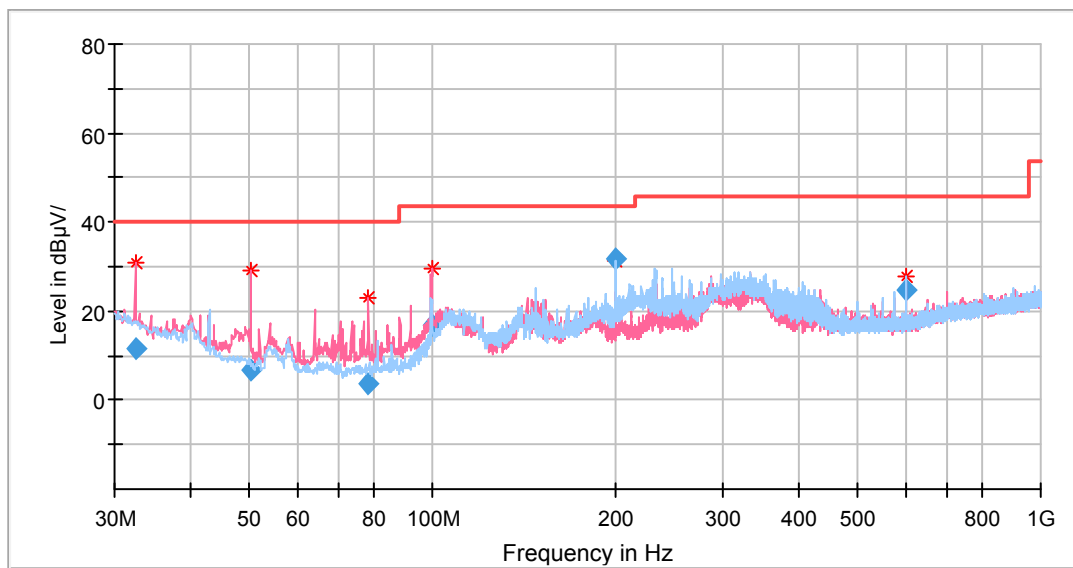30MHz-1GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
32.425000	17.89	QP	275.0	200.0	V	-6.5	11.39	40.00	28.61
50.248750	23.35	QP	355.0	100.0	V	-16.6	6.75	40.00	33.25
78.500000	20.58	QP	294.0	200.0	V	-17.0	3.58	40.00	36.42
99.718750	30.61	QP	94.0	200.0	V	-13.9	16.71	43.50	26.79
199.992500	44.24	QP	33.0	200.0	H	-12.5	31.74	43.50	11.76
599.996250	30.04	QP	207.0	200.0	H	-5.2	24.84	46.00	21.16

EUT operation mode: Transmitting

1GHz -25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8-DPSK mode, the worst case is BDR Mode (GFSK))

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Low Channel (2402 MHz)									
2402	92.74	PK	185	150	V	3	95.74	/	/
2402	84.73	Ave	185	150	V	3	87.73	/	/
2402	92.56	PK	150	150	H	3	95.56	/	/
2402	84.77	Ave	150	150	H	3	87.77	/	/
2359	30.47	Ave	66	150	H	4.1	34.57	54	19.43
2359	39.52	PK	66	150	H	4.1	43.62	74	30.38
2390	23.93	Ave	38	150	V	4.1	28.03	54	25.97
2390	32.53	PK	38	150	V	4.1	36.63	74	37.37
4804	32.07	Ave	124	150	H	13.7	45.77	54	8.23
4804	42.01	PK	124	150	H	13.7	55.71	74	18.29
6695	33.75	PK	154	250	V	18.8	52.55	74	21.45
6695	22.16	Ave	154	250	V	18.8	40.96	54	13.04
7206	32.89	PK	269	150	V	20.5	53.39	74	20.61
7206	25.18	Ave.	269	150	V	20.5	45.68	54	8.32
Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
Middle Channel (2441MHz)									
2441	92.91	PK	168	150	V	2.6	95.91	/	/
2441	84.9	Ave	168	150	V	2.6	87.9	/	/
2441	92.73	PK	168	150	H	2.6	95.73	/	/
2441	84.94	Ave	168	150	H	2.6	87.94	/	/
1520	30.64	Ave	156	250	V	0	34.74	54	19.26
1520	39.69	PK	156	250	V	0	43.79	74	30.21
2244	24.1	Ave	320	150	V	0.7	28.2	54	25.8
2244	32.7	PK	320	150	V	0.7	36.8	74	37.2
4882	32.24	Ave	21	150	H	13.9	45.94	54	8.06
4882	42.18	PK	21	150	H	13.9	55.88	74	18.12
6658	33.92	PK	83	249	H	18.8	52.72	74	21.28
6658	22.33	Ave	83	249	H	18.8	41.13	54	12.87
7323	33.06	PK	266	150	V	20.8	53.56	74	20.44
7323	25.35	Ave.	266	150	V	20.8	45.85	54	8.15

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
High Channel (2480 MHz)									
2480	92.03	PK	154	100	V	3.2	95.88	/	/
2480	86.42	Ave	154	100	V	3.2	88.87	/	/
2480	92.06	PK	136	100	H	3.2	95.7	/	/
2480	86.57	Ave	136	100	H	3.2	88.91	/	/
2483.5	30.61	PK	50	150	H	4.2	34.71	74	19.29
2483.5	39.66	Ave	50	150	H	4.2	43.76	54	30.24
2540	24.07	PK	100	150	H	4.4	28.17	74	25.83
2540	32.67	Ave	100	150	H	4.4	36.77	54	37.23
4960	32.21	Ave	321	200	H	14.1	45.91	54	8.09
4960	42.15	PK	321	200	H	14.1	55.85	74	18.15
6685	33.89	PK	25	100	V	18.8	52.69	74	21.31
6685	22.3	Ave	25	100	V	18.8	41.1	54	12.9
7440	33.03	PK	208	150	V	21.2	53.53	74	20.47
7440	25.32	Ave	208	150	V	21.2	45.82	54	8.18

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


2.4 GHz & 5 GHz radios can transmit simultaneously, they share the same antenna.

Conducted Spurious Emissions at Antenna Port


Low Channel

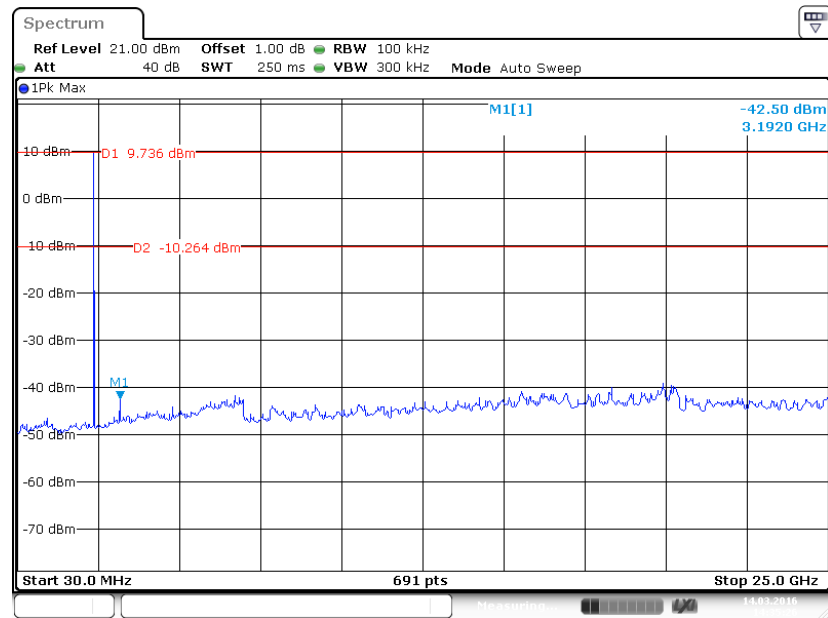

Middle Channel

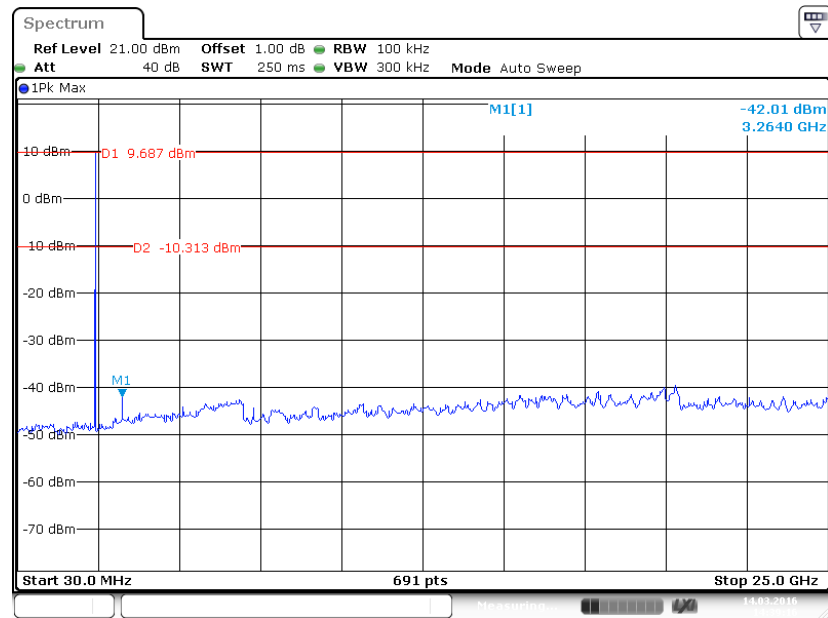

High Channel

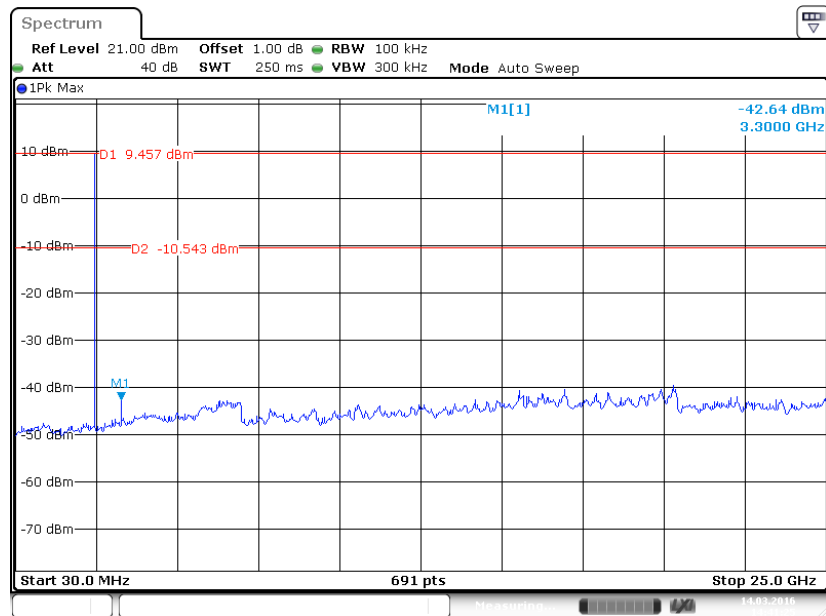

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-06-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-03-14.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	$\geq$ Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.004	0.650	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.652	Pass
	Adjacent	2442			
	High	2480	0.998	0.656	Pass
	Adjacent	2479			
EDR ($\pi/4$-DQPSK)	Low	2402	0.998	0.932	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.928	Pass
	Adjacent	2442			
	High	2480	0.992	0.934	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	1.004	0.938	Pass
	Adjacent	2403			
	Middle	2441	0.986	0.932	Pass
	Adjacent	2442			
	High	2480	1.004	0.934	Pass
	Adjacent	2479			

Note: Limit = 20 dB bandwidth *2/3


BDR (GFSK): Low Channel

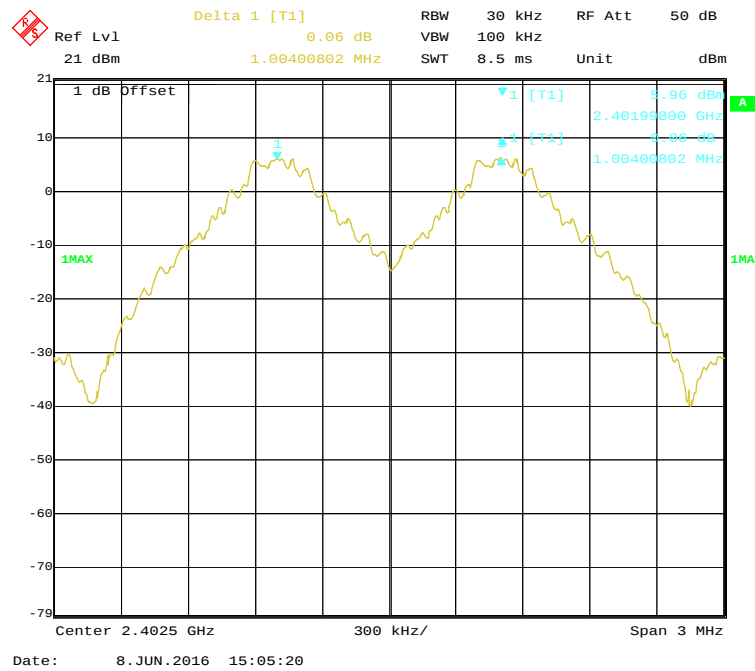


BDR (GFSK): Middle Channel

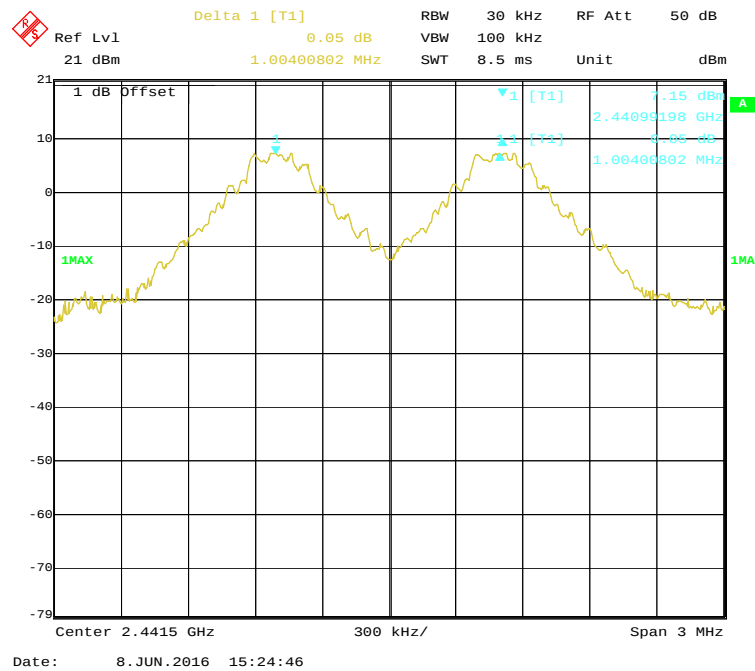

BDR (GFSK): High Channel

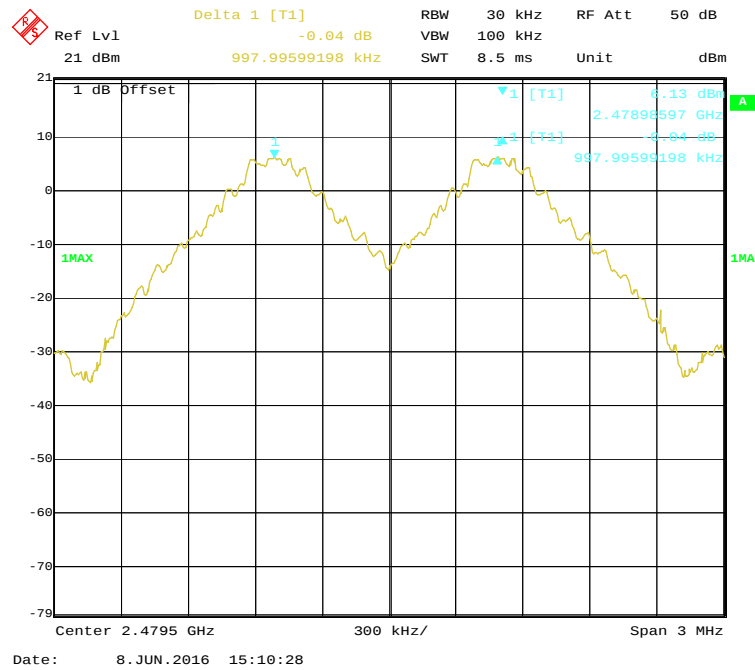

EDR ($\pi/4$ -DQPSK): Low Channel

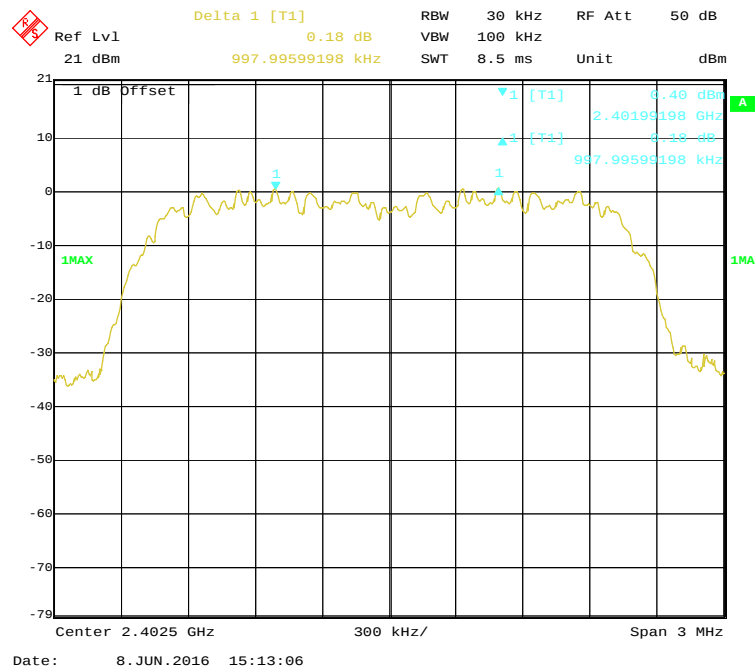

Delta 1 [T1] 0.07 dB RBW 30 kHz RF Att 50 dB
 Ref Lvl 21 dBm VBW 100 kHz Unit dBm
 1.00400802 MHz 2.44097996 GHz 8.5 ms 300 kHz/

Center 2.4415 GHz Span 3 MHz

1 dB Offset

1MAX

1 [T1] 1.19 dBm

2 [T1] 2.44097996 GHz

3 [T1] 0.07 dB

1.00400802 MHz

A

Delta 1 [T1] 0.20 dB RBW 30 kHz RF Att 50 dB
 Ref Lvl 21 dBm VBW 100 kHz Unit dBm
 991.98396794 kHz SWT 8.5 ms

1 dB Offset


1MAX

1 [T1] 0.60 dBm
 2.47897996 GHz
 991.98396794 kHz


Center 2.4795 GHz 300 kHz/ Span 3 MHz

Date: 8 JUN 2016 15:16:41


EDR (8DPSK): Low Channel

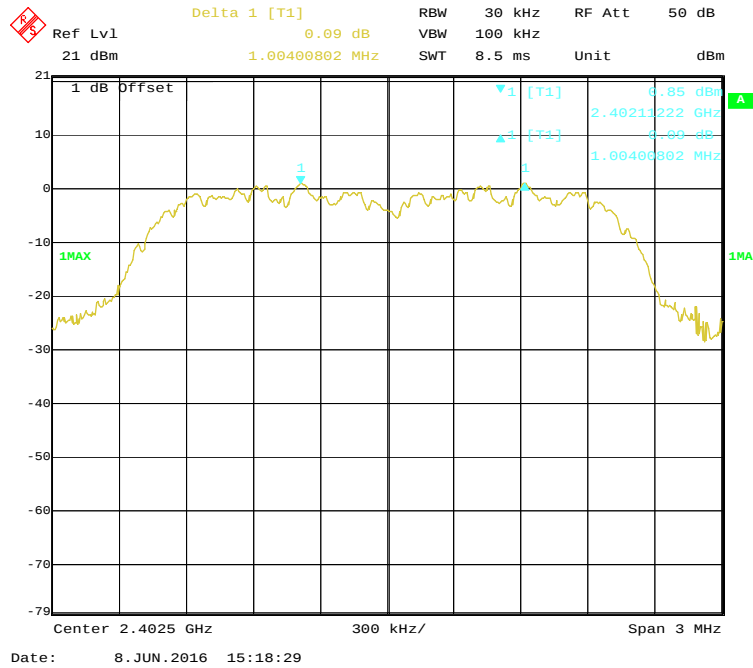

EDR (8DPSK): Middle Channel

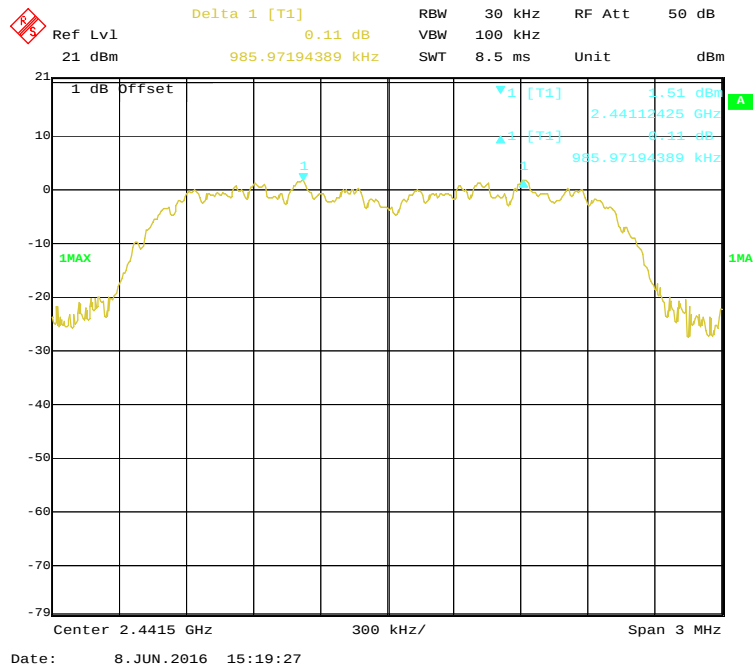

EDR (8DPSK): High Channel

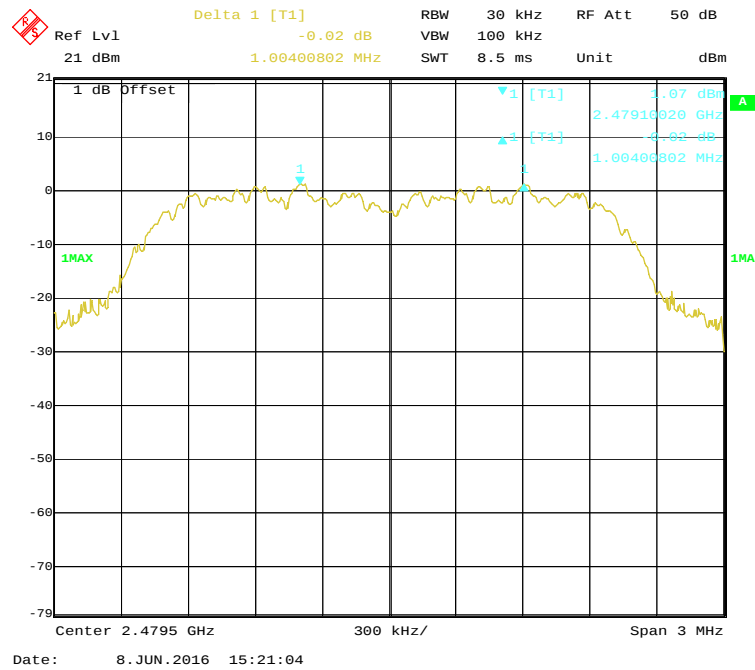

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2015-09-02	2016-09-02
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-06-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-03-14.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.975
	Middle	2441	0.978
	High	2480	0.984
EDR ($\pi/4$-DQPSK)	Low	2402	1.398
	Middle	2441	1.392
	High	2480	1.401
EDR (8DPSK)	Low	2402	1.407
	Middle	2441	1.398
	High	2480	1.401


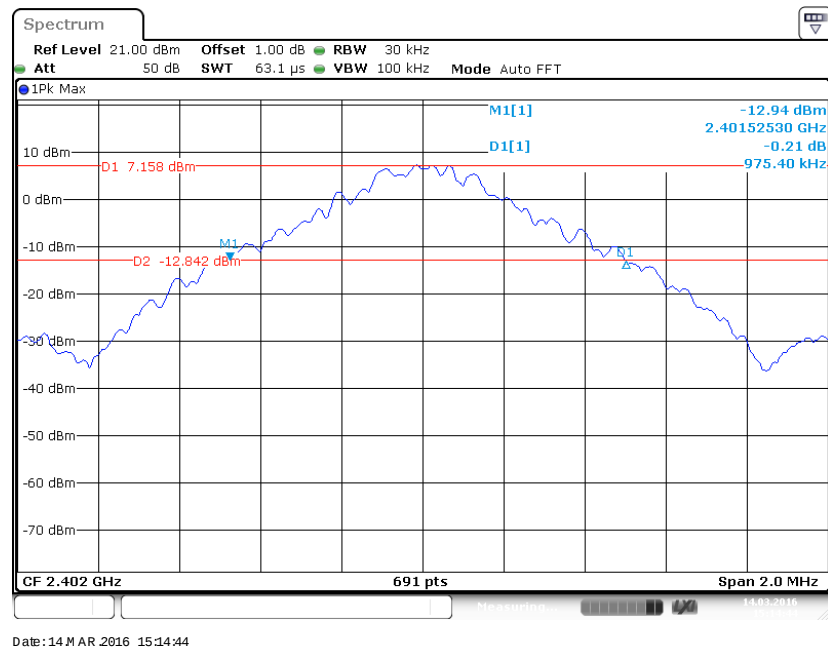
BDR (GFSK): Low Channel

BDR (GFSK): Middle Channel

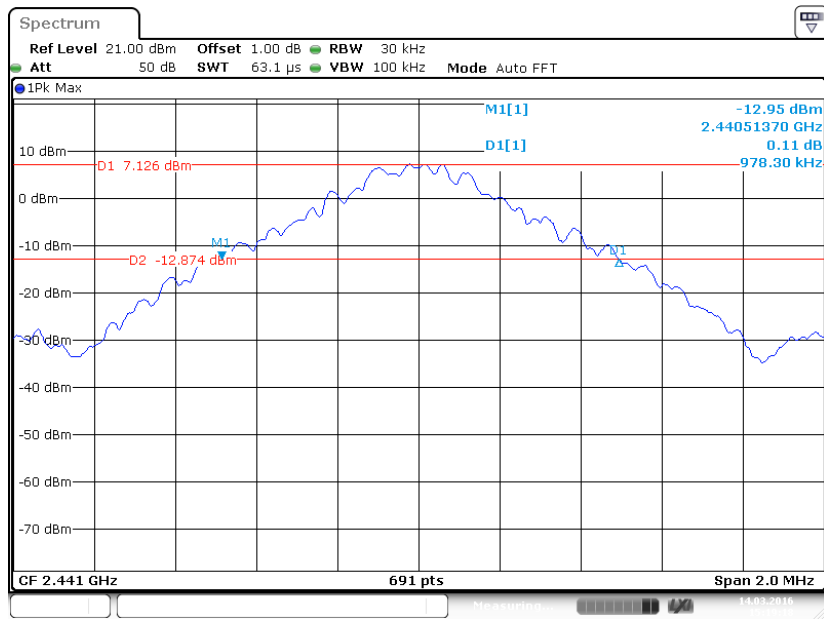


BDR (GFSK): High Channel

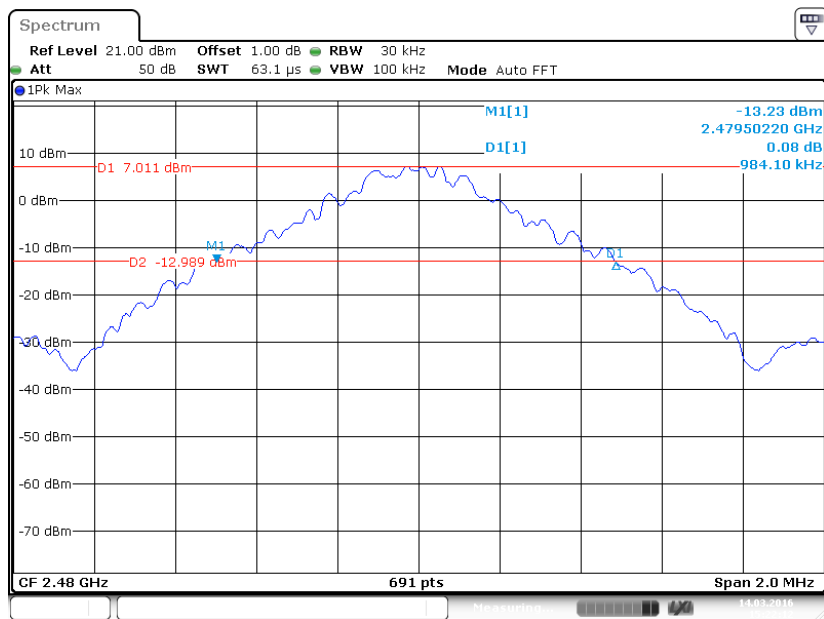

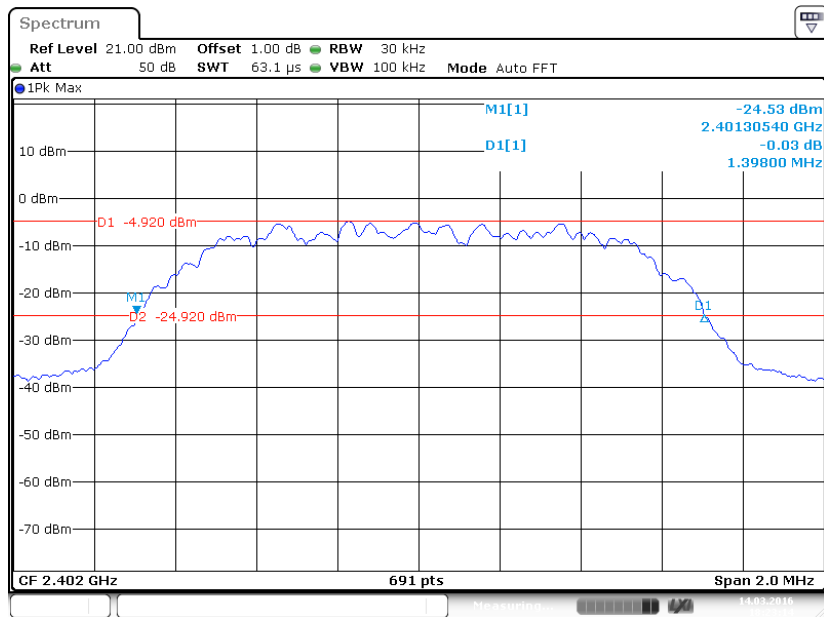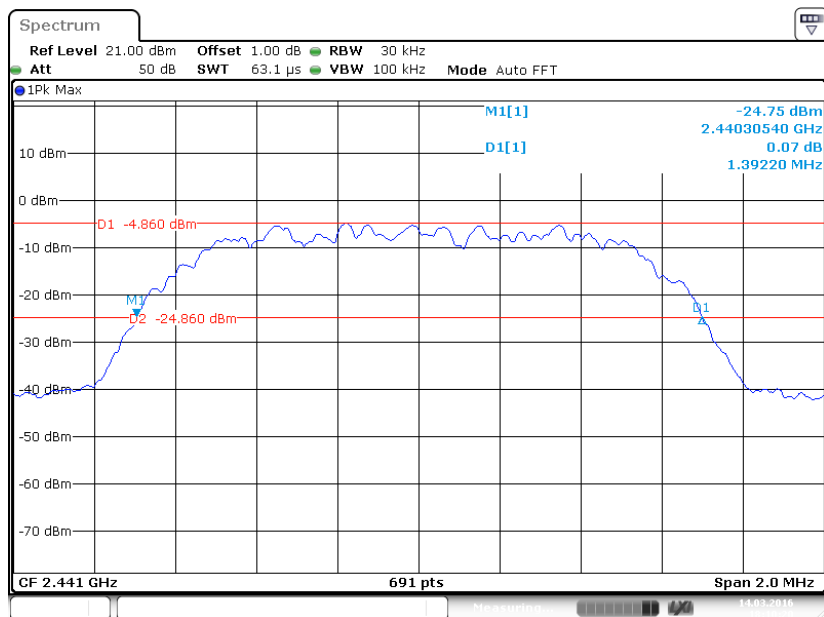
EDR ($\pi/4$ -DQPSK): Low Channel**EDR ($\pi/4$ -DQPSK): Middle Channel**

EDR ($\pi/4$ -DQPSK): High Channel

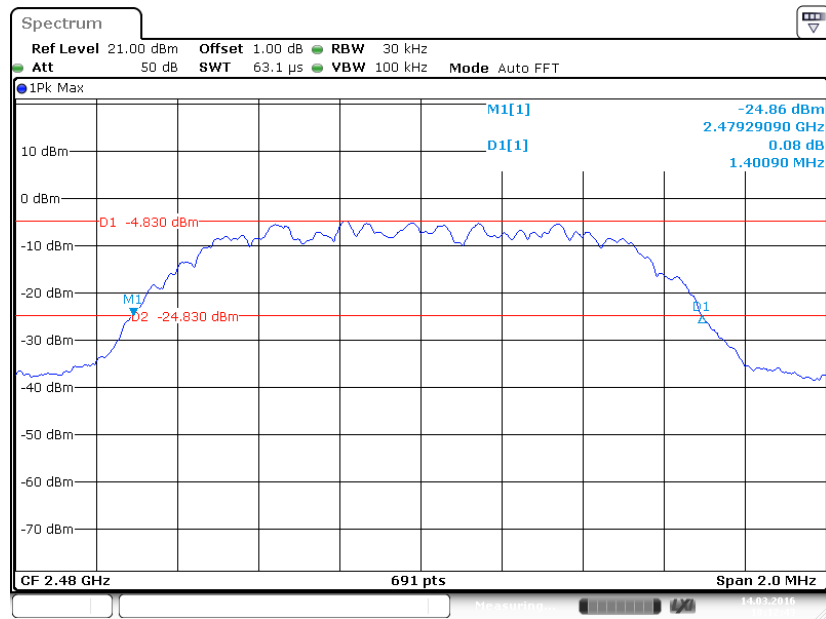


Date: 14 MAR 2016 18:12:44

EDR (8DPSK): Low Channel

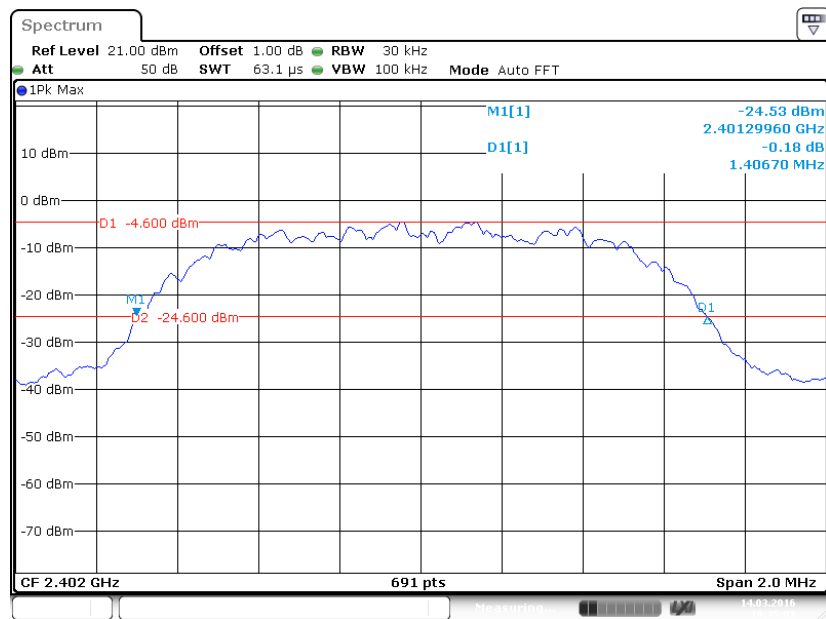


Date: 14 MAR 2016 19:35:33

EDR (8DPSK): Middle Channel

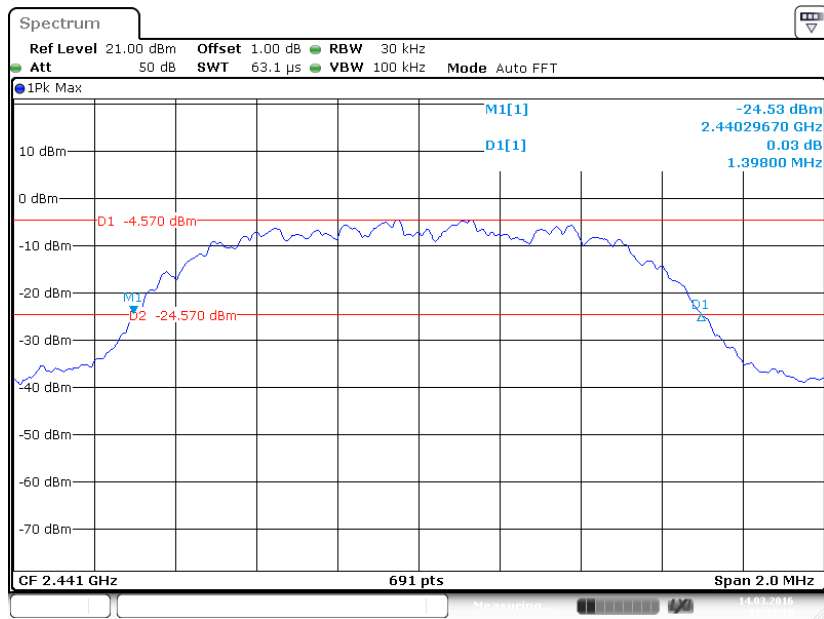

EDR (8DPSK): High Channel

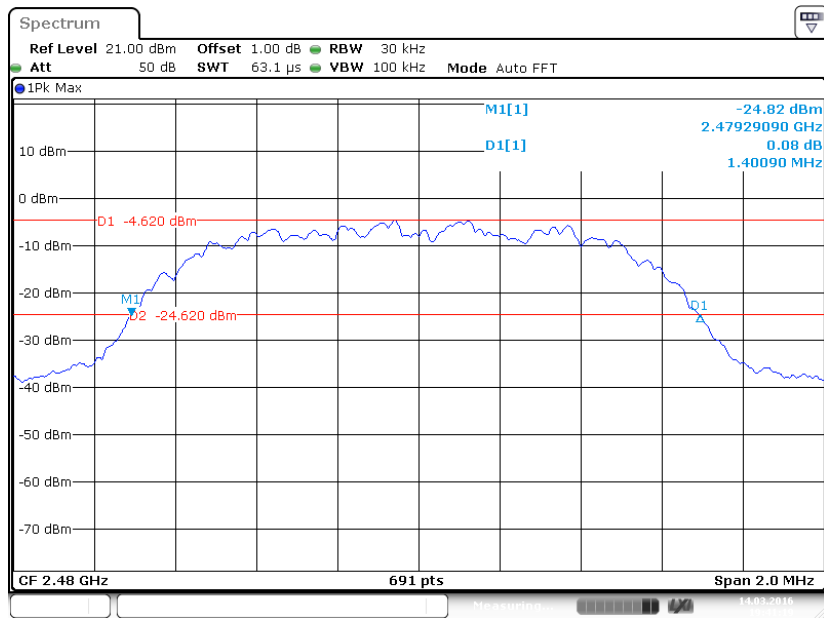

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2015-09-02	2016-09-02
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-06-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa


The testing was performed by Matt Yao on 2016-03-16.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥ 15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥ 15
EDR (8DPSK)	2400-2483.5	79	≥ 15

BDR (GFSK): Number of Hopping Channels

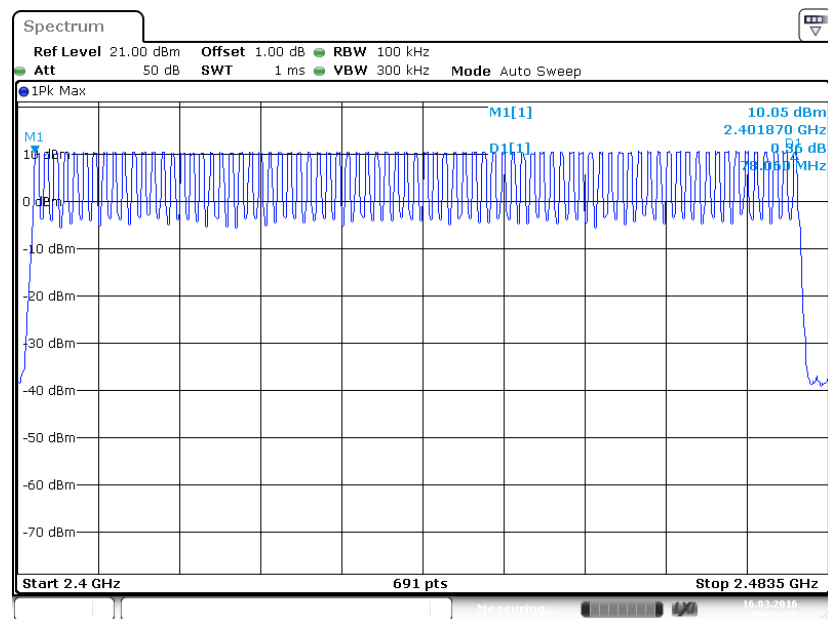


Date: 16 MAR 2016 09:31:20

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

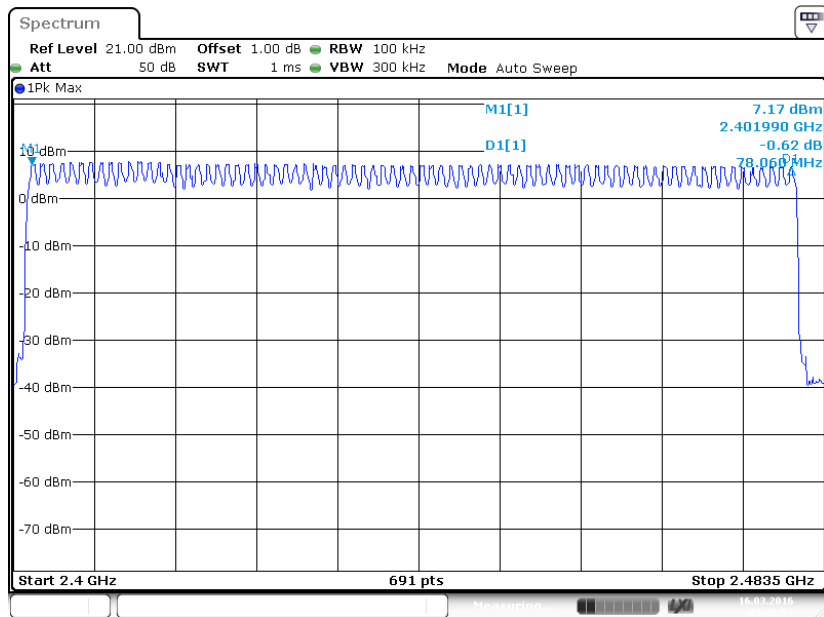

Date: 16 MAR 2016 09:46:57

EDR (8DPSK): Number of Hopping Channels

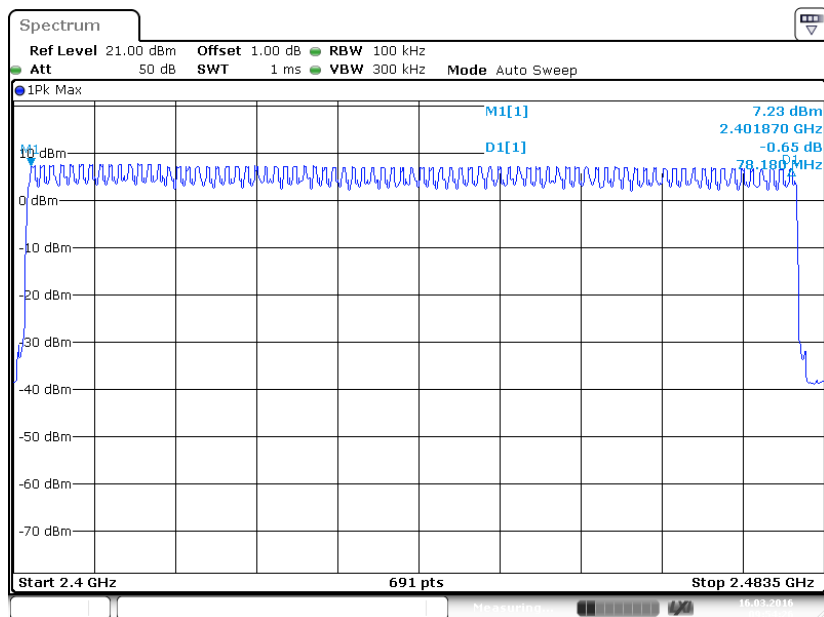

Date: 16 MAR 2016 09:54:27

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2015-09-02	2016-09-02
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-06-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa


The testing was performed by Matt Yao on 2016-03-16.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.384	0.123	0.4	Pass
		Middle	0.384	0.123	0.4	Pass
		High	0.384	0.123	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.694	0.271	0.4	Pass
		Middle	1.682	0.269	0.4	Pass
		High	1.694	0.271	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.948	0.314	0.4	Pass
		Middle	2.943	0.314	0.4	Pass
		High	2.953	0.315	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH 1	Low	0.387	0.124	0.4	Pass
		Middle	0.387	0.124	0.4	Pass
		High	0.387	0.124	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH 3	Low	1.787	0.286	0.4	Pass
		Middle	1.787	0.286	0.4	Pass
		High	1.787	0.286	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH 5	Low	3.036	0.324	0.4	Pass
		Middle	3.036	0.324	0.4	Pass
		High	3.036	0.324	0.4	Pass
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH 1	Low	0.462	0.148	0.4	Pass
		Middle	0.462	0.148	0.4	Pass
		High	0.462	0.148	0.4	Pass
		Note: 3DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH 3	Low	1.796	0.287	0.4	Pass
		Middle	1.796	0.287	0.4	Pass
		High	1.796	0.287	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH 5	Low	3.036	0.324	0.4	Pass
		Middle	3.036	0.324	0.4	Pass
		High	3.036	0.324	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				

BDR (GFSK): Pulse time, Low Channel, DH1

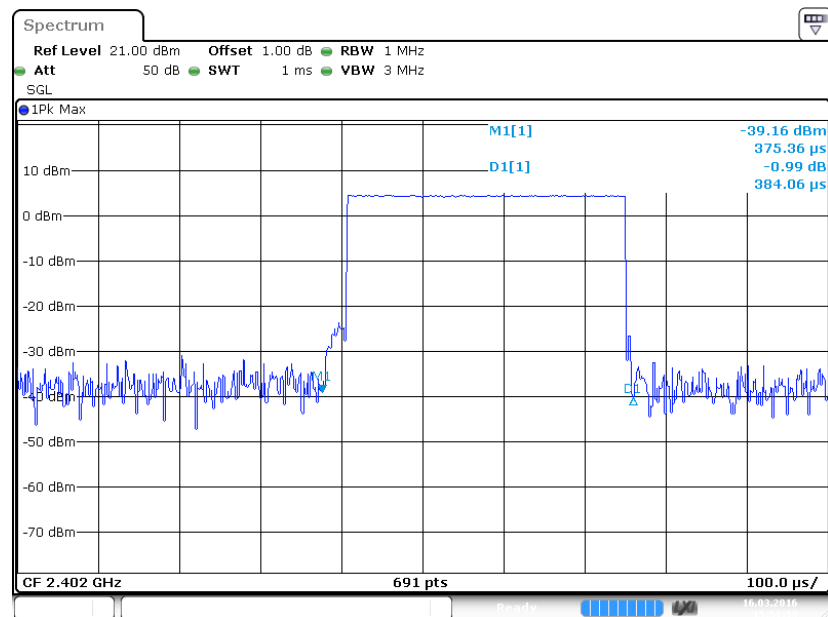


Date: 16 MAR 2016 15:51:13

Pulse time, Middle Channel, DH1

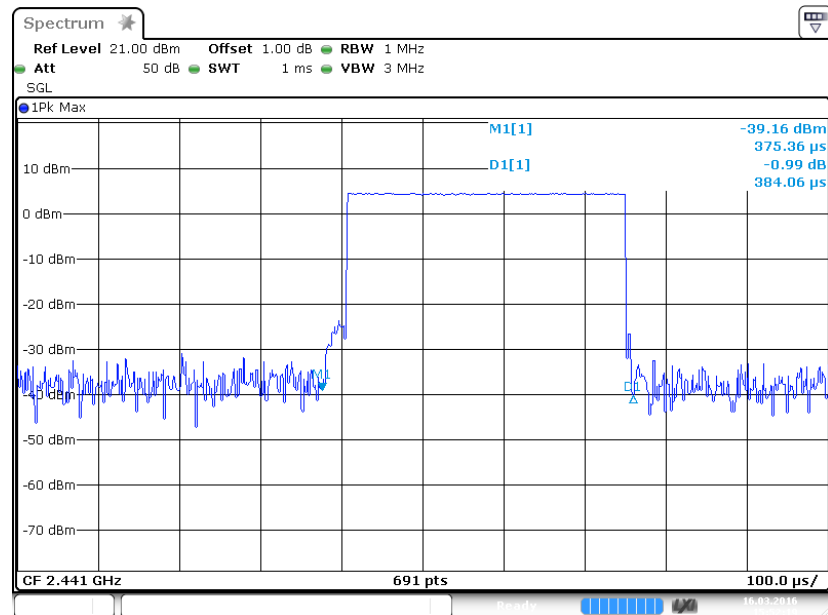


Date: 16 MAR 2016 15:52:19


Pulse time, High Channel, DH1

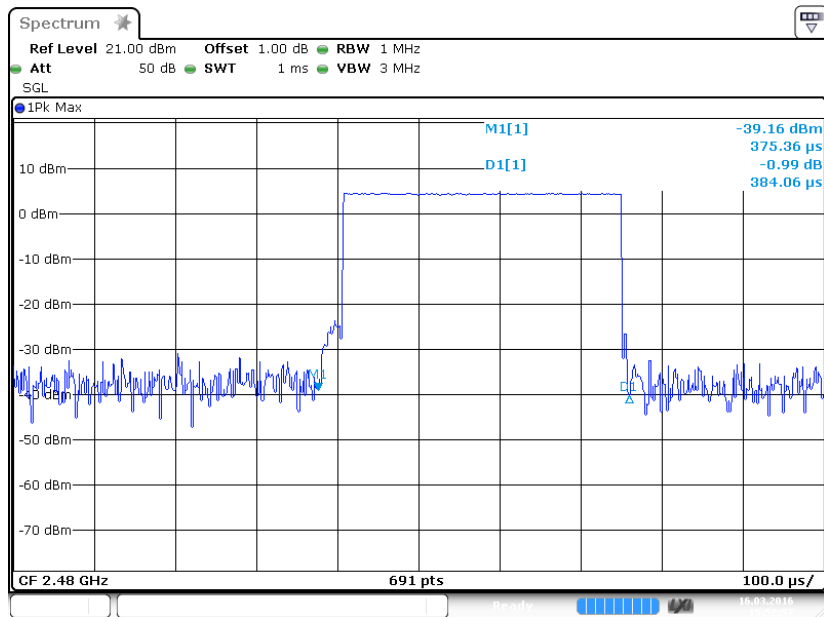

Pulse time, Low Channel, DH3

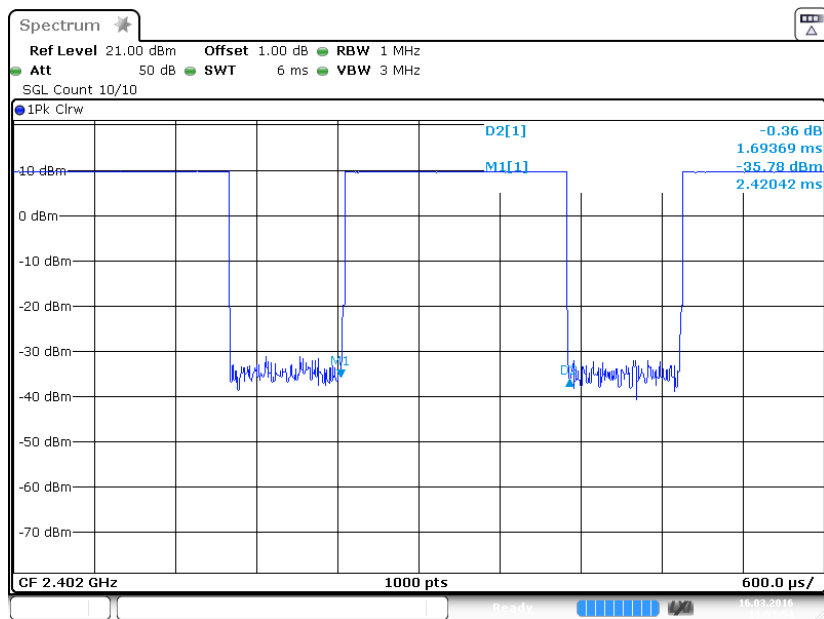


Pulse time, Middle Channel, DH3

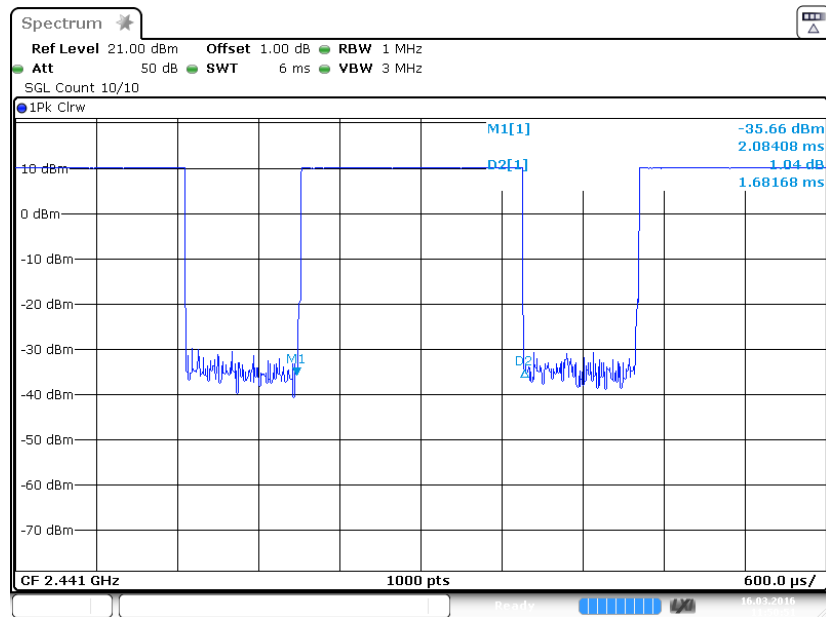


Date: 16 MAR 2016 11:50:52

Pulse time, High Channel, DH3

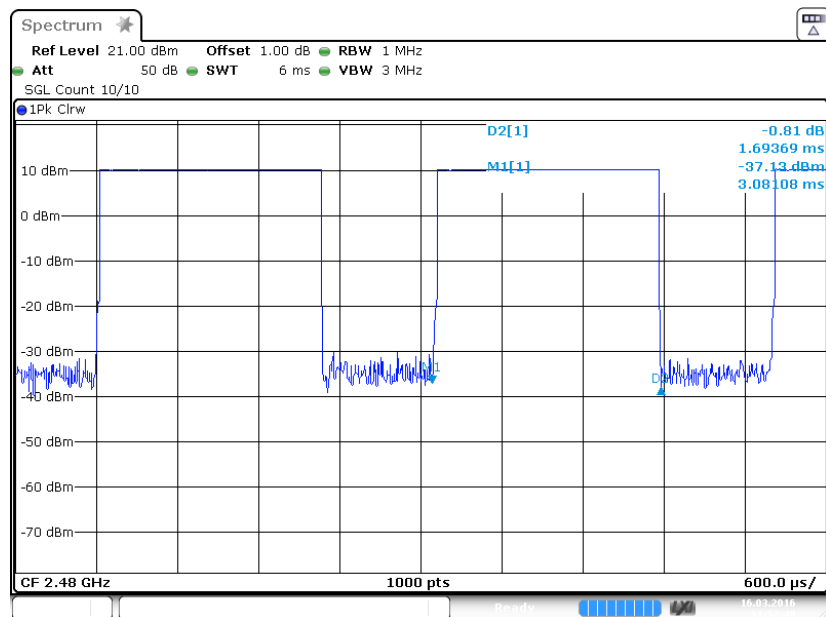


Date: 16 MAR 2016 11:52:50

Pulse time, Low Channel, DH5

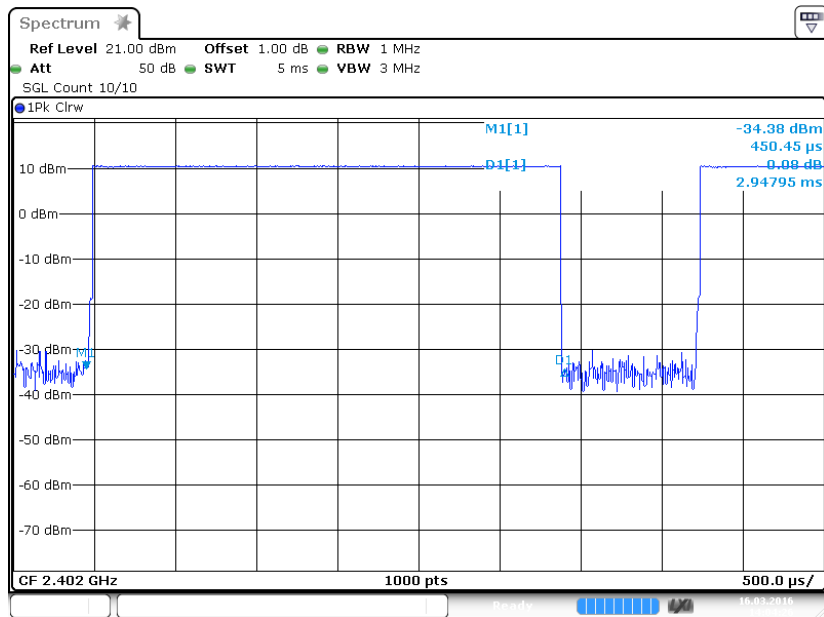


Date: 16 MAR 2016 14:04:27

Pulse time, Middle Channel, DH5

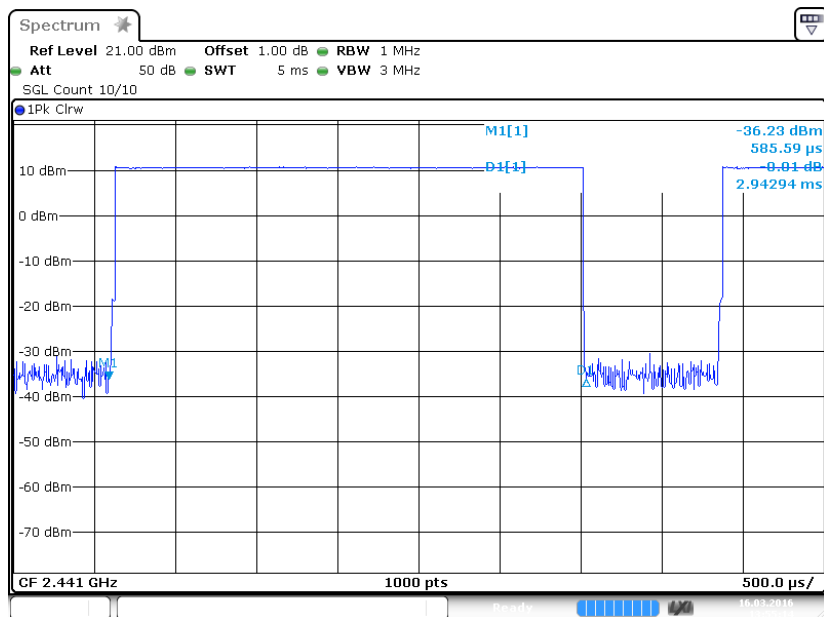


Date: 16 MAR 2016 13:55:13


Pulse time, High Channel, DH5

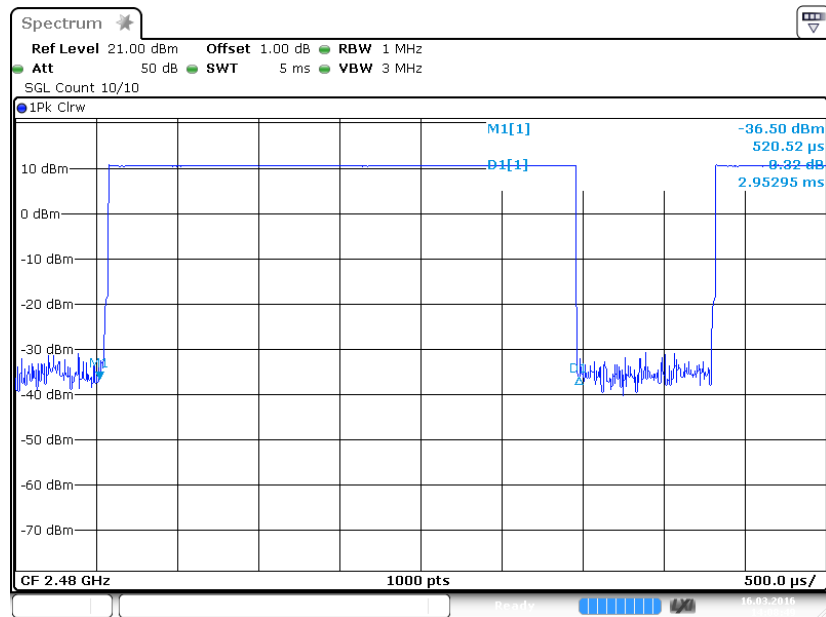


EDR ($\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH1

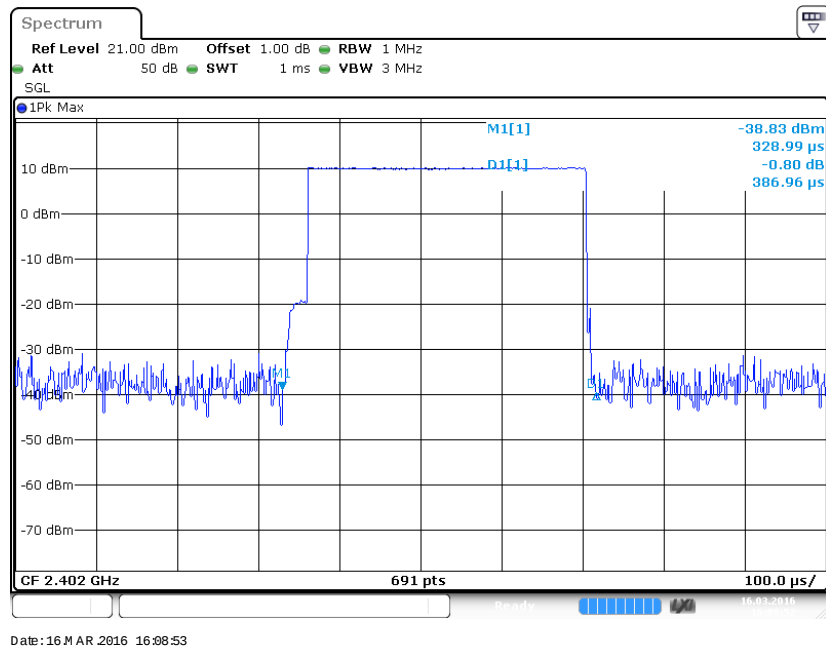


Pulse time, Middle Channel, 2DH1

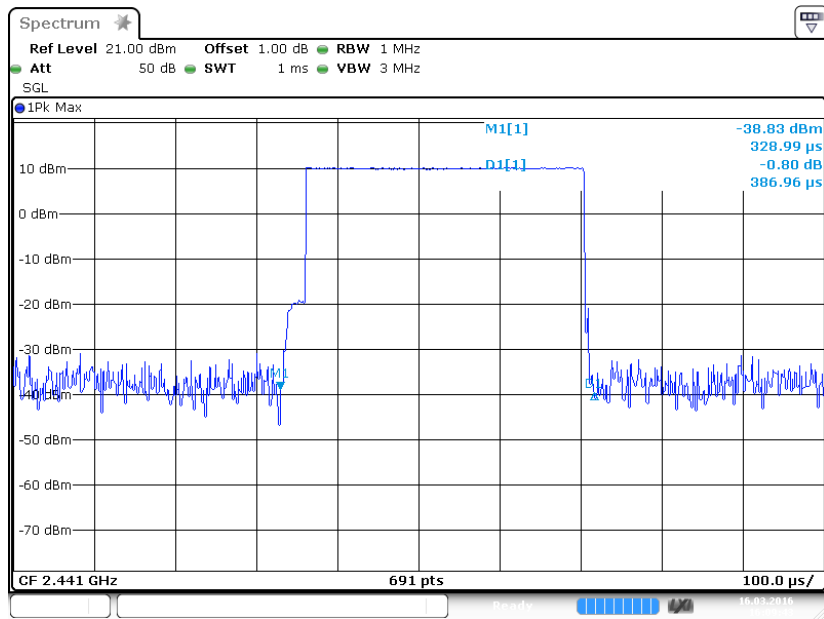


Pulse time, High Channel, 2DH1

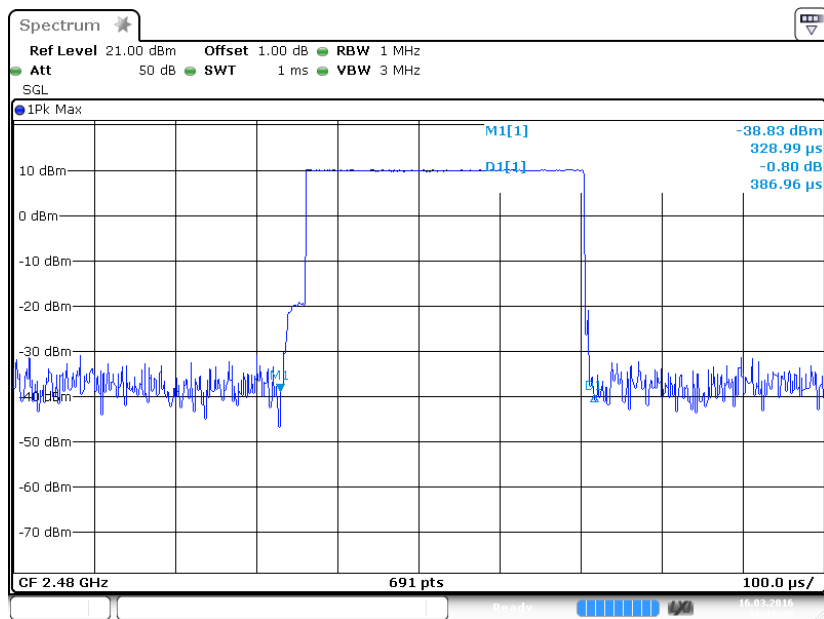


Pulse time, Low Channel, 2DH3

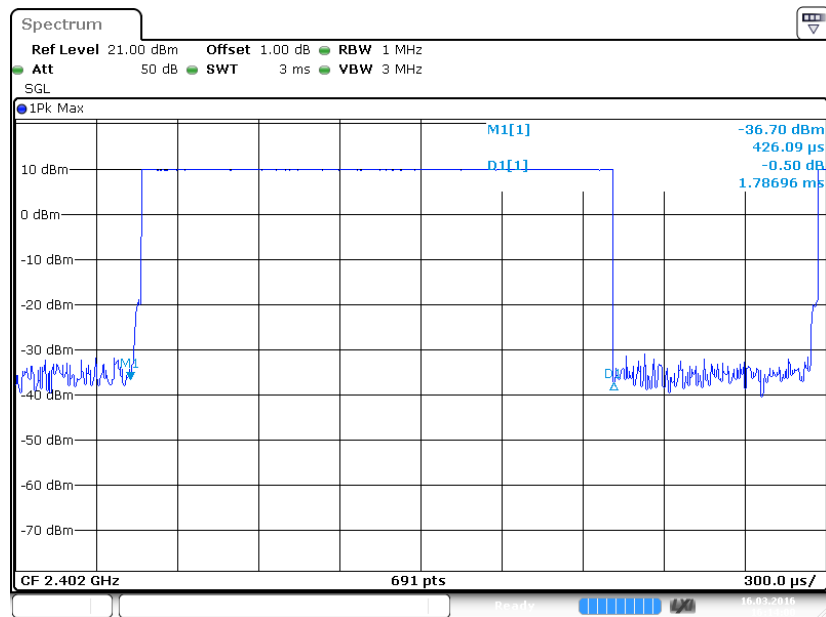


Pulse time, Middle Channel, 2DH3

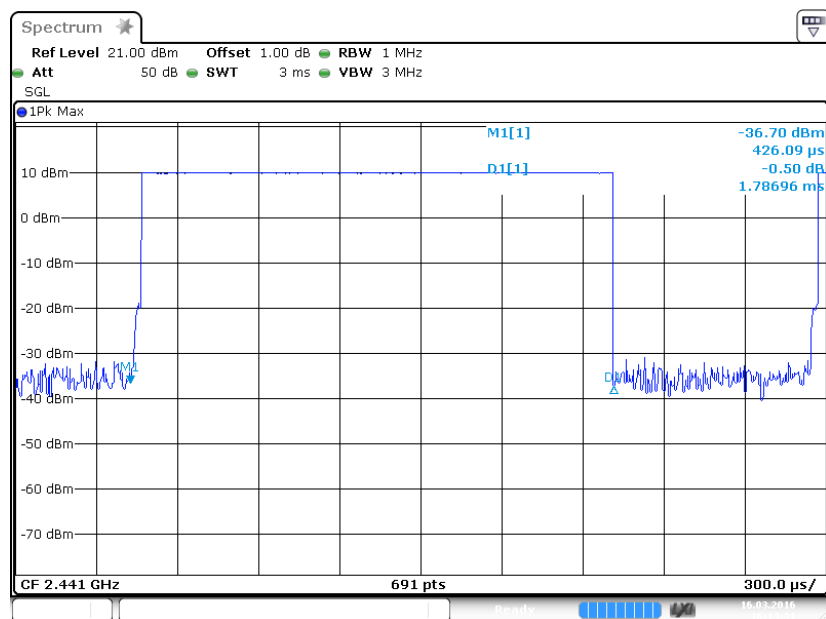


Pulse time, High Channel, 2DH3

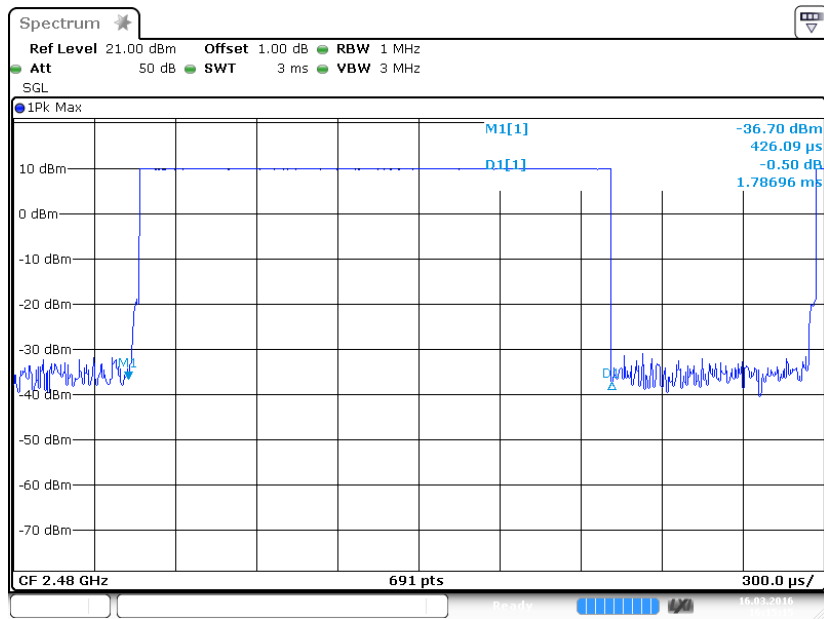

Pulse time, Low Channel, 2DH5

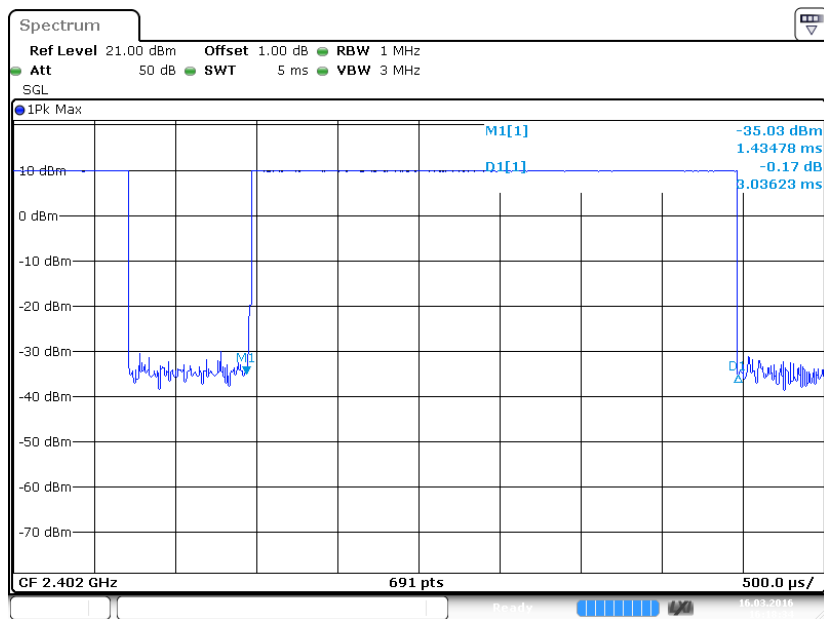


Pulse time, Middle Channel, 2DH5

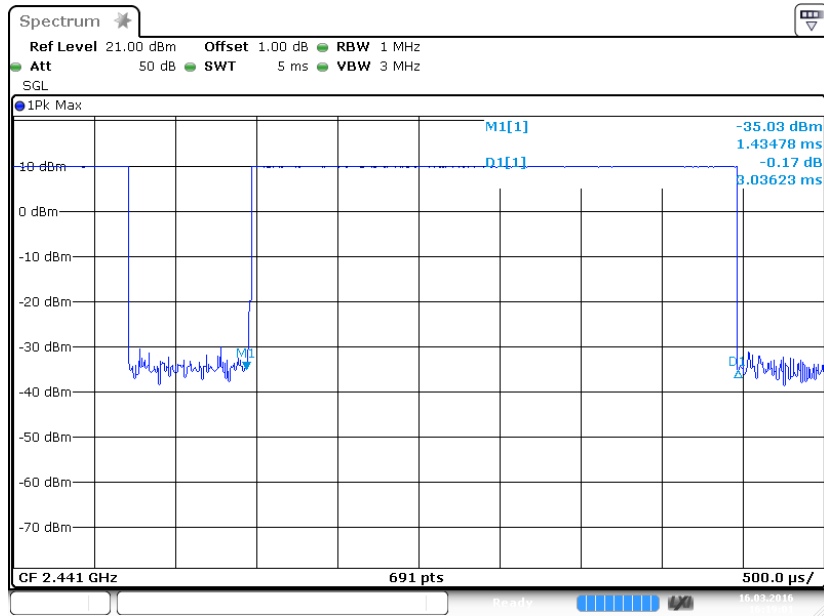


Date: 16 MAR 2016 16:19:01

Pulse time, High Channel, 2DH5

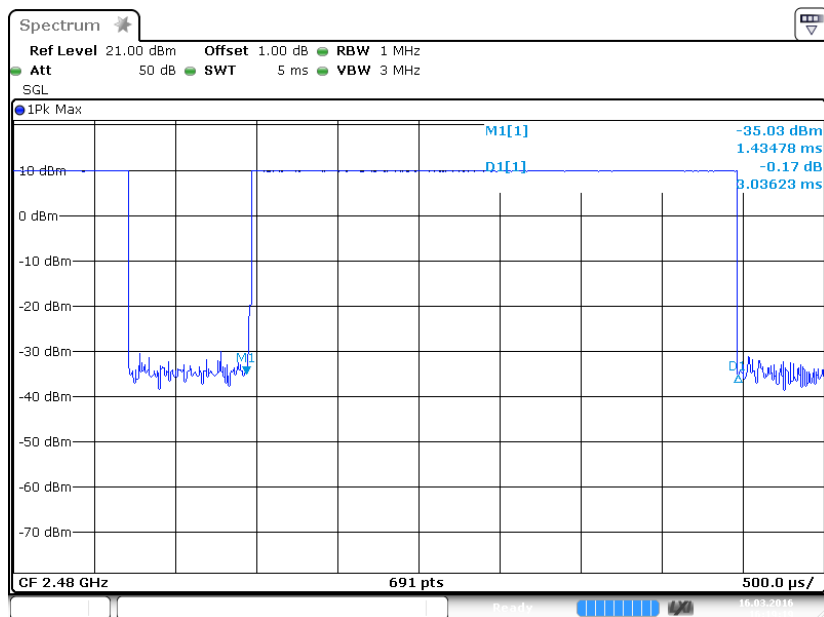


Date: 16 MAR 2016 16:19:19

EDR (8DPSK): Pulse time, Low Channel, 3DH1

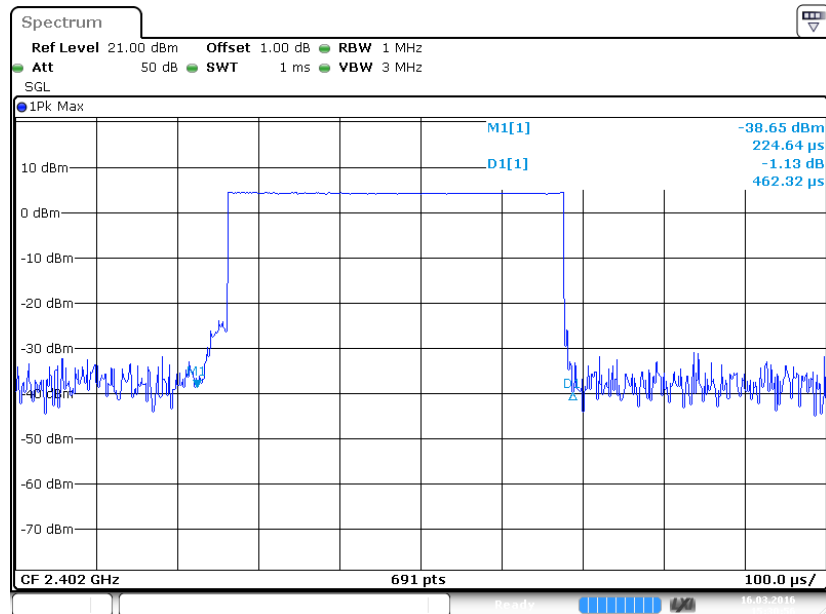


Date: 16 MAR 2016 15:30:57

Pulse time, Middle Channel, 3DH1

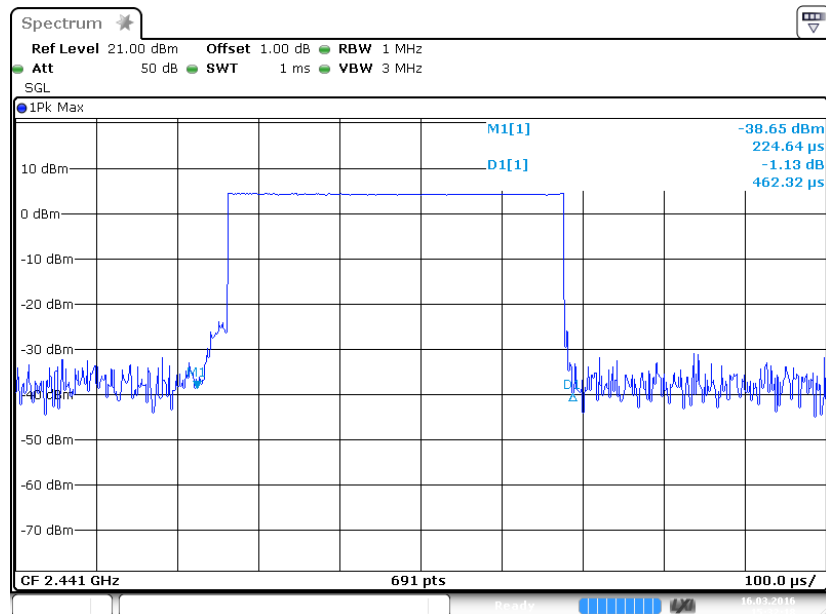


Date: 16 MAR 2016 15:32:18


Pulse time, High Channel, 3DH1

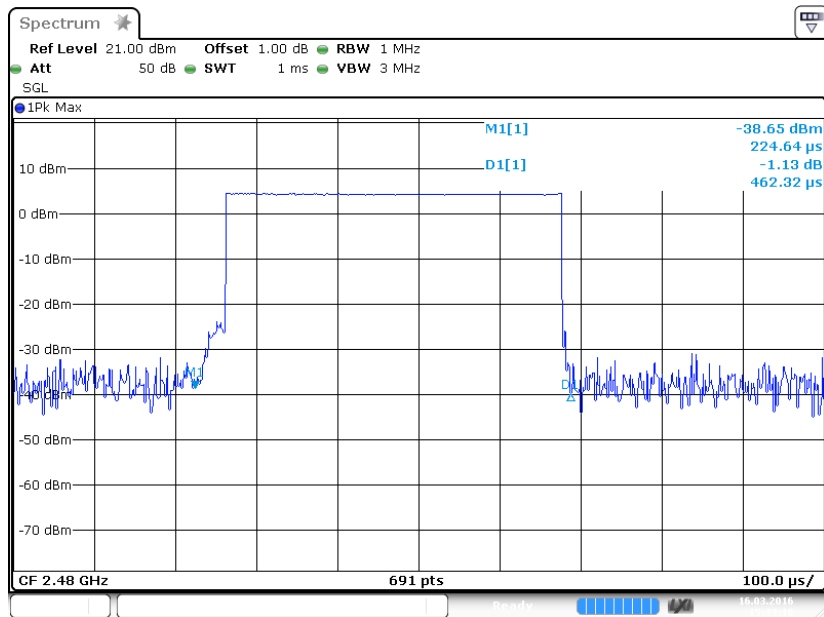

Pulse time, Low Channel, 3DH3

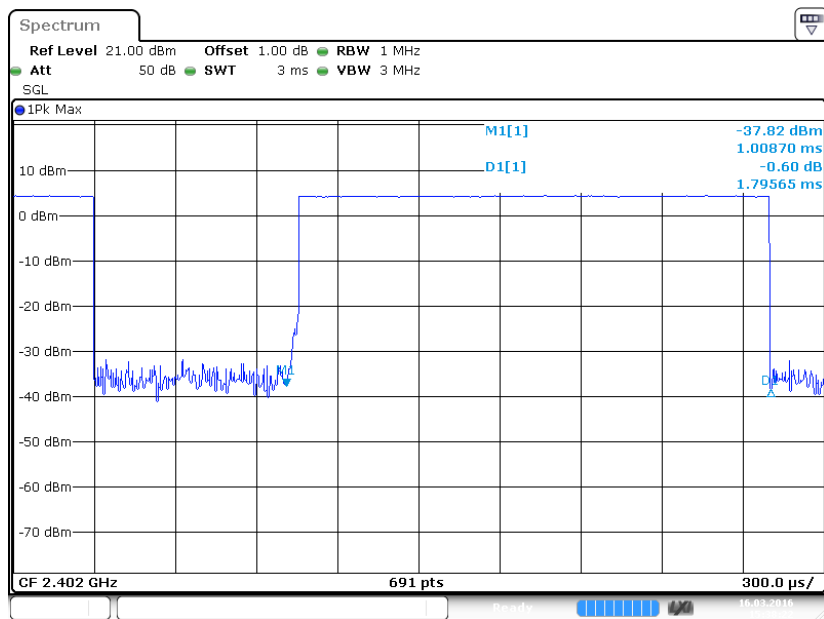


Pulse time, Middle Channel, 3DH3

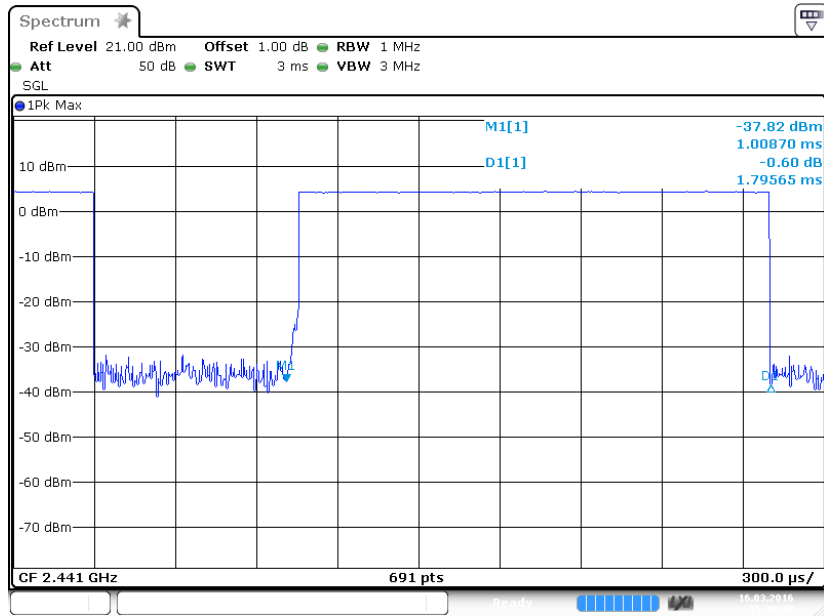


Date: 16 MAR 2016 15:39:40

Pulse time, High Channel, 3DH3

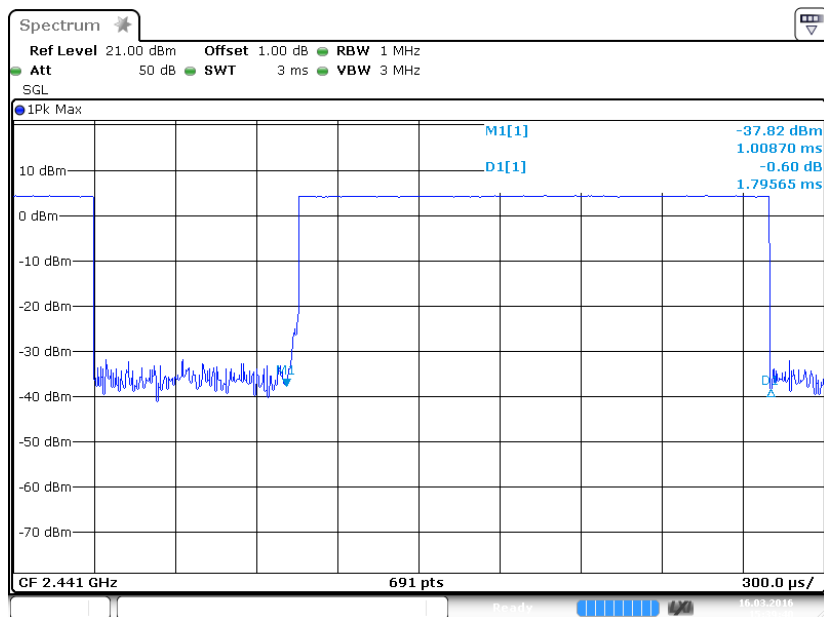


Date: 16 MAR 2016 15:39:40


Pulse time, Low Channel, 3DH5

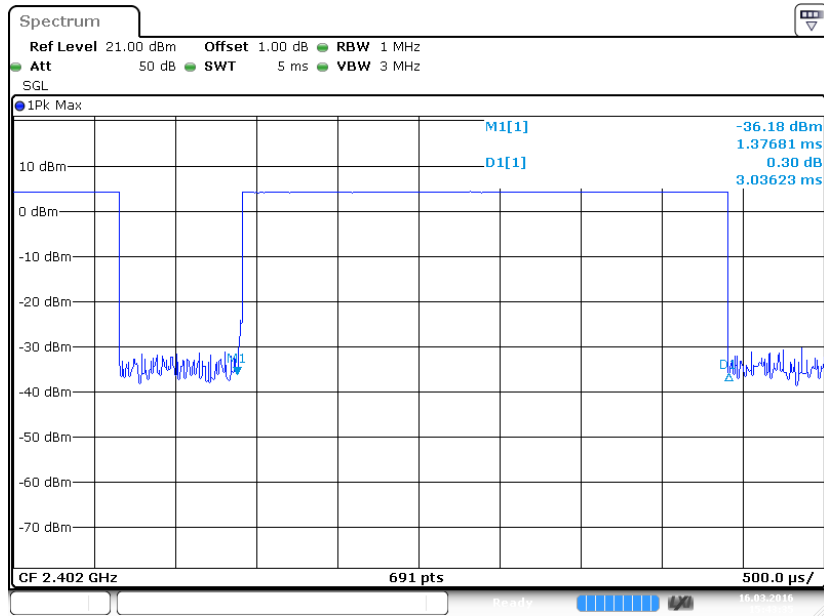

Pulse time, Middle Channel, 3DH5

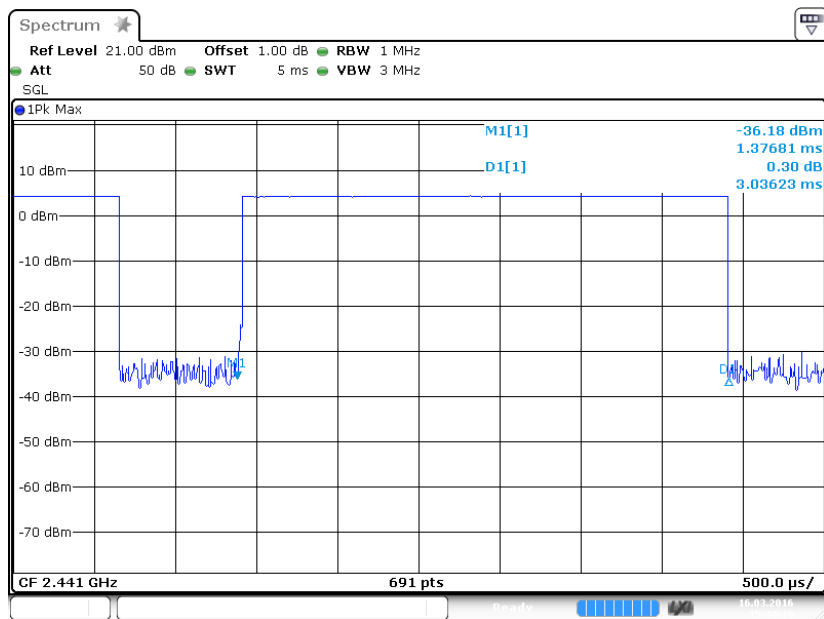

Pulse time, High Channel, 3DH5

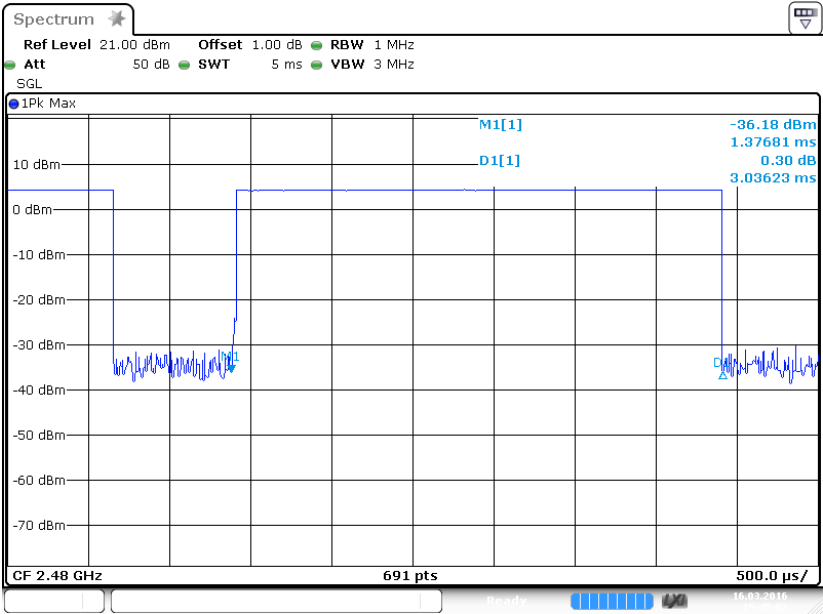

Date: 16 MAR 2016 15:45:02

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2015-09-02	2016-09-02
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-06-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-03-17.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots

Mode	Channel	Frequency (MHz)	Output Power		Limit (mW)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	9.70	9.33	1000
	Middle	2441	10.12	10.28	1000
	High	2480	10.00	10.00	1000
EDR ($\pi/4$-DQPSK)	Low	2402	8.71	7.43	1000
	Middle	2441	9.24	8.39	1000
	High	2480	9.07	8.07	1000
EDR (8DPSK)	Low	2402	8.74	7.48	1000
	Middle	2441	9.50	8.91	1000
	High	2480	9.25	8.41	1000

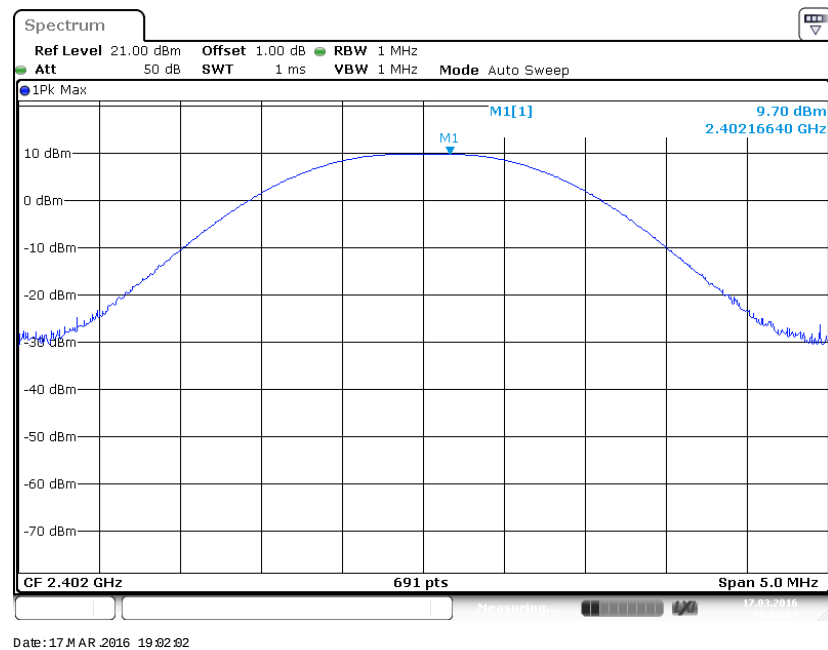
BDR (GFSK): Low Channel

BDR (GFSK): Middle Channel

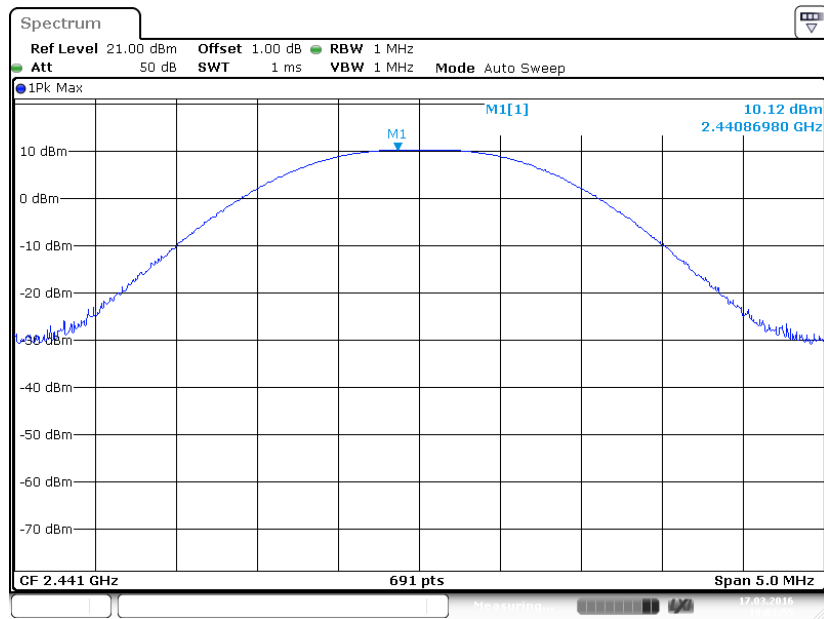


Date: 17 MAR 2016 19:03:56

BDR (GFSK): High Channel

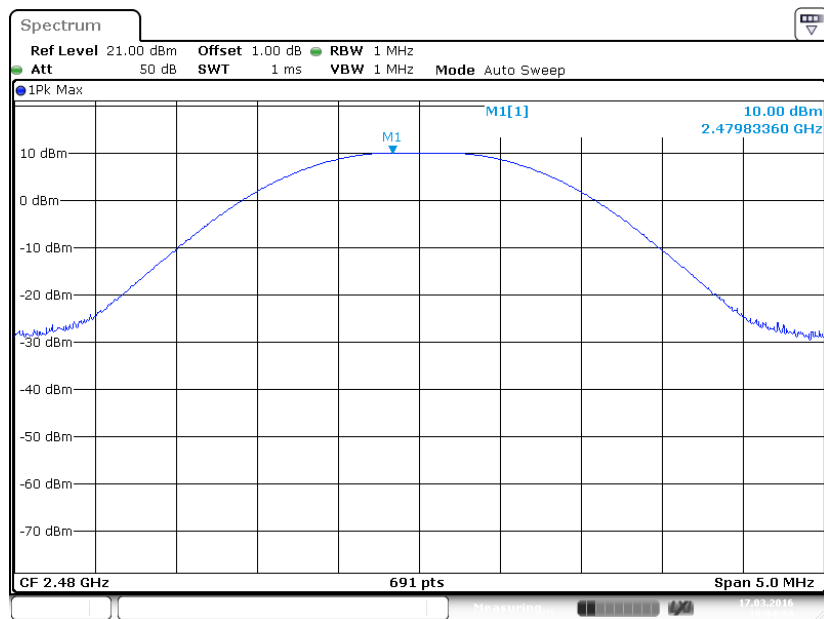


Date: 17 MAR 2016 19:04:34

EDR($\pi/4$ -DQPSK): Low Channel

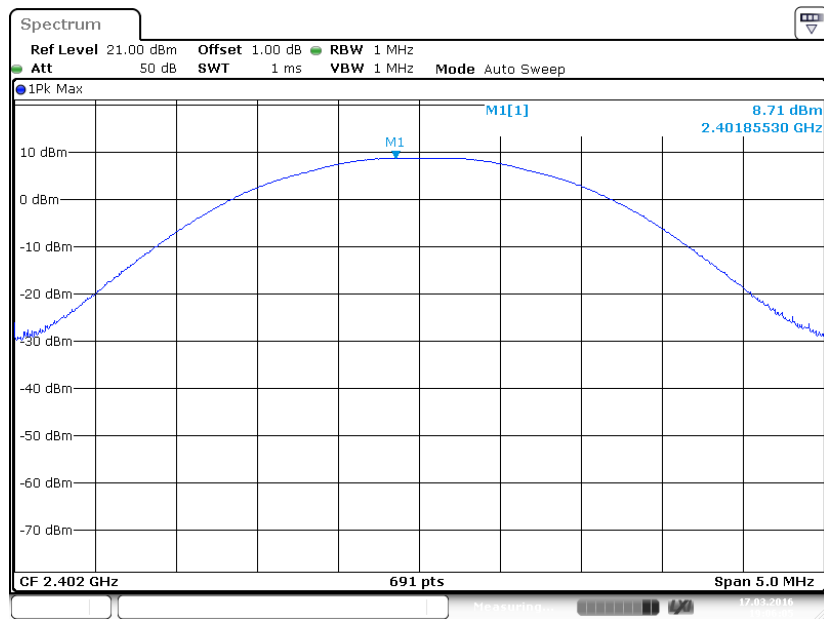


Date: 17 MAR 2016 19:06:06

EDR($\pi/4$ -DQPSK): Middle Channel

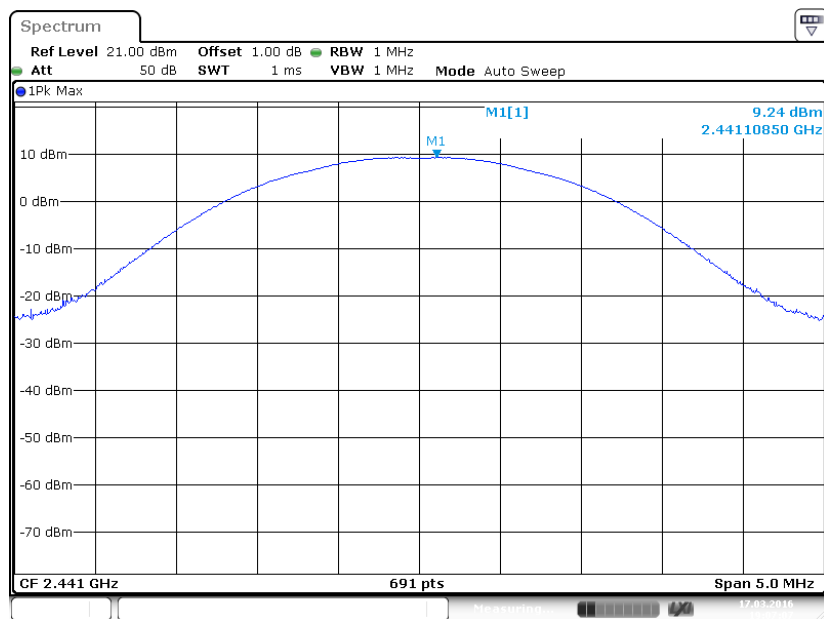


Date: 17 MAR 2016 19:07:07


EDR($\pi/4$ -DQPSK): High Channel

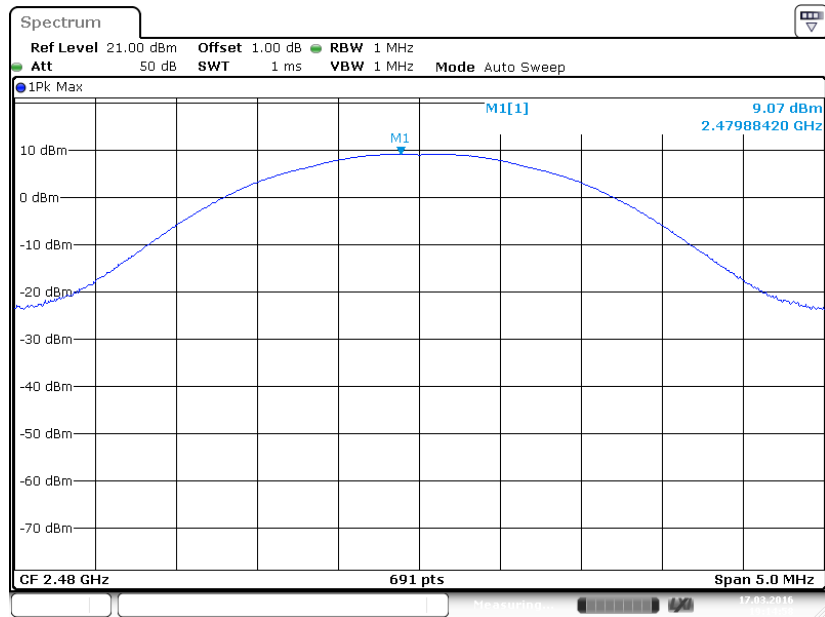

EDR(8DPSK): Low Channel

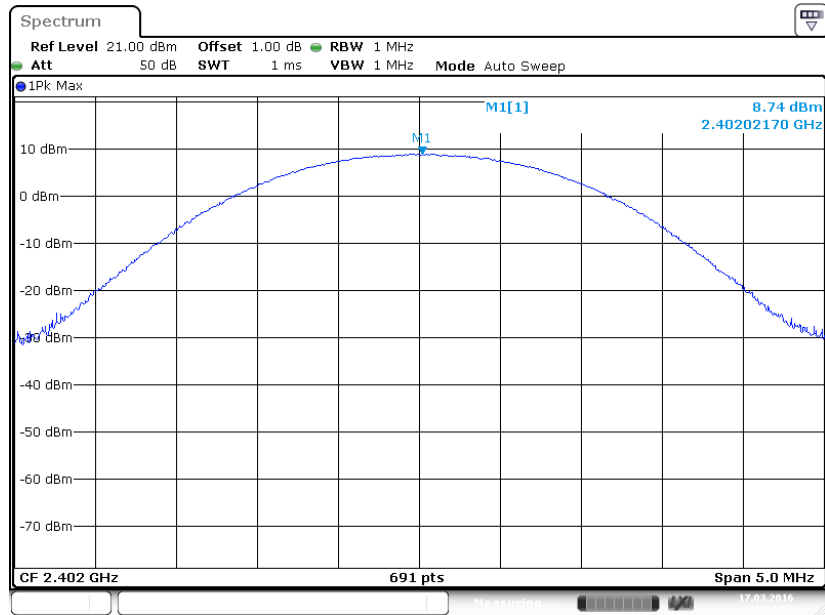


EDR(8DPSK): Middle Channel

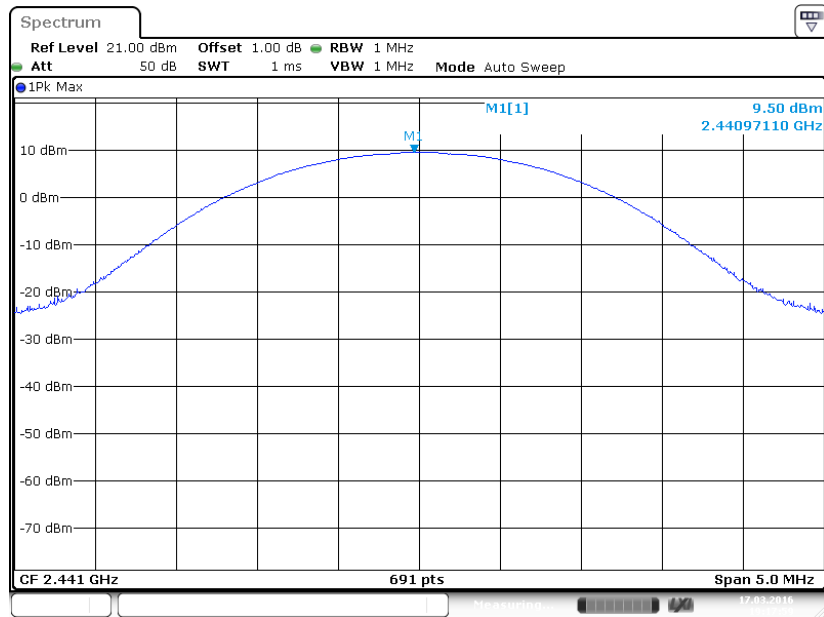

Date: 17 MAR 2016 19:17:59

EDR(8DPSK): High Channel

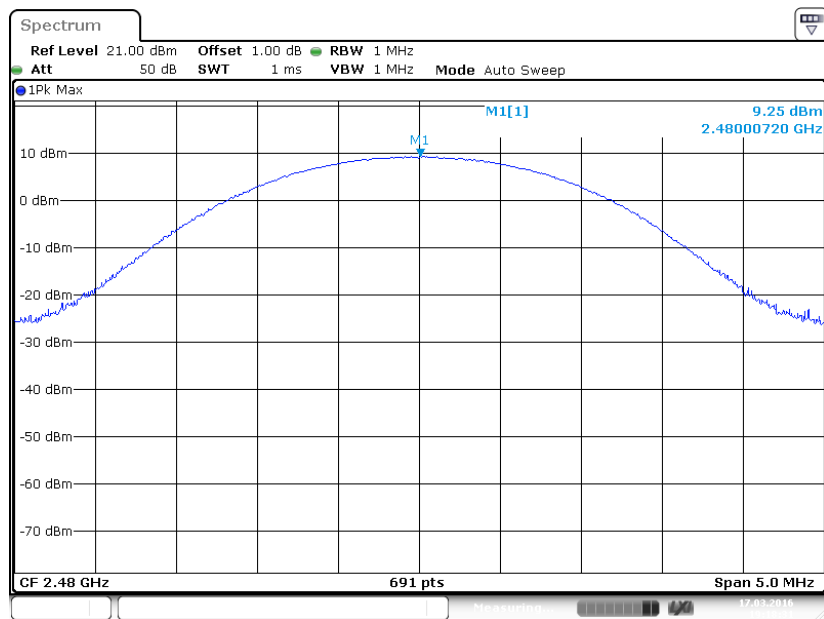

Date: 17 MAR 2016 19:18:32

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2015-09-02	2016-09-02
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-06-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-03-17


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following plots.


BDR (GFSK): Band Edge-Left Side

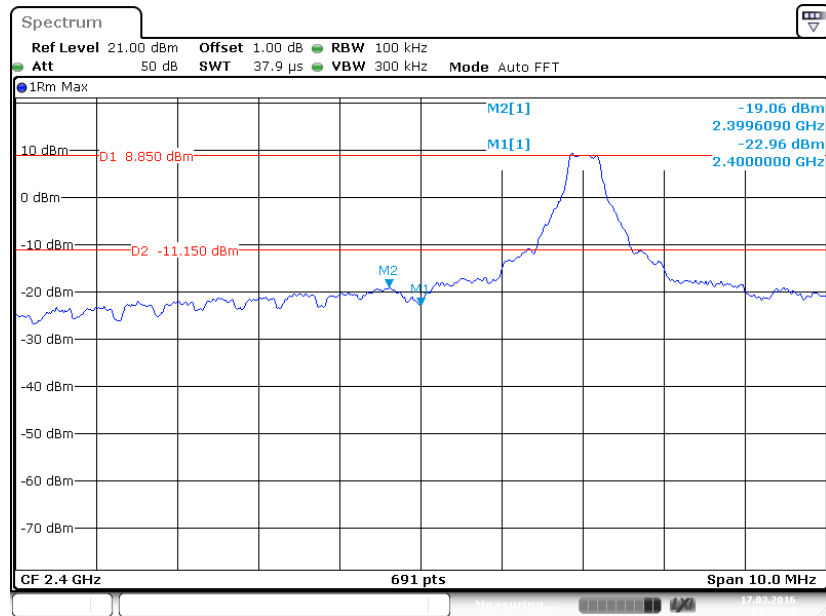


BDR (GFSK): Band Edge-Right Side

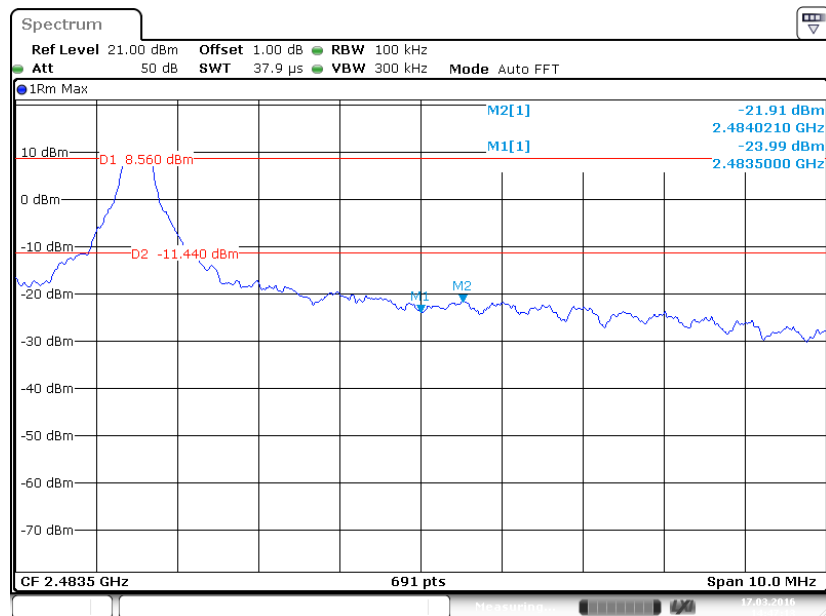


EDR ($\pi/4$ -DQPSK): Band Edge-Left Side

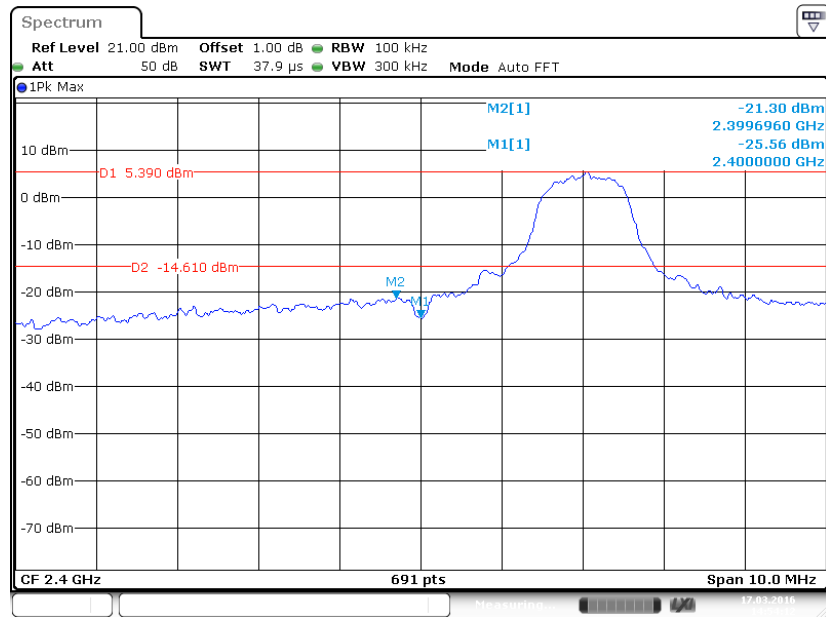

EDR ($\pi/4$ -DQPSK): Band Edge-Right Side

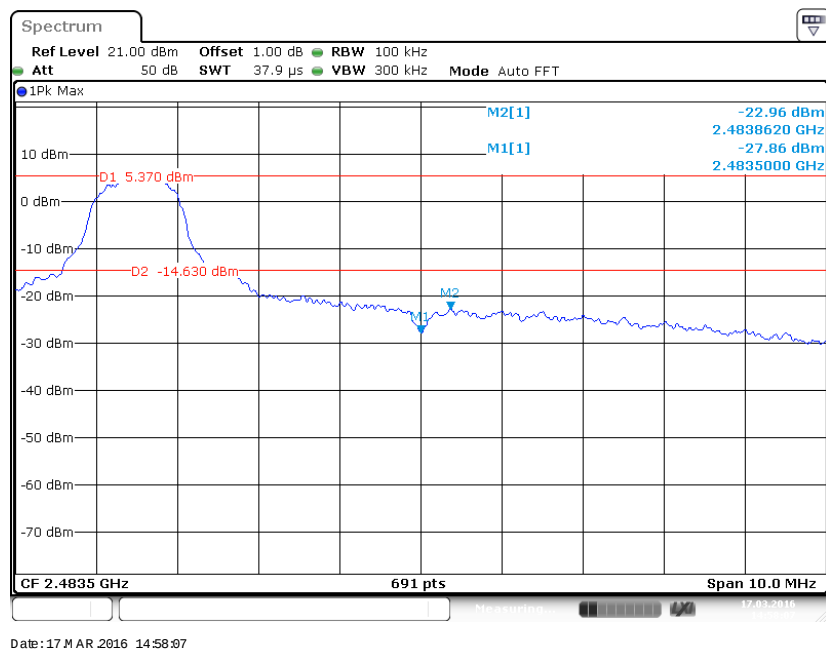

EDR (8DPSK): Band Edge-Left Side

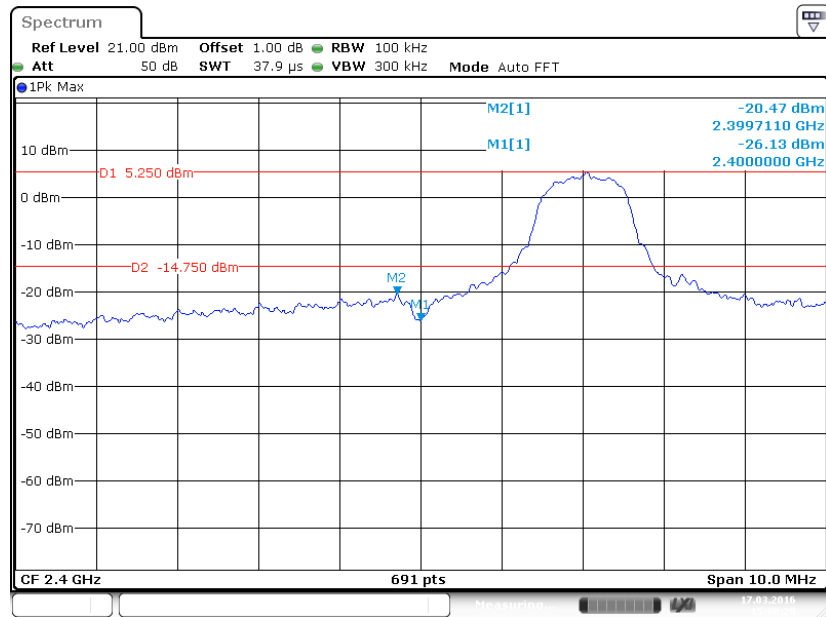

BDR (8DPSK): Band Edge-Right Side

