



FCC RADIO TEST REPORT

FCC ID : 2AEM4-FE02
Equipment : Wireless Router
Brand Name : eero
Model Name : FE02
Applicant : eero LLC
660 3rd St Fl 4, San Francisco, California, 94107, United States
Manufacturer : eero LLC
660 3rd St Fl 4, San Francisco, California, 94107, United States
Standard : FCC Part 15 Subpart C §15.247

The product was received on Feb. 11, 2026 and testing was performed from Mar. 24, 2026 to Jun. 01, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	5
2 Test Configuration of Equipment Under Test.....	6
2.1 Carrier Frequency Channel	6
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	8
2.5 EUT Operation Test Setup	8
2.6 Measurement Results Explanation Example.....	9
3 Test Result.....	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	11
3.3 Power Spectral Density Measurement	12
3.4 Conducted Band Edges and Spurious Emission Measurement	13
3.5 Radiated Band Edges and Spurious Emission Measurement	14
3.6 AC Conducted Emission Measurement.....	18
3.7 Antenna Requirements.....	20
4 List of Measuring Equipment	21
5 Measurement Uncertainty	23
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Result	
Appendix D. Duty Cycle Plots	



History of this test report

Report No.	Version	Description	Issue Date
FR621004-01A	01	Initial issue of report	Jun. 04, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Alan Liu

Report Producer: Shiori Chen

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature		
General Specs Bluetooth-LE, Wi-Fi 2.4GHz 802.11b/g/n/ax, and Wi-Fi 5GHz 802.11a/n/ac/ax.		
Antenna Type Bluetooth: Dipole Antenna		
Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	1.6

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: WLAN 2.4G Link + AC Adapter(1st Generation PSU Luxshare 15W type A)(C120011)
	Mode 2: Bluetooth Tx + AC Adapter(1st Generation PSU Luxshare 15W type A)(C120011)
Remark: - The worst case of Conducted Emission is mode 2; only the test data of it was reported. - For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. - The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

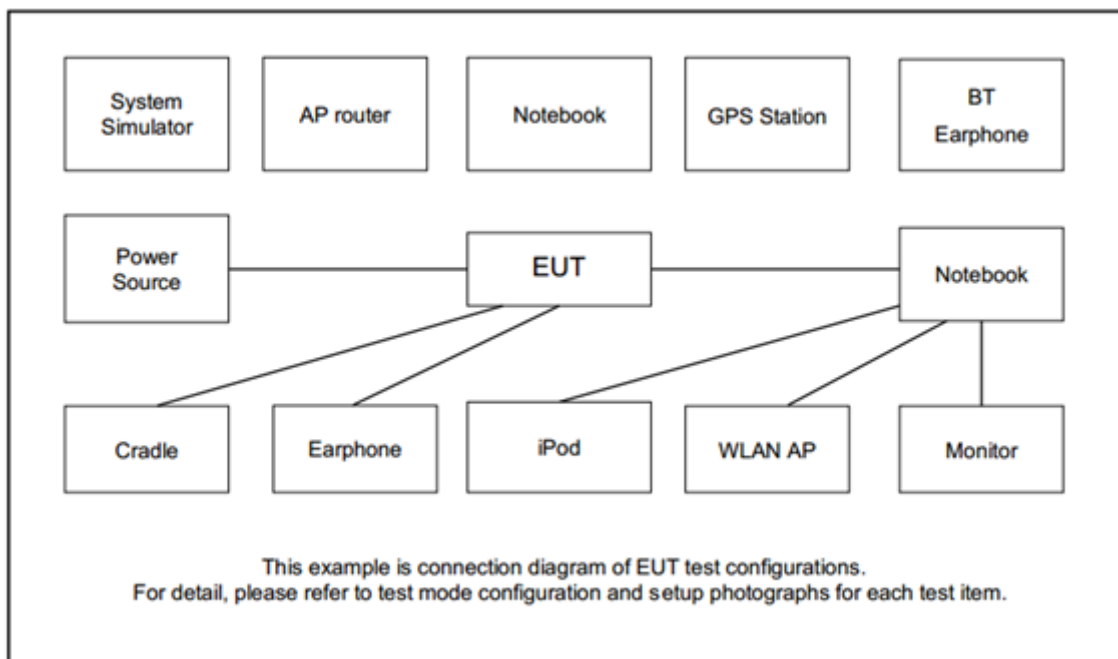

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Dell	Latitude 3420	FCC DoC	N/A	AC I/P: Unshielded, 1.2m DC O/P: Shielded, 1.8m
2.	Notebook	Dell	Latitude 3420	FCC DoC	N/A	AC I/P: Unshielded, 1.2m DC O/P: Shielded, 1.8m
3.	Deway Board	EERO	N/A	N/A	Shielded, 0.1m	N/A
4.	3.0 to RJ45 Gigabit Ethernet Adapter	shybo	HLY-681	FCC DoC	Shielded, 0.1m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility "QRCT Version 4.0.181.1" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth VBW $\geq 3 * RBW$. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth, and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = No faster than coupled (auto) time, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

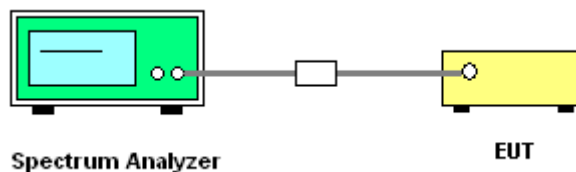

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

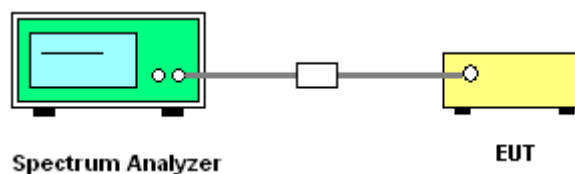

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.


7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
- (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, $VBW = 3$ MHz for $f \geq 1$ GHz for peak measurement.
- For average measurement:
The procedure for method trace averaging is as follows:
- a) RBW = 1 MHz.
 - b) $VBW \geq [3 \times RBW]$.
 - c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq RBW / 2$. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
 - d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging).
 - e) Sweep time = auto.
 - f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
 - g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - i. If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
 - ii. If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

3.5.4 Test Setup


For radiated test below 30MHz

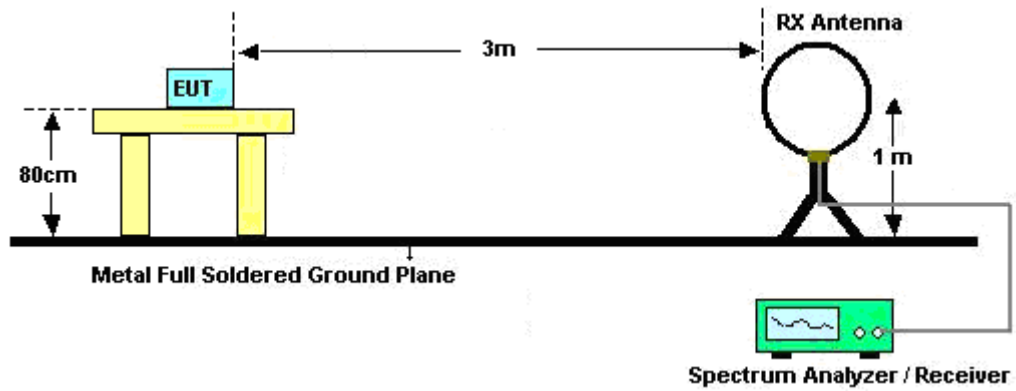


For radiated test from 30MHz to 1GHz

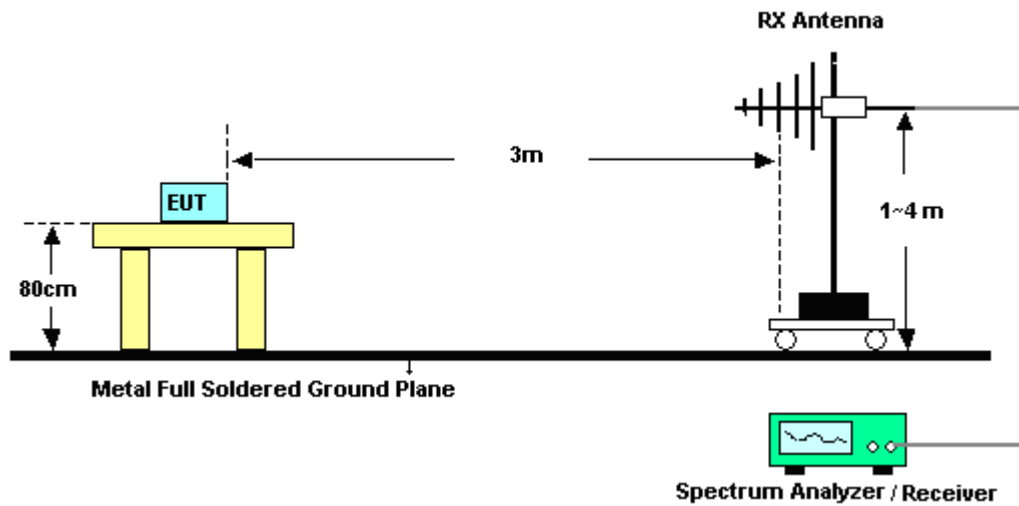

For radiated test from 1GHz to 18GHz

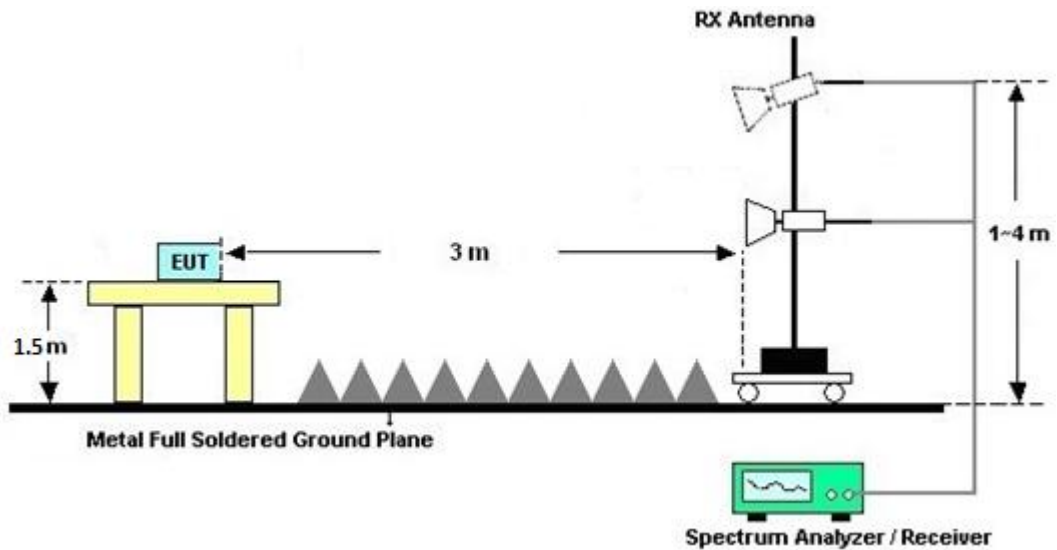

For radiated test above 18GHz

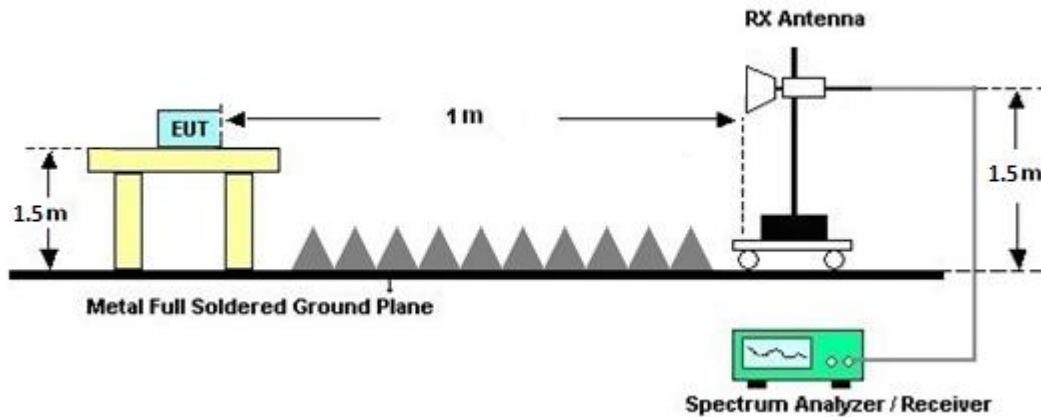

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
6. The frequency range from 150 kHz to 30 MHz is scanned.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

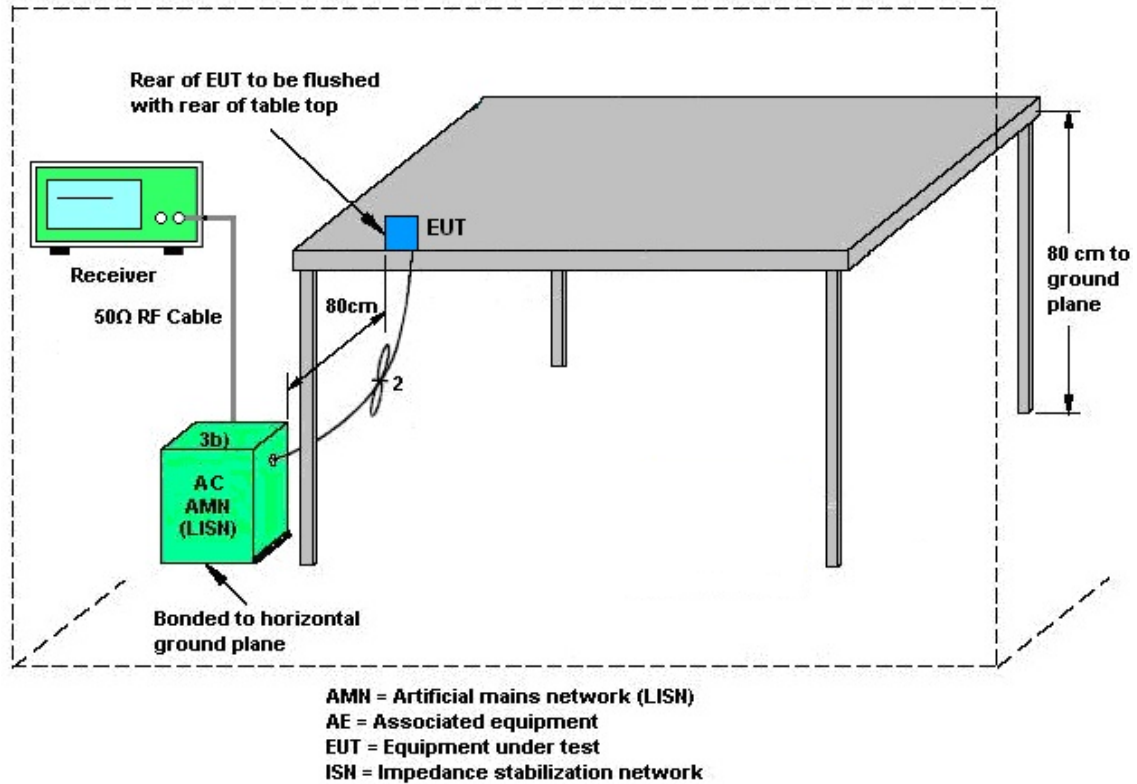

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9kHz~30MHz	Dec. 11, 2025	May 25, 2026~ Jun. 01, 2026	Dec. 10, 2026	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	1224	18GHz~40GHz	Jul. 02, 2025	May 25, 2026~ Jun. 01, 2026	Jul. 01, 2026	Radiation (03CH16-HY)
Spectrum Analyzer	Keysight	N9010B	MY60241055	10Hz~44GHz	Nov. 18, 2025	May 25, 2026~ Jun. 01, 2026	Nov. 17, 2026	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Nov. 26, 2025	May 25, 2026~ Jun. 01, 2026	Nov. 25, 2026	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N-06	47020 & 06	30MHz to 1GHz	Oct. 04, 2025	May 25, 2026~ Jun. 01, 2026	Oct. 03, 2026	Radiation (03CH16-HY)
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-02038	1GHz~18GHz	Aug. 07, 2025	May 25, 2026~ Jun. 01, 2026	Aug. 07, 2026	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1GHz	Jun. 30, 2025	May 25, 2026~ Jun. 01, 2026	Jun. 29, 2026	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Sep. 12, 2025	May 25, 2026~ Jun. 01, 2026	Sep. 11, 2026	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 22, 2025	May 25, 2026~ Jun. 01, 2026	Dec. 21, 2026	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Aug. 26, 2025	May 25, 2026~ Jun. 01, 2026	Aug. 25, 2026	Radiation (03CH16-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN17	1.53GHz Low Pass Filter	Jan. 13, 2026	May 25, 2026~ Jun. 01, 2026	Jan. 12, 2027	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0ST	SN3	3GHz High Pass Filter	Jun. 26, 2025	May 25, 2026~ Jun. 01, 2026	Jun. 25, 2026	Radiation (03CH16-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN27	6.75GHz High Pass Filter	Dec. 22, 2025	May 25, 2026~ Jun. 01, 2026	Dec. 21, 2026	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	May 13, 2026	May 25, 2026~ Jun. 01, 2026	May 12, 2027	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFLEX 104	EC-A5-300-5 757,805935/4 .802434/4	30MHz~18GHz	Aug. 06, 2025	May 25, 2026~ Jun. 01, 2026	Aug. 05, 2026	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804 012/2	18-40GHz	Dec. 18, 2025	May 25, 2026~ Jun. 01, 2026	Dec. 17, 2026	Radiation (03CH16-HY)
Software	Audix	E3 230621 V9	RK-002393	N/A	N/A	May 25, 2026~ Jun. 01, 2026	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	May 25, 2026~ Jun. 01, 2026	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	May 25, 2026~ Jun. 01, 2026	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	May 25, 2026~ Jun. 01, 2026	N/A	Radiation (03CH16-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	May 20, 2026~ May 28, 2026	Nov. 03, 2026	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO 37 (NO:167)	10MHz~6GHz	Nov. 14, 2025	May 20, 2026~ May 28, 2026	Nov. 13, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10HZ~44GHZ	Dec. 16, 2025	May 20, 2026~ May 28, 2026	Dec. 15, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900067 (BOX7)	N/A	Jul. 02, 2025	May 20, 2026~ May 28, 2026	Jul. 01, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ version_24082 3	N/A	Conducted Other Test Item	N/A	May 20, 2026~ May 28, 2026	N/A	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Mar. 24, 2026~ Apr. 14, 2026	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 24, 2026~ Apr. 14, 2026	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2025	Mar. 24, 2026~ Apr. 14, 2026	Oct. 19, 2026	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 02, 2026	Mar. 24, 2026~ Apr. 14, 2026	Mar. 01, 2027	Conduction (CO07-HY)
Two-Line V-Network	Rohde & Schwarz	ENV216	100080	N/A	Sep. 09, 2025	Mar. 24, 2026	Sep. 08, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Apr. 09, 2026	Apr. 14, 2026	Apr. 08, 2027	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Oct. 21, 2025	Mar. 24, 2026~ Apr. 14, 2026	Oct. 20, 2026	Conduction (CO07-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Sylvia Li	Temperature:	21~25	°C
Test Date:	2026/5/20~2026/05/28	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.031	0.708	0.50	Pass
BLE	1Mbps	1	19	2440	1.026	0.690	0.50	Pass
BLE	1Mbps	1	39	2480	1.020	0.682	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	-6.40	30.00	1.60	-4.80	36.00	Pass
BLE	1Mbps	1	19	2440	-7.40	30.00	1.60	-5.80	36.00	Pass
BLE	1Mbps	1	39	2480	-8.10	30.00	1.60	-6.50	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	-6.82	-21.38	1.60	8.00	Pass
BLE	1Mbps	1	19	2440	-7.72	-22.15	1.60	8.00	Pass
BLE	1Mbps	1	39	2480	-8.23	-22.60	1.60	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.030	1.161	0.50	Pass
BLE	2Mbps	1	19	2440	2.033	1.161	0.50	Pass
BLE	2Mbps	1	39	2480	2.027	1.160	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	-6.40	30.00	1.60	-4.80	36.00	Pass
BLE	2Mbps	1	19	2440	-7.50	30.00	1.60	-5.90	36.00	Pass
BLE	2Mbps	1	39	2480	-8.00	30.00	1.60	-6.40	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	-6.73	-24.03	1.60	8.00	Pass
BLE	2Mbps	1	19	2440	-7.74	-24.91	1.60	8.00	Pass
BLE	2Mbps	1	39	2480	-8.31	-25.16	1.60	8.00	Pass


Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.



Number of TX = 1, Ant. 1 (Measured)

6dB Bandwidth


<1M>

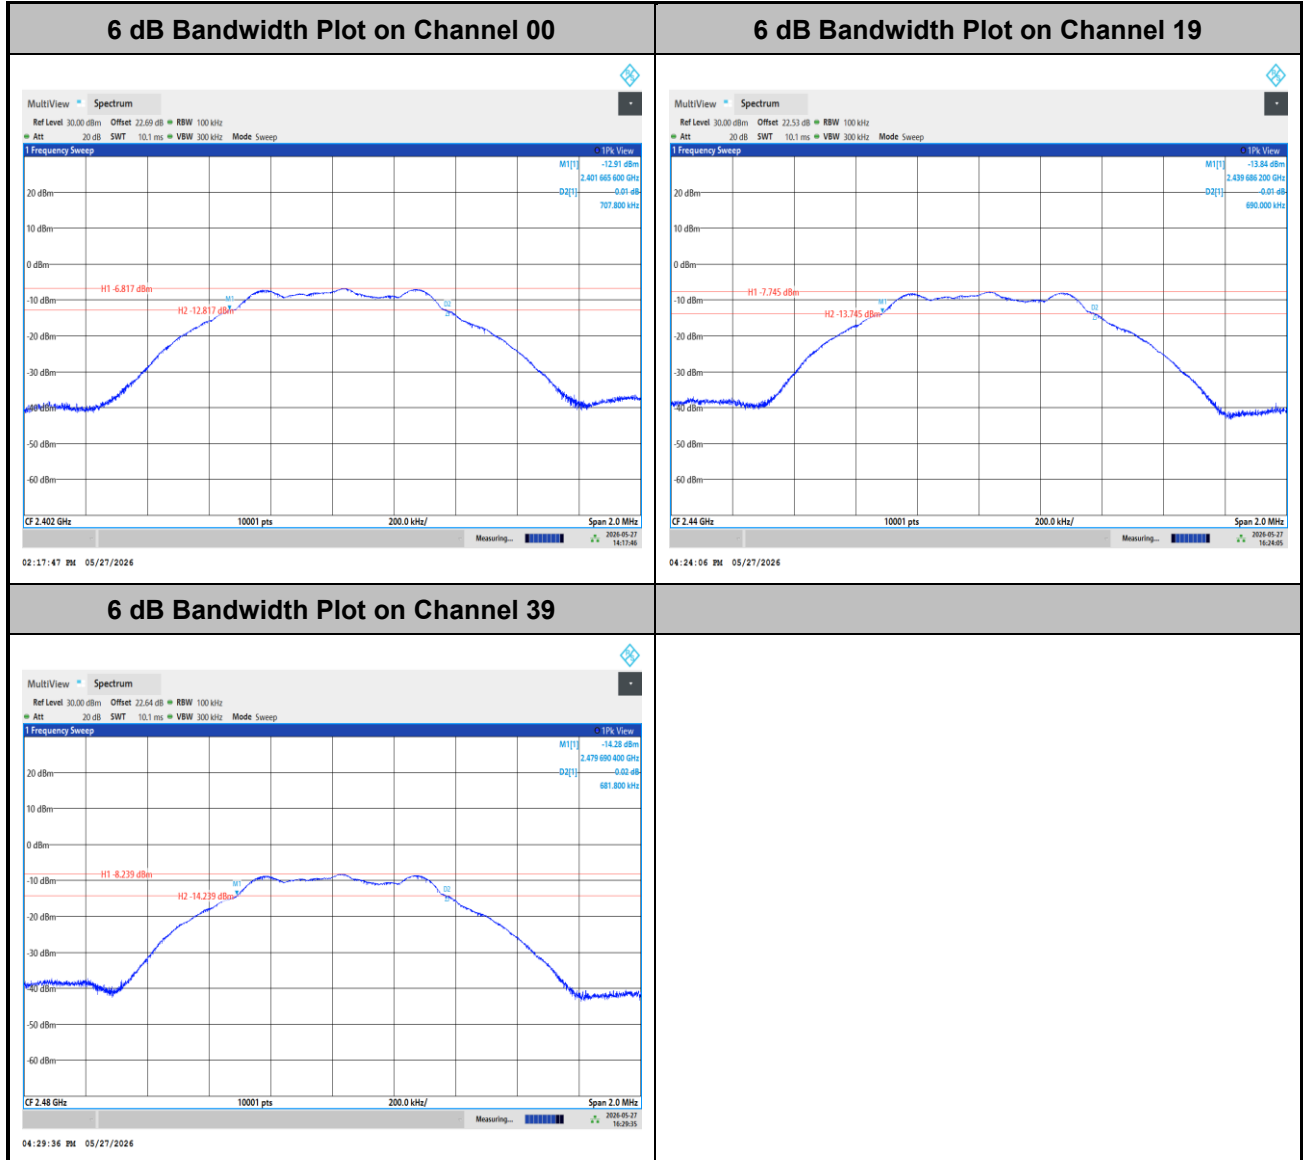




<2M>


6 dB Bandwidth Plot on Channel 00

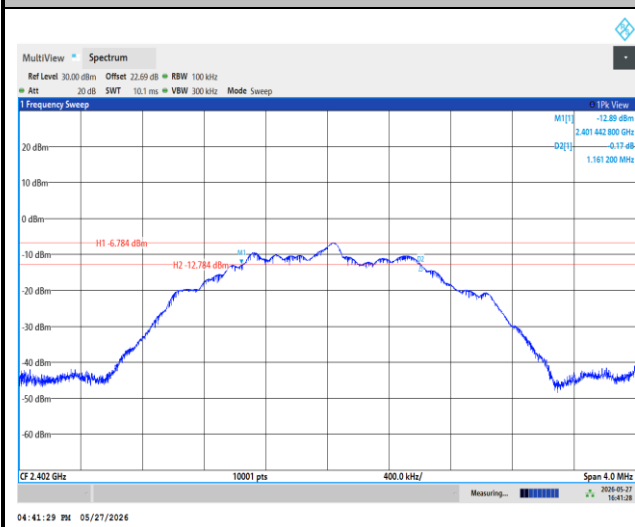

6 dB Bandwidth Plot on Channel 19



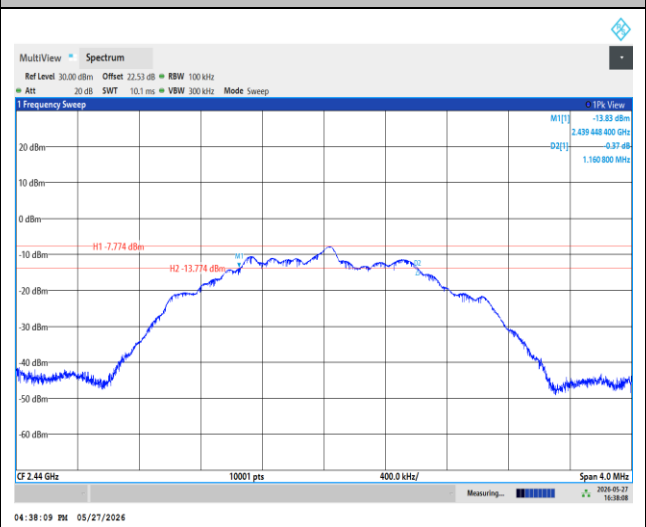


6 dB Bandwidth Plot on Channel 39

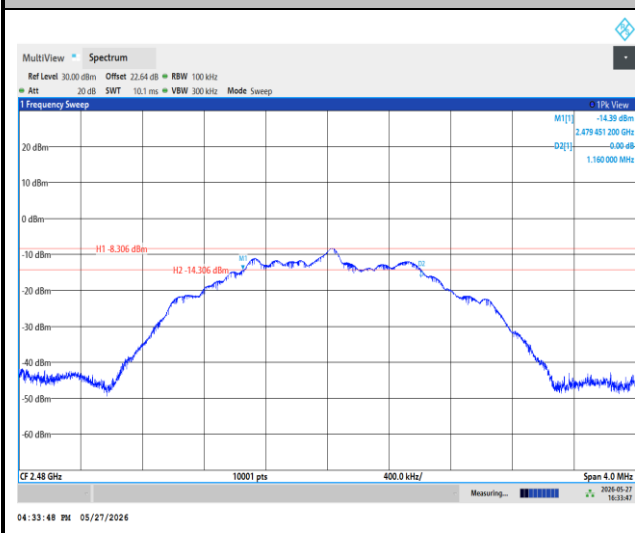

**99% Occupied Bandwidth**


<1M>

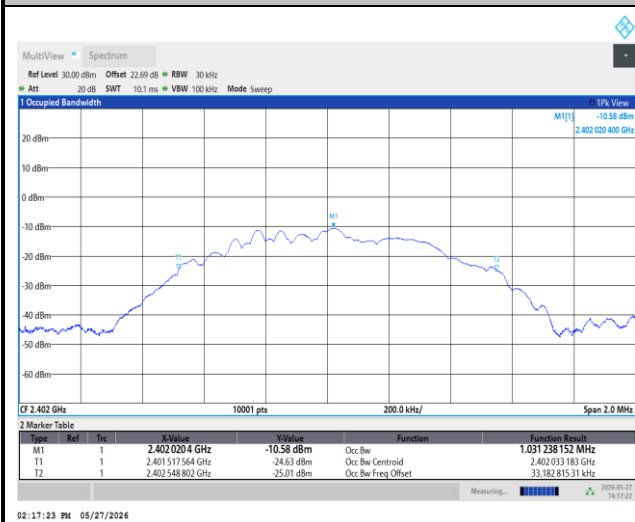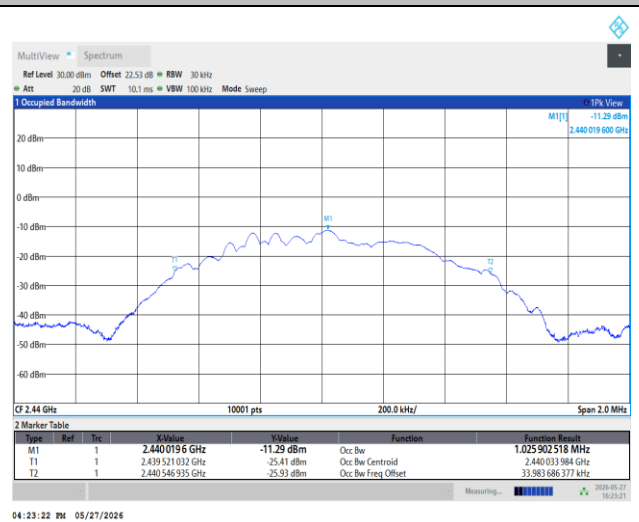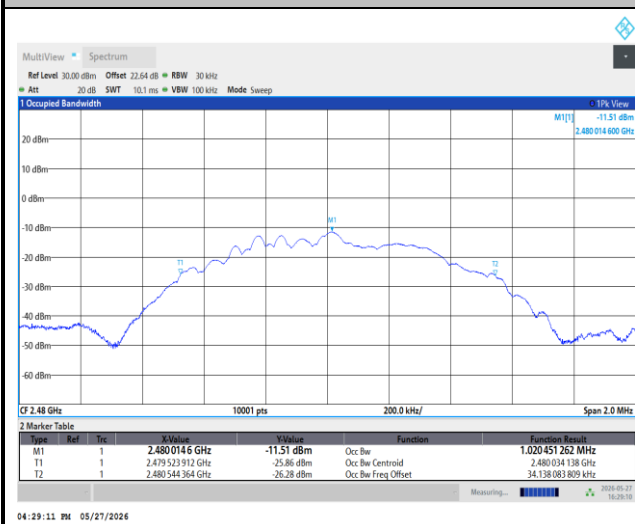99% Occupied Bandwidth Plot on Channel 00**99% Occupied Bandwidth Plot on Channel 19****99% Occupied Bandwidth Plot on Channel 39**




<2M>

99% Occupied Bandwidth Plot on Channel 00

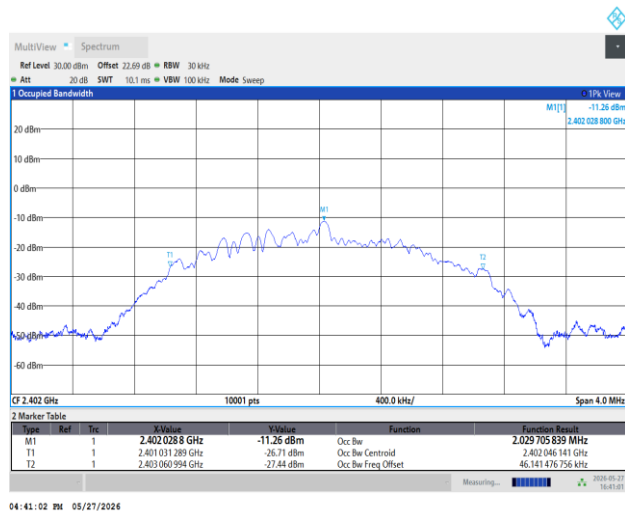


04:41:02 PM 05/27/2024

99% Occupied Bandwidth Plot on Channel 19

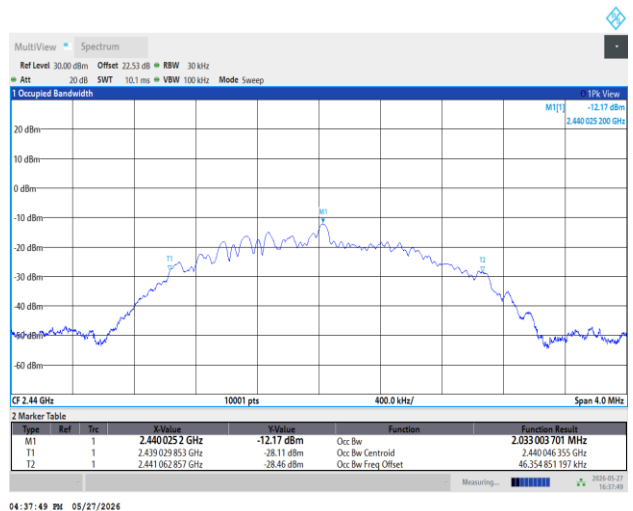

04:37:49 PM 05/27/2024




99% Occupied Bandwidth Plot on Channel 39

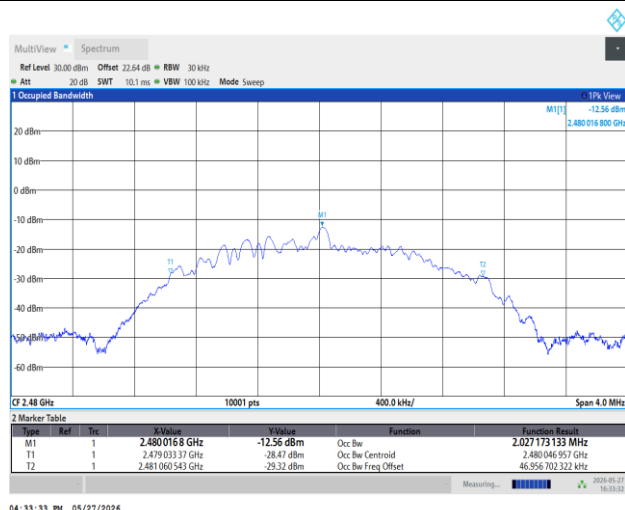

04:33:33 PM 05/27/2024

**Power Spectral Density (dBm/3kHz)**


<1M>

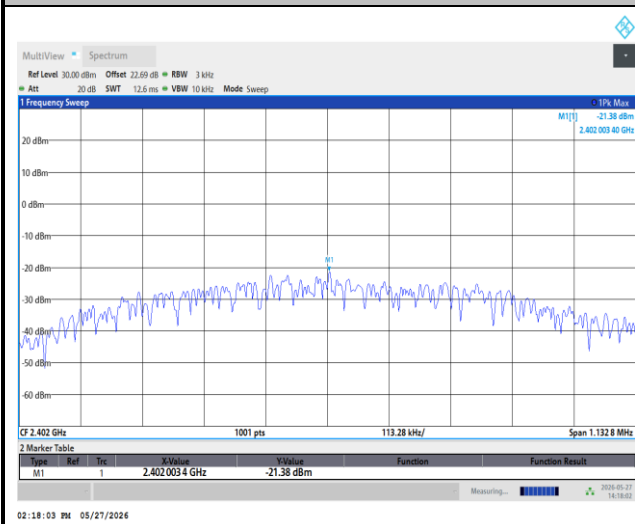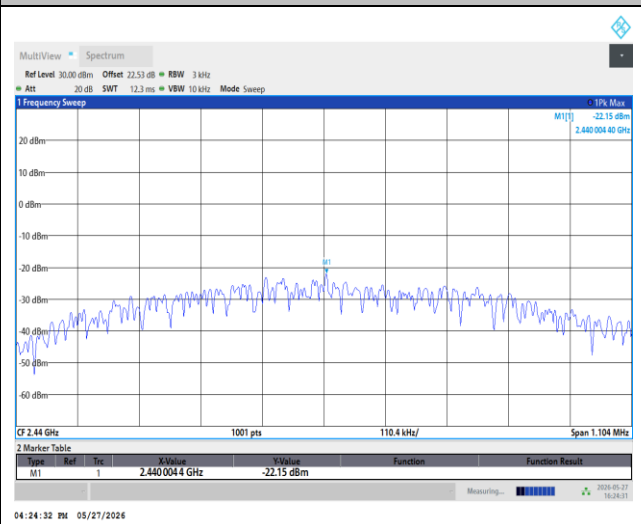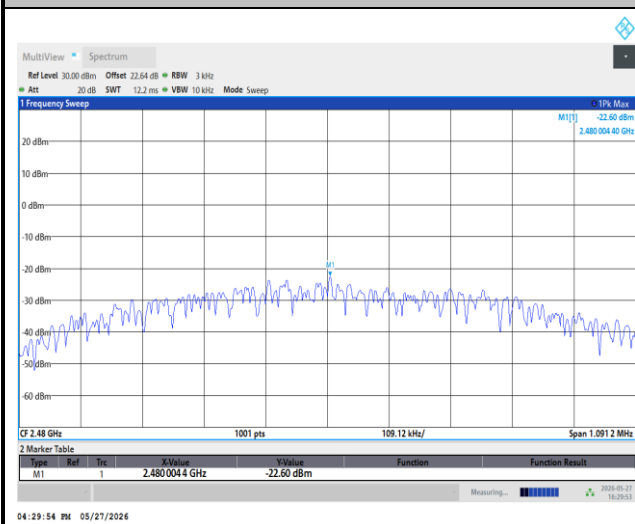Power Density (dBm/3kHz) Plot Channel 00**Power Density (dBm/3kHz) Plot Channel 19****Power Density (dBm/3kHz) Plot Channel 39**




<2M>


Power Density (dBm/3kHz) Plot Channel 00

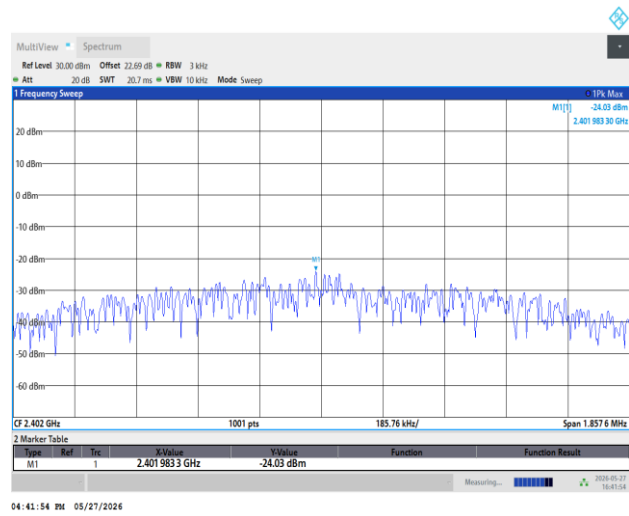

Power Density (dBm/3kHz) Plot Channel 19




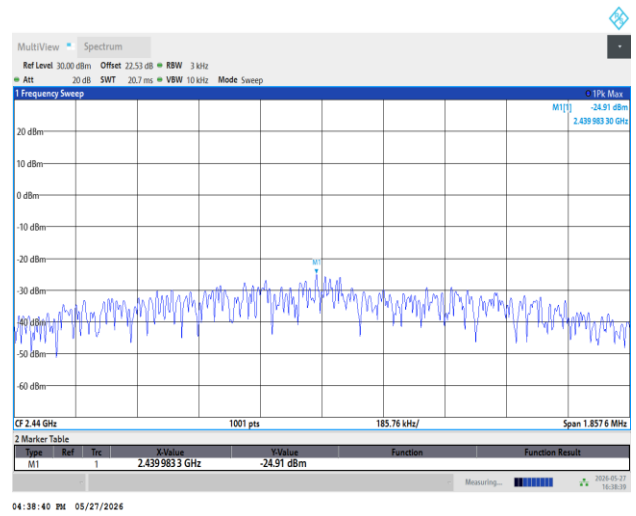


Power Density (dBm/3kHz) Plot Channel 39

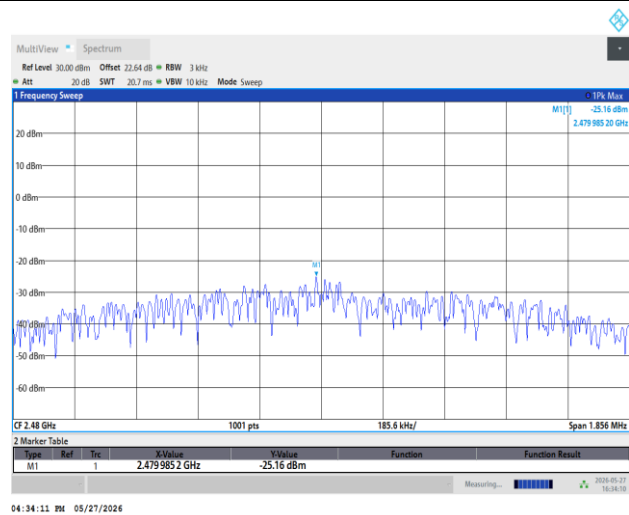

**Band Edge and Conducted Spurious Emission**


<1M>

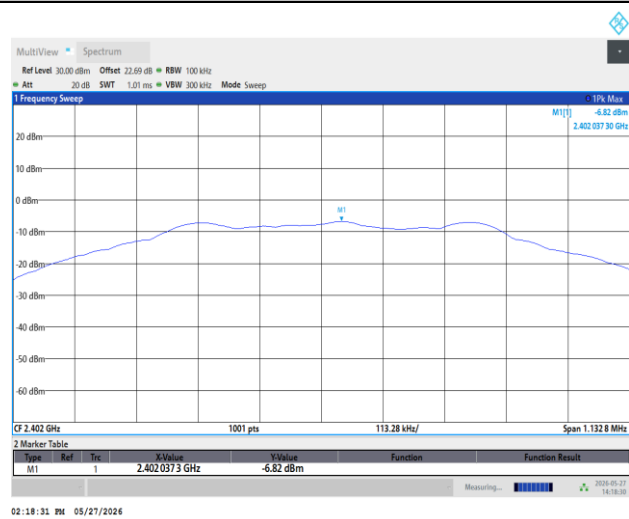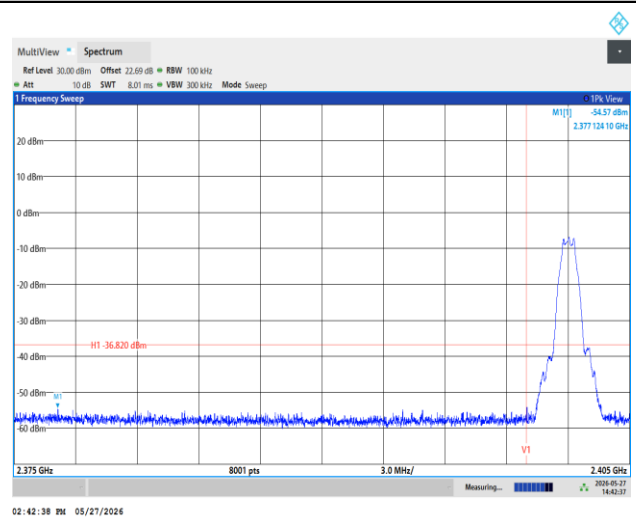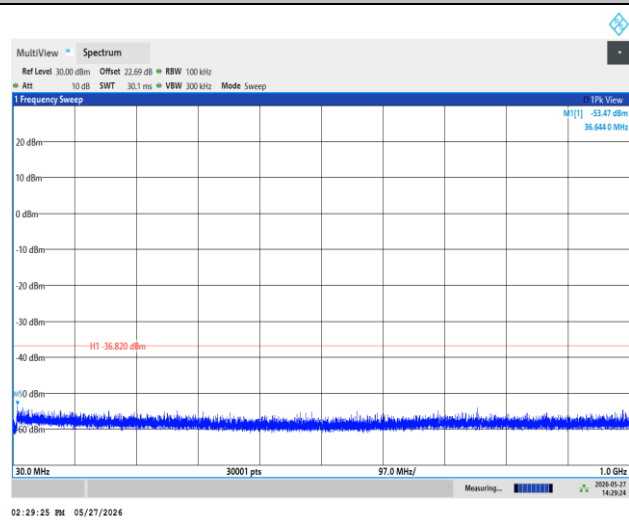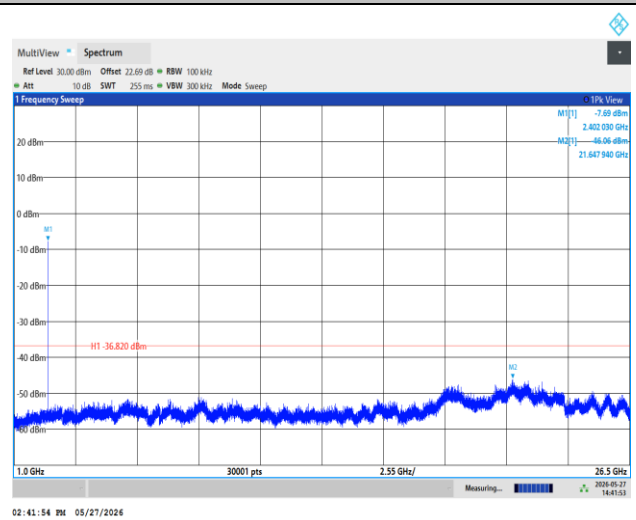Channel 00**100kHz PSD reference Level Plot****Plot on Channel 00****Spurious Emission 30MHz~1GHz Plot****Spurious Emission 1GHz~26.5GHz Plot**




Channel 19


100kHz PSD reference Level Plot

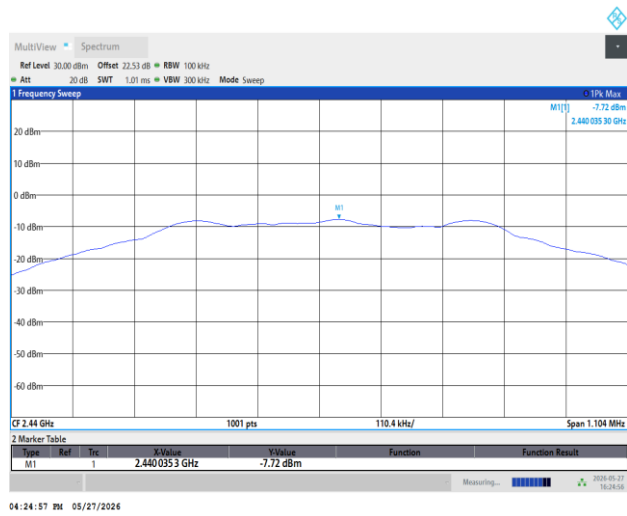

Spurious Emission 30MHz~1GHz Plot

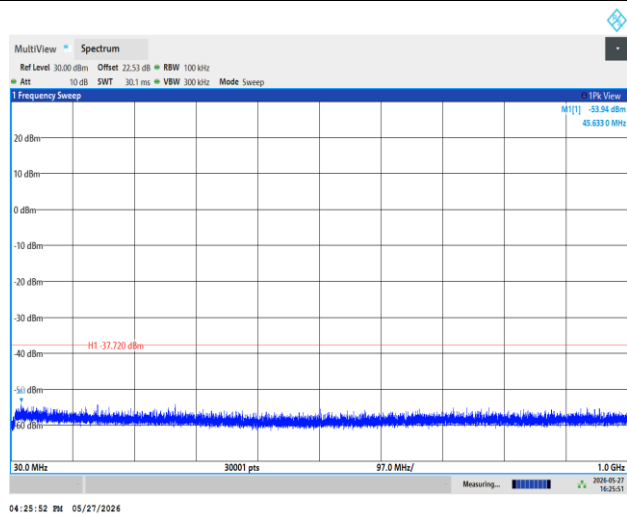


Spurious Emission 1GHz~26.5GHz Plot

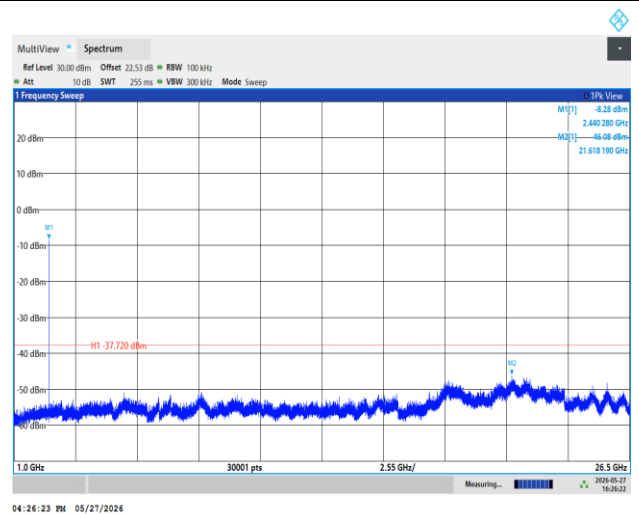




Channel 39


100kHz PSD reference Level Plot

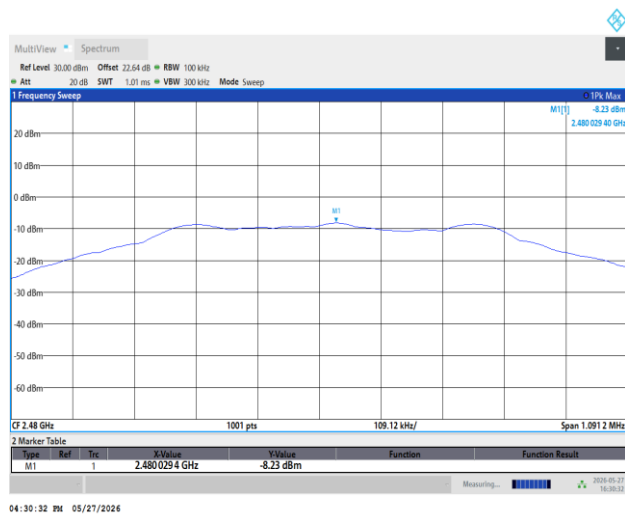


Plot on Channel 39

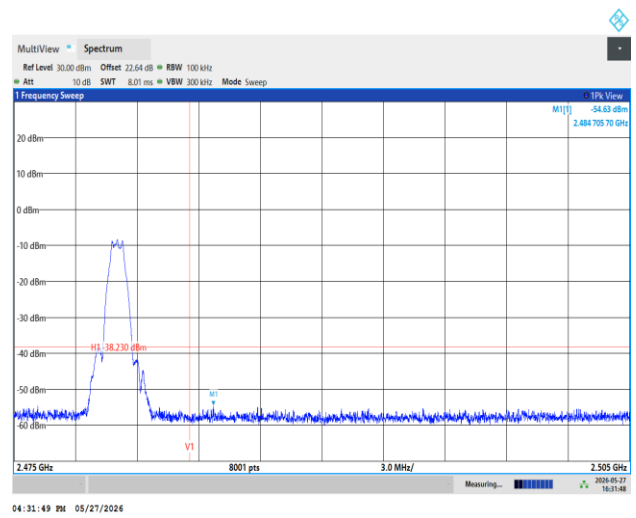

Spurious Emission 30MHz~1GHz Plot

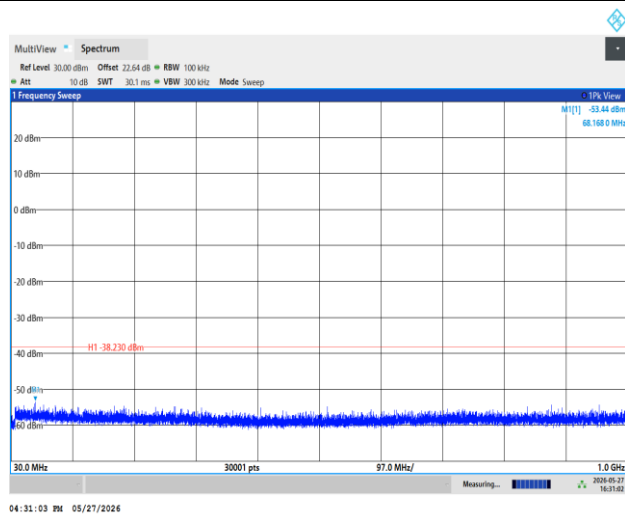


Spurious Emission 1GHz~26.5GHz Plot

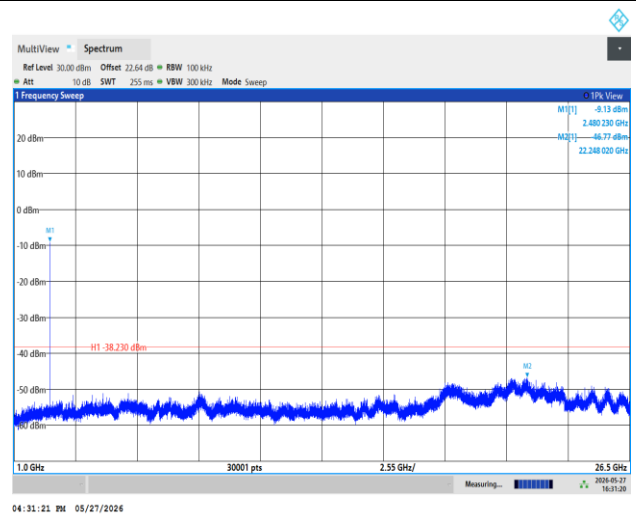




<2M>

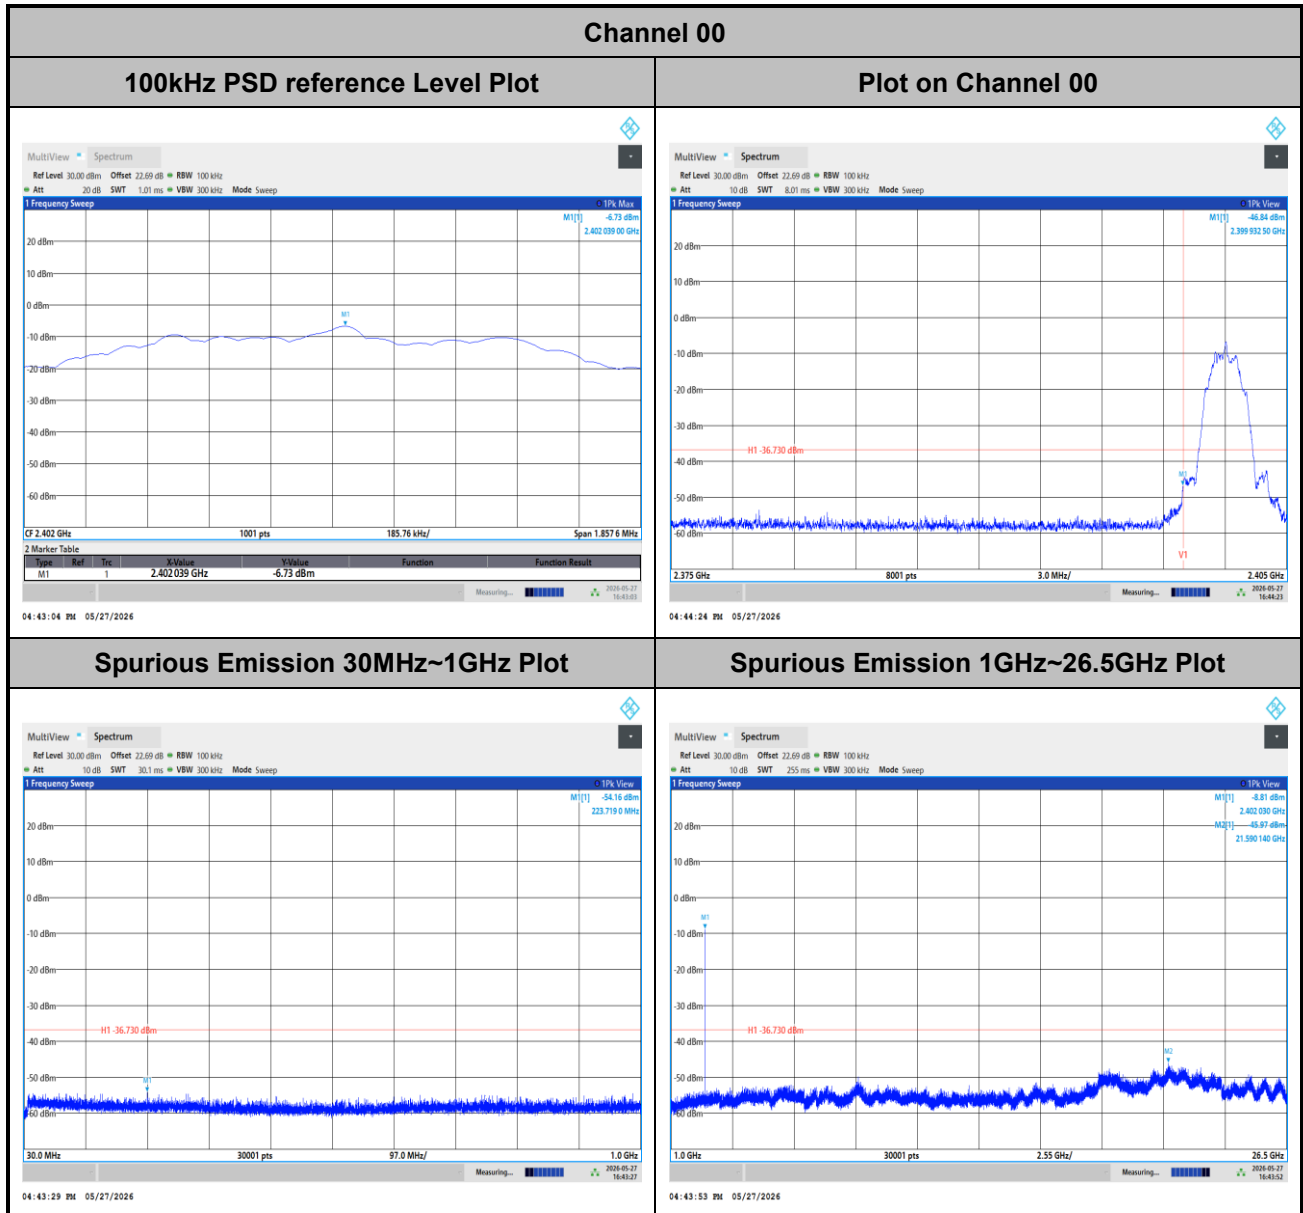




Channel 19


100kHz PSD reference Level Plot

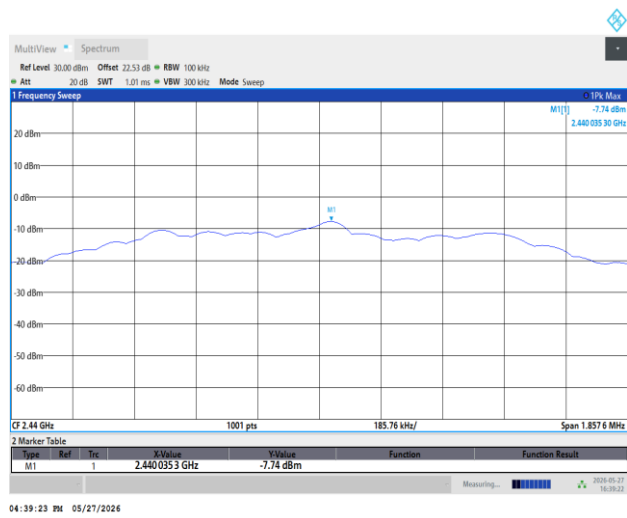

Spurious Emission 30MHz~1GHz Plot

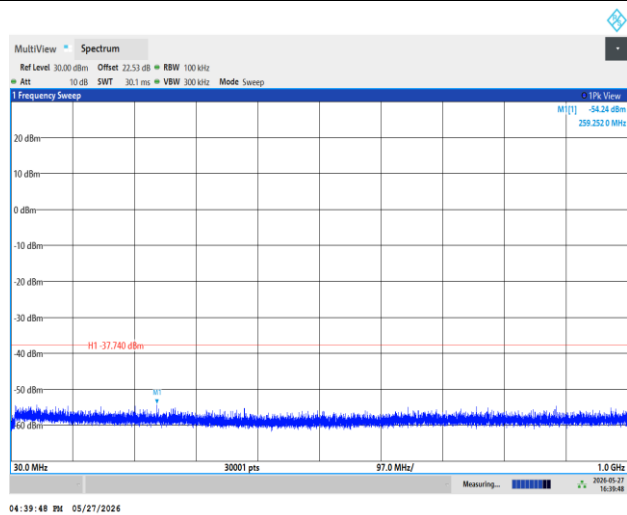


Spurious Emission 1GHz~26.5GHz Plot

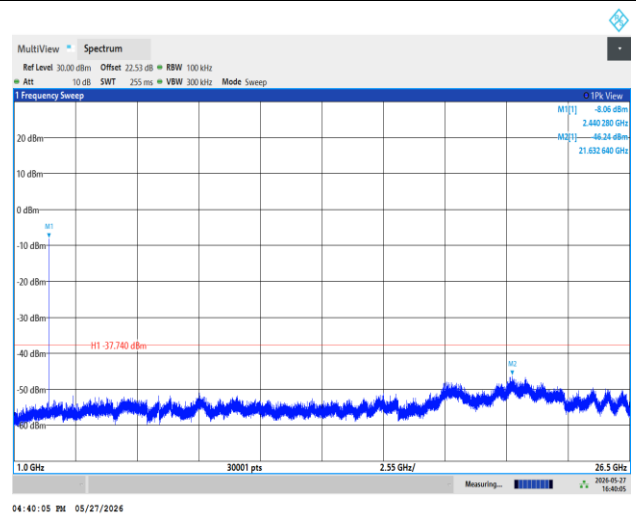




Channel 39


100kHz PSD reference Level Plot

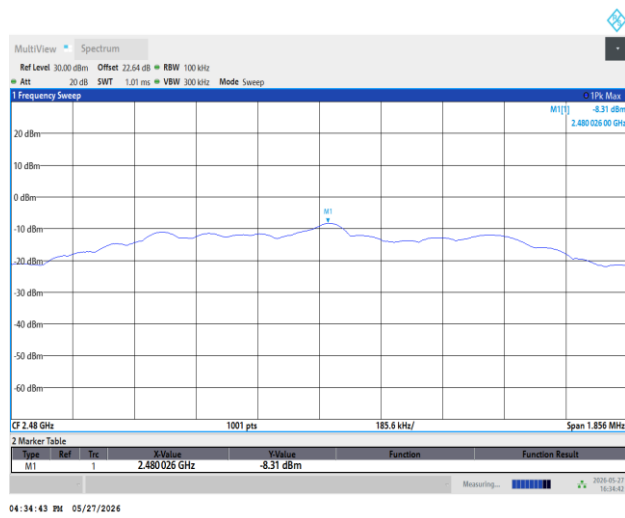


Plot on Channel 39

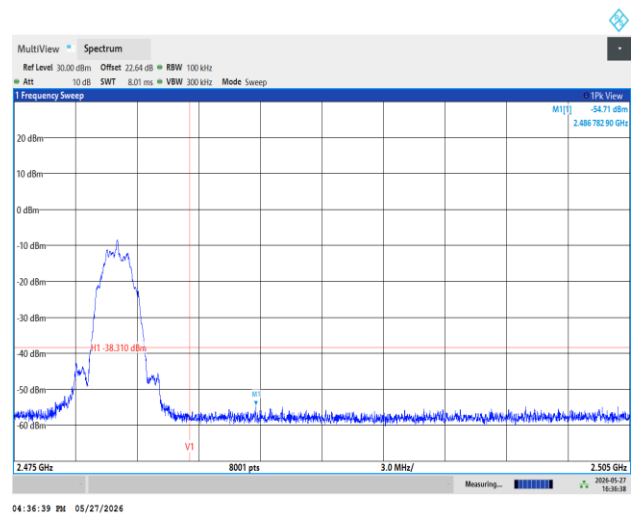

Spurious Emission 30MHz~1GHz Plot

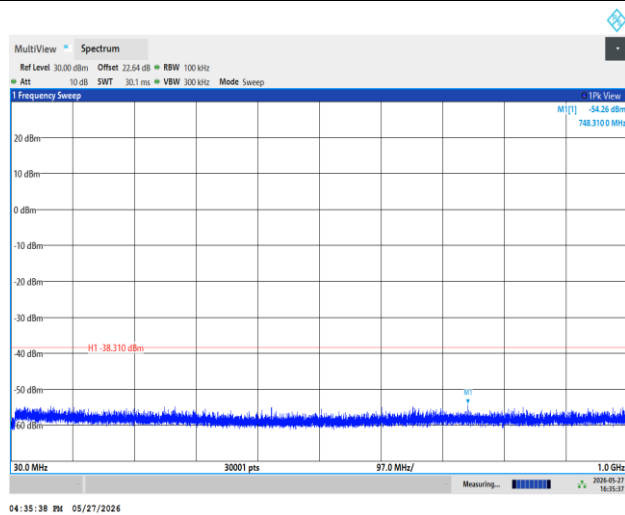

Spurious Emission 1GHz~26.5GHz Plot

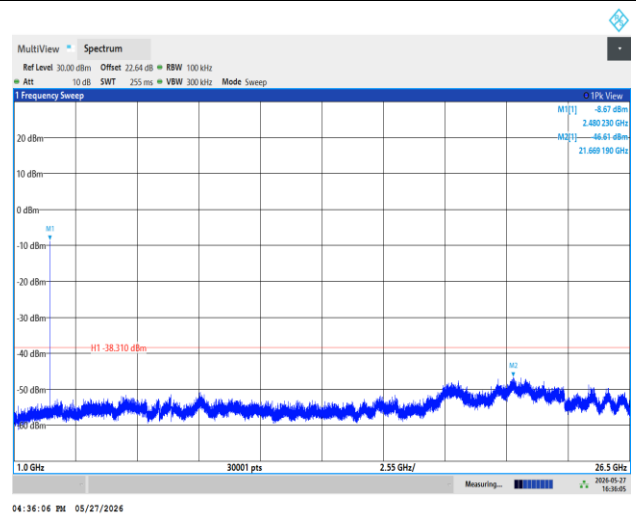




Appendix B. AC Conducted Emission Test Results

Test Engineer:	Brian Chen	Temperature:	22.6~24.3°C
		Relative Humidity:	45.7~49.9%

EUT Information

Report NO : 621004-01
Test Mode : Mode 2
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

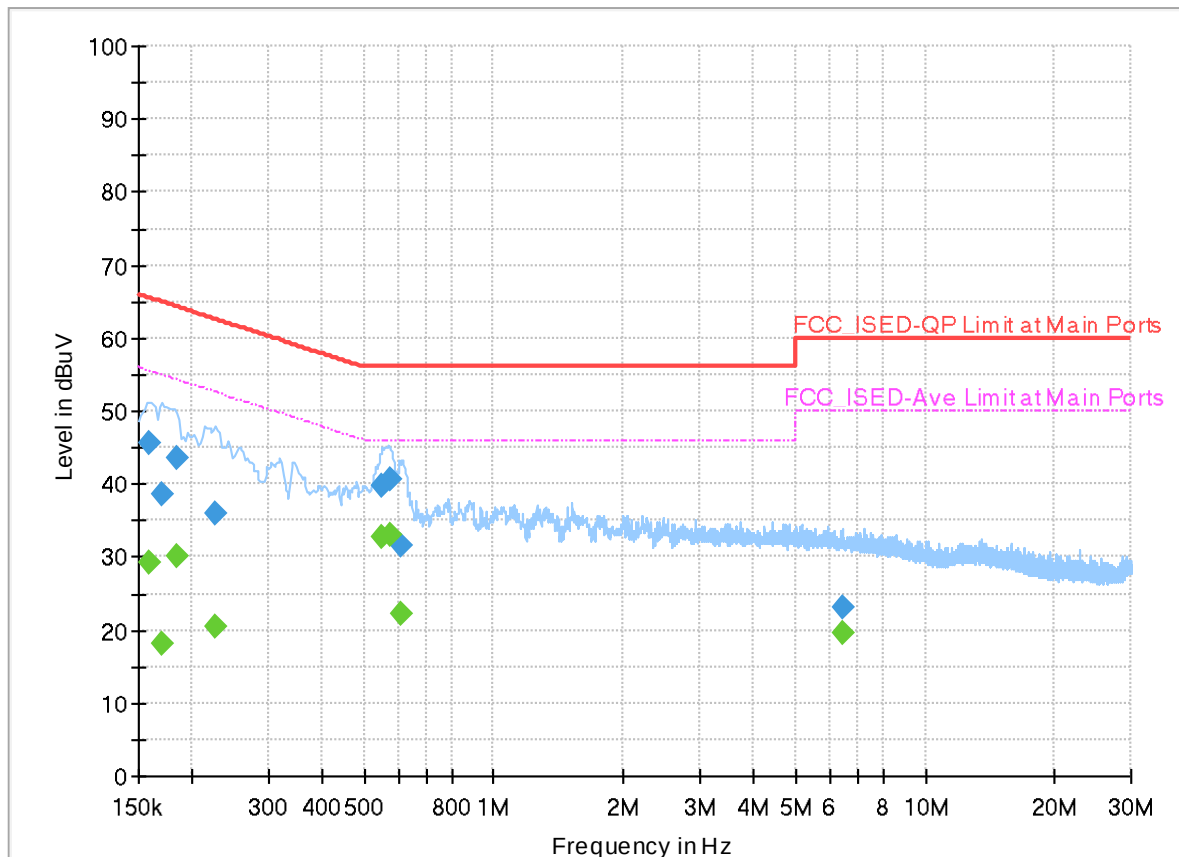


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	---	29.28	55.52	26.24	L1	OFF	19.9
0.159000	45.49	---	65.52	20.03	L1	OFF	19.9
0.170250	---	18.18	54.95	36.77	L1	OFF	19.9
0.170250	38.67	---	64.95	26.28	L1	OFF	19.9
0.183750	---	30.03	54.31	24.28	L1	OFF	19.9
0.183750	43.59	---	64.31	20.72	L1	OFF	19.9
0.226500	---	20.45	52.58	32.13	L1	OFF	19.9
0.226500	36.10	---	62.58	26.48	L1	OFF	19.9
0.550500	---	32.71	46.00	13.29	L1	OFF	20.0
0.550500	39.75	---	56.00	16.25	L1	OFF	20.0
0.577500	---	32.98	46.00	13.02	L1	OFF	20.0
0.577500	40.67	---	56.00	15.33	L1	OFF	20.0
0.606750	---	22.13	46.00	23.87	L1	OFF	20.0
0.606750	31.64	---	56.00	24.36	L1	OFF	20.0
6.407250	---	19.54	50.00	30.46	L1	OFF	20.0
6.407250	23.12	---	60.00	36.88	L1	OFF	20.0

EUT Information

Report NO : 621004-01
Test Mode : Mode 2
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

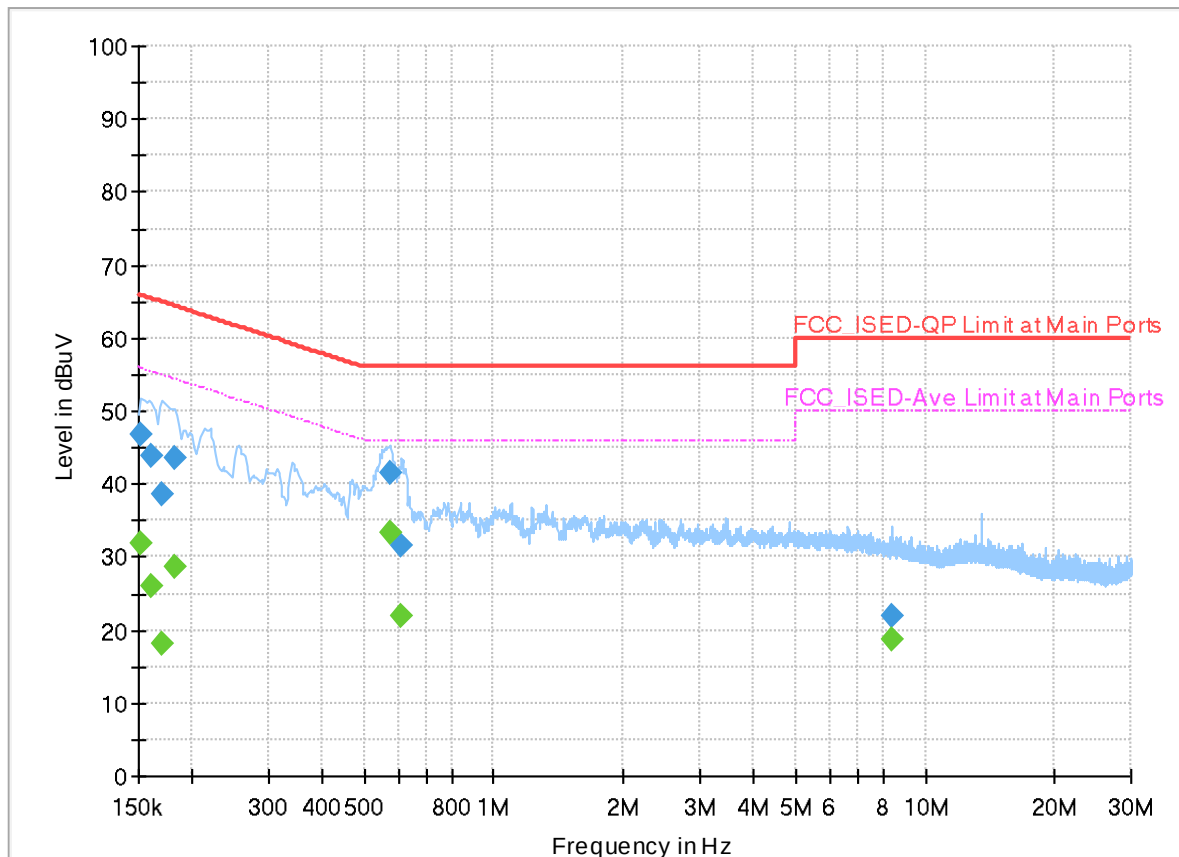

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	31.89	55.88	23.99	N	OFF	19.9
0.152250	46.75	---	65.88	19.13	N	OFF	19.9
0.161250	---	26.12	55.40	29.28	N	OFF	19.9
0.161250	43.82	---	65.40	21.58	N	OFF	19.9
0.170250	---	18.20	54.95	36.75	N	OFF	19.9
0.170250	38.71	---	64.95	26.24	N	OFF	19.9
0.181500	---	28.74	54.42	25.68	N	OFF	19.9
0.181500	43.58	---	64.42	20.84	N	OFF	19.9
0.573000	---	33.26	46.00	12.74	N	OFF	19.9
0.573000	41.44	---	56.00	14.56	N	OFF	19.9
0.611250	---	21.79	46.00	24.21	N	OFF	20.0
0.611250	31.49	---	56.00	24.51	N	OFF	20.0
8.367000	---	18.85	50.00	31.15	N	OFF	20.1
8.367000	21.98	---	60.00	38.02	N	OFF	20.1



Appendix C. Radiated Spurious Emission Test Data

Test Engineer:	Jerry Lan, Gary Guo, and Steven Wu	Temperature:	22.8~25.2°C
		Relative Humidity:	48.2~54.3%

Note symbol

-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth-LE_GFSK	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	1	Bluetooth-LE_GFSK	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	1	Bluetooth-LE_GFSK	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	1	Bluetooth-LE_GFSK	0	2402	2Mbps	-	-
Mode 5	2400-2483.5	1	Bluetooth-LE_GFSK	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	1	Bluetooth-LE_GFSK	39	2480	2Mbps	-	-
Mode 7	2400-2483.5	1	Bluetooth-LE_GFSK	39	2480	2Mbps	-	LF
Mode 8	2400-2483.5	1	Bluetooth-LE_GFSK	39	2480	2Mbps	-	SHF



C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth-LE_GFSK	00	2356.46	46.04	54.00	-7.96	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	00	4804.00	35.41	54.00	-18.59	V	Avg.	Pass	-	Harmonic
2	Bluetooth-LE_GFSK	19	-	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE_GFSK	19	7320.00	42.38	54.00	-11.62	V	Avg.	Pass	-	Harmonic
3	Bluetooth-LE_GFSK	39	2488.62	46.10	54.00	-7.90	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	39	7440.00	40.51	54.00	-13.49	V	Avg.	Pass	-	Harmonic
4	Bluetooth-LE_GFSK	0	2353.33	48.54	54.00	-5.46	V	Avg.	Pass	-	Band Edge
4	Bluetooth-LE_GFSK	0	4804.00	41.01	74.00	-32.99	H	Peak	Pass	-	Harmonic
5	Bluetooth-LE_GFSK	19	-	-	-	-	-	-	-	-	Band Edge
5	Bluetooth-LE_GFSK	19	7320.00	45.82	74.00	-28.18	V	Peak	Pass	-	Harmonic
6	Bluetooth-LE_GFSK	39	2489.46	49.00	54.00	-5.00	H	Avg.	Pass	-	Band Edge
6	Bluetooth-LE_GFSK	39	7440.00	45.00	74.00	-29.00	V	Peak	Pass	-	Harmonic
7	LF	39	897.18	32.68	46.00	-13.32	H	Peak	Pass	-	LF
8	SHF	39	25344.00	39.48	74.00	-34.52	V	Peak	Pass	-	SHF



Mode	1																																																																																													
	Band Edge																																																																																													
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																													
ANT	1																																																																																													
Pol.	Horizontal					Fundamental																																																																																								
Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2372.28</td><td>55.07</td><td>74.00</td><td>-18.93</td><td>45.87</td><td>27.22</td><td>8.16</td><td>36.10</td><td>9.92</td><td>37 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2372.28	55.07	74.00	-18.93	45.87	27.22	8.16	36.10	9.92	37 Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>91.86</td><td>-----</td><td>-----</td><td>82.34</td><td>27.50</td><td>8.20</td><td>36.10</td><td>9.92</td><td>37 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	91.86	-----	-----	82.34	27.50	8.20	36.10	9.92	37 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2372.28	55.07	74.00	-18.93	45.87	27.22	8.16	36.10	9.92	37 Peak																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2402.00	91.86	-----	-----	82.34	27.50	8.20	36.10	9.92	37 Peak																																																																																				
Avg	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.00</td><td>45.40</td><td>54.00</td><td>-8.60</td><td>35.98</td><td>27.42</td><td>8.18</td><td>36.10</td><td>9.92</td><td>37 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.00	45.40	54.00	-8.60	35.98	27.42	8.18	36.10	9.92	37 Average	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>87.20</td><td>-----</td><td>-----</td><td>77.68</td><td>27.50</td><td>8.20</td><td>36.10</td><td>9.92</td><td>37 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	87.20	-----	-----	77.68	27.50	8.20	36.10	9.92	37 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2386.00	45.40	54.00	-8.60	35.98	27.42	8.18	36.10	9.92	37 Average																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	2402.00	87.20	-----	-----	77.68	27.50	8.20	36.10	9.92	37 Average																																																																																				



Mode	1																																																																																												
	Band Edge																																																																																												
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																												
ANT	1																																																																																												
Pol.	Vertical						Fundamental																																																																																						
Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																						
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2383.60	54.68	74.00	-19.32	45.31	27.37	8.18	36.10	9.92	146	337	Peak		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	92.90	-----	-----	83.38	27.50	8.20	36.10	9.92	146	337	Peak					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2383.60	54.68	74.00	-19.32	45.31	27.37	8.18	36.10	9.92	146	337	Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2402.00	92.90	-----	-----	83.38	27.50	8.20	36.10	9.92	146	337	Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																						
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2356.46	46.04	54.00	-7.96	36.84	27.24	8.14	36.10	9.92	146	337	Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	87.58	-----	-----	78.06	27.50	8.20	36.10	9.92	146	337	Average					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2356.46	46.04	54.00	-7.96	36.84	27.24	8.14	36.10	9.92	146	337	Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2402.00	87.58	-----	-----	78.06	27.50	8.20	36.10	9.92	146	337	Average																																																																																	



Mode	1																																																																																											
	Harmonic																																																																																											
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_260326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4804.00</td><td>39.70</td><td>74.00</td><td>-34.30</td><td>61.94</td><td>32.40</td><td>11.32</td><td>66.35</td><td>0.39 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4804.00	39.70	74.00	-34.30	61.94	32.40	11.32	66.35	0.39 -- -- Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_260326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4804.00</td><td>42.35</td><td>74.00</td><td>-31.65</td><td>64.58</td><td>32.41</td><td>11.32</td><td>66.35</td><td>0.39 305 308 Peak</td></tr><tr><td>2</td><td>4804.00</td><td>35.41</td><td>54.00</td><td>-18.59</td><td>57.64</td><td>32.41</td><td>11.32</td><td>66.35</td><td>0.39 305 308 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4804.00	42.35	74.00	-31.65	64.58	32.41	11.32	66.35	0.39 305 308 Peak	2	4804.00	35.41	54.00	-18.59	57.64	32.41	11.32	66.35	0.39 305 308 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																			
1	4804.00	39.70	74.00	-34.30	61.94	32.40	11.32	66.35	0.39 -- -- Peak																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																			
1	4804.00	42.35	74.00	-31.65	64.58	32.41	11.32	66.35	0.39 305 308 Peak																																																																																			
2	4804.00	35.41	54.00	-18.59	57.64	32.41	11.32	66.35	0.39 305 308 Average																																																																																			



Mode	1	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-05-25 Frequency (MHz) Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 HORIZONTAL	Level (dBuV/m) Date: 2026-05-25 Frequency (MHz) Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 VERTICAL



Mode	2																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_260326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4800.00</td><td>40.16</td><td>74.00</td><td>-33.84</td><td>62.14</td><td>32.56</td><td>11.31</td><td>66.25</td><td>0.40 -- -- Peak</td></tr><tr><td>2</td><td>7320.00</td><td>45.36</td><td>74.00</td><td>-28.64</td><td>60.32</td><td>36.88</td><td>13.61</td><td>65.76</td><td>0.31 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4800.00	40.16	74.00	-33.84	62.14	32.56	11.31	66.25	0.40 -- -- Peak	2	7320.00	45.36	74.00	-28.64	60.32	36.88	13.61	65.76	0.31 -- -- Peak	Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_260326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4800.00</td><td>40.56</td><td>74.00</td><td>-33.44</td><td>62.54</td><td>32.56</td><td>11.31</td><td>66.25</td><td>0.40 -- -- Peak</td></tr><tr><td>2</td><td>7320.00</td><td>48.99</td><td>74.00</td><td>-25.01</td><td>63.95</td><td>36.88</td><td>13.61</td><td>65.76</td><td>0.31 285 215 Peak</td></tr><tr><td>3</td><td>7320.00</td><td>42.38</td><td>54.00</td><td>-11.62</td><td>57.34</td><td>36.88</td><td>13.61</td><td>65.76</td><td>0.31 285 215 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4800.00	40.56	74.00	-33.44	62.54	32.56	11.31	66.25	0.40 -- -- Peak	2	7320.00	48.99	74.00	-25.01	63.95	36.88	13.61	65.76	0.31 285 215 Peak	3	7320.00	42.38	54.00	-11.62	57.34	36.88	13.61	65.76	0.31 285 215 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																							
1	4800.00	40.16	74.00	-33.84	62.14	32.56	11.31	66.25	0.40 -- -- Peak																																																																																																							
2	7320.00	45.36	74.00	-28.64	60.32	36.88	13.61	65.76	0.31 -- -- Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																							
1	4800.00	40.56	74.00	-33.44	62.54	32.56	11.31	66.25	0.40 -- -- Peak																																																																																																							
2	7320.00	48.99	74.00	-25.01	63.95	36.88	13.61	65.76	0.31 285 215 Peak																																																																																																							
3	7320.00	42.38	54.00	-11.62	57.34	36.88	13.61	65.76	0.31 285 215 Average																																																																																																							



Mode	2	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 HORIZONTAL	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 VERTICAL



Mode	3																																																																																																
	Band Edge																																																																																																
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																																
ANT	1																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_260326 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2497.08</td><td>55.85</td><td>74.00</td><td>-18.15</td><td>46.01</td><td>27.70</td><td>8.33</td><td>36.11</td><td>9.92</td><td>300</td><td>47 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2497.08	55.85	74.00	-18.15	46.01	27.70	8.33	36.11	9.92	300	47 Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_260326 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.00</td><td>90.38</td><td>-----</td><td>-----</td><td>80.57</td><td>27.70</td><td>8.30</td><td>36.11</td><td>9.92</td><td>300</td><td>47 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.00	90.38	-----	-----	80.57	27.70	8.30	36.11	9.92	300	47 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2497.08	55.85	74.00	-18.15	46.01	27.70	8.33	36.11	9.92	300	47 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2488.00	90.38	-----	-----	80.57	27.70	8.30	36.11	9.92	300	47 Peak																																																																																						
Avg	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_260326 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.62</td><td>46.10</td><td>54.00</td><td>-7.90</td><td>36.27</td><td>27.70</td><td>8.32</td><td>36.11</td><td>9.92</td><td>300</td><td>47 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.62	46.10	54.00	-7.90	36.27	27.70	8.32	36.11	9.92	300	47 Average	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_260326 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.00</td><td>85.23</td><td>-----</td><td>-----</td><td>75.42</td><td>27.70</td><td>8.30</td><td>36.11</td><td>9.92</td><td>300</td><td>47 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.00	85.23	-----	-----	75.42	27.70	8.30	36.11	9.92	300	47 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2488.62	46.10	54.00	-7.90	36.27	27.70	8.32	36.11	9.92	300	47 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2488.00	85.23	-----	-----	75.42	27.70	8.30	36.11	9.92	300	47 Average																																																																																						



Mode	3																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.78</td><td>55.23</td><td>74.00</td><td>-18.77</td><td>45.41</td><td>27.70</td><td>8.31</td><td>36.11</td><td>9.92</td><td>103</td><td>336</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.78	55.23	74.00	-18.77	45.41	27.70	8.31	36.11	9.92	103	336	Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.00</td><td>91.03</td><td>-----</td><td>-----</td><td>81.22</td><td>27.70</td><td>8.30</td><td>36.11</td><td>9.92</td><td>103</td><td>336</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.00	91.03	-----	-----	81.22	27.70	8.30	36.11	9.92	103	336	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2487.78	55.23	74.00	-18.77	45.41	27.70	8.31	36.11	9.92	103	336	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2488.00	91.03	-----	-----	81.22	27.70	8.30	36.11	9.92	103	336	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2489.02</td><td>46.07</td><td>54.00</td><td>-7.93</td><td>36.24</td><td>27.70</td><td>8.32</td><td>36.11</td><td>9.92</td><td>103</td><td>336</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.02	46.07	54.00	-7.93	36.24	27.70	8.32	36.11	9.92	103	336	Average	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.00</td><td>86.50</td><td>-----</td><td>-----</td><td>76.69</td><td>27.70</td><td>8.30</td><td>36.11</td><td>9.92</td><td>103</td><td>336</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.00	86.50	-----	-----	76.69	27.70	8.30	36.11	9.92	103	336	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2489.02	46.07	54.00	-7.93	36.24	27.70	8.32	36.11	9.92	103	336	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2488.00	86.50	-----	-----	76.69	27.70	8.30	36.11	9.92	103	336	Average																																																																																								



Mode	3																																																																																																																																							
	Harmonic																																																																																																																																							
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																																																																							
ANT	1																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_260326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.49</td><td>74.00</td><td>-32.51</td><td>62.90</td><td>33.02</td><td>11.30</td><td>66.14</td><td>0.41</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>45.17</td><td>74.00</td><td>-28.83</td><td>60.46</td><td>36.42</td><td>13.73</td><td>65.81</td><td>0.37</td><td>100</td><td>54 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	41.49	74.00	-32.51	62.90	33.02	11.30	66.14	0.41	--	Peak	2	7440.00	45.17	74.00	-28.83	60.46	36.42	13.73	65.81	0.37	100	54 Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_260326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>43.44</td><td>74.00</td><td>-30.56</td><td>64.85</td><td>33.02</td><td>11.30</td><td>66.14</td><td>0.41</td><td>336</td><td>303 Peak</td></tr><tr><td>2</td><td>4960.00</td><td>35.58</td><td>54.00</td><td>-18.42</td><td>56.99</td><td>33.02</td><td>11.30</td><td>66.14</td><td>0.41</td><td>336</td><td>303 Average</td></tr><tr><td>3</td><td>7440.00</td><td>47.26</td><td>74.00</td><td>-26.74</td><td>62.55</td><td>36.42</td><td>13.73</td><td>65.81</td><td>0.37</td><td>286</td><td>219 Peak</td></tr><tr><td>4</td><td>7440.00</td><td>40.51</td><td>54.00</td><td>-13.49</td><td>55.80</td><td>36.42</td><td>13.73</td><td>65.81</td><td>0.37</td><td>286</td><td>219 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	43.44	74.00	-30.56	64.85	33.02	11.30	66.14	0.41	336	303 Peak	2	4960.00	35.58	54.00	-18.42	56.99	33.02	11.30	66.14	0.41	336	303 Average	3	7440.00	47.26	74.00	-26.74	62.55	36.42	13.73	65.81	0.37	286	219 Peak	4	7440.00	40.51	54.00	-13.49	55.80	36.42	13.73	65.81	0.37	286	219 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	4960.00	41.49	74.00	-32.51	62.90	33.02	11.30	66.14	0.41	--	Peak																																																																																																																													
2	7440.00	45.17	74.00	-28.83	60.46	36.42	13.73	65.81	0.37	100	54 Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1	4960.00	43.44	74.00	-30.56	64.85	33.02	11.30	66.14	0.41	336	303 Peak																																																																																																																													
2	4960.00	35.58	54.00	-18.42	56.99	33.02	11.30	66.14	0.41	336	303 Average																																																																																																																													
3	7440.00	47.26	74.00	-26.74	62.55	36.42	13.73	65.81	0.37	286	219 Peak																																																																																																																													
4	7440.00	40.51	54.00	-13.49	55.80	36.42	13.73	65.81	0.37	286	219 Average																																																																																																																													



Mode	3	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-05-25 Frequency (MHz) Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 HORIZONTAL	Level (dBuV/m) Date: 2026-05-25 Frequency (MHz) Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 VERTICAL



Mode	4																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH0_2402MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2383.88</td><td>54.96</td><td>74.00</td><td>-19.04</td><td>45.58</td><td>27.38</td><td>8.18</td><td>36.10</td><td>9.92</td><td>331</td><td>48</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2383.88	54.96	74.00	-19.04	45.58	27.38	8.18	36.10	9.92	331	48	Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>92.10</td><td>-----</td><td>-----</td><td>82.58</td><td>27.50</td><td>8.20</td><td>36.10</td><td>9.92</td><td>331</td><td>48</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	92.10	-----	-----	82.58	27.50	8.20	36.10	9.92	331	48	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2383.88	54.96	74.00	-19.04	45.58	27.38	8.18	36.10	9.92	331	48	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2402.00	92.10	-----	-----	82.58	27.50	8.20	36.10	9.92	331	48	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2384.34</td><td>48.25</td><td>54.00</td><td>-5.75</td><td>38.86</td><td>27.39</td><td>8.18</td><td>36.10</td><td>9.92</td><td>331</td><td>48</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2384.34	48.25	54.00	-5.75	38.86	27.39	8.18	36.10	9.92	331	48	Average	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>87.04</td><td>-----</td><td>-----</td><td>77.52</td><td>27.50</td><td>8.20</td><td>36.10</td><td>9.92</td><td>331</td><td>48</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	87.04	-----	-----	77.52	27.50	8.20	36.10	9.92	331	48	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2384.34	48.25	54.00	-5.75	38.86	27.39	8.18	36.10	9.92	331	48	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2402.00	87.04	-----	-----	77.52	27.50	8.20	36.10	9.92	331	48	Average																																																																																								



Mode	4																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH0_2402MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.37</td><td>55.54</td><td>74.00</td><td>-18.46</td><td>46.09</td><td>27.45</td><td>8.18</td><td>36.10</td><td>9.92</td><td>147</td><td>360</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.37	55.54	74.00	-18.46	46.09	27.45	8.18	36.10	9.92	147	360	Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>92.83</td><td>-----</td><td>-----</td><td>83.31</td><td>27.50</td><td>8.20</td><td>36.10</td><td>9.92</td><td>147</td><td>360</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	92.83	-----	-----	83.31	27.50	8.20	36.10	9.92	147	360	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2387.37	55.54	74.00	-18.46	46.09	27.45	8.18	36.10	9.92	147	360	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2402.00	92.83	-----	-----	83.31	27.50	8.20	36.10	9.92	147	360	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2353.33</td><td>48.54</td><td>54.00</td><td>-5.46</td><td>39.31</td><td>27.27</td><td>8.14</td><td>36.10</td><td>9.92</td><td>147</td><td>360</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2353.33	48.54	54.00	-5.46	39.31	27.27	8.14	36.10	9.92	147	360	Average	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>87.96</td><td>-----</td><td>-----</td><td>78.44</td><td>27.50</td><td>8.20</td><td>36.10</td><td>9.92</td><td>147</td><td>360</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	87.96	-----	-----	78.44	27.50	8.20	36.10	9.92	147	360	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2353.33	48.54	54.00	-5.46	39.31	27.27	8.14	36.10	9.92	147	360	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2402.00	87.96	-----	-----	78.44	27.50	8.20	36.10	9.92	147	360	Average																																																																																								



Mode	4																																																																																							
	Harmonic																																																																																							
	2400-2483.5_Bluetooth-LE_GFSK_CH0_2402MHz																																																																																							
ANT	1																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	Level (dBuV/m) Date: 2026-05-25 PEAK_74 AVG_54 Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_260326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>41.01</td><td>74.00</td><td>-32.99</td><td>63.24</td><td>32.41</td><td>11.32</td><td>66.35</td><td>0.39</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	41.01	74.00	-32.99	63.24	32.41	11.32	66.35	0.39	--	Peak	Level (dBuV/m) Date: 2026-05-25 PEAK_74 AVG_54 Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_260326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>40.70</td><td>74.00</td><td>-33.30</td><td>62.93</td><td>32.41</td><td>11.32</td><td>66.35</td><td>0.39</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	40.70	74.00	-33.30	62.93	32.41	11.32	66.35	0.39	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	4804.00	41.01	74.00	-32.99	63.24	32.41	11.32	66.35	0.39	--	Peak																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	4804.00	40.70	74.00	-33.30	62.93	32.41	11.32	66.35	0.39	--	Peak																																																																													



Mode	4	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH0_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 HORIZONTAL	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 VERTICAL



Mode	5																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_260326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>40.94</td><td>74.00</td><td>-33.06</td><td>62.92</td><td>32.56</td><td>11.31</td><td>66.25</td><td>0.40</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>44.88</td><td>74.00</td><td>-29.12</td><td>59.04</td><td>36.88</td><td>13.61</td><td>65.76</td><td>0.31</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	40.94	74.00	-33.06	62.92	32.56	11.31	66.25	0.40	--	--	Peak	2	7320.00	44.88	74.00	-29.12	59.04	36.88	13.61	65.76	0.31	--	--	Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_260326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>41.19</td><td>74.00</td><td>-32.81</td><td>63.17</td><td>32.56</td><td>11.31</td><td>66.25</td><td>0.40</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>45.82</td><td>74.00</td><td>-28.18</td><td>60.78</td><td>36.88</td><td>13.61</td><td>65.76</td><td>0.31</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	41.19	74.00	-32.81	63.17	32.56	11.31	66.25	0.40	--	--	Peak	2	7320.00	45.82	74.00	-28.18	60.78	36.88	13.61	65.76	0.31	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4880.00	40.94	74.00	-33.06	62.92	32.56	11.31	66.25	0.40	--	--	Peak																																																																																																																		
2	7320.00	44.88	74.00	-29.12	59.04	36.88	13.61	65.76	0.31	--	--	Peak																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4880.00	41.19	74.00	-32.81	63.17	32.56	11.31	66.25	0.40	--	--	Peak																																																																																																																		
2	7320.00	45.82	74.00	-28.18	60.78	36.88	13.61	65.76	0.31	--	--	Peak																																																																																																																		



Mode	5	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 HORIZONTAL	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 VERTICAL





Mode	6																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2492.44</td><td>55.41</td><td>74.00</td><td>-18.59</td><td>45.58</td><td>27.70</td><td>8.32</td><td>36.11</td><td>9.92</td><td>292 47 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.44	55.41	74.00	-18.59	45.58	27.70	8.32	36.11	9.92	292 47 Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.00</td><td>90.07</td><td>-----</td><td>-----</td><td>80.26</td><td>27.70</td><td>8.30</td><td>36.11</td><td>9.92</td><td>292 47 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.00	90.07	-----	-----	80.26	27.70	8.30	36.11	9.92	292 47 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2492.44	55.41	74.00	-18.59	45.58	27.70	8.32	36.11	9.92	292 47 Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2488.00	90.07	-----	-----	80.26	27.70	8.30	36.11	9.92	292 47 Peak																																																																																									
Avg	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2489.46</td><td>49.00</td><td>54.00</td><td>-5.00</td><td>39.17</td><td>27.70</td><td>8.32</td><td>36.11</td><td>9.92</td><td>292 47 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.46	49.00	54.00	-5.00	39.17	27.70	8.32	36.11	9.92	292 47 Average	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_260326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.00</td><td>83.68</td><td>-----</td><td>-----</td><td>73.87</td><td>27.70</td><td>8.30</td><td>36.11</td><td>9.92</td><td>292 47 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.00	83.68	-----	-----	73.87	27.70	8.30	36.11	9.92	292 47 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2489.46	49.00	54.00	-5.00	39.17	27.70	8.32	36.11	9.92	292 47 Average																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2488.00	83.68	-----	-----	73.87	27.70	8.30	36.11	9.92	292 47 Average																																																																																									



Mode	6																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2495.12</td><td>56.16</td><td>74.00</td><td>-17.84</td><td>46.33</td><td>27.70</td><td>8.32</td><td>36.11</td><td>9.92</td><td>168</td><td>337</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2495.12	56.16	74.00	-17.84	46.33	27.70	8.32	36.11	9.92	168	337	Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>90.87</td><td>-----</td><td>-----</td><td>81.06</td><td>27.70</td><td>8.30</td><td>36.11</td><td>9.92</td><td>168</td><td>337</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	90.87	-----	-----	81.06	27.70	8.30	36.11	9.92	168	337	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2495.12	56.16	74.00	-17.84	46.33	27.70	8.32	36.11	9.92	168	337	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	90.87	-----	-----	81.06	27.70	8.30	36.11	9.92	168	337	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.88</td><td>48.94</td><td>54.00</td><td>-5.06</td><td>39.10</td><td>27.70</td><td>8.33</td><td>36.11</td><td>9.92</td><td>168</td><td>337</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.88	48.94	54.00	-5.06	39.10	27.70	8.33	36.11	9.92	168	337	Average	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_260326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>85.33</td><td>-----</td><td>-----</td><td>75.52</td><td>27.70</td><td>8.30</td><td>36.11</td><td>9.92</td><td>168</td><td>337</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	85.33	-----	-----	75.52	27.70	8.30	36.11	9.92	168	337	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2496.88	48.94	54.00	-5.06	39.10	27.70	8.33	36.11	9.92	168	337	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	85.33	-----	-----	75.52	27.70	8.30	36.11	9.92	168	337	Average																																																																																								

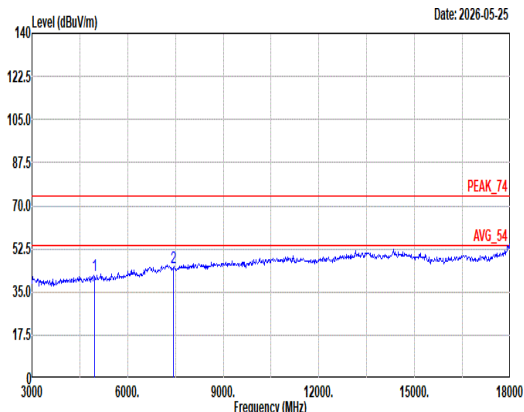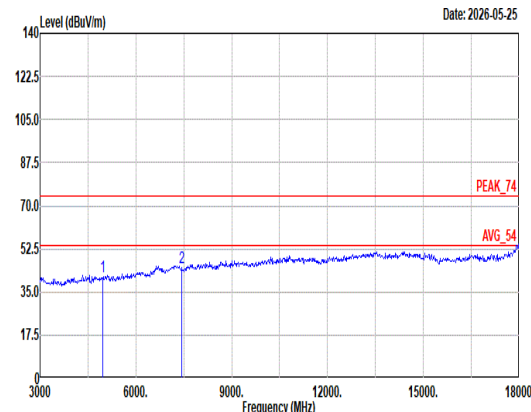

Mode	6																																																																			
	Harmonic																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																			
ANT	1																																																																			
Pol.	Horizontal						Vertical																																																													
Peak Avg																																																																				
	Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_260326 HORIZONTAL						Site : 03CH16-HY Condition: PEAK_74 3m 91280-1522_260326 VERTICAL																																																													
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.58</td><td>74.00</td><td>-32.42</td><td>62.99</td><td>33.02</td><td>11.30</td><td>66.14</td><td>0.41</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>44.94</td><td>74.00</td><td>-29.06</td><td>60.23</td><td>36.42</td><td>13.73</td><td>65.81</td><td>0.37</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	41.58	74.00	-32.42	62.99	33.02	11.30	66.14	0.41	--	--	Peak	2	7440.00	44.94	74.00	-29.06	60.23	36.42	13.73	65.81	0.37	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	4960.00	41.58	74.00	-32.42	62.99	33.02	11.30	66.14	0.41	--	--	Peak																																																								
2	7440.00	44.94	74.00	-29.06	60.23	36.42	13.73	65.81	0.37	--	--	Peak																																																								



Mode	6	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-05-25 Frequency (MHz) Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 HORIZONTAL	Level (dBuV/m) Date: 2026-05-25 Frequency (MHz) Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 VERTICAL



Mode	7																																																																																																																																																																																																															
	LF																																																																																																																																																																																																															
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																																																																																																																																															
ANT	1																																																																																																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																																																																																																														
QP/ Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: QP 3m CBL6111D&00802N1D01N-06_47020 & 06_251004 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.97</td><td>20.01</td><td>40.00</td><td>-19.99</td><td>27.98</td><td>23.30</td><td>0.95</td><td>32.23</td><td>0.01</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>184.23</td><td>20.81</td><td>43.50</td><td>-22.69</td><td>36.12</td><td>14.51</td><td>2.33</td><td>32.18</td><td>0.03</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>254.07</td><td>19.20</td><td>46.00</td><td>-26.80</td><td>29.90</td><td>18.74</td><td>2.70</td><td>32.22</td><td>0.08</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>508.21</td><td>23.46</td><td>46.00</td><td>-22.54</td><td>28.83</td><td>23.06</td><td>3.76</td><td>32.36</td><td>0.17</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>718.70</td><td>29.38</td><td>46.00</td><td>-16.62</td><td>30.75</td><td>26.40</td><td>4.46</td><td>32.37</td><td>0.14</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>897.18</td><td>32.68</td><td>46.00</td><td>-13.32</td><td>30.85</td><td>28.36</td><td>4.98</td><td>31.67</td><td>0.16</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	30.97	20.01	40.00	-19.99	27.98	23.30	0.95	32.23	0.01	--	Peak	2	184.23	20.81	43.50	-22.69	36.12	14.51	2.33	32.18	0.03	--	Peak	3	254.07	19.20	46.00	-26.80	29.90	18.74	2.70	32.22	0.08	--	Peak	4	508.21	23.46	46.00	-22.54	28.83	23.06	3.76	32.36	0.17	--	Peak	5	718.70	29.38	46.00	-16.62	30.75	26.40	4.46	32.37	0.14	--	Peak	6	897.18	32.68	46.00	-13.32	30.85	28.36	4.98	31.67	0.16	--	Peak	Level (dBuV/m) Date: 2026-05-25 Site : 03CH16-HY Condition: QP 3m CBL6111D&00802N1D01N-06_47020 & 06_251004 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>33.88</td><td>19.96</td><td>40.00</td><td>-20.04</td><td>29.01</td><td>22.14</td><td>1.04</td><td>32.24</td><td>0.01</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>185.20</td><td>26.73</td><td>43.50</td><td>-16.77</td><td>42.05</td><td>14.49</td><td>2.33</td><td>32.17</td><td>0.03</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>260.86</td><td>19.07</td><td>46.00</td><td>-26.93</td><td>28.80</td><td>19.68</td><td>2.73</td><td>32.22</td><td>0.08</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>492.69</td><td>23.84</td><td>46.00</td><td>-22.16</td><td>29.52</td><td>22.80</td><td>3.71</td><td>32.35</td><td>0.16</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>729.37</td><td>29.53</td><td>46.00</td><td>-16.47</td><td>30.30</td><td>26.96</td><td>4.49</td><td>32.36</td><td>0.14</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>903.00</td><td>32.37</td><td>46.00</td><td>-13.63</td><td>30.36</td><td>28.47</td><td>5.00</td><td>31.62</td><td>0.16</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	33.88	19.96	40.00	-20.04	29.01	22.14	1.04	32.24	0.01	--	Peak	2	185.20	26.73	43.50	-16.77	42.05	14.49	2.33	32.17	0.03	--	Peak	3	260.86	19.07	46.00	-26.93	28.80	19.68	2.73	32.22	0.08	--	Peak	4	492.69	23.84	46.00	-22.16	29.52	22.80	3.71	32.35	0.16	--	Peak	5	729.37	29.53	46.00	-16.47	30.30	26.96	4.49	32.36	0.14	--	Peak	6	903.00	32.37	46.00	-13.63	30.36	28.47	5.00	31.62	0.16	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																						
1	30.97	20.01	40.00	-19.99	27.98	23.30	0.95	32.23	0.01	--	Peak																																																																																																																																																																																																					
2	184.23	20.81	43.50	-22.69	36.12	14.51	2.33	32.18	0.03	--	Peak																																																																																																																																																																																																					
3	254.07	19.20	46.00	-26.80	29.90	18.74	2.70	32.22	0.08	--	Peak																																																																																																																																																																																																					
4	508.21	23.46	46.00	-22.54	28.83	23.06	3.76	32.36	0.17	--	Peak																																																																																																																																																																																																					
5	718.70	29.38	46.00	-16.62	30.75	26.40	4.46	32.37	0.14	--	Peak																																																																																																																																																																																																					
6	897.18	32.68	46.00	-13.32	30.85	28.36	4.98	31.67	0.16	--	Peak																																																																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																						
1	33.88	19.96	40.00	-20.04	29.01	22.14	1.04	32.24	0.01	--	Peak																																																																																																																																																																																																					
2	185.20	26.73	43.50	-16.77	42.05	14.49	2.33	32.17	0.03	--	Peak																																																																																																																																																																																																					
3	260.86	19.07	46.00	-26.93	28.80	19.68	2.73	32.22	0.08	--	Peak																																																																																																																																																																																																					
4	492.69	23.84	46.00	-22.16	29.52	22.80	3.71	32.35	0.16	--	Peak																																																																																																																																																																																																					
5	729.37	29.53	46.00	-16.47	30.30	26.96	4.49	32.36	0.14	--	Peak																																																																																																																																																																																																					
6	903.00	32.37	46.00	-13.63	30.36	28.47	5.00	31.62	0.16	--	Peak																																																																																																																																																																																																					




Mode	8																																																																																																
	SHF																																																																																																
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																																
ANT	1																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak	Level (dBuV/m) Date: 2026-05-25 PEAK_74 AVG_54 Frequency (MHz) Site : 03CH16-HY Condition: PEAK_74 1m BBHA9170_1230_251105 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24616.00</td><td>39.08</td><td>74.00</td><td>-34.92</td><td>56.03</td><td>39.16</td><td>6.40</td><td>52.97</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24616.00	39.08	74.00	-34.92	56.03	39.16	6.40	52.97	-9.54	--	Peak	Level (dBuV/m) Date: 2026-05-25 PEAK_74 AVG_54 Frequency (MHz) Site : 03CH16-HY Condition: PEAK_74 1m BBHA9170_1230_251105 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>25344.00</td><td>39.48</td><td>74.00</td><td>-34.52</td><td>56.76</td><td>39.01</td><td>6.45</td><td>53.20</td><td>-9.54</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	25344.00	39.48	74.00	-34.52	56.76	39.01	6.45	53.20	-9.54	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	24616.00	39.08	74.00	-34.92	56.03	39.16	6.40	52.97	-9.54	--	Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	25344.00	39.48	74.00	-34.52	56.76	39.01	6.45	53.20	-9.54	--	Peak																																																																																						



Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle (%)	Duty Factor(dB)
1	Bluetooth - LE for 1Mbps	62.50	2.04
1	Bluetooth - LE for 2Mbps	33.17	4.79

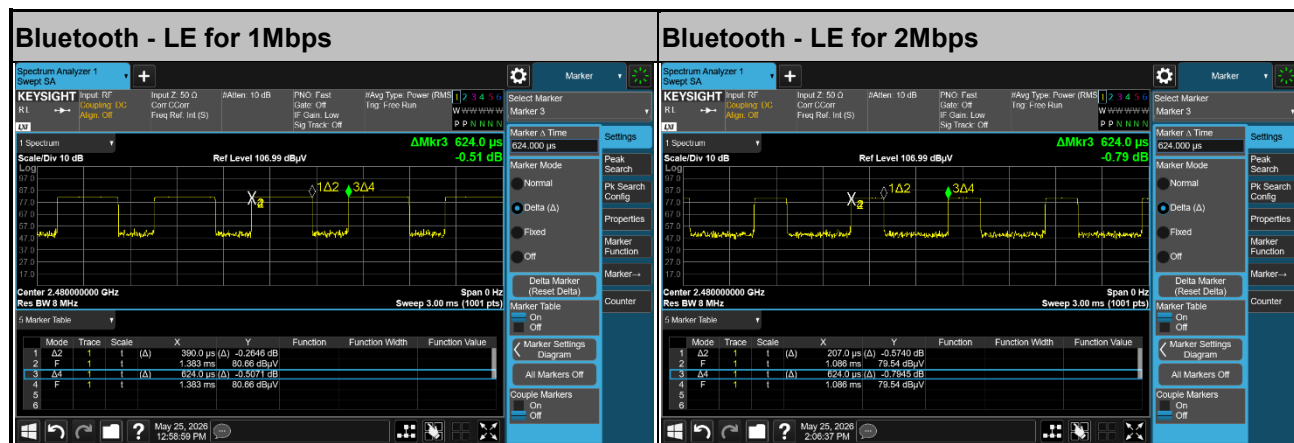

—THE END—