




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----




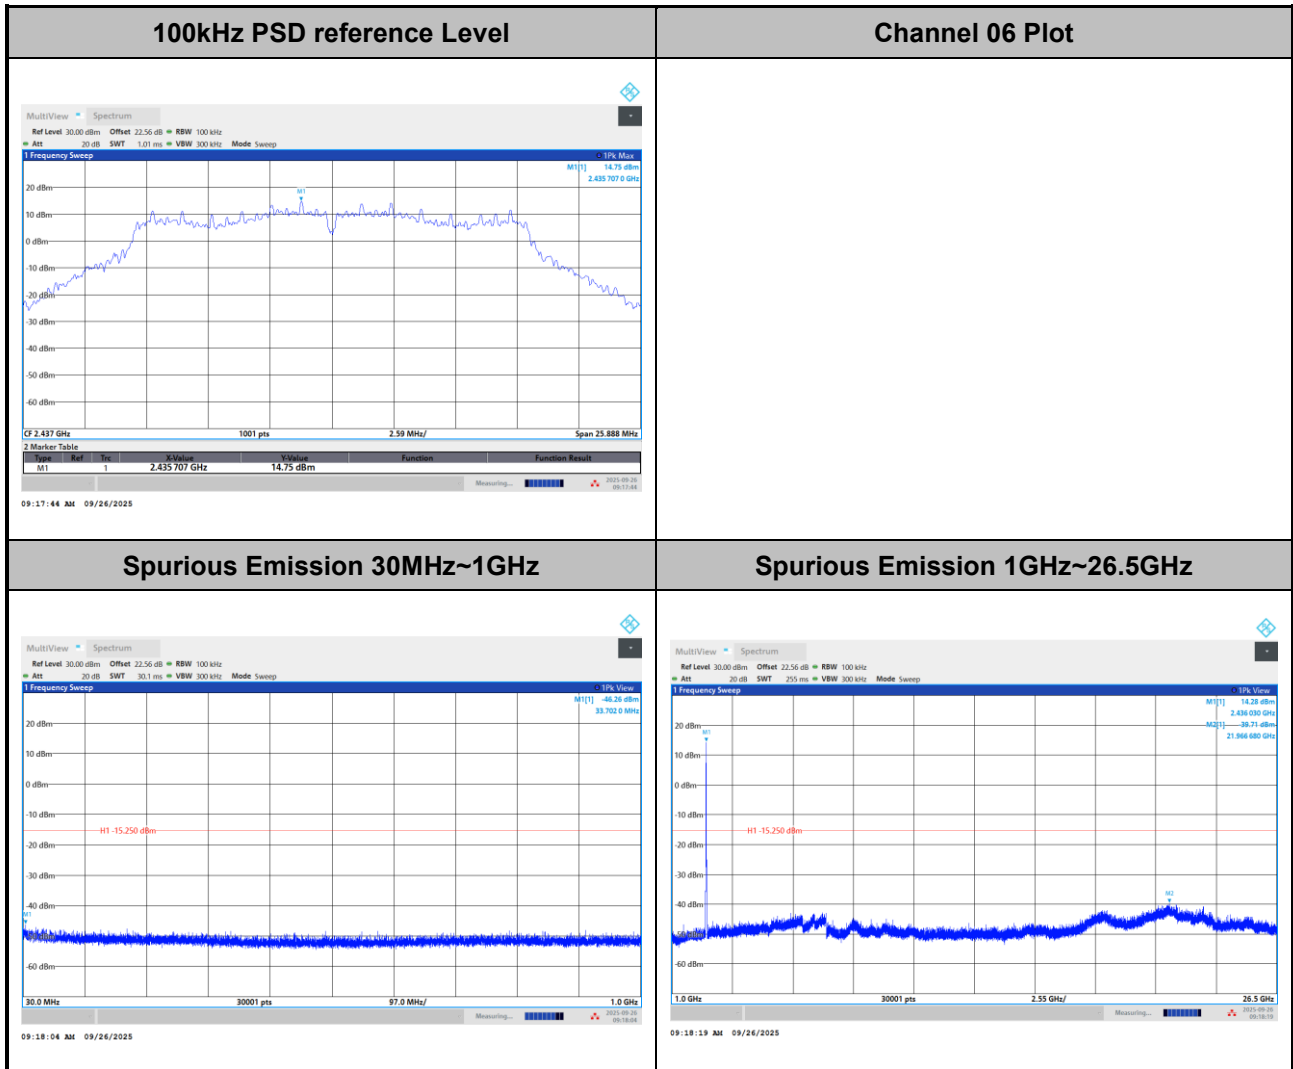


Test Mode : 802.11g

Test Channel : 11


100kHz PSD reference Level

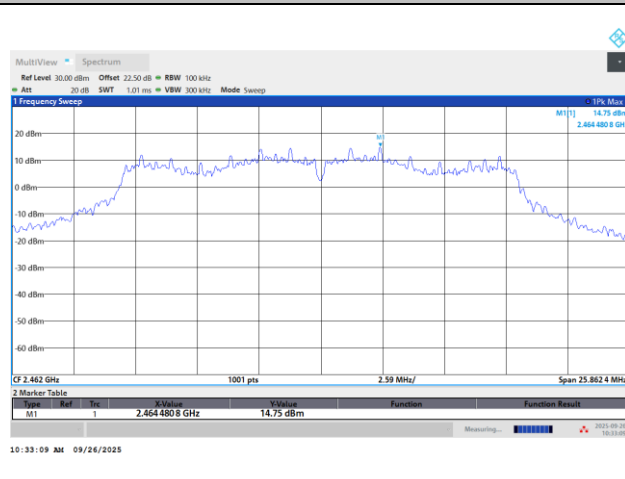


Channel 11 Plot

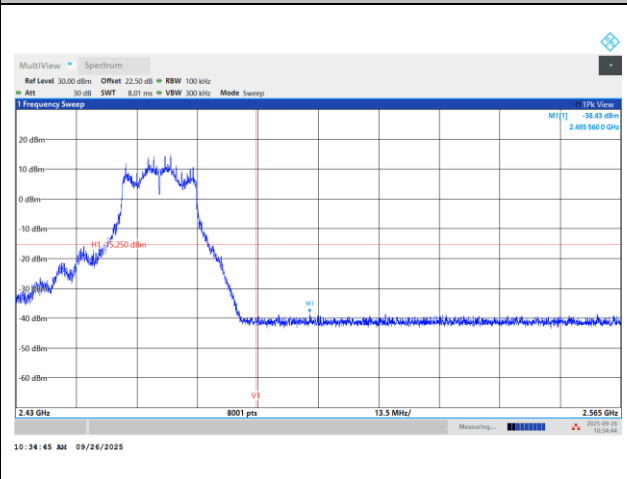

Spurious Emission 30MHz~1GHz

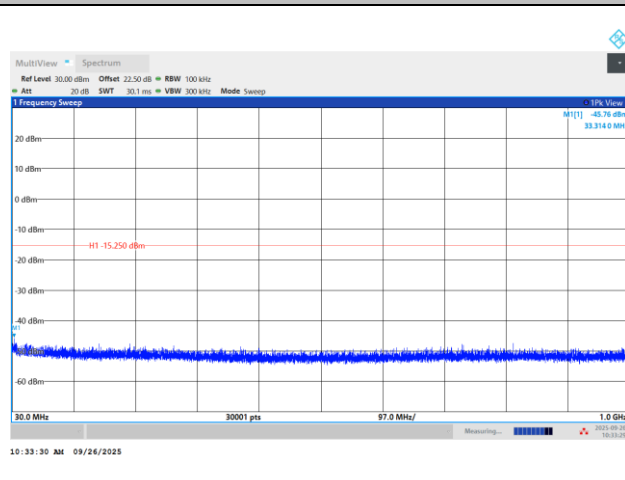

Spurious Emission 1GHz~26.5GHz

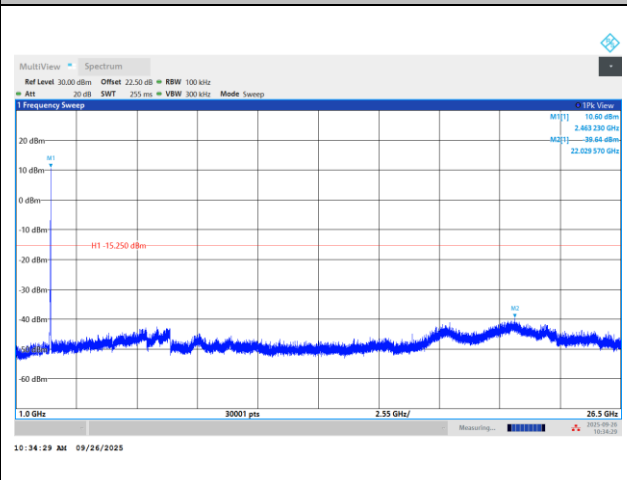





Test Mode : 802.11n HT20

Test Channel : 01


100kHz PSD reference Level

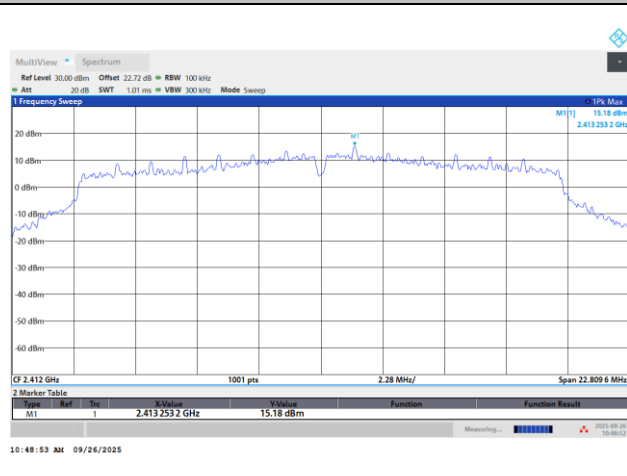


Channel 01 Plot

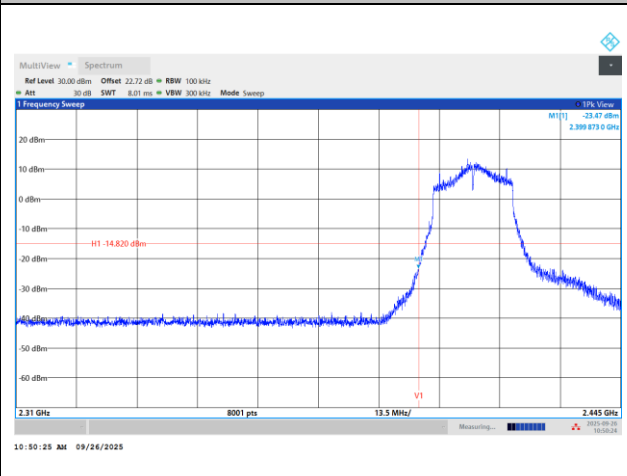

Spurious Emission 30MHz~1GHz

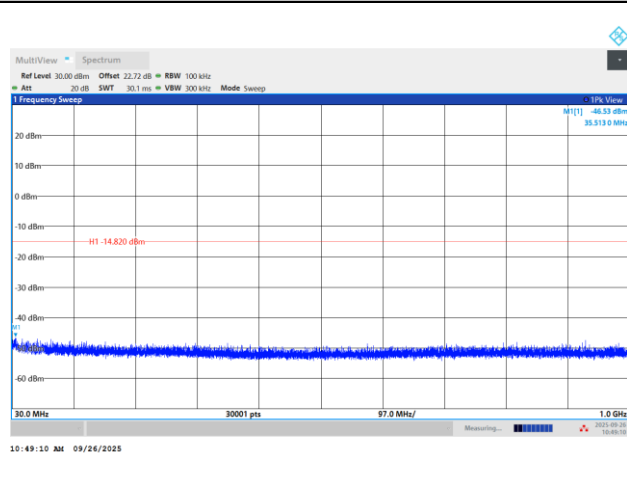

Spurious Emission 1GHz~26.5GHz

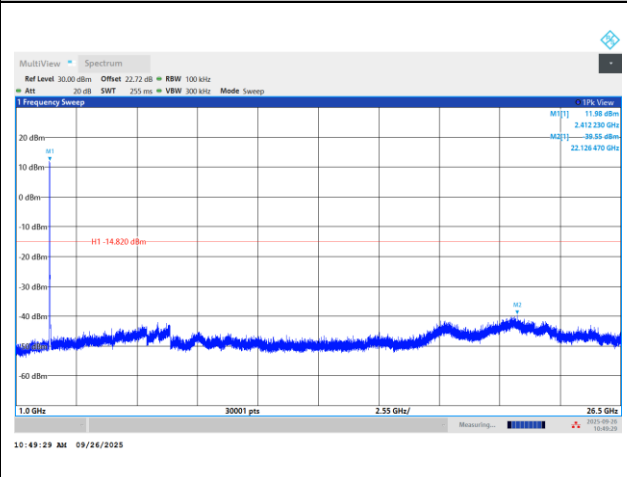




Test Mode : 802.11n HT20

Test Channel : 06


100kHz PSD reference Level

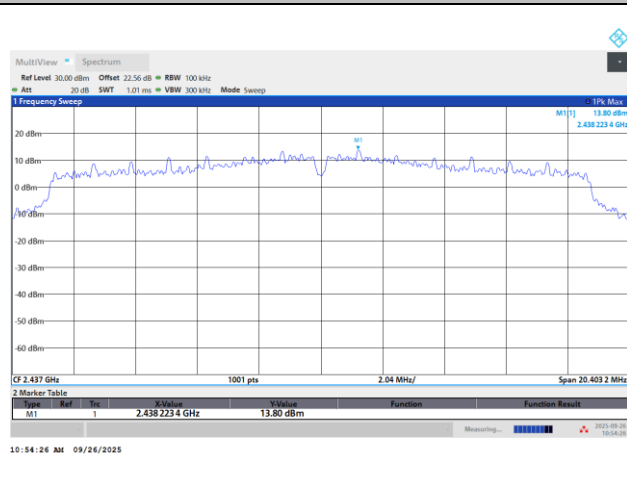


Channel 06 Plot



Spurious Emission 30MHz~1GHz

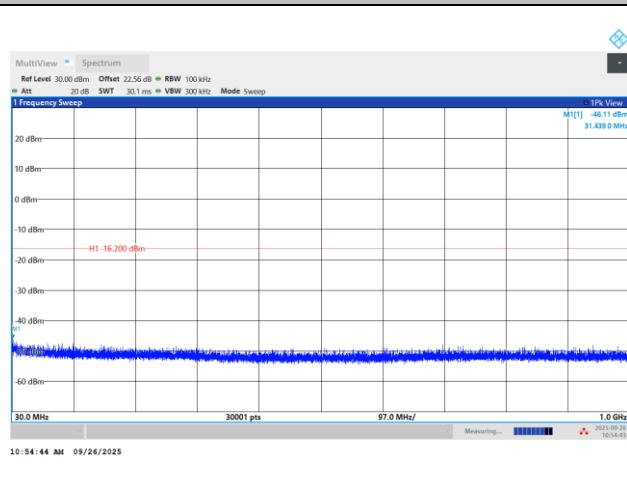

Spurious Emission 1GHz~26.5GHz

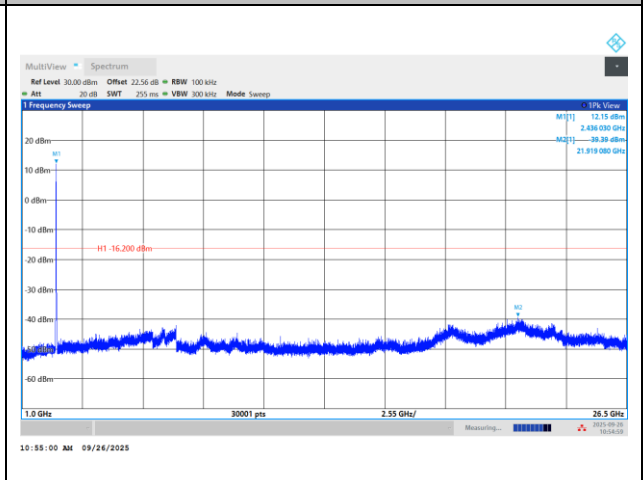





Test Mode : 802.11n HT20

Test Channel : 11


100kHz PSD reference Level

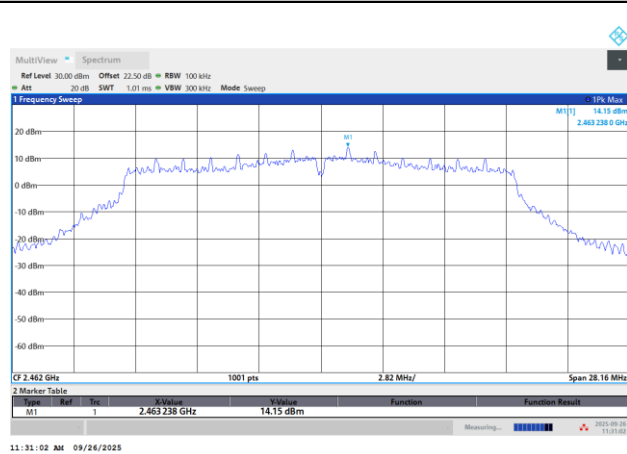


Channel 11 Plot

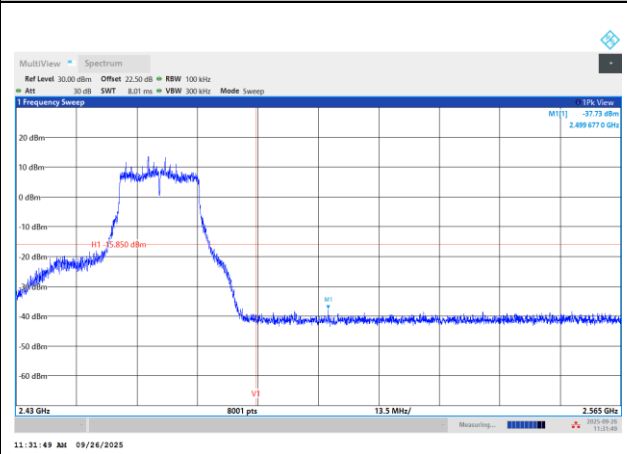

Spurious Emission 30MHz~1GHz

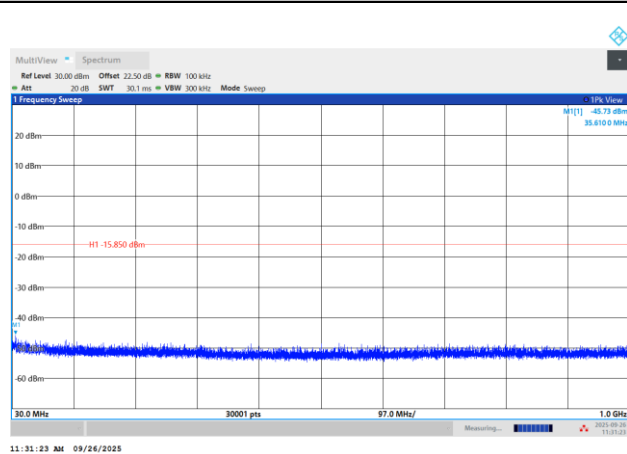

Spurious Emission 1GHz~26.5GHz

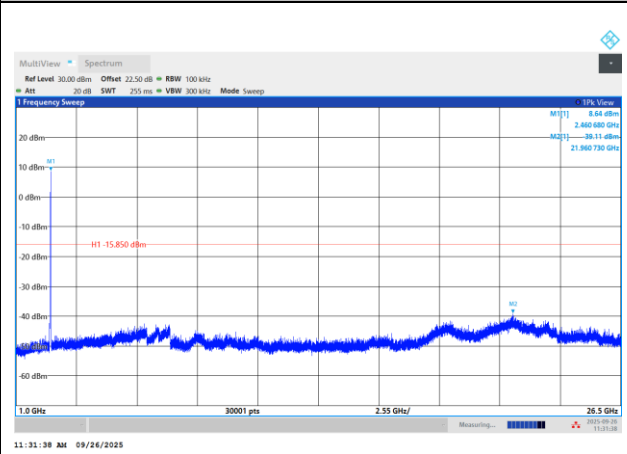





Test Mode : 802.11n HT40

Test Channel : 03


100kHz PSD reference Level

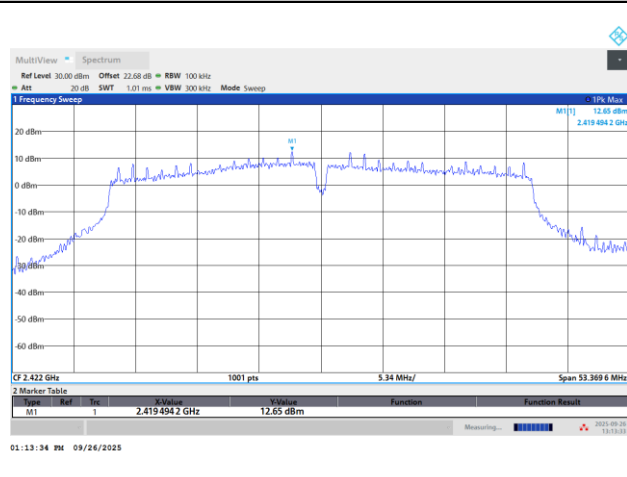


Channel 03 Plot

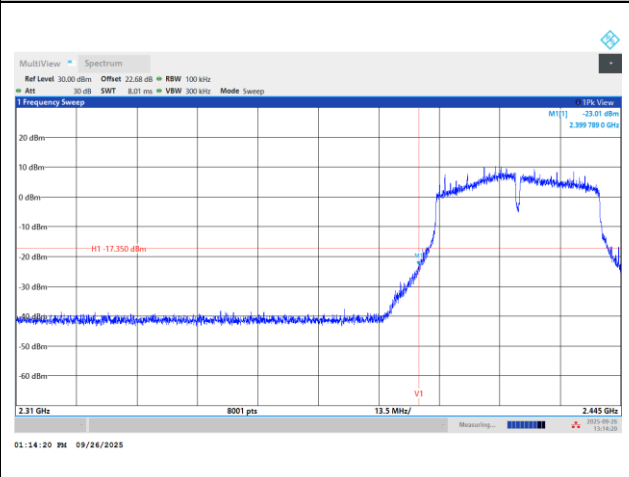

Spurious Emission 30MHz~1GHz

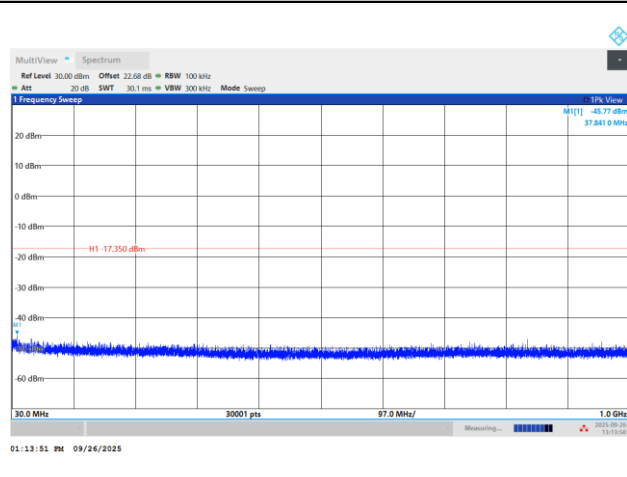


Spurious Emission 1GHz~26.5GHz

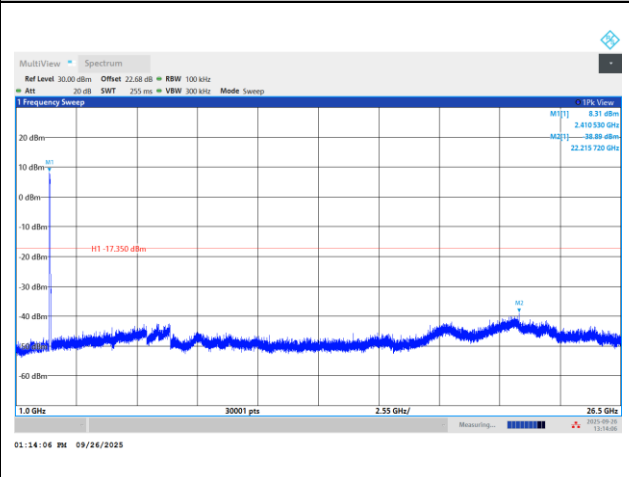



Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

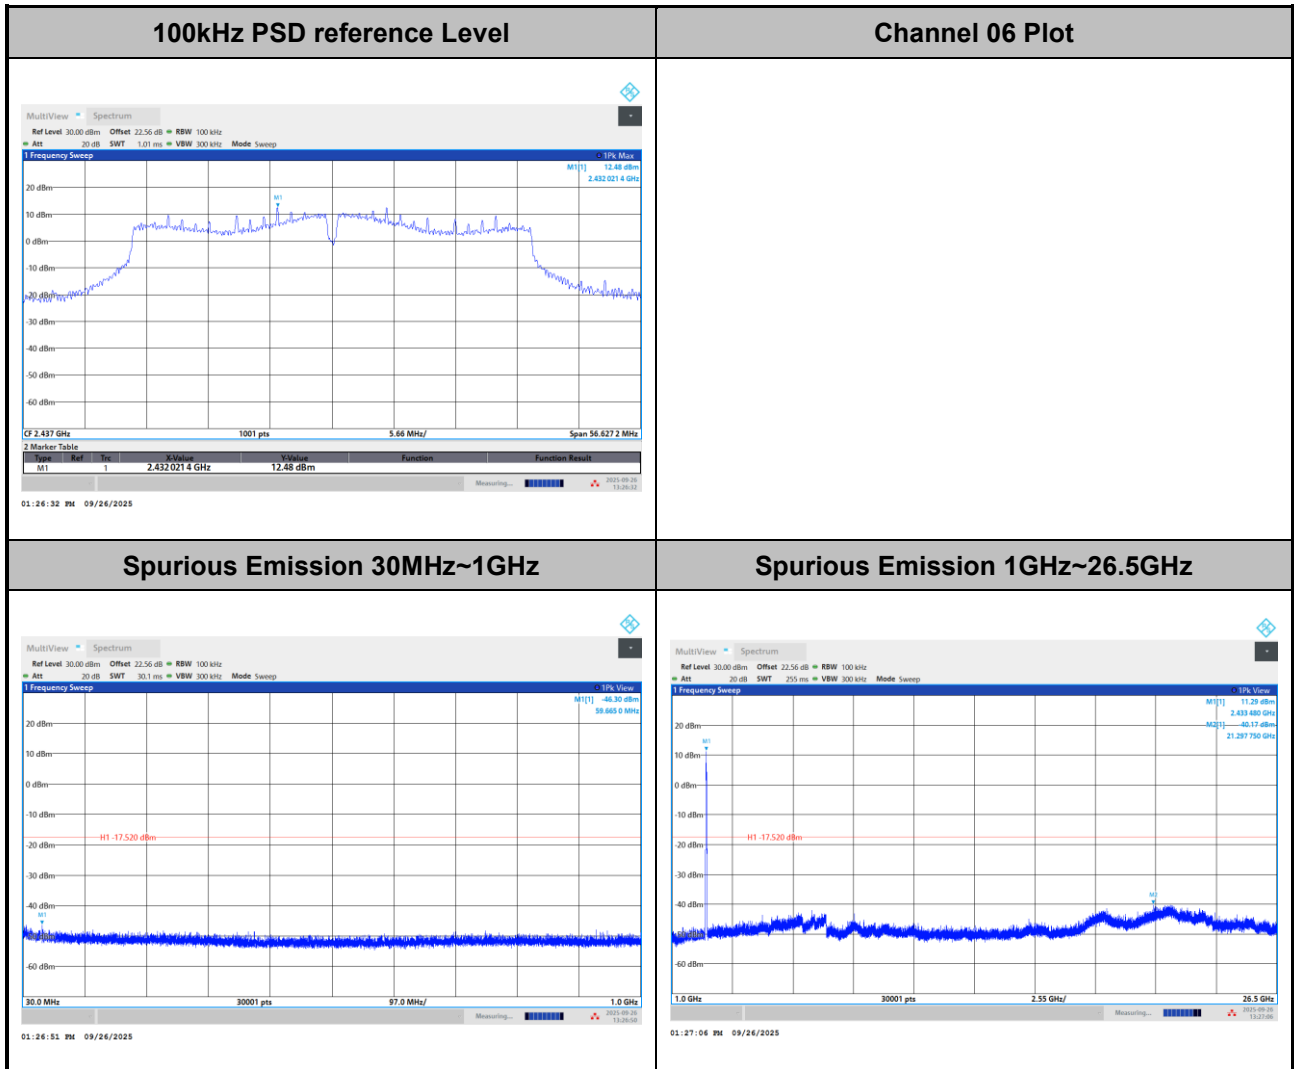





Test Mode : 802.11n HT40

Test Channel : 09


100kHz PSD reference Level

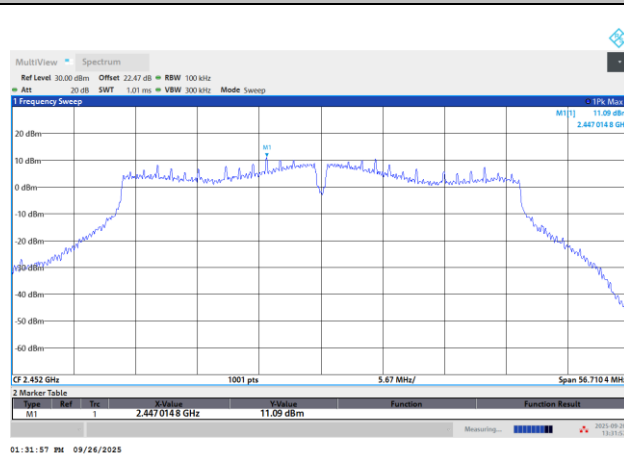


Channel 09 Plot

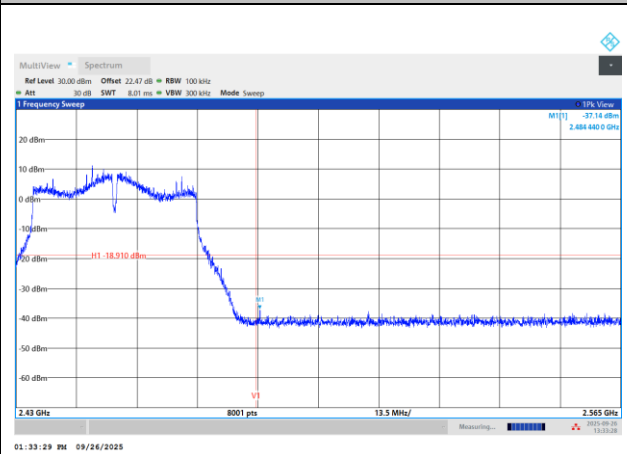

Spurious Emission 30MHz~1GHz

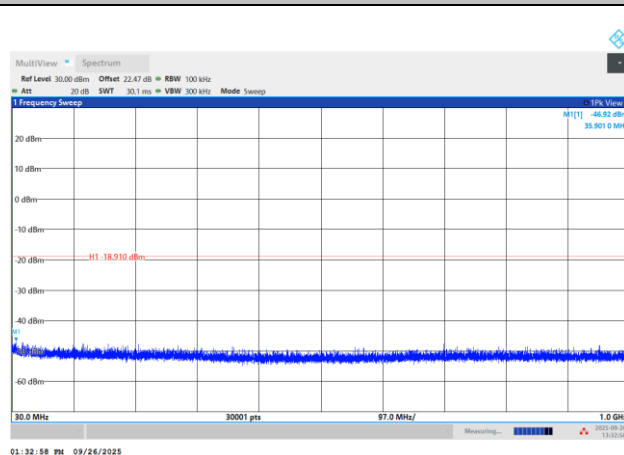

Spurious Emission 1GHz~26.5GHz

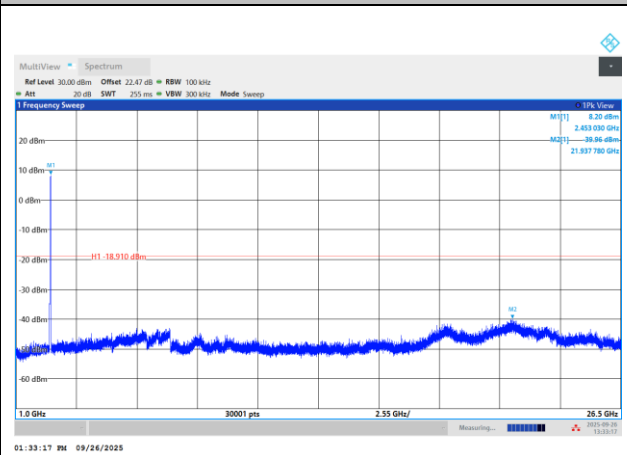





Test Mode : 802.11be EHT20_RU 242T

Test Channel : 01


100kHz PSD reference Level

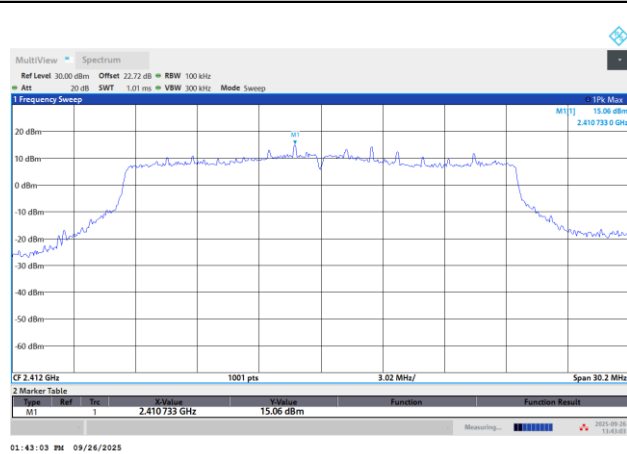


Channel 01 Plot

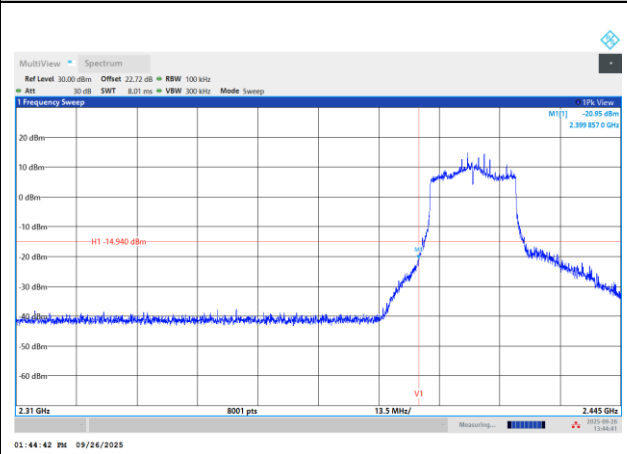

Spurious Emission 30MHz~1GHz

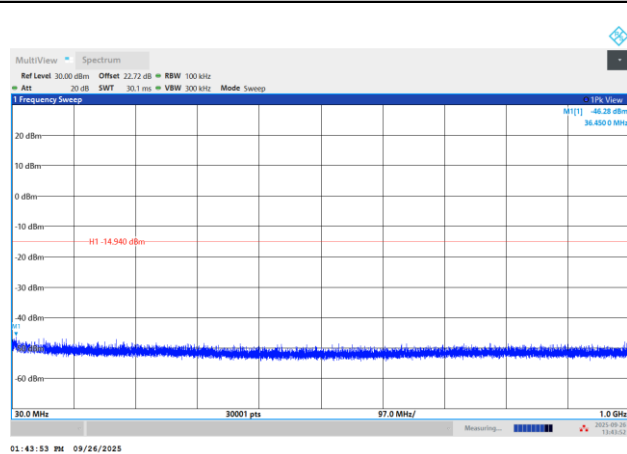


Spurious Emission 1GHz~26.5GHz

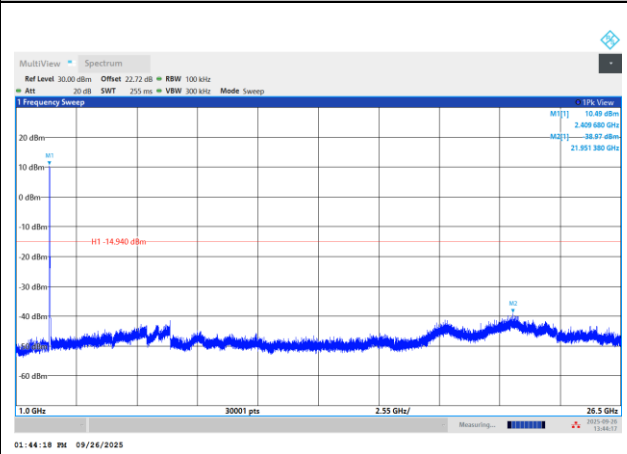



Test Mode :	802.11be EHT20_RU 242T	Test Channel :	06
-------------	------------------------	----------------	----

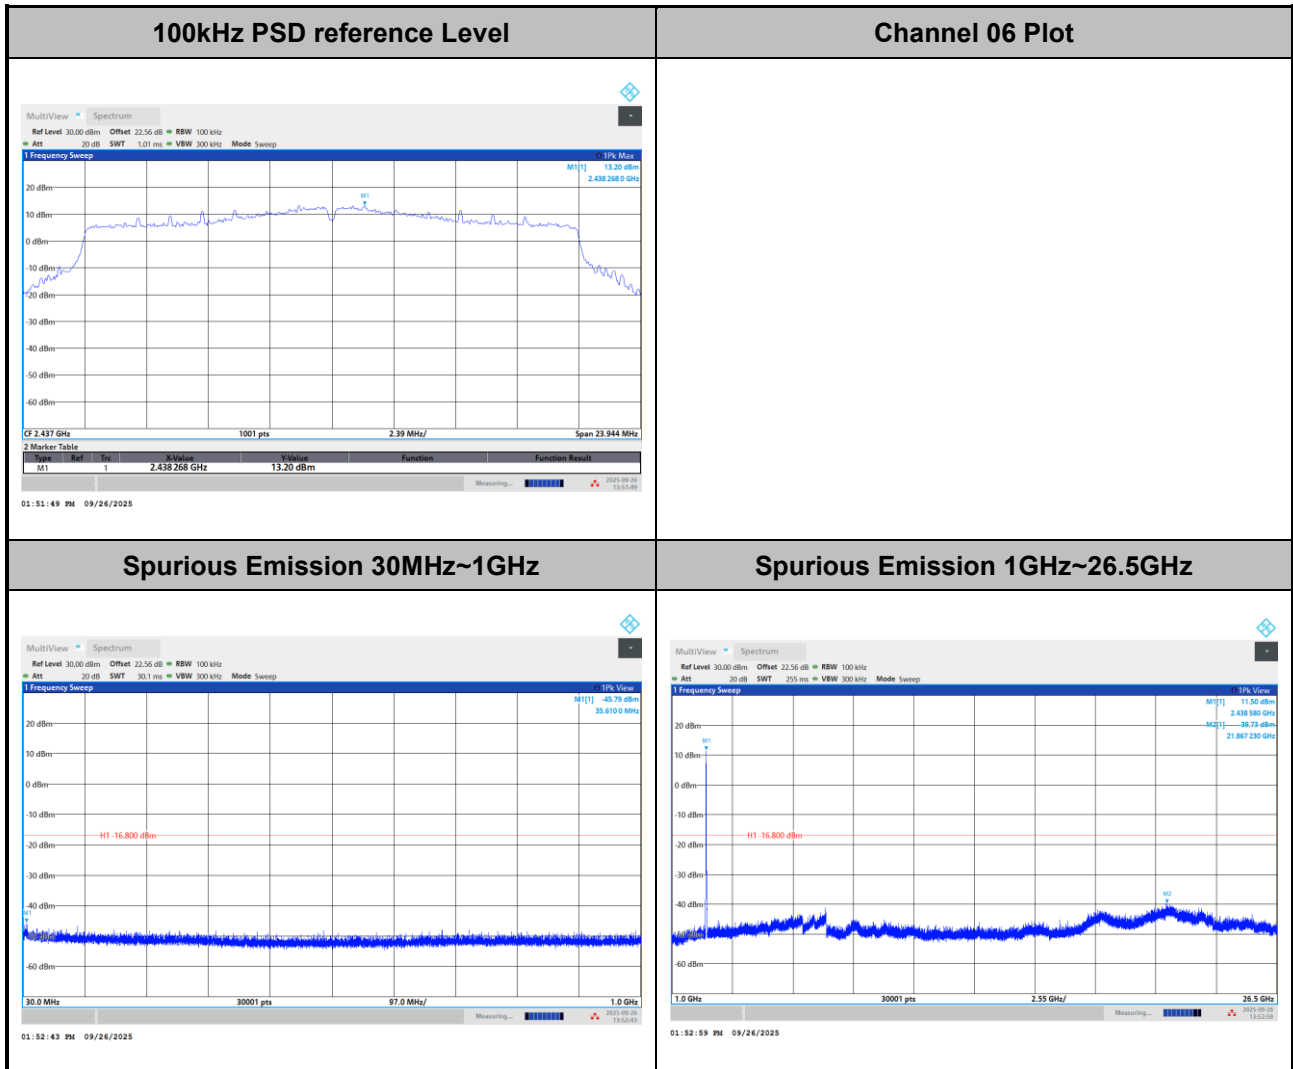





Test Mode : 802.11be EHT20_RU 242T

Test Channel : 11


100kHz PSD reference Level

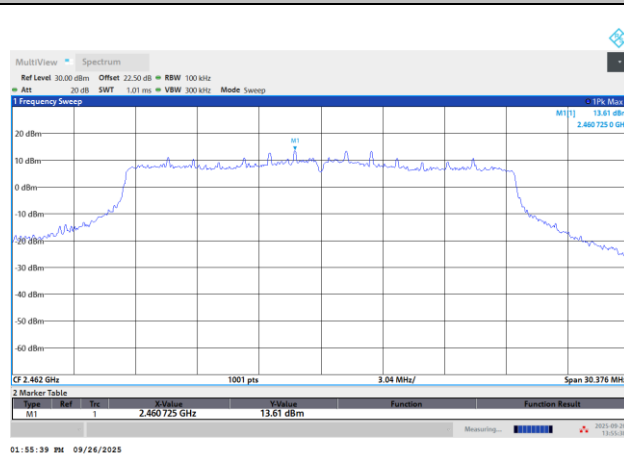


Channel 11 Plot

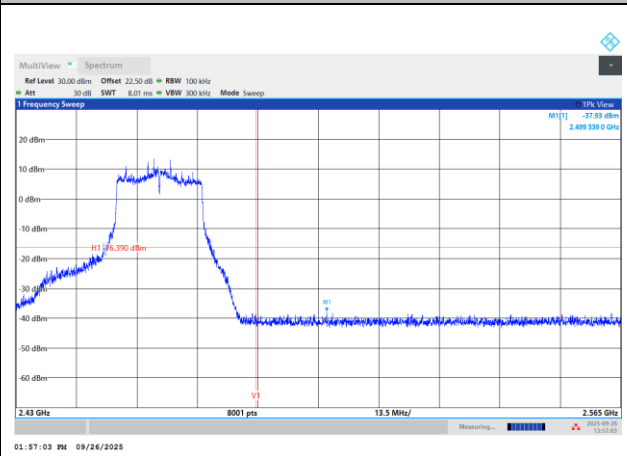

Spurious Emission 30MHz~1GHz

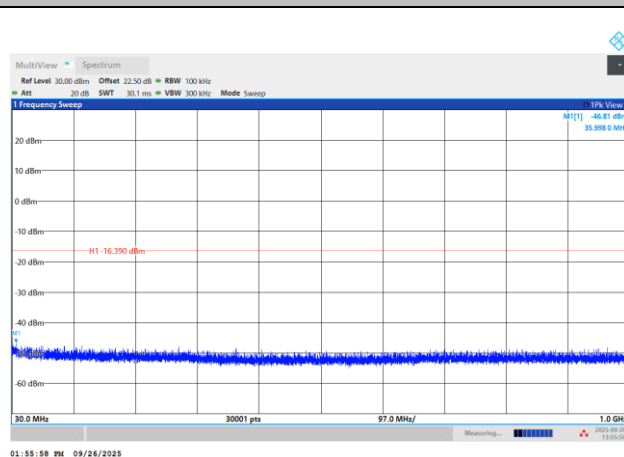

Spurious Emission 1GHz~26.5GHz

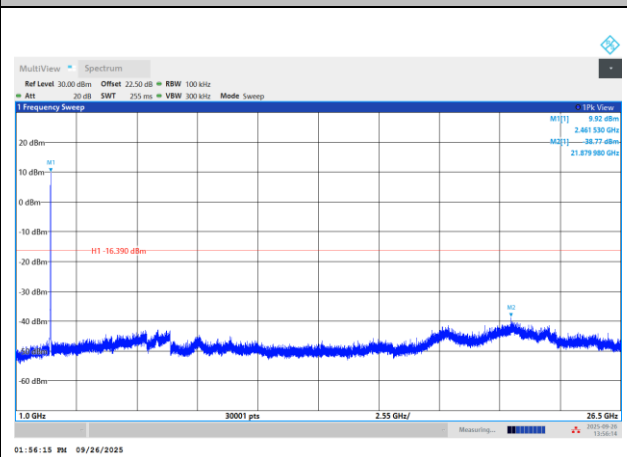





Test Mode : 802.11be EHT40_RU 484T

Test Channel : 03


100kHz PSD reference Level

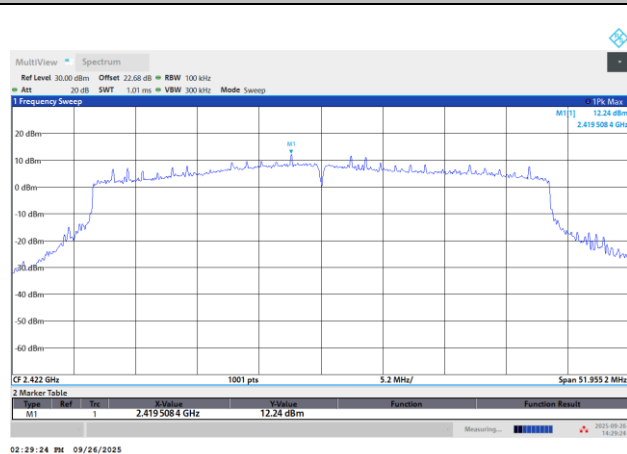


Channel 03 Plot

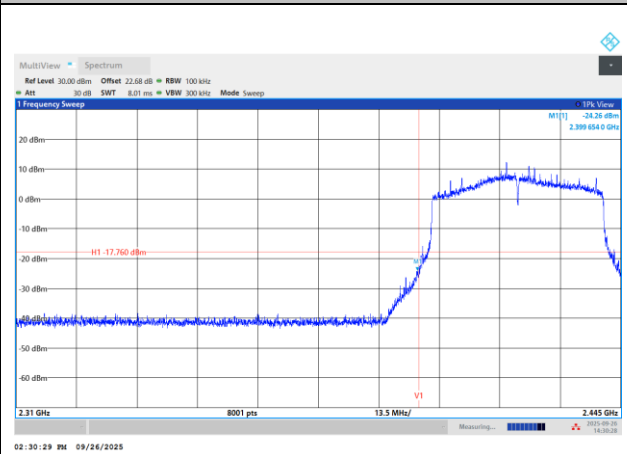

Spurious Emission 30MHz~1GHz

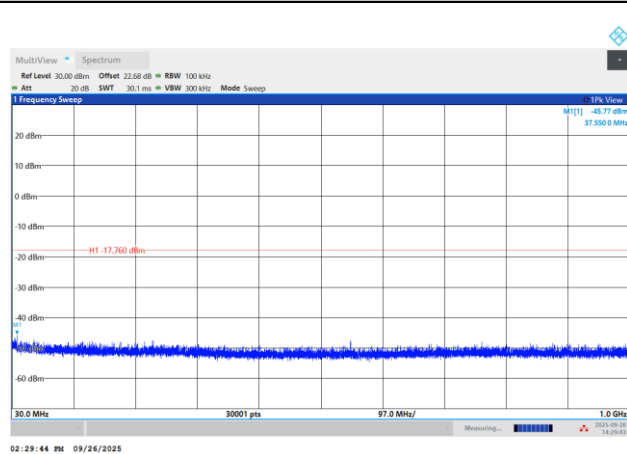

Spurious Emission 1GHz~26.5GHz

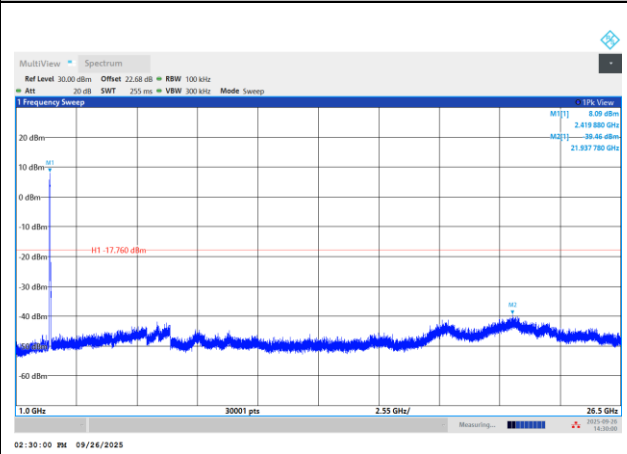




Test Mode : 802.11be EHT40_RU 484T

Test Channel : 06


100kHz PSD reference Level

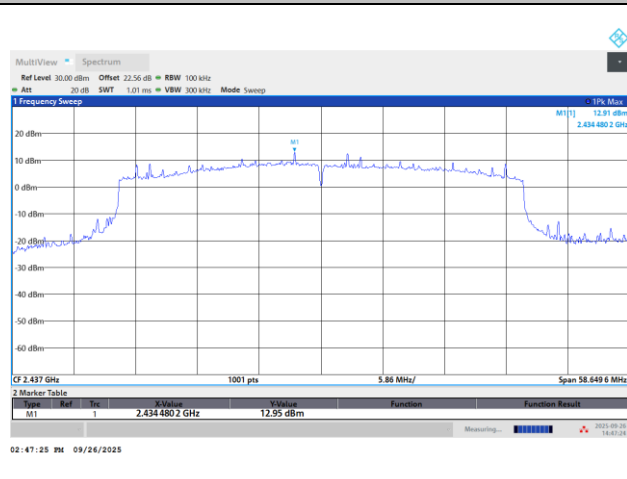


Channel 06 Plot



Spurious Emission 30MHz~1GHz

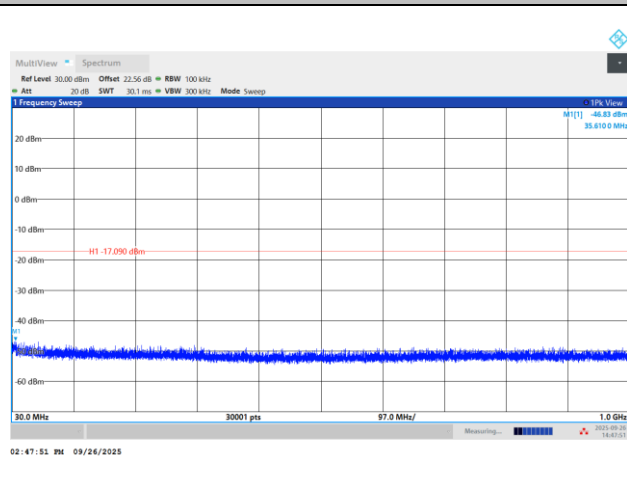

Spurious Emission 1GHz~26.5GHz

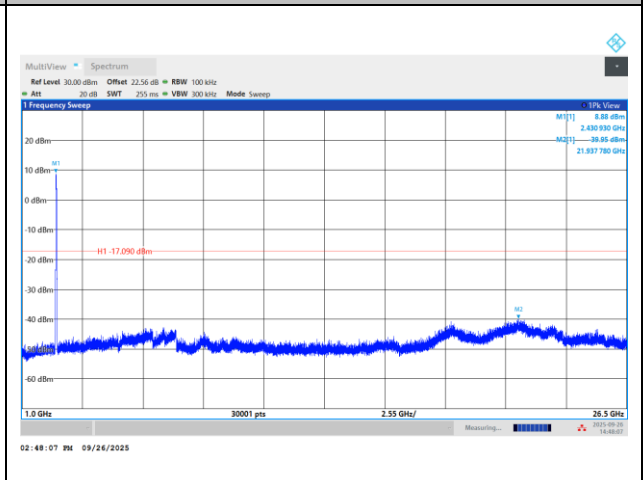





Test Mode : 802.11be EHT40_RU 484T

Test Channel : 09


100kHz PSD reference Level

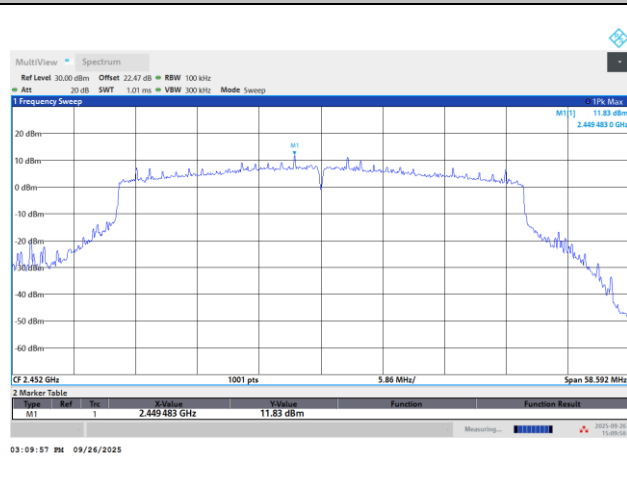


Channel 09 Plot

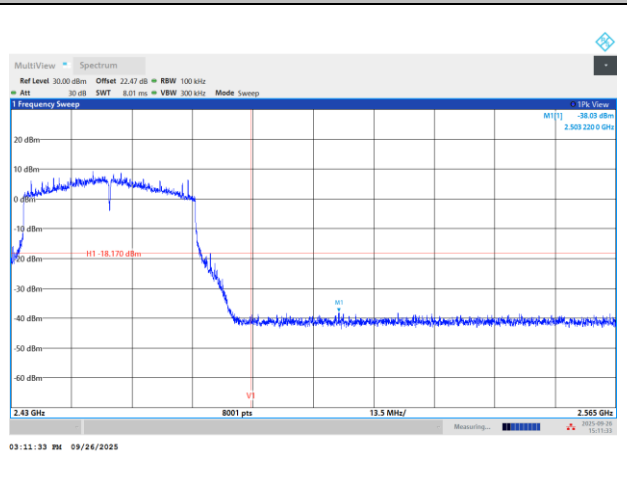

Spurious Emission 30MHz~1GHz

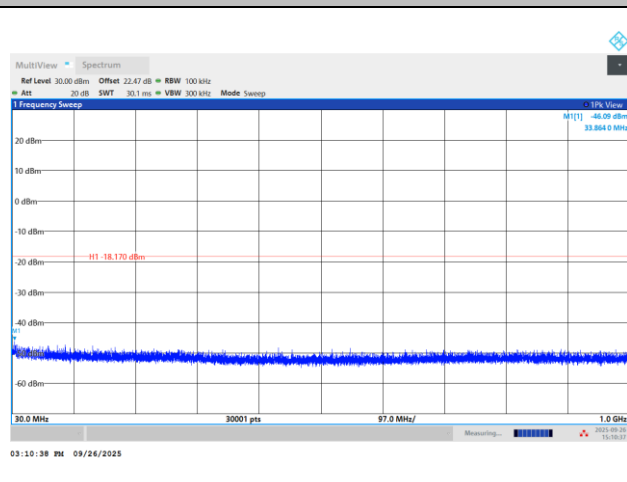

Spurious Emission 1GHz~26.5GHz

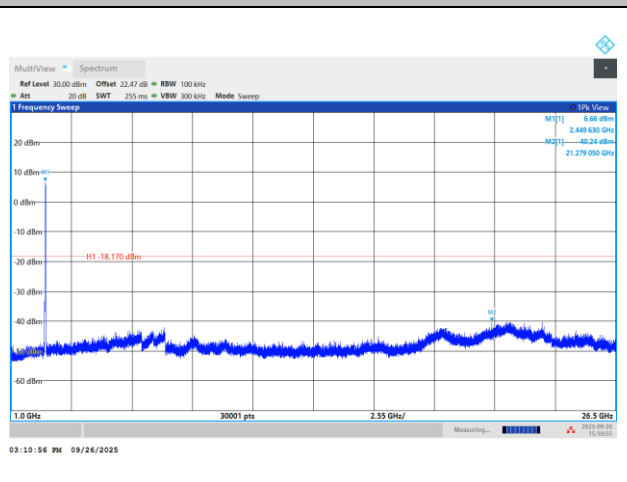




Number of TX = 1, SISO Chain 1 (Ant. 2) (Measured)


Test Mode : 802.11n HT40

Test Channel : 09


100kHz PSD reference Level

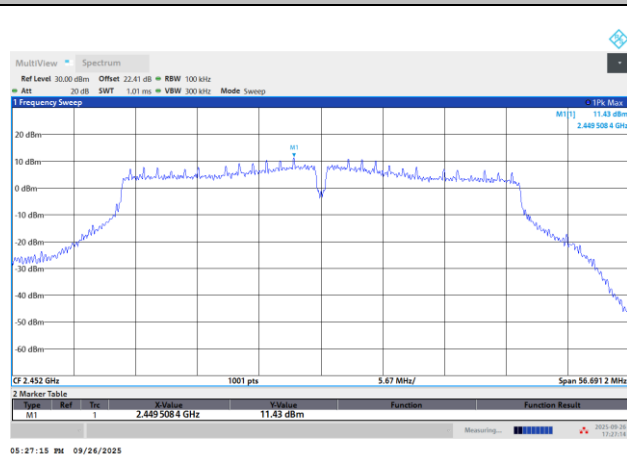


Channel 09 Plot

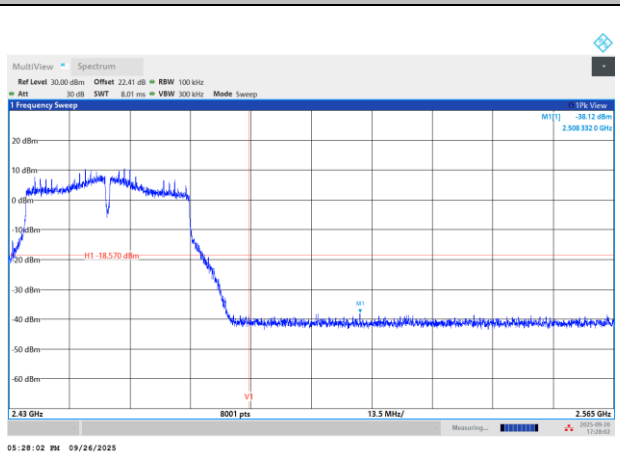

Spurious Emission 30MHz~1GHz

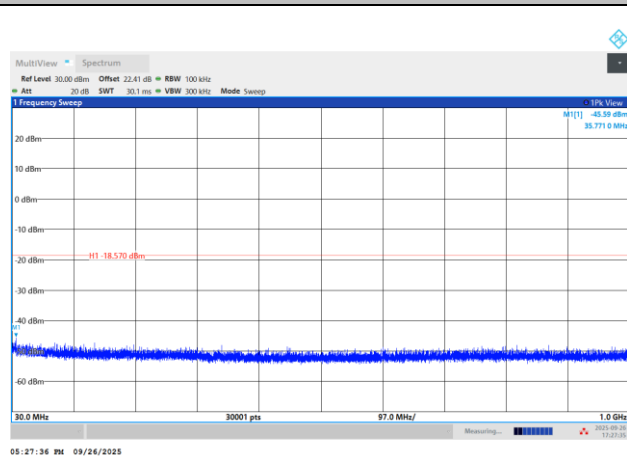

Spurious Emission 1GHz~26.5GHz

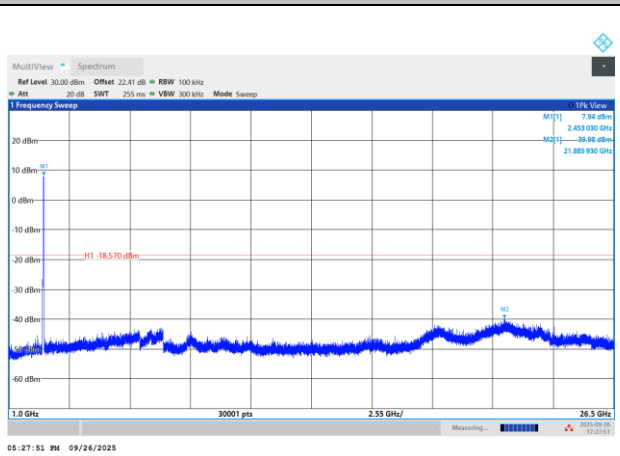





Test Mode : 802.11be EHT20_RU 242T

Test Channel : 11


100kHz PSD reference Level

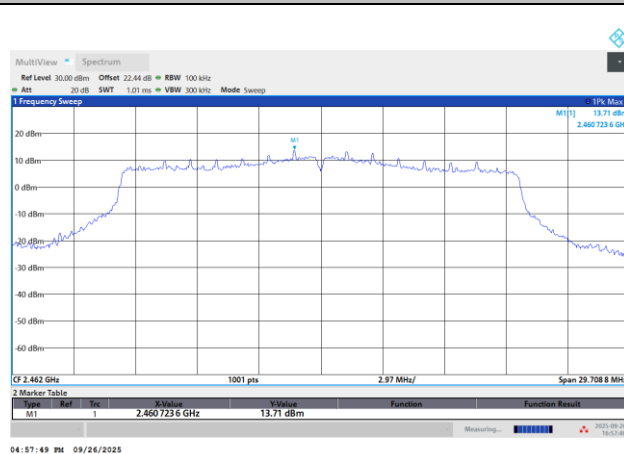


Channel 11 Plot

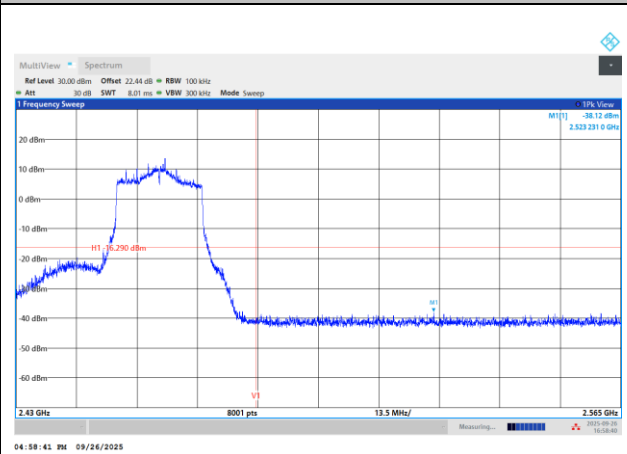

Spurious Emission 30MHz~1GHz

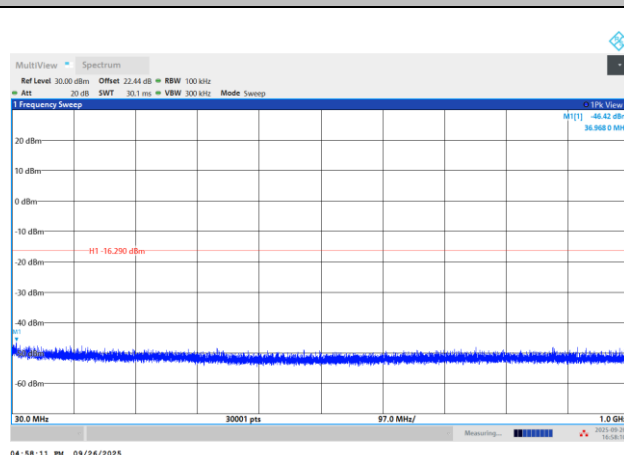

Spurious Emission 1GHz~26.5GHz

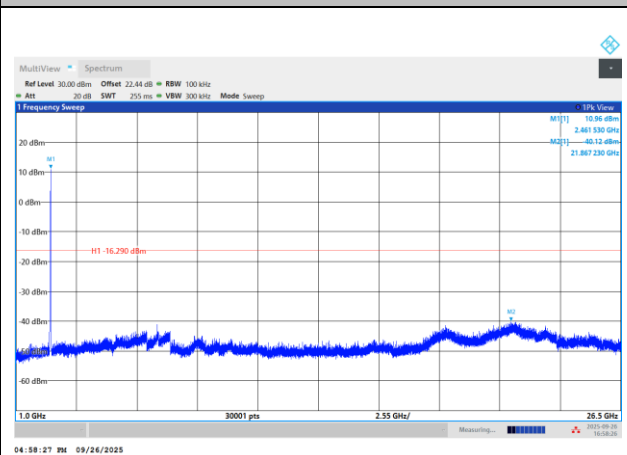





Test Mode : 802.11be EHT40_RU 484T

Test Channel : 03


100kHz PSD reference Level

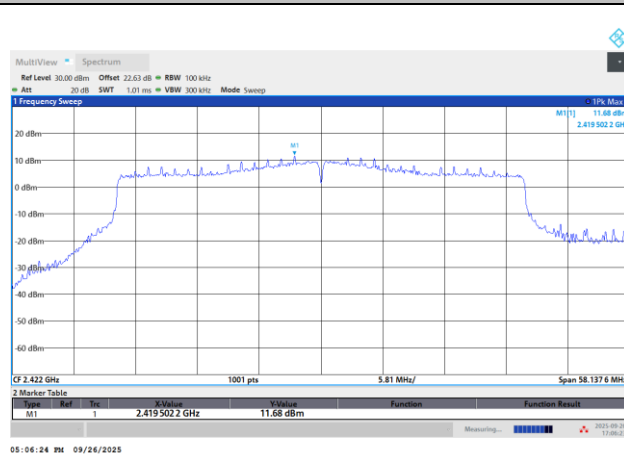


Channel 03 Plot

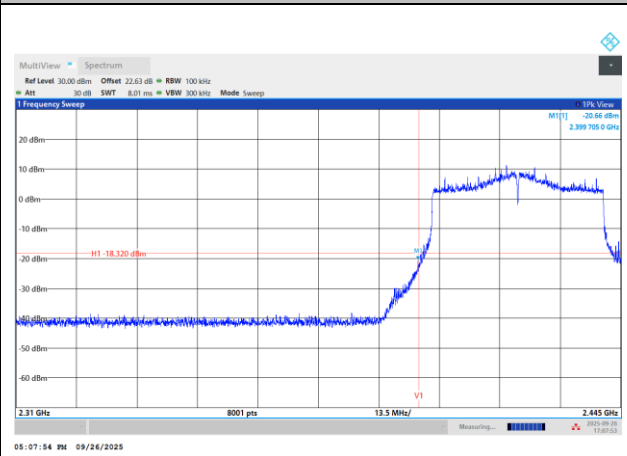

Spurious Emission 30MHz~1GHz

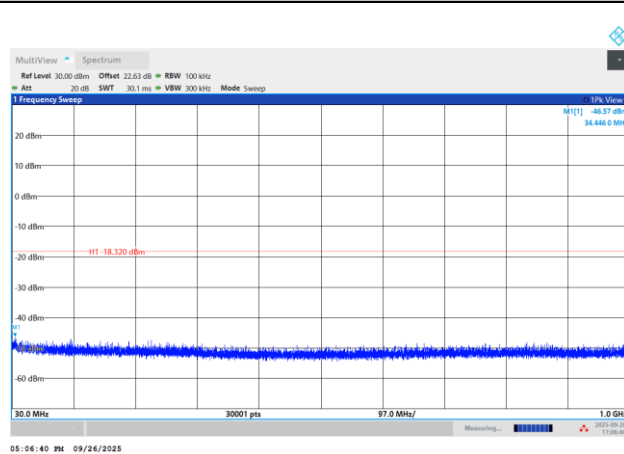

Spurious Emission 1GHz~26.5GHz

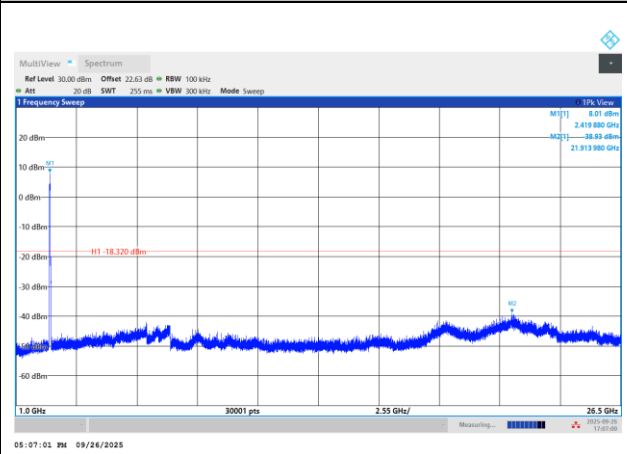





Test Mode : 802.11be EHT40_RU 484T

Test Channel : 09


100kHz PSD reference Level

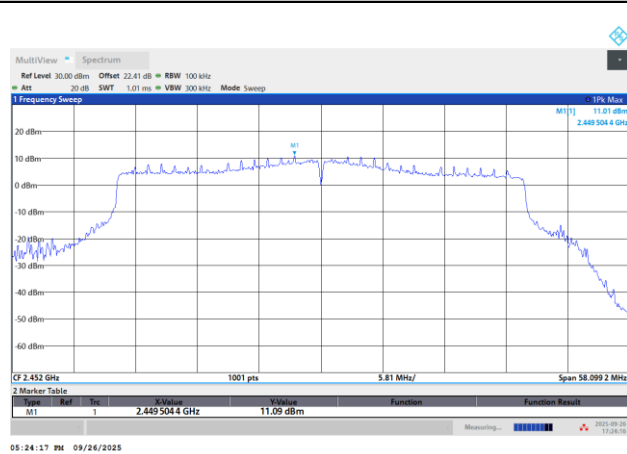


Channel 09 Plot

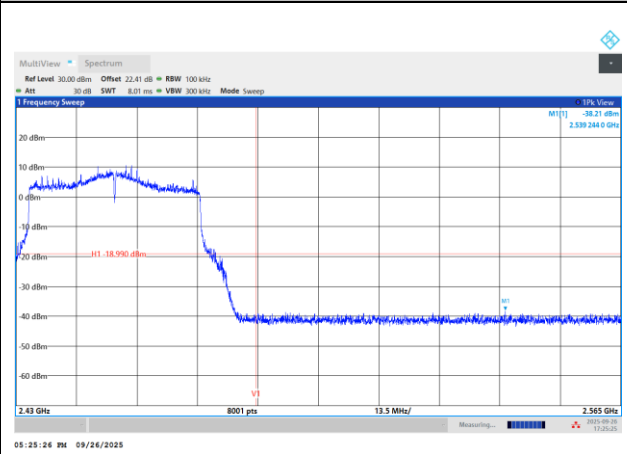

Spurious Emission 30MHz~1GHz

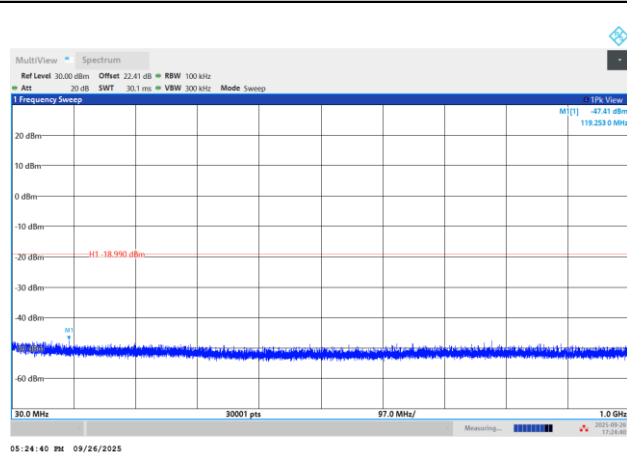

Spurious Emission 1GHz~26.5GHz

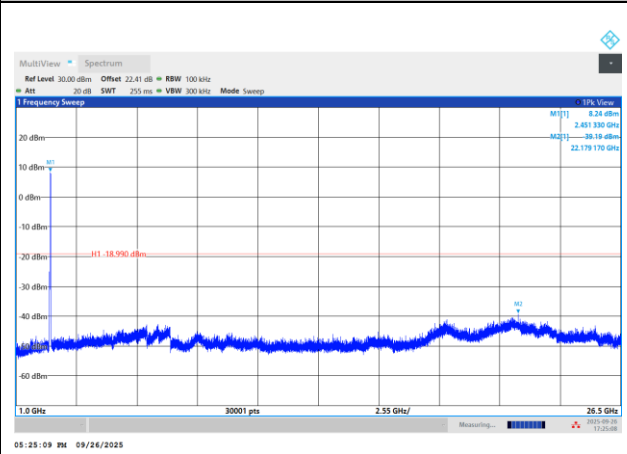




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Brian Chen	Temperature :	23~26℃
		Relative Humidity :	45~55%

EUT Information

Report NO : 562407
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

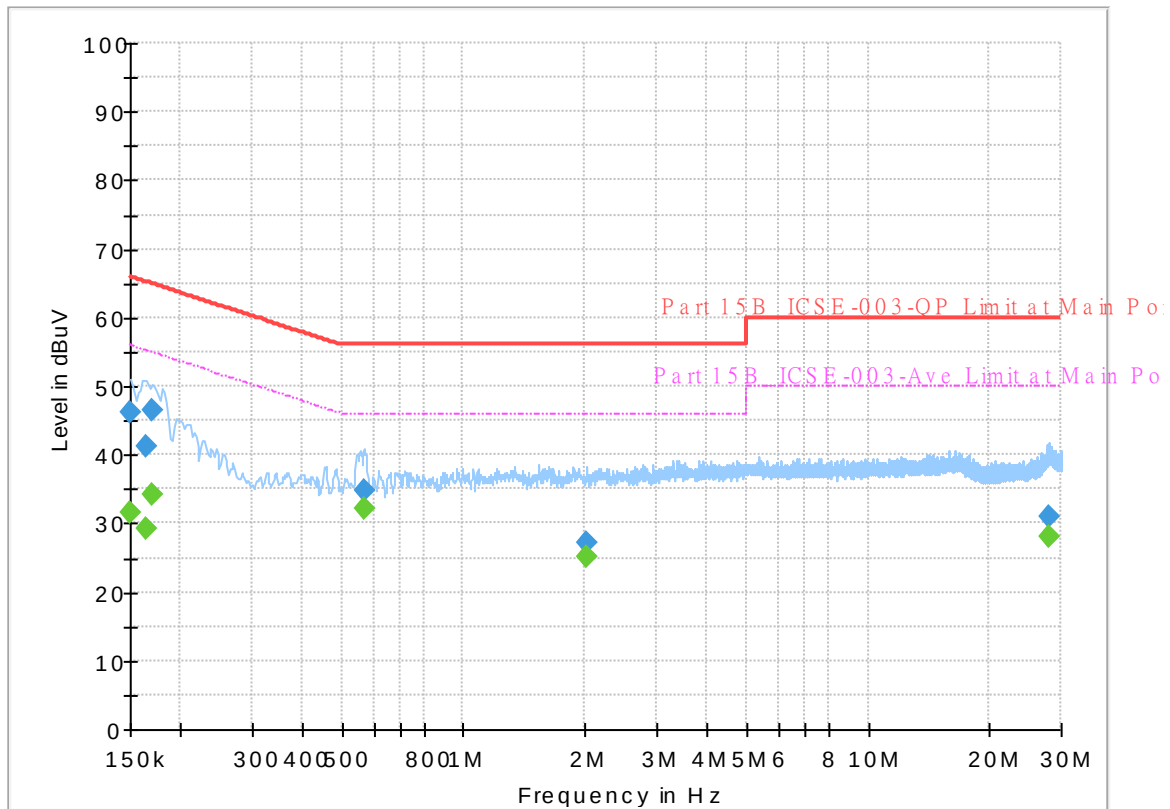


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	31.72	56.00	24.28	L1	OFF	19.8
0.150000	46.16	---	66.00	19.84	L1	OFF	19.8
0.163500	---	29.34	55.28	25.94	L1	OFF	19.8
0.163500	41.24	---	65.28	24.04	L1	OFF	19.8
0.170250	---	34.08	54.95	20.87	L1	OFF	19.8
0.170250	46.53	---	64.95	18.42	L1	OFF	19.8
0.566250	---	32.19	46.00	13.81	L1	OFF	19.9
0.566250	34.81	---	56.00	21.19	L1	OFF	19.9
2.013000	---	25.01	46.00	20.99	L1	OFF	19.9
2.013000	27.07	---	56.00	28.93	L1	OFF	19.9
27.993750	---	28.12	50.00	21.88	L1	OFF	20.8
27.993750	30.94	---	60.00	29.06	L1	OFF	20.8

EUT Information

Report NO : 562407
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

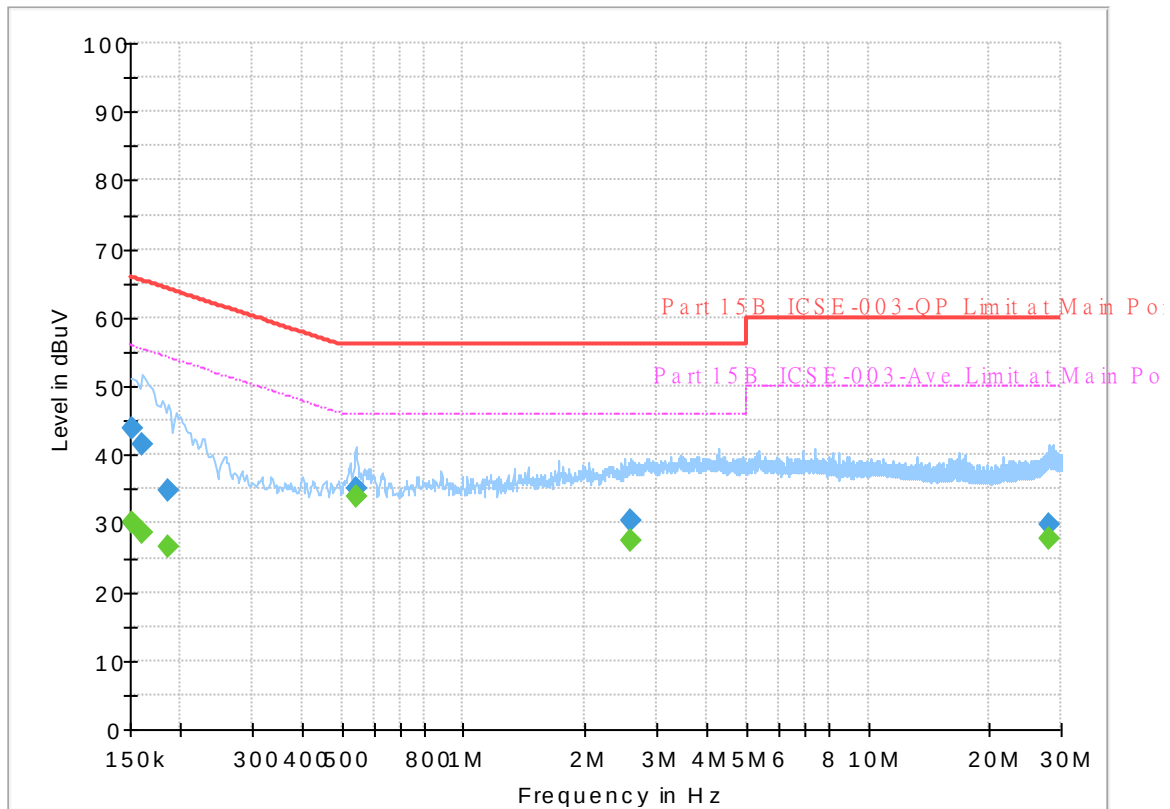

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	30.08	55.88	25.80	N	OFF	19.8
0.152250	43.76	---	65.88	22.12	N	OFF	19.8
0.161250	---	28.55	55.40	26.85	N	OFF	19.8
0.161250	41.53	---	65.40	23.87	N	OFF	19.8
0.186000	---	26.71	54.21	27.50	N	OFF	19.8
0.186000	34.87	---	64.21	29.34	N	OFF	19.8
0.541500	---	33.95	46.00	12.05	N	OFF	19.8
0.541500	35.22	---	56.00	20.78	N	OFF	19.8
2.582250	---	27.63	46.00	18.37	N	OFF	20.0
2.582250	30.38	---	56.00	25.62	N	OFF	20.0
28.101750	---	27.69	50.00	22.31	N	OFF	20.9
28.101750	29.79	---	60.00	30.21	N	OFF	20.9



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Daniel Lee, Fu Chen, and Troye Hsieh.	Temperature :	19.1~20.9°C
		Relative Humidity :	51.4~66.5%

Note symbol

-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	2+1(CDD)	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	2+1(CDD)	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	2+1(CDD)	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	2+1(CDD)	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	2+1(CDD)	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	2+1(CDD)	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	2+1(CDD)	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	2+1(CDD)	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	2+1(CDD)	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	2+1(CDD)	802.11n HT40	03	2422	MCS0	-	-
Mode 11	2400-2483.5	2+1(CDD)	802.11n HT40	06	2437	MCS0	-	-
Mode 12	2400-2483.5	2+1(CDD)	802.11n HT40	09	2452	MCS0	-	-
Mode 13	2400-2483.5	2+1(CDD)	802.11be EHT20	01	2412	MCS0	RU 242T	-
Mode 14	2400-2483.5	2+1(CDD)	802.11be EHT20	06	2437	MCS0	RU 242T	-
Mode 15	2400-2483.5	2+1(CDD)	802.11be EHT20	11	2462	MCS0	RU 242T	-



Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 16	2400-2483.5	2+1(CDD)	802.11be EHT40	03	2422	MCS0	RU 484T	-
Mode 17	2400-2483.5	2+1(CDD)	802.11be EHT40	06	2437	MCS0	RU 484T	-
Mode 18	2400-2483.5	2+1(CDD)	802.11be EHT40	09	2452	MCS0	RU 484T	-
Mode 19	2400-2483.5	2	802.11n HT40	09	2452	MCS0	-	-
Mode 20	2400-2483.5	2	802.11be EHT20	11	2462	MCS0	RU 242T	-
Mode 21	2400-2483.5	2	802.11be EHT40	03	2422	MCS0	RU 484T	-
Mode 22	2400-2483.5	2	802.11be EHT40	09	2452	MCS0	RU 484T	-
Mode 23	2400-2483.5	2+1(CDD)	802.11be EHT40	09	2452	MCS0	RU 484T	SHF
Mode 24	2400-2483.5	2+1(CDD)	802.11be EHT40	09	2452	MCS0	RU 484T	LF

C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11b	01	2385.53	41.83	54.00	-12.17	H	Avg.	Pass	-	Band Edge
	802.11b	01	4824.00	40.66	74.00	-33.34	V	Peak	Pass	-	Harmonic
2	802.11b	06	2493.26	42.68	54.00	-11.32	V	Avg.	Pass	-	Band Edge
	802.11b	06	7311.00	43.61	74.00	-30.39	H	Peak	Pass	-	Harmonic
3	802.11b	11	2491.79	42.73	54.00	-11.27	V	Avg.	Pass	-	Band Edge
	802.11b	11	7386.00	43.40	74.00	-30.60	V	Peak	Pass	-	Harmonic
4	802.11g	01	2389.30	44.94	54.00	-9.06	V	Avg.	Pass	-	Band Edge
	802.11g	01	4824.00	40.87	74.00	-33.13	H	Peak	Pass	-	Harmonic
5	802.11g	06	2490.49	42.52	54.00	-11.48	V	Avg.	Pass	-	Band Edge
	802.11g	06	7311.00	43.74	74.00	-30.26	V	Peak	Pass	-	Harmonic
6	802.11g	11	2483.62	51.04	54.00	-2.96	V	Avg.	Pass	-	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
6	802.11g	11	7386.00	43.50	74.00	-30.50	H	Peak	Pass	-	Harmonic
7	802.11n HT20	01	2389.95	46.18	54.00	-7.82	H	Avg.	Pass	-	Band Edge
7	802.11n HT20	01	4824.00	40.04	74.00	-33.96	H	Peak	Pass	-	Harmonic
8	802.11n HT20	06	2484.94	42.90	54.00	-11.10	H	Avg.	Pass	-	Band Edge
8	802.11n HT20	06	7311.00	42.90	74.00	-31.10	H	Peak	Pass	-	Harmonic
9	802.11n HT20	11	2483.55	46.83	54.00	-7.17	V	Avg.	Pass	-	Band Edge
9	802.11n HT20	11	7386.00	43.66	74.00	-30.34	H	Peak	Pass	-	Harmonic
10	802.11n HT40	03	2387.28	51.66	54.00	-2.34	V	Avg.	Pass	-	Band Edge
10	802.11n HT40	03	-	-	-	-	-	-	-	-	Harmonic
11	802.11n HT40	06	2484.57	45.43	54.00	-8.57	V	Avg.	Pass	-	Band Edge
11	802.11n HT40	06	-	-	-	-	-	-	-	-	Harmonic
12	802.11n HT40	09	2483.63	52.92	54.00	-1.08	V	Avg.	Pass	-	Band Edge
	802.11n HT40	09	-	-	-	-	-	-	-	-	Harmonic
13	802.11be EHT20	01	2389.95	47.43	54.00	-6.57	V	Avg.	Pass	RU 242T	Band Edge
	802.11be EHT20	01	4824.00	41.01	74.00	-32.99	V	Peak	Pass	RU 242T	Harmonic
14	802.11be EHT20	06	2487.34	42.67	54.00	-11.33	H	Avg.	Pass	RU 242T	Band Edge
	802.11be EHT20	06	7311.00	43.45	74.00	-30.55	H	Peak	Pass	RU 242T	Harmonic
15	802.11be EHT20	11	2483.96	52.91	54.00	-1.09	V	Avg.	Pass	RU 242T	Band Edge
	802.11be EHT20	11	7386.00	43.85	74.00	-30.15	H	Peak	Pass	RU 242T	Harmonic
16	802.11be EHT40	03	2388.74	52.09	54.00	-1.91	V	Avg.	Pass	RU 484T	Band Edge
	802.11be EHT40	03	-	-	-	-	-	-	-	-	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
17	802.11be EHT40	06	2386.07	44.66	54.00	-9.34	V	Avg.	Pass	RU 484T	Band Edge
	802.11be EHT40	06	-	-	-	-	-	-	-	-	Harmonic
18	802.11be EHT40	09	2483.73	53.32	54.00	-0.68	V	Avg.	Pass	RU 484T	Band Edge
	802.11be EHT40	09	-	-	-	-	-	-	-	-	Harmonic
19	802.11n HT40	09	2484.11	48.63	54.00	-5.37	V	Avg.	Pass	-	Band Edge
	802.11n HT40	09	-	-	-	-	-	-	-	-	Harmonic
20	802.11be EHT20	11	2483.74	49.64	54.00	-4.36	V	Avg.	Pass	RU 242T	Band Edge
	802.11be EHT20	11	-	-	-	-	-	-	-	-	Harmonic
21	802.11be EHT40	03	2389.30	47.20	54.00	-6.80	V	Avg.	Pass	RU 484T	Band Edge
	802.11be EHT40	03	-	-	-	-	-	-	-	-	Harmonic
22	802.11be EHT40	09	2484.30	51.81	54.00	-2.19	V	Avg.	Pass	RU 484T	Band Edge
	802.11be EHT40	09	-	-	-	-	-	-	-	-	Harmonic
23	802.11be EHT40	09	24943.11	39.48	74.00	-34.52	H	Peak	Pass	RU 484T	SHF
24	802.11be EHT40	09	30.97	33.52	40.00	-6.48	V	Peak	Pass	RU 484T	LF



		1												
Mode		Band Edge												
		2400-2483.5_802.11b_CH01_2412MHz												
ANT		2+1(CDD)												
Pol.		Horizontal						Fundamental						
Peak														







Mode	1											
	Band Edge											
	2400-2483.5_802.11b_CH01_2412MHz											
ANT	2+1(CDD)											
Pol.	Vertical						Fundamental					
Peak	Level (dBuV/m) </											



Mode	1																																																																																																
	Harmonic																																																																																																
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																
ANT	2+1(CDD)																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak Avg	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK(UNII) 3m 91280_01620_240828 HORIZONTAL Mode : 1 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>/Hz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>40.05</td><td>74.00</td><td>-33.95</td><td>63.42</td><td>32.44</td><td>10.42</td><td>66.74</td><td>0.51</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		/Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	40.05	74.00	-33.95	63.42	32.44	10.42	66.74	0.51	--	Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK(UNII) 3m 91280_01620_240828 VERTICAL Mode : 1 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>/Hz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>40.66</td><td>74.00</td><td>-33.34</td><td>64.03</td><td>32.44</td><td>10.42</td><td>66.74</td><td>0.51</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		/Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	40.66	74.00	-33.34	64.03	32.44	10.42	66.74	0.51	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																							
	/Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	4824.00	40.05	74.00	-33.95	63.42	32.44	10.42	66.74	0.51	--	Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	/Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	4824.00	40.66	74.00	-33.34	64.03	32.44	10.42	66.74	0.51	--	Peak																																																																																						

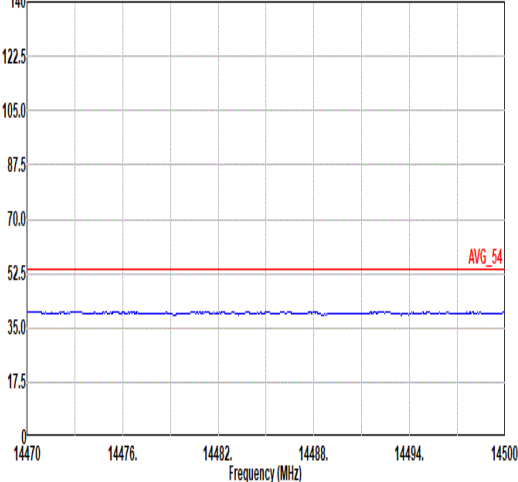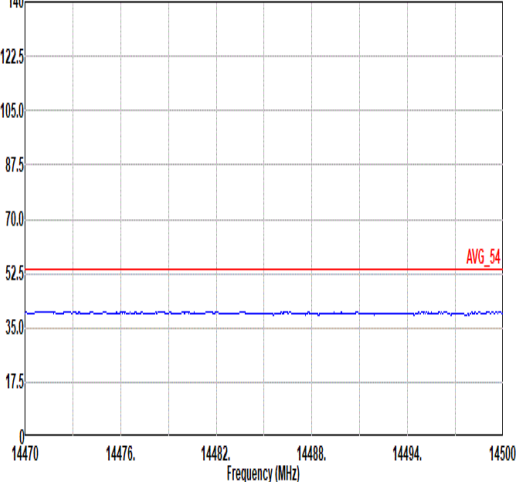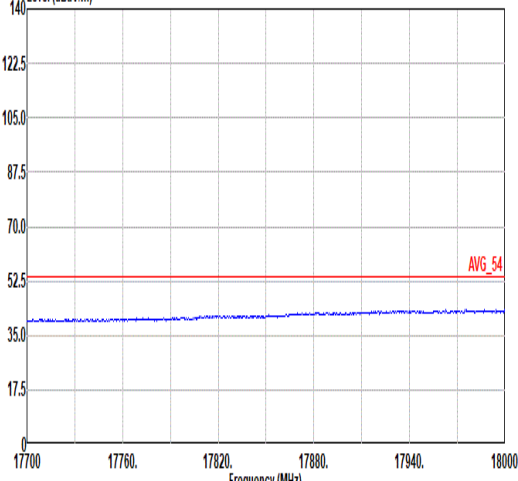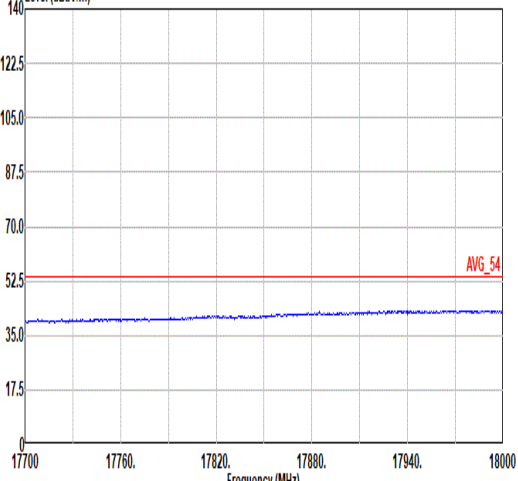

Mode	1	
	Harmonic	
	2400-2483.5_802.11b_CH01_2412MHz	
ANT	2+1(CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 1 Setting : 24	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 1 Setting : 24
	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 1 Setting : 24	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 1 Setting : 24







Mode	2																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																			
ANT	2+1(CDD)																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 2 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.36</td><td>53.49</td><td>74.00</td><td>-20.51</td><td>42.68</td><td>27.20</td><td>6.79</td><td>33.21</td><td>10.03</td><td>152 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.36	53.49	74.00	-20.51	42.68	27.20	6.79	33.21	10.03	152 Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 2 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>120.02</td><td>-----</td><td>-----</td><td>108.71</td><td>27.60</td><td>6.84</td><td>33.16</td><td>10.03</td><td>152 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	120.02	-----	-----	108.71	27.60	6.84	33.16	10.03	152 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2386.36	53.49	74.00	-20.51	42.68	27.20	6.79	33.21	10.03	152 Peak																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	120.02	-----	-----	108.71	27.60	6.84	33.16	10.03	152 Peak																																																																																										
Avg	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 2 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2357.12</td><td>41.69</td><td>54.00</td><td>-12.31</td><td>30.95</td><td>27.20</td><td>6.75</td><td>33.23</td><td>10.02</td><td>152 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2357.12	41.69	54.00	-12.31	30.95	27.20	6.75	33.23	10.02	152 Average	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 2 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>113.00</td><td>-----</td><td>-----</td><td>102.49</td><td>27.60</td><td>6.84</td><td>33.16</td><td>10.03</td><td>152 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	113.00	-----	-----	102.49	27.60	6.84	33.16	10.03	152 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2357.12	41.69	54.00	-12.31	30.95	27.20	6.75	33.23	10.02	152 Average																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	113.00	-----	-----	102.49	27.60	6.84	33.16	10.03	152 Average																																																																																										



Mode	2																																											
	Band Edge - R																																											
	2400-2483.5_802.11b_CH06_2437MHz																																											
ANT	2+1(CDD)																																											
Pol.	Horizontal						Fundamental																																					
Peak	Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 24 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2499.81</td><td>54.12</td><td>74.00</td><td>-19.88</td><td>42.41</td><td>27.90</td><td>6.88</td><td>33.10</td><td>10.03</td><td>218</td><td>152 Peak</td></tr></table>						Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2499.81	54.12	74.00	-19.88	42.41	27.90	6.88	33.10	10.03	218	152 Peak	Blank				
Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1 2499.81	54.12	74.00	-19.88	42.41	27.90	6.88	33.10	10.03	218	152 Peak																																		
Avg	Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : RMS Mode : 2 Setting : 24 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2494.52</td><td>42.58</td><td>54.00</td><td>-11.42</td><td>30.88</td><td>27.90</td><td>6.88</td><td>33.11</td><td>10.03</td><td>218</td><td>152 Average</td></tr></table>						Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2494.52	42.58	54.00	-11.42	30.88	27.90	6.88	33.11	10.03	218	152 Average	Blank				
Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1 2494.52	42.58	54.00	-11.42	30.88	27.90	6.88	33.11	10.03	218	152 Average																																		

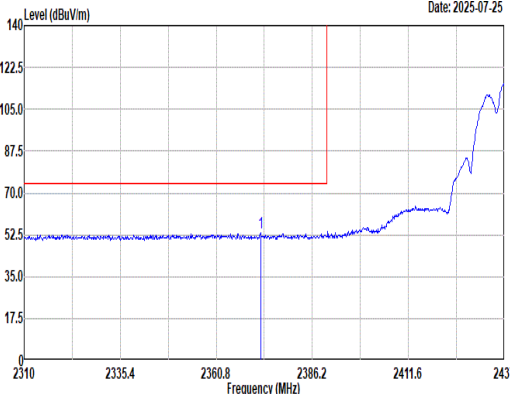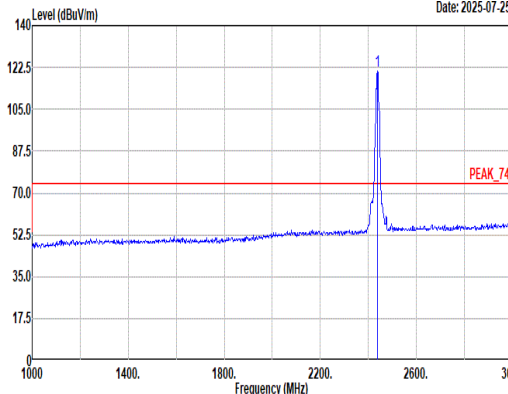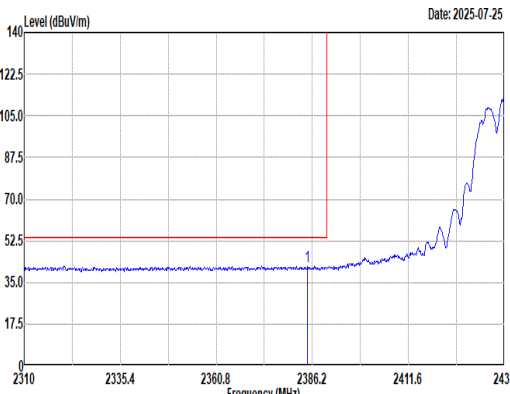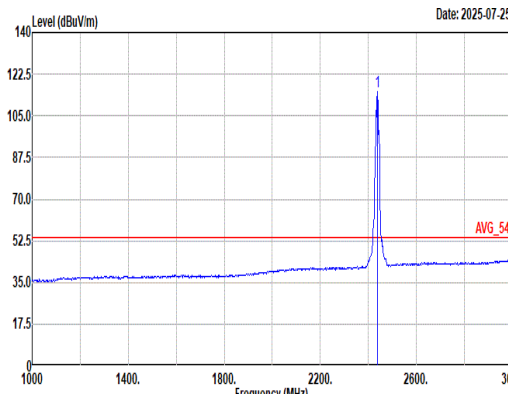

Mode	2																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																		
ANT	2+1(CDD)																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 2 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2372.48</td><td>53.18</td><td>74.00</td><td>-20.82</td><td>42.41</td><td>27.20</td><td>6.77</td><td>33.22</td><td>10.02</td><td>269 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2372.48	53.18	74.00	-20.82	42.41	27.20	6.77	33.22	10.02	269 Peak	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 2 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>121.15</td><td>-----</td><td>-----</td><td>109.84</td><td>27.60</td><td>6.84</td><td>33.16</td><td>10.03</td><td>269 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	121.15	-----	-----	109.84	27.60	6.84	33.16	10.03	269 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2372.48	53.18	74.00	-20.82	42.41	27.20	6.77	33.22	10.02	269 Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	121.15	-----	-----	109.84	27.60	6.84	33.16	10.03	269 Peak																																																																																									
Avg	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 2 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2384.93</td><td>41.78</td><td>54.00</td><td>-12.22</td><td>30.91</td><td>27.25</td><td>6.80</td><td>33.21</td><td>10.03</td><td>269 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2384.93	41.78	54.00	-12.22	30.91	27.25	6.80	33.21	10.03	269 Average	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 2 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>115.32</td><td>-----</td><td>-----</td><td>104.01</td><td>27.60</td><td>6.84</td><td>33.16</td><td>10.03</td><td>269 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	115.32	-----	-----	104.01	27.60	6.84	33.16	10.03	269 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2384.93	41.78	54.00	-12.22	30.91	27.25	6.80	33.21	10.03	269 Average																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	115.32	-----	-----	104.01	27.60	6.84	33.16	10.03	269 Average																																																																																									



Mode	2																																		
	Band Edge - R																																		
	2400-2483.5_802.11b_CH06_2437MHz																																		
ANT	2+1(CDD)																																		
Pol.	Vertical	Fundamental																																	
Peak	Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 24 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2495.53</td><td>54.03</td><td>74.00</td><td>-19.97</td><td>42.32</td><td>27.90</td><td>6.88</td><td>33.10</td><td>10.03</td><td>200</td><td>269 Peak</td></tr></table>	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2495.53	54.03	74.00	-19.97	42.32	27.90	6.88	33.10	10.03	200	269 Peak	Blank
Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																									
1 2495.53	54.03	74.00	-19.97	42.32	27.90	6.88	33.10	10.03	200	269 Peak																									
Avg	Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto Detector : RMS Mode : 2 Setting : 24 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2493.26</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>30.98</td><td>27.90</td><td>6.88</td><td>33.11</td><td>10.03</td><td>200</td><td>269 Average</td></tr></table>	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2493.26	42.68	54.00	-11.32	30.98	27.90	6.88	33.11	10.03	200	269 Average	Blank
Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																									
1 2493.26	42.68	54.00	-11.32	30.98	27.90	6.88	33.11	10.03	200	269 Average																									



Mode	2																																																																																																					
	Harmonic																																																																																																					
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																					
ANT	2+1(CDD)																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 2 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>40.68</td><td>74.00</td><td>-33.32</td><td>63.51</td><td>32.70</td><td>10.64</td><td>66.70</td><td>0.53 -- -- Peak</td></tr><tr><td>2</td><td>7311.00</td><td>43.61</td><td>74.00</td><td>-30.39</td><td>58.55</td><td>36.78</td><td>13.73</td><td>65.77</td><td>0.32 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4874.00	40.68	74.00	-33.32	63.51	32.70	10.64	66.70	0.53 -- -- Peak	2	7311.00	43.61	74.00	-30.39	58.55	36.78	13.73	65.77	0.32 -- -- Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 2 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>41.71</td><td>74.00</td><td>-32.29</td><td>64.54</td><td>32.70</td><td>10.64</td><td>66.70</td><td>0.53 -- -- Peak</td></tr><tr><td>2</td><td>7311.00</td><td>43.49</td><td>74.00</td><td>-30.51</td><td>58.43</td><td>36.78</td><td>13.73</td><td>65.77</td><td>0.32 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4874.00	41.71	74.00	-32.29	64.54	32.70	10.64	66.70	0.53 -- -- Peak	2	7311.00	43.49	74.00	-30.51	58.43	36.78	13.73	65.77	0.32 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	4874.00	40.68	74.00	-33.32	63.51	32.70	10.64	66.70	0.53 -- -- Peak																																																																																													
2	7311.00	43.61	74.00	-30.39	58.55	36.78	13.73	65.77	0.32 -- -- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	4874.00	41.71	74.00	-32.29	64.54	32.70	10.64	66.70	0.53 -- -- Peak																																																																																													
2	7311.00	43.49	74.00	-30.51	58.43	36.78	13.73	65.77	0.32 -- -- Peak																																																																																													



Mode	2	
	Harmonic	
	2400-2483.5_802.11b_CH06_2437MHz	
ANT	2+1(CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 2 Setting : 24	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 2 Setting : 24
	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 2 Setting : 24	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 2 Setting : 24



		3																																																																																																
Mode		Band Edge																																																																																																
		2400-2483.5_802.11b_CH11_2462MHz																																																																																																
ANT		2+1(CDD)																																																																																																
Pol.		Horizontal					Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 3 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.31</td><td>54.58</td><td>74.00</td><td>-19.42</td><td>42.95</td><td>27.84</td><td>6.87</td><td>33.11</td><td>10.03</td><td>243 Peak</td></tr></table> Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 3 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>118.88</td><td>-----</td><td>-----</td><td>107.50</td><td>27.62</td><td>6.86</td><td>33.13</td><td>10.03</td><td>243 Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.31	54.58	74.00	-19.42	42.95	27.84	6.87	33.11	10.03	243 Peak		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	118.88	-----	-----	107.50	27.62	6.86	33.13	10.03	243 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2484.31	54.58	74.00	-19.42	42.95	27.84	6.87	33.11	10.03	243 Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	118.88	-----	-----	107.50	27.62	6.86	33.13	10.03	243 Peak																																																																																								
Avg	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 3 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.73</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>30.97</td><td>27.90</td><td>6.88</td><td>33.10</td><td>10.03</td><td>243 Average</td></tr></table> Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 3 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>113.21</td><td>-----</td><td>-----</td><td>101.86</td><td>27.60</td><td>6.86</td><td>33.14</td><td>10.03</td><td>243 Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.73	42.68	54.00	-11.32	30.97	27.90	6.88	33.10	10.03	243 Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	113.21	-----	-----	101.86	27.60	6.86	33.14	10.03	243 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2496.73	42.68	54.00	-11.32	30.97	27.90	6.88	33.10	10.03	243 Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	113.21	-----	-----	101.86	27.60	6.86	33.14	10.03	243 Average																																																																																								







Mode	3																																																																																							
	Band Edge																																																																																							
	2400-2483.5_802.11b_CH11_2462MHz																																																																																							
ANT	2+1(CDD)																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 3 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2498.52</td><td>54.23</td><td>74.00</td><td>-19.77</td><td>42.52</td><td>27.90</td><td>6.88</td><td>33.10</td><td>10.03</td><td>200</td><td>269</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2498.52	54.23	74.00	-19.77	42.52	27.90	6.88	33.10	10.03	200	269	Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 3 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>121.03</td><td>-----</td><td>-----</td><td>109.68</td><td>27.60</td><td>6.86</td><td>33.14</td><td>10.03</td><td>200</td><td>269</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	121.03	-----	-----	109.68	27.60	6.86	33.14	10.03	200	269	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2498.52	54.23	74.00	-19.77	42.52	27.90	6.88	33.10	10.03	200	269	Peak																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2462.00	121.03	-----	-----	109.68	27.60	6.86	33.14	10.03	200	269	Peak																																																																												
Avg	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 3 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2491.79</td><td>42.73</td><td>54.00</td><td>-11.27</td><td>31.03</td><td>27.90</td><td>6.88</td><td>33.11</td><td>10.03</td><td>200</td><td>269</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2491.79	42.73	54.00	-11.27	31.03	27.90	6.88	33.11	10.03	200	269	Average	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 3 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>115.37</td><td>-----</td><td>-----</td><td>104.02</td><td>27.60</td><td>6.86</td><td>33.14</td><td>10.03</td><td>200</td><td>269</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	115.37	-----	-----	104.02	27.60	6.86	33.14	10.03	200	269	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2491.79	42.73	54.00	-11.27	31.03	27.90	6.88	33.11	10.03	200	269	Average																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																			
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2462.00	115.37	-----	-----	104.02	27.60	6.86	33.14	10.03	200	269	Average																																																																												



Mode	3																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																			
ANT	2+1(CDD)																																																																																																																			
Pol.	Horizontal								Vertical																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 3 Setting : 24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>42.55</td><td>74.00</td><td>-31.45</td><td>64.90</td><td>32.90</td><td>10.85</td><td>66.66</td><td>0.56 -- -- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>43.18</td><td>74.00</td><td>-30.82</td><td>58.48</td><td>36.48</td><td>13.79</td><td>65.86</td><td>0.29 -- -- Peak</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4924.00	42.55	74.00	-31.45	64.90	32.90	10.85	66.66	0.56 -- -- Peak	2	7386.00	43.18	74.00	-30.82	58.48	36.48	13.79	65.86	0.29 -- -- Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 3 Setting : 24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>42.23</td><td>74.00</td><td>-31.77</td><td>64.58</td><td>32.90</td><td>10.85</td><td>66.66</td><td>0.56 -- -- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>43.40</td><td>74.00</td><td>-30.60</td><td>58.70</td><td>36.48</td><td>13.79</td><td>65.86</td><td>0.29 -- -- Peak</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4924.00	42.23	74.00	-31.77	64.58	32.90	10.85	66.66	0.56 -- -- Peak	2	7386.00	43.40	74.00	-30.60	58.70	36.48	13.79	65.86	0.29 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																												
1	4924.00	42.55	74.00	-31.45	64.90	32.90	10.85	66.66	0.56 -- -- Peak																																																																																																											
2	7386.00	43.18	74.00	-30.82	58.48	36.48	13.79	65.86	0.29 -- -- Peak																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																												
1	4924.00	42.23	74.00	-31.77	64.58	32.90	10.85	66.66	0.56 -- -- Peak																																																																																																											
2	7386.00	43.40	74.00	-30.60	58.70	36.48	13.79	65.86	0.29 -- -- Peak																																																																																																											

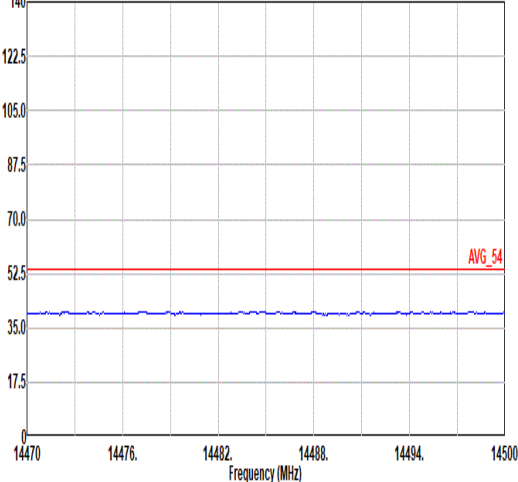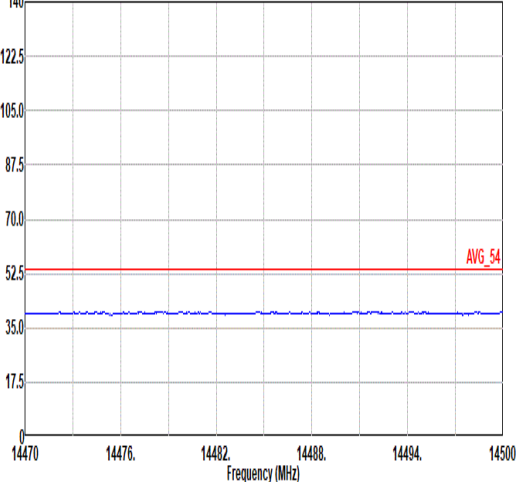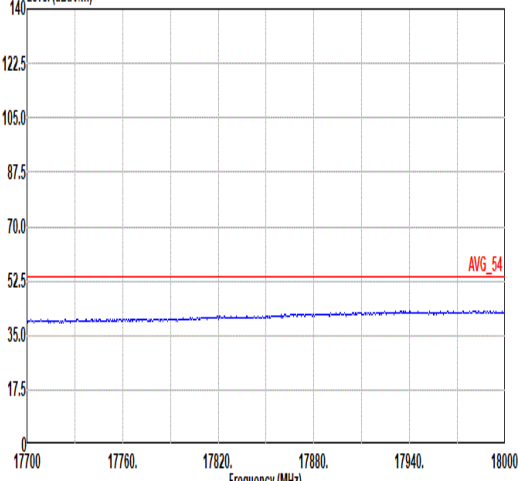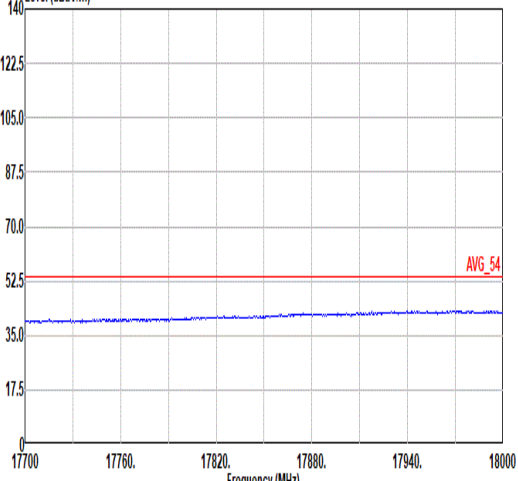

Mode	3	
	Harmonic	
	2400-2483.5_802.11b_CH11_2462MHz	
ANT	2+1(CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 3 Setting : 24	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 3 Setting : 24
	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 3 Setting : 24	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 3 Setting : 24



Mode	4																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11g_CH01_2412MHz																																																																																	
ANT	2+1(CDD)																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 4 Setting : 24 <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2386.70</td><td>55.73</td><td>74.00</td><td>-18.27</td><td>44.83</td><td>27.27</td><td>6.80</td><td>33.20</td><td>10.03</td><td>142</td><td>111</td><td>Peak</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB dB cm deg									1	2386.70	55.73	74.00	-18.27	44.83	27.27	6.80	33.20	10.03	142	111	Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 4 Setting : 24 <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>121.67</td><td>-----</td><td>-----</td><td>110.57</td><td>27.42</td><td>6.83</td><td>33.18</td><td>10.03</td><td>142</td><td>111</td><td>Peak</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB dB cm deg									1	2412.00	121.67	-----	-----	110.57	27.42	6.83	33.18	10.03	142	111	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																		
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB dB cm deg																																																																																		
1	2386.70	55.73	74.00	-18.27	44.83	27.27	6.80	33.20	10.03	142	111	Peak																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																		
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB dB cm deg																																																																																		
1	2412.00	121.67	-----	-----	110.57	27.42	6.83	33.18	10.03	142	111	Peak																																																																						
Avg	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 4 Setting : 24 <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2386.70</td><td>43.74</td><td>54.00</td><td>-10.26</td><td>32.84</td><td>27.27</td><td>6.80</td><td>33.20</td><td>10.03</td><td>142</td><td>111</td><td>Average</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB dB cm deg									1	2386.70	43.74	54.00	-10.26	32.84	27.27	6.80	33.20	10.03	142	111	Average	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 4 Setting : 24 <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>110.30</td><td>-----</td><td>-----</td><td>99.22</td><td>27.40</td><td>6.83</td><td>33.18</td><td>10.03</td><td>142</td><td>111</td><td>Average</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB dB cm deg									1	2412.00	110.30	-----	-----	99.22	27.40	6.83	33.18	10.03	142	111	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																		
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB dB cm deg																																																																																		
1	2386.70	43.74	54.00	-10.26	32.84	27.27	6.80	33.20	10.03	142	111	Average																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq Level Line Margin Level Factor Loss Factor Factor																																																																																		
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB dB cm deg																																																																																		
1	2412.00	110.30	-----	-----	99.22	27.40	6.83	33.18	10.03	142	111	Average																																																																						







		4																																																																																											
Mode		Band Edge																																																																																											
		2400-2483.5_802.11g_CH01_2412MHz																																																																																											
ANT		2+1(CDD)																																																																																											
Pol.		Vertical						Fundamental																																																																																					
Peak		Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 4 Setting : 24 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2389.95</td><td>57.49</td><td>74.00</td><td>-16.51</td><td>46.56</td><td>27.30</td><td>6.80</td><td>33.20</td><td>10.03</td><td>167</td><td>260</td><td>Peak</td></tr></table> Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 4 Setting : 24 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2412.00</td><td>122.98</td><td>-----</td><td>-----</td><td>111.86</td><td>27.44</td><td>6.83</td><td>33.18</td><td>10.03</td><td>167</td><td>260</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2389.95	57.49	74.00	-16.51	46.56	27.30	6.80	33.20	10.03	167	260	Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2412.00	122.98	-----	-----	111.86	27.44	6.83	33.18	10.03	167	260	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																					
1	2389.95	57.49	74.00	-16.51	46.56	27.30	6.80	33.20	10.03	167	260	Peak																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																					
1	2412.00	122.98	-----	-----	111.86	27.44	6.83	33.18	10.03	167	260	Peak																																																																																	
		Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 4 Setting : 24 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2389.30</td><td>44.94</td><td>54.00</td><td>-9.06</td><td>34.02</td><td>27.29</td><td>6.80</td><td>33.20</td><td>10.03</td><td>167</td><td>260</td><td>Average</td></tr></table> Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 4 Setting : 24 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2412.00</td><td>112.48</td><td>-----</td><td>-----</td><td>101.36</td><td>27.44</td><td>6.83</td><td>33.18</td><td>10.03</td><td>167</td><td>260</td><td>Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2389.30	44.94	54.00	-9.06	34.02	27.29	6.80	33.20	10.03	167	260	Average	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2412.00	112.48	-----	-----	101.36	27.44	6.83	33.18	10.03	167	260	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																					
1	2389.30	44.94	54.00	-9.06	34.02	27.29	6.80	33.20	10.03	167	260	Average																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																					
1	2412.00	112.48	-----	-----	101.36	27.44	6.83	33.18	10.03	167	260	Average																																																																																	



Mode	4																																																																																																	
	Harmonic																																																																																																	
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																	
ANT	2+1(CDD)																																																																																																	
Pol.	Horizontal						Vertical																																																																																											
Peak Avg	Level (dBuV/m) Date: 2025-07-25 PEAK_74 AVG_54 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 4 Setting : 24						Level (dBuV/m) Date: 2025-07-25 PEAK_74 AVG_54 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 4 Setting : 24																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>/Hz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>40.87</td><td>74.00</td><td>-33.13</td><td>64.24</td><td>32.44</td><td>10.42</td><td>66.74</td><td>0.51</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		/Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	40.87	74.00	-33.13	64.24	32.44	10.42	66.74	0.51	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>/Hz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>40.85</td><td>74.00</td><td>-33.15</td><td>64.22</td><td>32.44</td><td>10.42</td><td>66.74</td><td>0.51</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		/Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	40.85	74.00	-33.15	64.22	32.44	10.42	66.74	0.51	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	/Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	4824.00	40.87	74.00	-33.13	64.24	32.44	10.42	66.74	0.51	--	Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	/Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	4824.00	40.85	74.00	-33.15	64.22	32.44	10.42	66.74	0.51	--	Peak																																																																																							

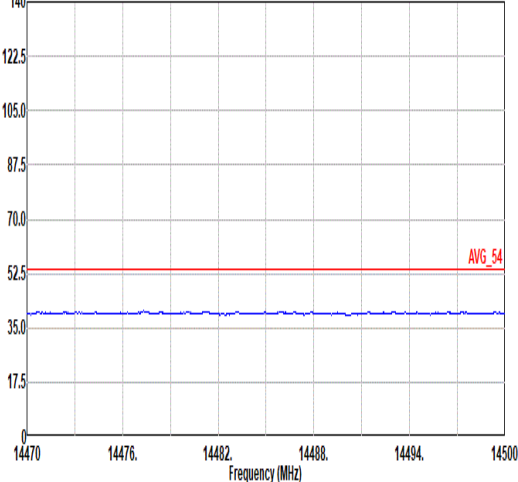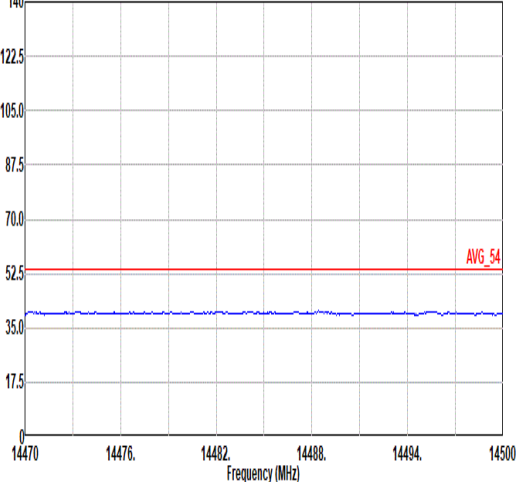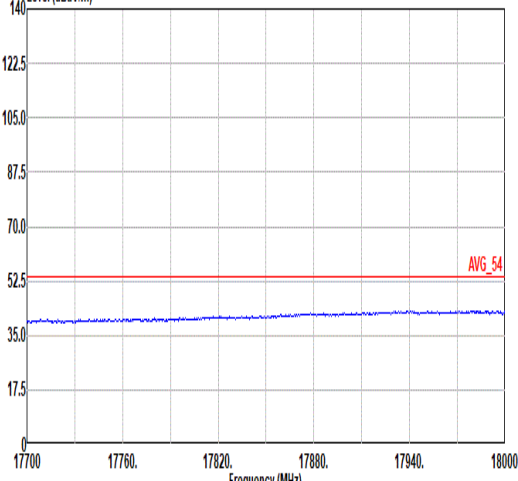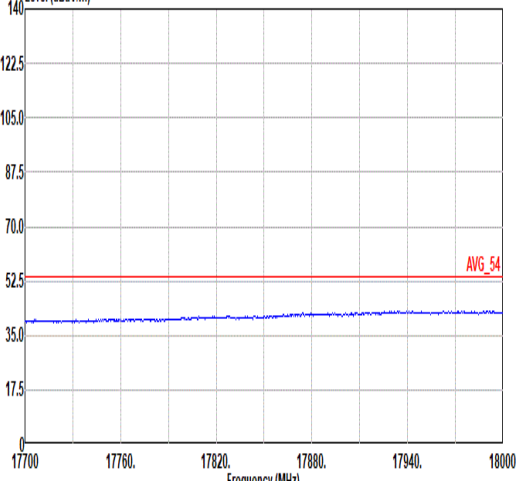

Mode	4	
	Harmonic	
	2400-2483.5_802.11g_CH01_2412MHz	
ANT	2+1(CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 4 Setting : 24	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 4 Setting : 24
	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 4 Setting : 24	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 4 Setting : 24



Mode	5																																																																																																											
	Band Edge - L																																																																																																											
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																											
ANT	2+1(CDD)																																																																																																											
Pol.	Horizontal						Fundamental																																																																																																					
Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 5 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2386.71</td><td>54.01</td><td>74.00</td><td>-19.99</td><td>43.11</td><td>27.27</td><td>6.80</td><td>33.20</td><td>10.03</td><td>221</td><td>153 Peak</td></tr></table> Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 5 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.00</td><td>121.92</td><td>-----</td><td>-----</td><td>110.61</td><td>27.60</td><td>6.84</td><td>33.16</td><td>10.03</td><td>221</td><td>153 Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2386.71	54.01	74.00	-19.99	43.11	27.27	6.80	33.20	10.03	221	153 Peak		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2437.00	121.92	-----	-----	110.61	27.60	6.84	33.16	10.03	221	153 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2386.71	54.01	74.00	-19.99	43.11	27.27	6.80	33.20	10.03	221	153 Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2437.00	121.92	-----	-----	110.61	27.60	6.84	33.16	10.03	221	153 Peak																																																																																																	
Avg	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 5 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2375.53</td><td>41.87</td><td>54.00</td><td>-12.13</td><td>31.00</td><td>27.20</td><td>6.78</td><td>33.21</td><td>10.02</td><td>221</td><td>153 Average</td></tr></table> Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 5 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2437.00</td><td>111.56</td><td>-----</td><td>-----</td><td>100.25</td><td>27.60</td><td>6.84</td><td>33.16</td><td>10.03</td><td>221</td><td>153 Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2375.53	41.87	54.00	-12.13	31.00	27.20	6.78	33.21	10.02	221	153 Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2437.00	111.56	-----	-----	100.25	27.60	6.84	33.16	10.03	221	153 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2375.53	41.87	54.00	-12.13	31.00	27.20	6.78	33.21	10.02	221	153 Average																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2437.00	111.56	-----	-----	100.25	27.60	6.84	33.16	10.03	221	153 Average																																																																																																	



Mode	5	
	Band Edge - R	
	2400-2483.5_802.11g_CH06_2437MHz	
ANT	2+1(CDD)	
Pol.	Horizontal	Fundamental
Peak	</	



Mode	5																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																			
ANT	2+1(CDD)																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 5 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2382.26</td><td>53.20</td><td>74.00</td><td>-20.80</td><td>42.37</td><td>27.22</td><td>6.79</td><td>33.21</td><td>10.03</td><td>266 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2382.26	53.20	74.00	-20.80	42.37	27.22	6.79	33.21	10.03	266 Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 5 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>123.85</td><td>-----</td><td>-----</td><td>112.54</td><td>27.60</td><td>6.84</td><td>33.16</td><td>10.03</td><td>266 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	123.85	-----	-----	112.54	27.60	6.84	33.16	10.03	266 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2382.26	53.20	74.00	-20.80	42.37	27.22	6.79	33.21	10.03	266 Peak																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	123.85	-----	-----	112.54	27.60	6.84	33.16	10.03	266 Peak																																																																																										
Avg	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 5 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2359.28</td><td>41.69</td><td>54.00</td><td>-12.31</td><td>30.95</td><td>27.20</td><td>6.75</td><td>33.23</td><td>10.02</td><td>266 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2359.28	41.69	54.00	-12.31	30.95	27.20	6.75	33.23	10.02	266 Average	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 5 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>113.90</td><td>-----</td><td>-----</td><td>102.59</td><td>27.60</td><td>6.84</td><td>33.16</td><td>10.03</td><td>266 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	113.90	-----	-----	102.59	27.60	6.84	33.16	10.03	266 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2359.28	41.69	54.00	-12.31	30.95	27.20	6.75	33.23	10.02	266 Average																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	113.90	-----	-----	102.59	27.60	6.84	33.16	10.03	266 Average																																																																																										



Mode	5										
	Band Edge - R										
	2400-2483.5_802.11g_CH06_2437MHz										
ANT	2+1(CDD)										
Pol.	Vertical						Fundamental				
Peak	<										



Mode	5																																																																																																																	
	Harmonic																																																																																																																	
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																	
ANT	2+1(CDD)																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2025-07-25 PEAK_74 AVG_54 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 5 Setting : 24 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>41.09</td><td>74.00</td><td>-32.91</td><td>63.92</td><td>32.70</td><td>10.64</td><td>66.70</td><td>0.53</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>43.66</td><td>74.00</td><td>-30.34</td><td>58.60</td><td>36.78</td><td>13.73</td><td>65.77</td><td>0.32</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	4874.00	41.09	74.00	-32.91	63.92	32.70	10.64	66.70	0.53	--	--	Peak	2	7311.00	43.66	74.00	-30.34	58.60	36.78	13.73	65.77	0.32	--	--	Peak	Level (dBuV/m) Date: 2025-07-25 PEAK_74 AVG_54 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 5 Setting : 24 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>40.52</td><td>74.00</td><td>-33.48</td><td>63.35</td><td>32.70</td><td>10.64</td><td>66.70</td><td>0.53</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>43.74</td><td>74.00</td><td>-30.26</td><td>58.68</td><td>36.78</td><td>13.73</td><td>65.77</td><td>0.32</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	1	4874.00	40.52	74.00	-33.48	63.35	32.70	10.64	66.70	0.53	--	--	Peak	2	7311.00	43.74	74.00	-30.26	58.68	36.78	13.73	65.77	0.32	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																																																																							
1	4874.00	41.09	74.00	-32.91	63.92	32.70	10.64	66.70	0.53	--	--	Peak																																																																																																						
2	7311.00	43.66	74.00	-30.34	58.60	36.78	13.73	65.77	0.32	--	--	Peak																																																																																																						
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg																																																																																																							
1	4874.00	40.52	74.00	-33.48	63.35	32.70	10.64	66.70	0.53	--	--	Peak																																																																																																						
2	7311.00	43.74	74.00	-30.26	58.68	36.78	13.73	65.77	0.32	--	--	Peak																																																																																																						



Mode	5	
	Harmonic	
	2400-2483.5_802.11g_CH06_2437MHz	
ANT	2+1(CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 5 Setting : 24	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 5 Setting : 24
	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 5 Setting : 24	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 5 Setting : 24



Mode	6																																																																																															
	Band Edge																																																																																															
	2400-2483.5_802.11g_CH11_2462MHz																																																																																															
ANT	2+1(CDD)																																																																																															
Pol.	Horizontal						Fundamental																																																																																									
Peak	Level (dBuV/m) Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 6 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.70</td><td>61.20</td><td>74.00</td><td>-12.00</td><td>49.57</td><td>27.84</td><td>6.87</td><td>33.11</td><td>10.03</td><td>245 Peak</td></tr></table> Level (dBuV/m) Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 6 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>121.28</td><td>-----</td><td>-----</td><td>109.88</td><td>27.64</td><td>6.86</td><td>33.13</td><td>10.03</td><td>245 Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.70	61.20	74.00	-12.00	49.57	27.84	6.87	33.11	10.03	245 Peak		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	121.28	-----	-----	109.88	27.64	6.86	33.13	10.03	245 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2483.70	61.20	74.00	-12.00	49.57	27.84	6.87	33.11	10.03	245 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2462.00	121.28	-----	-----	109.88	27.64	6.86	33.13	10.03	245 Peak																																																																																						
Avg	Level (dBuV/m) Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 6 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>46.58</td><td>54.00</td><td>-7.42</td><td>34.96</td><td>27.84</td><td>6.87</td><td>33.12</td><td>10.03</td><td>245 Average</td></tr></table> Level (dBuV/m) Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 6 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>109.74</td><td>-----</td><td>-----</td><td>98.34</td><td>27.64</td><td>6.86</td><td>33.13</td><td>10.03</td><td>245 Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.58	46.58	54.00	-7.42	34.96	27.84	6.87	33.12	10.03	245 Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	109.74	-----	-----	98.34	27.64	6.86	33.13	10.03	245 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2483.58	46.58	54.00	-7.42	34.96	27.84	6.87	33.12	10.03	245 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2462.00	109.74	-----	-----	98.34	27.64	6.86	33.13	10.03	245 Average																																																																																						



Mode	6																																																																																						
	Band Edge																																																																																						
	2400-2483.5_802.11g_CH11_2462MHz																																																																																						
ANT	2+1(CDD)																																																																																						
Pol.	Vertical					Fundamental																																																																																	
Peak	Level (dBuV/m) Date: 2025-07-25 PEAK_BE_74					Level (dBuV/m) Date: 2025-07-25 PEAK_74																																																																																	
	Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : PEAK Mode : 6 Setting : 24 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.51</td><td>66.89</td><td>74.00</td><td>-7.11</td><td>55.27</td><td>27.84</td><td>6.87</td><td>33.12</td><td>10.03</td><td>200</td><td>271</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.51	66.89	74.00	-7.11	55.27	27.84	6.87	33.12	10.03	200	271	Peak	Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : PEAK Mode : 6 Setting : 24 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>123.67</td><td>-----</td><td>-----</td><td>112.27</td><td>27.64</td><td>6.86</td><td>33.13</td><td>10.03</td><td>200</td><td>271</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2462.00	123.67	-----	-----	112.27	27.64	6.86	33.13	10.03	200	271
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2483.51	66.89	74.00	-7.11	55.27	27.84	6.87	33.12	10.03	200	271	Peak																																																																											
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2462.00	123.67	-----	-----	112.27	27.64	6.86	33.13	10.03	200	271	Peak																																																																											
Avg	Level (dBuV/m) Date: 2025-07-25 AVG_BE_54					Level (dBuV/m) Date: 2025-07-25 AVG_54																																																																																	
	Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : RMS Mode : 6 Setting : 24 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.62</td><td>51.04</td><td>54.00</td><td>-2.96</td><td>39.42</td><td>27.84</td><td>6.87</td><td>33.12</td><td>10.03</td><td>200</td><td>271</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.62	51.04	54.00	-2.96	39.42	27.84	6.87	33.12	10.03	200	271	Average	Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : RMS Mode : 6 Setting : 24 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>112.90</td><td>-----</td><td>-----</td><td>101.50</td><td>27.64</td><td>6.86</td><td>33.13</td><td>10.03</td><td>200</td><td>271</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2462.00	112.90	-----	-----	101.50	27.64	6.86	33.13	10.03	200	271
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2483.62	51.04	54.00	-2.96	39.42	27.84	6.87	33.12	10.03	200	271	Average																																																																											
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2462.00	112.90	-----	-----	101.50	27.64	6.86	33.13	10.03	200	271	Average																																																																											



Mode	6																																																																																																																																											
	Harmonic																																																																																																																																											
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																											
ANT	2+1(CDD)																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																					
Peak Avg	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 6 Setting : 24 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th colspan="2">Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>42.70</td><td>74.00</td><td>-31.30</td><td>65.05</td><td>32.90</td><td>10.85</td><td>66.66</td><td>0.56</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>43.50</td><td>74.00</td><td>-30.50</td><td>58.80</td><td>36.48</td><td>13.79</td><td>65.86</td><td>0.29</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq		Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor				MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	dB	cm	deg		1	4924.00	42.70	74.00	-31.30	65.05	32.90	10.85	66.66	0.56	--	--	Peak	2	7386.00	43.50	74.00	-30.50	58.80	36.48	13.79	65.86	0.29	--	--	Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 6 Setting : 24 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th colspan="2">Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>42.71</td><td>74.00</td><td>-31.29</td><td>65.06</td><td>32.90</td><td>10.85</td><td>66.66</td><td>0.56</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>43.38</td><td>74.00</td><td>-30.62</td><td>58.68</td><td>36.48</td><td>13.79</td><td>65.86</td><td>0.29</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq		Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor				MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	dB	cm	deg		1	4924.00	42.71	74.00	-31.29	65.06	32.90	10.85	66.66	0.56	--	--	Peak	2	7386.00	43.38	74.00	-30.62	58.68	36.48	13.79	65.86	0.29	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
	Freq		Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																																		
	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	dB	cm	deg																																																																																																																																	
1	4924.00	42.70	74.00	-31.30	65.05	32.90	10.85	66.66	0.56	--	--	Peak																																																																																																																																
2	7386.00	43.50	74.00	-30.50	58.80	36.48	13.79	65.86	0.29	--	--	Peak																																																																																																																																
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq		Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	dB	cm	deg																																																																																																																																	
1	4924.00	42.71	74.00	-31.29	65.06	32.90	10.85	66.66	0.56	--	--	Peak																																																																																																																																
2	7386.00	43.38	74.00	-30.62	58.68	36.48	13.79	65.86	0.29	--	--	Peak																																																																																																																																



Mode	6	
	Harmonic	
	2400-2483.5_802.11g_CH11_2462MHz	
ANT	2+1(CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 6 Setting : 24	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 6 Setting : 24
	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 6 Setting : 24	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 6 Setting : 24



Mode	7																																																																																														
	Band Edge																																																																																														
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																														
ANT	2+1(CDD)																																																																																														
Pol.	Horizontal						Fundamental																																																																																								
Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 7 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>60.67</td><td>74.00</td><td>-13.33</td><td>49.74</td><td>27.30</td><td>6.80</td><td>33.20</td><td>10.03</td><td>109 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	60.67	74.00	-13.33	49.74	27.30	6.80	33.20	10.03	109 Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 7 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>120.83</td><td>-----</td><td>-----</td><td>109.73</td><td>27.42</td><td>6.83</td><td>33.18</td><td>10.03</td><td>109 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	120.83	-----	-----	109.73	27.42	6.83	33.18	10.03	109 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2389.95	60.67	74.00	-13.33	49.74	27.30	6.80	33.20	10.03	109 Peak																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2412.00	120.83	-----	-----	109.73	27.42	6.83	33.18	10.03	109 Peak																																																																																					
Avg	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 7 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>46.18</td><td>54.00</td><td>-7.82</td><td>35.25</td><td>27.30</td><td>6.80</td><td>33.20</td><td>10.03</td><td>109 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	46.18	54.00	-7.82	35.25	27.30	6.80	33.20	10.03	109 Average	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 7 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>110.73</td><td>-----</td><td>-----</td><td>99.63</td><td>27.42</td><td>6.83</td><td>33.18</td><td>10.03</td><td>109 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	110.73	-----	-----	99.63	27.42	6.83	33.18	10.03	109 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2389.95	46.18	54.00	-7.82	35.25	27.30	6.80	33.20	10.03	109 Average																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2412.00	110.73	-----	-----	99.63	27.42	6.83	33.18	10.03	109 Average																																																																																					







		7											
Mode		Band Edge											
		2400-2483.5_802.11n HT20_CH01_2412MHz											
ANT		2+1(CDD)											
Pol.		Vertical						Fundamental					
Peak		</											



Mode	7																																																																																																	
	Harmonic																																																																																																	
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																	
ANT	2+1(CDD)																																																																																																	
Pol.	Horizontal						Vertical																																																																																											
Peak Avg	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 7 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>40.04</td><td>74.00</td><td>-33.96</td><td>63.41</td><td>32.44</td><td>10.42</td><td>66.74</td><td>0.51</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	40.04	74.00	-33.96	63.41	32.44	10.42	66.74	0.51	--	Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 7 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>40.01</td><td>74.00</td><td>-33.99</td><td>63.38</td><td>32.44</td><td>10.42</td><td>66.74</td><td>0.51</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	40.01	74.00	-33.99	63.38	32.44	10.42	66.74	0.51	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	4824.00	40.04	74.00	-33.96	63.41	32.44	10.42	66.74	0.51	--	Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	4824.00	40.01	74.00	-33.99	63.38	32.44	10.42	66.74	0.51	--	Peak																																																																																							

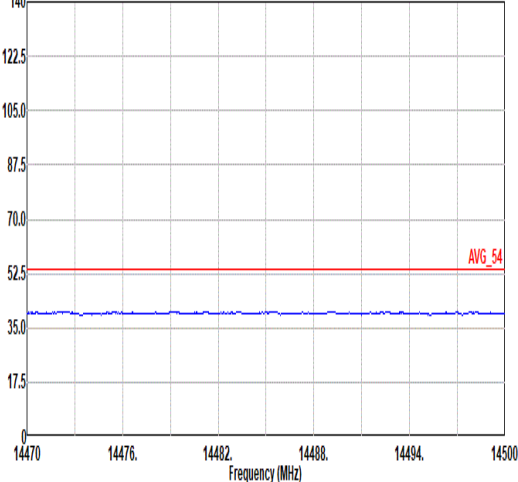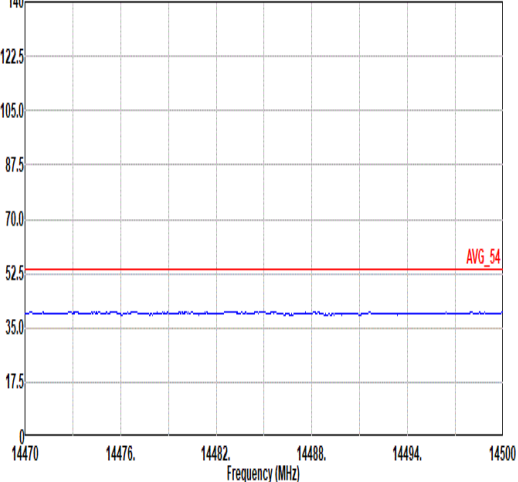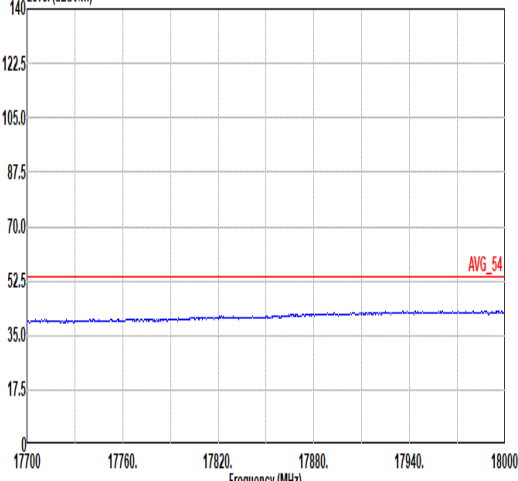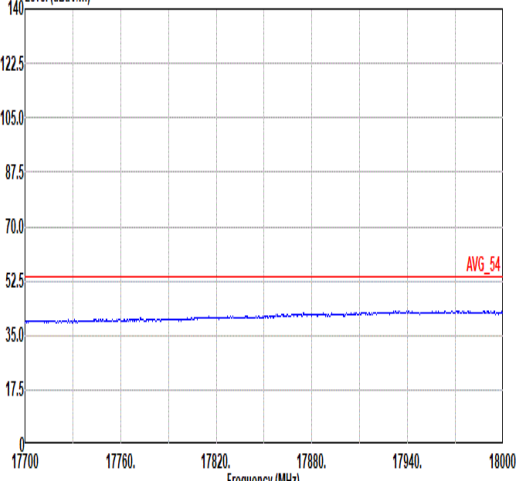

Mode	7	
	Harmonic	
	2400-2483.5_802.11n HT20_CH01_2412MHz	
ANT	2+1(CDD)	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 7 Setting : 24	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 7 Setting : 24
	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 7 Setting : 24	Level (dBuV/m) Date: 2025-07-25  Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 7 Setting : 24



		8																																																																																																					
Mode		Band Edge - L																																																																																																					
		2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																																					
ANT		2+1(CDD)																																																																																																					
Pol.		Horizontal					Fundamental																																																																																																
Peak	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 8 Setting : 24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2377.06</td><td>53.20</td><td>74.00</td><td>-20.80</td><td>42.41</td><td>27.20</td><td>6.78</td><td>33.21</td><td>10.02</td><td>300</td><td>209</td><td>Peak</td></tr></tbody></table> Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 8 Setting : 24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>118.91</td><td>-----</td><td>-----</td><td>107.60</td><td>27.60</td><td>6.84</td><td>33.16</td><td>10.03</td><td>300</td><td>209</td><td>Peak</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2377.06	53.20	74.00	-20.80	42.41	27.20	6.78	33.21	10.02	300	209	Peak		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2437.00	118.91	-----	-----	107.60	27.60	6.84	33.16	10.03	300	209	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	2377.06	53.20	74.00	-20.80	42.41	27.20	6.78	33.21	10.02	300	209	Peak																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	2437.00	118.91	-----	-----	107.60	27.60	6.84	33.16	10.03	300	209	Peak																																																																																											
Avg	Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 8 Setting : 24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2375.28</td><td>41.85</td><td>54.00</td><td>-12.15</td><td>31.06</td><td>27.20</td><td>6.78</td><td>33.21</td><td>10.02</td><td>300</td><td>209</td><td>Average</td></tr></tbody></table> Level (dBuV/m) Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 8 Setting : 24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>108.42</td><td>-----</td><td>-----</td><td>97.11</td><td>27.60</td><td>6.84</td><td>33.16</td><td>10.03</td><td>300</td><td>209</td><td>Average</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2375.28	41.85	54.00	-12.15	31.06	27.20	6.78	33.21	10.02	300	209	Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB			1	2437.00	108.42	-----	-----	97.11	27.60	6.84	33.16	10.03	300	209	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	2375.28	41.85	54.00	-12.15	31.06	27.20	6.78	33.21	10.02	300	209	Average																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	2437.00	108.42	-----	-----	97.11	27.60	6.84	33.16	10.03	300	209	Average																																																																																											



Mode	8																																					
	Band Edge - R																																					
	2400-2483.5_802.11n HT20_CH06_2437MHz																																					
ANT	2+1(CDD)																																					
Pol.	Horizontal	Fundamental																																				
Peak	Date: 2025-07-25 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VSW:3000.000kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 24 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.31</td><td>53.78</td><td>74.00</td><td>-20.22</td><td>42.15</td><td>27.84</td><td>6.87</td><td>33.11</td><td>10.03</td><td>300</td><td>209 Peak</td></tr></tbody></table>		Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2484.31	53.78	74.00	-20.22	42.15	27.84	6.87	33.11	10.03	300	209 Peak	Blank
		Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																											
1	2484.31	53.78	74.00	-20.22	42.15	27.84	6.87	33.11	10.03	300	209 Peak																											
Avg	Date: 2025-07-25 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VSW:3000.000kHz SMT:Auto Detector : RMS Mode : 8 Setting : 24 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.94</td><td>42.90</td><td>54.00</td><td>-11.10</td><td>31.26</td><td>27.85</td><td>6.87</td><td>33.11</td><td>10.03</td><td>300</td><td>209 Average</td></tr></tbody></table>		Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2484.94	42.90	54.00	-11.10	31.26	27.85	6.87	33.11	10.03	300	209 Average	Blank
		Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																											
1	2484.94	42.90	54.00	-11.10	31.26	27.85	6.87	33.11	10.03	300	209 Average																											



Mode	8																																																																																															
	Band Edge - L																																																																																															
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																															
ANT	2+1(CDD)																																																																																															
Pol.	Vertical						Fundamental																																																																																									
Peak	Level (dBuV/m) Date: 2025-07-24 23102335.42360.82386.22411.62437 Frequency (MHz) Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 8 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.63</td><td>53.19</td><td>74.00</td><td>-20.81</td><td>42.26</td><td>27.30</td><td>6.80</td><td>33.20</td><td>10.03</td><td>261 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.63	53.19	74.00	-20.81	42.26	27.30	6.80	33.20	10.03	261 Peak	Level (dBuV/m) Date: 2025-07-24 100014001800220026003000 Frequency (MHz) Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 8 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>123.30</td><td>-----</td><td>-----</td><td>111.99</td><td>27.60</td><td>6.84</td><td>33.16</td><td>10.03</td><td>261 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	123.30	-----	-----	111.99	27.60	6.84	33.16	10.03	261 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2389.63	53.19	74.00	-20.81	42.26	27.30	6.80	33.20	10.03	261 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2437.00	123.30	-----	-----	111.99	27.60	6.84	33.16	10.03	261 Peak																																																																																						
Avg	Level (dBuV/m) Date: 2025-07-24 23102335.42360.82386.22411.62437 Frequency (MHz) Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 8 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2379.98</td><td>41.99</td><td>54.00</td><td>-12.01</td><td>31.19</td><td>27.20</td><td>6.79</td><td>33.21</td><td>10.02</td><td>261 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2379.98	41.99	54.00	-12.01	31.19	27.20	6.79	33.21	10.02	261 Average	Level (dBuV/m) Date: 2025-07-24 100014001800220026003000 Frequency (MHz) Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: RMS Mode : 8 Setting : 24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>113.11</td><td>-----</td><td>-----</td><td>101.80</td><td>27.60</td><td>6.84</td><td>33.16</td><td>10.03</td><td>261 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	113.11	-----	-----	101.80	27.60	6.84	33.16	10.03	261 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2379.98	41.99	54.00	-12.01	31.19	27.20	6.79	33.21	10.02	261 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2437.00	113.11	-----	-----	101.80	27.60	6.84	33.16	10.03	261 Average																																																																																						