



FCC RADIO TEST REPORT

FCC ID : 2AEM4-NV01
Equipment : Wireless Router
Brand Name : eero
Model Name : NV01
Applicant : eero LLC
660 3rd St Fl 4, San Francisco, California, 94107, United States
Manufacturer : eero LLC
660 3rd St Fl 4, San Francisco, California, 94107, United States
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jul. 18, 2025 and testing was performed from Jul. 18, 2025 to Aug. 21, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	20
3.7 Antenna Requirements.....	22
4 List of Measuring Equipment	23
5 Measurement Uncertainty	25
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Result	
Appendix D. Duty Cycle Plots	



History of this test report

Report No.	Version	Description	Issue Date
FR562407C	01	Initial issue of report	Sep. 17, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Avis Chuang

Report Producer: Hannah Yang

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs Bluetooth-LE, IEEE 802.15.4, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, Wi-Fi 6GHz 802.11ax/be
Antenna Type IEEE 802.15.4: PIFA Antenna

Antenna information
2400 MHz ~ 2483.5 MHz
Peak Gain (dBi)
5.2

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY (TAF Code: 1190)
Remark	The AC Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, 03CH11-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786



1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2020

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	12	2410	20	2450
	13	2415	21	2455
	14	2420	22	2460
	15	2425	23	2465
	16	2430	24	2470
	17	2435	25	2475
	18	2440	26	2480


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: IEEE 802.15.4 Tx CH11_2405 MHz
	Mode 2: IEEE 802.15.4 Tx CH18_2440 MHz
	Mode 3: IEEE 802.15.4 Tx CH25_2475 MHz
	Mode 4: IEEE 802.15.4 Tx CH26_2480 MHz
AC Conducted Emission	Mode 1: IEEE 802.15.4 Tx CH18 + LAN Link + AC Adapter (Luxshare_27W_Type A plug) (C210001)
Remark: - For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. - The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

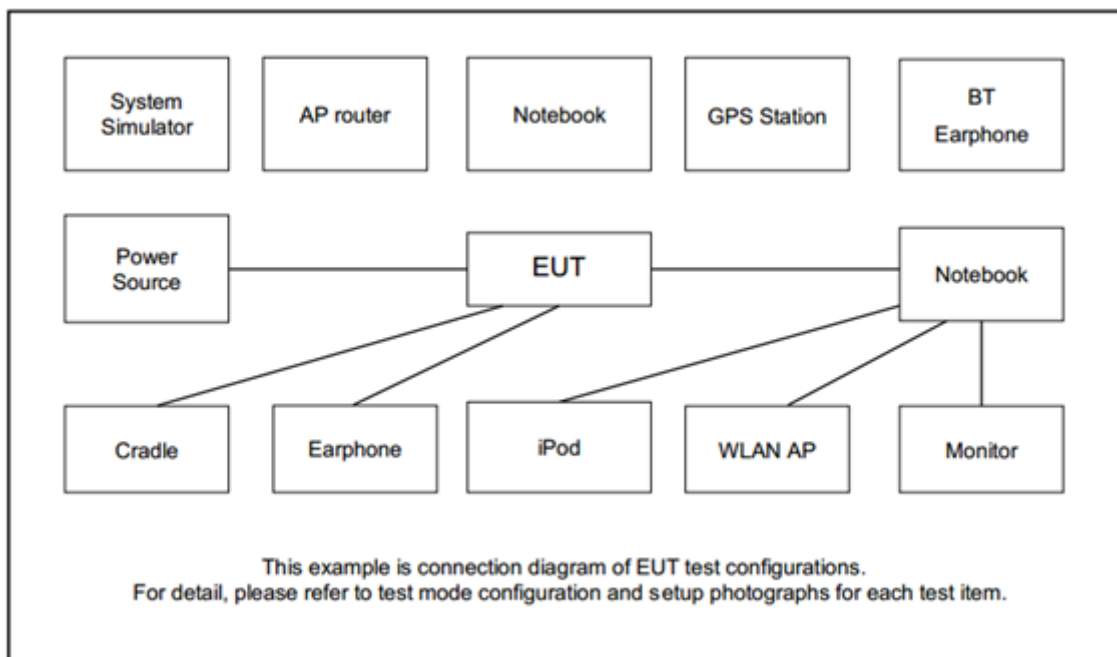

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude 3420	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	PC	msi	PRO DP1 80A7	FCC DoC	N/A	Unshielded, 1.8 m
3.	PC	Lenovo	P320	FCC DoC	N/A	Unshielded, 1.8 m

2.5 EUT Operation Test Setup

The RF test items, utility "RadioControlConsole.exe (v4.0.0.0)" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth VBW $\geq 3 * RBW$. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = No faster than coupled (auto) time, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

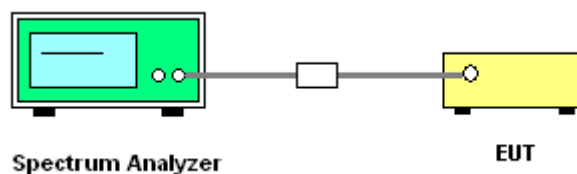

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

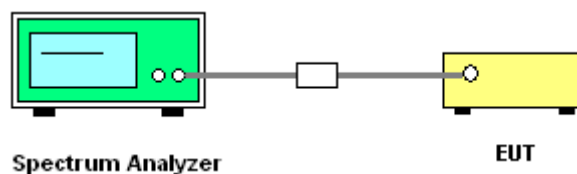

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
The procedure for method trace averaging is as follows:
 - a) RBW = 1 MHz.
 - b) VBW $\geq [3 \times \text{RBW}]$.
 - c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
 - d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - e) Sweep time = auto.




- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
- g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - i. If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
 - ii. If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

3.5.4 Test Setup


For radiated test below 30MHz

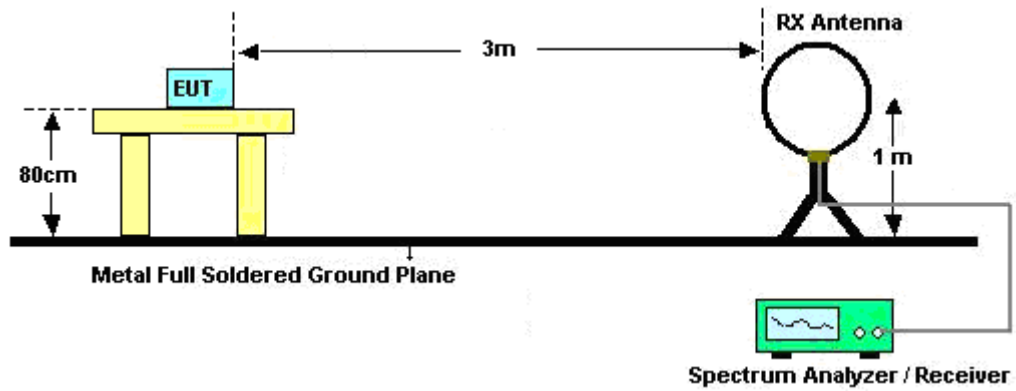


For radiated test from 30MHz to 1GHz

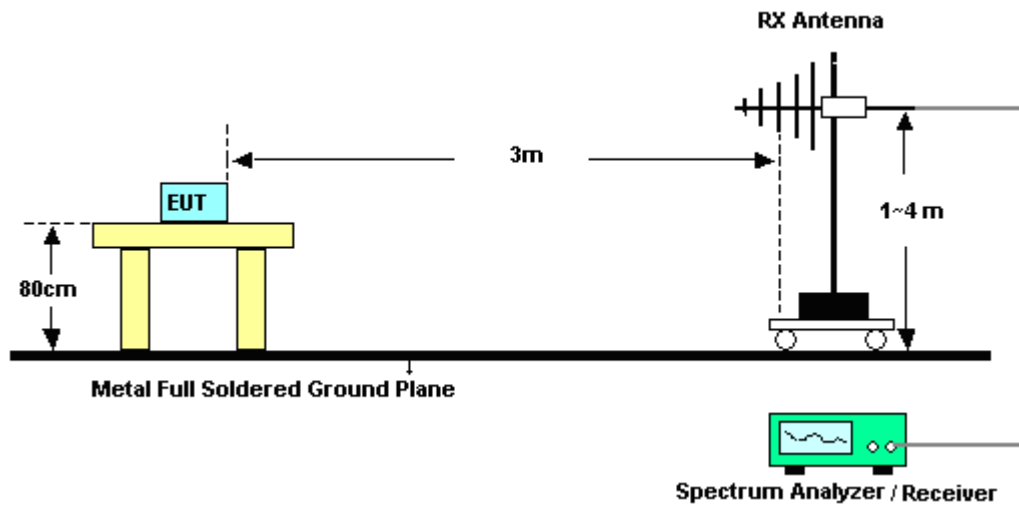

For radiated test from 1GHz to 18GHz

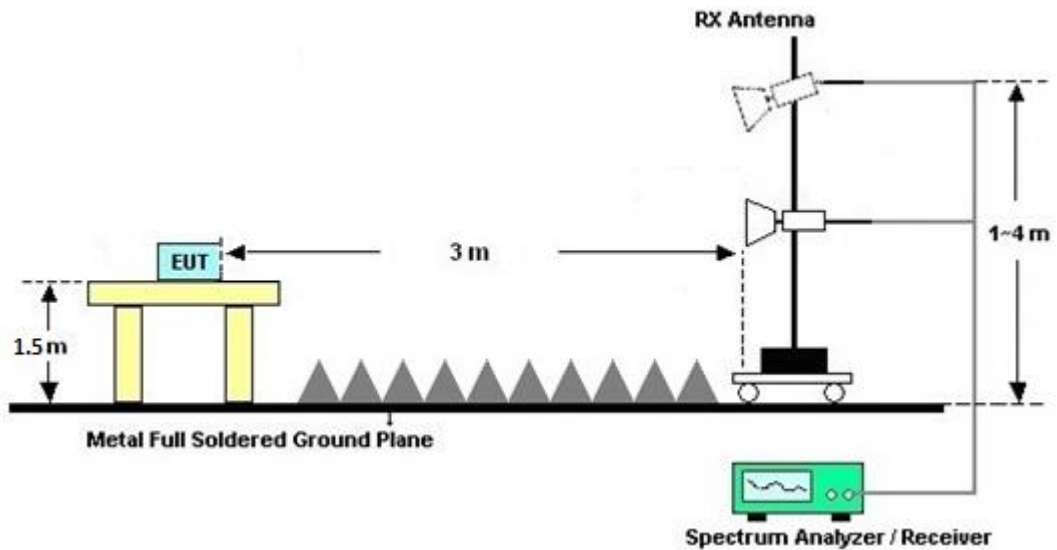

For radiated test above 18GHz

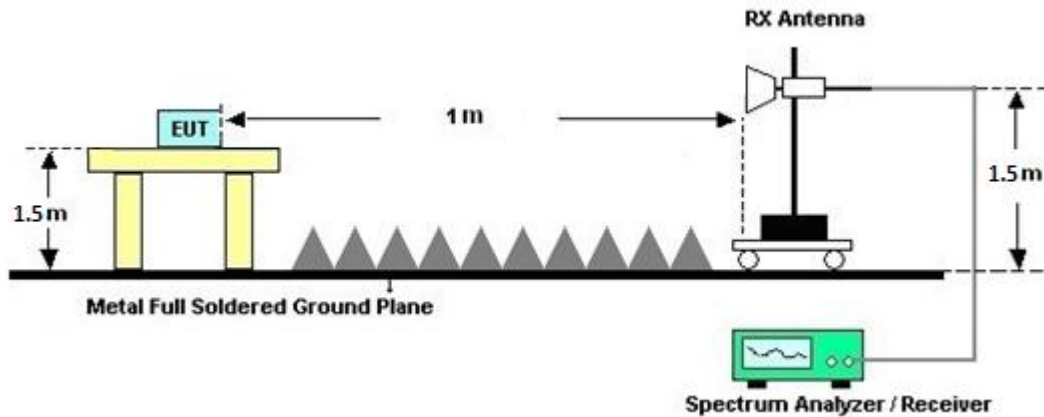

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
6. The frequency range from 150 kHz to 30 MHz is scanned.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

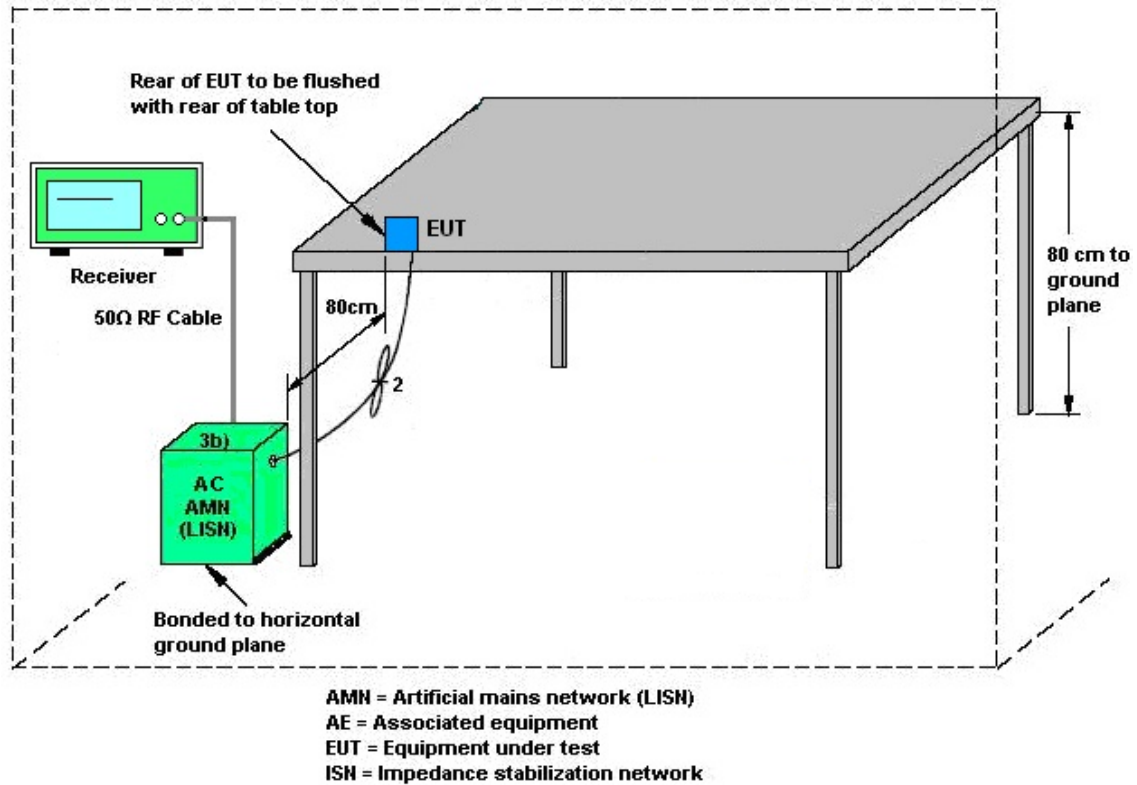

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	37059 & 01	30MHz~1GHz	Nov. 27, 2024	Jul. 18, 2025~ Aug. 08, 2025	Nov. 26, 2025	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 18, 2024	Jul. 18, 2025~ Aug. 08, 2025	Dec. 17, 2025	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-01620	1GHz~18GHz	Aug. 28, 2024	Jul. 18, 2025~ Aug. 08, 2025	Aug. 27, 2025	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	00994	18GHz~40GHz	Jan. 09, 2025	Jul. 18, 2025~ Aug. 08, 2025	Jan. 08, 2026	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 07, 2024	Jul. 18, 2025~ Aug. 08, 2025	Dec. 06, 2025	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 24, 2025	Jul. 18, 2025~ Aug. 08, 2025	Mar. 23, 2026	Radiation (03CH11-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18G-56-01-A70	EC1900249	1GHz~18GHz	Jan. 21, 2025	Jul. 18, 2025~ Aug. 08, 2025	Jan. 20, 2026	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 23, 2024	Jul. 18, 2025~ Aug. 08, 2025	Aug. 22, 2025	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 14, 2024	Jul. 18, 2025~ Aug. 08, 2025	Oct. 13, 2025	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY53290053	20Hz~26.5GHz	Sep. 09, 2024	Jul. 18, 2025~ Aug. 08, 2025	Sep. 08, 2025	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jul. 18, 2025~ Aug. 08, 2025	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jul. 18, 2025~ Aug. 08, 2025	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jul. 18, 2025~ Aug. 08, 2025	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Jul. 18, 2025~ Aug. 08, 2025	N/A	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP200880	N/A	Aug. 29, 2024	Jul. 18, 2025~ Aug. 08, 2025	Aug. 28, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804013/2	30M~40G	Mar. 05, 2025	Jul. 18, 2025~ Aug. 08, 2025	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 05, 2025	Jul. 18, 2025~ Aug. 08, 2025	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 05, 2025	Jul. 18, 2025~ Aug. 08, 2025	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	805139 2	30M~40G	May 10, 2025	Jul. 18, 2025~ Aug. 08, 2025	May 09, 2026	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN3	3GHz High Pass Filter	Sep. 10, 2024	Jul. 18, 2025~ Aug. 08, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WHKX8-5872.5-6750-18000-40SS	SN3	6.75GHz High Pass Filter	Sep. 10, 2024	Jul. 18, 2025~ Aug. 08, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN11	1.53GHz Low Pass Filter	Sep. 10, 2024	Jul. 18, 2025~ Aug. 08, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Attenuator	HONOVA	5910 SMA-50-005	0028	N/A	Sep. 10, 2024	Jul. 18, 2025~ Aug. 08, 2025	Sep. 09, 2025	Radiation (03CH11-HY)

**FCC RADIO TEST REPORT****Report No. : FR562407C**

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEP	DTM-303A	TP201996	N/A	Nov. 01, 2024	Aug. 18, 2025~ Aug. 19, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3008W	RPR8W-2301 001(NO:146)	10MHz~8GHz	Jan. 17, 2025	Aug. 18, 2025~ Aug. 19, 2025	Jan. 16, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10Hz~44GHz	Jan. 14, 2025	Aug. 18, 2025~ Aug. 19, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Aug. 18, 2025~ Aug. 19, 2025	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ version_25061 3	N/A	Conducted Other Test Item	N/A	Aug. 18, 2025~ Aug. 19, 2025	N/A	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Aug. 21, 2025	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 10, 2024	Aug. 21, 2025	Dec. 09, 2025	Conduction (CO05-HY)
Hygrometer	TECEP	DTM-303A	TP210031	N/A	Jun. 26, 2025	Aug. 21, 2025	Jun. 25, 2026	Conduction (CO05-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	9kHz~30MHz	Mar. 26, 2025	Aug. 21, 2025	Mar. 25, 2026	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Jul. 25, 2025	Aug. 21, 2025	Jul. 24, 2026	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Aug. 21, 2025	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 29, 2025	Aug. 21, 2025	Jul. 28, 2026	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	MQT2408250 1	9KHz - 30MHz	Oct. 15, 2024	Aug. 21, 2025	Oct. 14, 2025	Conduction (CO05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.4 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Sylvia Li	Temperature:	21~25	°C
Test Date:	2025/08/18~2025/08/19	Relative Humidity:	51~54	%

TEST RESULTS DATA 6dB and 99% Occupied Bandwidth								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
802.15.4	250K	1	11	2405	2.209	1.555	0.50	Pass
802.15.4	250K	1	18	2440	2.209	1.541	0.50	Pass
802.15.4	250K	1	25	2475	2.212	1.546	0.50	Pass
802.15.4	250K	1	26	2480	2.214	1.554	0.50	Pass

TEST RESULTS DATA Average Power Table										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
802.15.4	250K	1	11	2405	19.50	30.00	5.20	24.70	36.00	Pass
802.15.4	250K	1	18	2440	17.80	30.00	5.20	23.00	36.00	Pass
802.15.4	250K	1	25	2475	17.80	30.00	5.20	23.00	36.00	Pass
802.15.4	250K	1	26	2480	3.30	30.00	5.20	8.50	36.00	Pass

TEST RESULTS DATA Peak Power Density									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
802.15.4	250K	1	11	2405	17.12	5.77	5.20	8.00	Pass
802.15.4	250K	1	18	2440	15.42	3.63	5.20	8.00	Pass
802.15.4	250K	1	25	2475	15.35	3.59	5.20	8.00	Pass
802.15.4	250K	1	26	2480	0.79	-11.59	5.20	8.00	Pass


Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




6dB Bandwidth

<802.15.4>


6 dB Bandwidth Plot on Channel 11

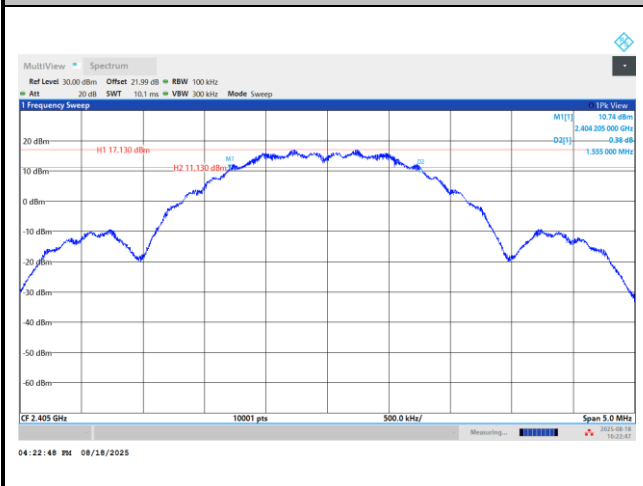


6 dB Bandwidth Plot on Channel 18

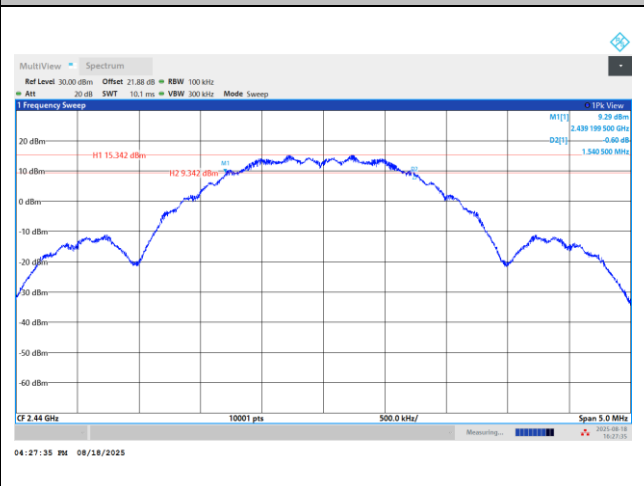

6 dB Bandwidth Plot on Channel 25




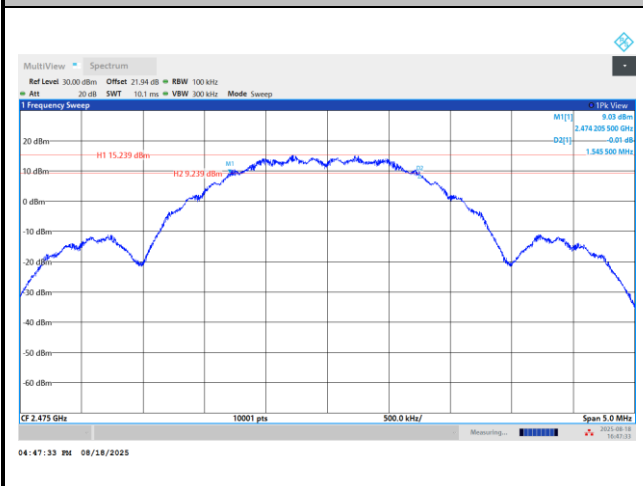


6 dB Bandwidth Plot on Channel 26

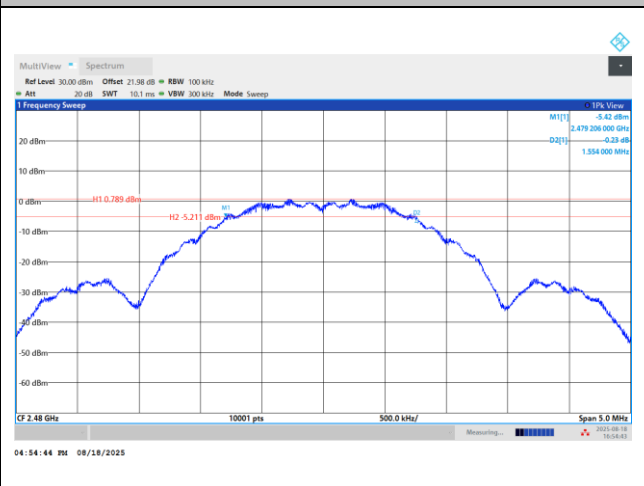





**99% Occupied Bandwidth**

<802.15.4>

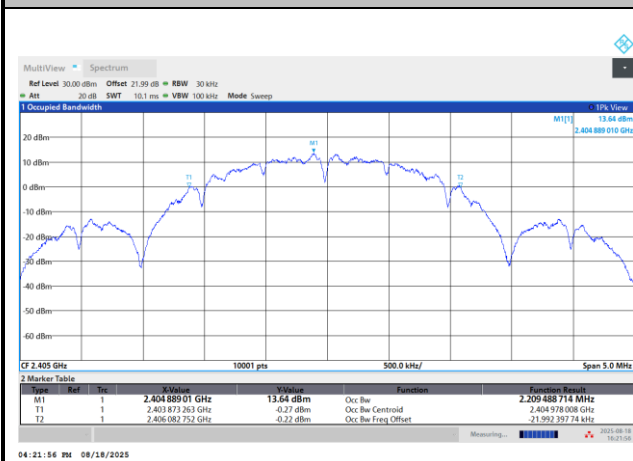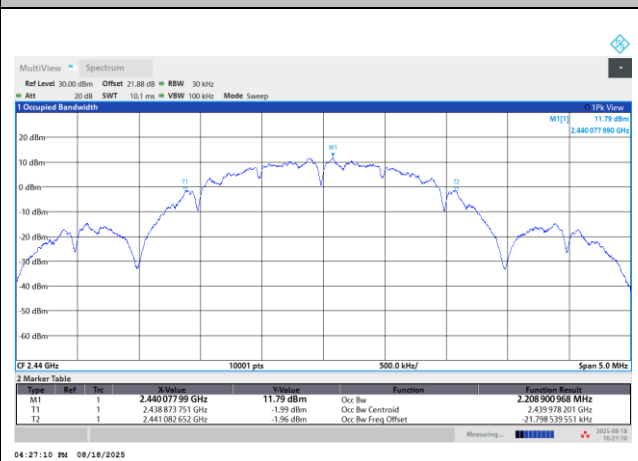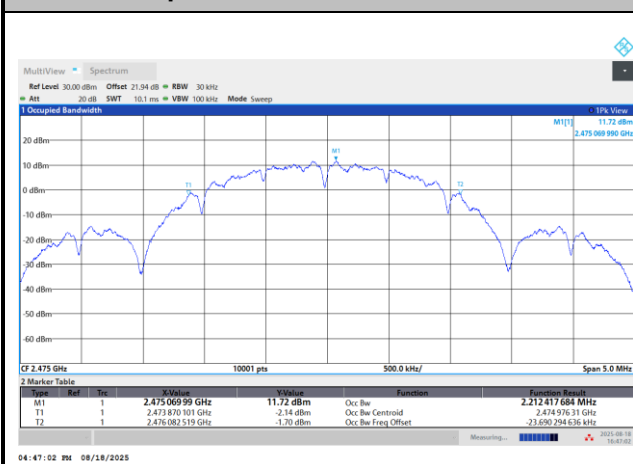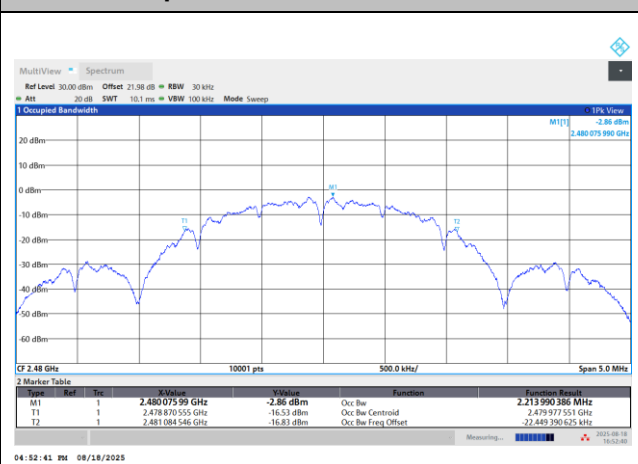99% Occupied Bandwidth Plot on Channel 11**99% Occupied Bandwidth Plot on Channel 18****99% Occupied Bandwidth Plot on Channel 25****99% Occupied Bandwidth Plot on Channel 26**





**Power Spectral Density (dBm/3kHz)**

<802.15.4>

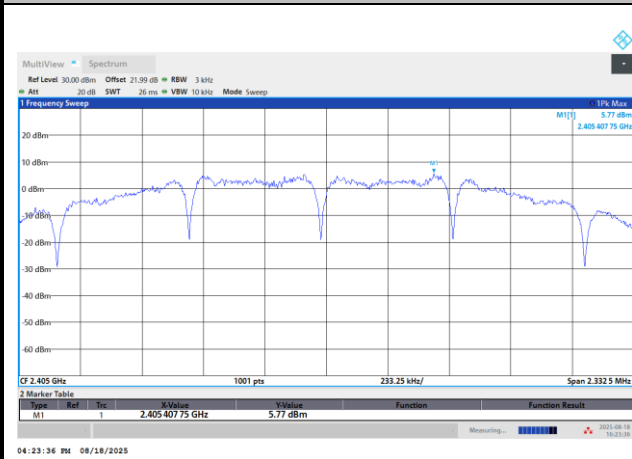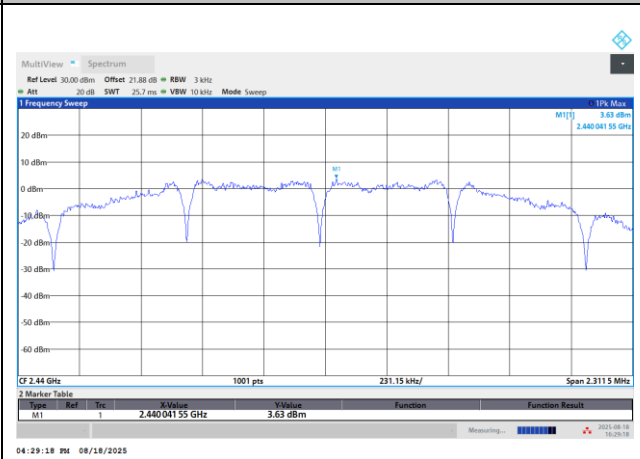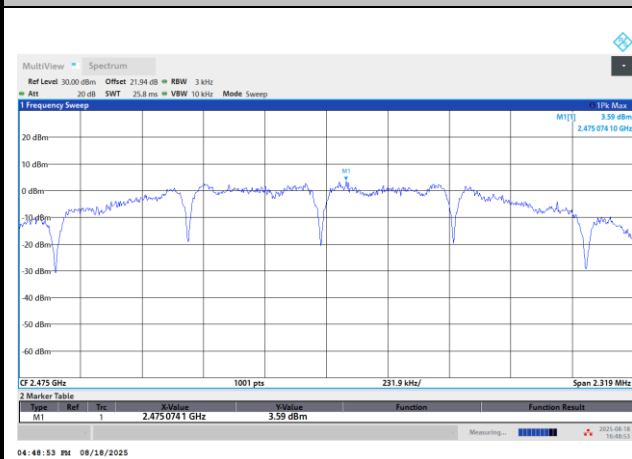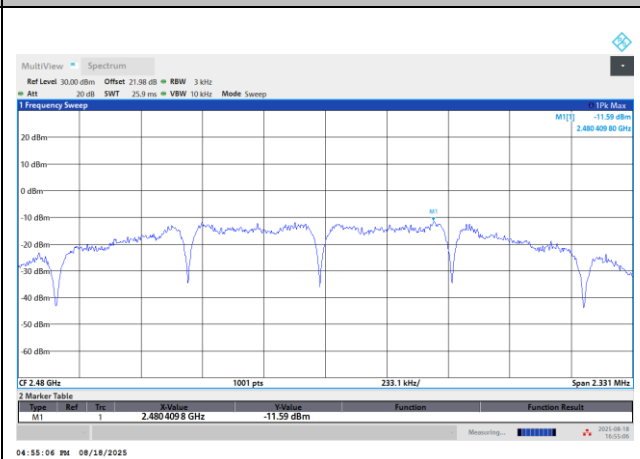Power Density (dBm/3kHz) Plot Channel 11**Power Density (dBm/3kHz) Plot Channel 18****Power Density (dBm/3kHz) Plot Channel 25****Power Density (dBm/3kHz) Plot Channel 26**

**Band Edge and Conducted Spurious Emission**


<802.15.4>

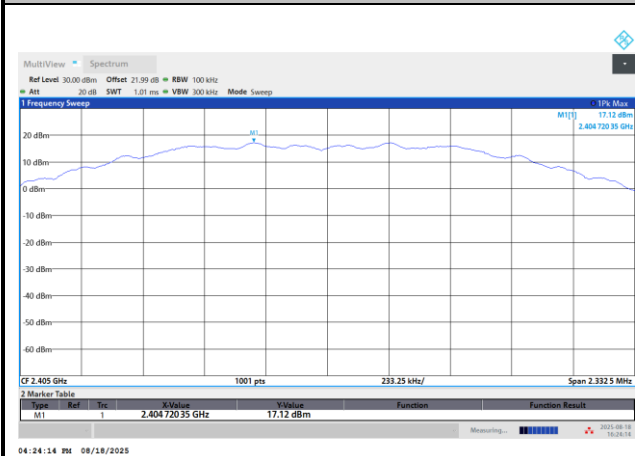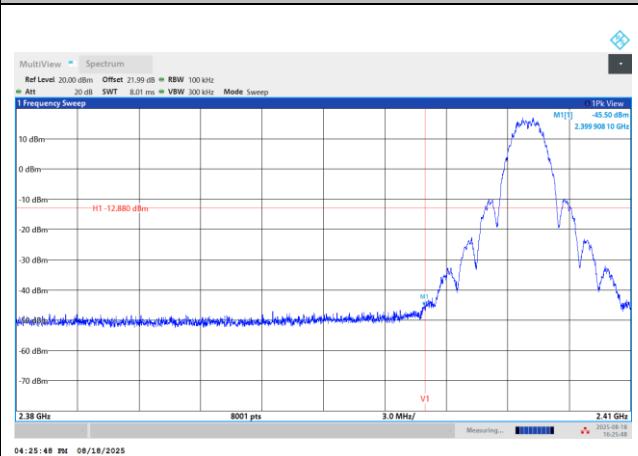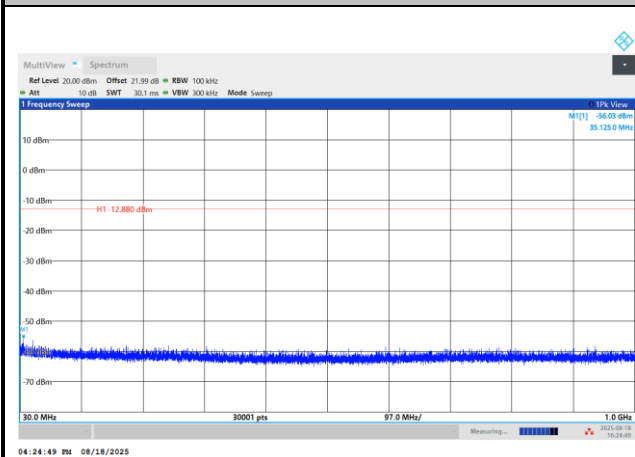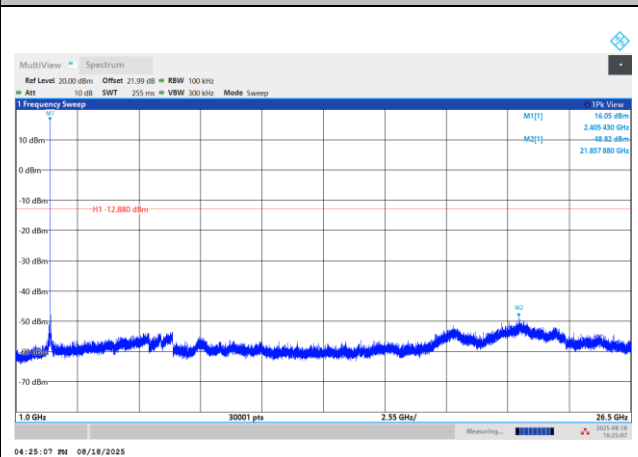Channel 11**100kHz PSD reference Level Plot****Low Channel Plot****Spurious Emission 30MHz~1GHz Plot****Spurious Emission 1GHz~26.5GHz Plot**




Channel 18

100kHz PSD reference Level Plot

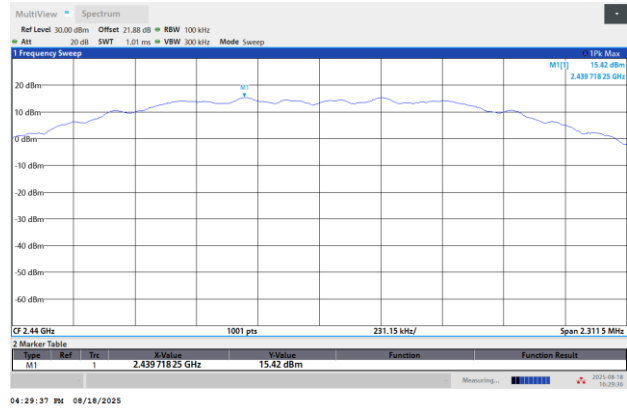


Low Channel Plot

Spurious Emission 30MHz~1GHz Plot

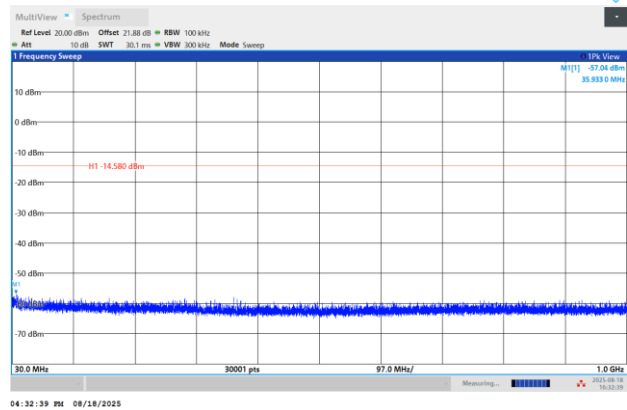


Spurious Emission 1GHz~26.5GHz Plot

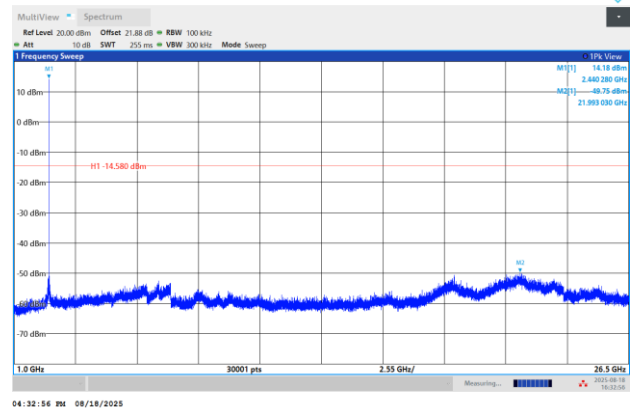




Channel 25


100kHz PSD reference Level Plot

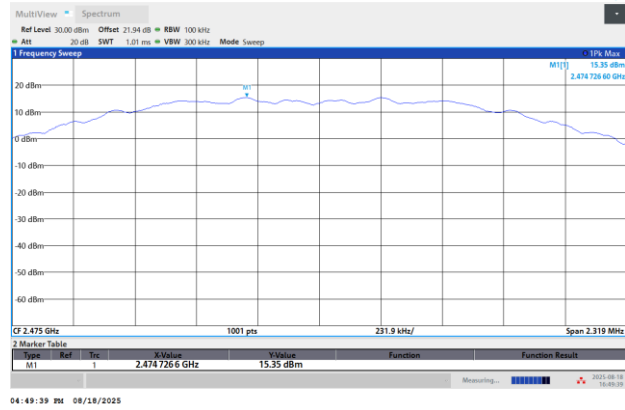


Low Channel Plot

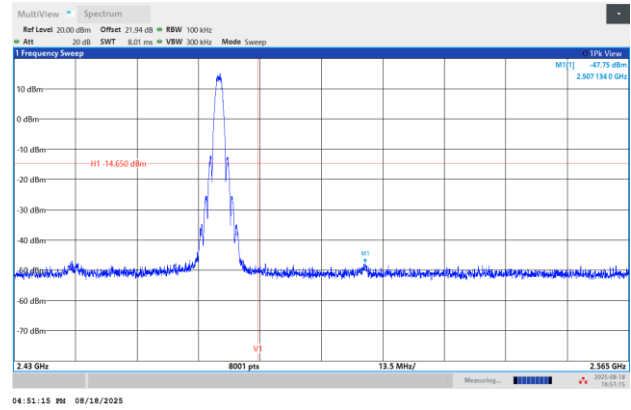

Spurious Emission 30MHz~1GHz Plot

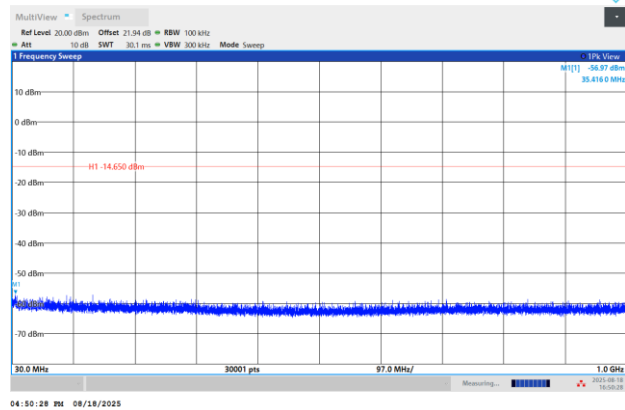


Spurious Emission 1GHz~26.5GHz Plot

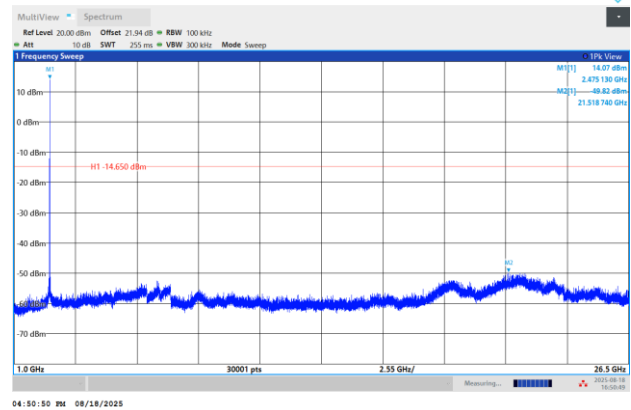




Channel 26


100kHz PSD reference Level Plot

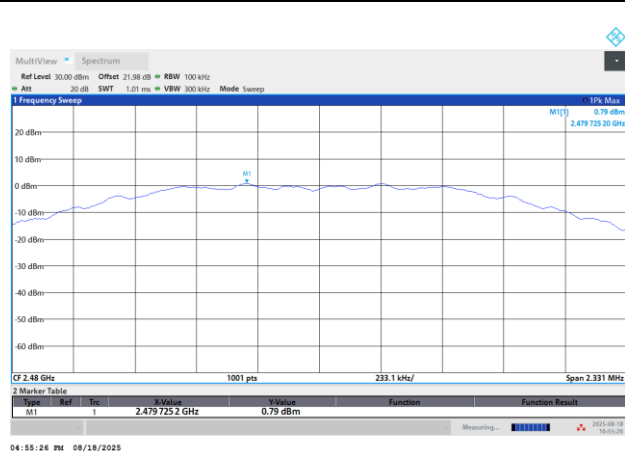


Low Channel Plot

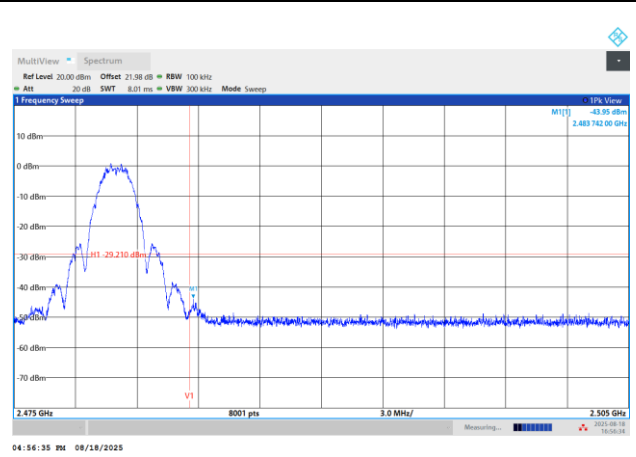

Spurious Emission 30MHz~1GHz Plot

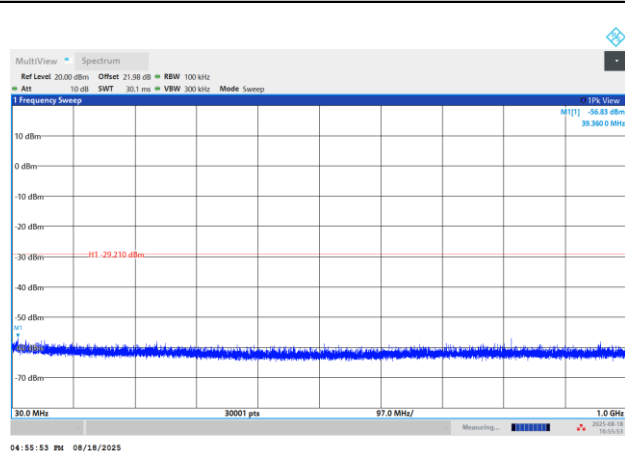

Spurious Emission 1GHz~26.5GHz Plot

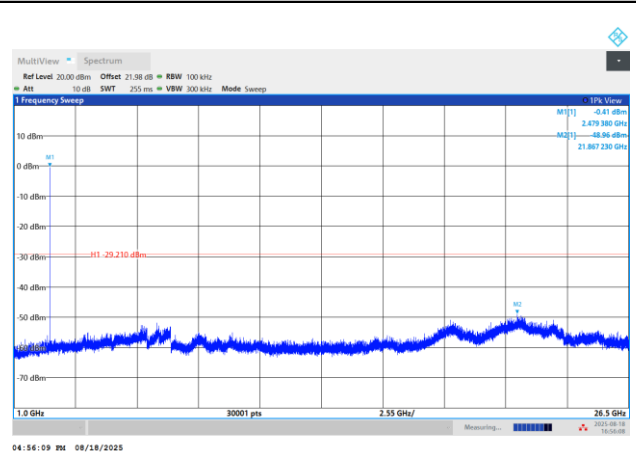




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Brian Chen	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 562407
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

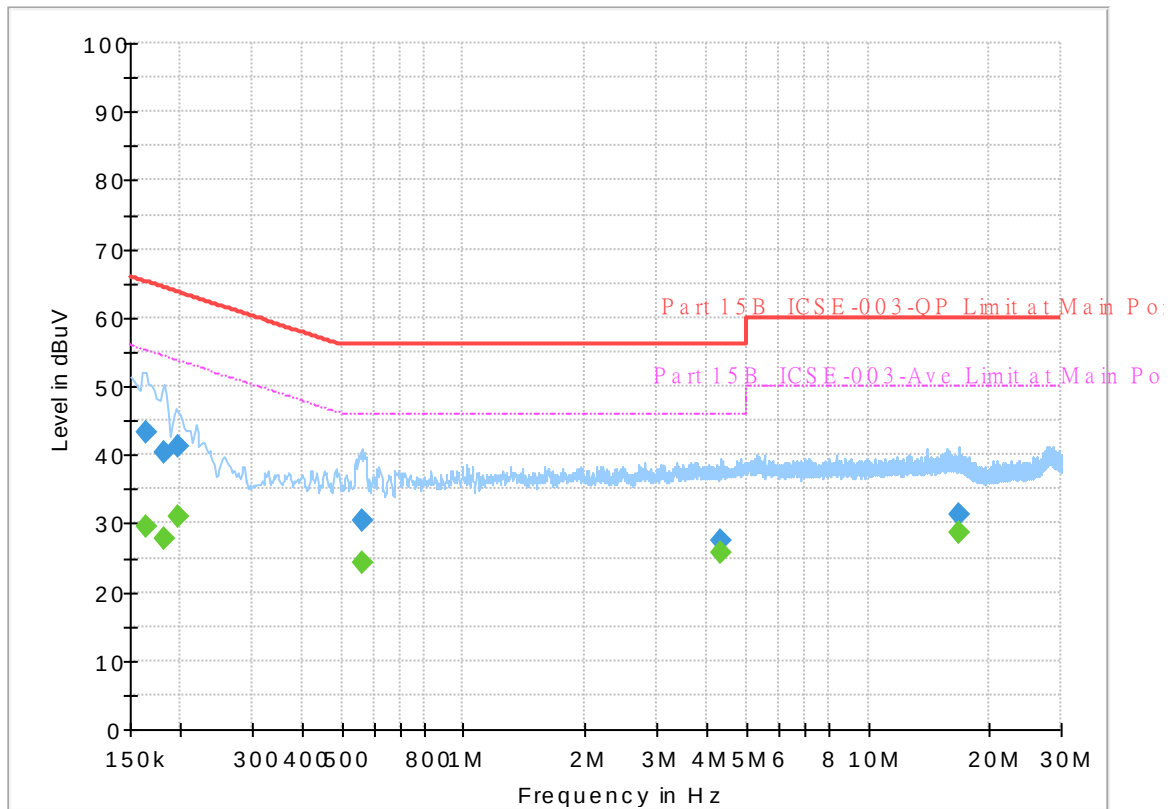


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.163500	---	29.40	55.28	25.88	L1	OFF	19.8
0.163500	43.14	---	65.28	22.14	L1	OFF	19.8
0.181500	---	27.65	54.42	26.77	L1	OFF	19.8
0.181500	40.47	---	64.42	23.95	L1	OFF	19.8
0.197250	---	31.09	53.73	22.64	L1	OFF	19.8
0.197250	41.12	---	63.73	22.61	L1	OFF	19.8
0.559500	---	24.26	46.00	21.74	L1	OFF	19.9
0.559500	30.41	---	56.00	25.59	L1	OFF	19.9
4.310250	---	25.68	46.00	20.32	L1	OFF	20.0
4.310250	27.37	---	56.00	28.63	L1	OFF	20.0
16.815750	---	28.75	50.00	21.25	L1	OFF	20.5
16.815750	31.30	---	60.00	28.70	L1	OFF	20.5

EUT Information

Report NO : 562407
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

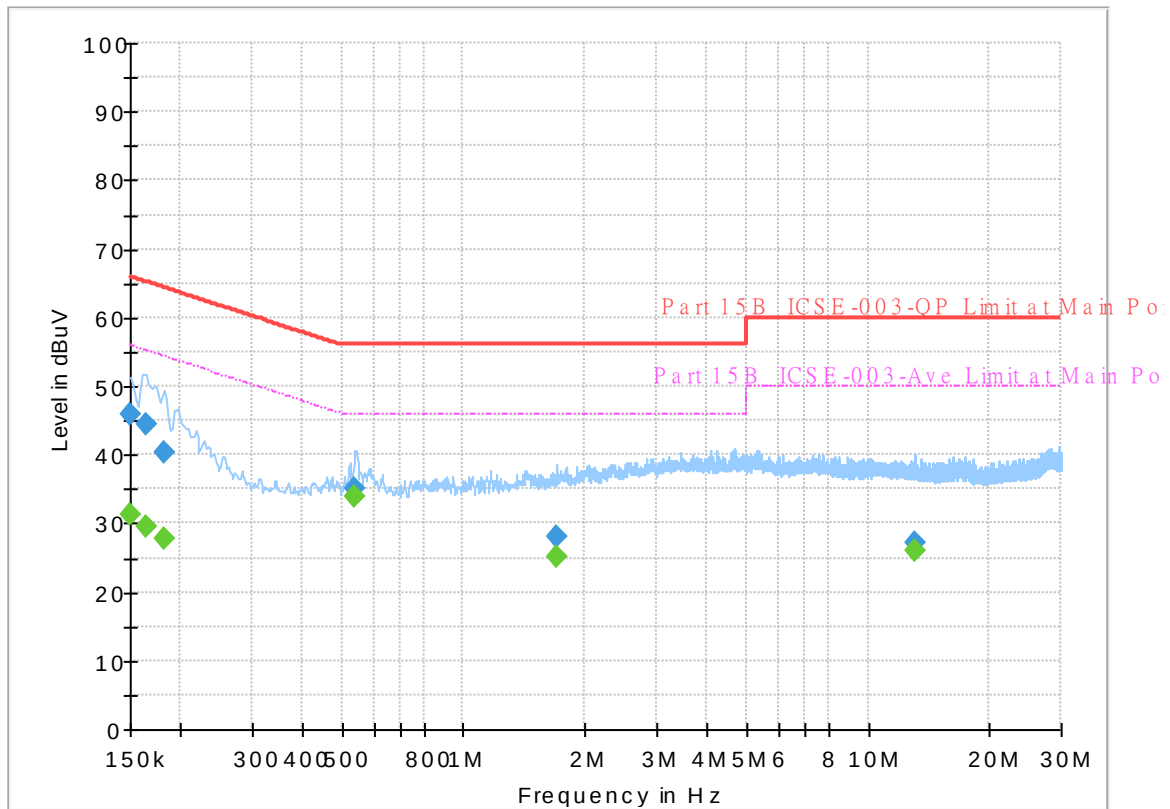

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	31.30	56.00	24.70	N	OFF	19.8
0.150000	45.87	---	66.00	20.13	N	OFF	19.8
0.163500	---	29.64	55.28	25.64	N	OFF	19.8
0.163500	44.34	---	65.28	20.94	N	OFF	19.8
0.181500	---	27.79	54.42	26.63	N	OFF	19.8
0.181500	40.42	---	64.42	24.00	N	OFF	19.8
0.539250	---	33.85	46.00	12.15	N	OFF	19.8
0.539250	35.22	---	56.00	20.78	N	OFF	19.8
1.698000	---	25.19	46.00	20.81	N	OFF	19.9
1.698000	27.98	---	56.00	28.02	N	OFF	19.9
13.047000	---	25.89	50.00	24.11	N	OFF	20.6
13.047000	27.27	---	60.00	32.73	N	OFF	20.6



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Daniel Lee, Fu Chen and Troye Hsieh	Temperature :	19.1~20.9°C
		Relative Humidity :	51.4~66.5%

Note symbol

-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	3	IEEE 802.15.4_O-QPSK	11	2405	250kbps	-	-
Mode 2	2400-2483.5	3	IEEE 802.15.4_O-QPSK	18	2440	250kbps	-	-
Mode 3	2400-2483.5	3	IEEE 802.15.4_O-QPSK	25	2475	250kbps	-	-
Mode 4	2400-2483.5	3	IEEE 802.15.4_O-QPSK	26	2480	250kbps	-	-
Mode 5	2400-2483.5	3	IEEE 802.15.4_O-QPSK	11	2405	250kbps	-	SHF
Mode 6	2400-2483.5	3	IEEE 802.15.4_O-QPSK	11	2405	250kbps	-	LF

C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	IEEE 802.15.4_O-QPSK	11	2372.99	46.17	54.00	-7.83	V	Avg.	Pass	-	Band Edge
	IEEE 802.15.4_O-QPSK	11	12025.00	50.52	54.00	-3.48	V	Avg.	Pass	-	Harmonic
2	IEEE 802.15.4_O-QPSK	18	2376.04	44.94	54.00	-9.06	V	Avg.	Pass	-	Band Edge
	IEEE 802.15.4_O-QPSK	18	12200.00	49.82	54.00	-4.18	V	Avg.	Pass	-	Harmonic
3	IEEE 802.15.4_O-QPSK	25	2483.53	45.17	54.00	-8.83	V	Avg.	Pass	-	Band Edge
	IEEE 802.15.4_O-QPSK	25	12375.00	49.08	54.00	-4.92	V	Avg.	Pass	-	Harmonic
4	IEEE 802.15.4_O-QPSK	26	2483.52	52.22	54.00	-1.78	V	Avg.	Pass	-	Band Edge
	IEEE 802.15.4_O-QPSK	26	-	-	-	-	-	-	-	-	Harmonic
5	IEEE 802.15.4_O-QPSK	11	24050.00	44.97	54.00	-9.03	H	Avg.	Pass	-	SHF
6	IEEE 802.15.4_O-QPSK	11	30.00	33.41	40.00	-6.59	V	Peak	Pass	-	LF



Mode	1																																																																																																																																																																																																																								
	Band Edge																																																																																																																																																																																																																								
	2400-2483.5_IEEE 802.15.4_O-QPSK_CH11_2405MHz																																																																																																																																																																																																																								
ANT	3																																																																																																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																																																																																																		
Peak	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: PEAK_BE_74_3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Peak</th></tr><tr><td>1</td><td>2372.70</td><td>55.74</td><td>74.00</td><td>-18.26</td><td>44.97</td><td>27.20</td><td>6.77</td><td>33.22</td><td>10.02</td><td>100</td><td>25 Peak</td></tr></table> Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: PEAK_74_3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Peak</th></tr><tr><td>1</td><td>2405.00</td><td>115.60</td><td>-----</td><td>-----</td><td>104.54</td><td>27.40</td><td>6.82</td><td>33.19</td><td>10.03</td><td>100</td><td>25 Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Peak	1	2372.70	55.74	74.00	-18.26	44.97	27.20	6.77	33.22	10.02	100	25 Peak		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Peak	1	2405.00	115.60	-----	-----	104.54	27.40	6.82	33.19	10.03	100	25 Peak	Avg	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_BE_54_3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Average</th></tr><tr><td>1</td><td>2372.99</td><td>44.57</td><td>54.00</td><td>-9.43</td><td>33.79</td><td>27.20</td><td>6.78</td><td>33.22</td><td>10.02</td><td>100</td><td>25 Average</td></tr></table> Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_54_3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 1 Setting : 20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Average</th></tr><tr><td>1</td><td>2405.00</td><td>113.90</td><td>-----</td><td>-----</td><td>102.84</td><td>27.40</td><td>6.82</td><td>33.19</td><td>10.03</td><td>100</td><td>25 Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Average	1	2372.99	44.57	54.00	-9.43	33.79	27.20	6.78	33.22	10.02	100	25 Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Average	1	2405.00	113.90	-----	-----	102.84	27.40	6.82	33.19	10.03	100	25 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark																																																																																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Peak																																																																																																																																																																																																														
1	2372.70	55.74	74.00	-18.26	44.97	27.20	6.77	33.22	10.02	100	25 Peak																																																																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark																																																																																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Peak																																																																																																																																																																																																														
1	2405.00	115.60	-----	-----	104.54	27.40	6.82	33.19	10.03	100	25 Peak																																																																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark																																																																																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Average																																																																																																																																																																																																														
1	2372.99	44.57	54.00	-9.43	33.79	27.20	6.78	33.22	10.02	100	25 Average																																																																																																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark																																																																																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Average																																																																																																																																																																																																														
1	2405.00	113.90	-----	-----	102.84	27.40	6.82	33.19	10.03	100	25 Average																																																																																																																																																																																																														



Mode	1																																																																																							
	Band Edge																																																																																							
	2400-2483.5_IEEE 802.15.4_O-QPSK_CH11_2405MHz																																																																																							
ANT	3																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: PEAK_BE_74_3m 91200_01620_240828 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector: PEAK Mode : 1 Setting : 20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2373.18</td><td>56.23</td><td>74.00</td><td>-17.77</td><td>45.45</td><td>27.20</td><td>6.78</td><td>33.22</td><td>10.02</td><td>100</td><td>13 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2373.18	56.23	74.00	-17.77	45.45	27.20	6.78	33.22	10.02	100	13 Peak	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: PEAK_74_3m 91200_01620_240828 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector: PEAK Mode : 1 Setting : 20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2405.00</td><td>118.24</td><td>-----</td><td>-----</td><td>107.18</td><td>27.40</td><td>6.82</td><td>33.19</td><td>10.03</td><td>100</td><td>13 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	118.24	-----	-----	107.18	27.40	6.82	33.19	10.03	100	13 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2373.18	56.23	74.00	-17.77	45.45	27.20	6.78	33.22	10.02	100	13 Peak																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2405.00	118.24	-----	-----	107.18	27.40	6.82	33.19	10.03	100	13 Peak																																																																													
Avg	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_BE_54_3m 91200_01620_240828 VERTICAL RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector: PEAK Mode : 1 Setting : 20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2372.99</td><td>46.17</td><td>54.00</td><td>-7.83</td><td>35.39</td><td>27.20</td><td>6.78</td><td>33.22</td><td>10.02</td><td>100</td><td>13 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2372.99	46.17	54.00	-7.83	35.39	27.20	6.78	33.22	10.02	100	13 Average	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_54_3m 91200_01620_240828 VERTICAL RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector: PEAK Mode : 1 Setting : 20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2405.00</td><td>116.55</td><td>-----</td><td>-----</td><td>105.49</td><td>27.40</td><td>6.82</td><td>33.19</td><td>10.03</td><td>100</td><td>13 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	116.55	-----	-----	105.49	27.40	6.82	33.19	10.03	100	13 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2372.99	46.17	54.00	-7.83	35.39	27.20	6.78	33.22	10.02	100	13 Average																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	2405.00	116.55	-----	-----	105.49	27.40	6.82	33.19	10.03	100	13 Average																																																																													



Mode	1																																																																																																																																																																																																																													
	Harmonic																																																																																																																																																																																																																													
	2400-2483.5_IEEE 802.15.4_O-QPSK_CH11_2405MHz																																																																																																																																																																																																																													
ANT	3																																																																																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																																																																																												
Peak Avg	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 1 Setting : 20 : The unwanted signal "7215,9620,14430,16835 MHz" can be ignored since it falls within : the non-restricted band and meet the requirements of 15.247 (d). <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4810.00</td><td>51.09</td><td>74.00</td><td>-22.91</td><td>74.62</td><td>32.36</td><td>10.36</td><td>66.75</td><td>0.50</td><td>400 59 Peak</td></tr><tr><td>2 4818.00</td><td>44.03</td><td>54.00</td><td>-9.97</td><td>67.56</td><td>32.36</td><td>10.36</td><td>66.75</td><td>0.50</td><td>400 59 Average</td></tr><tr><td>3 7215.00</td><td>45.28</td><td>74.00</td><td>-28.72</td><td>60.14</td><td>36.80</td><td>13.65</td><td>65.66</td><td>0.35</td><td>-- -- Peak</td></tr><tr><td>4 9620.00</td><td>49.09</td><td>74.00</td><td>-24.91</td><td>62.09</td><td>38.12</td><td>15.75</td><td>67.35</td><td>0.48</td><td>-- -- Peak</td></tr><tr><td>5 12025.00</td><td>54.61</td><td>74.00</td><td>-19.39</td><td>63.38</td><td>38.85</td><td>17.95</td><td>65.90</td><td>0.33</td><td>314 331 Peak</td></tr><tr><td>6 12025.00</td><td>48.28</td><td>54.00</td><td>-5.72</td><td>57.05</td><td>38.85</td><td>17.95</td><td>65.90</td><td>0.33</td><td>314 331 Average</td></tr><tr><td>7 14430.00</td><td>51.76</td><td>74.00</td><td>-22.24</td><td>57.01</td><td>40.20</td><td>19.99</td><td>65.97</td><td>0.53</td><td>-- -- Peak</td></tr><tr><td>8 16835.00</td><td>53.21</td><td>74.00</td><td>-20.79</td><td>59.34</td><td>38.11</td><td>21.39</td><td>66.20</td><td>0.57</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 4810.00	51.09	74.00	-22.91	74.62	32.36	10.36	66.75	0.50	400 59 Peak	2 4818.00	44.03	54.00	-9.97	67.56	32.36	10.36	66.75	0.50	400 59 Average	3 7215.00	45.28	74.00	-28.72	60.14	36.80	13.65	65.66	0.35	-- -- Peak	4 9620.00	49.09	74.00	-24.91	62.09	38.12	15.75	67.35	0.48	-- -- Peak	5 12025.00	54.61	74.00	-19.39	63.38	38.85	17.95	65.90	0.33	314 331 Peak	6 12025.00	48.28	54.00	-5.72	57.05	38.85	17.95	65.90	0.33	314 331 Average	7 14430.00	51.76	74.00	-22.24	57.01	40.20	19.99	65.97	0.53	-- -- Peak	8 16835.00	53.21	74.00	-20.79	59.34	38.11	21.39	66.20	0.57	-- -- Peak	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 1 Setting : 20 : The unwanted signal "7215,9620,14430,16835 MHz" can be ignored since it falls within : the non-restricted band and meet the requirements of 15.247 (d). <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4810.00</td><td>51.10</td><td>74.00</td><td>-22.90</td><td>74.63</td><td>32.36</td><td>10.36</td><td>66.75</td><td>0.50</td><td>355 0 Peak</td></tr><tr><td>2 4818.00</td><td>44.19</td><td>54.00</td><td>-9.81</td><td>67.72</td><td>32.36</td><td>10.36</td><td>66.75</td><td>0.50</td><td>355 0 Average</td></tr><tr><td>3 7215.00</td><td>44.77</td><td>74.00</td><td>-29.23</td><td>59.63</td><td>36.80</td><td>13.65</td><td>65.66</td><td>0.35</td><td>-- -- Peak</td></tr><tr><td>4 9620.00</td><td>51.22</td><td>74.00</td><td>-22.78</td><td>64.22</td><td>38.12</td><td>15.75</td><td>67.35</td><td>0.48</td><td>-- -- Peak</td></tr><tr><td>5 12025.00</td><td>56.46</td><td>74.00</td><td>-17.54</td><td>65.23</td><td>38.85</td><td>17.95</td><td>65.90</td><td>0.33</td><td>191 332 Peak</td></tr><tr><td>6 12025.00</td><td>50.52</td><td>54.00</td><td>-3.48</td><td>59.29</td><td>38.85</td><td>17.95</td><td>65.90</td><td>0.33</td><td>191 332 Average</td></tr><tr><td>7 14430.00</td><td>53.02</td><td>74.00</td><td>-20.98</td><td>58.27</td><td>40.20</td><td>19.99</td><td>65.97</td><td>0.53</td><td>-- -- Peak</td></tr><tr><td>8 16835.00</td><td>54.94</td><td>74.00</td><td>-19.06</td><td>61.07</td><td>38.11</td><td>21.39</td><td>66.20</td><td>0.57</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 4810.00	51.10	74.00	-22.90	74.63	32.36	10.36	66.75	0.50	355 0 Peak	2 4818.00	44.19	54.00	-9.81	67.72	32.36	10.36	66.75	0.50	355 0 Average	3 7215.00	44.77	74.00	-29.23	59.63	36.80	13.65	65.66	0.35	-- -- Peak	4 9620.00	51.22	74.00	-22.78	64.22	38.12	15.75	67.35	0.48	-- -- Peak	5 12025.00	56.46	74.00	-17.54	65.23	38.85	17.95	65.90	0.33	191 332 Peak	6 12025.00	50.52	54.00	-3.48	59.29	38.85	17.95	65.90	0.33	191 332 Average	7 14430.00	53.02	74.00	-20.98	58.27	40.20	19.99	65.97	0.53	-- -- Peak	8 16835.00	54.94	74.00	-19.06	61.07	38.11	21.39	66.20	0.57	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																					
1 4810.00	51.09	74.00	-22.91	74.62	32.36	10.36	66.75	0.50	400 59 Peak																																																																																																																																																																																																																					
2 4818.00	44.03	54.00	-9.97	67.56	32.36	10.36	66.75	0.50	400 59 Average																																																																																																																																																																																																																					
3 7215.00	45.28	74.00	-28.72	60.14	36.80	13.65	65.66	0.35	-- -- Peak																																																																																																																																																																																																																					
4 9620.00	49.09	74.00	-24.91	62.09	38.12	15.75	67.35	0.48	-- -- Peak																																																																																																																																																																																																																					
5 12025.00	54.61	74.00	-19.39	63.38	38.85	17.95	65.90	0.33	314 331 Peak																																																																																																																																																																																																																					
6 12025.00	48.28	54.00	-5.72	57.05	38.85	17.95	65.90	0.33	314 331 Average																																																																																																																																																																																																																					
7 14430.00	51.76	74.00	-22.24	57.01	40.20	19.99	65.97	0.53	-- -- Peak																																																																																																																																																																																																																					
8 16835.00	53.21	74.00	-20.79	59.34	38.11	21.39	66.20	0.57	-- -- Peak																																																																																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																					
1 4810.00	51.10	74.00	-22.90	74.63	32.36	10.36	66.75	0.50	355 0 Peak																																																																																																																																																																																																																					
2 4818.00	44.19	54.00	-9.81	67.72	32.36	10.36	66.75	0.50	355 0 Average																																																																																																																																																																																																																					
3 7215.00	44.77	74.00	-29.23	59.63	36.80	13.65	65.66	0.35	-- -- Peak																																																																																																																																																																																																																					
4 9620.00	51.22	74.00	-22.78	64.22	38.12	15.75	67.35	0.48	-- -- Peak																																																																																																																																																																																																																					
5 12025.00	56.46	74.00	-17.54	65.23	38.85	17.95	65.90	0.33	191 332 Peak																																																																																																																																																																																																																					
6 12025.00	50.52	54.00	-3.48	59.29	38.85	17.95	65.90	0.33	191 332 Average																																																																																																																																																																																																																					
7 14430.00	53.02	74.00	-20.98	58.27	40.20	19.99	65.97	0.53	-- -- Peak																																																																																																																																																																																																																					
8 16835.00	54.94	74.00	-19.06	61.07	38.11	21.39	66.20	0.57	-- -- Peak																																																																																																																																																																																																																					

Remark: The unwanted signal 7215.000MHz 、 9620.000MHz 、 14430.000MHz 、 16835.000MHz 、 7215.000MHz 、 9620.000MHz 、 14430.000MHz 、 16835.000MHz can be ignored since it falls within the non-restricted band and meet the requirements of 15.247 (d).





Mode	1	
	Harmonic	
	2400-2483.5_IEEE 802.15.4_O-QPSK_CH11_2405MHz	
ANT	3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 1 Setting : 20	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 1 Setting : 20
	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 1 Setting : 20	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 1 Setting : 20



Mode	2																																																																																					
	Band Edge - L																																																																																					
	2400-2483.5_IEEE 802.15.4_O-QPSK_CH18_2440MHz																																																																																					
ANT	3																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: PEAK_BE_74_3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 18 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.83</td><td>54.08</td><td>74.00</td><td>-19.92</td><td>43.18</td><td>27.27</td><td>6.80</td><td>33.20</td><td>10.03</td><td>25 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.83	54.08	74.00	-19.92	43.18	27.27	6.80	33.20	10.03	25 Peak	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: PEAK_74_3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 18 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>114.67</td><td>-----</td><td>-----</td><td>103.36</td><td>27.60</td><td>6.84</td><td>33.16</td><td>10.03</td><td>25 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	114.67	-----	-----	103.36	27.60	6.84	33.16	10.03	25 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2386.83	54.08	74.00	-19.92	43.18	27.27	6.80	33.20	10.03	25 Peak																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2440.00	114.67	-----	-----	103.36	27.60	6.84	33.16	10.03	25 Peak																																																																												
Avg	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_BE_54_3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 18 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2376.04</td><td>43.95</td><td>54.00</td><td>-10.05</td><td>33.16</td><td>27.20</td><td>6.78</td><td>33.21</td><td>10.02</td><td>25 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2376.04	43.95	54.00	-10.05	33.16	27.20	6.78	33.21	10.02	25 Average	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_54_3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector : PEAK Mode : 2 Setting : 18 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>113.01</td><td>-----</td><td>-----</td><td>101.70</td><td>27.60</td><td>6.84</td><td>33.16</td><td>10.03</td><td>25 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	113.01	-----	-----	101.70	27.60	6.84	33.16	10.03	25 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2376.04	43.95	54.00	-10.05	33.16	27.20	6.78	33.21	10.02	25 Average																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2440.00	113.01	-----	-----	101.70	27.60	6.84	33.16	10.03	25 Average																																																																												

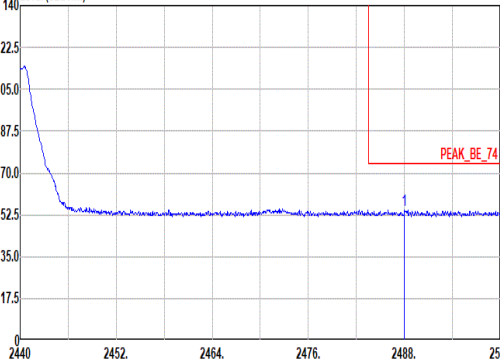
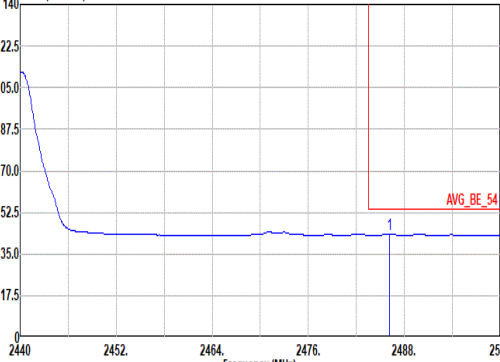


Mode	2																																											
	Band Edge - R																																											
	2400-2483.5_IEEE 802.15.4_O-QPSK_CH18_2440MHz																																											
ANT	3																																											
Pol.	Horizontal	Fundamental																																										
Peak	Date: 2025-07-27  Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : PEAK Mode : 2 Setting : 18 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2488.00</td><td>54.66</td><td>74.00</td><td>-19.34</td><td></td><td>42.99</td><td>27.88</td><td>6.87</td><td>33.11</td><td>10.03</td><td>106</td><td>25</td><td>Peak</td></tr></table> <td>Blank</td>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	2488.00	54.66	74.00	-19.34		42.99	27.88	6.87	33.11	10.03	106	25	Peak	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																
1	2488.00	54.66	74.00	-19.34		42.99	27.88	6.87	33.11	10.03	106	25	Peak																															
Avg	Date: 2025-07-27  Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : PEAK Mode : 2 Setting : 18 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2486.14</td><td>43.37</td><td>54.00</td><td>-10.63</td><td></td><td>31.72</td><td>27.86</td><td>6.87</td><td>33.11</td><td>10.03</td><td>106</td><td>25</td><td>Average</td></tr></table> <td>Blank</td>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	2486.14	43.37	54.00	-10.63		31.72	27.86	6.87	33.11	10.03	106	25	Average	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																
1	2486.14	43.37	54.00	-10.63		31.72	27.86	6.87	33.11	10.03	106	25	Average																															



Mode	2											
	Band Edge - L											
	2400-2483.5_IEEE 802.15.4_O-QPSK_CH18_2440MHz											
ANT	3											
Pol.	Vertical						Fundamental					
Peak	</											

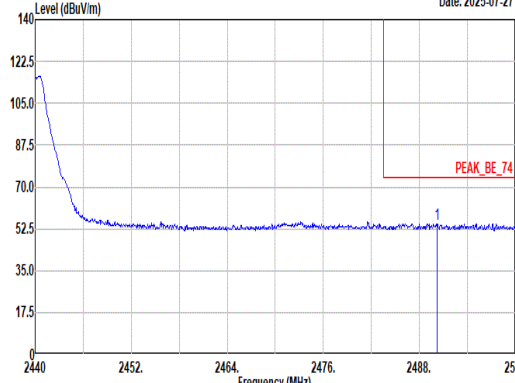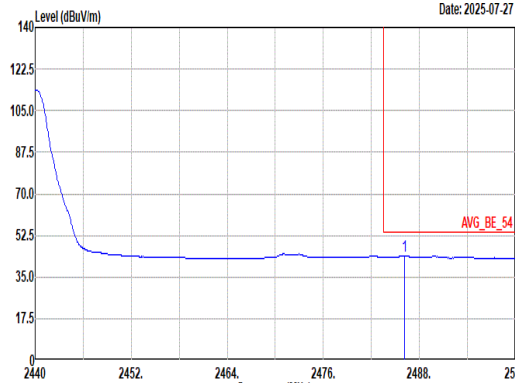

Mode	2																																											
	Band Edge - R																																											
	2400-2483.5_ IEEE 802.15.4_O-QPSK_CH18_2440MHz																																											
ANT	3																																											
Pol.	Vertical	Fundamental																																										
Peak	Date: 2025-07-27  Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : PEAK Mode : 2 Setting : 18 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.22</td><td>54.64</td><td>74.00</td><td>-19.36</td><td></td><td>42.95</td><td>27.90</td><td>6.87</td><td>33.11</td><td>10.03</td><td>112</td><td>15</td><td>Peak</td></tr></table> <td>Blank</td>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2490.22	54.64	74.00	-19.36		42.95	27.90	6.87	33.11	10.03	112	15	Peak	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																															
1	2490.22	54.64	74.00	-19.36		42.95	27.90	6.87	33.11	10.03	112	15	Peak																															
Avg	Date: 2025-07-27  Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : PEAK Mode : 2 Setting : 18 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.14</td><td>43.80</td><td>54.00</td><td>-10.20</td><td></td><td>32.15</td><td>27.86</td><td>6.87</td><td>33.11</td><td>10.03</td><td>112</td><td>15</td><td>Average</td></tr></table> <td>Blank</td>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2486.14	43.80	54.00	-10.20		32.15	27.86	6.87	33.11	10.03	112	15	Average	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																															
1	2486.14	43.80	54.00	-10.20		32.15	27.86	6.87	33.11	10.03	112	15	Average																															



Mode	2	
	Harmonic	
	2400-2483.5_IEEE 802.15.4_O-QPSK_CH18_2440MHz	
ANT	3	
Pol.	Horizontal	Vertical
Peak		

Remark: The unwanted signal 9760.000MHz 、14640.000MHz can be ignored since it falls within the non-restricted band and meet the requirements of 15.247 (d).



Mode	2	
	Harmonic	
	2400-2483.5_IEEE 802.15.4_O-QPSK_CH18_2440MHz	
ANT	3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 2 Setting : 18	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 2 Setting : 18
	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 2 Setting : 18	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 2 Setting : 18



Mode	3																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_IEEE 802.15.4_O-QPSK_CH25_2475MHz																																																																																																	
ANT	3																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector: PEAK Mode : 3 Setting : 18 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.08</td><td>55.59</td><td>74.00</td><td>-18.41</td><td>43.92</td><td>27.88</td><td>6.87</td><td>33.11</td><td>10.03</td><td>132</td><td>27 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.08	55.59	74.00	-18.41	43.92	27.88	6.87	33.11	10.03	132	27 Peak	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector: PEAK Mode : 3 Setting : 18 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2475.00</td><td>114.23</td><td>-----</td><td>-----</td><td>102.69</td><td>27.76</td><td>6.87</td><td>33.12</td><td>10.03</td><td>132</td><td>27 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	114.23	-----	-----	102.69	27.76	6.87	33.12	10.03	132	27 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2488.08	55.59	74.00	-18.41	43.92	27.88	6.87	33.11	10.03	132	27 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2475.00	114.23	-----	-----	102.69	27.76	6.87	33.12	10.03	132	27 Peak																																																																																							
Avg	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector: PEAK Mode : 3 Setting : 18 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.53</td><td>44.05</td><td>54.00</td><td>-9.95</td><td>32.43</td><td>27.84</td><td>6.87</td><td>33.12</td><td>10.03</td><td>132</td><td>27 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.53	44.05	54.00	-9.95	32.43	27.84	6.87	33.12	10.03	132	27 Average	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL RBW:1000.000kHz VBW:0.010kHz SMT:Auto Detector: PEAK Mode : 3 Setting : 18 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2475.00</td><td>112.57</td><td>-----</td><td>-----</td><td>101.03</td><td>27.76</td><td>6.87</td><td>33.12</td><td>10.03</td><td>132</td><td>27 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2475.00	112.57	-----	-----	101.03	27.76	6.87	33.12	10.03	132	27 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.53	44.05	54.00	-9.95	32.43	27.84	6.87	33.12	10.03	132	27 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2475.00	112.57	-----	-----	101.03	27.76	6.87	33.12	10.03	132	27 Average																																																																																							



Mode	3																																																																																																											
	Band Edge																																																																																																											
	2400-2483.5_IEEE 802.15.4_O-QPSK_CH25_2475MHz																																																																																																											
ANT	3																																																																																																											
Pol.	Vertical						Fundamental																																																																																																					
Peak	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 3 Setting : 18 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.93</td><td>56.15</td><td>74.00</td><td>-17.85</td><td>44.52</td><td>27.84</td><td>6.87</td><td>33.11</td><td>10.03</td><td>123</td><td>15 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.93	56.15	74.00	-17.85	44.52	27.84	6.87	33.11	10.03	123	15 Peak	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector: PEAK Mode : 3 Setting : 18 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2475.00</td><td>116.79</td><td>-----</td><td>-----</td><td>105.25</td><td>27.76</td><td>6.87</td><td>33.12</td><td>10.03</td><td>123</td><td>15 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2475.00	116.79	-----	-----	105.25	27.76	6.87	33.12	10.03	123	15 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2483.93	56.15	74.00	-17.85	44.52	27.84	6.87	33.11	10.03	123	15 Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2475.00	116.79	-----	-----	105.25	27.76	6.87	33.12	10.03	123	15 Peak																																																																																																	
Avg	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector: PEAK Mode : 3 Setting : 18 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.53</td><td>45.17</td><td>54.00</td><td>-8.83</td><td>33.55</td><td>27.84</td><td>6.87</td><td>33.12</td><td>10.03</td><td>123</td><td>15 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2483.53	45.17	54.00	-8.83	33.55	27.84	6.87	33.12	10.03	123	15 Average	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector: PEAK Mode : 3 Setting : 18 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2475.00</td><td>115.18</td><td>-----</td><td>-----</td><td>103.64</td><td>27.76</td><td>6.87</td><td>33.12</td><td>10.03</td><td>123</td><td>15 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2475.00	115.18	-----	-----	103.64	27.76	6.87	33.12	10.03	123	15 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2483.53	45.17	54.00	-8.83	33.55	27.84	6.87	33.12	10.03	123	15 Average																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	APos	TPos	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2475.00	115.18	-----	-----	103.64	27.76	6.87	33.12	10.03	123	15 Average																																																																																																	



Mode	3																																																																																																																																																																																																																													
	Harmonic																																																																																																																																																																																																																													
	2400-2483.5_IEEE 802.15.4_O-QPSK_CH25_2475MHz																																																																																																																																																																																																																													
ANT	3																																																																																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																																																																																												
Peak Avg	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 HORIZONTAL Mode : 3 Setting : 18 : The unwanted signal "9915,14850 MHz" can be ignored since it falls within : the non-restricted band and meet the requirements of 15.247 (d). <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4950.00</td><td>46.95</td><td>74.00</td><td>-27.05</td><td>69.05</td><td>33.00</td><td>10.97</td><td>66.64</td><td>0.57</td><td>400 54 Peak</td></tr><tr><td>2 4950.00</td><td>40.35</td><td>54.00</td><td>-13.65</td><td>62.45</td><td>33.00</td><td>10.97</td><td>66.64</td><td>0.57</td><td>400 54 Average</td></tr><tr><td>3 7425.00</td><td>50.53</td><td>74.00</td><td>-23.47</td><td>65.99</td><td>36.30</td><td>13.84</td><td>65.91</td><td>0.31</td><td>298 347 Peak</td></tr><tr><td>4 7425.00</td><td>43.45</td><td>54.00</td><td>-10.55</td><td>58.91</td><td>36.30</td><td>13.84</td><td>65.91</td><td>0.31</td><td>298 347 Average</td></tr><tr><td>5 9915.00</td><td>51.81</td><td>74.00</td><td>-22.19</td><td>64.75</td><td>38.07</td><td>16.13</td><td>67.47</td><td>0.33</td><td>200 21 Peak</td></tr><tr><td>6 12375.00</td><td>53.75</td><td>74.00</td><td>-20.25</td><td>62.16</td><td>38.90</td><td>18.30</td><td>65.97</td><td>0.36</td><td>347 334 Peak</td></tr><tr><td>7 12375.00</td><td>46.91</td><td>54.00</td><td>-7.09</td><td>55.32</td><td>38.90</td><td>18.30</td><td>65.97</td><td>0.36</td><td>347 334 Average</td></tr><tr><td>8 14850.00</td><td>53.69</td><td>74.00</td><td>-20.31</td><td>59.48</td><td>39.90</td><td>20.09</td><td>66.32</td><td>0.54</td><td>300 352 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	cm deg	1 4950.00	46.95	74.00	-27.05	69.05	33.00	10.97	66.64	0.57	400 54 Peak	2 4950.00	40.35	54.00	-13.65	62.45	33.00	10.97	66.64	0.57	400 54 Average	3 7425.00	50.53	74.00	-23.47	65.99	36.30	13.84	65.91	0.31	298 347 Peak	4 7425.00	43.45	54.00	-10.55	58.91	36.30	13.84	65.91	0.31	298 347 Average	5 9915.00	51.81	74.00	-22.19	64.75	38.07	16.13	67.47	0.33	200 21 Peak	6 12375.00	53.75	74.00	-20.25	62.16	38.90	18.30	65.97	0.36	347 334 Peak	7 12375.00	46.91	54.00	-7.09	55.32	38.90	18.30	65.97	0.36	347 334 Average	8 14850.00	53.69	74.00	-20.31	59.48	39.90	20.09	66.32	0.54	300 352 Peak	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: PEAK_74 3m 91280_01620_240828 VERTICAL Mode : 3 Setting : 18 : The unwanted signal "9915,14850 MHz" can be ignored since it falls within : the non-restricted band and meet the requirements of 15.247 (d). <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4950.00</td><td>46.45</td><td>74.00</td><td>-27.55</td><td>68.55</td><td>33.00</td><td>10.97</td><td>66.64</td><td>0.57</td><td>152 346 Peak</td></tr><tr><td>2 4950.00</td><td>40.01</td><td>54.00</td><td>-13.99</td><td>62.11</td><td>33.00</td><td>10.97</td><td>66.64</td><td>0.57</td><td>152 346 Average</td></tr><tr><td>3 7425.00</td><td>49.59</td><td>74.00</td><td>-24.41</td><td>65.05</td><td>36.30</td><td>13.84</td><td>65.91</td><td>0.31</td><td>398 0 Peak</td></tr><tr><td>4 7425.00</td><td>42.92</td><td>54.00</td><td>-11.08</td><td>58.38</td><td>36.30</td><td>13.84</td><td>65.91</td><td>0.31</td><td>398 0 Average</td></tr><tr><td>5 9915.00</td><td>52.07</td><td>74.00</td><td>-21.93</td><td>65.01</td><td>38.07</td><td>16.13</td><td>67.47</td><td>0.33</td><td>300 347 Peak</td></tr><tr><td>6 12375.00</td><td>55.38</td><td>74.00</td><td>-18.62</td><td>63.79</td><td>38.90</td><td>18.30</td><td>65.97</td><td>0.36</td><td>200 321 Peak</td></tr><tr><td>7 12375.00</td><td>49.08</td><td>54.00</td><td>-4.92</td><td>57.49</td><td>38.90</td><td>18.30</td><td>65.97</td><td>0.36</td><td>200 321 Average</td></tr><tr><td>8 14850.00</td><td>54.28</td><td>74.00</td><td>-19.72</td><td>60.07</td><td>39.90</td><td>20.09</td><td>66.32</td><td>0.54</td><td>100 22 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	cm deg	1 4950.00	46.45	74.00	-27.55	68.55	33.00	10.97	66.64	0.57	152 346 Peak	2 4950.00	40.01	54.00	-13.99	62.11	33.00	10.97	66.64	0.57	152 346 Average	3 7425.00	49.59	74.00	-24.41	65.05	36.30	13.84	65.91	0.31	398 0 Peak	4 7425.00	42.92	54.00	-11.08	58.38	36.30	13.84	65.91	0.31	398 0 Average	5 9915.00	52.07	74.00	-21.93	65.01	38.07	16.13	67.47	0.33	300 347 Peak	6 12375.00	55.38	74.00	-18.62	63.79	38.90	18.30	65.97	0.36	200 321 Peak	7 12375.00	49.08	54.00	-4.92	57.49	38.90	18.30	65.97	0.36	200 321 Average	8 14850.00	54.28	74.00	-19.72	60.07	39.90	20.09	66.32	0.54	100 22 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																																																					
1 4950.00	46.95	74.00	-27.05	69.05	33.00	10.97	66.64	0.57	400 54 Peak																																																																																																																																																																																																																					
2 4950.00	40.35	54.00	-13.65	62.45	33.00	10.97	66.64	0.57	400 54 Average																																																																																																																																																																																																																					
3 7425.00	50.53	74.00	-23.47	65.99	36.30	13.84	65.91	0.31	298 347 Peak																																																																																																																																																																																																																					
4 7425.00	43.45	54.00	-10.55	58.91	36.30	13.84	65.91	0.31	298 347 Average																																																																																																																																																																																																																					
5 9915.00	51.81	74.00	-22.19	64.75	38.07	16.13	67.47	0.33	200 21 Peak																																																																																																																																																																																																																					
6 12375.00	53.75	74.00	-20.25	62.16	38.90	18.30	65.97	0.36	347 334 Peak																																																																																																																																																																																																																					
7 12375.00	46.91	54.00	-7.09	55.32	38.90	18.30	65.97	0.36	347 334 Average																																																																																																																																																																																																																					
8 14850.00	53.69	74.00	-20.31	59.48	39.90	20.09	66.32	0.54	300 352 Peak																																																																																																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																																																					
1 4950.00	46.45	74.00	-27.55	68.55	33.00	10.97	66.64	0.57	152 346 Peak																																																																																																																																																																																																																					
2 4950.00	40.01	54.00	-13.99	62.11	33.00	10.97	66.64	0.57	152 346 Average																																																																																																																																																																																																																					
3 7425.00	49.59	74.00	-24.41	65.05	36.30	13.84	65.91	0.31	398 0 Peak																																																																																																																																																																																																																					
4 7425.00	42.92	54.00	-11.08	58.38	36.30	13.84	65.91	0.31	398 0 Average																																																																																																																																																																																																																					
5 9915.00	52.07	74.00	-21.93	65.01	38.07	16.13	67.47	0.33	300 347 Peak																																																																																																																																																																																																																					
6 12375.00	55.38	74.00	-18.62	63.79	38.90	18.30	65.97	0.36	200 321 Peak																																																																																																																																																																																																																					
7 12375.00	49.08	54.00	-4.92	57.49	38.90	18.30	65.97	0.36	200 321 Average																																																																																																																																																																																																																					
8 14850.00	54.28	74.00	-19.72	60.07	39.90	20.09	66.32	0.54	100 22 Peak																																																																																																																																																																																																																					

Remark: The unwanted signal 9915.000MHz 、14850.000MHz can be ignored since it falls within the non-restricted band and meet the requirements of 15.247 (d).



Mode	3	
	Harmonic	
	2400-2483.5_IEEE 802.15.4_O-QPSK_CH25_2475MHz	
ANT	3	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 3 Setting : 18	Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 3 Setting : 18
	Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL Mode : 3 Setting : 18	Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL Mode : 3 Setting : 18



Mode	4																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_ IEEE 802.15.4_O-QPSK_CH26_2480MHz																																																																																																	
ANT	3																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector: PEAK Mode : 4 Setting : 4 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>59.32</td><td>74.00</td><td>-14.68</td><td>47.70</td><td>27.84</td><td>6.87</td><td>33.12</td><td>10.03</td><td>102</td><td>23 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	59.32	74.00	-14.68	47.70	27.84	6.87	33.12	10.03	102	23 Peak	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector: PEAK Mode : 4 Setting : 4 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>100.19</td><td>-----</td><td>-----</td><td>88.61</td><td>27.80</td><td>6.87</td><td>33.12</td><td>10.03</td><td>102</td><td>23 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	100.19	-----	-----	88.61	27.80	6.87	33.12	10.03	102	23 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.56	59.32	74.00	-14.68	47.70	27.84	6.87	33.12	10.03	102	23 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2480.00	100.19	-----	-----	88.61	27.80	6.87	33.12	10.03	102	23 Peak																																																																																							
Avg	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector: RMS Mode : 4 Setting : 4 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>49.79</td><td>54.00</td><td>-4.21</td><td>38.17</td><td>27.84</td><td>6.87</td><td>33.12</td><td>10.03</td><td>102</td><td>23 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	49.79	54.00	-4.21	38.17	27.84	6.87	33.12	10.03	102	23 Average	Level (dBuV/m) Date: 2025-07-27 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector: RMS Mode : 4 Setting : 4 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>95.11</td><td>-----</td><td>-----</td><td>83.53</td><td>27.80</td><td>6.87</td><td>33.12</td><td>10.03</td><td>102</td><td>23 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	95.11	-----	-----	83.53	27.80	6.87	33.12	10.03	102	23 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.52	49.79	54.00	-4.21	38.17	27.84	6.87	33.12	10.03	102	23 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2480.00	95.11	-----	-----	83.53	27.80	6.87	33.12	10.03	102	23 Average																																																																																							



Mode	4																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_IEEE 802.15.4_O-QPSK_CH26_2480MHz																																																																																																		
ANT	3																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak	Level (dBuV/m) Date: 2025-07-27 PEAK_BE_74 Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector: PEAK Mode : 4 Setting : 4 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>61.05</td><td>74.00</td><td>-12.95</td><td>49.43</td><td>27.84</td><td>6.87</td><td>33.12</td><td>10.03</td><td>118 14 Peak</td></tr></table> <td colspan="5"> Level (dBuV/m) Date: 2025-07-27 PEAK_74 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector: PEAK Mode : 4 Setting : 4 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>103.08</td><td>-----</td><td>-----</td><td>91.50</td><td>27.80</td><td>6.87</td><td>33.12</td><td>10.03</td><td>118 14 Peak</td></tr></table> </td>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	61.05	74.00	-12.95	49.43	27.84	6.87	33.12	10.03	118 14 Peak	Level (dBuV/m) Date: 2025-07-27 PEAK_74 Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector: PEAK Mode : 4 Setting : 4 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>103.08</td><td>-----</td><td>-----</td><td>91.50</td><td>27.80</td><td>6.87</td><td>33.12</td><td>10.03</td><td>118 14 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	103.08	-----	-----	91.50	27.80	6.87	33.12	10.03	118 14 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.52	61.05	74.00	-12.95	49.43	27.84	6.87	33.12	10.03	118 14 Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	103.08	-----	-----	91.50	27.80	6.87	33.12	10.03	118 14 Peak																																																																																									
Avg	Level (dBuV/m) Date: 2025-07-27 AVG_BE_54 Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector: RMS Mode : 4 Setting : 4 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>52.22</td><td>54.00</td><td>-1.78</td><td>40.60</td><td>27.84</td><td>6.87</td><td>33.12</td><td>10.03</td><td>118 14 Average</td></tr></table> <td colspan="5"> Level (dBuV/m) Date: 2025-07-27 AVG_54 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector: RMS Mode : 4 Setting : 4 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>98.21</td><td>-----</td><td>-----</td><td>86.63</td><td>27.80</td><td>6.87</td><td>33.12</td><td>10.03</td><td>118 14 Average</td></tr></table> </td>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	52.22	54.00	-1.78	40.60	27.84	6.87	33.12	10.03	118 14 Average	Level (dBuV/m) Date: 2025-07-27 AVG_54 Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector: RMS Mode : 4 Setting : 4 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>98.21</td><td>-----</td><td>-----</td><td>86.63</td><td>27.80</td><td>6.87</td><td>33.12</td><td>10.03</td><td>118 14 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	98.21	-----	-----	86.63	27.80	6.87	33.12	10.03	118 14 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.52	52.22	54.00	-1.78	40.60	27.84	6.87	33.12	10.03	118 14 Average																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	98.21	-----	-----	86.63	27.80	6.87	33.12	10.03	118 14 Average																																																																																									



Mode	5																																																																																																																																																																																																											
	SHF																																																																																																																																																																																																											
	2400-2483.5_IEEE 802.15.4_O-QPSK_CH11_2405MHz																																																																																																																																																																																																											
ANT	3																																																																																																																																																																																																											
Pol.	Horizontal					Vertical																																																																																																																																																																																																						
Peak	Level (dBuV/m) Date: 2025-08-08 Site : 03CH11-HY Condition: PEAK_74 1m SHF_00994_250109 HORIZONTAL Mode : 5 Setting : 20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 19240.00</td><td>46.01</td><td>74.00</td><td>-27.99</td><td>49.48</td><td>38.56</td><td>22.86</td><td>55.35</td><td>-9.54</td><td>150</td><td>0 Peak</td></tr><tr><td>2 19240.00</td><td>39.11</td><td>54.00</td><td>-14.89</td><td>42.58</td><td>38.56</td><td>22.86</td><td>55.35</td><td>-9.54</td><td>150</td><td>0 Average</td></tr><tr><td>3 21645.00</td><td>49.23</td><td>74.00</td><td>-24.77</td><td>50.42</td><td>38.70</td><td>24.59</td><td>54.94</td><td>-9.54</td><td>150</td><td>69 Peak</td></tr><tr><td>4 21645.00</td><td>42.83</td><td>54.00</td><td>-11.17</td><td>44.02</td><td>38.70</td><td>24.59</td><td>54.94</td><td>-9.54</td><td>150</td><td>69 Average</td></tr><tr><td>5 24050.00</td><td>50.69</td><td>74.00</td><td>-23.31</td><td>48.59</td><td>39.20</td><td>26.28</td><td>53.84</td><td>-9.54</td><td>150</td><td>293 Peak</td></tr><tr><td>6 24050.00</td><td>44.97</td><td>54.00</td><td>-9.03</td><td>42.87</td><td>39.20</td><td>26.28</td><td>53.84</td><td>-9.54</td><td>150</td><td>293 Average</td></tr></table> Level (dBuV/m) Date: 2025-08-08 Site : 03CH11-HY Condition: PEAK_74 1m SHF_00994_250109 VERTICAL Mode : 5 Setting : 20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 19240.00</td><td>42.92</td><td>74.00</td><td>-31.08</td><td>46.39</td><td>38.56</td><td>22.86</td><td>55.35</td><td>-9.54</td><td>150</td><td>58 Peak</td></tr><tr><td>2 19240.00</td><td>36.24</td><td>54.00</td><td>-17.76</td><td>39.71</td><td>38.56</td><td>22.86</td><td>55.35</td><td>-9.54</td><td>150</td><td>58 Average</td></tr><tr><td>3 21645.00</td><td>44.55</td><td>74.00</td><td>-29.45</td><td>45.74</td><td>38.70</td><td>24.59</td><td>54.94</td><td>-9.54</td><td>150</td><td>9 Peak</td></tr><tr><td>4 21645.00</td><td>37.51</td><td>54.00</td><td>-16.49</td><td>38.70</td><td>38.70</td><td>24.59</td><td>54.94</td><td>-9.54</td><td>150</td><td>9 Average</td></tr><tr><td>5 24050.00</td><td>48.50</td><td>74.00</td><td>-25.50</td><td>46.40</td><td>39.20</td><td>26.28</td><td>53.84</td><td>-9.54</td><td>150</td><td>340 Peak</td></tr><tr><td>6 24050.00</td><td>41.98</td><td>54.00</td><td>-12.02</td><td>39.88</td><td>39.20</td><td>26.28</td><td>53.84</td><td>-9.54</td><td>150</td><td>340 Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 19240.00	46.01	74.00	-27.99	49.48	38.56	22.86	55.35	-9.54	150	0 Peak	2 19240.00	39.11	54.00	-14.89	42.58	38.56	22.86	55.35	-9.54	150	0 Average	3 21645.00	49.23	74.00	-24.77	50.42	38.70	24.59	54.94	-9.54	150	69 Peak	4 21645.00	42.83	54.00	-11.17	44.02	38.70	24.59	54.94	-9.54	150	69 Average	5 24050.00	50.69	74.00	-23.31	48.59	39.20	26.28	53.84	-9.54	150	293 Peak	6 24050.00	44.97	54.00	-9.03	42.87	39.20	26.28	53.84	-9.54	150	293 Average		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 19240.00	42.92	74.00	-31.08	46.39	38.56	22.86	55.35	-9.54	150	58 Peak	2 19240.00	36.24	54.00	-17.76	39.71	38.56	22.86	55.35	-9.54	150	58 Average	3 21645.00	44.55	74.00	-29.45	45.74	38.70	24.59	54.94	-9.54	150	9 Peak	4 21645.00	37.51	54.00	-16.49	38.70	38.70	24.59	54.94	-9.54	150	9 Average	5 24050.00	48.50	74.00	-25.50	46.40	39.20	26.28	53.84	-9.54	150	340 Peak	6 24050.00	41.98	54.00	-12.02	39.88	39.20	26.28	53.84	-9.54	150	340 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																		
	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																		
1 19240.00	46.01	74.00	-27.99	49.48	38.56	22.86	55.35	-9.54	150	0 Peak																																																																																																																																																																																																		
2 19240.00	39.11	54.00	-14.89	42.58	38.56	22.86	55.35	-9.54	150	0 Average																																																																																																																																																																																																		
3 21645.00	49.23	74.00	-24.77	50.42	38.70	24.59	54.94	-9.54	150	69 Peak																																																																																																																																																																																																		
4 21645.00	42.83	54.00	-11.17	44.02	38.70	24.59	54.94	-9.54	150	69 Average																																																																																																																																																																																																		
5 24050.00	50.69	74.00	-23.31	48.59	39.20	26.28	53.84	-9.54	150	293 Peak																																																																																																																																																																																																		
6 24050.00	44.97	54.00	-9.03	42.87	39.20	26.28	53.84	-9.54	150	293 Average																																																																																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																		
1 19240.00	42.92	74.00	-31.08	46.39	38.56	22.86	55.35	-9.54	150	58 Peak																																																																																																																																																																																																		
2 19240.00	36.24	54.00	-17.76	39.71	38.56	22.86	55.35	-9.54	150	58 Average																																																																																																																																																																																																		
3 21645.00	44.55	74.00	-29.45	45.74	38.70	24.59	54.94	-9.54	150	9 Peak																																																																																																																																																																																																		
4 21645.00	37.51	54.00	-16.49	38.70	38.70	24.59	54.94	-9.54	150	9 Average																																																																																																																																																																																																		
5 24050.00	48.50	74.00	-25.50	46.40	39.20	26.28	53.84	-9.54	150	340 Peak																																																																																																																																																																																																		
6 24050.00	41.98	54.00	-12.02	39.88	39.20	26.28	53.84	-9.54	150	340 Average																																																																																																																																																																																																		




Mode	6																																																																																																																																																																																					
	LF																																																																																																																																																																																					
	2400-2483.5_IEEE 802.15.4_O-QPSK_CH11_2405MHz																																																																																																																																																																																					
ANT	3																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QP/ Peak	Level (dBuV/m) Date: 2025-08-08 Site : 03CH11-HY Condition: QP 3m B1LOG_37059801_241127 HORIZONTAL Mode : 6 Setting : <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>30.97</td><td>33.06</td><td>40.00</td><td>-6.94</td><td>40.36</td><td>24.21</td><td>0.83</td><td>32.41</td><td>0.07 -- -- Peak</td></tr><tr><td>2</td><td>126.03</td><td>21.78</td><td>43.50</td><td>-21.72</td><td>34.79</td><td>17.65</td><td>1.58</td><td>32.29</td><td>0.05 -- -- Peak</td></tr><tr><td>3</td><td>261.83</td><td>18.50</td><td>46.00</td><td>-27.50</td><td>28.20</td><td>20.11</td><td>2.25</td><td>32.20</td><td>0.14 -- -- Peak</td></tr><tr><td>4</td><td>500.45</td><td>23.40</td><td>46.00</td><td>-22.60</td><td>28.22</td><td>24.14</td><td>3.12</td><td>32.20</td><td>0.12 -- -- Peak</td></tr><tr><td>5</td><td>754.59</td><td>28.38</td><td>46.00</td><td>-17.62</td><td>28.09</td><td>28.37</td><td>3.80</td><td>32.08</td><td>0.20 -- -- Peak</td></tr><tr><td>6</td><td>941.80</td><td>32.36</td><td>46.00</td><td>-13.64</td><td>28.33</td><td>30.53</td><td>4.27</td><td>30.98</td><td>0.21 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	30.97	33.06	40.00	-6.94	40.36	24.21	0.83	32.41	0.07 -- -- Peak	2	126.03	21.78	43.50	-21.72	34.79	17.65	1.58	32.29	0.05 -- -- Peak	3	261.83	18.50	46.00	-27.50	28.20	20.11	2.25	32.20	0.14 -- -- Peak	4	500.45	23.40	46.00	-22.60	28.22	24.14	3.12	32.20	0.12 -- -- Peak	5	754.59	28.38	46.00	-17.62	28.09	28.37	3.80	32.08	0.20 -- -- Peak	6	941.80	32.36	46.00	-13.64	28.33	30.53	4.27	30.98	0.21 -- -- Peak	Level (dBuV/m) Date: 2025-08-08 Site : 03CH11-HY Condition: QP 3m B1LOG_37059801_241127 VERTICAL Mode : 6 Setting : <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>30.00</td><td>33.41</td><td>40.00</td><td>-6.59</td><td>40.43</td><td>24.51</td><td>0.82</td><td>32.43</td><td>0.08 -- -- Peak</td></tr><tr><td>2</td><td>98.07</td><td>26.84</td><td>43.50</td><td>-16.66</td><td>41.60</td><td>16.07</td><td>1.44</td><td>32.31</td><td>0.04 -- -- Peak</td></tr><tr><td>3</td><td>269.59</td><td>19.46</td><td>46.00</td><td>-26.54</td><td>30.09</td><td>19.15</td><td>2.29</td><td>32.20</td><td>0.13 -- -- Peak</td></tr><tr><td>4</td><td>494.93</td><td>24.23</td><td>46.00</td><td>-21.77</td><td>29.40</td><td>23.04</td><td>3.07</td><td>32.20</td><td>0.12 -- -- Peak</td></tr><tr><td>5</td><td>751.68</td><td>28.55</td><td>46.00</td><td>-17.45</td><td>28.30</td><td>28.35</td><td>3.79</td><td>32.09</td><td>0.20 -- -- Peak</td></tr><tr><td>6</td><td>951.50</td><td>33.13</td><td>46.00</td><td>-12.87</td><td>28.48</td><td>31.04</td><td>4.28</td><td>30.88</td><td>0.21 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	30.00	33.41	40.00	-6.59	40.43	24.51	0.82	32.43	0.08 -- -- Peak	2	98.07	26.84	43.50	-16.66	41.60	16.07	1.44	32.31	0.04 -- -- Peak	3	269.59	19.46	46.00	-26.54	30.09	19.15	2.29	32.20	0.13 -- -- Peak	4	494.93	24.23	46.00	-21.77	29.40	23.04	3.07	32.20	0.12 -- -- Peak	5	751.68	28.55	46.00	-17.45	28.30	28.35	3.79	32.09	0.20 -- -- Peak	6	951.50	33.13	46.00	-12.87	28.48	31.04	4.28	30.88	0.21 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	30.97	33.06	40.00	-6.94	40.36	24.21	0.83	32.41	0.07 -- -- Peak																																																																																																																																																																													
2	126.03	21.78	43.50	-21.72	34.79	17.65	1.58	32.29	0.05 -- -- Peak																																																																																																																																																																													
3	261.83	18.50	46.00	-27.50	28.20	20.11	2.25	32.20	0.14 -- -- Peak																																																																																																																																																																													
4	500.45	23.40	46.00	-22.60	28.22	24.14	3.12	32.20	0.12 -- -- Peak																																																																																																																																																																													
5	754.59	28.38	46.00	-17.62	28.09	28.37	3.80	32.08	0.20 -- -- Peak																																																																																																																																																																													
6	941.80	32.36	46.00	-13.64	28.33	30.53	4.27	30.98	0.21 -- -- Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	30.00	33.41	40.00	-6.59	40.43	24.51	0.82	32.43	0.08 -- -- Peak																																																																																																																																																																													
2	98.07	26.84	43.50	-16.66	41.60	16.07	1.44	32.31	0.04 -- -- Peak																																																																																																																																																																													
3	269.59	19.46	46.00	-26.54	30.09	19.15	2.29	32.20	0.13 -- -- Peak																																																																																																																																																																													
4	494.93	24.23	46.00	-21.77	29.40	23.04	3.07	32.20	0.12 -- -- Peak																																																																																																																																																																													
5	751.68	28.55	46.00	-17.45	28.30	28.35	3.79	32.09	0.20 -- -- Peak																																																																																																																																																																													
6	951.50	33.13	46.00	-12.87	28.48	31.04	4.28	30.88	0.21 -- -- Peak																																																																																																																																																																													



Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	Duty Factor(dB)
3	IEEE 802.15.4	100.00	-	0.00

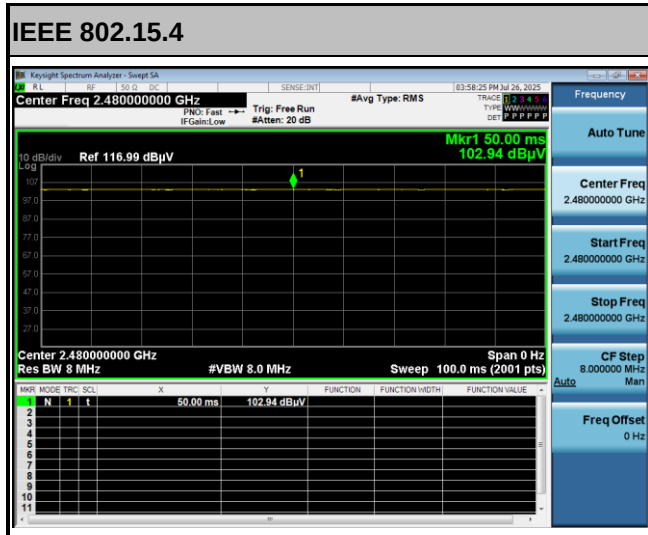

—THE END—