



TESTING LABORATORY  
CERTIFICATE #4820.01



FCC PART 22H, PART 24E  
FCC PART 27  
MEASUREMENT AND TEST REPORT  
For  
**MAXWEST INTERNATIONAL LIMITED.**

No.1,Longgang Road,Buji, Longgang,Shenzhen,China

**FCC ID: 2AEN3NITRO55R**

|                                                                                                                                                                                                                                                                               |                                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                                                                                                                                                        | <b>Product Type:</b><br>Mobile Phone |
| <b>Report Number:</b> RDG181205001-00D                                                                                                                                                                                                                                        |                                      |
| <b>Report Date:</b> 2018-12-29                                                                                                                                                                                                                                                |                                      |
| <b>Reviewed By:</b>                                                                                                                                                                                                                                                           | Jerry Zhang<br>EMC Manager           |
| <b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Dongguan)<br>No.69 Pulongcun, Puxinhu Industry Area,<br>Tangxia, Dongguan, Guangdong, China<br>Tel: +86-769-86858888<br>Fax: +86-769-86858891<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |                                      |

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”.

## **TABLE OF CONTENTS**

|                                                                                                           |           |
|-----------------------------------------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                                                           | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                                                  | 4         |
| OBJECTIVE .....                                                                                           | 4         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                                                        | 4         |
| TEST METHODOLOGY .....                                                                                    | 4         |
| MEASUREMENT UNCERTAINTY .....                                                                             | 5         |
| TEST FACILITY .....                                                                                       | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                                                     | <b>6</b>  |
| JUSTIFICATION .....                                                                                       | 6         |
| EQUIPMENT MODIFICATIONS .....                                                                             | 6         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                                                                  | 6         |
| CONFIGURATION OF TEST SETUP .....                                                                         | 6         |
| BLOCK DIAGRAM OF TEST SETUP .....                                                                         | 7         |
| <b>SUMMARY OF TEST RESULTS .....</b>                                                                      | <b>8</b>  |
| <b>FCC §1.1310 &amp; §2.1093- RF EXPOSURE .....</b>                                                       | <b>9</b>  |
| APPLICABLE STANDARD .....                                                                                 | 9         |
| TEST RESULT .....                                                                                         | 9         |
| <b>FCC §2.1047 - MODULATION CHARACTERISTIC .....</b>                                                      | <b>10</b> |
| <b>FCC § 2.1046, § 22.913 (A) &amp; § 24.232 (C) - RF OUTPUT POWER.....</b>                               | <b>11</b> |
| APPLICABLE STANDARD .....                                                                                 | 11        |
| TEST PROCEDURE .....                                                                                      | 12        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                                      | 16        |
| TEST DATA .....                                                                                           | 16        |
| <b>FCC §2.1049, §22.917, §22.905 &amp; §24.238&amp;§27.53 - OCCUPIED BANDWIDTH.....</b>                   | <b>20</b> |
| APPLICABLE STANDARD .....                                                                                 | 20        |
| TEST PROCEDURE .....                                                                                      | 20        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                                      | 20        |
| TEST DATA .....                                                                                           | 21        |
| <b>FCC §2.1051, §22.917(A) &amp; §24.238(A) &amp; §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS ..</b> | <b>28</b> |
| APPLICABLE STANDARD .....                                                                                 | 28        |
| TEST PROCEDURE .....                                                                                      | 28        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                                      | 28        |
| TEST DATA .....                                                                                           | 28        |
| <b>FCC §2.1053, §22.917 &amp; §24.238 &amp; §27.53 - SPURIOUS RADIATED EMISSIONS .....</b>                | <b>34</b> |
| APPLICABLE STANDARD .....                                                                                 | 34        |
| TEST PROCEDURE .....                                                                                      | 34        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                                      | 35        |
| TEST DATA .....                                                                                           | 35        |
| <b>FCC §22.917(A) &amp; §24.238(A) &amp; §27.53- BAND EDGES.....</b>                                      | <b>38</b> |
| APPLICABLE STANDARD .....                                                                                 | 38        |
| TEST PROCEDURE .....                                                                                      | 38        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                                      | 38        |
| TEST DATA .....                                                                                           | 38        |
| <b>FCC §2.1055, §22.355 &amp; §24.235&amp; §27.54 - FREQUENCY STABILITY.....</b>                          | <b>50</b> |

APPLICABLE STANDARD .....50

TEST PROCEDURE .....50

TEST EQUIPMENT LIST AND DETAILS.....51

TEST DATA .....51

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                             |                |                                            |
|-----------------------------|----------------|--------------------------------------------|
| <b>EUT Name:</b>            |                | Mobile Phone                               |
| <b>EUT Model:</b>           |                | Nitro 55R                                  |
| <b>FCC ID:</b>              |                | 2AEN3NITRO55R                              |
| <b>Rated Input Voltage:</b> |                | DC 3.8V from Battery or DC 5V from adapter |
| <b>Adapter Information</b>  | <b>Model:</b>  | ZHY-QU050100S                              |
|                             | <b>Input:</b>  | 100-240V, 50/60Hz, 0.2A                    |
|                             | <b>Output:</b> | DC5.0V, 1 A                                |
| <b>External Dimension:</b>  |                | 150mm(L)*70.7mm(W)*8.9mm(H)                |
| <b>Serial Number:</b>       |                | 181205001                                  |
| <b>EUT Received Date:</b>   |                | 2018.12.05                                 |

### Objective

This report is prepared on behalf of *MAXWEST INTERNATIONAL LIMITED*. in accordance with: Part 2-Subpart J, Part 22-Subpart H, Part 24-Subpart E and part 27 of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC Rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

### Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: 2AEN3NITRO55R.  
FCC Part 15C DSS submissions with FCC ID: 2AEN3NITRO55R.

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services  
Part 24 Subpart E - Personal Communication Services  
Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D-2010.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

**Measurement Uncertainty**

| Parameter                     | Measurement Uncertainty                      |
|-------------------------------|----------------------------------------------|
| Occupied Channel Bandwidth    | ±5 %                                         |
| RF output power, conducted    | ±0.61dB                                      |
| Unwanted Emissions, radiated  | 30MHz ~ 1GHz: 5.85 dB<br>1G~26.5GHz: 5.23 dB |
| Unwanted Emissions, conducted | ±1.5 dB                                      |
| Temperature                   | ±1 °C                                        |
| Humidity                      | ±5%                                          |
| DC and low frequency voltages | ±0.4%                                        |
| Duty Cycle                    | 1%                                           |

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

## SYSTEM TEST CONFIGURATION

### Justification

The EUT was configured for testing according to TIA/EIA-603-D 2010.

The test items were performed with the EUT operating at testing mode.


### Equipment Modifications

No modification was made to the EUT.


### Support Equipment List and Details

| Manufacturer | Description                          | Model  | Serial Number |
|--------------|--------------------------------------|--------|---------------|
| R&S          | Universal Radio Communication Tester | CMU200 | 106 891       |
| Un-known     | ANTENNA                              | /      | /             |

### Configuration of Test Setup

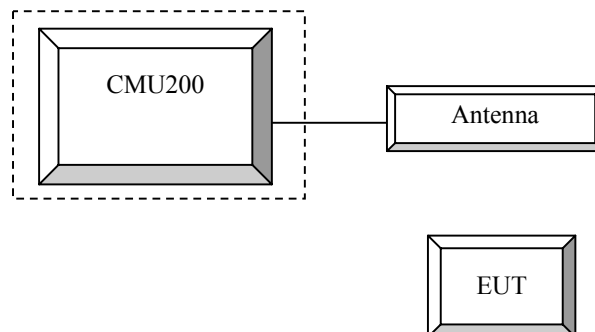

Block Diagram of Test Setup

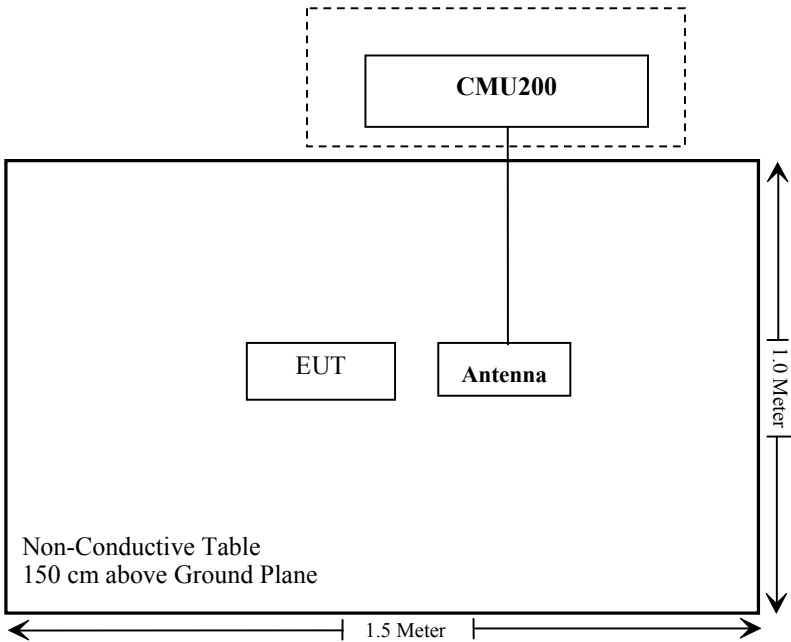

**SUMMARY OF TEST RESULTS**

| FCC Rules                                          | Description of Test                                                    | Result         |
|----------------------------------------------------|------------------------------------------------------------------------|----------------|
| §1.1310, §2.1093                                   | RF Exposure                                                            | Compliance     |
| §2.1046;<br>§ 22.913 (a); § 24.232 (c);<br>§27.50  | RF Output Power                                                        | Compliance     |
| § 2.1047                                           | Modulation Characteristics                                             | Not Applicable |
| § 2.1049; § 22.905<br>§ 22.917; § 24.238;§27.53    | Occupied Bandwidth                                                     | Compliance     |
| § 2.1051,<br>§ 22.917 (a); § 24.238 (a) ;<br>§27.5 | Spurious Emissions at Antenna Terminal                                 | Compliance     |
| § 2.1053<br>§ 22.917 (a); § 24.238 (a)<br>§27.53   | Spurious Radiation Emissions                                           | Compliance     |
| § 22.917 (a); § 24.238 (a)<br>§27.53               | Out of band emission, Band Edge                                        | Compliance     |
| § 2.1055<br>§ 22.355; § 24.235 §27.54              | Frequency stability vs. temperature<br>Frequency stability vs. voltage | Compliance     |

---

## **FCC §1.1310 & §2.1093- RF EXPOSURE**

---

### **Applicable Standard**

FCC§1.1310 and §2.1093.

### **Test Result**

Compliance, please refer to the SAR report: RDG181205001-20A.

---

## **FCC §2.1047 - MODULATION CHARACTERISTIC**

---

According to FCC § 2.1047(d), Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

---

**FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER**

---

**Applicable Standard**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50

(a)(3) Mobile and portable stations. (i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c) (10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d), (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h),(2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

## Test Procedure

### GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

**WCDMA-Release 99**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

|                                   |                         |              |
|-----------------------------------|-------------------------|--------------|
| <b>WCDMA<br/>General Settings</b> | Loopback Mode           | Test Mode 1  |
|                                   | Rel99 RMC               | 12.2kbps RMC |
|                                   | Power Control Algorithm | Algorithm2   |
|                                   | $\beta_c / \beta_d$     | 8/15         |

**WCDMA HSDPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

|                                        | Mode<br>Subset                  | HSDPA<br>1   | HSDPA<br>2 | HSDPA<br>3 | HSDPA<br>4 |
|----------------------------------------|---------------------------------|--------------|------------|------------|------------|
| <b>WCDMA<br/>General<br/>Settings</b>  | Loopback Mode                   | Test Mode 1  |            |            |            |
|                                        | Rel99 RMC                       | 12.2kbps RMC |            |            |            |
|                                        | HSDPA FRC                       | H-Set1       |            |            |            |
|                                        | Power Control Algorithm         | Algorithm2   |            |            |            |
|                                        | $\beta_c$                       | 2/15         | 12/15      | 15/15      | 15/15      |
|                                        | $\beta_d$                       | 15/15        | 15/15      | 8/15       | 4/15       |
|                                        | $\beta_d$ (SF)                  | 64           |            |            |            |
|                                        | $\beta_c / \beta_d$             | 2/15         | 12/15      | 15/8       | 15/4       |
|                                        | $\beta_{hs}$                    | 4/15         | 24/15      | 30/15      | 30/15      |
|                                        | MPR(dB)                         | 0            | 0          | 0.5        | 0.5        |
| <b>HSDPA<br/>Specific<br/>Settings</b> | DACK                            | 8            |            |            |            |
|                                        | DNAK                            | 8            |            |            |            |
|                                        | DCQI                            | 8            |            |            |            |
|                                        | Ack-Nack repetition factor      | 3            |            |            |            |
|                                        | CQI Feedback                    | 4ms          |            |            |            |
|                                        | CQI Repetition Factor           | 2            |            |            |            |
|                                        | $A_{hs} = \beta_{hs} / \beta_c$ | 30/15        |            |            |            |

**WCDMA HSUPA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

|                                | Mode                             | HSUPA                                                                                                                                        | HSUPA                                                | HSUPA                                                                                                                                      | HSUPA                                                                                                                                        | HSUPA                                                                                                                                        |
|--------------------------------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
|                                | Subset                           | 1                                                                                                                                            | 2                                                    | 3                                                                                                                                          | 4                                                                                                                                            | 5                                                                                                                                            |
| <b>WCDMA General Settings</b>  | Loopback Mode                    | Test Mode 1                                                                                                                                  |                                                      |                                                                                                                                            |                                                                                                                                              |                                                                                                                                              |
|                                | Rel99 RMC                        | 12.2kbps RMC                                                                                                                                 |                                                      |                                                                                                                                            |                                                                                                                                              |                                                                                                                                              |
|                                | HSDPA FRC                        | H-Set1                                                                                                                                       |                                                      |                                                                                                                                            |                                                                                                                                              |                                                                                                                                              |
|                                | HSUPA Test                       | HSUPA Loopback                                                                                                                               |                                                      |                                                                                                                                            |                                                                                                                                              |                                                                                                                                              |
|                                | Power Control Algorithm          | Algorithm2                                                                                                                                   |                                                      |                                                                                                                                            |                                                                                                                                              |                                                                                                                                              |
|                                | $\beta_c$                        | 11/15                                                                                                                                        | 6/15                                                 | 15/15                                                                                                                                      | 2/15                                                                                                                                         | 15/15                                                                                                                                        |
|                                | $\beta_d$                        | 15/15                                                                                                                                        | 15/15                                                | 9/15                                                                                                                                       | 15/15                                                                                                                                        | 0                                                                                                                                            |
|                                | $\beta_{ec}$                     | 209/225                                                                                                                                      | 12/15                                                | 30/15                                                                                                                                      | 2/15                                                                                                                                         | 5/15                                                                                                                                         |
|                                | $\beta_c/\beta_d$                | 11/15                                                                                                                                        | 6/15                                                 | 15/9                                                                                                                                       | 2/15                                                                                                                                         | -                                                                                                                                            |
|                                | $\beta_{hs}$                     | 22/15                                                                                                                                        | 12/15                                                | 30/15                                                                                                                                      | 4/15                                                                                                                                         | 5/15                                                                                                                                         |
|                                | CM(dB)                           | 1.0                                                                                                                                          | 3.0                                                  | 2.0                                                                                                                                        | 3.0                                                                                                                                          | 1.0                                                                                                                                          |
|                                | MPR(dB)                          | 0                                                                                                                                            | 2                                                    | 1                                                                                                                                          | 2                                                                                                                                            | 0                                                                                                                                            |
| <b>HSDPA Specific Settings</b> | DACK                             | 8                                                                                                                                            |                                                      |                                                                                                                                            |                                                                                                                                              |                                                                                                                                              |
|                                | DNAK                             | 8                                                                                                                                            |                                                      |                                                                                                                                            |                                                                                                                                              |                                                                                                                                              |
|                                | DCQI                             | 8                                                                                                                                            |                                                      |                                                                                                                                            |                                                                                                                                              |                                                                                                                                              |
|                                | Ack-Nack repetition factor       | 3                                                                                                                                            |                                                      |                                                                                                                                            |                                                                                                                                              |                                                                                                                                              |
|                                | CQI Feedback                     | 4ms                                                                                                                                          |                                                      |                                                                                                                                            |                                                                                                                                              |                                                                                                                                              |
|                                | CQI Repetition Factor            | 2                                                                                                                                            |                                                      |                                                                                                                                            |                                                                                                                                              |                                                                                                                                              |
|                                | $A_{hs}=\beta_{hs}/\beta_c$      | 30/15                                                                                                                                        |                                                      |                                                                                                                                            |                                                                                                                                              |                                                                                                                                              |
| <b>HSUPA Specific Settings</b> | DE-DPCCH                         | 6                                                                                                                                            | 8                                                    | 8                                                                                                                                          | 5                                                                                                                                            | 7                                                                                                                                            |
|                                | DHARQ                            | 0                                                                                                                                            | 0                                                    | 0                                                                                                                                          | 0                                                                                                                                            | 0                                                                                                                                            |
|                                | AG Index                         | 20                                                                                                                                           | 12                                                   | 15                                                                                                                                         | 17                                                                                                                                           | 21                                                                                                                                           |
|                                | ETFCI                            | 75                                                                                                                                           | 67                                                   | 92                                                                                                                                         | 71                                                                                                                                           | 81                                                                                                                                           |
|                                | Associated Max UL Data Rate kbps | 242.1                                                                                                                                        | 174.9                                                | 482.8                                                                                                                                      | 205.8                                                                                                                                        | 308.9                                                                                                                                        |
|                                | Reference E_FCI                  | E-TFCI 11 E<br>E-TFCI PO 4<br>E-TFCI 67<br>E-TFCI PO 18<br>E-TFCI 71<br>E-TFCI PO23<br>E-TFCI 75<br>E-TFCI PO26<br>E-TFCI 81<br>E-TFCI PO 27 | E-TFCI 11<br>E-TFCI PO4<br>E-TFCI 92<br>E-TFCI PO 18 | E-TFCI 11<br>E-TFCI PO 4<br>E-TFCI 67<br>E-TFCI PO 18<br>E-TFCI 71<br>E-TFCI PO23<br>E-TFCI 75<br>E-TFCI PO26<br>E-TFCI 81<br>E-TFCI PO 27 | E-TFCI 11 E<br>E-TFCI PO 4<br>E-TFCI 67<br>E-TFCI PO 18<br>E-TFCI 71<br>E-TFCI PO23<br>E-TFCI 75<br>E-TFCI PO26<br>E-TFCI 81<br>E-TFCI PO 27 | E-TFCI 11 E<br>E-TFCI PO 4<br>E-TFCI 67<br>E-TFCI PO 18<br>E-TFCI 71<br>E-TFCI PO23<br>E-TFCI 75<br>E-TFCI PO26<br>E-TFCI 81<br>E-TFCI PO 27 |

**HSPA+**

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

| Sub-test                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | $\beta_c$<br>(Note 3) | $\beta_d$ | $\beta_{HS}$<br>(Note 1) | $\beta_{ec}$ | $\beta_{ed}$<br>(2xSF2)<br>(Note 4)            | $\beta_{ed}$<br>(2xSF4)<br>(Note 4)            | CM<br>(dB)<br>(Note 2) | MPR<br>(dB)<br>(Note 2) | AG<br>Index<br>(Note 4) | E-TFCI<br>(Note 5) | E-TFCI<br>(boost) |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------|--------------------------|--------------|------------------------------------------------|------------------------------------------------|------------------------|-------------------------|-------------------------|--------------------|-------------------|
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 1                     | 0         | 30/15                    | 30/15        | $\beta_{ed1}$ : 30/15<br>$\beta_{ed2}$ : 30/15 | $\beta_{ed3}$ : 24/15<br>$\beta_{ed4}$ : 24/15 | 3.5                    | 2.5                     | 14                      | 105                | 105               |
| <p>Note 1: <math>\Delta_{ACK}</math>, <math>\Delta_{NACK}</math> and <math>\Delta_{CQI} = 30/15</math> with <math>\beta_{hs} = 30/15 * \beta_c</math>.</p> <p>Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).</p> <p>Note 3: DPDCH is not configured, therefore the <math>\beta_c</math> is set to 1 and <math>\beta_d = 0</math> by default.</p> <p>Note 4: <math>\beta_{ed}</math> can not be set directly; it is set by Absolute Grant Value.</p> <p>Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.</p> |                       |           |                          |              |                                                |                                                |                        |                         |                         |                    |                   |

**DC-HSDPA**

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

| Parameter                                                                                                                                                                                                                                                                                                     | Unit      | Value |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------|
| Nominal Avg. Inf. Bit Rate                                                                                                                                                                                                                                                                                    | kbps      | 60    |
| Inter-TTI Distance                                                                                                                                                                                                                                                                                            | TTI's     | 1     |
| Number of HARQ Processes                                                                                                                                                                                                                                                                                      | Processes | 6     |
| Information Bit Payload ( $N_{INF}$ )                                                                                                                                                                                                                                                                         | Bits      | 120   |
| Number Code Blocks                                                                                                                                                                                                                                                                                            | Blocks    | 1     |
| Binary Channel Bits Per TTI                                                                                                                                                                                                                                                                                   | Bits      | 960   |
| Total Available SML's in UE                                                                                                                                                                                                                                                                                   | SML's     | 19200 |
| Number of SML's per HARQ Proc.                                                                                                                                                                                                                                                                                | SML's     | 3200  |
| Coding Rate                                                                                                                                                                                                                                                                                                   |           | 0.15  |
| Number of Physical Channel Codes                                                                                                                                                                                                                                                                              | Codes     | 1     |
| Modulation                                                                                                                                                                                                                                                                                                    |           | QPSK  |
| <p>Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.</p> <p>Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.</p> |           |       |

**Test Equipment List and Details**

| Manufacturer   | Description                          | Model     | Serial Number | Calibration Date | Calibration Due Date |
|----------------|--------------------------------------|-----------|---------------|------------------|----------------------|
| R&S            | EMI Test Receiver                    | ESCI      | 100035        | 2018-08-03       | 2019-08-03           |
| Sunol Sciences | Antenna                              | JB3       | A060611-3     | 2017-07-21       | 2019-07-21           |
| EMCO           | Adjustable Dipole Antenna            | 3121C     | 9109-753      | N/A              | N/A                  |
| Unknown        | Coaxial Cable                        | C-NJNJ-50 | C-1000-01     | 2018-09-05       | 2019-09-05           |
| Unknown        | Coaxial Cable                        | C-NJNJ-50 | C-0400-02     | 2018-09-05       | 2019-09-05           |
| Unknown        | Coaxial Cable                        | C-NJNJ-50 | C-0530-01     | 2018-09-24       | 2019-09-24           |
| Unknown        | Coaxial Cable                        | C-NJNJ-50 | C-0200-02     | 2018-09-05       | 2019-09-05           |
| R&S            | Universal Radio Communication Tester | CMU200    | 106 891       | 2017-12-14       | 2018-12-14           |
| Agilent        | Signal Generator                     | E8247C    | MY43321350    | 2018-12-10       | 2019-12-10           |
| Agilent        | Spectrum Analyzer                    | E4440A    | SG43360054    | 2018-01-04       | 2019-01-04           |
| TDK RF         | Horn Antenna                         | HRN-0118  | 130 084       | 2016-01-05       | 2019-01-04           |
| ETS-Lindgren   | Horn Antenna                         | 3115      | 000 527 35    | 2016-01-05       | 2019-01-04           |
| Unknown        | Coaxial Cable                        | C-SJSJ-50 | C-0800-01     | 2018-09-05       | 2019-09-05           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                           |               |
|---------------------------|---------------|
| <b>Temperature:</b>       | 20.7~20.9 °C  |
| <b>Relative Humidity:</b> | 32~51 %       |
| <b>ATM Pressure:</b>      | 99.5~99.7 kPa |

\* The testing was performed by Sunny Cen & Tyler Pan from 2018-12-11 to 2018-12-13.

Test Result: Compliance

**Conducted Output Power****Cellular Band & PCS Band**

| Band     | Channel No. | Conducted Peak Output Power (dBm) |                |                |                |                |
|----------|-------------|-----------------------------------|----------------|----------------|----------------|----------------|
|          |             | GSM                               | GPRS 1 TX Slot | GPRS 2 TX Slot | GPRS 3 TX Slot | GPRS 4 TX Slot |
| Cellular | 128         | 31.1                              | 31.55          | 29.81          | 28.46          | 26.97          |
|          | 190         | 31.2                              | 31.4           | 29.85          | 28.66          | 27.03          |
|          | 251         | 31.3                              | 31.57          | 29.77          | 28.6           | 27.05          |
| PCS      | 512         | 29.2                              | 29.24          | 27.03          | 25.69          | 23.94          |
|          | 661         | 29.2                              | 29.27          | 27.34          | 26.07          | 24.35          |
|          | 810         | 29.2                              | 29.28          | 27.71          | 26.55          | 24.67          |

**WCDMA Band II**

| Mode          | 3GPP Sub Test | Low Channel      |          | Middle Channel   |          | High Channel     |          |
|---------------|---------------|------------------|----------|------------------|----------|------------------|----------|
|               |               | Ave. Power (dBm) | PAR (dB) | Ave. Power (dBm) | PAR (dB) | Ave. Power (dBm) | PAR (dB) |
| Rel 99        | 1             | 23.06            | 2.40     | 22.63            | 2.64     | 22.78            | 2.56     |
| HSDPA         | 1             | 21.33            | 3.20     | 21.01            | 3.12     | 20.82            | 3.20     |
|               | 2             | 21.10            | 3.61     | 20.88            | 2.99     | 21.12            | 3.63     |
|               | 3             | 20.85            | 3.62     | 20.74            | 3.69     | 20.99            | 3.90     |
|               | 4             | 20.46            | 3.40     | 20.48            | 3.25     | 20.41            | 4.13     |
| HSUPA         | 1             | 21.63            | 3.04     | 21.06            | 3.56     | 20.78            | 3.08     |
|               | 2             | 21.23            | 3.31     | 21.30            | 4.41     | 21.22            | 3.35     |
|               | 3             | 21.03            | 4.40     | 20.98            | 4.18     | 20.96            | 3.59     |
|               | 4             | 20.85            | 4.41     | 20.75            | 3.53     | 20.98            | 4.32     |
|               | 5             | 20.40            | 4.48     | 20.30            | 3.38     | 20.22            | 4.29     |
| DC-HSDPA      | 1             | 20.97            | 3.47     | 20.81            | 3.60     | 21.00            | 3.95     |
|               | 2             | 20.68            | 3.46     | 20.65            | 3.39     | 20.60            | 3.88     |
|               | 3             | 20.45            | 3.65     | 20.25            | 3.07     | 20.31            | 4.16     |
|               | 4             | 20.31            | 4.15     | 20.08            | 3.07     | 20.25            | 3.78     |
| HSPA+ (16QAM) | 1             | 20.75            | 4.31     | 20.80            | 4.29     | 20.73            | 3.58     |

## WCDMA Band IV

| Mode          | 3GPP Sub Test | Low Channel      |          | Middle Channel   |          | High Channel     |          |
|---------------|---------------|------------------|----------|------------------|----------|------------------|----------|
|               |               | Ave. Power (dBm) | PAR (dB) | Ave. Power (dBm) | PAR (dB) | Ave. Power (dBm) | PAR (dB) |
| Rel 99        | 1             | 21.23            | 2.64     | 21.89            | 2.04     | 22.03            | 2.64     |
| HSDPA         | 1             | 21.53            | 2.64     | 20.28            | 2.72     | 22.37            | 2.92     |
|               | 2             | 20.98            | 4.36     | 21.27            | 3.45     | 20.97            | 3.40     |
|               | 3             | 20.87            | 4.16     | 20.65            | 4.30     | 21.01            | 3.87     |
|               | 4             | 20.38            | 4.15     | 20.26            | 4.30     | 20.57            | 3.63     |
| HSUPA         | 1             | 21.33            | 3.88     | 20.16            | 2.96     | 22.03            | 3.12     |
|               | 2             | 21.26            | 4.08     | 21.24            | 3.96     | 21.08            | 3.70     |
|               | 3             | 20.97            | 4.09     | 20.86            | 4.12     | 20.98            | 3.16     |
|               | 4             | 20.59            | 3.74     | 20.59            | 4.01     | 20.46            | 3.91     |
|               | 5             | 20.33            | 3.44     | 20.52            | 3.80     | 20.43            | 3.20     |
| DC-HSDPA      | 1             | 20.79            | 4.26     | 20.54            | 4.38     | 20.85            | 3.56     |
|               | 2             | 20.51            | 4.13     | 20.30            | 3.67     | 20.35            | 4.44     |
|               | 3             | 20.43            | 4.25     | 20.17            | 3.24     | 20.35            | 4.47     |
|               | 4             | 20.45            | 3.67     | 20.37            | 3.40     | 20.49            | 4.06     |
| HSPA+ (16QAM) | 1             | 20.60            | 3.68     | 20.59            | 3.13     | 20.44            | 4.44     |

## WCDMA Band V

| Mode          | 3GPP Sub Test | Low Channel      |          | Middle Channel   |          | High Channel     |          |
|---------------|---------------|------------------|----------|------------------|----------|------------------|----------|
|               |               | Ave. Power (dBm) | PAR (dB) | Ave. Power (dBm) | PAR (dB) | Ave. Power (dBm) | PAR (dB) |
| Rel 99        | 1             | 22.81            | 2.64     | 23.03            | 2.44     | 22.59            | 2.72     |
| HSDPA         | 1             | 20.77            | 3.24     | 21.84            | 3.80     | 21.29            | 3.20     |
|               | 2             | 22.34            | 3.60     | 22.34            | 3.75     | 22.22            | 3.65     |
|               | 3             | 21.00            | 4.29     | 20.84            | 3.50     | 20.77            | 4.11     |
|               | 4             | 20.79            | 3.03     | 21.02            | 3.75     | 20.95            | 4.42     |
| HSUPA         | 1             | 20.71            | 3.52     | 21.83            | 3.04     | 21.19            | 3.40     |
|               | 2             | 21.35            | 4.05     | 21.46            | 3.48     | 20.89            | 3.84     |
|               | 3             | 20.89            | 3.72     | 21.01            | 4.36     | 20.74            | 4.35     |
|               | 4             | 20.97            | 3.18     | 20.94            | 4.02     | 20.46            | 3.22     |
|               | 5             | 20.52            | 3.11     | 20.24            | 4.05     | 20.33            | 4.48     |
| DC-HSDPA      | 1             | 20.92            | 4.15     | 20.65            | 3.12     | 20.90            | 4.27     |
|               | 2             | 20.67            | 3.75     | 20.82            | 4.06     | 20.51            | 4.43     |
|               | 3             | 20.44            | 2.99     | 20.65            | 4.17     | 20.36            | 3.98     |
|               | 4             | 20.34            | 3.77     | 20.47            | 4.15     | 20.37            | 3.74     |
| HSPA+ (16QAM) | 1             | 20.13            | 3.99     | 20.14            | 3.08     | 20.18            | 3.51     |

## ERP &amp; EIRP

## Part 22H

| Frequency<br>(MHz)          | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                              |                    | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|-----------------------------|----------------|-------------------------------|-------------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
|                             |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd/dBi) | Cable Loss<br>(dB) |                            |                |                |
| GSM 850 Middle Channel      |                |                               |                               |                              |                    |                            |                |                |
| 836.60                      | H              | 90.15                         | 15.92                         | 0.00                         | 0.50               | 15.42                      | 38.45          | 23.03          |
| 836.60                      | V              | 101.43                        | 30.17                         | 0.00                         | 0.50               | 29.67                      | 38.45          | 8.78           |
| WCDMA Band V Middle Channel |                |                               |                               |                              |                    |                            |                |                |
| 836.60                      | H              | 82.57                         | 8.34                          | 0.00                         | 0.50               | 7.84                       | 38.45          | 30.61          |
| 836.60                      | V              | 93.04                         | 21.78                         | 0.00                         | 0.50               | 21.28                      | 38.45          | 17.17          |

## Part 24E

| Frequency<br>(MHz)           | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                              |                    | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|------------------------------|----------------|-------------------------------|-------------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
|                              |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd/dBi) | Cable Loss<br>(dB) |                            |                |                |
| PCS 1900 Middle Channel      |                |                               |                               |                              |                    |                            |                |                |
| 1880.00                      | H              | 91.82                         | 19.21                         | 11.66                        | 2.66               | 28.21                      | 33.00          | 4.79           |
| 1880.00                      | V              | 86.18                         | 13.71                         | 11.66                        | 2.66               | 22.71                      | 33.00          | 10.29          |
| WCDMA Band II Middle Channel |                |                               |                               |                              |                    |                            |                |                |
| 1880.00                      | H              | 84.92                         | 12.31                         | 11.66                        | 2.66               | 21.31                      | 33.00          | 11.69          |
| 1880.00                      | V              | 78.61                         | 6.14                          | 11.66                        | 2.66               | 15.14                      | 33.00          | 17.86          |

## Part 27

| Frequency<br>(MHz)           | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                              |                    | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|------------------------------|----------------|-------------------------------|-------------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
|                              |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd/dBi) | Cable Loss<br>(dB) |                            |                |                |
| WCDMA Band IV Middle Channel |                |                               |                               |                              |                    |                            |                |                |
| 1732.60                      | H              | 85.13                         | 11.08                         | 10.90                        | 2.51               | 19.47                      | 30.00          | 10.53          |
| 1732.60                      | V              | 80.02                         | 5.65                          | 10.90                        | 2.51               | 14.04                      | 30.00          | 15.96          |

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level


**FCC §2.1049, §22.917, §22.905 & §24.238&§27.53 - OCCUPIED BANDWIDTH****Applicable Standard**

FCC §2.1049, §22.917, §22.905, §24.238, §27.53

**Test Procedure**

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

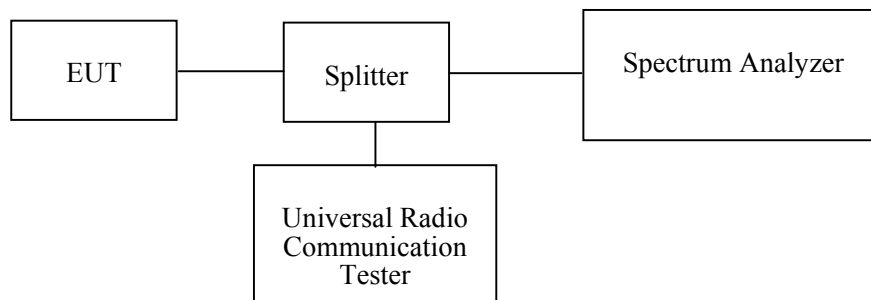**Test Equipment List and Details**

| Manufacturer    | Description      | Model         | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|------------------|---------------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer  | FSIQ26        | 831929/005    | 2018-08-03       | 2019-08-03           |
| yzjingcheng     | Coaxial Cable    | KTRFBU-141-50 | 41005012      | Each time        | N/A                  |
| Unknown         | Coaxial Cable    | C-SJ00-0010   | C0010/01      | Each time        | N/A                  |
| E-Microwave     | Two-way Splitter | ODP-1-6-2S    | OE0120142     | Each time        | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**



|                           |               |
|---------------------------|---------------|
| <b>Temperature:</b>       | 23.9~24.1 °C  |
| <b>Relative Humidity:</b> | 31~35 %       |
| <b>ATM Pressure:</b>      | 99.7~99.9 kPa |

\* The testing was performed by Tiago Huang on 2018-12-13~2018-12-14 .


Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.


| Band         | Test Channel | Mode   | 99% Occupied Bandwidth (MHz) | 26 dB Occupied Bandwidth (MHz) |
|--------------|--------------|--------|------------------------------|--------------------------------|
| Cellular     | Middle       | GSM    | 0.244                        | 0.314                          |
| PCS          |              | GSM    | 0.242                        | 0.311                          |
| WCDMA Band 2 |              | Rel 99 | 4.168                        | 4.689                          |
|              |              | HSDPA  | 4.148                        | 4.669                          |
|              |              | HSUPA  | 4.148                        | 4.669                          |
| WCDMA Band 4 |              | Rel 99 | 4.188                        | 4.729                          |
|              |              | HSDPA  | 4.148                        | 4.689                          |
|              |              | HSUPA  | 4.188                        | 4.749                          |
| WCDMA Band 5 |              | Rel 99 | 4.188                        | 4.709                          |
|              |              | HSDPA  | 4.148                        | 4.689                          |
|              |              | HSUPA  | 4.168                        | 4.669                          |

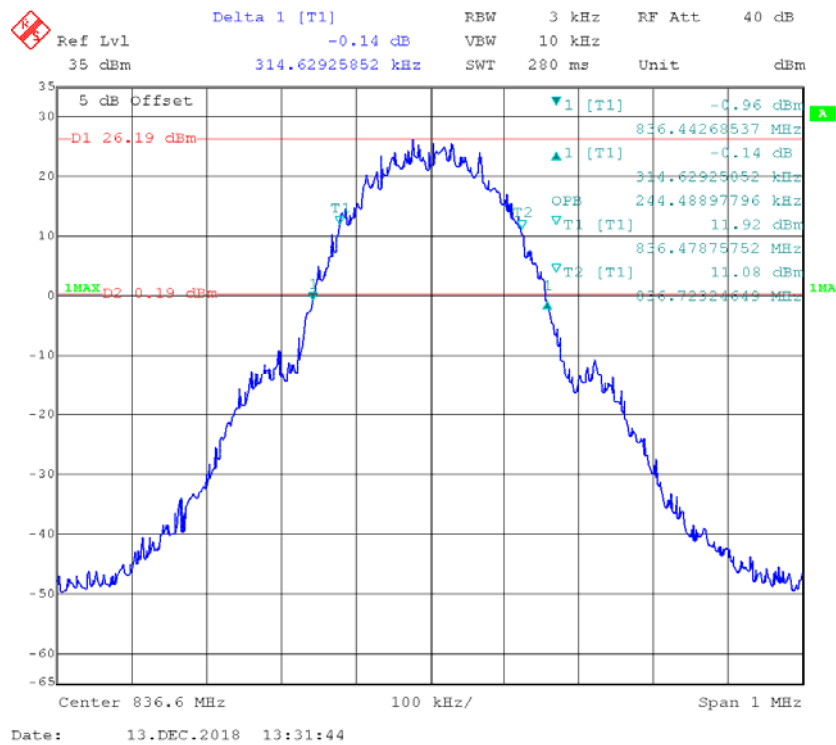
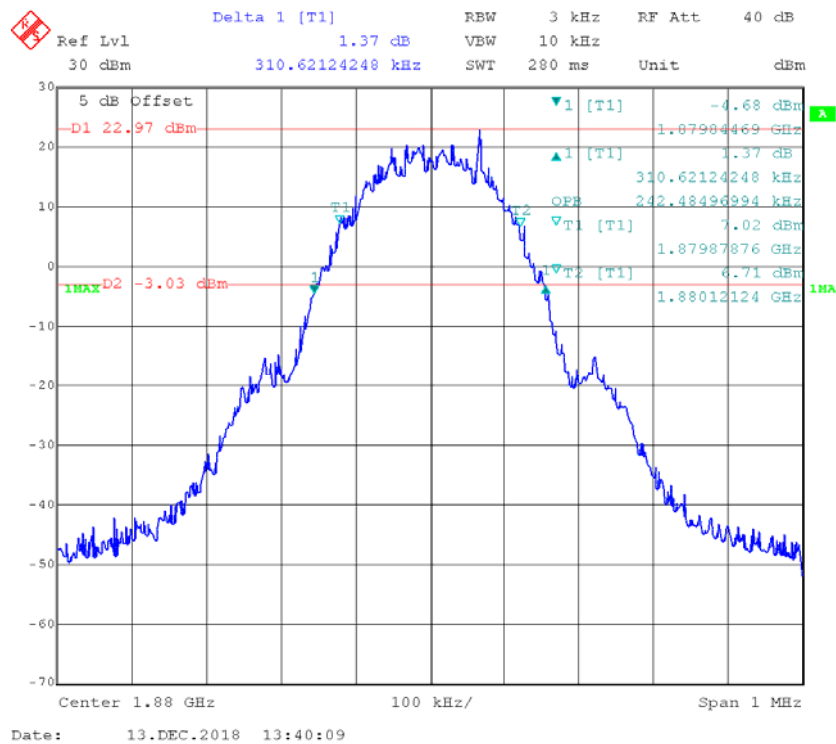
**GSM 850 Cellular Band****GSM PCS1900 Cellular Band**



### REL99 Band II


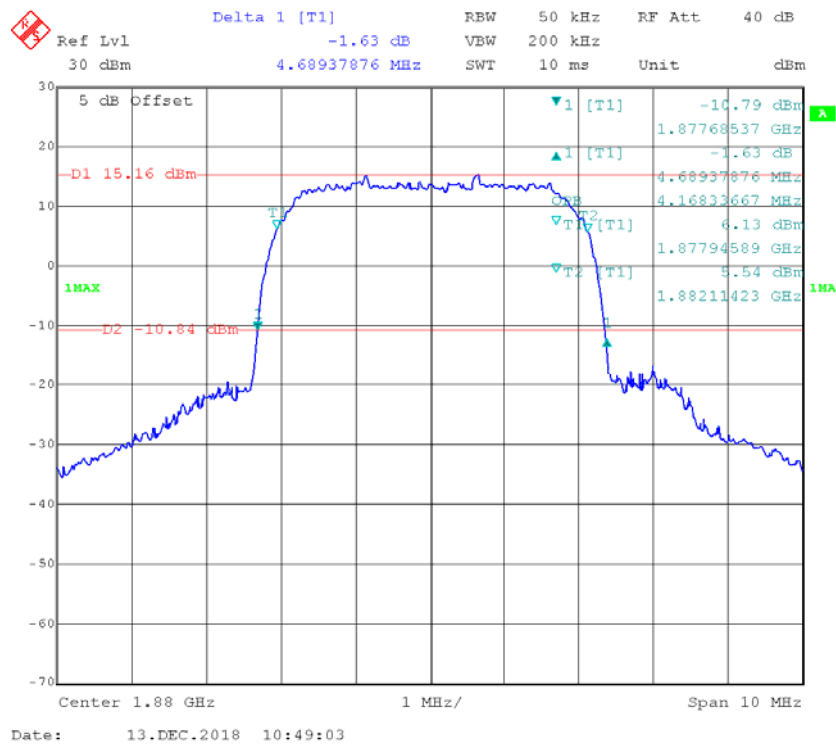


### HSDPA Band II

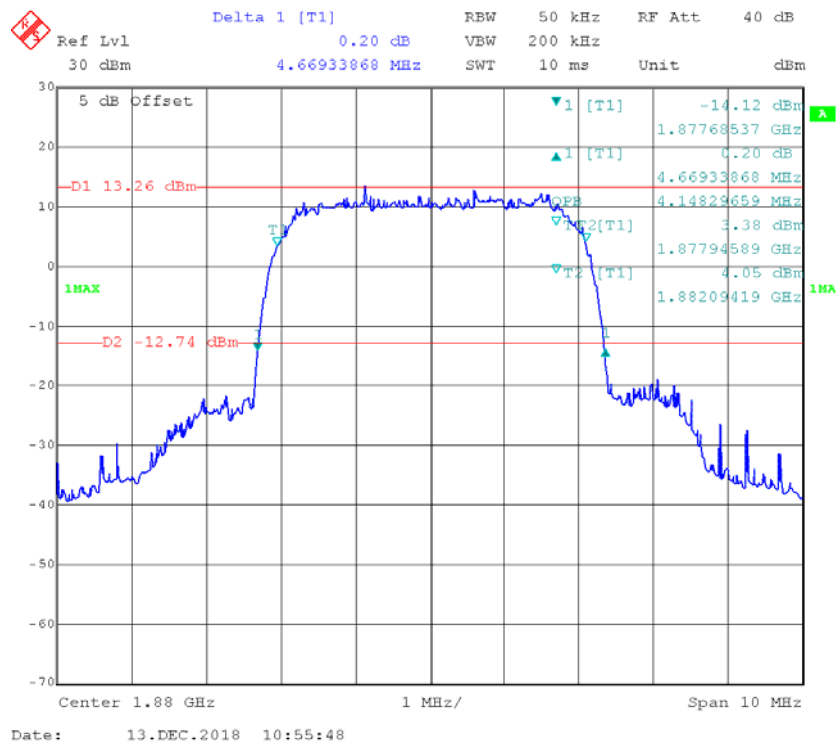


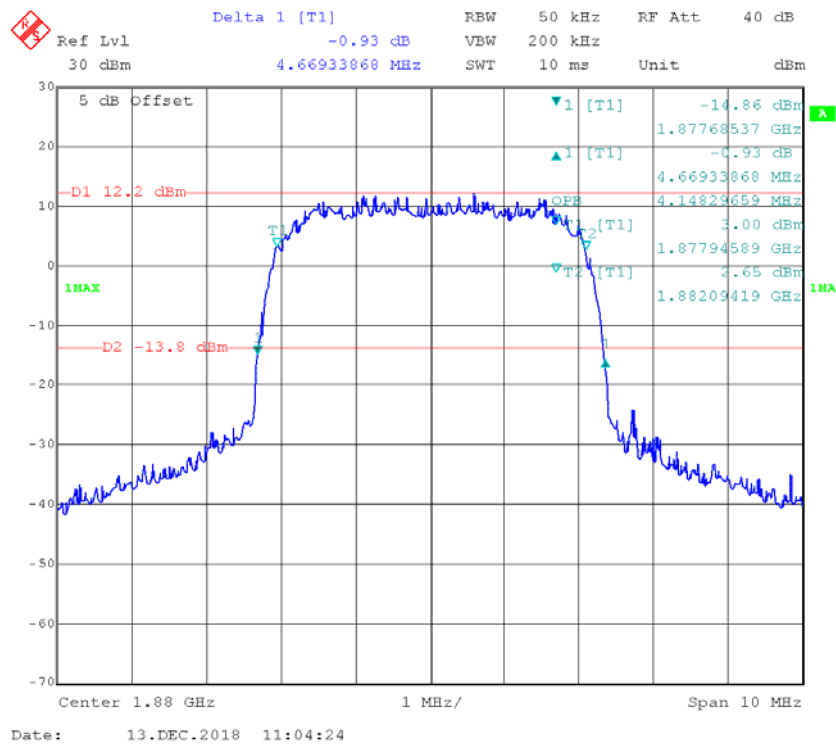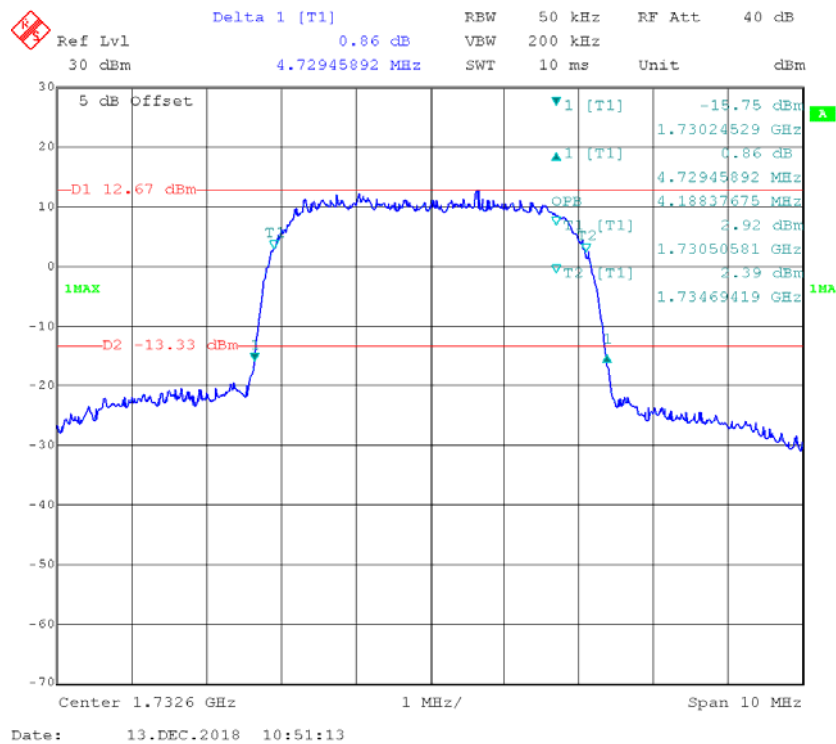**HSUPA Band II****REL99 Band IV**

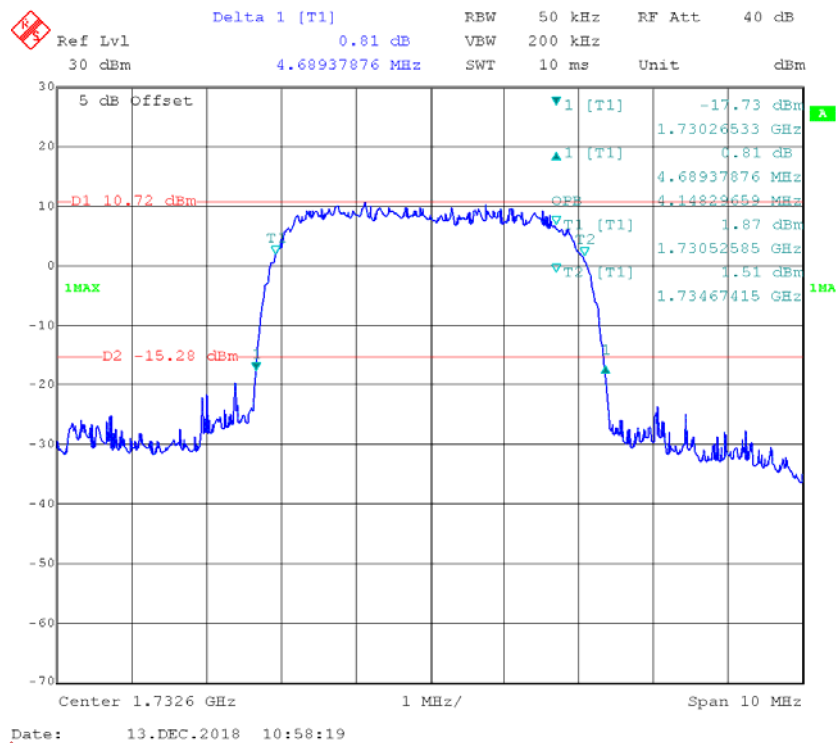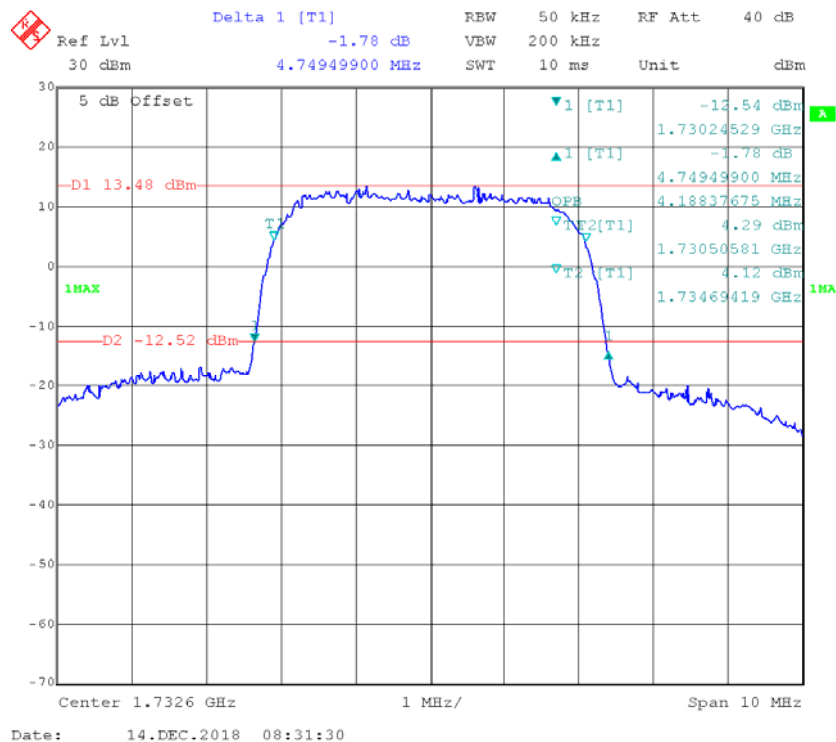**HSDPA Band IV****HSUPA Band IV**

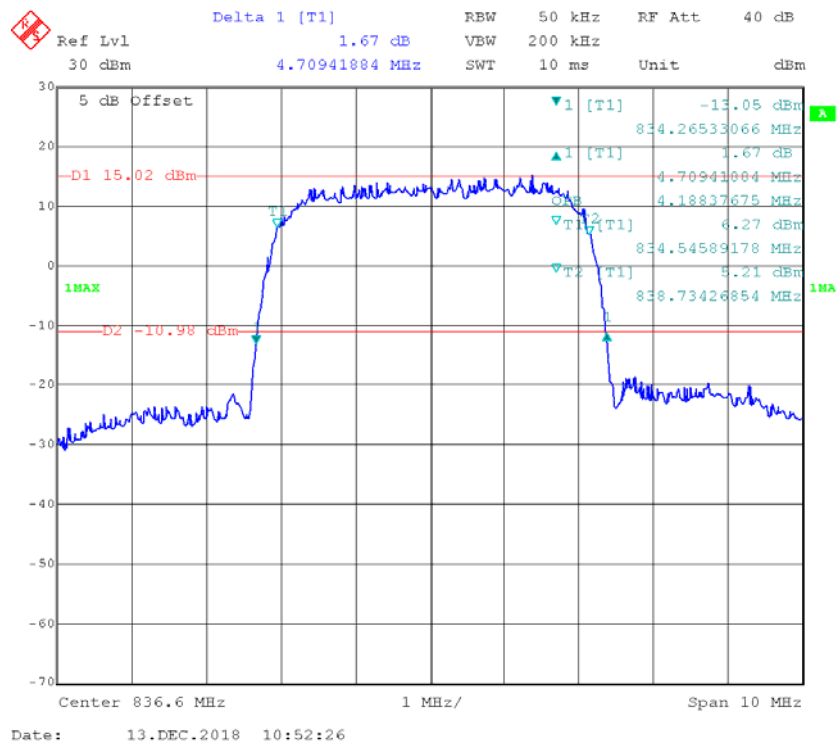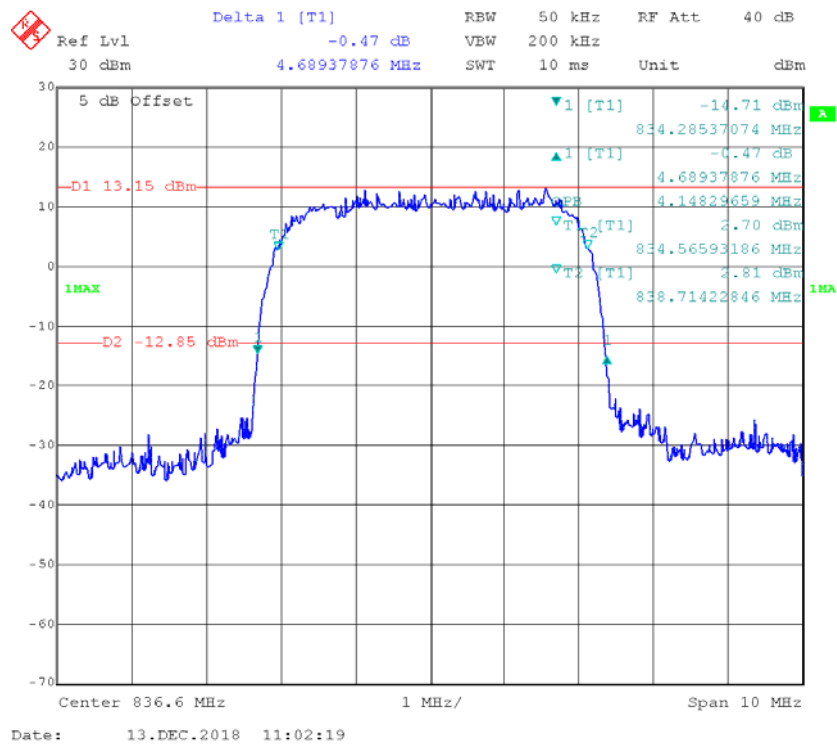**REL99 Band V****HSDPA Band V**

### HSUPA Band V

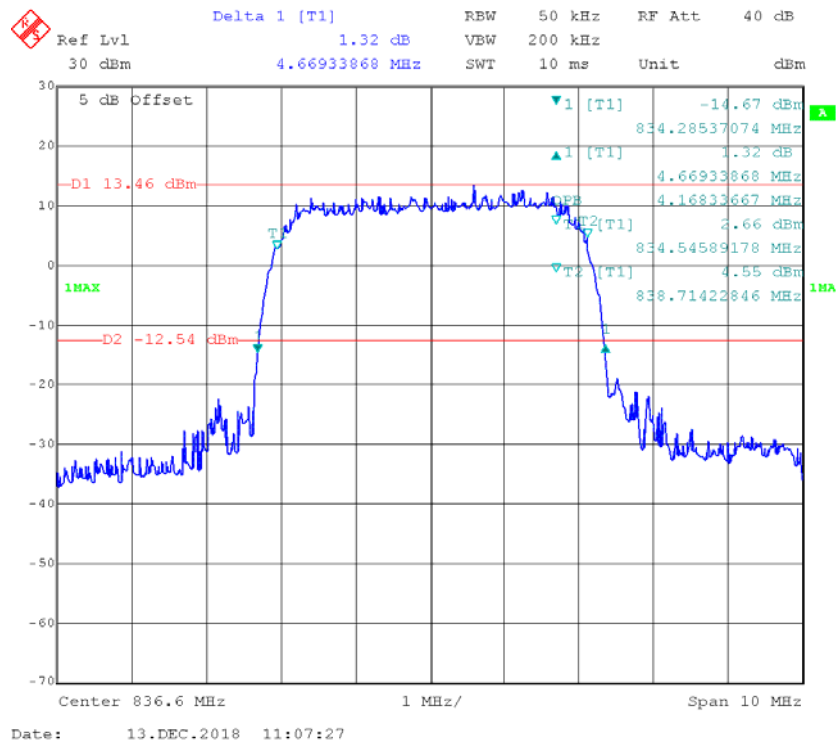

## FCC §2.1051, §22.917(a) & §24.238(a) & §27.53 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


### Applicable Standard

FCC §2.1051, §22.917(a), §24.238(a), §27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

### Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

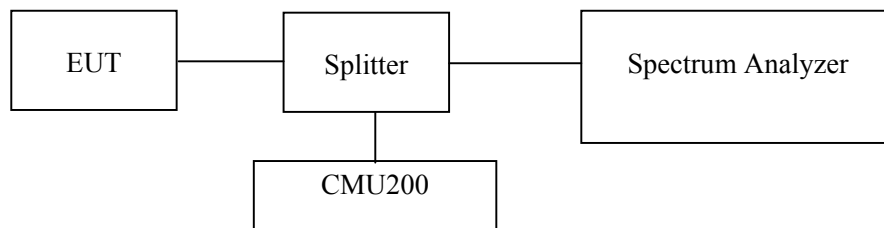

### Test Equipment List and Details

| Manufacturer    | Description      | Model         | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|------------------|---------------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer  | FSIQ26        | 831929/005    | 2018-08-03       | 2019-08-03           |
| yzjingcheng     | Coaxial Cable    | KTRFBU-141-50 | 41005012      | 2018-09-05       | 2019-09-05           |
| Unknown         | Coaxial Cable    | C-SJ00-0010   | C0010/01      | Each time        | N/A                  |
| E-Microwave     | Two-way Splitter | ODP-1-6-2S    | OE0120142     | Each time        | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data



#### Environmental Conditions

|                    |          |
|--------------------|----------|
| Temperature:       | 23.9 °C  |
| Relative Humidity: | 31 %     |
| ATM Pressure:      | 99.7 kPa |


\* The testing was performed by Tiago Huang on 2018-12-13.

Test Result: Compliance. Please refer to the following plots.


### GSM850\_Middle Channel

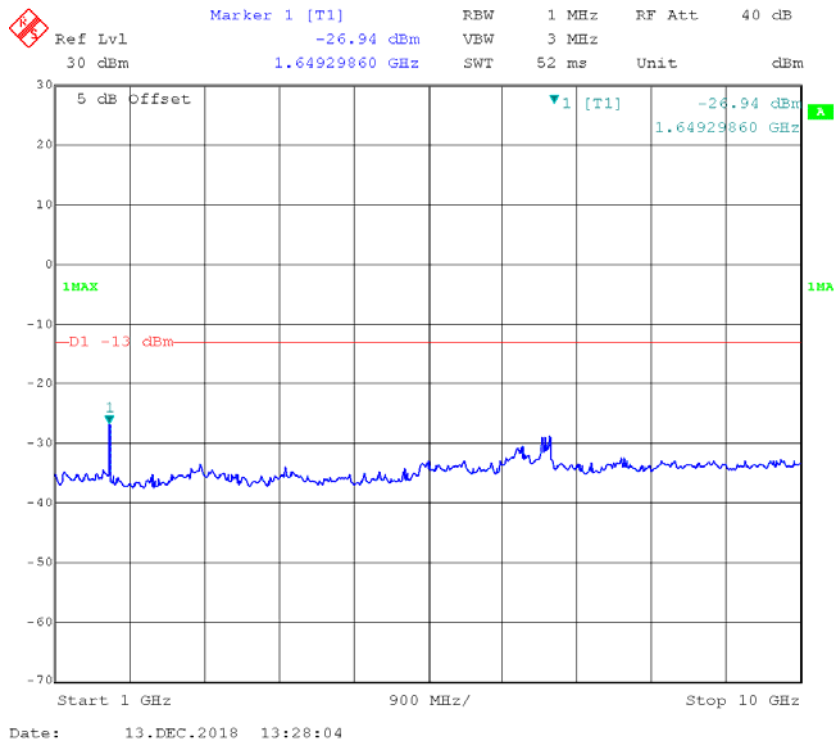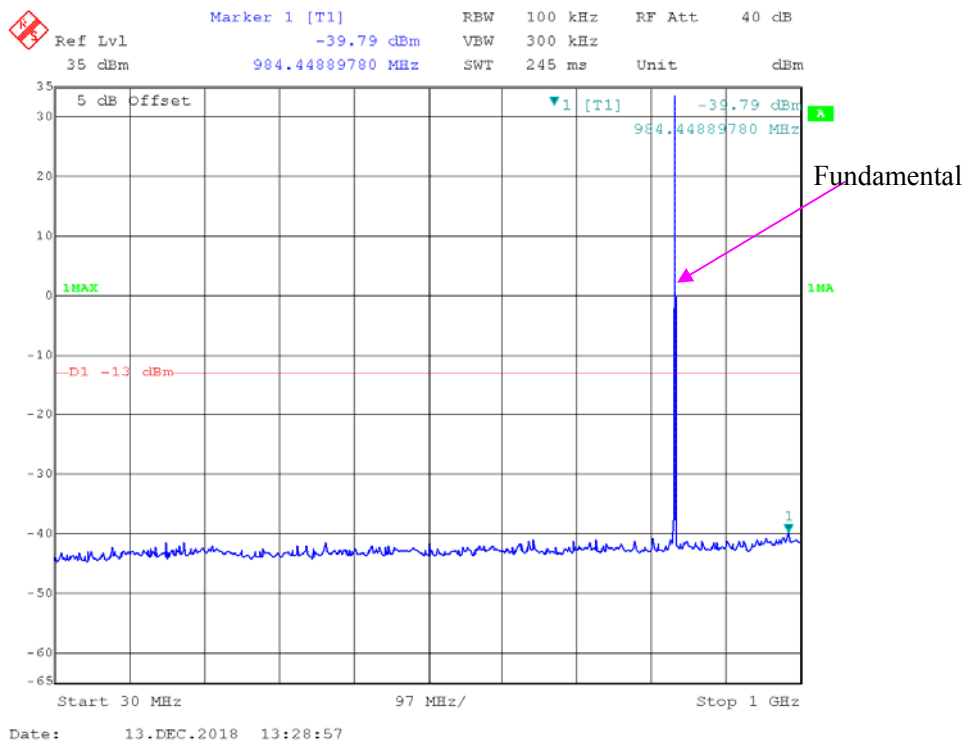


### PCS 1900\_ Middle Channel

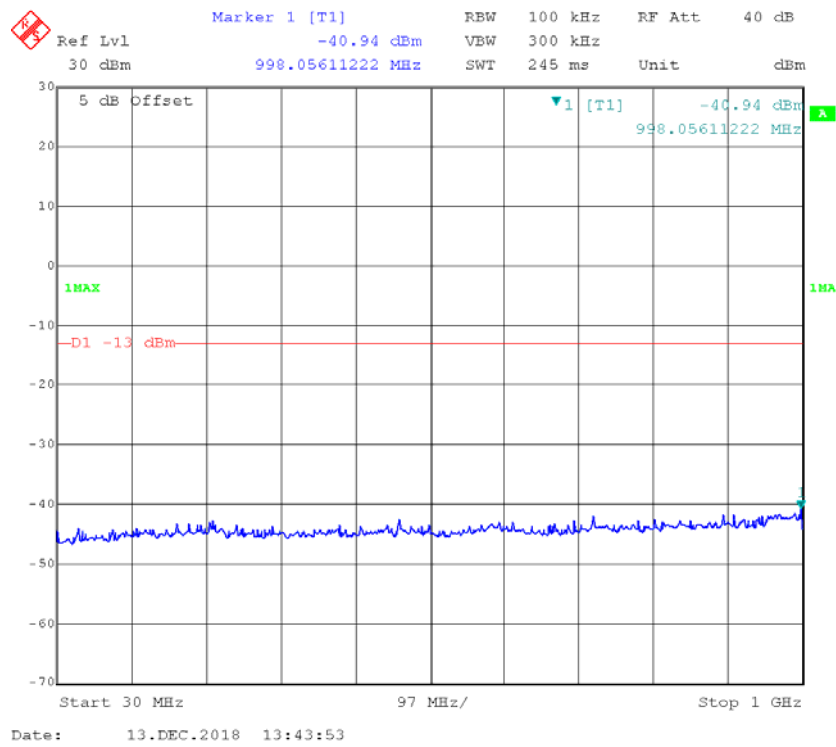


Fundamental

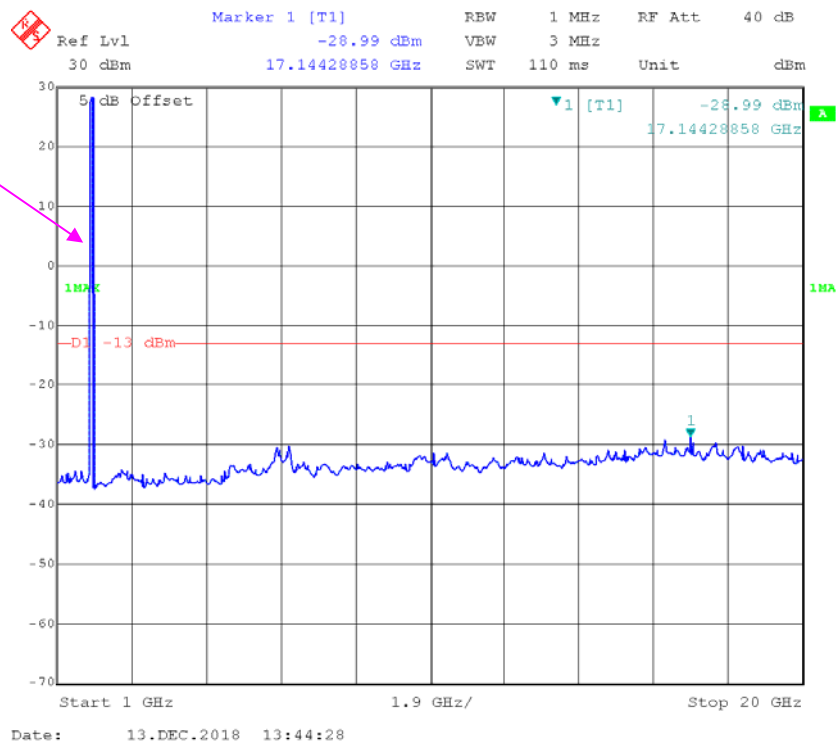


### REL99 Band II\_ Middle Channel

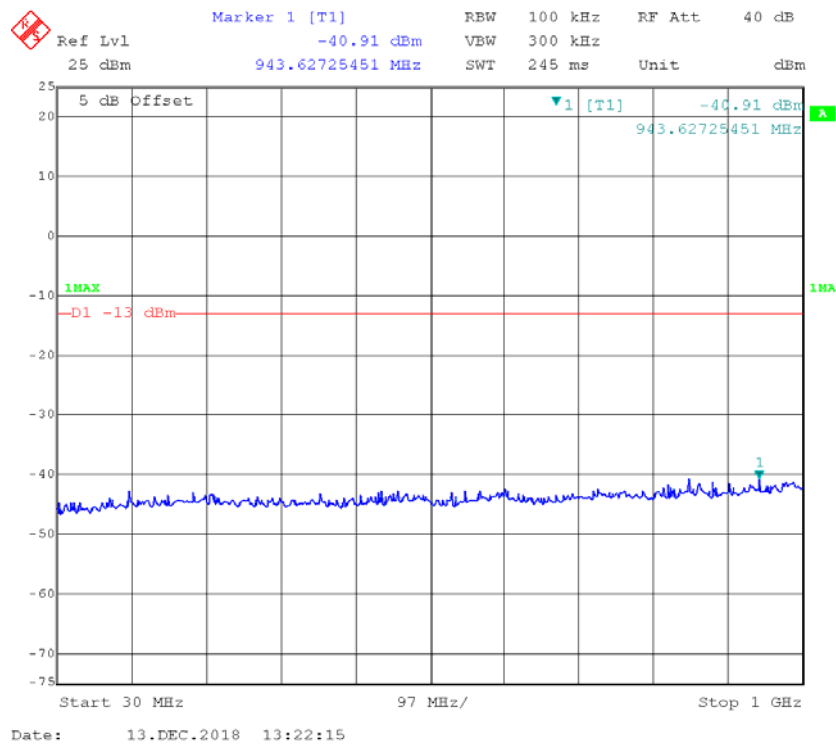


Fundamental

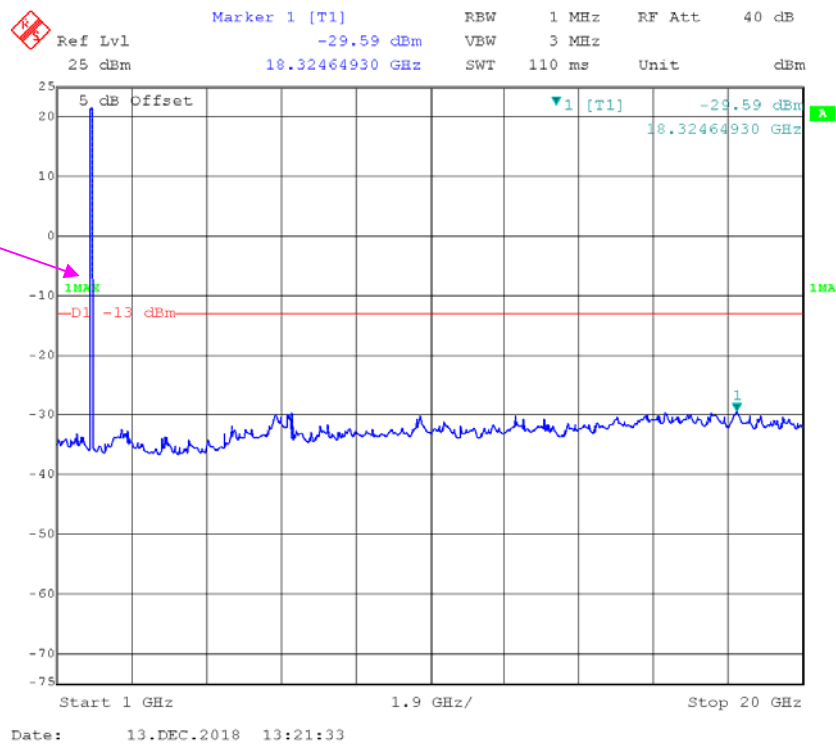



### REL99 Band IV\_ Middle Channel

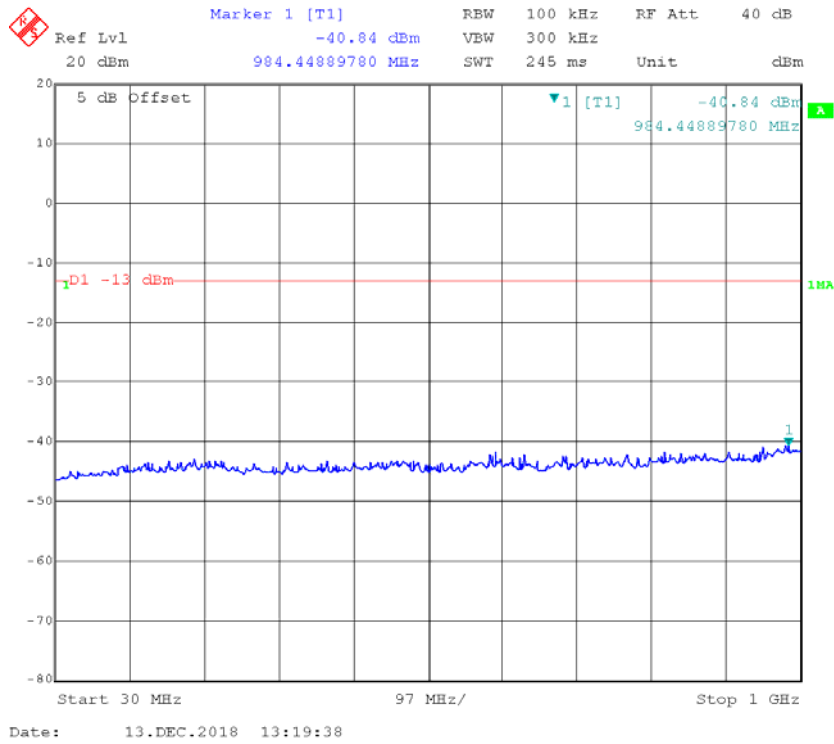

Fundamental

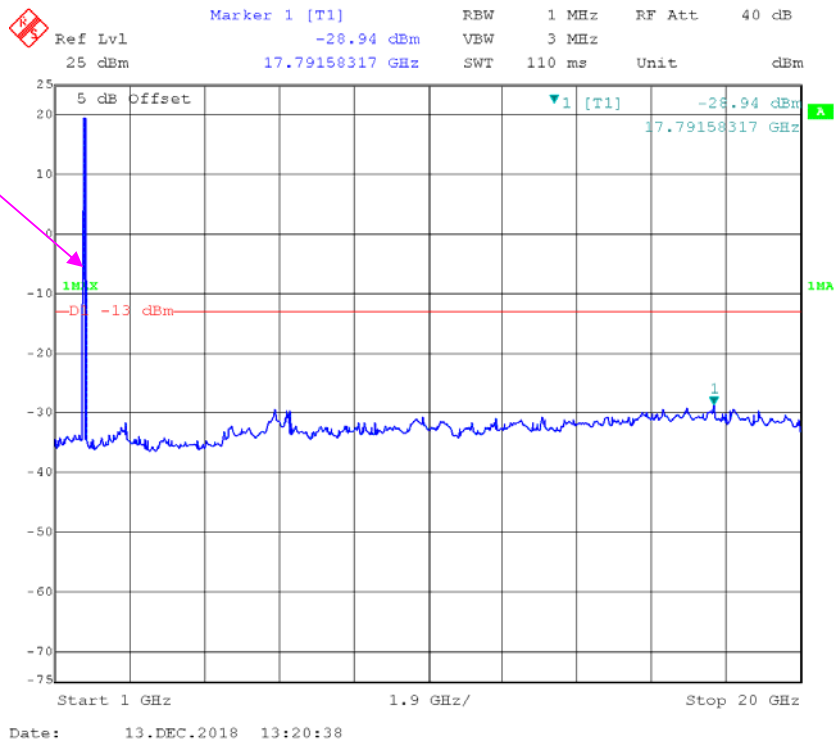

### REL99 Band V\_ Middle Channel

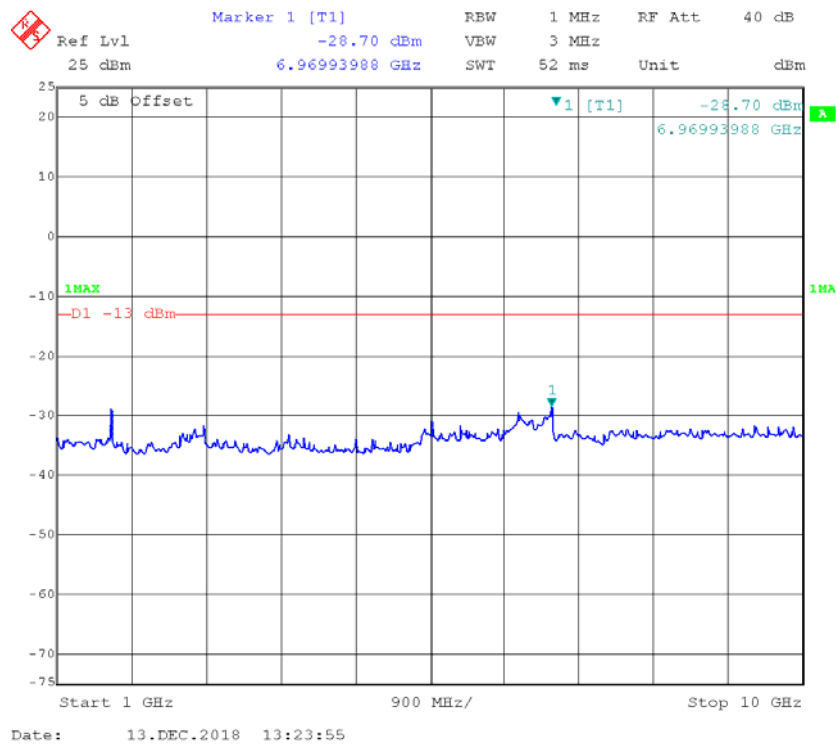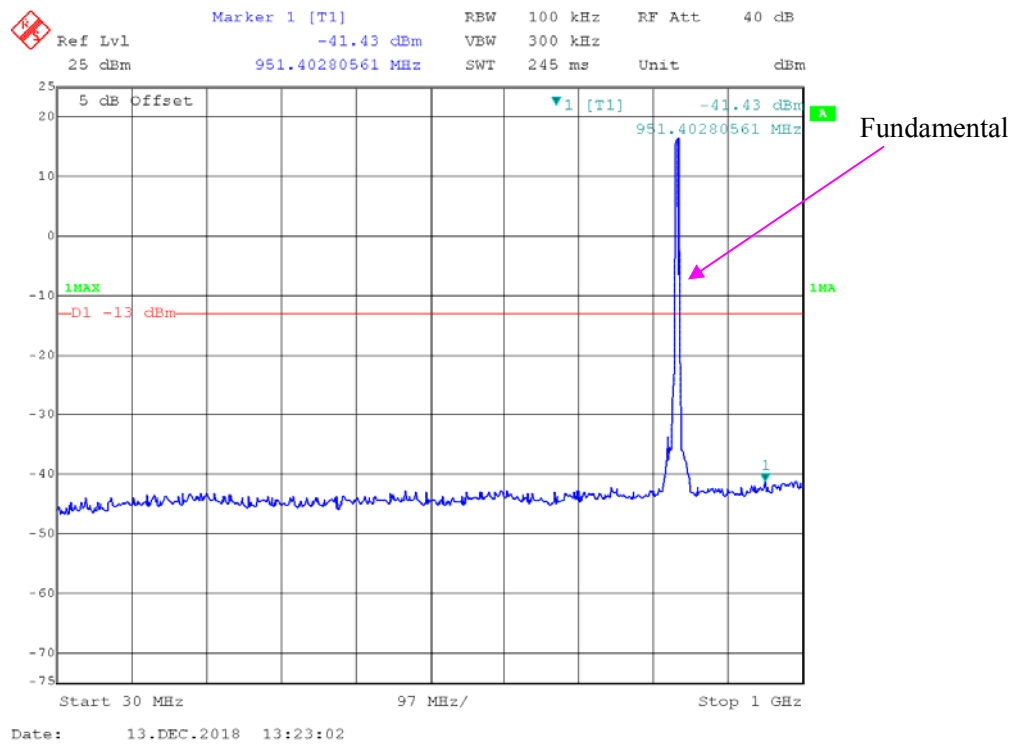

**FCC §2.1053, §22.917 & §24.238 & §27.53 - SPURIOUS RADIATED EMISSIONS**

---

**Applicable Standard**

FCC § 2.1053, §22.917, § 24.238 and § 27.53.

**Test Procedure**

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =  $10 \lg (\text{TXpwr in Watts}/0.001)$  – the absolute level

Spurious attenuation limit in dB =  $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

**Test Equipment List and Details**

| Manufacturer          | Description               | Model                   | Serial Number      | Calibration Date | Calibration Due Date |
|-----------------------|---------------------------|-------------------------|--------------------|------------------|----------------------|
| R&S                   | EMI Test Receiver         | ESCI                    | 100035             | 2018-08-03       | 2019-08-03           |
| Sunol Sciences        | Antenna                   | JB3                     | A060611-3          | 2017-07-21       | 2019-07-21           |
| EMCO                  | Adjustable Dipole Antenna | 3121C                   | 9109-753           | N/A              | N/A                  |
| Unknown               | Coaxial Cable             | C-NJNJ-50               | C-1000-01          | 2018-09-05       | 2019-09-05           |
| Unknown               | Coaxial Cable             | C-NJNJ-50               | C-0400-02          | 2018-09-05       | 2019-09-05           |
| Unknown               | Coaxial Cable             | C-NJNJ-50               | C-0530-01          | 2018-09-24       | 2019-09-24           |
| Unknown               | Coaxial Cable             | C-NJNJ-50               | C-0200-02          | 2018-09-05       | 2019-09-05           |
| Sonoma                | Amplifier                 | 310N                    | 185914             | 2018-10-13       | 2019-10-13           |
| Agilent               | Spectrum Analyzer         | E4440A                  | SG43360054         | 2018-01-04       | 2019-01-04           |
| TDK RF                | Horn Antenna              | HRN-0118                | 130 084            | 2016-01-05       | 2019-01-04           |
| ETS-Lindgren          | Horn Antenna              | 3115                    | 000 527 35         | 2016-01-05       | 2019-01-04           |
| Unknown               | Coaxial Cable             | C-SJSJ-50               | C-0800-01          | 2018-09-05       | 2019-09-05           |
| MITEQ                 | Amplifier                 | AFS42-00101800-25-S-42  | 2001271            | 2018-09-05       | 2019-09-05           |
| Sinoscite             | Band-stop filter          | BSF1710-1785MN-0383-003 | 0383003            | 2018-06-16       | 2019-06-16           |
| Sinoscite             | Band-stop filter          | BSF824-862MS-1438-001   | 1438001            | 2018-06-16       | 2019-06-16           |
| Sinoscite             | Band-stop filter          | BSF1850-1910MS-0935V2   | 0935V2             | 2018-06-16       | 2019-06-16           |
| Ducommun Technologies | Horn Antenna              | ARH-4223-02             | 1007726-01<br>1304 | 2016-11-18       | 2019-11-18           |
| Ducommun Technologies | Horn Antenna              | ARH-4223-02             | 1007726-02<br>1304 | 2016-11-18       | 2019-11-18           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                           |               |
|---------------------------|---------------|
| <b>Temperature:</b>       | 20.7~20.9 °C  |
| <b>Relative Humidity:</b> | 32~51 %       |
| <b>ATM Pressure:</b>      | 99.5~99.7 kPa |

\* The testing was performed by Sunny Cen & Tyler Pan on 2018-12-11~2018-12-13.

Test Result: Compliance.

*EUT Operation Mode: Transmitting***Cellular Band (PART 22H)****30 MHz-10 GHz:**

| Frequency<br>(MHz)                      | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                              |                    | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|-----------------------------------------|----------------|-------------------------------|-------------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
|                                         |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd/dBi) | Cable Loss<br>(dB) |                            |                |                |
| GSM850, Frequency:836.600 MHz           |                |                               |                               |                              |                    |                            |                |                |
| 1673.200                                | H              | 66.13                         | -48.08                        | 10.6                         | 0.73               | -38.2                      | -13.0          | 25.2           |
| 1673.200                                | V              | 64.64                         | -50.17                        | 10.6                         | 0.73               | -40.3                      | -13.0          | 27.3           |
| 2509.800                                | H              | 54.99                         | -58.03                        | 13.1                         | 1.25               | -46.2                      | -13.0          | 33.2           |
| 2509.800                                | V              | 49.97                         | -63.08                        | 13.1                         | 1.25               | -51.2                      | -13.0          | 38.2           |
| 3346.400                                | H              | 46.03                         | -64.63                        | 13.8                         | 1.61               | -52.4                      | -13.0          | 39.4           |
| 3346.400                                | V              | 45.78                         | -64.93                        | 13.8                         | 1.61               | -52.7                      | -13.0          | 39.7           |
| 486.000                                 | H              | 45.87                         | -59.73                        | 0.0                          | 0.35               | -60.1                      | -13.0          | 47.1           |
| 486.000                                 | V              | 47.88                         | -55.04                        | 0.0                          | 0.35               | -55.4                      | -13.0          | 42.4           |
| WCDMA Band V R99, Frequency:836.600 MHz |                |                               |                               |                              |                    |                            |                |                |
| 1673.200                                | H              | 68.93                         | -45.28                        | 10.6                         | 0.73               | -35.4                      | -13.0          | 22.4           |
| 1673.200                                | V              | 65.97                         | -48.84                        | 10.6                         | 0.73               | -39.0                      | -13.0          | 26.0           |
| 2509.800                                | H              | 53.25                         | -59.77                        | 13.1                         | 1.25               | -47.9                      | -13.0          | 34.9           |
| 2509.800                                | V              | 51.42                         | -61.63                        | 13.1                         | 1.25               | -49.8                      | -13.0          | 36.8           |
| 3346.400                                | H              | 46.82                         | -63.84                        | 13.8                         | 1.61               | -51.6                      | -13.0          | 38.6           |
| 3346.400                                | V              | 45.77                         | -64.94                        | 13.8                         | 1.61               | -52.7                      | -13.0          | 39.7           |
| 372.000                                 | H              | 47.58                         | -59.73                        | 0.0                          | 0.36               | -60.1                      | -13.0          | 47.1           |
| 372.000                                 | V              | 48.95                         | -55.98                        | 0.0                          | 0.36               | -56.3                      | -13.0          | 43.3           |

**PCS Band (PART 24E)****30 MHz-20 GHz:**

| Frequency<br>(MHz)                         | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                              |                    | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|--------------------------------------------|----------------|-------------------------------|-------------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
|                                            |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd/dBi) | Cable Loss<br>(dB) |                            |                |                |
| GSM1900, Frequency:1880.000 MHz            |                |                               |                               |                              |                    |                            |                |                |
| 3760.000                                   | H              | 50.72                         | -58.08                        | 13.8                         | 1.63               | -46.0                      | -13.0          | 33.0           |
| 3760.000                                   | V              | 49.65                         | -59.02                        | 13.8                         | 1.63               | -46.9                      | -13.0          | 33.9           |
| 5640.000                                   | H              | 57.68                         | -48.35                        | 14.0                         | 1.31               | -35.6                      | -13.0          | 22.6           |
| 5640.000                                   | V              | 53.46                         | -52.45                        | 14.0                         | 1.31               | -39.7                      | -13.0          | 26.7           |
| 635.000                                    | H              | 46.69                         | -55.2                         | 0.0                          | 0.37               | -55.6                      | -13.0          | 42.6           |
| 635.000                                    | V              | 47.31                         | -51.83                        | 0.0                          | 0.37               | -52.2                      | -13.0          | 39.2           |
| WCDMA Band II, R99, Frequency:1880.000 MHz |                |                               |                               |                              |                    |                            |                |                |
| 3760.000                                   | H              | 57.66                         | -51.14                        | 13.8                         | 1.63               | -39.0                      | -13.0          | 26.0           |
| 3760.000                                   | V              | 55.41                         | -53.26                        | 13.8                         | 1.63               | -41.1                      | -13.0          | 28.1           |
| 5640.000                                   | H              | 52.73                         | -53.3                         | 14.0                         | 1.31               | -40.6                      | -13.0          | 27.6           |
| 5640.000                                   | V              | 48.02                         | -57.89                        | 14.0                         | 1.31               | -45.2                      | -13.0          | 32.2           |
| 7520.000                                   | H              | 47.88                         | -52.44                        | 13.2                         | 1.33               | -40.6                      | -13.0          | 27.6           |
| 7520.000                                   | V              | 47.53                         | -53.26                        | 13.2                         | 1.33               | -41.4                      | -13.0          | 28.4           |
| 395.000                                    | H              | 46.57                         | -60.31                        | 0.0                          | 0.38               | -60.7                      | -13.0          | 47.7           |
| 395.000                                    | V              | 48.66                         | -55.61                        | 0.0                          | 0.38               | -56.0                      | -13.0          | 43.0           |

**Part 27**

| Frequency<br>(MHz)                         | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                              |                    | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|--------------------------------------------|----------------|-------------------------------|-------------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
|                                            |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd/dBi) | Cable Loss<br>(dB) |                            |                |                |
| WCDMA Band IV, R99, Frequency:1732.600 MHz |                |                               |                               |                              |                    |                            |                |                |
| 3465.200                                   | H              | 51.97                         | -58.27                        | 13.9                         | 1.62               | -46.0                      | -13.0          | 33.0           |
| 3465.200                                   | V              | 50.72                         | -59.55                        | 13.9                         | 1.62               | -47.3                      | -13.0          | 34.3           |
| 5197.800                                   | H              | 47.15                         | -59.27                        | 14.0                         | 1.52               | -46.8                      | -13.0          | 33.8           |
| 5197.800                                   | V              | 46.53                         | -59.96                        | 14.0                         | 1.52               | -47.5                      | -13.0          | 34.5           |
| 6930.400                                   | H              | 48.98                         | -53.32                        | 13.6                         | 1.81               | -41.5                      | -13.0          | 28.5           |
| 6930.400                                   | V              | 47.64                         | -54.52                        | 13.6                         | 1.81               | -42.7                      | -13.0          | 29.7           |
| 459.000                                    | H              | 46.58                         | -59.4                         | 0.0                          | 0.36               | -59.8                      | -13.0          | 46.8           |
| 459.000                                    | V              | 48.71                         | -54.59                        | 0.0                          | 0.36               | -55.0                      | -13.0          | 42.0           |

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

## FCC §22.917(a) & §24.238(a) & §27.53- BAND EDGES


### Applicable Standard

FCC § 2.1053, §22.917, § 24.238, § 27.53.

### Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

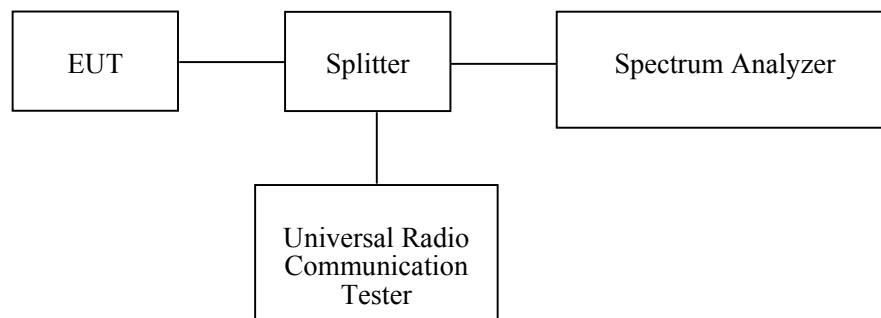

### Test Equipment List and Details

| Manufacturer    | Description      | Model         | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|------------------|---------------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer  | FSIQ26        | 831929/005    | 2018-08-03       | 2019-08-03           |
| yzjingcheng     | Coaxial Cable    | KTRFBU-141-50 | 41005012      | Each time        | N/A                  |
| Unknown         | Coaxial Cable    | C-SJ00-0010   | C0010/01      | Each time        | N/A                  |
| E-Microwave     | Two-way Splitter | ODP-1-6-2S    | OE0120142     | Each time        | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions


|                    |          |
|--------------------|----------|
| Temperature:       | 23.9 °C  |
| Relative Humidity: | 31 %     |
| ATM Pressure:      | 99.7 kPa |

\* The testing was performed by Tiago Huang on 2018-12-13.


Test Mode: Transmitting



Test Result: Compliance. Please refer to the following plots.

### GSM 850, Left Band Edge

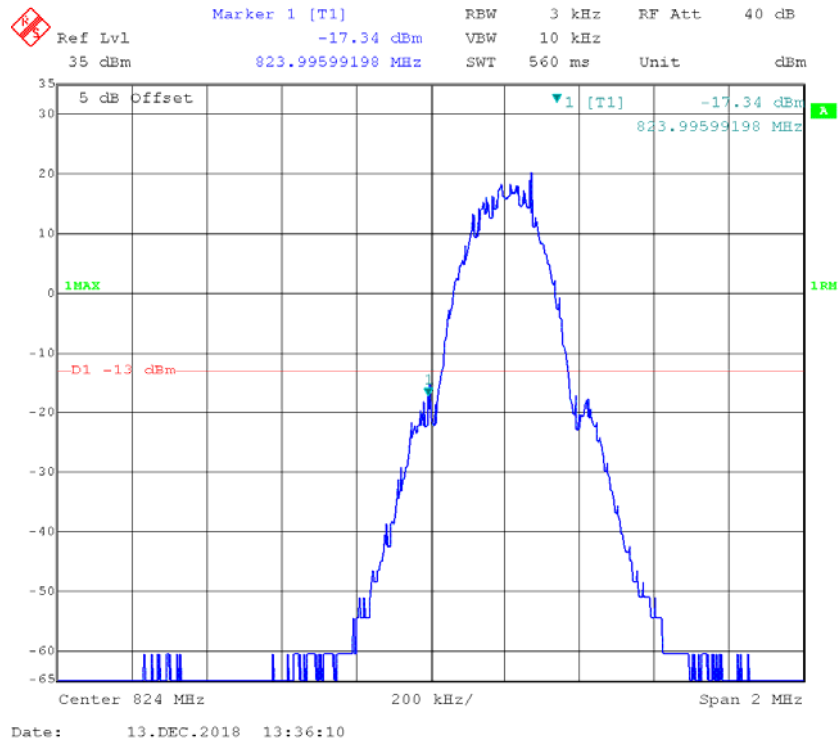


### GSM 850, Right Band Edge

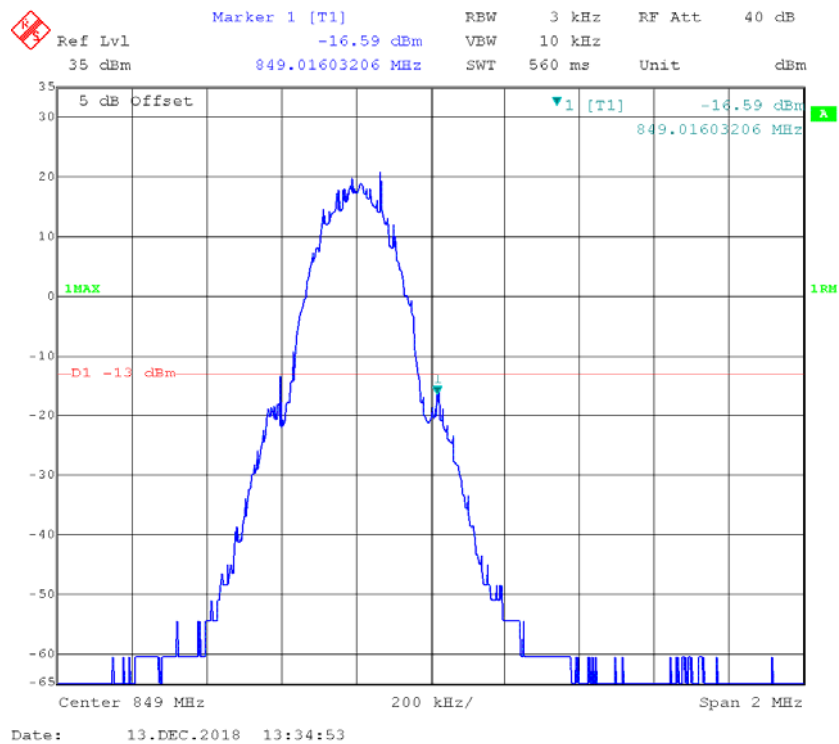

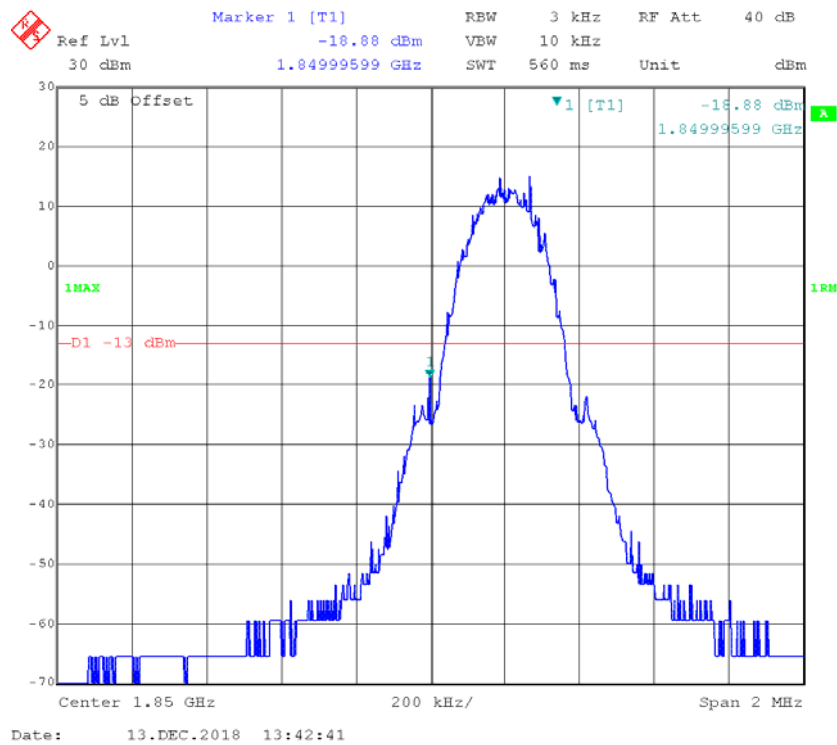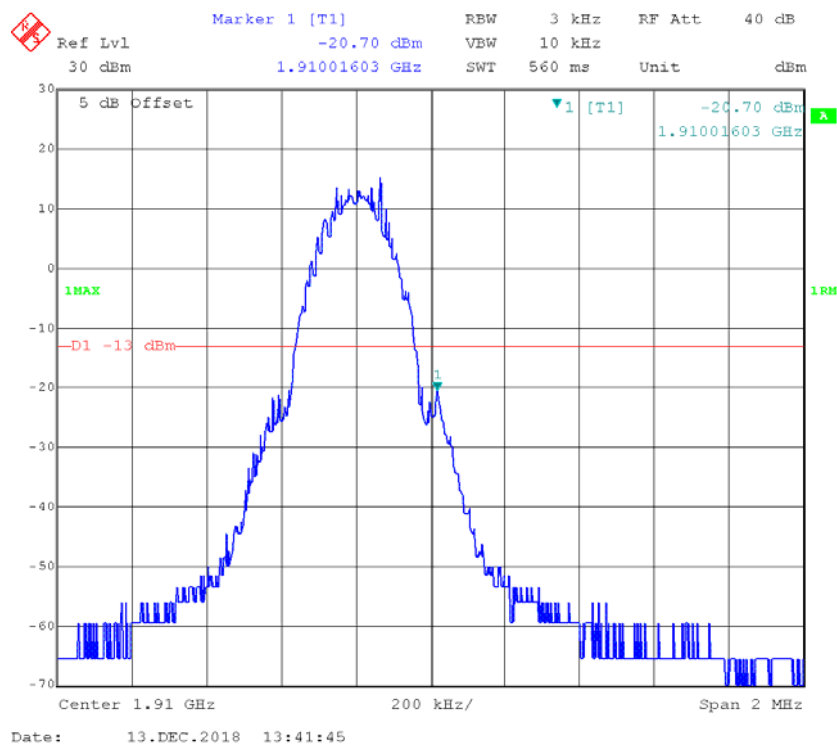
**GSM 1900, Left Band Edge****GSM 1900, Right Band Edge**



WCDMA Band II:

**REL99 Band II, Left Band Edge**

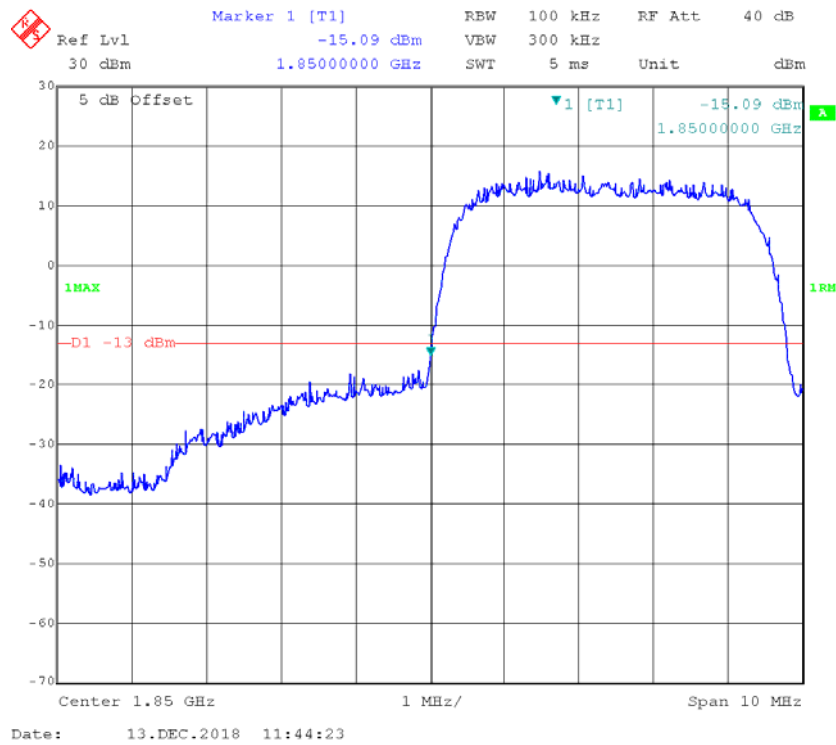


**REL99 Band II, Right Band Edge**

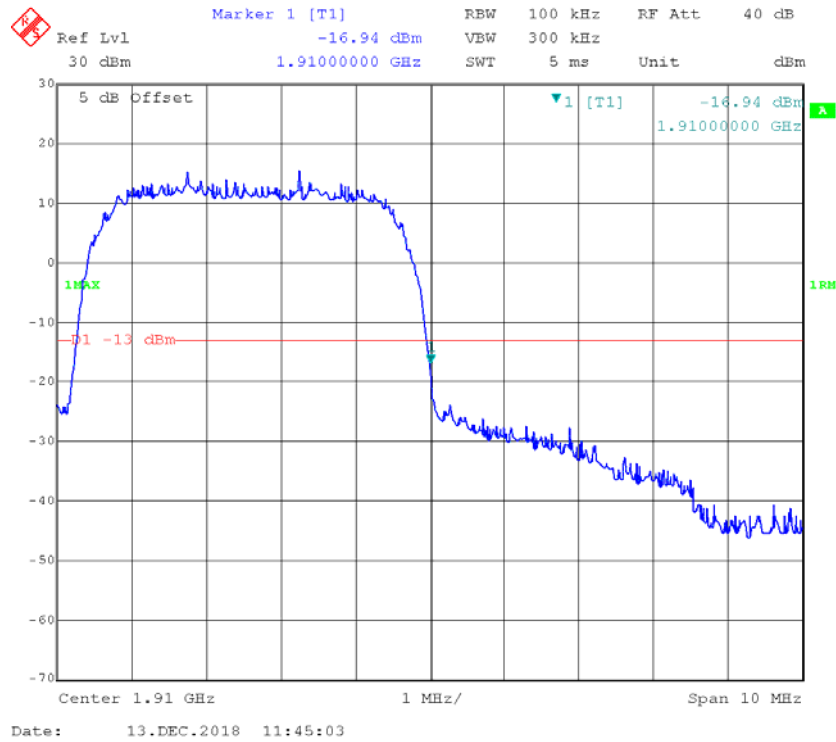


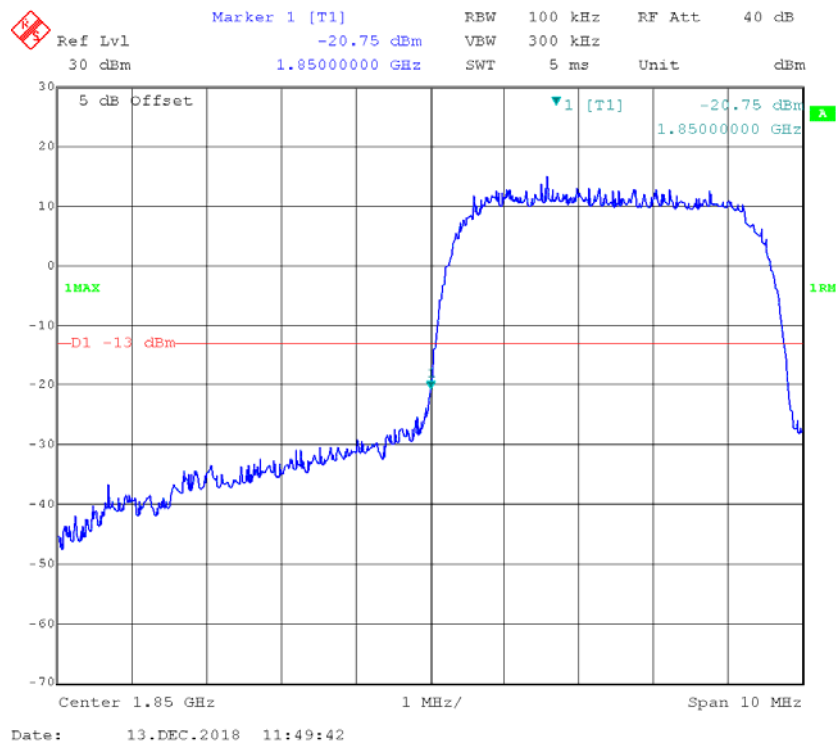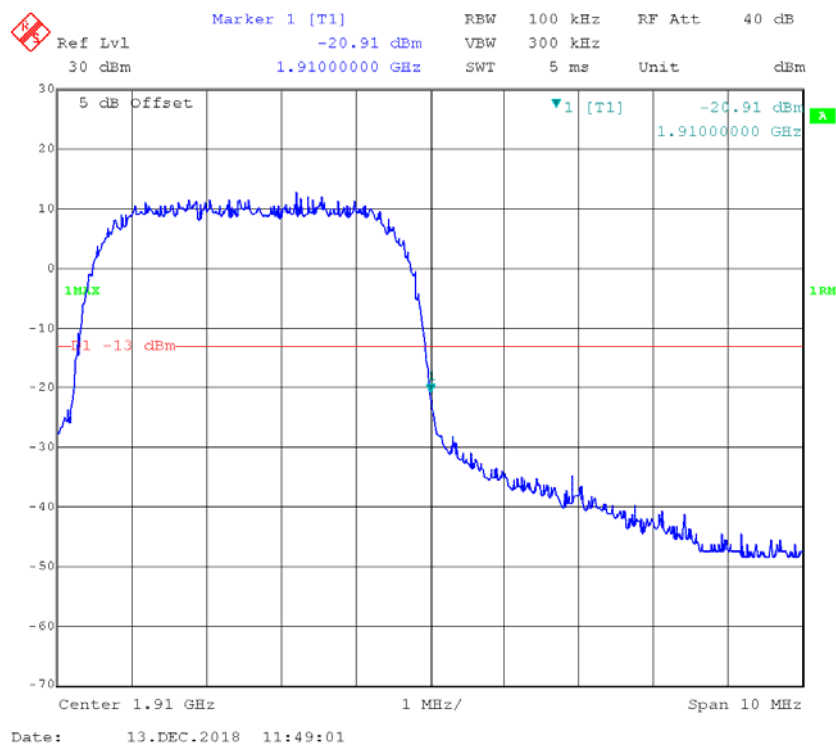**HSDPA Band II, Left Band Edge****HSDPA Band II, Right Band Edge**

### HSUPA Band II, Left Band Edge

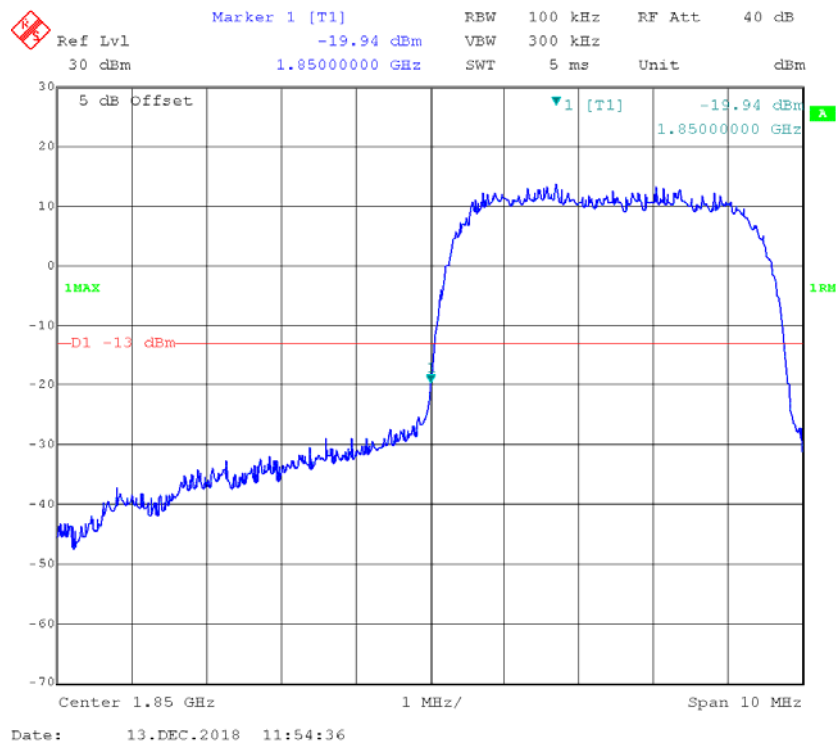


### HSUPA Band II, Right Band Edge

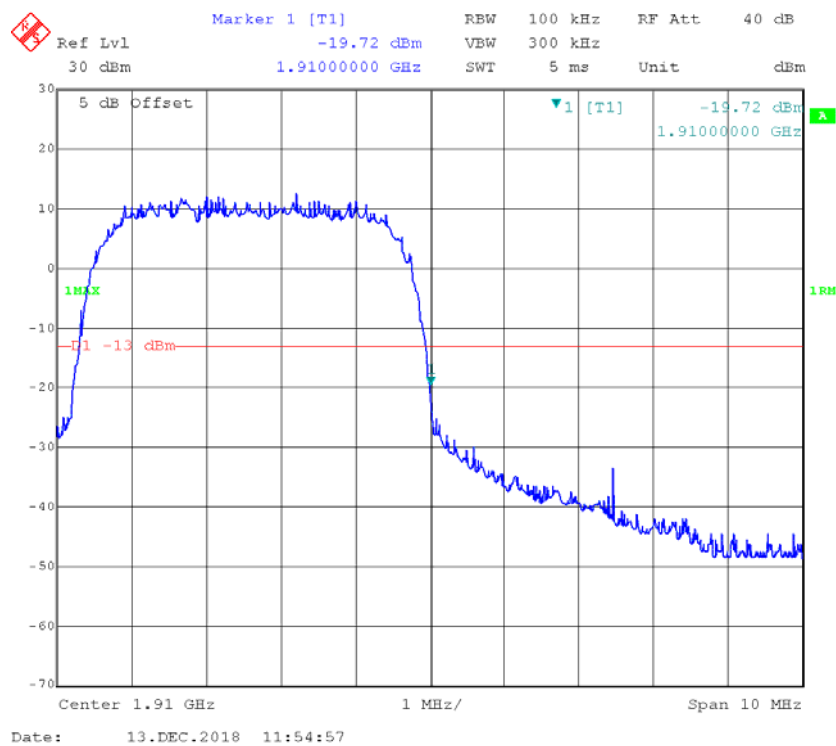




## WCDMA Band IV

## REL99 Band IV, Left Band Edge

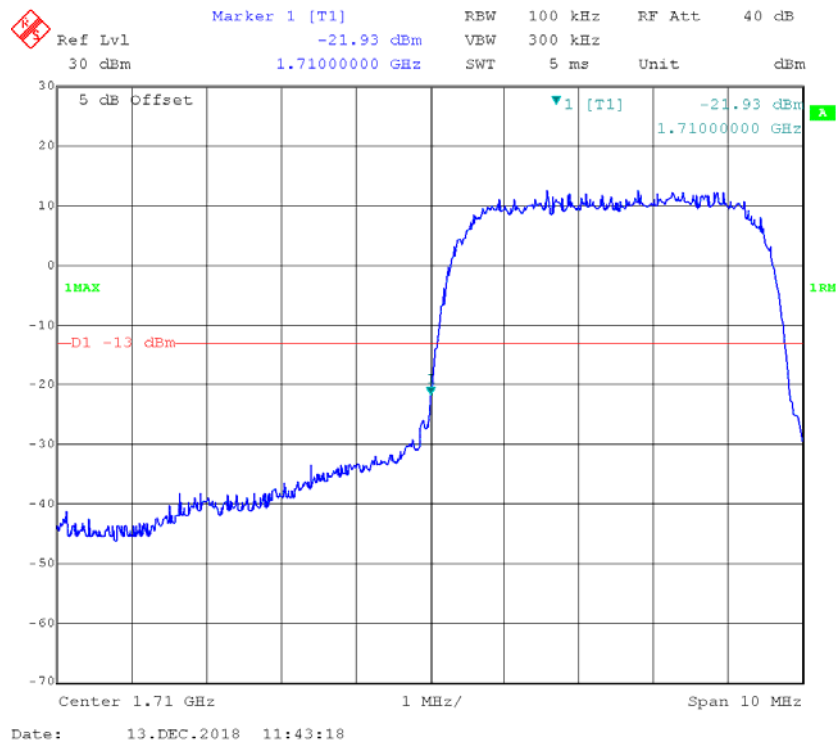


## REL99 Band IV Right Band Edge

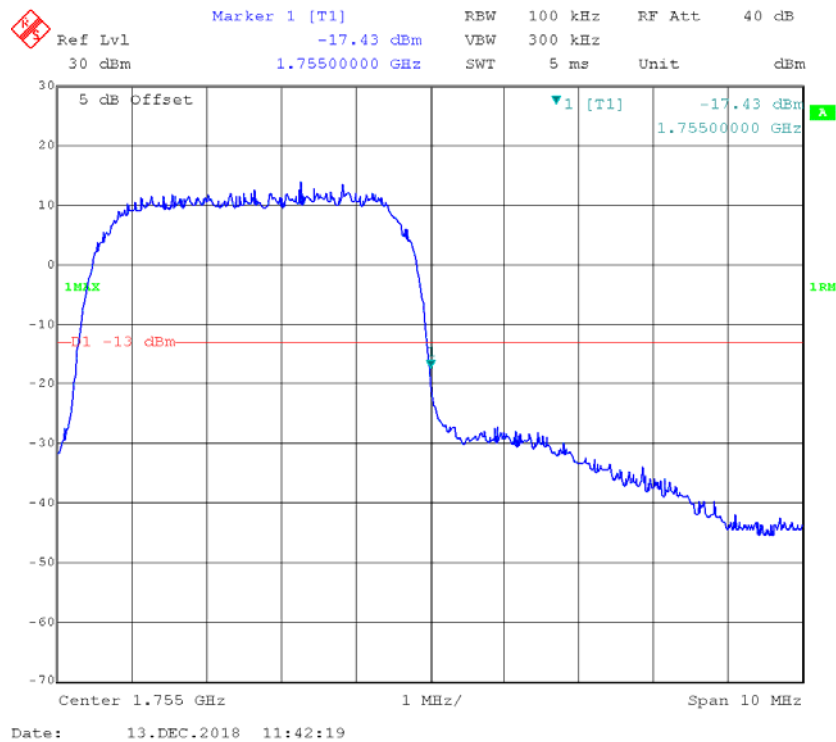


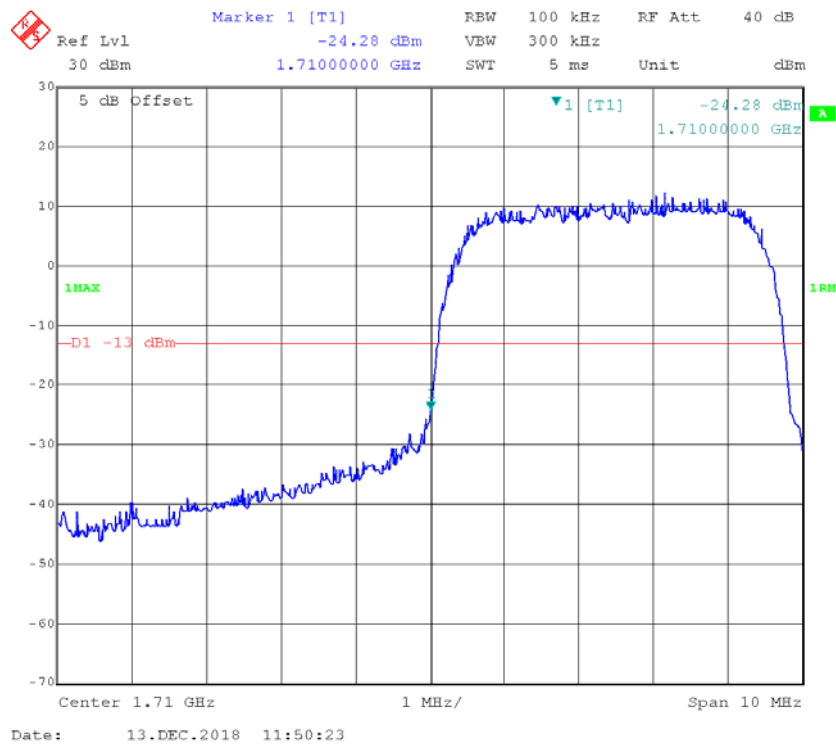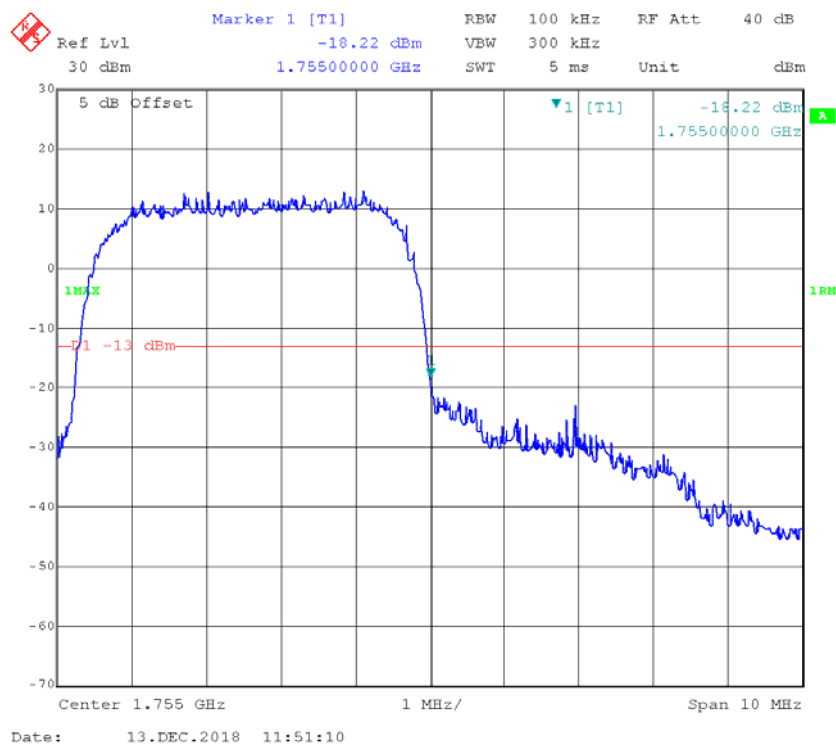**HSDPA Band IV, Left Band Edge****HSDPA Band IV, Right Band Edge**

### HSUPA Band IV, Left Band Edge

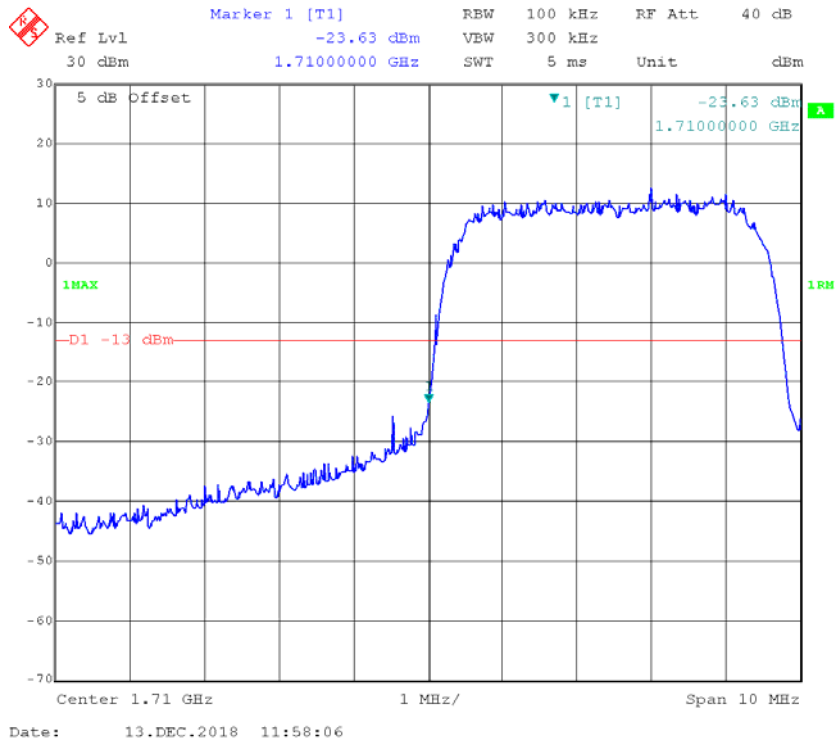


### HSUPA Band IV, Right Band Edge

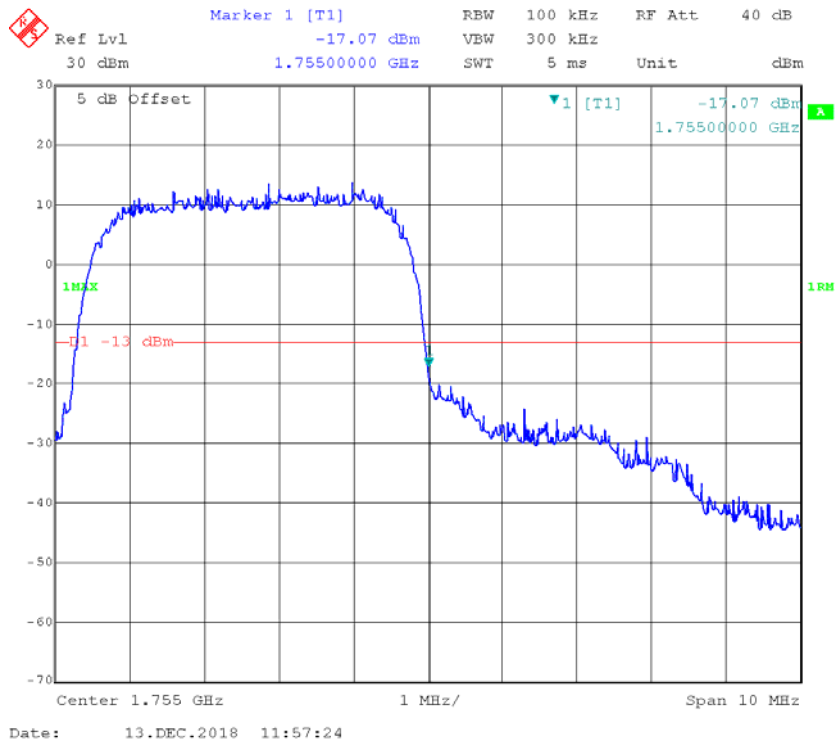




WCDMA Band V

REL99 Band V, Left Band Edge

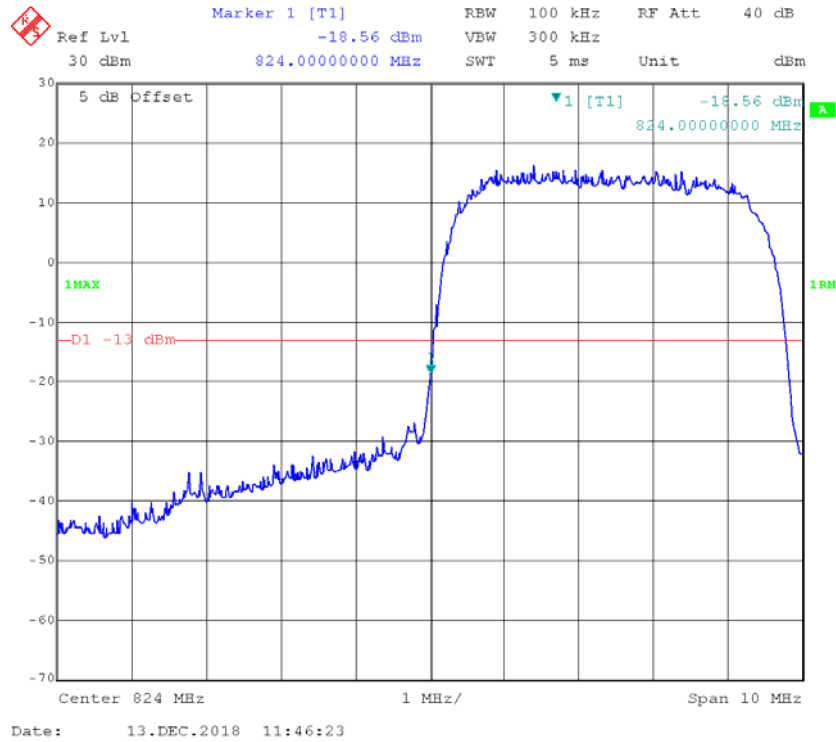


REL99 Band V, Right Band Edge

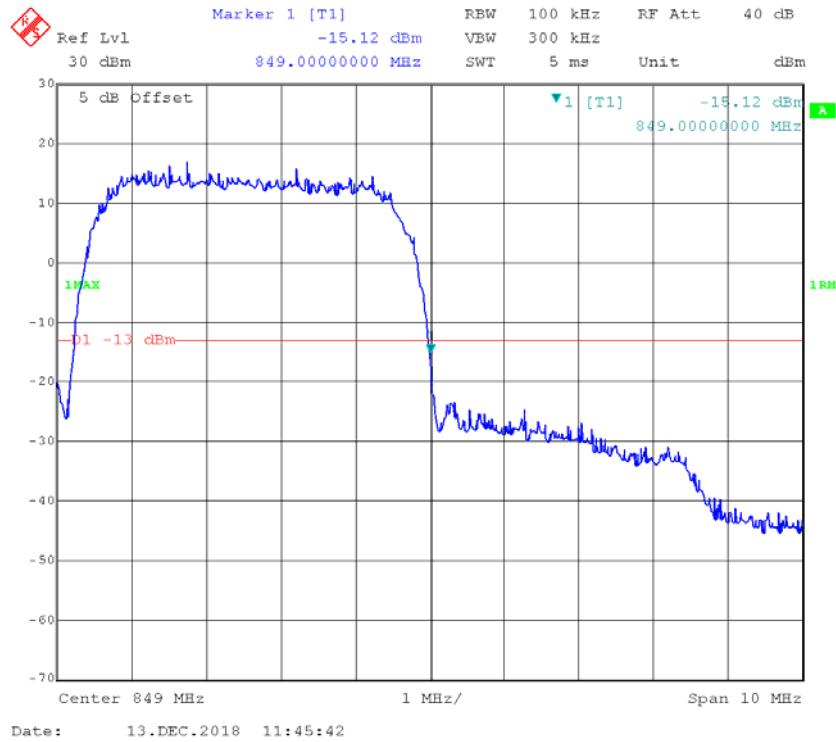


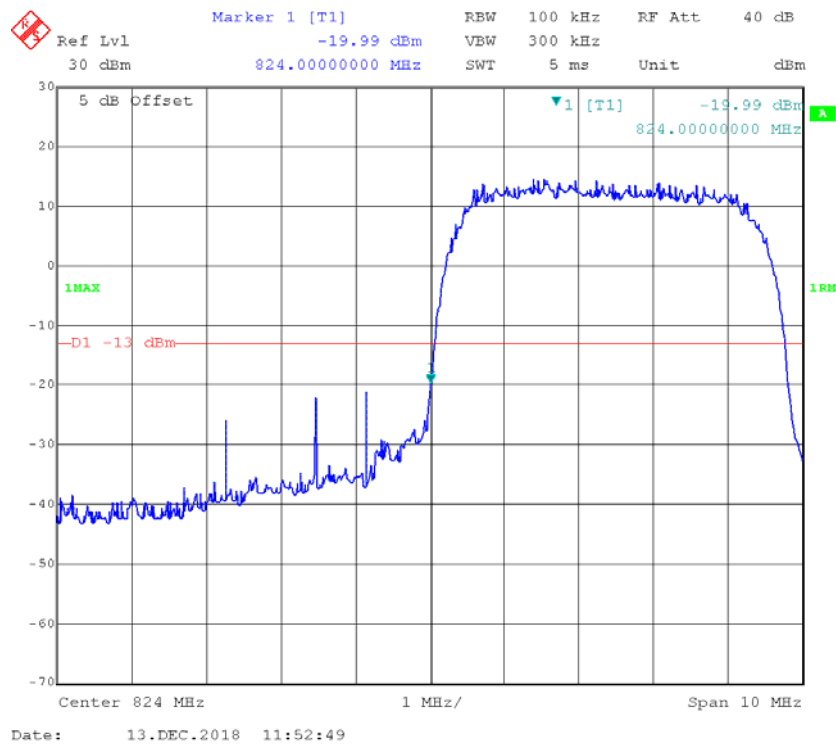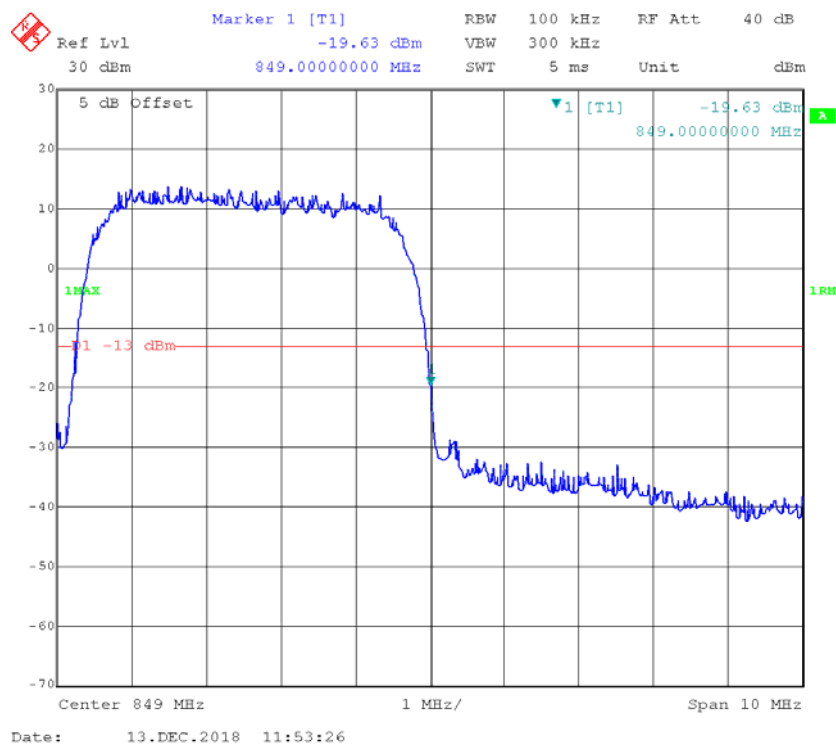**HSDPA Band V, Left Band Edge****HSDPA Band V, Right Band Edge**

### HSUPA Band V, Left Band Edge

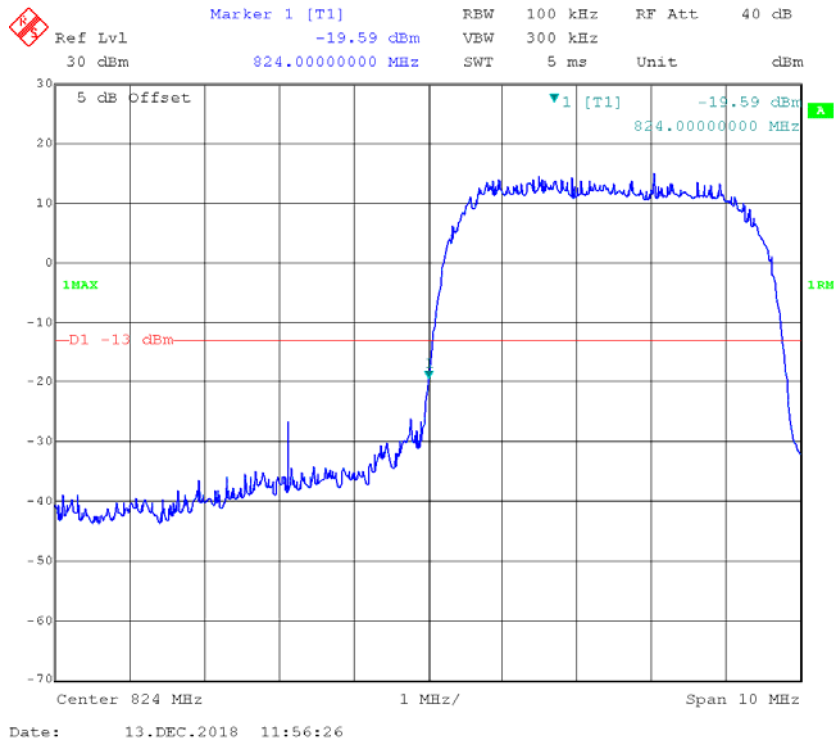

### HSUPA Band V, Right Band Edge

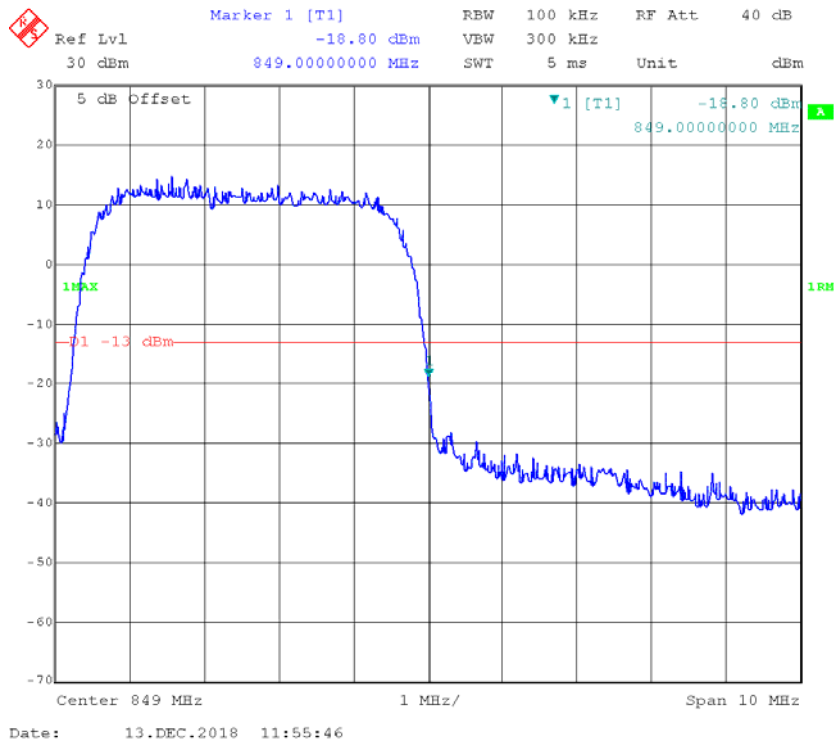

**FCC §2.1055, §22.355 & §24.235& §27.54 - FREQUENCY STABILITY****Applicable Standard**

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235,§27.54

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

| Frequency Range (MHz) | Base, fixed (ppm) | Mobile > 3 watts (ppm) | Mobile ≤ 3 watts (ppm) |
|-----------------------|-------------------|------------------------|------------------------|
| 25 to 50              | 20.0              | 20.0                   | 50.0                   |
| 50 to 450             | 5.0               | 5.0                    | 50.0                   |
| 450 to 512            | 2.5               | 5.0                    | 5.0                    |
| 821 to 896            | 1.5               | 2.5                    | 2.5                    |
| 928 to 929.           | 5.0               | N/A                    | N/A                    |
| 929 to 960.           | 1.5               | N/A                    | N/A                    |
| 2110 to 2220          | 10.0              | N/A                    | N/A                    |


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

**Test Procedure**

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

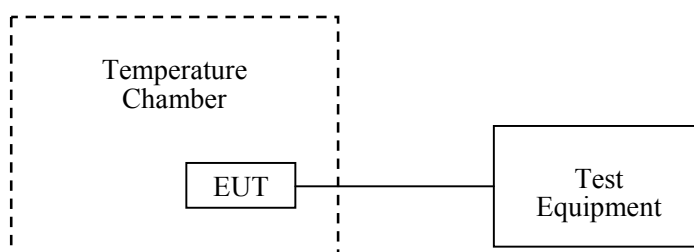

**Test Equipment List and Details**

| Manufacturer    | Description                              | Model         | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|------------------------------------------|---------------|---------------|------------------|----------------------|
| R&S             | Universal Radio Communication Tester     | CMU200        | 106 891       | 2017-12-14       | 2018-12-14           |
| ESPEC           | Constant temperature and humidity Tester | ESX-4CA       | 018 463       | 2018-03-26       | 2019-03-26           |
| Unknown         | Coaxial Cable                            | C-SJ00-0010   | C0010/01      | Each time        | N/A                  |
| UNI-T           | Multimeter                               | UT39A         | M130199938    | 2018-05-09       | 2019-05-09           |
| Pro instrument  | DC Power Supply                          | pps3300       | 3300012       | N/A              | N/A                  |
| Unknown         | Coaxial Cable                            | C-SJ00-0010   | C0010/01      | Each time        | N/A                  |
| E-Microwave     | Two-way Splitter                         | ODP-1-6-2S    | OE0120142     | Each time        | N/A                  |
| yzjingcheng     | Coaxial Cable                            | KTRFBU-141-50 | 41005012      | Each time        | N/A                  |
| Rohde & Schwarz | Signal Analyzer                          | FSIQ26        | 831929/005    | 2018-08-03       | 2019-08-03           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                           |          |
|---------------------------|----------|
| <b>Temperature:</b>       | 23.9 °C  |
| <b>Relative Humidity:</b> | 31 %     |
| <b>ATM Pressure:</b>      | 99.7 kPa |

\* The testing was performed by Tiago Huang on 2018-12-13.

Test Result: Compliance.

**Cellular Band**

| GMSK, Middle Channel, $f_c = 836.6$ MHz |                 |                 |                 |       |
|-----------------------------------------|-----------------|-----------------|-----------------|-------|
| Temperature                             | Voltage         | Frequency Error | Frequency Error | Limit |
| °C                                      | V <sub>DC</sub> | Hz              | ppm             | ppm   |
| -30                                     | 3.8             | -7              | -0.00837        | 2.5   |
| -20                                     |                 | 8               | 0.00956         |       |
| -10                                     |                 | -11             | -0.01315        |       |
| 0                                       |                 | 6               | 0.00717         |       |
| 10                                      |                 | -10             | -0.01195        |       |
| 20                                      |                 | 18              | 0.02152         |       |
| 30                                      |                 | 8               | 0.00956         |       |
| 40                                      |                 | -5              | -0.00598        |       |
| 50                                      |                 | 3               | 0.00359         |       |
| 20                                      | 3.6             | 7               | 0.00837         |       |
| 20                                      | 4.35            | 7               | 0.00837         |       |

**PCS Band**

| GMSK, Middle Channel, $f_c = 1880.0$ MHz |                 |                 |                 |         |
|------------------------------------------|-----------------|-----------------|-----------------|---------|
| Temperature                              | Voltage         | Frequency Error | Frequency Error | Results |
| °C                                       | V <sub>DC</sub> | Hz              | ppm             |         |
| -30                                      | 3.8             | -2              | -0.00106        | Pass    |
| -20                                      |                 | 2               | 0.00106         |         |
| -10                                      |                 | -2              | -0.00106        |         |
| 0                                        |                 | -4              | -0.00213        |         |
| 10                                       |                 | -3              | -0.00160        |         |
| 20                                       |                 | -5              | -0.00266        |         |
| 30                                       |                 | 5               | 0.00266         |         |
| 40                                       |                 | -9              | -0.00479        |         |
| 50                                       |                 | 7               | 0.00372         |         |
| 20                                       | 3.6             | -9              | -0.00479        |         |
| 20                                       | 4.35            | -1              | -0.00053        |         |

**WCDMA Band II: R99**

| Middle Channel, $f_c = 1880.0$ MHz |                 |                 |                 |         |
|------------------------------------|-----------------|-----------------|-----------------|---------|
| Temperature                        | Voltage         | Frequency Error | Frequency Error | Results |
| °C                                 | V <sub>DC</sub> | Hz              | ppm             |         |
| -30                                | 3.8             | 5               | 0.00266         | Pass    |
| -20                                |                 | 6               | 0.00319         |         |
| -10                                |                 | 8               | 0.00426         |         |
| 0                                  |                 | 6               | 0.00319         |         |
| 10                                 |                 | -10             | -0.00532        |         |
| 20                                 |                 | -4              | -0.00213        |         |
| 30                                 |                 | 6               | 0.00319         |         |
| 40                                 |                 | -10             | -0.00532        |         |
| 50                                 |                 | -8              | -0.00426        |         |
| 20                                 | 3.6             | 0               | 0.00000         |         |
| 20                                 | 4.35            | -11             | -0.00585        |         |

**WCDMA Band V: R99**

| Middle Channel, $f_c = 836.6$ MHz |                 |                 |                 |       |
|-----------------------------------|-----------------|-----------------|-----------------|-------|
| Temperature                       | Voltage         | Frequency Error | Frequency Error | Limit |
| °C                                | V <sub>DC</sub> | Hz              | ppm             | ppm   |
| -30                               | 3.8             | -9              | -0.01076        | 2.5   |
| -20                               |                 | -2              | -0.00239        |       |
| -10                               |                 | 2               | 0.00239         |       |
| 0                                 |                 | -1              | -0.00120        |       |
| 10                                |                 | -6              | -0.00717        |       |
| 20                                |                 | -2              | -0.00239        |       |
| 30                                |                 | -5              | -0.00598        |       |
| 40                                |                 | 6               | 0.00717         |       |
| 50                                |                 | -2              | -0.00239        |       |
| 20                                | 3.6             | 5               | 0.00598         |       |
| 20                                | 4.35            | 2               | 0.00239         |       |

**WCDMA Band IV:**

| <b>REL99</b>       |                       |                              |                      |                        |                      |
|--------------------|-----------------------|------------------------------|----------------------|------------------------|----------------------|
| <b>Temperature</b> | <b>Voltage</b>        | <b>Test Result<br/>(MHz)</b> |                      | <b>Limit<br/>(MHz)</b> |                      |
| <b>°C</b>          | <b>V<sub>DC</sub></b> | <b>F<sub>L</sub></b>         | <b>F<sub>H</sub></b> | <b>F<sub>L</sub></b>   | <b>F<sub>H</sub></b> |
| -30                | 3.8                   | 1710.356                     | 1754.741             | 1710                   | 1755                 |
| -20                |                       | 1710.260                     | 1754.769             | 1710                   | 1755                 |
| -10                |                       | 1710.311                     | 1754.711             | 1710                   | 1755                 |
| 0                  |                       | 1710.312                     | 1754.723             | 1710                   | 1755                 |
| 10                 |                       | 1710.256                     | 1754.721             | 1710                   | 1755                 |
| 20                 |                       | 1710.365                     | 1754.714             | 1710                   | 1755                 |
| 30                 |                       | 1710.451                     | 1754.723             | 1710                   | 1755                 |
| 40                 |                       | 1710.342                     | 1754.714             | 1710                   | 1755                 |
| 50                 |                       | 1710.348                     | 1754.721             | 1710                   | 1755                 |
| 20                 | 3.6                   | 1710.361                     | 1754.698             | 1710                   | 1755                 |
| 20                 | 4.35                  | 1710.354                     | 1754.689             | 1710                   | 1755                 |

Note: The fundamental emissions stay within the authorized bands of operation based on the frequency deviation measured is small, the extreme voltage was declared by applicant.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***