



Radio Test Report

Report No.:STS2601020W02

Issued for

Shenzhen Mileseey Technology Co., Ltd

No. 3601 Block A, Tanglang Town Plaza West, Fuguang
Community, Taoyuan Street, Nanshan District, 518000
Shenzhen, China

Product Name: Golf Speaker

Brand Name: **MILESEEY®**

Model Name: GeneSonic Pro

Series Model(s): GeneSonic Play, GeneSonic Go, GeneSonic Lite,
GeneSonic Std, GeneSonic Mini, SP1, SP1-A,
SP1-B, SP1-Pro, SP1-Lite, SP1-Mini, SP2, SP3,
SP4, SP5, SP6, SP7, SP8, SP9,
GeneSonic Elite, GeneSonic Max,
GeneSonic Ultra, GeneSonic X, GeneSonic Neo,
GeneSonic Air, GeneSonic Flex,
GeneSonic Spark, GeneSonic Pulse,
GeneSonic Wave, GeneSonic Rhythm,
GeneSonic Flow, GeneSonic Echo,
GeneSonic GPS, GeneSonic Smart,
GeneSonic Nav, GeneSonic Vision,
GeneSonic Aura, GeneSonic Boost

FCC ID: 2AEOGGENESP

Test Standards: FCC Part15.247

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT**

Applicant's Name..... : Shenzhen Milesee Technology Co., Ltd
Address : No. 3601 Block A, Tanglang Town Plaza West, Fuguang Community,
Taoyuan Street, Nanshan District, 518000 Shenzhen, China
Manufacturer's Name : Shenzhen Milesee Technology Co., Ltd
Address : No. 3601 Block A, Tanglang Town Plaza West, Fuguang Community,
Taoyuan Street, Nanshan District, 518000 Shenzhen, China

Product Description

Product Name : Golf Speaker
Brand Name : **MILESEEY®**
Model Name : GeneSonic Pro
GeneSonic Play, GeneSonic Go, GeneSonic Lite, GeneSonic Std,
GeneSonic Mini, SP1, SP1-A, SP1-B, SP1-Pro, SP1-Lite,
SP1-Mini, SP2, SP3, SP4, SP5, SP6, SP7, SP8, SP9,
GeneSonic Elite, GeneSonic Max, GeneSonic Ultra,
Series Model(s) : GeneSonic X, GeneSonic Neo, GeneSonic Air, GeneSonic Flex,
GeneSonic Spark, GeneSonic Pulse, GeneSonic Wave, GeneSonic
Rhythm, GeneSonic Flow, GeneSonic Echo, GeneSonic GPS ,
GeneSonic Smart, GeneSonic Nav,
GeneSonic Vision , GeneSonic Aura, GeneSonic Boost

Test Standards..... : FCC Part15.247
Test Procedure : ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the IC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test..... :

Date of receipt of test item : 05 Jan. 2026
Date (s) of performance of tests..... : 05 Jan. 2026 ~ 16 Jan. 2026
Date of Issue..... : 16 Jan. 2026
Test Result..... : **Pass**

Testing Engineer :

Aaron Bu

(Aaron Bu)

Technical Manager :

Skylar Li

(Skylar Li)

Authorized Signatory :

Bovey Yang

(Bovey Yang)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	7
1.1 TEST FACTORY	8
1.2 MEASUREMENT UNCERTAINTY	8
2. GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF THE EUT	9
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	11
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.6 EQUIPMENTS LIST	13
3. EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 TEST PROCEDURE	15
3.3 TEST SETUP	15
3.4 EUT OPERATING CONDITIONS	15
3.5 TEST RESULTS	16
4. RADIATED EMISSION MEASUREMENT	18
4.1 RADIATED EMISSION LIMITS	18
4.2 TEST PROCEDURE	20
4.3 TEST SETUP	21
4.4 EUT OPERATING CONDITIONS	21
4.5 FIELD STRENGTH CALCULATION	22
4.6 TEST RESULTS	23
5. DUTY CYCLE	52
5.1 TEST STANDARD	52
5.2 TEST PROCEDURE	52
5.3 DEVIATION FROM STANDARD	52
5.4 TEST SETUP	52
5.6 TEST RESULTS	52
6. CONDUCTED SPURIOUS & BAND EDGE EMISSION	53
6.1 LIMIT	53
6.2 TEST PROCEDURE	53



Table of Contents	Page
6.3 TEST SETUP	53
6.4 EUT OPERATION CONDITIONS	53
6.5 TEST RESULTS	53
7. POWER SPECTRAL DENSITY TEST	54
7.1 LIMIT	54
7.2 TEST PROCEDURE	54
7.3 TEST SETUP	54
7.4 EUT OPERATION CONDITIONS	54
7.5 TEST RESULTS	54
8. BANDWIDTH TEST	55
8.1 LIMIT	55
8.2 TEST PROCEDURE	55
8.3 TEST SETUP	55
8.4 EUT OPERATION CONDITIONS	55
8.5 TEST RESULTS	55
9. PEAK OUTPUT POWER TEST	56
9.1 LIMIT	56
9.2 TEST PROCEDURE	56
9.3 TEST SETUP	56
9.4 EUT OPERATION CONDITIONS	56
9.5 TEST RESULTS	56
10. ANTENNA REQUIREMENT	57
10.1 STANDARD REQUIREMENT	57
10.2 EUT ANTENNA	57
APPENDIX 1-TEST DATA	58
DUTY CYCLE	58
MAXIMUM PEAK CONDUCTED OUTPUT POWER	62
-6DB BANDWIDTH	66
OCCUPIED CHANNEL BANDWIDTH	70
MAXIMUM POWER SPECTRAL DENSITY LEVEL	74
BAND EDGE	78



Table of Contents

Page

CONDUCTED RF SPURIOUS EMISSION

83

APPENDIX 2- EUT TEST PHOTO

90

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	16 Jan. 2026	STS2601020W02	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted bands of operation	PASS	--
Part 15.247(d)/ Part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

Note:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.751\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.888\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.48\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 2.52\text{dB}$
5	All emissions, radiated 1G-18GHz	$\pm 3.48\text{dB}$
6	All emissions, radiated >18GHz	$\pm 4.18\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.48\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.52\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.6\%$
10	Power Spectral Density, conducted	$\pm 1.214\text{dB}$
11	Duty Cycle	$\pm 3.2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Golf Speaker	
Brand Name	MILESEEEY®	
Model Name	GeneSonic Pro	
Series Model(s)	GeneSonic Play, GeneSonic Go, GeneSonic Lite, GeneSonic Std, GeneSonic Mini, SP1, SP1-A, SP1-B, SP1-Pro, SP1-Lite, SP1-Mini, SP2, SP3, SP4, SP5, SP6, SP7, SP8, SP9, GeneSonic Elite, GeneSonic Max, GeneSonic Ultra, GeneSonic X, GeneSonic Neo, GeneSonic Air, GeneSonic Flex, GeneSonic Spark, GeneSonic Pulse, GeneSonic Wave, GeneSonic Rhythm, GeneSonic Flow, GeneSonic Echo, GeneSonic GPS, GeneSonic Smart, GeneSonic Nav, GeneSonic Vision, GeneSonic Aura, GeneSonic Boost	
Model Difference	Only model name and the color of appearance	
Product Description	The EUT is a Golf Speaker	
	Operation Frequency:	2402~2480 MHz
	Modulation Type:	GFSK
	Radio Technology:	BLE
	Bluetooth Configuration:	LE(Support 1M PHY, 2M PHY)
	Number Of Channel:	40
	Antenna Type:	Inverted F Antenna
	Antenna Gain (dBi)	-0.68
Channel List	Please refer to the Note 3.	
Power Rating	USB-C Input: 5VDC, 3A or 9VDC, 3.3A or 15VDC, 2A or 20VDC, 1.5A or 7.4VDC, 4500mAh (Supplied by built-in rechargeable lithium-ion battery pack) USB-C Output: 5VDC, 3A or 9VDC, 3A or 15VDC, 2A or 20VDC, 1.5A Pogopin Port Output: 5VDC, 450mA	
Adapter	N/A	
Battery	Model: 21700-7.4V-4500mAh Brand: N/A Rated Voltage: 7.4V Charge Limit Voltage: 8.4 V Capacity: 4500mAh	
Hardware version number	SP1B_MAIN_V1.1.1 RGB V1.0.3 KEY V 1.1.0 REM V1.0.2	



Software version number	V0.1.3
Connecting I/O Port(s)	Please refer to the Note 1.

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.
- 3.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	19	2440	29	2460	39	2480

2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Worst Mode	Description	Data/Modulation
Mode 1	TX CH00(2402MHz)	1M PHY /GFSK
Mode 2	TX CH19(2440MHz)	1M PHY /GFSK
Mode 3	TX CH39(2480MHz)	1M PHY /GFSK

Worst Mode	Description	Data/Modulation
Mode 4	TX CH00(2402MHz)	2M PHY /GFSK
Mode 5	TX CH19(2440MHz)	2M PHY /GFSK
Mode 6	TX CH39(2480MHz)	2M PHY /GFSK

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/60Hz is shown in the report.



(3) All models are the same expect model name and the color of appearance, therefore, model GeneSonic Pro was chosen as the representative model to perform RF full tests, other models were deemed to fulfill relevant RF requirements without further testing

For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 7 : Keeping BT TX


2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
BLE(With 2M PHY)	BLE_1M PHY	GFSK	-0.68	68	FCC_Tool_V3.01
	BLE_2M PHY	GFSK		68	

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Radiated Spurious Emission Test

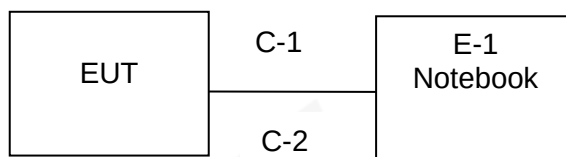

AC Conducted Emission Test

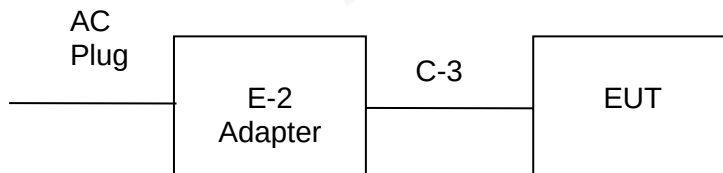

RF Conducted Test

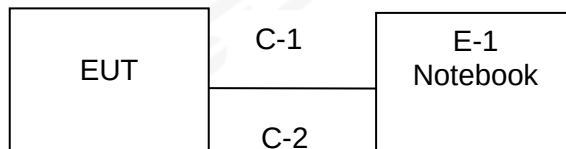



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
E-1	Notebook	DELL	Inspiron 3501	N/A
E-2	Adapter	Apple	A2164	N/A
C-1	Serial port board	XES	WTYZK	N/A
C-2	USB Cable	MI	RYEW3A	N/A
C-3	USB Cable	ZTC	NB-A515A	N/A

Item	Equipment	Mfr/Brand	Length	Note
C-2	Shielded	NO	150cm	N/A
C-3	Shielded	NO	100cm	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.6 EQUIPMENTS LIST

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Pre-Amplifier(0.1 M-3GHz)	EM	EM330	060665	2025.02.22	2026.02.21
Pre-Amplifier(1G -18GHz)	SKET	LNPA-01018G-45	SK2018080901	2025.09.25	2026.09.24
Pre-Amplifier(18 G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2025.02.22	2026.02.21
Active loop Antenna	ZHINAN	ZN30900C	16035	2025.02.25	2027.02.24
Bilog Antenna	TESEQ	CBL6111D	34678	2025.09.27	2027.09.26
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2025.09.27	2027.09.26
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2025.09.27	2027.09.26
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2025.09.26	2026.09.25
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENG FENG	DPS-305AF	17064939	2025.09.22	2026.09.21
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2025.09.25	2026.09.24
Limiter	CYBERTEK	EM5010	N/A	2025.09.25	2026.09.24
LISN	R&S	ENV216	101242	2025.09.25	2026.09.24
LISN	EMCO	3810/2NM	23625	2025.09.25	2026.09.24
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2025.02.22	2026.02.21
Power Meter	Keysight	U2021XA	MY56120038	2025.09.23	2026.09.22
Switch control box	MW	MW100-RFCB	N/A	N/A	N/A
Temperature& Humidity test chamber	Safety test	AG80L	171200018	2025.02.22	2026.02.21
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Test SW	MW	MTS 8310_2.0.0.0			



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “*” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

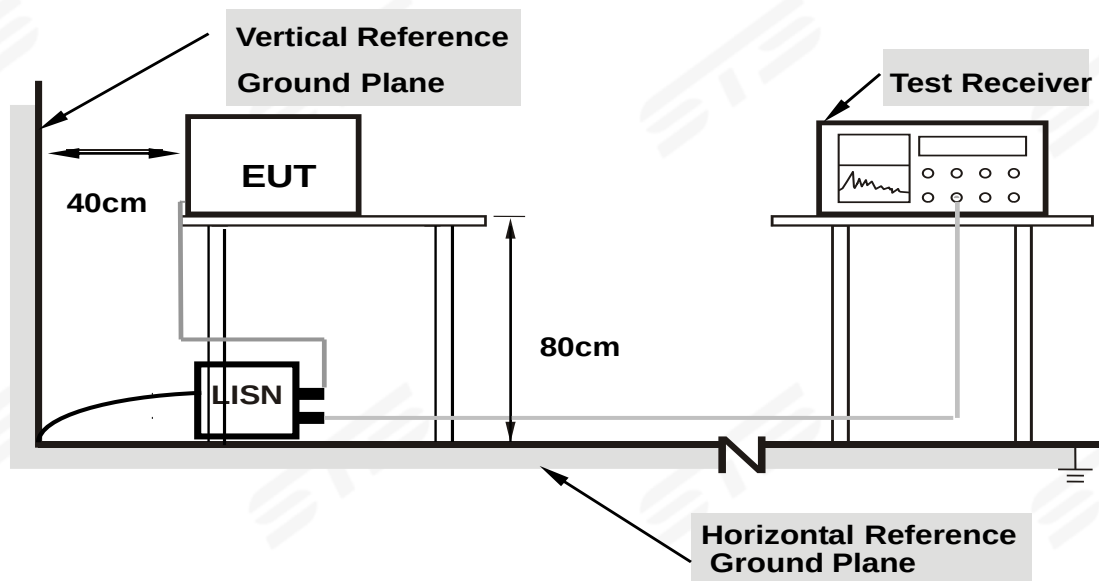

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.5 TEST RESULTS

Temperature:	25.1℃	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 7		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1620	31.66	19.37	51.03	65.36	-14.33	QP
2	0.1620	6.62	19.37	25.99	55.36	-29.37	AVG
3	0.2908	30.57	19.37	49.94	60.50	-10.56	QP
4	0.2908	12.79	19.37	32.16	50.50	-18.34	AVG
5	0.3860	31.43	19.38	50.81	58.15	-7.34	QP
6	0.3860	11.23	19.38	30.61	48.15	-17.54	AVG
7	0.5380	24.37	19.39	43.76	56.00	-12.24	QP
8	0.5380	9.30	19.39	28.69	46.00	-17.31	AVG
9	0.6820	26.05	19.37	45.42	56.00	-10.58	QP
10	0.6820	11.79	19.37	31.16	46.00	-14.84	AVG
11	0.9380	20.74	19.35	40.09	56.00	-15.91	QP
12	0.9380	5.14	19.35	24.49	46.00	-21.51	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

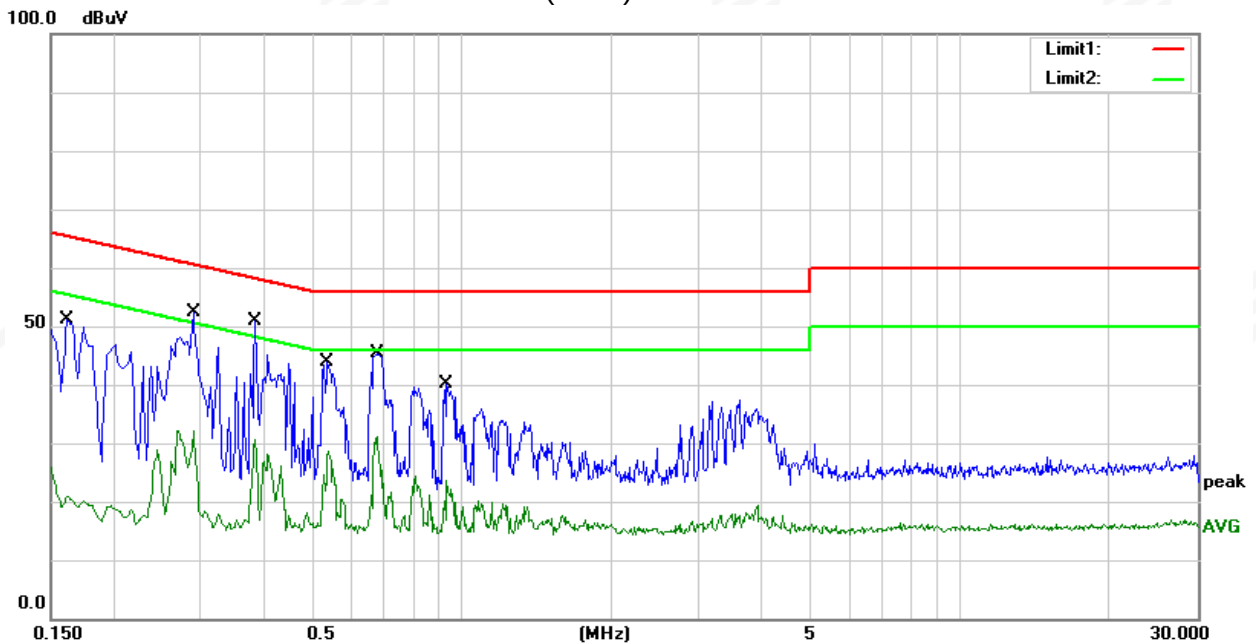




Temperature:	25.1℃	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 7		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1540	37.18	19.41	56.59	65.78	-9.19	QP
2	0.1540	9.09	19.41	28.50	55.78	-27.28	AVG
3	0.2700	29.12	19.37	48.49	61.12	-12.63	QP
4	0.2700	12.91	19.37	32.28	51.12	-18.84	AVG
5	0.3380	28.30	19.36	47.66	59.25	-11.59	QP
6	0.3380	11.11	19.36	30.47	49.25	-18.78	AVG
7	0.4100	29.85	19.35	49.20	57.65	-8.45	QP
8	0.4100	11.26	19.35	30.61	47.65	-17.04	AVG
9	0.5380	25.04	19.35	44.39	56.00	-11.61	QP
10	0.5380	8.80	19.35	28.15	46.00	-17.85	AVG
11	0.6820	25.90	19.40	45.30	56.00	-10.70	QP
12	0.6820	11.19	19.40	30.59	46.00	-15.41	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

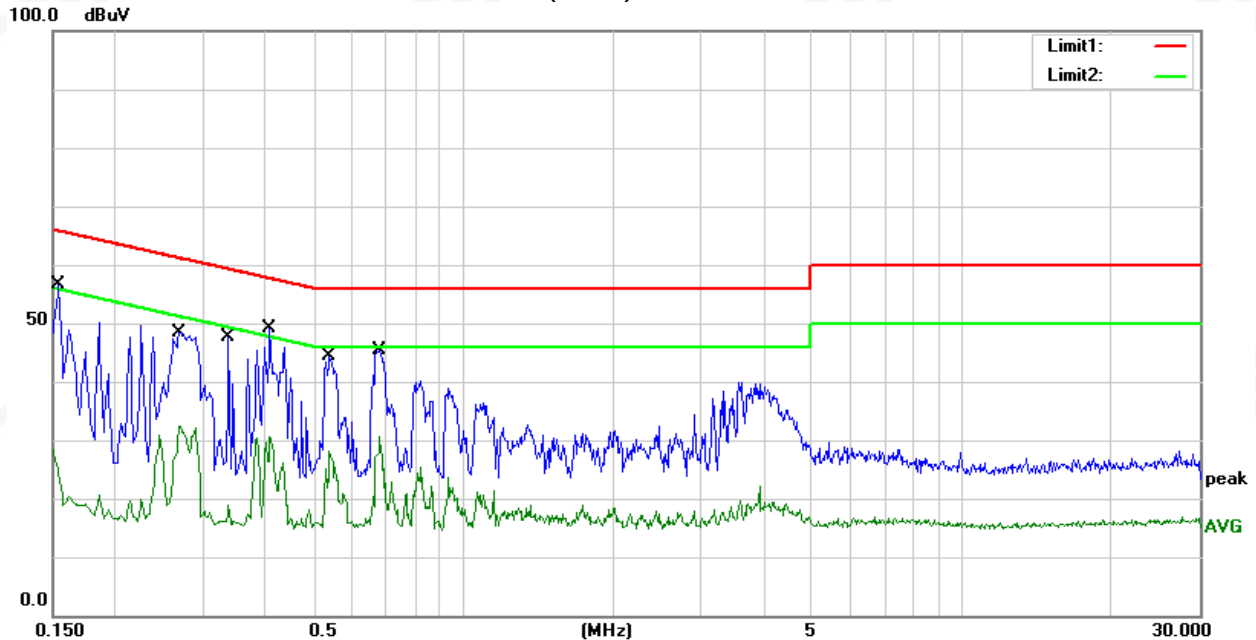



4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2020 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2310 to 2410 MHz Upper Band Edge: 2475 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

4.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

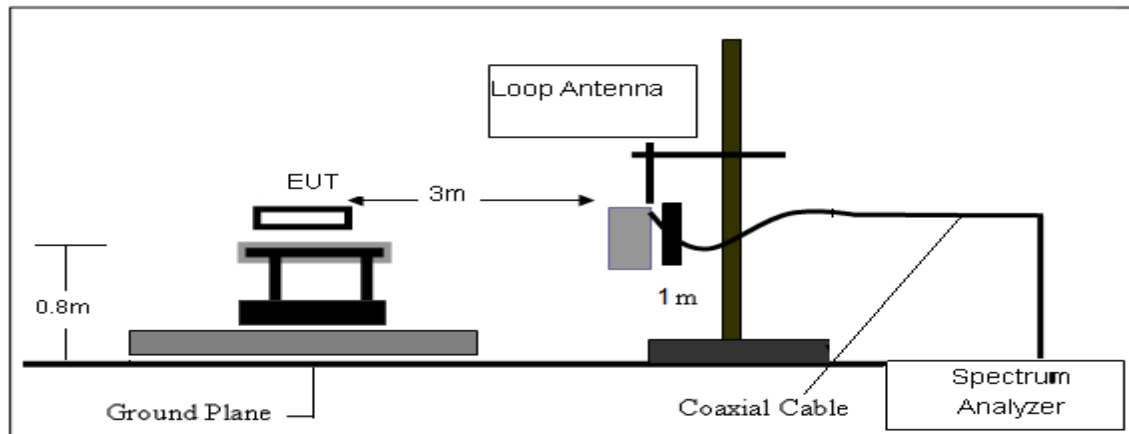

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

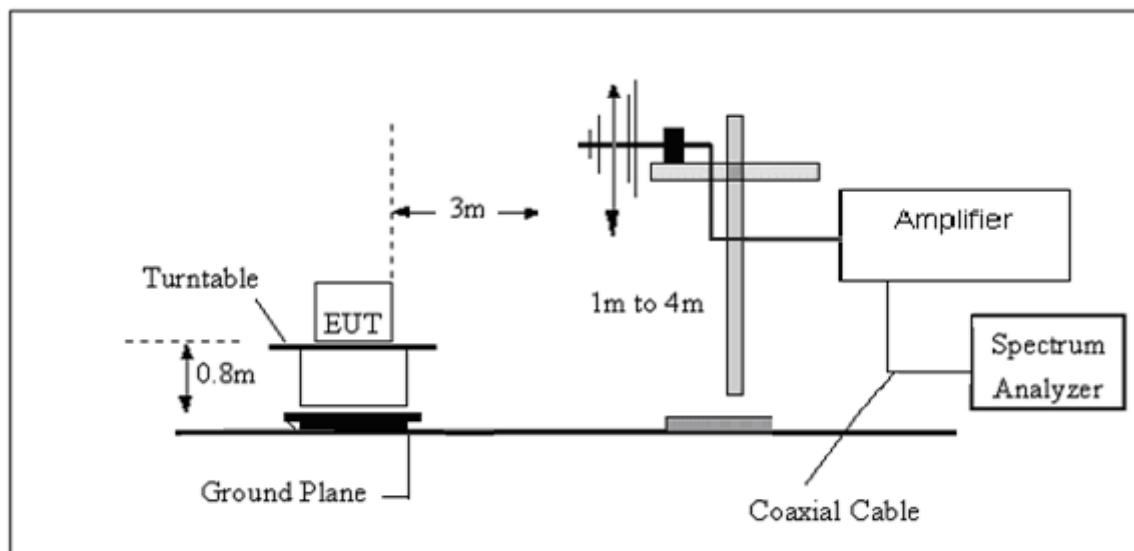

(C) Radiated Emission Test-Up Frequency Above 1GHz

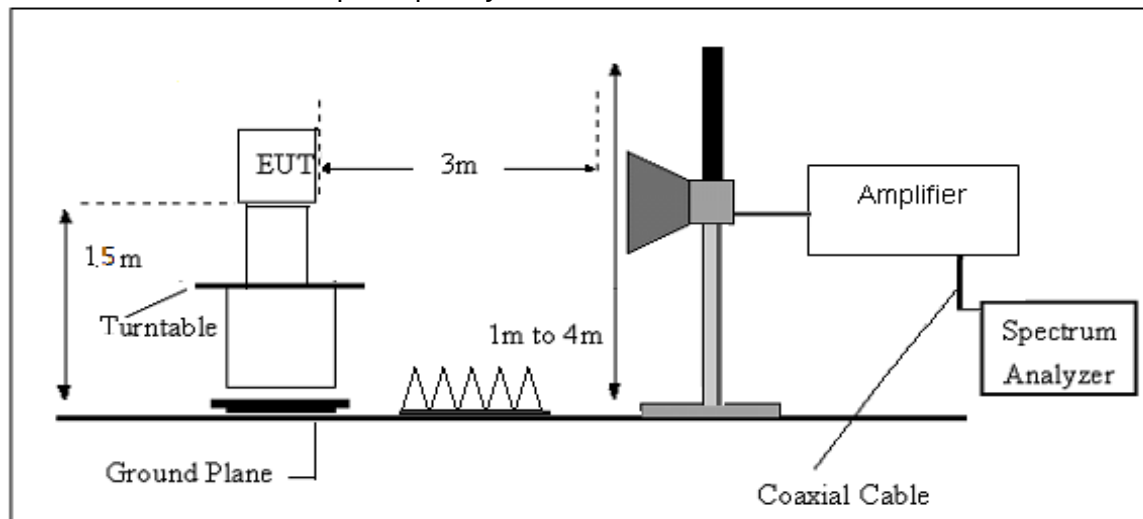

4.4 EUT OPERATING CONDITIONS

Please refer to section 3.4 of this report.



4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$




4.6 TEST RESULTS

(Between 9KHz – 30 MHz)

Temperature:	23.4℃	Relative Humidity:	60%
Test Voltage:	DC 7.4V	Polarization:	--
Test Mode:	TX Mode		

9K-150K


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0146	7.12	19.71	26.83	124.32	-97.49	peak
2	0.0256	5.75	19.99	25.74	119.44	-93.70	peak
3	0.0418	6.55	19.66	26.21	115.18	-88.97	peak
4	0.0787	5.63	18.62	24.25	109.68	-85.43	peak
5	0.0949	5.05	17.84	22.89	108.06	-85.17	peak
6	0.1272	4.83	17.55	22.38	105.51	-83.13	peak

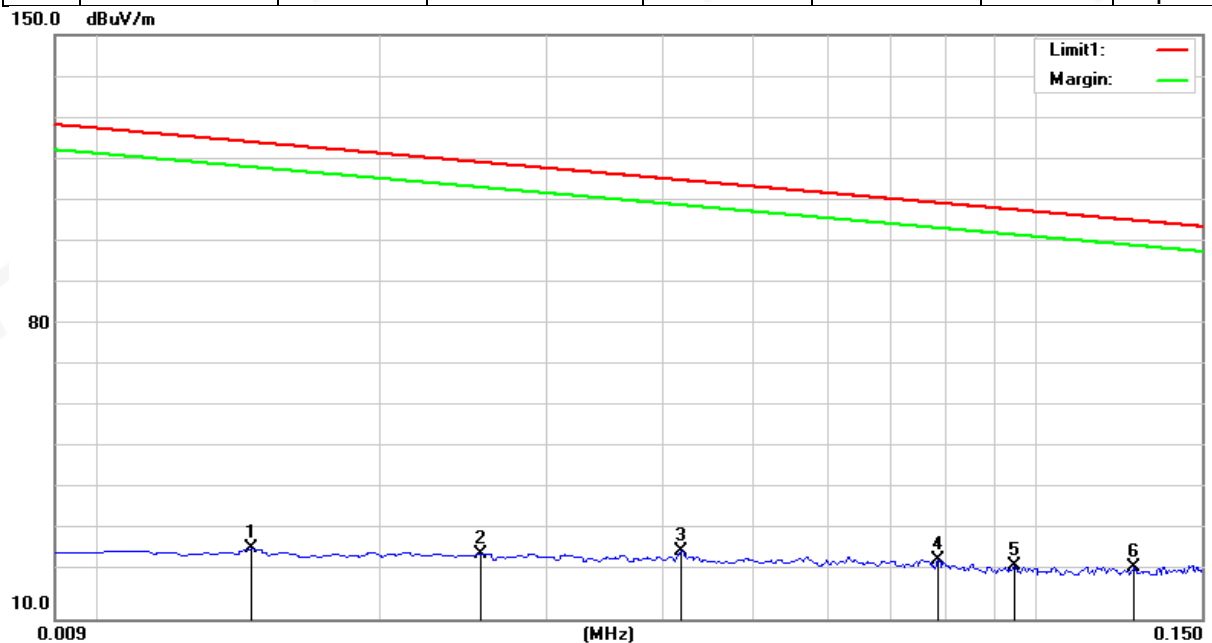



150K-30M

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.2694	2.87	20.11	22.98	99.00	-76.02	peak
2	0.8366	9.83	20.27	30.10	69.15	-39.05	peak
3	1.5530	7.98	20.31	28.29	63.78	-35.49	peak
4	3.9410	7.58	20.38	27.96	69.50	-41.54	peak
5	6.4185	8.23	20.41	28.64	69.50	-40.86	peak
6	14.3885	7.44	21.17	28.61	69.50	-40.89	peak

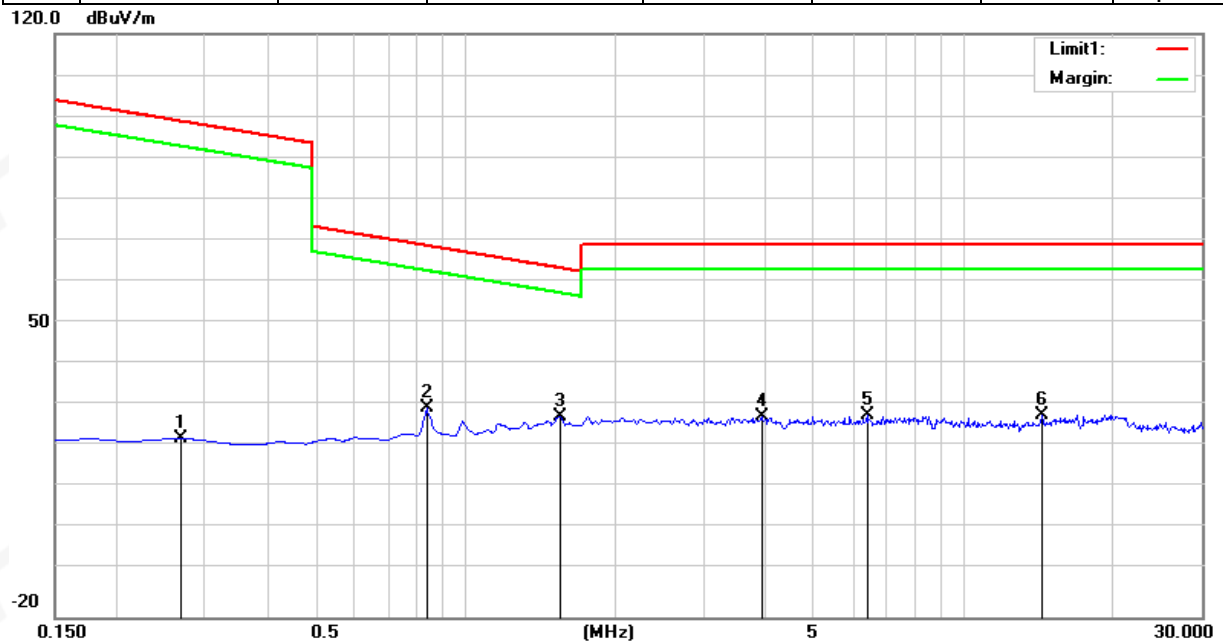

Note:

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



(30MHz -1000MHz)


1M PHY

Temperature:	23.4℃	Relative Humidity:	60%
Test Voltage:	DC 7.4V	Phase:	Horizontal
Test Mode:	Mode 1/2/3 (Mode 2 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	47.4600	47.16	-21.92	25.24	40.00	-14.76	peak
2	119.2400	54.12	-18.38	35.74	43.50	-7.76	peak
3	143.4900	57.63	-18.23	39.40	43.50	-4.10	peak
4	295.7800	50.26	-14.95	35.31	46.00	-10.69	peak
5	527.6100	49.31	-7.54	41.77	46.00	-4.23	peak
6	901.0600	39.44	-0.43	39.01	46.00	-6.99	peak

Remark:

1. $\text{Margin} = \text{Result} (\text{Result} = \text{Reading} + \text{Factor}) - \text{Limit}$
2. $\text{Factor} = \text{Antenna factor} + \text{Cable attenuation factor (cable loss)} - \text{Amplifier gain}$
3. All modes have been tested, only show the worst case.

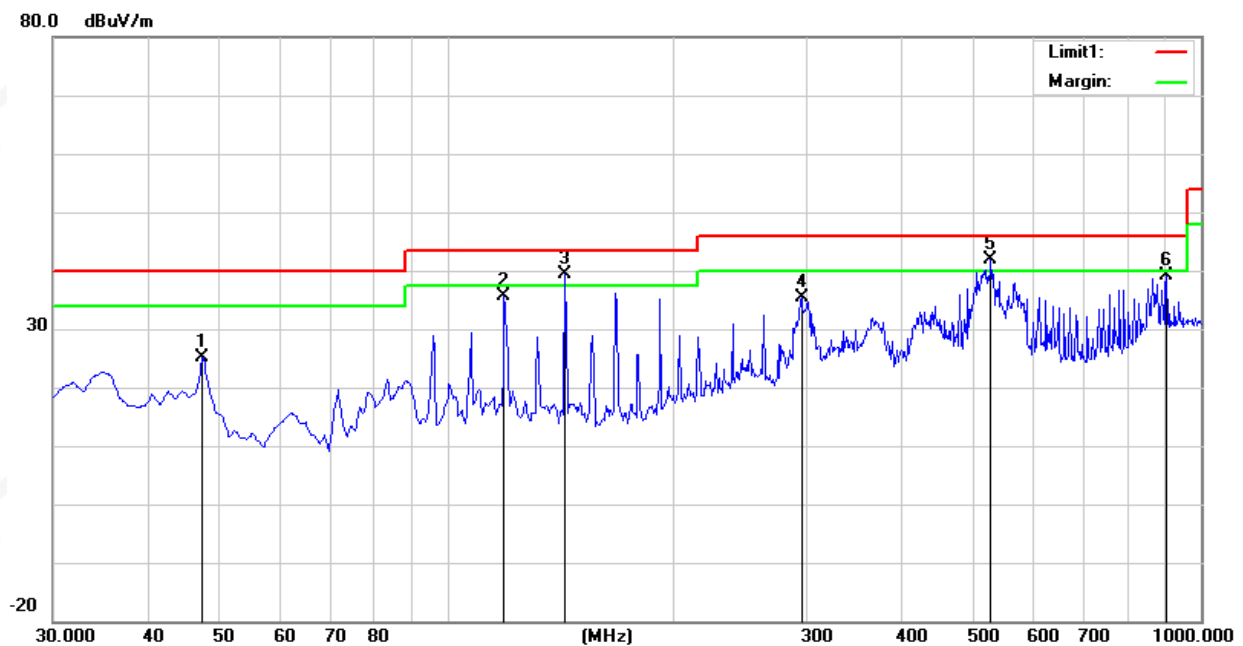




Temperature:	23.4℃	Relative Humidity:	60%
Test Voltage:	DC 7.4V	Phase:	Vertical
Test Mode:	Mode 1/2/3 (Mode 2 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.8800	45.99	-14.80	31.19	40.00	-8.81	peak
2	119.2400	54.89	-18.38	36.51	43.50	-6.99	peak
3	143.4900	54.35	-18.23	36.12	43.50	-7.38	peak
4	263.7700	46.25	-14.75	31.50	46.00	-14.50	peak
5	515.0000	44.55	-7.88	36.67	46.00	-9.33	peak
6	951.5000	32.11	1.62	33.73	46.00	-12.27	peak

Remark:

1. Margin = Result (Result = Reading + Factor) - Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain
3. All modes have been tested, only show the worst case.

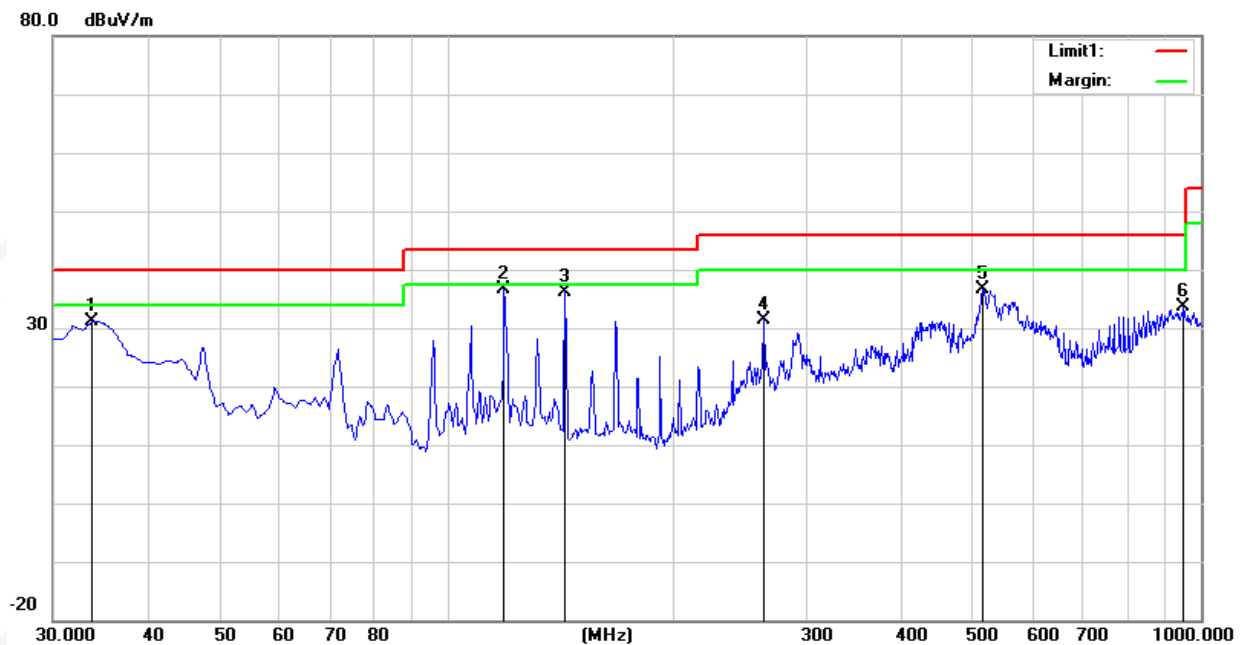




2M PHY

Temperature:	23.4℃	Relative Humidity:	60%
Test Voltage:	DC 7.4V	Phase:	Horizontal
Test Mode:	Mode 4/5/6 (Mode 5 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	47.4600	47.36	-21.92	25.44	40.00	-14.56	peak
2	143.4900	57.08	-18.23	38.85	43.50	-4.65	peak
3	167.7400	56.23	-19.58	36.65	43.50	-6.85	peak
4	293.8400	51.81	-15.02	36.79	46.00	-9.21	peak
5	521.7900	49.95	-7.75	42.20	46.00	-3.80	peak
6	900.0900	42.20	-0.45	41.75	46.00	-4.25	peak

Remark:

1. Margin = Result (Result = Reading + Factor) - Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain
3. All modes have been tested, only show the worst case.

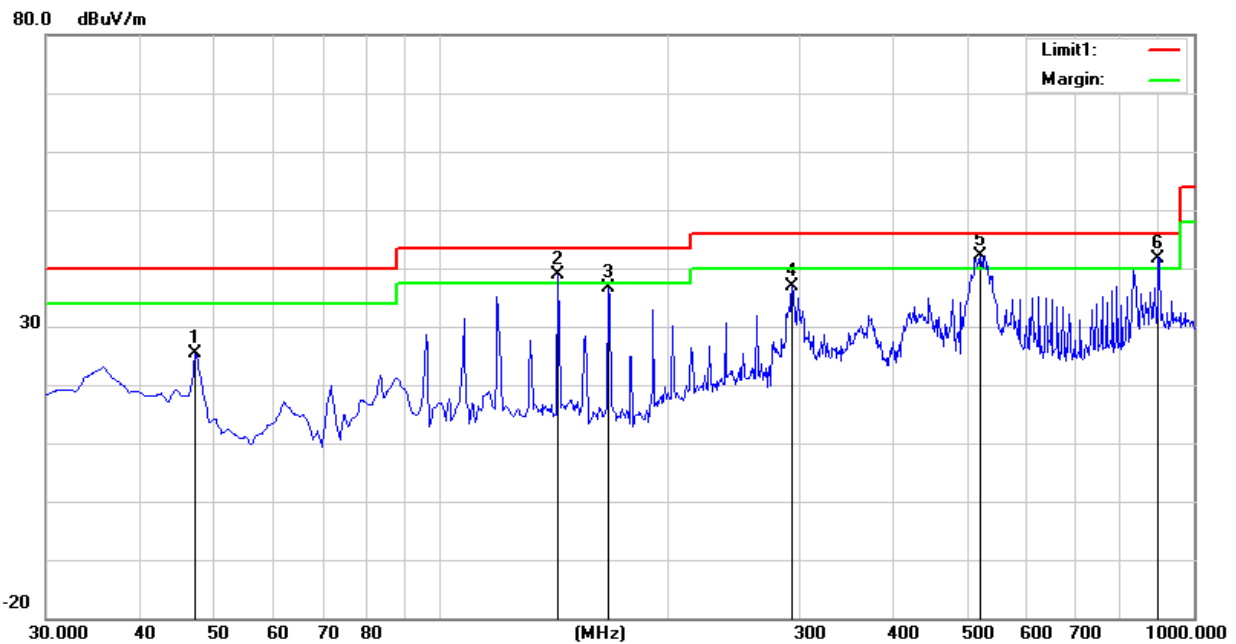




Temperature:	23.4℃	Relative Humidity:	60%
Test Voltage:	DC 7.4V	Phase:	Vertical
Test Mode:	Mode 4/5/6 (Mode 5 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.8800	42.50	-14.80	27.70	40.00	-12.30	peak
2	119.2400	56.40	-18.38	38.02	43.50	-5.48	peak
3	143.4900	52.98	-18.23	34.75	43.50	-8.75	peak
4	263.7700	45.35	-14.75	30.60	46.00	-15.40	peak
5	511.1200	46.15	-7.93	38.22	46.00	-7.78	peak
6	832.1900	43.49	-0.66	42.83	46.00	-3.17	peak

Remark:

1. Margin = Result (Result = Reading + Factor) – Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. All modes have been tested,only show the worst case.

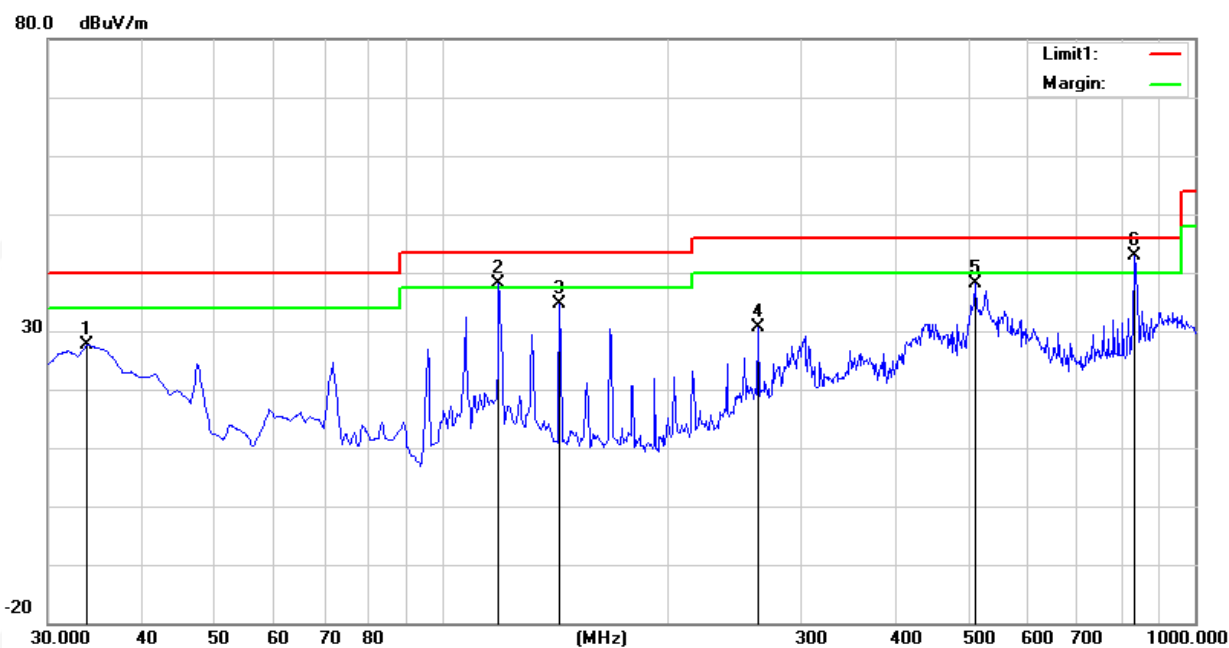




(1GHz-25GHz) Spurious emission Requirements

1M PHY

1GHz-18GHz-L-H

RE_FCC Test Case_FCC 15C 1GHz-18GHz

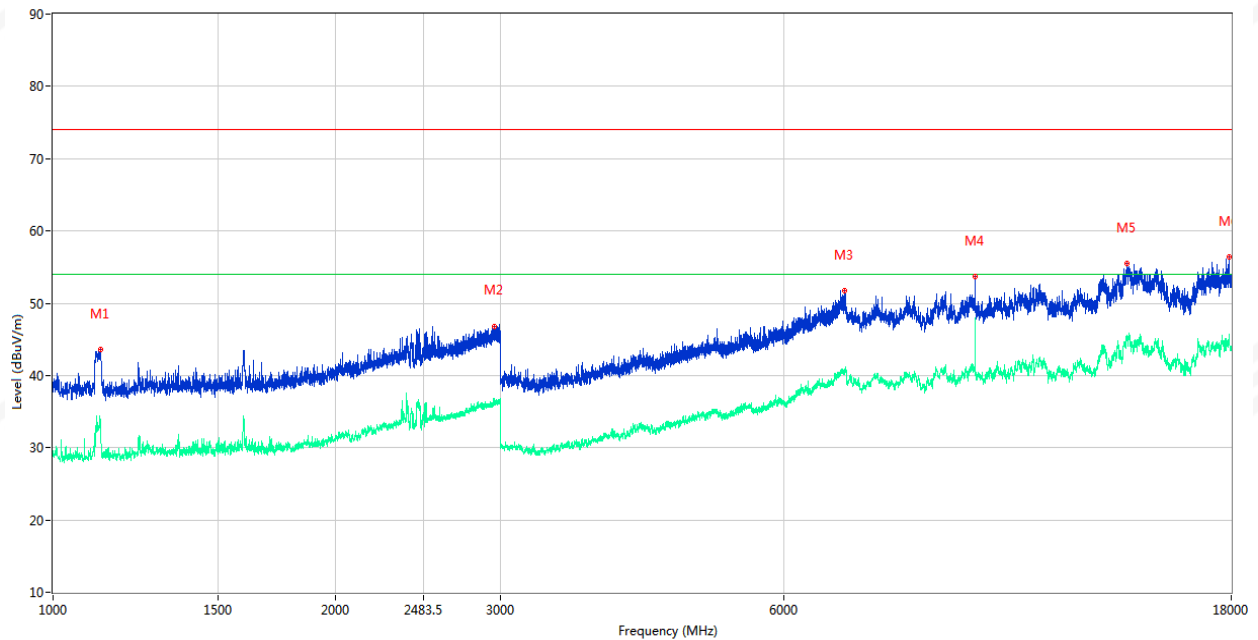


Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1124.000	43.59	-1.72	74.0	30.41	Peak	270.40	Horizontal	Pass
1124.000	32.03	-1.72	54.0	21.97	AV	270.40	Horizontal	Pass
2952.500	46.78	5.23	74.0	27.22	Peak	233.60	Horizontal	Pass
2952.500	36.38	5.23	54.0	17.62	AV	233.60	Horizontal	Pass
6976.000	51.76	1.13	74.0	22.24	Peak	29.70	Horizontal	Pass
6976.000	40.39	1.13	54.0	13.61	AV	29.70	Horizontal	Pass
9607.000	53.68	0.57	74.0	20.32	Peak	77.20	Horizontal	Pass
9607.000	47.90	0.57	54.0	6.10	AV	77.20	Horizontal	Pass
13927.250	55.52	7.54	74.0	18.48	Peak	198.50	Horizontal	Pass
13927.250	45.42	7.54	54.0	8.58	AV	198.50	Horizontal	Pass
17909.250	56.34	7.17	74.0	17.66	Peak	140.90	Horizontal	Pass
17909.250	45.54	7.17	54.0	8.46	AV	140.90	Horizontal	Pass



1GHz-18GHz-L-V

RE_FCC Test Case_FCC 15C 1GHz-18GHz

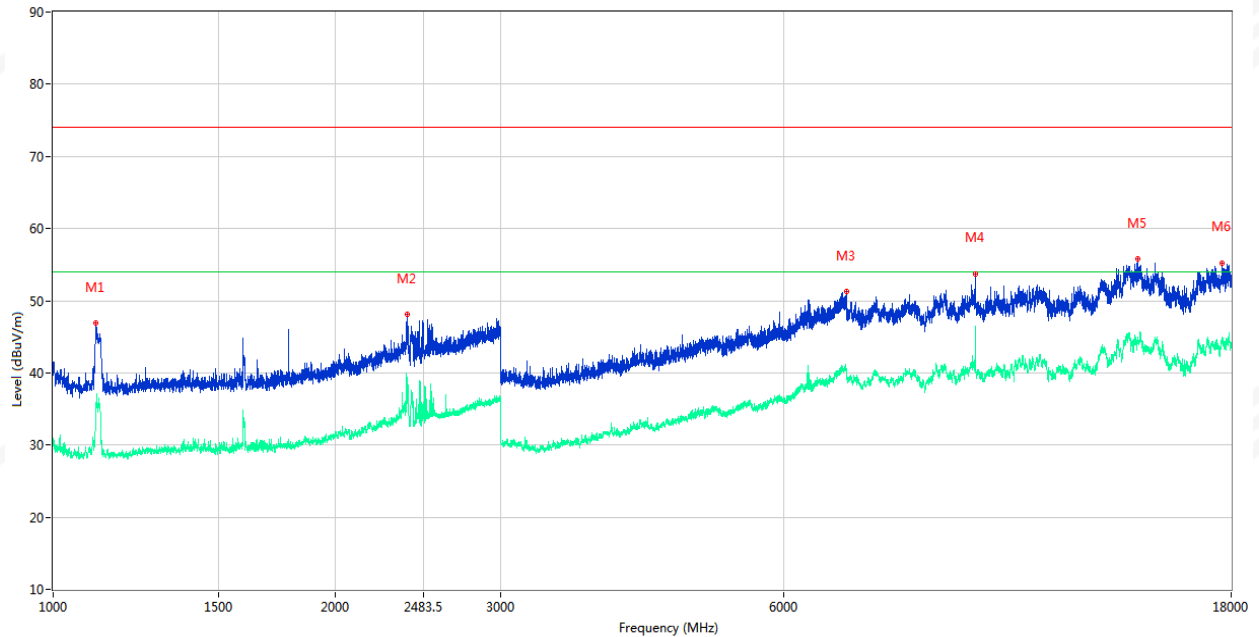

Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Antenna	Verdict
1111.500	46.90	-1.74	74.0	27.10	Peak	158.40	Vertical	Pass
1111.500	34.77	-1.74	54.0	19.23	AV	158.40	Vertical	Pass
2386.500	48.05	2.99	74.0	25.95	Peak	92.60	Vertical	Pass
2386.500	38.49	2.99	54.0	15.51	AV	92.60	Vertical	Pass
7000.000	51.27	1.32	74.0	22.73	Peak	130.80	Vertical	Pass
7000.000	40.64	1.32	54.0	13.36	AV	130.80	Vertical	Pass
9607.000	53.76	0.57	74.0	20.24	Peak	264.70	Vertical	Pass
9607.000	46.42	0.57	54.0	7.58	AV	264.70	Vertical	Pass
14326.000	55.82	6.91	74.0	18.18	Peak	21.60	Vertical	Pass
14326.000	44.20	6.91	54.0	9.80	AV	21.60	Vertical	Pass
17593.000	55.27	6.51	74.0	18.73	Peak	226.40	Vertical	Pass
17593.000	44.13	6.51	54.0	9.87	AV	226.40	Vertical	Pass