



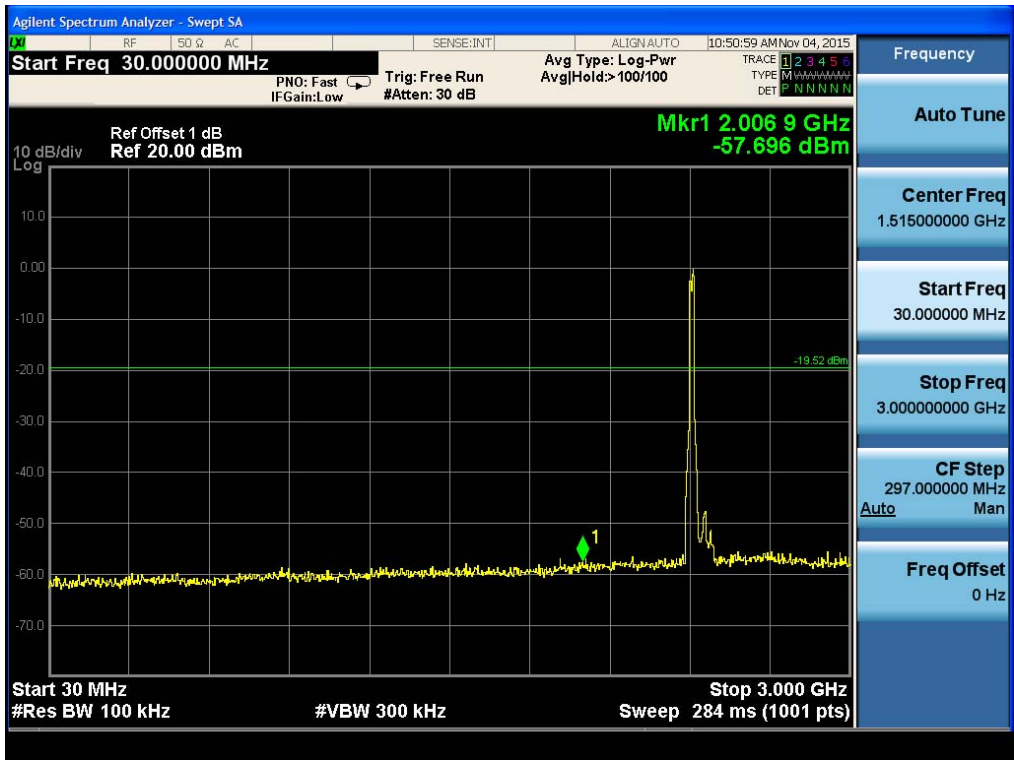


(Plot 4.6.2 A2: Channel 1: 2412MHz @ 802.11g)

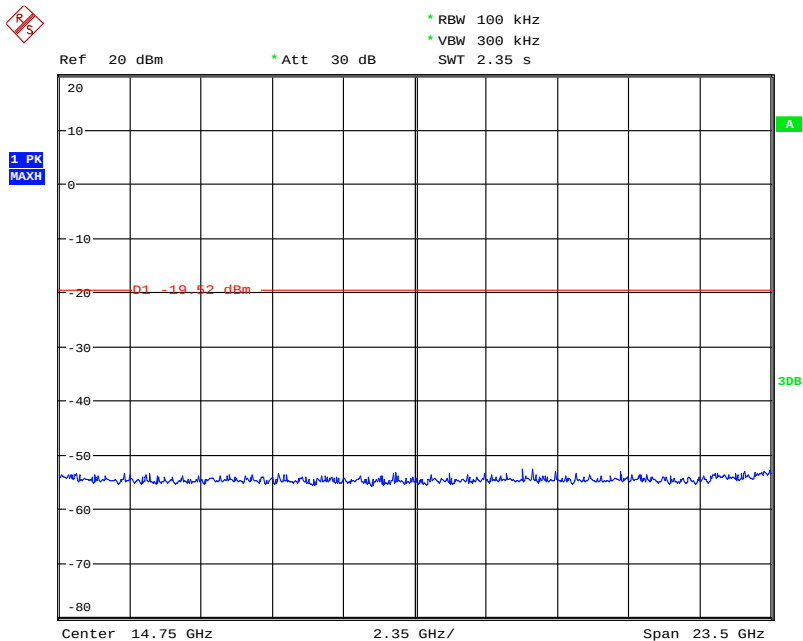


Date: 6.NOV.2015 04:16:34


(Plot 4.6.2 A3: Channel 1: 2412MHz @ 802.11g)

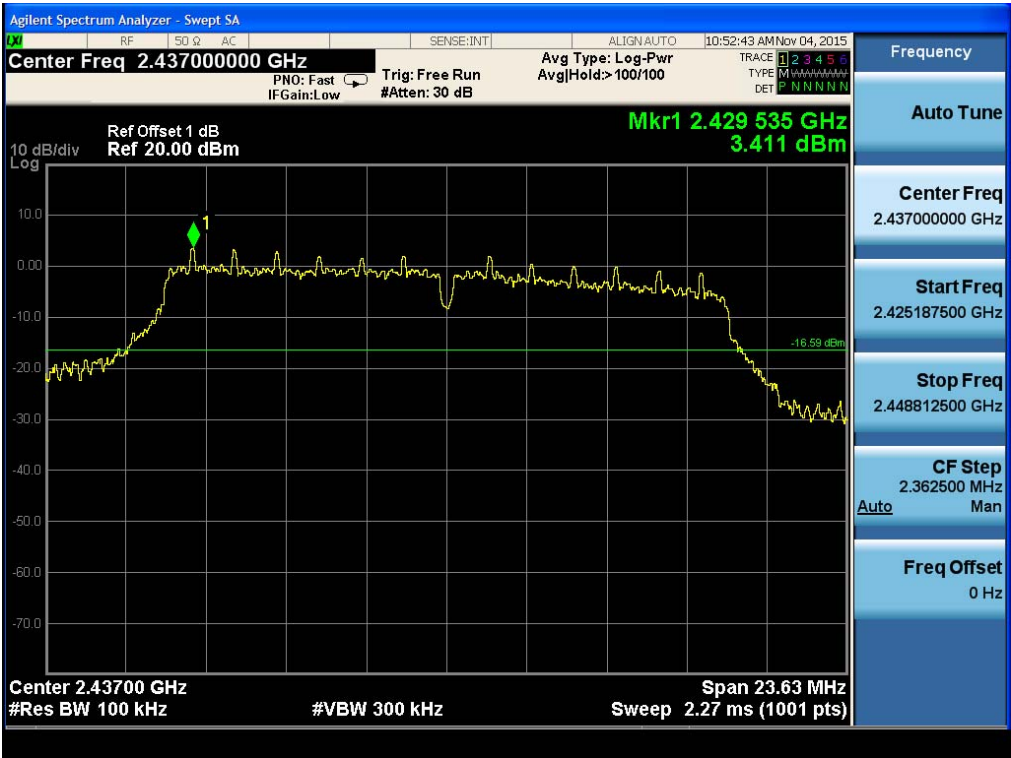

(Plot 4.6.2 B1: Channel 6: 2437MHz @ 802.11g)

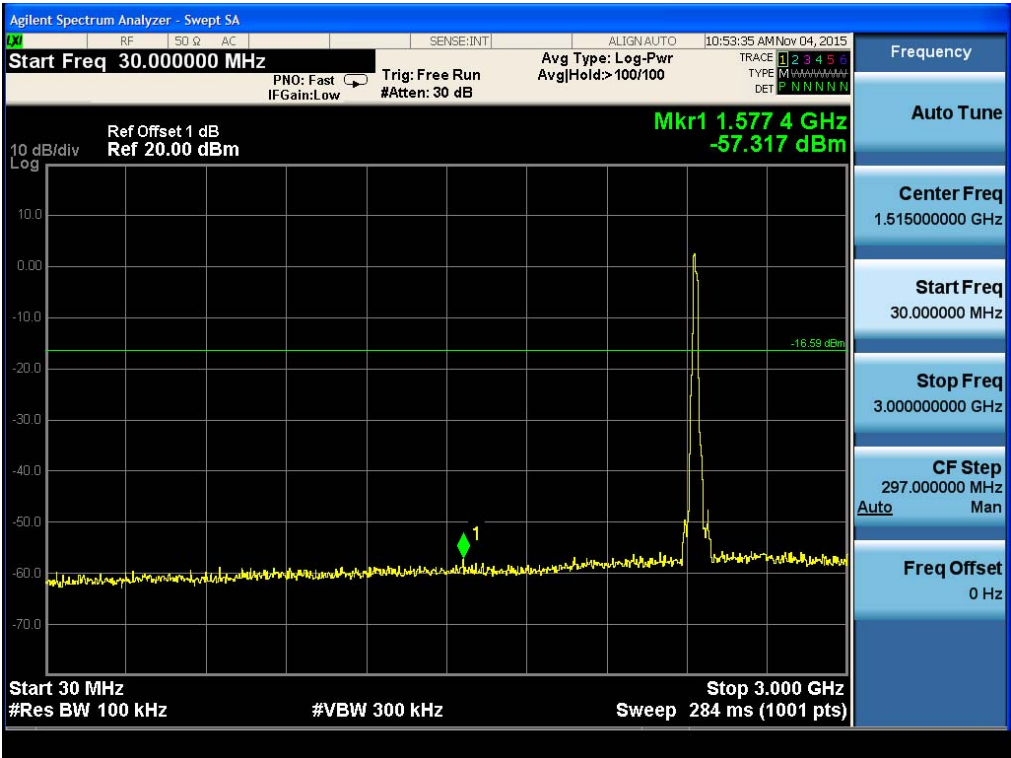

(Plot 4.6.2 B2: Channel 6: 2437MHz @ 802.11g)

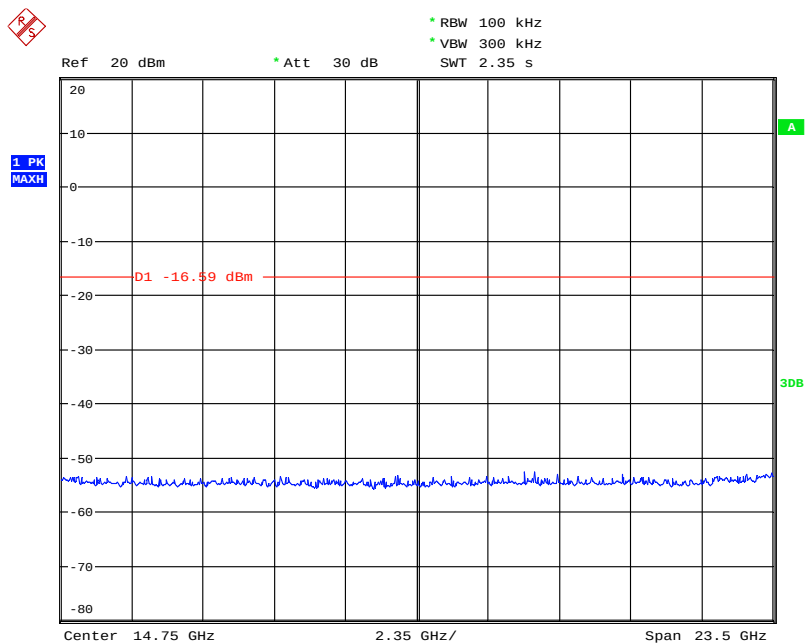


Date: 6.NOV.2015 04:16:56


(Plot 4.6.2 B3: Channel 6: 2437MHz @ 802.11g)



(Plot 4.6.2 C1: Channel 11: 2462MHz @ 802.11g)

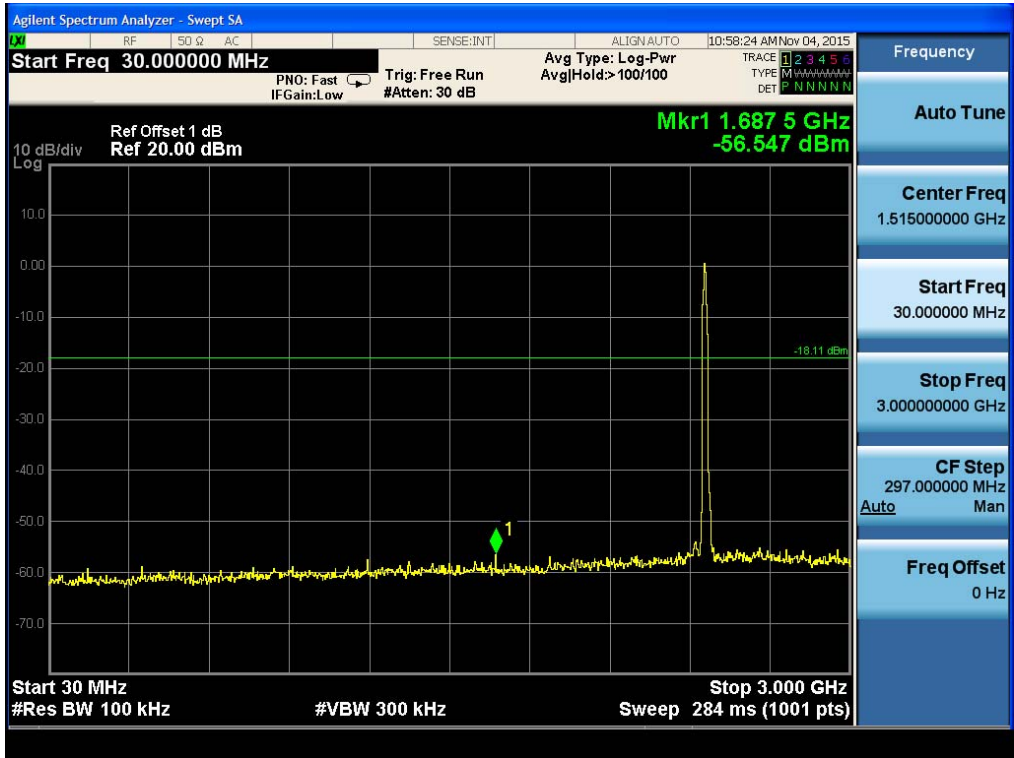

(Plot 4.6.2 C2: Channel 11: 2462MHz @ 802.11g)

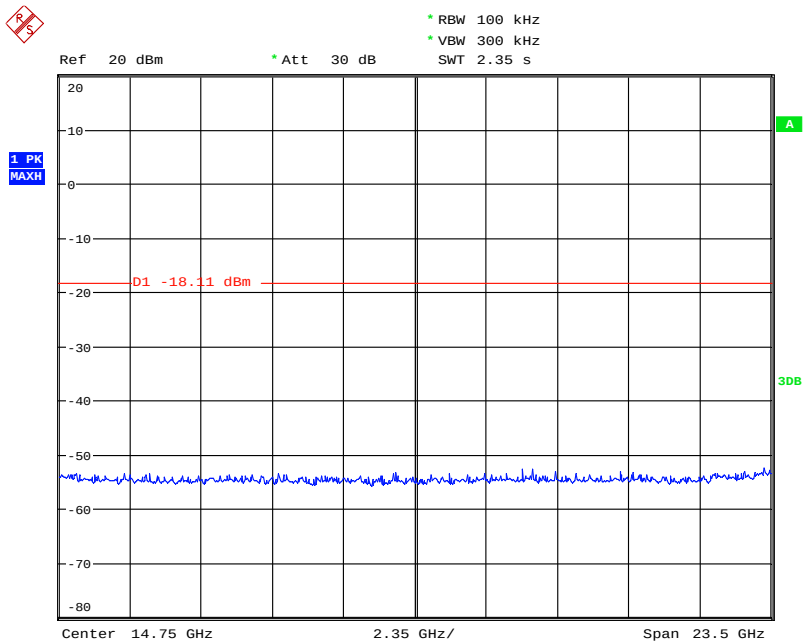

Date: 6.NOV.2015 04:17:13

(Plot 4.6.2 C3: Channel 11: 2462MHz @ 802.11g)

4.6.3 802.11n HT20MHz Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBc)	Verdict
1	2412	2.412 GHz	Plot 4.6.3 A1	---	PASS
		30MHz -3GHz	Plot 4.6.3 A2	-20	PASS
		3GHz-.5 GHz	Plot 4.6.3 A3	-20	PASS
		3GHz-.10 GHz	Plot 4.6.3 A4	-20	PASS
		10GHz-.15 GHz	Plot 4.6.3 A5	-20	PASS
		15GHz-.25 GHz	Plot 4.6.3 A6	-20	PASS
6	2437	2.437 GHz	Plot 4.6.3 B1	---	PASS
		30MHz -3GHz	Plot 4.6.3 B2	-20	PASS
		3GHz-.5 GHz	Plot 4.6.3 B3	-20	PASS
		3GHz-.10 GHz	Plot 4.6.3 B4	-20	PASS
		10GHz-.15 GHz	Plot 4.6.3 B5	-20	PASS
		15GHz-.25 GHz	Plot 4.6.3 B6	-20	PASS
11	2462	2.462 GHz	Plot 4.6.3 C1	---	PASS
		30MHz -3GHz	Plot 4.6.3 C2	-20	PASS
		3GHz-.5 GHz	Plot 4.6.3 C3	-20	PASS
		3GHz-.10 GHz	Plot 4.6.3 C4	-20	PASS
		10GHz-.15 GHz	Plot 4.6.3 C5	-20	PASS
		15GHz-.25 GHz	Plot 4.6.3 C6	-20	PASS


Note:

1. For 802.11n HT20MHz mode at final test to get the worst-case emission at 6.5Mbps.
2. The test results including the cable lose.
3. For 9KHz -30MHz, Because there was only background, So We did not recorded data.


B. Test Plots



(Plot 4.6.3 A1: Channel 1: 2412MHz @ 802.11n HT20)

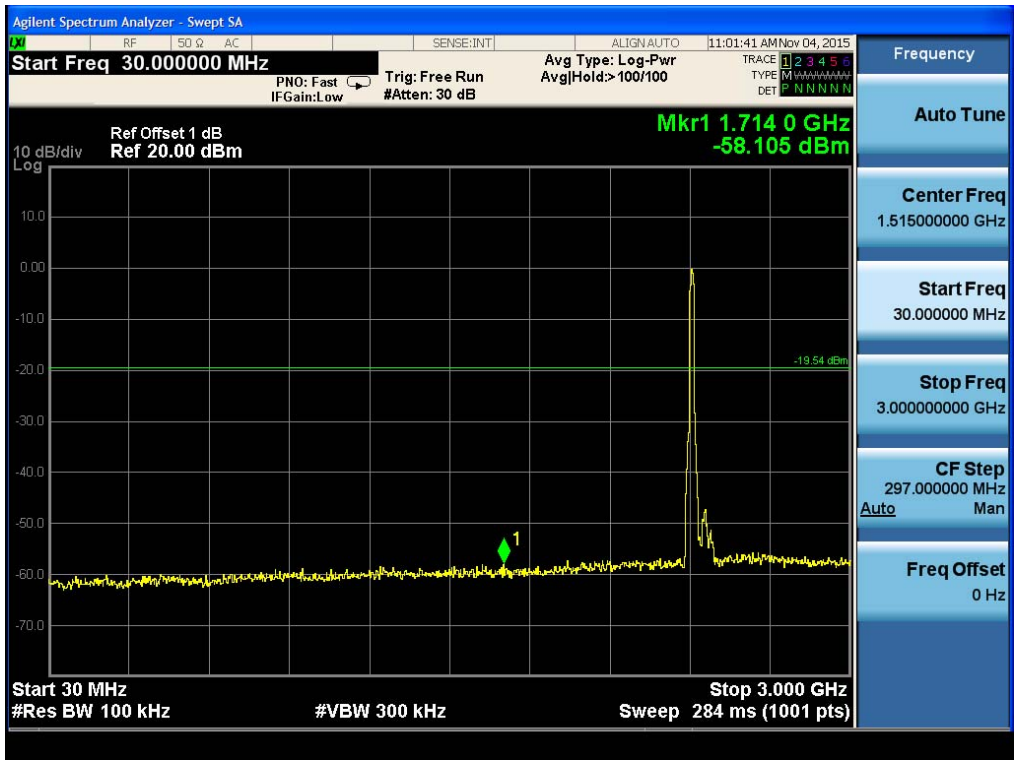

(Plot 4.6.3 A2: Channel 1: 2412MHz @ 802.11n HT20)

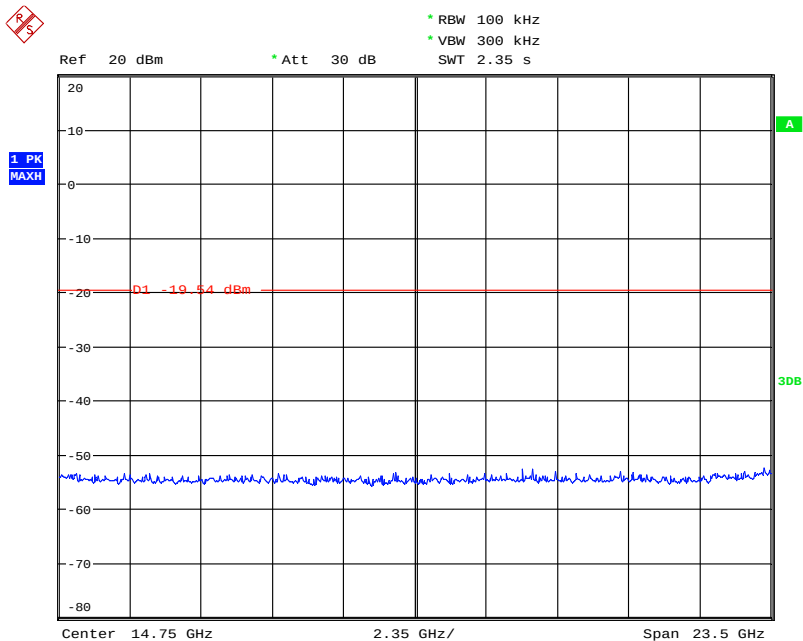


Date: 6.NOV.2015 04:17:41


(Plot 4.6.3 A3: Channel 1: 2412MHz @ 802.11n HT20)



(Plot 4.6.3 B1: Channel 6: 2437MHz @ 802.11n HT20)

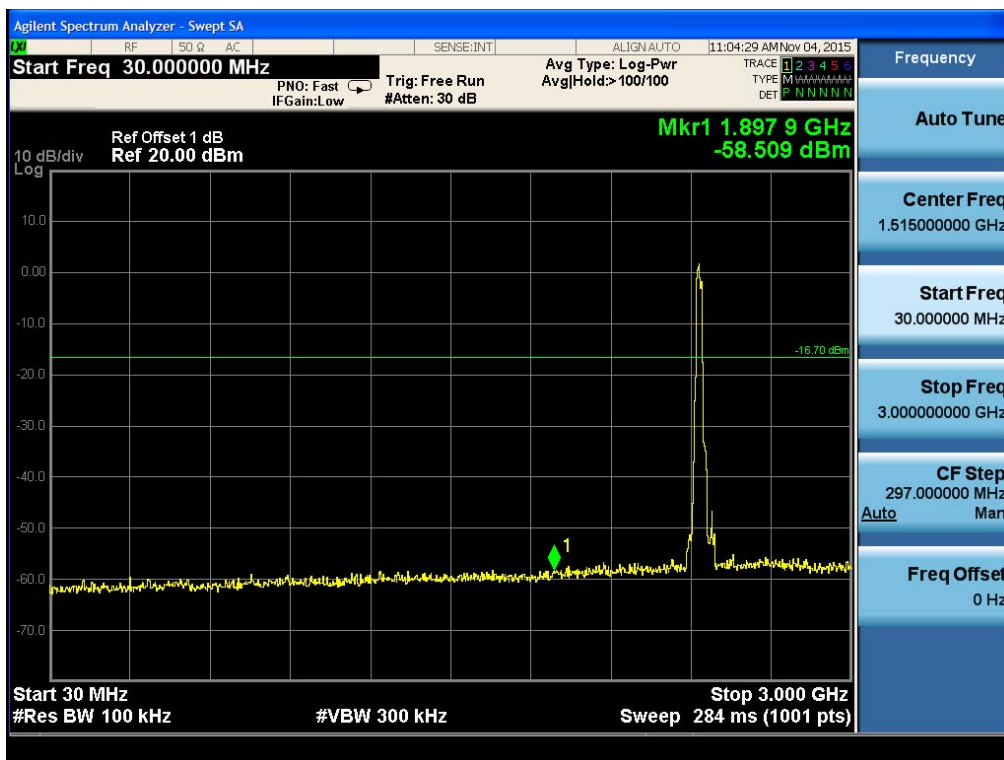

(Plot 4.6.3 B2: Channel 6: 2437MHz @ 802.11n HT20)

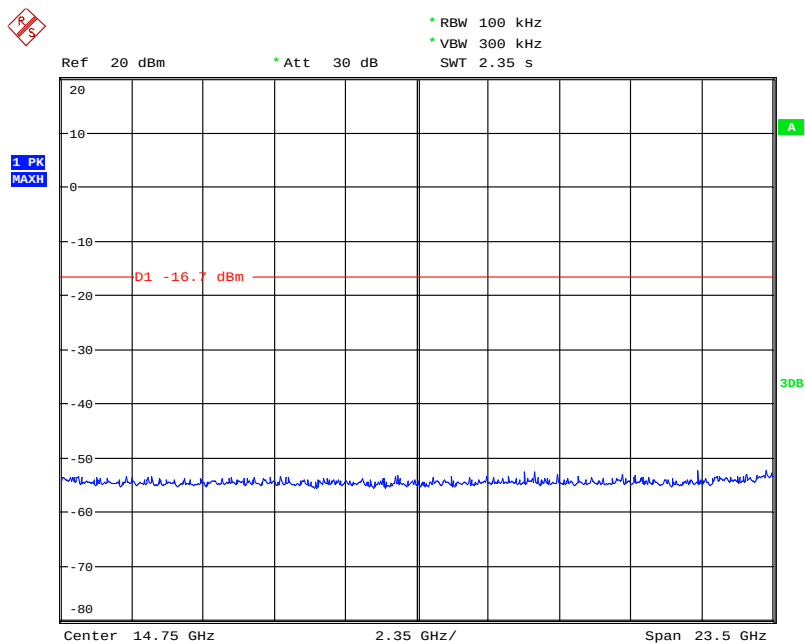


Date: 6.NOV.2015 04:17:52


(Plot 4.6.3 B3: Channel 6: 2437MHz @ 802.11n HT20)



(Plot 4.6.3 C1: Channel 11: 2462MHz @ 802.11n HT20)

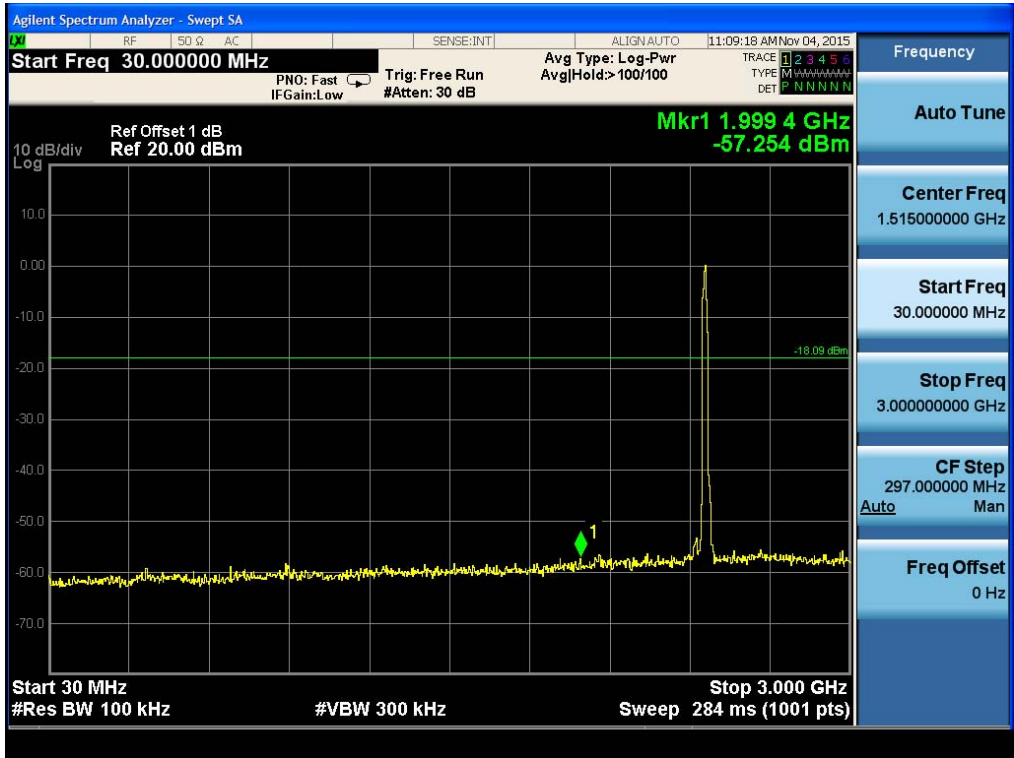

(Plot 4.6.3 C2: Channel 11: 2462MHz @ 802.11n HT20)

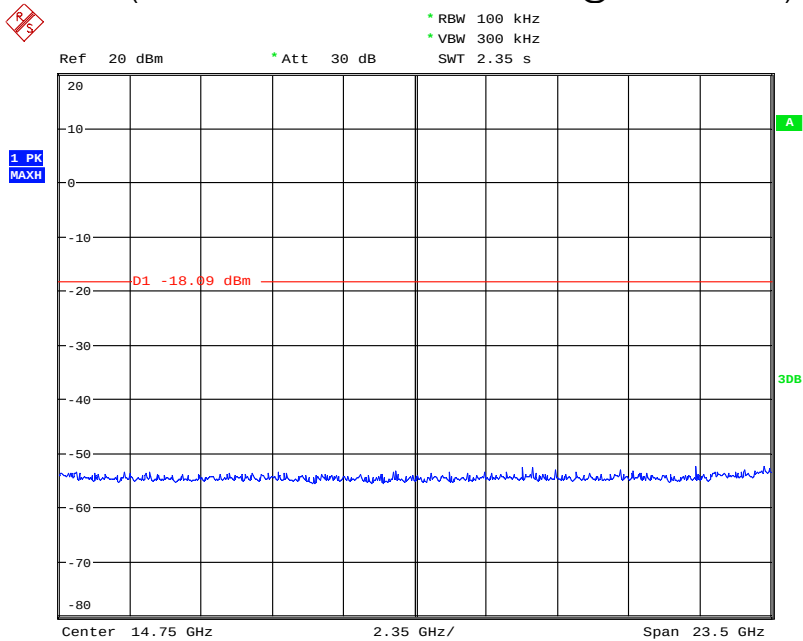

Date: 6.NOV.2015 04:18:06

(Plot 4.6.3 C3: Channel 11: 2462MHz @ 802.11n HT20)

4.6.4 802.11n HT40MHz Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBc)	Verdict
3	2422	2.422 GHz	Plot 4.6.4 A1	---	PASS
		30MHz -3GHz	Plot 4.6.4 A2	-20	PASS
		3GHz-.5 GHz	Plot 4.6.4 A3	-20	PASS
		3GHz-.10 GHz	Plot 4.6.4 A4	-20	PASS
		10GHz-.15 GHz	Plot 4.6.4 A5	-20	PASS
		15GHz-.25 GHz	Plot 4.6.4 A6	-20	PASS
6	2437	2.437 GHz	Plot 4.6.4 B1	---	PASS
		30MHz -3GHz	Plot 4.6.4 B2	-20	PASS
		3GHz-.5 GHz	Plot 4.6.4 B3	-20	PASS
		3GHz-.10 GHz	Plot 4.6.4 B4	-20	PASS
		10GHz-.15 GHz	Plot 4.6.4 B5	-20	PASS
		15GHz-.25 GHz	Plot 4.6.4 B6	-20	PASS
9	2452	2.452 GHz	Plot 4.6.4 C1	---	PASS
		30MHz -3GHz	Plot 4.6.3 C2	-20	PASS
		3GHz-.5 GHz	Plot 4.6.3 C3	-20	PASS
		3GHz-.10 GHz	Plot 4.6.3 C4	-20	PASS
		10GHz-.15 GHz	Plot 4.6.3 C5	-20	PASS
		15GHz-.25 GHz	Plot 4.6.3 C6	-20	PASS


Note:

1. For 802.11n HT40MHz mode at final test to get the worst-case emission at 13.5Mbps.
2. The test results including the cable loss.
3. For 9KHz -30MHz, Because there was only background, So We did not record data.


B. Test Plots



(Plot 4.6.4 A1: Channel 3: 2422MHz @ 802.11n HT40)

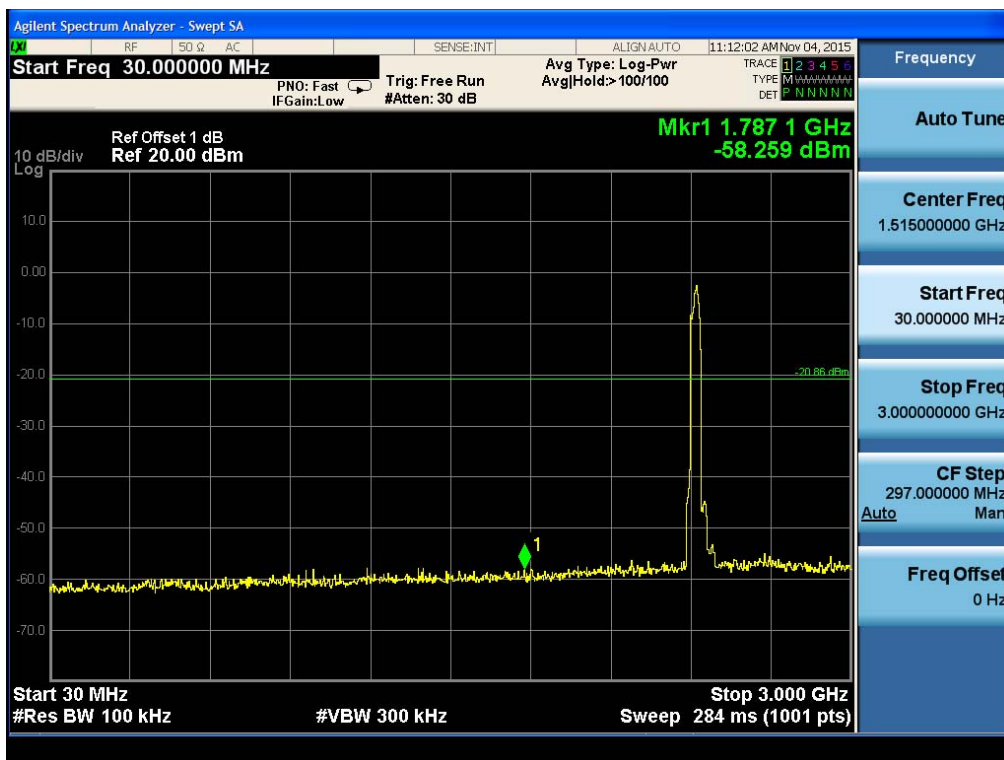


(Plot 4.6.4 A2: Channel 3: 2422MHz @ 802.11n HT40)

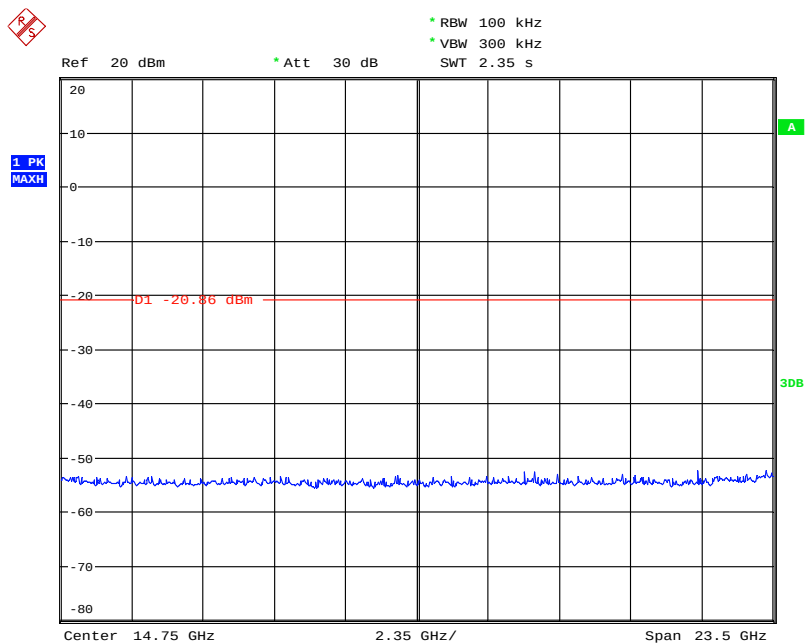


Date: 6.NOV.2015 04:18:23


(Plot 4.6.4 A3: Channel 3: 2422MHz @ 802.11n HT40)

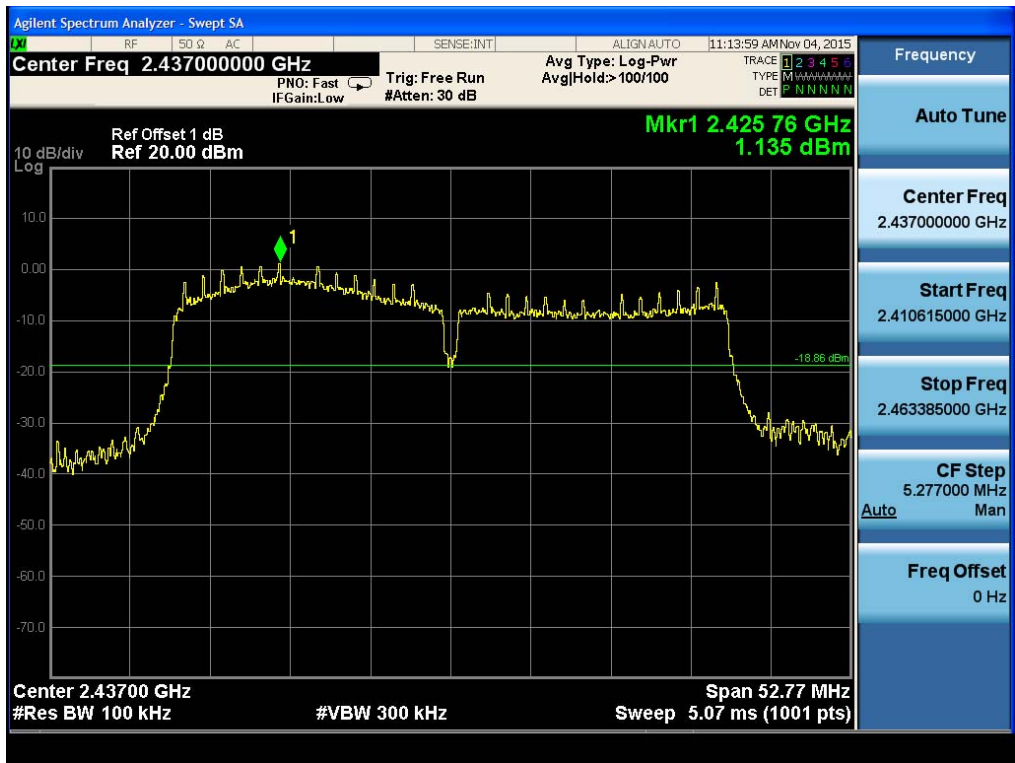


(Plot 4.6.4 B1: Channel 6: 2437MHz @ 802.11n HT40)

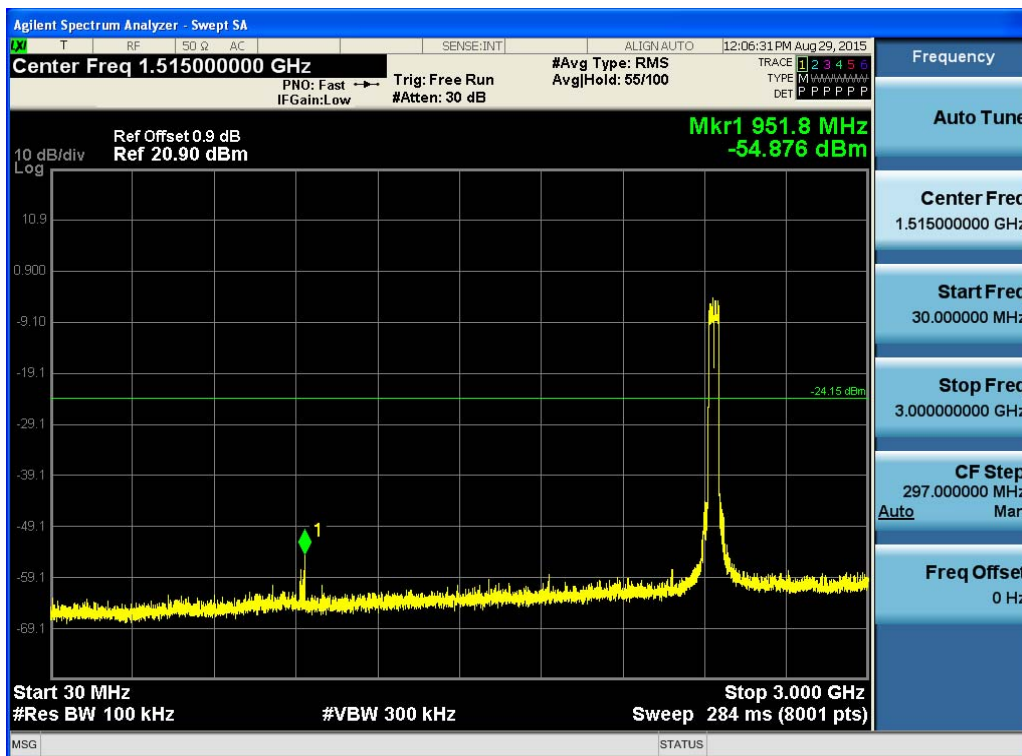

(Plot 4.6.4 B2: Channel 6: 2437MHz @ 802.11n HT40)

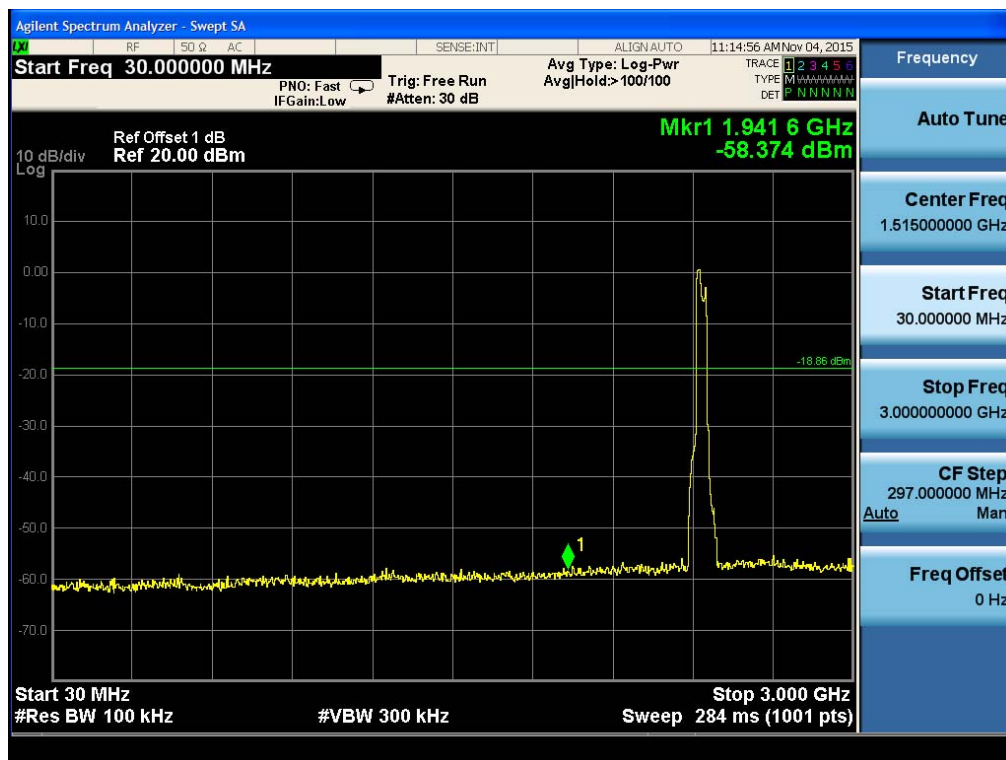

(Plot 4.6.4 B3: Channel 6: 2437MHz @ 802.11n HT40)

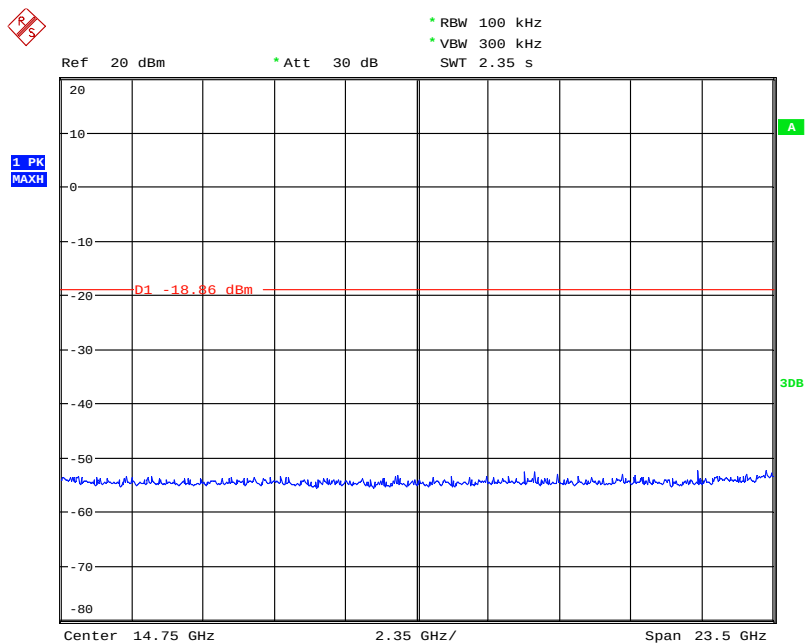


Date: 6.NOV.2015 04:18:47


(Plot 4.6.4 B4: Channel 6: 2437MHz @ 802.11n HT40)



(Plot 4.6.4 C1: Channel 9 : 2452MHz @ 802.11n HT40)

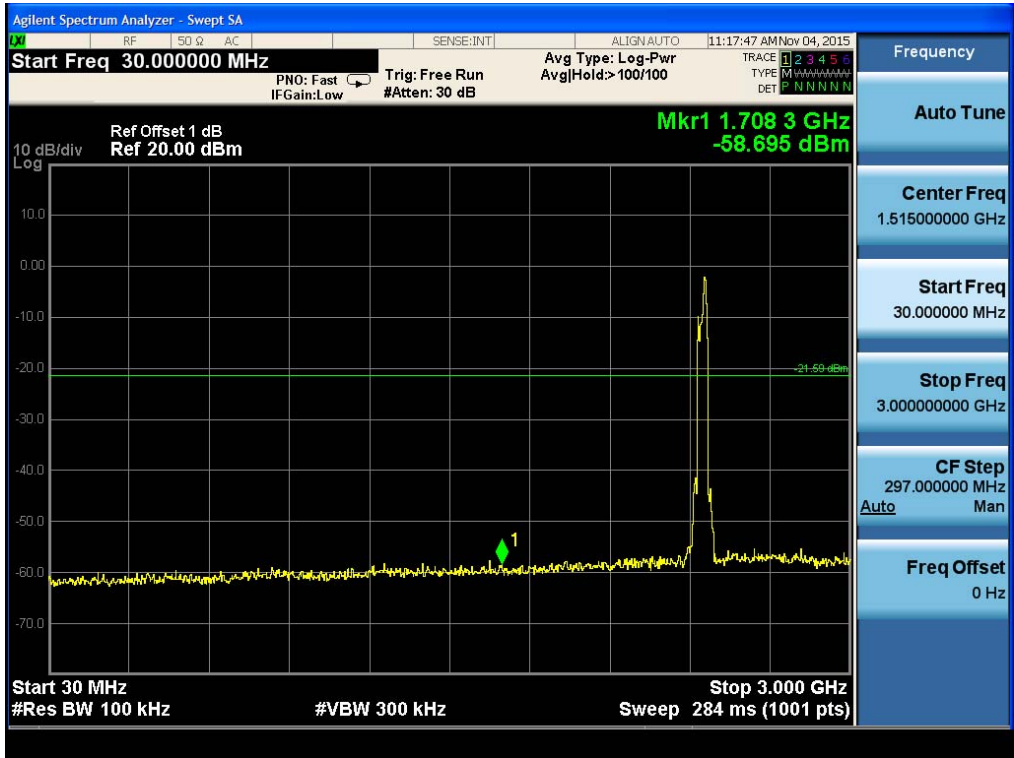

(Plot 4.6.4 C2: Channel 9: 2452MHz @ 802.11n HT40)

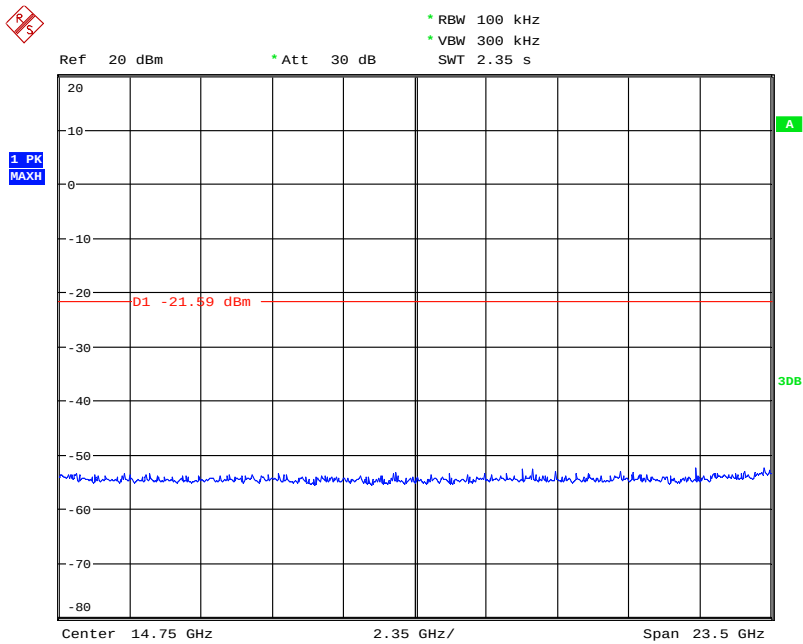


Date: 6.NOV.2015 04:19:00

(Plot 4.6.4 C3: Channel 9: 2452MHz @ 802.11n HT40)

4.7 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300KHz. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. According to KDB558074 D01 V03 for one of the following procedures may be used to determine the modulated DTS device signal bandwidth.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

LIMIT

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST RESULTS

4.7.1 801.11b Test Mode

A. Test Verdict

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Verdict
1	2412	10.08	Plot 4.7.1 A	≥ 500	PASS
6	2437	9.604	Plot 4.7.1 B	≥ 500	PASS
11	2462	7.652	Plot 4.7.1 C	≥ 500	PASS

Note:

1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
2. The test results including the cable loss.


B. Test Plots



(Plot 4.7.1 A: Channel 1: 2412MHz @ 802.11b)



(Plot 4.7.1 B: Channel 6: 2437MHz @ 802.11b)

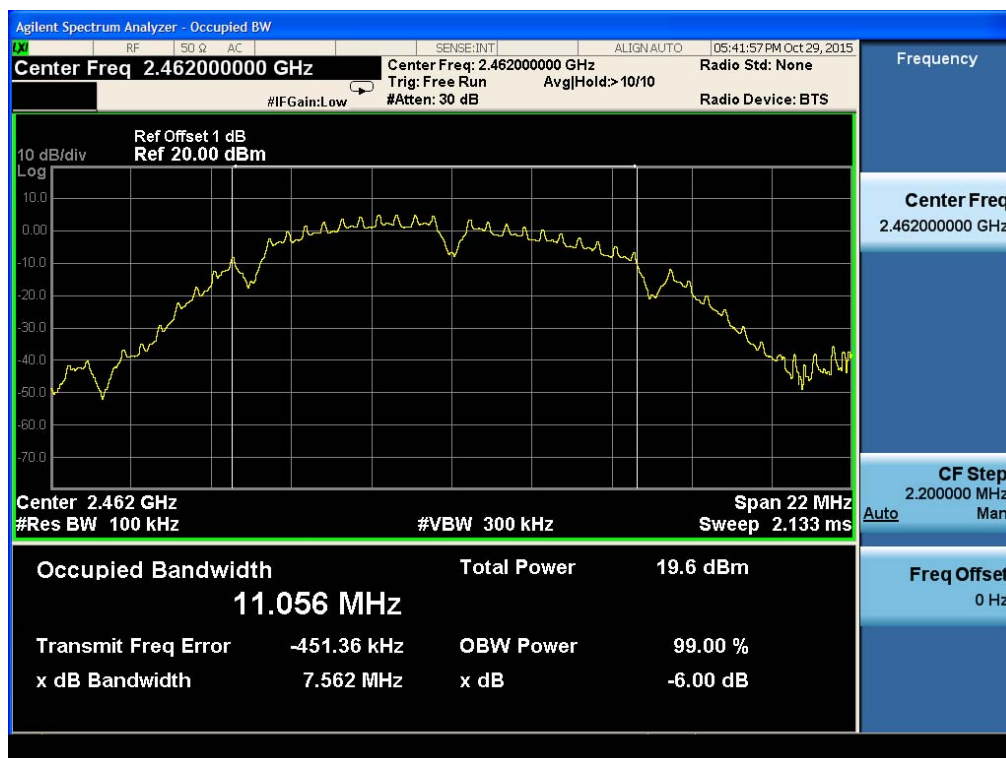

(Plot 4.7.1 C: Channel 11: 2462MHz @ 802.11b)

4.7.2 801.11g Test Mode


A. Test Verdict

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Verdict
1	2412	15.77	Plot 4.7.2 A	≥500	PASS
6	2437	15.75	Plot 4.7.2 B	≥500	PASS
11	2462	10.05	Plot 4.7.2 C	≥500	PASS


Note:

1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
2. The test results including the cable loss.


B. Test Plots

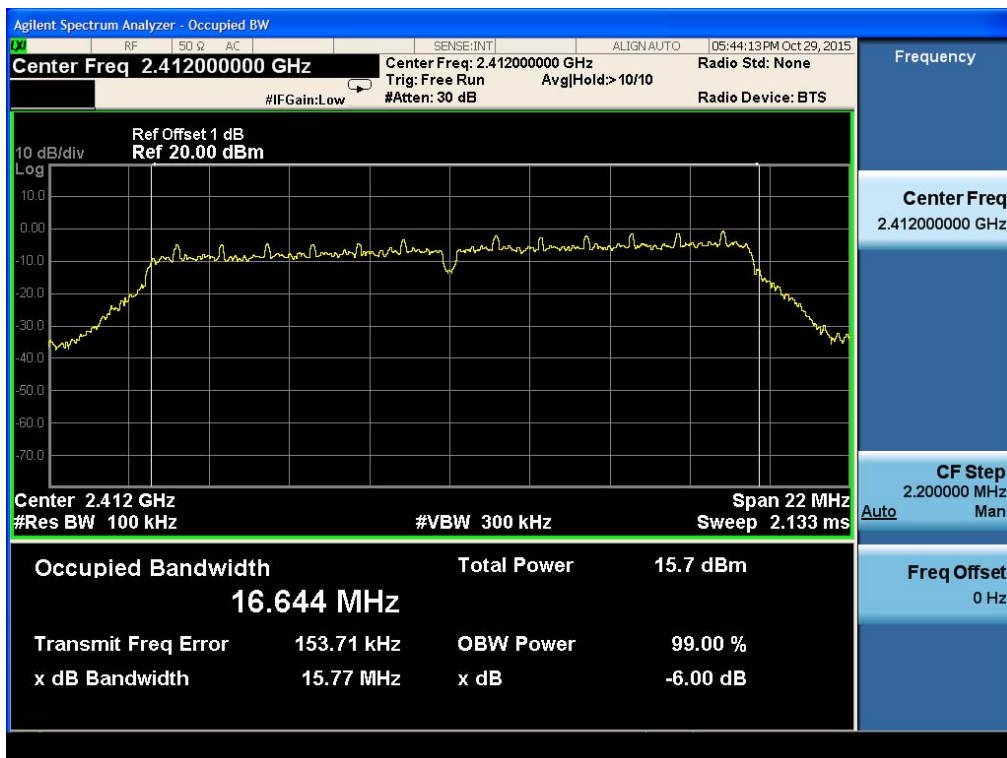

(Plot 4.7.2 A: Channel 1: 2412MHz @ 802.11g)

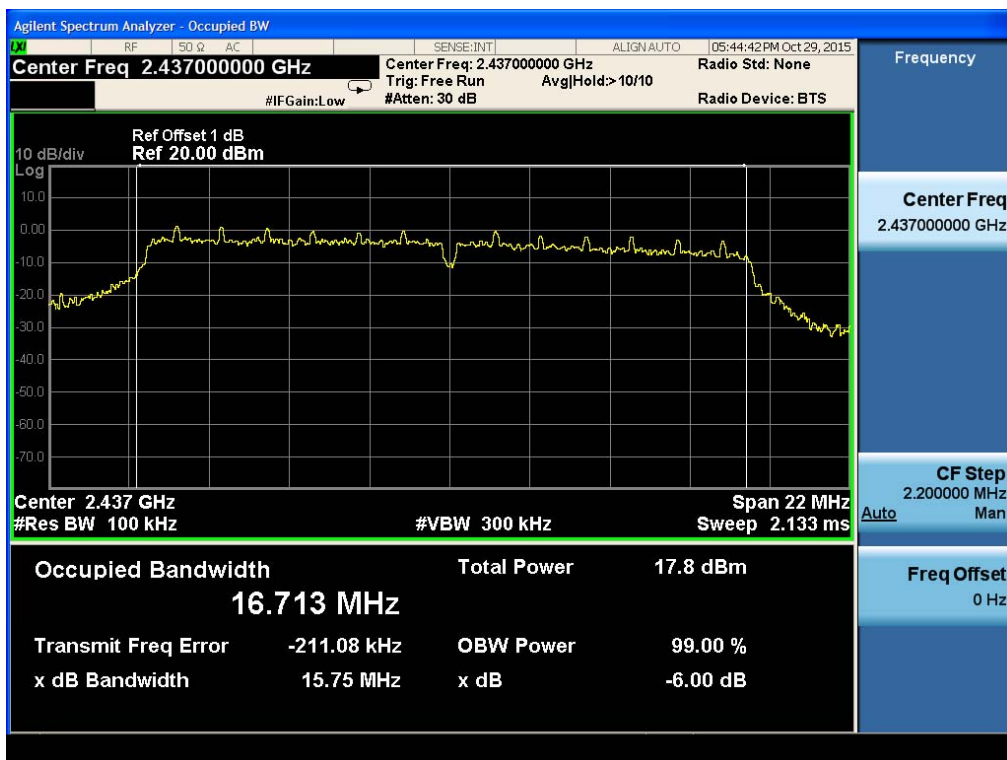

(Plot 4.7.2 B: Channel 6: 2437MHz @ 802.11g)

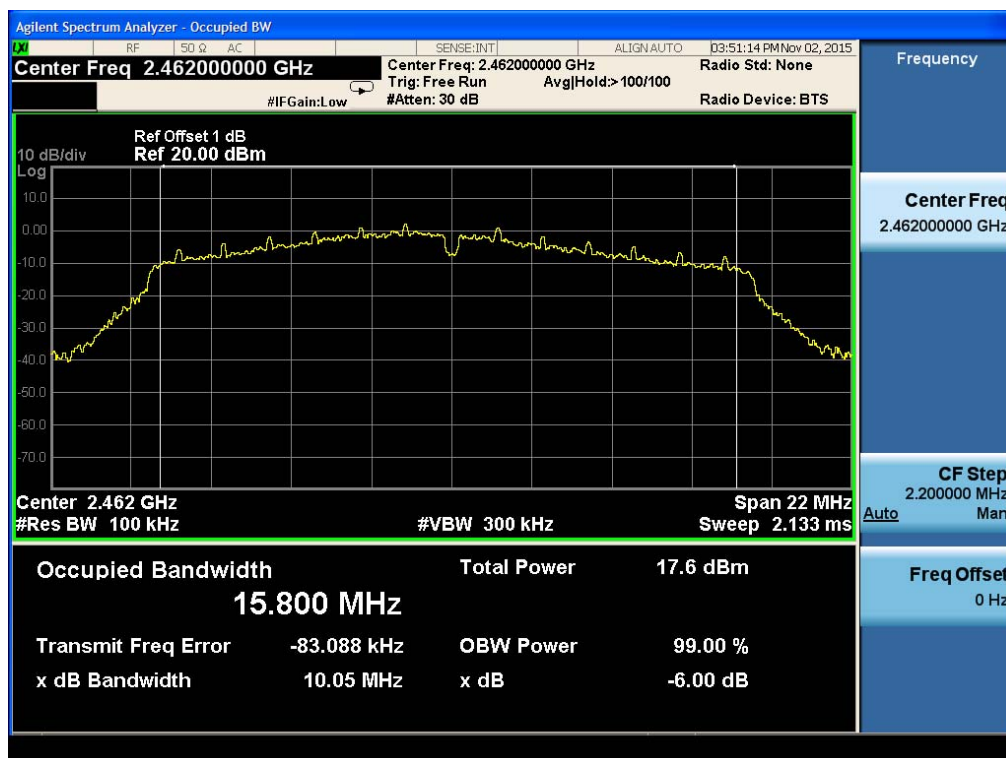

(Plot 4.7.2 C: Channel 11: 2462MHz @ 802.11g)

4.7.3 801.11n HT20 Test Mode


A. Test Verdict

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Verdict
1	2412	16.42	Plot 4.7.3 A	≥500	PASS
6	2437	16.43	Plot 4.7.3 B	≥500	PASS
11	2462	15.88	Plot 4.7.3 C	≥500	PASS


Note:

1. For 802.11n HT20 mode at final test to get the worst-case emission at 6.5Mbps.
2. The test results including the cable loss.

B. Test Plots

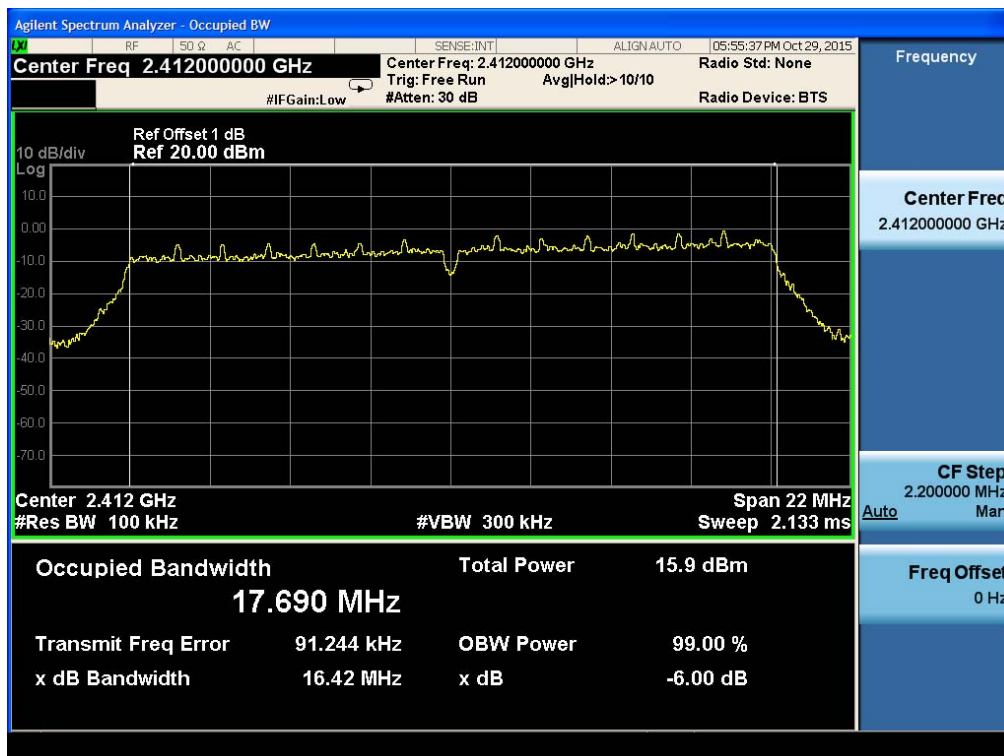

(Plot 4.7.3 A: Channel 1: 2412MHz @ 802.11n HT20)

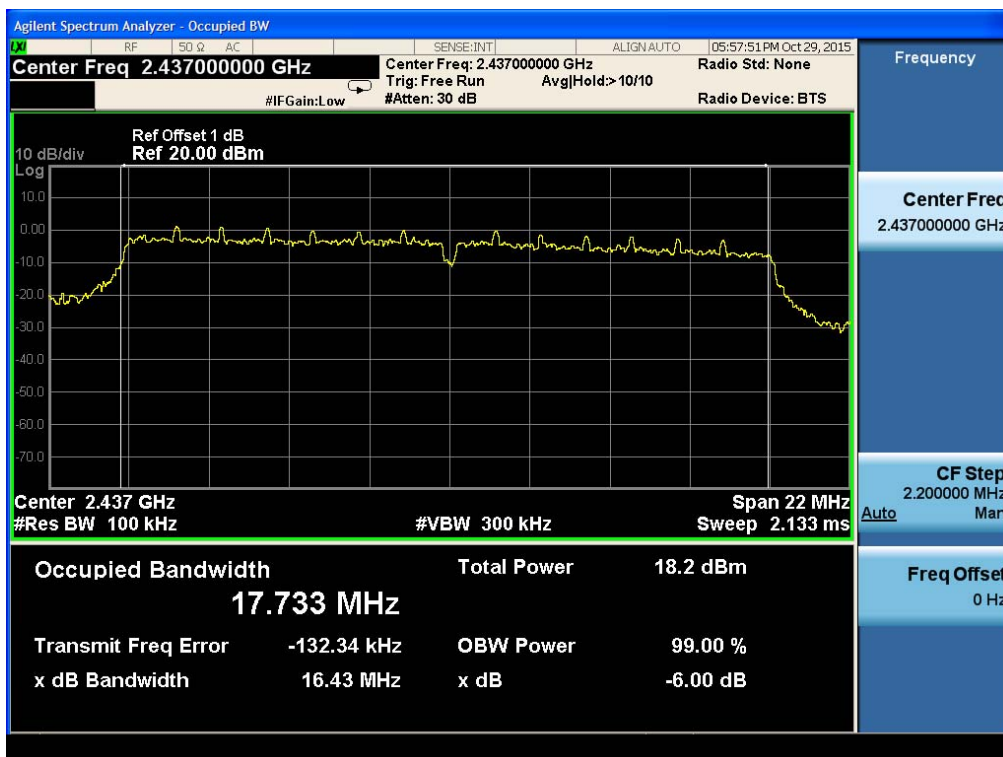

(Plot 4.7.3 B: Channel 6: 2437MHz @ 802.11n HT20)



(Plot 4.7.3 C: Channel 11: 2462MHz @ 802.11n HT20)

4.7.4 801.11n HT40 Test Mode


A. Test Verdict

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Verdict
3	2422	35.09	Plot 4.7.4 A	≥500	PASS
6	2437	35.18	Plot 4.7.4 B	≥500	PASS
9	2452	35.07	Plot 4.7.4 C	≥500	PASS


Note:

1. For 802.11n HT40 mode at final test to get the worst-case emission at 13.5Mbps.
2. The test results including the cable loss.

B. Test Plots

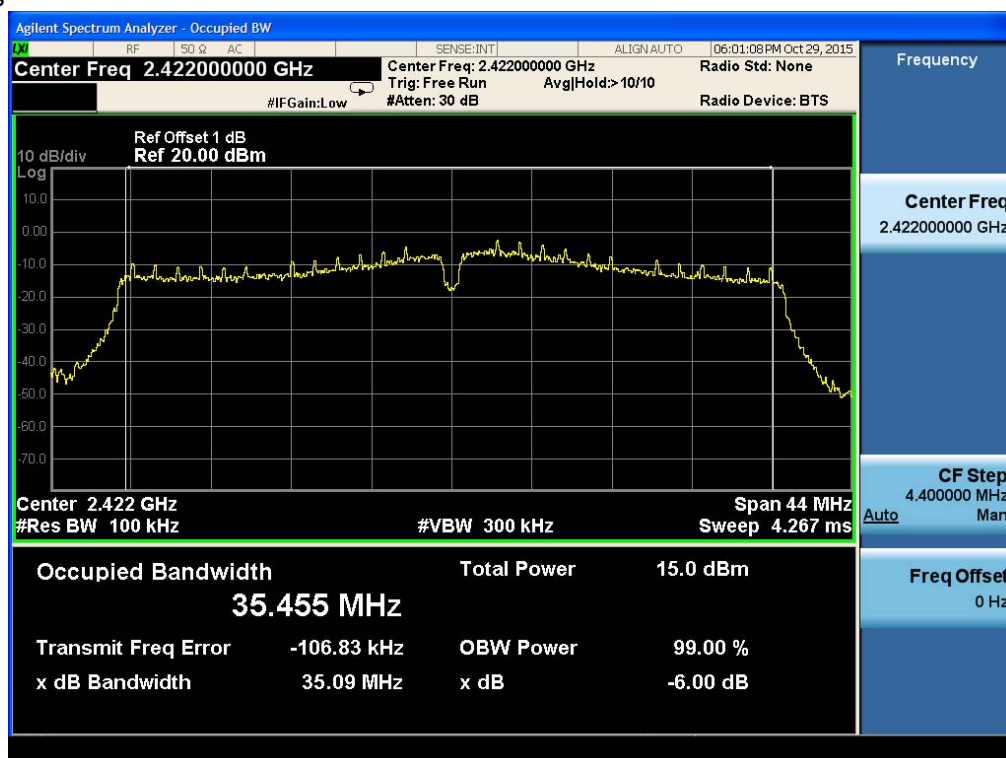

(Plot 4.7.4 A: Channel 3: 2422MHz @ 802.11n HT40)

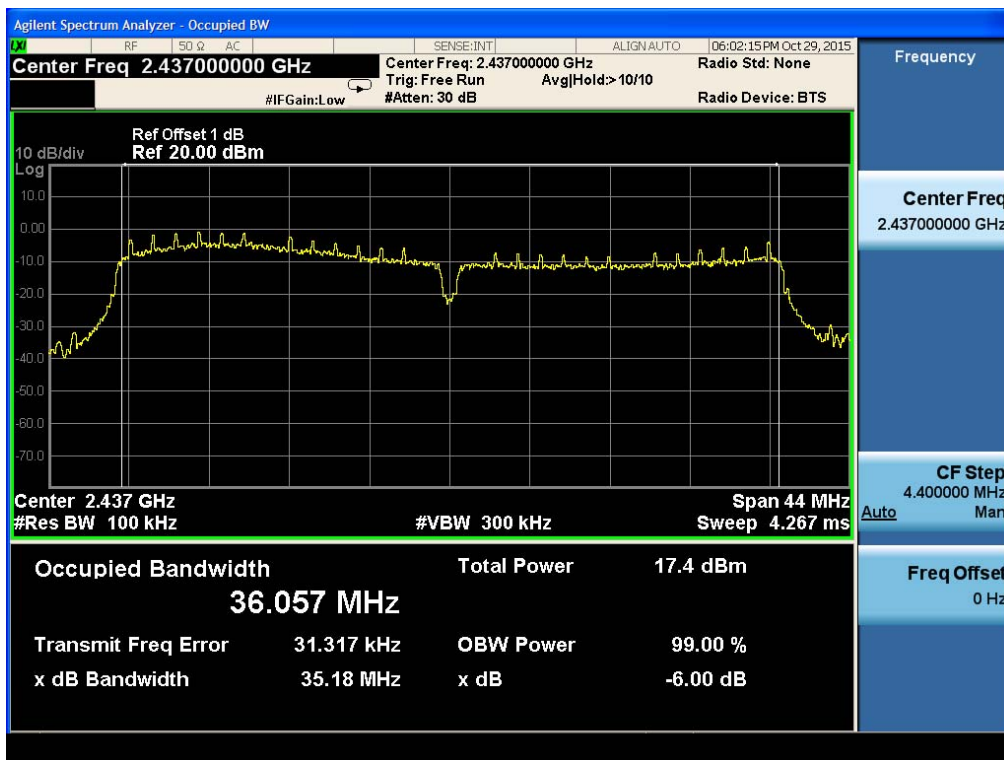

(Plot 4.7.3 B: Channel 6: 2437MHz @ 802.11n HT40)



(Plot 4.7.4 C: Channel 9: 2452MHz @ 802.11n HT40)

4.8 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

Measurement parameters

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

Limits

FCC	IC
Antenna Gain	
6 dBi	

Results

T _{nom}	V _{nom}	Lowest Channel 2412 MHz	Middle Channel 2437 MHz	Highest Channel 2462 MHz
Conducted power [dBm] Measured with DSSS modulation		10.44	10.09	10.41
Conducted power [dBm] Measured with DSSS modulation		10.84	10.65	10.80
Gain [dBi] Calculated		0.40	0.56	0.39
Measurement uncertainty		± 0.6 dB (cond.) / ± 2.56 dB (rad.)		

5 Test Setup Photos of the EUT

Please refer to separated files for Test Setup Photos of the EUT.

6 External Photos of the EUT

Please refer to separated files for External Photos of the EUT.

7 Internal Photos of the EUT

Please refer to separated files for Internal Photos of the EUT.

.....**End of Report**.....