FCC PART 27

FCC PART 22H, PART 24E

TEST REPORT

For

ComTrade USA East, Inc.

275 Grove Street, Suite 2-400 Newton, Massachusetts,United States

FCC ID: 2AERWTSM62L

Report Type:	**Product Type:**
Original Report	Smartphone with 4G (voice), GPS and BT

Report Number:	RSZ170110007-00D
Report Date:	2017-04-06
Reviewed By:	Oscar Ye Engineer
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION 3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 3
OBJECTIVE 3
RELATED SUBMITTAL(S)/GRANT(S) 3
TEST METHODOLOGY 3
MEASUREMENT UNCERTAINTY 4
TEST FACILITY 4
SYSTEM TEST CONFIGURATION 5
DESCRIPTION OF TEST CONFIGURATION 5
EQUIPMENT MODIFICATIONS 5
SUPPORT EQUIPMENT LIST AND DETAILS 5
BLOCK DIAGRAM OF TEST SETUP 5
SUMMARY OF TEST RESULTS 6
TEST EQUIPMENT LIST 7
FCC §1.1307 & §2.1093 - RF EXPOSURE 8
APPLICABLE STANDARD 8
TEST RESULT 8
FCC §2.1047 - MODULATION CHARACTERISTIC 9
FCC § 2.1046, § 22.913 (A) & § 24.232 (C); §27.50 (C) (D) (H) - RF OUTPUT POWER 10
APPLICABLE STANDARD 10
TEST PROCEDURE 10
TEST DATA 10
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH 37
APPLICABLE STANDARD 37
TEST PROCEDURE 37
TEST DATA 37
FCC §2.1051, §22.917(A) & §24.238(A); §27.53 (H) (M) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS 73
APPLICABLE STANDARD 73
TEST PROCEDURE 73
TEST DATA 73
FCC § 2.1053; § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) SPURIOUS RADIATED EMISSIONS 110
APPLICABLE STANDARD 110
TEST PROCEDURE 110
TEST DATA 110
FCC § 22.917 (A);§ 24.238 (A); §27.53 (H)(M) - BAND EDGES 114
APPLICABLE STANDARD 114
TEST PROCEDURE 114
TEST DATA 114
FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY 172
APPLICABLE STANDARD 172
TEST PROCEDURE 172
TEST DATA 173

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *ComTrade USA East, Inc.'s* product, model number: *Smartphone 6.2 Lite (FCC ID: 2AERWTSM62L) in* this report is a *Smartphone with 4G (voice), GPS and BT*, which was measured approximately: 137 mm (L) * 68 mm (W) *8 mm (H), rated with input voltage: DC 3.8V from Li-ion battery or DC 5.0V from adapter.

Adapter information
Input: AC 100-240V, 50/60Hz, 0.15A
Output: 5.0V, 1A

Notes: This series products model: K7 and Smartphone 6.2 Lite are identical; they have the identical schematics, only named differently. Model Smartphone 6.2 Lite was selected for fully testing, the detailed information can be referred to the declaration which was stated and guaranteed by the applicant.

** All measurement and test data in this report was gathered from production sample serial number: 1700018 (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2017-02-01*

Objective

This test report is prepared on behalf of *ComTrade USA East, Inc.* in accordance with Part 2-Subpart J, Part 22-Subpart H and Part 24-Subpart E and Part 27 of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS & DSS and Part 15B JBP submissions with FCC ID: 2AERWTSM62L.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2-Subpart J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services
Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D, ANSI C63.4-2014.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
RF conducted test with spectrum		±0.9dB
RF Output Power with Power meter		±0.5dB
Radiated emission	30MHz~1GHz	±5.91dB
	Above 1G	±4.92dB
Occupied Bandwidth		±0.5kHz
Temperature		±1.0℃
Humidity		±6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50-116218-UY
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605

Block Diagram of Test Setup

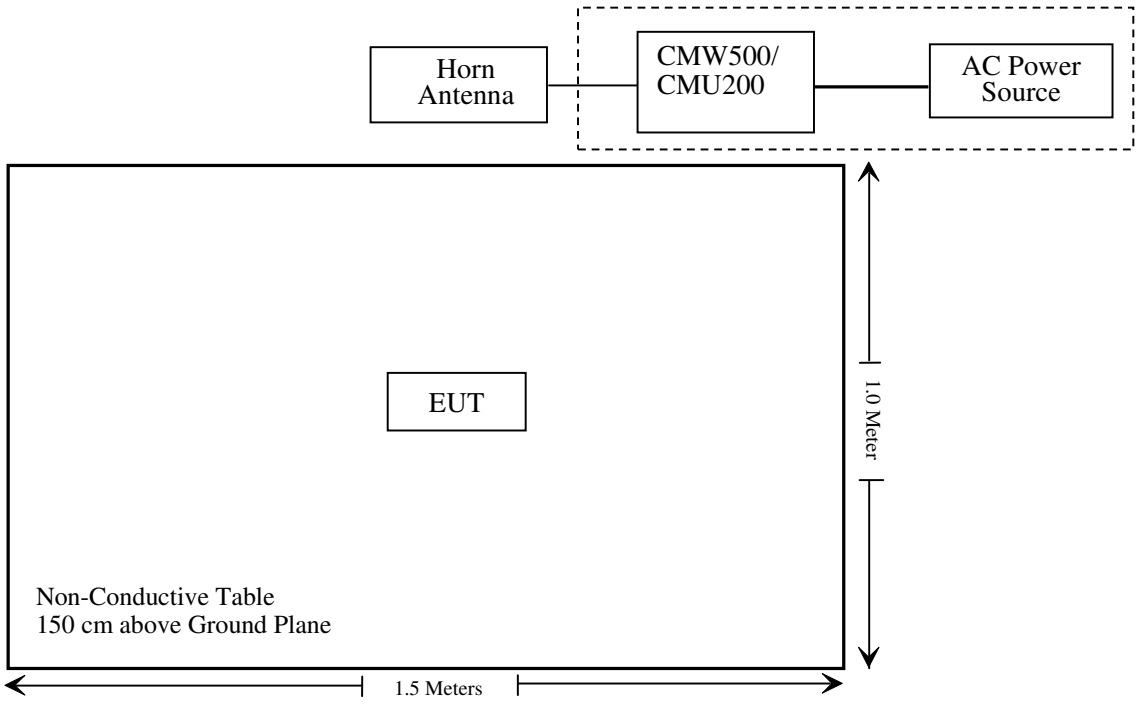

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307, §2.1093	RF Exposure (SAR)	Compliance
§2.1046; § 22.913 (a); § 24.232 (c); §27.50 (c) (d) (h)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Field Strength of Spurious Radiation	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (h)(m)	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Sonoma Instrunent	Amplifier	330	171377	2016-12-12	2017-12-12
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-25
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2016-01-09	2019-01-08
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2016-01-09	2019-01-08
Narda	Pre-amplifier	AFS42-00101800	2001270	2016-09-08	2017-09-08
EMCO	Horn Antenna	3116	9510-2384	2015-11-07	2018-11-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2016-11-25	2017-11-25
ETS	Horn Antenna	3115	6229	2016-01-11	2017-01-10
ETS	Horn Antenna	3115	9311-4159	2016-01-11	2017-01-10
R&S	Auto test Software	EMC32	V 09.10.0	NCR	NCR
haojintech	Coaxial Cable	Cable-1	001	2016-12-12	2017-12-12
haojintech	Coaxial Cable	Cable-2	002	2016-12-12	2017-12-12
haojintech	Coaxial Cable	Cable-3	003	2016-12-12	2017-12-12
MICRO-COAX	Coaxial Cable	Cable-4	004	2016-12-12	2017-12-12
MICRO-COAX	Coaxial Cable	Cable-5	005	2016-12-12	2017-12-12
MICRO-COAX	Coaxial Cable	Cable-7	007	2016-12-12	2017-12-12
HP	Signal Generator	8341B	2624A00116	2016-08-29	2017-08-29
RF Conducted test					
BACL	TS 8997 Cable-01	T-KS-EMC086	T-KS-EMC086	2016-12-09	2017-12-08
BACL	RF cable	KS-LAB-012	KS-LAB-012	2016-12-15	2017-12-14
WEINSCHEL	3dB Attenuator	5326	N/A	2016-06-18	2017-06-18
Rohde & Schwarz	OSP120 BASE UNIT	OSP120	101247	2016-07-04	2017-07-03
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2016-09-21	2017-09-21
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	110605	2016-11-25	2017-11-25
R&S	Wideband Radio Communication tester	CMW500	1201.002K50-116218-UY	2016-10-08	2017-10-08
HONOVA	Power Splitter	ZFRSC-14-S+	019411452	2016-06-12	2017-06-12

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307 & §2.1093 - RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RSZ170110007-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H, 24E & Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c); §27.50 (c) (d) (h) - RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d), the maximum EIRP must not exceed 1Watts (30dBm) for 1710-1755MHz.
The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

According to §27.50(c),Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

According to §27.50(h), the maximum EIRP must not exceed 2Watts (33dBm) for 2500-2570MHz.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMW500/CMU200 through sufficient attenuation.



Radiated method:

TIA 603-D section 2.2.17

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Echo Wu on 2017-02-27.

Conducted Power

Cellular Band (Part 22H)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	32.10	38.45
	190	836.6	32.10	38.45
	251	848.8	32.10	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	33.49	33.05	31.60	30.45	38.45
	190	836.6	33.59	33.09	31.58	30.40	38.45
	251	848.8	33.62	33.12	31.52	30.38	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	25.11	24.15	22.12	21.15	38.45
	190	836.6	25.09	24.13	22.23	21.19	38.45
	251	848.8	24.98	24.01	22.10	21.05	38.45

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	Normal	RMC12.2k		21.87	22.18	21.20
		HSDPA	1	20.47	20.56	20.98
			2	20.58	20.46	20.54
			3	20.54	20.46	20.37
			4	20.45	20.67	20.24
		HSUPA	1	20.38	20.46	20.59
			2	20.24	20.41	20.46
			3	20.75	20.31	20.25
			4	20.37	20.78	20.31
			5	20.34	20.47	20.37
		HSPA+	1	20.12	20.18	20.21

PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	29.17	33
	661	1880.0	28.98	33
	810	1909.8	28.86	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	31.19	30.37	26.78	25.64	33
	661	1880.0	30.95	30.15	26.58	25.45	33
	810	1909.8	30.81	30.01	26.46	25.36	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	512	1850.2	25.76	24.79	22.83	21.81	33
	661	1880.0	25.64	24.69	22.82	21.80	33
	810	1909.8	25.58	24.68	22.80	21.91	33

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	Normal	RMC12.2k		21.81	21.31	21.97
		HSDPA	1	20.34	20.91	20.71
			2	20.21	20.74	20.98
			3	20.15	20.36	20.68
			4	20.14	20.64	20.12
		HSUPA	1	20.15	20.36	20.71
			2	20.36	20.65	20.11
			3	20.36	20.47	20.36
			4	20.11	20.36	20.10
			5	20.36	20.45	20.11
		HSPA+	1	20.98	20.12	20.16

AWS Band

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA IV	Normal	RMC12.2k		22.12	22.15	22.21
		HSDPA	1	21.54	21.74	21.51
			2	21.52	21.69	21.45
			3	21.49	21.59	21.41
			4	21.45	21.64	21.45
		HSUPA	1	21.45	21.36	21.51
			2	21.35	21.55	21.25
			3	21.36	21.47	21.36
			4	21.25	21.45	21.39
			5	21.24	21.52	21.41
		HSPA+	1	21.45	21.78	21.56

Peak-to-average ratio (PAR)

Cellular Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.14	13
	Middle	0.16	13
	High	0.15	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	0.19	13
	Middle	0.17	13
	High	0.18	13

Mode	Channel	PAR (dB)	Limit (dBm)
WCDMA (BPSK)	Low	2.52	13
	Middle	2.45	13
	High	2.86	13
HSDPA (16QAM)	Low	2.28	13
	Middle	2.24	13
	High	2.65	13
HSUPA (BPSK)	Low	2.34	13
	Middle	2.31	13
	High	2.65	13

PCS Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	0.15	13
	Middle	0.15	13
	High	0.17	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	0.19	13
	Middle	0.18	13
	High	0.20	13

Mode	Channel	PAR (dB)	Limit (dBm)
WCDMA (BPSK)	Low	1.99	13
	Middle	2.10	13
	High	3.04	13
HSDPA (16QAM)	Low	1.84	13
	Middle	1.92	13
	High	2.56	13
HSUPA (BPSK)	Low	1.87	13
	Middle	2.00	13
	High	2.61	13

AWS Band

Mode	Channel	PAR (dB)	Limit (dBm)
WCDMA (BPSK)	Low	2.56	13
	Middle	2.66	13
	High	2.99	13
HSDPA (16QAM)	Low	2.81	13
	Middle	2.92	13
	High	2.77	13
HSUPA (BPSK)	Low	2.68	13
	Middle	2.73	13
	High	2.69	13

Radiated Power

GSM Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E	
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for Cellular Band (Part 22H), Middle Channel										
836.6	89.92	76	2.1	H	19.7	0.26	4.75	24.19	38.45	14.26
836.6	100.74	320	2.1	V	26.5	0.26	4.75	30.99	38.45	7.46
EIRP for PCS Band (Part 24E), Middle Channel										
1880	80.89	300	2.2	H	19.4	0.45	8.84	27.79	33	5.21
1880	84.82	91	1.6	V	21.1	0.45	8.84	29.49	33	3.51

EDGE Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)			
ERP, Cellular Band (Part 22H), Middle Channel										
836.6	87.02	217	2.3	H	16.8	0.26	4.75	21.29	38.45	17.16
836.6	96.44	10	1.3	V	22.2	0.26	4.75	26.69	38.45	11.76
EIRP, PCS Band (Part 24E), Middle Channel										
1880.0	75.89	68	1.9	H	14.4	0.45	8.84	22.79	33	10.21
1880.0	80.92	203	1.1	V	17.2	0.45	8.84	25.59	33	7.41

WCDMA Mode:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22H/24E/27	
			Height (m)	Polar (H/V)	S.G. Level (dBm)	Cable loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
ERP for WCDMA Band V (Part 22H), Middle Channel										
836.6	81.22	262	1.0	H	11.0	0.26	4.75	15.49	38.45	22.96
836.6	90.74	32	1.0	V	16.5	0.26	4.75	20.99	38.45	17.46
EIRP for WCDMA Band II (Part 24E), Middle Channel										
1880.0	68.99	138	1.5	H	7.5	0.45	8.84	15.89	33	17.11
1880.0	76.02	354	1.1	V	12.3	0.45	8.84	20.69	33	12.31
EIRP for WCDMA Band IV (Part 27), Middle Channel										
1732.6	71.27	287	1.3	H	7.7	0.40	8.52	15.82	30	14.18
1732.6	78.34	265	2.0	V	12.8	0.40	8.52	20.92	30	9.08

Note:
All above data were tested with no amplifier.
Absolute Level = SG Level - Cable loss + Antenna Gain
Margin = Limit- Absolute Level

LTE Band 2

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4	QPSK	RB Size=1, RB Offset=0	22.16	22.20	22.15
		RB Size=1, RB Offset=2	22.91	22.44	22.71
		RB Size=1, RB Offset=5	21.75	22.81	22.98
		RB Size=3, RB Offset=0	21.85	21.20	22.95
		RB Size=3, RB Offset=1	22.34	22.41	22.63
		RB Size=3, RB Offset=2	21.76	21.03	21.05
		RB Size=6, RB Offset=0	20.26	20.06	20.40
	16QAM	RB Size=1, RB Offset=0	22.81	22.44	22.79
		RB Size=1, RB Offset=2	21.82	21.48	22.71
		RB Size=1, RB Offset=5	22.30	21.37	22.94
		RB Size=3, RB Offset=0	22.38	21.57	22.20
		RB Size=3, RB Offset=1	21.17	22.78	21.23
		RB Size=3, RB Offset=2	22.61	21.98	21.13
		RB Size=6, RB Offset=0	20.15	20.53	20.88
3.0	QPSK	RB Size=1, RB Offset=0	22.49	22.51	22.99
		RB Size=1, RB Offset=7	22.03	22.56	22.23
		RB Size=1, RB Offset=14	21.39	22.84	22.86
		RB Size=8, RB Offset=0	22.38	22.06	21.55
		RB Size=8, RB Offset=4	21.31	21.25	22.66
		RB Size=8, RB Offset=7	22.71	21.52	22.55
		RB Size=15, RB Offset=0	20.87	20.14	20.19
	16QAM	RB Size=1, RB Offset=0	22.61	22.60	22.64
		RB Size=1, RB Offset=7	21.74	22.55	22.09
		RB Size=1, RB Offset=14	21.47	22.83	22.11
		RB Size=8, RB Offset=0	21.24	22.85	21.21
		RB Size=8, RB Offset=4	22.43	21.01	21.68
		RB Size=8, RB Offset=7	22.12	22.85	22.65
		RB Size=15, RB Offset=0	20.98	20.92	20.73

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.33	22.68	22.11
		RB Size=1, RB Offset=12	22.57	21.11	22.83
		RB Size=1, RB Offset=24	21.29	21.34	21.78
		RB Size=12, RB Offset=0	22.46	22.25	21.43
		RB Size=12, RB Offset=6	21.07	21.59	22.77
		RB Size=12, RB Offset=11	21.82	21.6	22.85
		RB Size=25, RB Offset=0	20.28	20.61	20.05
	16QAM	RB Size=1, RB Offset=0	21.65	22.13	21.93
		RB Size=1, RB Offset=12	21.17	21.17	21.12
		RB Size=1, RB Offset=24	22.90	22.44	22.71
		RB Size=12, RB Offset=0	21.75	22.81	22.98
		RB Size=12, RB Offset=6	21.85	21.21	22.95
		RB Size=12, RB Offset=11	22.34	22.41	22.64
		RB Size=25, RB Offset=0	20.76	20.03	20.05
10.0	QPSK	RB Size=1, RB Offset=0	22.26	22.06	21.40
		RB Size=1, RB Offset=24	21.82	21.44	22.79
		RB Size=1, RB Offset=49	21.82	21.48	22.72
		RB Size=25, RB Offset=0	22.30	21.38	22.94
		RB Size=25, RB Offset=12	22.38	21.57	22.11
		RB Size=25, RB Offset=24	21.16	21.78	21.57
		RB Size=50, RB Offset=0	20.61	20.97	20.13
	16QAM	RB Size=1, RB Offset=0	22.15	22.53	22.88
		RB Size=1, RB Offset=24	22.48	22.51	22.99
		RB Size=1, RB Offset=49	22.03	22.56	22.23
		RB Size=25, RB Offset=0	21.39	22.84	22.86
		RB Size=25, RB Offset=12	22.38	22.06	21.55
		RB Size=25, RB Offset=24	21.31	21.25	22.66
		RB Size=50, RB Offset=0	20.71	20.52	20.55

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	21.87	22.14	22.19
		RB Size=1, RB Offset=37	21.45	22.60	22.64
		RB Size=1, RB Offset=74	21.74	22.55	22.09
		RB Size=36, RB Offset=0	21.47	22.83	22.11
		RB Size=36, RB Offset=18	21.24	22.85	21.21
		RB Size=36, RB Offset=37	22.43	21.01	21.68
		RB Size=75, RB Offset=0	20.12	20.85	20.65
	16QAM	RB Size=1, RB Offset=0	22.98	22.92	22.73
		RB Size=1, RB Offset=37	21.34	22.68	22.11
		RB Size=1, RB Offset=74	22.57	21.11	22.83
		RB Size=36, RB Offset=0	21.29	21.34	21.78
		RB Size=36, RB Offset=18	22.46	22.25	21.43
		RB Size=36, RB Offset=37	21.07	21.59	22.77
		RB Size=75, RB Offset=0	20.82	20.60	20.85
20.0	QPSK	RB Size=1, RB Offset=0	22.28	22.61	22.05
		RB Size=1, RB Offset=49	21.65	22.13	21.93
		RB Size=1, RB Offset=99	21.17	21.17	21.12
		RB Size=50, RB Offset=0	22.90	22.44	22.71
		RB Size=50, RB Offset=24	21.75	22.81	22.98
		RB Size=50, RB Offset=49	21.85	21.21	22.95
		RB Size=100, RB Offset=0	20.33	20.41	20.64
	16QAM	RB Size=1, RB Offset=0	21.76	21.03	21.05
		RB Size=1, RB Offset=49	22.26	22.06	21.98
		RB Size=1, RB Offset=99	21.82	21.43	22.79
		RB Size=50, RB Offset=0	21.82	21.48	22.72
		RB Size=50, RB Offset=24	22.30	21.38	22.93
		RB Size=50, RB Offset=49	22.38	21.57	22.11
		RB Size=100, RB Offset=0	20.17	20.78	20.57

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.33	13	Pass
QPSK (100%RB Size)	6.27	13	Pass
16QAM (1RB Size)	4. 45	13	Pass
16QAM (100%RB Size)	6.14	13	Pass

QPSK:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1880.00	77.59	272	2.3	H	16.1	0.45	8.84	24.49	33
1880.00	77.92	96	1.0	V	14.2	0.45	8.84	22.59	33
3 MHz Bandwidth									
1880.00	77.59	107	1.2	H	16.1	0.45	8.84	24.49	33
1880.00	77.62	285	2.0	V	13.9	0.45	8.84	22.29	33
5 MHz Bandwidth									
1880.00	77.19	202	2.2	H	15.7	0.45	8.84	24.09	33
1880.00	78.22	73	1.7	V	14.5	0.45	8.84	22.89	33
10 MHz Bandwidth									
1880.00	78.39	311	2.1	H	16.9	0.45	8.84	25.29	33
1880.00	78.02	51	1.7	V	14.3	0.45	8.84	22.69	33
15 MHz Bandwidth									
1880.00	77.19	84	1.5	H	15.7	0.45	8.84	24.09	33
1880.00	78.22	354	2.4	V	14.5	0.45	8.84	22.89	33
20 MHz Bandwidth									
1880.00	77.59	353	1.0	H	16.1	0.45	8.84	24.49	33
1880.00	79.22	358	1.5	V	15.5	0.45	8.84	23.89	33

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1880.00	77.99	315	2.5	H	16.5	0.45	8.84	24.89	33
1880.00	77.42	41	1.3	V	13.7	0.45	8.84	22.09	33
3 MHz Bandwidth									
1880.00	77.79	187	1.7	H	16.3	0.45	8.84	24.69	33
1880.00	77.12	48	2.3	V	13.4	0.45	8.84	21.79	33
5 MHz Bandwidth									
1880.00	76.89	221	2.5	H	15.4	0.45	8.84	23.79	33
1880.00	77.82	192	1.3	V	14.1	0.45	8.84	22.49	33
10 MHz Bandwidth									
1880.00	78.39	122	1.5	H	16.9	0.45	8.84	25.29	33
1880.00	78.12	89	1.6	V	14.4	0.45	8.84	22.79	33
15 MHz Bandwidth									
1880.00	78.29	75	1.8	H	16.8	0.45	8.84	25.19	33
1880.00	78.42	291	2.2	V	14.7	0.45	8.84	23.09	33
20 MHz Bandwidth									
1880.00	78.09	343	1.5	H	16.6	0.45	8.84	24.99	33
1880.00	79.52	70	2.1	V	15.8	0.45	8.84	24.19	33

LTE Band 4:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB Size=1, RB Offset=0	22.25	21.87	21.77
		RB Size=1, RB Offset=2	22.90	22.44	22.71
		RB Size=1, RB Offset=5	21.75	22.81	22.98
		RB Size=3, RB Offset=0	21.85	21.21	22.95
		RB Size=3, RB Offset=1	22.34	22.41	22.64
		RB Size=3, RB Offset=2	21.75	21.03	21.05
		RB Size=6, RB Offset=0	20.26	20.06	20.40
	16QAM	RB Size=1, RB Offset=0	21.82	21.44	22.79
		RB Size=1, RB Offset=2	21.82	21.48	22.72
		RB Size=1, RB Offset=5	22.30	21.38	22.94
		RB Size=3, RB Offset=0	22.38	21.57	22.11
		RB Size=3, RB Offset=1	21.17	22.78	21.57
		RB Size=3, RB Offset=2	22.61	21.98	21.13
		RB Size=6, RB Offset=0	20.15	20.53	20.88
3M	QPSK	RB Size=1, RB Offset=0	22.49	22.51	22.99
		RB Size=1, RB Offset=7	22.03	22.56	22.23
		RB Size=1, RB Offset=14	21.39	22.84	22.86
		RB Size=8, RB Offset=0	22.38	22.06	21.55
		RB Size=8, RB Offset=4	21.31	21.25	22.66
		RB Size=8, RB Offset=7	22.71	21.52	22.55
		RB Size=15, RB Offset=0	20.87	20.14	20.19
	16QAM	RB Size=1, RB Offset=0	21.61	22.60	22.64
		RB Size=1, RB Offset=7	21.74	22.55	22.09
		RB Size=1, RB Offset=14	21.47	22.83	22.11
		RB Size=8, RB Offset=0	21.24	22.85	21.21
		RB Size=8, RB Offset=4	22.43	21.01	21.68
		RB Size=8, RB Offset=7	22.12	22.85	22.65
		RB Size=15, RB Offset=0	20.98	20.92	20.73

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	21.34	22.68	22.11
		RB Size=1, RB Offset=12	22.57	21.11	22.83
		RB Size=1, RB Offset=24	21.29	21.34	21.78
		RB Size=12, RB Offset=0	22.46	22.25	21.43
		RB Size=12, RB Offset=6	21.07	21.59	22.77
		RB Size=12, RB Offset=11	21.82	21.6	22.85
		RB Size=25, RB Offset=0	20.28	20.61	20.05
	16QAM	RB Size=1, RB Offset=0	21.65	22.13	21.93
		RB Size=1, RB Offset=12	21.17	21.17	21.12
		RB Size=1, RB Offset=24	22.90	22.44	22.71
		RB Size=12, RB Offset=0	21.75	22.81	22.98
		RB Size=12, RB Offset=6	21.85	21.21	22.95
		RB Size=12, RB Offset=11	22.34	22.41	22.64
		RB Size=25, RB Offset=0	20.75	20.03	20.05
10.0	QPSK	RB Size=1, RB Offset=0	22.26	22.06	21.40
		RB Size=1, RB Offset=24	21.82	21.44	22.79
		RB Size=1, RB Offset=49	21.82	21.48	22.72
		RB Size=25, RB Offset=0	22.30	21.38	22.94
		RB Size=25, RB Offset=12	22.38	21.57	22.11
		RB Size=25, RB Offset=24	21.17	22.78	21.57
		RB Size=50, RB Offset=0	20.61	20.98	20.13
	16QAM	RB Size=1, RB Offset=0	21.15	21.53	22.88
		RB Size=1, RB Offset=24	22.49	22.51	22.99
		RB Size=1, RB Offset=49	22.03	22.56	22.23
		RB Size=25, RB Offset=0	21.39	22.84	22.86
		RB Size=25, RB Offset=12	22.38	22.06	21.55
		RB Size=25, RB Offset=24	21.31	21.25	22.66
		RB Size=50, RB Offset=0	20.71	20.52	20.55

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	21.87	22.14	22.19
		RB Size=1, RB Offset=37	21.45	22.60	22.64
		RB Size=1, RB Offset=74	21.74	22.55	22.09
		RB Size=36, RB Offset=0	21.47	22.83	22.11
		RB Size=36, RB Offset=18	21.24	22.85	21.21
		RB Size=36, RB Offset=37	22.43	21.01	21.68
		RB Size=75, RB Offset=0	20.12	20.85	20.65
	16QAM	RB Size=1, RB Offset=0	22.98	22.92	22.73
		RB Size=1, RB Offset=37	21.34	22.68	22.11
		RB Size=1, RB Offset=74	22.57	21.11	22.83
		RB Size=36, RB Offset=0	21.29	21.34	21.78
		RB Size=36, RB Offset=18	22.46	22.25	21.43
		RB Size=36, RB Offset=37	21.07	21.59	22.77
		RB Size=75, RB Offset=0	20.82	20.60	20.85
20.0	QPSK	RB Size=1, RB Offset=0	22.28	21.61	21.05
		RB Size=1, RB Offset=49	21.65	22.13	21.93
		RB Size=1, RB Offset=99	21.17	21.17	21.12
		RB Size=50, RB Offset=0	22.90	22.44	22.71
		RB Size=50, RB Offset=24	21.75	22.81	22.98
		RB Size=50, RB Offset=49	21.85	21.21	22.95
		RB Size=100, RB Offset=0	20.34	20.41	20.64
	16QAM	RB Size=1, RB Offset=0	21.76	21.03	21.05
		RB Size=1, RB Offset=49	22.26	22.06	21.98
		RB Size=1, RB Offset=99	21.82	21.44	22.79
		RB Size=50, RB Offset=0	21.82	21.48	22.72
		RB Size=50, RB Offset=24	22.30	21.38	22.94
		RB Size=50, RB Offset=49	22.38	21.57	22.11
		RB Size=100, RB Offset=0	20.17	20.78	20.57

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.46	13	Pass
QPSK (100%RB Size)	5.24	13	Pass
16QAM (1RB Size)	4.21	13	Pass
16QAM (100%RB Size)	5.98	13	Pass

QPSK:

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1732.50	76.67	309	1.4	H	13.1	0.40	8.52	21.22	30
1732.50	76.94	53	2.5	V	11.4	0.40	8.52	19.52	30
3 MHz Bandwidth									
1732.50	76.57	243	2.3	H	13.0	0.40	8.52	21.12	30
1732.50	77.34	212	2.0	V	11.8	0.40	8.52	19.92	30
5 MHz Bandwidth									
1732.50	77.27	292	2.0	H	13.7	0.40	8.52	21.82	30
1732.50	77.84	61	1.1	V	12.3	0.40	8.52	20.42	30
10 MHz Bandwidth									
1732.50	76.27	277	1.8	H	12.7	0.40	8.52	20.82	30
1732.50	77.44	19	1.7	V	11.9	0.40	8.52	20.02	30
15 MHz Bandwidth									
1732.50	75.97	89	1.2	H	12.4	0.40	8.52	20.52	30
1732.50	76.84	260	1.9	V	11.3	0.40	8.52	19.42	30
20 MHz Bandwidth									
1732.50	76.57	53	1.7	H	13.0	0.40	8.52	21.12	30
1732.50	77.94	94	1.6	V	12.4	0.40	8.52	20.52	30

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
1732.50	76.77	327	2.1	H	13.2	0.40	8.52	21.32	33
1732.50	77.24	350	2.3	V	11.7	0.40	8.52	19.82	33
3 MHz Bandwidth									
1732.50	76.57	158	2.4	H	13.0	0.40	8.52	21.12	33
1732.50	76.74	243	2.1	V	11.2	0.40	8.52	19.32	33
5 MHz Bandwidth									
1732.50	77.67	61	2.4	H	14.1	0.40	8.52	22.22	33
1732.50	77.24	153	1.9	V	11.7	0.40	8.52	19.82	33
10 MHz Bandwidth									
1732.50	76.47	82	2.2	H	12.9	0.40	8.52	21.02	33
1732.50	77.14	114	2.4	V	11.6	0.40	8.52	19.72	33
15 MHz Bandwidth									
1732.50	76.97	120	1.1	H	13.4	0.40	8.52	21.52	33
1732.50	76.44	167	1.9	V	10.9	0.40	8.52	19.02	33
20 MHz Bandwidth									
1732.50	77.77	32	1.2	H	14.2	0.40	8.52	22.32	33
1732.50	77.64	88	1.3	V	12.1	0.40	8.52	20.22	33

LTE Band 5:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB Size=1, RB Offset=0	21.89	21.97	21.84
		RB Size=1, RB Offset=2	21.94	21.63	22.74
		RB Size=1, RB Offset=5	21.60	21.44	22.37
		RB Size=3, RB Offset=0	21.66	22.40	21.41
		RB Size=3, RB Offset=1	21.52	21.85	21.78
		RB Size=3, RB Offset=2	22.21	21.15	21.25
		RB Size=6, RB Offset=0	20.36	20.43	20.97
	16QAM	RB Size=1, RB Offset=0	21.43	22.94	22.57
		RB Size=1, RB Offset=2	21.35	22.09	22.80
		RB Size=1, RB Offset=5	21.47	22.04	21.49
		RB Size=3, RB Offset=0	22.41	22.17	22.18
		RB Size=3, RB Offset=1	22.47	22.99	22.36
		RB Size=3, RB Offset=2	21.95	21.54	21.71
		RB Size=6, RB Offset=0	20.68	20.43	20.42
3M	QPSK	RB Size=1, RB Offset=0	22.88	21.78	22.09
		RB Size=1, RB Offset=7	22.89	22.90	22.88
		RB Size=1, RB Offset=14	21.42	22.07	21.02
		RB Size=8, RB Offset=0	22.67	22.9	21.82
		RB Size=8, RB Offset=4	21.61	22.73	21.93
		RB Size=8, RB Offset=7	22.77	22.70	22.71
		RB Size=15, RB Offset=0	20.85	20.96	20.14
	16QAM	RB Size=1, RB Offset=0	22.96	21.88	21.66
		RB Size=1, RB Offset=7	22.69	22.70	22.69
		RB Size=1, RB Offset=14	21.98	22.91	21.96
		RB Size=8, RB Offset=0	21.41	22.96	22.76
		RB Size=8, RB Offset=4	22.78	22.15	21.78
		RB Size=8, RB Offset=7	22.63	22.73	21.11
		RB Size=15, RB Offset=0	20.43	20.38	20.91

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	21.62	22.61	21.39
		RB Size=1, RB Offset=12	21.89	21.97	21.84
		RB Size=1, RB Offset=24	21.94	21.63	22.74
		RB Size=12, RB Offset=0	21.57	21.44	22.37
		RB Size=12, RB Offset=6	21.66	22.42	21.49
		RB Size=12, RB Offset=11	21.53	21.86	21.78
		RB Size=25, RB Offset=0	20.21	20.15	20.25
	16QAM	RB Size=1, RB Offset=0	21.36	21.43	21.97
		RB Size=1, RB Offset=12	21.43	22.94	22.57
		RB Size=1, RB Offset=24	21.35	22.09	22.8
		RB Size=12, RB Offset=0	21.47	22.04	21.49
		RB Size=12, RB Offset=6	22.41	22.17	22.18
		RB Size=12, RB Offset=11	22.47	22.99	22.36
		RB Size=25, RB Offset=0	20.95	20.54	20.71
10.0	QPSK	RB Size=1, RB Offset=0	21.68	21.43	22.42
		RB Size=1, RB Offset=24	22.88	21.77	22.09
		RB Size=1, RB Offset=49	22.87	22.90	22.78
		RB Size=25, RB Offset=0	21.42	22.07	21.02
		RB Size=25, RB Offset=12	22.67	22.90	21.82
		RB Size=25, RB Offset=24	21.61	22.73	21.93
		RB Size=50, RB Offset=0	20.77	20.70	20.72
	16QAM	RB Size=1, RB Offset=0	21.85	21.96	22.14
		RB Size=1, RB Offset=24	22.97	21.88	21.66
		RB Size=1, RB Offset=49	22.70	22.70	22.69
		RB Size=25, RB Offset=0	21.50	22.91	21.96
		RB Size=25, RB Offset=12	21.41	22.96	22.76
		RB Size=25, RB Offset=24	22.78	22.15	21.78
		RB Size=50, RB Offset=0	20.63	20.73	20.11

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.11	13	Pass
QPSK (100%RB Size)	5.22	13	Pass
16QAM (1RB Size)	4.19	13	Pass
16QAM (100%RB Size)	5.14	13	Pass

QPSK:

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
836.5	81.52	351	2.3	H	11.3	0.26	4.75	15.79	38.45
836.5	89.84	105	1.1	V	15.6	0.26	4.75	20.09	38.45
3 MHz Bandwidth									
836.5	81.52	351	2.3	H	11.3	0.26	4.75	15.79	38.45
836.5	89.84	105	1.1	V	15.6	0.26	4.75	20.09	38.45
5 MHz Bandwidth									
836.5	79.72	183	2.4	H	9.5	0.26	4.75	13.99	38.45
836.5	87.24	310	2.5	V	13.0	0.26	4.75	17.49	38.45
10 MHz Bandwidth									
836.5	79.82	175	1.1	H	9.6	0.26	4.75	14.09	38.45
836.5	87.44	174	1.4	V	13.2	0.26	4.75	17.69	38.45

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
1.4 MHz Bandwidth									
836.5	82.62	330	1.1	H	12.4	0.26	4.75	16.89	38.45
836.5	90.24	52	1.4	V	16.0	0.26	4.75	20.49	38.45
3 MHz Bandwidth									
836.5	82.22	350	1.5	H	12.0	0.26	4.75	16.49	38.45
836.5	89.90	48	1.8	V	15.7	0.26	4.75	20.19	38.45
5 MHz Bandwidth									
836.5	82.32	153	2.3	H	12.1	0.26	4.75	16.59	38.45
836.5	89.14	324	2.2	V	14.9	0.26	4.75	19.39	38.45
10 MHz Bandwidth									
836.5	81.52	351	2.3	H	11.3	0.26	4.75	15.79	38.45
836.5	88.84	105	1.1	V	14.6	0.26	4.75	19.09	38.45

LTE Band 7

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5.0	QPSK	RB Size=1, RB Offset=0	22.32	22.24	22.18
		RB Size=1, RB Offset=12	22.75	22.97	21.65
		RB Size=1, RB Offset=24	21.38	21.30	22.20
		RB Size=12, RB Offset=0	22.01	21.07	21.63
		RB Size=12, RB Offset=6	22.25	22.15	21.27
		RB Size=12, RB Offset=11	22.87	22.81	22.63
		RB Size=25, RB Offset=0	20.92	20.43	20.08
	16QAM	RB Size=1, RB Offset=0	21.01	21.47	21.68
		RB Size=1, RB Offset=12	21.26	21.05	22.75
		RB Size=1, RB Offset=24	22.22	21.21	22.78
		RB Size=12, RB Offset=0	21.19	21.89	22.46
		RB Size=12, RB Offset=6	22.35	22.85	21.33
		RB Size=12, RB Offset=11	21.91	21.37	22.12
		RB Size=25, RB Offset=0	20.34	20.48	20.58
10.0	QPSK	RB Size=1, RB Offset=0	22.48	22.20	21.82
		RB Size=1, RB Offset=24	22.09	22.69	22.89
		RB Size=1, RB Offset=49	21.03	22.90	21.35
		RB Size=25, RB Offset=0	21.41	21.40	21.73
		RB Size=25, RB Offset=12	22.49	21.27	21.71
		RB Size=25, RB Offset=24	22.54	22.24	21.57
		RB Size=50, RB Offset=0	20.53	20.94	20.33
	16QAM	RB Size=1, RB Offset=0	22.55	22.54	21.86
		RB Size=1, RB Offset=24	22.95	22.27	21.71
		RB Size=1, RB Offset=49	22.92	21.68	22.97
		RB Size=25, RB Offset=0	22.37	21.45	22.16
		RB Size=25, RB Offset=12	21.83	22.07	22.37
		RB Size=25, RB Offset=24	22.65	22.44	21.73
		RB Size=50, RB Offset=0	20.87	20.73	20.92

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15.0	QPSK	RB Size=1, RB Offset=0	21.09	22.97	22.57
		RB Size=1, RB Offset=37	21.08	22.86	22.95
		RB Size=1, RB Offset=74	21.41	21.46	22.43
		RB Size=36, RB Offset=0	21.64	22.3	21.76
		RB Size=36, RB Offset=18	21.78	21.47	22.88
		RB Size=36, RB Offset=37	21.96	21.60	22.34
		RB Size=75, RB Offset=0	20.61	20.71	20.37
	16QAM	RB Size=1, RB Offset=0	21.96	21.32	22.66
		RB Size=1, RB Offset=37	22.32	22.24	22.18
		RB Size=1, RB Offset=74	22.75	22.97	21.65
		RB Size=36, RB Offset=0	21.38	21.30	22.20
		RB Size=36, RB Offset=18	22.01	21.07	21.63
		RB Size=36, RB Offset=37	22.25	22.19	21.27
		RB Size=75, RB Offset=0	20.87	20.81	20.63
20.0	QPSK	RB Size=1, RB Offset=0	21.92	22.43	21.08
		RB Size=1, RB Offset=49	21.01	21.47	21.68
		RB Size=1, RB Offset=99	21.26	21.05	22.75
		RB Size=50, RB Offset=0	22.22	21.21	22.78
		RB Size=50, RB Offset=24	21.19	21.89	22.46
		RB Size=50, RB Offset=49	22.35	22.85	21.33
		RB Size=100, RB Offset=0	20.91	20.37	20.12
	16QAM	RB Size=1, RB Offset=0	22.34	22.48	21.58
		RB Size=1, RB Offset=49	22.48	22.21	21.82
		RB Size=1, RB Offset=99	22.09	22.69	22.89
		RB Size=50, RB Offset=0	21.03	22.90	21.35
		RB Size=50, RB Offset=24	21.41	21.40	21.73
		RB Size=50, RB Offset=49	22.49	21.27	21.71
		RB Size=100, RB Offset=0	20.54	20.24	20.57

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.66	13	Pass
QPSK (100%RB Size)	6.38	13	Pass
16QAM (1RB Size)	4.19	13	Pass
16QAM (100%RB Size)	6.19	13	Pass

EIRP:

QPSK:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
2535.00	71.46	2	1.0	H	8.9	0.49	10.10	18.51	33
2535.00	75.77	285	1.6	V	12.5	0.49	10.10	22.11	33
10 MHz Bandwidth									
2535.00	71.26	153	2.1	H	8.7	0.49	10.10	18.31	33
2535.00	75.37	142	1.7	V	12.1	0.49	10.10	21.71	33
15 MHz Bandwidth									
2535.00	70.66	228	1.3	H	8.1	0.49	10.10	17.71	33
2535.00	75.21	295	1.3	V	11.9	0.49	10.10	21.51	33
20 MHz Bandwidth									
2535.00	69.06	64	1.6	H	6.5	0.49	10.10	16.11	33
2535.00	75.12	41	2.5	V	11.8	0.49	10.10	21.41	33

16QAM:

Frequency (MHz)	Receiver Reading (dBμV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
2535.00	72.06	303	2.0	H	9.5	0.49	10.10	19.11	33
2535.00	76.57	224	1.7	V	13.3	0.49	10.10	22.91	33
10 MHz Bandwidth									
2535.00	71.56	41	1.3	H	9.0	0.49	10.10	18.61	33
2535.00	75.97	197	1.1	V	12.7	0.49	10.10	22.31	33
15 MHz Bandwidth									
2535.00	71.26	191	1.3	H	8.7	0.49	10.10	18.31	33
2535.00	75.37	55	1.3	V	12.1	0.49	10.10	21.71	33
20 MHz Bandwidth									
2535.00	70.66	330	1.2	H	8.1	0.49	10.10	17.71	33
2535.00	74.57	174	2.4	V	11.3	0.49	10.10	20.91	33

LTE Band 17:

Maximum Output Power

Bandwidth (MHz)	Modulation	RB size/RB Offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB Size=1, RB Offset=0	22.35	22.34	22.34
		RB Size=1, RB Offset=12	21.73	22.80	22.78
		RB Size=1, RB Offset=24	21.79	21.81	22.86
		RB Size=12, RB Offset=0	22.53	22.63	21.45
		RB Size=12, RB Offset=6	21.05	22.94	22.37
		RB Size=12,RB Offset=11	22.94	21.12	21.76
		RB Size=25, RB Offset=0	20.71	20.33	20.69
	16QAM	RB Size=1, RB Offset=0	22.38	21.68	21.07
		RB Size=1, RB Offset=12	21.26	21.93	22.77
		RB Size=1, RB Offset=24	22.48	22.69	22.19
		RB Size=12, RB Offset=0	22.09	21.29	21.17
		RB Size=12, RB Offset=6	21.35	21.33	22.82
		RB Size=12, RB Offset=11	22.18	21.22	21.28
		RB Size=25, RB Offset=0	20.49	20.82	20.77
10M	QPSK	RB Size=1, RB Offset=0	21.32	21.93	22.45
		RB Size=1, RB Offset=24	22.54	21.78	22.23
		RB Size=1, RB Offset=49	22.33	22.32	22.23
		RB Size=25, RB Offset=0	22.06	21.92	2198
		RB Size=25, RB Offset=12	22.28	21.43	21.38
		RB Size=25, RB Offset=24	21.28	21.77	21.66
		RB Size=50, RB Offset=0	20.84	20.91	20.79
	16QAM	RB Size=1, RB Offset=0	22.53	22.07	21.47
		RB Size=1, RB Offset=24	21.81	21.38	21.78
		RB Size=1, RB Offset=49	21.49	21.38	21.57
		RB Size=25, RB Offset=0	22.40	22.39	22.48
		RB Size=25, RB Offset=12	22.38	22.29	21.33
		RB Size=25, RB Offset=24	21.68	21.68	22.54
		RB Size=50, RB Offset=0	20.75	20.80	20.81

Peak-to-average ratio (PAR)

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	4.33	13	Pass
QPSK (100%RB Size)	6.27	13	Pass
16QAM (1RB Size)	4.14	13	Pass
16QAM (100%RB Size)	6.85	13	Pass

QPSK:

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
710.00	90.02	358	1.9	H	11.7	0.26	4.25	15.69	34.77
710.00	92.48	0	2.2	V	17.2	0.26	4.25	21.19	34.77
10 MHz Bandwidth									
710.00	91.02	272	2.0	H	12.7	0.26	4.25	16.69	34.77
710.00	91.68	146	1.6	V	16.4	0.26	4.25	20.39	34.77

16QAM:

Frequency (MHz)	Receiver Reading (dBµV)	Turn table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		
Middle Channel									
5 MHz Bandwidth									
710.00	90.42	83	2.0	H	12.1	0.26	4.25	16.09	34.77
710.00	90.78	253	1.3	V	15.5	0.26	4.25	19.49	34.77
10 MHz Bandwidth									
710.00	89.12	185	1.8	H	10.8	0.26	4.25	14.79	34.77
710.00	89.98	148	2.0	V	14.7	0.26	4.25	18.69	34.77

Note:
All above data were tested with no amplifier
Absolute Level = SG Level - Cable loss + Antenna Gain
Margin = Limit- Absolute Level

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53 - OCCUPIED BANDWIDTH

Applicable Standard

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 1% to 5% of the anticipated emission bandwidth and the 26 dB & 99% bandwidth was recorded.

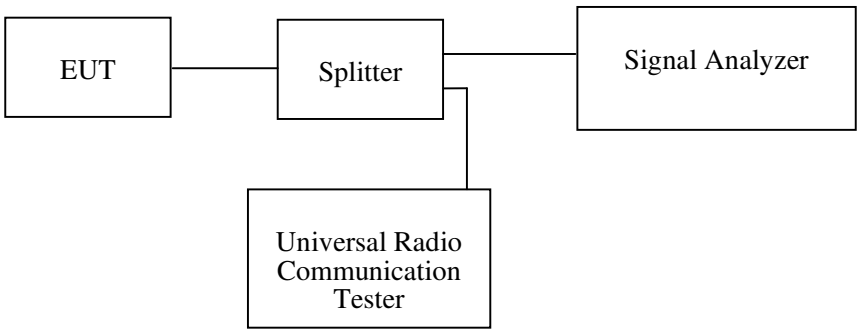

Test Data

Environmental Conditions

Temperature:	23~25 ℃
Relative Humidity:	45~50 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Echo Wu on 2017-02-23 and 2017-03-01.

EUT operation mode: transmitting

Test Result: Compliance. Please refer to the following tables and plots.

Cellular Band (Part 22H)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	836.6	246.5	312.6
EGPRS(8PSK)	836.6	246.5	312.6

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	836.6	4.21	4.91
HSUPA (BPSK)	836.6	4.21	4.95
HSDPA (16QAM)	836.6	4.21	4.91

PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM(GMSK)	1880.0	246.5	312.6
EGPRS(8PSK)	1880.0	258.5	330.7

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1880.0	4.21	4.89
HSUPA (BPSK)	1880.0	4.23	4.93
HSDPA (16QAM)	1880.0	4.21	4.95

AWS Band (Part 27)

Mode	Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
RMC (BPSK)	1732.6	4.21	4.89
HSUPA (BPSK)	1732.6	4.21	4.93
HSDPA (16QAM)	1732.6	4.23	4.85

Cellular Band (Part 22H)

26 dB Emissions &99% Occupied Bandwidth for GSM (GMSK) Mode

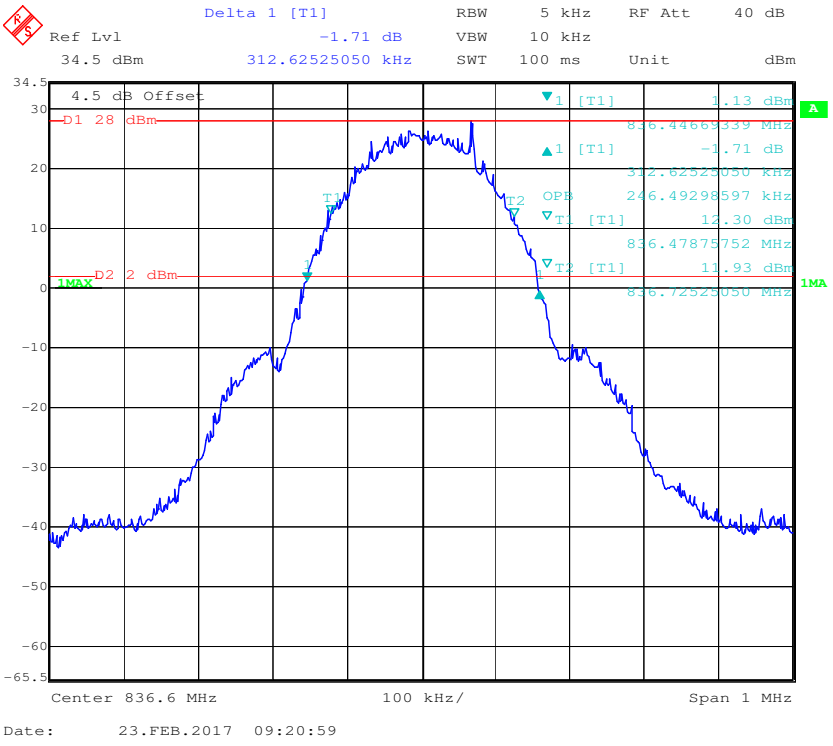

26 dB Emissions &99% Occupied Bandwidth for EDGE Mode

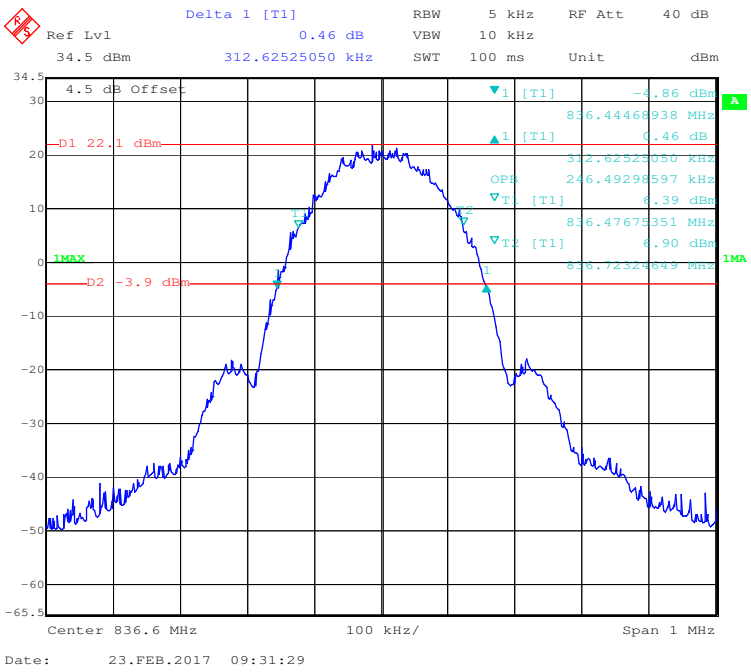

26 dB Emissions &99% Occupied Bandwidth for RMC (BPSK) Mode

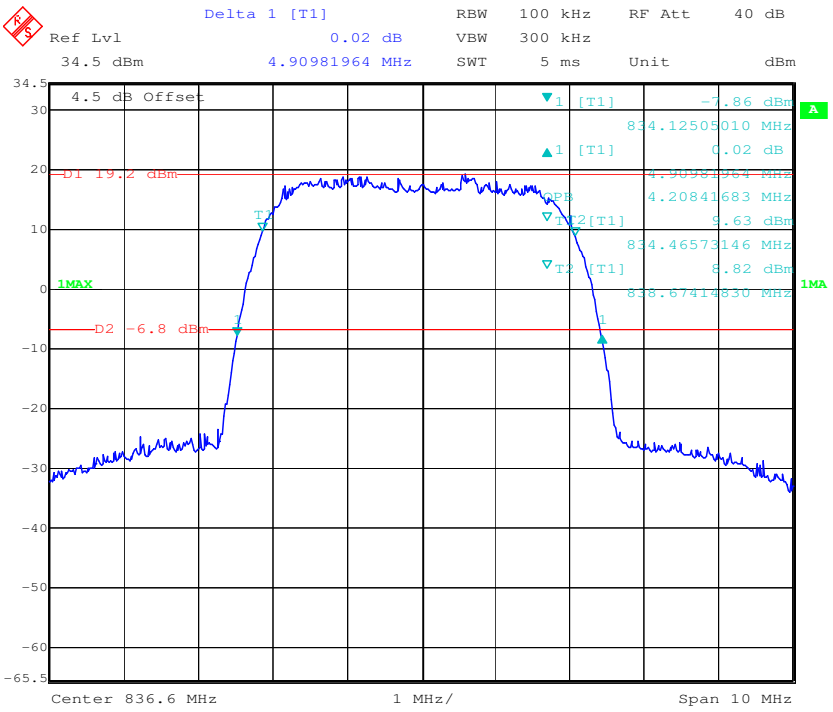

26 dB Emissions &99% Occupied Bandwidth for HSUPA (BPSK) Mode

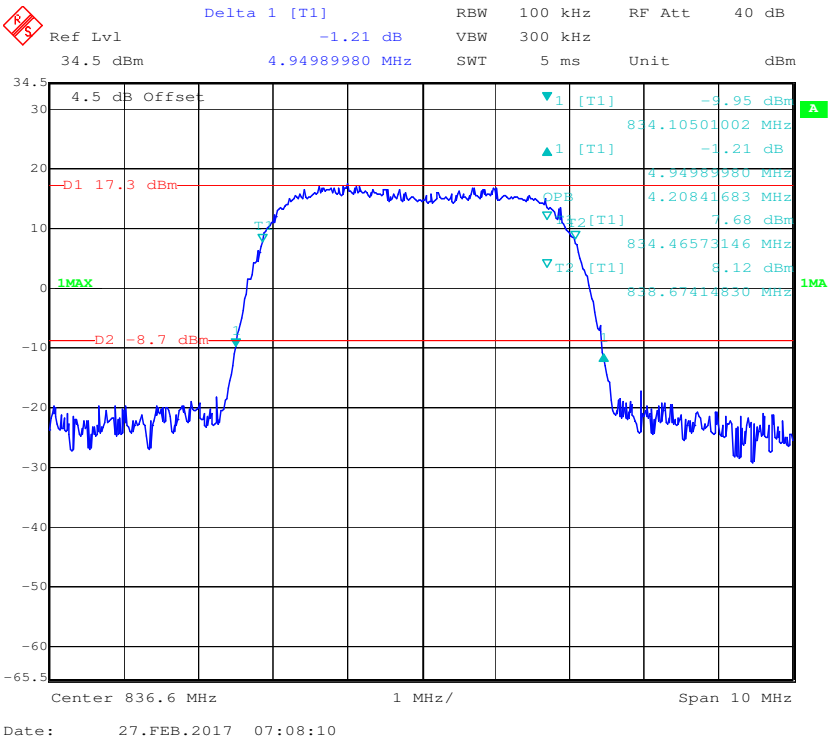

26 dB Emissions &99% Occupied Bandwidth for HSDPA (16QAM) Mode

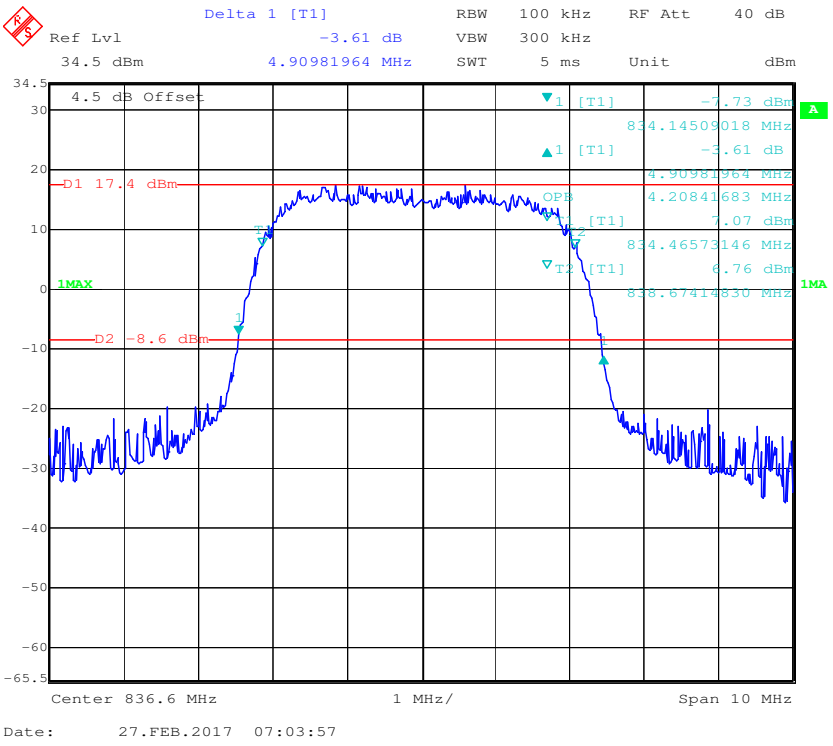

PCS Band (Part 24E)

26 dB Emissions &99% Occupied Bandwidth for GSM (GMSK) Mode

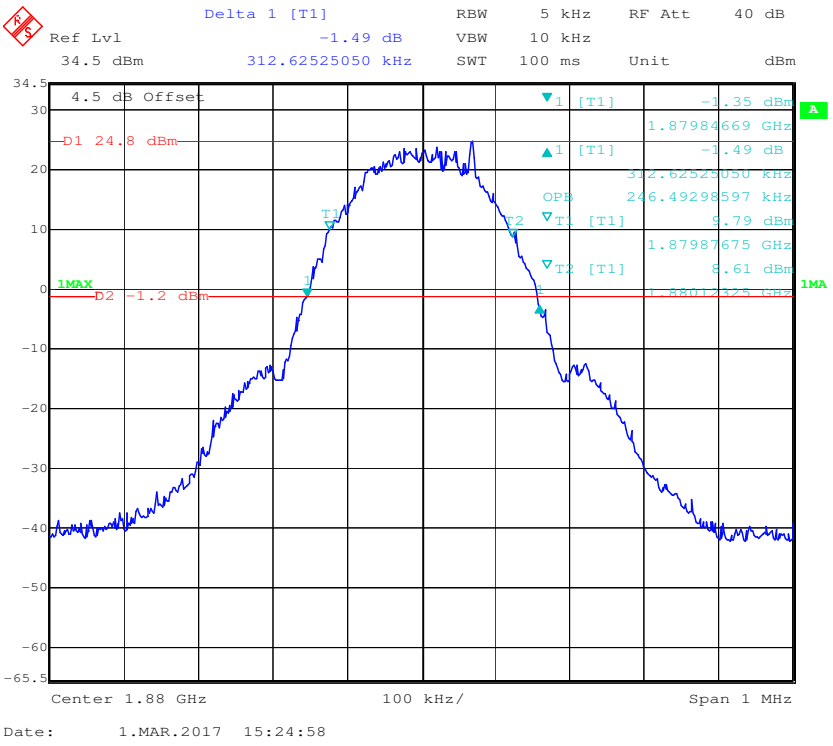

26 dB Emissions &99% Occupied Bandwidth for EDGE Mode

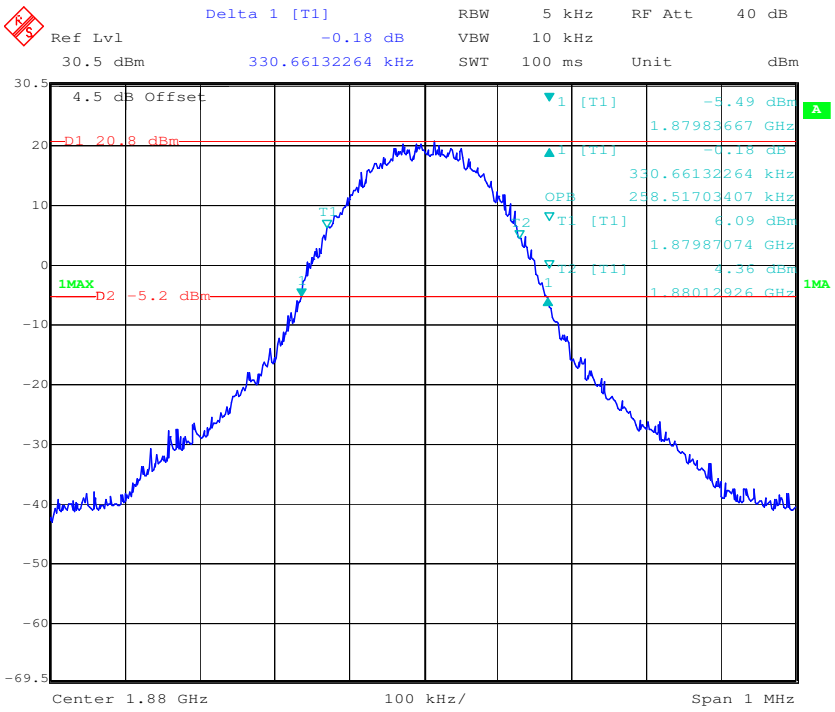

26 dB Emissions &99% Occupied Bandwidth for RMC (BPSK) Mode

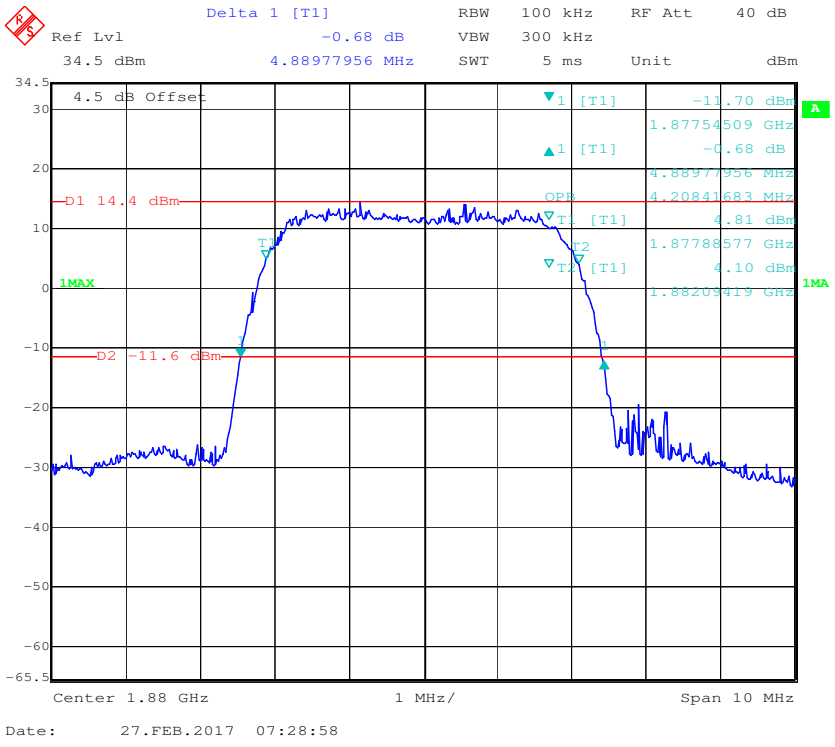

26 dB Emissions &99% Occupied Bandwidth for HSUPA (BPSK) Mode

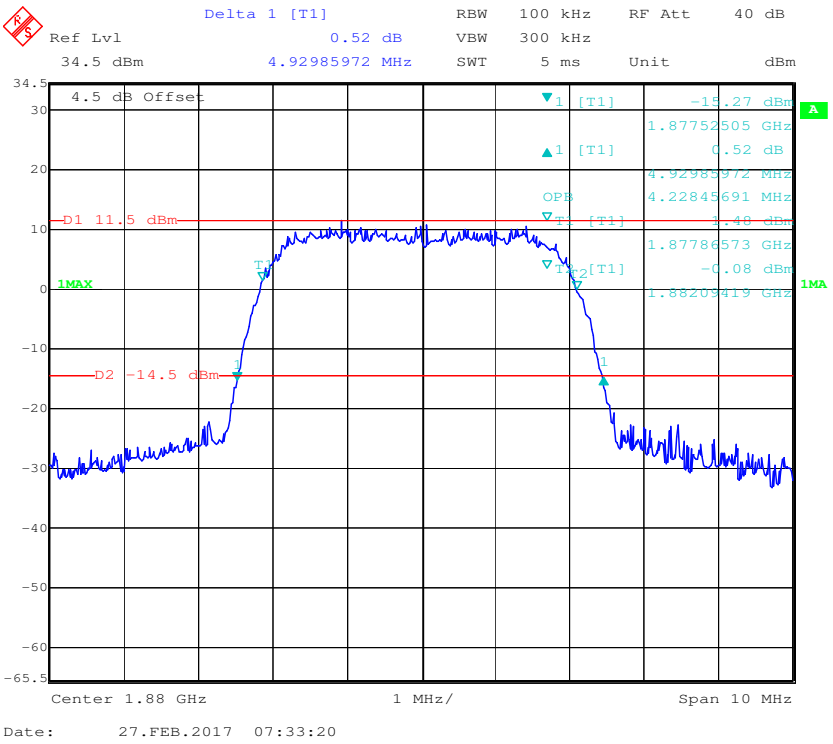

26 dB Emissions &99% Occupied Bandwidth for HSDPA (16QAM) Mode

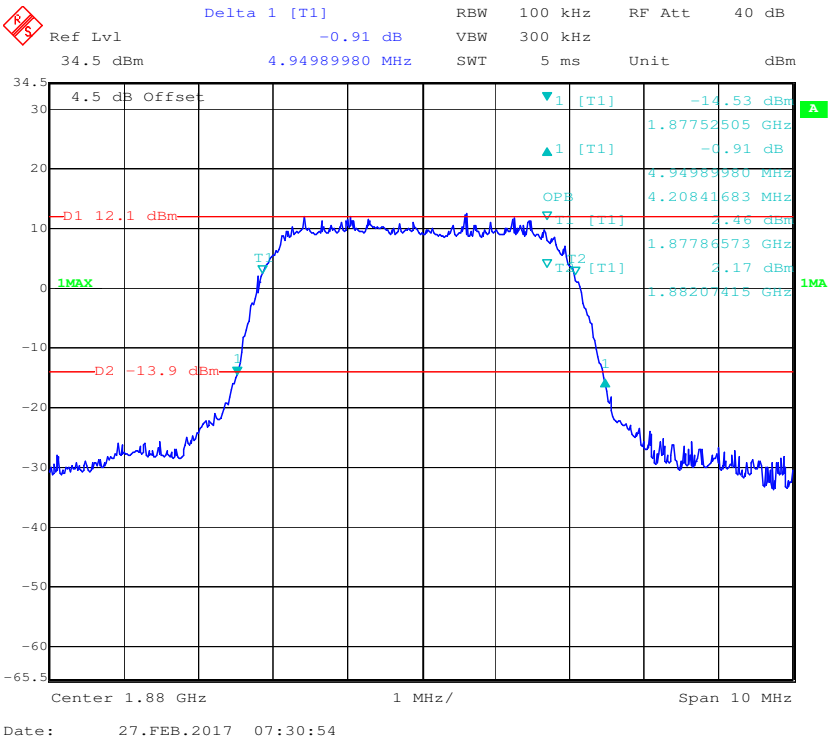

AWS Band (Part 27)

26 dB Emissions &99% Occupied Bandwidth for RMC (BPSK) Mode

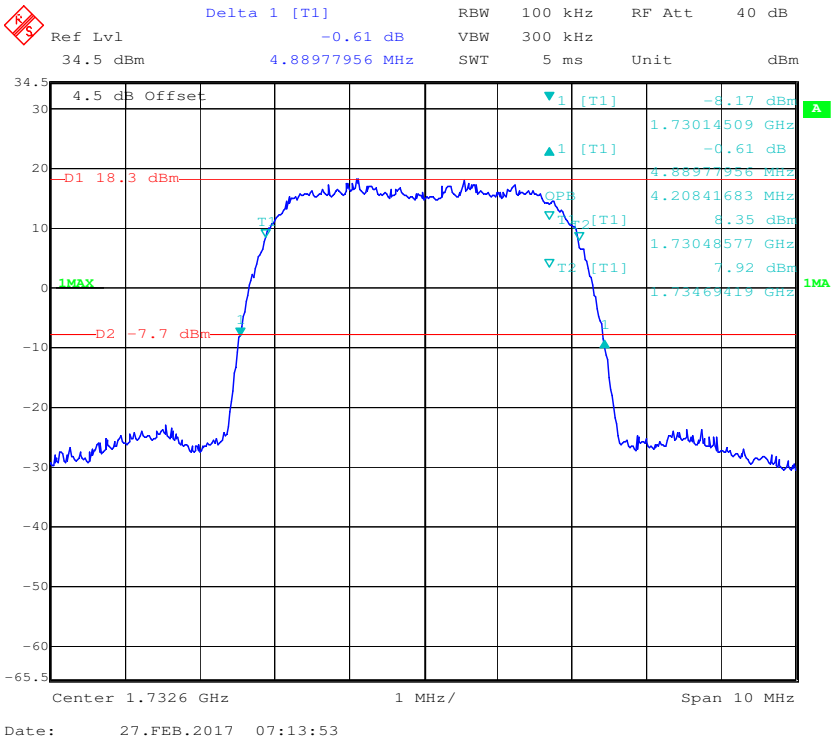

26 dB Emissions &99% Occupied Bandwidth for HSUPA (BPSK) Mode

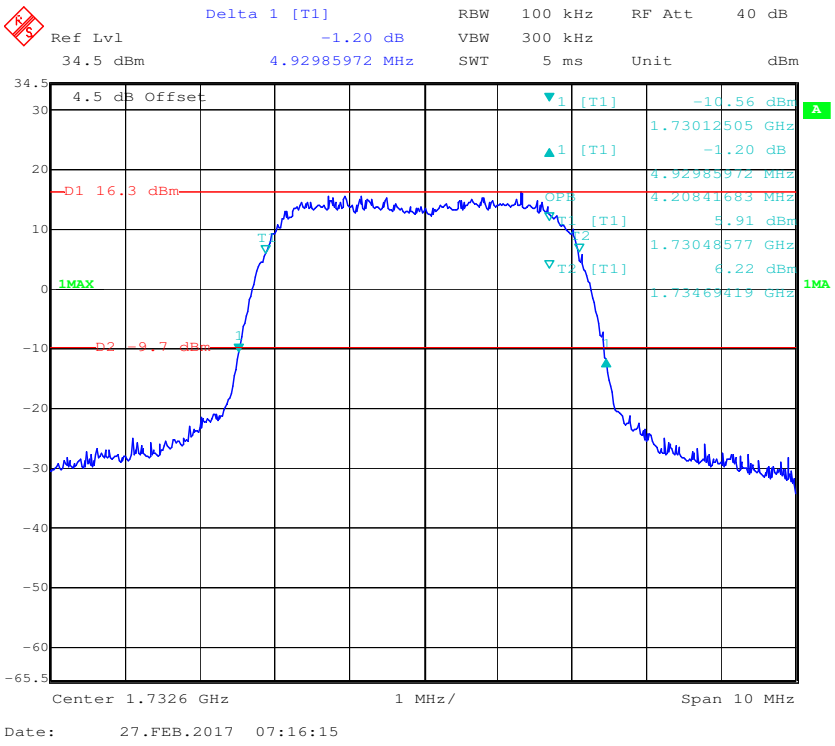

26 dB Emissions &99% Occupied Bandwidth for HSDPA (16QAM) Mode

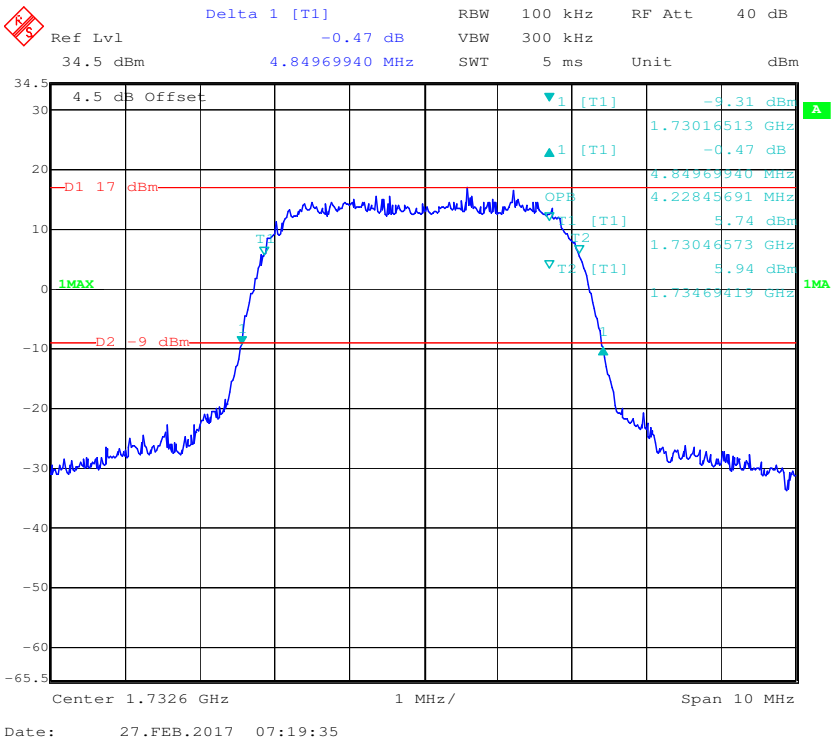

LTE Band 2: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.111	1.302
	16QAM	1.117	1.307
3.0	QPSK	2.693	2.934
	16QAM	2.693	2.982
5.0	QPSK	4.549	5.070
	16QAM	4.549	5.070
10.0	QPSK	8.978	9.860
	16QAM	8.978	9.739
15.0	QPSK	13.647	15.150
	16QAM	13.587	14.970
20.0	QPSK	18.036	19.639
	16QAM	18.036	19.719

QPSK (1.4 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

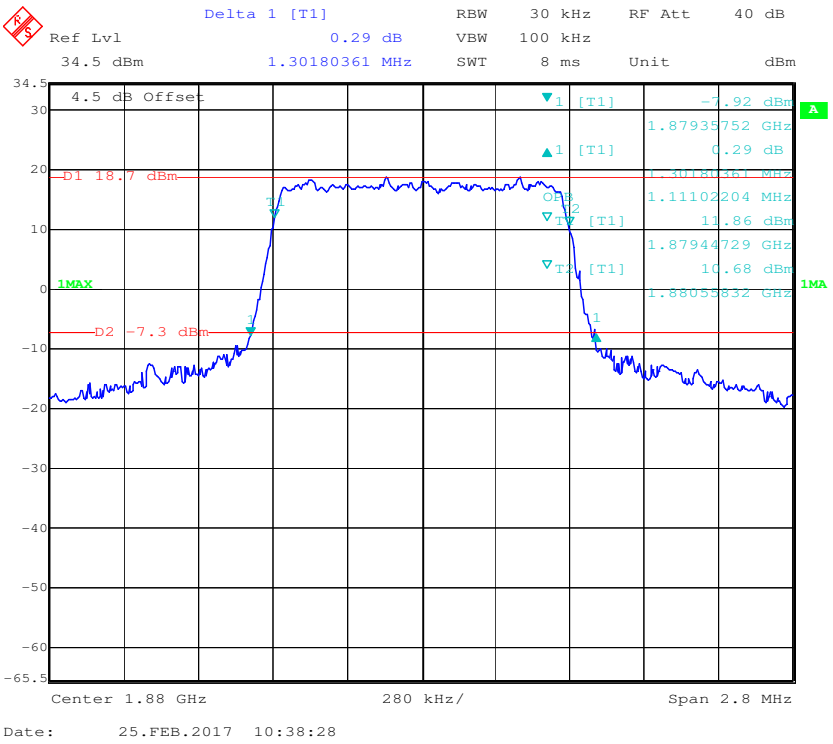

16-QAM (1.4 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

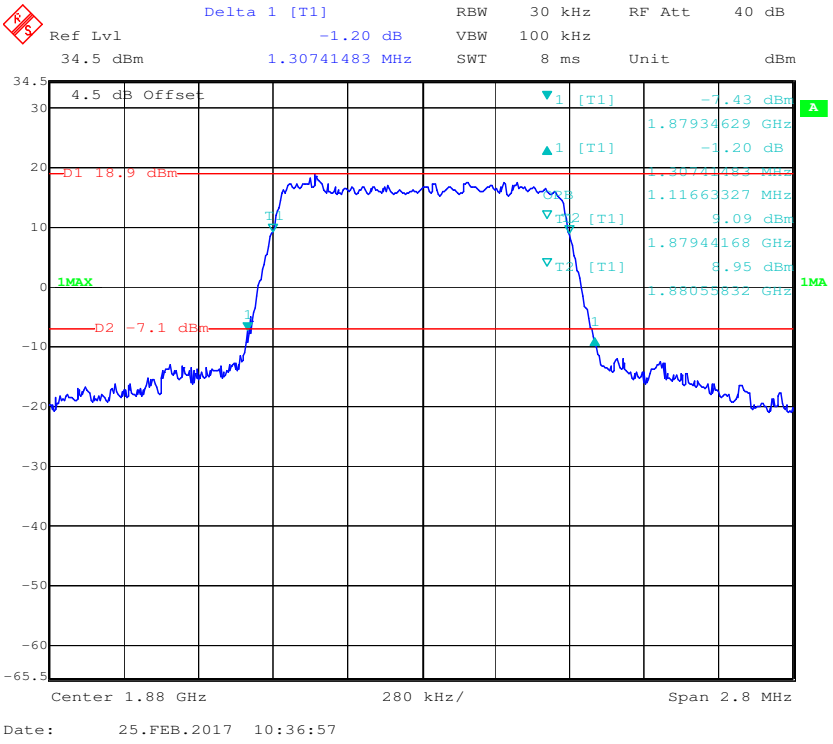

QPSK (3.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

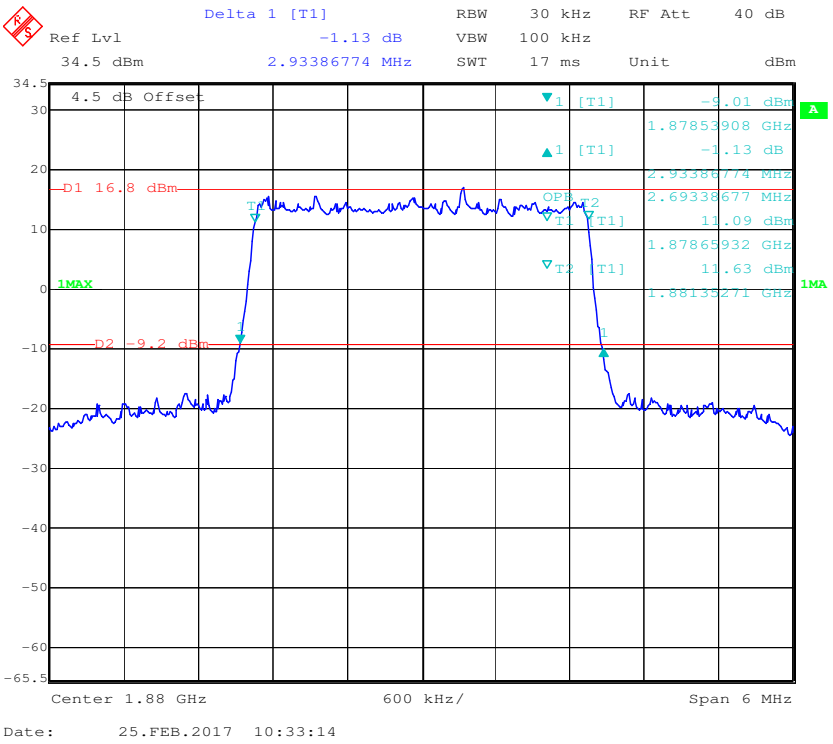

16-QAM (3.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

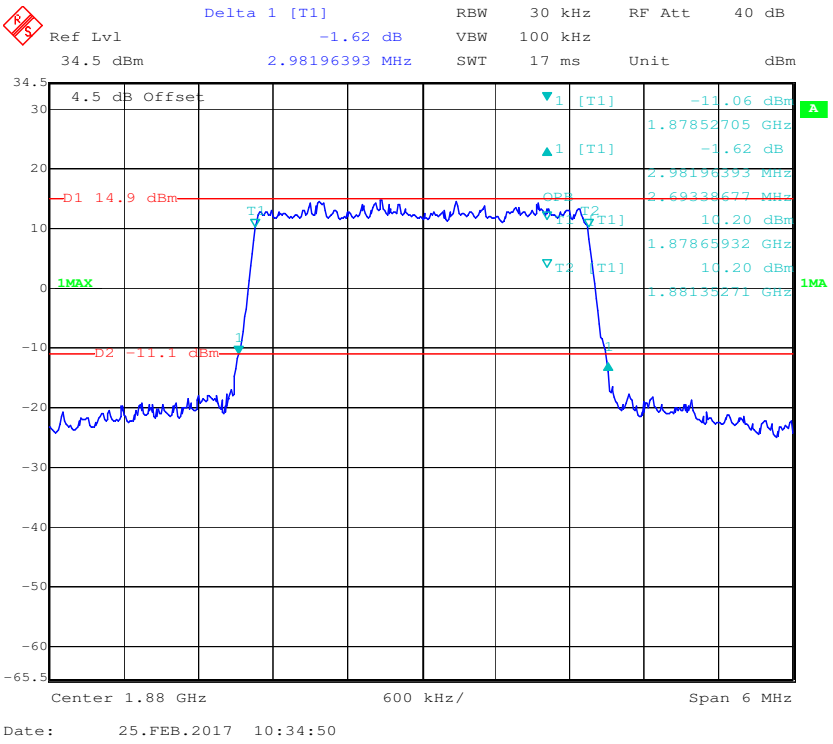

QPSK (5.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

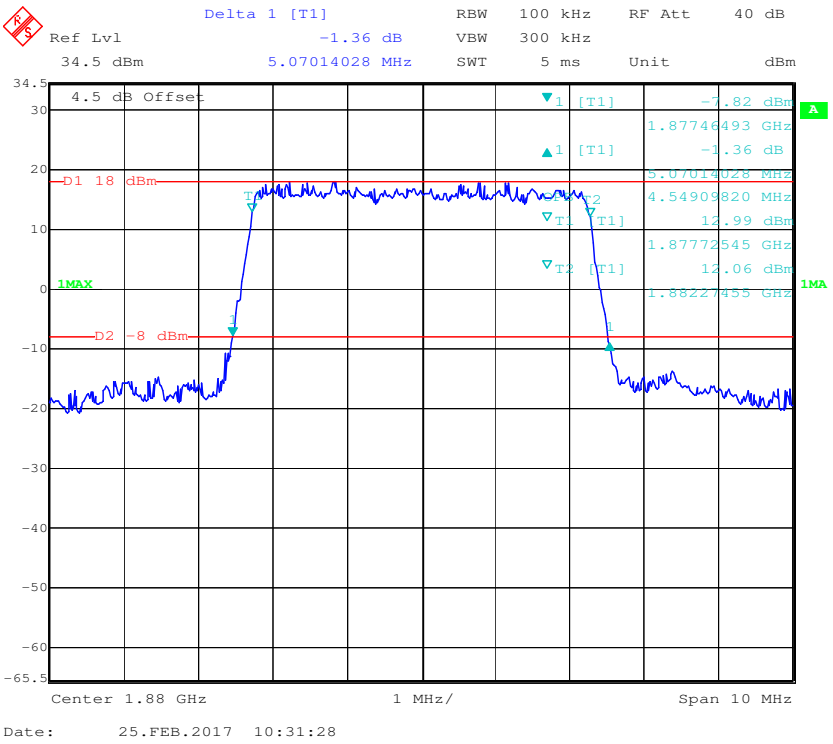

16-QAM (5.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

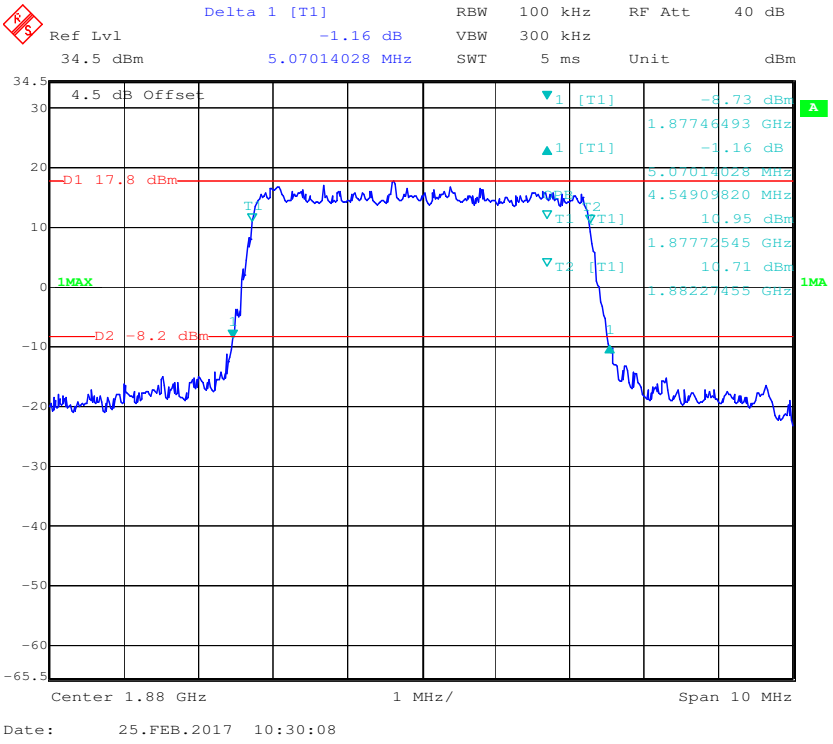

QPSK (10.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

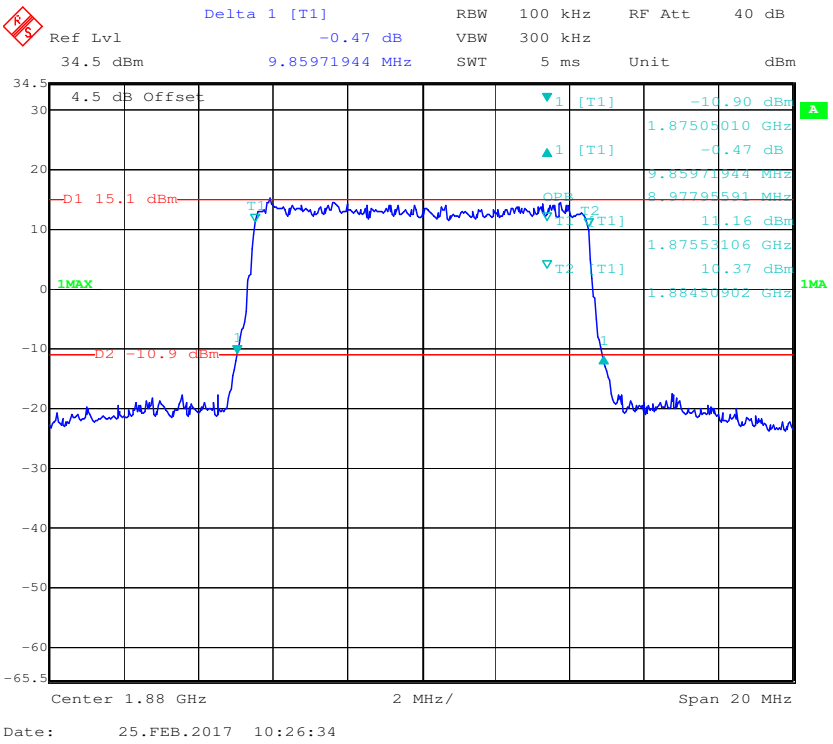

16-QAM (10.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

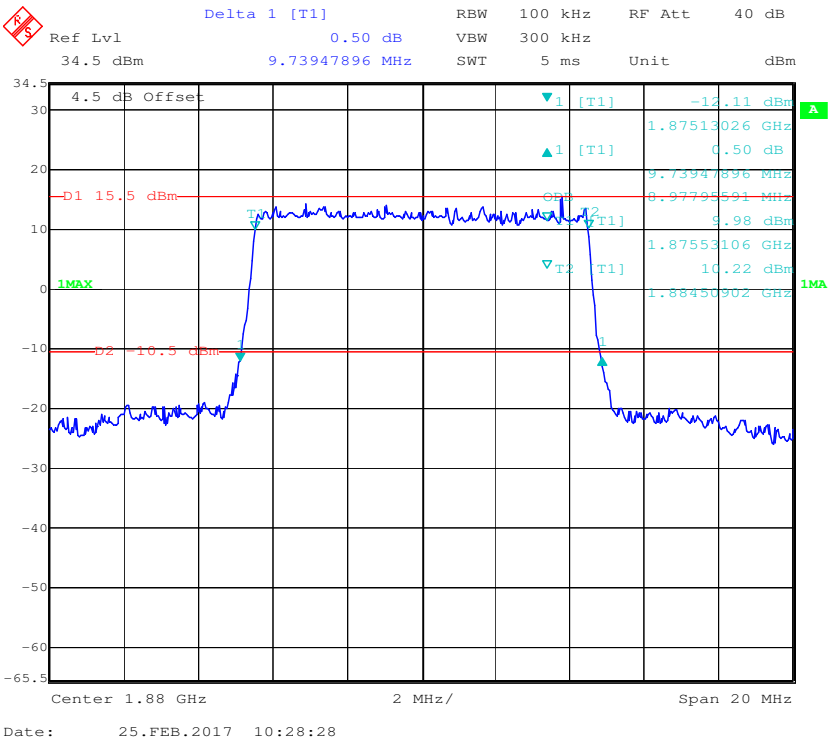

QPSK (15.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

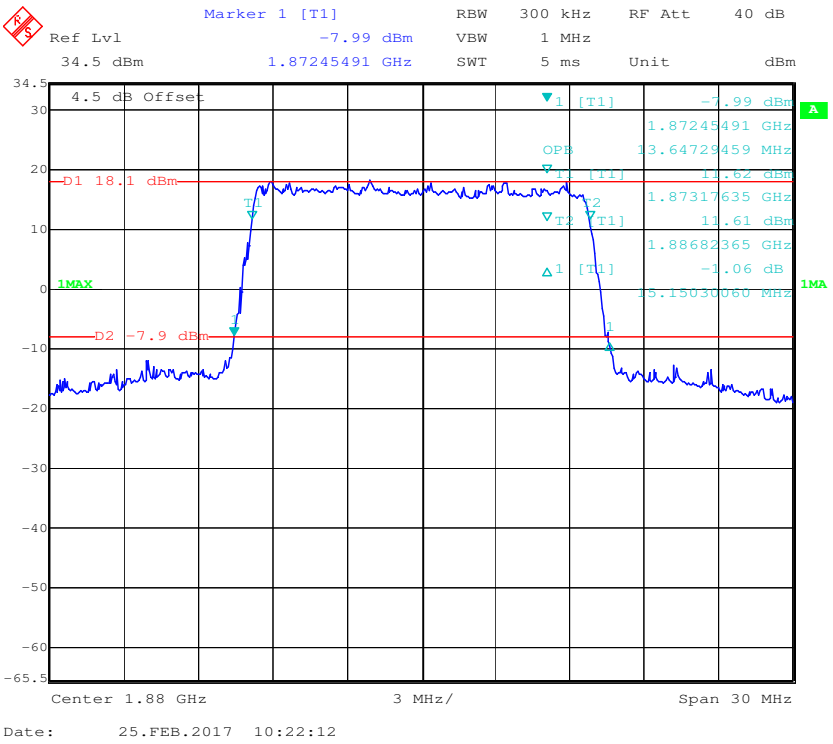

16-QAM (15.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

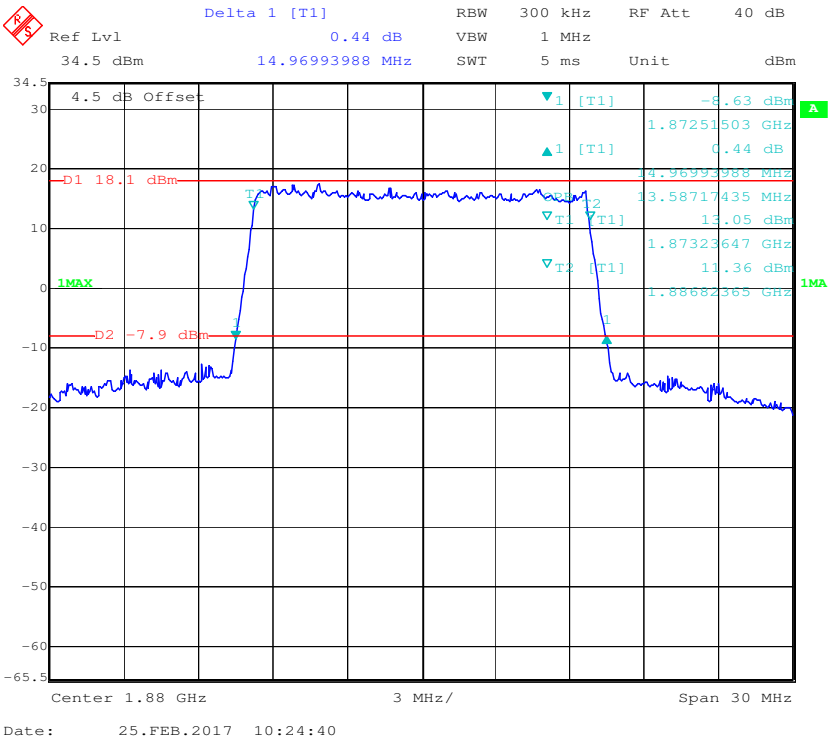

QPSK (20.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

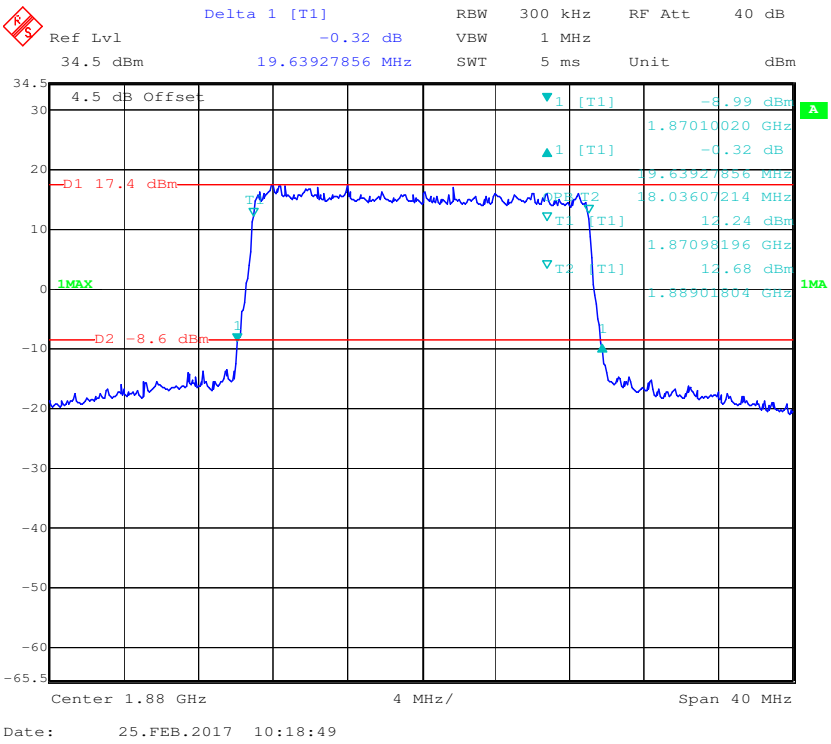

16-QAM (20.0 MHz) - 99% Occupied Bandwidth& 26 dB Bandwidth, Middle channel

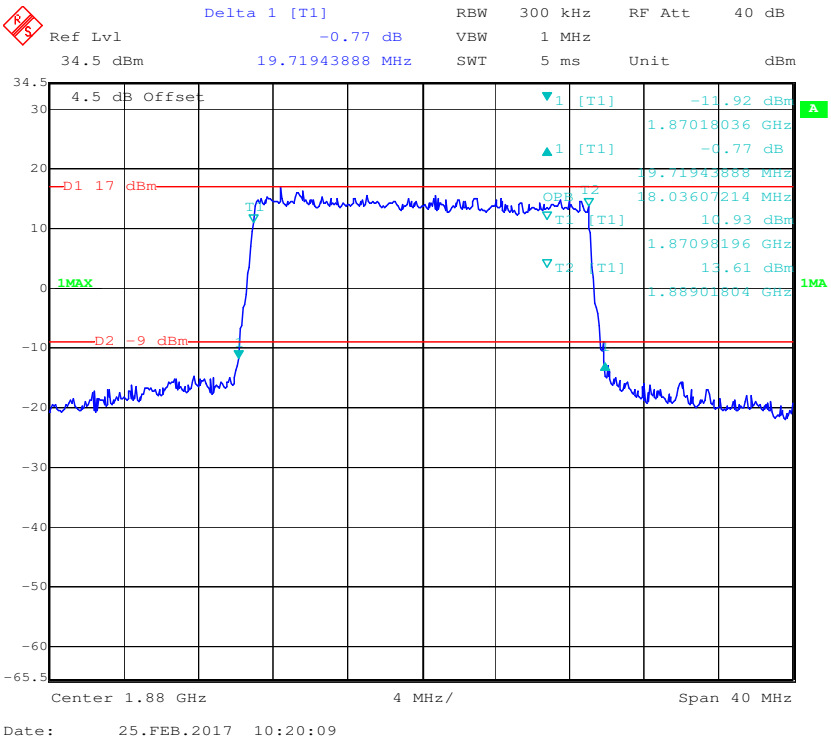

LTE Band 4: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.111	1.307
	16QAM	1.100	1.285
3.0	QPSK	2.693	2.934
	16QAM	2.693	2.982
5.0	QPSK	4.549	5.090
	16QAM	4.549	5.090
10.0	QPSK	8.978	9.820
	16QAM	8.978	9.780
15.0	QPSK	13.587	15.030
	16QAM	13.527	15.030
20.0	QPSK	17.956	19.479
	16QAM	18.036	19.639

QPSK (1.4 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

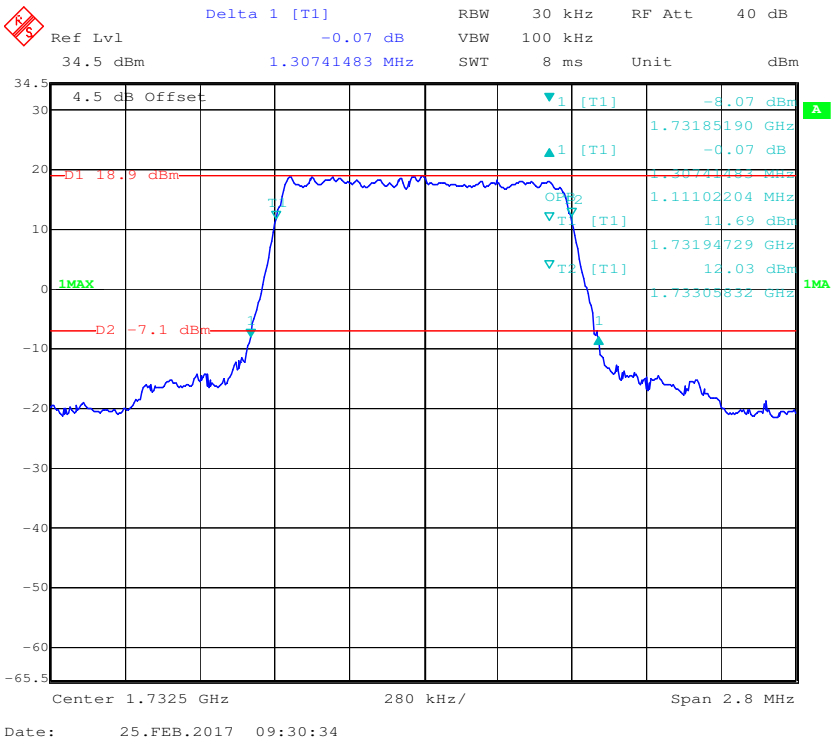

16-QAM (1.4 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

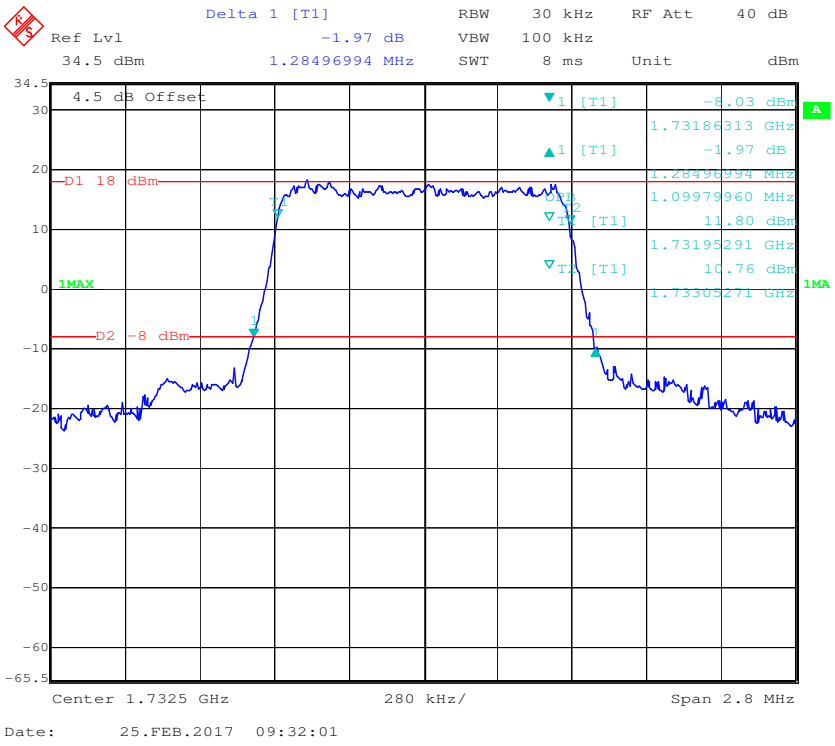

QPSK (3.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

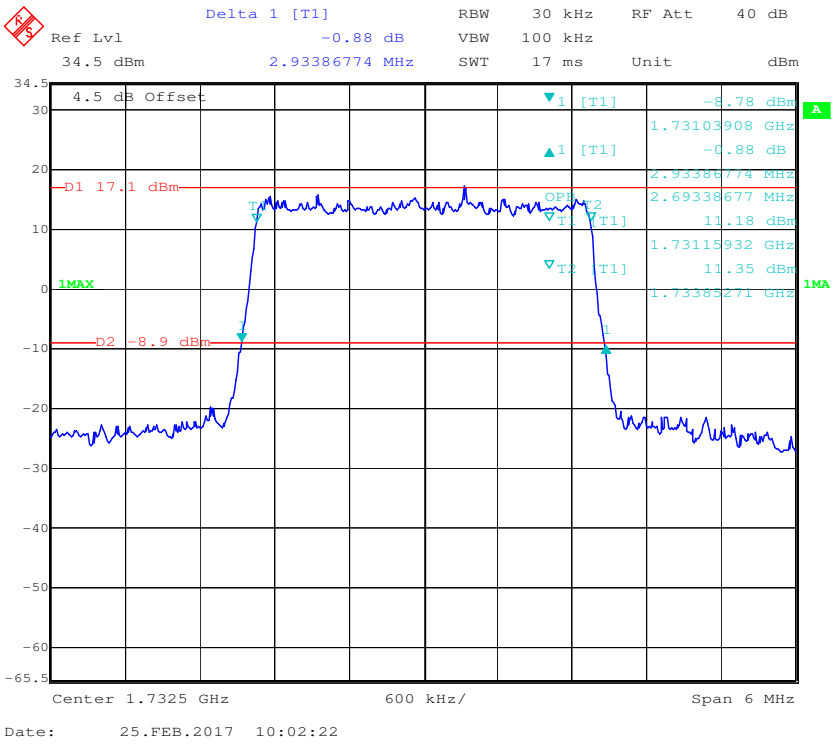

16-QAM (3.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

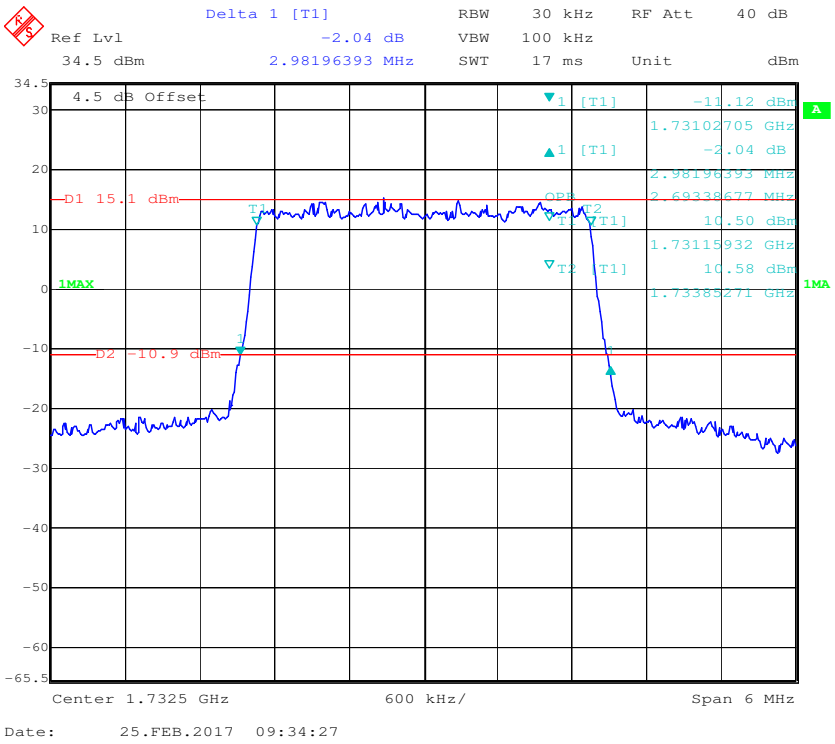

QPSK (5.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

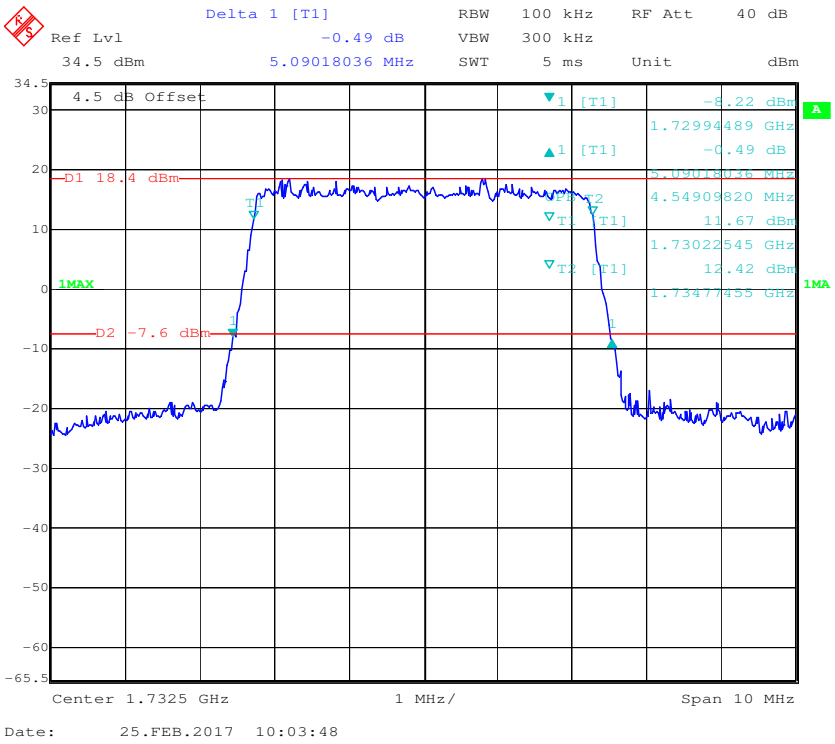

16-QAM (5.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

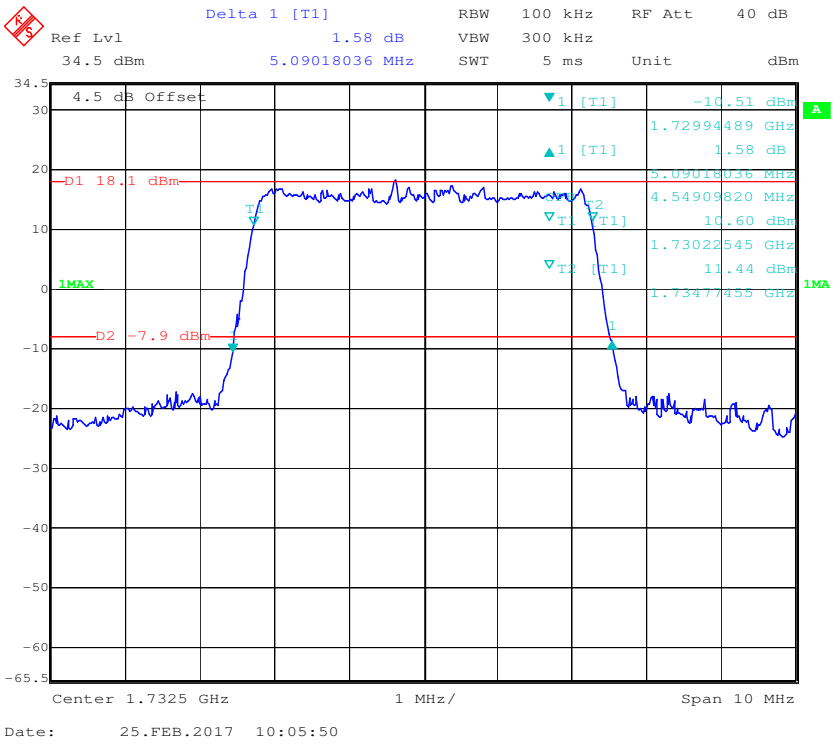

QPSK (10.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

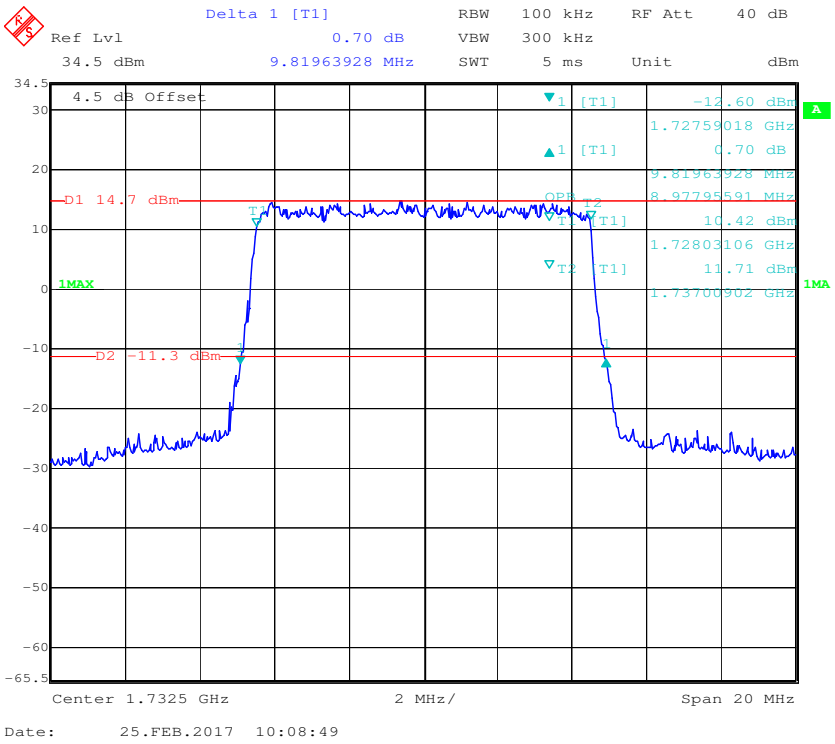

16-QAM (10.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

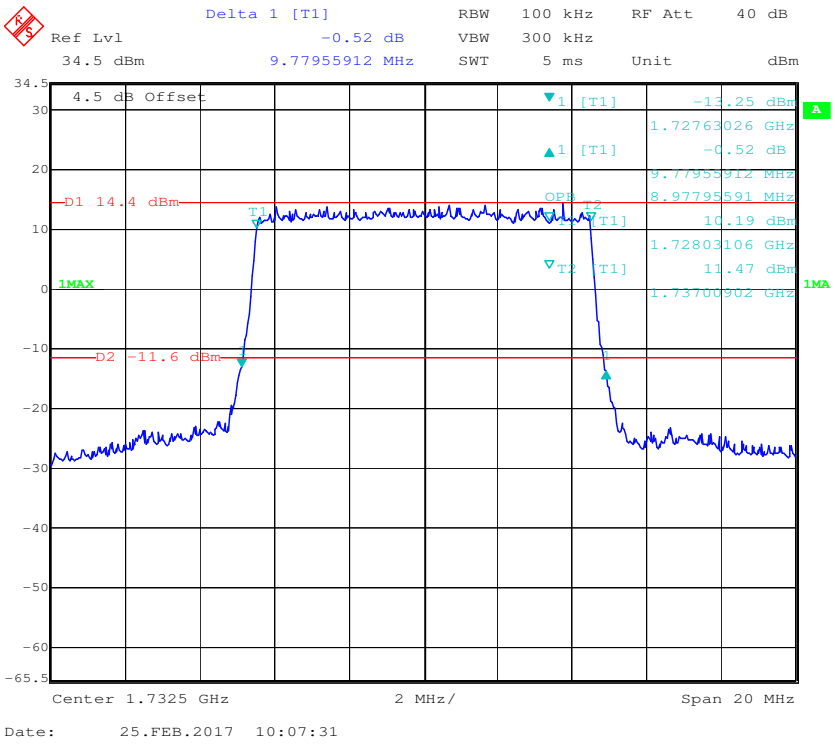

QPSK (15.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

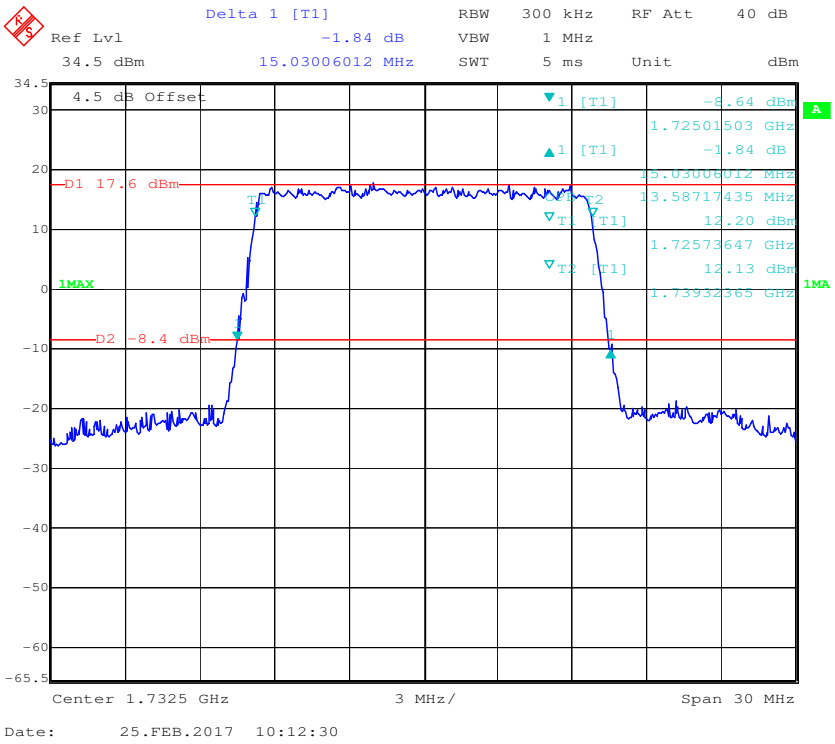

16-QAM (15.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

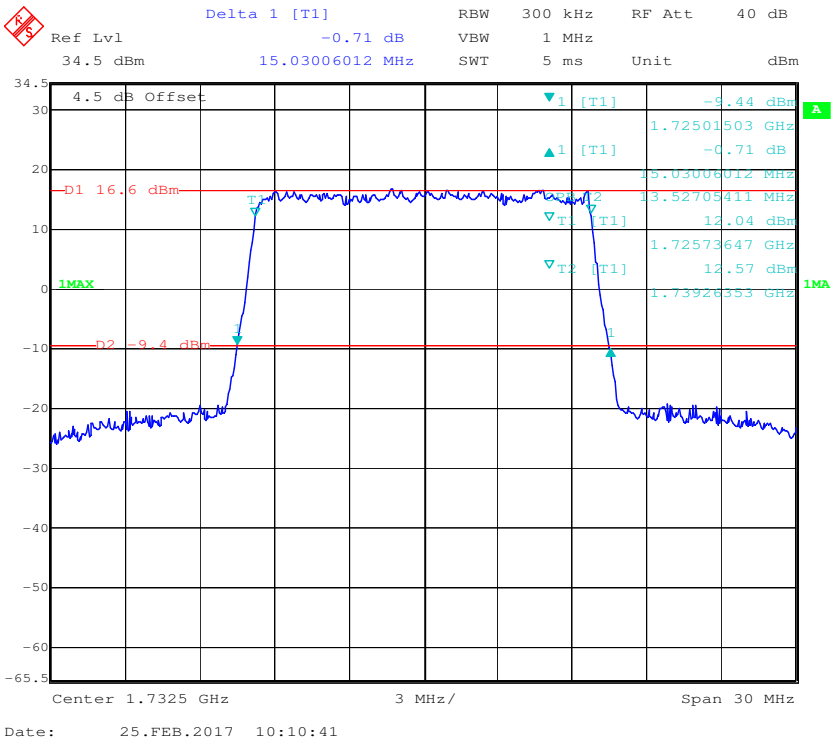

QPSK (20.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

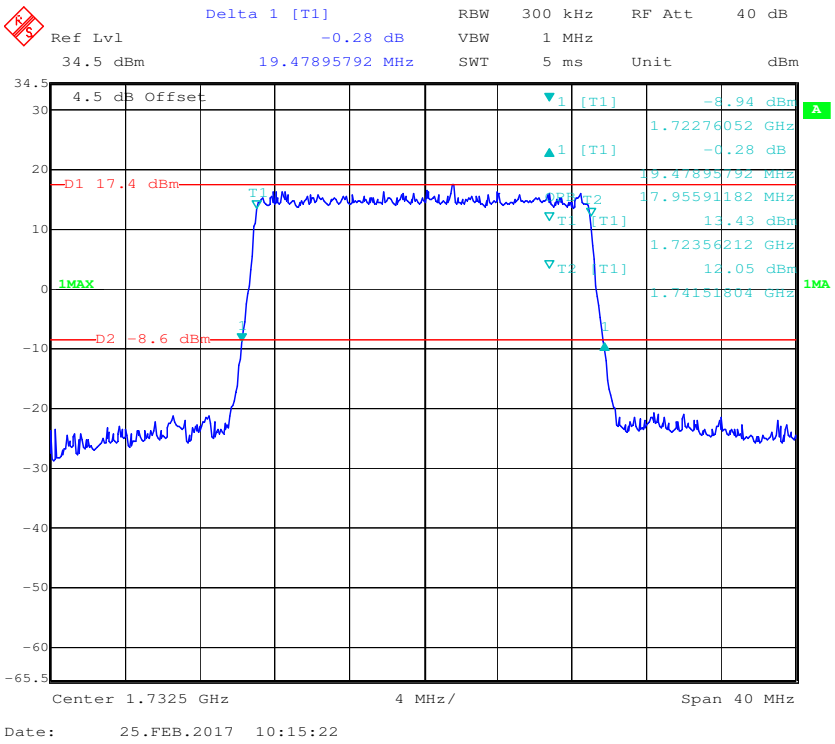

16-QAM (20.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

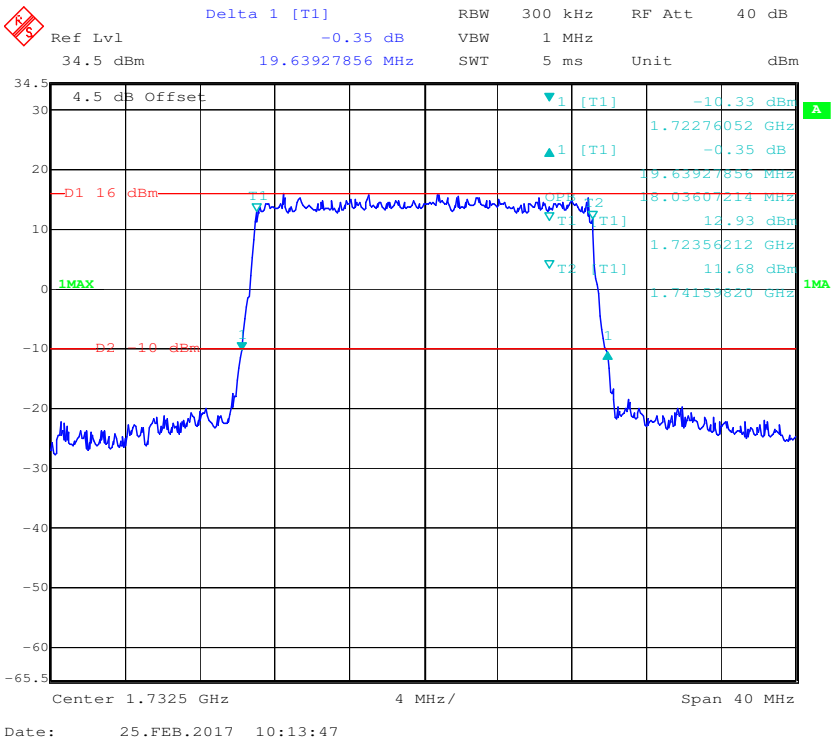

LTE Band 5: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
1.4	QPSK	1.111	1.291
	16QAM	1.111	1.291
3.0	QPSK	2.693	2.946
	16QAM	2.693	2.958
5.0	QPSK	4.549	5.110
	16QAM	4.529	5.070
10.0	QPSK	9.018	9.920
	16QAM	8.938	9.739

QPSK (1.4 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

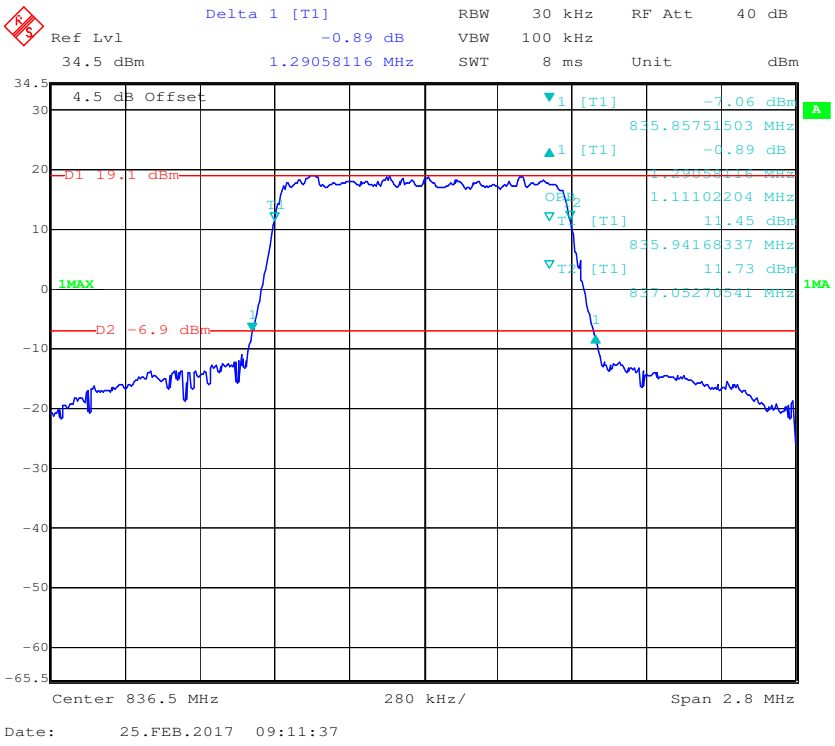

16-QAM (1.4 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

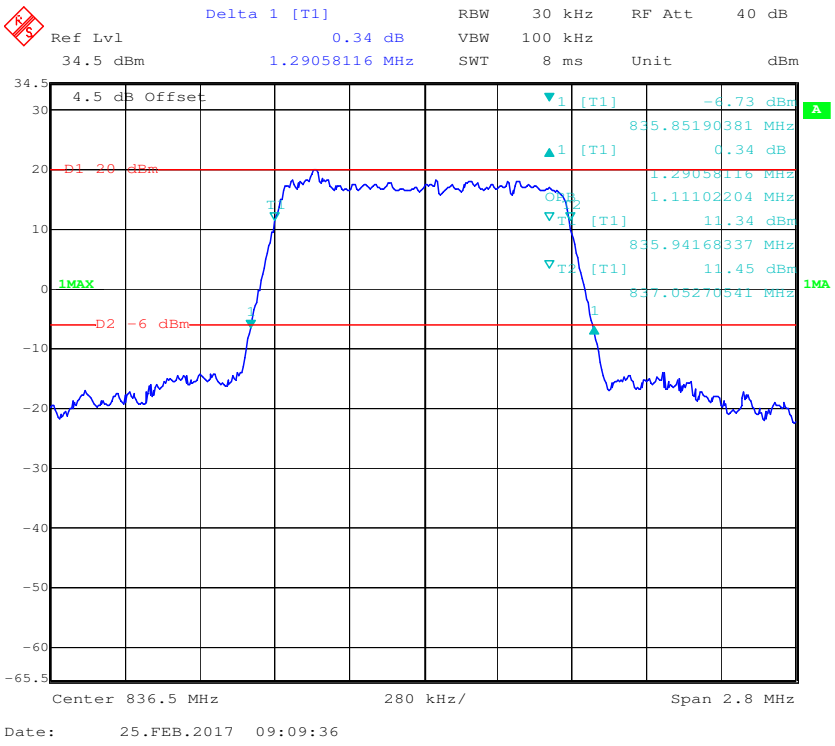

QPSK (3.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

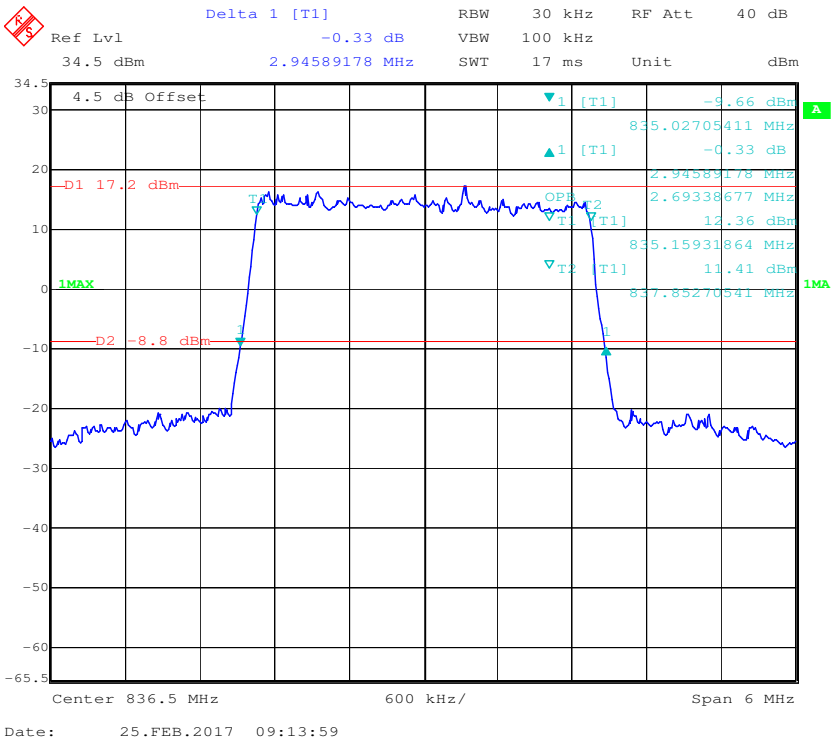

16-QAM (3.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

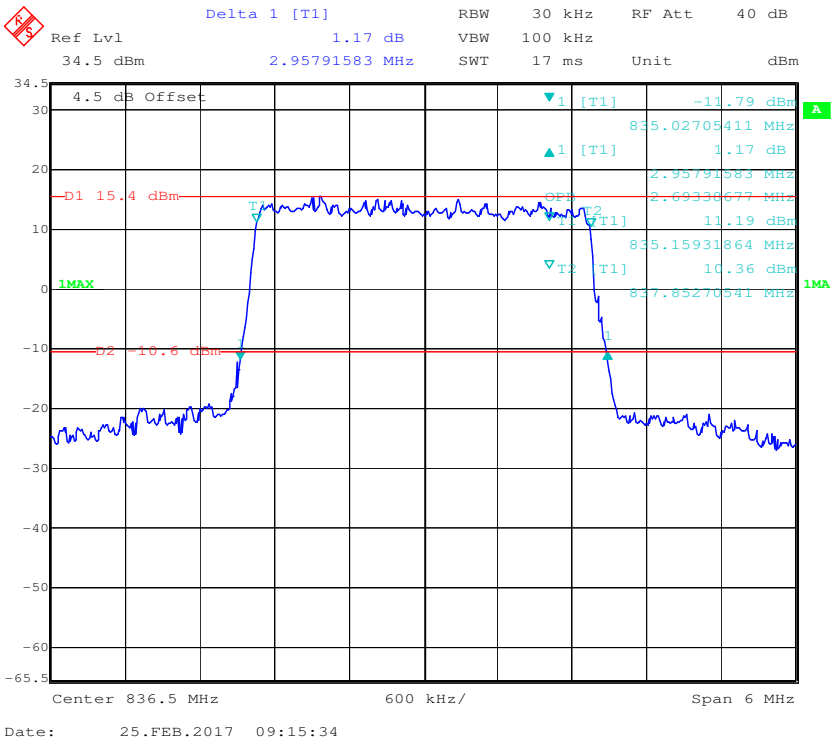

QPSK (5.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

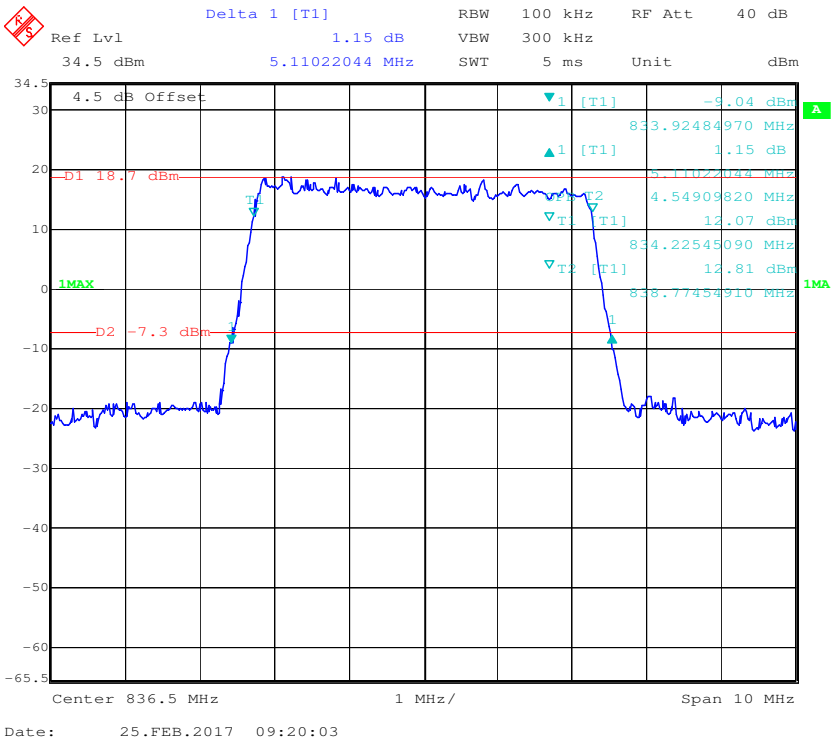

16-QAM (5.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

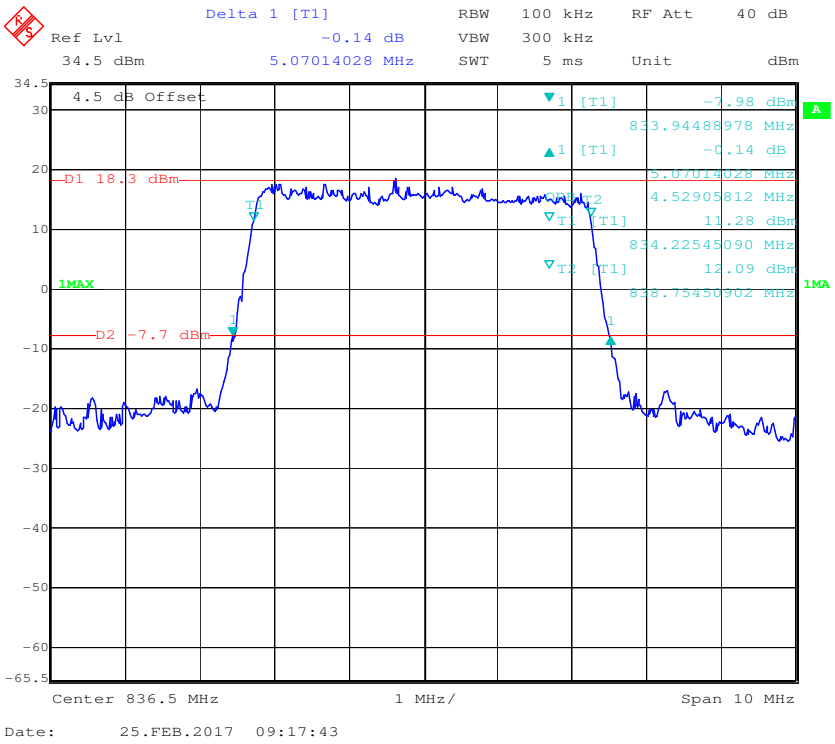

QPSK (10.0 MHz) - 99% Occupied Bandwidth & 26 dB Bandwidth, Middle channel

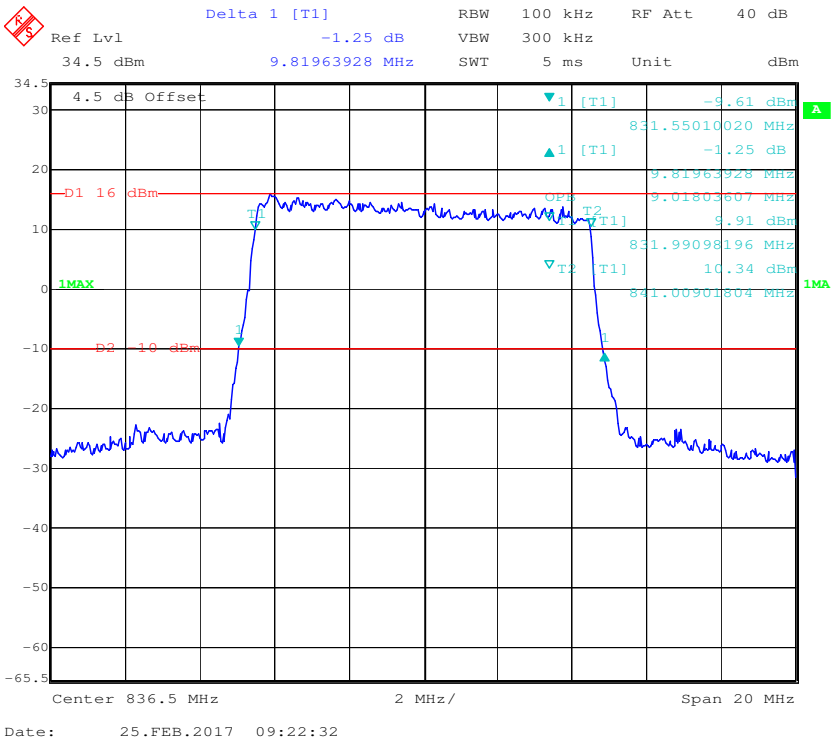

16-QAM (10.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

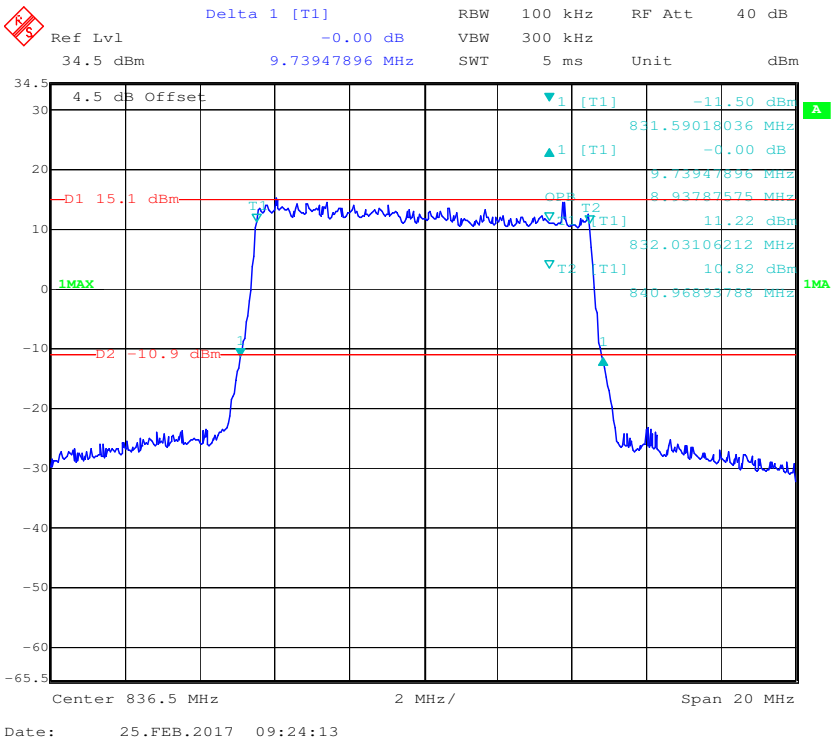

LTE Band 7

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
5.0	QPSK	4.549	5.230
	16QAM	4.589	5.130
10.0	QPSK	8.978	10.020
	16QAM	8.978	10.020
15.0	QPSK	13.587	15.331
	16QAM	13.587	15.090
20.0	QPSK	17.956	19.719
	16QAM	17.956	19.800

QPSK (5 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

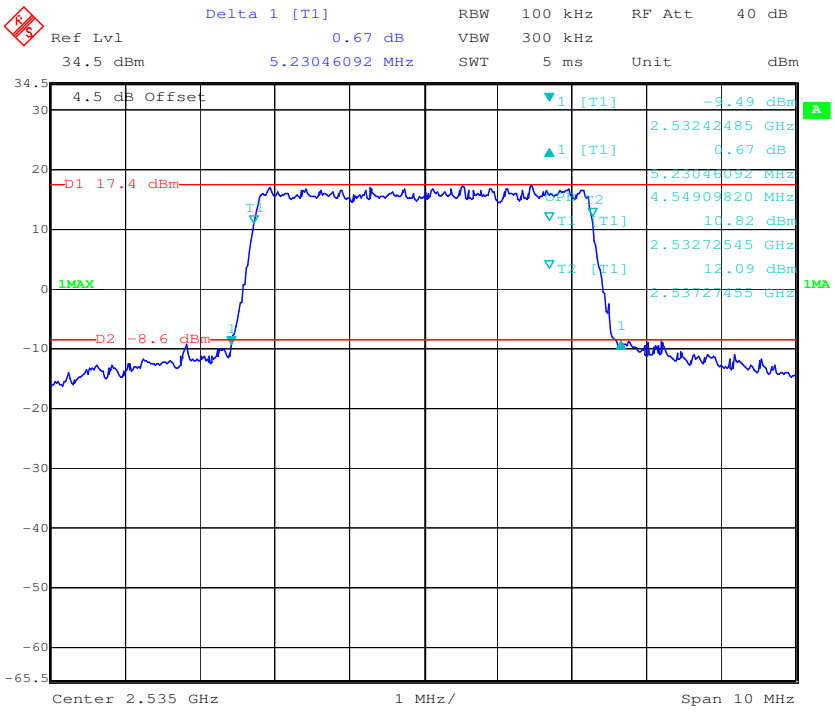

16-QAM (5 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

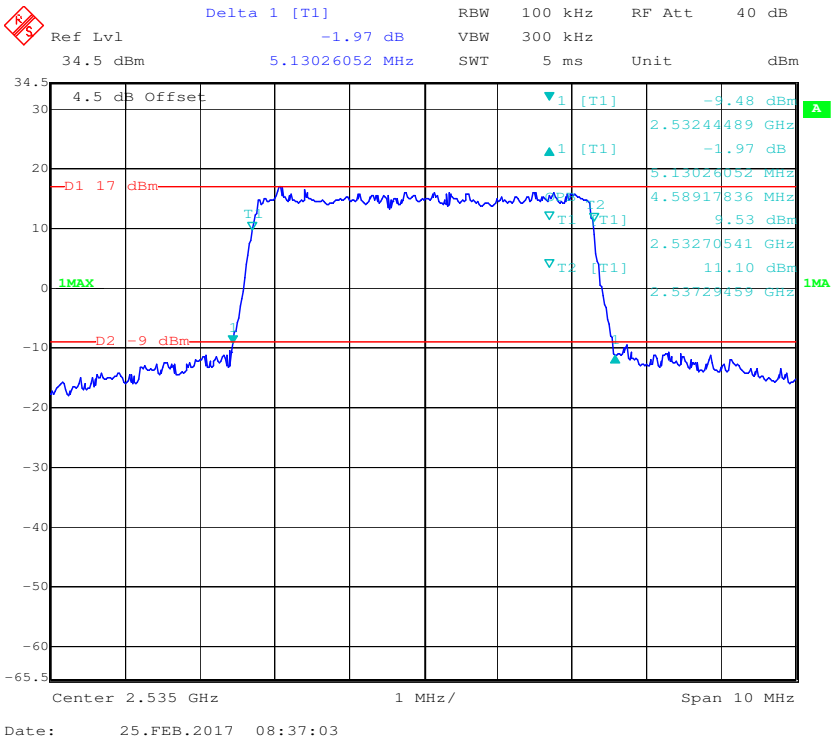

QPSK (10 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

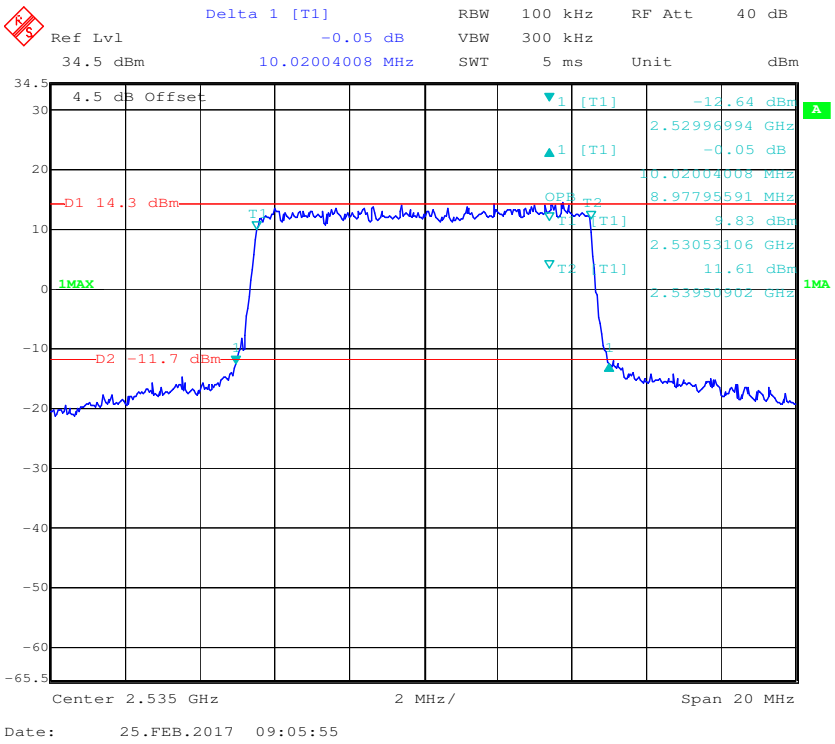

16-QAM (10MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

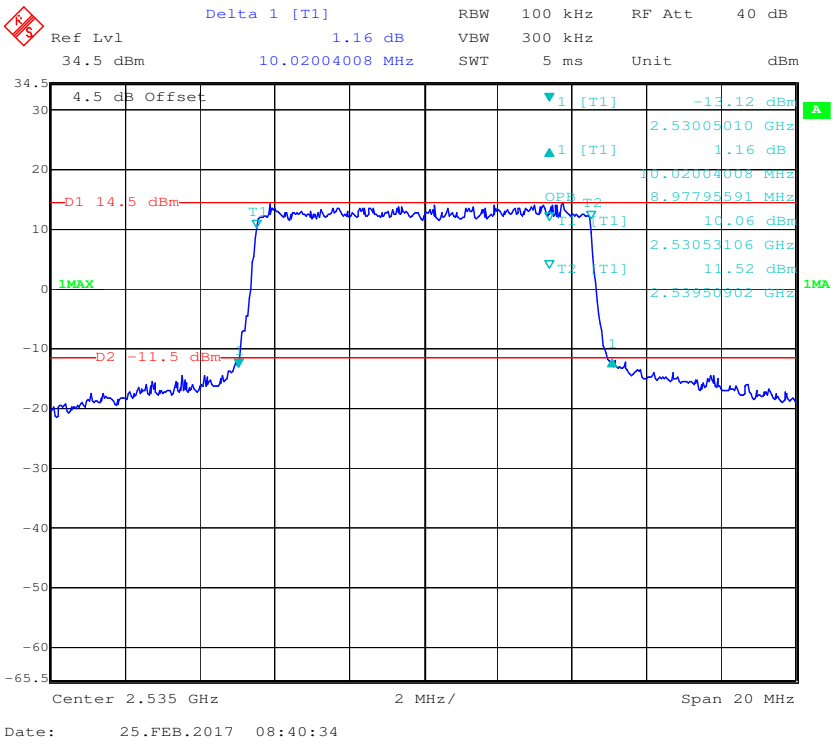

QPSK (15 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

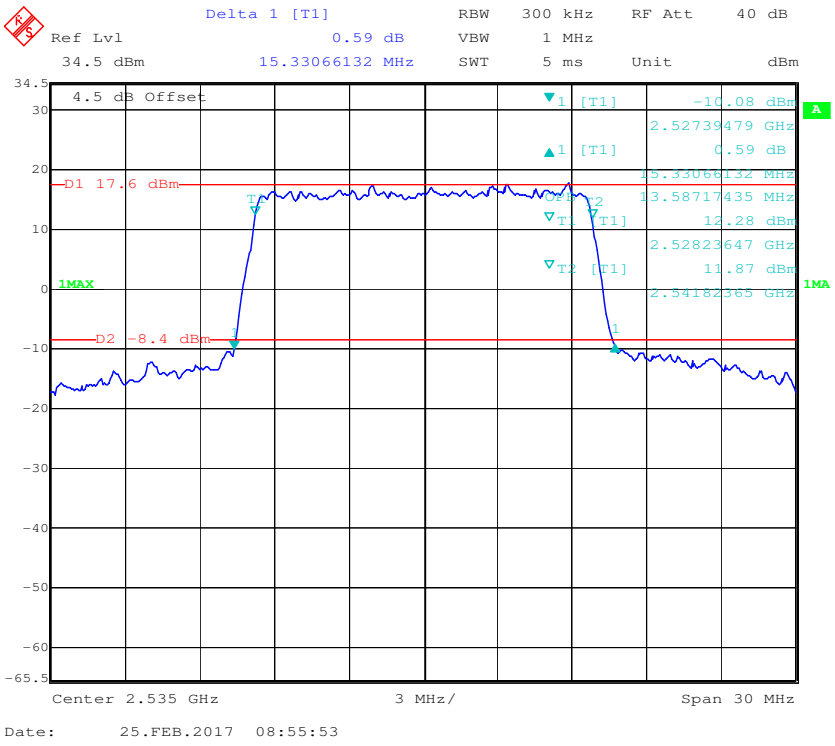

16-QAM (15 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

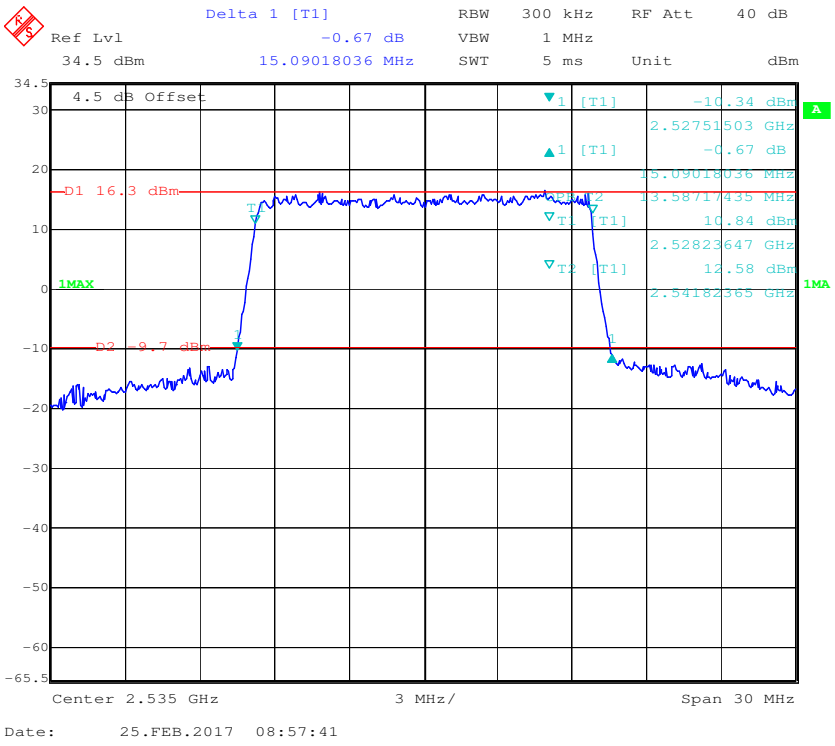

QPSK (20 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

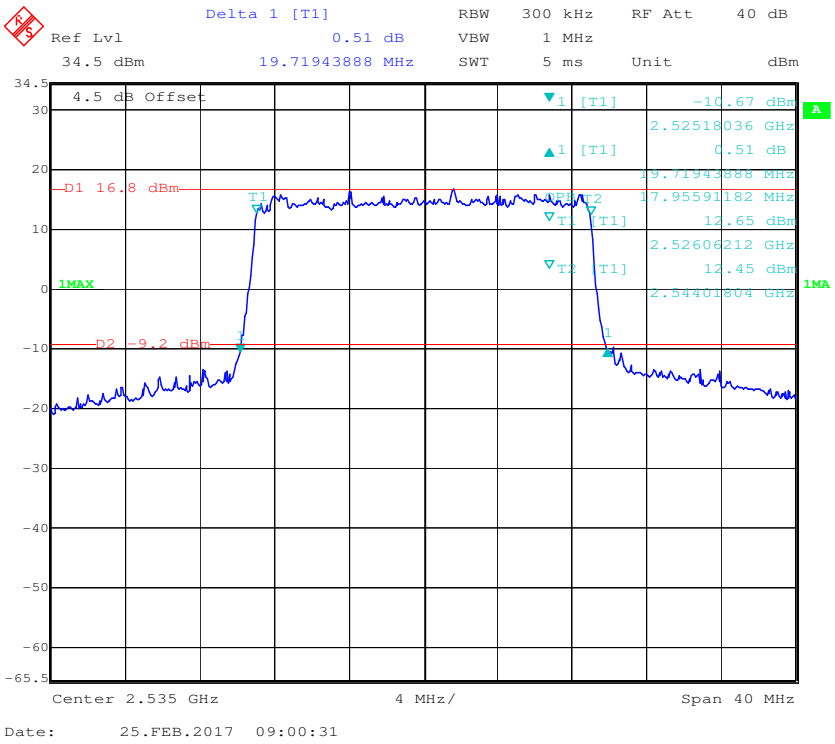

16-QAM (20 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

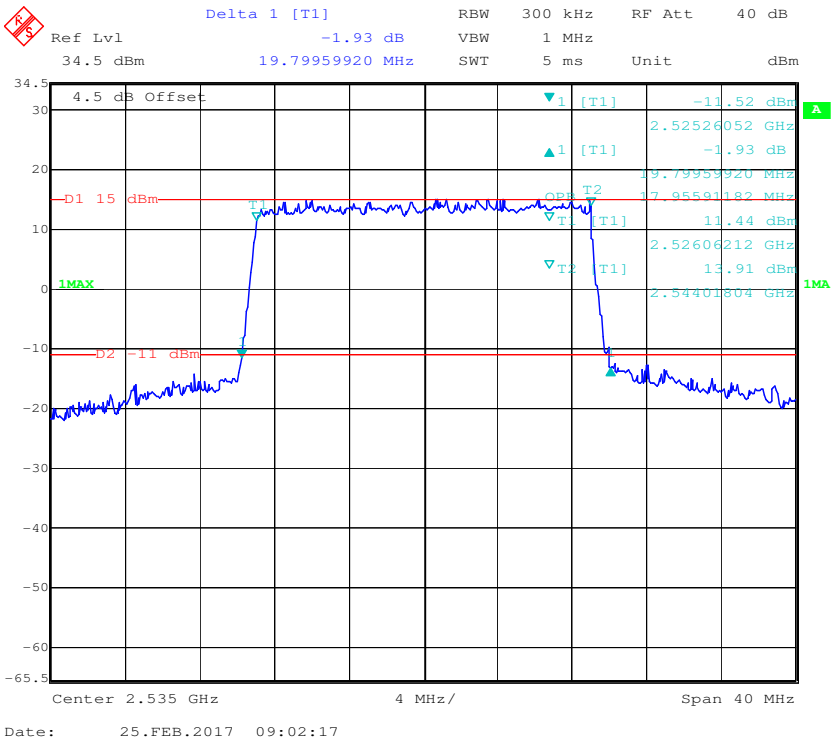

LTE Band 17: (Middle Channel)

Bandwidth (MHz)	Modulation	99% Occupied Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
5.0	QPSK	4.549	5.110
	16QAM	4.549	5.110
10.0	QPSK	9.018	9.900
	16QAM	9.018	9.980

QPSK (5.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

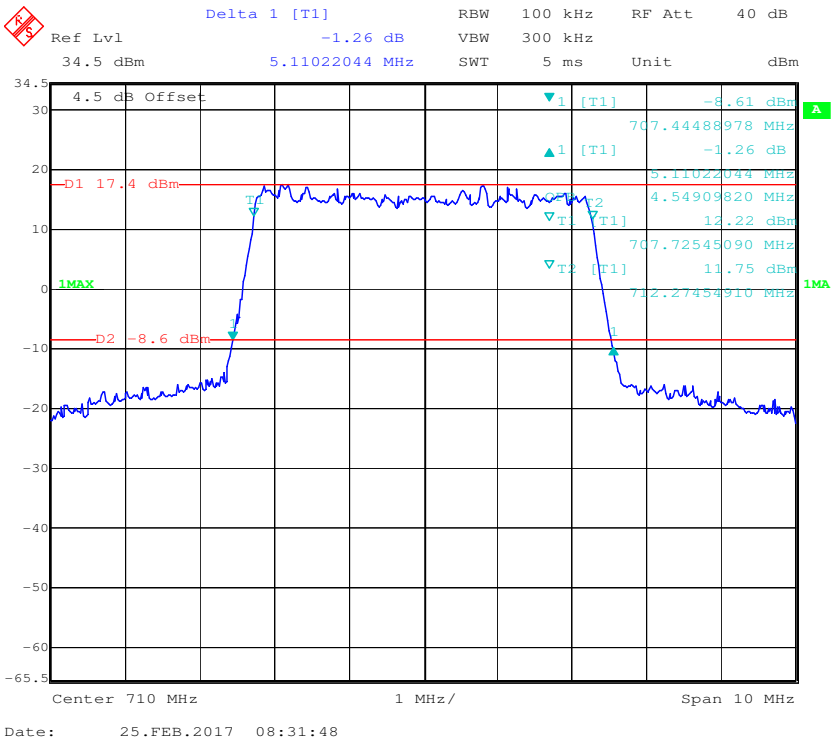

16-QAM (5.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

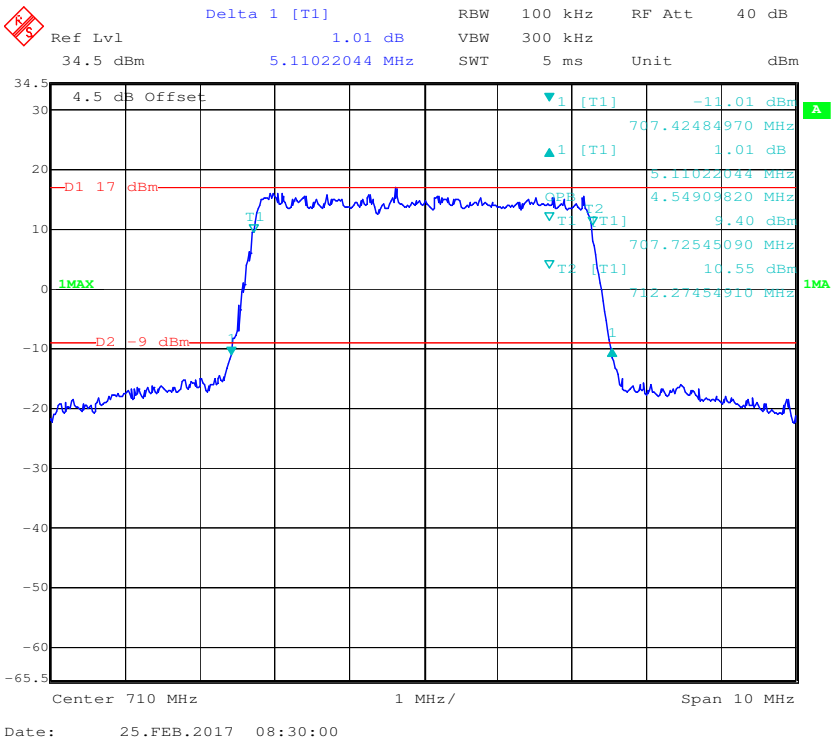

QPSK (10.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

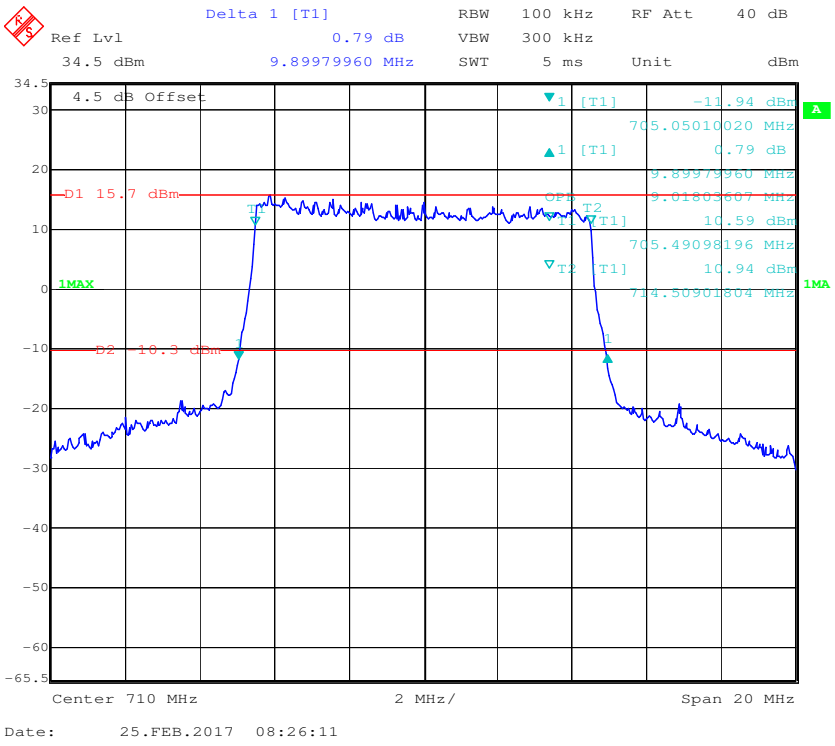

16-QAM (10.0 MHz) - 99% Occupied Bandwidth &26 dB Bandwidth, Middle channel

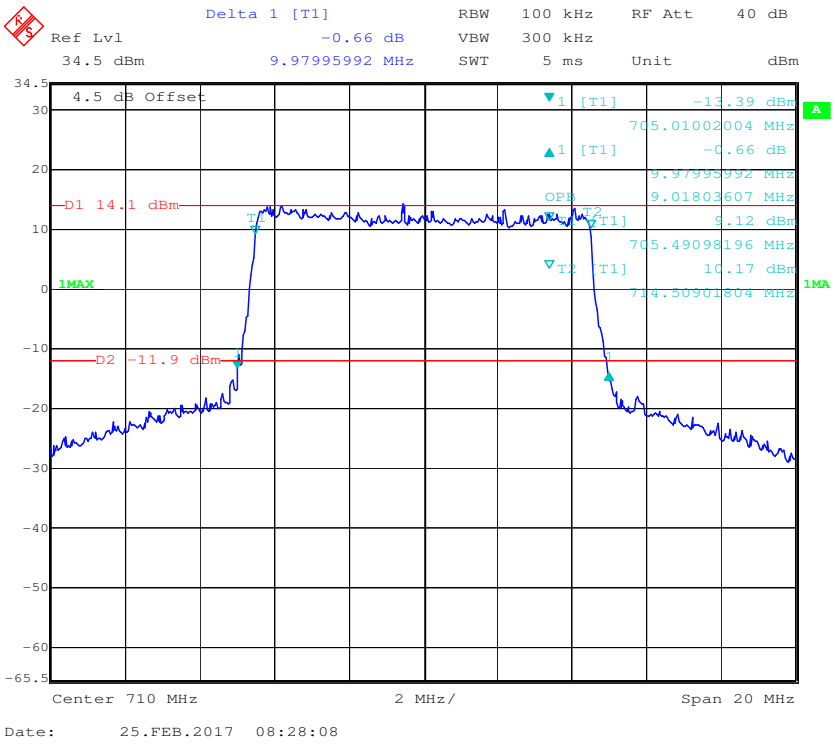

FCC §2.1051, §22.917(a) & §24.238(a); §27.53 (h) (m) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53(h) (m).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

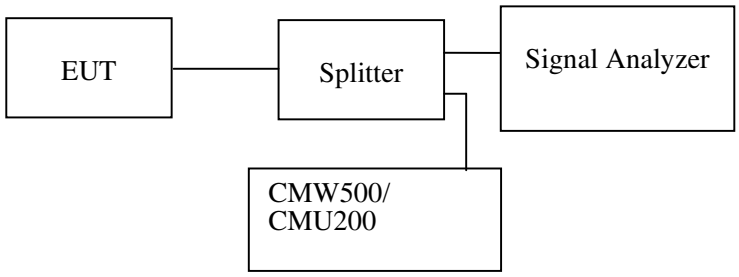

Test Data

Environmental Conditions

Temperature:	23~25 ℃
Relative Humidity:	45~50 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Echo Wu from 2017-02-23 to 2017-03-01.

EUT operation mode: transmitting

Test result: Compliance, please refer to the following plots.

Cellular Band (Part 22H)

30 MHz – 1 GHz (GSM Mode)

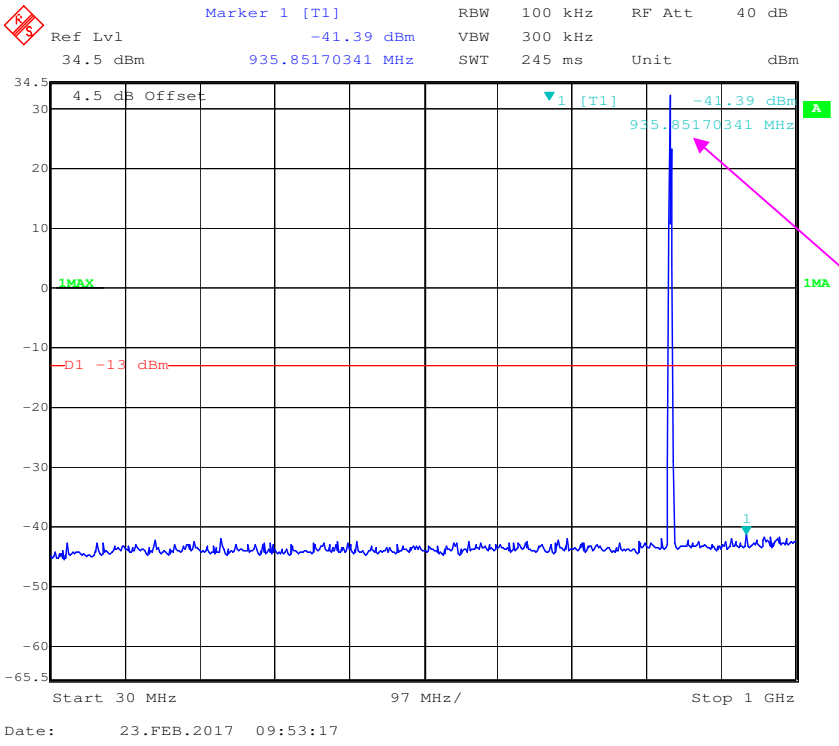

Fundamental test

1 GHz – 10 GHz (GSM Mode)

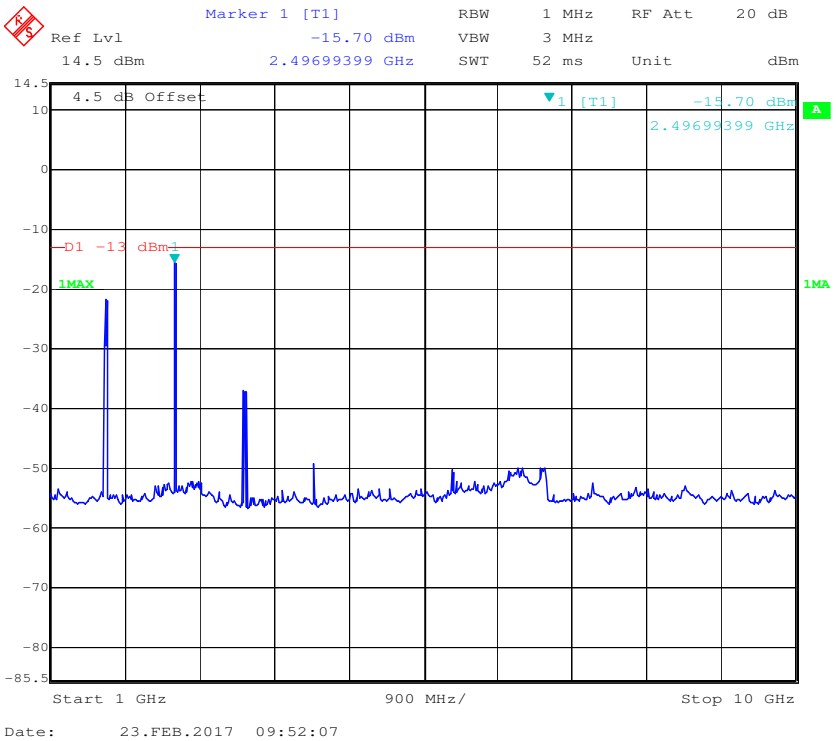

30 MHz – 1 GHz (WCDMA Mode)

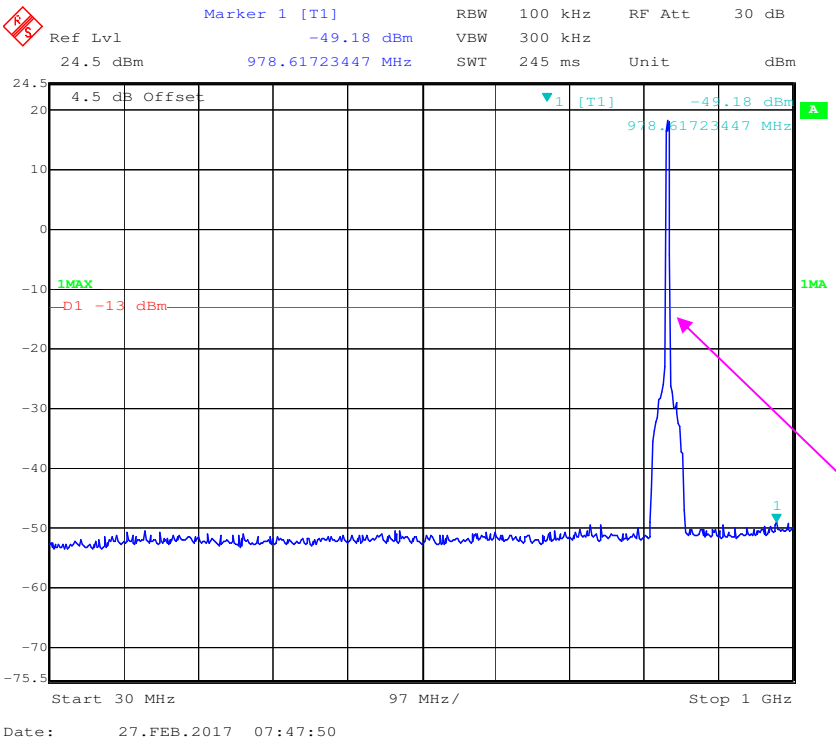

Fundamental test

1 GHz – 10 GHz (WCDMA Mode)

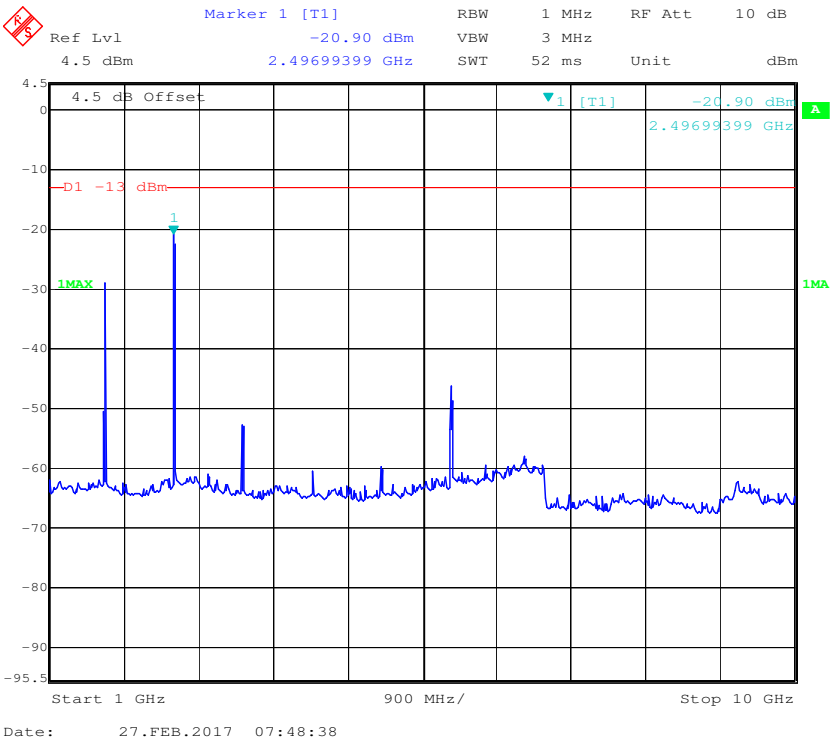

PCS Band (Part 24E)

30 MHz – 1 GHz (GSM Mode)

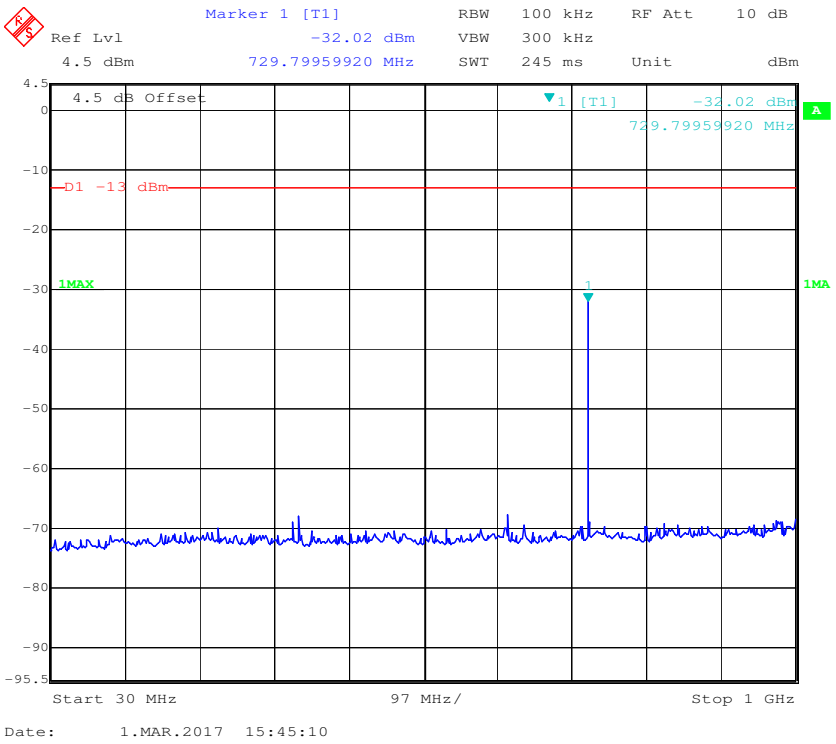

Date: 1.MAR.2017 15:45:10

1 GHz – 2 GHz (GSM Mode)

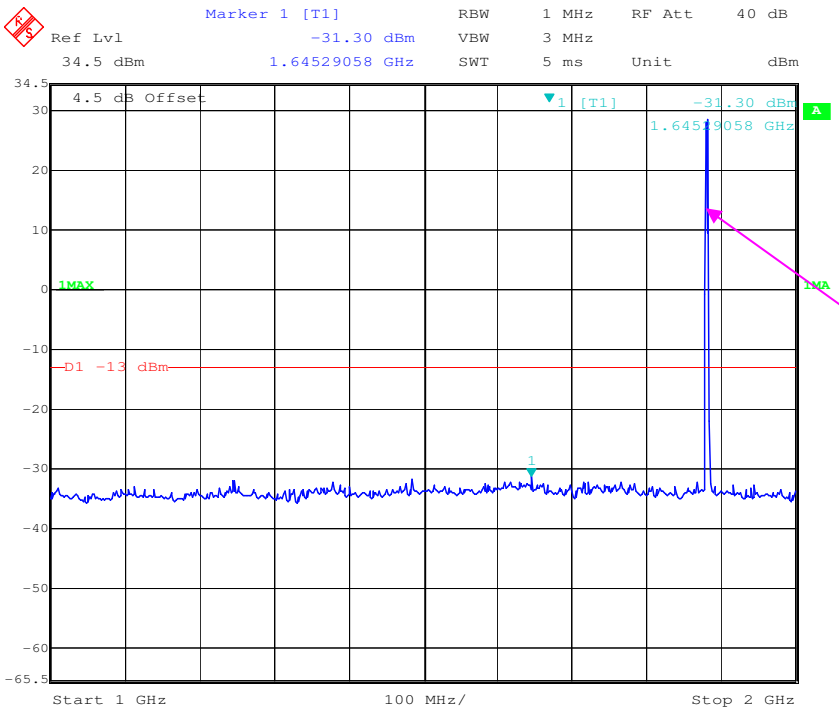

Date: 1.MAR.2017 15:42:23

Fundamental test

2 GHz – 20 GHz (GSM Mode)

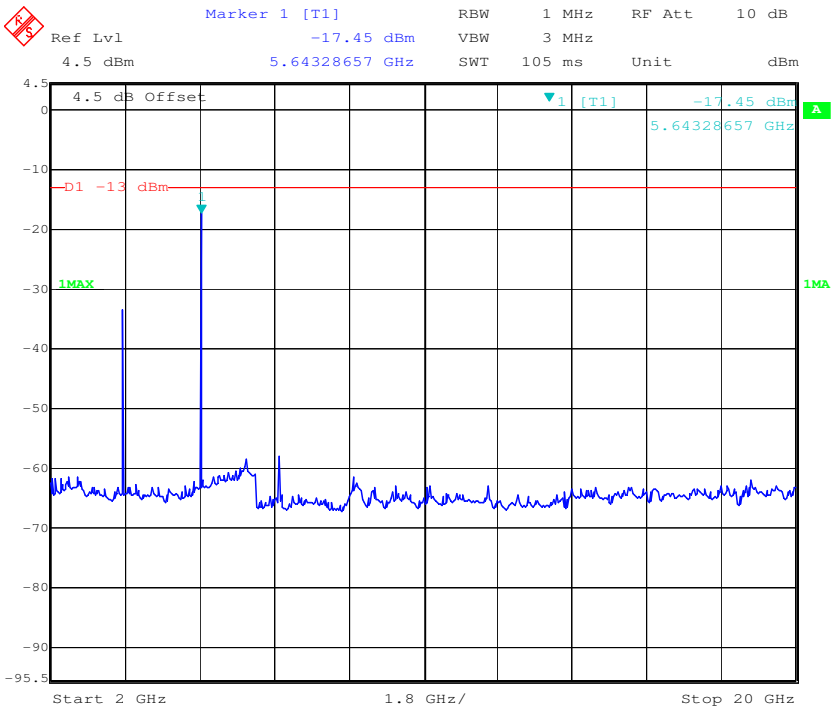

30 MHz – 1 GHz (WCDMA Mode)

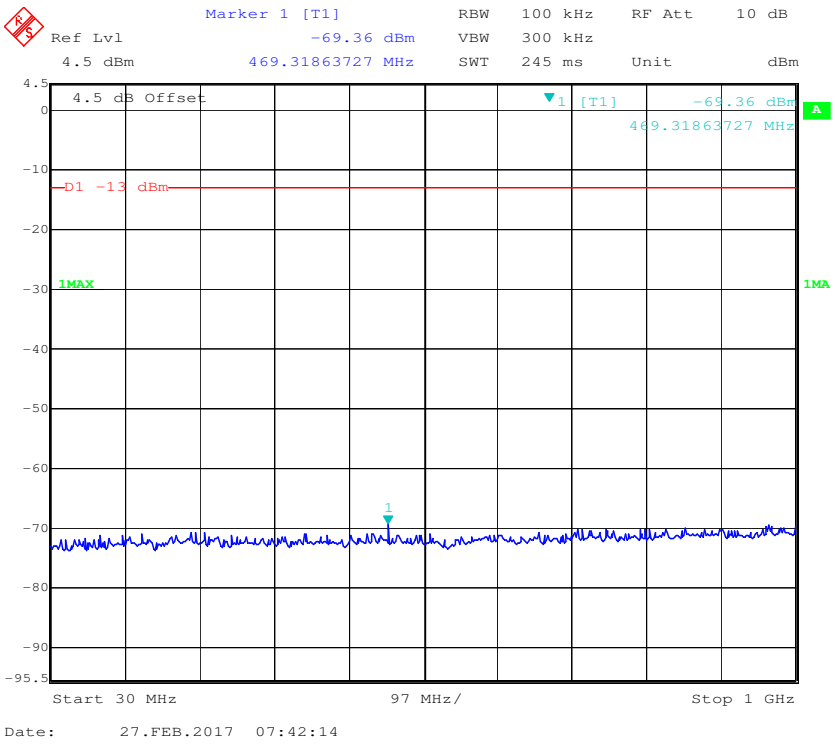

1 GHz – 20 GHz (WCDMA Mode)

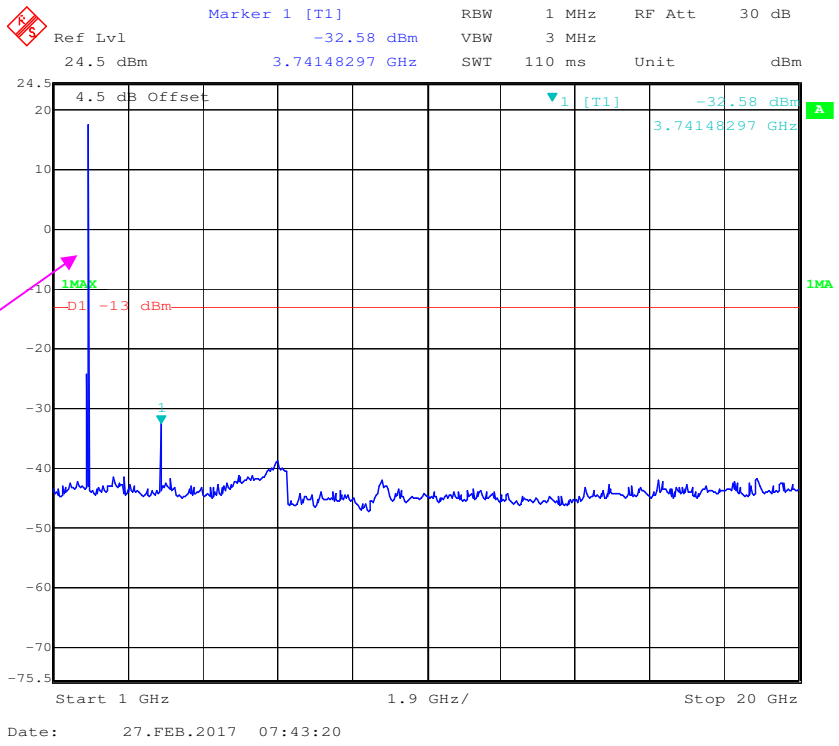

Fundamental test

AWS Band (Part 27)

30 MHz – 1 GHz (WCDMA Mode)

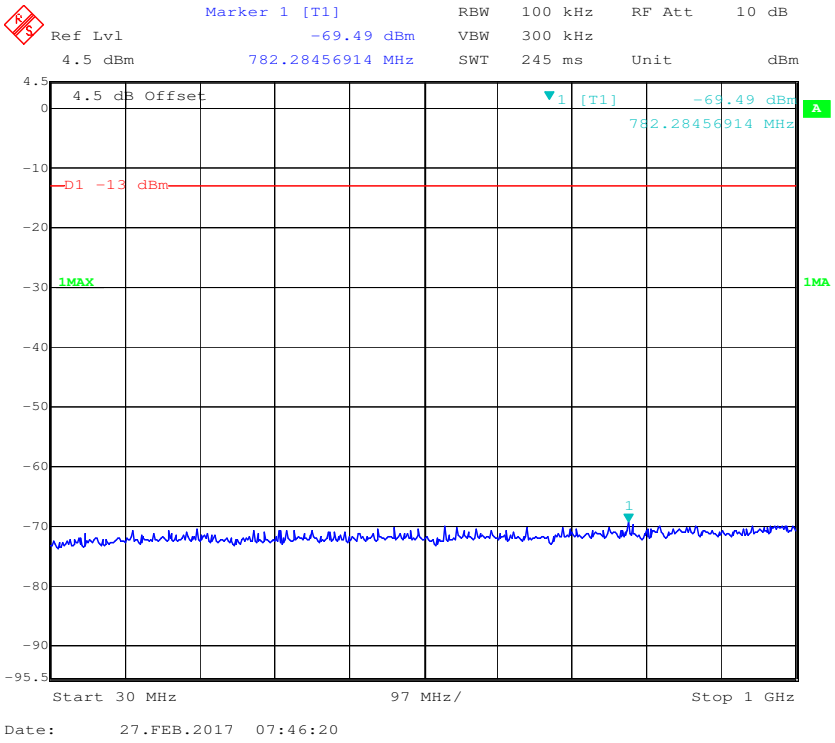

1 GHz – 20 GHz (WCDMA Mode)

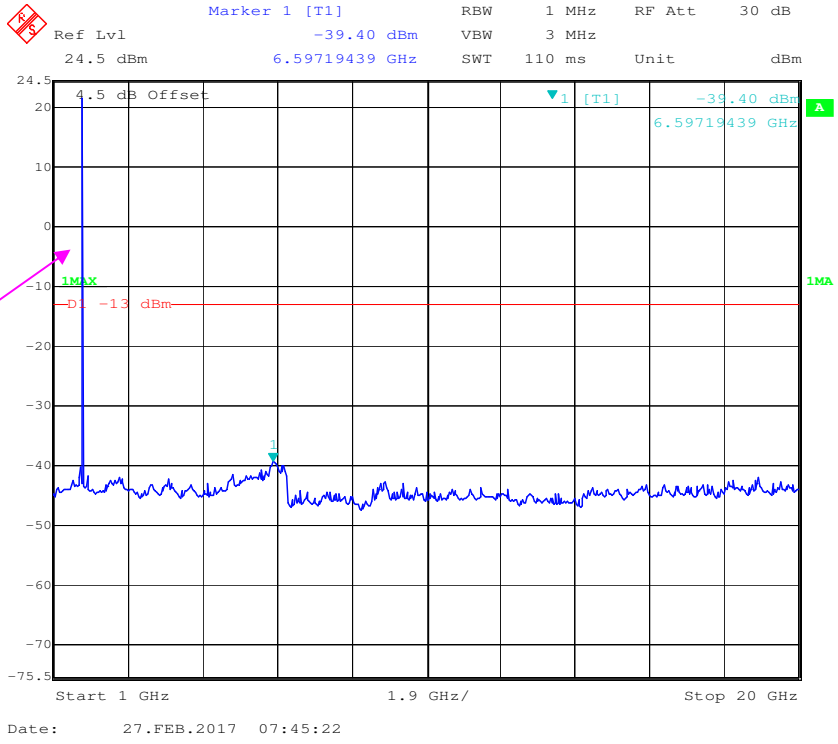

Fundamental test

LTE Band 2:

30 MHz - 1 GHz (1.4 MHz, Middle Channel)

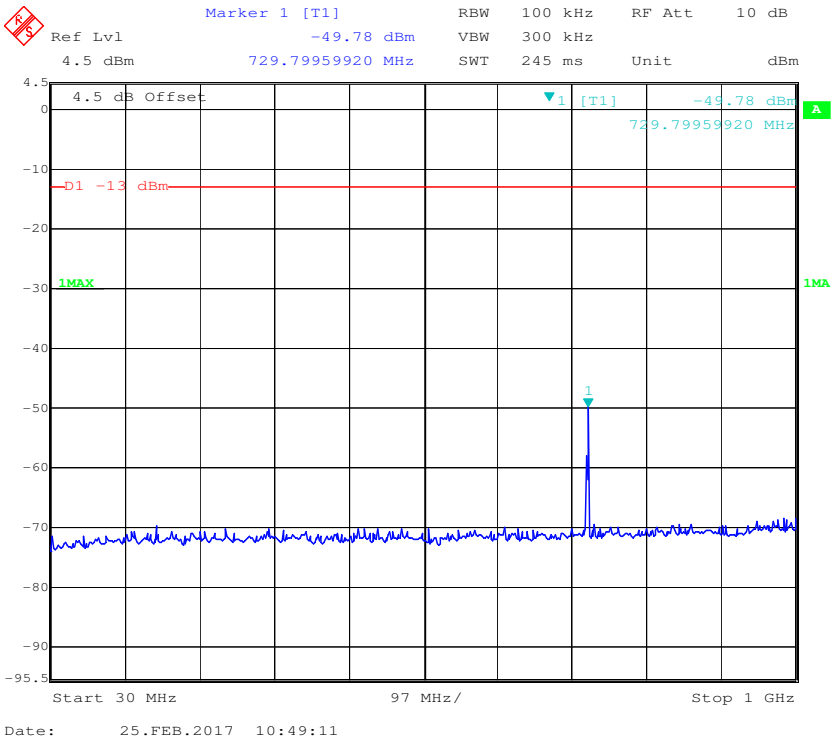

1 GHz – 2 GHz (1.4 MHz, Middle Channel)

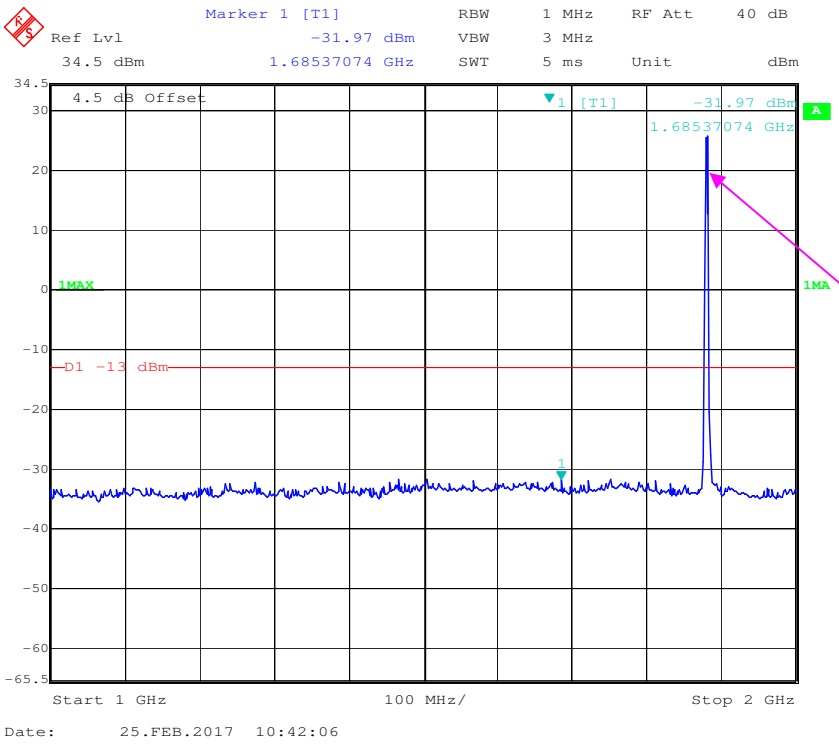

Fundamental test

2 GHz – 20 GHz (1.4 MHz, Middle Channel)

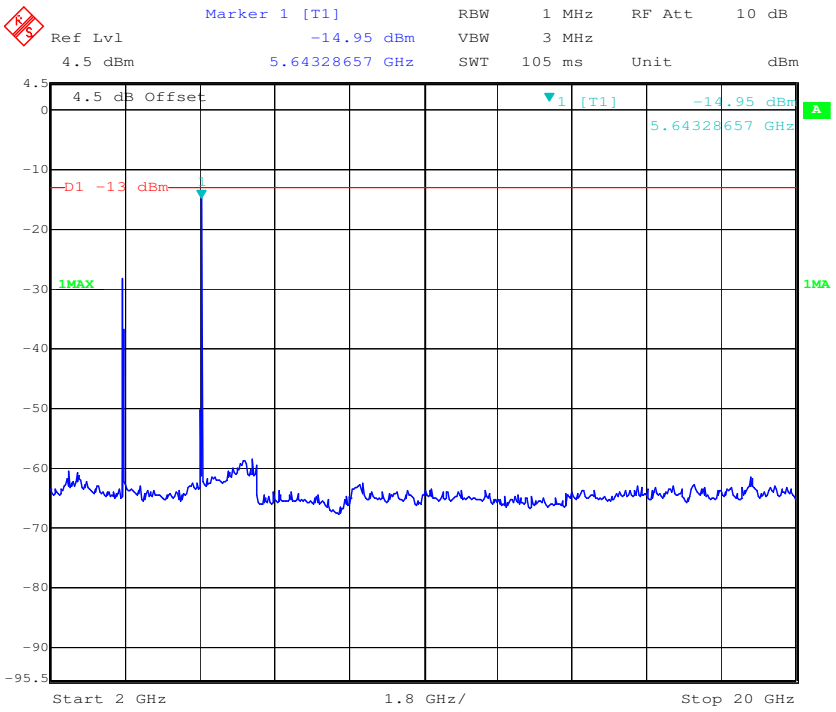

30 MHz - 1 GHz (3.0 MHz, Middle Channel)

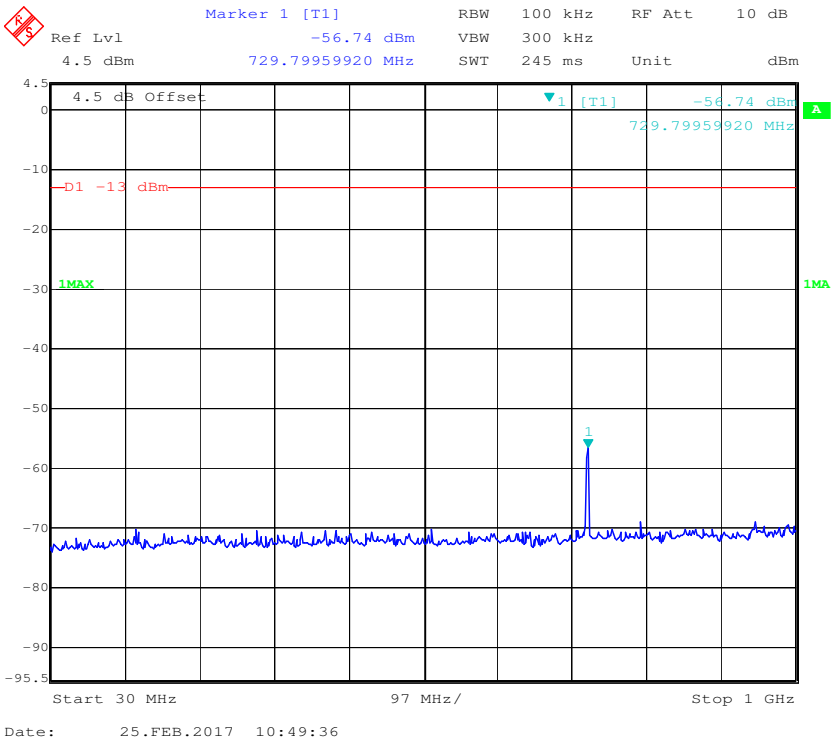

1 GHz – 2 GHz (3.0 MHz, Middle Channel)

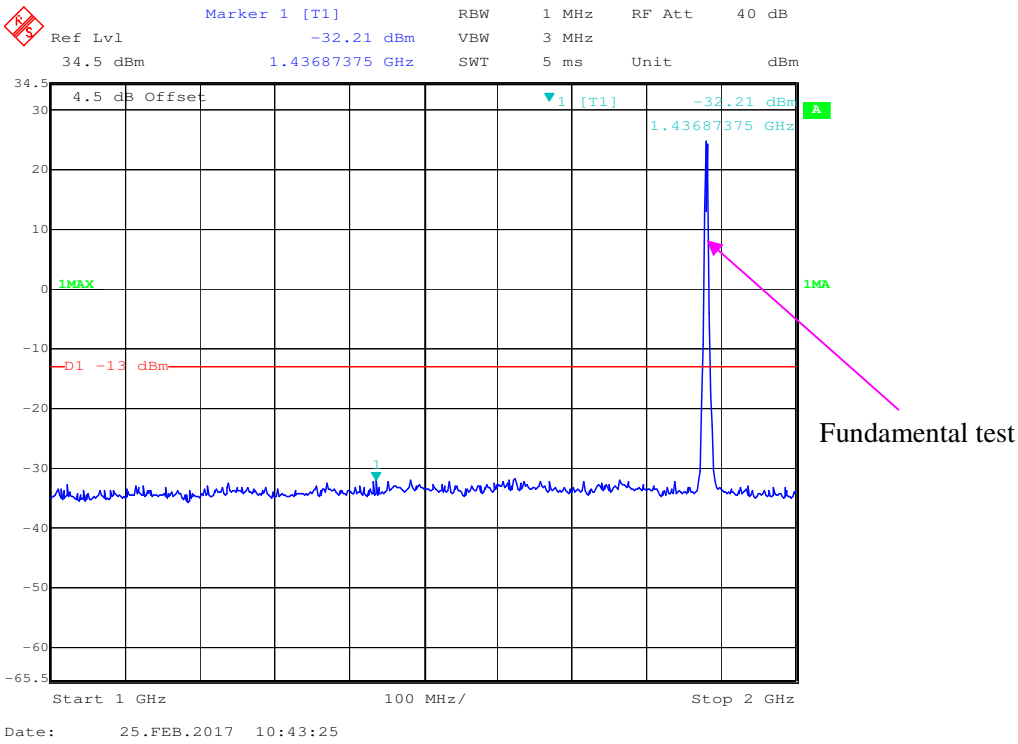

2 GHz – 20 GHz (3.0 MHz, Middle Channel)

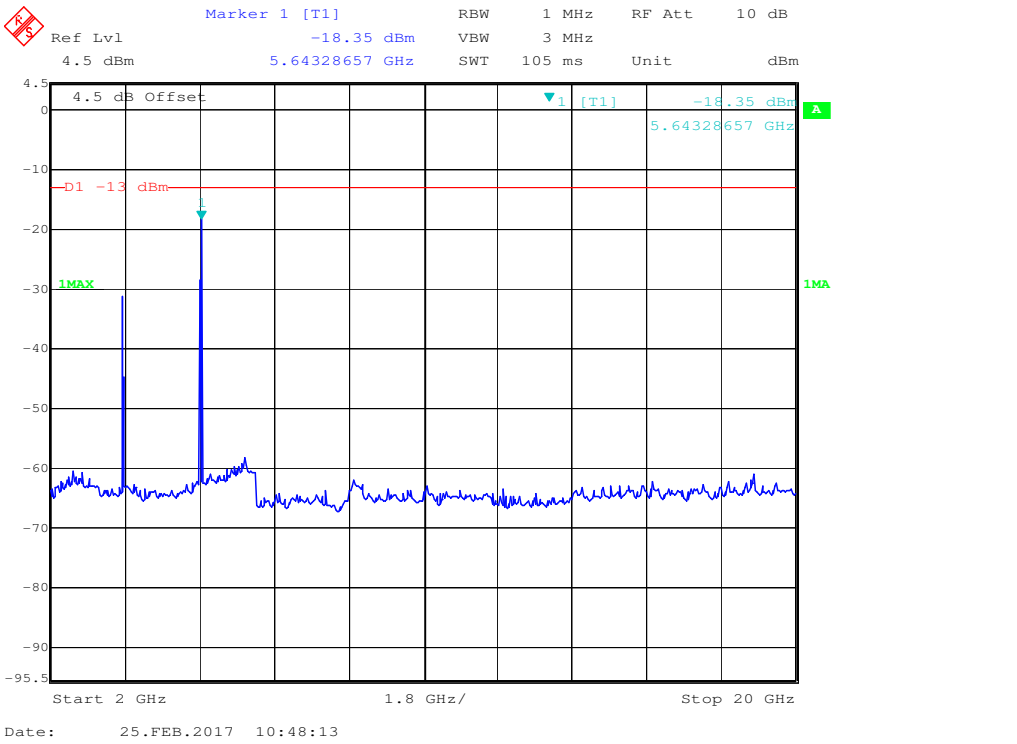

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

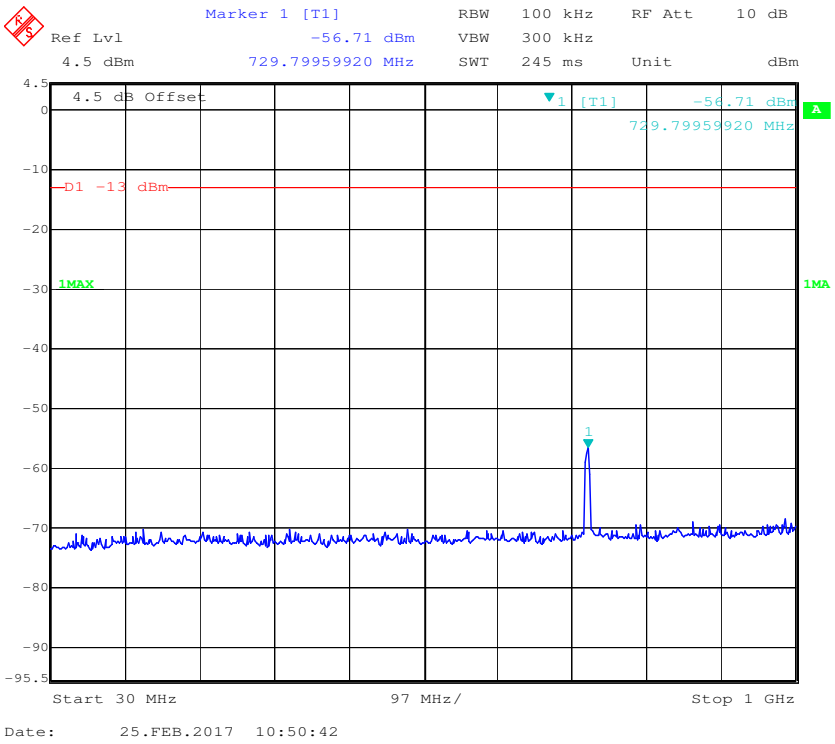

1 GHz – 2 GHz (5.0 MHz, Middle Channel)

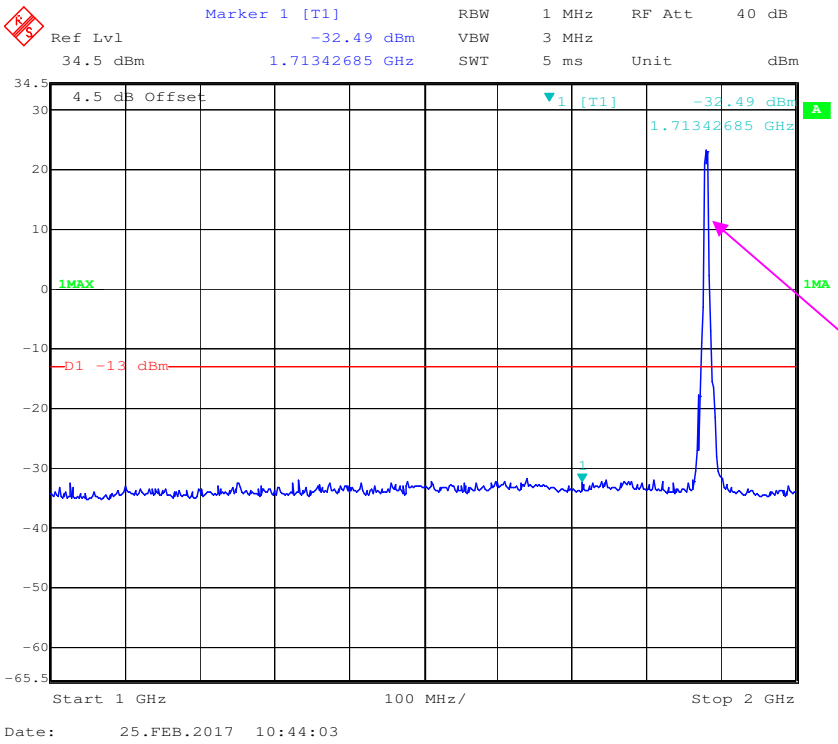

Fundamental test

2 GHz – 20 GHz (5.0 MHz, Middle Channel)

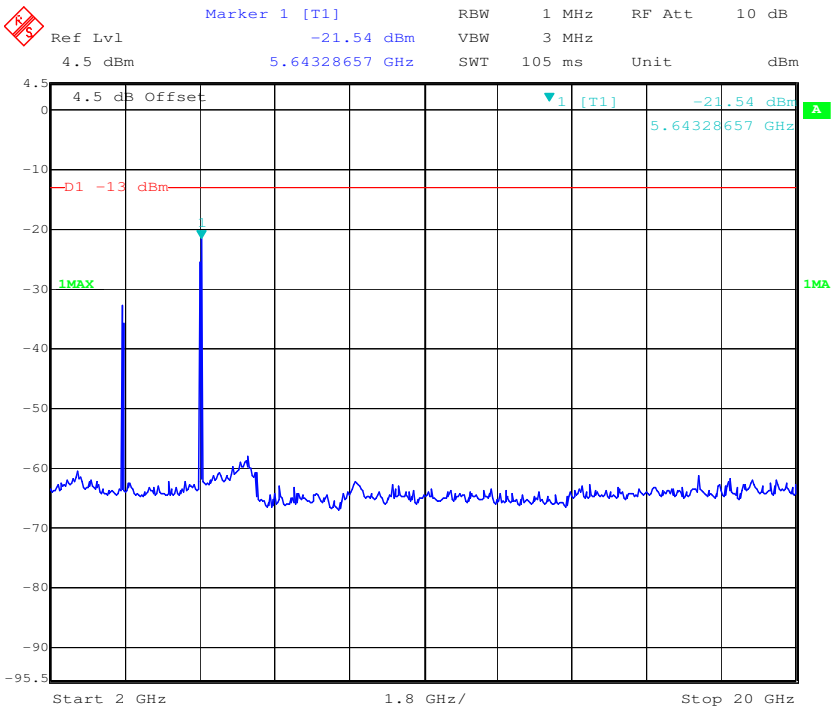

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

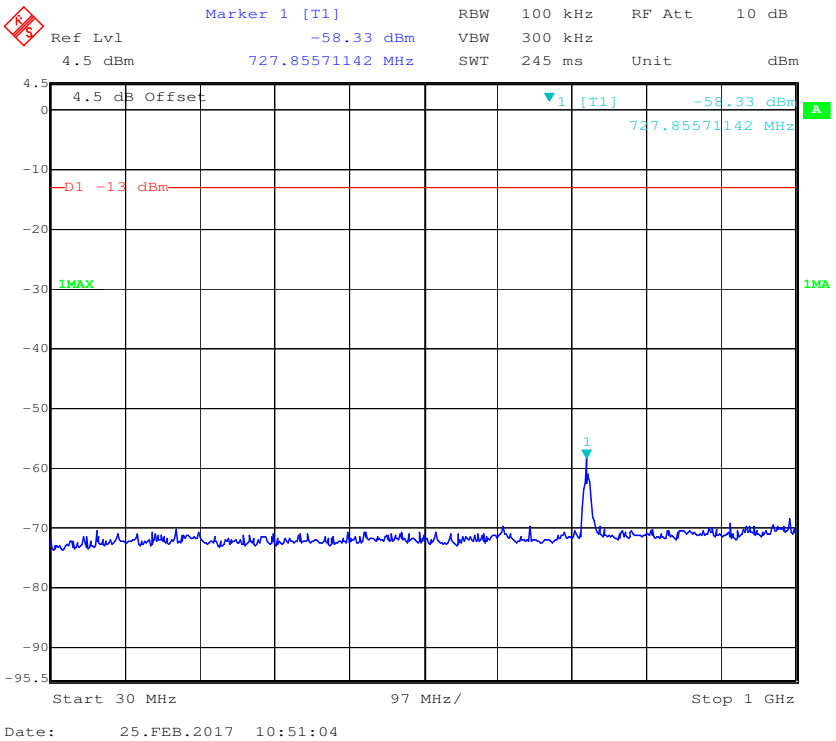

1 GHz – 2 GHz (10.0 MHz, Middle Channel)

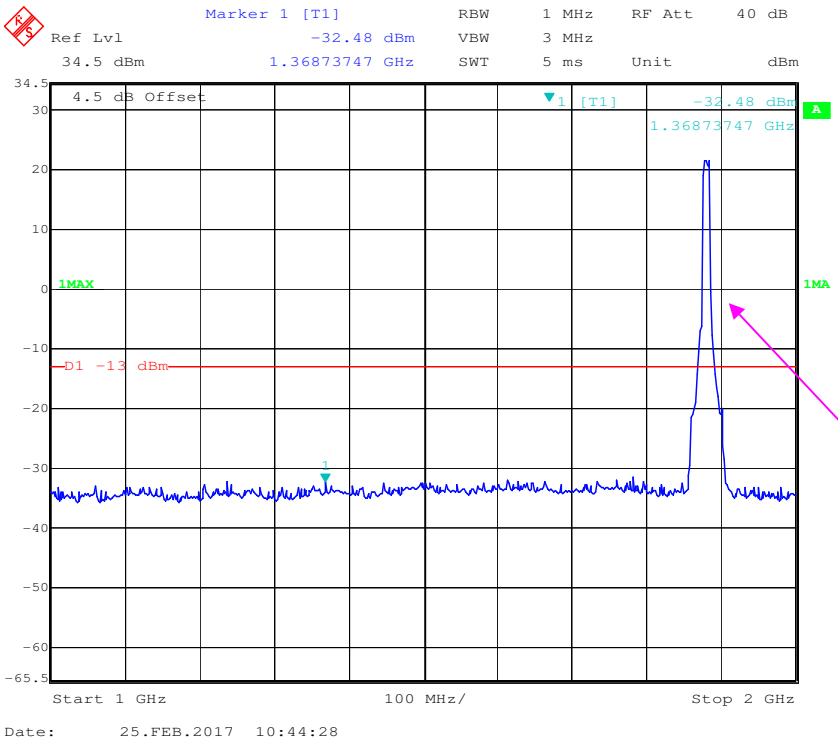

Fundamental test

2 GHz – 20 GHz (10.0 MHz, Middle Channel)

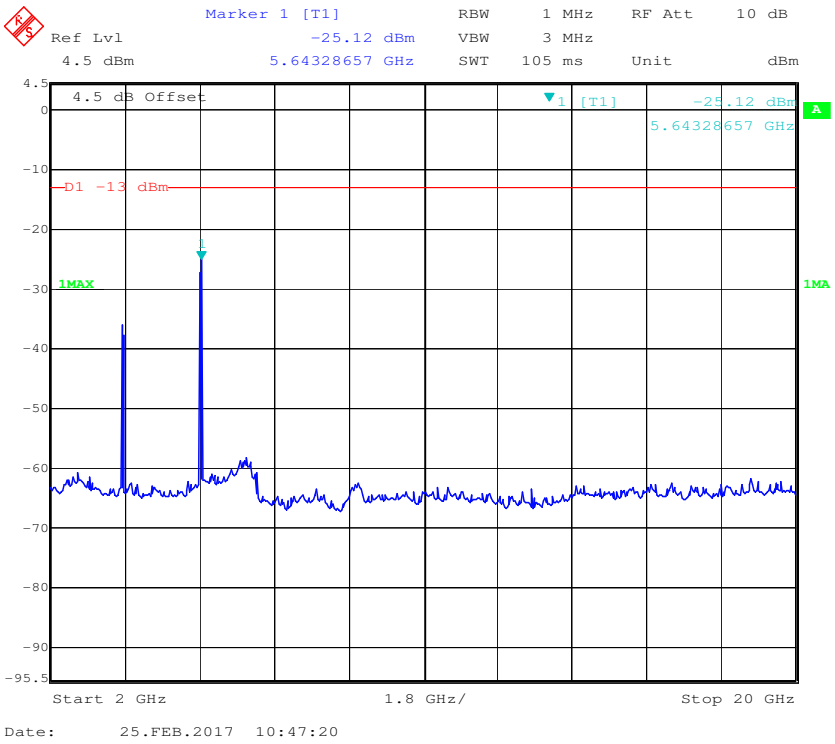

30 MHz - 1 GHz (15.0 MHz, Middle Channel)

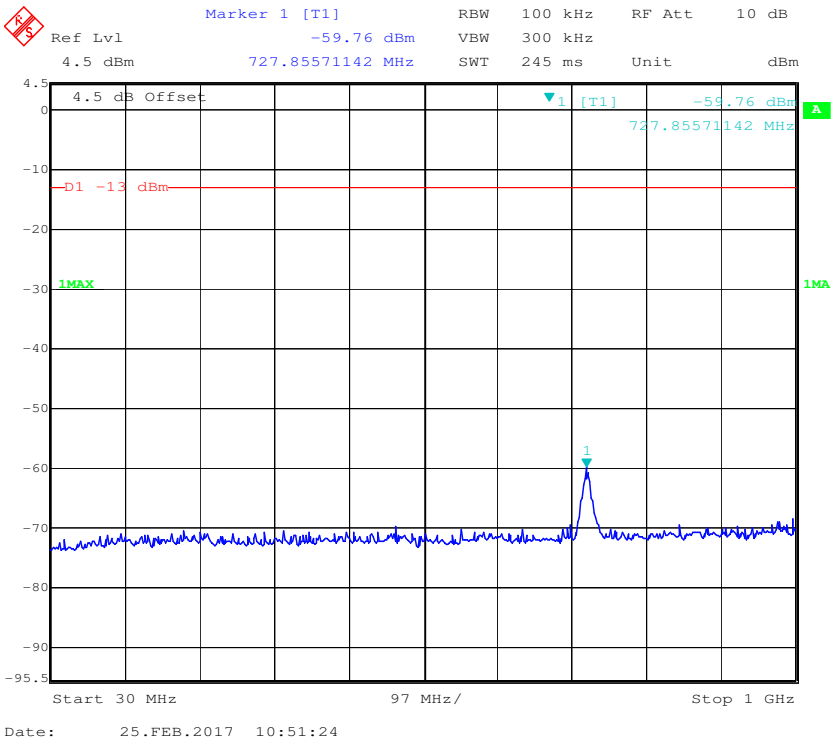

1 GHz – 2 GHz (15.0 MHz, Middle Channel)

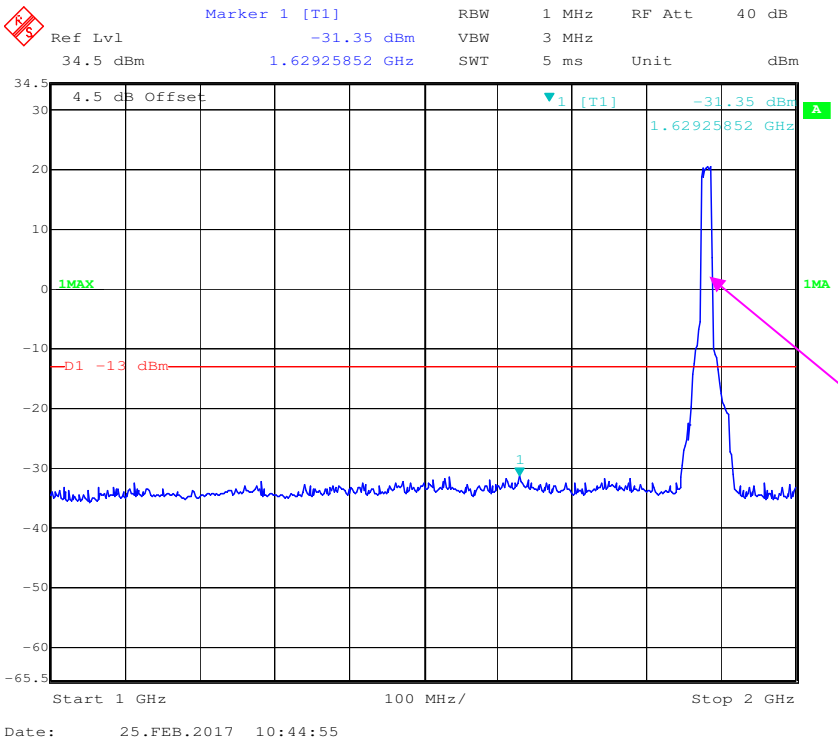

Fundamental test

2 GHz – 20 GHz (15.0 MHz, Middle Channel)

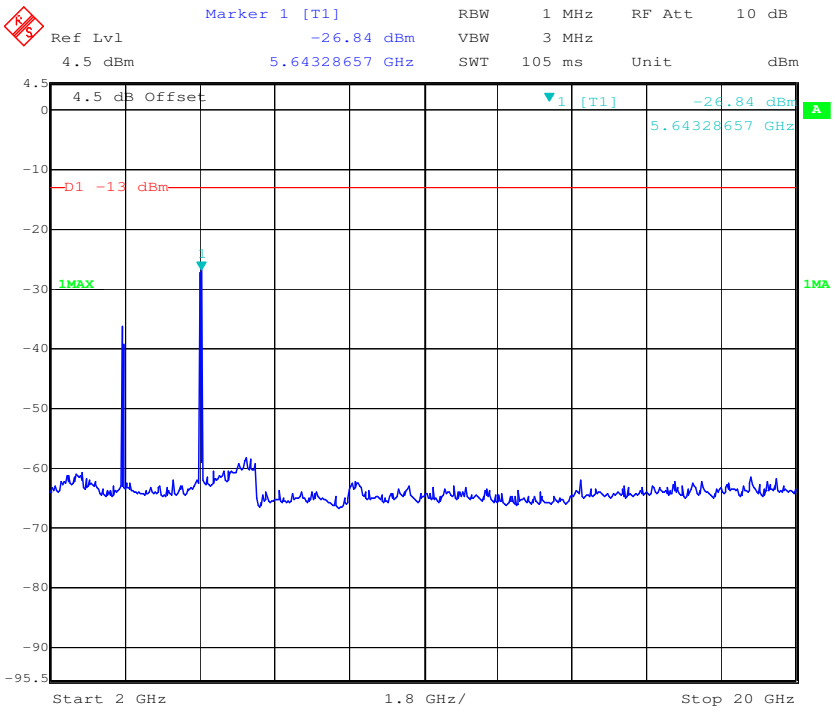

30 MHz - 1 GHz (20.0 MHz, Middle Channel)

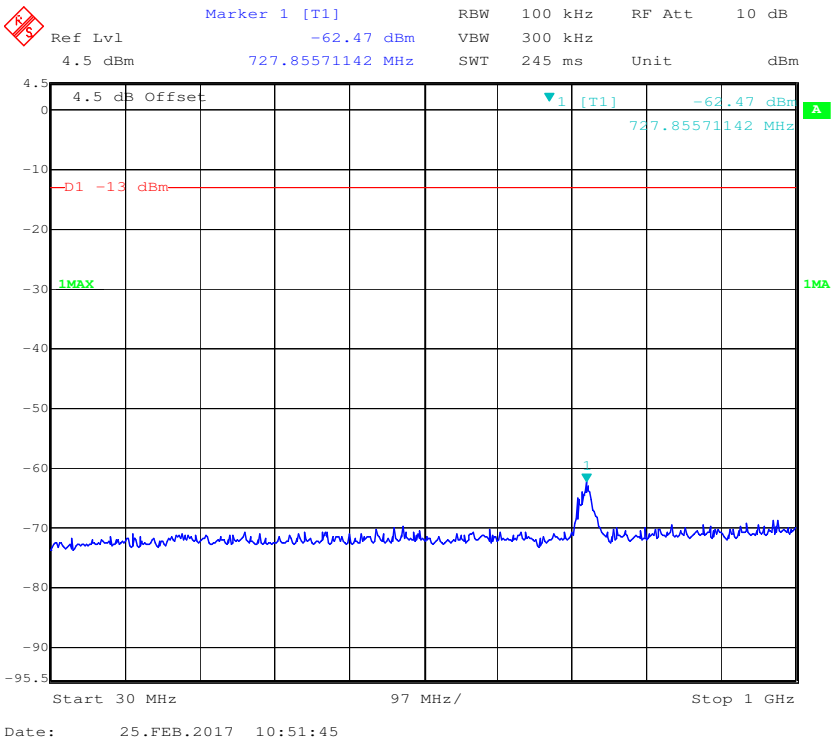

1 GHz – 2 GHz (20.0 MHz, Middle Channel)

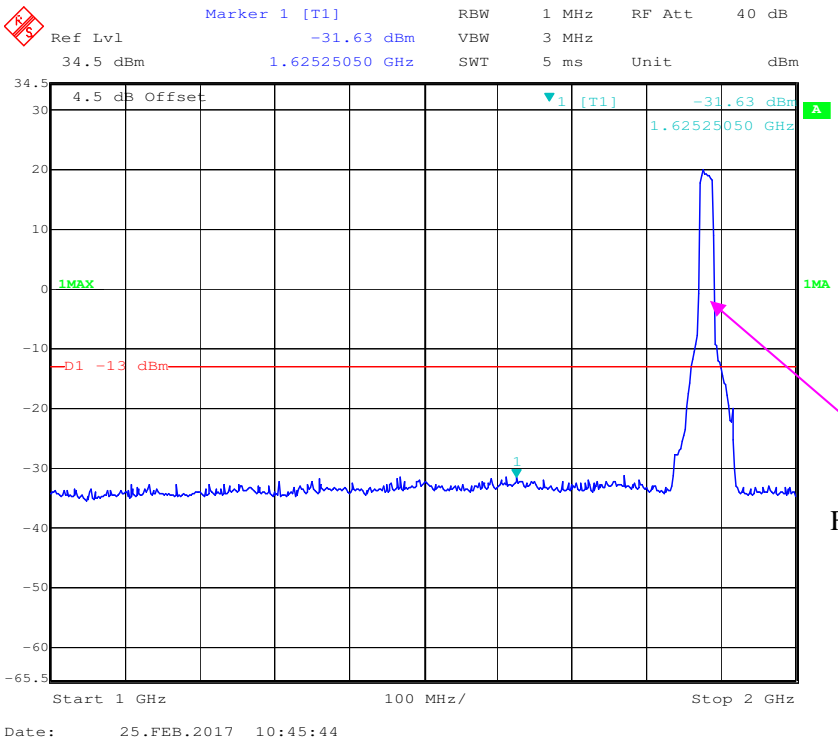

Fundamental test

2 GHz –20 GHz (20.0 MHz, Middle Channel)

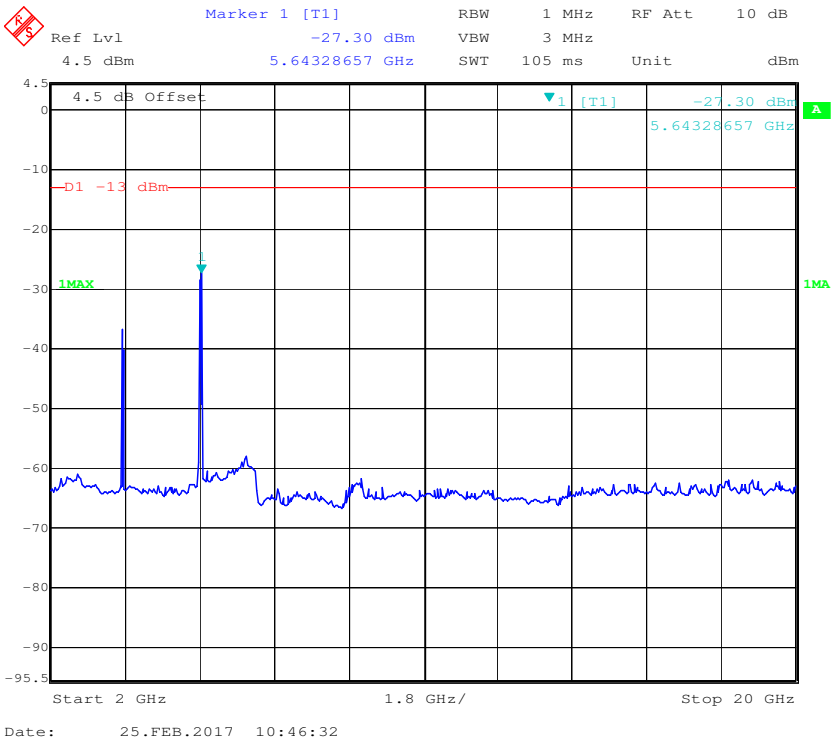

LTE Band 4:

30 MHz - 1 GHz (1.4 MHz, Middle Channel)

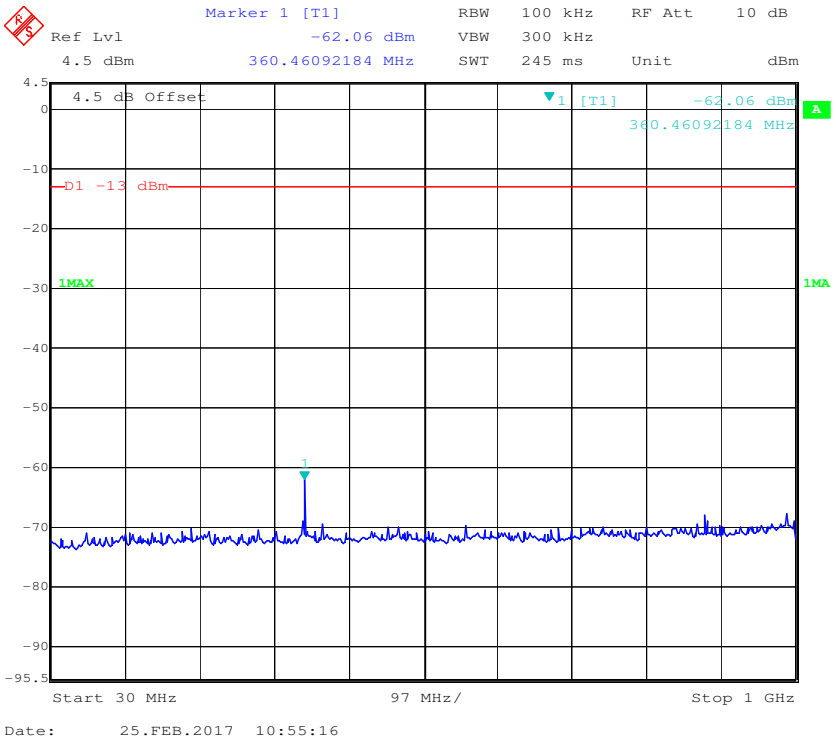

1 GHz – 2 GHz (1.4 MHz, Middle Channel)

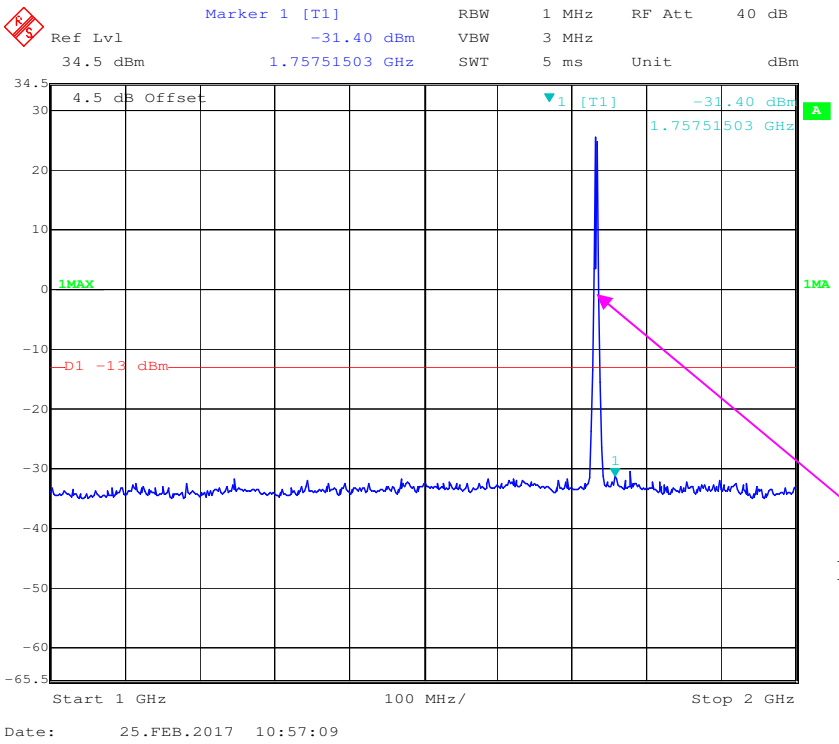

Fundamental test

2 GHz – 20 GHz (1.4 MHz, Middle Channel)

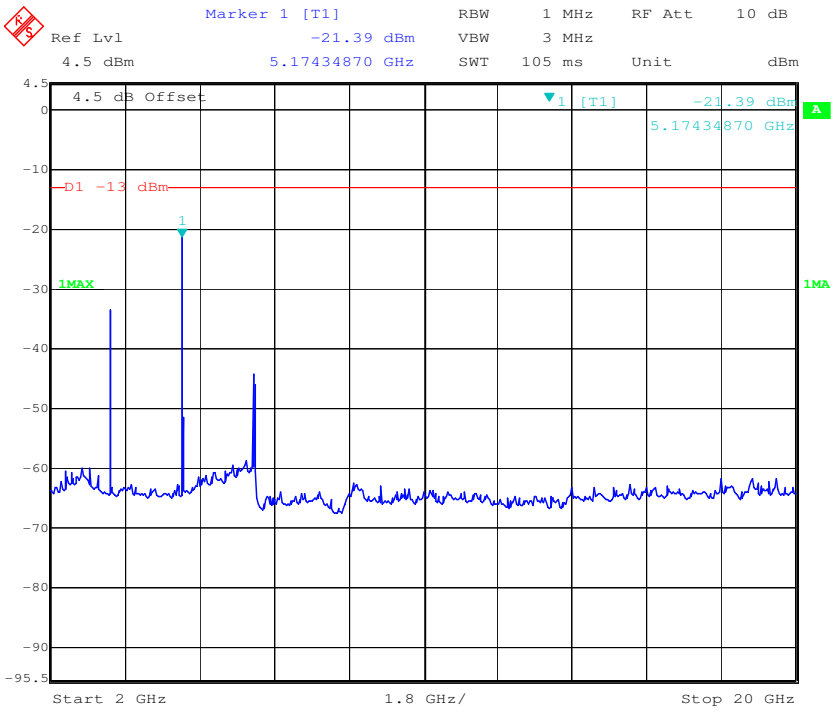

30 MHz - 1 GHz (3.0 MHz, Middle Channel)

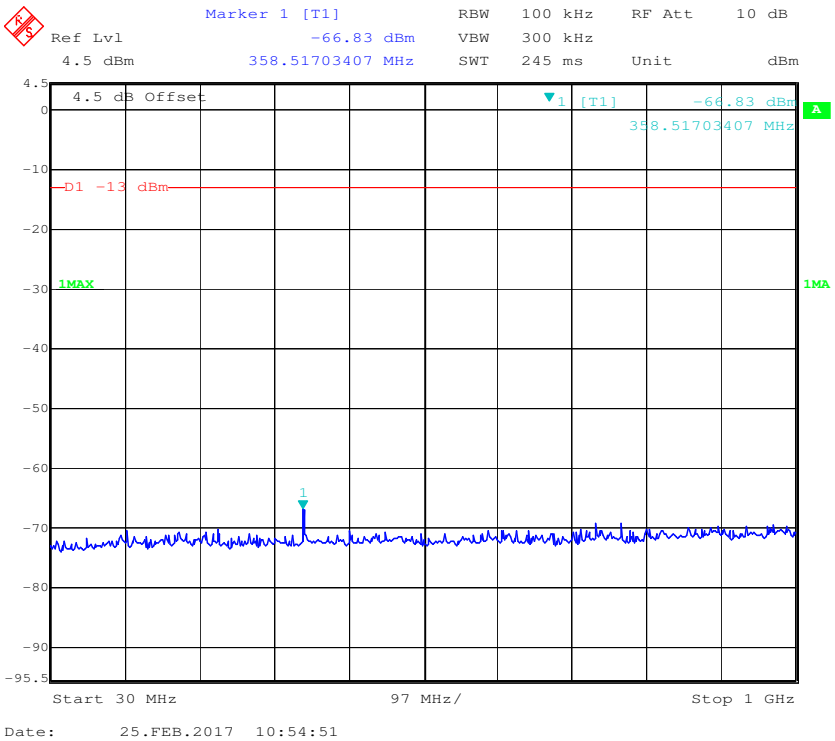

1 GHz – 2 GHz (3.0 MHz, Middle Channel)

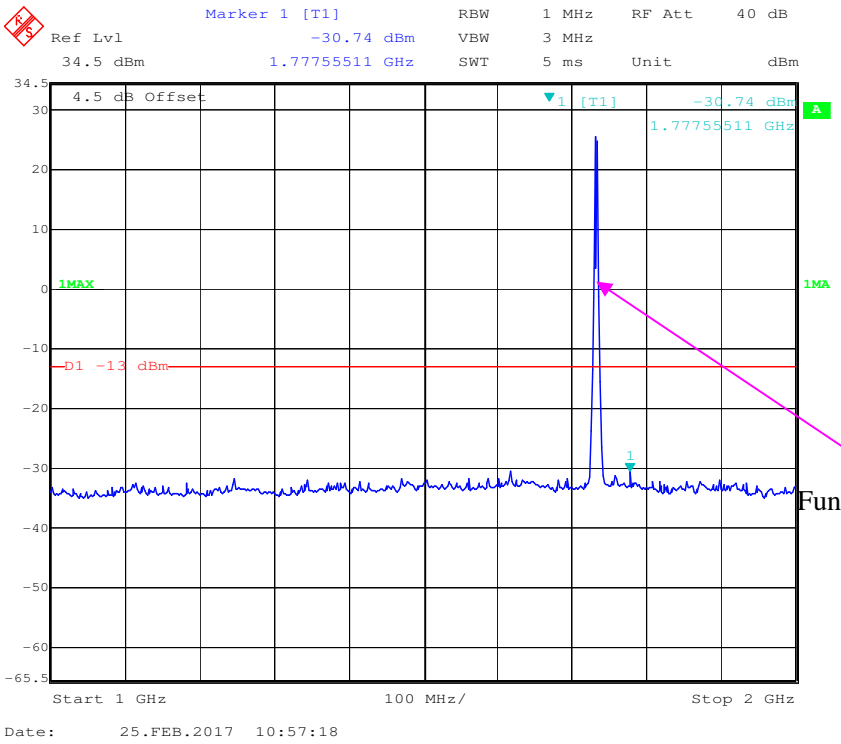

Fundamental test

2 GHz – 20 GHz (3.0 MHz, Middle Channel)

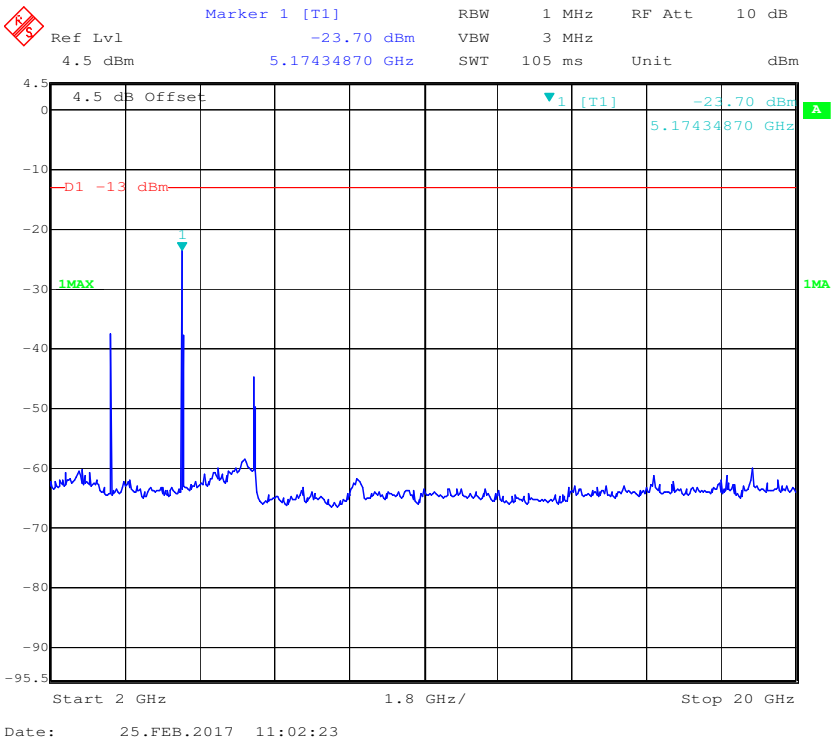

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

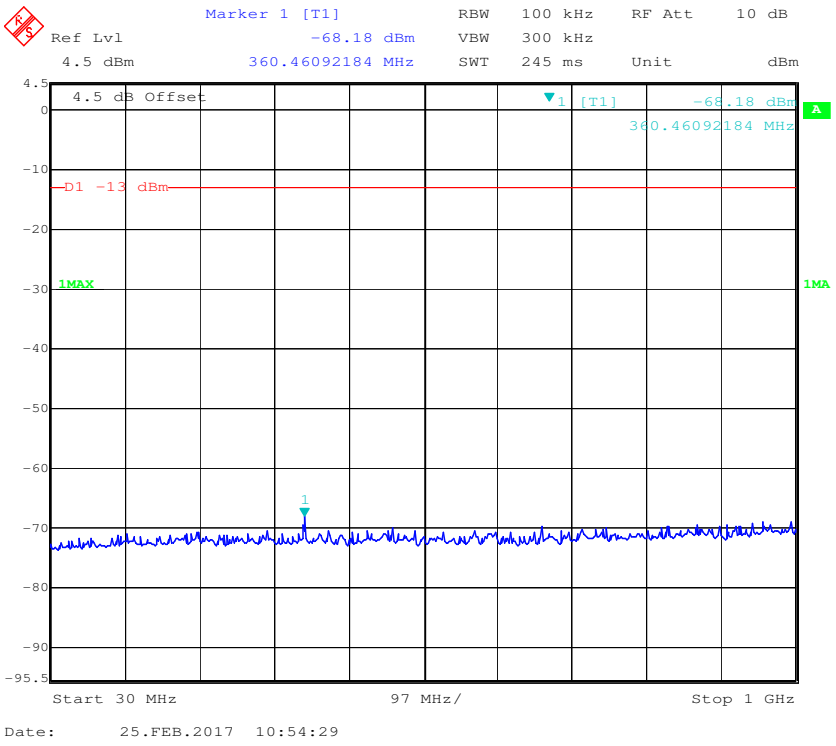

1 GHz – 2 GHz (5.0 MHz, Middle Channel)

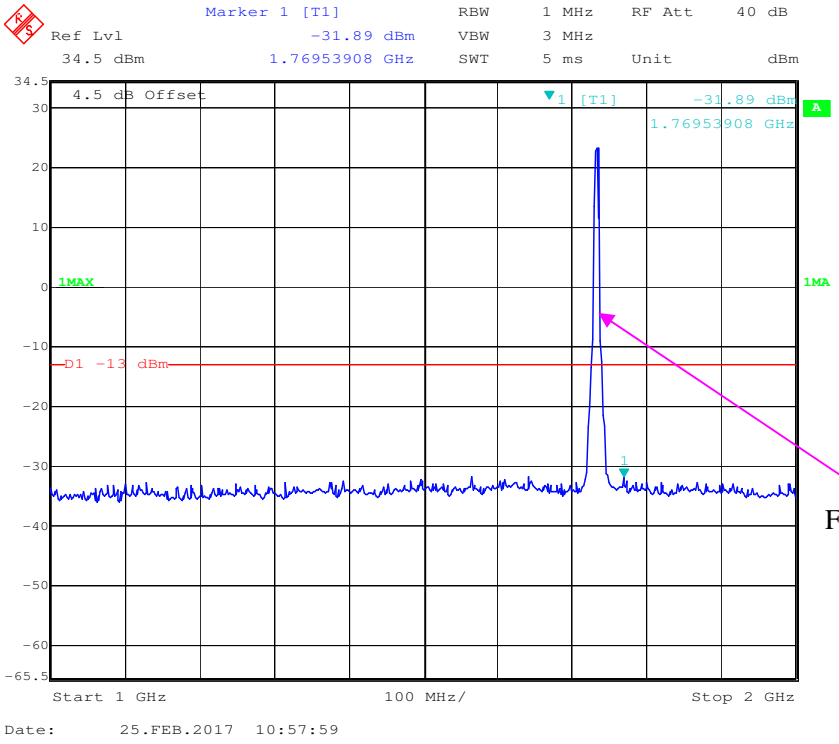

Fundamental test

2 GHz – 20 GHz (5.0 MHz, Middle Channel)

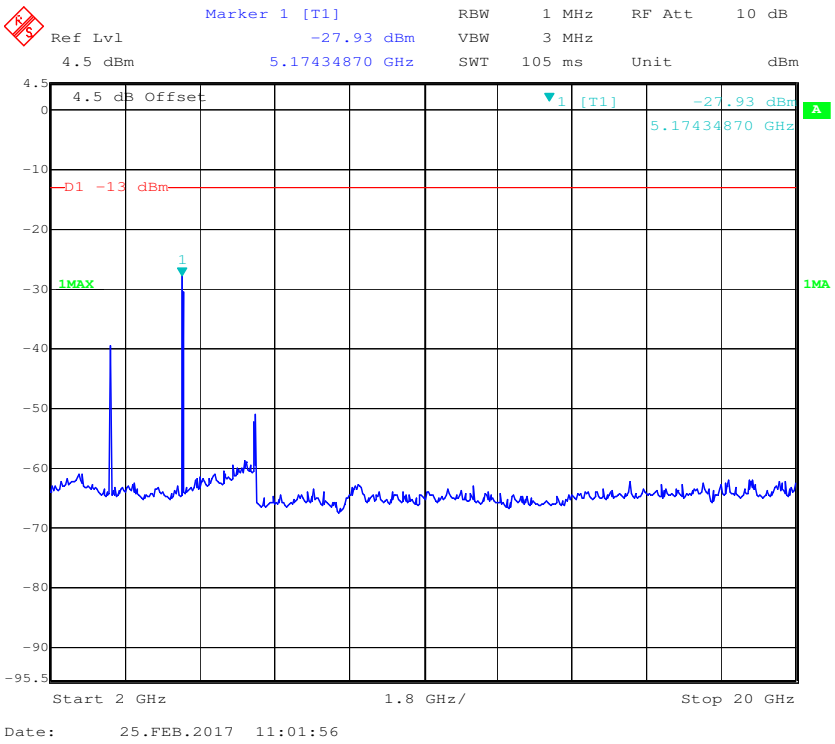

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

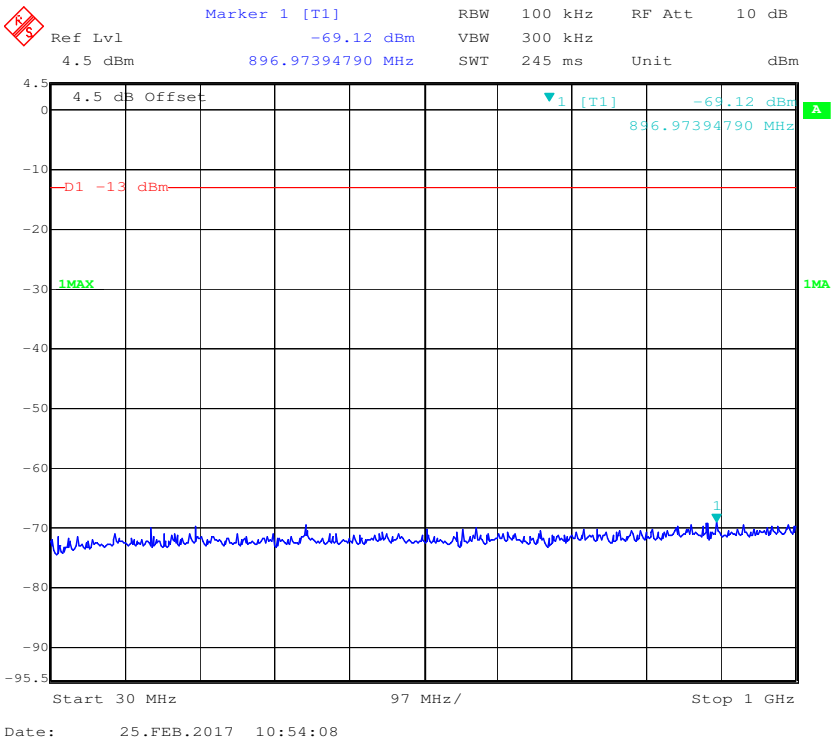

1 GHz – 2 GHz (10.0 MHz, Middle Channel)

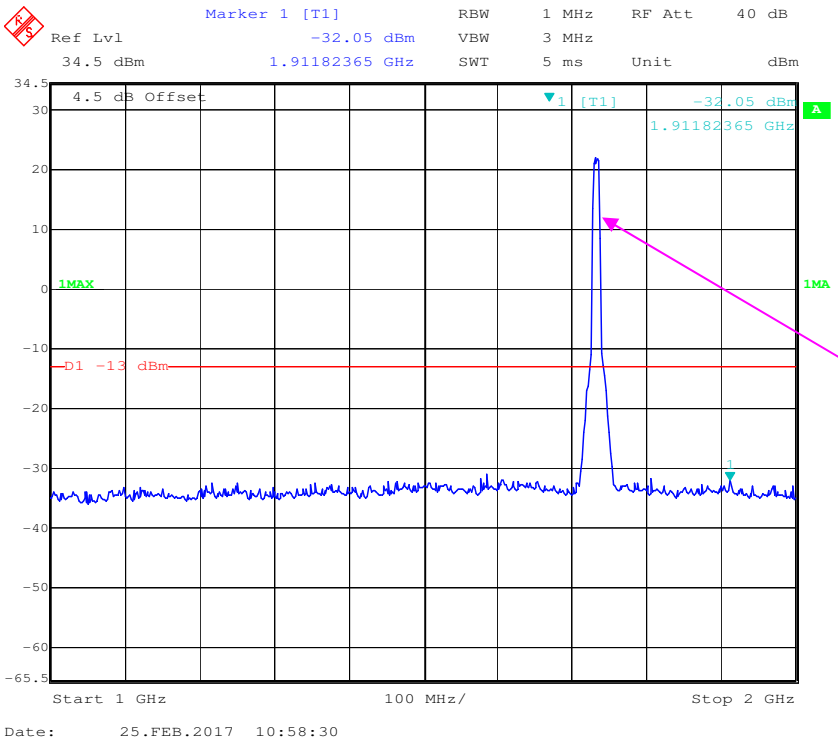

Fundamental test

2 GHz – 20 GHz (10.0 MHz, Middle Channel)

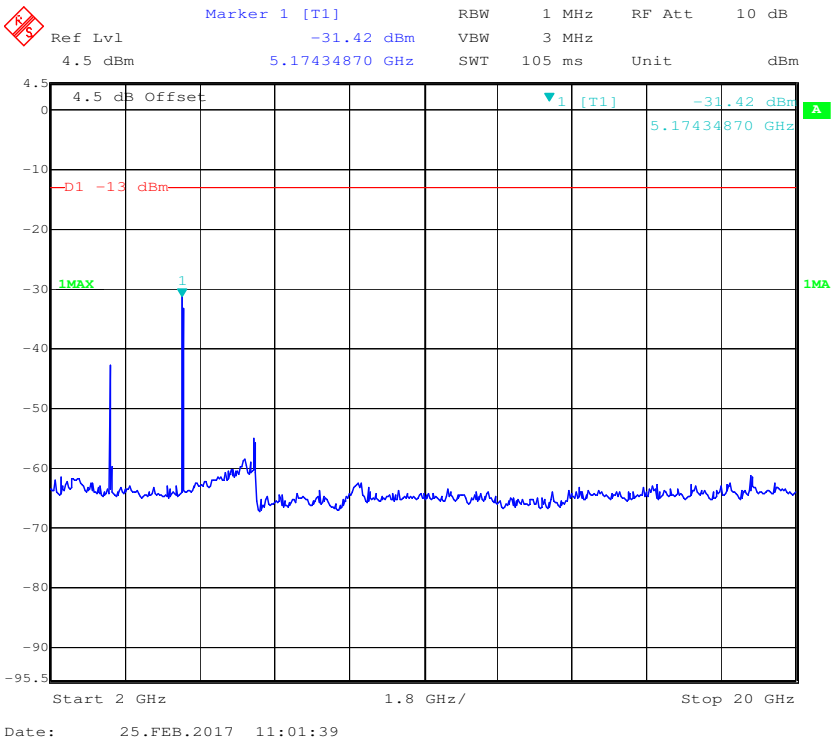

30 MHz - 1 GHz (15.0 MHz, Middle Channel)

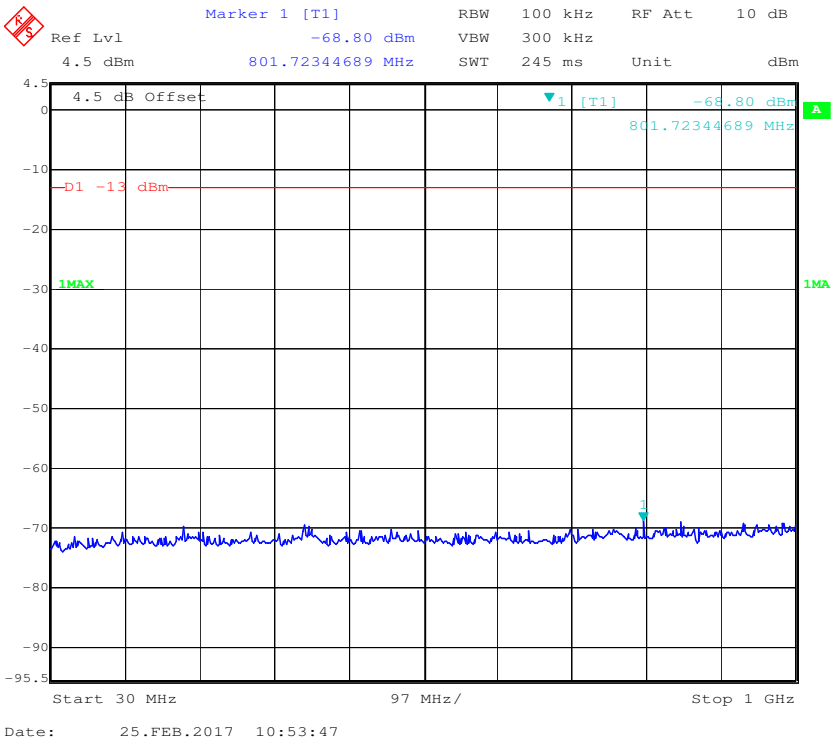

1 GHz – 2 GHz (15.0 MHz, Middle Channel)

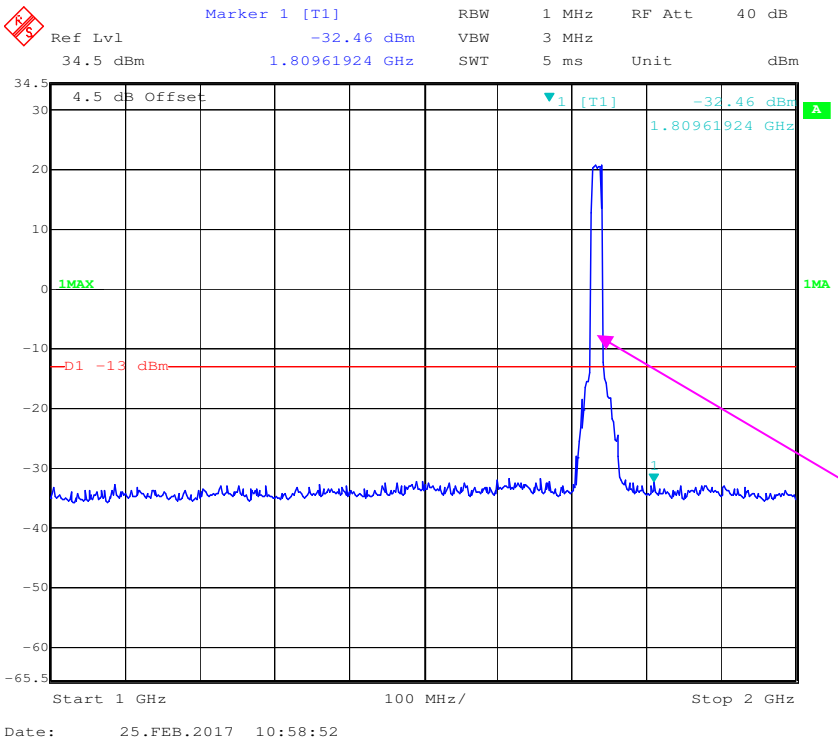

Fundamental test

2 GHz – 20 GHz (15.0 MHz, Middle Channel)

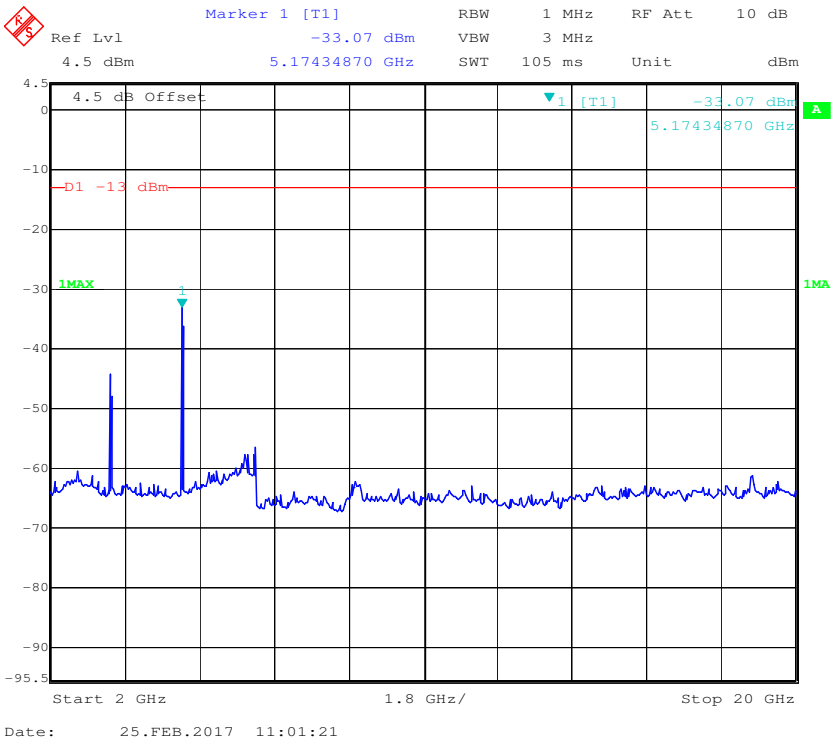

30 MHz - 1 GHz (20.0 MHz, Middle Channel)

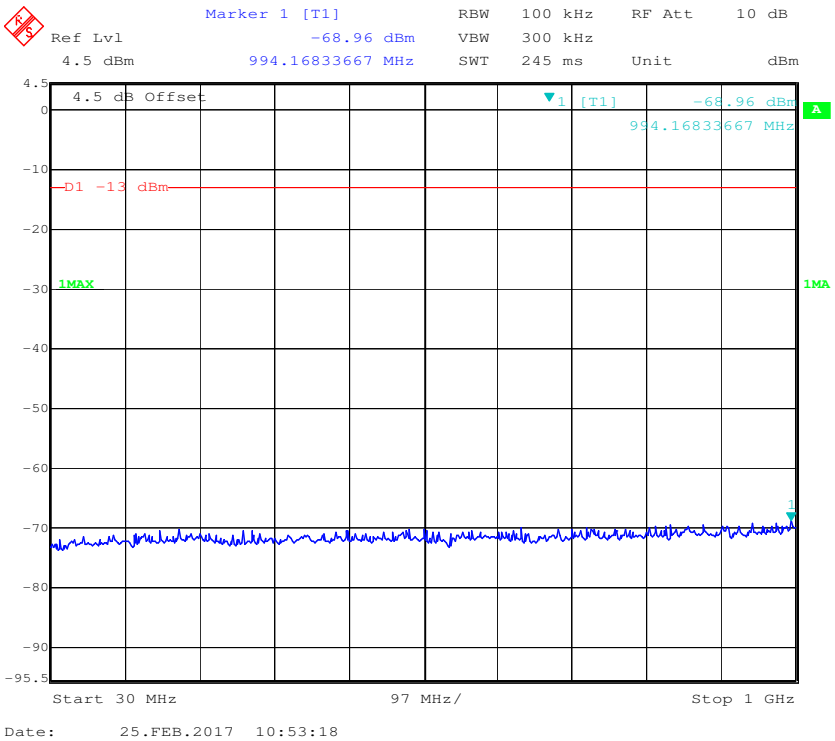

1 GHz – 2 GHz (20.0 MHz, Middle Channel)

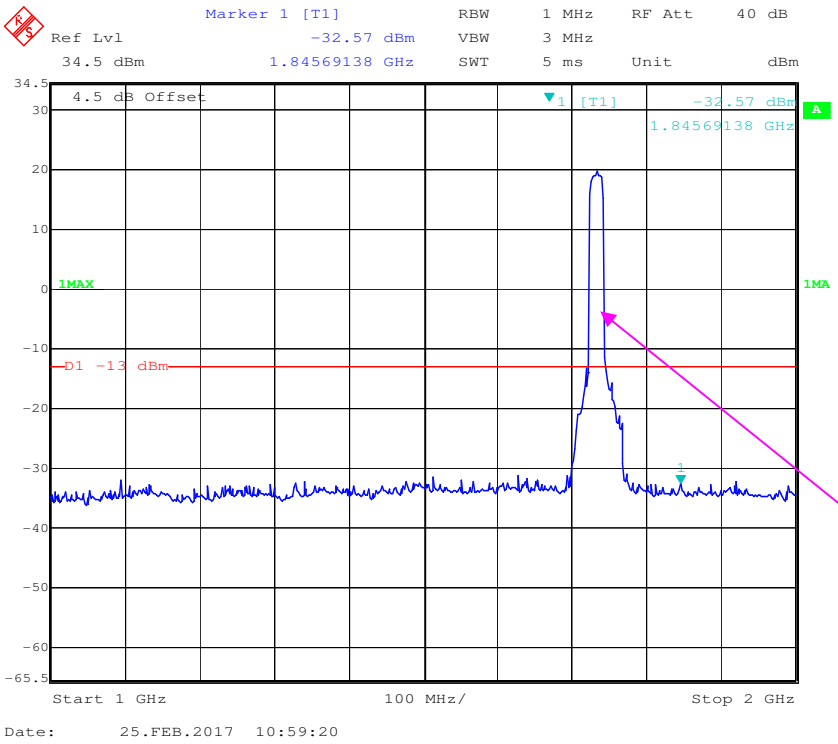

Fundamental test

2 GHz – 20 GHz (20.0 MHz, Middle Channel)

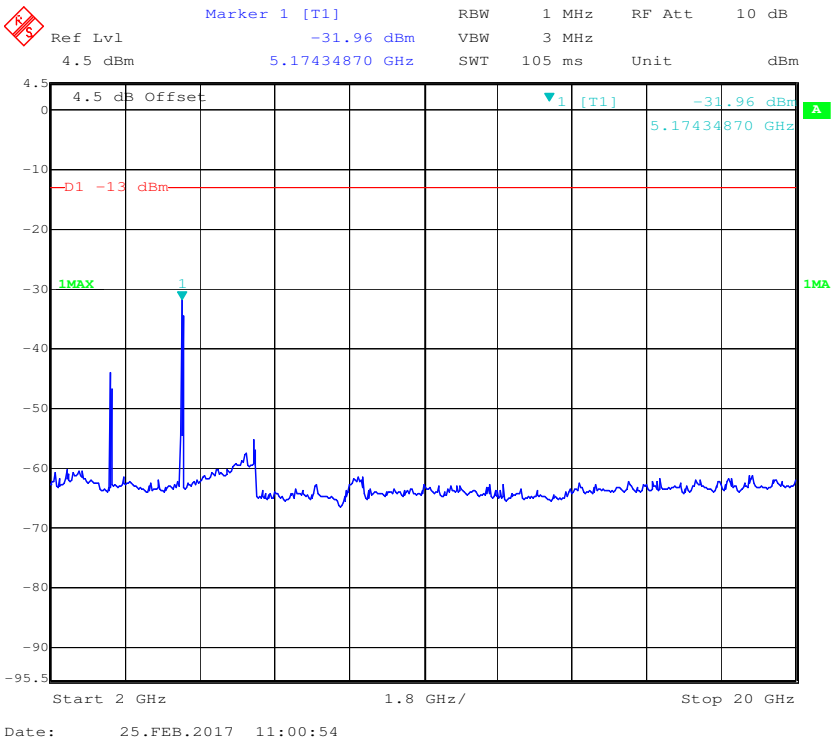

LTE Band 5:

30 MHz - 1 GHz (1.4 MHz, Middle Channel)

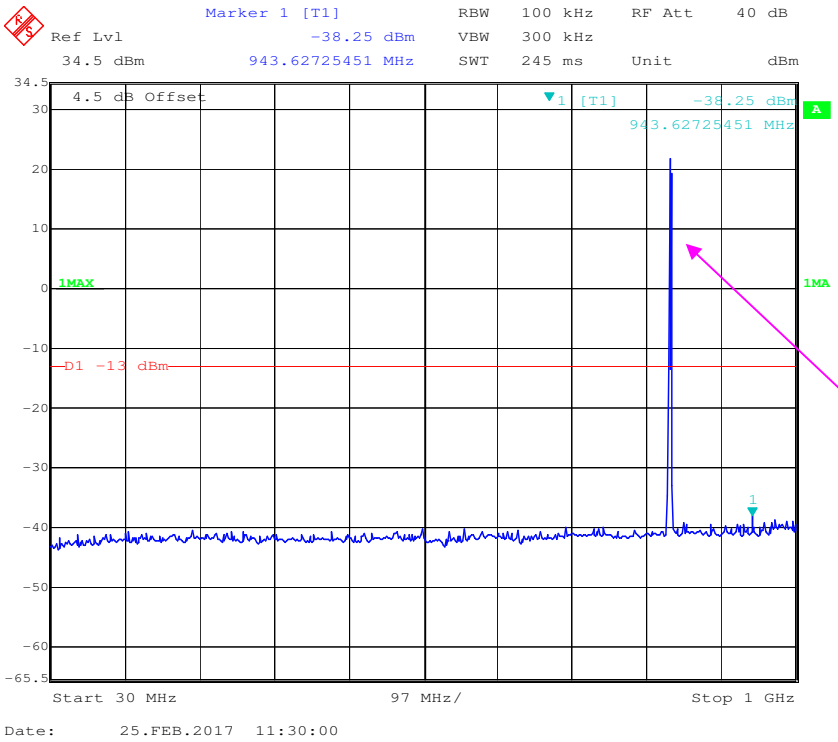

Fundamental test

1 GHz – 9 GHz (1.4 MHz, Middle Channel)

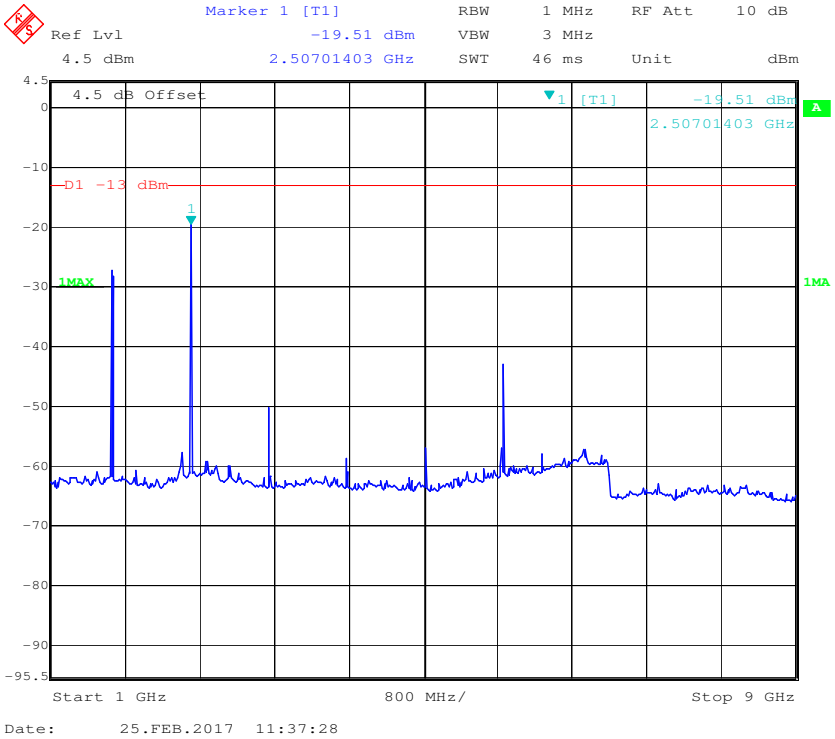

30 MHz - 1 GHz (3.0 MHz, Middle Channel)

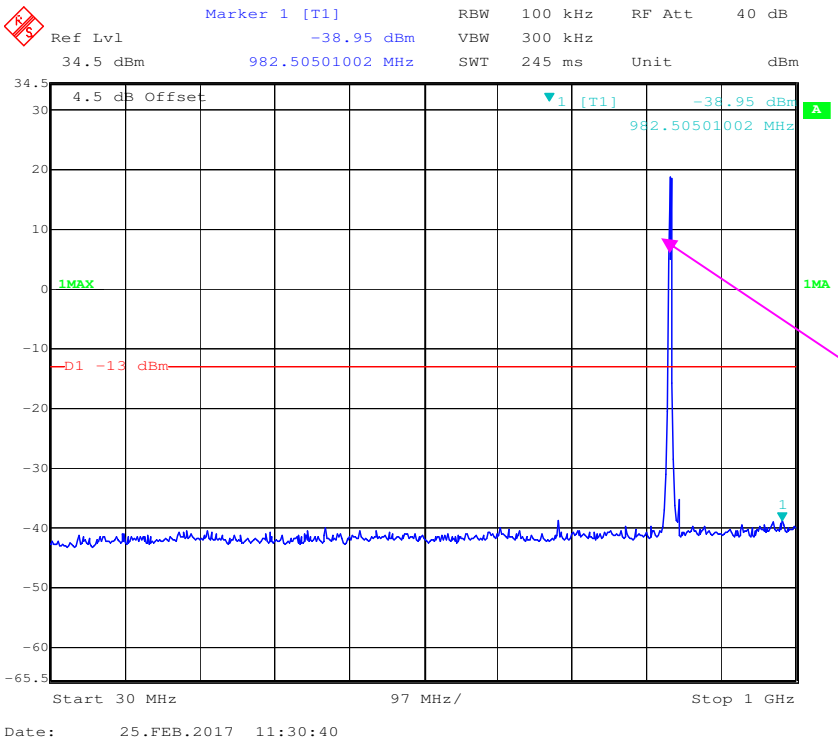

Fundamental test

1 GHz – 9 GHz (3.0 MHz, Middle Channel)

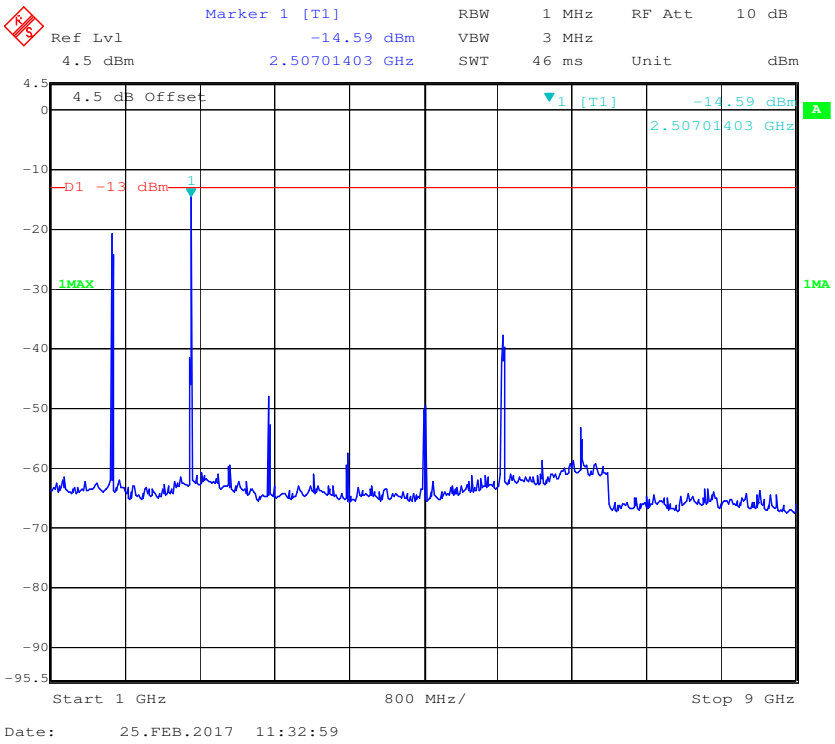

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

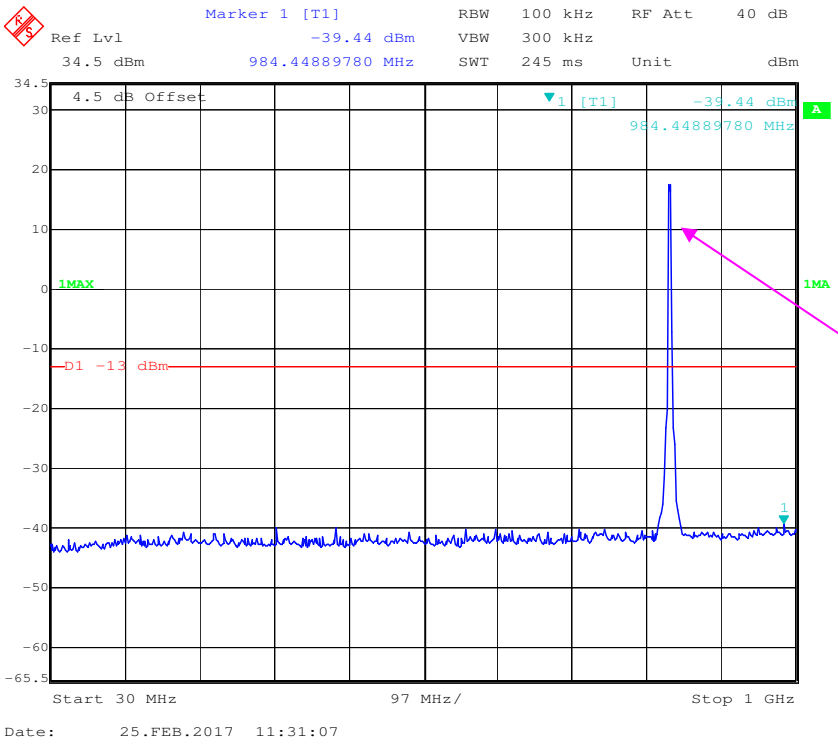

Fundamental test

1 GHz – 9 GHz (5.0 MHz, Middle Channel)

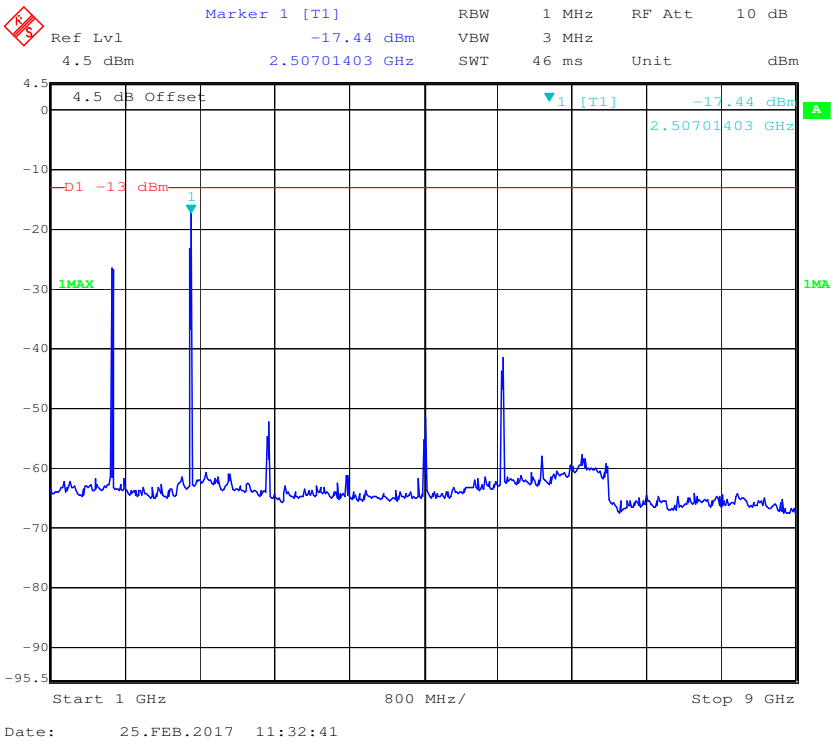

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

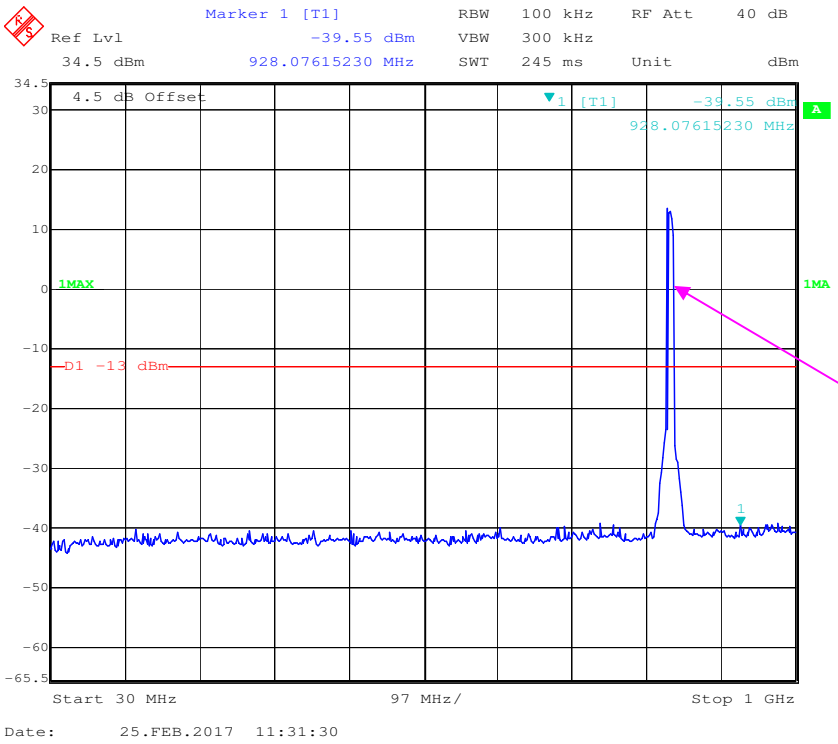

Fundamental test

1 GHz – 9 GHz (10.0 MHz, Middle Channel)

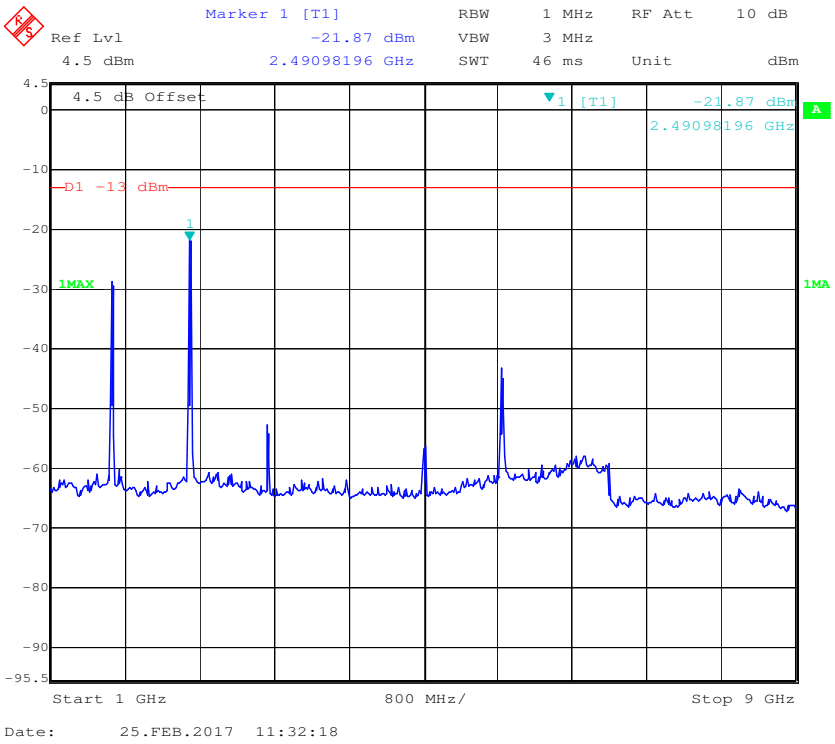

LTE Band 7:

30 MHz – 1 GHz (5.0 MHz, Middle Channel)

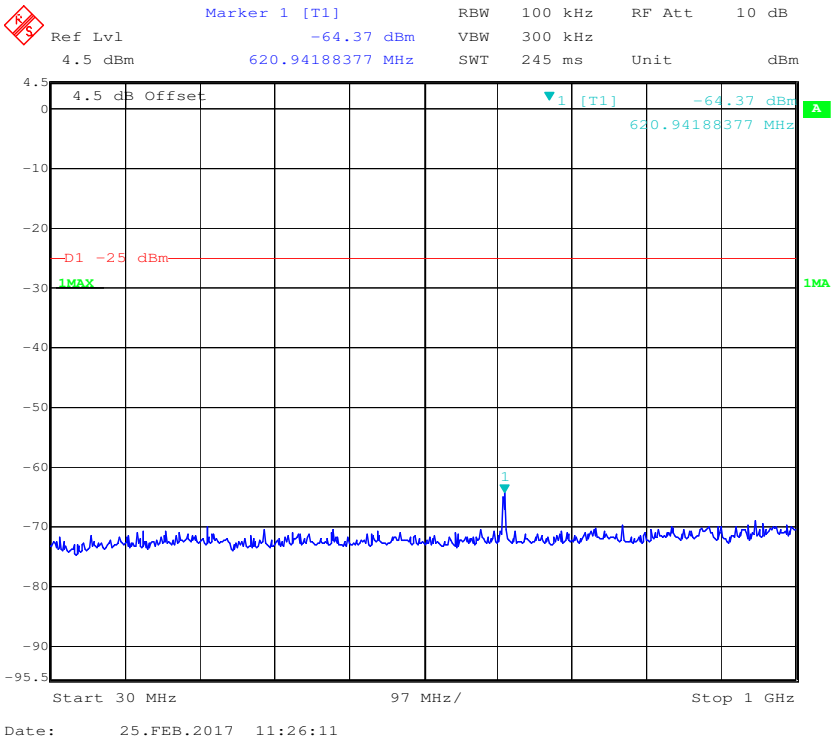

1 GHz – 3.0 GHz (5.0 MHz, Middle Channel)

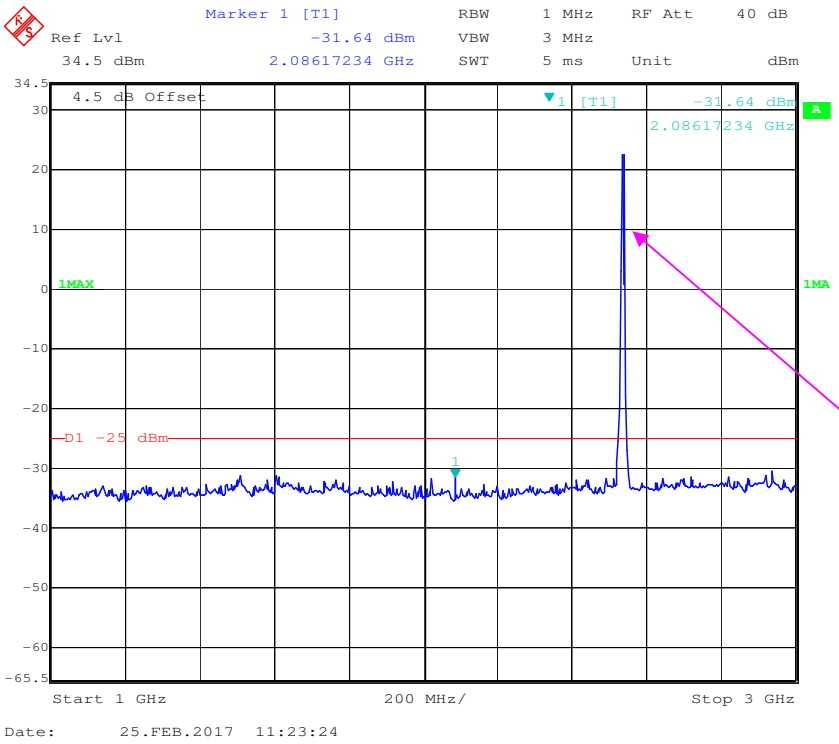

Fundamental test

3.0 GHz – 26 GHz (5.0 MHz, Middle Channel)

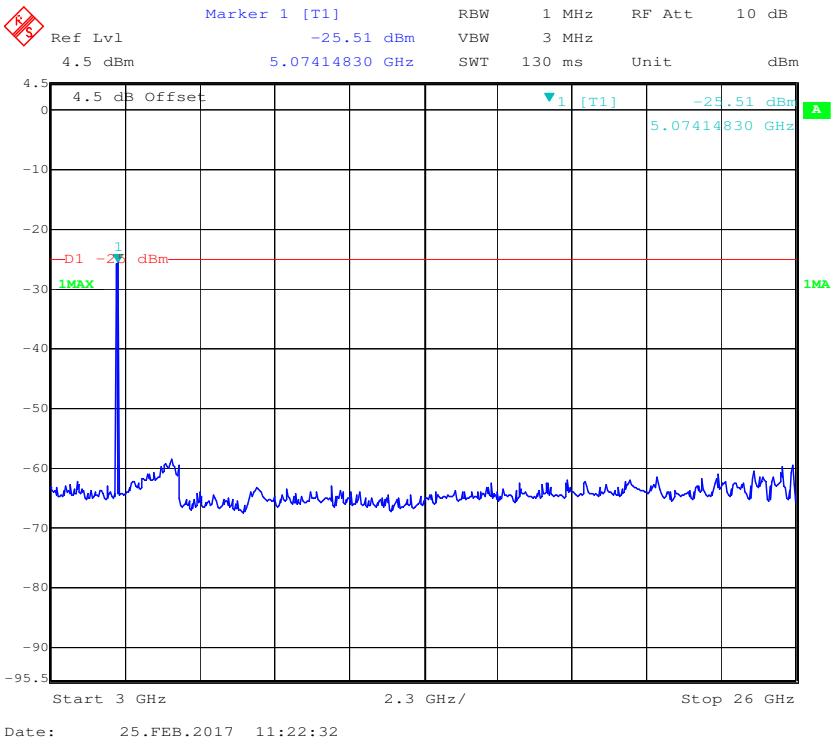

30 MHz – 1.0 GHz (10.0 MHz, Middle Channel)

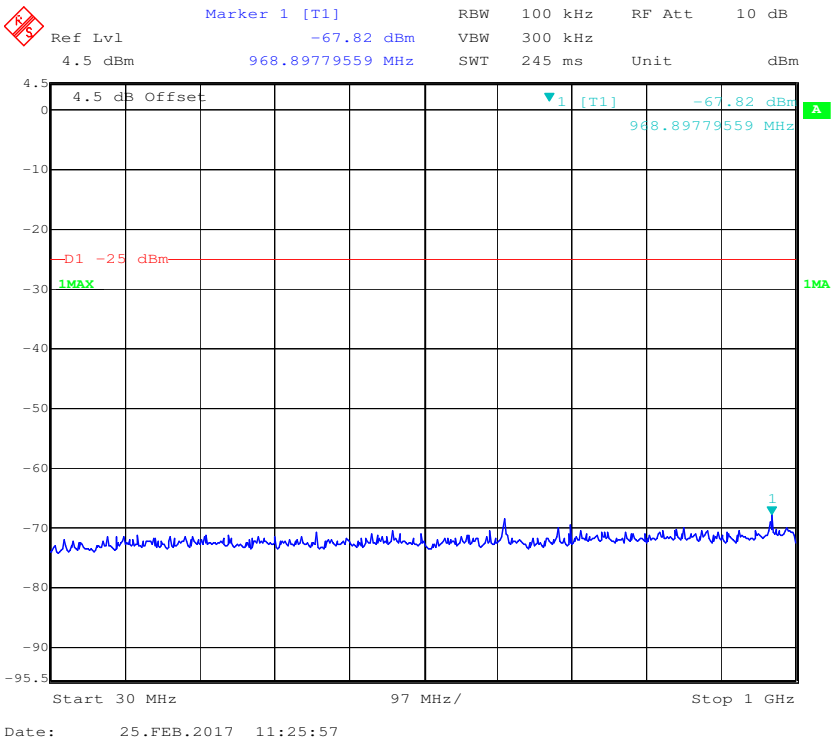

1 GHz – 3 GHz (10.0 MHz, Middle Channel)

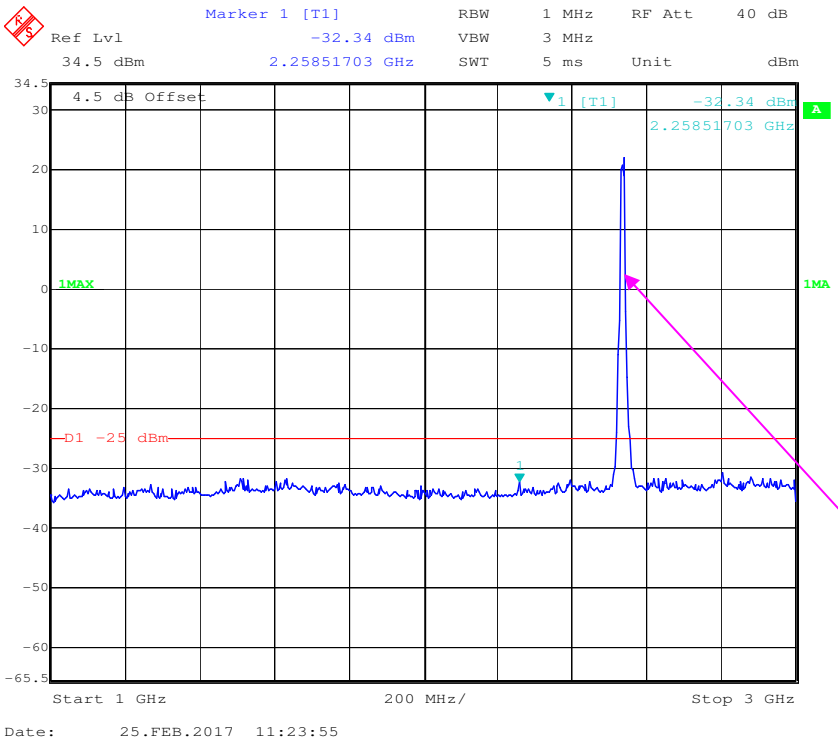

Fundamental test

3 GHz – 26 GHz (10.0 MHz, Middle Channel)

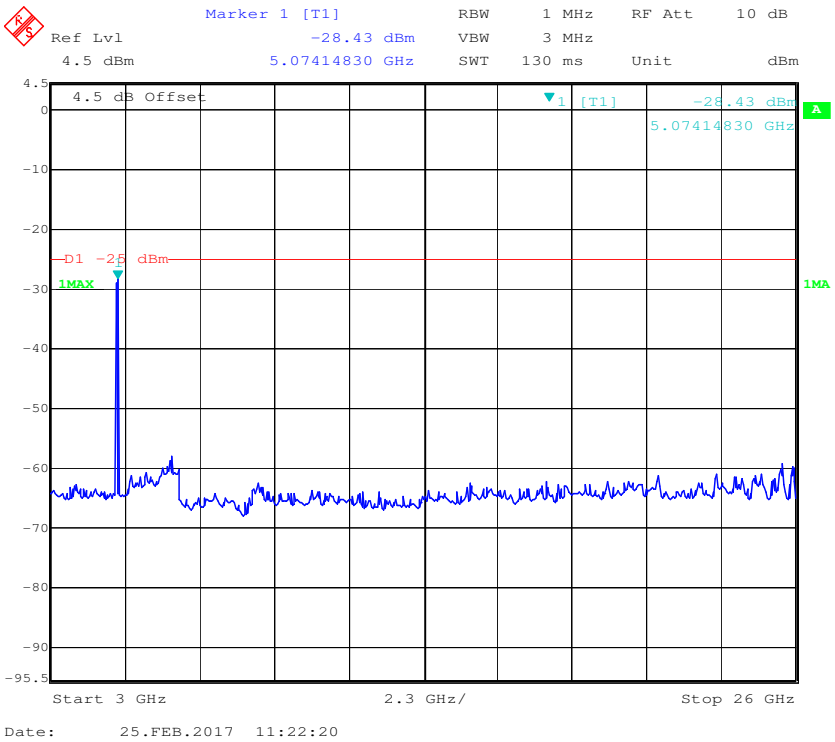

30 MHz – 1 GHz (15.0 MHz, Middle Channel)

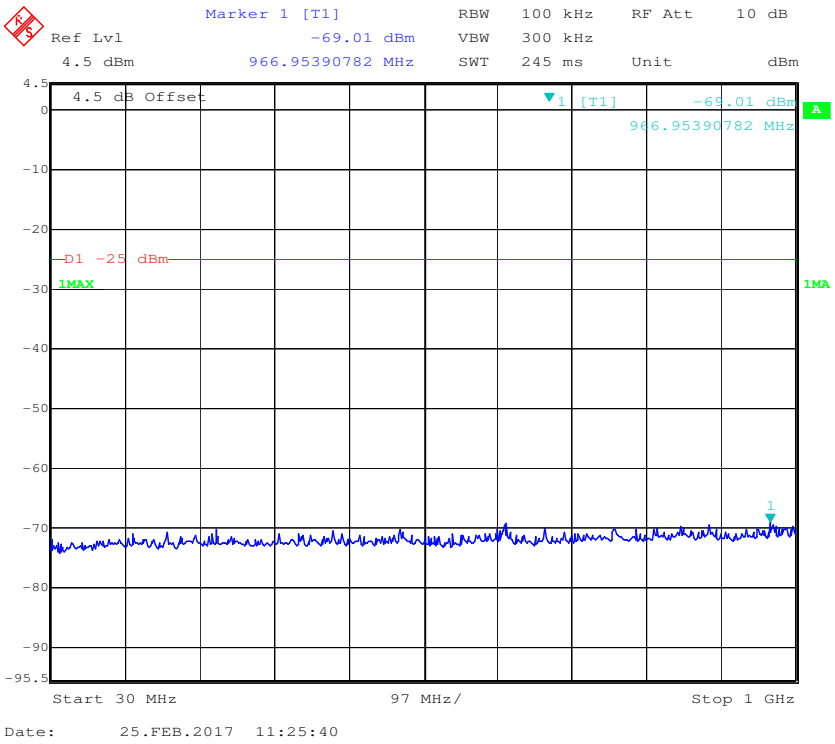

1 GHz – 3 GHz (15.0 MHz, Middle Channel)

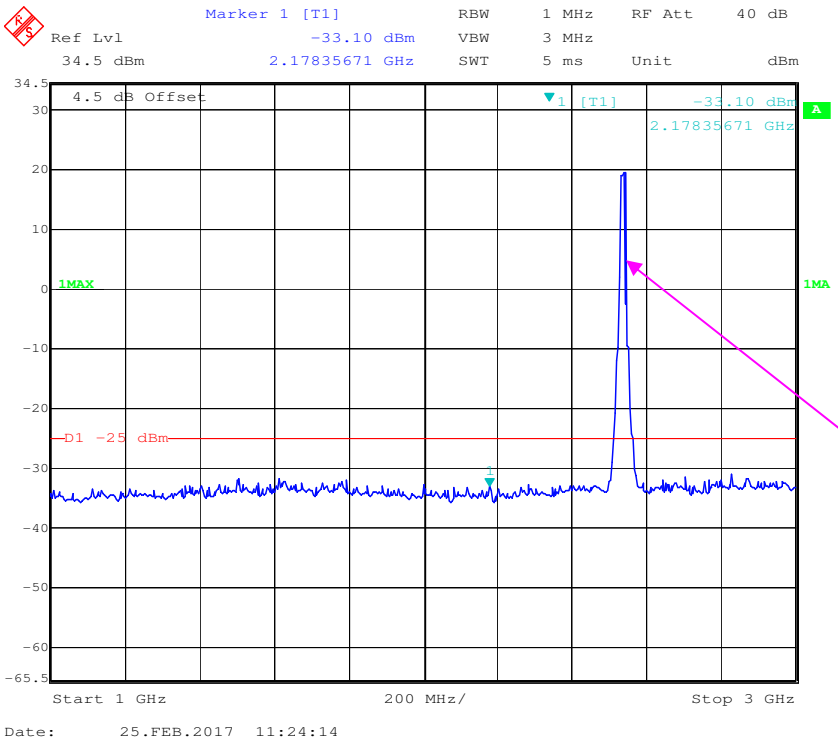

Fundamental test

3 GHz – 26 GHz (15.0 MHz, Middle Channel)

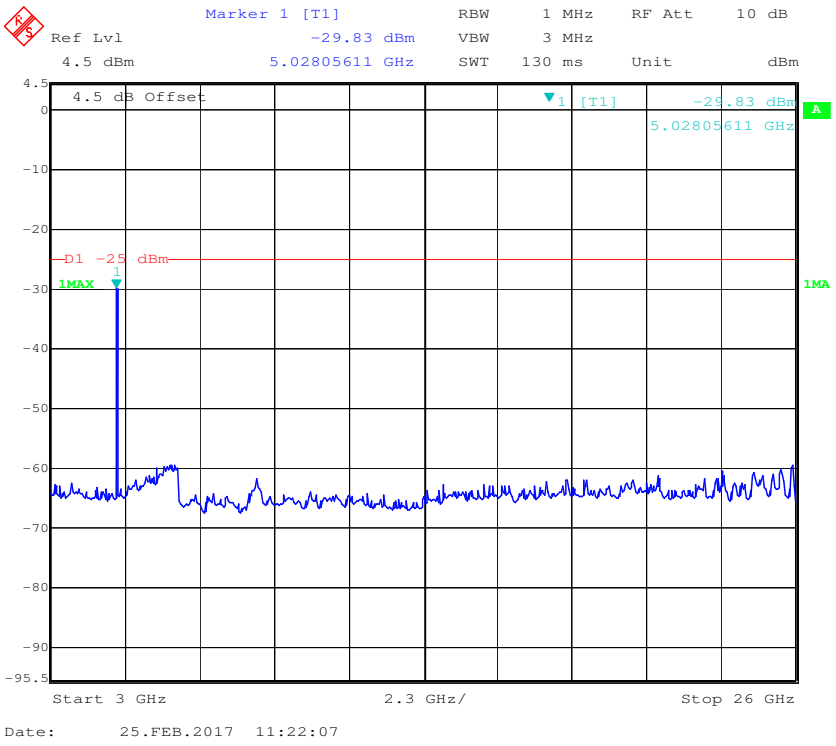

30 MHz – 1 GHz (20.0 MHz, Middle Channel)

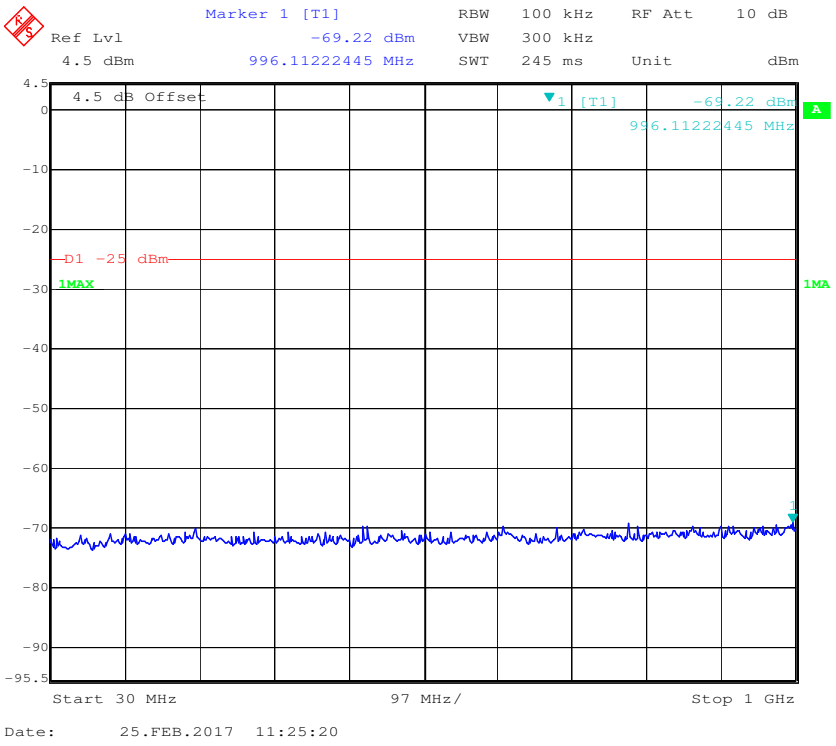

1 GHz – 3 GHz (20.0 MHz, Middle Channel)

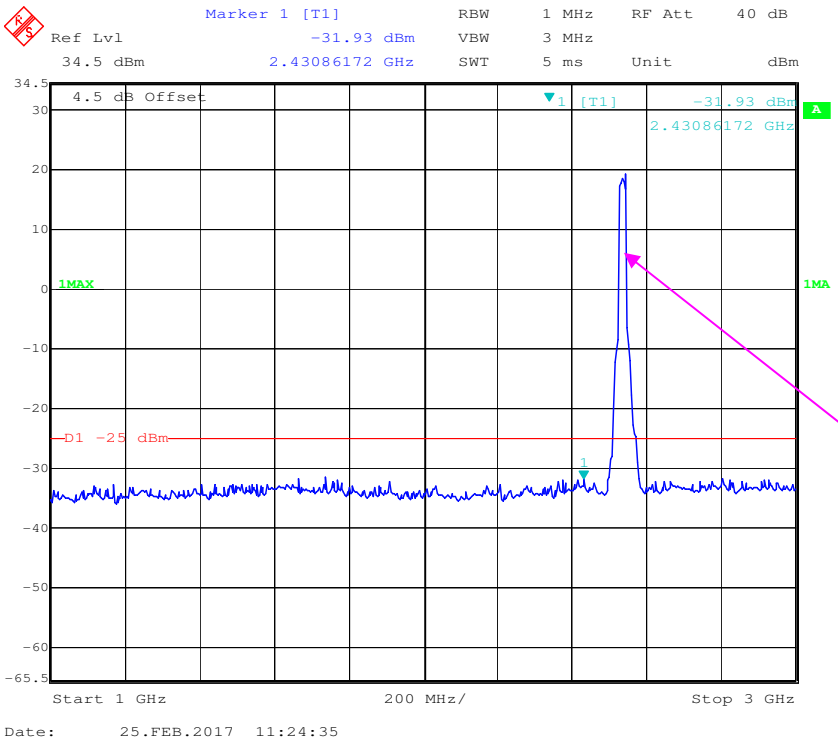

Fundamental test

3 GHz – 26 GHz (20.0 MHz, Middle Channel)

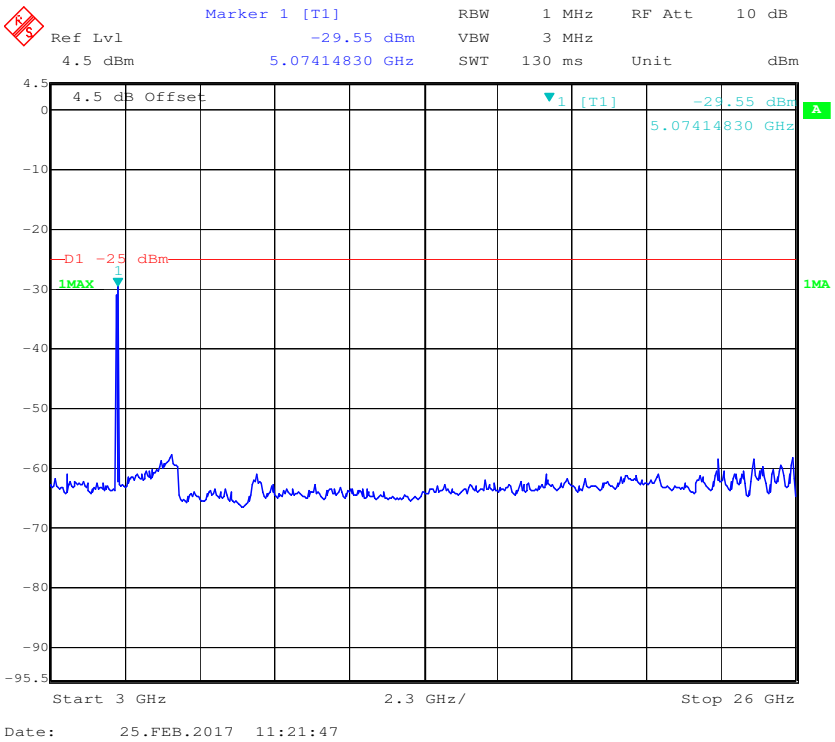

LTE Band 17:

30 MHz - 1 GHz (5.0 MHz, Middle Channel)

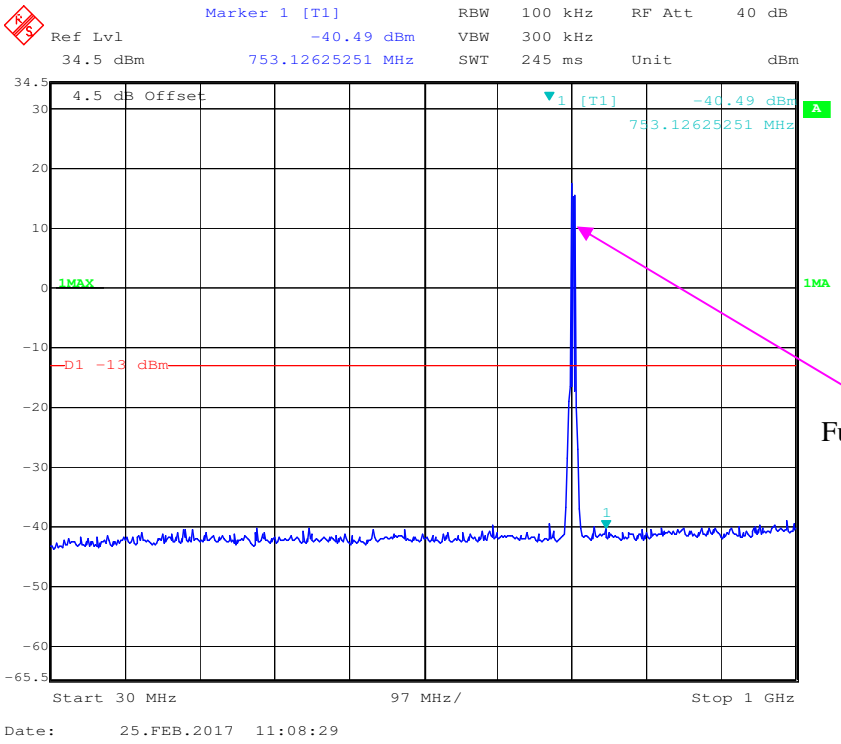

Fundamental test

1 GHz – 8 GHz (5.0 MHz, Middle Channel)

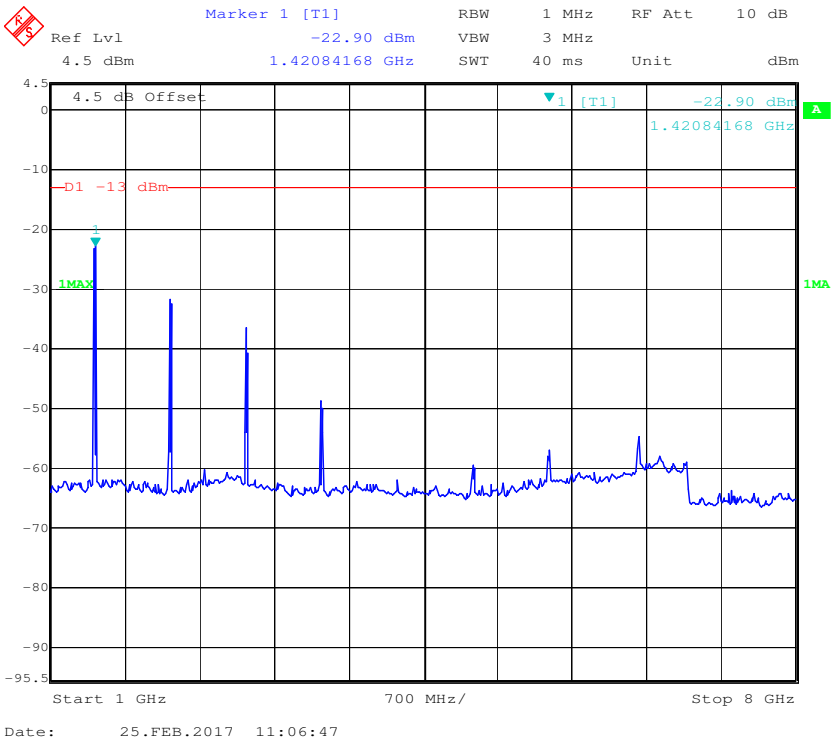

30 MHz - 1 GHz (10.0 MHz, Middle Channel)

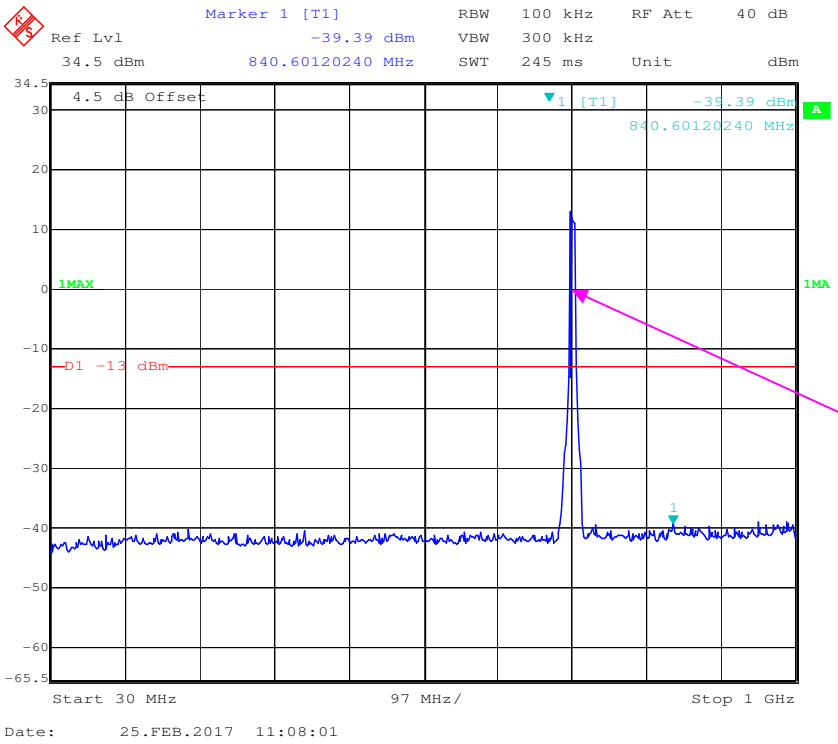

Fundamental test

1 GHz – 8 GHz (10.0 MHz, Middle Channel)

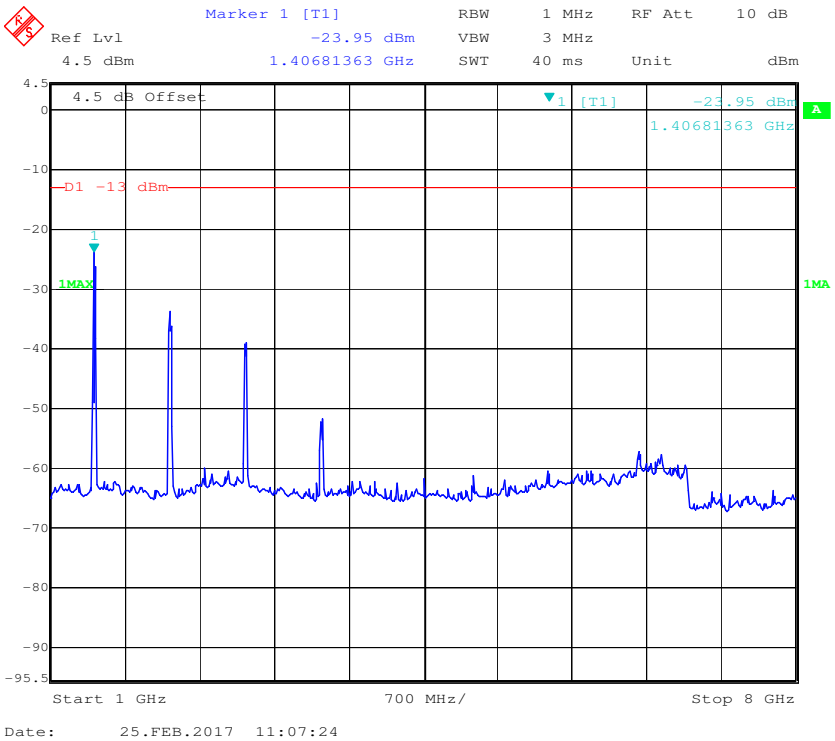

FCC § 2.1053; § 22.917 (a);§ 24.238 (a); §27.53 (h)(m) SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917(a) and § 24.238(a) and § 27.53(h)(m)

For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TX pwr in Watts/0.001) – the absolute level

Spurious attenuation limit in dB = 43 + 10 Log_{10} (power out in Watts)

Spurious attenuation limit in dB = 55 + 10 Log_{10} (power out in Watts)

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Echo Wu on 2017-02-18.

EUT operation mode: transmitting

Pre-scan with Low, Middle and High channel, the worst case as below:

30 MHz ~ 10 GHz:

Cellular Band (Part 22H)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
GSM Mode, Middle channel										
399.88	60.55	350	2.0	H	-42.1	0.23	4.65	-37.68	-13	24.68
399.88	64.69	291	1.9	V	-41.1	0.23	4.65	-36.68	-13	23.68
1673.20	61.90	6	1.8	H	-39.9	0.40	8.52	-31.78	-13	18.78
1673.20	63.17	227	1.2	V	-40.6	0.40	8.52	-32.48	-13	19.48
WCDMA Mode, Middle channel										
399.88	64.56	154	1.6	H	-38.1	0.23	4.65	-33.68	-13	20.68
399.88	66.90	219	1.0	V	-38.9	0.23	4.65	-34.48	-13	21.48
1673.20	50.00	71	1.9	H	-51.8	0.40	8.52	-43.68	-13	30.68
1673.20	51.47	154	2.5	V	-52.3	0.40	8.52	-44.18	-13	31.18

30 MHz ~ 20 GHz:

PCS Band (Part 24E)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
GSM Mode, Middle channel										
399.88	61.66	299	1.7	H	-41.0	0.23	4.65	-36.58	-13	23.58
399.88	66.00	146	2.2	V	-39.8	0.23	4.65	-35.38	-13	22.38
3760.00	45.92	353	1.6	H	-50.1	0.59	9.72	-40.97	-13	27.97
3760.00	47.81	233	1.8	V	-49.3	0.59	9.72	-40.17	-13	27.17
WCDMA Mode, Middle channel										
399.88	63.66	111	1.5	H	-39.0	0.23	4.65	-34.58	-13	21.58
399.88	65.60	333	2.2	V	-40.2	0.23	4.65	-35.78	-13	22.78
3760.00	46.72	349	1.7	H	-49.3	0.59	9.72	-40.17	-13	27.17
3760.00	46.91	92	2.0	V	-50.2	0.59	9.72	-41.07	-13	28.07

30 MHz ~ 18 GHz:

AWS Band (Part 27)

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
WCDMA Mode										
399.88	65.46	344	1.4	H	-37.2	0.23	4.65	-32.78	-13	19.78
399.88	67.60	297	2.2	V	-38.2	0.23	4.65	-33.78	-13	20.78
3465.20	46.33	240	1.7	H	-50.7	0.54	9.90	-41.34	-13	28.34
3465.20	49.13	287	2.2	V	-49.2	0.54	9.90	-39.84	-13	26.84

LTE Band:

Test mode: Transmitting (Pre-scan with all the bandwidth, and worse case as below)

Frequency	Receiver	Turntable	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
(MHz)	Reading (dBμV)	Angle Degree	Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Band 2										
Test frequency range:30 MHz ~ 20 GHz										
399.88	62.46	229	1.7	H	-40.2	0.23	4.65	-35.78	-13	22.78
399.88	66.90	12	2.2	V	-38.9	0.23	4.65	-34.48	-13	21.48
3760.00	41.52	249	1.3	H	-54.5	0.59	9.72	-45.37	-13	32.37
3760.00	43.91	78	1.5	V	-53.2	0.59	9.72	-44.07	-13	31.07
Band 4										
Test frequency range:30 MHz ~ 20 GHz										
399.88	62.76	192	1.7	H	-39.9	0.23	4.65	-35.48	-13	22.48
399.88	67.20	274	1.3	V	-38.6	0.23	4.65	-34.18	-13	21.18
3465.00	43.13	61	1.5	H	-53.9	0.54	9.90	-44.54	-13	31.54
3465.00	46.43	231	1.5	V	-51.9	0.54	9.90	-42.54	-13	29.54
Band 5										
Test frequency range:30 MHz ~ 10 GHz										
399.88	62.56	261	2.0	H	-40.1	0.23	4.65	-35.68	-13	22.68
399.88	67.10	221	2.1	V	-38.7	0.23	4.65	-34.28	-13	21.28
1673.00	50.90	170	1.9	H	-50.9	0.40	8.52	-42.78	-13	29.78
1673.00	53.27	54	2.3	V	-50.5	0.40	8.52	-42.38	-13	29.38
Band 7										
Test frequency range: 30 MHz ~ 26 GHz										
399.88	63.16	78	2.3	H	-39.5	0.23	4.65	-35.08	-25	10.08
399.88	68.00	262	1.9	V	-37.8	0.23	4.65	-33.38	-25	8.38
5070.00	42.84	295	1.5	H	-50.3	0.64	10.30	-40.64	-25	15.64
5070.00	45.97	294	1.9	V	-48.7	0.64	10.30	-39.04	-25	14.04
Band 17										
Test frequency range: 30 MHz ~ 10GHz										
399.88	63.46	111	1.3	H	-39.2	0.23	4.65	-34.78	-13	21.78
399.88	68.00	240	1.3	V	-37.8	0.23	4.65	-33.38	-13	20.38
1420.00	54.97	315	1.3	H	-49.1	0.34	7.92	-41.52	-13	28.52
1420.00	54.00	320	1.4	V	-51.8	0.34	7.92	-44.22	-13	31.22

Note:
1) Absolute Level = SG Level - Cable loss + Antenna Gain
2) Margin = Limit- Absolute Level

FCC § 22.917 (a);§ 24.238 (a); §27.53 (h)(m) - BAND EDGES

Applicable Standard

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

According to FCC §27.53 (h)(m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

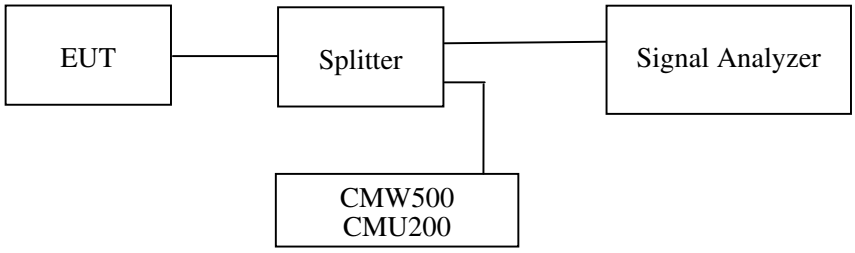

Test Data

Environmental Conditions

Temperature:	23~25 ℃
Relative Humidity:	45~50 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Echo Wu on 2017-02-23 and 2017-04-06.

EUT operation mode: transmitting

Test Result: Compliance. Please refer to the following plots.

Cellular Band, Left Band Edge for GSM (GMSK) Mode

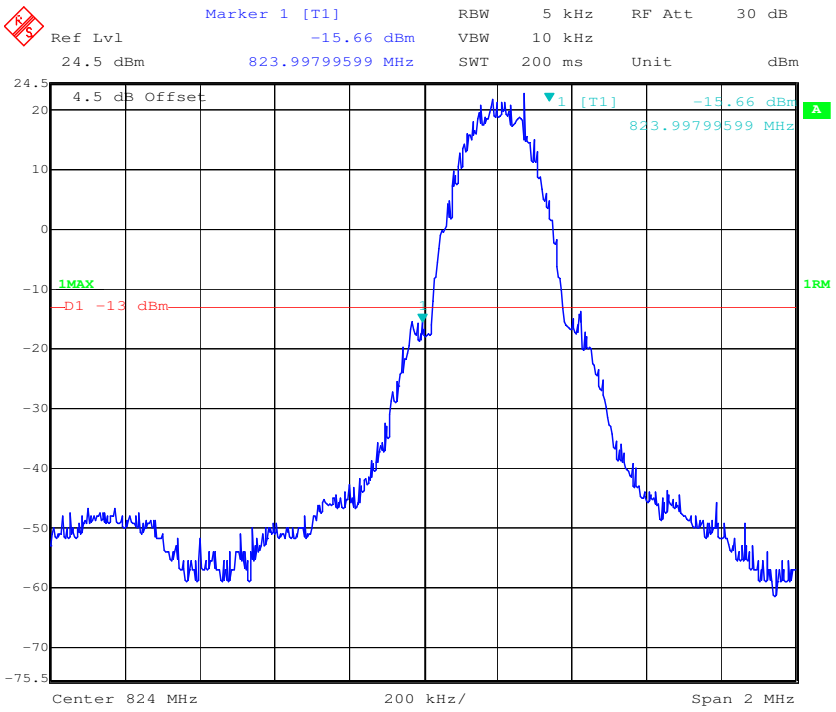

Cellular Band, Right Band Edge for GSM (GMSK) Mode

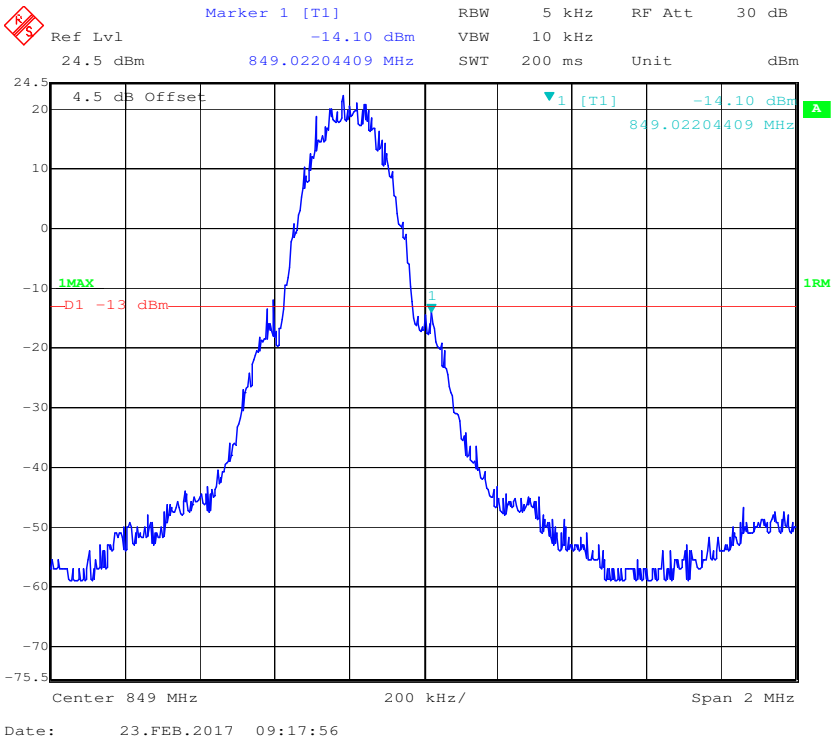

Cellular Band, Left Band Edge for EDGE Mode

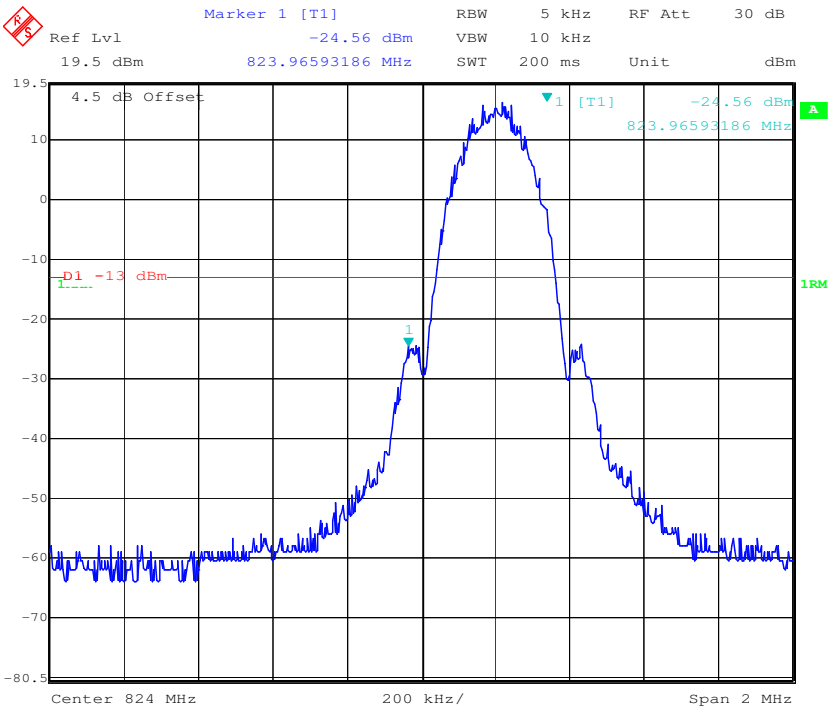

Date: 23.FEB.2017 09:40:51

Cellular Band, Right Band Edge for EDGE Mode

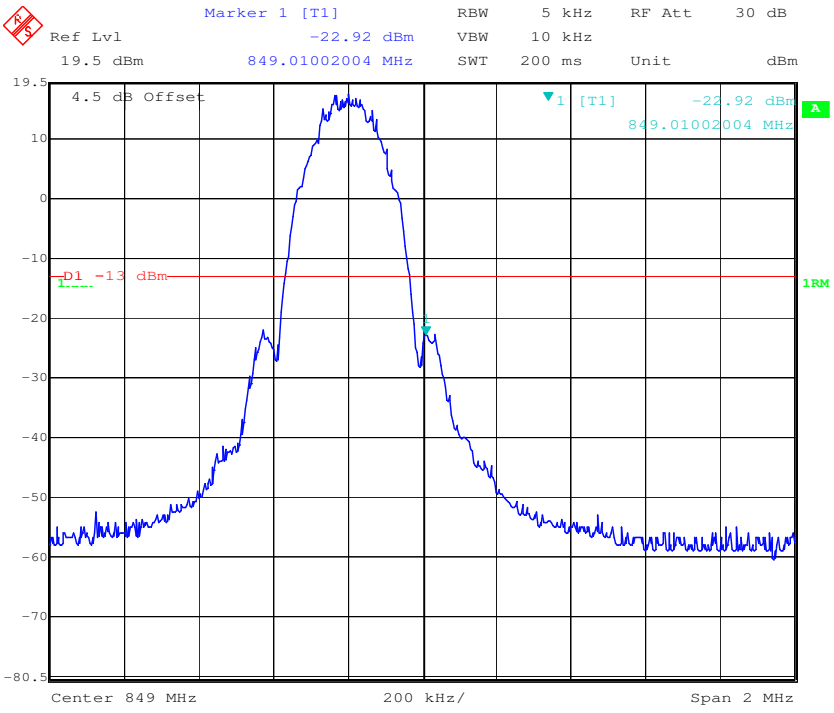

Date: 23.FEB.2017 09:49:07

Cellular Band, Left Band Edge for WCDMA (BPSK) Mode

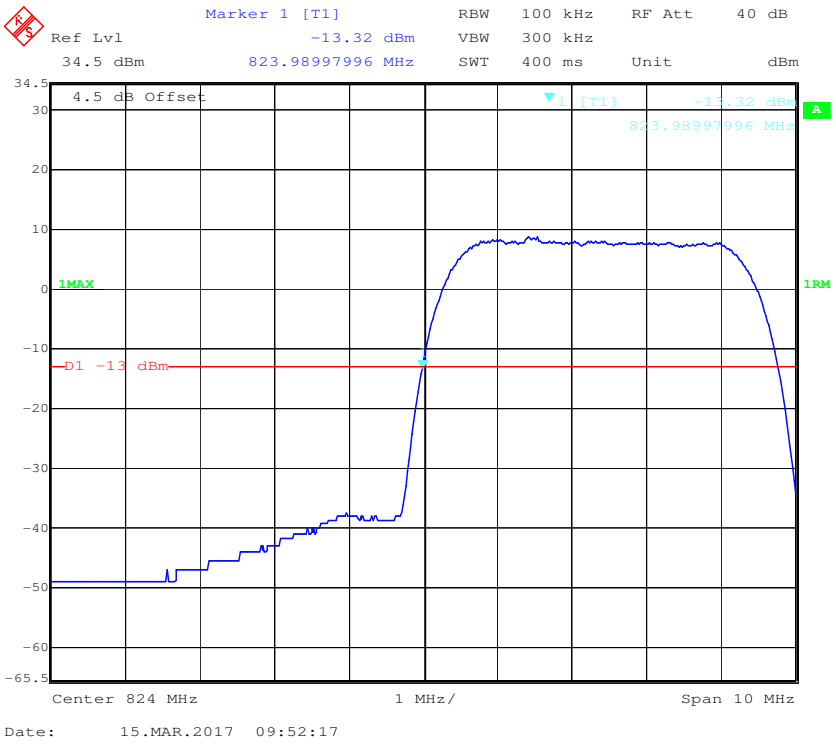

Cellular Band, Right Band Edge for WCDMA (BPSK) Mode

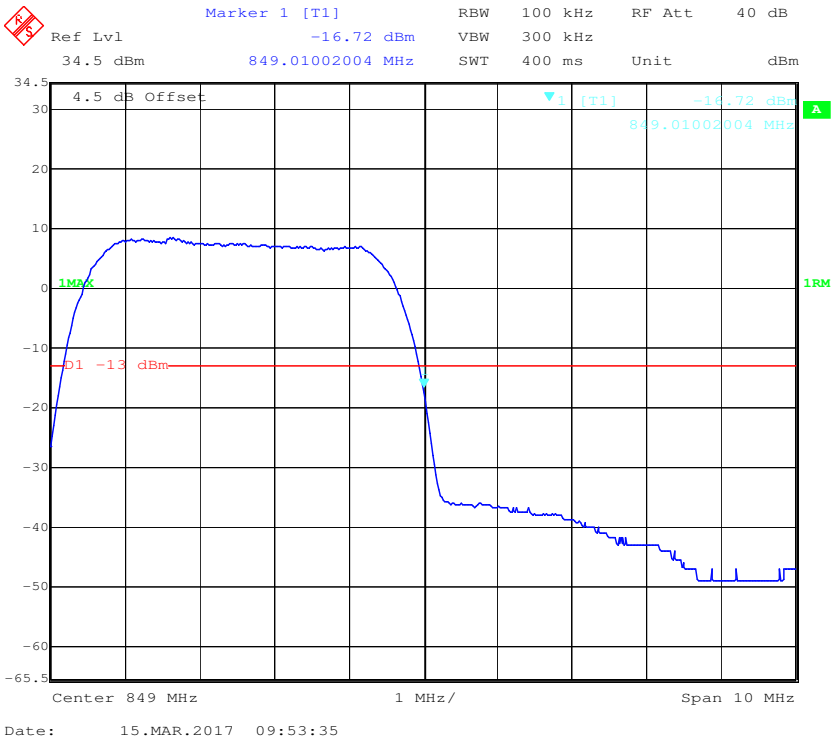

Cellular Band, Left Band Edge for HSDPA (16QAM) Mode

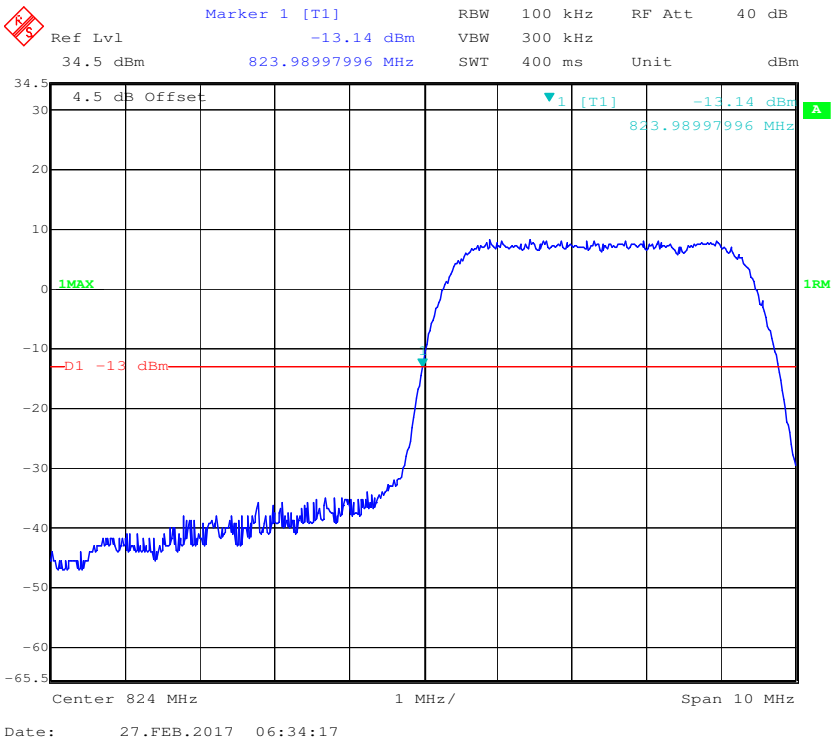

Cellular Band, Right Band Edge for HSDPA (16QAM) Mode

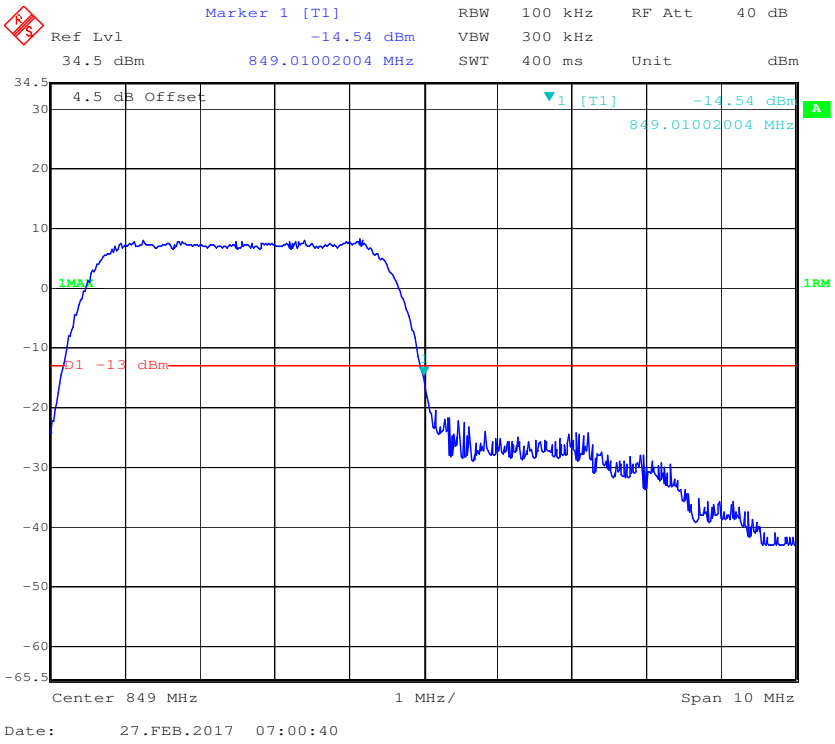

Cellular Band, Left Band Edge for HSUPA (BPSK) Mode

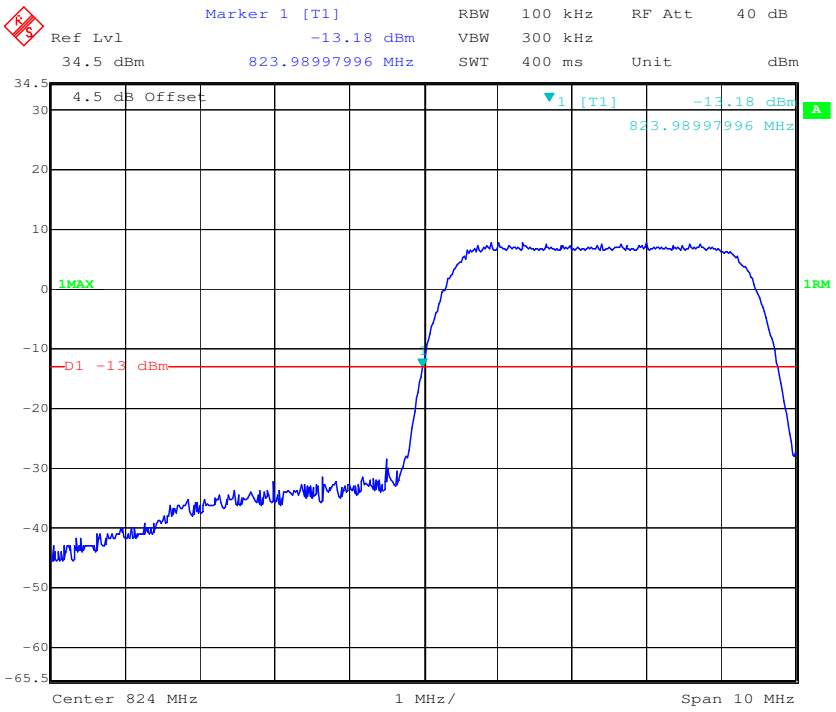

Cellular Band, Right Band Edge for HSUPA (BPSK) Mode

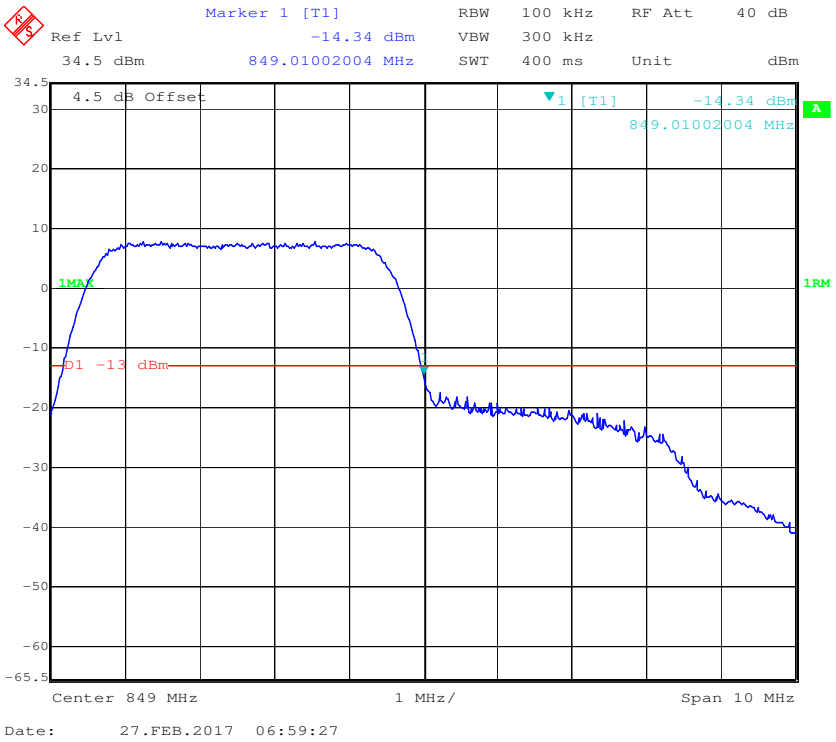

PCS Band, Left Band Edge for GSM (GMSK) Mode

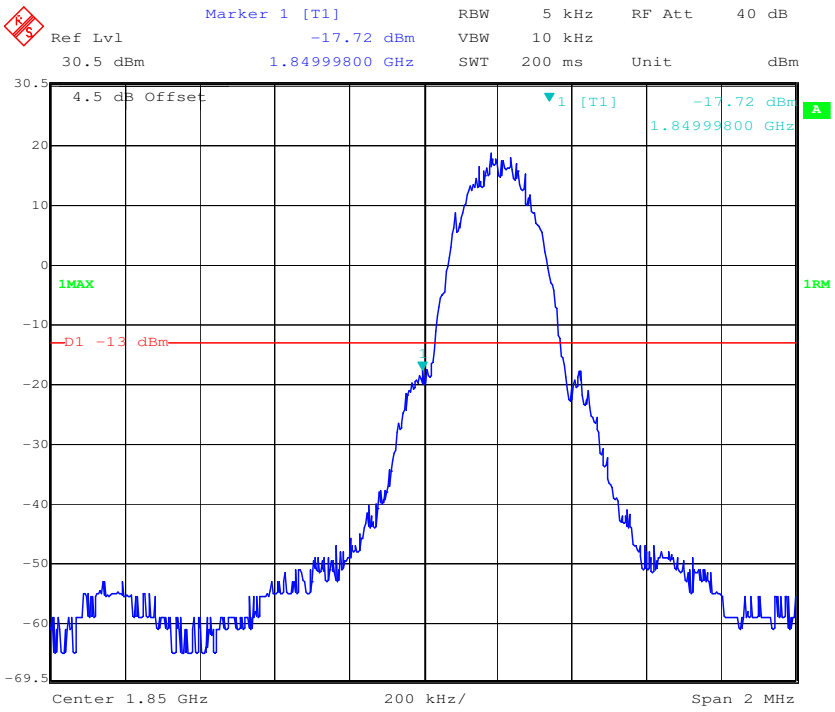

PCS Band, Right Band Edge for GSM (GMSK) Mode

PCS Band, Left Band Edge for EDGE Mode

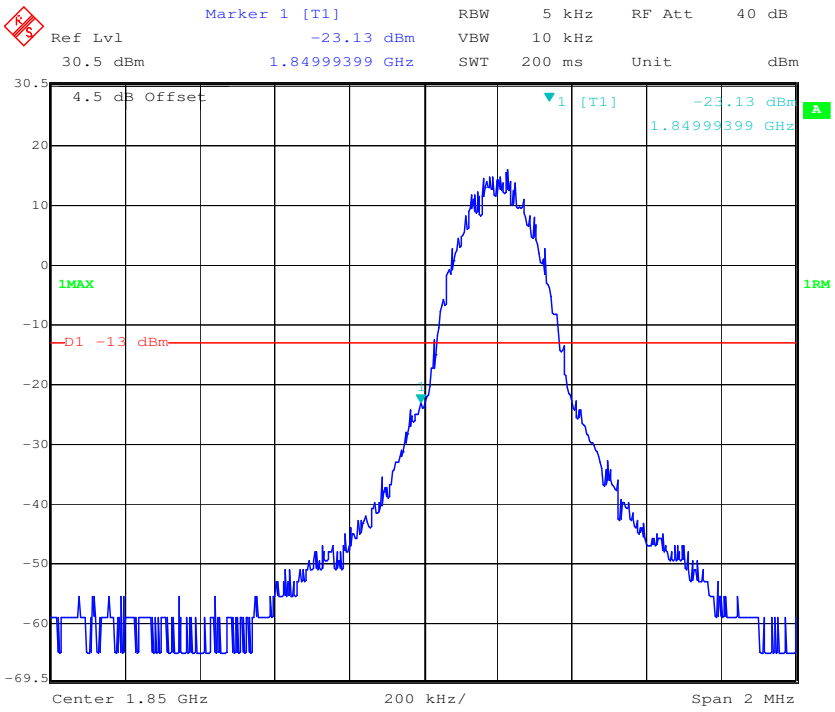

PCS Band, Right Band Edge for EDGE Mode

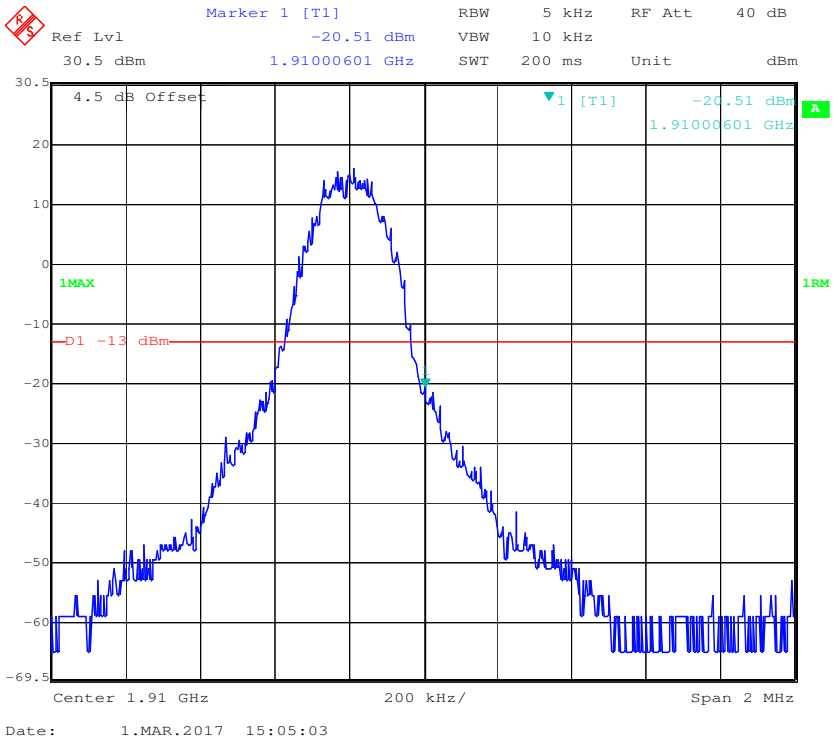

PCS Band, Left Band Edge for WCDMA (BPSK) Mode

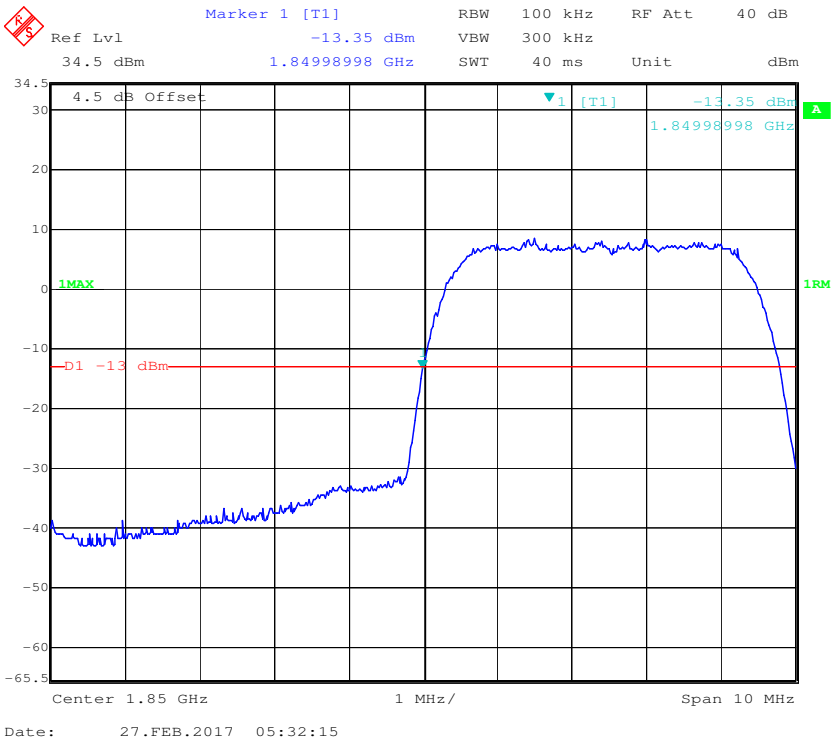

PCS Band, Right Band Edge for WCDMA (BPSK) Mode

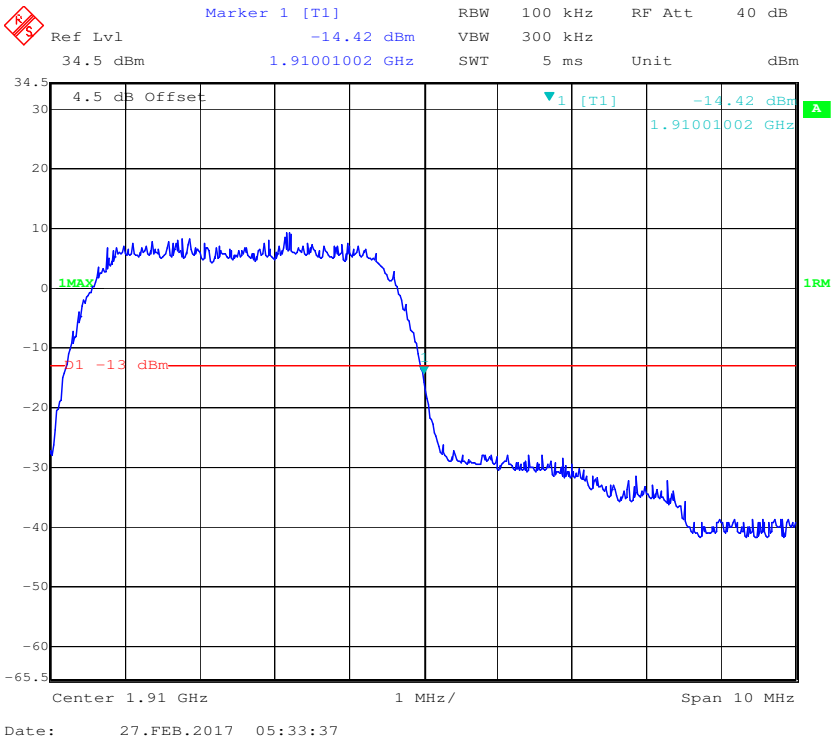

PCS Band, Left Band Edge for HSDPA (16QAM) Mode

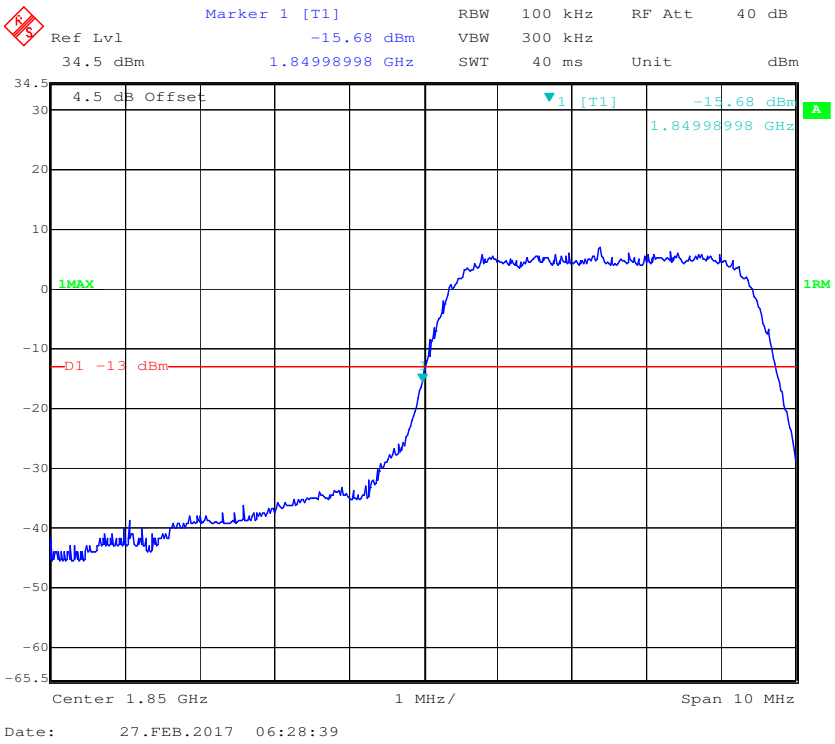

PCS Band, Right Band Edge for HSDPA (16QAM) Mode

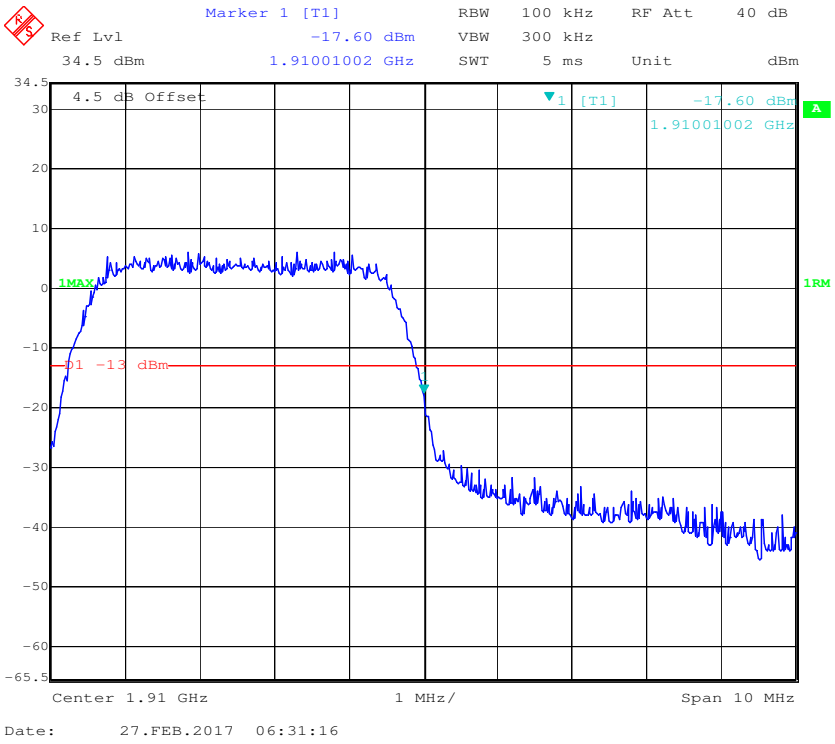

PCS Band, Left Band Edge for HSUPA (BPSK) Mode

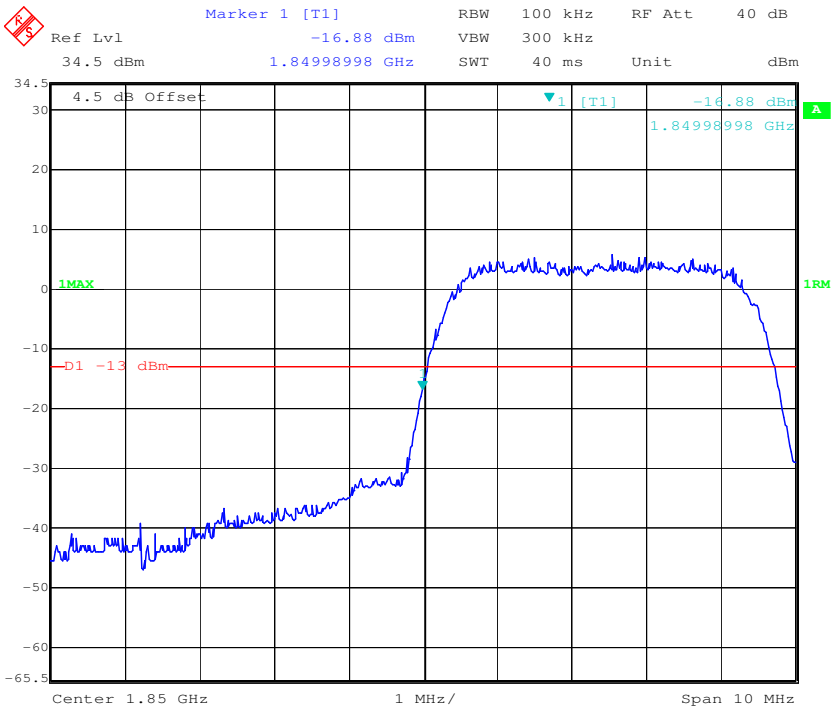

PCS Band, Right Band Edge for HSUPA (BPSK) Mode

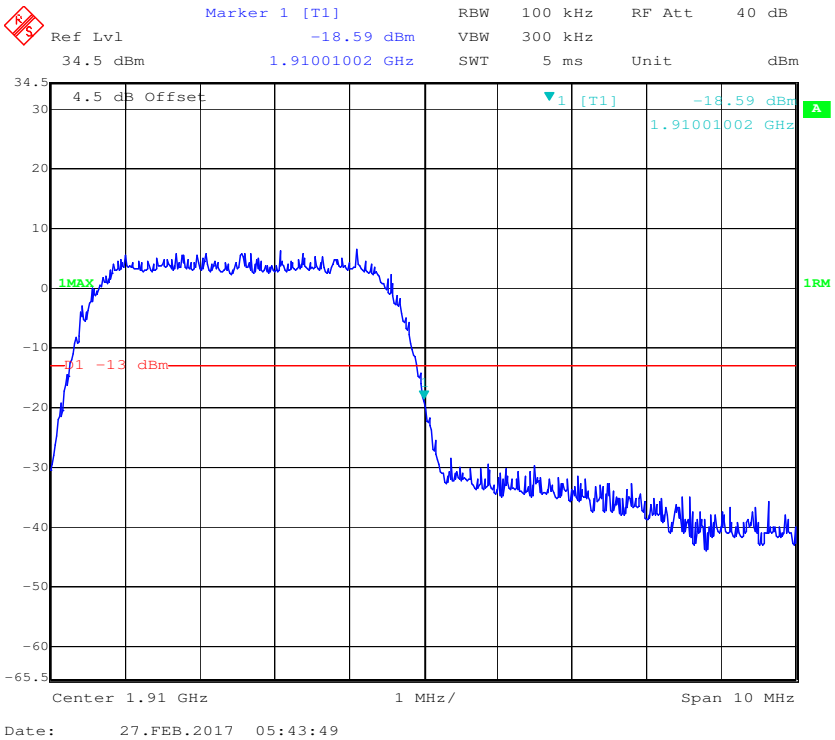

AWS Band, Left Band Edge for RMC (BPSK) Mode

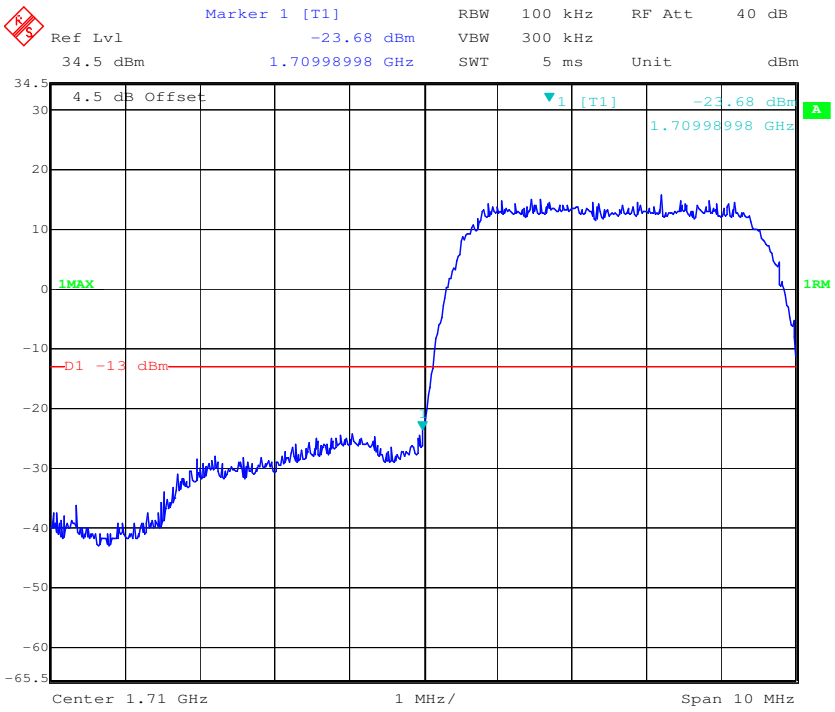

AWS Band, Right Band Edge for RMC (BPSK) Mode

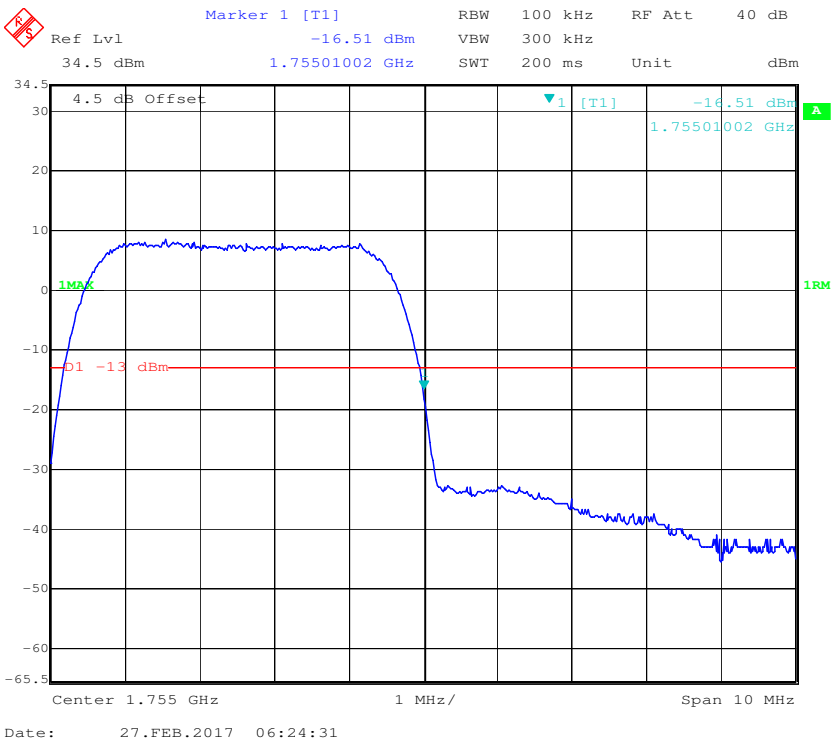

AWS Band, Left Band Edge for HSDPA (16QAM) Mode

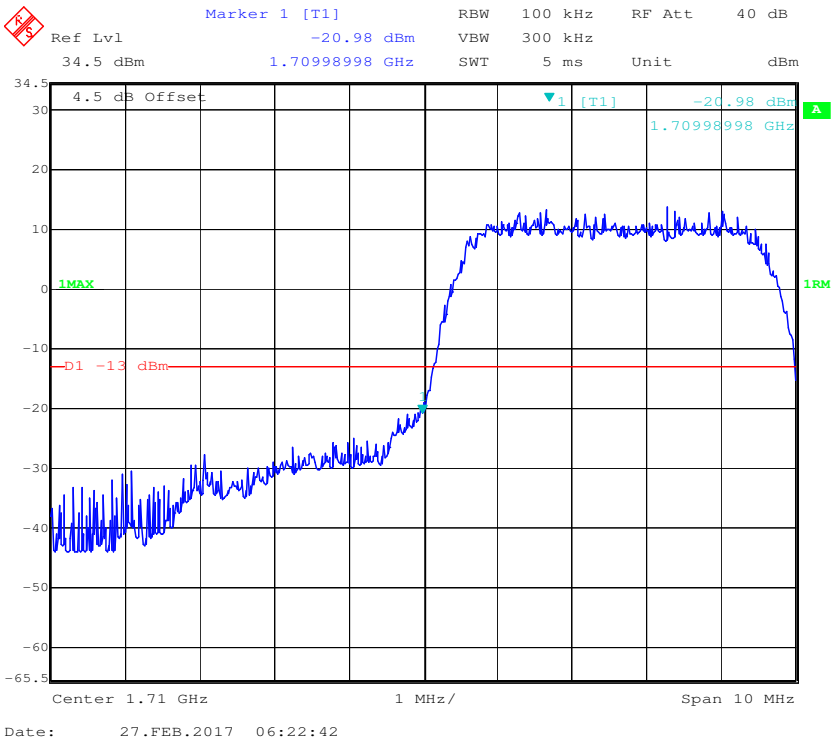

AWS Band, Right Band Edge for HSDPA (16QAM) Mode

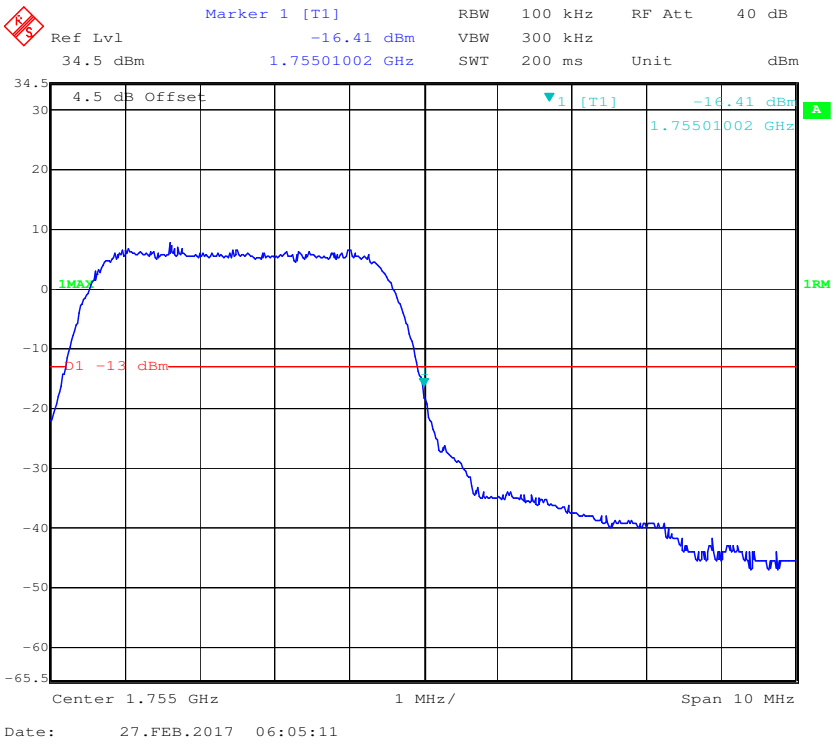

AWS Band, Left Band Edge for HSUPA (BPSK) Mode

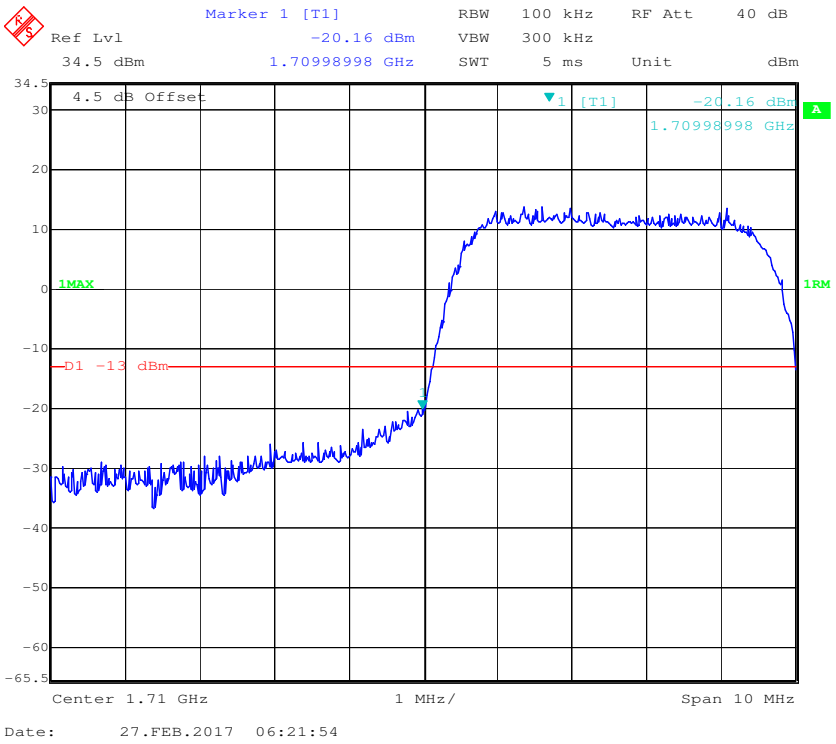

AWS Band, Right Band Edge for HSUPA (BPSK) Mode

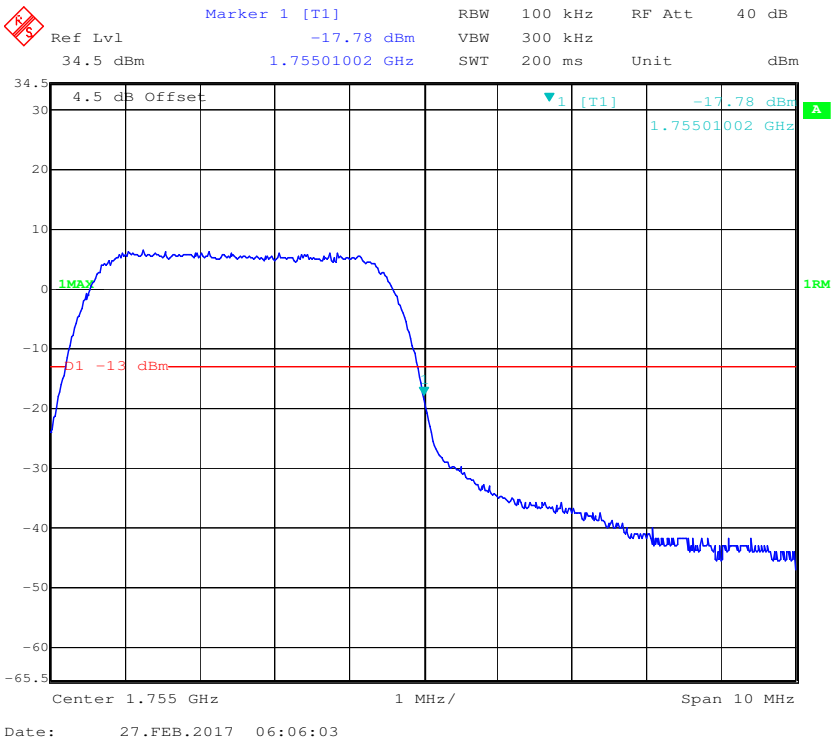

LTE Band 2:

QPSK (1.4 MHz, FULL RB) - Left Band Edge

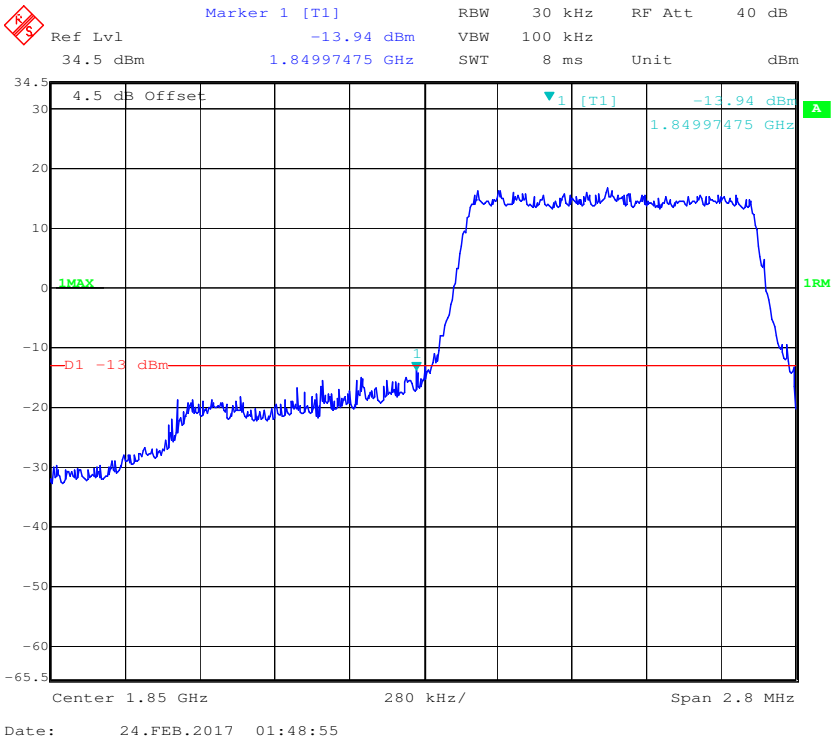

Date: 24.FEB.2017 01:48:55

QPSK (1.4 MHz, FULL RB) - Right Band Edge

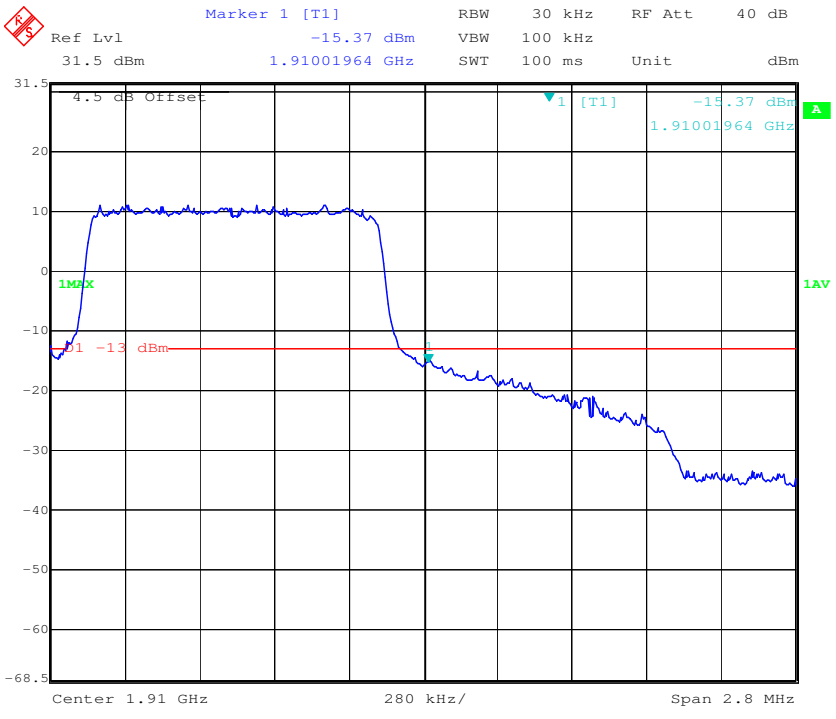

Date: 25.FEB.2017 07:01:03

16-QAM (1.4 MHz, FULL RB) - Left Band Edge

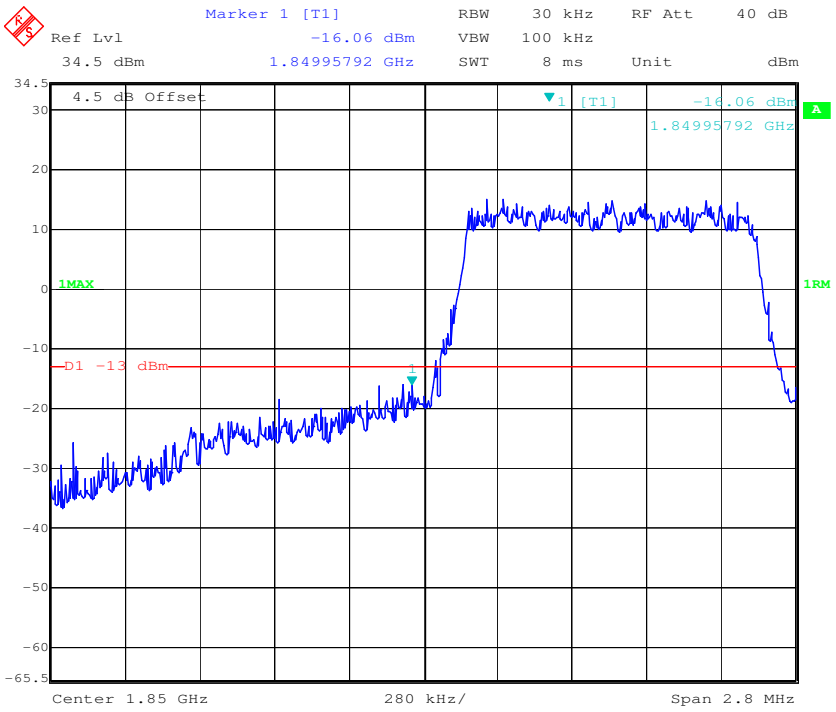

16-QAM (1.4 MHz, FULL RB) - Right Band Edge

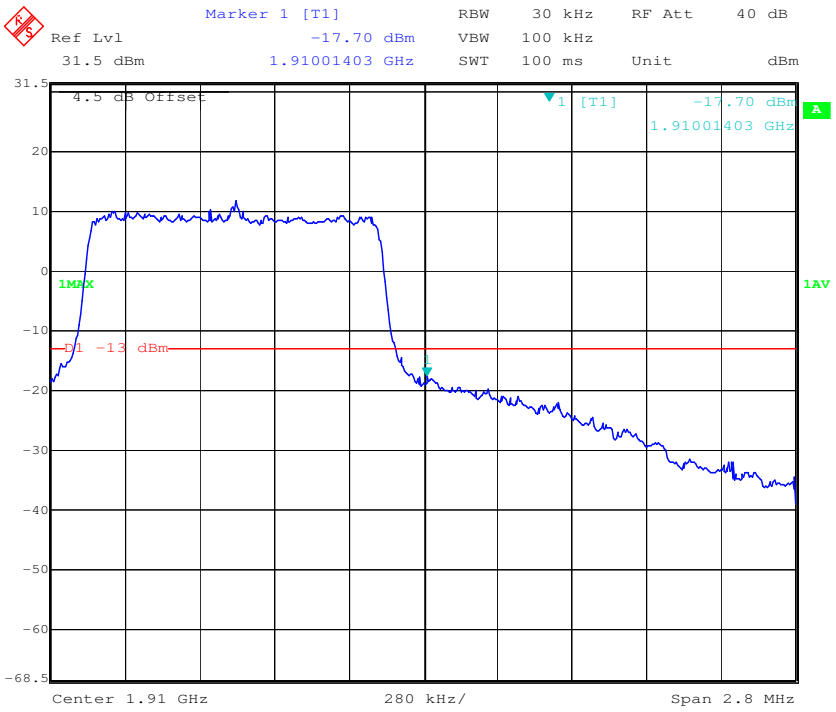

QPSK (3.0 MHz, FULL RB) - Left Band Edge

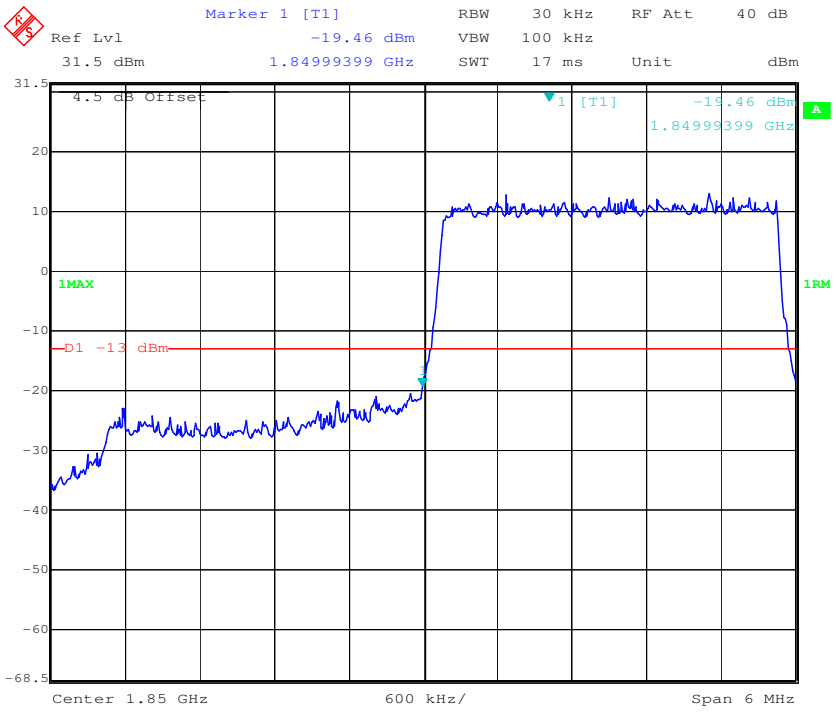

QPSK (3.0 MHz, FULL RB) - Right Band Edge

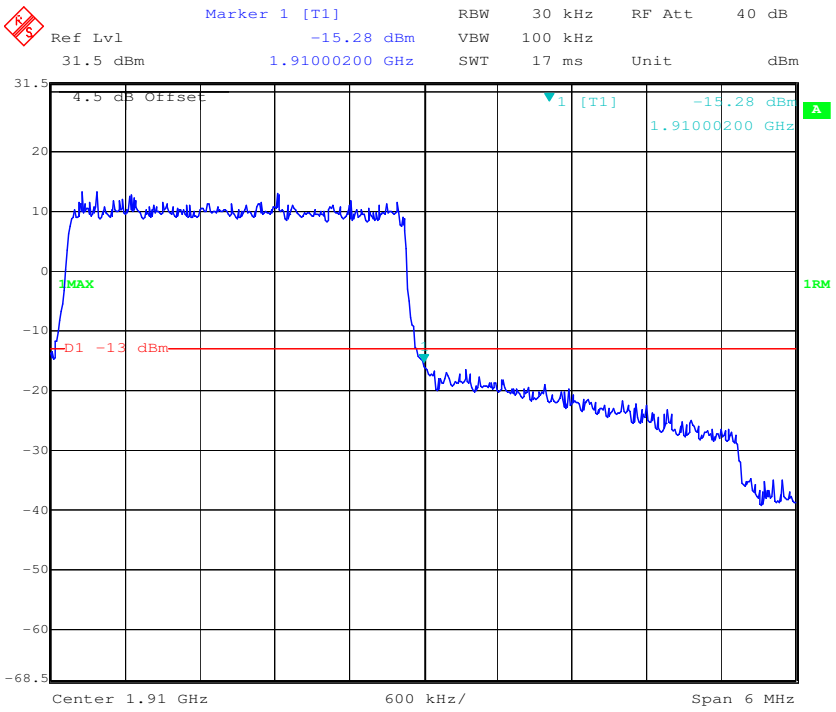

16-QAM (3.0 MHz, FULL RB) - Left Band Edge

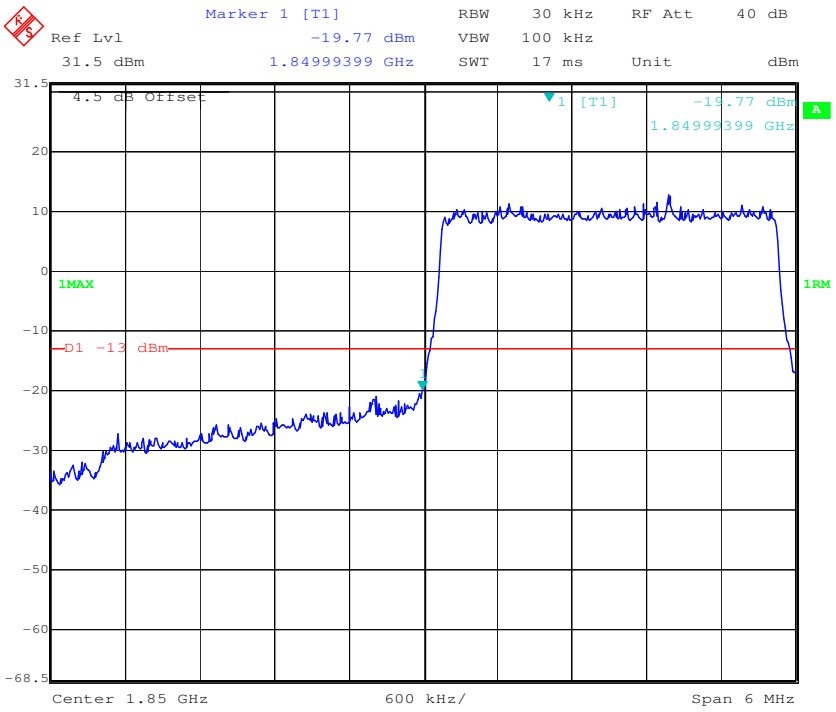

16-QAM (3.0 MHz, FULL RB) - Right Band Edge

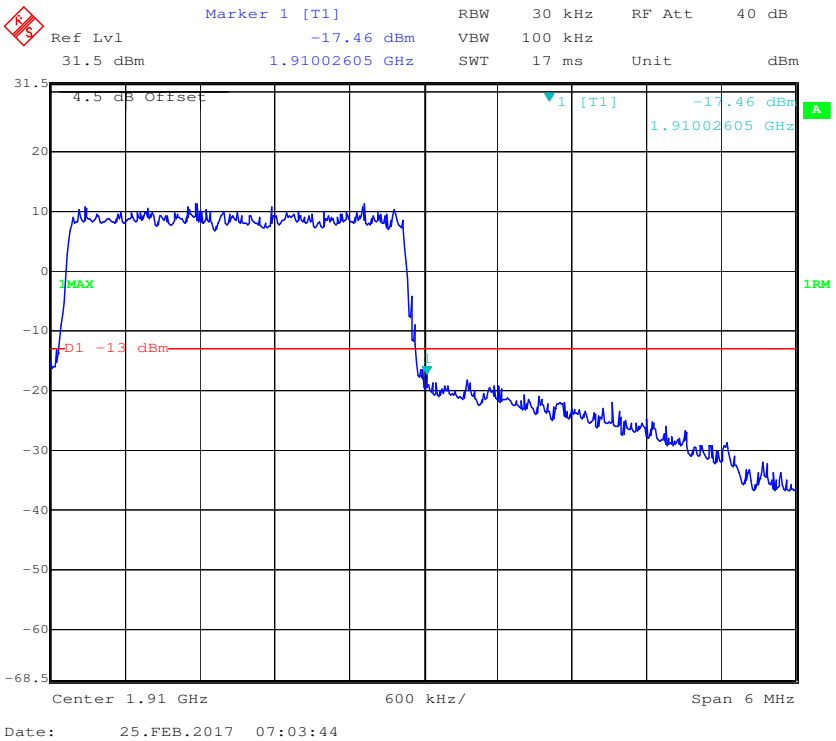

QPSK (5.0 MHz, FULL RB) - Left Band Edge

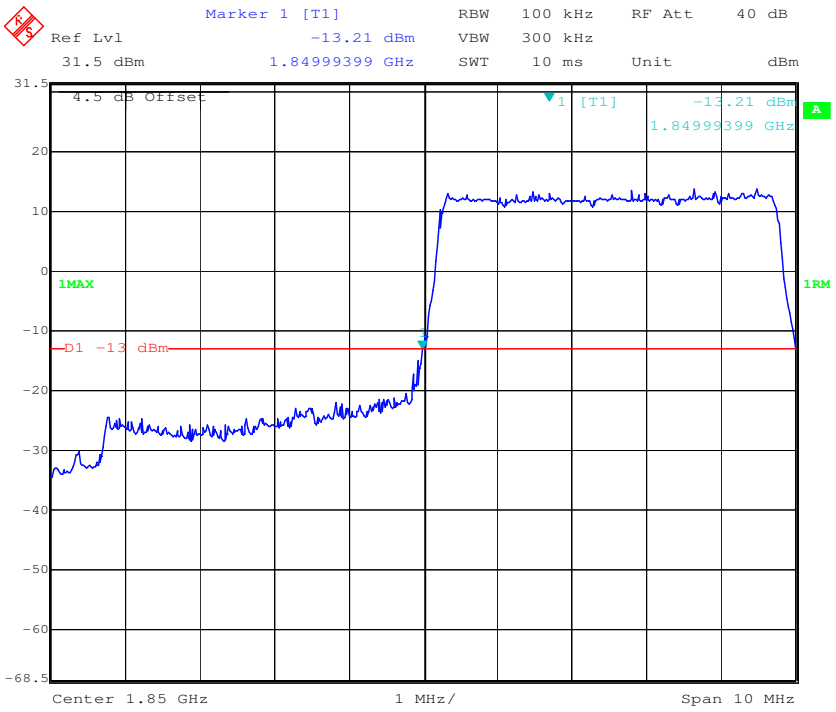

QPSK (5.0 MHz, FULL RB) - Right Band Edge

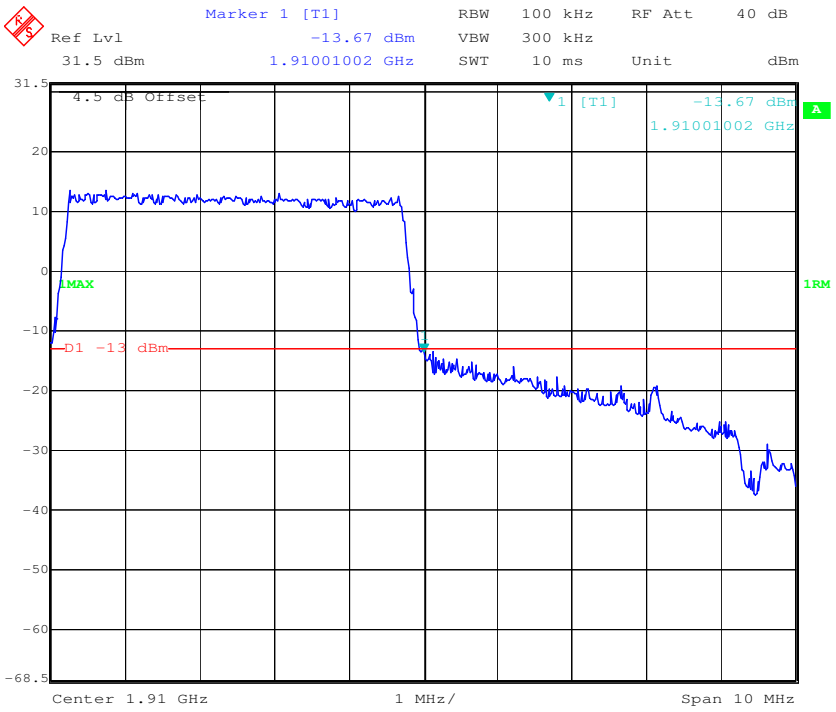

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

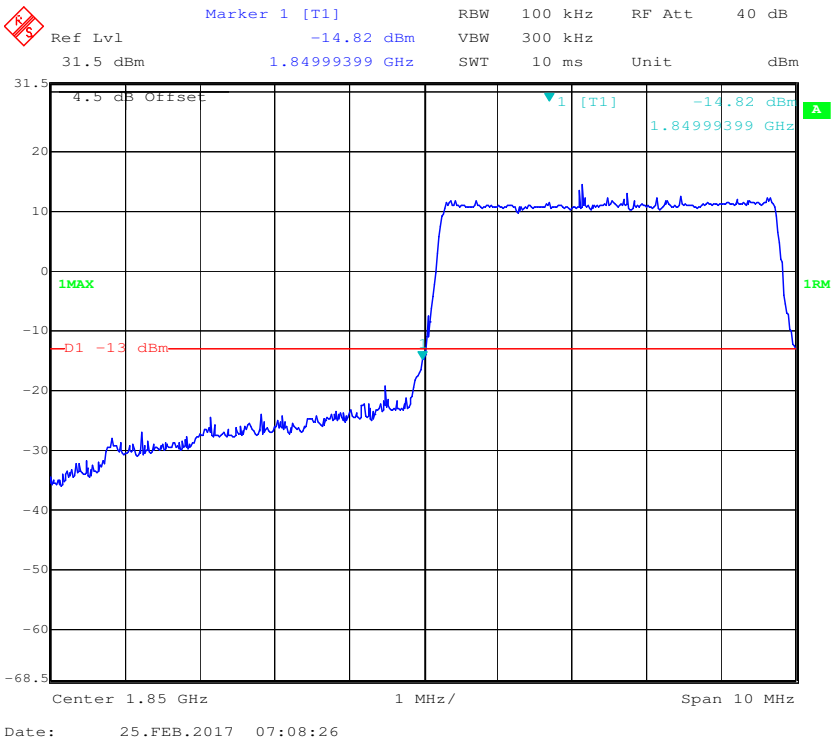

16-QAM (5.0 MHz, FULL RB) - Right Band Edge

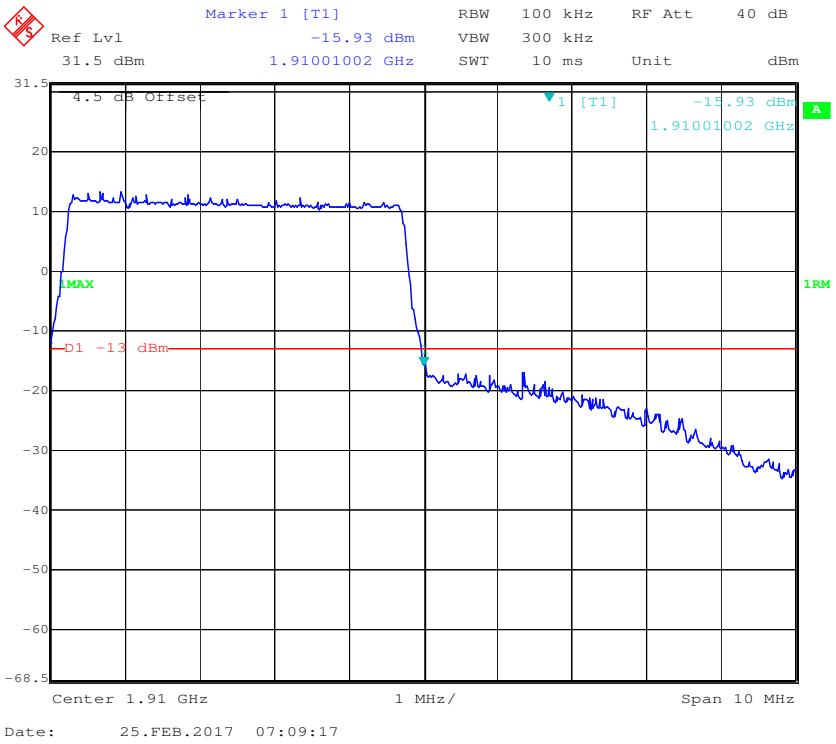

QPSK (10.0 MHz, FULL RB) - Left Band Edge

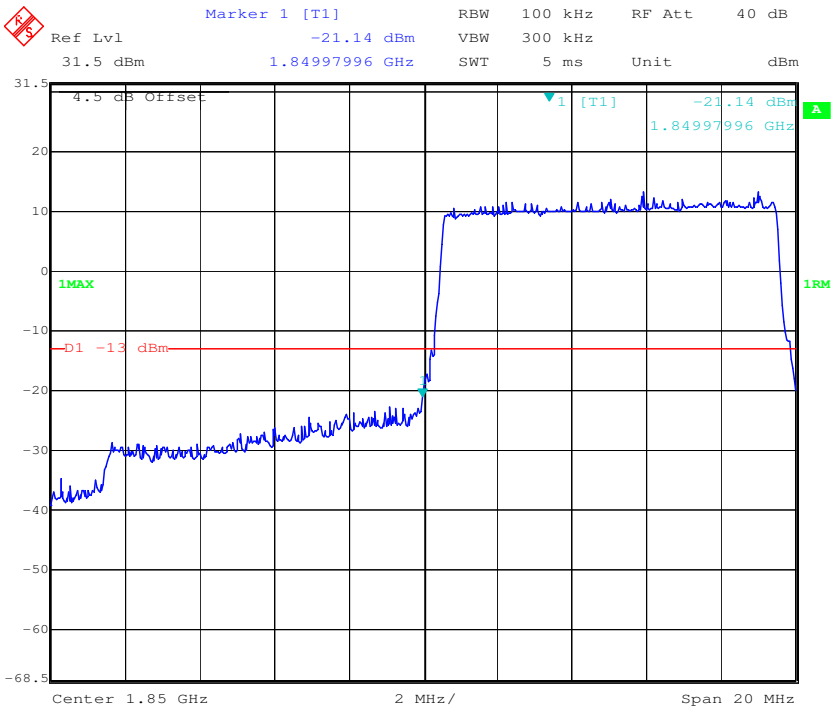

QPSK (10.0 MHz, FULL RB) - Right Band Edge

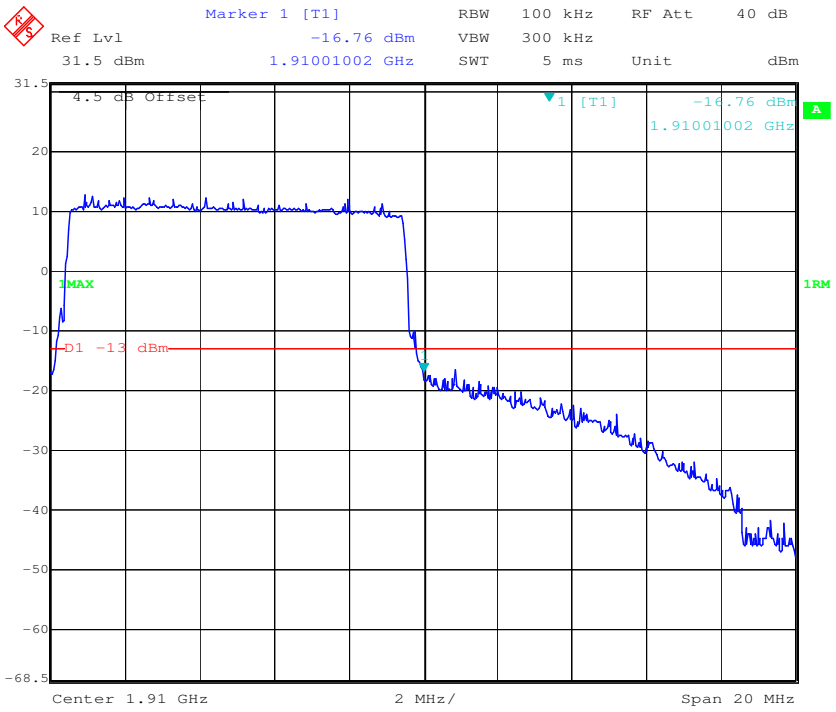

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

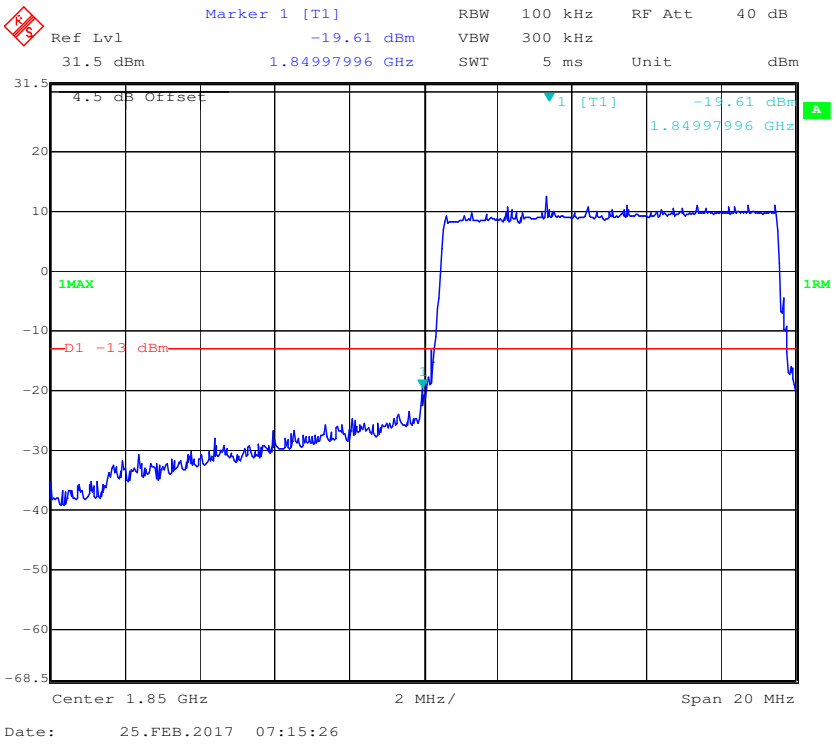

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

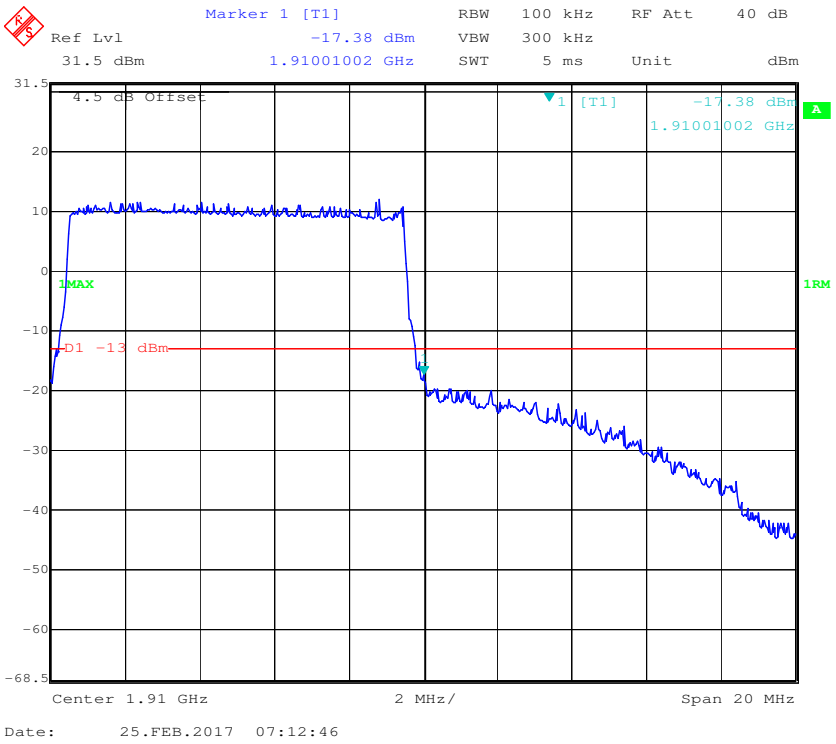

QPSK (15.0 MHz, FULL RB) - Left Band Edge

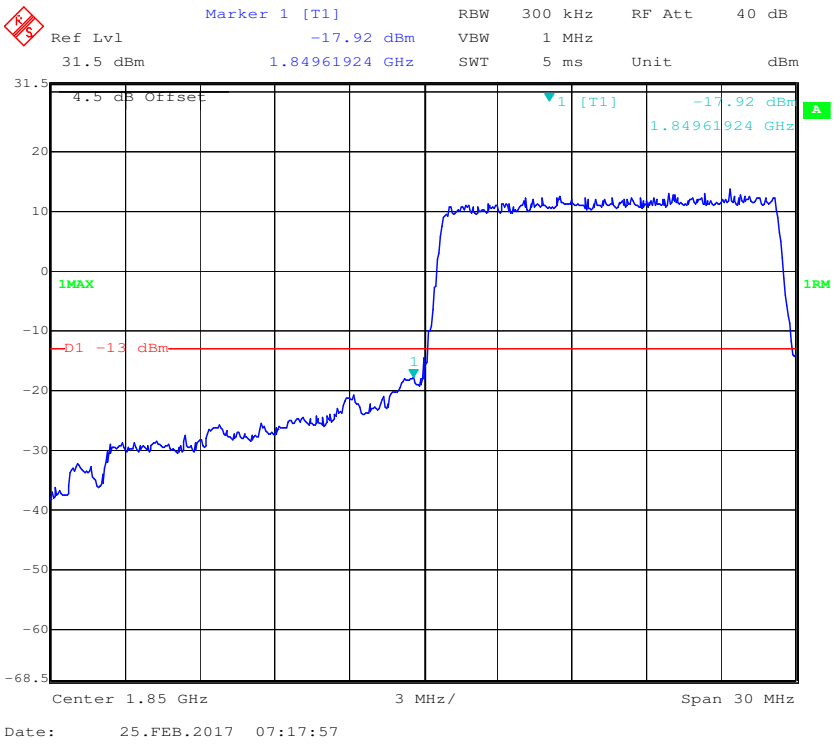

QPSK (15.0 MHz, FULL RB) - Right Band Edge

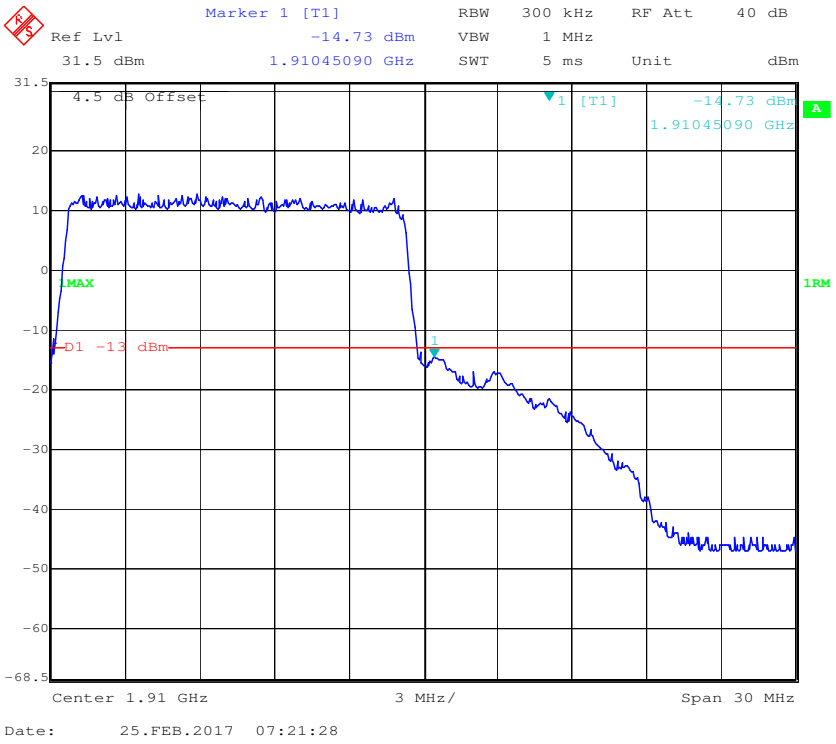

16-QAM (15.0 MHz, FULL RB) - Left Band Edge

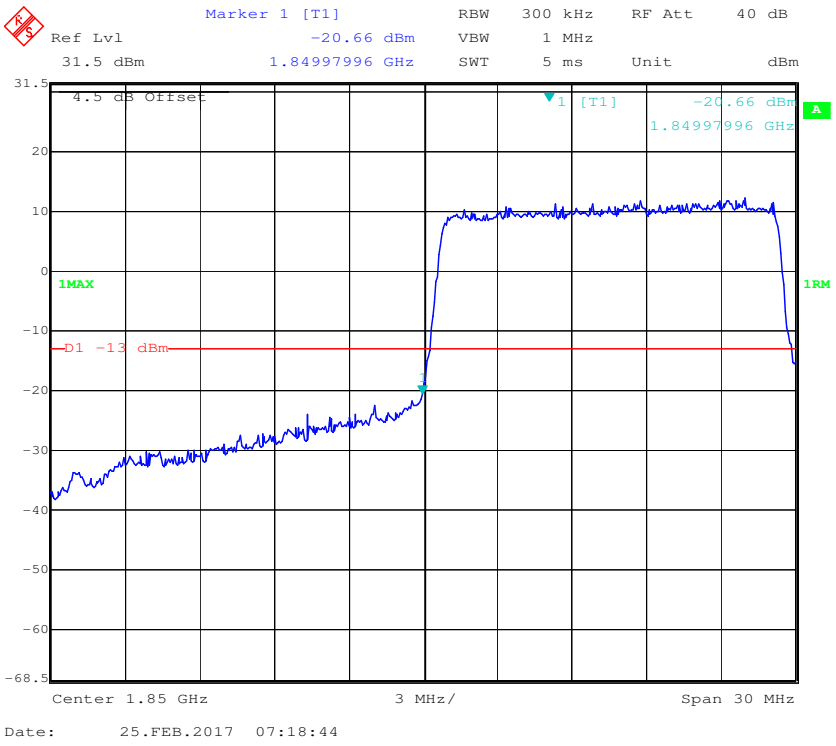

16-QAM (15.0 MHz, FULL RB) - Right Band Edge

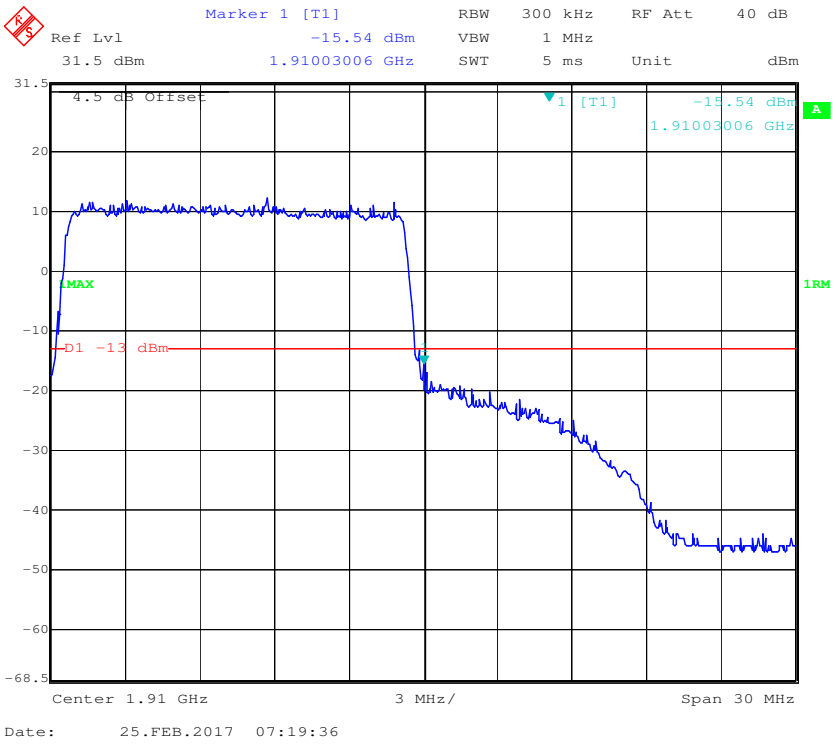

QPSK (20.0 MHz, FULL RB) - Left Band Edge

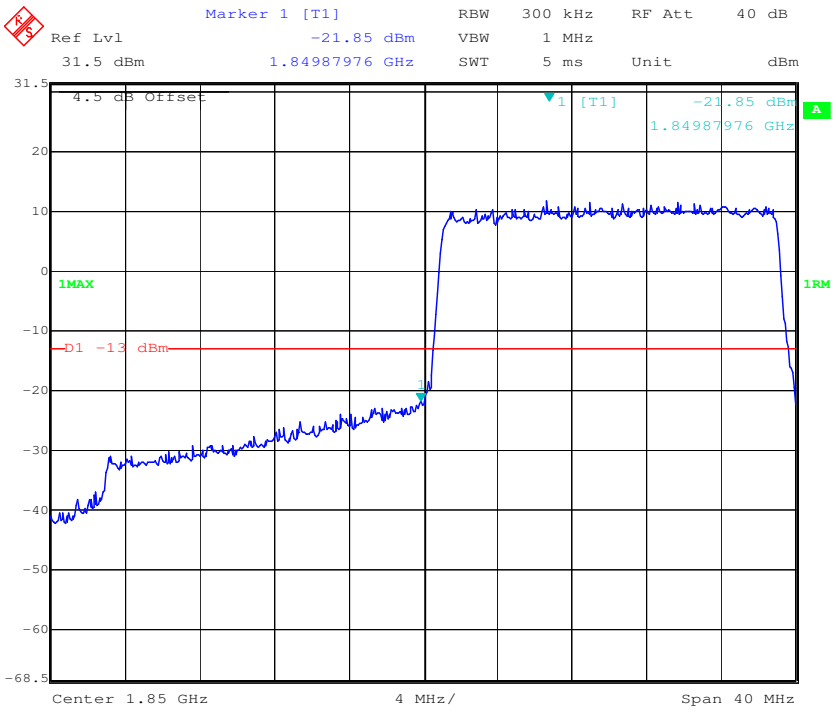

QPSK (20.0 MHz, FULL RB) - Right Band Edge

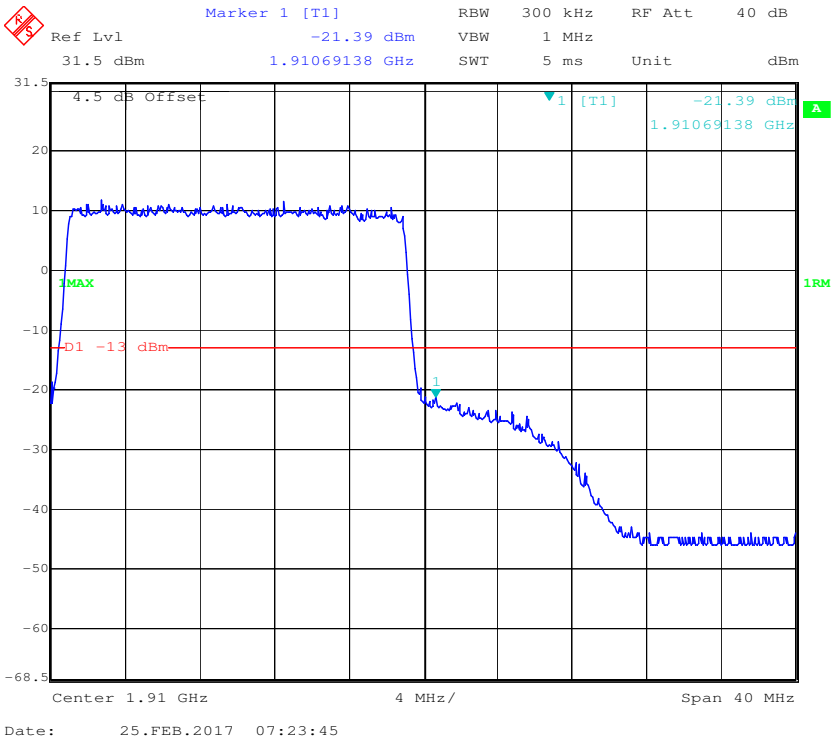

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

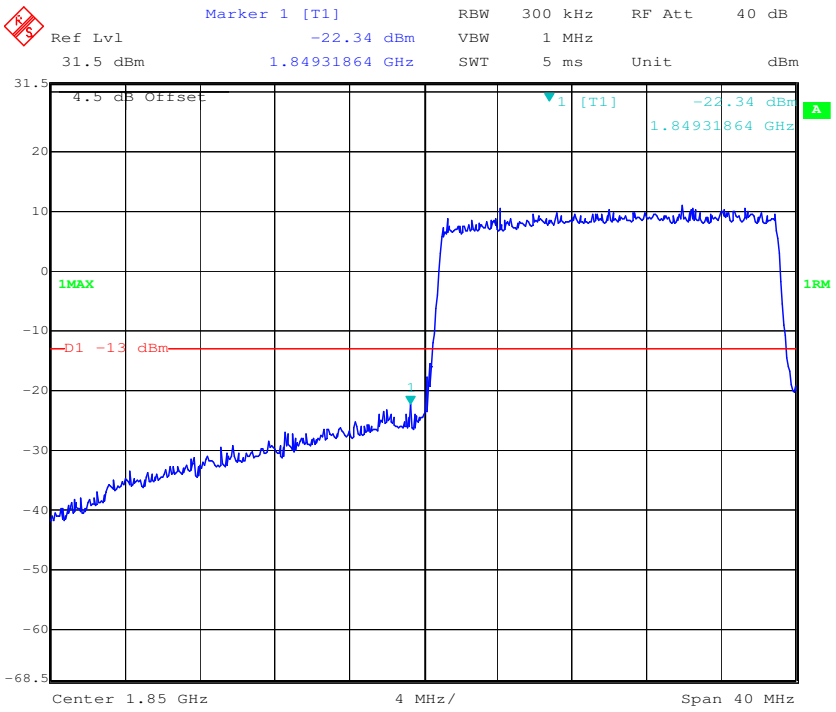

16-QAM (20.0 MHz, FULL RB) - Right Band Edge

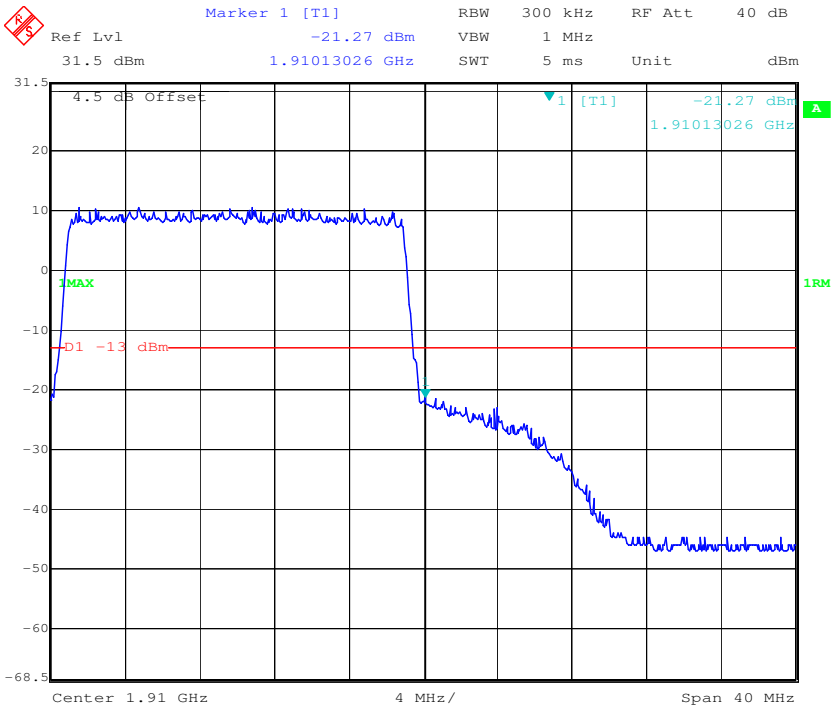

LTE Band 4:

QPSK (1.4 MHz, FULL RB) - Left Band Edge

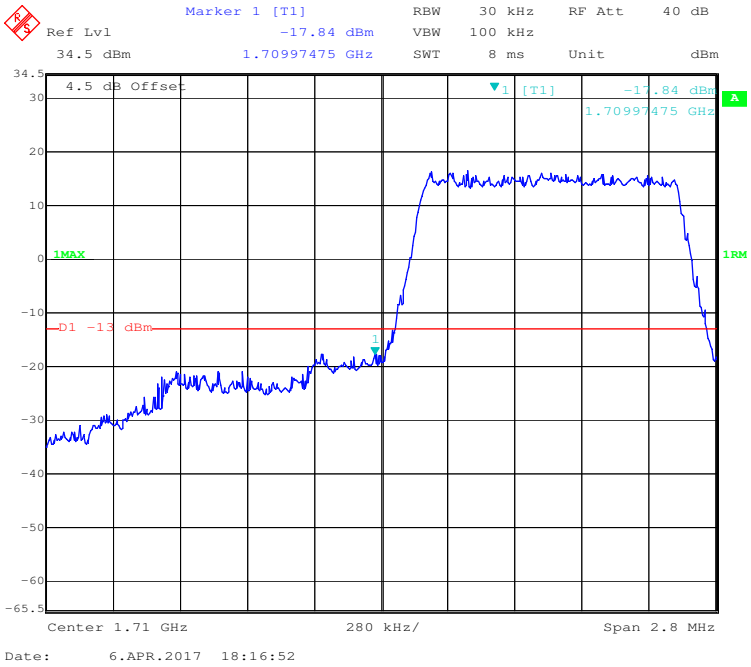

QPSK (1.4 MHz, FULL RB) - Right Band Edge

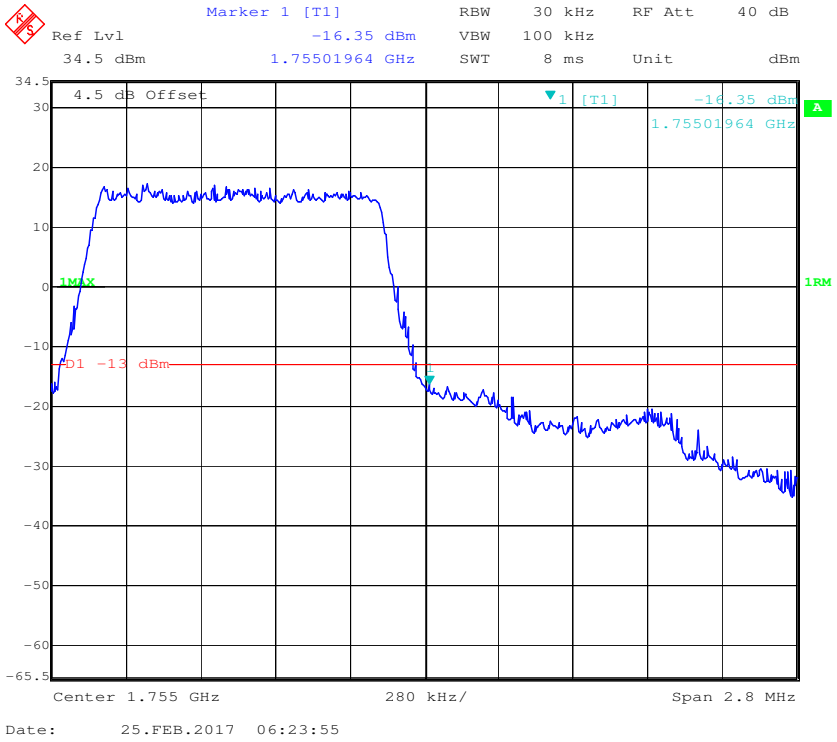

16-QAM (1.4 MHz, FULL RB) - Left Band Edge

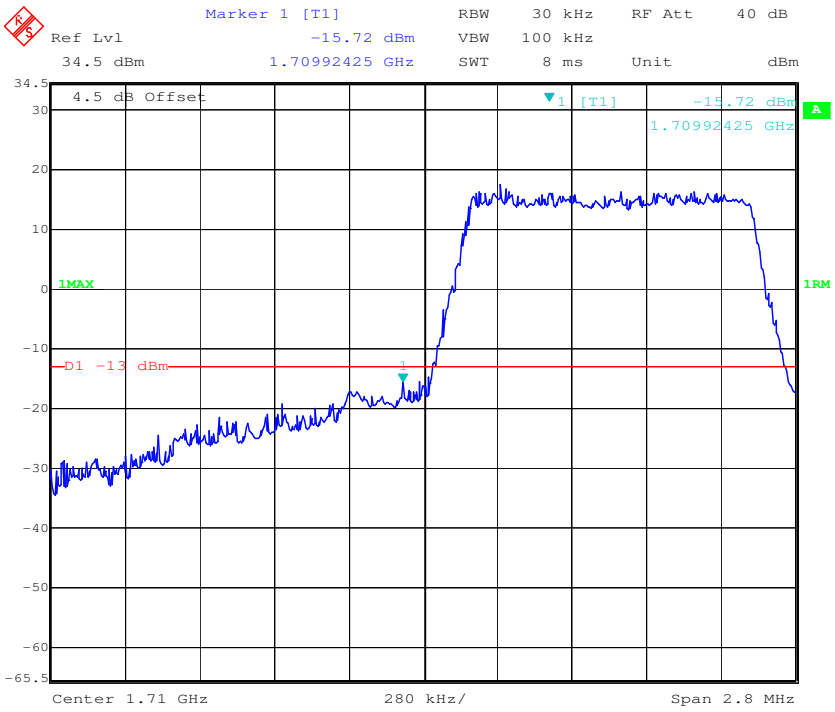

16-QAM (1.4 MHz, FULL RB) - Right Band Edge

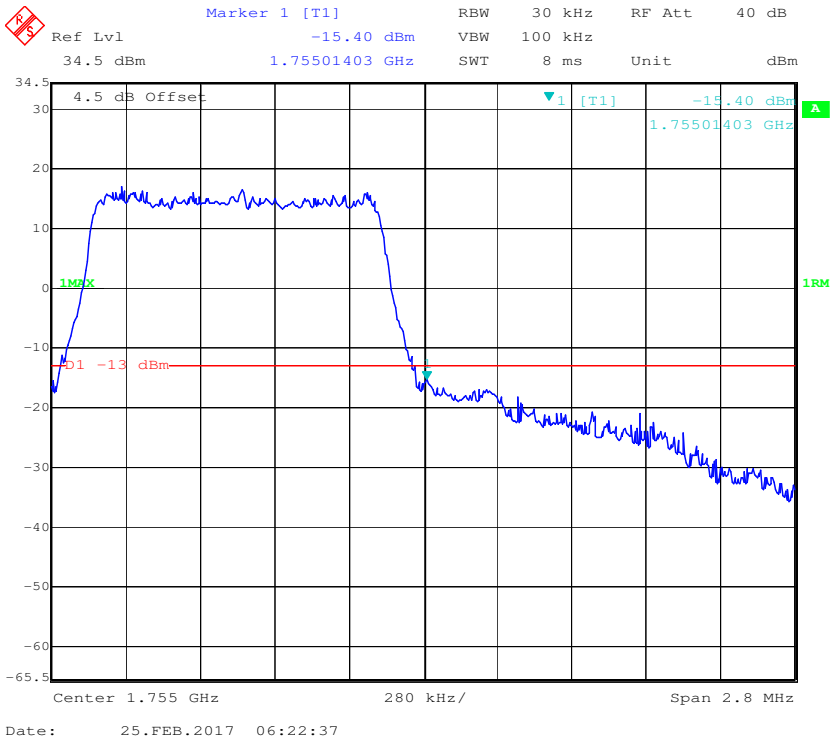

QPSK (3.0 MHz, FULL RB) - Left Band Edge

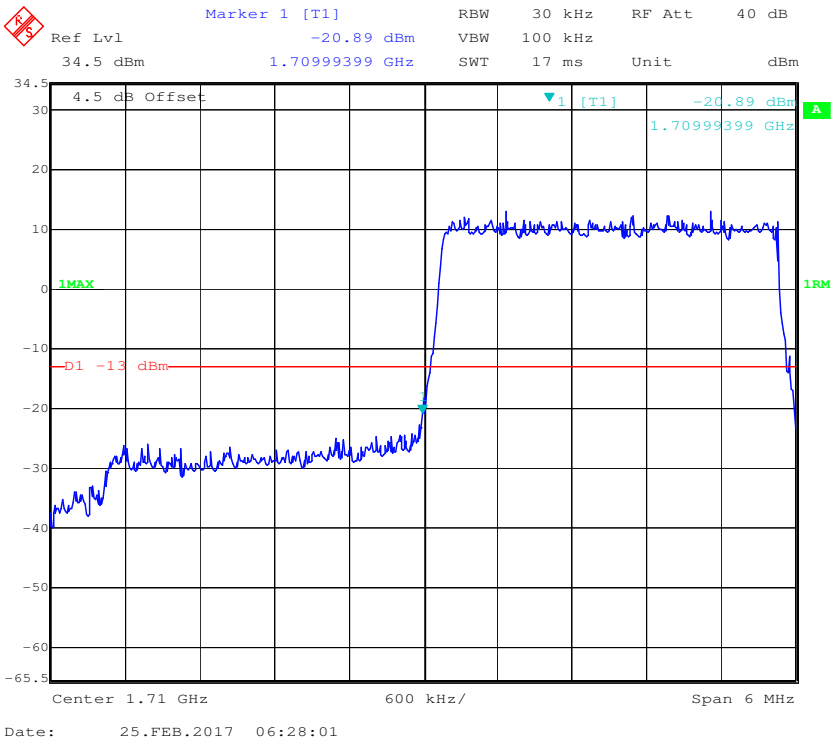

QPSK (3.0 MHz, FULL RB) - Right Band Edge

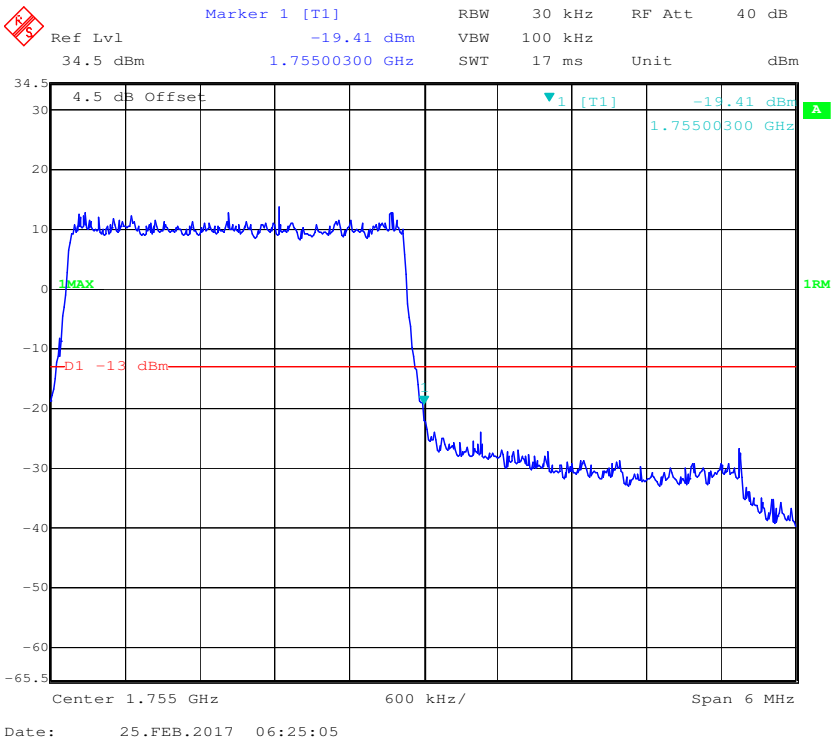

16-QAM (3.0 MHz, FULL RB) - Left Band Edge

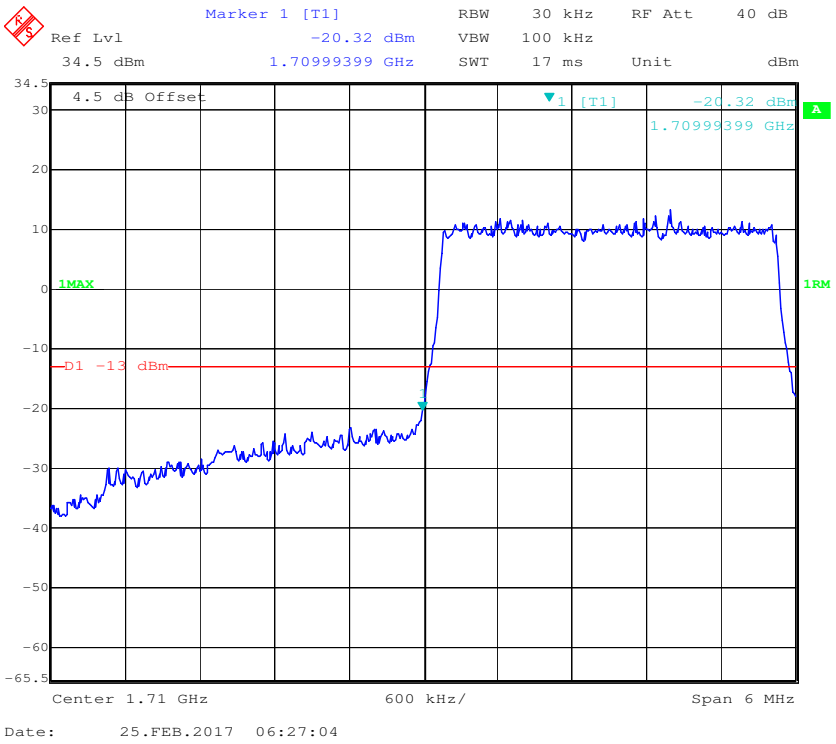

16-QAM (3.0 MHz, FULL RB) - Right Band Edge

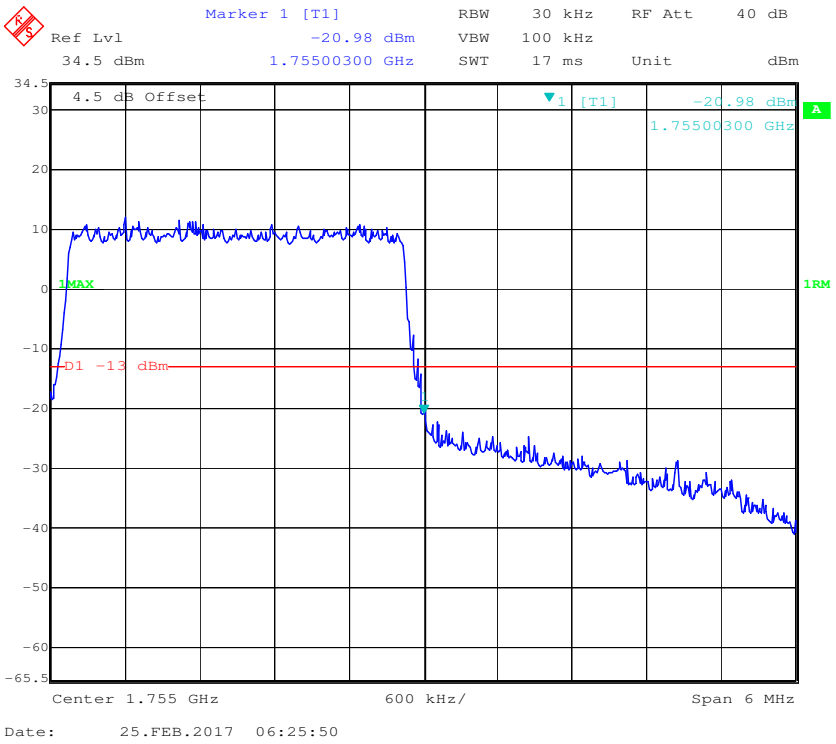

QPSK (5.0 MHz, FULL RB) - Left Band Edge

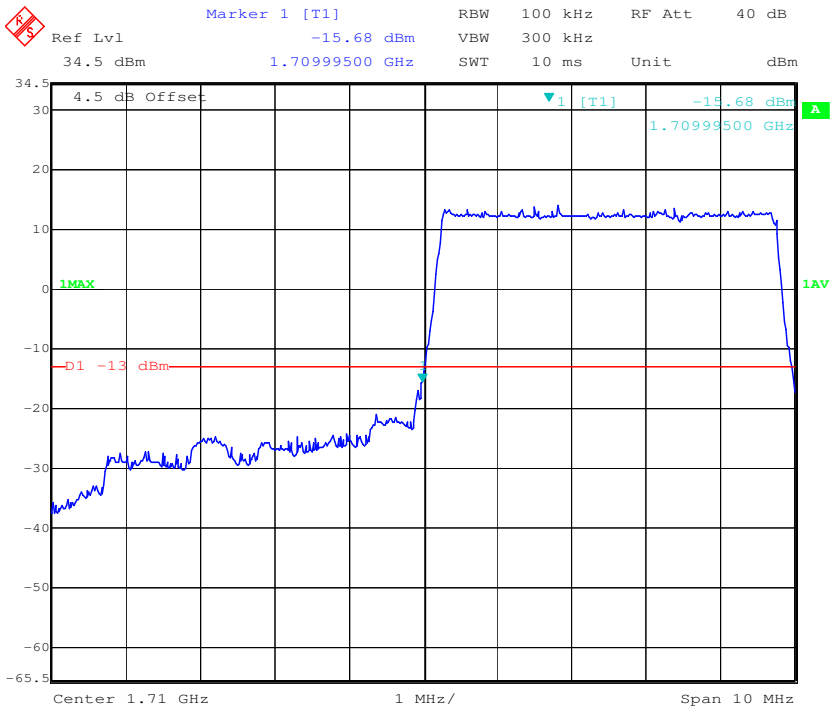

QPSK (5.0 MHz, FULL RB) - Right Band Edge

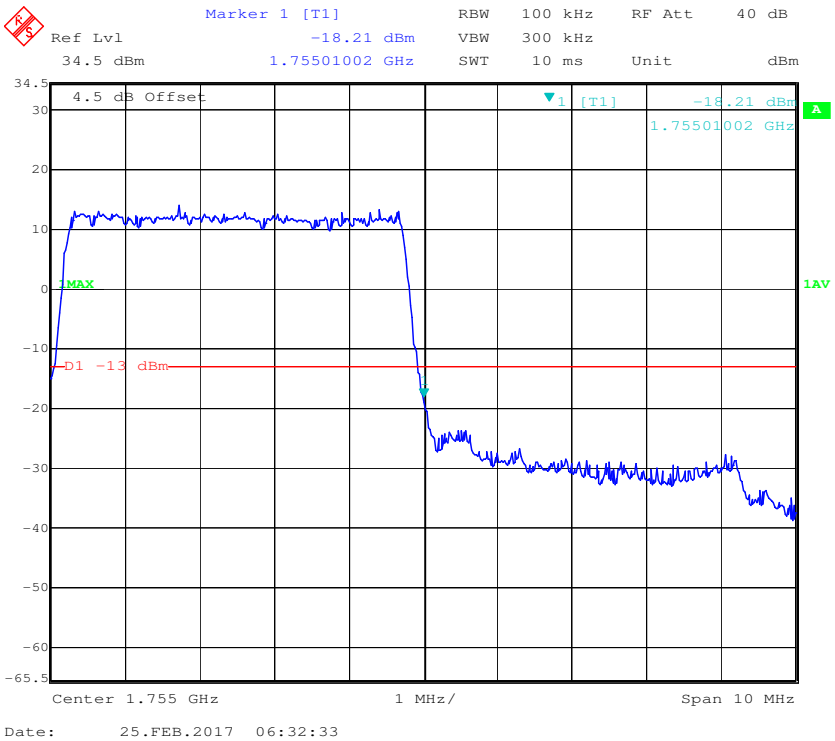

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

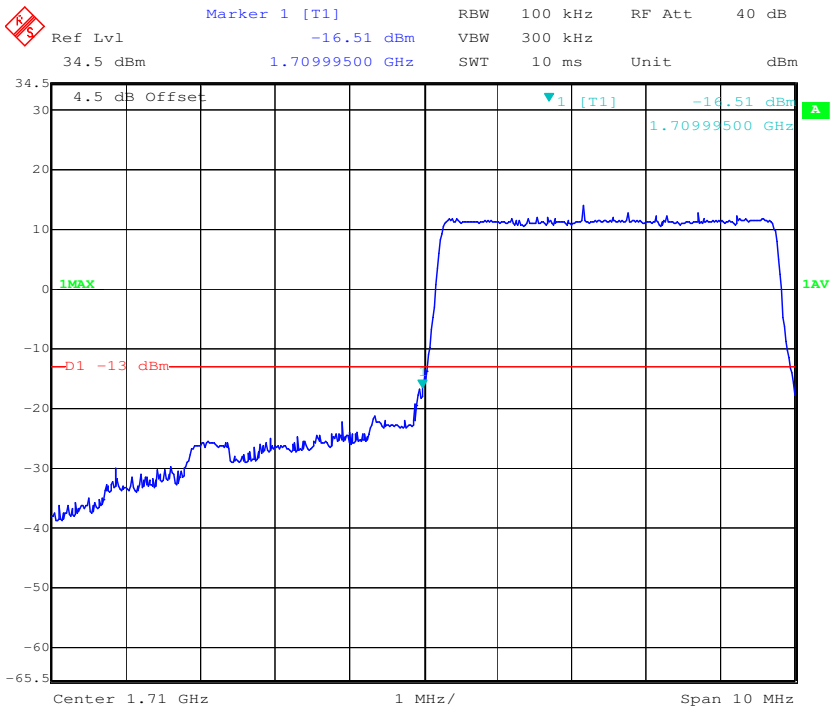

16-QAM (5.0 MHz, FULL RB) - Right Band Edge

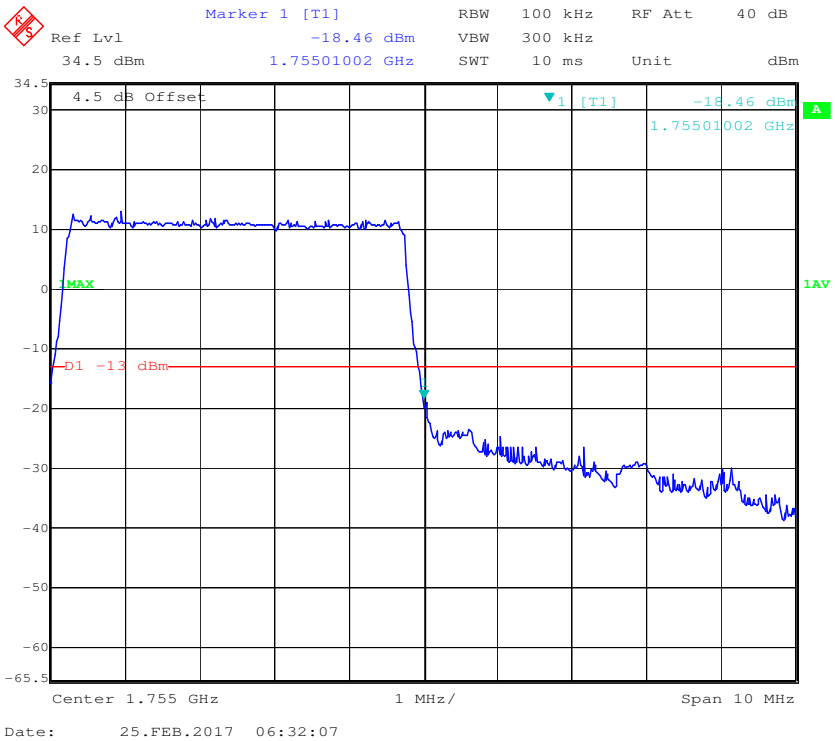

QPSK (10.0 MHz, FULL RB) - Left Band Edge

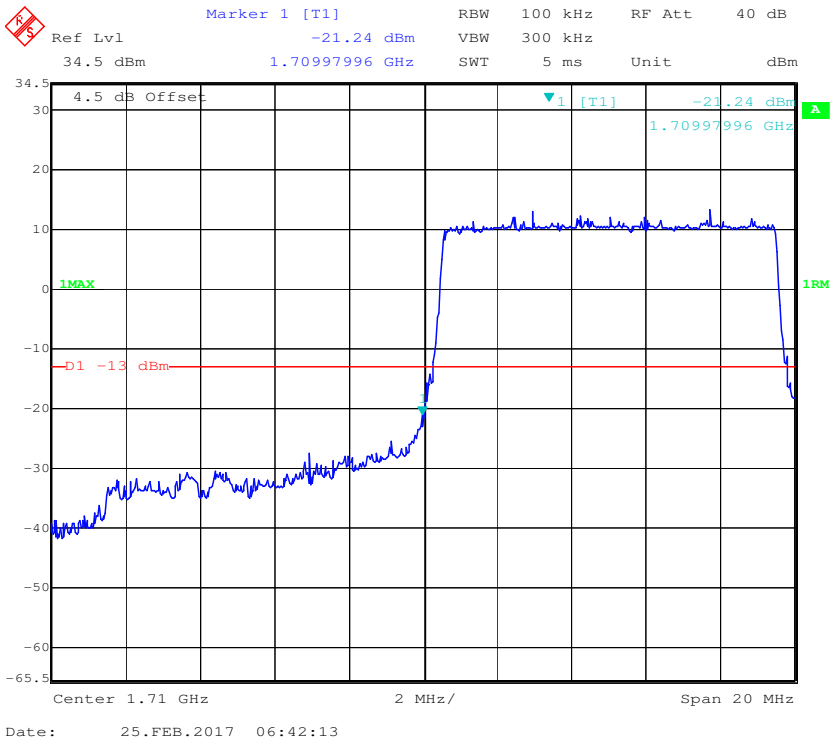

QPSK (10.0 MHz, FULL RB) - Right Band Edge

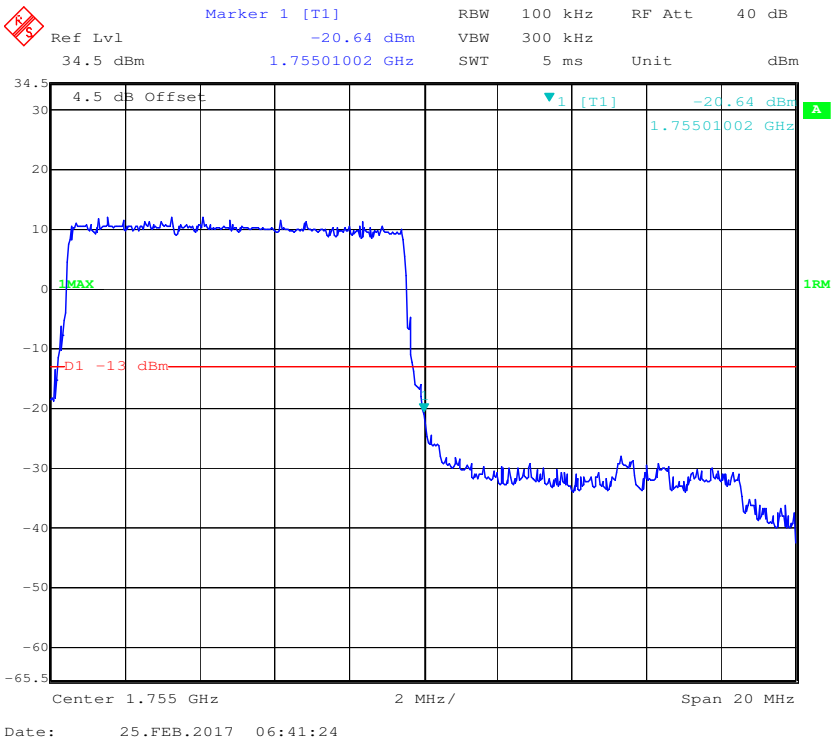

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

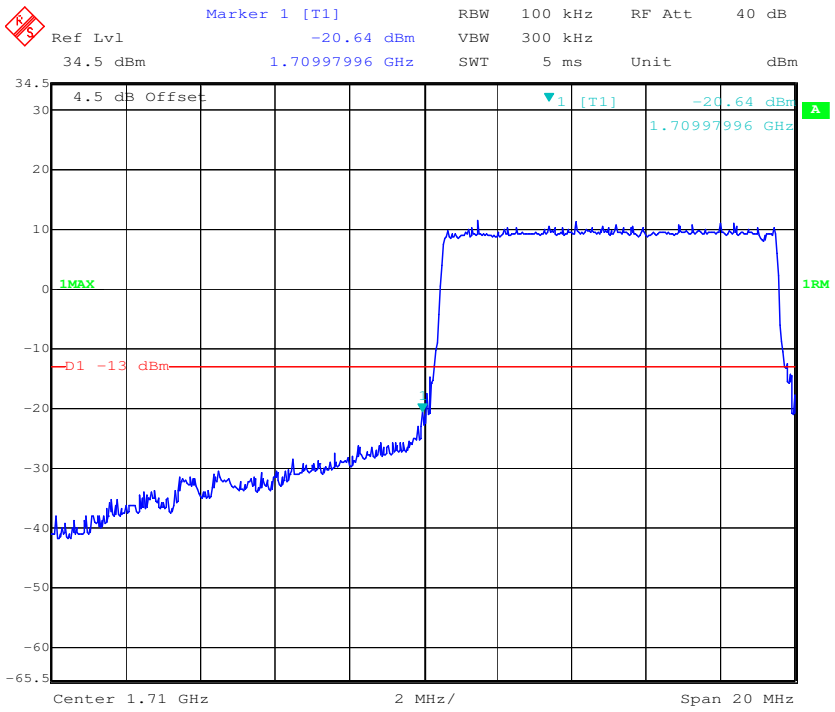

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

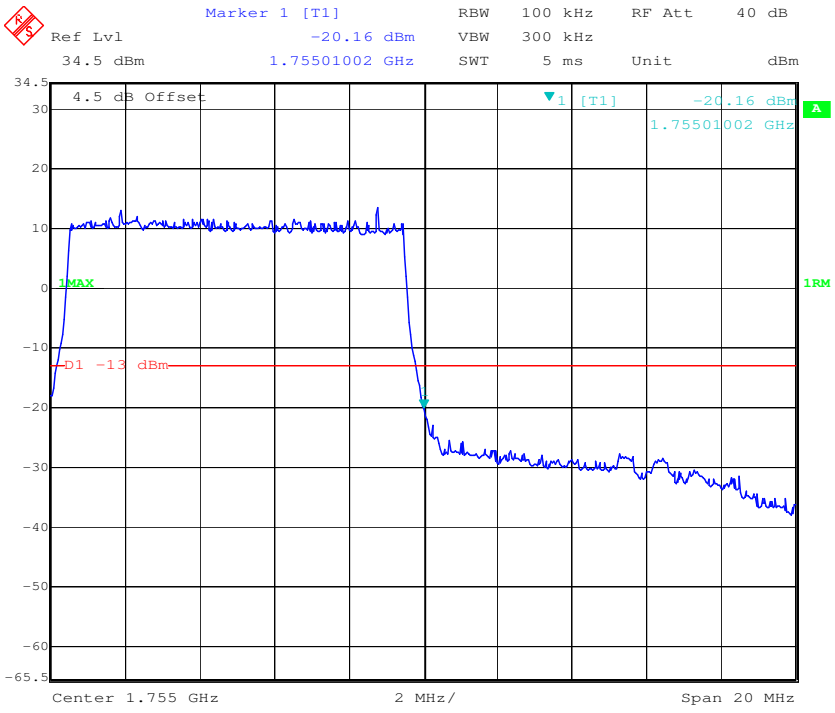

QPSK (15.0 MHz, FULL RB) - Left Band Edge

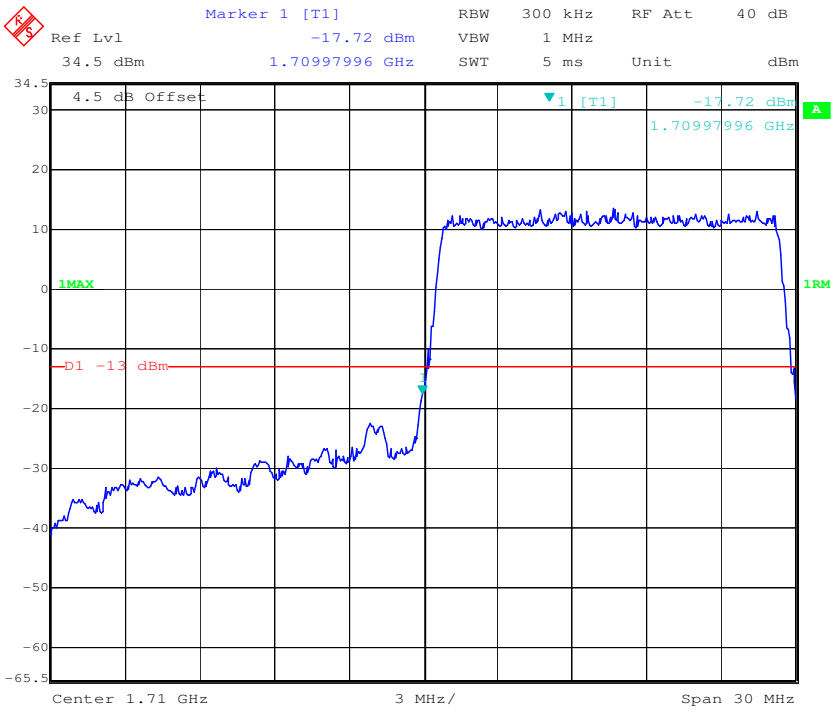

Date: 25.FEB.2017 06:44:14

QPSK (15.0 MHz, FULL RB) - Right Band Edge

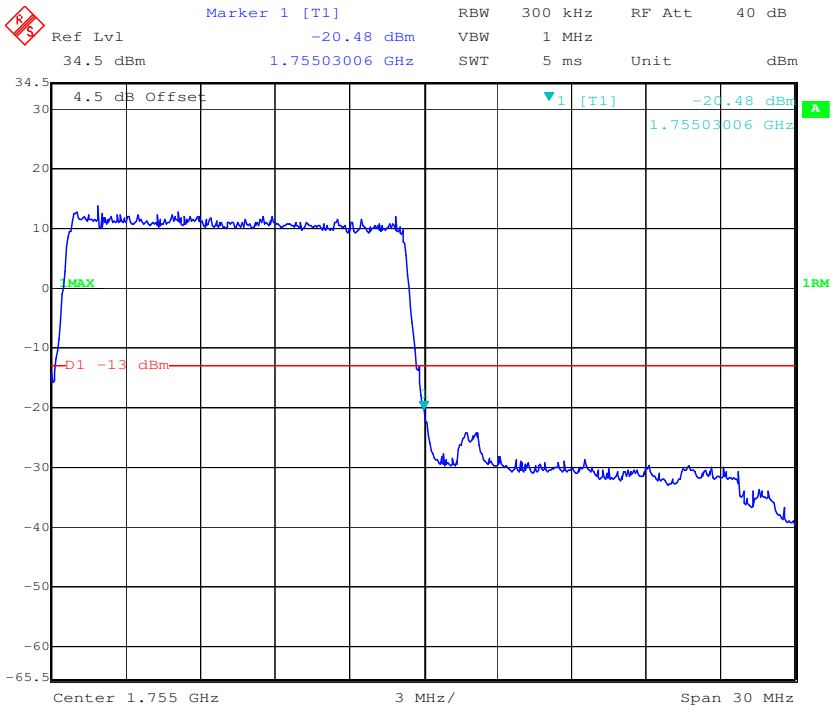

Date: 25.FEB.2017 06:47:39

16-QAM (15.0 MHz, FULL RB) - Left Band Edge

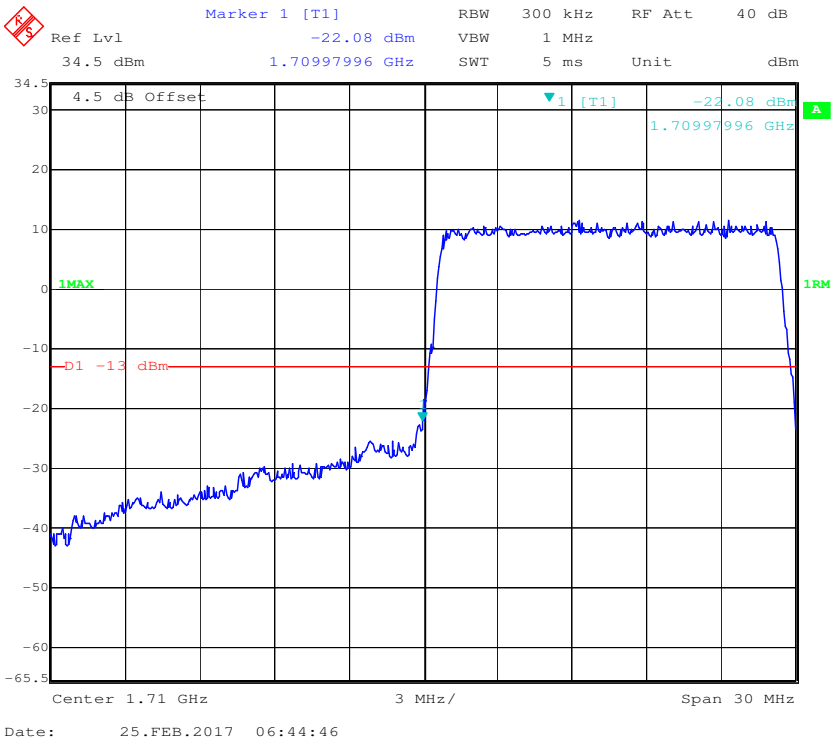

16-QAM (15.0 MHz, FULL RB) - Right Band Edge

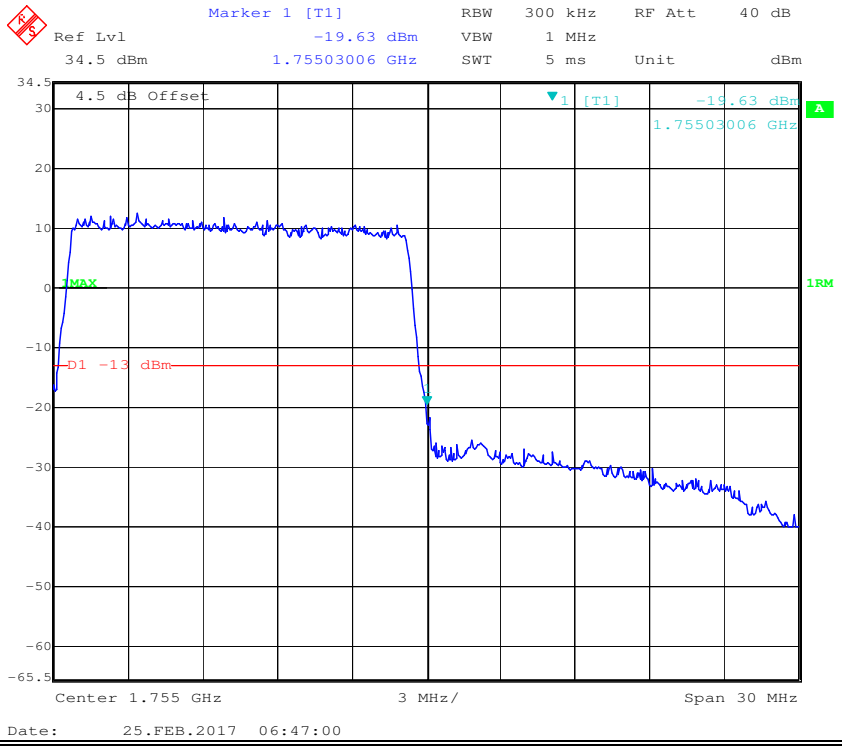

QPSK (20.0 MHz, FULL RB) - Left Band Edge

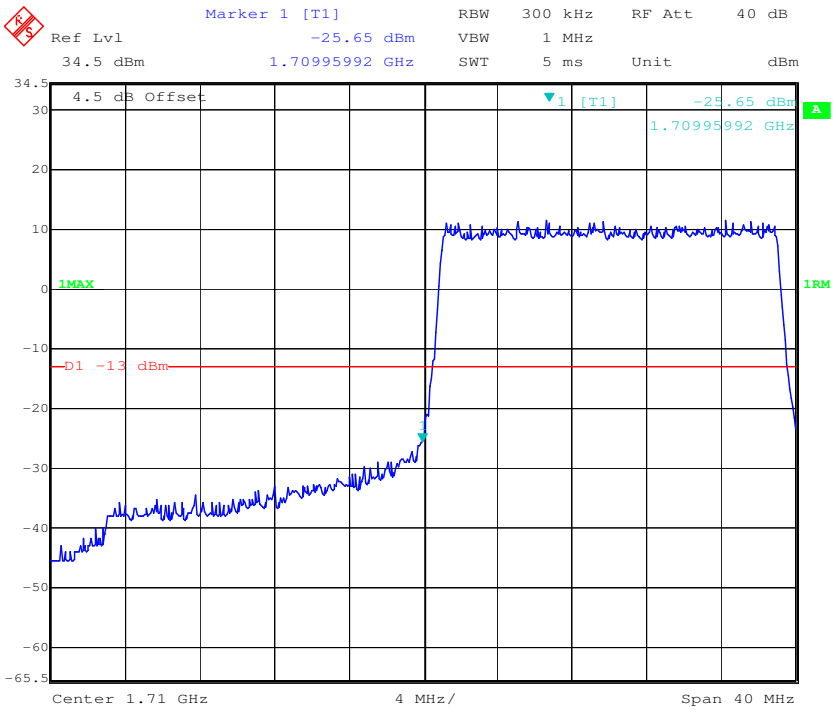

QPSK (20.0 MHz, FULL RB) - Right Band Edge

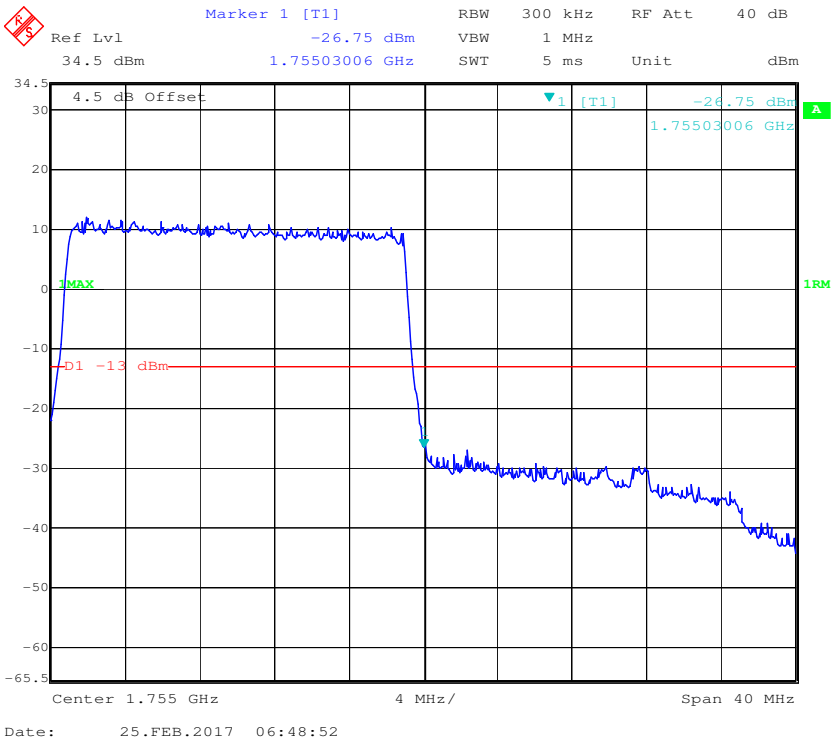

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

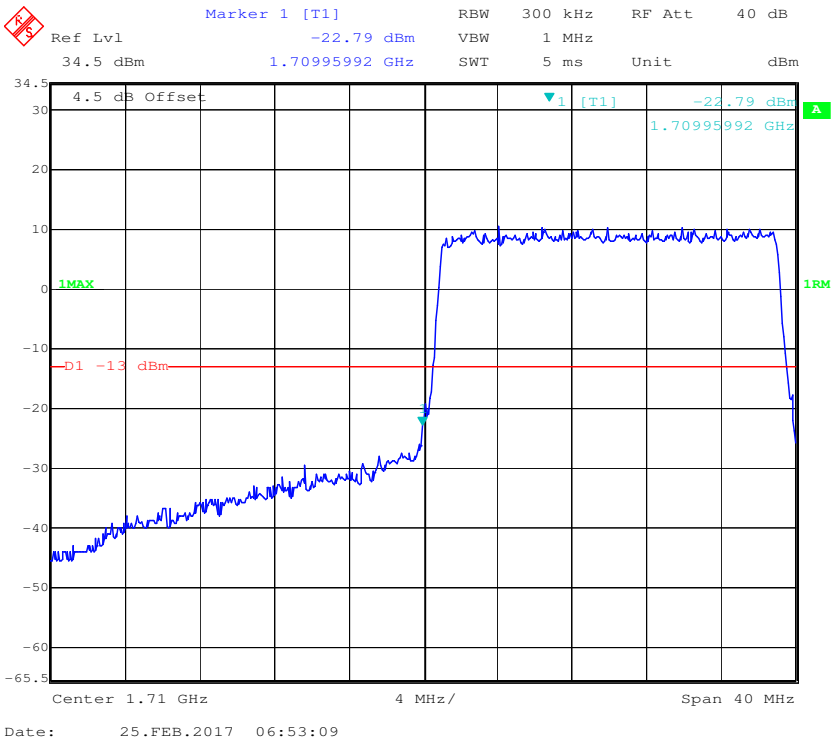

16-QAM (20.0 MHz, FULL RB) - Right Band Edge

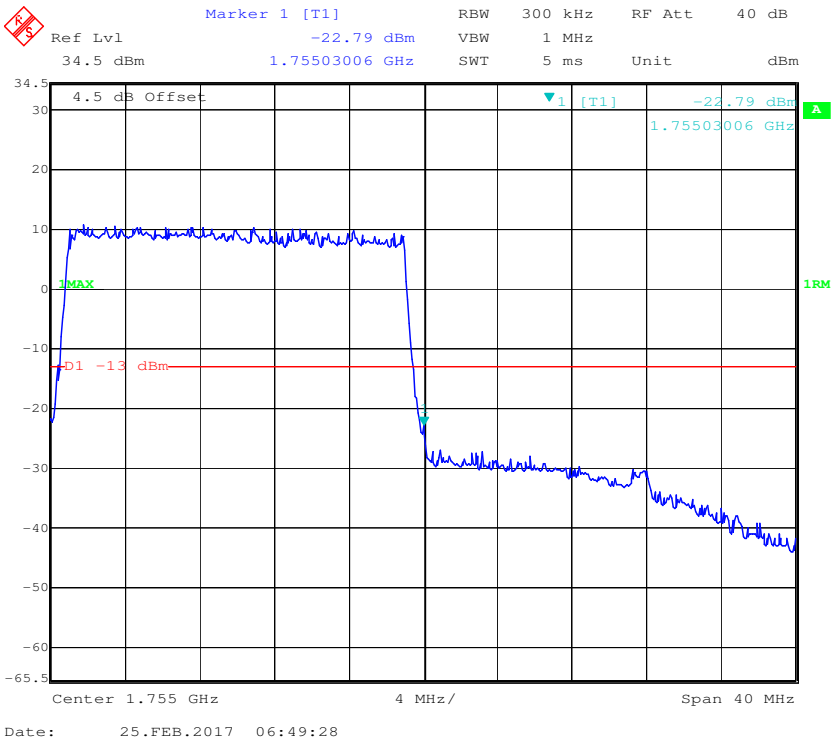

LTE Band 5:

QPSK (1.4 MHz, FULL RB) - Left Band Edge

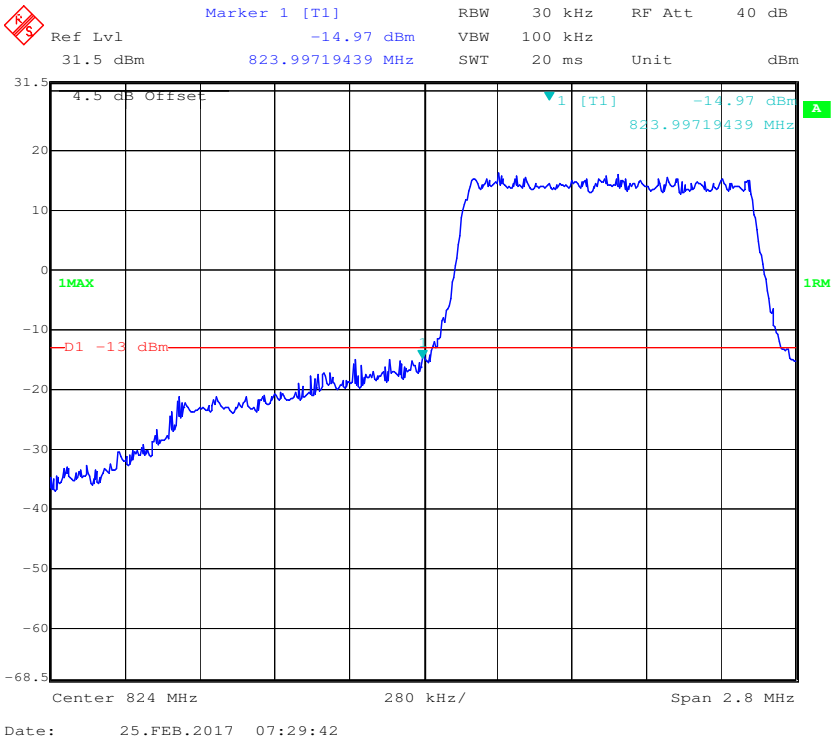

QPSK (1.4 MHz, FULL RB) - Right Band Edge

16-QAM (1.4 MHz, FULL RB) - Left Band Edge

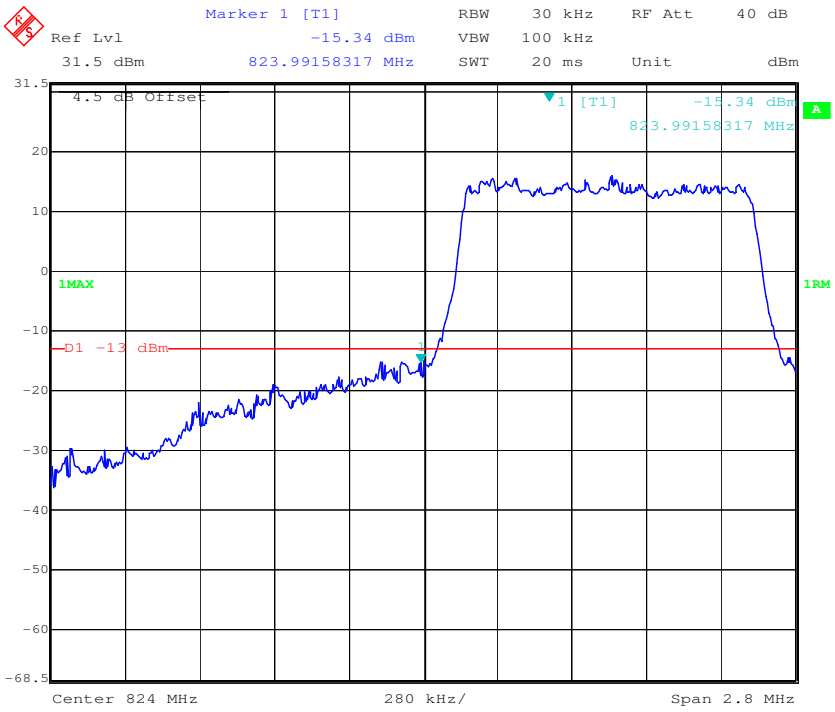

16-QAM (1.4 MHz, FULL RB) - Right Band Edge

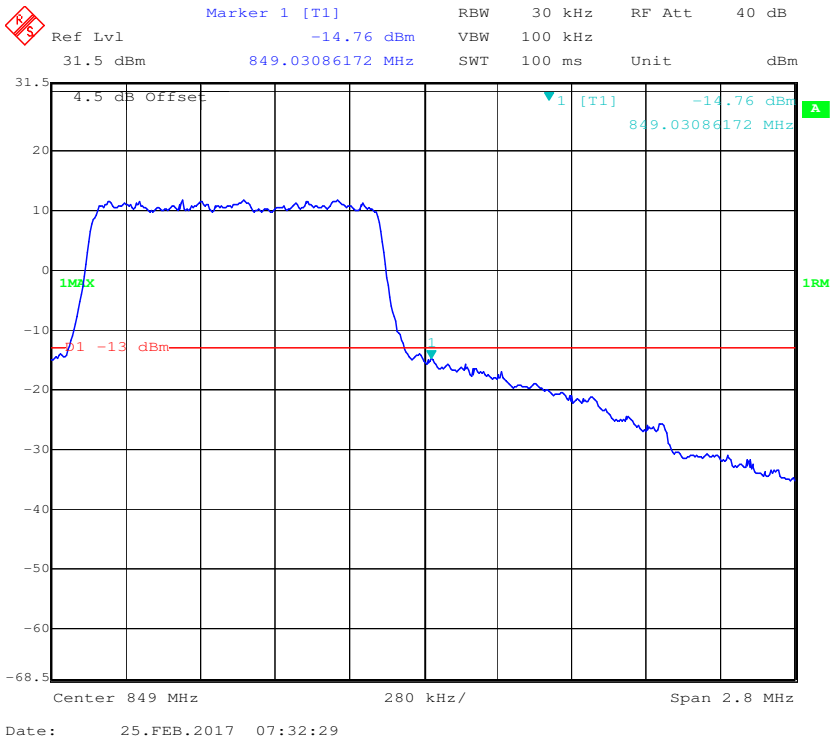

QPSK (3.0 MHz, FULL RB) - Left Band Edge

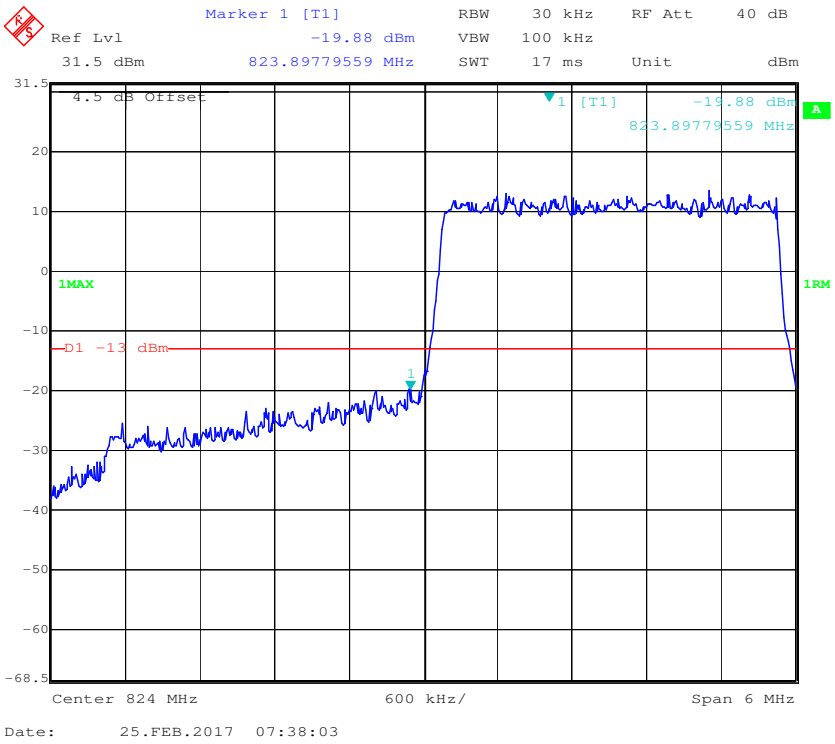

QPSK (3.0 MHz, FULL RB) - Right Band Edge

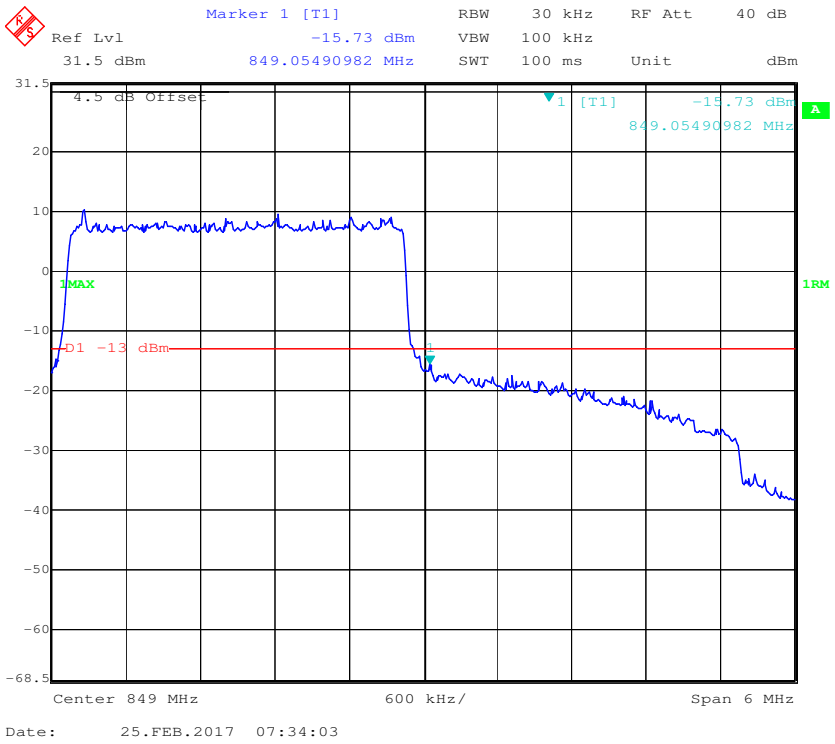

16-QAM (3.0 MHz, FULL RB) - Left Band Edge

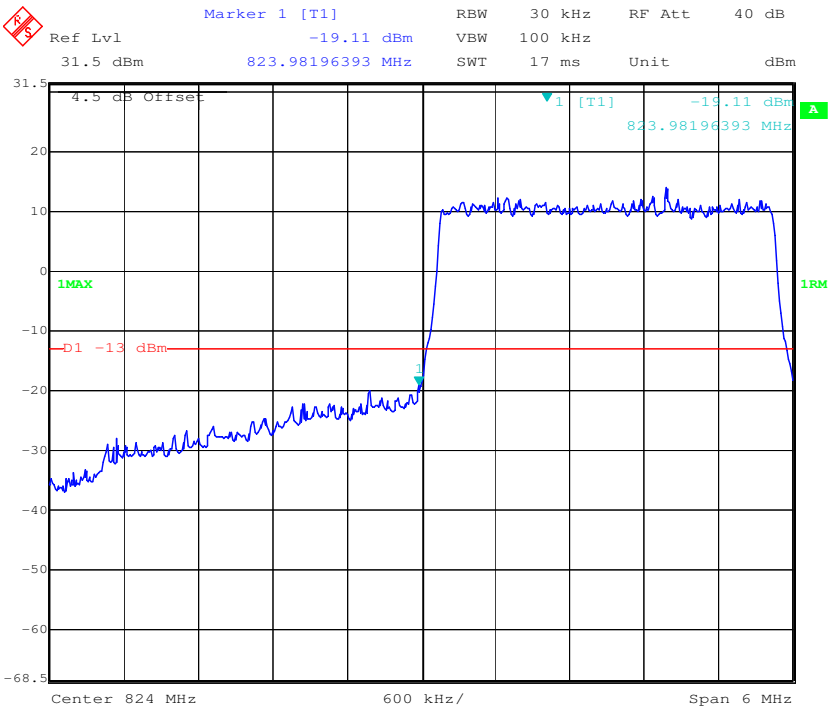

16-QAM (3.0 MHz, FULL RB) - Right Band Edge

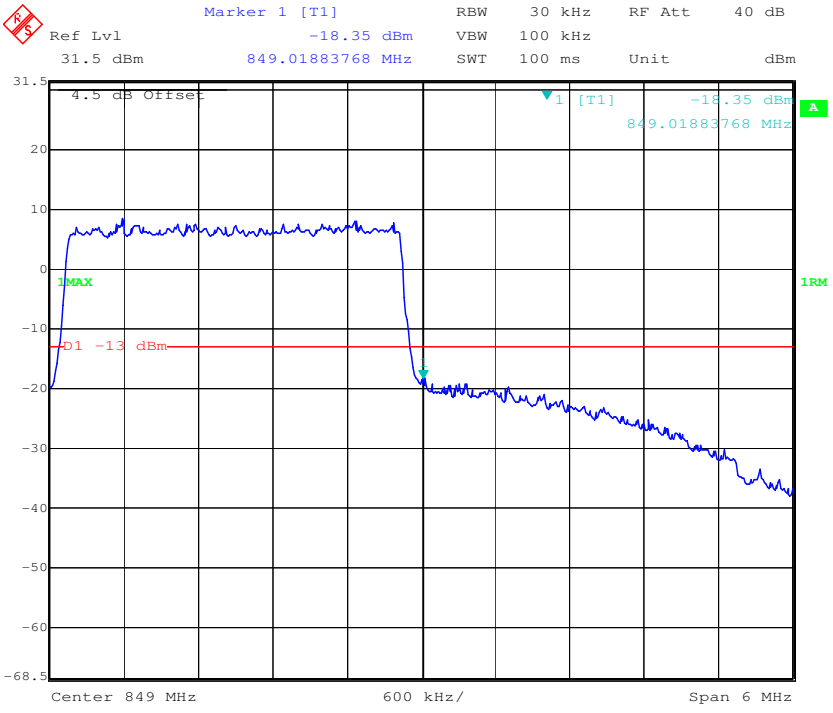

QPSK (5.0 MHz, FULL RB) - Left Band Edge

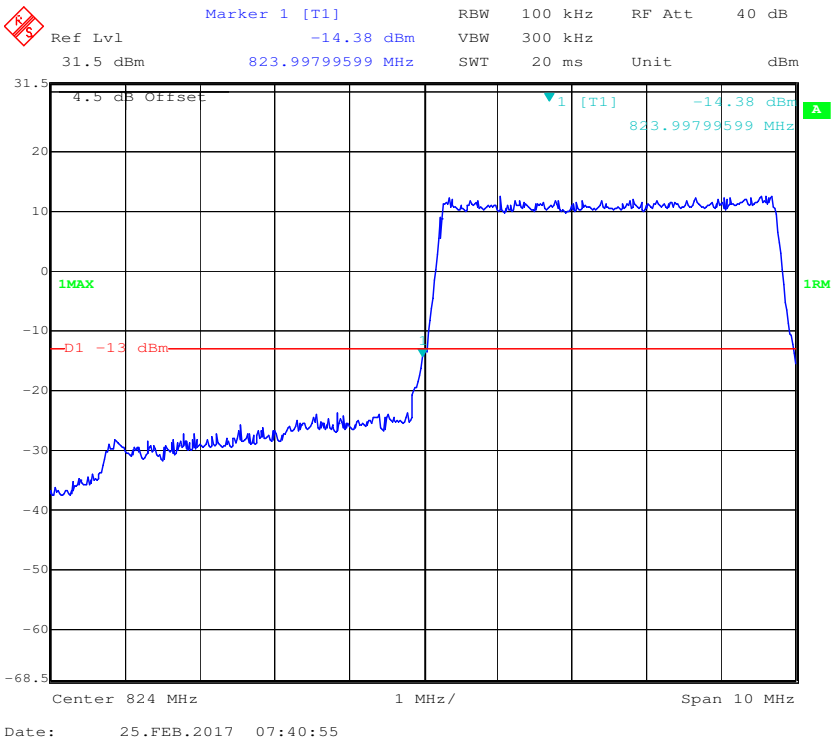

QPSK (5.0 MHz, FULL RB) - Right Band Edge

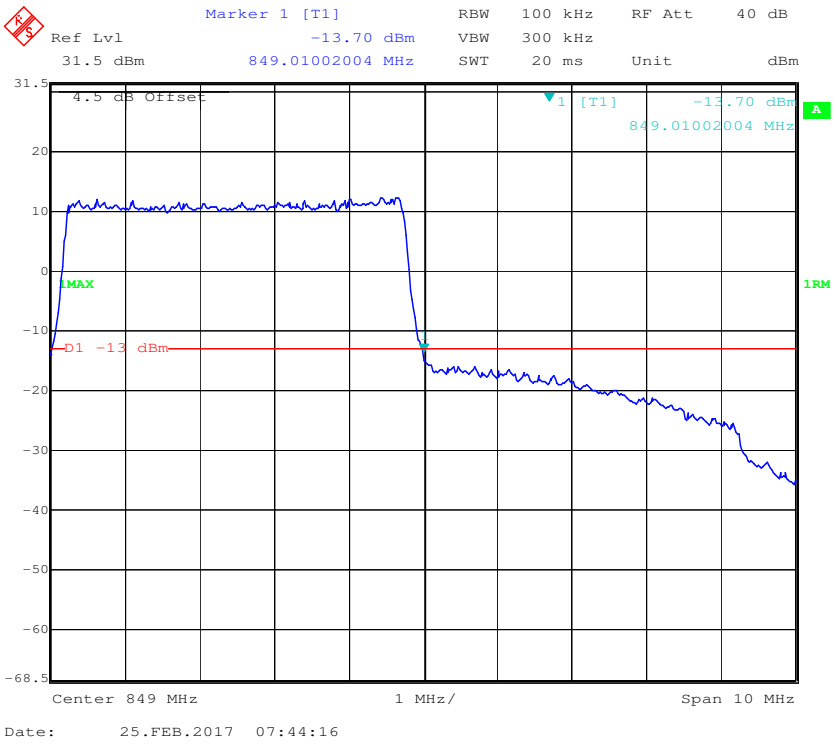

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

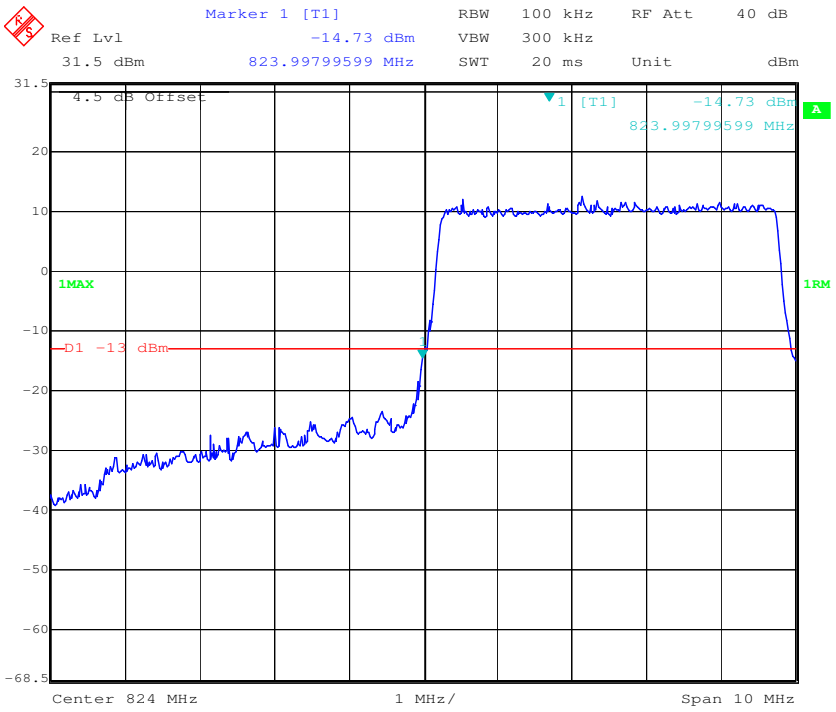

16-QAM (5.0 MHz, FULL RB) - Right Band Edge

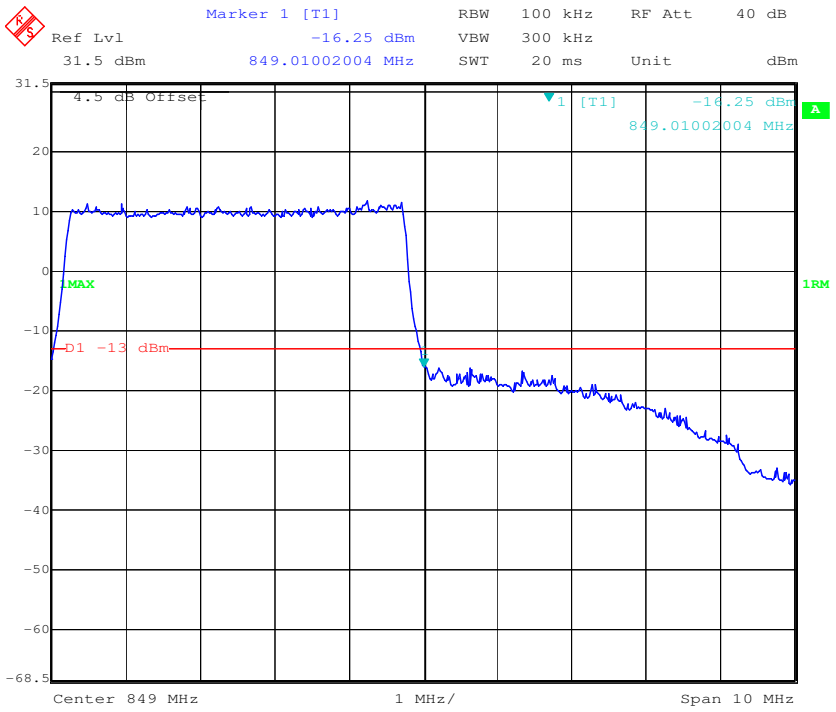

QPSK (10.0 MHz, FULL RB) - Left Band Edge

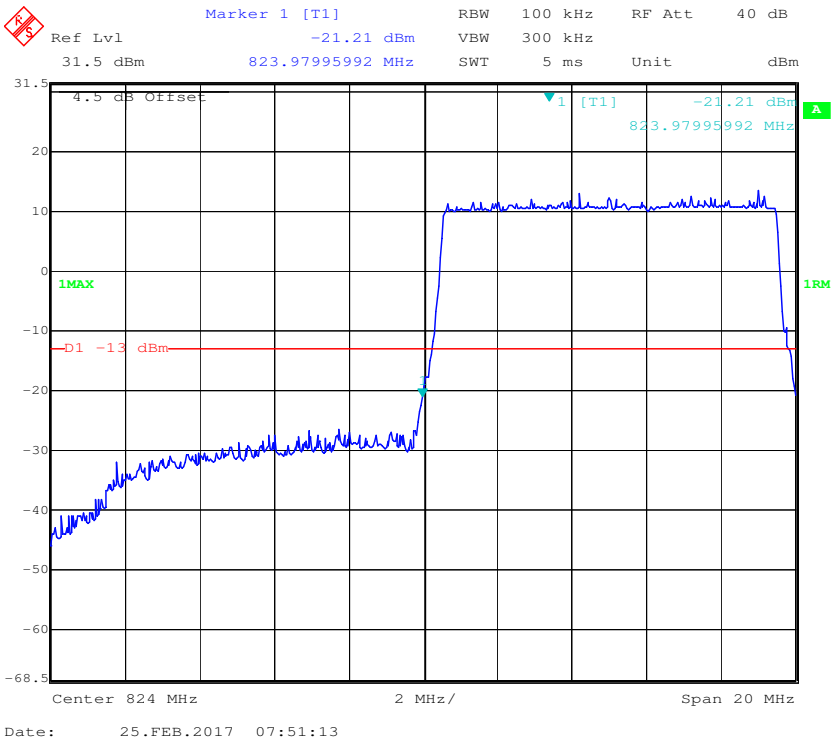

QPSK (10.0 MHz, FULL RB) - Right Band Edge

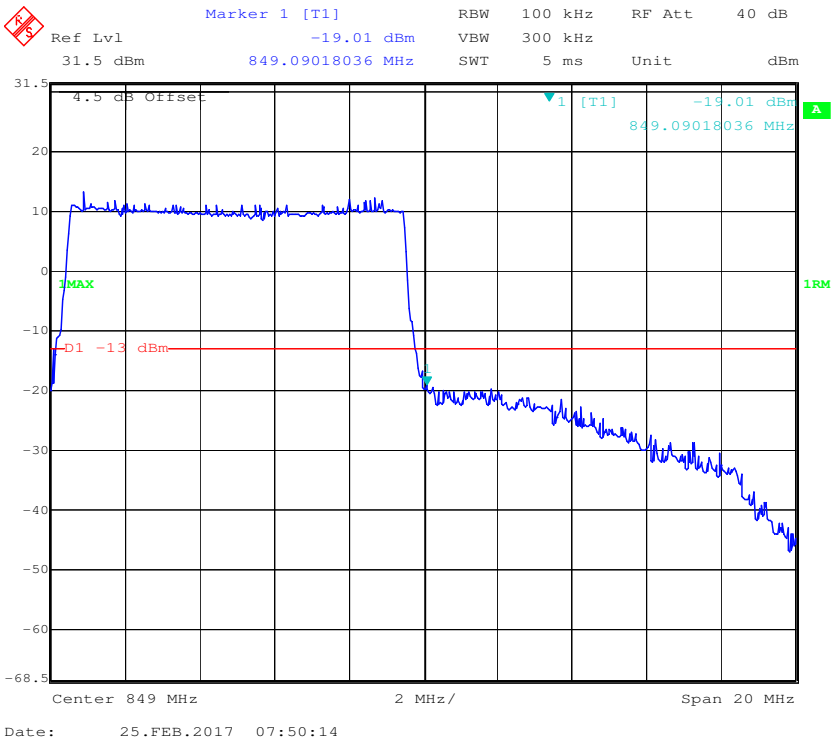

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

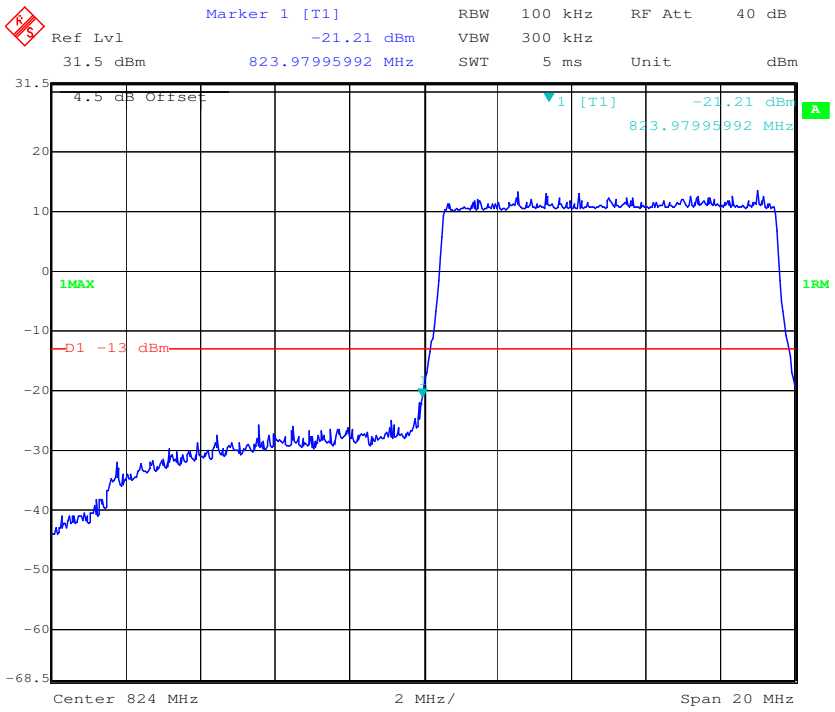

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

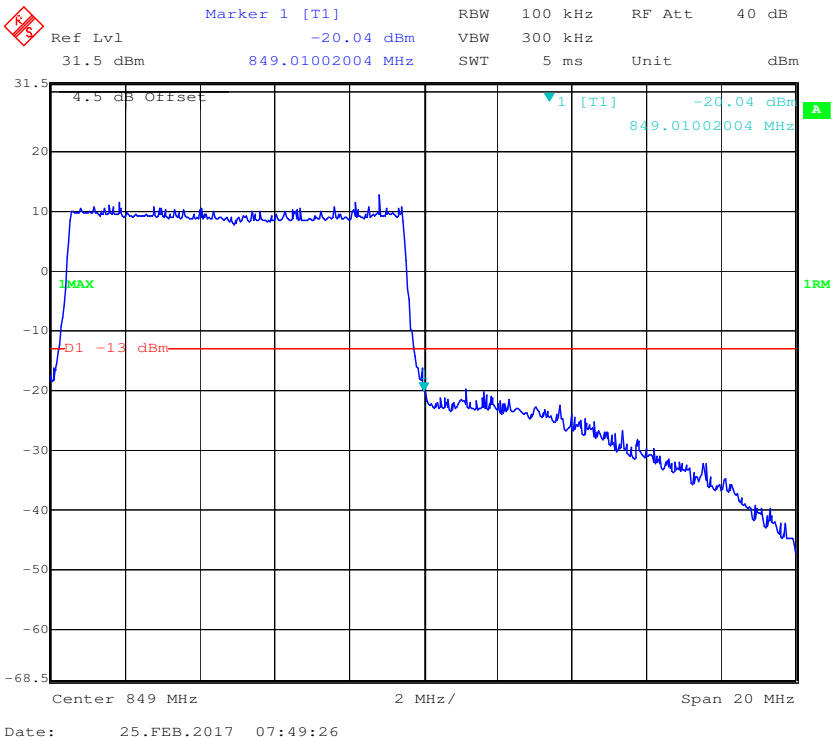

LTE Band 7:

QPSK (5.0 MHz, FULL RB) - Left Band Edge

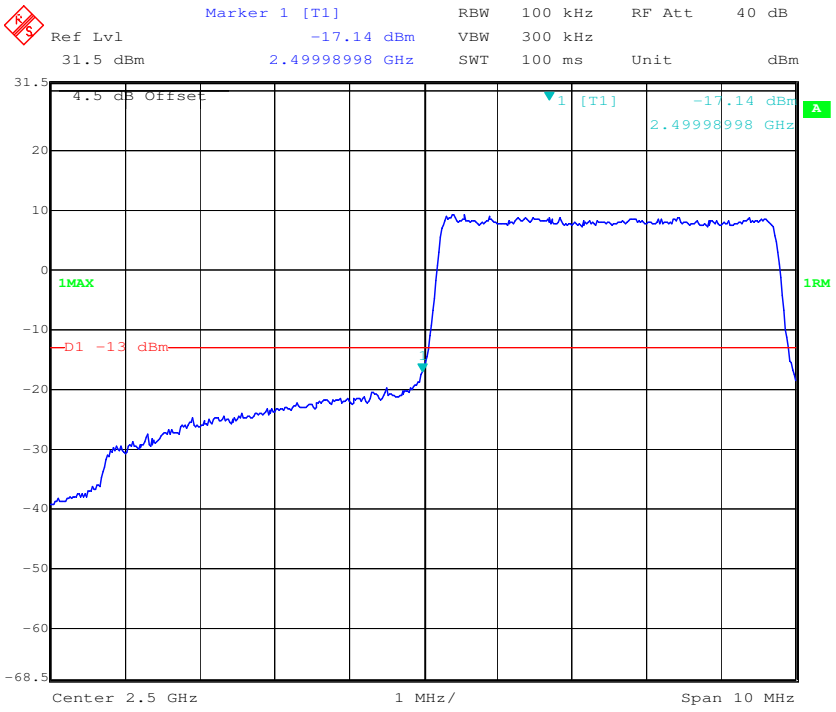

QPSK (5.0 MHz, FULL RB) - Right Band Edge

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

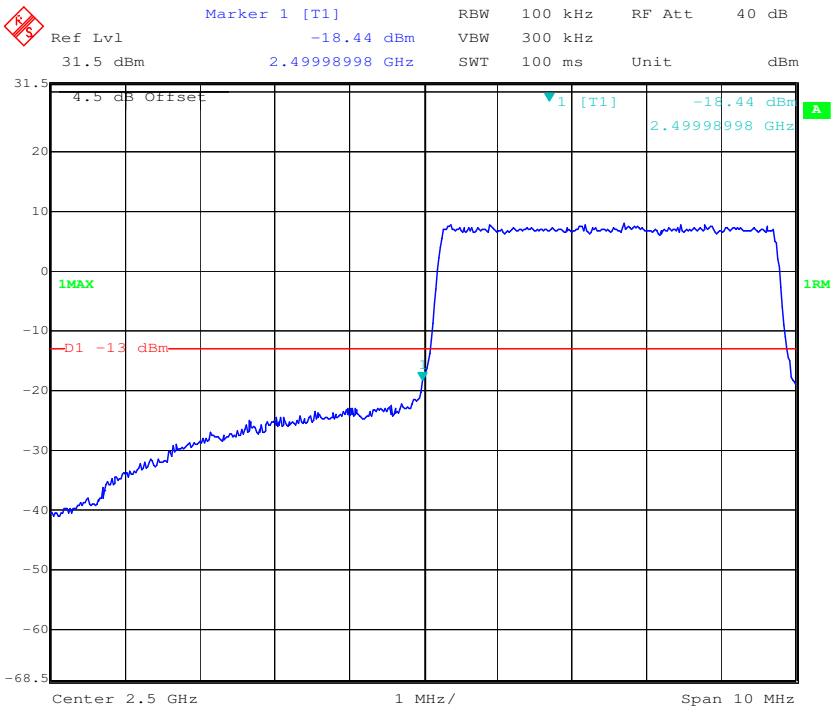

16-QAM (5.0 MHz, FULL RB) - Right Band Edge

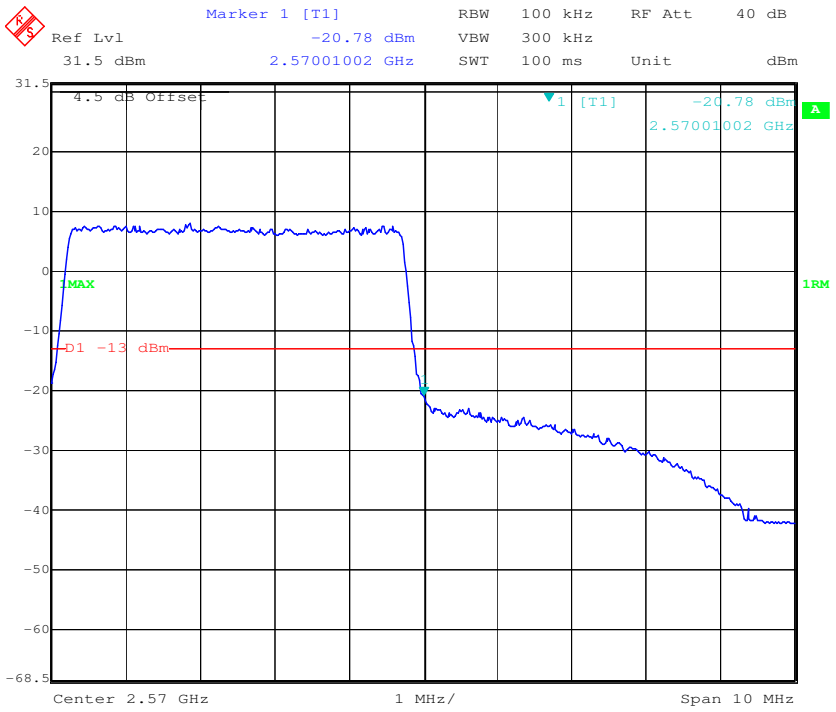

QPSK (10.0 MHz, FULL RB) - Left Band Edge

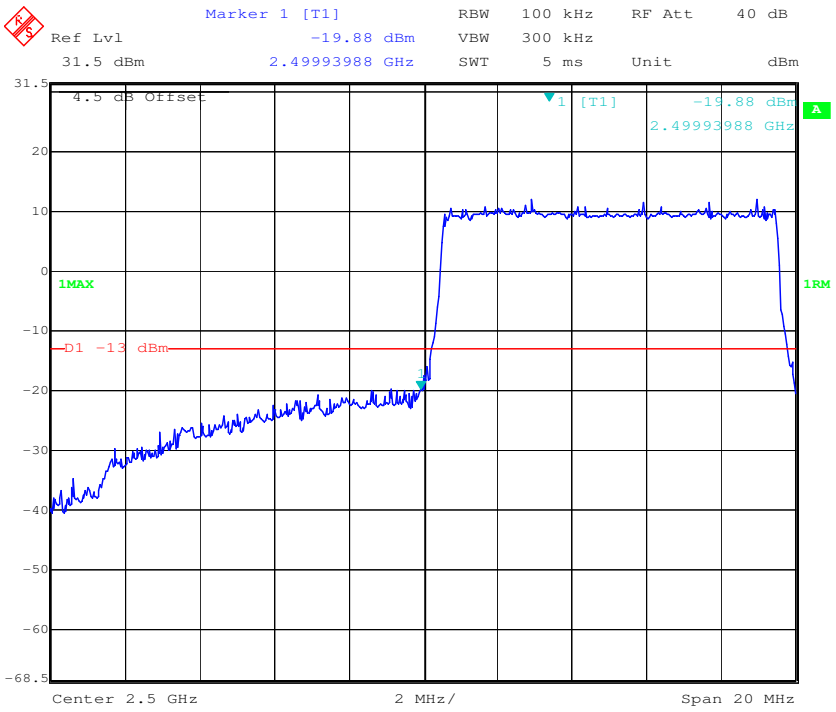

QPSK (10.0 MHz, FULL RB) - Right Band Edge

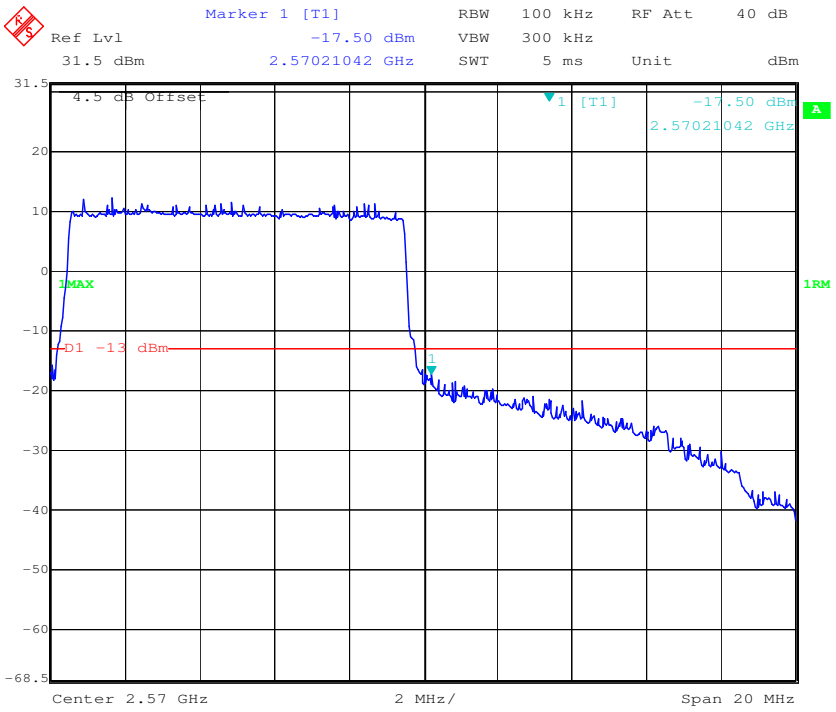

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

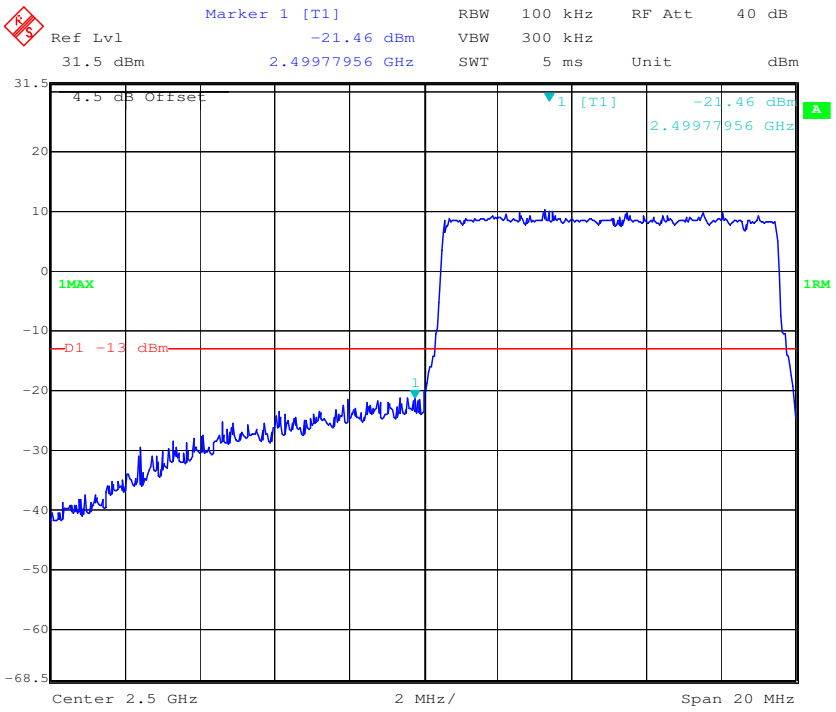

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

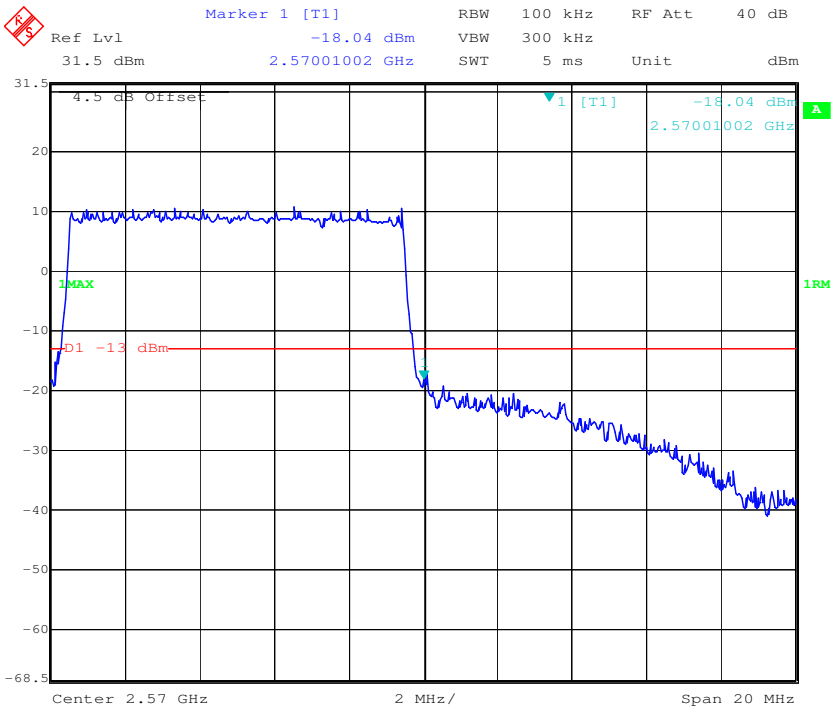

QPSK (15 MHz, FULL RB) - Left Band Edge

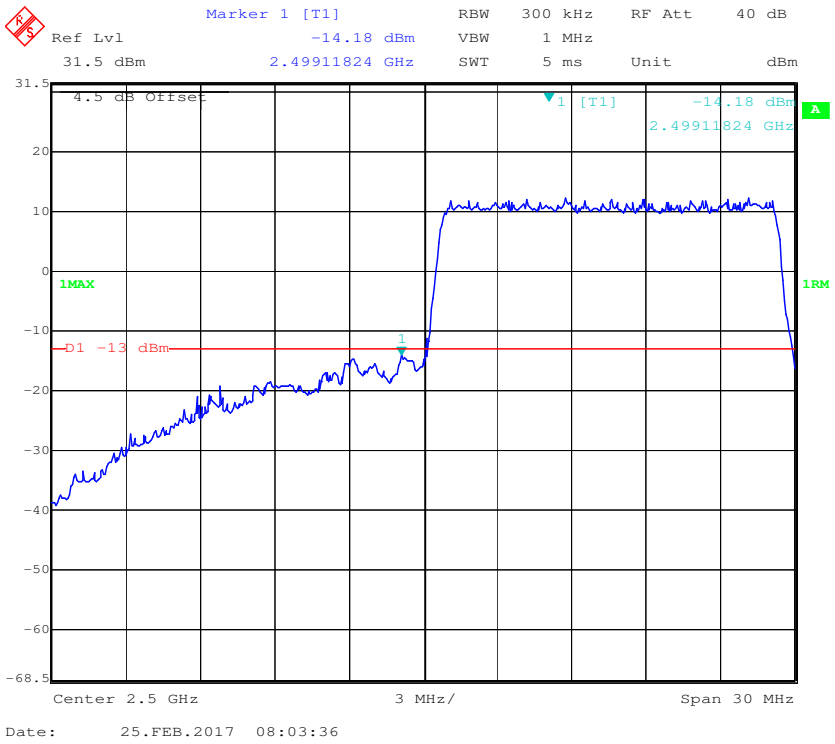

QPSK (15 MHz, FULL RB) - Right Band Edge

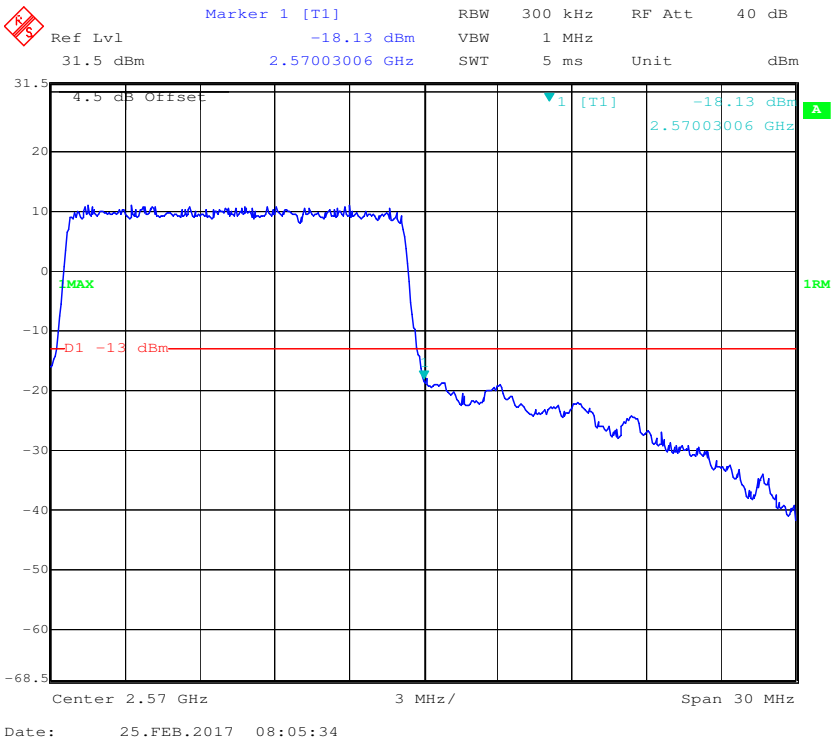

16-QAM (15 MHz, FULL RB) - Left Band Edge

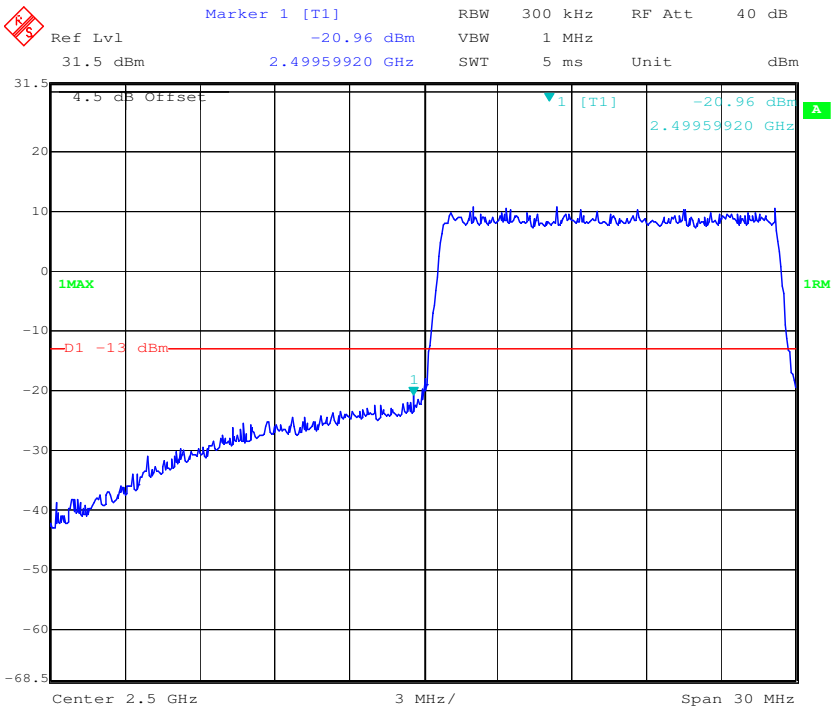

16-QAM (15 MHz, FULL RB) - Right Band Edge

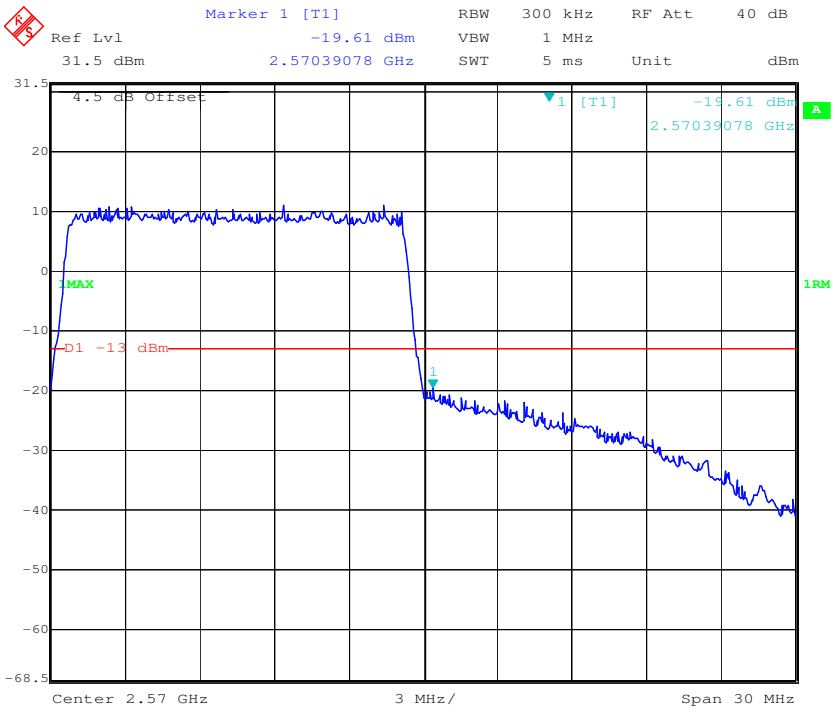

QPSK (20 MHz, FULL RB) - Left Band Edge

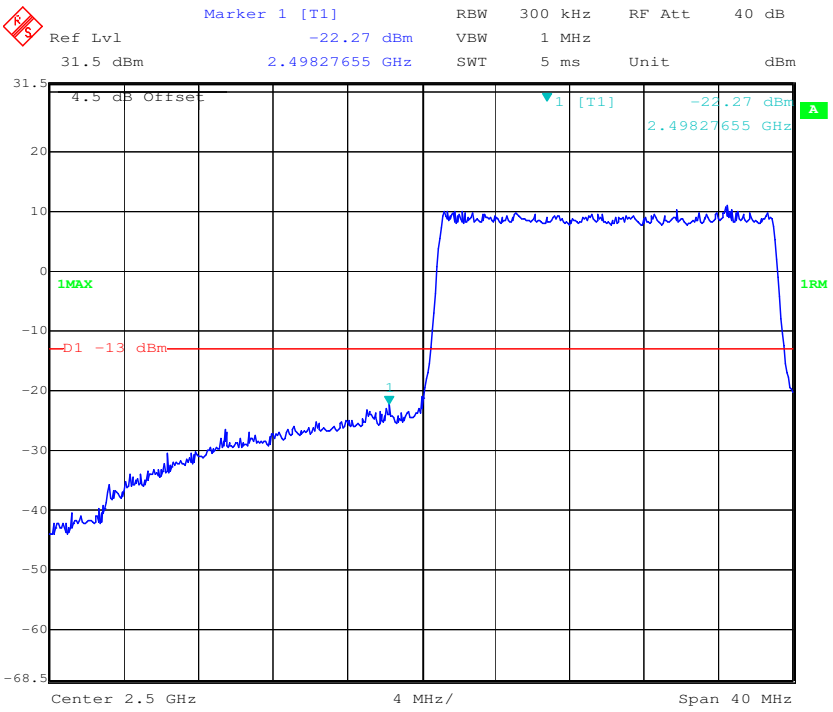

QPSK (20 MHz, FULL RB) - Right Band Edge

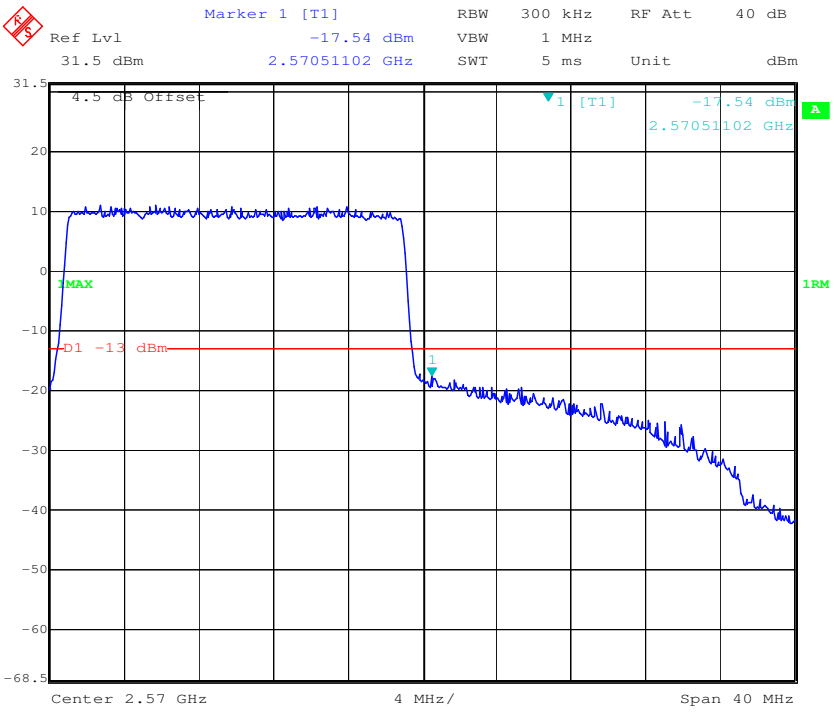

16-QAM (20 MHz, FULL RB) - Left Band Edge

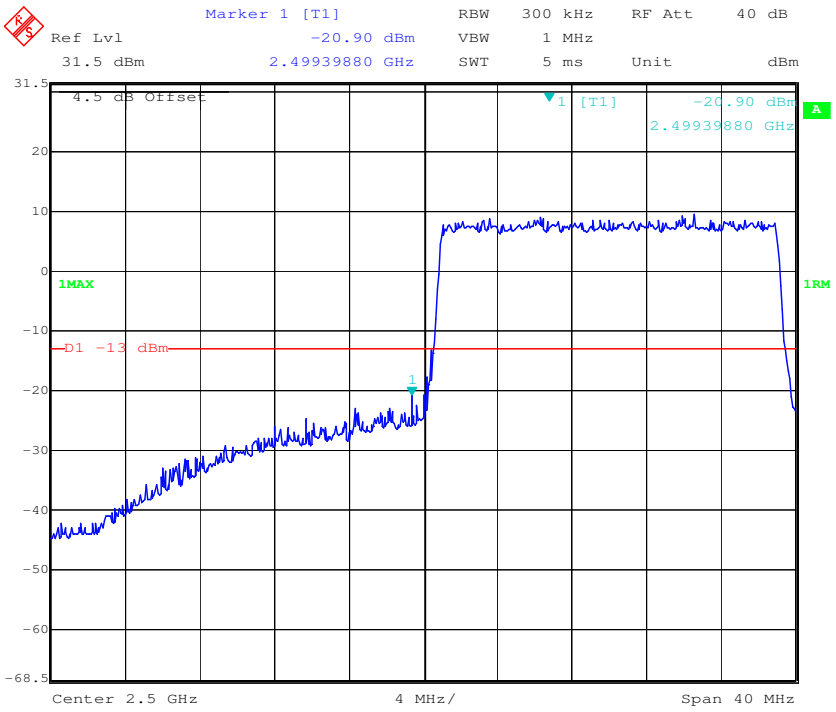

16-QAM (20 MHz, FULL RB) - Right Band Edge

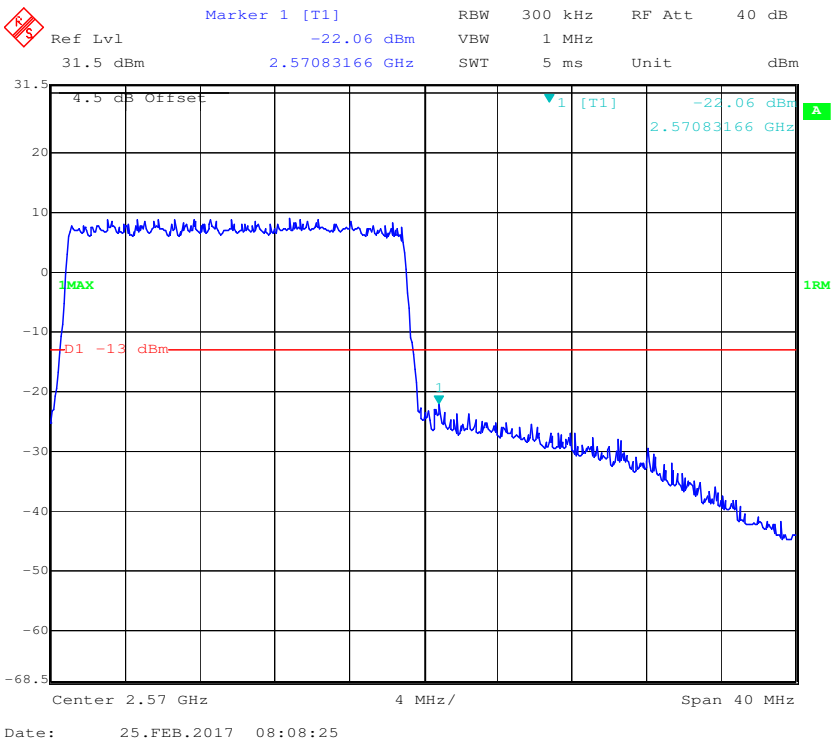

LTE Band 17:

QPSK (5.0 MHz, FULL RB) - Left Band Edge

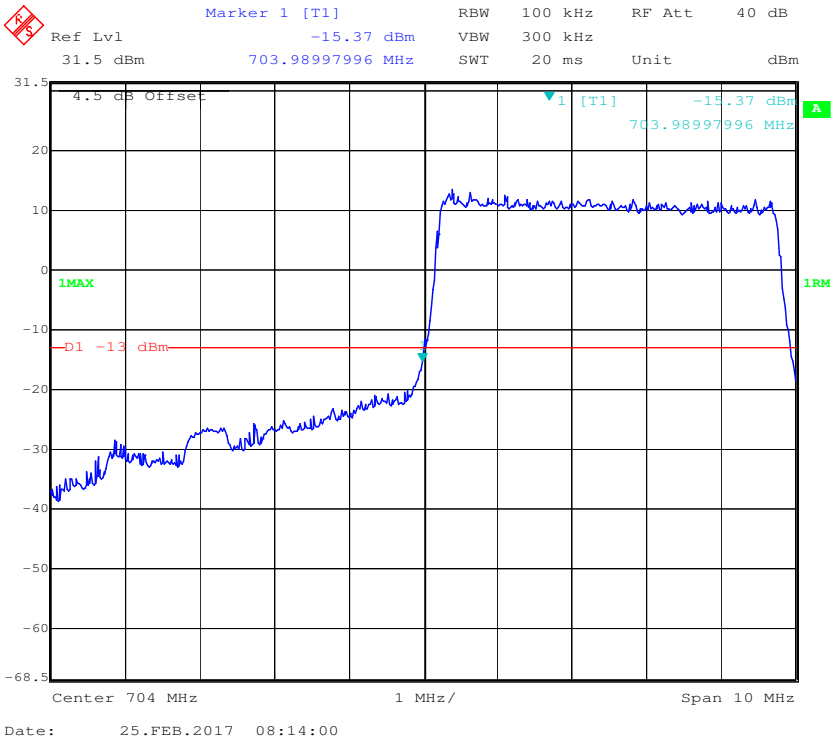

QPSK (5.0 MHz, FULL RB) - Right Band Edge

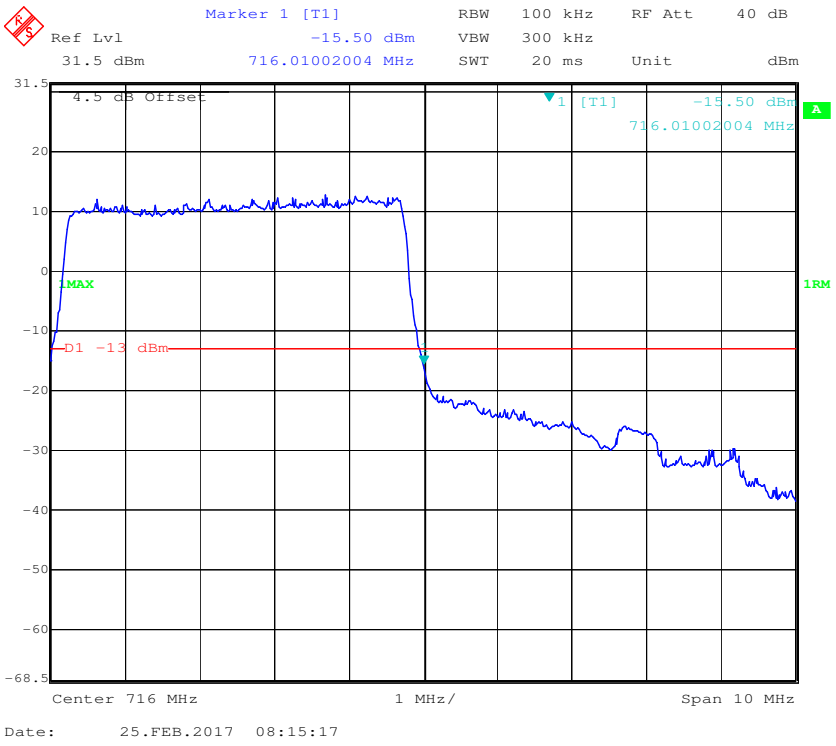

16-QAM (5.0 MHz, FULL RB) - Left Band Edge

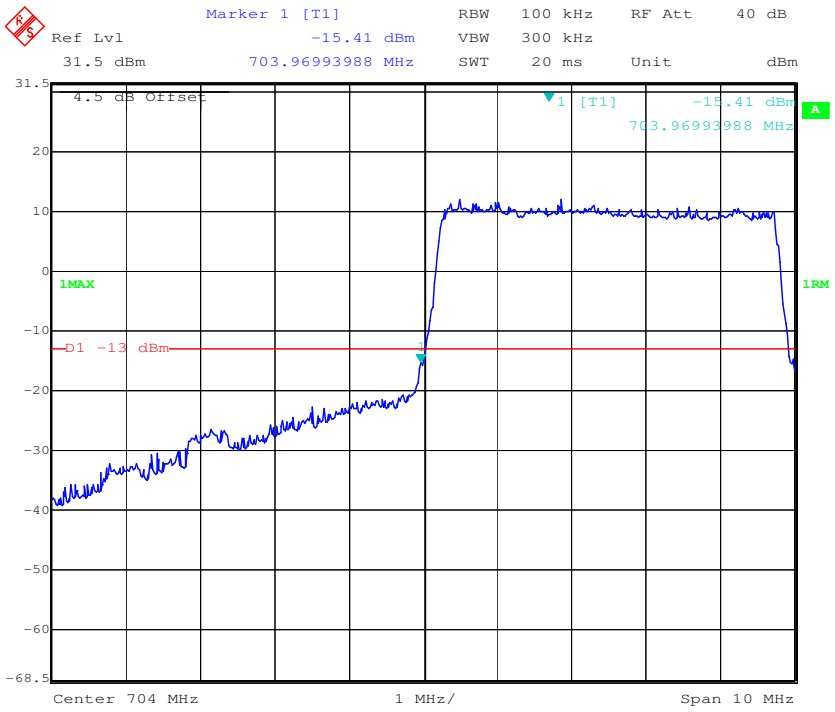

16-QAM (5.0 MHz, FULL RB) - Right Band Edge

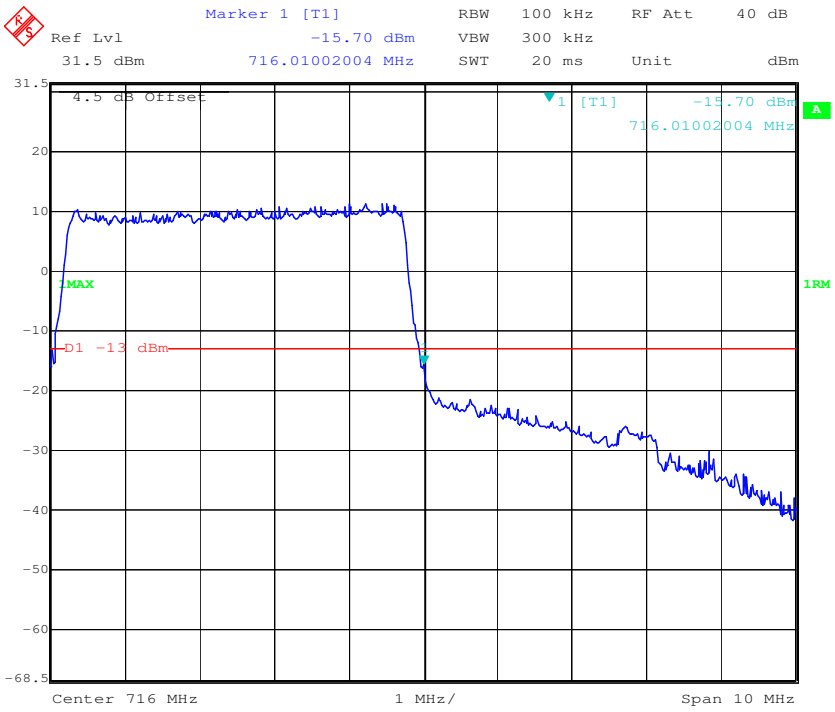

QPSK (10.0 MHz, FULL RB) - Left Band Edge

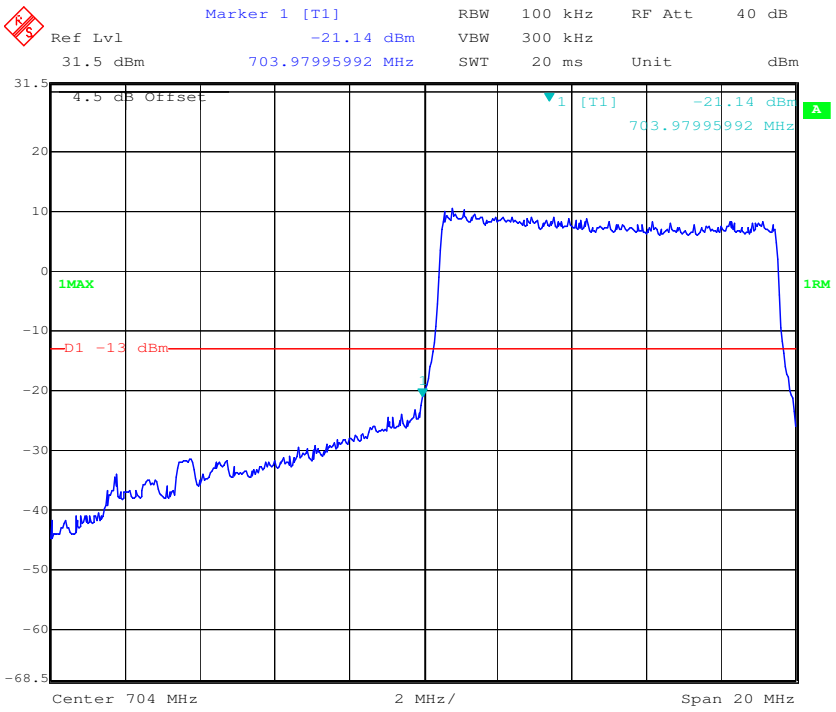

QPSK (10.0 MHz, FULL RB) - Right Band Edge

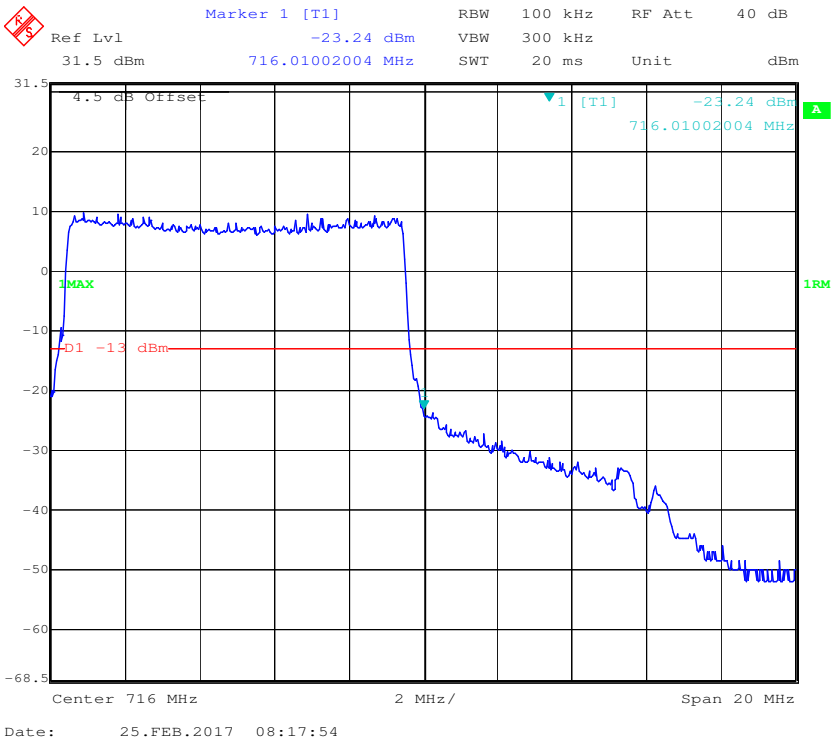

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

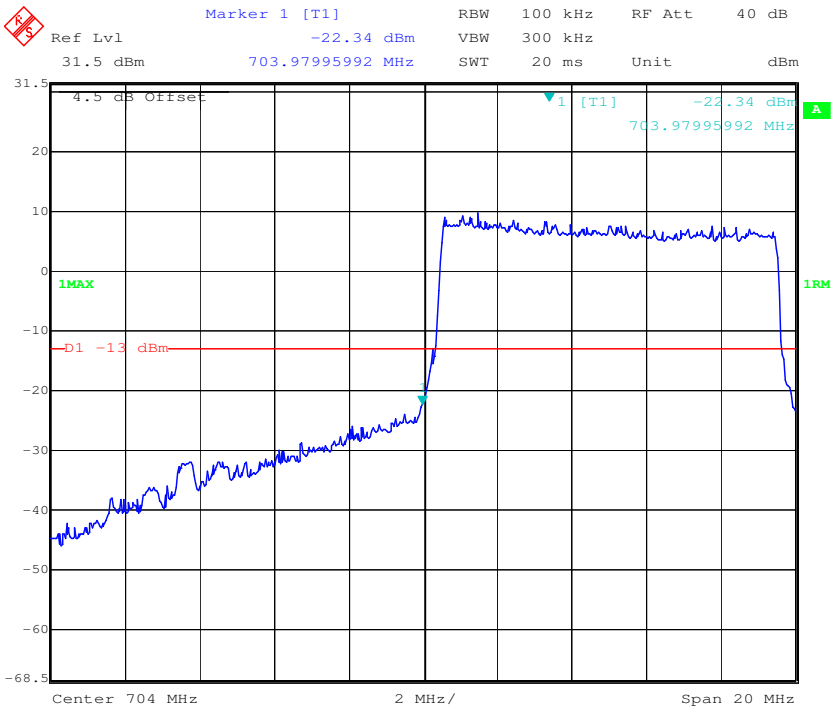

16-QAM (10.0 MHz, FULL RB) - Right Band Edge

FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055, §22.355, §24.235 and & §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile > 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

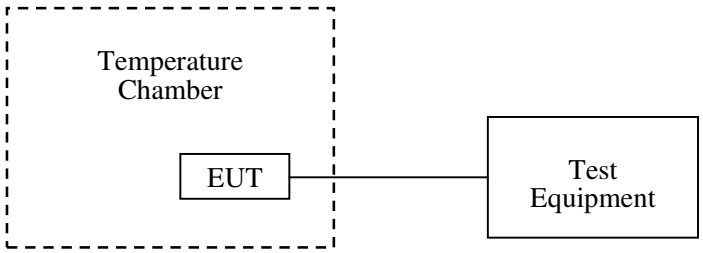

Test Data

Environmental Conditions

Temperature:	25 ℃
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Echo Wu on 2017-03-01.

EUT operation mode: transmitting

Test Result: Compliance. Please refer to the following tables.

Cellular Band (Part 22H)

GSM Mode

Middle Channel, f_o =836.6MHz				
Temperature (℃)	**Power Supplied (V_{DC})**	**Frequency Error (Hz)**	**Frequency Error (ppm)**	**Limit (ppm)**
-30	3.8	5	0.00598	2.5
-20		4	0.00478	2.5
-10		9	0.01076	2.5
0		8	0.00956	2.5
10		10	0.01195	2.5
20		13	0.01554	2.5
30		11	0.01315	2.5
40		13	0.01554	2.5
50		11	0.01315	2.5
25	V min.= 3.6	15	0.01793	2.5
25	V max.= 4.2	17	0.02032	2.5

EDGE Mode

Middle Channel, f_o =836.6MHz				
Temperature (℃)	**Power Supplied (V_{DC})**	**Frequency Error (Hz)**	**Frequency Error (ppm)**	**Limit (ppm)**
-30	3.8	-9	-0.01076	2.5
-20		-5	-0.00598	2.5
-10		-3	-0.00359	2.5
0		-4	-0.00478	2.5
10		-1	-0.00120	2.5
20		1	0.00120	2.5
30		2	0.00239	2.5
40		5	0.00598	2.5
50		5	0.00598	2.5
25	V min.= 3.6	7	0.00837	2.5
25	V max.= 4.2	10	0.01195	2.5

WCDMA Mode

Middle Channel, f_o =836.6MHz				
Temperature (℃)	**Power Supplied (V_{DC})**	**Frequency Error (Hz)**	**Frequency Error (ppm)**	**Limit (ppm)**
-30	3.8	-8	-0.00956	2.5
-20		-8	-0.00956	2.5
-10		-7	-0.00837	2.5
0		2	0.00239	2.5
10		-2	-0.00239	2.5
20		1	0.00120	2.5
30		2	0.00239	2.5
40		5	0.00598	2.5
50		5	0.00598	2.5
25	V min.= 3.6	6	0.00717	2.5
25	V max.= 4.2	7	0.00837	2.5

PCS Band (Part 24E)

GSM Mode

Middle Channel, f_o =1880.0 MHz				
Temperature (℃)	**Power Supplied (V_{DC})**	**Frequency Error (Hz)**	**Frequency Error (ppm)**	**Result**
-30	3.8	4	0.00213	pass
-20		6	0.00319	pass
-10		7	0.00372	pass
0		9	0.00479	pass
10		11	0.00585	pass
20		18	0.00957	pass
30		19	0.01011	pass
40		19	0.01011	pass
50		20	0.01064	pass
25	V min.= 3.6	21	0.01117	pass
25	V max.= 4.2	21	0.01117	pass

EDGE Mode

Middle Channel, f_o =1880.0 MHz				
Temperature (℃)	**Power Supplied (V_{DC})**	**Frequency Error (Hz)**	**Frequency Error (ppm)**	**Result**
-30	3.8	9	0.00479	pass
-20		10	0.00532	pass
-10		11	0.00585	pass
0		10	0.00532	pass
10		13	0.00691	pass
20		15	0.00798	pass
30		16	0.00851	pass
40		10	0.00532	pass
50		19	0.01011	pass
25	V min.= 3.6	20	0.01064	pass
25	V max.= 4.2	21	0.01117	pass

WCDMA Mode

Middle Channel, f_o =1880.0 MHz				
Temperature (℃)	**Power Supplied (V_{DC})**	**Frequency Error (Hz)**	**Frequency Error (ppm)**	**Result**
-30	3.8	-9	-0.00479	pass
-20		-8	-0.00426	pass
-10		-7	-0.00372	pass
0		-2	-0.00106	pass
10		-2	-0.00106	pass
20		1	0.00053	pass
30		0	0.00000	pass
40		1	0.00053	pass
50		2	0.00106	pass
25	V min.= 3.6	4	0.00213	pass
25	V max.= 4.2	7	0.00372	pass

AWS Band (Part 27)

WCDMA Mode

Middle Channel, f_o =1732.6 MHz				
Temperature (℃)	**Voltage Supplied (V_{DC})**	**Frequency Error (Hz)**	**Frequency Error (ppm)**	**Limit (ppm)**
-30	3.8	-15	-0.00866	pass
-20		-11	-0.00635	pass
-10		-7	-0.00404	pass
0		-10	-0.00577	pass
10		-8	-0.00462	pass
20		-5	-0.00289	pass
30		-4	-0.00231	pass
40		2	0.00115	pass
50		2	0.00115	pass
25	V min.= 3.6	4	0.00231	pass
25	V max.= 4.2	6	0.00346	pass

LTE Band 2:

20 MHz Middle Channel, f_o=1880MHz(QPSK)				
Temperature (℃)	**Power Supplied (V_{DC})**	**Frequency Error (Hz)**	**Frequency Error (ppm)**	**Result**
-30	3.8	2	0.00106	pass
-20		2	0.00106	pass
-10		-1	-0.00053	pass
0		1	0.00053	pass
10		-2	-0.00106	pass
20		-1	-0.00053	pass
30		2	0.00106	pass
40		-2	-0.00106	pass
50		-1	-0.00053	pass
20	V min.= 3.6	2	0.00106	pass
	V max.= 4.2	1	0.00053	pass

20 MHz Middle Channel, f_o=1880MHz(16-QAM)				
Temperature (℃)	**Power Supplied (V_{DC})**	**Frequency Error (Hz)**	**Frequency Error (ppm)**	**Result**
-30	3.8	1	0.00053	pass
-20		2	0.00106	pass
-10		1	0.00053	pass
0		1	0.00053	pass
10		-2	-0.00106	pass
20		-1	-0.00053	pass
30		2	0.00106	pass
40		-2	-0.00106	pass
50		-1	-0.00053	pass
20	V min.= 3.6	2	0.00106	pass
	V max.= 4.2	-1	-0.00053	pass

LTE Band 4:

20 MHz Middle Channel, f_o=1732.5 MHz(QPSK)				
Temperature (℃)	**Power Supplied (V_{DC})**	**Frequency Error (Hz)**	**Frequency Error (ppm)**	**Result**
-30	3.8	1	0.00058	pass
-20		1	0.00058	pass
-10		-1	-0.00058	pass
0		1	0.00058	pass
10		3	0.00173	pass
20		1	0.00058	pass
30		-1	-0.00058	pass
40		1	0.00058	pass
50		2	0.00115	pass
20	V min.= 3.6	1	0.00058	pass
	V max.= 4.2	3	0.00173	pass

20 MHz Middle Channel, f_o=1732.5 MHz(16-QAM)				
Temperature (℃)	**Power Supplied (V_{DC})**	**Frequency Error (Hz)**	**Frequency Error (ppm)**	**Result**
-30	3.8	1	0.00058	pass
-20		-2	-0.00115	pass
-10		-1	-0.00058	pass
0		-1	-0.00058	pass
10		2	0.00115	pass
20		1	0.00058	pass
30		-1	-0.00058	pass
40		1	0.00058	pass
50		-2	-0.00115	pass
20	V min.= 3.6	1	0.00058	pass
	V max.= 4.2	2	0.00115	pass

LTE Band 5:

10.0 MHz Middle Channel, f_o=836.5 MHz				
Temperature (℃)	**Power Supplied (V_{DC})**	**Frequency Error (Hz)**	**Frequency Error (ppm)**	**Limit (ppm)**
-30	3.8	1	0.00120	2.5
-20		3	0.00359	2.5
-10		1	0.00120	2.5
0		2	0.00239	2.5
10		-1	-0.00120	2.5
20		-1	-0.00120	2.5
30		1	0.00120	2.5
40		-2	-0.00239	2.5
50		1	0.00120	2.5
20	V min.= 3.6	3	0.00359	2.5
	V max.= 4.2	6	0.00717	2.5

10.0 MHz Middle Channel, f_o=836.5 MHz				
Temperature (℃)	**Power Supplied (V_{DC})**	**Frequency Error (Hz)**	**Frequency Error (ppm)**	**Limit (ppm)**
-30	3.8	5	0.00598	2.5
-20		3	0.00359	2.5
-10		1	0.00120	2.5
0		2	0.00239	2.5
10		3	0.00359	2.5
20		3	0.00359	2.5
30		2	0.00239	2.5
40		8	0.00956	2.5
50		6	0.00717	2.5
20	V min.= 3.6	7	0.00837	2.5
	V max.= 4.2	6	0.00717	2.5

LTE Band 7:

20 MHz Middle Channel, f_o=2535 MHz(QPSK)				
Temperature (℃)	**Power Supplied (V_{DC})**	**Frequency Error (Hz)**	**Frequency Error (ppm)**	**Limit (ppm)**
-30	3.8	2	0.00079	pass
-20		3	0.00118	pass
-10		1	0.00039	pass
0		3	0.00118	pass
10		2	0.00079	pass
20		4	0.00158	pass
30		-2	-0.00079	pass
40		2	0.00079	pass
50		2	0.00079	pass
20	V min.= 3.6	2	0.00079	pass
	V max.= 4.2	3	0.00118	pass

20 MHz Middle Channel, f_o=2535 MHz(16-QAM)				
Temperature (℃)	**Power Supplied (V_{DC})**	**Frequency Error (Hz)**	**Frequency Error (ppm)**	**Limit (ppm)**
-30	3.8	2	0.00079	pass
-20		3	0.00118	pass
-10		-1	-0.00039	pass
0		3	0.00118	pass
10		2	0.00079	pass
20		5	0.00197	pass
30		-2	-0.00079	pass
40		2	0.00079	pass
50		-1	-0.00039	pass
20	V min.= 3.6	3	0.00118	pass
	V max.= 4.2	4	0.00158	pass

LTE Band 17:

10.0 MHz Middle Channel, f_o=710 MHz (QPSK)				
Temperature (℃)	**Power Supplied (V_{DC})**	**Frequency Error (Hz)**	**Frequency Error (ppm)**	**Result**
-30	3.8	5	0.00704	pass
-20		2	0.00282	pass
-10		2	0.00282	pass
0		3	0.00423	pass
10		2	0.00282	pass
20		3	0.00423	pass
30		-3	-0.00423	pass
40		2	0.00282	pass
50		6	0.00845	pass
25	V min.= 3.6	3	0.00423	pass
25	V max.= 4.2	6	0.00845	pass

10.0 MHz Middle Channel, f_o=710 MHz (QPSK)				
Temperature (℃)	**Power Supplied (V_{DC})**	**Frequency Error (Hz)**	**Frequency Error (ppm)**	**Result**
-30	3.8	-1	-0.00141	pass
-20		1	0.00141	pass
-10		2	0.00282	pass
0		2	0.00282	pass
10		1	0.00141	pass
20		3	0.00423	pass
30		-3	-0.00423	pass
40		2	0.00282	pass
50		1	0.00141	pass
25	V min.= 3.6	2	0.00282	pass
25	V max.= 4.2	4	0.00563	pass

******* END OF REPORT *******