



Main charge


ISET1: 10K, fast charge current, 54mA
Pre-term: 1K, stop charge current, 5% of Iprogram
ISET2: Float, max charge current 100mA

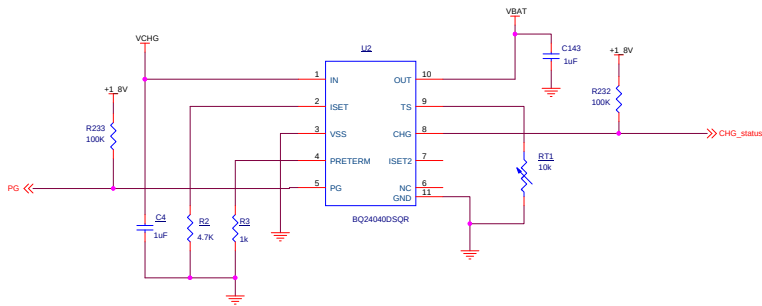

DC-DC +5.0V

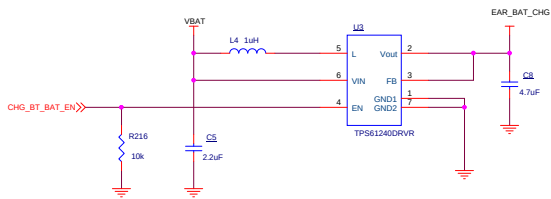


I/O Expander

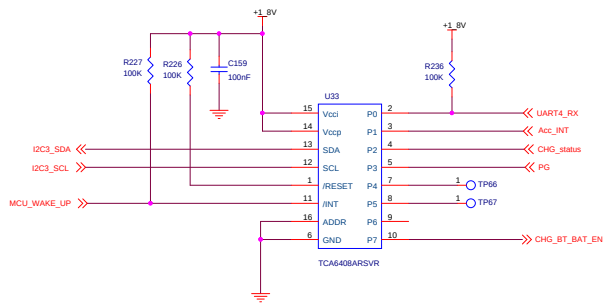


File	<Title>	Rev
Size	Document Number	<RevCode>
C	<Doc>	
Date:	Wednesday, April 08, 2015	Sheet 1 of 5

Serial NOR Flash

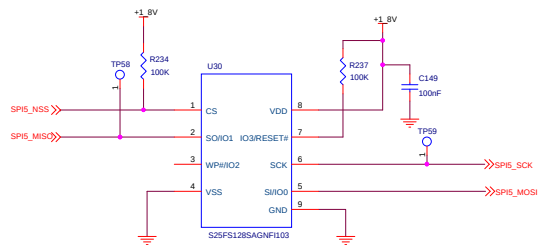


Pedometer

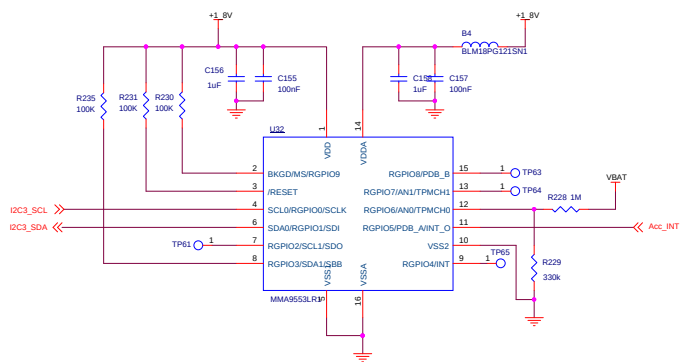


Title			
<Title>			
Size	Document Number		Rev
C	<Doc>		<Rev Code>
Date:	Wednesday, April 08, 2015		Sheet 1 of 5

FPC Connector


Include HX7309, laser diode, vibrator

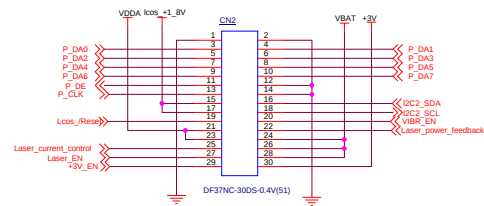

Prox connector

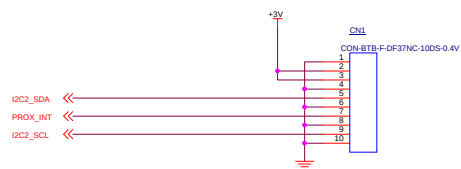


BT Ear Set PADS




File		<Title>	Rev
Size	Document Number		<Rev Code>
C	<Doc>		
Date:	Wednesday, April 08, 2015	Sheet 2 of 5	

DC-DC 1.8V + 3.0V


1.8V / 600mA+1000mA

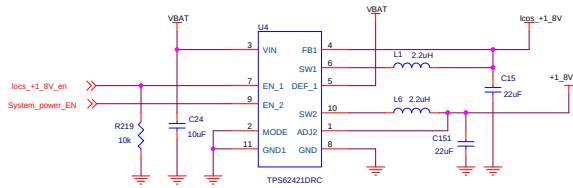


DC-DC 6.0V

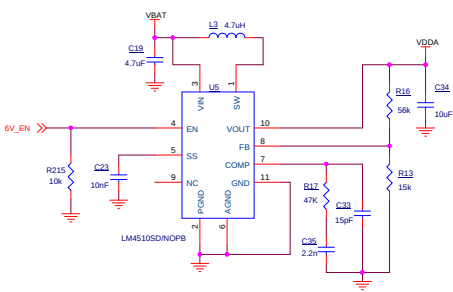

Debug interface



Voltage Monitor

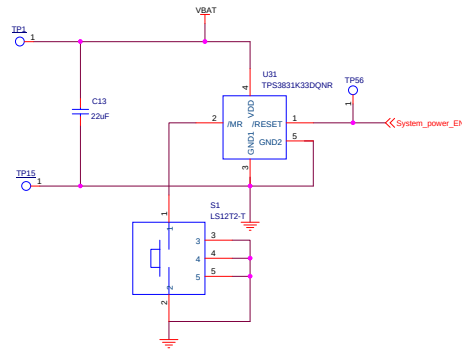

File			
<Title>			
Size	Document Number	Rev	Rev Code
C	<Doc>		
Date:	Wednesday, April 08, 2015	Sheet	5 of 5