



	18																																																																																									
Mode	Band Edge																																																																																									
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																									
ANT	0																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.30</td><td>59.27</td><td>74.00</td><td>-14.73</td><td>52.30</td><td>27.29</td><td>6.69</td><td>36.94</td><td>9.93</td><td>400</td><td>173</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.30	59.27	74.00	-14.73	52.30	27.29	6.69	36.94	9.93	400	173	Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>105.39</td><td>-----</td><td>-----</td><td>98.28</td><td>27.40</td><td>6.72</td><td>36.94</td><td>9.93</td><td>400</td><td>173</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	105.39	-----	-----	98.28	27.40	6.72	36.94	9.93	400	173	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.30	59.27	74.00	-14.73	52.30	27.29	6.69	36.94	9.93	400	173	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2412.00	105.39	-----	-----	98.28	27.40	6.72	36.94	9.93	400	173	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.95</td><td>48.04</td><td>54.00</td><td>-5.96</td><td>41.06</td><td>27.30</td><td>6.69</td><td>36.94</td><td>9.93</td><td>400</td><td>173</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.95	48.04	54.00	-5.96	41.06	27.30	6.69	36.94	9.93	400	173	Average	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2412.00</td><td>96.99</td><td>-----</td><td>-----</td><td>89.88</td><td>27.40</td><td>6.72</td><td>36.94</td><td>9.93</td><td>400</td><td>173</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	96.99	-----	-----	89.88	27.40	6.72	36.94	9.93	400	173	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.95	48.04	54.00	-5.96	41.06	27.30	6.69	36.94	9.93	400	173	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2412.00	96.99	-----	-----	89.88	27.40	6.72	36.94	9.93	400	173	Average																																																																														







Mode	18																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																									
ANT	0																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.69</td><td>61.07</td><td>74.00</td><td>-12.93</td><td>54.09</td><td>27.30</td><td>6.69</td><td>36.94</td><td>9.93</td><td>300</td><td>225</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.69	61.07	74.00	-12.93	54.09	27.30	6.69	36.94	9.93	300	225	Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>107.79</td><td>-----</td><td>-----</td><td>100.67</td><td>27.40</td><td>6.73</td><td>36.94</td><td>9.93</td><td>300</td><td>225</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	107.79	-----	-----	100.67	27.40	6.73	36.94	9.93	300	225	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.69	61.07	74.00	-12.93	54.09	27.30	6.69	36.94	9.93	300	225	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2412.00	107.79	-----	-----	100.67	27.40	6.73	36.94	9.93	300	225	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.69</td><td>50.55</td><td>54.00</td><td>-3.45</td><td>43.57</td><td>27.30</td><td>6.69</td><td>36.94</td><td>9.93</td><td>300</td><td>225</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.69	50.55	54.00	-3.45	43.57	27.30	6.69	36.94	9.93	300	225	Average	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>100.20</td><td>-----</td><td>-----</td><td>93.09</td><td>27.40</td><td>6.72</td><td>36.94</td><td>9.93</td><td>300</td><td>225</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	100.20	-----	-----	93.09	27.40	6.72	36.94	9.93	300	225	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.69	50.55	54.00	-3.45	43.57	27.30	6.69	36.94	9.93	300	225	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2412.00	100.20	-----	-----	93.09	27.40	6.72	36.94	9.93	300	225	Average																																																																														



Mode	18																																																																																																	
	Harmonic																																																																																																	
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																	
ANT	0																																																																																																	
Pol.	Horizontal						Vertical																																																																																											
Peak Avg	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>40.35</td><td>74.00</td><td>-33.65</td><td>55.95</td><td>32.34</td><td>9.81</td><td>58.34</td><td>0.59</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	40.35	74.00	-33.65	55.95	32.34	9.81	58.34	0.59	--	Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>39.97</td><td>74.00</td><td>-34.03</td><td>55.57</td><td>32.34</td><td>9.81</td><td>58.34</td><td>0.59</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	39.97	74.00	-34.03	55.57	32.34	9.81	58.34	0.59	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	4824.00	40.35	74.00	-33.65	55.95	32.34	9.81	58.34	0.59	--	Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	4824.00	39.97	74.00	-34.03	55.57	32.34	9.81	58.34	0.59	--	Peak																																																																																							

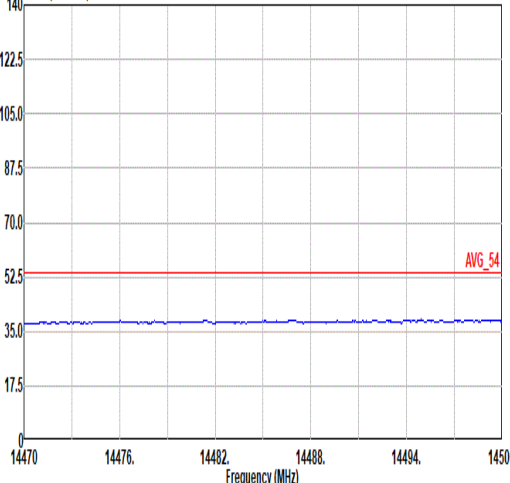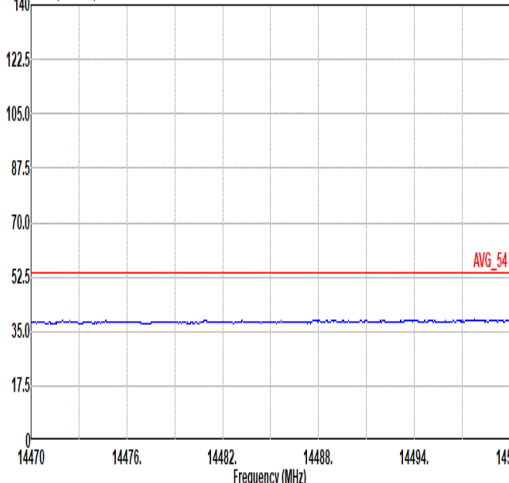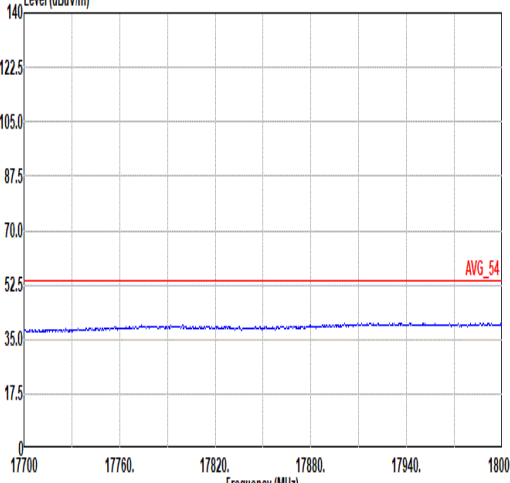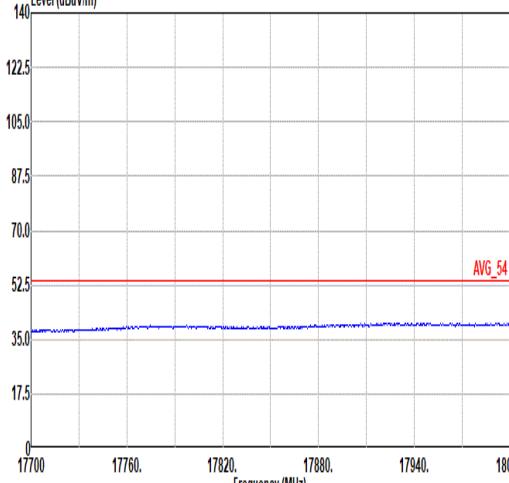

Mode	18	
	Harmonic	
	2400-2483.5_802.11n_HT20_CH01_2412MHz	
ANT	0	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-03-17  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Level (dBuV/m) Date: 2026-03-17  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL
	Level (dBuV/m) Date: 2026-03-17  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Level (dBuV/m) Date: 2026-03-17  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL







	19																																																																																																			
Mode	Band Edge																																																																																																			
	2400-2483.5_802.11n_HT20_CH02_2417MHz																																																																																																			
ANT	0																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2383.58</td><td>59.20</td><td>74.00</td><td>-14.80</td><td>52.28</td><td>27.24</td><td>6.69</td><td>36.94</td><td>9.93</td><td>300</td><td>159</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2383.58	59.20	74.00	-14.80	52.28	27.24	6.69	36.94	9.93	300	159	Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2417.00</td><td>105.26</td><td>-----</td><td>-----</td><td>98.14</td><td>27.40</td><td>6.73</td><td>36.94</td><td>9.93</td><td>300</td><td>159</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2417.00	105.26	-----	-----	98.14	27.40	6.73	36.94	9.93	300	159	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2383.58	59.20	74.00	-14.80	52.28	27.24	6.69	36.94	9.93	300	159	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2417.00	105.26	-----	-----	98.14	27.40	6.73	36.94	9.93	300	159	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>49.19</td><td>54.00</td><td>-4.81</td><td>42.21</td><td>27.30</td><td>6.69</td><td>36.94</td><td>9.93</td><td>300</td><td>159</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	49.19	54.00	-4.81	42.21	27.30	6.69	36.94	9.93	300	159	Average	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2417.00</td><td>97.60</td><td>-----</td><td>-----</td><td>90.48</td><td>27.40</td><td>6.73</td><td>36.94</td><td>9.93</td><td>300</td><td>159</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2417.00	97.60	-----	-----	90.48	27.40	6.73	36.94	9.93	300	159	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.95	49.19	54.00	-4.81	42.21	27.30	6.69	36.94	9.93	300	159	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2417.00	97.60	-----	-----	90.48	27.40	6.73	36.94	9.93	300	159	Average																																																																																								



		19																																																																																									
Mode		Band Edge																																																																																									
		2400-2483.5_802.11n HT20_CH02_2417MHz																																																																																									
ANT		0																																																																																									
Pol.		Vertical						Fundamental																																																																																			
Peak		Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.17</td><td>61.21</td><td>74.00</td><td>-12.79</td><td>54.24</td><td>27.29</td><td>6.69</td><td>36.94</td><td>9.93</td><td>224</td><td>227</td><td>Peak</td></tr></table> Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2417.00</td><td>110.53</td><td>74.00</td><td>36.53</td><td>103.41</td><td>27.40</td><td>6.73</td><td>36.94</td><td>9.93</td><td>224</td><td>227</td><td>Peak</td></tr></table>													Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.17	61.21	74.00	-12.79	54.24	27.29	6.69	36.94	9.93	224	227	Peak		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2417.00	110.53	74.00	36.53	103.41	27.40	6.73	36.94	9.93	224	227	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2389.17	61.21	74.00	-12.79	54.24	27.29	6.69	36.94	9.93	224	227	Peak																																																																															
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2417.00	110.53	74.00	36.53	103.41	27.40	6.73	36.94	9.93	224	227	Peak																																																																															
Avg		Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.43</td><td>50.94</td><td>54.00</td><td>-3.06</td><td>43.97</td><td>27.29</td><td>6.69</td><td>36.94</td><td>9.93</td><td>224</td><td>227</td><td>Average</td></tr></table> Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2417.00</td><td>100.60</td><td>54.00</td><td>46.60</td><td>93.48</td><td>27.40</td><td>6.73</td><td>36.94</td><td>9.93</td><td>224</td><td>227</td><td>Average</td></tr></table>													Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.43	50.94	54.00	-3.06	43.97	27.29	6.69	36.94	9.93	224	227	Average		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2417.00	100.60	54.00	46.60	93.48	27.40	6.73	36.94	9.93	224	227	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2389.43	50.94	54.00	-3.06	43.97	27.29	6.69	36.94	9.93	224	227	Average																																																																															
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2417.00	100.60	54.00	46.60	93.48	27.40	6.73	36.94	9.93	224	227	Average																																																																															

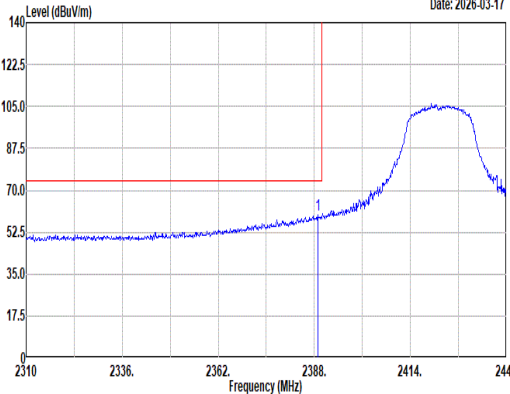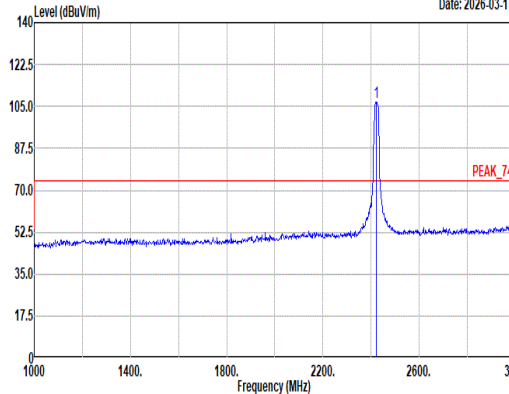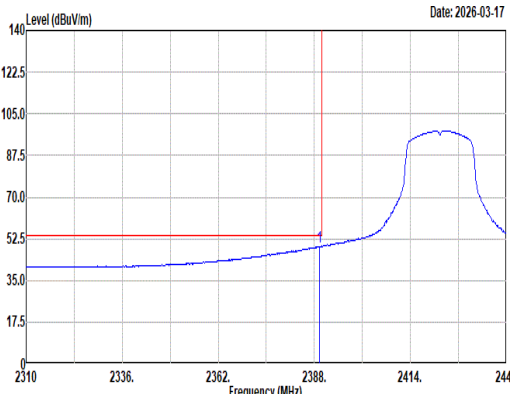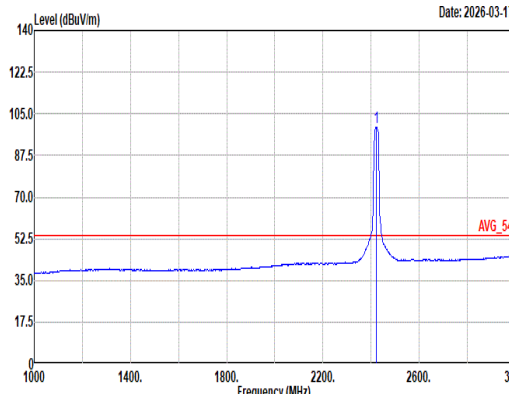

Mode	20																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11n_HT20_CH03_2422MHz																																																																																									
ANT	0																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-03-17  231023362362238824142440 Frequency (MHz) Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2388.91</td><td>59.83</td><td>74.00</td><td>-14.17</td><td>52.86</td><td>27.29</td><td>6.69</td><td>36.94</td><td>9.93</td><td>300</td><td>157</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2388.91	59.83	74.00	-14.17	52.86	27.29	6.69	36.94	9.93	300	157	Peak	Level (dBuV/m) Date: 2026-03-17  100014001800220026003000 Frequency (MHz) Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>106.98</td><td>-----</td><td>-----</td><td>99.85</td><td>27.40</td><td>6.74</td><td>36.94</td><td>9.93</td><td>300</td><td>157</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2422.00	106.98	-----	-----	99.85	27.40	6.74	36.94	9.93	300	157	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2388.91	59.83	74.00	-14.17	52.86	27.29	6.69	36.94	9.93	300	157	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2422.00	106.98	-----	-----	99.85	27.40	6.74	36.94	9.93	300	157	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-03-17  231023362362238824142440 Frequency (MHz) Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.43</td><td>49.32</td><td>54.00</td><td>-4.68</td><td>42.35</td><td>27.29</td><td>6.69</td><td>36.94</td><td>9.93</td><td>300</td><td>157</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.43	49.32	54.00	-4.68	42.35	27.29	6.69	36.94	9.93	300	157	Average	Level (dBuV/m) Date: 2026-03-17  100014001800220026003000 Frequency (MHz) Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>99.38</td><td>-----</td><td>-----</td><td>92.21</td><td>27.44</td><td>6.74</td><td>36.94</td><td>9.93</td><td>300</td><td>157</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2422.00	99.38	-----	-----	92.21	27.44	6.74	36.94	9.93	300	157	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.43	49.32	54.00	-4.68	42.35	27.29	6.69	36.94	9.93	300	157	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2422.00	99.38	-----	-----	92.21	27.44	6.74	36.94	9.93	300	157	Average																																																																														



Mode	20																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11n HT20_CH03_2422MHz																																																																																									
ANT	0																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2388.65</td><td>61.62</td><td>74.00</td><td>-12.38</td><td>54.65</td><td>27.29</td><td>6.69</td><td>36.94</td><td>9.93</td><td>225</td><td>226</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2388.65	61.62	74.00	-12.38	54.65	27.29	6.69	36.94	9.93	225	226	Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>109.33</td><td>-----</td><td>-----</td><td>102.20</td><td>27.40</td><td>6.74</td><td>36.94</td><td>9.93</td><td>225</td><td>226</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2422.00	109.33	-----	-----	102.20	27.40	6.74	36.94	9.93	225	226	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2388.65	61.62	74.00	-12.38	54.65	27.29	6.69	36.94	9.93	225	226	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2422.00	109.33	-----	-----	102.20	27.40	6.74	36.94	9.93	225	226	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.69</td><td>50.90</td><td>54.00</td><td>-3.10</td><td>43.92</td><td>27.30</td><td>6.69</td><td>36.94</td><td>9.93</td><td>225</td><td>226</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.69	50.90	54.00	-3.10	43.92	27.30	6.69	36.94	9.93	225	226	Average	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>101.56</td><td>-----</td><td>-----</td><td>94.43</td><td>27.40</td><td>6.74</td><td>36.94</td><td>9.93</td><td>225</td><td>226</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2422.00	101.56	-----	-----	94.43	27.40	6.74	36.94	9.93	225	226	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.69	50.90	54.00	-3.10	43.92	27.30	6.69	36.94	9.93	225	226	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2422.00	101.56	-----	-----	94.43	27.40	6.74	36.94	9.93	225	226	Average																																																																														







		21																																																																																								
Mode	Band Edge																																																																																									
	2400-2483.5_802.11n_HT20_CH04_2427MHz																																																																																									
ANT	0																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2388.91</td><td>60.66</td><td>74.00</td><td>-13.34</td><td>53.69</td><td>27.29</td><td>6.69</td><td>36.94</td><td>9.93</td><td>296</td><td>158</td><td>Peak</td></tr></tbody></table> Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2427.00</td><td>100.92</td><td>-----</td><td>-----</td><td>101.68</td><td>27.50</td><td>6.75</td><td>36.94</td><td>9.93</td><td>296</td><td>158</td><td>Peak</td></tr></tbody></table>													Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2388.91	60.66	74.00	-13.34	53.69	27.29	6.69	36.94	9.93	296	158	Peak		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2427.00	100.92	-----	-----	101.68	27.50	6.75	36.94	9.93	296	158	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2388.91	60.66	74.00	-13.34	53.69	27.29	6.69	36.94	9.93	296	158	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2427.00	100.92	-----	-----	101.68	27.50	6.75	36.94	9.93	296	158	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>49.58</td><td>54.00</td><td>-4.42</td><td>42.60</td><td>27.30</td><td>6.69</td><td>36.94</td><td>9.93</td><td>296</td><td>158</td><td>Average</td></tr></tbody></table> Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2427.00</td><td>101.39</td><td>-----</td><td>-----</td><td>94.20</td><td>27.46</td><td>6.74</td><td>36.94</td><td>9.93</td><td>296</td><td>158</td><td>Average</td></tr></tbody></table>													Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.95	49.58	54.00	-4.42	42.60	27.30	6.69	36.94	9.93	296	158	Average		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2427.00	101.39	-----	-----	94.20	27.46	6.74	36.94	9.93	296	158	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.95	49.58	54.00	-4.42	42.60	27.30	6.69	36.94	9.93	296	158	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2427.00	101.39	-----	-----	94.20	27.46	6.74	36.94	9.93	296	158	Average																																																																														



		21																																																																																									
Mode	Band Edge																																																																																										
	2400-2483.5_802.11n HT20_CH04_2427MHz																																																																																										
ANT	0																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.69</td><td>61.48</td><td>74.00</td><td>-12.52</td><td>54.50</td><td>27.30</td><td>6.69</td><td>36.94</td><td>9.93</td><td>227</td><td>225</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.69	61.48	74.00	-12.52	54.50	27.30	6.69	36.94	9.93	227	225	Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2427.00</td><td>110.68</td><td>-----</td><td>-----</td><td>103.46</td><td>27.48</td><td>6.75</td><td>36.94</td><td>9.93</td><td>227</td><td>225</td><td>Peak</td></tr></table>								Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2427.00	110.68	-----	-----	103.46	27.48	6.75	36.94	9.93	227	225	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2389.69	61.48	74.00	-12.52	54.50	27.30	6.69	36.94	9.93	227	225	Peak																																																																															
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2427.00	110.68	-----	-----	103.46	27.48	6.75	36.94	9.93	227	225	Peak																																																																															
Avg	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.56</td><td>50.82</td><td>54.00</td><td>-3.18</td><td>43.84</td><td>27.30</td><td>6.69</td><td>36.94</td><td>9.93</td><td>227</td><td>225</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.56	50.82	54.00	-3.18	43.84	27.30	6.69	36.94	9.93	227	225	Average	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2427.00</td><td>103.03</td><td>-----</td><td>-----</td><td>95.81</td><td>27.48</td><td>6.75</td><td>36.94</td><td>9.93</td><td>227</td><td>225</td><td>Average</td></tr></table>								Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2427.00	103.03	-----	-----	95.81	27.48	6.75	36.94	9.93	227	225	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2389.56	50.82	54.00	-3.18	43.84	27.30	6.69	36.94	9.93	227	225	Average																																																																															
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2427.00	103.03	-----	-----	95.81	27.48	6.75	36.94	9.93	227	225	Average																																																																															

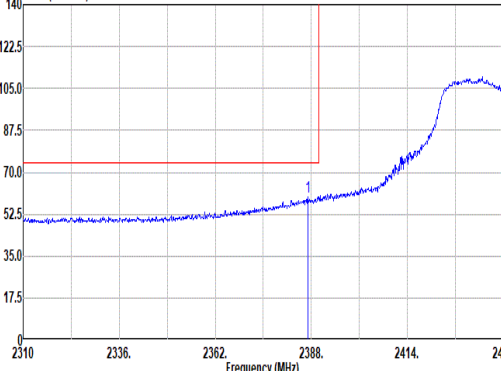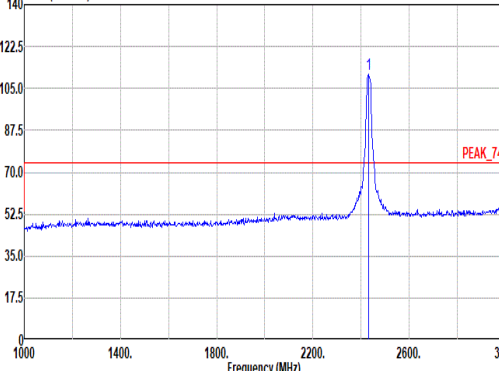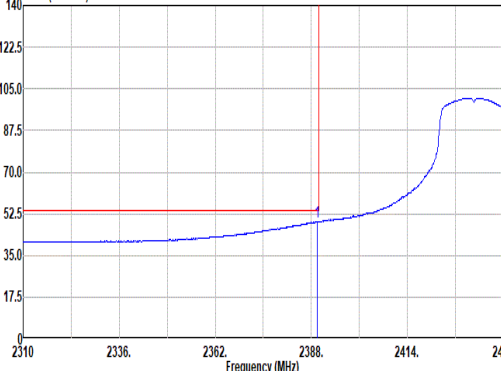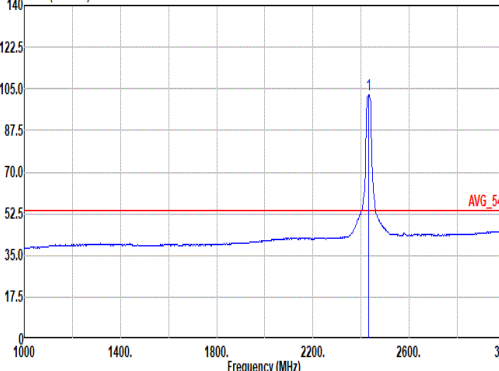

	22																																																																																																			
Mode	Band Edge																																																																																																			
	2400-2483.5_802.11n_HT20_CH05_2432MHz																																																																																																			
ANT	0																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-03-17  Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.09</td><td>59.80</td><td>74.00</td><td>-14.20</td><td>52.85</td><td>27.27</td><td>6.69</td><td>36.94</td><td>9.93</td><td>293</td><td>157</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.09	59.80	74.00	-14.20	52.85	27.27	6.69	36.94	9.93	293	157	Peak	Level (dBuV/m) Date: 2026-03-17  Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2432.00</td><td>110.68</td><td>-----</td><td>-----</td><td>103.44</td><td>27.50</td><td>6.75</td><td>36.94</td><td>9.93</td><td>293</td><td>157</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2432.00	110.68	-----	-----	103.44	27.50	6.75	36.94	9.93	293	157	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2387.09	59.80	74.00	-14.20	52.85	27.27	6.69	36.94	9.93	293	157	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2432.00	110.68	-----	-----	103.44	27.50	6.75	36.94	9.93	293	157	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-03-17  Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>49.18</td><td>54.00</td><td>-4.82</td><td>42.20</td><td>27.30</td><td>6.69</td><td>36.94</td><td>9.93</td><td>293</td><td>157</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	49.18	54.00	-4.82	42.20	27.30	6.69	36.94	9.93	293	157	Average	Level (dBuV/m) Date: 2026-03-17  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2432.00</td><td>102.55</td><td>-----</td><td>-----</td><td>95.31</td><td>27.50</td><td>6.75</td><td>36.94</td><td>9.93</td><td>293</td><td>157</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2432.00	102.55	-----	-----	95.31	27.50	6.75	36.94	9.93	293	157	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.69	49.18	54.00	-4.82	42.20	27.30	6.69	36.94	9.93	293	157	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2432.00	102.55	-----	-----	95.31	27.50	6.75	36.94	9.93	293	157	Average																																																																																								



Mode	22																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11n HT20_CH05_2432MHz																																																																																									
ANT	0																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2387.48</td><td>61.33</td><td>74.00</td><td>-12.67</td><td>54.38</td><td>27.27</td><td>6.69</td><td>36.94</td><td>9.93</td><td>223 226 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2387.48	61.33	74.00	-12.67	54.38	27.27	6.69	36.94	9.93	223 226 Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2432.00</td><td>112.35</td><td>-----</td><td>-----</td><td>105.11</td><td>27.50</td><td>6.75</td><td>36.94</td><td>9.93</td><td>223 226 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2432.00	112.35	-----	-----	105.11	27.50	6.75	36.94	9.93	223 226 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2387.48	61.33	74.00	-12.67	54.38	27.27	6.69	36.94	9.93	223 226 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2432.00	112.35	-----	-----	105.11	27.50	6.75	36.94	9.93	223 226 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.56</td><td>50.67</td><td>54.00</td><td>-3.33</td><td>43.69</td><td>27.30</td><td>6.69</td><td>36.94</td><td>9.93</td><td>223 226 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.56	50.67	54.00	-3.33	43.69	27.30	6.69	36.94	9.93	223 226 Average	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2432.00</td><td>104.78</td><td>-----</td><td>-----</td><td>97.54</td><td>27.50</td><td>6.75</td><td>36.94</td><td>9.93</td><td>223 226 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2432.00	104.78	-----	-----	97.54	27.50	6.75	36.94	9.93	223 226 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.56	50.67	54.00	-3.33	43.69	27.30	6.69	36.94	9.93	223 226 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2432.00	104.78	-----	-----	97.54	27.50	6.75	36.94	9.93	223 226 Average																																																																																	



	23																																																																																																																																																
Mode	Harmonic																																																																																																																																																
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																																																																																
ANT	0																																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																																										
Peak Avg	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4874.00</td><td>40.91</td><td>74.00</td><td>-33.09</td><td>56.08</td><td>32.55</td><td>9.89</td><td>58.22</td><td>0.61</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 7311.00</td><td>47.06</td><td>74.00</td><td>-26.94</td><td>55.28</td><td>36.68</td><td>12.12</td><td>57.67</td><td>0.65</td><td>209</td><td>267</td><td>Peak</td></tr><tr><td>3 7311.00</td><td>36.58</td><td>54.00</td><td>-17.42</td><td>44.00</td><td>36.68</td><td>12.12</td><td>57.67</td><td>0.65</td><td>209</td><td>267</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4874.00	40.91	74.00	-33.09	56.08	32.55	9.89	58.22	0.61	--	--	Peak	2 7311.00	47.06	74.00	-26.94	55.28	36.68	12.12	57.67	0.65	209	267	Peak	3 7311.00	36.58	54.00	-17.42	44.00	36.68	12.12	57.67	0.65	209	267	Average	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 4874.00</td><td>41.03</td><td>74.00</td><td>-32.97</td><td>56.20</td><td>32.55</td><td>9.89</td><td>58.22</td><td>0.61</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 7311.00</td><td>48.04</td><td>74.00</td><td>-25.96</td><td>56.26</td><td>36.68</td><td>12.12</td><td>57.67</td><td>0.65</td><td>183</td><td>201</td><td>Peak</td></tr><tr><td>3 7311.00</td><td>37.49</td><td>54.00</td><td>-16.51</td><td>45.71</td><td>36.68</td><td>12.12</td><td>57.67</td><td>0.65</td><td>183</td><td>201</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 4874.00	41.03	74.00	-32.97	56.20	32.55	9.89	58.22	0.61	--	--	Peak	2 7311.00	48.04	74.00	-25.96	56.26	36.68	12.12	57.67	0.65	183	201	Peak	3 7311.00	37.49	54.00	-16.51	45.71	36.68	12.12	57.67	0.65	183	201	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																							
1 4874.00	40.91	74.00	-33.09	56.08	32.55	9.89	58.22	0.61	--	--	Peak																																																																																																																																						
2 7311.00	47.06	74.00	-26.94	55.28	36.68	12.12	57.67	0.65	209	267	Peak																																																																																																																																						
3 7311.00	36.58	54.00	-17.42	44.00	36.68	12.12	57.67	0.65	209	267	Average																																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																							
1 4874.00	41.03	74.00	-32.97	56.20	32.55	9.89	58.22	0.61	--	--	Peak																																																																																																																																						
2 7311.00	48.04	74.00	-25.96	56.26	36.68	12.12	57.67	0.65	183	201	Peak																																																																																																																																						
3 7311.00	37.49	54.00	-16.51	45.71	36.68	12.12	57.67	0.65	183	201	Average																																																																																																																																						



Mode	23	
	Harmonic	
	2400-2483.5_802.11n_HT20_CH06_2437MHz	
ANT	0	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL
	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL



Mode	24																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11n_HT20_CH08_2447MHz																																																																																			
ANT	0																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2486.43</td><td>61.39</td><td>74.00</td><td>-12.61</td><td>53.83</td><td>27.76</td><td>6.82</td><td>36.95</td><td>9.93</td><td>300</td><td>159</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2486.43	61.39	74.00	-12.61	53.83	27.76	6.82	36.95	9.93	300	159	Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2447.00</td><td>109.77</td><td>-----</td><td>-----</td><td>102.50</td><td>27.50</td><td>6.78</td><td>36.94</td><td>9.93</td><td>300</td><td>159</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2447.00	109.77	-----	-----	102.50	27.50	6.78	36.94	9.93	300	159	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2486.43	61.39	74.00	-12.61	53.83	27.76	6.82	36.95	9.93	300	159	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2447.00	109.77	-----	-----	102.50	27.50	6.78	36.94	9.93	300	159	Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-03-18 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.73</td><td>49.56</td><td>54.00</td><td>-4.44</td><td>42.02</td><td>27.74</td><td>6.82</td><td>36.95</td><td>9.93</td><td>300</td><td>159</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.73	49.56	54.00	-4.44	42.02	27.74	6.82	36.95	9.93	300	159	Average	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2447.00</td><td>102.25</td><td>-----</td><td>-----</td><td>94.99</td><td>27.50</td><td>6.77</td><td>36.94</td><td>9.93</td><td>300</td><td>159</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2447.00	102.25	-----	-----	94.99	27.50	6.77	36.94	9.93	300	159	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2483.73	49.56	54.00	-4.44	42.02	27.74	6.82	36.95	9.93	300	159	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2447.00	102.25	-----	-----	94.99	27.50	6.77	36.94	9.93	300	159	Average																																																																									



	24																																																																																									
Mode	Band Edge																																																																																									
	2400-2483.5_802.11n HT20_CH08_2447MHz																																																																																									
ANT	0																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.05</td><td>65.26</td><td>74.00</td><td>-8.74</td><td>57.72</td><td>27.74</td><td>6.82</td><td>36.95</td><td>9.93</td><td>300</td><td>224</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.05	65.26	74.00	-8.74	57.72	27.74	6.82	36.95	9.93	300	224	Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2447.00</td><td>110.89</td><td>-----</td><td>-----</td><td>103.62</td><td>27.50</td><td>6.78</td><td>36.94</td><td>9.93</td><td>300</td><td>224</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2447.00	110.89	-----	-----	103.62	27.50	6.78	36.94	9.93	300	224	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2484.05	65.26	74.00	-8.74	57.72	27.74	6.82	36.95	9.93	300	224	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2447.00	110.89	-----	-----	103.62	27.50	6.78	36.94	9.93	300	224	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.68</td><td>50.78</td><td>54.00</td><td>-3.22</td><td>43.24</td><td>27.74</td><td>6.82</td><td>36.95</td><td>9.93</td><td>300</td><td>224</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.68	50.78	54.00	-3.22	43.24	27.74	6.82	36.95	9.93	300	224	Average	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2447.00</td><td>103.21</td><td>-----</td><td>-----</td><td>95.95</td><td>27.50</td><td>6.77</td><td>36.94</td><td>9.93</td><td>300</td><td>224</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2447.00	103.21	-----	-----	95.95	27.50	6.77	36.94	9.93	300	224	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2483.68	50.78	54.00	-3.22	43.24	27.74	6.82	36.95	9.93	300	224	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2447.00	103.21	-----	-----	95.95	27.50	6.77	36.94	9.93	300	224	Average																																																																														



Mode	25																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11n_HT20_CH09_2452MHz																																																																																	
ANT	0																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.94</td><td>61.16</td><td>74.00</td><td>-12.84</td><td>53.60</td><td>27.76</td><td>6.82</td><td>36.95</td><td>9.93 299 157 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.94	61.16	74.00	-12.84	53.60	27.76	6.82	36.95	9.93 299 157 Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>107.97</td><td>-----</td><td>-----</td><td>100.70</td><td>27.50</td><td>6.78</td><td>36.94</td><td>9.93 299 157 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	107.97	-----	-----	100.70	27.50	6.78	36.94	9.93 299 157 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2485.94	61.16	74.00	-12.84	53.60	27.76	6.82	36.95	9.93 299 157 Peak																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2452.00	107.97	-----	-----	100.70	27.50	6.78	36.94	9.93 299 157 Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.02</td><td>50.11</td><td>54.00</td><td>-3.89</td><td>42.57</td><td>27.74</td><td>6.82</td><td>36.95</td><td>9.93 299 157 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.02	50.11	54.00	-3.89	42.57	27.74	6.82	36.95	9.93 299 157 Average	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>100.31</td><td>-----</td><td>-----</td><td>93.01</td><td>27.54</td><td>6.78</td><td>36.95</td><td>9.93 299 157 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	100.31	-----	-----	93.01	27.54	6.78	36.95	9.93 299 157 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2484.02	50.11	54.00	-3.89	42.57	27.74	6.82	36.95	9.93 299 157 Average																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2452.00	100.31	-----	-----	93.01	27.54	6.78	36.95	9.93 299 157 Average																																																																									



	25																																																																																									
Mode	Band Edge																																																																																									
	2400-2483.5_802.11n_HT20_CH09_2452MHz																																																																																									
ANT	0																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.97</td><td>61.56</td><td>74.00</td><td>-12.44</td><td>54.02</td><td>27.74</td><td>6.82</td><td>36.95</td><td>9.93</td><td>238</td><td>224</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.97	61.56	74.00	-12.44	54.02	27.74	6.82	36.95	9.93	238	224	Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2452.00</td><td>109.97</td><td>-----</td><td>-----</td><td>102.70</td><td>27.50</td><td>6.78</td><td>36.94</td><td>9.93</td><td>238</td><td>224</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2452.00	109.97	-----	-----	102.70	27.50	6.78	36.94	9.93	238	224	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2483.97	61.56	74.00	-12.44	54.02	27.74	6.82	36.95	9.93	238	224	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2452.00	109.97	-----	-----	102.70	27.50	6.78	36.94	9.93	238	224	Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.63</td><td>50.36</td><td>54.00</td><td>-3.64</td><td>42.82</td><td>27.74</td><td>6.82</td><td>36.95</td><td>9.93</td><td>238</td><td>224</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.63	50.36	54.00	-3.64	42.82	27.74	6.82	36.95	9.93	238	224	Average	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2452.00</td><td>102.34</td><td>-----</td><td>-----</td><td>95.04</td><td>27.54</td><td>6.78</td><td>36.95</td><td>9.93</td><td>238</td><td>224</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2452.00	102.34	-----	-----	95.04	27.54	6.78	36.95	9.93	238	224	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2483.63	50.36	54.00	-3.64	42.82	27.74	6.82	36.95	9.93	238	224	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2452.00	102.34	-----	-----	95.04	27.54	6.78	36.95	9.93	238	224	Average																																																																														







Mode	26																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11n_HT20_CH10_2457MHz																																																																																			
ANT	0																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.75</td><td>63.61</td><td>74.00</td><td>-10.39</td><td>56.07</td><td>27.74</td><td>6.82</td><td>36.95</td><td>9.93</td><td>300</td><td>158</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.75	63.61	74.00	-10.39	56.07	27.74	6.82	36.95	9.93	300	158	Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2457.00</td><td>107.29</td><td>-----</td><td>-----</td><td>99.97</td><td>27.56</td><td>6.78</td><td>36.95</td><td>9.93</td><td>300</td><td>158</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2457.00	107.29	-----	-----	99.97	27.56	6.78	36.95	9.93	300	158	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2483.75	63.61	74.00	-10.39	56.07	27.74	6.82	36.95	9.93	300	158	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2457.00	107.29	-----	-----	99.97	27.56	6.78	36.95	9.93	300	158	Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2484.09</td><td>49.53</td><td>54.00</td><td>-4.47</td><td>41.99</td><td>27.74</td><td>6.82</td><td>36.95</td><td>9.93</td><td>300</td><td>158</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2484.09	49.53	54.00	-4.47	41.99	27.74	6.82	36.95	9.93	300	158	Average	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2457.00</td><td>99.63</td><td>-----</td><td>-----</td><td>92.28</td><td>27.58</td><td>6.79</td><td>36.95</td><td>9.93</td><td>300</td><td>158</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2457.00	99.63	-----	-----	92.28	27.58	6.79	36.95	9.93	300	158	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2484.09	49.53	54.00	-4.47	41.99	27.74	6.82	36.95	9.93	300	158	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2457.00	99.63	-----	-----	92.28	27.58	6.79	36.95	9.93	300	158	Average																																																																									



Mode	26																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11n HT20_CH10_2457MHz																																																																																	
ANT	0																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2026-03-17 PEAK_BE_74 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.53</td><td>63.48</td><td>74.00</td><td>-10.52</td><td>55.94</td><td>27.74</td><td>6.82</td><td>36.95</td><td>9.93</td><td>295 224 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.53	63.48	74.00	-10.52	55.94	27.74	6.82	36.95	9.93	295 224 Peak	Level (dBuV/m) Date: 2026-03-17 PEAK_74 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2457.00</td><td>100.20</td><td>-----</td><td>-----</td><td>100.83</td><td>27.60</td><td>6.79</td><td>36.95</td><td>9.93</td><td>295 224 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2457.00	100.20	-----	-----	100.83	27.60	6.79	36.95	9.93	295 224 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2483.53	63.48	74.00	-10.52	55.94	27.74	6.82	36.95	9.93	295 224 Peak																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2457.00	100.20	-----	-----	100.83	27.60	6.79	36.95	9.93	295 224 Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-03-17 AVG_BE_54 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.83</td><td>50.95</td><td>54.00</td><td>-3.05</td><td>43.41</td><td>27.74</td><td>6.82</td><td>36.95</td><td>9.93</td><td>295 224 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.83	50.95	54.00	-3.05	43.41	27.74	6.82	36.95	9.93	295 224 Average	Level (dBuV/m) Date: 2026-03-17 AVG_54 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2457.00</td><td>100.53</td><td>-----</td><td>-----</td><td>93.18</td><td>27.58</td><td>6.79</td><td>36.95</td><td>9.93</td><td>295 224 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2457.00	100.53	-----	-----	93.18	27.58	6.79	36.95	9.93	295 224 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2483.83	50.95	54.00	-3.05	43.41	27.74	6.82	36.95	9.93	295 224 Average																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2457.00	100.53	-----	-----	93.18	27.58	6.79	36.95	9.93	295 224 Average																																																																									

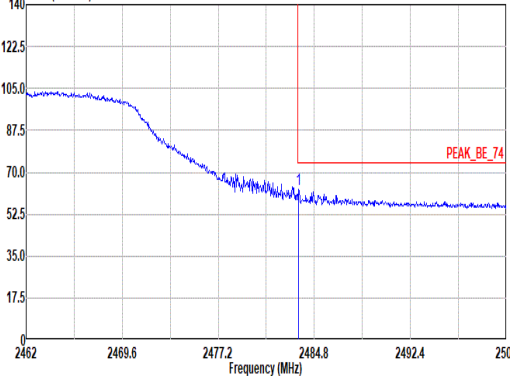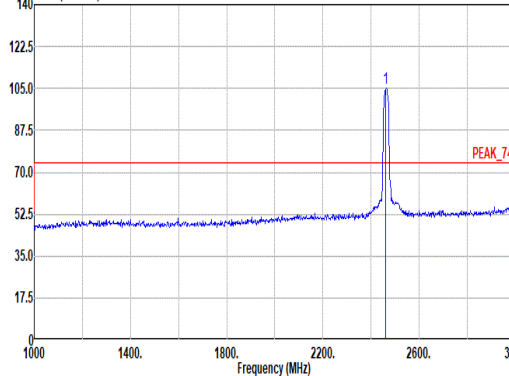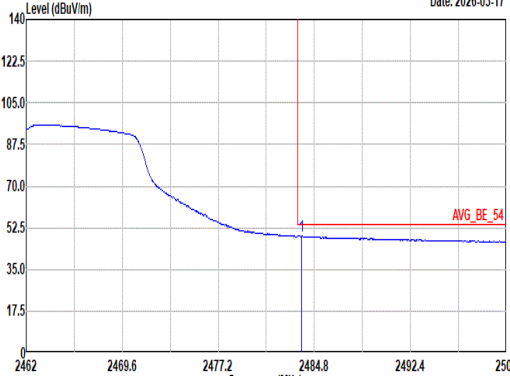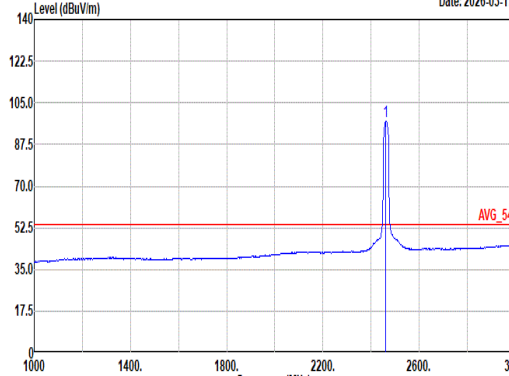

Mode	27																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																			
ANT	0																																																																																			
Pol.	Horizontal					Fundamental																																																																														
Peak	Level (dBuV/m) Date: 2026-03-17  PEAK_BE_74 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2483.55</td><td>62.73</td><td>74.00</td><td>-11.27</td><td>55.19</td><td>27.74</td><td>6.82</td><td>36.95</td><td>9.93</td><td>372 160 Peak</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.55	62.73	74.00	-11.27	55.19	27.74	6.82	36.95	9.93	372 160 Peak	Level (dBuV/m) Date: 2026-03-17  PEAK_74 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2462.00</td><td>104.91</td><td>-----</td><td>-----</td><td>97.54</td><td>27.60</td><td>6.79</td><td>36.95</td><td>9.93</td><td>372 160 Peak</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2462.00	104.91	-----	-----	97.54	27.60	6.79	36.95	9.93	372 160 Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																												
1 2483.55	62.73	74.00	-11.27	55.19	27.74	6.82	36.95	9.93	372 160 Peak																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																												
1 2462.00	104.91	-----	-----	97.54	27.60	6.79	36.95	9.93	372 160 Peak																																																																											
Avg	Level (dBuV/m) Date: 2026-03-17  AVG_BE_54 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2483.77</td><td>49.03</td><td>54.00</td><td>-4.97</td><td>41.49</td><td>27.74</td><td>6.82</td><td>36.95</td><td>9.93</td><td>372 160 Average</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2483.77	49.03	54.00	-4.97	41.49	27.74	6.82	36.95	9.93	372 160 Average	Level (dBuV/m) Date: 2026-03-17  AVG_54 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 2462.00</td><td>97.17</td><td>-----</td><td>-----</td><td>89.80</td><td>27.60</td><td>6.79</td><td>36.95</td><td>9.93</td><td>372 160 Average</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 2462.00	97.17	-----	-----	89.80	27.60	6.79	36.95	9.93	372 160 Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																												
1 2483.77	49.03	54.00	-4.97	41.49	27.74	6.82	36.95	9.93	372 160 Average																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																												
1 2462.00	97.17	-----	-----	89.80	27.60	6.79	36.95	9.93	372 160 Average																																																																											







Mode	27																																																																																								
	Band Edge																																																																																								
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																								
ANT	0																																																																																								
Pol.	Vertical						Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2026-03-17 PEAK_BE_74 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.70</td><td>64.19</td><td>74.00</td><td>-9.81</td><td>56.65</td><td>27.74</td><td>6.82</td><td>36.95</td><td>9.93</td><td>100</td><td>230 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.70	64.19	74.00	-9.81	56.65	27.74	6.82	36.95	9.93	100	230 Peak	Level (dBuV/m) Date: 2026-03-17 PEAK_74 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>107.50</td><td>-----</td><td>-----</td><td>100.13</td><td>27.60</td><td>6.79</td><td>36.95</td><td>9.93</td><td>100</td><td>230 Peak</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	107.50	-----	-----	100.13	27.60	6.79	36.95	9.93	100	230 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
	Freq	Level	Level	Factor	Loss	Factor	Factor	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2483.70	64.19	74.00	-9.81	56.65	27.74	6.82	36.95	9.93	100	230 Peak																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Level	Factor	Loss	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2462.00	107.50	-----	-----	100.13	27.60	6.79	36.95	9.93	100	230 Peak																																																																															
Avg	Level (dBuV/m) Date: 2026-03-17 AVG_BE_54 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.58</td><td>50.48</td><td>54.00</td><td>-3.52</td><td>42.94</td><td>27.74</td><td>6.82</td><td>36.95</td><td>9.93</td><td>100</td><td>230 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.58	50.48	54.00	-3.52	42.94	27.74	6.82	36.95	9.93	100	230 Average	Level (dBuV/m) Date: 2026-03-17 AVG_54 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>99.49</td><td>-----</td><td>-----</td><td>92.12</td><td>27.60</td><td>6.79</td><td>36.95</td><td>9.93</td><td>100</td><td>230 Average</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Level	Factor	Loss	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	99.49	-----	-----	92.12	27.60	6.79	36.95	9.93	100	230 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
	Freq	Level	Level	Factor	Loss	Factor	Factor	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2483.58	50.48	54.00	-3.52	42.94	27.74	6.82	36.95	9.93	100	230 Average																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Level	Factor	Loss	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2462.00	99.49	-----	-----	92.12	27.60	6.79	36.95	9.93	100	230 Average																																																																															



Mode	27																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																									
ANT	0																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>40.70</td><td>74.00</td><td>-33.30</td><td>55.52</td><td>32.70</td><td>9.97</td><td>58.11</td><td>0.62</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>46.06</td><td>74.00</td><td>-27.94</td><td>54.65</td><td>36.46</td><td>12.09</td><td>57.79</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	40.70	74.00	-33.30	55.52	32.70	9.97	58.11	0.62	--	Peak	2	7386.00	46.06	74.00	-27.94	54.65	36.46	12.09	57.79	0.65	--	Peak	Level (dBuV/m) Date: 2026-03-17 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>40.82</td><td>74.00</td><td>-33.18</td><td>55.64</td><td>32.70</td><td>9.97</td><td>58.11</td><td>0.62</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>45.72</td><td>74.00</td><td>-28.28</td><td>54.31</td><td>36.46</td><td>12.09</td><td>57.79</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	40.82	74.00	-33.18	55.64	32.70	9.97	58.11	0.62	--	Peak	2	7386.00	45.72	74.00	-28.28	54.31	36.46	12.09	57.79	0.65	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4924.00	40.70	74.00	-33.30	55.52	32.70	9.97	58.11	0.62	--	Peak																																																																																																															
2	7386.00	46.06	74.00	-27.94	54.65	36.46	12.09	57.79	0.65	--	Peak																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4924.00	40.82	74.00	-33.18	55.64	32.70	9.97	58.11	0.62	--	Peak																																																																																																															
2	7386.00	45.72	74.00	-28.28	54.31	36.46	12.09	57.79	0.65	--	Peak																																																																																																															

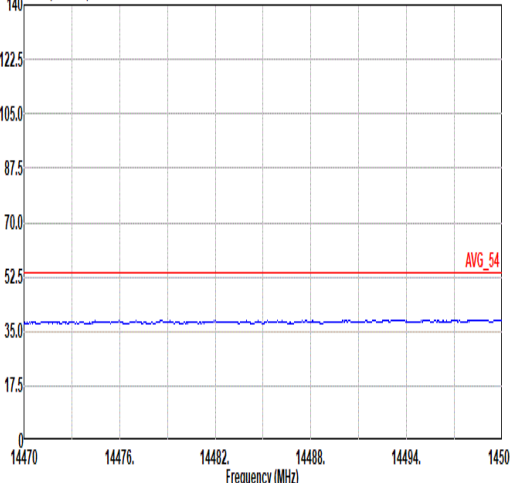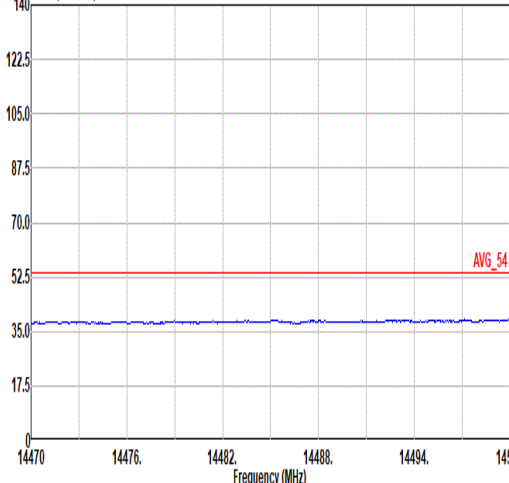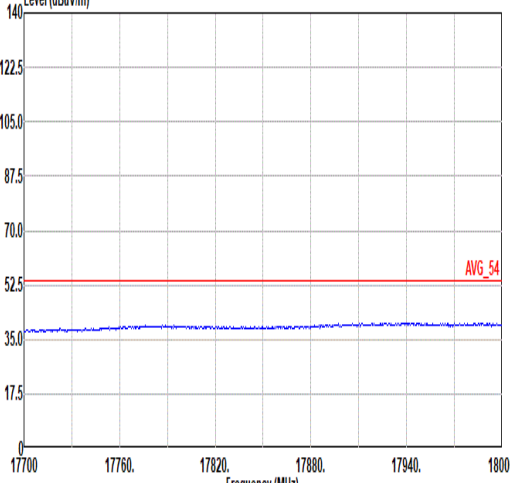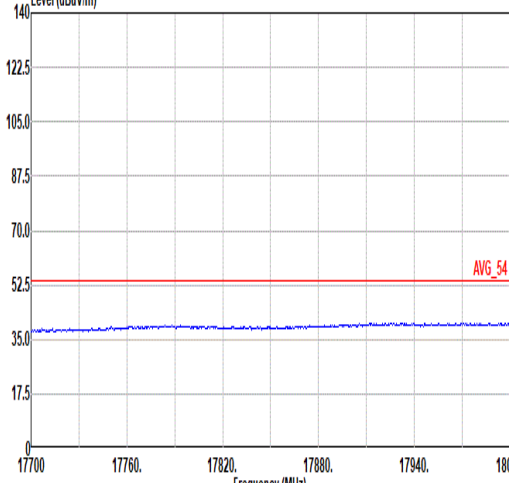

Mode	27	
	Harmonic	
	2400-2483.5_802.11n_HT20_CH11_2462MHz	
ANT	0	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-03-17  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Level (dBuV/m) Date: 2026-03-17  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL
	Level (dBuV/m) Date: 2026-03-17  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL	Level (dBuV/m) Date: 2026-03-17  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL



Mode	28																																																																																																																																																																																					
	LF																																																																																																																																																																																					
	2400-2483.5_802.11g_CH02_2417MHz																																																																																																																																																																																					
ANT	0																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QP/ Peak	Level (dBuV/m) Date: 2026-03-19 Site : 03CH13-HY Condition: QP 3m BILOG_40103 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>62.01</td><td>27.47</td><td>40.00</td><td>-12.53</td><td>46.31</td><td>12.07</td><td>1.10</td><td>32.12</td><td>0.11 -- -- Peak</td></tr><tr><td>2</td><td>110.51</td><td>25.89</td><td>43.50</td><td>-17.61</td><td>39.31</td><td>17.12</td><td>1.50</td><td>32.11</td><td>0.07 -- -- Peak</td></tr><tr><td>3</td><td>270.56</td><td>29.35</td><td>46.00</td><td>-16.65</td><td>39.77</td><td>19.12</td><td>2.31</td><td>31.97</td><td>0.12 -- -- Peak</td></tr><tr><td>4</td><td>273.47</td><td>34.89</td><td>46.00</td><td>-11.11</td><td>45.50</td><td>18.92</td><td>2.32</td><td>31.97</td><td>0.12 -- -- Peak</td></tr><tr><td>5</td><td>730.34</td><td>36.31</td><td>46.00</td><td>-9.69</td><td>36.51</td><td>27.84</td><td>3.75</td><td>31.93</td><td>0.14 -- -- Peak</td></tr><tr><td>6</td><td>956.35</td><td>34.64</td><td>46.00</td><td>-11.36</td><td>30.20</td><td>30.84</td><td>4.21</td><td>30.82</td><td>0.21 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	62.01	27.47	40.00	-12.53	46.31	12.07	1.10	32.12	0.11 -- -- Peak	2	110.51	25.89	43.50	-17.61	39.31	17.12	1.50	32.11	0.07 -- -- Peak	3	270.56	29.35	46.00	-16.65	39.77	19.12	2.31	31.97	0.12 -- -- Peak	4	273.47	34.89	46.00	-11.11	45.50	18.92	2.32	31.97	0.12 -- -- Peak	5	730.34	36.31	46.00	-9.69	36.51	27.84	3.75	31.93	0.14 -- -- Peak	6	956.35	34.64	46.00	-11.36	30.20	30.84	4.21	30.82	0.21 -- -- Peak	Level (dBuV/m) Date: 2026-03-19 Site : 03CH13-HY Condition: QP 3m BILOG_40103 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>44.55</td><td>32.55</td><td>40.00</td><td>-7.45</td><td>46.50</td><td>17.27</td><td>0.95</td><td>32.38</td><td>0.13 -- -- Peak</td></tr><tr><td>2</td><td>126.03</td><td>19.72</td><td>43.50</td><td>-23.78</td><td>32.53</td><td>17.62</td><td>1.60</td><td>32.10</td><td>0.07 -- -- Peak</td></tr><tr><td>3</td><td>260.86</td><td>21.63</td><td>46.00</td><td>-24.37</td><td>31.06</td><td>20.15</td><td>2.27</td><td>31.97</td><td>0.12 -- -- Peak</td></tr><tr><td>4</td><td>467.47</td><td>27.34</td><td>46.00</td><td>-18.66</td><td>32.70</td><td>23.50</td><td>3.00</td><td>31.97</td><td>0.11 -- -- Peak</td></tr><tr><td>5</td><td>717.73</td><td>32.28</td><td>46.00</td><td>-13.72</td><td>33.25</td><td>27.13</td><td>3.72</td><td>31.96</td><td>0.14 -- -- Peak</td></tr><tr><td>6</td><td>958.29</td><td>34.36</td><td>46.00</td><td>-11.64</td><td>29.92</td><td>30.82</td><td>4.21</td><td>30.80</td><td>0.21 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	44.55	32.55	40.00	-7.45	46.50	17.27	0.95	32.38	0.13 -- -- Peak	2	126.03	19.72	43.50	-23.78	32.53	17.62	1.60	32.10	0.07 -- -- Peak	3	260.86	21.63	46.00	-24.37	31.06	20.15	2.27	31.97	0.12 -- -- Peak	4	467.47	27.34	46.00	-18.66	32.70	23.50	3.00	31.97	0.11 -- -- Peak	5	717.73	32.28	46.00	-13.72	33.25	27.13	3.72	31.96	0.14 -- -- Peak	6	958.29	34.36	46.00	-11.64	29.92	30.82	4.21	30.80	0.21 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	62.01	27.47	40.00	-12.53	46.31	12.07	1.10	32.12	0.11 -- -- Peak																																																																																																																																																																													
2	110.51	25.89	43.50	-17.61	39.31	17.12	1.50	32.11	0.07 -- -- Peak																																																																																																																																																																													
3	270.56	29.35	46.00	-16.65	39.77	19.12	2.31	31.97	0.12 -- -- Peak																																																																																																																																																																													
4	273.47	34.89	46.00	-11.11	45.50	18.92	2.32	31.97	0.12 -- -- Peak																																																																																																																																																																													
5	730.34	36.31	46.00	-9.69	36.51	27.84	3.75	31.93	0.14 -- -- Peak																																																																																																																																																																													
6	956.35	34.64	46.00	-11.36	30.20	30.84	4.21	30.82	0.21 -- -- Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	44.55	32.55	40.00	-7.45	46.50	17.27	0.95	32.38	0.13 -- -- Peak																																																																																																																																																																													
2	126.03	19.72	43.50	-23.78	32.53	17.62	1.60	32.10	0.07 -- -- Peak																																																																																																																																																																													
3	260.86	21.63	46.00	-24.37	31.06	20.15	2.27	31.97	0.12 -- -- Peak																																																																																																																																																																													
4	467.47	27.34	46.00	-18.66	32.70	23.50	3.00	31.97	0.11 -- -- Peak																																																																																																																																																																													
5	717.73	32.28	46.00	-13.72	33.25	27.13	3.72	31.96	0.14 -- -- Peak																																																																																																																																																																													
6	958.29	34.36	46.00	-11.64	29.92	30.82	4.21	30.80	0.21 -- -- Peak																																																																																																																																																																													



Mode	29																																																																																																
	SHF																																																																																																
	2400-2483.5_802.11g_CH02_2417MHz																																																																																																
ANT	0																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak	Date: 2026-03-19 Site : 03CH13-HY Condition: PEAK_74 1m SHF_1225 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>22445.00</td><td>47.25</td><td>74.00</td><td>-26.75</td><td>54.78</td><td>38.59</td><td>6.28</td><td>62.41</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	22445.00	47.25	74.00	-26.75	54.78	38.59	6.28	62.41	-9.54	--	PEAK	Date: 2026-03-19 Site : 03CH13-HY Condition: PEAK_74 1m SHF_1225 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>23047.00</td><td>47.65</td><td>74.00</td><td>-26.35</td><td>53.98</td><td>39.10</td><td>6.47</td><td>62.18</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	23047.00	47.65	74.00	-26.35	53.98	39.10	6.47	62.18	-9.54	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	22445.00	47.25	74.00	-26.75	54.78	38.59	6.28	62.41	-9.54	--	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	23047.00	47.65	74.00	-26.35	53.98	39.10	6.47	62.18	-9.54	--	PEAK																																																																																						



Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
0	802.11b	98.85	-	-	10Hz
0	802.11g	93.44	1425	0.70	750Hz
0	2.4GHz 802.11n HT20	93.01	1330	0.75	820Hz

