

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

Report No.: RFCJWN-WTW-P26060620-2

FCC ID: 2AEUP-5CFYB6

Product: Security Camrea

Brand: ring

Model No.: 5CFYB6

Received Date: 2026/6/26

Test Date: 2026/7/28 ~ 2026/8/28

Issued Date: 2026/9/18

Applicant: Ring LLC

Address: 12515 Cerise Ave, Hawthorne, CA 90250, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City 244, Taiwan

Test Location(1): No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 333, Taiwan

Test Location(2): No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan

FCC Registration / 788550 / TW0003 for Test Location(1)

Designation Number: 281270 / TW0032 for Test Location(2)

Approved by:



, **Date:**

2026/9/18

Jeremy Lin / Project Engineer

This test report consists of 99 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Annie Chang / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Antenna Description of EUT	8
3.3 Channel List	9
3.4 Test Mode Applicability and Tested Channel Detail	10
3.5 Duty Cycle of Test Signal	12
3.6 Test Program Used and Operation Descriptions	13
3.7 Connection Diagram of EUT and Peripheral Devices	13
3.8 Configuration of Peripheral Devices and Cable Connections	13
4 Test Instruments	14
4.1 26 dB Bandwidth	14
4.2 RF Output Power	14
4.3 Power Spectral Density	14
4.4 6 dB Bandwidth	14
4.5 Occupied Bandwidth	14
4.6 AC Power Conducted Emissions	15
4.7 Unwanted Emissions below 1 GHz	16
4.8 Unwanted Emissions above 1 GHz	17
5 Limits of Test Items	19
5.1 26 dB Bandwidth	19
5.2 RF Output Power	19
5.3 Power Spectral Density	19
5.4 6 dB Bandwidth	19
5.5 Occupied Bandwidth	19
5.6 AC Power Conducted Emissions	20
5.7 Unwanted Emissions below 1 GHz	20
5.8 Unwanted Emissions above 1 GHz	21
6 Test Arrangements	22
6.1 26 dB Bandwidth	22
6.1.1 Test Setup	22
6.1.2 Test Procedure	22
6.2 RF Output Power	23
6.2.1 Test Setup	23
6.2.2 Test Procedure	23
6.3 Power Spectral Density	24
6.3.1 Test Setup	24
6.3.2 Test Procedure	24
6.4 6 dB Bandwidth	25
6.4.1 Test Setup	25
6.4.2 Test Procedure	25
6.5 Occupied Bandwidth	25
6.5.1 Test Setup	25
6.5.2 Test Procedure	25
6.6 AC Power Conducted Emissions	26
6.6.1 Test Setup	26
6.6.2 Test Procedure	26
6.7 Unwanted Emissions below 1 GHz	27
6.7.1 Test Setup	27
6.7.2 Test Procedure	28

6.8	Unwanted Emissions above 1 GHz.....	29
6.8.1	Test Setup	29
6.8.2	Test Procedure	29
7	Test Results of Test Item	30
7.1	26 dB Bandwidth	30
7.2	RF Output Power.....	36
7.3	Power Spectral Density	43
7.4	6 dB Bandwidth	49
7.5	Occupied Bandwidth.....	52
7.6	AC Power Conducted Emissions	58
7.7	Unwanted Emissions below 1 GHz	60
7.8	Unwanted Emissions above 1 GHz.....	62
8	Pictures of Test Arrangements	98
9	Information of the Testing Laboratories	99

Release Control Record

Issue No.	Description	Date Issued
RFCJWN-WTW-P26060620-2	Original release.	2026/9/18

1 Certificate

Product: Security Camrea
Brand: ring
Test Model: 5CFYB6
Sample Status: Engineering sample
Applicant: Ring LLC
Test Date: 2026/7/28 ~ 2026/8/28
Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
Measurement procedure: ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024
KDB 789033 D02 General UNII Test Procedure New Rules v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
Clause	Test Item	Result	Remark
15.407(a)(2)	26 dB Bandwidth	N/A	For U-NII-2A U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6 dB Bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
---	Occupied Bandwidth	-	Reference only.
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -11.39 dB at 0.53800 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -7.1 dB at 30.97 MHz
15.407(b) (1/10) 15.407(b) (2/10) 15.407(b) (3/10) 15.407(b) (4(i)/10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -3.5 dB at 5460.00 MHz
15.203	Antenna Requirement	Pass	No antenna connector is used.

Notes:

- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- The "Dynamic Frequency Selection measurement" was recorded in DFS test report.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Uncertainty (±)
26 dB Bandwidth	-	206.5 Hz
RF Output Power	-	1.371 dB
Power Spectral Density	-	1.017 dB
6 dB Bandwidth	-	206.5 Hz
Occupied Bandwidth	-	72 Hz
AC Power Conducted Emissions	9 kHz ~ 30 MHz	3.23 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3 dB
	30 MHz ~ 1 GHz	2.93 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	1.76 dB
	18 GHz ~ 40 GHz	1.77 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Security Camrea
Brand	ring
Test Model	5CFYB6
Status of EUT	Engineering sample
Power Supply Rating	100-240VAC, 50/60Hz, 32W
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode 1024QAM for OFDMA in 11ax mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	Up to 143.4 Mbps
Operating Frequency	5.18 GHz ~ 5.24 GHz, 5.26 GHz ~ 5.32 GHz, 5.5 GHz ~ 5.72 GHz, 5.745 GHz ~ 5.825 GHz
Number of Channel	802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):25
Partial RU Mode	Single RU
Channel Puncturing	Not support
Output Power	5.18 GHz ~ 5.24 GHz: 43.451 mW (16.38 dBm) 5.26 GHz ~ 5.32 GHz: 39.628 mW (15.98 dBm) 5.5 GHz ~ 5.72 GHz: 37.584 mW (15.75 dBm) 5.745 GHz ~ 5.825 GHz: 35.975 mW (15.56 dBm)
EUT Category	Client device

Note:

1. The EUT uses following accessories.

Item	Specification
AC power cable	Non-shielded AC cable (6.0m)

2. There are Bluetooth and WLAN (2.4 GHz & 5 GHz) and 60 GHz radar technologies used for the EUT.
3. Bluetooth and WLAN (2.4 GHz & 5 GHz) and 60 GHz radar technologies cannot operate simultaneously.
4. The EUT support OFDMA and Partial RU mode, therefore partial RU combination were investigated and the worst case scenario was identified.
5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna Gain (dBi)	Frequency Range	Antenna Type	Connector Type
4	2.4~2.4835 GHz	PIFA	NA
3.5	5 GHz		
3	60~61GHz		

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a SISO function:

5 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11a	1TX	1RX
802.11n (HT20)	1TX	1RX
802.11ac (VHT20)	1TX	1RX
802.11ax (HE20)	1TX	1RX
802.11ax (RU26/52/106/242)	1TX	1RX

Note: After investigation, 802.11ax mode 20 MHz represents the worst mode in the report since the power setting is the same or higher than 802.11n mode 20 MHz and 802.11ac mode 20 MHz, and the modulation type and bandwidth are all similar.

3.3 Channel List

FOR 5180 ~ 5320 MHz

8 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	52	5260 MHz
40	5200 MHz	56	5280 MHz
44	5220 MHz	60	5300 MHz
48	5240 MHz	64	5320 MHz

FOR 5500 ~ 5720 MHz

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

FOR 5745 ~ 5825 MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

3.4 Test Mode Applicability and Tested Channel Detail

Worst Case:	1. EUT can be used in the following ways: X-axis/ Y-axis / Z-axis. Pre-scan these ways and find the worst case: Y-axis as a representative test condition.
	2. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.
	3. The worst-case Partial RU modes have been determined via pre-scan. The worst case occurs in 20 MHz bandwidth (RU 26/ 52/106).

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
26 dB Bandwidth	802.11a	52, 60, 64, 100, 120, 140, 144	BPSK	6Mb/s	NA
	802.11ax (HE20)	52, 60, 64, 100, 120, 140, 144	BPSK	MCS0	NA
	802.11ax (HE20) 26-tone RU	52, 60, 64, 100, 120, 140, 144	BPSK	MCS0	0, 0, 8, 0, 8, 8, 8
	802.11ax (HE20) 52-tone RU	52, 60, 64, 100, 120, 140, 144	BPSK	MCS0	37, 37, 40, 37, 37, 40, 40
	802.11ax (HE20) 106-tone RU	52, 60, 64, 100, 120, 140, 144	BPSK	MCS0	53, 53, 54, 53, 53, 54, 54
RF Output Power	802.11a	36, 40, 48, 52, 60, 64, 100, 120, 140, 144, 149, 157, 165	BPSK	6Mb/s	NA
	802.11ax (HE20)	36, 40, 48, 52, 60, 64, 100, 120, 140, 144, 149, 157, 165	BPSK	MCS0	NA
	802.11ax (HE20) 26-tone RU	36, 40, 48, 52, 60, 64, 100, 120, 140, 144, 149, 157, 165	BPSK	MCS0	0, 0, 8, 0, 0, 8, 0, 8, 8, 8, 0, 0, 8
	802.11ax (HE20) 52-tone RU	36, 40, 48, 52, 60, 64, 100, 120, 140, 144, 149, 157, 165	BPSK	MCS0	37, 37, 40, 37, 37, 40, 37, 37, 40, 40, 37, 37, 40
	802.11ax (HE20) 106-tone RU	36, 40, 48, 52, 60, 64, 100, 120, 140, 144, 149, 157, 165	BPSK	MCS0	53, 53, 54, 53, 53, 54, 53, 53, 54, 54, 53, 53, 54
Power Spectral Density	802.11a	36, 40, 48, 52, 60, 64, 100, 120, 140, 144, 149, 157, 165	BPSK	6Mb/s	NA
	802.11ax (HE20)	36, 40, 48, 52, 60, 64, 100, 120, 140, 144, 149, 157, 165	BPSK	MCS0	NA
	802.11ax (HE20) 26-tone RU	36, 40, 48, 52, 60, 64, 100, 120, 140, 144, 149, 157, 165	BPSK	MCS0	0, 0, 8, 0, 0, 8, 0, 8, 8, 8, 0, 0, 8

Test Item	Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
	802.11ax (HE20) 52-tone RU	36, 40, 48, 52, 60, 64, 100, 120, 140, 144, 149, 157, 165	BPSK	MCS0	37, 37, 40, 37, 37, 40, 37, 37, 40, 40, 37, 37, 40
	802.11ax (HE20) 106-tone RU	36, 40, 48, 52, 60, 64, 100, 120, 140, 144, 149, 157, 165	BPSK	MCS0	53, 53, 54, 53, 53, 54, 53, 53, 54, 54, 53, 53, 54
6 dB Bandwidth	802.11a	144, 149, 157, 165	BPSK	6Mb/s	NA
	802.11ax (HE20)	144, 149, 157, 165	BPSK	MCS0	NA
	802.11ax (HE20) 26-tone RU	144, 149, 157, 165	BPSK	MCS0	8, 0, 0, 8
	802.11ax (HE20) 52-tone RU	144, 149, 157, 165	BPSK	MCS0	40, 37, 37, 40
	802.11ax (HE20) 106-tone RU	144, 149, 157, 165	BPSK	MCS0	54, 53, 53, 54
Occupied Bandwidth	802.11a	36, 40, 48, 52, 60, 64, 100, 120, 140, 144, 149, 157, 165	BPSK	6Mb/s	NA
	802.11ax (HE20)	36, 40, 48, 52, 60, 64, 100, 120, 140, 144, 149, 157, 165	BPSK	MCS0	NA
	802.11ax (HE20) 26-tone RU	36, 40, 48, 52, 60, 64, 100, 120, 140, 144, 149, 157, 165	BPSK	MCS0	0, 0, 8, 0, 0, 8, 0, 8, 8, 8, 0, 0, 8
	802.11ax (HE20) 52-tone RU	36, 40, 48, 52, 60, 64, 100, 120, 140, 144, 149, 157, 165	BPSK	MCS0	37, 37, 40, 37, 37, 40, 37, 37, 40, 40, 37, 37, 40
	802.11ax (HE20) 106-tone RU	36, 40, 48, 52, 60, 64, 100, 120, 140, 144, 149, 157, 165	BPSK	MCS0	53, 53, 54, 53, 53, 54, 53, 53, 54, 54, 53, 53, 54
AC Power Conducted Emissions	802.11a	36	BPSK	6Mb/s	NA
Unwanted Emissions below 1 GHz	802.11a	36	BPSK	6Mb/s	NA
Unwanted Emissions above 1 GHz	802.11a	36, 40, 48, 52, 60, 64, 100, 120, 140, 144, 149, 157, 165	BPSK	6Mb/s	NA
	802.11ax (HE20)	36, 40, 48, 52, 60, 64, 100, 120, 140, 144, 149, 157, 165	BPSK	MCS0	NA

3.5 Duty Cycle of Test Signal

802.11a: Duty cycle = 0.132 ms / 0.152 ms x 100% = 86.8%, duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.61 \text{ dB}$

802.11ax (HE20): Duty cycle = 0.311 ms / 0.329 ms x 100% = 94.5%, duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.24 \text{ dB}$

802.11ax (HE20) 26-tone RU: Duty cycle = 5.333 ms / 6.346 ms x 100% = 84.0%, duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.76 \text{ dB}$

802.11ax (HE20) 52-tone RU: Duty cycle = 2.695 ms / 3.702 ms x 100% = 72.8%, duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 1.38 \text{ dB}$


802.11ax (HE20) 106-tone RU: Duty cycle = 1.304 ms / 2.31 ms x 100% = 56.5%, duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 2.48 \text{ dB}$



3.6 Test Program Used and Operation Descriptions

Controlling software Tera Term version 4.106 has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

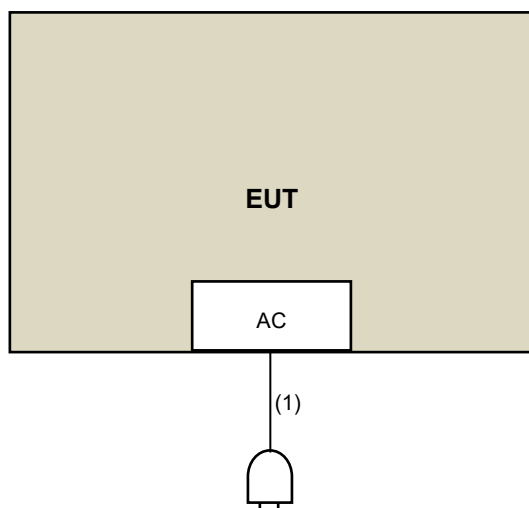

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	AC cable(with Base)	1	6	No	0	Supplied by applicant

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 26 dB Bandwidth

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-10	00800A1K01A-10-01	2026/5/21	2027/5/20
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A
Spectrum Analyzer R&S	FSU43	101261	2026/5/4	2027/5/3

Notes:

1. The test was performed in HY - Oven room(Hwaya).
2. Tested Date: 2026/8/18 ~ 2026/8/28

4.2 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-10	00800A1K01A-10-01	2026/5/21	2027/5/20
Peak Power Analyzer Keysight	8990B	MY51000485	2026/1/23	2027/1/22
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A
Spectrum Analyzer R&S	FSU43	101261	2026/5/4	2027/5/3
USB Power Sensor Anritsu	MA24408A	12994	2025/12/5	2026/12/4
Wideband Power Sensor Keysight	N1923A	MY58020002	2026/1/26	2027/1/25
		MY58140009	2026/1/26	2027/1/25

Notes:

1. The test was performed in HY - Oven room(Hwaya).
2. Tested Date: 2026/8/18 ~ 2026/8/28

4.3 Power Spectral Density

Refer to section 4.1 to get the tested date and information of the instruments.

4.4 6 dB Bandwidth

Refer to section 4.1 to get the tested date and information of the instruments.

4.5 Occupied Bandwidth

Refer to section 4.1 to get the tested date and information of the instruments.

4.6 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance	E1-011279	04	2025/12/4	2026/12/3
	E1-011280	05	2025/12/4	2026/12/3
	E1-011311	09	2025/12/4	2026/12/3
DC LISN Schwarzbeck	NNBM 8126G	8126G-069	2025/11/3	2026/11/2
Diode Pulse Limiter Schwarzbeck	VTSD 9561 F-N	01445	2026/4/18	2027/4/17
EMI Test Receiver R&S	ESCI	100613	2025/11/27	2026/11/26
Extension Power Line EMCI	EMCI-EXP-EU-US	023	2026/3/6	2027/3/5
LISN R&S	ENV216	101826	2026/3/6	2027/3/5
	ESH3-Z5	100311	2025/8/28	2026/8/27
RF Coaxial Cable Woken	5D-FB	Cable-cond1-01	2026/1/3	2027/1/2
Software BVADT	BVADT_Conc_ V7.4.1.0	N/A	N/A	N/A
V-LISN Schwarzbeck	NNBL 8226-2	8226-142	2025/8/27	2026/8/26

Notes:

1. The test was performed in HY - Conduction 1.
2. Tested Date: 2026/7/28

4.7 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	MFT-151SS-0.5T	N/A	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-1213	2025/9/18	2026/9/17
Loop Antenna TESEQ	HLA 6121	45745	2025/9/1	2026/8/31
MXE EMI Receiver Keysight	N9038B	MY60180019	2026/1/14	2027/1/13
Preamplifier EMCI	EMC330N	980782	2026/1/13	2027/1/12
RF Coaxial Cable EMCI	EMCCFD400-NM-NM-500	201233	2026/1/13	2027/1/12
	EMCCFD400-NM-NM-3000	201235	2026/1/13	2027/1/12
	EMCCFD400-NM-NM-9000	201236(with PAD)	2026/1/13	2027/1/12
Signal & Spectrum Analyzer R&S	FSW43	101867	2026/2/11	2027/2/10
Software BV ADT	ADT_Radiated_ V7.7.1.1.1	N/A	N/A	N/A
Turn Table Max-Full	MF-7802BS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208674	N/A	N/A

Notes:

1. The test was performed in WM - 966 chamber 8(Wenming).
2. Tested Date: 2026/8/4

4.8 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	MFT-151SS-0.5T	N/A	N/A	N/A
Horn Antenna RFSPIN	DRH18-E	210103A18E	2025/11/9	2026/11/8
Horn Antenna Schwarzbeck	BBHA 9170	9170-1049	2025/11/9	2026/11/8
MXE EMI Receiver Keysight	N9038B	MY60180019	2026/1/14	2027/1/13
Preamplifier EMCI	EMC118A45SE	980808	2025/12/24	2026/12/23
	EMC184045SE	980788	2026/1/13	2027/1/12
RF Coaxial Cable EMCI	EMC101G-KM-KM-2000	201254	2026/1/13	2027/1/12
		201255	2026/1/13	2027/1/12
	EMC101G-KM-KM-5000	201261	2026/1/13	2027/1/12
	EMC104-SM-SM-1000	210102	2026/1/13	2027/1/12
	EMC104-SM-SM-3000	201231	2026/1/13	2027/1/12
	EMC104-SM-SM-9000	201243	2026/1/13	2027/1/12
Signal & Spectrum Analyzer R&S	FSW43	101867	2026/2/11	2027/2/10
Software BV ADT	ADT_Radiated_ V7.7.1.1.1	N/A	N/A	N/A
Turn Table Max-Full	MF-7802BS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208674	N/A	N/A

Notes:

1. The test was performed in WM - 966 chamber 8(Wenming).
2. Tested Date: 2026/7/28

Plot of Band Edge and of Other Emission

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower KaiTuo	N/A	N/A	N/A	N/A
Antenna Tower Controller KaiTuo	KT-2000	N/A	N/A	N/A
Horn Antenna RFSPIN	DRH18-E	210104A18E	2025/11/9	2026/11/8
Horn Antenna Schwarzbeck	BBHA 9170	9170-1048	2025/11/9	2026/11/8
MXE EMI Receiver Agilent	N9038A	MY52260177	2025/10/3	2026/10/2
Preamplifier EMCI	EMC118A45SE	980810	2025/12/24	2026/12/23
	EMC184045SE	980787	2026/1/13	2027/1/12
RF Coaxial Cable EMCI	EMC101G-KM-KM-2000	201254	2026/1/13	2027/1/12
		201255	2026/1/13	2027/1/12
	EMC101G-KM-KM-5000	201261	2026/1/13	2027/1/12
	EMC104-SM-SM-1000	210101	2026/1/13	2027/1/12
	EMC104-SM-SM-3000	201242	2026/1/13	2027/1/12
	EMC104-SM-SM-9000	201230	2026/1/13	2027/1/12
Software BV ADT	ADT_Radiated_ V7.7.1.1.1	N/A	N/A	N/A
Turn Table Max-Full	MFT-151SS-0.5T	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208675	N/A	N/A
UXA Signal Analyzer Keysight	N9040B	MY59490105	2026/1/14	2027/1/13

Notes:

1. The test was performed in WM - 966 chamber 7(Wenming).
2. Tested Date: 2026/7/28 ~ 2026/8/5

5 Limits of Test Items

5.1 26 dB Bandwidth

The results are for reference only.

5.2 RF Output Power

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Points	1 Watt (30 dBm)
	Indoor Access Point	1 Watt (30 dBm)
	Client devices	250mW (24 dBm)

Operation Band	Limit
U-NII-2A	250 mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	250 mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

5.3 Power Spectral Density

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	17 dBm/MHz
	Fixed point-to-point Access Points	
	Indoor Access Point	
	Client devices	11 dBm/MHz

Operation Band	Limit
U-NII-2A	11 dBm/MHz
U-NII-2C	11 dBm/MHz
U-NII-3	30 dBm/500 kHz

5.4 6 dB Bandwidth

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.5 Occupied Bandwidth

The results are for reference only.

5.6 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.7 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.8 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To	Limit	
789033 D02 General UNII Test Procedure New Rules v02r01	Field Strength at 3 m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)

For transmitters operating in the 5.15-5.25 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.25-5.35 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(2)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.47-5.725 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(3)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)

For transmitters operating in the 5.725-5.850 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2 (dBμV/m) ^{*1} PK: 105.2 (dBμV/m) ^{*2} PK: 110.8 (dBμV/m) ^{*3} PK: 122.2 (dBμV/m) ^{*4}

^{*1} beyond 75 MHz or more above of the band edge.

^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

6 Test Arrangements

6.1 26 dB Bandwidth

6.1.1 Test Setup




Note: The correction factor has already been compensated by the instrument.

6.1.2 Test Procedure

- a. Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- b. Set the VBW > RBW.
- c. Detector = peak.
- d. Trace mode = max-hold.
- e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.


6.2 RF Output Power

6.2.1 Test Setup

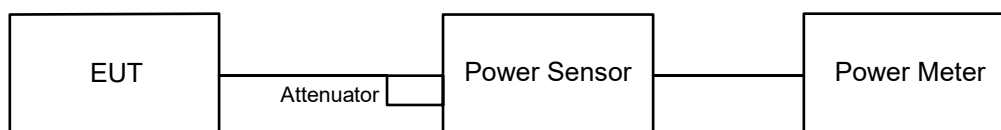

Note: The correction factor has already been compensated by the instrument.

For channel straddling:



Note: The correction factor has already been compensated by the instrument.

6.2.2 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

For channel straddling:


Method SA-2A

- a. Measure the duty cycle of the transmitter output signal.
- b. Set span to encompass the entire 99% OBW of the signal.
- c. Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS.
- d. Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- e. Manually set sweep time $\geq [10 \times (\text{number of points in sweep}) \times (\text{total ON/OFF period of the transmitted signal})]$.
- f. Perform a single sweep.
- g. Compute power by integrating the spectrum across the 99% OBW of the signal using the instrument's band-power measurement function with band limits set equal to the OBW band-edges. If the instrument does not have a band-power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 99% OBW of the spectrum.
- h. Record the max value and add $10 \log (1/\text{duty cycle})$.

Note: When measuring straddle channel power, use compute power by integrating the spectrum across the 99% OBW of the signal using the instrument's band power measurement function, with band limits set equal to the 99% OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 99% OBW of the spectrum.

6.3 Power Spectral Density

6.3.1 Test Setup



Note: The correction factor has already been compensated by the instrument.

6.3.2 Test Procedure

For specified measurement bandwidth 1 MHz:

Method SA-2

- Measure the duty cycle of the transmitter output signal.
- Set span to encompass the entire 99% OBW of the signal.
- Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS.
- Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- Record the max value and add $10 \log (1/\text{duty cycle})$.


For specified measurement bandwidth 500 kHz:

Method SA-2

- Measure the duty cycle of the transmitter output signal.
- Set span to encompass the entire 99% OBW of the signal.
- Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS.
- Scale the observed power level to an equivalent value in 500 kHz by adjusting (increasing) the measured power by a bandwidth correction factor (BWCF) where $\text{BWCF} = 10\log(500 \text{ kHz}/300 \text{ kHz})$.
- Sweep points $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto, trigger set to "free run".
- Trace average at least 100 traces in power averaging mode.
- Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- Record the max value and add $10 \log (1/\text{duty cycle})$.

6.4 6 dB Bandwidth

6.4.1 Test Setup




Note: The correction factor has already been compensated by the instrument.

6.4.2 Test Procedure

- Set RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.5 Occupied Bandwidth

6.5.1 Test Setup



Note: The correction factor has already been compensated by the instrument.


6.5.2 Test Procedure

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, without going below the values in section 6.9.1 of ANSI C63.10a-2024 and video bandwidth (VBW) shall be at least three times RBW, unless otherwise specified by the applicable requirement.
- Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
- Step a) through step c) might require iteration to adjust within the specified range.
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

6.6 AC Power Conducted Emissions

6.6.1 Test Setup

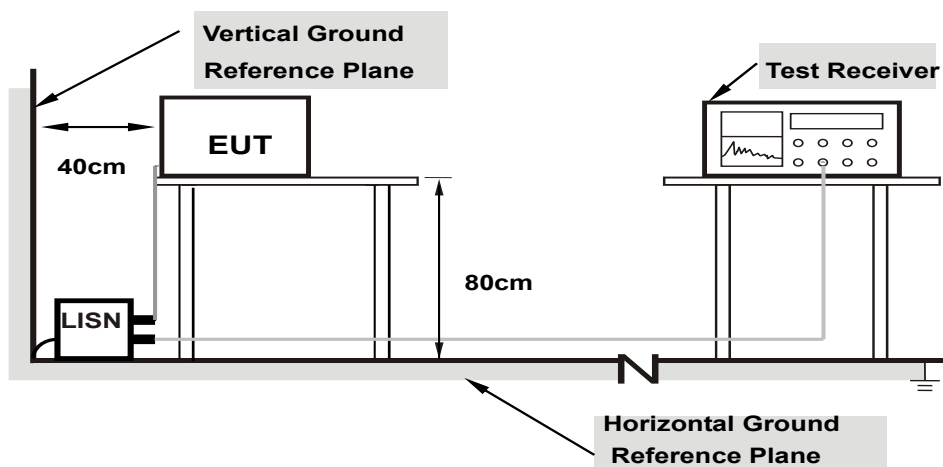

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure


- Exploratory ac power-line conducted emission measurements: The EUT shall be operated on the mid channel and in the mode with highest output power unless the fundamental operates in the AC power-line emission test range then the EUT shall be operated in the range of typical modes of operation.
- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.7 Unwanted Emissions below 1 GHz

6.7.1 Test Setup

For Radiated emission below 30 MHz

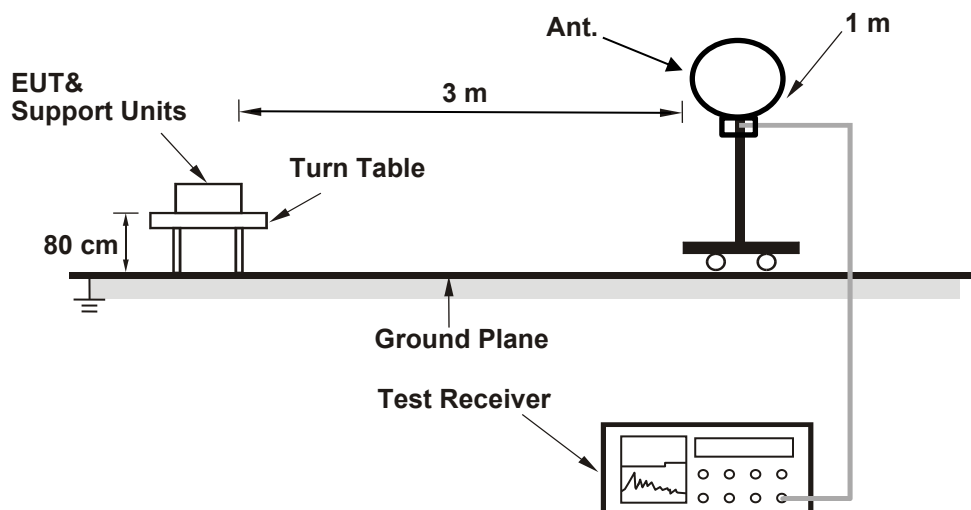

For Radiated emission above 30 MHz

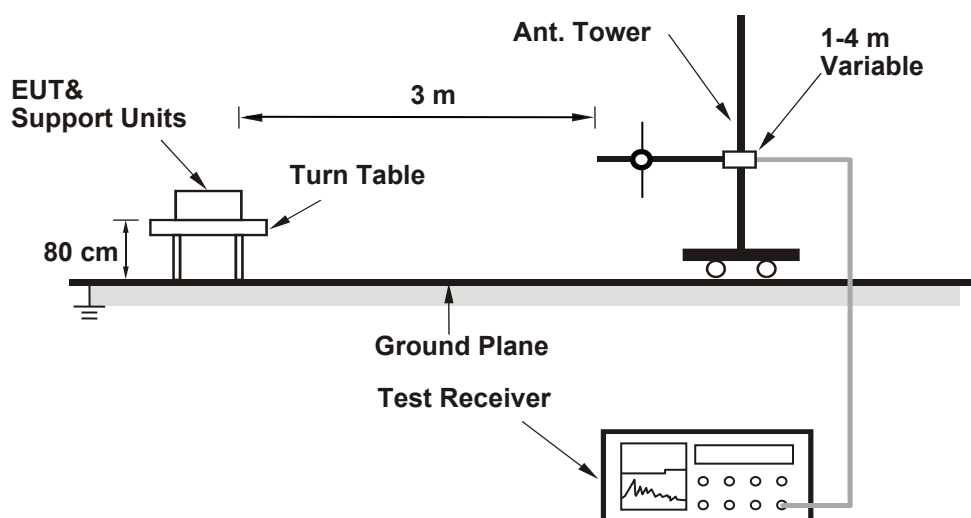

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode (however, peak detector measurements may be used to determine compliance with QP requirements), except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-peak(QP) detect function, Average(AV) detect function, Peak(PK) detect function and specified bandwidth with maximum hold mode when the test frequencies less than or equal to 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz (however, peak detector measurements may be used to determine compliance with QP requirements).
2. All modes of operation were investigated and the worst-case emissions are reported.

6.8 Unwanted Emissions above 1 GHz

6.8.1 Test Setup

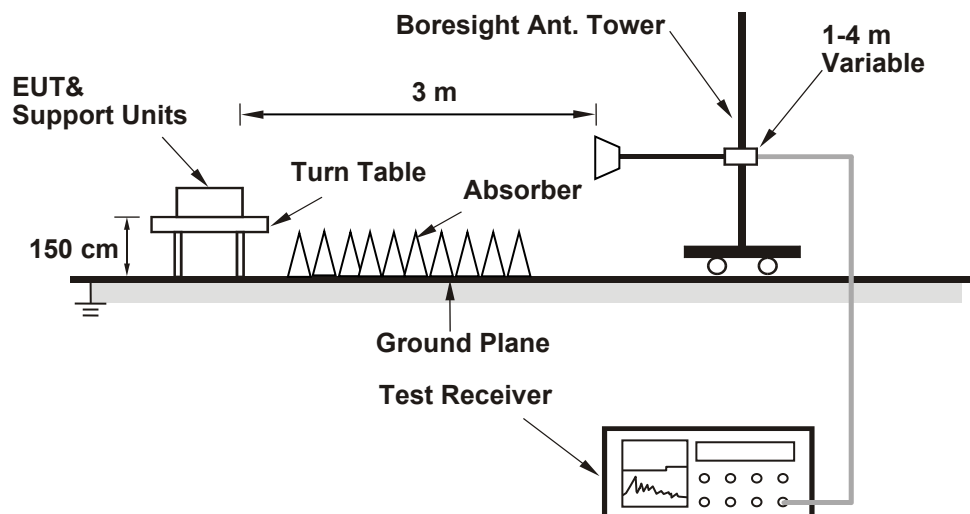

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.8.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 26 dB Bandwidth

Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Lin / Match Tsui / Ivan Tseng
---------------------------	--------------	------------	------------------------------------

802.11a

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
52	5260	21.1
60	5300	21.19
64	5320	21.06
100	5500	21.23
120	5600	21.15
140	5700	21.34
144 (U-NII-2C)	5720	15.46
144 (U-NII-3)	5720	5.57

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
52	5260	21.10	24.24	>	24
60	5300	21.19	24.26	>	24
64	5320	21.06	24.23	>	24
100	5500	21.23	24.26	>	24
120	5600	21.15	24.25	>	24
140	5700	21.34	24.29	>	24
144 (U-NII-2C)	5720	15.46	22.89	<	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11ax (HE20)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
52	5260	21.71
60	5300	21.68
64	5320	21.78
100	5500	21.76
120	5600	21.66
140	5700	21.78
144 (U-NII-2C)	5720	15.98
144 (U-NII-3)	5720	5.89

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
52	5260	21.71	24.36	>	24
60	5300	21.68	24.36	>	24
64	5320	21.78	24.38	>	24
100	5500	21.76	24.37	>	24
120	5600	21.66	24.35	>	24
140	5700	21.78	24.38	>	24
144 (U-NII-2C)	5720	15.98	23.03	<	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11ax (HE20) 26-tone RU

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
52	5260	19.79
60	5300	19.76
64	5320	20.46
100	5500	19.73
120	5600	19.84
140	5700	20.47
144 (U-NII-2C)	5720	14.67
144 (U-NII-3)	5720	5.88

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
52	5260	19.79	23.96	<	24
60	5300	19.76	23.95	<	24
64	5320	20.46	24.1	>	24
100	5500	19.73	23.95	<	24
120	5600	19.84	23.97	<	24
140	5700	20.47	24.11	>	24
144 (U-NII-2C)	5720	14.67	22.66	<	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11ax (HE20) 52-tone RU

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
52	5260	19.89
60	5300	19.9
64	5320	20.46
100	5500	19.84
120	5600	19.87
140	5700	20.4
144 (U-NII-2C)	5720	14.57
144 (U-NII-3)	5720	5.93

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
52	5260	19.89	23.98	<	24
60	5300	19.90	23.98	<	24
64	5320	20.46	24.1	>	24
100	5500	19.84	23.97	<	24
120	5600	19.87	23.98	<	24
140	5700	20.40	24.09	>	24
144 (U-NII-2C)	5720	14.57	22.63	<	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.


802.11ax (HE20) 106-tone RU

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
52	5260	21.18
60	5300	21.26
64	5320	21.23
100	5500	21.14
120	5600	21.17
140	5700	21.22
144 (U-NII-2C)	5720	15.29
144 (U-NII-3)	5720	5.88


Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
52	5260	21.18	24.25	>	24
60	5300	21.26	24.27	>	24
64	5320	21.23	24.26	>	24
100	5500	21.14	24.25	>	24
120	5600	21.17	24.25	>	24
140	5700	21.22	24.26	>	24
144 (U-NII-2C)	5720	15.29	22.84	<	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.


Spectrum Plot of Minimum Value

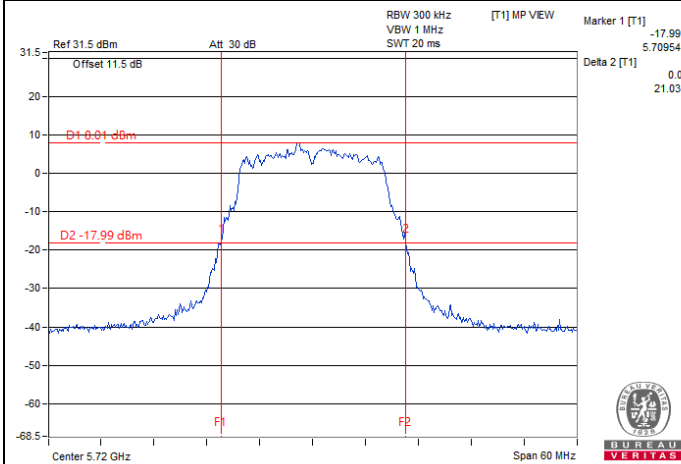


802.11a: CH 144 (U-NII-3)

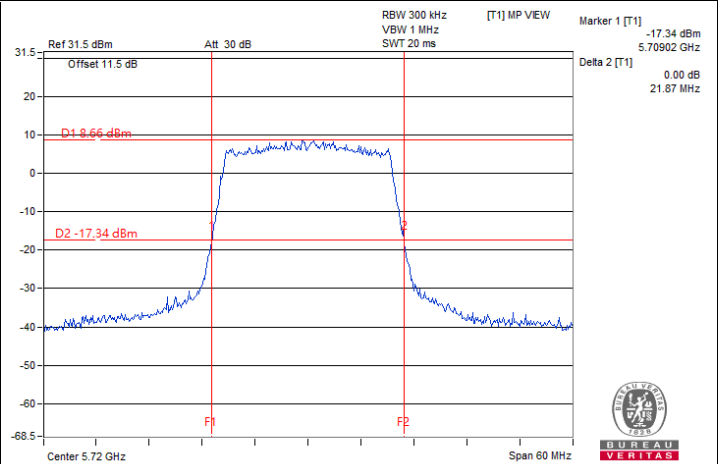


802.11ax (HE20): CH 144 (U-NII-3)

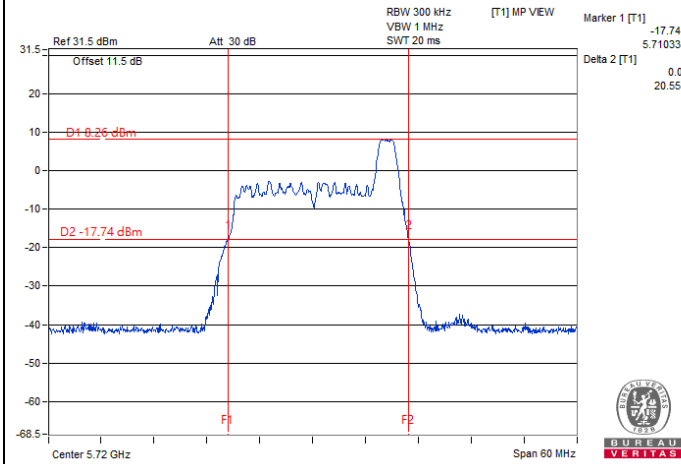

802.11ax (HE20) 26-tone RU: CH 144 (U-NII-3)

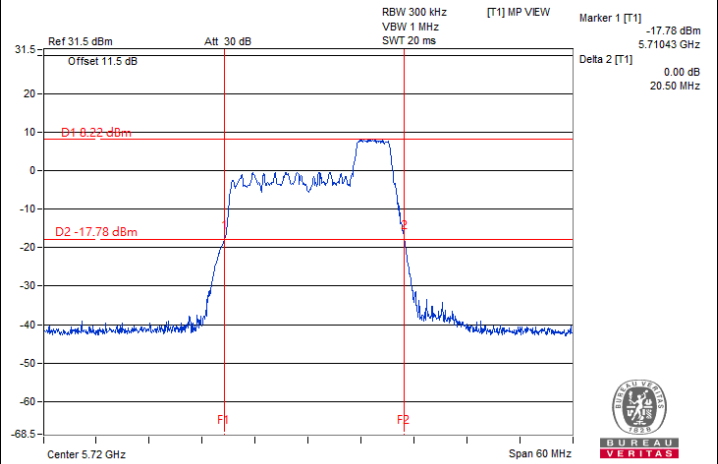

802.11ax (HE20) 52-tone RU: CH 144 (U-NII-3)

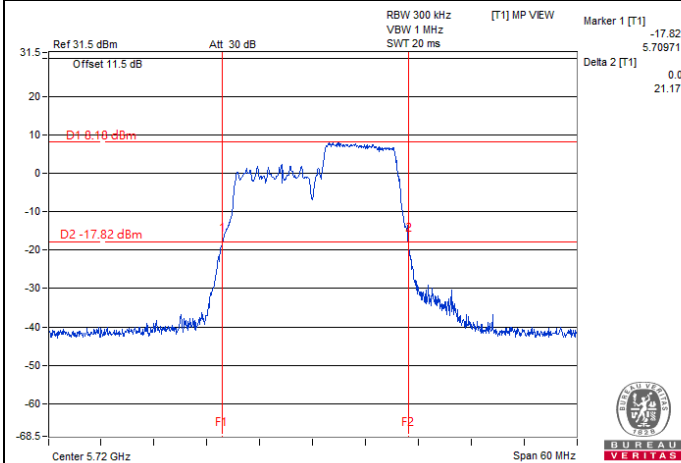

802.11ax (HE20) 106-tone RU: CH 144 (U-NII-3)

Notes:

1. For U-NII-2C straddle channel = 5725 MHz - Marker 1
2. For U-NII-3 straddle channel = Marker 1 + Delta 2 - 5725 MHz

7.2 RF Output Power

Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Lin / Match Tsui / Ivan Tseng
---------------------------	--------------	------------	------------------------------------

802.11a

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
36	5180	43.451	16.38	24	Pass
40	5200	41.115	16.14	24	Pass
48	5240	39.446	15.96	24	Pass
52	5260	39.174	15.93	24	Pass
60	5300	38.459	15.85	24	Pass
64	5320	37.757	15.77	24	Pass
100	5500	37.068	15.69	24	Pass
120	5600	34.198	15.34	24	Pass
140	5700	33.343	15.23	24	Pass
*144 (U-NII-2C)	5720	26.994	14.31	22.89	Pass
*144 (U-NII-3)	5720	4.605	6.63	30	Pass
149	5745	34.914	15.43	30	Pass
157	5785	35.481	15.50	30	Pass
165	5825	35.645	15.52	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2A and use spectrum analyzer test , the duty factor was included in the total power.
- For U-NII-1, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
36	5180	42.073	16.24	24	Pass
40	5200	40.926	16.12	24	Pass
48	5240	39.902	16.01	24	Pass
52	5260	39.628	15.98	24	Pass
60	5300	39.174	15.93	24	Pass
64	5320	37.844	15.78	24	Pass
100	5500	37.584	15.75	24	Pass
120	5600	34.041	15.32	24	Pass
140	5700	30.409	14.83	24	Pass
*144 (U-NII-2C)	5720	25.553	14.07	23.03	Pass
*144 (U-NII-3)	5720	5.867	7.68	30	Pass
149	5745	35.237	15.47	30	Pass
157	5785	35.4	15.49	30	Pass
165	5825	35.975	15.56	30	Pass

Notes:

1. * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2A and use spectrum analyzer test , the duty factor was included in the total power.
2. For U-NII-1, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
3. For U-NII-2A, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
4. For U-NII-2C, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
5. For U-NII-3, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE20) 26-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
36	5180	6.73	8.28	24	Pass
40	5200	6.516	8.14	24	Pass
48	5240	6.471	8.11	24	Pass
52	5260	5.728	7.58	23.96	Pass
60	5300	5.794	7.63	23.95	Pass
64	5320	5.821	7.65	24	Pass
100	5500	5.546	7.44	23.95	Pass
120	5600	4.819	6.83	23.97	Pass
140	5700	4.457	6.49	24	Pass
*144 (U-NII-2C)	5720	2.982	4.75	22.66	Pass
*144 (U-NII-3)	5720	4.694	6.72	30	Pass
149	5745	5.14	7.11	30	Pass
157	5785	5.445	7.36	30	Pass
165	5825	5.495	7.40	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2A and use spectrum analyzer test , the duty factor was included in the total power.
- For U-NII-1, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.

802.11ax (HE20) 52-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
36	5180	12.531	10.98	24	Pass
40	5200	12.106	10.83	24	Pass
48	5240	12.023	10.80	24	Pass
52	5260	10.789	10.33	23.98	Pass
60	5300	10.715	10.30	23.98	Pass
64	5320	10.889	10.37	24	Pass
100	5500	10.162	10.07	23.97	Pass
120	5600	9.099	9.59	23.98	Pass
140	5700	8.63	9.36	24	Pass
*144 (U-NII-2C)	5720	7.978	9.02	22.63	Pass
*144 (U-NII-3)	5720	9.395	9.73	30	Pass
149	5745	9.954	9.98	30	Pass
157	5785	10.139	10.06	30	Pass
165	5825	10.52	10.22	30	Pass

Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2A and use spectrum analyzer test , the duty factor was included in the total power.
- For U-NII-1, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.


802.11ax (HE20) 106-tone RU

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)	Power Limit (dBm)	Test Result
36	5180	23.659	13.74	24	Pass
40	5200	22.284	13.48	24	Pass
48	5240	21.928	13.41	24	Pass
52	5260	20.893	13.20	24	Pass
60	5300	20.749	13.17	24	Pass
64	5320	20.654	13.15	24	Pass
100	5500	19.409	12.88	24	Pass
120	5600	17.579	12.45	24	Pass
140	5700	16.181	12.09	24	Pass
*144 (U-NII-2C)	5720	16.008	12.04	22.84	Pass
*144 (U-NII-3)	5720	8.401	9.24	30	Pass
149	5745	18.836	12.75	30	Pass
157	5785	18.923	12.77	30	Pass
165	5825	19.143	12.82	30	Pass


Notes:

- * : Test was performed in accordance with measurement follow FCC KDB 789033 UNII test procedure Method SA-2A and use spectrum analyzer test , the duty factor was included in the total power.
- For U-NII-1, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2A, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-2C, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.
- For U-NII-3, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the output power limit shall not be reduced.


Spectrum Plot for channel straddling

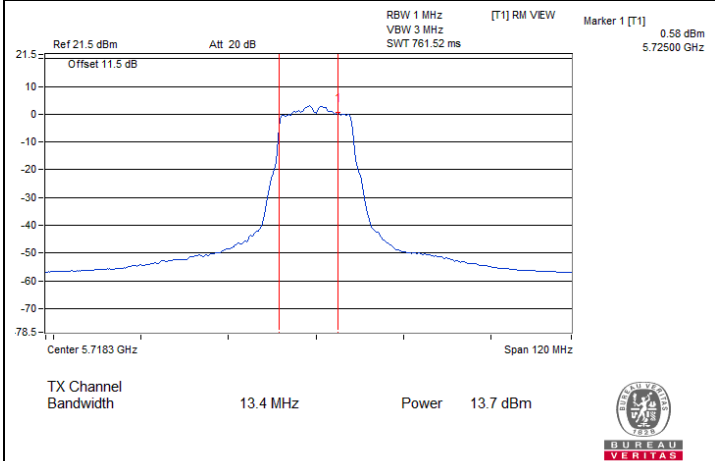


802.11a: CH 144 (U-NII-2C)

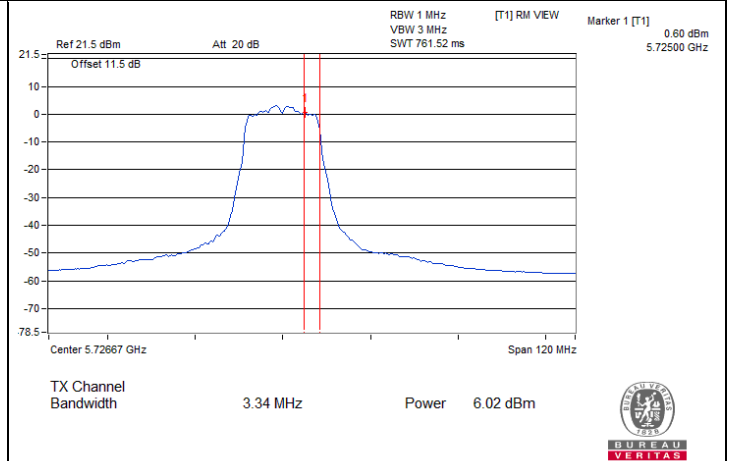


802.11a: CH 144 (U-NII-3)

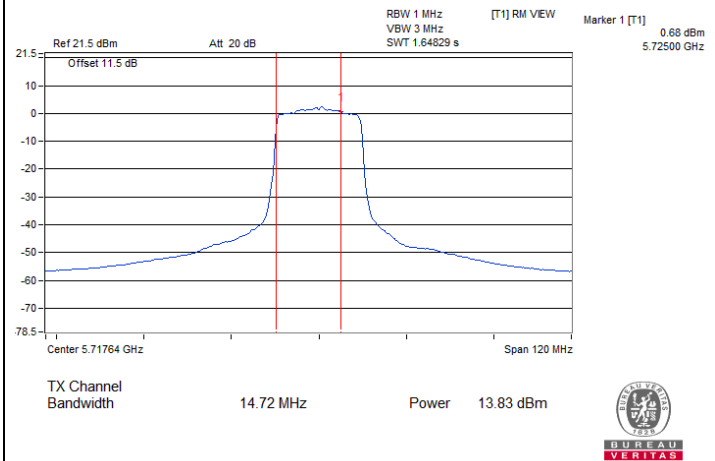


802.11ax (HE20): CH 144 (U-NII-2C)

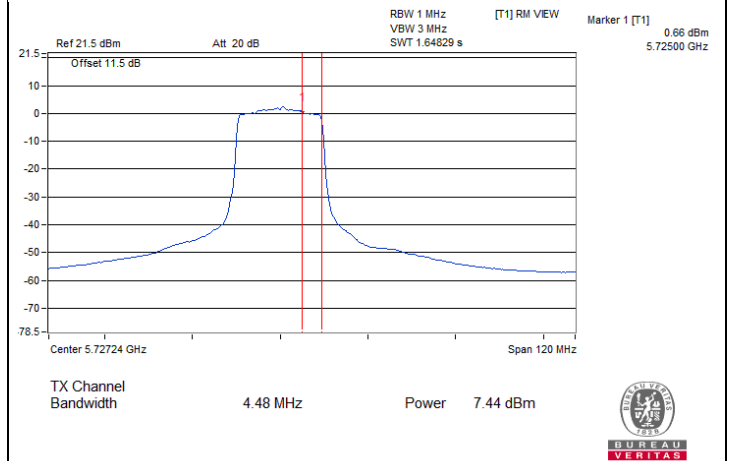

802.11ax (HE20): CH 144 (U-NII-3)

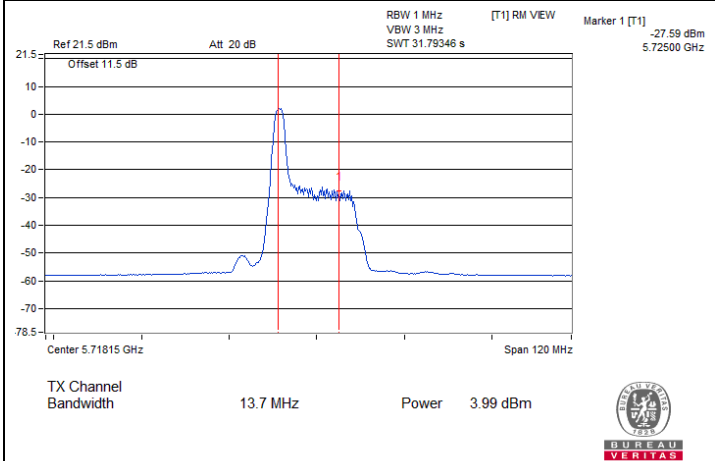


802.11ax (HE20) 26-tone RU: CH 144 (U-NII-2C)

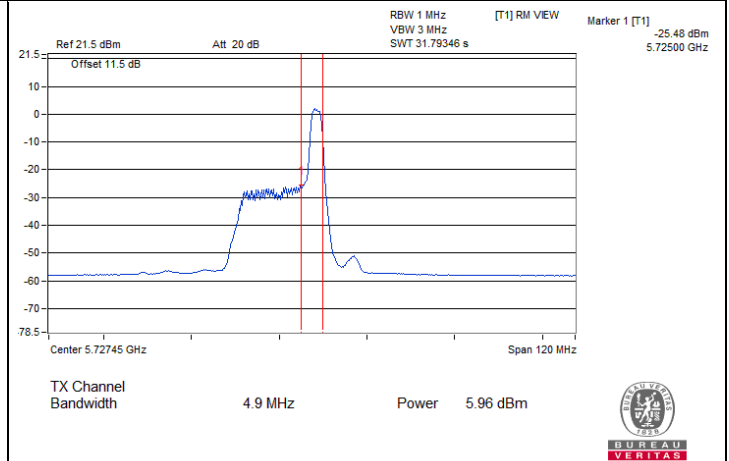


802.11ax (HE20) 26-tone RU: CH 144 (U-NII-3)


Spectrum Plot for channel straddling

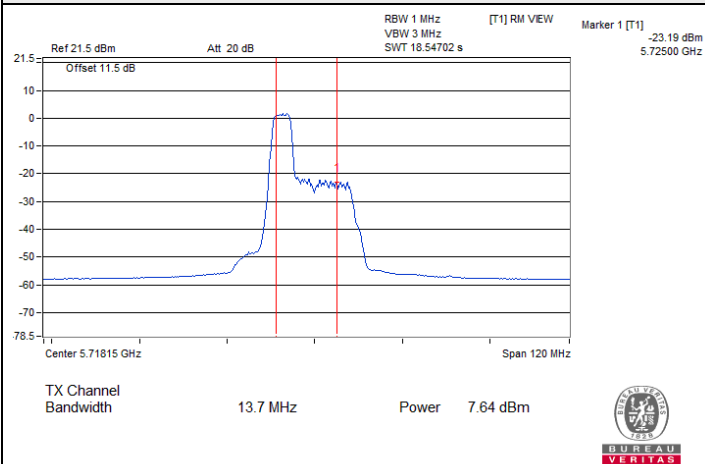


802.11ax (HE20) 52-tone RU: CH 144 (U-NII-2C)

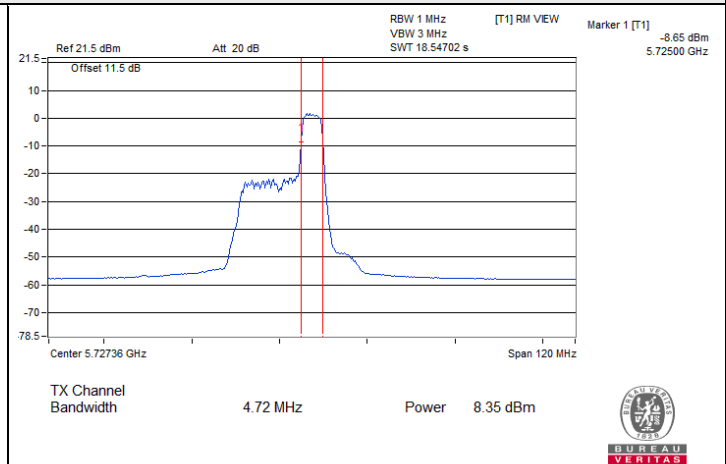

802.11ax (HE20) 52-tone RU: CH 144 (U-NII-3)

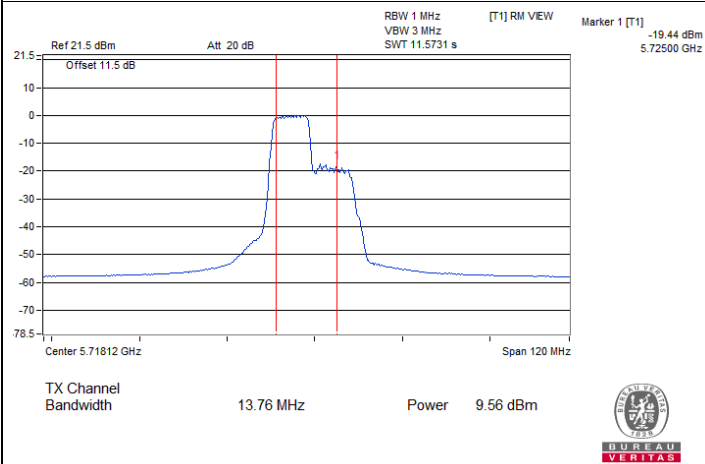

802.11ax (HE20) 106-tone RU: CH 144 (U-NII-2C)

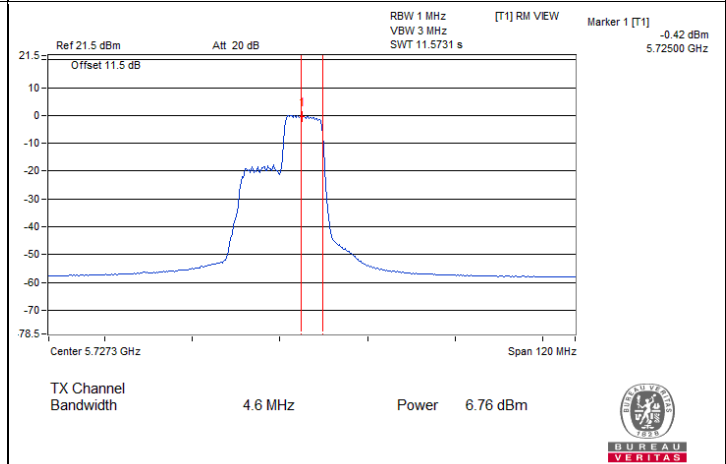

802.11ax (HE20) 106-tone RU: CH 144 (U-NII-3)

7.3 Power Spectral Density

Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Lin / Match Tsui / Ivan Tseng
---------------------------	--------------	------------	------------------------------------

802.11a

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
36	5180	3.77	0.61	4.38	11	Pass
40	5200	3.78	0.61	4.39	11	Pass
48	5240	3.77	0.61	4.38	11	Pass
52	5260	3.48	0.61	4.09	11	Pass
60	5300	3.43	0.61	4.04	11	Pass
64	5320	3.50	0.61	4.11	11	Pass
100	5500	3.28	0.61	3.89	11	Pass
120	5600	3.08	0.61	3.69	11	Pass
140	5700	2.96	0.61	3.57	11	Pass
144 (U-NII-2C)	5720	2.75	0.61	3.36	11	Pass

Notes:

1. For U-NII-1, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
2. For U-NII-2A, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
3. For U-NII-2C, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
36	5180	3.67	0.24	3.91	11	Pass
40	5200	3.49	0.24	3.73	11	Pass
48	5240	3.49	0.24	3.73	11	Pass
52	5260	3.13	0.24	3.37	11	Pass
60	5300	3.27	0.24	3.51	11	Pass
64	5320	3.23	0.24	3.47	11	Pass
100	5500	2.80	0.24	3.04	11	Pass
120	5600	2.25	0.24	2.49	11	Pass
140	5700	1.85	0.24	2.09	11	Pass
144 (U-NII-2C)	5720	2.54	0.24	2.78	11	Pass

Notes:

1. For U-NII-1, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
2. For U-NII-2A, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
3. For U-NII-2C, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11ax (HE20) 26-tone RU

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
36	5180	3.11	0.76	3.87	11	Pass
40	5200	2.86	0.76	3.62	11	Pass
48	5240	2.95	0.76	3.71	11	Pass
52	5260	2.33	0.76	3.09	11	Pass
60	5300	2.48	0.76	3.24	11	Pass
64	5320	2.49	0.76	3.25	11	Pass
100	5500	2.21	0.76	2.97	11	Pass
120	5600	1.63	0.76	2.39	11	Pass
140	5700	1.28	0.76	2.04	11	Pass
144 (U-NII-2C)	5720	1.79	0.76	2.55	11	Pass

Notes:

1. For U-NII-1, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
2. For U-NII-2A, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
3. For U-NII-2C, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11ax (HE20) 52-tone RU

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
36	5180	2.43	1.38	3.81	11	Pass
40	5200	2.22	1.38	3.60	11	Pass
48	5240	2.07	1.38	3.45	11	Pass
52	5260	1.88	1.38	3.26	11	Pass
60	5300	1.85	1.38	3.23	11	Pass
64	5320	1.77	1.38	3.15	11	Pass
100	5500	1.49	1.38	2.87	11	Pass
120	5600	0.94	1.38	2.32	11	Pass
140	5700	0.57	1.38	1.95	11	Pass
144 (U-NII-2C)	5720	1.19	1.38	2.57	11	Pass

Notes:

1. For U-NII-1, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
2. For U-NII-2A, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
3. For U-NII-2C, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11ax (HE20) 106-tone RU

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
36	5180	1.38	2.48	3.86	11	Pass
40	5200	1.16	2.48	3.64	11	Pass
48	5240	1.12	2.48	3.60	11	Pass
52	5260	0.83	2.48	3.31	11	Pass
60	5300	1.00	2.48	3.48	11	Pass
64	5320	0.90	2.48	3.38	11	Pass
100	5500	0.53	2.48	3.01	11	Pass
120	5600	-0.04	2.48	2.44	11	Pass
140	5700	-0.44	2.48	2.04	11	Pass
144 (U-NII-2C)	5720	0.20	2.48	2.68	11	Pass

Notes:

1. For U-NII-1, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
2. For U-NII-2A, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.
3. For U-NII-2C, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11a

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)	Duty Factor (dB)	PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
144 (U-NII-3)	5720	-6.47	0.61	-3.64	30	Pass
149	5745	-3.87	0.61	-1.04	30	Pass
157	5785	-3.85	0.61	-1.02	30	Pass
165	5825	-3.76	0.61	-0.93	30	Pass

Note: For U-NII-3, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)	Duty Factor (dB)	PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
144 (U-NII-3)	5720	-7.77	0.24	-5.31	30	Pass
149	5745	-6.17	0.24	-3.71	30	Pass
157	5785	-5.99	0.24	-3.53	30	Pass
165	5825	-5.76	0.24	-3.30	30	Pass

Note: For U-NII-3, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11ax (HE20) 26-tone RU

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)	Duty Factor (dB)	PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
144 (U-NII-3)	5720	-7.64	0.76	-4.66	30	Pass
149	5745	-7.1	0.76	-4.12	30	Pass
157	5785	-6.94	0.76	-3.96	30	Pass
165	5825	-6.74	0.76	-3.76	30	Pass

Note: For U-NII-3, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11ax (HE20) 52-tone RU

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)	Duty Factor (dB)	PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
144 (U-NII-3)	5720	-8.55	1.38	-4.95	30	Pass
149	5745	-7.65	1.38	-4.05	30	Pass
157	5785	-7.57	1.38	-3.97	30	Pass
165	5825	-7.26	1.38	-3.66	30	Pass


Note: For U-NII-3, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.

802.11ax (HE20) 106-tone RU


Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/300kHz)	Duty Factor (dB)	PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
144 (U-NII-3)	5720	-10.08	2.48	-5.38	30	Pass
149	5745	-8.76	2.48	-4.06	30	Pass
157	5785	-8.58	2.48	-3.88	30	Pass
165	5825	-8.32	2.48	-3.62	30	Pass

Note: For U-NII-3, the antenna gain is 3.5 dBi $\leq$ 6 dBi, so the power density limit shall not be reduced.


Spectrum Plot of Maximum Value

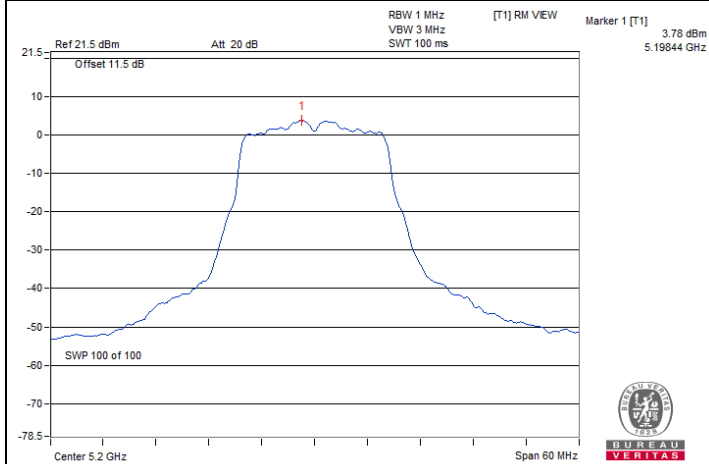


802.11a: CH 40

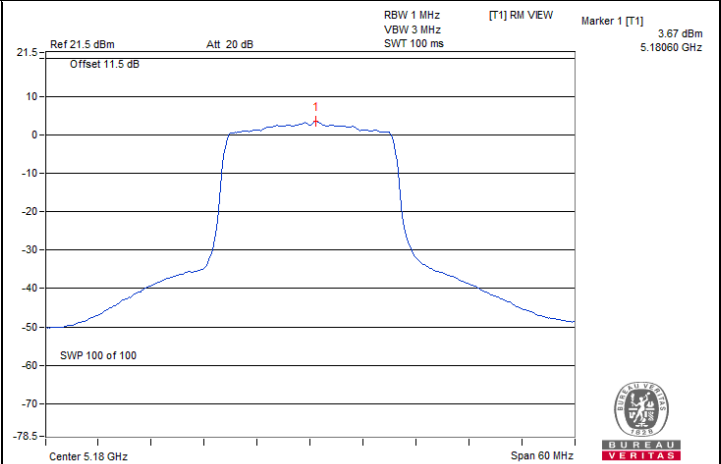


802.11ax (HE20): CH 36

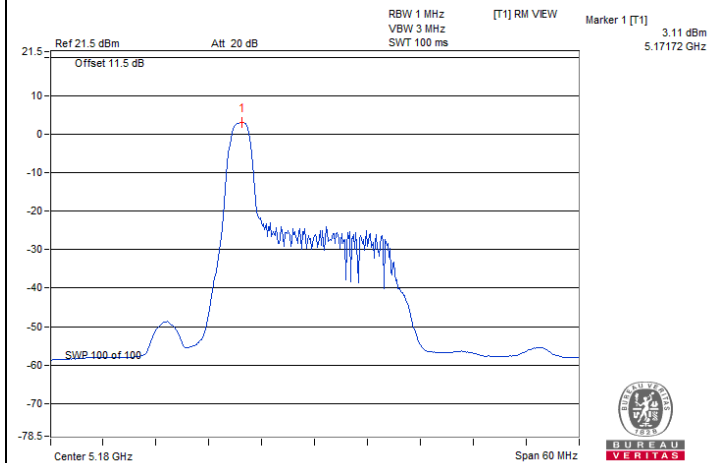


802.11ax (HE20) 26-tone RU: CH 36

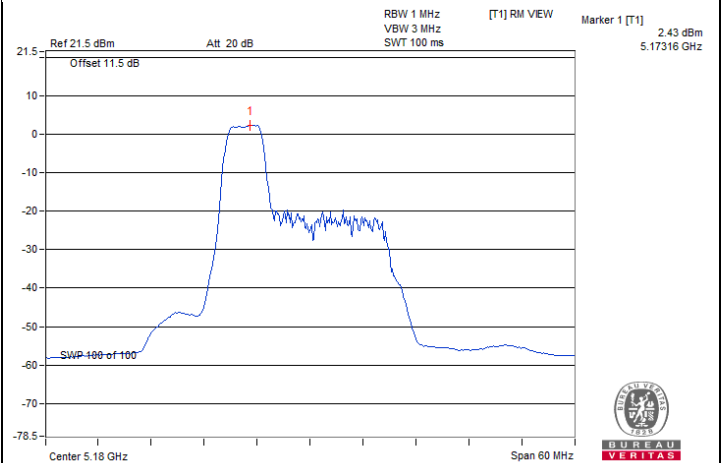

802.11ax (HE20) 52-tone RU: CH 36

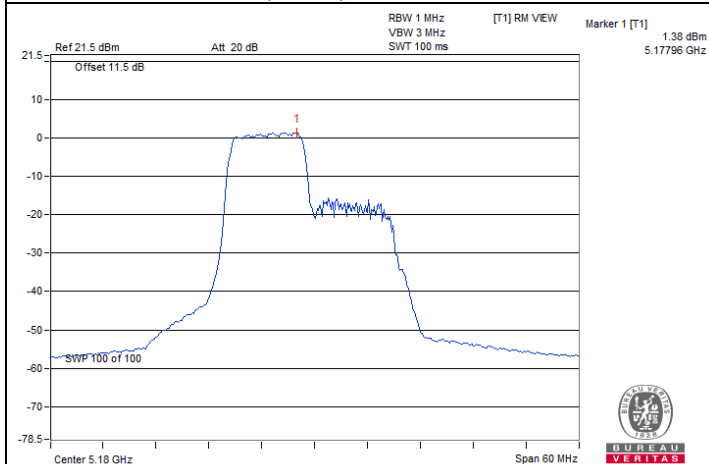


802.11ax (HE20) 106-tone RU: CH 36

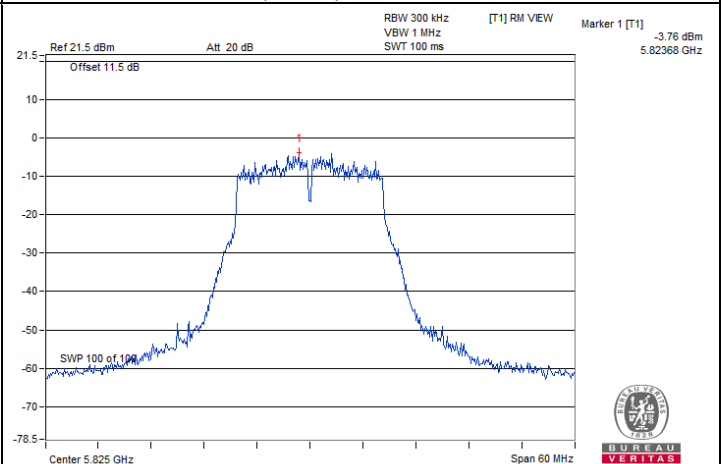


802.11a: CH 165


Spectrum Plot of Maximum Value

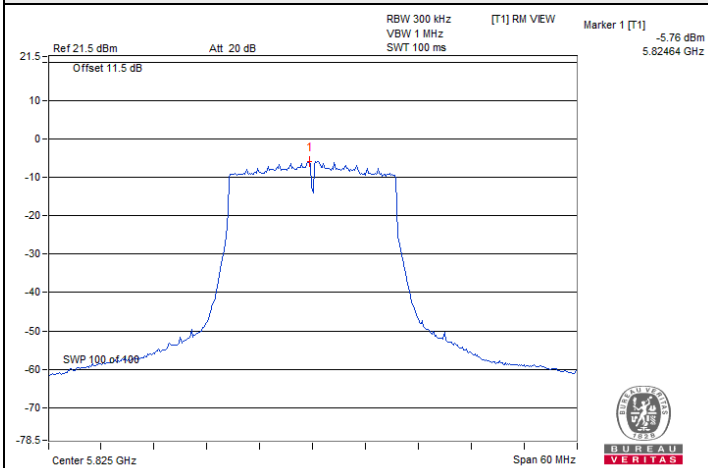


802.11ax (HE20): CH 165

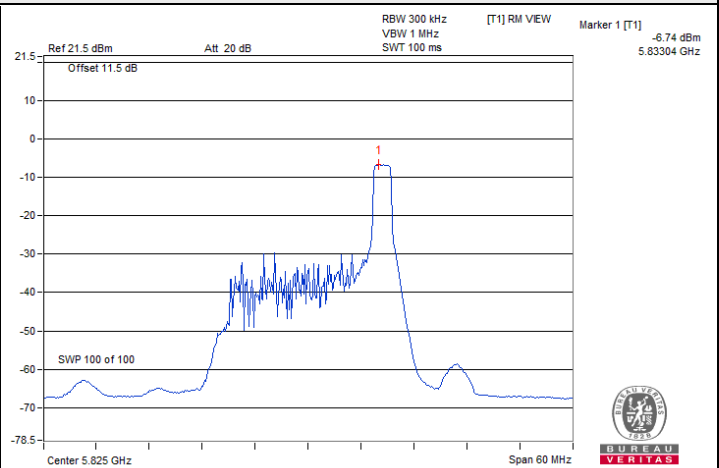

802.11ax (HE20) 26-tone RU: CH 165

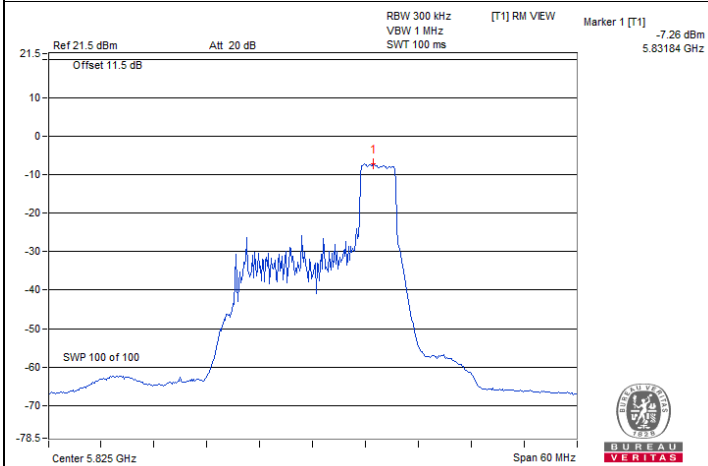

802.11ax (HE20) 52-tone RU: CH 165

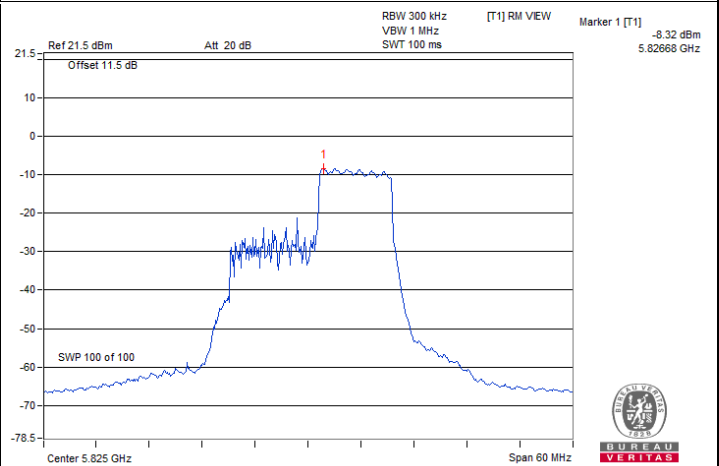

802.11ax (HE20) 106-tone RU: CH 165

7.4 6 dB Bandwidth

Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Lin / Match Tsui / Ivan Tseng
---------------------------	--------------	------------	------------------------------------

802.11a

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
144 (U-NII-3)	5720	2.65	0.5	Pass
149	5745	15.85	0.5	Pass
157	5785	15.93	0.5	Pass
165	5825	15.89	0.5	Pass

802.11ax (HE20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
144 (U-NII-3)	5720	4.39	0.5	Pass
149	5745	18.75	0.5	Pass
157	5785	18.86	0.5	Pass
165	5825	18.8	0.5	Pass

802.11ax (HE20) 26-tone RU

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
144 (U-NII-3)	5720	2.12	0.5	Pass
149	5745	2.17	0.5	Pass
157	5785	2.16	0.5	Pass
165	5825	2.16	0.5	Pass


802.11ax (HE20) 52-tone RU

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
144 (U-NII-3)	5720	4.46	0.5	Pass
149	5745	17.14	0.5	Pass
157	5785	17.1	0.5	Pass
165	5825	17.07	0.5	Pass


802.11ax (HE20) 106-tone RU

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
144 (U-NII-3)	5720	4.52	0.5	Pass
149	5745	17.28	0.5	Pass
157	5785	17.27	0.5	Pass
165	5825	17.26	0.5	Pass


Spectrum Plot of Minimum Value

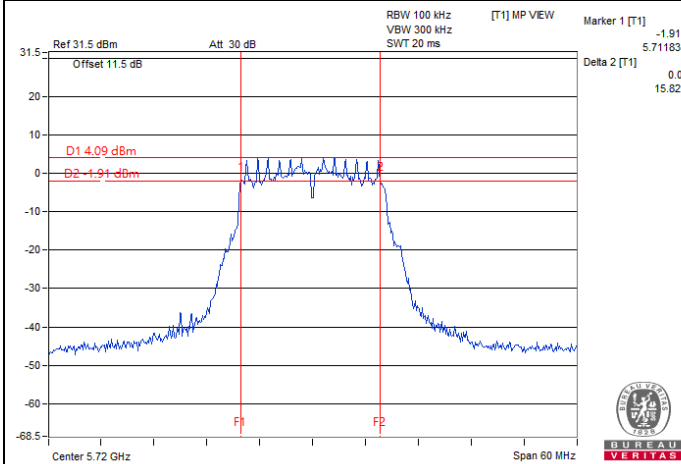


802.11a: CH 144 (U-NII-3)

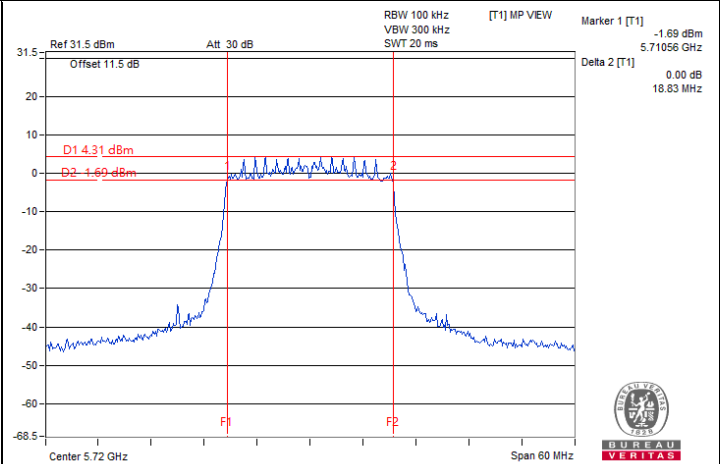


802.11ax (HE20): CH 144 (U-NII-3)

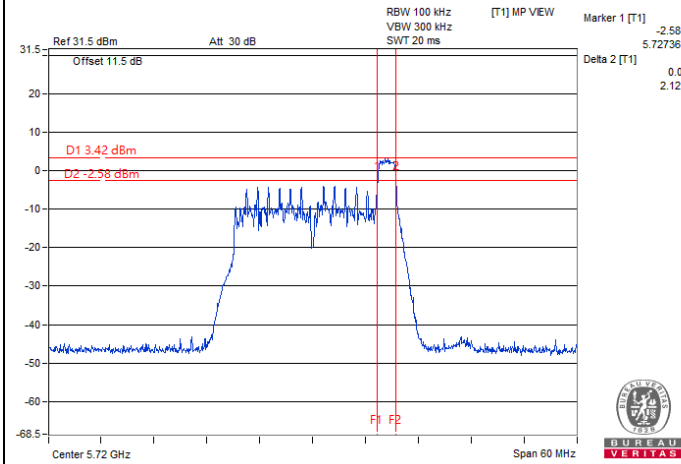

802.11ax (HE20) 26-tone RU: CH 144 (U-NII-3)

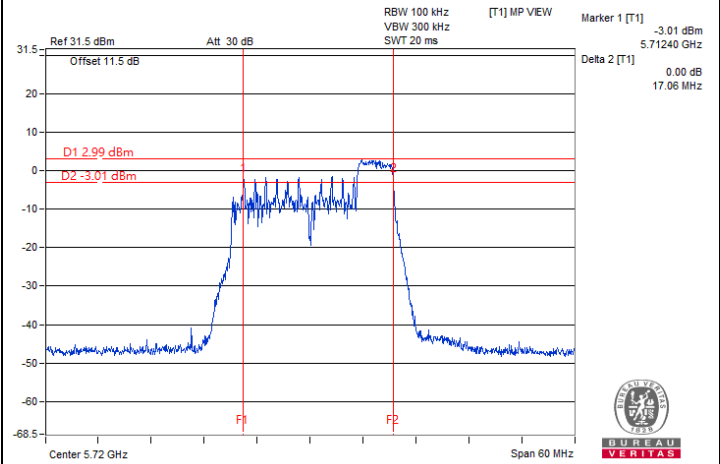

802.11ax (HE20) 52-tone RU: CH 144 (U-NII-3)

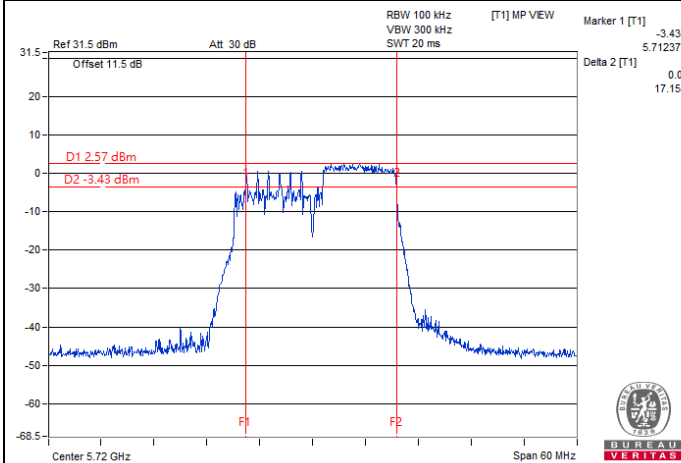

802.11ax (HE20) 106-tone RU: CH 144 (U-NII-3)

Note: For U-NII-3 straddle channel = Marker 1 + Delta 2 - 5725 MHz

7.5 Occupied Bandwidth

Environmental Conditions:	25°C, 60% RH	Tested By:	Gary Lin / Match Tsui / Ivan Tseng
---------------------------	--------------	------------	------------------------------------

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
36	5180	16.8
40	5200	16.8
48	5240	16.8
52	5260	16.8
60	5300	16.8
64	5320	16.68
100	5500	16.8
120	5600	16.8
140	5700	16.68
144 (U-NII-2C)	5720	13.4
144 (U-NII-3)	5720	3.34
149	5745	16.68
157	5785	16.68
165	5825	16.68

802.11ax (HE20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
36	5180	19.08
40	5200	19.08
48	5240	19.08
52	5260	19.08
60	5300	19.2
64	5320	19.08
100	5500	19.08
120	5600	19.08
140	5700	19.2
144 (U-NII-2C)	5720	14.72
144 (U-NII-3)	5720	4.48
149	5745	19.08
157	5785	19.08
165	5825	19.08

802.11ax (HE20) 26-tone RU

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
36	5180	18.48
40	5200	18.3
48	5240	18.48
52	5260	18.6
60	5300	18.42
64	5320	18.48
100	5500	18.42
120	5600	18.3
140	5700	18.54
144 (U-NII-2C)	5720	13.7
144 (U-NII-3)	5720	4.9
149	5745	18.48
157	5785	18.48
165	5825	18.6


802.11ax (HE20) 52-tone RU

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
36	5180	18.06
40	5200	18.3
48	5240	18.36
52	5260	18.24
60	5300	18.24
64	5320	18.42
100	5500	18.24
120	5600	18.3
140	5700	18.36
144 (U-NII-2C)	5720	13.7
144 (U-NII-3)	5720	4.72
149	5745	18.24
157	5785	18.12
165	5825	18.48


802.11ax (HE20) 106-tone RU

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
36	5180	18.24
40	5200	18.24
48	5240	18.3
52	5260	18.24
60	5300	18.3
64	5320	18.36
100	5500	18.3
120	5600	18.3
140	5700	18.36
144 (U-NII-2C)	5720	13.76
144 (U-NII-3)	5720	4.6
149	5745	18.24
157	5785	18.24
165	5825	18.36


Spectrum Plot of Maximum Value

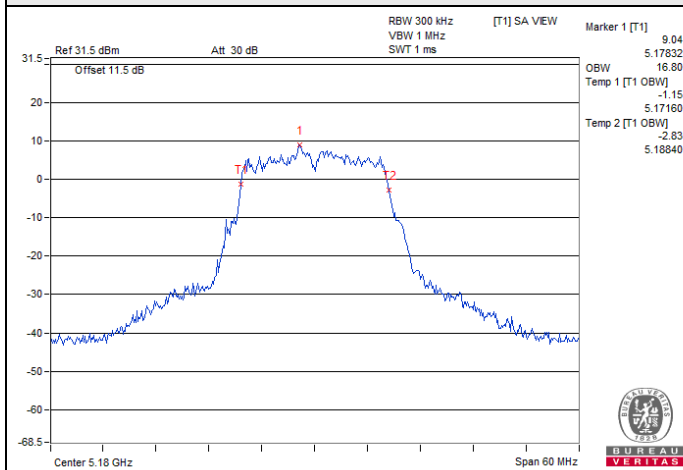


802.11a: CH 36

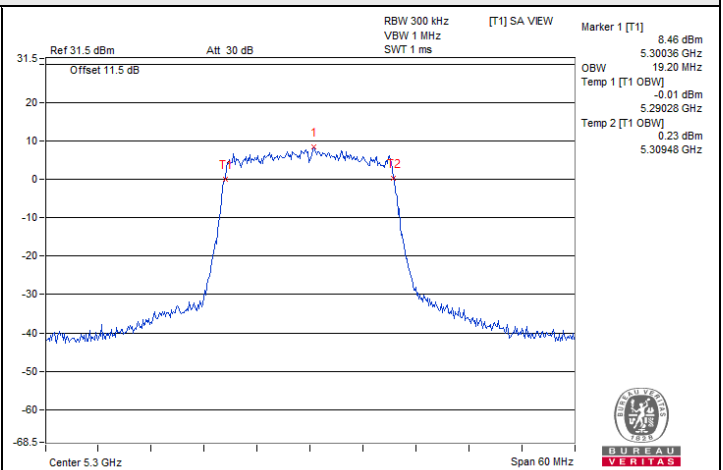


802.11ax (HE20): CH 60

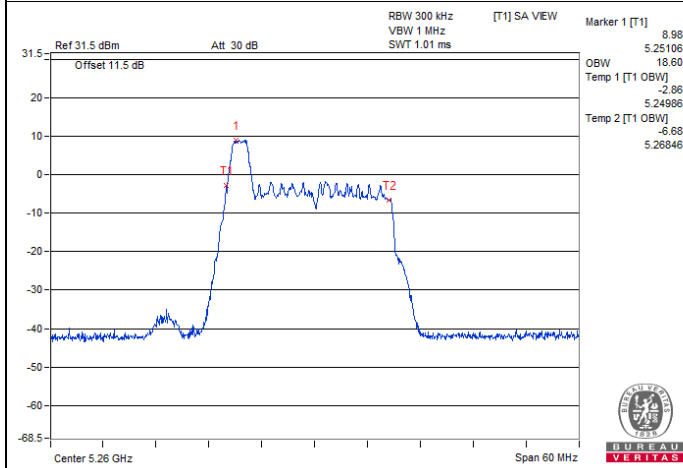

802.11ax (HE20) 26-tone RU: CH 52

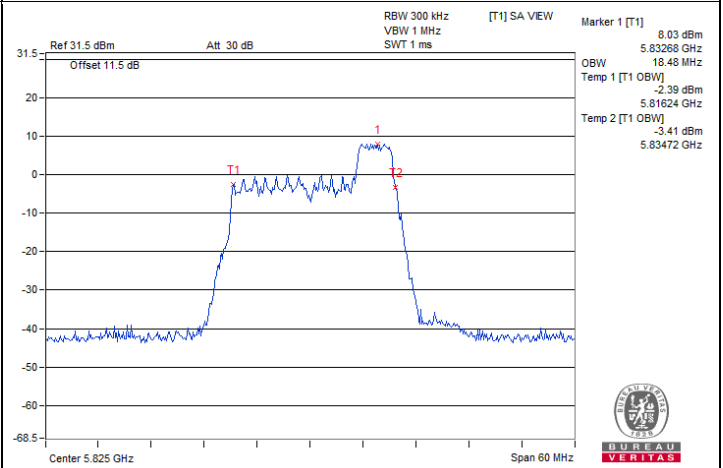


802.11ax (HE20) 52-tone RU: CH 165

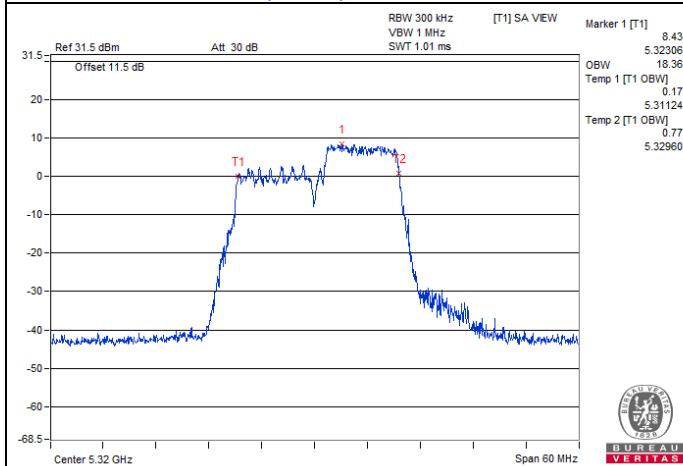


802.11ax (HE20) 106-tone RU: CH 64


Spectrum Plot for nearby DFS band
(DFS is required, if 99% OCP straddle into U-NII-2A)

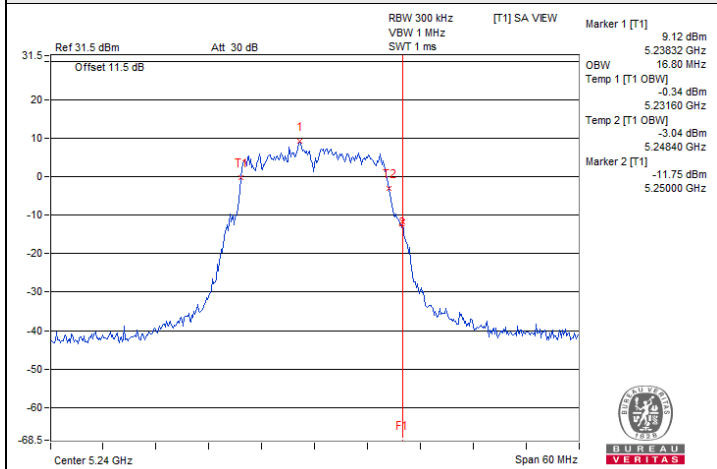


802.11a: CH 48

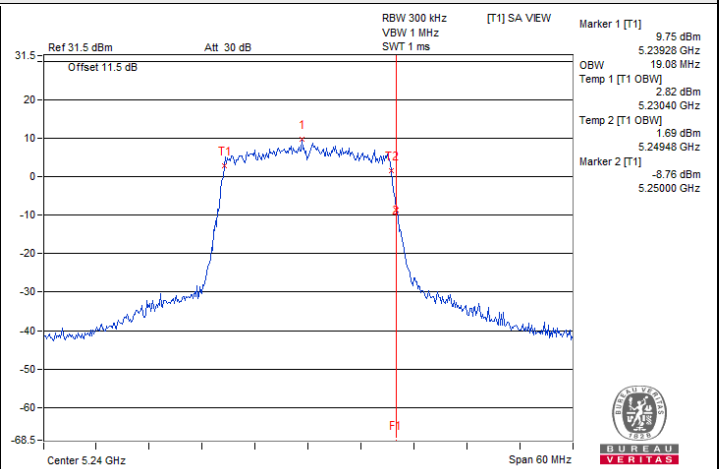


802.11ax (HE20): CH 48

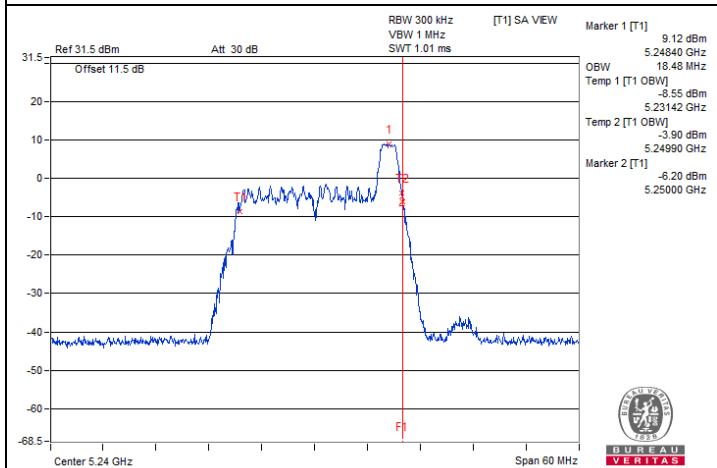

802.11ax (HE20) 26-tone RU: CH 48





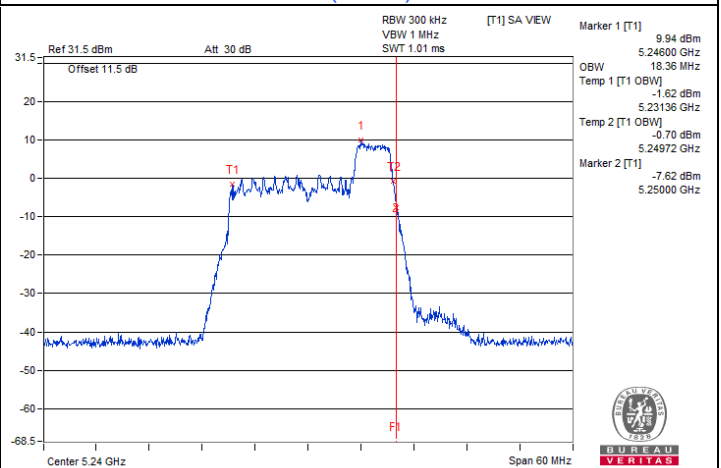


802.11ax (HE20) 52-tone RU: CH 48

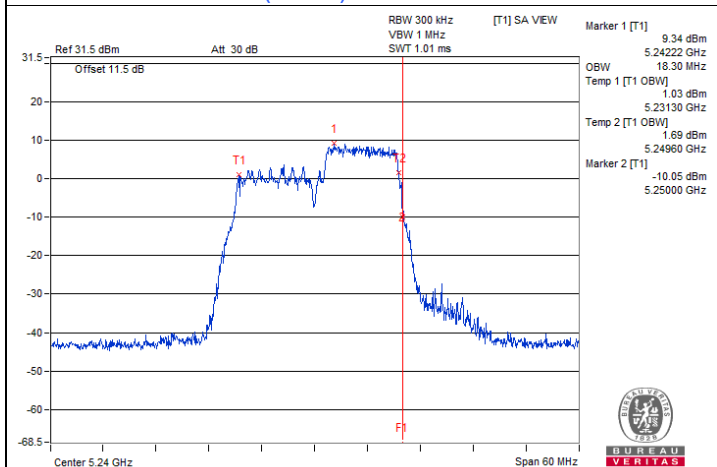

802.11ax (HE20) 106-tone RU: CH 48

Spectrum Plot for nearby DFS band (DFS is required, if 99% OCP straddle into U-NII-2C)

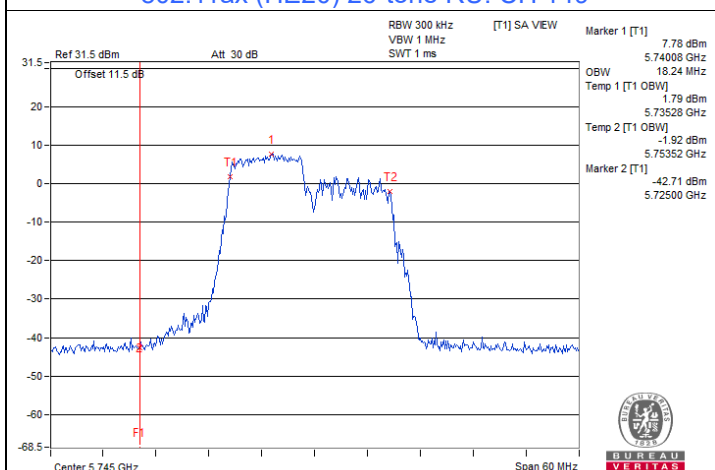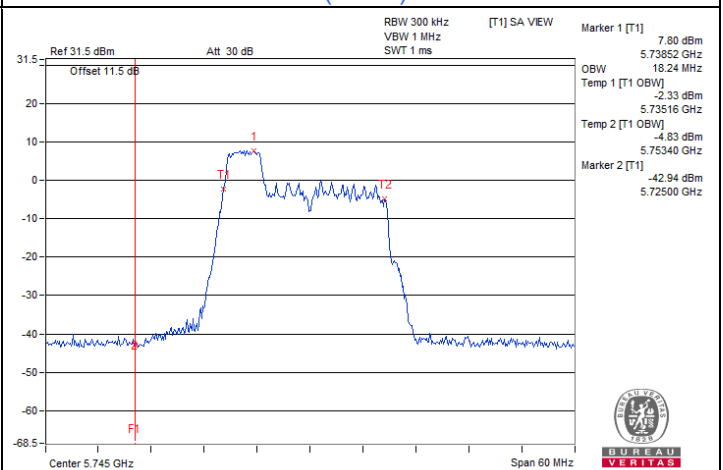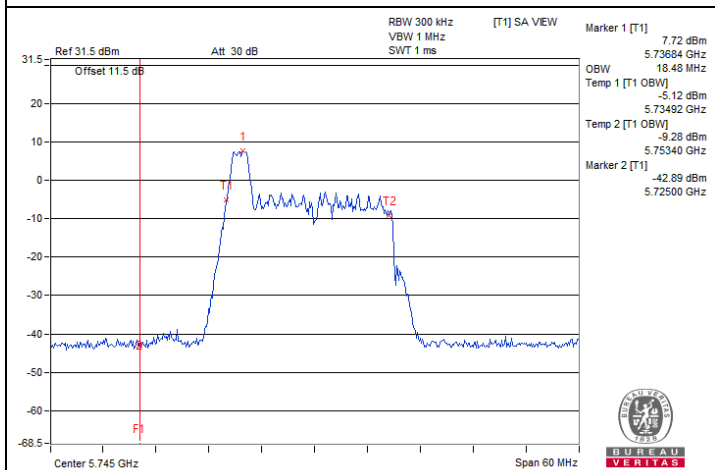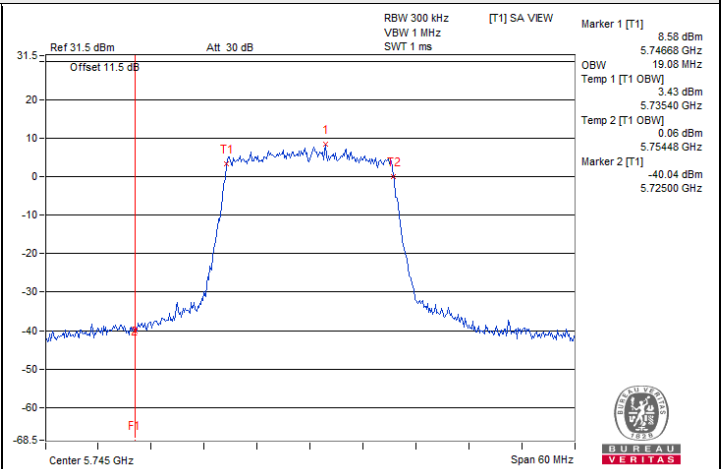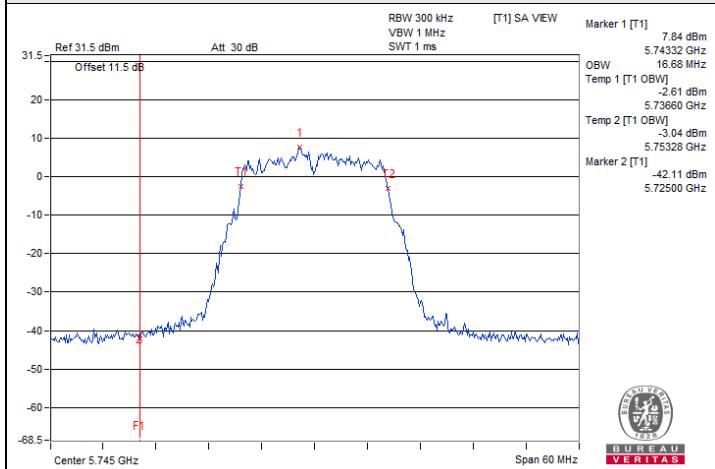


7.6 AC Power Conducted Emissions

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.32119	9.77	25.44	18.67	35.21	28.44	59.68	49.68	-24.47	-21.24
2	0.53800	9.79	31.55	23.40	41.34	33.19	56.00	46.00	-14.66	-12.81
3	0.75000	9.80	17.54	15.81	27.34	25.61	56.00	46.00	-28.66	-20.39
4	0.96600	9.81	12.85	5.46	22.66	15.27	56.00	46.00	-33.34	-30.73
5	2.23305	9.88	16.42	7.83	26.30	17.71	56.00	46.00	-29.70	-28.29
6	11.49400	9.99	11.69	3.88	21.68	13.87	60.00	50.00	-38.32	-36.13

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

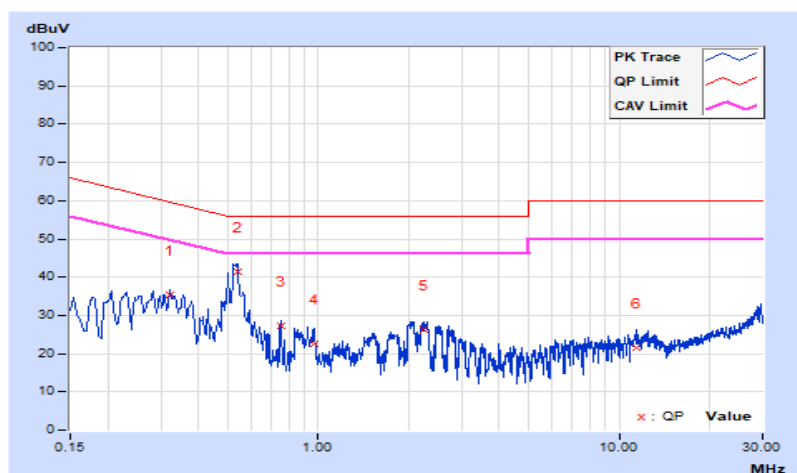


RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75% RH
Tested By	Vanness Huang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.31698	9.78	25.29	14.53	35.07	24.31	59.79	49.79	-24.72	-25.48
2	0.53800	9.79	33.13	24.82	42.92	34.61	56.00	46.00	-13.08	-11.39
3	0.75000	9.79	16.08	15.17	25.87	24.96	56.00	46.00	-30.13	-21.04
4	1.54600	9.84	13.97	4.72	23.81	14.56	56.00	46.00	-32.19	-31.44
5	2.05400	9.88	17.73	6.42	27.61	16.30	56.00	46.00	-28.39	-29.70
6	2.67000	9.90	13.57	2.84	23.47	12.74	56.00	46.00	-32.53	-33.26

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

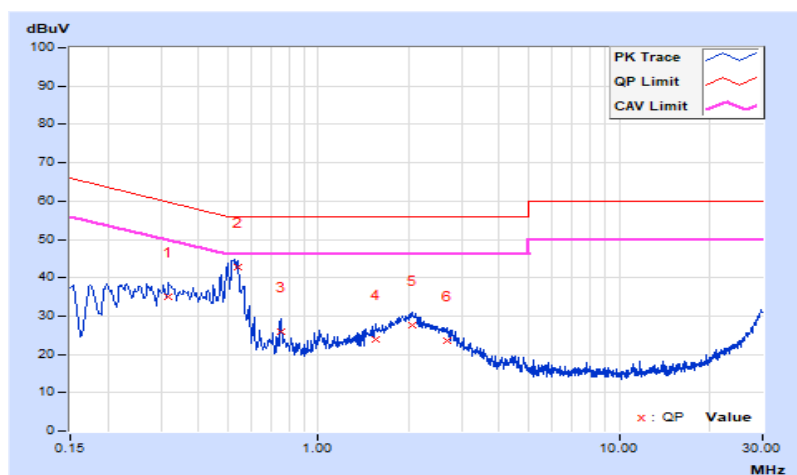


7.7 Unwanted Emissions below 1 GHz

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Sian Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	26.1 QP	40.0	-13.9	2.00 H	114	38.9	-12.8
2	148.34	23.6 QP	43.5	-19.9	2.00 H	16	36.0	-12.4
3	208.48	24.6 QP	43.5	-18.9	2.00 H	253	40.6	-16.0
4	267.65	25.9 QP	46.0	-20.1	1.00 H	148	38.7	-12.8
5	761.38	32.8 QP	46.0	-13.2	1.00 H	77	33.8	-1.0
6	948.59	36.8 QP	46.0	-9.2	1.00 H	183	35.2	1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

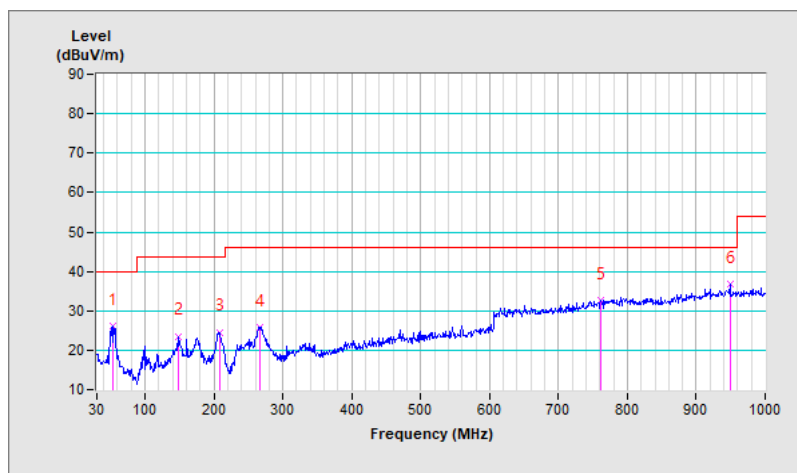


RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120 kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 67% RH
Tested By	Sian Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.97	32.9 QP	40.0	-7.1	1.00 V	218	47.2	-14.3
2	60.07	24.9 QP	40.0	-15.1	1.00 V	16	38.5	-13.6
3	140.58	22.1 QP	43.5	-21.4	1.00 V	278	35.0	-12.9
4	206.54	23.3 QP	43.5	-20.2	1.00 V	71	39.3	-16.0
5	266.68	23.5 QP	46.0	-22.5	2.00 V	212	36.5	-13.0
6	945.68	36.3 QP	46.0	-9.7	2.00 V	324	34.7	1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

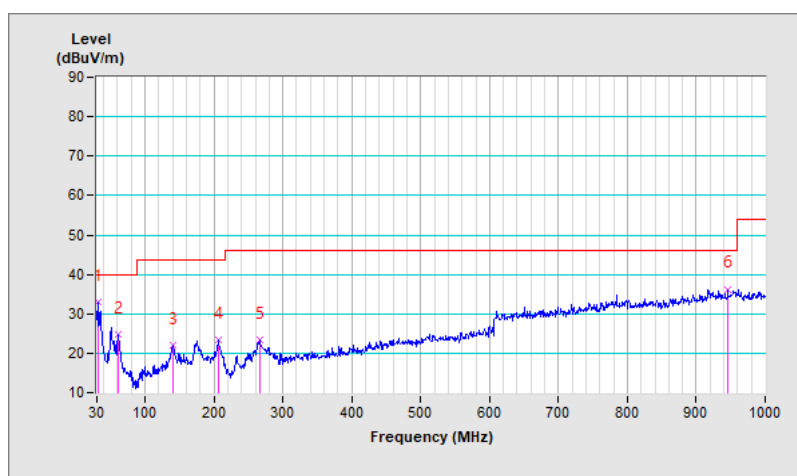

7.8 Unwanted Emissions above 1 GHz

RF Mode	802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.3 PK	74.0	-14.7	2.09 H	322	56.0	3.3
2	5150.00	49.0 AV	54.0	-5.0	2.09 H	322	45.7	3.3
3	*5180.00	107.2 PK			2.09 H	322	66.3	40.9
4	*5180.00	99.2 AV			2.09 H	322	58.3	40.9
5	#10360.00	57.7 PK	68.2	-10.5	2.16 H	334	48.3	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.3 PK	74.0	-15.7	1.92 V	244	55.0	3.3
2	5150.00	48.7 AV	54.0	-5.3	1.92 V	244	45.4	3.3
3	*5180.00	106.5 PK			1.92 V	244	65.6	40.9
4	*5180.00	98.7 AV			1.92 V	244	57.8	40.9
5	#10360.00	57.4 PK	68.2	-10.8	1.58 V	177	48.0	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	107.7 PK			1.84 H	321	66.8	40.9
2	*5200.00	99.5 AV			1.84 H	321	58.6	40.9
3	#10400.00	58.0 PK	68.2	-10.2	2.12 H	322	48.7	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	107.1 PK			1.95 V	241	66.2	40.9
2	*5200.00	98.8 AV			1.95 V	241	57.9	40.9
3	#10400.00	57.8 PK	68.2	-10.4	1.54 V	177	48.5	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	106.8 PK			1.84 H	319	66.0	40.8
2	*5240.00	98.7 AV			1.84 H	319	57.9	40.8
3	5350.00	58.9 PK	74.0	-15.1	1.84 H	319	55.6	3.3
4	5350.00	48.4 AV	54.0	-5.6	1.84 H	319	45.1	3.3
5	#10480.00	58.5 PK	68.2	-9.7	2.10 H	334	48.8	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	105.9 PK			1.92 V	245	65.1	40.8
2	*5240.00	97.9 AV			1.92 V	245	57.1	40.8
3	5350.00	58.5 PK	74.0	-15.5	1.92 V	245	55.2	3.3
4	5350.00	48.3 AV	54.0	-5.7	1.92 V	245	45.0	3.3
5	#10480.00	58.3 PK	68.2	-9.9	1.52 V	173	48.6	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.9 PK	74.0	-15.1	1.91 H	318	55.6	3.3
2	5150.00	48.3 AV	54.0	-5.7	1.91 H	318	45.0	3.3
3	*5260.00	107.1 PK			1.91 H	318	66.3	40.8
4	*5260.00	99.0 AV			1.91 H	318	58.2	40.8
5	#10520.00	58.1 PK	68.2	-10.1	2.14 H	327	48.1	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.8 PK	74.0	-15.2	1.82 V	239	55.5	3.3
2	5150.00	48.5 AV	54.0	-5.5	1.82 V	239	45.2	3.3
3	*5260.00	104.9 PK			1.82 V	239	64.1	40.8
4	*5260.00	97.0 AV			1.82 V	239	56.2	40.8
5	#10520.00	57.8 PK	68.2	-10.4	1.53 V	174	47.8	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	106.0 PK			1.91 H	317	65.2	40.8
2	*5300.00	98.2 AV			1.91 H	317	57.4	40.8
3	10600.00	58.1 PK	74.0	-15.9	2.18 H	322	48.0	10.1
4	10600.00	44.9 AV	54.0	-9.1	2.18 H	322	34.8	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	105.5 PK			1.84 V	237	64.7	40.8
2	*5300.00	97.6 AV			1.84 V	237	56.8	40.8
3	10600.00	57.9 PK	74.0	-16.1	1.50 V	178	47.8	10.1
4	10600.00	44.7 AV	54.0	-9.3	1.50 V	178	34.6	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	106.5 PK			1.76 H	317	65.7	40.8
2	*5320.00	98.1 AV			1.76 H	317	57.3	40.8
3	5350.00	59.7 PK	74.0	-14.3	1.76 H	317	56.4	3.3
4	5350.00	48.8 AV	54.0	-5.2	1.76 H	317	45.5	3.3
5	10640.00	58.7 PK	74.0	-15.3	2.16 H	327	48.3	10.4
6	10640.00	45.5 AV	54.0	-8.5	2.16 H	327	35.1	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	105.7 PK			1.89 V	240	64.9	40.8
2	*5320.00	97.4 AV			1.89 V	240	56.6	40.8
3	5350.00	59.0 PK	74.0	-15.0	1.89 V	240	55.7	3.3
4	5350.00	48.5 AV	54.0	-5.5	1.89 V	240	45.2	3.3
5	10640.00	58.5 PK	74.0	-15.5	1.54 V	174	48.1	10.4
6	10640.00	45.2 AV	54.0	-8.8	1.54 V	174	34.8	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.5 PK	74.0	-15.5	2.38 H	293	55.1	3.4
2	5460.00	48.5 AV	54.0	-5.5	2.38 H	293	45.1	3.4
3	#5470.00	60.5 PK	68.2	-7.7	2.38 H	293	57.1	3.4
4	*5500.00	107.2 PK			2.38 H	293	66.1	41.1
5	*5500.00	99.2 AV			2.38 H	293	58.1	41.1
6	11000.00	59.2 PK	74.0	-14.8	2.28 H	320	48.8	10.4
7	11000.00	46.0 AV	54.0	-8.0	2.28 H	320	35.6	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.7 PK	74.0	-15.3	1.91 V	244	55.3	3.4
2	5460.00	48.4 AV	54.0	-5.6	1.91 V	244	45.0	3.4
3	#5470.00	60.0 PK	68.2	-8.2	1.91 V	244	56.6	3.4
4	*5500.00	106.6 PK			1.91 V	244	65.5	41.1
5	*5500.00	98.4 AV			1.91 V	244	57.3	41.1
6	11000.00	58.9 PK	74.0	-15.1	1.52 V	178	48.5	10.4
7	11000.00	45.7 AV	54.0	-8.3	1.52 V	178	35.3	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	109.5 PK			2.44 H	292	67.9	41.6
2	*5600.00	101.7 AV			2.44 H	292	60.1	41.6
3	11200.00	58.9 PK	74.0	-15.1	2.27 H	318	48.7	10.2
4	11200.00	45.6 AV	54.0	-8.4	2.27 H	318	35.4	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	109.0 PK			1.90 V	245	67.4	41.6
2	*5600.00	101.2 AV			1.90 V	245	59.6	41.6
3	11200.00	58.7 PK	74.0	-15.3	1.59 V	188	48.5	10.2
4	11200.00	45.5 AV	54.0	-8.5	1.59 V	188	35.3	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	107.3 PK			2.40 H	292	65.3	42.0
2	*5700.00	99.3 AV			2.40 H	292	57.3	42.0
3	#5725.00	60.9 PK	68.2	-7.3	2.40 H	292	56.5	4.4
4	11400.00	59.6 PK	74.0	-14.4	2.26 H	324	48.6	11.0
5	11400.00	46.4 AV	54.0	-7.6	2.26 H	324	35.4	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	106.8 PK			1.94 V	247	64.8	42.0
2	*5700.00	98.8 AV			1.94 V	247	56.8	42.0
3	#5725.00	60.8 PK	68.2	-7.4	1.94 V	247	56.4	4.4
4	11400.00	59.8 PK	74.0	-14.2	1.57 V	182	48.8	11.0
5	11400.00	46.5 AV	54.0	-7.5	1.57 V	182	35.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.7 PK	68.2	-10.5	2.58 H	290	54.3	3.4
2	*5720.00	107.4 PK			2.58 H	290	65.4	42.0
3	*5720.00	99.3 AV			2.58 H	290	57.3	42.0
4	#5725.00	59.2 PK	68.2	-9.0	2.58 H	290	54.8	4.4
5	11440.00	59.8 PK	74.0	-14.2	2.07 H	320	48.8	11.0
6	11440.00	46.5 AV	54.0	-7.5	2.07 H	320	35.5	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	58.8 PK	68.2	-9.4	1.89 V	240	55.4	3.4
2	*5720.00	106.6 PK			1.89 V	240	64.6	42.0
3	*5720.00	98.6 AV			1.89 V	240	56.6	42.0
4	#5725.00	59.7 PK	68.2	-8.5	1.89 V	240	55.3	4.4
5	11440.00	59.6 PK	74.0	-14.4	1.54 V	174	48.6	11.0
6	11440.00	46.2 AV	54.0	-7.8	1.54 V	174	35.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5616.40	58.9 PK	68.2	-9.3	2.60 H	289	54.9	4.0
2	*5745.00	107.8 PK			2.60 H	289	65.7	42.1
3	*5745.00	99.7 AV			2.60 H	289	57.6	42.1
4	#5973.60	60.1 PK	68.2	-8.1	2.60 H	289	55.6	4.5
5	11490.00	59.8 PK	74.0	-14.2	2.10 H	324	48.9	10.9
6	11490.00	46.4 AV	54.0	-7.6	2.10 H	324	35.5	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5622.00	59.7 PK	68.2	-8.5	1.71 V	234	55.5	4.2
2	*5745.00	107.0 PK			1.71 V	234	64.9	42.1
3	*5745.00	98.8 AV			1.71 V	234	56.7	42.1
4	#5962.40	60.2 PK	68.2	-8.0	1.71 V	234	55.8	4.4
5	11490.00	59.4 PK	74.0	-14.6	1.54 V	169	48.5	10.9
6	11490.00	46.1 AV	54.0	-7.9	1.54 V	169	35.2	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5623.20	59.3 PK	68.2	-8.9	2.75 H	287	55.1	4.2
2	*5785.00	107.9 PK			2.75 H	287	65.7	42.2
3	*5785.00	99.9 AV			2.75 H	287	57.7	42.2
4	#5965.60	60.2 PK	68.2	-8.0	2.75 H	287	55.8	4.4
5	11570.00	59.8 PK	74.0	-14.2	2.08 H	326	48.7	11.1
6	11570.00	46.5 AV	54.0	-7.5	2.08 H	326	35.4	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5619.60	59.3 PK	68.2	-8.9	1.70 V	228	55.1	4.2
2	*5785.00	107.1 PK			1.70 V	228	64.9	42.2
3	*5785.00	99.0 AV			1.70 V	228	56.8	42.2
4	#5996.40	60.0 PK	68.2	-8.2	1.70 V	228	55.3	4.7
5	11570.00	59.5 PK	74.0	-14.5	1.57 V	164	48.4	11.1
6	11570.00	46.4 AV	54.0	-7.6	1.57 V	164	35.3	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5629.60	59.0 PK	68.2	-9.2	2.84 H	282	54.8	4.2
2	*5825.00	107.5 PK			2.84 H	282	65.4	42.1
3	*5825.00	99.1 AV			2.84 H	282	57.0	42.1
4	#5984.00	59.3 PK	68.2	-8.9	2.84 H	282	54.7	4.6
5	11650.00	60.0 PK	74.0	-14.0	2.04 H	332	49.0	11.0
6	11650.00	46.7 AV	54.0	-7.3	2.04 H	332	35.7	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5629.20	60.2 PK	68.2	-8.0	1.71 V	224	56.0	4.2
2	*5825.00	106.4 PK			1.71 V	224	64.3	42.1
3	*5825.00	98.2 AV			1.71 V	224	56.1	42.1
4	#5968.00	60.4 PK	68.2	-7.8	1.71 V	224	55.9	4.5
5	11650.00	59.7 PK	74.0	-14.3	1.53 V	168	48.7	11.0
6	11650.00	46.5 AV	54.0	-7.5	1.53 V	168	35.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 36 : 5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.5 PK	74.0	-13.5	2.09 H	322	57.2	3.3
2	5150.00	50.0 AV	54.0	-4.0	2.09 H	322	46.7	3.3
3	*5180.00	110.0 PK			2.09 H	322	69.1	40.9
4	*5180.00	99.2 AV			2.09 H	322	58.3	40.9
5	#10360.00	57.5 PK	68.2	-10.7	2.16 H	334	48.1	9.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.4 PK	74.0	-13.6	1.92 V	244	57.1	3.3
2	5150.00	49.5 AV	54.0	-4.5	1.92 V	244	46.2	3.3
3	*5180.00	109.2 PK			1.92 V	244	68.3	40.9
4	*5180.00	98.4 AV			1.92 V	244	57.5	40.9
5	#10360.00	57.2 PK	68.2	-11.0	1.58 V	177	47.8	9.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 40 : 5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	110.2 PK			1.84 H	321	69.3	40.9
2	*5200.00	98.4 AV			1.84 H	321	57.5	40.9
3	#10400.00	57.8 PK	68.2	-10.4	4.00 H	332	48.5	9.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	109.4 PK			1.95 V	241	68.5	40.9
2	*5200.00	97.6 AV			1.95 V	241	56.7	40.9
3	#10400.00	57.5 PK	68.2	-10.7	1.54 V	177	48.2	9.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 48 : 5240 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	110.1 PK			1.84 H	319	69.3	40.8
2	*5240.00	98.0 AV			1.84 H	319	57.2	40.8
3	5350.00	58.9 PK	74.0	-15.1	1.84 H	319	55.6	3.3
4	5350.00	48.4 AV	54.0	-5.6	1.84 H	319	45.1	3.3
5	#10480.00	57.6 PK	68.2	-10.6	2.10 H	334	47.9	9.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	109.3 PK			1.92 V	245	68.5	40.8
2	*5240.00	97.3 AV			1.92 V	245	56.5	40.8
3	5350.00	57.9 PK	74.0	-16.1	1.92 V	245	54.6	3.3
4	5350.00	47.2 AV	54.0	-6.8	1.92 V	245	43.9	3.3
5	#10480.00	57.3 PK	68.2	-10.9	1.52 V	173	47.6	9.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 52 : 5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.9 PK	74.0	-15.1	1.91 H	318	55.6	3.3
2	5150.00	48.0 AV	54.0	-6.0	1.91 H	318	44.7	3.3
3	*5260.00	108.9 PK			1.91 H	318	68.1	40.8
4	*5260.00	97.6 AV			1.91 H	318	56.8	40.8
5	#10520.00	58.2 PK	68.2	-10.0	2.14 H	327	48.2	10.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.4 PK	74.0	-15.6	1.82 V	239	55.1	3.3
2	5150.00	47.7 AV	54.0	-6.3	1.82 V	239	44.4	3.3
3	*5260.00	108.1 PK			1.82 V	239	67.3	40.8
4	*5260.00	96.8 AV			1.82 V	239	56.0	40.8
5	#10520.00	58.0 PK	68.2	-10.2	1.53 V	174	48.0	10.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 60 : 5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	108.5 PK			1.91 H	317	67.7	40.8
2	*5300.00	97.1 AV			1.91 H	317	56.3	40.8
3	10600.00	57.9 PK	74.0	-16.1	2.18 H	322	47.8	10.1
4	10600.00	44.7 AV	54.0	-9.3	2.18 H	322	34.6	10.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	107.8 PK			1.84 V	237	67.0	40.8
2	*5300.00	96.3 AV			1.84 V	237	55.5	40.8
3	10600.00	57.6 PK	74.0	-16.4	1.50 V	178	47.5	10.1
4	10600.00	44.5 AV	54.0	-9.5	1.50 V	178	34.4	10.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE20)	Channel	CH 64 : 5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	108.1 PK			1.76 H	317	67.3	40.8
2	*5320.00	96.6 AV			1.76 H	317	55.8	40.8
3	5350.00	60.1 PK	74.0	-13.9	1.76 H	317	56.8	3.3
4	5350.00	47.9 AV	54.0	-6.1	1.76 H	317	44.6	3.3
5	10640.00	58.4 PK	74.0	-15.6	2.16 H	327	48.0	10.4
6	10640.00	45.2 AV	54.0	-8.8	2.16 H	327	34.8	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	107.4 PK			1.89 V	240	66.6	40.8
2	*5320.00	95.9 AV			1.89 V	240	55.1	40.8
3	5350.00	57.8 PK	74.0	-16.2	1.89 V	240	54.5	3.3
4	5350.00	47.8 AV	54.0	-6.2	1.89 V	240	44.5	3.3
5	10640.00	58.2 PK	74.0	-15.8	1.54 V	174	47.8	10.4
6	10640.00	45.0 AV	54.0	-9.0	1.54 V	174	34.6	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE20)	Channel	CH 100 : 5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.3 PK	74.0	-14.7	2.38 H	293	55.9	3.4
2	5460.00	50.5 AV	54.0	-3.5	2.38 H	293	47.1	3.4
3	#5470.00	61.1 PK	68.2	-7.1	2.38 H	293	57.7	3.4
4	*5500.00	110.4 PK			2.38 H	293	69.3	41.1
5	*5500.00	99.2 AV			2.38 H	293	58.1	41.1
6	11000.00	59.0 PK	74.0	-15.0	2.28 H	320	48.6	10.4
7	11000.00	45.8 AV	54.0	-8.2	2.28 H	320	35.4	10.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.7 PK	74.0	-15.3	1.91 V	244	55.3	3.4
2	5460.00	50.2 AV	54.0	-3.8	1.91 V	244	46.8	3.4
3	#5470.00	59.6 PK	68.2	-8.6	1.91 V	244	56.2	3.4
4	*5500.00	109.7 PK			1.91 V	244	68.6	41.1
5	*5500.00	98.4 AV			1.91 V	244	57.3	41.1
6	11000.00	58.7 PK	74.0	-15.3	1.52 V	178	48.3	10.4
7	11000.00	45.6 AV	54.0	-8.4	1.52 V	178	35.2	10.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 120 : 5600 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	112.0 PK			2.44 H	292	70.4	41.6
2	*5600.00	100.8 AV			2.44 H	292	59.2	41.6
3	11200.00	58.6 PK	74.0	-15.4	2.27 H	318	48.4	10.2
4	11200.00	45.4 AV	54.0	-8.6	2.27 H	318	35.2	10.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5600.00	111.4 PK			2.27 V	318	69.8	41.6
2	*5600.00	100.4 AV			2.27 V	318	58.8	41.6
3	11200.00	58.5 PK	74.0	-15.5	1.59 V	188	48.3	10.2
4	11200.00	45.2 AV	54.0	-8.8	1.59 V	188	35.0	10.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE20)	Channel	CH 140 : 5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	109.7 PK			2.40 H	292	67.7	42.0
2	*5700.00	97.9 AV			2.40 H	292	55.9	42.0
3	#5725.00	63.5 PK	68.2	-4.7	2.40 H	292	59.1	4.4
4	11400.00	59.5 PK	74.0	-14.5	1.16 H	284	48.5	11.0
5	11400.00	46.1 AV	54.0	-7.9	1.16 H	284	35.1	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	109.2 PK			1.94 V	247	67.2	42.0
2	*5700.00	97.3 AV			1.94 V	247	55.3	42.0
3	#5725.00	63.3 PK	68.2	-4.9	1.94 V	247	58.9	4.4
4	11400.00	59.1 PK	74.0	-14.9	2.26 V	324	48.1	11.0
5	11400.00	46.0 AV	54.0	-8.0	2.26 V	324	35.0	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 144 : 5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	58.0 PK	68.2	-10.2	2.58 H	290	54.6	3.4
2	*5720.00	110.2 PK			2.58 H	290	68.2	42.0
3	*5720.00	98.4 AV			2.58 H	290	56.4	42.0
4	#5725.00	59.7 PK	68.2	-8.5	2.58 H	290	55.3	4.4
5	11440.00	59.6 PK	74.0	-14.4	2.07 H	320	48.6	11.0
6	11440.00	46.2 AV	54.0	-7.8	2.07 H	320	35.2	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	58.3 PK	68.2	-9.9	1.72 V	238	54.9	3.4
2	*5720.00	109.4 PK			1.72 V	238	67.4	42.0
3	*5720.00	97.7 AV			1.72 V	238	55.7	42.0
4	#5725.00	59.9 PK	68.2	-8.3	1.72 V	238	55.5	4.4
5	11440.00	59.2 PK	74.0	-14.8	1.58 V	181	48.2	11.0
6	11440.00	45.9 AV	54.0	-8.1	1.58 V	181	34.9	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 149 : 5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5639.60	60.0 PK	68.2	-8.2	2.60 H	289	55.8	4.2
2	*5745.00	110.3 PK			2.60 H	289	68.2	42.1
3	*5745.00	99.3 AV			2.60 H	289	57.2	42.1
4	#5969.60	59.6 PK	68.2	-8.6	2.60 H	289	55.1	4.5
5	11490.00	59.6 PK	74.0	-14.4	2.10 H	324	48.7	10.9
6	11490.00	46.3 AV	54.0	-7.7	2.10 H	324	35.4	10.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5613.60	59.5 PK	68.2	-8.7	1.71 V	234	55.5	4.0
2	*5745.00	109.5 PK			1.71 V	234	67.4	42.1
3	*5745.00	98.6 AV			1.71 V	234	56.5	42.1
4	#5948.40	59.5 PK	68.2	-8.7	1.71 V	234	55.1	4.4
5	11490.00	59.3 PK	74.0	-14.7	1.54 V	169	48.4	10.9
6	11490.00	46.1 AV	54.0	-7.9	1.54 V	169	35.2	10.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5636.80	60.8 PK	68.2	-7.4	2.75 H	287	56.6	4.2
2	*5785.00	109.4 PK			2.75 H	287	67.2	42.2
3	*5785.00	99.0 AV			2.75 H	287	56.8	42.2
4	#5960.80	60.4 PK	68.2	-7.8	2.75 H	287	56.0	4.4
5	11570.00	59.7 PK	74.0	-14.3	2.08 H	326	48.6	11.1
6	11570.00	46.4 AV	54.0	-7.6	2.08 H	326	35.3	11.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5623.60	59.9 PK	68.2	-8.3	1.70 V	228	55.7	4.2
2	*5785.00	108.6 PK			1.70 V	228	66.4	42.2
3	*5785.00	98.1 AV			1.70 V	228	55.9	42.2
4	#5975.20	60.3 PK	68.2	-7.9	1.70 V	228	55.8	4.5
5	11570.00	59.4 PK	74.0	-14.6	1.57 V	164	48.3	11.1
6	11570.00	46.4 AV	54.0	-7.6	1.57 V	164	35.3	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23 °C, 64% RH
Tested By	Karl Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5620.00	61.2 PK	68.2	-7.0	2.84 H	282	57.0	4.2
2	*5825.00	109.8 PK			2.84 H	282	67.7	42.1
3	*5825.00	98.0 AV			2.84 H	282	55.9	42.1
4	#5972.80	59.8 PK	68.2	-8.4	2.84 H	282	55.3	4.5
5	11650.00	60.0 PK	74.0	-14.0	2.04 H	332	49.0	11.0
6	11650.00	46.7 AV	54.0	-7.3	2.04 H	332	35.7	11.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5628.00	60.0 PK	68.2	-8.2	1.71 V	224	55.8	4.2
2	*5825.00	109.0 PK			1.71 V	224	66.9	42.1
3	*5825.00	97.3 AV			1.71 V	224	55.2	42.1
4	#5961.60	59.7 PK	68.2	-8.5	1.71 V	224	55.3	4.4
5	11650.00	59.8 PK	74.0	-14.2	1.53 V	168	48.8	11.0
6	11650.00	46.4 AV	54.0	-7.6	1.53 V	168	35.4	11.0


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.


Plot of Band Edge

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 kHz, DET=Peak
-----------------	--------------------	-------------------------------	---


802.11a Channel 36

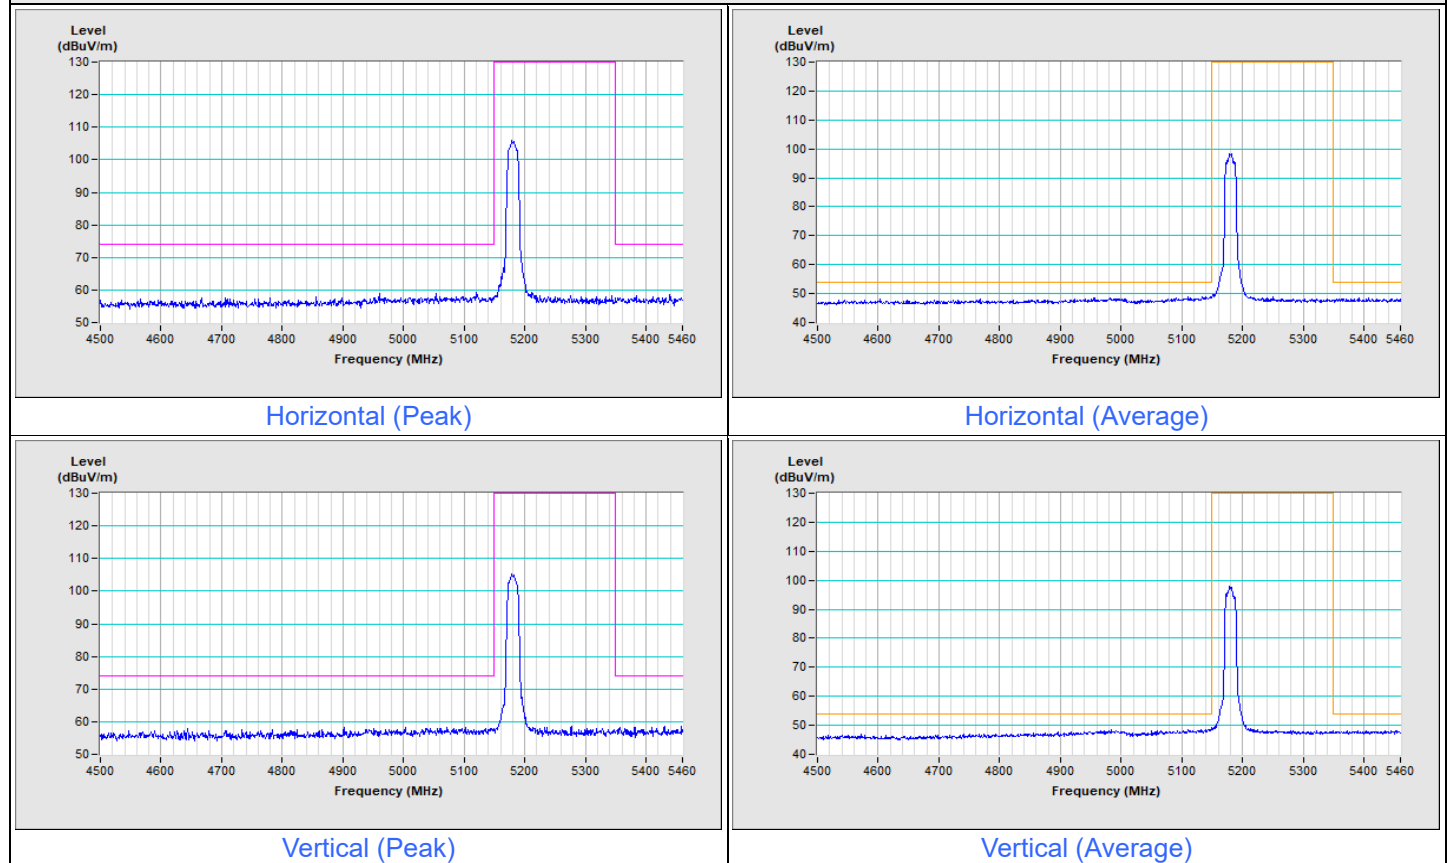


802.11a Channel 64

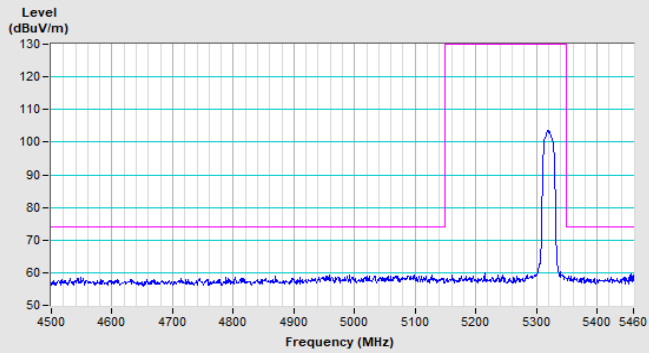


Horizontal (Peak)

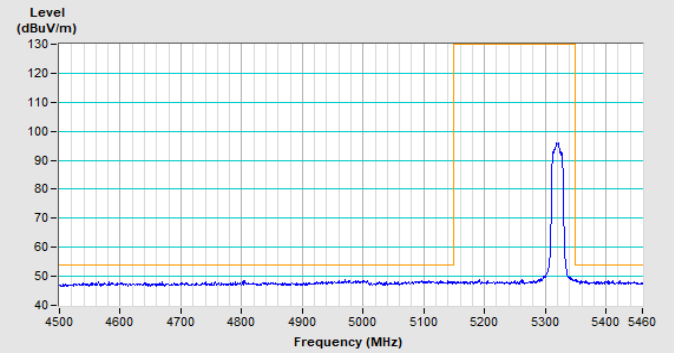

Horizontal (Average)

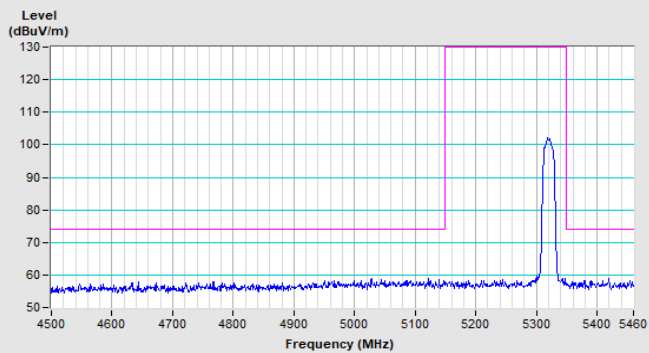


Vertical (Peak)

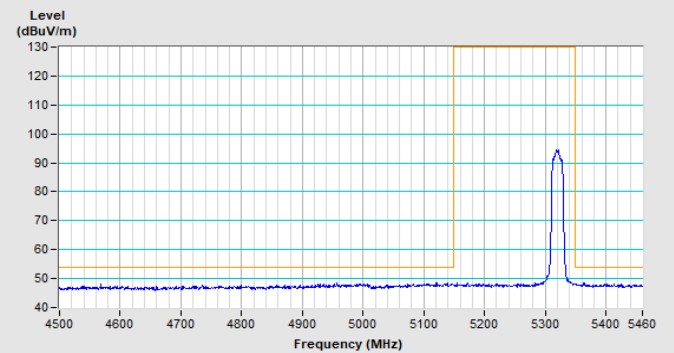


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 kHz, DET=Peak
-----------------	---------------------	-------------------------------	---


802.11a Channel 100

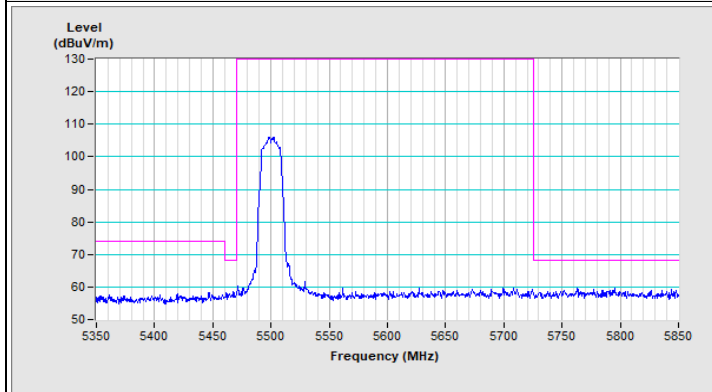


Horizontal (Peak)

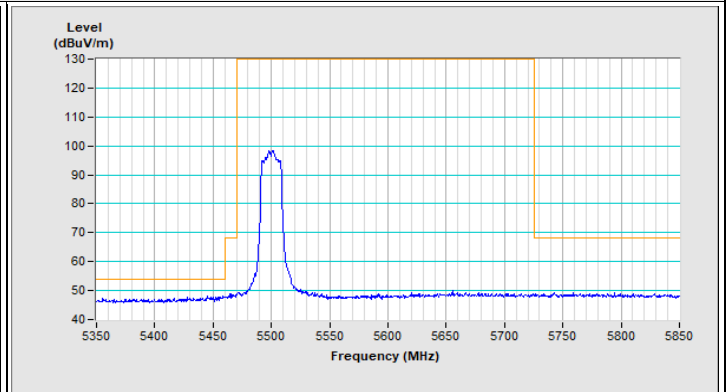

Horizontal (Average)

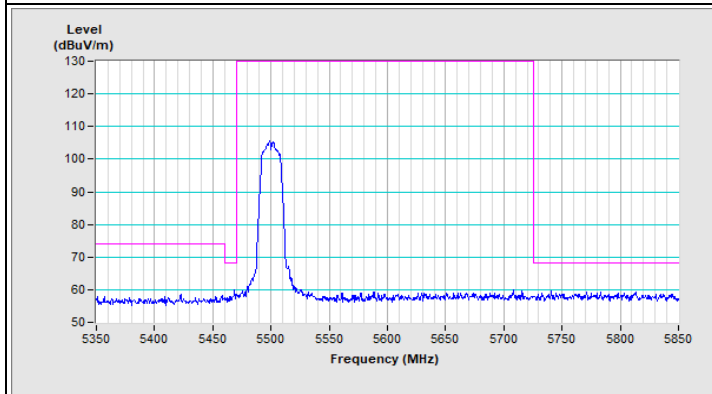


Vertical (Peak)

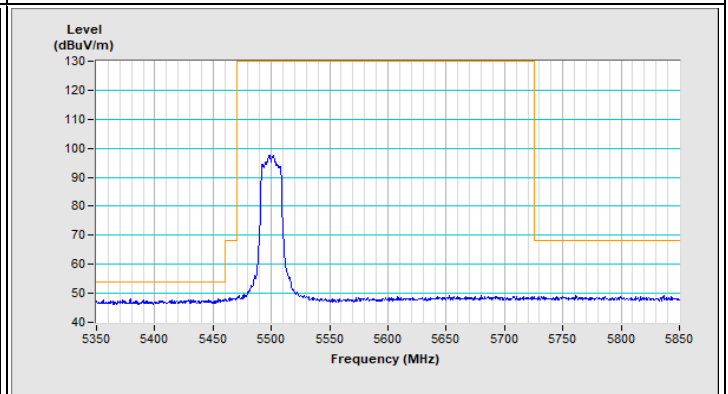


Vertical (Average)

802.11a Channel 140

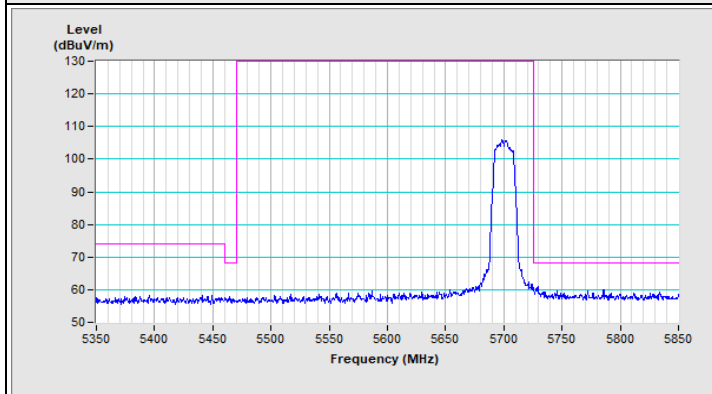


Horizontal (Peak)

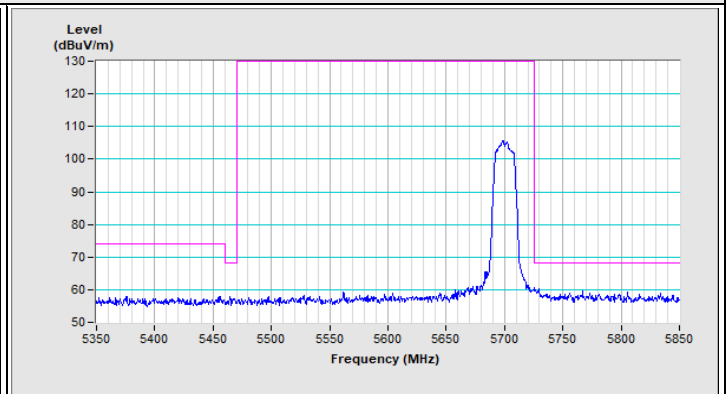


Vertical (Peak)

Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11a Channel 149

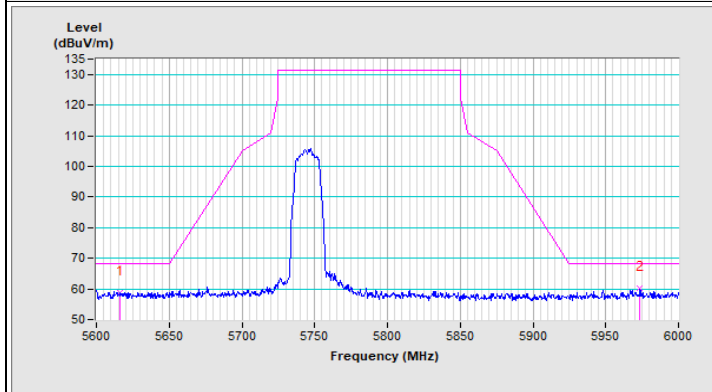


Horizontal (Peak)

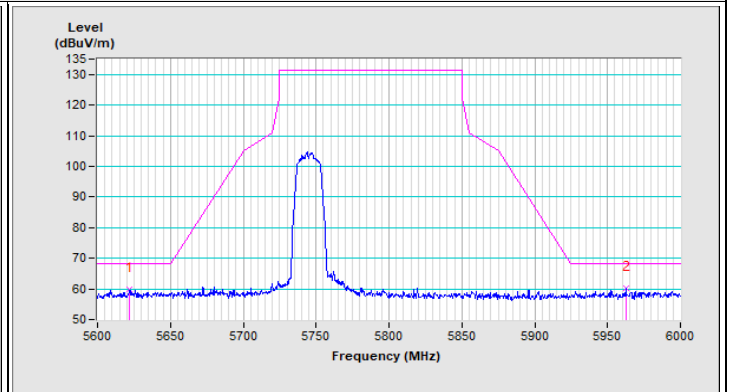


Vertical (Peak)

802.11a Channel 157

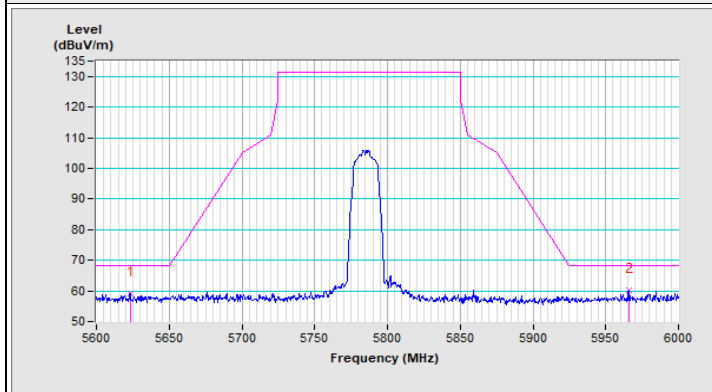


Horizontal (Peak)

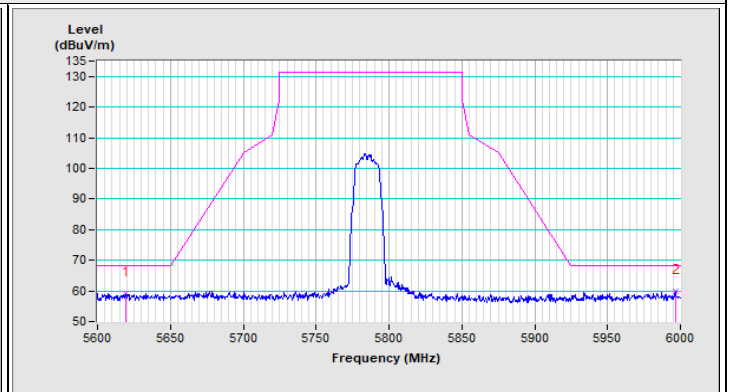


Vertical (Peak)

802.11a Channel 165

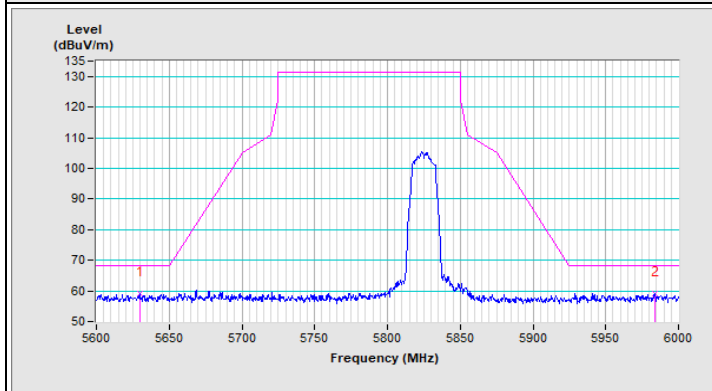


Horizontal (Peak)

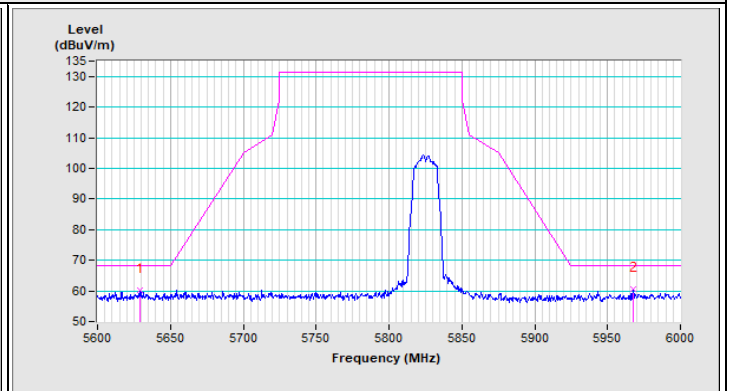


Vertical (Peak)

Frequency Range	4.5 GHz ~ 5.46 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
-----------------	--------------------	-------------------------------	--


802.11ax (HE20) Channel 36

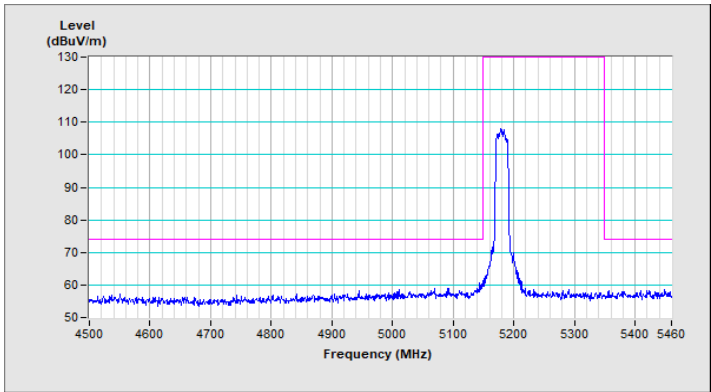


Horizontal (Peak)

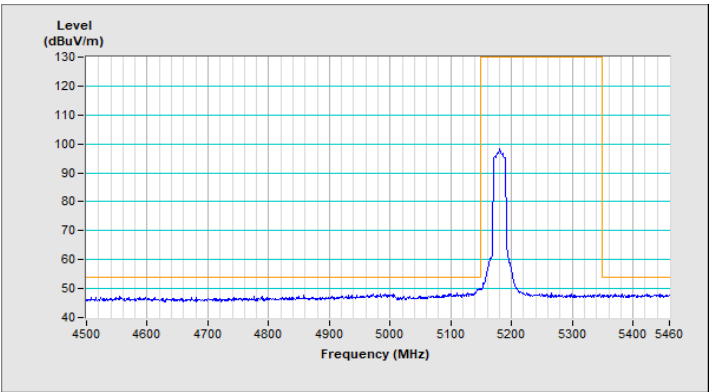

Horizontal (Average)

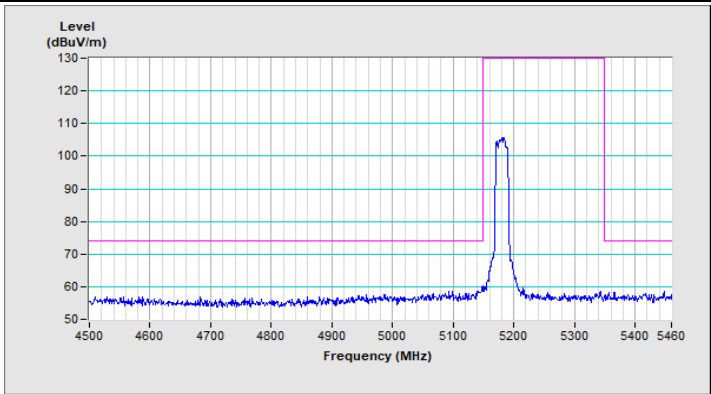


Vertical (Peak)

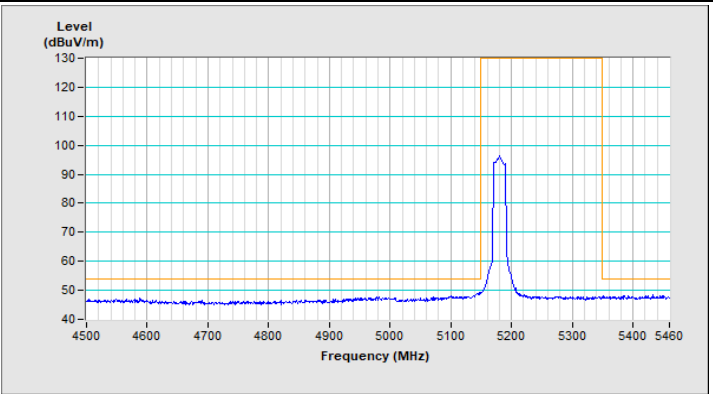


Vertical (Average)


802.11ax (HE20) Channel 64

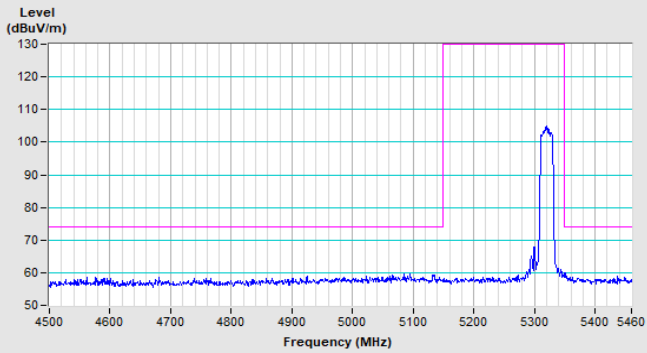


Horizontal (Peak)

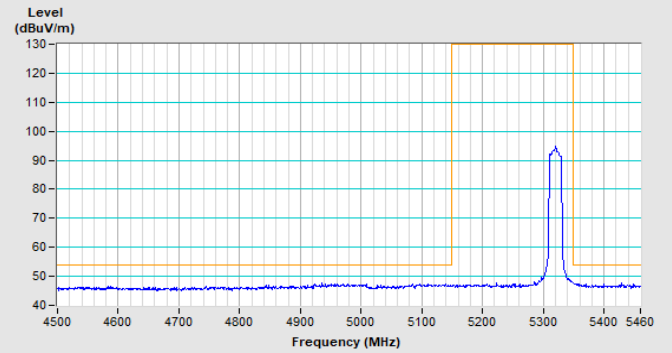

Horizontal (Average)

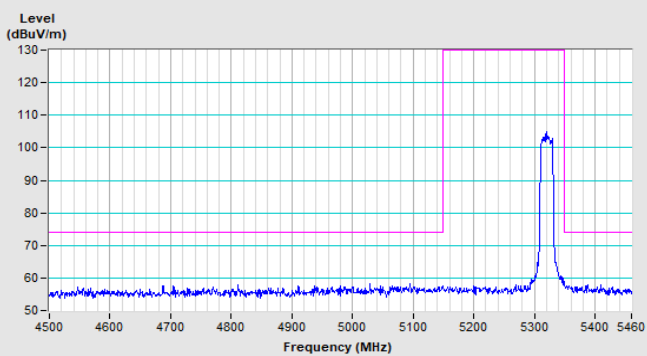


Vertical (Peak)

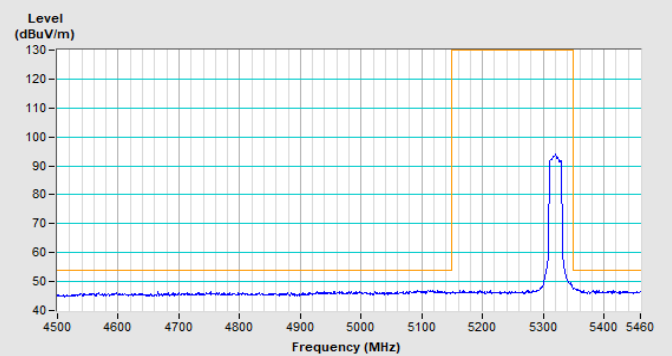


Vertical (Average)

Frequency Range	5.35 GHz ~ 5.85 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


802.11ax (HE20) Channel 100

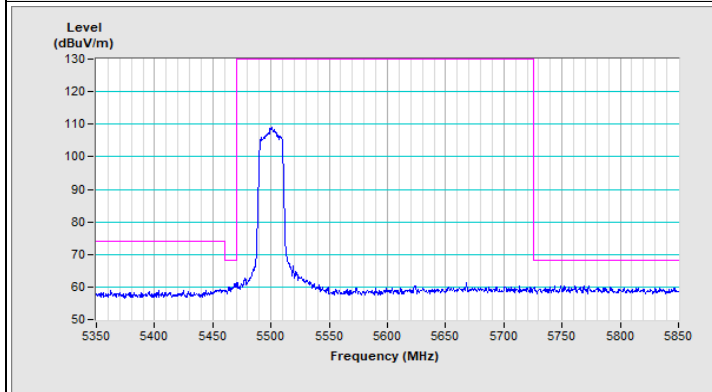


Horizontal (Peak)

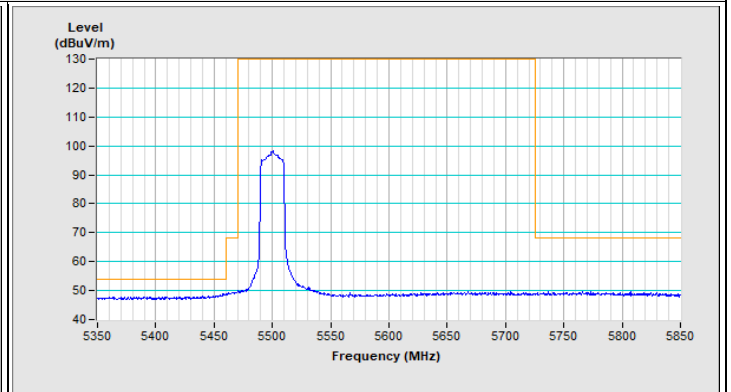

Horizontal (Average)

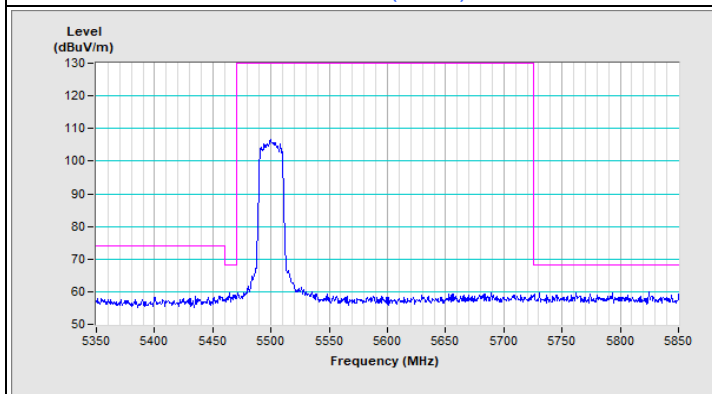


Vertical (Peak)

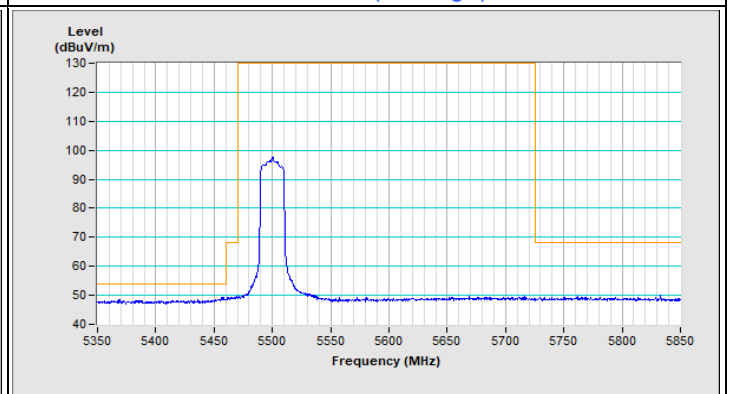


Vertical (Average)

802.11ax (HE20) Channel 140

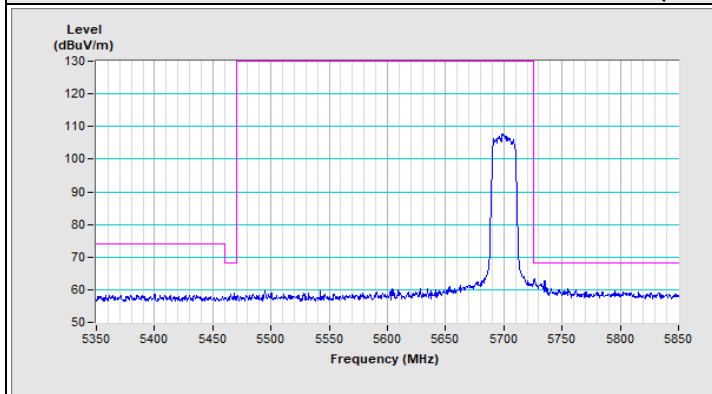


Horizontal (Peak)

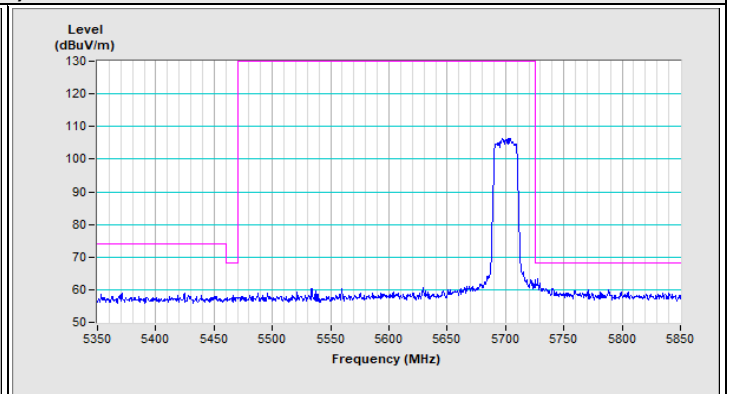


Vertical (Peak)

Frequency Range	5.6 GHz ~ 6 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak
-----------------	-----------------	-------------------------------	----------------------------------

802.11ax (HE20) Channel 149

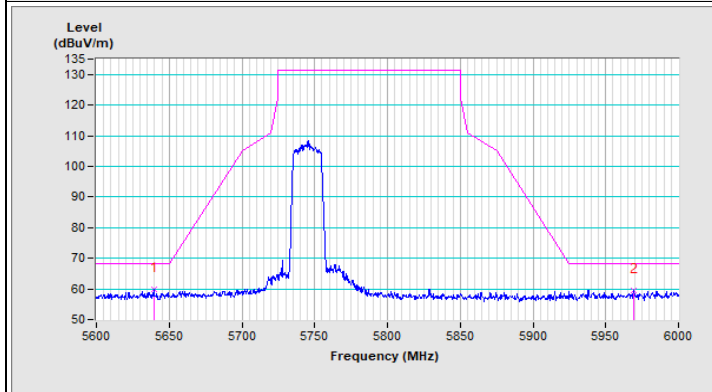


Horizontal (Peak)

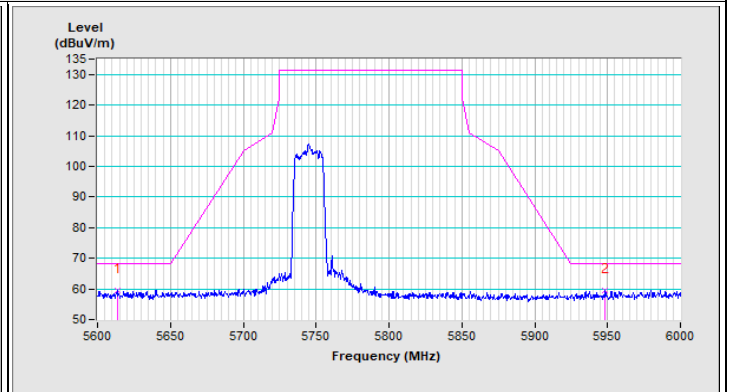


Vertical (Peak)

802.11ax (HE20) Channel 157

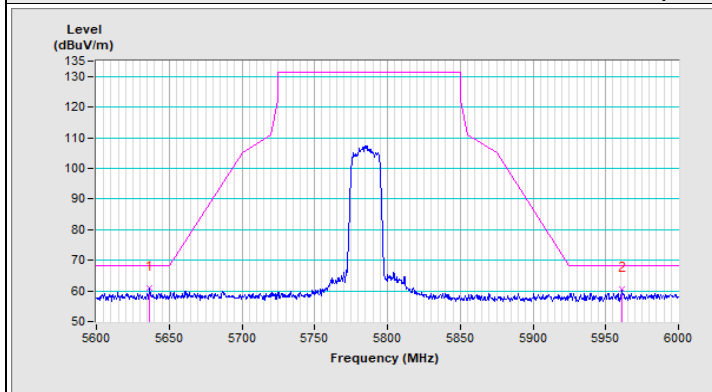


Horizontal (Peak)

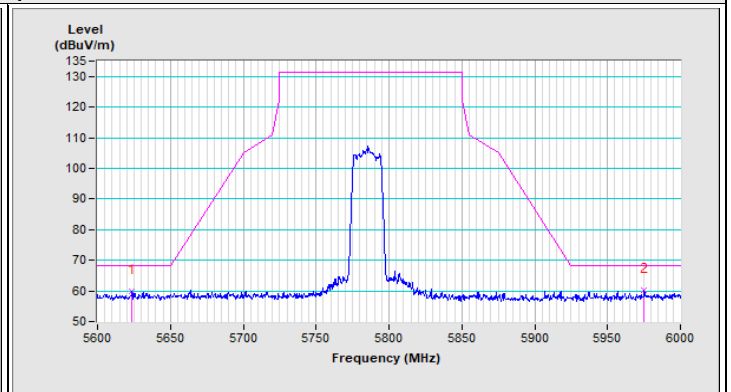


Vertical (Peak)

802.11ax (HE20) Channel 165

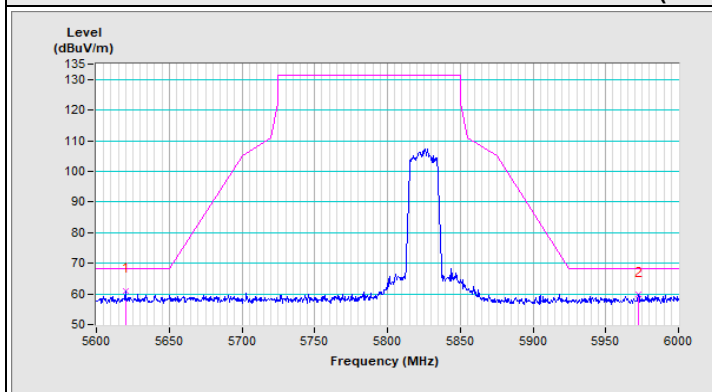

Horizontal (Peak)

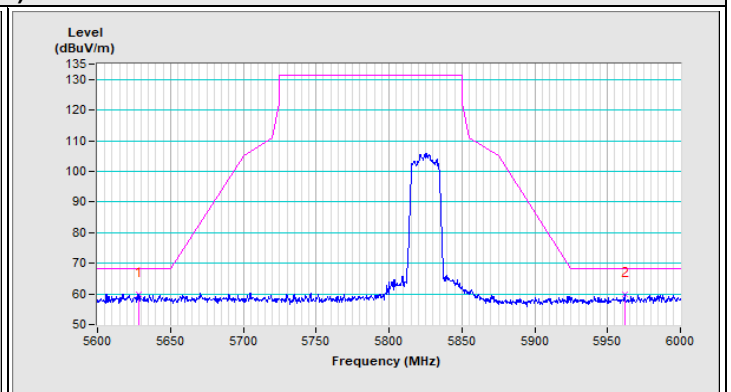


Vertical (Peak)

Plot of Other Emission

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=10 kHz, DET=Peak
-----------------	----------------	-------------------------------	---


802.11a Channel 36

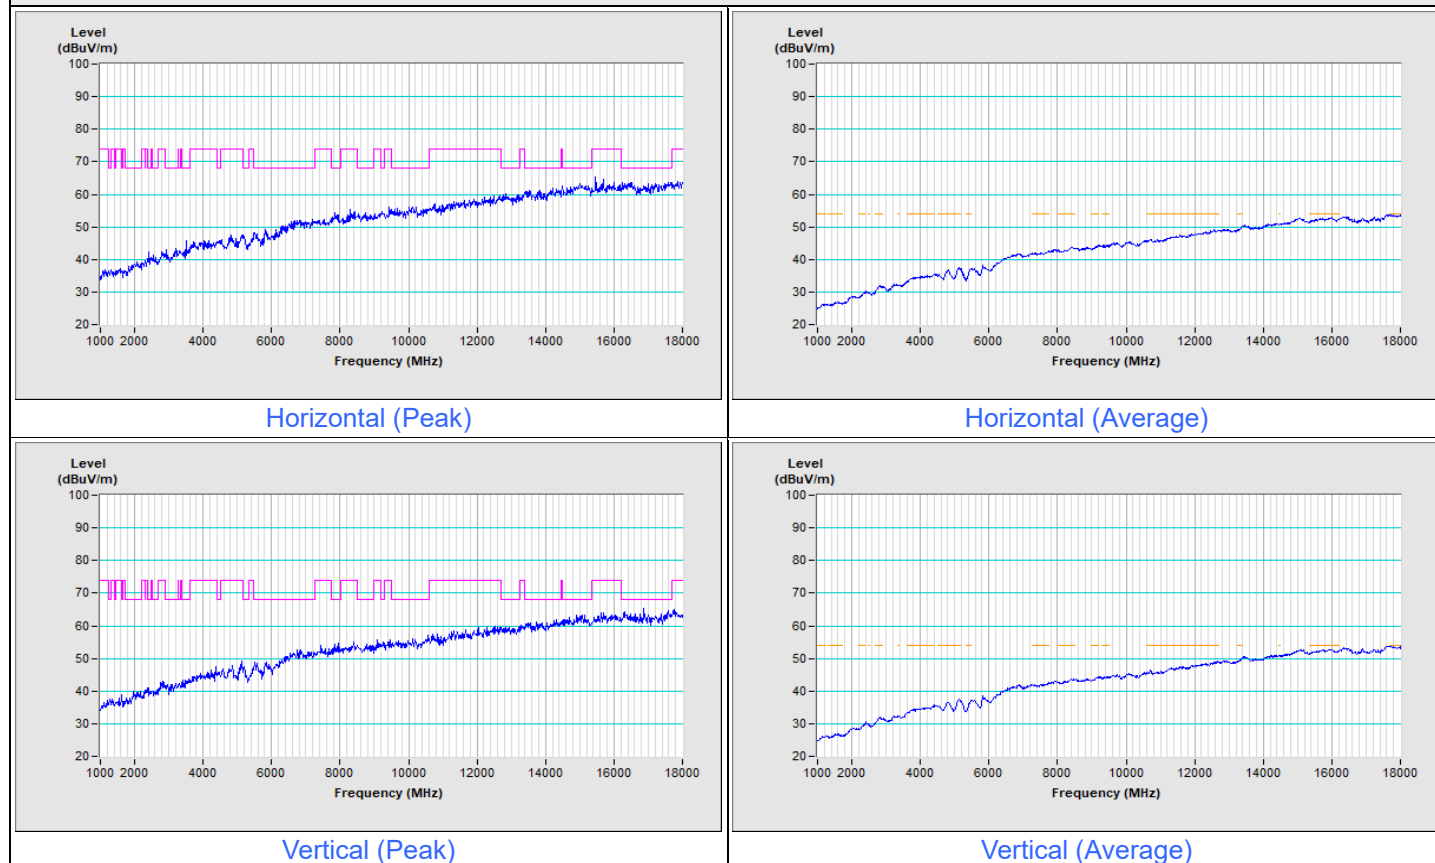

Notes:

- For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
- The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

Frequency Range	1 GHz ~ 18 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
-----------------	----------------	-------------------------------	--

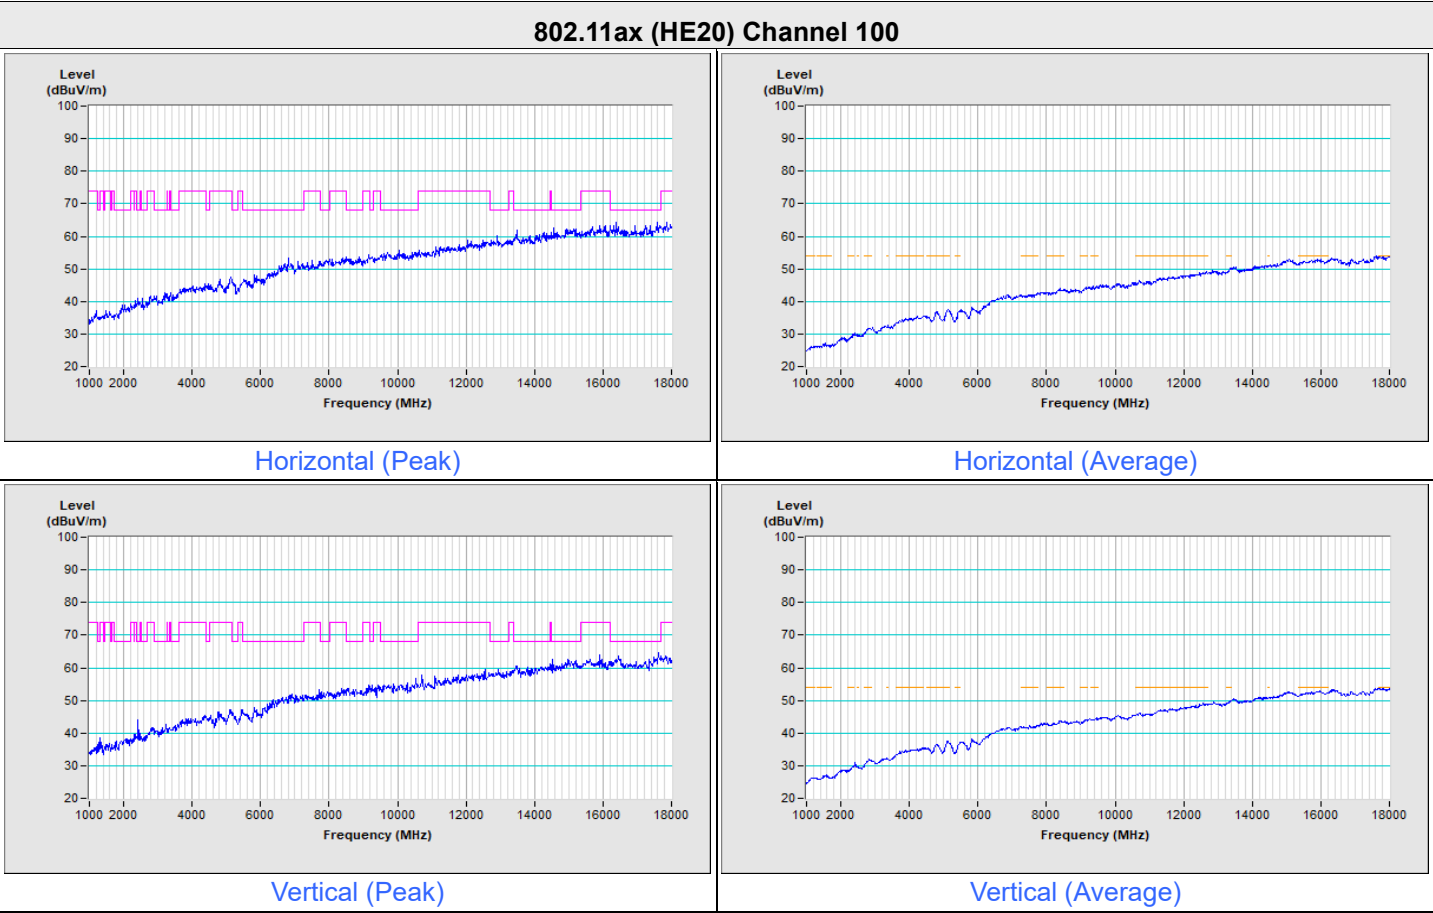

- Notes:
1. For radiated emission test data, complete spectral plots shall be presented in the report only for the worst-case scenarios of each mode within each operating frequency band.
 2. The frequency range 18 GHz ~ 40 GHz: After investigation, no any emissions were found to exist, therefore they are not recorded in this report.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-(0)2-26052180

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-(0)3-6668565 (SIP)

Tel: 886-(0)3-5120595 (WD)

Hwa Ya EMC/RF/Safety/SAR Lab & Wenming EMC/RF Lab

Tel: 886-(0)3-3183232

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---