




FCC RADIO TEST REPORT

FCC ID : 2AEUP-5DFYA9
Equipment : Video Doorbell
Brand Name : ring 
Model Name : 5DFYA9
Applicant : Ring LLC
12515 Cerise Ave, Hawthorne, CA 90250, USA
Manufacturer : Ring LLC
12515 Cerise Ave, Hawthorne, CA 90250, USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Jul. 29, 2025 and testing was performed from Aug. 14, 2025 to Jan. 12, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 26dB & 99% Occupied Bandwidth Measurement	11
3.2 Maximum Conducted Output Power Measurement	12
3.3 Power Spectral Density Measurement	14
3.4 Unwanted Emissions Measurement	16
3.5 AC Conducted Emission Measurement.....	21
3.6 Antenna Requirements.....	23
4 List of Measuring Equipment.....	24
5 Measurement Uncertainty	26
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Result	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	
Appendix F. Spot Check Evaluation on 5DFYA9	



History of this test report

Report No.	Version	Description	Issue Date
FR572903-01C	01	Initial issue of report	Jan. 14, 2026



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403	26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	
3.5	15.207	AC Conducted Emission	Pass	
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. ECR inquiry for data referencing from FCC ID: 2AEUPBHADP021 has been approved by TCB. The ECR inquiry and the associated document are submitted in the confidential exhibit.
2. FCC ID: **2AEUP-5DFYA9** is different from FCC ID: 2AEUPBHADP021 (Reference model), in the following:
 - The only difference between FCC ID: **2AEUP-5DFYA9** and FCC ID: 2AEUPBHADP021 are Remove 24G Radar Function & Component
3. All the test results are referenced from FCC ID: 2AEUPBHADP021 (Sporton Test Report FR572903C), and spot check results to justify data referencing is presented in the Appendix F.
4. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
5. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Freda Wu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature		
General Specs Bluetooth-LE, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, and Wi-Fi 5GHz 802.11a/n/ac/ax		
Antenna Type WLAN: Stamped metal IFA antenna		

Antenna information		
5150 MHz ~ 5250 MHz	Peak Gain (dBi)	4.0
5250 MHz ~ 5350 MHz	Peak Gain (dBi)	4.0
5470 MHz ~ 5725 MHz	Peak Gain (dBi)	4.0

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 EUT Information (Referenced Model)

Product Feature		
General Specs Bluetooth-LE, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and 24GHz Radar		
Antenna Type WLAN: Stamped metal IFA antenna		

Antenna information		
5150 MHz ~ 5250 MHz	Peak Gain (dBi)	4.0
5250 MHz ~ 5350 MHz	Peak Gain (dBi)	4.0
5470 MHz ~ 5725 MHz	Peak Gain (dBi)	4.0

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH12-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ FCC Part 15 Subpart E
- ♦ ANSI C63.10-2020

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	40	5200	48	5240
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	56	5280	64	5320
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	124	5620
	104	5520	128	5640
	108	5540	132	5660
	112	5560	136	5680
	116	5580	140	5700
	120	5600		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	144	5720	-	-

2.2 Test Mode

This device support 26/52/106 tone RU.

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.


The power for 802.11n mode is smaller than 802.11ac mode, so all other conducted and radiated test is covered by 802.11ac mode.

The final test modes include the worst data rates for each modulation shown in the table below.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by VHT20)	MCS0
802.11ac VHT20	MCS0
802.11ax HE20	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : WLAN 5G Link + adapter
Remark: 1. The detailed Radiated test modes are shown in Appendix C. 2. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

2.3 Connection Diagram of Test System

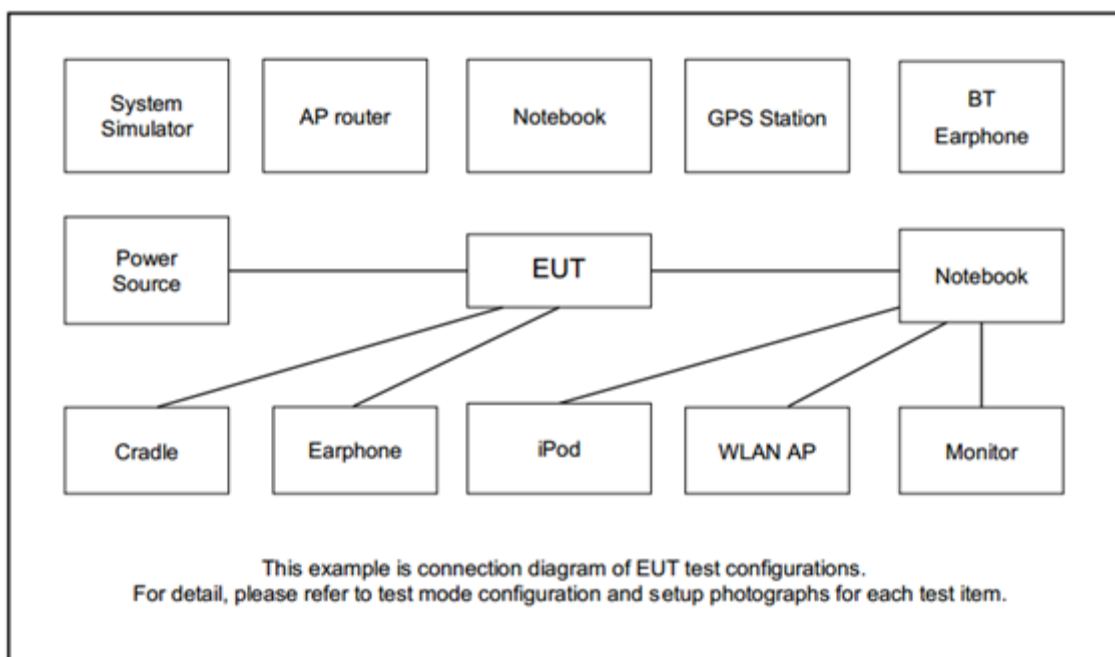

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded, 1.8m
2.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
3.	WLAN AP	ASUS	RT-AX88U	MSQ-RTAXHP00	N/A	N/A
4.	Bluetooth Earphone	SONY	SBH20	N/A	N/A	N/A
5.	TEST NB	DELL	Latitude 3400	N/A	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items, utility "Tera Term v4.95" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

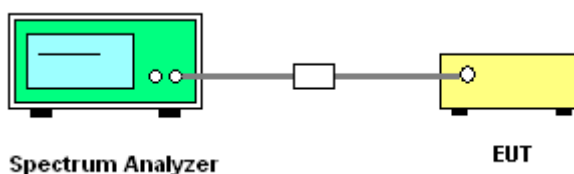

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

■ For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands:

■ The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.2.4 Test Setup

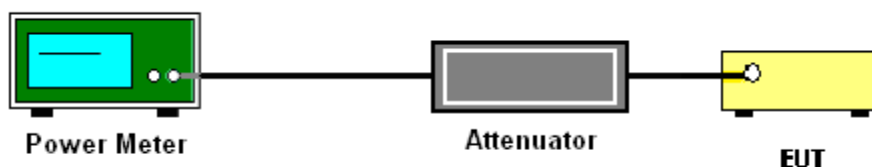

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1.0 MHz band.

For the 5.25–5.725 GHz bands:

The maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

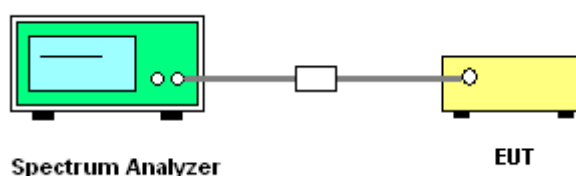

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000 MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold


(3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.4.4 Test Setup


For radiated emissions below 30MHz

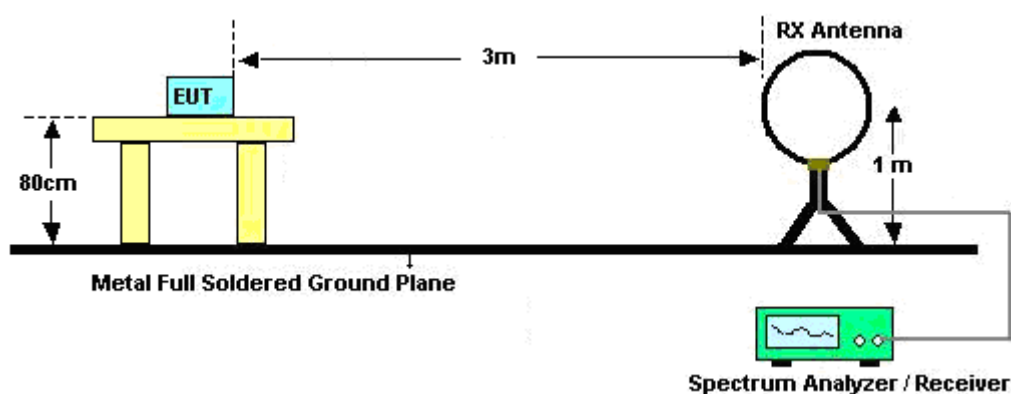


For radiated emissions from 30MHz to 1GHz

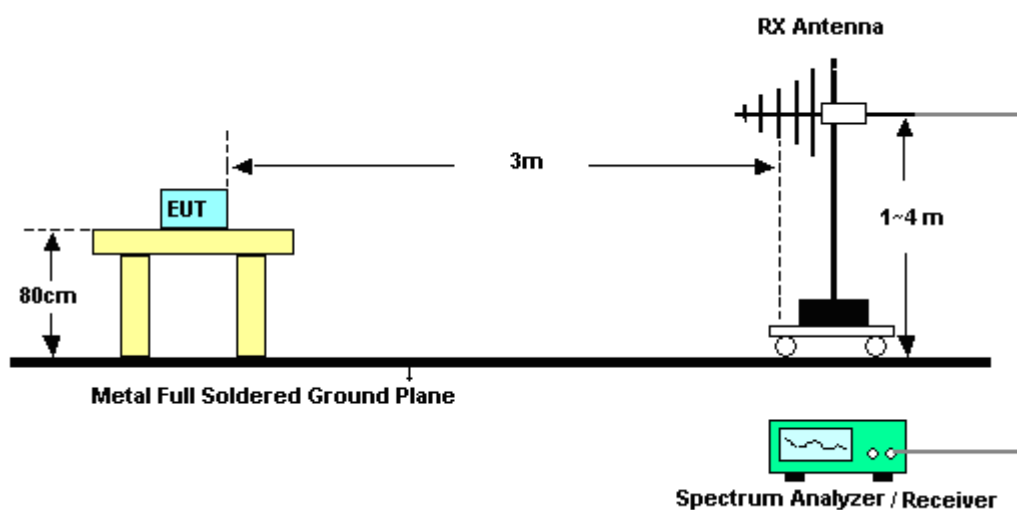

For radiated test from 1GHz to 18GHz

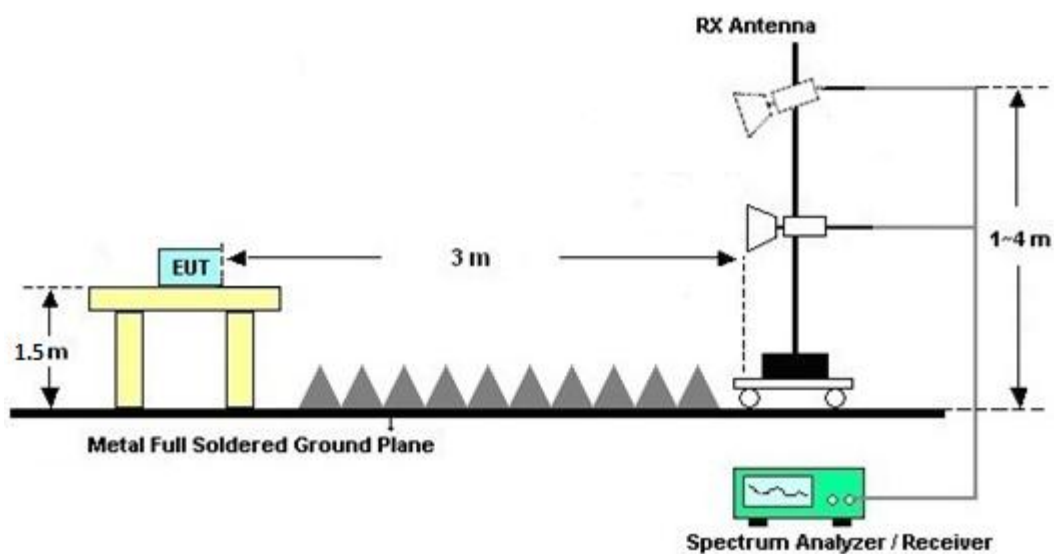

For radiated test above 18GHz

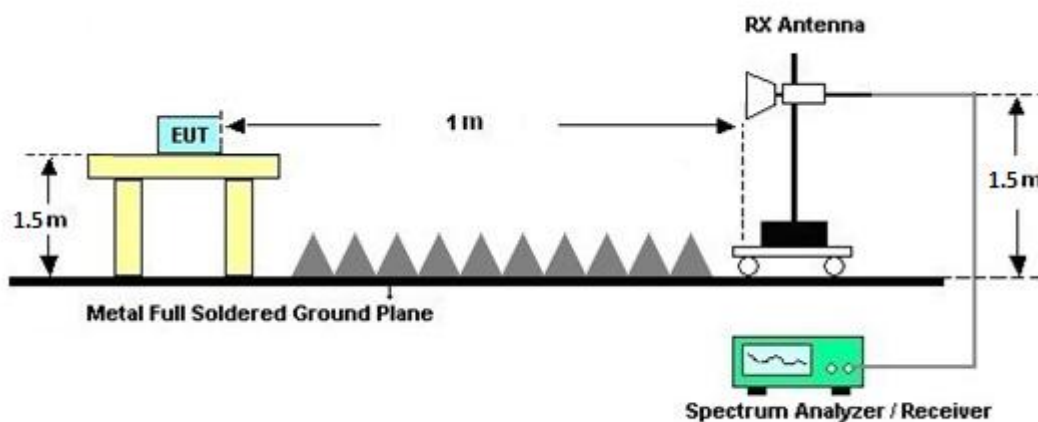

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site **v01r01**, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

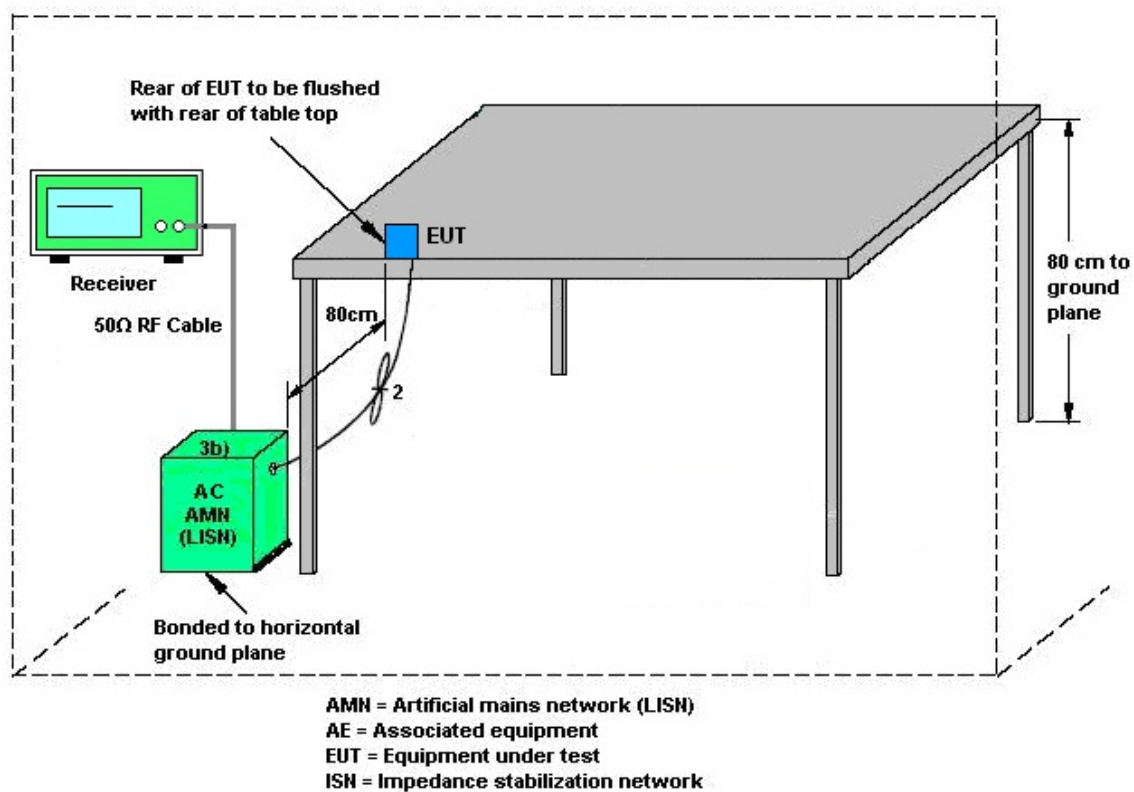

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.6.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec.18,2024	Sep. 10 2025~ Sep. 11 2025	Dec.17,2025	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N -06	47020 & 06	30MHz~1GHz	Oct. 05, 2024	Sep. 10 2025~ Sep. 11 2025	Oct. 04, 2025	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	9120D-02114	1GHz~18GHz	Jul. 02, 2025	Sep. 10 2025~ Sep. 11 2025	Jul. 01, 2026	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	00994	18GHz~40GHz	Jan. 09, 2025	Sep. 10 2025~ Sep. 11 2025	Jan. 08, 2026	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 19, 2025	Sep. 10 2025~ Sep. 11 2025	Mar. 18, 2026	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	Feb. 07, 2025	Sep. 10 2025~ Sep. 11 2025	Feb. 06, 2026	Radiation (03CH12-HY)
Amplifier	EMEC	EM01G18GA	060941	1GHz~18GHz	Nov. 29, 2024	Sep. 10 2025~ Sep. 11 2025	Nov. 28, 2025	Radiation (03CH12-HY)
Preamplifier	E- INSTRUMENT TECH LTD.	ERA-100M- 18G-56-01- A70	EC1900269	1GHz~18GHz	Dec. 19, 2024	Sep. 10 2025~ Sep. 11 2025	Dec. 18, 2025	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 02, 2024	Sep. 10 2025~ Sep. 11 2025	Dec. 01, 2025	Radiation (03CH12-HY)
Spectrum Analyzer	Keysight	N9010B	MY64320114	10Hz~44GHz	Oct. 05, 2024	Sep. 10 2025~ Sep. 11 2025	Oct. 04, 2025	Radiation (03CH12-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290111	20Hz~26.5GHz	Nov. 22, 2024	Sep. 10 2025~ Sep. 11 2025	Nov. 21, 2025	Radiation (03CH12-HY)
Notch Filter	Wainwright	WLKS1200- 12SS	SN2	1.2GHz Low Pass Filter	Mar. 12, 2025	Sep. 10 2025~ Sep. 11 2025	Mar. 11, 2026	Radiation (03CH12-HY)
Notch Filter	Wainwright	WHKX8- 5872.5-6750- 18000-40ST	SN2	6.75GHz High Pass Filter	Mar. 12, 2025	Sep. 10 2025~ Sep. 11 2025	Mar. 11, 2026	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Dec. 19, 2024	Sep. 10 2025~ Sep. 11 2025	Dec. 18, 2025	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803955/2	30MHz~40GHz	Nov. 01, 2024	Sep. 10 2025~ Sep. 11 2025	Oct. 31, 2025	Radiation (03CH12-HY)
RF Cable	EMCI	EMC101Y-KM- KM-100	240907	30MHz~40GHz	Nov. 14, 2024	Sep. 10 2025~ Sep. 11 2025	Nov. 13, 2025	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP200722	N/A	Mar. 03, 2025	Sep. 10 2025~ Sep. 11 2025	Mar. 02, 2026	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Sep. 10 2025~ Sep. 11 2025	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Sep. 10 2025~ Sep. 11 2025	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Sep. 10 2025~ Sep. 11 2025	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8- 24	RK-000989	N/A	N/A	Sep. 10 2025~ Sep. 11 2025	N/A	Radiation (03CH12-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Aug. 29, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Aug. 29, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	9561-FN00373	9kHz~200MHz	Oct. 23, 2024	Aug. 29, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 3, 2025	Aug. 29, 2025	Mar. 2, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Aug. 29, 2025	Mar. 23, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Aug. 29, 2025	Sep. 22, 2025	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Aug. 15, 2025~ Aug. 26, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	Aug. 15, 2025~ Aug. 26, 2025	Jan. 08, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10HZ~44GHZ	Jan. 14, 2025	Aug. 15, 2025~ Aug. 26, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Aug. 15, 2025~ Aug. 26, 2025	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Aug. 15, 2025~ Aug. 26, 2025	N/A	Conducted (TH05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Jay Chen	Temperature:	21~25	°C
Test Date:	2025/8/15~2025/8/26	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 single antenna													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	36	5180	19.41	-	-	24.00	-	4.00	-	-	Pass
11a	6Mbps	1	44	5220	19.76	-		24.00	-	4.00	-		Pass
11a	6Mbps	1	48	5240	19.60	-		24.00	-	4.00	-		Pass
HT20	MCS0	1	36	5180	19.42	-		24.00	-	4.00	-		Pass
HT20	MCS0	1	44	5220	19.65	-		24.00	-	4.00	-		Pass
HT20	MCS0	1	48	5240	19.49	-		24.00	-	4.00	-		Pass
VHT20	MCS0	1	36	5180	19.55	-		24.00	-	4.00	-		Pass
VHT20	MCS0	1	44	5220	19.71	-		24.00	-	4.00	-		Pass
VHT20	MCS0	1	48	5240	19.59	-		24.00	-	4.00	-		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 single antenna													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180	17.30	-	26.21	-	-	-	22.38	-	
11a	6Mbps	1	44	5220	17.32	-	27.04	-	-	-	22.39	-	
11a	6Mbps	1	48	5240	17.54	-	29.02	-	-	-	22.44	-	
VHT20	MCS0	1	36	5180	18.24	-	27.62	-	-	-	22.61	-	
VHT20	MCS0	1	44	5220	18.24	-	31.82	-	-	-	22.61	-	
VHT20	MCS0	1	48	5240	18.35	-	32.69	-	-	-	22.64	-	

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 single antenna														
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180	0.11	-	7.70	-	-	11.00	-	4.00	-	Pass
11a	6Mbps	1	44	5220	0.11	-	7.88	-		11.00	-	4.00	-	Pass
11a	6Mbps	1	48	5240	0.11	-	8.33	-		11.00	-	4.00	-	Pass
VHT20	MCS0	1	36	5180	0.12	-	7.55	-		11.00	-	4.00	-	Pass
VHT20	MCS0	1	44	5220	0.12	-	7.62	-		11.00	-	4.00	-	Pass
VHT20	MCS0	1	48	5240	0.12	-	7.44	-		11.00	-	4.00	-	Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A single antenna													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	52	5260	19.41	-	-	23.98	-	4.00	-	26.99	Pass
11a	6Mbps	1	60	5300	19.40	-		23.98	-	4.00	-	26.99	Pass
11a	6Mbps	1	64	5320	19.15	-		23.98	-	4.00	-	26.99	Pass
HT20	MCS0	1	52	5260	19.11	-		23.98	-	4.00	-	26.99	Pass
HT20	MCS0	1	60	5300	19.35	-		23.98	-	4.00	-	26.99	Pass
HT20	MCS0	1	64	5320	17.98	-		23.98	-	4.00	-	26.99	Pass
VHT20	MCS0	1	52	5260	19.21	-		23.98	-	4.00	-	26.99	Pass
VHT20	MCS0	1	60	5300	19.47	-		23.98	-	4.00	-	26.99	Pass
VHT20	MCS0	1	64	5320	18.02	-		23.98	-	4.00	-	26.99	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	52	5260	17.39	-	28.58	-	23.40	-	29.40	-	23.98	-	-
11a	6Mbps	1	60	5300	17.34	-	28.45	-	23.39	-	29.39	-	23.98	-	
11a	6Mbps	1	64	5320	17.42	-	29.61	-	23.41	-	29.41	-	23.98	-	
VHT20	MCS0	1	52	5260	18.25	-	31.81	-	23.61	-	29.61	-	23.98	-	
VHT20	MCS0	1	60	5300	18.20	-	30.85	-	23.60	-	29.60	-	23.98	-	
VHT20	MCS0	1	64	5320	18.11	-	27.59	-	23.58	-	29.58	-	23.98	-	

TEST RESULTS DATA
Power Spectral Density

U-NII-2A single antenna														
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	52	5260	0.11	-	8.06	-	-	11.00	-	4.00	-	Pass
11a	6Mbps	1	60	5300	0.11	-	7.82	-		11.00	-	4.00	-	Pass
11a	6Mbps	1	64	5320	0.11	-	7.63	-		11.00	-	4.00	-	Pass
VHT20	MCS0	1	52	5260	0.12	-	7.56	-		11.00	-	4.00	-	Pass
VHT20	MCS0	1	60	5300	0.12	-	7.70	-		11.00	-	4.00	-	Pass
VHT20	MCS0	1	64	5320	0.12	-	6.50	-		11.00	-	4.00	-	Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C single antenna													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	100	5500	17.55	-	-	23.98	-	4.00	-	26.99	Pass
11a	6Mbps	1	116	5580	18.73	-		23.98	-	4.00	-	26.99	Pass
11a	6Mbps	1	140	5700	17.84	-		23.98	-	4.00	-	26.99	Pass
HT20	MCS0	1	100	5500	18.02	-		23.98	-	4.00	-	26.99	Pass
HT20	MCS0	1	116	5580	18.67	-		23.98	-	4.00	-	26.99	Pass
HT20	MCS0	1	140	5700	17.09	-		23.98	-	4.00	-	26.99	Pass
VHT20	MCS0	1	100	5500	18.14	-		23.98	-	4.00	-	26.99	Pass
VHT20	MCS0	1	116	5580	18.83	-		23.98	-	4.00	-	26.99	Pass
VHT20	MCS0	1	140	5700	17.18	-		23.98	-	4.00	-	26.99	Pass

FCC U-NII-2C straddle channel single antenna													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	144	5720	18.09	-	-	23.98	-	4.00	-	26.99	Pass
HT20	MCS0	1	144	5720	17.73	-		23.98	-	4.00	-	26.99	Pass
VHT20	MCS0	1	144	5720	17.76	-		23.98	-	4.00	-	26.99	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C single antenna																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
11a	6Mbps	1	100	5500	17.39	-	20.76	-	23.40	-	29.40	-	23.98	-	----	----
11a	6Mbps	1	116	5580	17.37	-	27.42	-	23.40	-	29.40	-	23.98	-	----	----
11a	6Mbps	1	140	5700	17.18	-	20.57	-	23.35	-	29.35	-	23.98	-	----	----
VHT20	MCS0	1	100	5500	18.12	-	26.49	-	23.58	-	29.58	-	23.98	-	----	----
VHT20	MCS0	1	116	5580	18.15	-	27.02	-	23.59	-	29.59	-	23.98	-	----	----
VHT20	MCS0	1	140	5700	18.03	-	20.86	-	23.56	-	29.56	-	23.98	-	----	----

U-NII-2C straddle channel single antenna																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
11a	6Mbps	1	144	5720	13.64	-	15.32	-	23.35	-	29.35	-	23.98	-	2.535	-
VHT20	MCS0	1	144	5720	14.05	-	15.44	-	23.56	-	29.56	-	23.98	-	2.535	-
6dB Bandwidth Limit $\geq$ 500kHz															Pass	

TEST RESULTS DATA
Power Spectral Density

U-NII-2C single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	100	5500	0.11	-	6.53	-	-	11.00	-	4.00	-	-
11a	6Mbps	1	116	5580	0.11	-	7.24	-		11.00	-	4.00	-	
11a	6Mbps	1	140	5700	0.11	-	6.67	-		11.00	-	4.00	-	
VHT20	MCS0	1	100	5500	0.12	-	6.95	-		11.00	-	4.00	-	
VHT20	MCS0	1	116	5580	0.12	-	7.57	-		11.00	-	4.00	-	
VHT20	MCS0	1	140	5700	0.12	-	6.12	-		11.00	-	4.00	-	

U-NII-2C straddle channel single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	144	5720	0.11	-	6.67	-	-	11.00	-	4.00	-	-
VHT20	MCS0	1	144	5720	0.12	-	5.88	-		11.00	-	4.00	-	

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	36	5180	Full	19.64	-	-	24.00	-	4.00	-	-	Pass
HE20	MCS0	1	36	5180	26/0	9.74	-		24.00	-	4.00	-		Pass
HE20	MCS0	1	36	5180	52/37	12.72	-		24.00	-	4.00	-		Pass
HE20	MCS0	1	36	5180	106/53	15.79	-		24.00	-	4.00	-		Pass
HE20	MCS0	1	44	5220	Full	19.78	-		24.00	-	4.00	-		Pass
HE20	MCS0	1	44	5220	26/4	11.46	-		24.00	-	4.00	-		Pass
HE20	MCS0	1	44	5220	52/37	13.53	-		24.00	-	4.00	-		Pass
HE20	MCS0	1	44	5220	106/53	15.93	-		24.00	-	4.00	-		Pass
HE20	MCS0	1	48	5240	Full	19.64	-		24.00	-	4.00	-		Pass
HE20	MCS0	1	48	5240	26/8	10.46	-		24.00	-	4.00	-		Pass
HE20	MCS0	1	48	5240	52/40	13.12	-		24.00	-	4.00	-		Pass
HE20	MCS0	1	48	5240	106/54	16.12	-		24.00	-	4.00	-		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)			Note
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	36	5180	Full	19.00	-	21.42	-	-		22.79	-	-	-
HE20	MCS0	1	44	5220	Full	19.02	-	24.57	-	-		22.79	-		
HE20	MCS0	1	48	5240	Full	19.07	-	31.72	-	-		22.80	-		

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	36	5180	Full	0.15	-	7.22	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	36	5180	26/0	0.25	-	6.88	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	36	5180	52/37	0.44	-	6.89	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	36	5180	106/53	0.73	-	6.86	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	44	5220	Full	0.15	-	7.40	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	44	5220	26/4	0.25	-	7.18	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	44	5220	52/37	0.44	-	7.36	-	-	11.00	-	4.00	-	Pass
HE20	MCS0	1	44	5220	106/53	0.73	-	7.02	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	48	5240	Full	0.15	-	7.79	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	48	5240	26/8	0.25	-	7.36	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	48	5240	52/40	0.44	-	7.37	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	48	5240	106/54	0.73	-	7.34	-		11.00	-	4.00	-	Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	52	5260	Full	19.27	-	-	23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	52	5260	26/0	10.25	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	52	5260	52/37	12.73	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	52	5260	106/53	15.47	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	60	5300	Full	19.56	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	60	5300	26/4	10.76	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	60	5300	52/37	12.68	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	60	5300	106/53	15.74	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	64	5320	Full	18.14	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	64	5320	26/8	9.26	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	64	5320	52/40	12.31	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	64	5320	106/54	15.21	-		23.98	-	4.00	-	26.99	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A single antenna																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	52	5260	Full	19.02	-	25.63	-	23.79	-	29.79	-	23.98	-	
HE20	MCS0	1	60	5300	Full	19.03	-	24.24	-	23.79	-	29.79	-	23.98	-	
HE20	MCS0	1	64	5320	Full	18.97	-	21.91	-	23.78	-	29.78	-	23.98	-	

TEST RESULTS DATA
Power Spectral Density

U-NII-2A single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	52	5260	Full	0.15	-	7.34	-	-	11.00	-	4.00	-	Pass
HE20	MCS0	1	52	5260	26/0	0.25	-	6.95	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	52	5260	52/37	0.44	-	7.09	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	52	5260	106/53	0.73	-	7.05	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	60	5300	Full	0.15	-	6.93	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	60	5300	26/4	0.25	-	6.48	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	60	5300	52/37	0.44	-	6.56	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	60	5300	106/53	0.73	-	6.72	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	64	5320	Full	0.15	-	6.53	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	64	5320	26/8	0.25	-	6.04	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	64	5320	52/40	0.44	-	6.12	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	64	5320	106/54	0.73	-	6.23	-		11.00	-	4.00	-	Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	100	5500	Full	18.22	-	-	23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	100	5500	26/0	9.30	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	100	5500	52/37	12.44	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	100	5500	106/53	15.13	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	116	5580	Full	18.87	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	116	5580	26/4	10.82	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	116	5580	52/37	12.39	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	116	5580	106/53	15.45	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	140	5700	Full	17.24	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	140	5700	26/8	8.83	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	140	5700	52/40	11.23	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	140	5700	106/54	13.98	-		23.98	-	4.00	-	26.99	Pass

FCC U-NII-2C straddle channel single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	144	5720	Full	17.92	-	-	23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	144	5720	26/8	8.75	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	144	5720	52/40	11.34	-		23.98	-	4.00	-	26.99	Pass
HE20	MCS0	1	144	5720	106/54	14.01	-		23.98	-	4.00	-	26.99	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C single antenna																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
HE20	MCS0	1	100	5500	Full	18.97	-	20.96	-	23.78	-	29.78	-	23.98	-	----	----
HE20	MCS0	1	116	5580	Full	19.01	-	23.99	-	23.79	-	29.79	-	23.98	-	----	----
HE20	MCS0	1	140	5700	Full	18.92	-	20.94	-	23.77	-	29.77	-	23.98	-	----	----

U-NII-2C straddle channel single antenna																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
HE20	MCS0	1	144	5720	Full	14.49	-	15.55	-	23.77	-	29.77	-	23.98	-	4.155	-
6dB Bandwidth Limit ≥ 500kHz																Pass	


TEST RESULTS DATA
Power Spectral Density

U-NII-2C single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	100	5500	Full	0.15	-	6.60	-	-	11.00	-	4.00	-	Pass
HE20	MCS0	1	100	5500	26/0	0.25	-	6.28	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	100	5500	52/37	0.44	-	6.49	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	100	5500	106/53	0.73	-	6.15	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	116	5580	Full	0.15	-	6.55	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	116	5580	26/4	0.25	-	6.36	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	116	5580	52/37	0.44	-	6.12	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	116	5580	106/53	0.73	-	6.32	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	140	5700	Full	0.15	-	5.76	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	140	5700	26/8	0.25	-	5.61	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	140	5700	52/40	0.44	-	5.49	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	140	5700	106/54	0.73	-	5.27	-		11.00	-	4.00	-	Pass


U-NII-2C straddle channel single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	144	5720	Full	0.15	-	5.76	-	-	11.00	-	4.00	-	Pass
HE20	MCS0	1	144	5720	26/8	0.25	-	5.66	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	144	5720	52/40	0.44	-	5.34	-		11.00	-	4.00	-	Pass
HE20	MCS0	1	144	5720	106/54	0.73	-	5.35	-		11.00	-	4.00	-	Pass



<802.11a>




<802.11ac VHT20>





<802.11ax HE20>

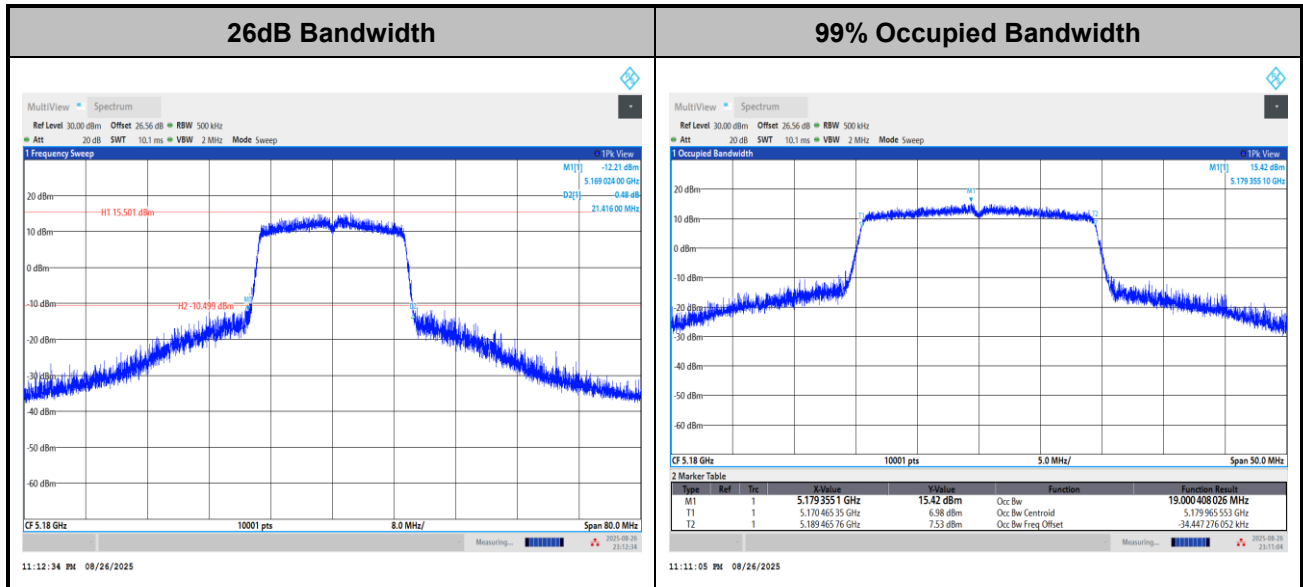


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




Test Result of Power Spectral Density

<802.11a Ant1>

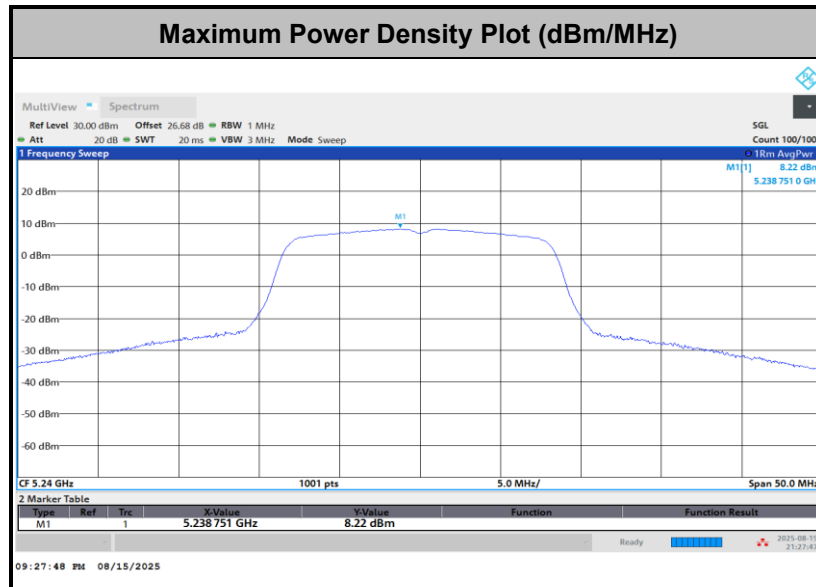


<802.11ac20 VHT Ant1>

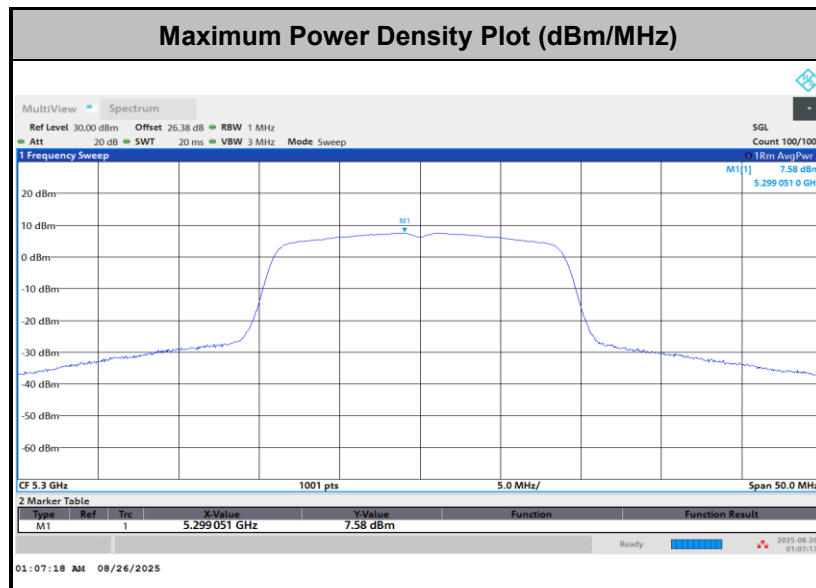



<802.11ax20 HE Ant1>

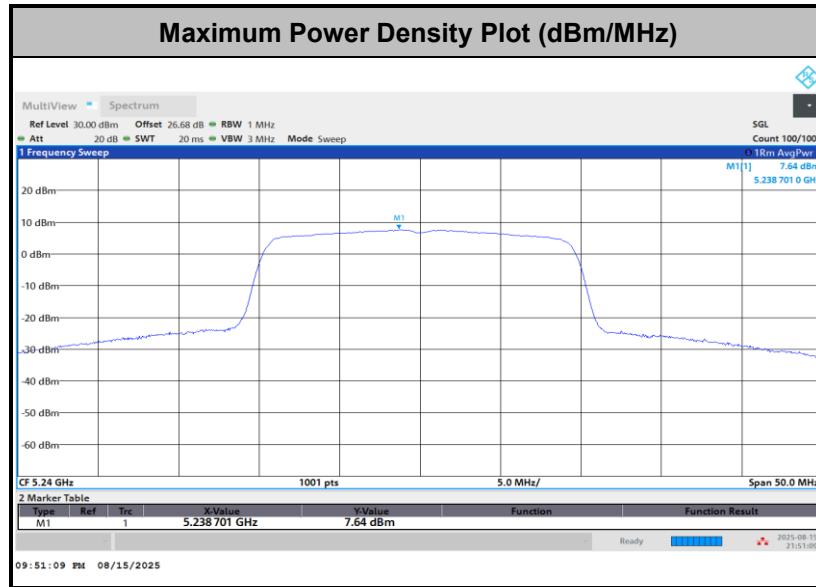



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Louis Chung	Temperature :	23.5 ~ 26.6℃
		Relative Humidity :	45.5 ~ 57.0%

EUT Information

Test Mode :
Test Voltage :
Phase :

Mode 1
120Vac/60Hz
Line

Full Spectrum

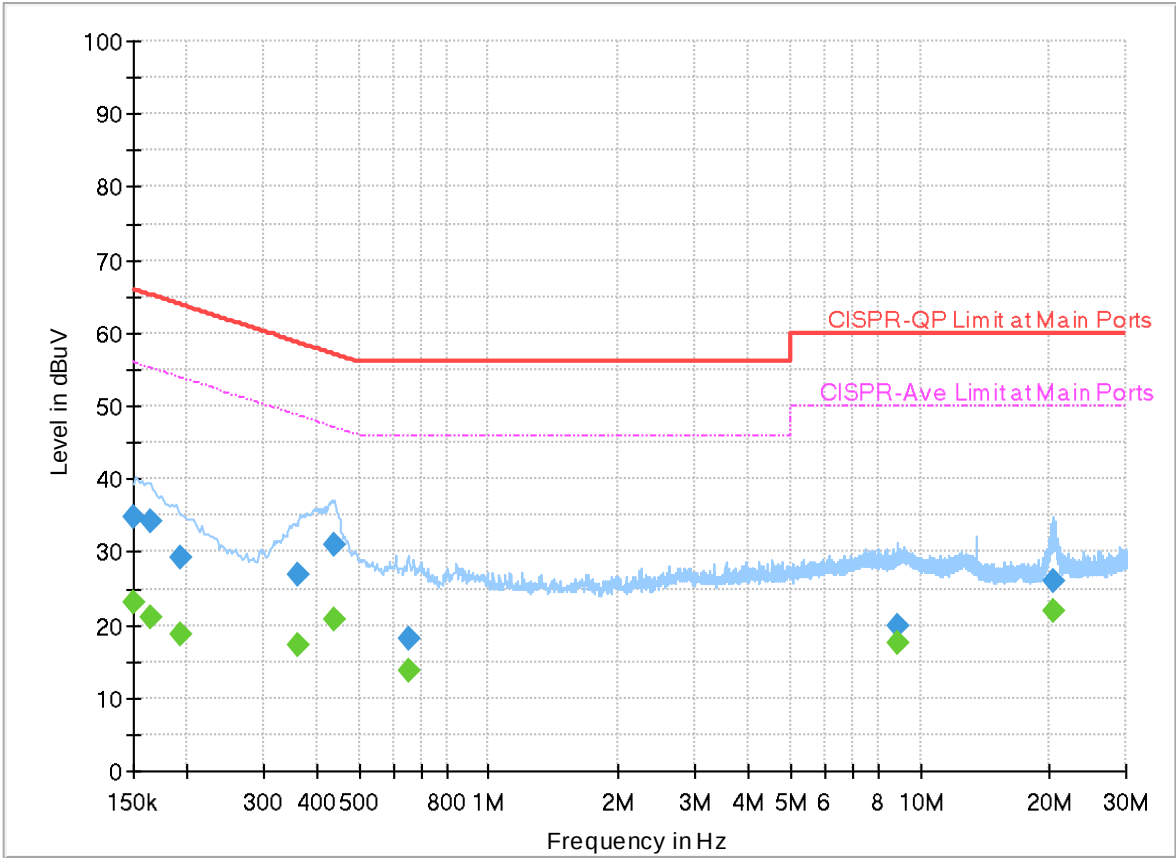


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.150000	---	23.04	56.00	32.96	L1	FLO	20.0
0.150000	34.87	---	66.00	31.13	L1	FLO	20.0
0.163860	---	21.12	55.27	34.15	L1	FLO	20.0
0.163860	34.09	---	65.27	31.18	L1	FLO	20.0
0.192300	---	18.59	53.94	35.35	L1	FLO	20.0
0.192300	29.16	---	63.94	34.78	L1	FLO	20.0
0.359250	---	17.12	48.75	31.63	L1	FLO	20.0
0.359250	26.95	---	58.75	31.80	L1	FLO	20.0
0.439980	---	20.74	47.06	26.32	L1	FLO	20.0
0.439980	30.90	---	57.06	26.16	L1	FLO	20.0
0.650310	---	13.79	46.00	32.21	L1	FLO	20.0
0.650310	18.26	---	56.00	37.74	L1	FLO	20.0
8.868210	---	17.40	50.00	32.60	L1	FLO	20.3
8.868210	19.87	---	60.00	40.13	L1	FLO	20.3
20.424750	---	21.86	50.00	28.14	L1	FLO	20.8
20.424750	26.07	---	60.00	33.93	L1	FLO	20.8

EUT Information

Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

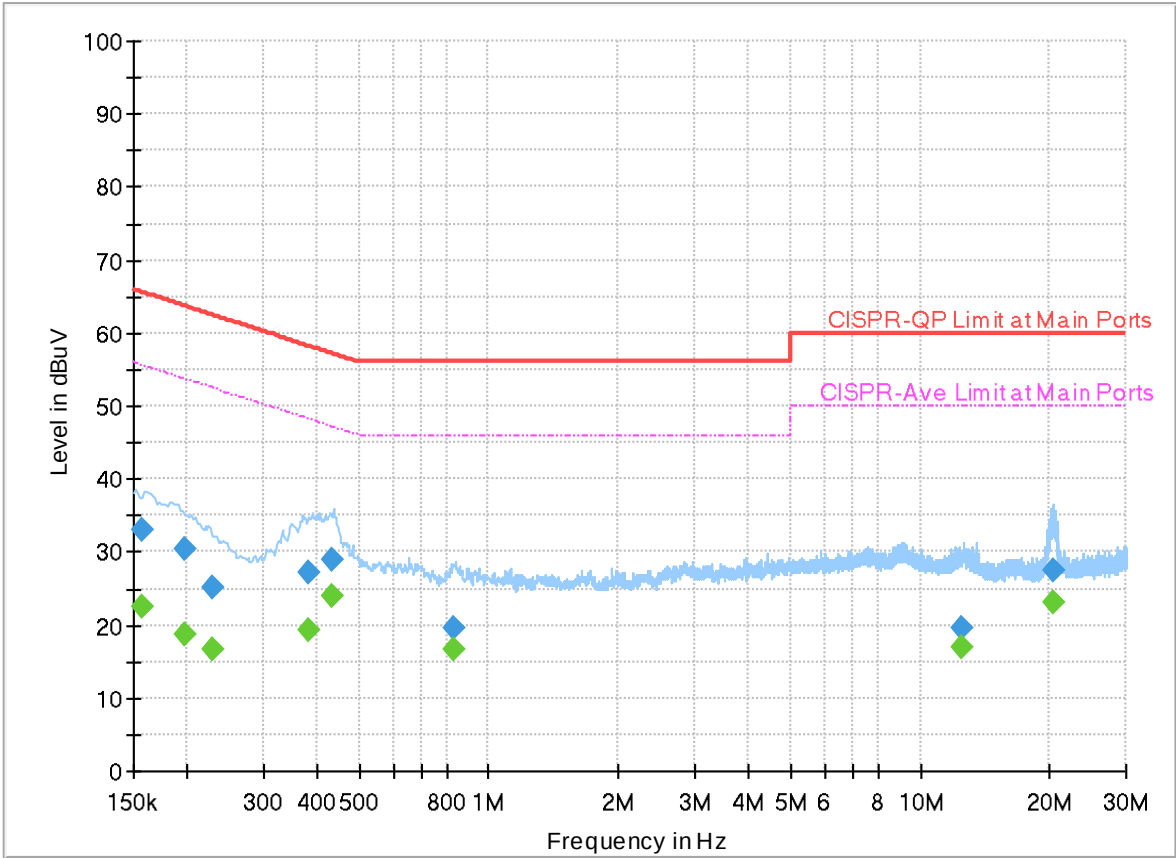

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.156750	---	22.46	55.63	33.17	N	FLO	20.0
0.156750	32.98	---	65.63	32.65	N	FLO	20.0
0.197250	---	18.76	53.73	34.97	N	FLO	20.0
0.197250	30.28	---	63.73	33.45	N	FLO	20.0
0.228660	---	16.66	52.50	35.84	N	FLO	20.0
0.228660	25.12	---	62.50	37.38	N	FLO	20.0
0.381120	---	19.25	48.26	29.01	N	FLO	20.0
0.381120	27.30	---	58.26	30.96	N	FLO	20.0
0.435210	---	24.06	47.15	23.09	N	FLO	20.0
0.435210	28.94	---	57.15	28.21	N	FLO	20.0
0.832020	---	16.57	46.00	29.43	N	FLO	20.0
0.832020	19.61	---	56.00	36.39	N	FLO	20.0
12.446070	---	17.09	50.00	32.91	N	FLO	20.5
12.446070	19.50	---	60.00	40.50	N	FLO	20.5
20.427000	---	22.98	50.00	27.02	N	FLO	20.9
20.427000	27.57	---	60.00	32.43	N	FLO	20.9



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Gerry Wei, Tim Lee and Wilson Wu	Temperature :	21.0 ~ 25.3°C
		Relative Humidity :	51.0 ~ 61.8%

Note symbol

-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	1	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	1	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	1	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	Full RU	-
Mode 5	U-NII-1	5.15-5.25	1	802.11ax HE20	44	5220	MCS0	Full RU	-
Mode 6	U-NII-1	5.15-5.25	1	802.11ax HE20	48	5240	MCS0	Full RU	-
Mode 7	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	Partial RU106/53	-
Mode 8	U-NII-2A	5.25-5.35	1	802.11a	52	5260	6Mbps	-	-
Mode 9	U-NII-2A	5.25-5.35	1	802.11a	60	5300	6Mbps	-	-
Mode 10	U-NII-2A	5.25-5.35	1	802.11a	64	5320	6Mbps	-	-
Mode 11	U-NII-2A	5.25-5.35	1	802.11ax HE20	52	5260	MCS0	Full RU	-

**FCC RADIO TEST REPORT**

Report No. : FR572903-01C

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	U-NII-2A	5.25-5.35	1	802.11ax HE20	60	5300	MCS0	Full RU	-
Mode 13	U-NII-2A	5.25-5.35	1	802.11ax HE20	64	5320	MCS0	Full RU	-
Mode 14	U-NII-2A	5.25-5.35	1	802.11ax HE20	64	5320	MCS0	Partial RU106/54	-
Mode 15	U-NII-2C	5.47-5.725	1	802.11a	100	5500	6Mbps	-	-
Mode 16	U-NII-2C	5.47-5.725	1	802.11a	116	5580	6Mbps	-	-
Mode 17	U-NII-2C	5.47-5.725	1	802.11a	140	5700	6Mbps	-	-
Mode 18	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	Full RU	-
Mode 19	U-NII-2C	5.47-5.725	1	802.11ax HE20	116	5580	MCS0	Full RU	-
Mode 20	U-NII-2C	5.47-5.725	1	802.11ax HE20	140	5700	MCS0	Full RU	-
Mode 21	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	Partial RU106/53	-
Mode 22	U-NII-2C	5.47-5.725	1	802.11a	144	5720	6Mbps	-	-

**FCC RADIO TEST REPORT**

Report No. : FR572903-01C

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 23	U-NII-2C	5.47-5.725	1	802.11ax HE20	144	5720	MCS0	-	-
Mode 24	U-NII-2A	5.25-5.35	1	802.11ax HE20	64	5320	MCS0	Full RU	LF
Mode 33	U-NII-2A	5.25-5.35	1	802.11ac VHT20	64	5320	MCS0	Full RU	-

C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11a	36	5149.94	46.72	54.00	-7.28	V	Avg.	Pass	-	Band Edge
	802.11a	36	10360.00	55.80	68.20	-12.40	V	Peak	Pass	-	Harmonic
2	802.11a	44	5001.32	42.84	54.00	-11.16	H	Avg.	Pass	-	Band Edge
	802.11a	44	10440.00	55.03	68.20	-13.17	V	Peak	Pass	-	Harmonic
3	802.11a	48	5032.40	42.84	54.00	-11.16	V	Avg.	Pass	-	Band Edge
	802.11a	48	10480.00	54.56	68.20	-13.64	V	Peak	Pass	-	Harmonic
4	802.11ax HE20	36	5149.40	49.41	54.00	-4.59	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	36	10360.00	56.36	68.20	-11.84	V	Peak	Pass	Full RU	Harmonic
5	802.11ax HE20	44	5037.84	43.41	54.00	-10.59	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	44	10440.00	55.25	68.20	-12.95	V	Peak	Pass	Full RU	Harmonic
6	802.11ax HE20	48	5146.88	43.47	54.00	-10.53	V	Avg.	Pass	Full RU	Band Edge

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
6	802.11ax HE20	48	10480.00	54.24	68.20	-13.96	H	Peak	Pass	Full RU	Harmonic
7	802.11ax HE20	36	5149.04	49.69	54.00	-4.31	H	Avg.	Pass	Partial RU106/53	Band Edge
	802.11ax HE20	36	-	-	-	-	-	-	-	Partial RU106/53	Harmonic
8	802.11a	52	5012.22	42.83	54.00	-11.17	V	Avg.	Pass	-	Band Edge
	802.11a	52	10520.00	54.15	68.20	-14.05	H	Peak	Pass	-	Harmonic
9	802.11a	60	5011.40	42.98	54.00	-11.02	V	Avg.	Pass	-	Band Edge
	802.11a	60	10600.00	45.60	54.00	-8.40	V	Avg.	Pass	-	Harmonic
10	802.11a	64	5350.24	50.63	54.00	-3.37	V	Avg.	Pass	-	Band Edge
	802.11a	64	10640.00	46.26	54.00	-7.74	V	Avg.	Pass	-	Harmonic
11	802.11ax HE20	52	5143.78	43.43	54.00	-10.57	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	52	10520.00	55.00	68.20	-13.20	V	Peak	Pass	Full RU	Harmonic

**FCC RADIO TEST REPORT**

Report No. : FR572903-01C

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
12	802.11ax HE20	60	5350.24	44.77	54.00	-9.23	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	60	10600.00	44.86	54.00	-9.14	V	Avg.	Pass	Full RU	Harmonic
13	802.11ax HE20	64	5350.10	50.95	54.00	-3.05	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	64	10640.00	45.20	54.00	-8.80	V	Avg.	Pass	Full RU	Harmonic
14	802.11ax HE20	64	5350.10	50.80	54.00	-3.20	V	Avg.	Pass	Partial RU106/54	Band Edge
	802.11ax HE20	64	-	-	-	-	-	-	-	Partial RU106/54	Harmonic
15	802.11a	100	5465.35	62.44	68.20	-5.76	V	Peak	Pass	-	Band Edge
	802.11a	100	11000.00	45.02	54.00	-8.98	V	Avg.	Pass	-	Harmonic
16	802.11a	116	5457.87	42.34	54.00	-11.66	H	Avg.	Pass	-	Band Edge
	802.11a	116	11160.00	44.93	54.00	-9.07	V	Avg.	Pass	-	Harmonic
17	802.11a	140	5725.61	64.41	68.20	-3.79	H	Peak	Pass	-	Band Edge

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
17	802.11a	140	11400.00	44.15	54.00	-9.85	V	Avg.	Pass	-	Harmonic
18	802.11ax HE20	100	5469.85	64.60	68.20	-3.60	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	100	11000.00	44.16	54.00	-9.84	V	Avg.	Pass	Full RU	Harmonic
19	802.11ax HE20	116	5447.75	42.70	54.00	-11.30	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	116	11160.00	46.58	54.00	-7.42	V	Avg.	Pass	Full RU	Harmonic
20	802.11ax HE20	140	5725.42	64.03	68.20	-4.17	V	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	140	11400.00	45.44	54.00	-8.56	V	Avg.	Pass	Full RU	Harmonic
21	802.11ax HE20	100	5469.55	62.27	68.20	-5.93	H	Peak	Pass	Partial RU106/53	Band Edge
	802.11ax HE20	100	-	-	-	-	-	-	-	Partial RU106/53	Harmonic
22	802.11a	144	5449.45	42.20	54.00	-11.80	H	Avg.	Pass	-	Band Edge
	802.11a	144	11440.00	42.68	54.00	-11.32	V	Avg.	Pass	-	Harmonic

**FCC RADIO TEST REPORT**

Report No. : FR572903-01C

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
23	802.11ax HE20	144	5451.40	42.38	54.00	-11.62	H	Avg.	Pass	-	Band Edge
	802.11ax HE20	144	11440.00	45.89	54.00	-8.11	V	Avg.	Pass	-	Harmonic
24	LF	64	36.79	33.69	40.00	-6.31	H	Peak	Pass	-	LF
33	802.11ac VHT20	64	5350.10	50.27	54.00	-3.73	V	Avg.	Pass	Full RU	Band Edge
	802.11ac VHT20	64	10640.00	42.13	54.00	-11.87	H	Avg.	Pass	Full RU	Harmonic



Mode	1																																																																																					
	Band Edge																																																																																					
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																					
ANT	1																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-08-14 Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5145.98</td><td>54.50</td><td>74.00</td><td>-19.50</td><td>45.18</td><td>33.29</td><td>10.02</td><td>33.99</td><td>0.00</td><td>111</td><td>273 PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5145.98	54.50	74.00	-19.50	45.18	33.29	10.02	33.99	0.00	111	273 PEAK	Level (dBuV/m) Date: 2025-08-14 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5180.00</td><td>107.73</td><td>-----</td><td>-----</td><td>98.31</td><td>33.36</td><td>10.05</td><td>33.99</td><td>0.00</td><td>111</td><td>273 PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5180.00	107.73	-----	-----	98.31	33.36	10.05	33.99	0.00	111	273 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 5145.98	54.50	74.00	-19.50	45.18	33.29	10.02	33.99	0.00	111	273 PEAK																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 5180.00	107.73	-----	-----	98.31	33.36	10.05	33.99	0.00	111	273 PEAK																																																																												
Avg	Level (dBuV/m) Date: 2025-08-14 Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5149.94</td><td>45.37</td><td>54.00</td><td>-8.63</td><td>36.04</td><td>33.30</td><td>10.02</td><td>33.99</td><td>0.00</td><td>111</td><td>273 AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5149.94	45.37	54.00	-8.63	36.04	33.30	10.02	33.99	0.00	111	273 AVERAGE	Level (dBuV/m) Date: 2025-08-14 Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5180.00</td><td>99.81</td><td>-----</td><td>-----</td><td>90.39</td><td>33.36</td><td>10.05</td><td>33.99</td><td>0.00</td><td>111</td><td>273 AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5180.00	99.81	-----	-----	90.39	33.36	10.05	33.99	0.00	111	273 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 5149.94	45.37	54.00	-8.63	36.04	33.30	10.02	33.99	0.00	111	273 AVERAGE																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1 5180.00	99.81	-----	-----	90.39	33.36	10.05	33.99	0.00	111	273 AVERAGE																																																																												







		1																																																																																																		
Mode	Band Edge																																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-08-14 Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.58</td><td>55.16</td><td>74.00</td><td>-18.84</td><td>45.83</td><td>33.30</td><td>10.02</td><td>33.99</td><td>0.00</td><td>306</td><td>208</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.58	55.16	74.00	-18.84	45.83	33.30	10.02	33.99	0.00	306	208	PEAK	Level (dBuV/m) Date: 2025-08-14 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>100.63</td><td>-----</td><td>-----</td><td>99.22</td><td>33.35</td><td>10.05</td><td>33.99</td><td>0.00</td><td>306</td><td>208</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	100.63	-----	-----	99.22	33.35	10.05	33.99	0.00	306	208	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5149.58	55.16	74.00	-18.84	45.83	33.30	10.02	33.99	0.00	306	208	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5180.00	100.63	-----	-----	99.22	33.35	10.05	33.99	0.00	306	208	PEAK																																																																																								
Avg	Level (dBuV/m) Date: 2025-08-14 Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.94</td><td>46.72</td><td>54.00</td><td>-7.28</td><td>37.39</td><td>33.30</td><td>10.02</td><td>33.99</td><td>0.00</td><td>306</td><td>208</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.94	46.72	54.00	-7.28	37.39	33.30	10.02	33.99	0.00	306	208	AVERAGE	Level (dBuV/m) Date: 2025-08-14 Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>100.27</td><td>-----</td><td>-----</td><td>90.86</td><td>33.35</td><td>10.05</td><td>33.99</td><td>0.00</td><td>306</td><td>208</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	100.27	-----	-----	90.86	33.35	10.05	33.99	0.00	306	208	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5149.94	46.72	54.00	-7.28	37.39	33.30	10.02	33.99	0.00	306	208	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5180.00	100.27	-----	-----	90.86	33.35	10.05	33.99	0.00	306	208	AVERAGE																																																																																								



Mode	1																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2025-08-18 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91280-02114-250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>54.28</td><td>68.20</td><td>-13.92</td><td>67.67</td><td>38.78</td><td>15.64</td><td>67.97</td><td>0.16</td><td>100</td><td>205</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>46.50</td><td>74.00</td><td>-27.50</td><td>56.62</td><td>38.60</td><td>19.39</td><td>68.20</td><td>0.09</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	54.28	68.20	-13.92	67.67	38.78	15.64	67.97	0.16	100	205	Peak	2	15540.00	46.50	74.00	-27.50	56.62	38.60	19.39	68.20	0.09	--	--	Peak	Level (dBuV/m) Date: 2025-08-18 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91280-02114-250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>55.80</td><td>68.20</td><td>-12.40</td><td>69.19</td><td>38.78</td><td>15.64</td><td>67.97</td><td>0.16</td><td>100</td><td>135</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.19</td><td>74.00</td><td>-26.81</td><td>57.31</td><td>38.60</td><td>19.39</td><td>68.20</td><td>0.09</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	55.80	68.20	-12.40	69.19	38.78	15.64	67.97	0.16	100	135	Peak	2	15540.00	47.19	74.00	-26.81	57.31	38.60	19.39	68.20	0.09	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	10360.00	54.28	68.20	-13.92	67.67	38.78	15.64	67.97	0.16	100	205	Peak																																																																																																								
2	15540.00	46.50	74.00	-27.50	56.62	38.60	19.39	68.20	0.09	--	--	Peak																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	10360.00	55.80	68.20	-12.40	69.19	38.78	15.64	67.97	0.16	100	135	Peak																																																																																																								
2	15540.00	47.19	74.00	-26.81	57.31	38.60	19.39	68.20	0.09	--	--	Peak																																																																																																								

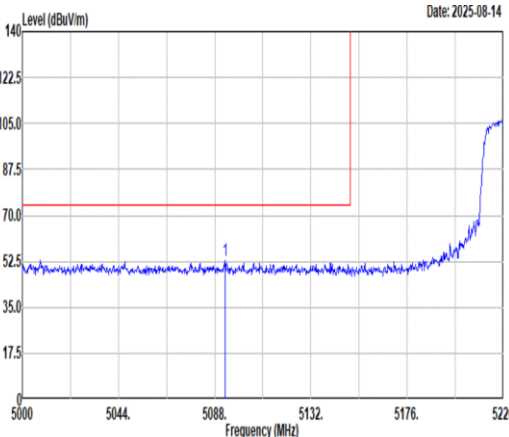
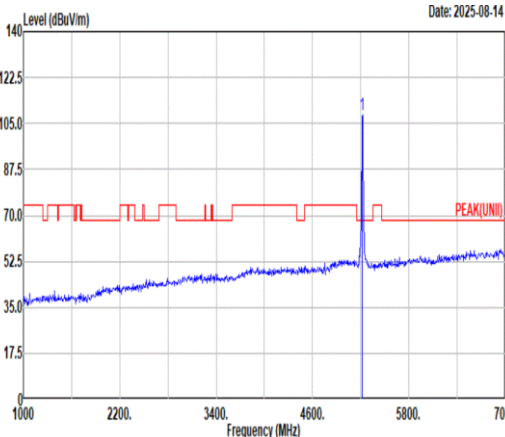
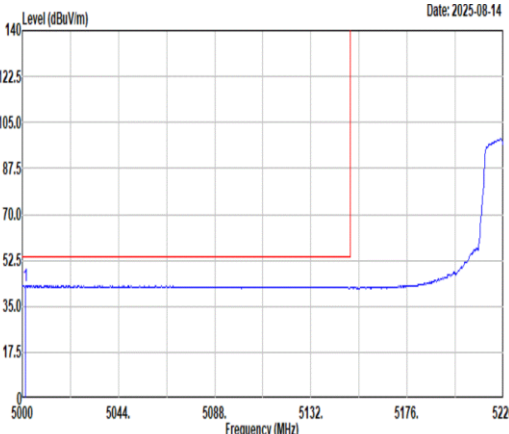
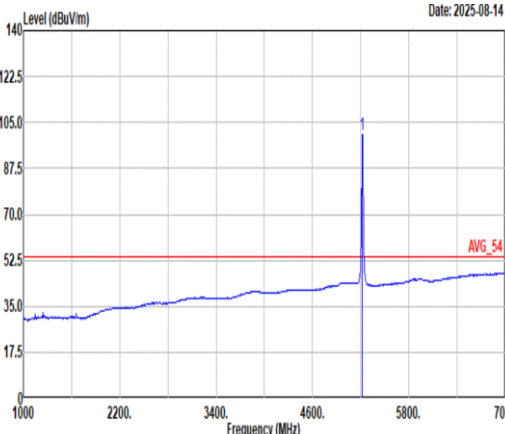


		2																																																																																																
Mode	Band Edge - L																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak																																																																																																		
	Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5092.62</td><td>52.68</td><td>74.00</td><td>-21.32</td><td>43.47</td><td>33.24</td><td>9.96</td><td>33.99</td><td>0.00</td><td>391 360 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5092.62	52.68	74.00	-21.32	43.47	33.24	9.96	33.99	0.00	391 360 PEAK	Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>100.53</td><td>-----</td><td>-----</td><td>99.08</td><td>33.35</td><td>10.09</td><td>33.99</td><td>0.00</td><td>391 360 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	100.53	-----	-----	99.08	33.35	10.09	33.99	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5092.62	52.68	74.00	-21.32	43.47	33.24	9.96	33.99	0.00	391 360 PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5220.00	100.53	-----	-----	99.08	33.35	10.09	33.99	0.00	391 360 PEAK																																																																																								
Avg																																																																																																		
	Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5091.32</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>33.36</td><td>33.60</td><td>9.87</td><td>33.99</td><td>0.00</td><td>391 360 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5091.32	42.84	54.00	-11.16	33.36	33.60	9.87	33.99	0.00	391 360 AVERAGE	Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>100.21</td><td>-----</td><td>-----</td><td>90.76</td><td>33.35</td><td>10.09</td><td>33.99</td><td>0.00</td><td>391 360 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	100.21	-----	-----	90.76	33.35	10.09	33.99	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5091.32	42.84	54.00	-11.16	33.36	33.60	9.87	33.99	0.00	391 360 AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5220.00	100.21	-----	-----	90.76	33.35	10.09	33.99	0.00	391 360 AVERAGE																																																																																								



Mode	2																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																						
ANT	1																																																						
Pol.	Horizontal						Fundamental																																																
Peak	Level (dBuV/m) Date: 2025-08-14 PEAK_BE_74 Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5445.60</td><td>50.52</td><td>74.00</td><td>-23.48</td><td>41.06</td><td>33.20</td><td>10.24</td><td>33.98</td><td>0.00</td><td>391</td><td>360</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5445.60	50.52	74.00	-23.48	41.06	33.20	10.24	33.98	0.00	391	360	PEAK	Blank				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 5445.60	50.52	74.00	-23.48	41.06	33.20	10.24	33.98	0.00	391	360	PEAK																																												
Avg	Level (dBuV/m) Date: 2025-08-14 AVG_BE_54 Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5450.32</td><td>41.91</td><td>54.00</td><td>-12.09</td><td>32.43</td><td>33.20</td><td>10.26</td><td>33.98</td><td>0.00</td><td>391</td><td>360</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5450.32	41.91	54.00	-12.09	32.43	33.20	10.26	33.98	0.00	391	360	AVERAGE	Blank				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 5450.32	41.91	54.00	-12.09	32.43	33.20	10.26	33.98	0.00	391	360	AVERAGE																																												

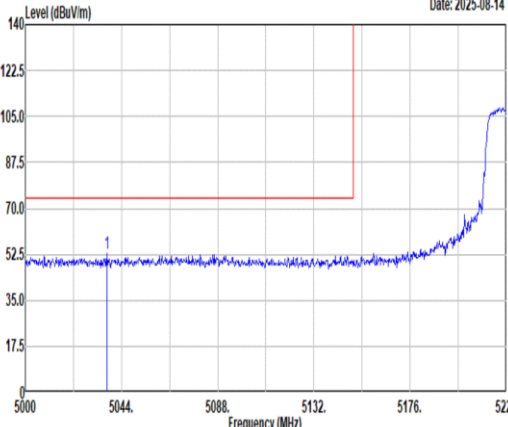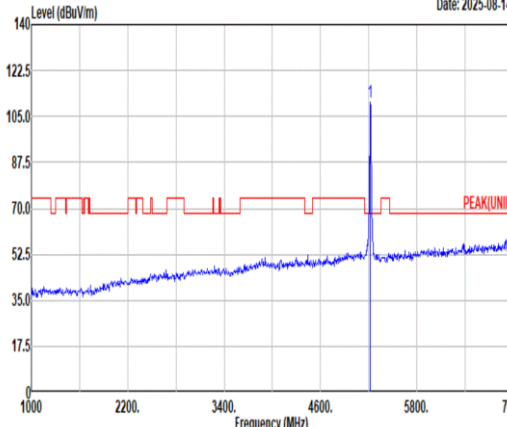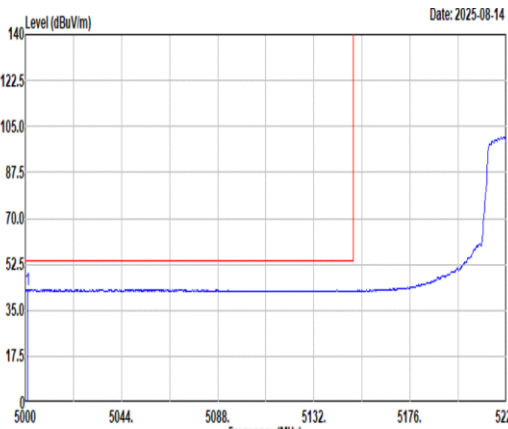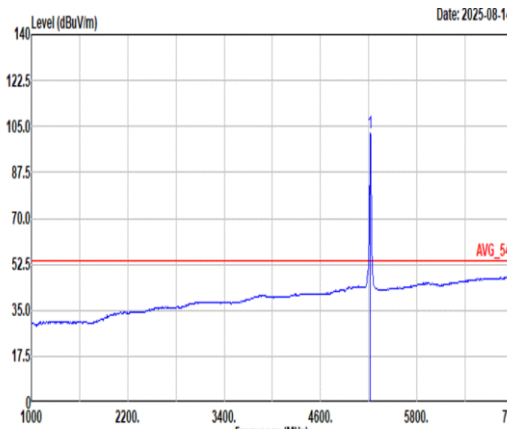

Mode	2																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5037.18</td><td>52.75</td><td>74.00</td><td>-21.25</td><td>43.30</td><td>33.53</td><td>9.91</td><td>33.99</td><td>0.00</td><td>400</td><td>208</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5037.18	52.75	74.00	-21.25	43.30	33.53	9.91	33.99	0.00	400	208	PEAK	Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>110.43</td><td>-----</td><td>-----</td><td>100.98</td><td>33.36</td><td>10.08</td><td>33.99</td><td>0.00</td><td>400</td><td>208</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	110.43	-----	-----	100.98	33.36	10.08	33.99	0.00	400	208
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5037.18	52.75	74.00	-21.25	43.30	33.53	9.91	33.99	0.00	400	208	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	110.43	-----	-----	100.98	33.36	10.08	33.99	0.00	400	208	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5001.10</td><td>42.79</td><td>54.00</td><td>-11.21</td><td>33.31</td><td>33.60</td><td>9.87</td><td>33.99</td><td>0.00</td><td>400</td><td>208</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5001.10	42.79	54.00	-11.21	33.31	33.60	9.87	33.99	0.00	400	208	AVERAGE	Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-250702 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>102.35</td><td>-----</td><td>-----</td><td>92.90</td><td>33.36</td><td>10.08</td><td>33.99</td><td>0.00</td><td>400</td><td>208</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	102.35	-----	-----	92.90	33.36	10.08	33.99	0.00	400	208
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5001.10	42.79	54.00	-11.21	33.31	33.60	9.87	33.99	0.00	400	208	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	102.35	-----	-----	92.90	33.36	10.08	33.99	0.00	400	208	AVERAGE																																																																																							



FCC RADIO TEST REPORT

Report No. : FR572903-01C

Mode	2											
	Band Edge - R											
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz											
ANT	1											
Pol.	Vertical						Fundamental					
Peak	<											



Mode	2																																																																																																					
	Harmonic																																																																																																					
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	Level (dBuV/m) Date: 2025-08-18 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91280-02114-250702 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 10440.00</td><td>53.21</td><td>68.20</td><td>-14.99</td><td>66.58</td><td>38.70</td><td>15.70</td><td>67.93</td><td>0.16</td><td>100 202 PEAK</td></tr><tr><td>2 15660.00</td><td>47.55</td><td>74.00</td><td>-26.45</td><td>57.92</td><td>38.18</td><td>19.46</td><td>68.10</td><td>0.09</td><td>-- -- PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 10440.00	53.21	68.20	-14.99	66.58	38.70	15.70	67.93	0.16	100 202 PEAK	2 15660.00	47.55	74.00	-26.45	57.92	38.18	19.46	68.10	0.09	-- -- PEAK	Level (dBuV/m) Date: 2025-08-18 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91280-02114-250702 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 10440.00</td><td>55.03</td><td>68.20</td><td>-13.17</td><td>68.40</td><td>38.70</td><td>15.70</td><td>67.93</td><td>0.16</td><td>100 139 PEAK</td></tr><tr><td>2 15660.00</td><td>47.41</td><td>74.00</td><td>-26.59</td><td>57.78</td><td>38.18</td><td>19.46</td><td>68.10</td><td>0.09</td><td>-- -- PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 10440.00	55.03	68.20	-13.17	68.40	38.70	15.70	67.93	0.16	100 139 PEAK	2 15660.00	47.41	74.00	-26.59	57.78	38.18	19.46	68.10	0.09	-- -- PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																													
1 10440.00	53.21	68.20	-14.99	66.58	38.70	15.70	67.93	0.16	100 202 PEAK																																																																																													
2 15660.00	47.55	74.00	-26.45	57.92	38.18	19.46	68.10	0.09	-- -- PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																													
1 10440.00	55.03	68.20	-13.17	68.40	38.70	15.70	67.93	0.16	100 139 PEAK																																																																																													
2 15660.00	47.41	74.00	-26.59	57.78	38.18	19.46	68.10	0.09	-- -- PEAK																																																																																													



		3																																																																																																			
Mode	Band Edge - L																																																																																																				
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak	Level (dBuV/m) Date: 2025-08-14 Site : 03CH12-HY Condition: PEAK_BE_74 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1</td><td>5018.48</td><td>52.54</td><td>74.00</td><td>-21.46</td><td>43.00</td><td>33.56</td><td>9.89</td><td>33.99</td><td>0.00</td><td>365</td><td>1 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				1	5018.48	52.54	74.00	-21.46	43.00	33.56	9.89	33.99	0.00	365	1 PEAK	Level (dBuV/m) Date: 2025-08-14 Site : 03CH12-HY Condition: PEAK(UNII) 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1</td><td>5240.00</td><td>110.11</td><td>-----</td><td>-----</td><td>100.68</td><td>33.33</td><td>10.09</td><td>33.99</td><td>0.00</td><td>365</td><td>1 PEAK</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				1	5240.00	110.11	-----	-----	100.68	33.33	10.09	33.99	0.00	365	1 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																													
1	5018.48	52.54	74.00	-21.46	43.00	33.56	9.89	33.99	0.00	365	1 PEAK																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																													
1	5240.00	110.11	-----	-----	100.68	33.33	10.09	33.99	0.00	365	1 PEAK																																																																																										
Avg	Level (dBuV/m) Date: 2025-08-14 Site : 03CH12-HY Condition: AVG_BE_54 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1</td><td>5004.32</td><td>42.76</td><td>54.00</td><td>-11.24</td><td>33.29</td><td>33.59</td><td>9.87</td><td>33.99</td><td>0.00</td><td>365</td><td>1 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				1	5004.32	42.76	54.00	-11.24	33.29	33.59	9.87	33.99	0.00	365	1 AVERAGE	Level (dBuV/m) Date: 2025-08-14 Site : 03CH12-HY Condition: AVG_54 3m 91200-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th><th></th></tr><tr><td>1</td><td>5240.00</td><td>101.26</td><td>-----</td><td>-----</td><td>91.83</td><td>33.33</td><td>10.09</td><td>33.99</td><td>0.00</td><td>365</td><td>1 AVERAGE</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB				1	5240.00	101.26	-----	-----	91.83	33.33	10.09	33.99	0.00	365	1 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																													
1	5004.32	42.76	54.00	-11.24	33.29	33.59	9.87	33.99	0.00	365	1 AVERAGE																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																													
1	5240.00	101.26	-----	-----	91.83	33.33	10.09	33.99	0.00	365	1 AVERAGE																																																																																										



Mode	3																																												
	Band Edge - R																																												
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																												
ANT	1																																												
Pol.	Horizontal	Fundamental																																											
Peak	Date: 2025-08-14 Level (dBuV/m) 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5240 5284 5328 5372 5416 5460 PEAK_BE_74 1 Site : 03CH12-HY Condition: PEAK_BE_74 3m 91280-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5441.00</td><td>51.71</td><td>74.00</td><td>-22.29</td><td>42.25</td><td>33.20</td><td>10.24</td><td>33.98</td><td>0.00</td><td>365</td><td>1 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5441.00	51.71	74.00	-22.29	42.25	33.20	10.24	33.98	0.00	365	1 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	5441.00	51.71	74.00	-22.29	42.25	33.20	10.24	33.98	0.00	365	1 PEAK																																		
Avg	Date: 2025-08-14 Level (dBuV/m) 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5240 5284 5328 5372 5416 5460 AVG_BE_54 1 Site : 03CH12-HY Condition: AVG_BE_54 3m 91280-02114-250702 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5456.26</td><td>41.97</td><td>54.00</td><td>-12.03</td><td>32.50</td><td>33.20</td><td>10.25</td><td>33.98</td><td>0.00</td><td>365</td><td>1 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5456.26	41.97	54.00	-12.03	32.50	33.20	10.25	33.98	0.00	365	1 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	5456.26	41.97	54.00	-12.03	32.50	33.20	10.25	33.98	0.00	365	1 AVERAGE																																		