


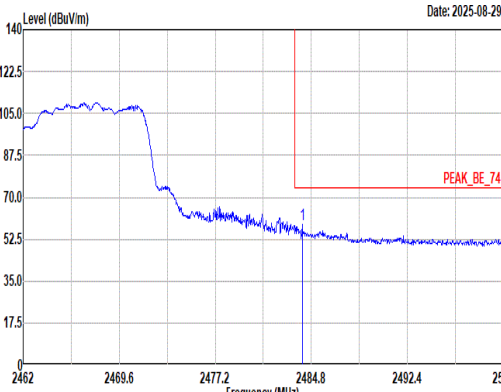
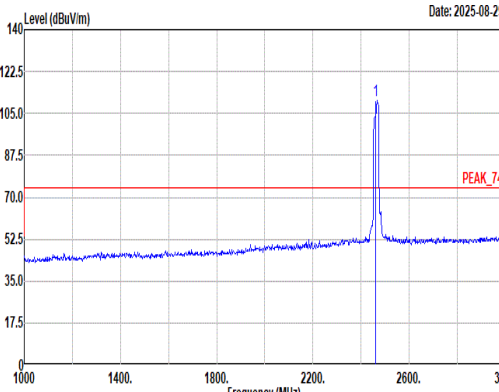
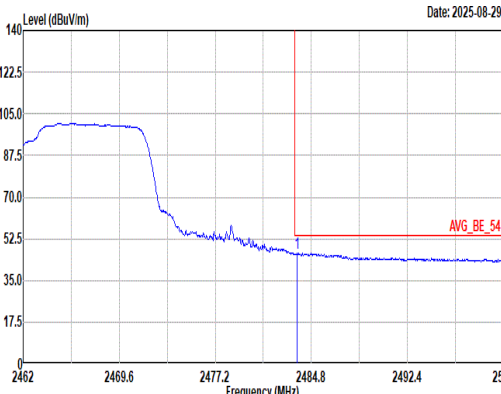
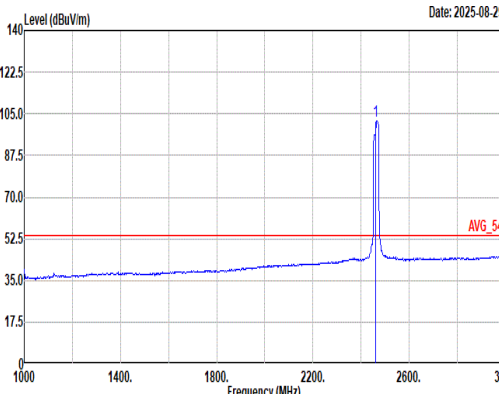
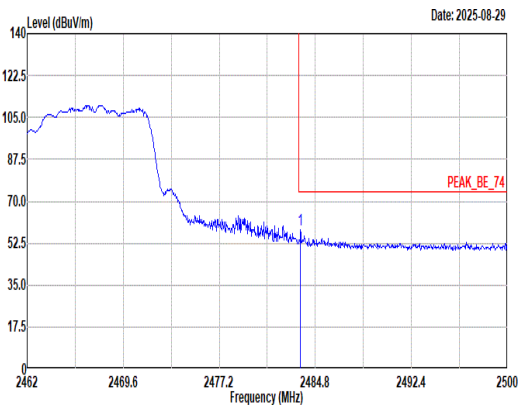


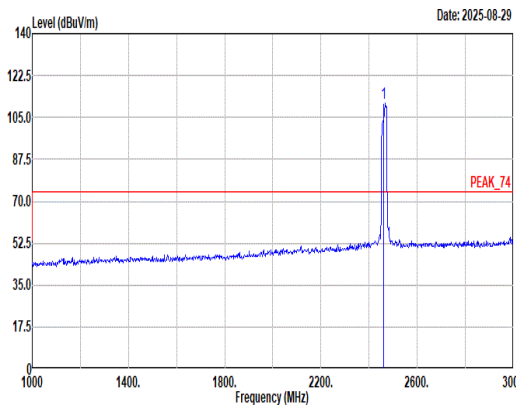

Mode	30																																																																																							
	Band Edge																																																																																							
	2400-2483.5_802.11ax HE20_CH11_Partial RU106/54_2462MHz																																																																																							
ANT	0																																																																																							
Pol.	Horizontal						Fundamental																																																																																	
Peak	 Date: 2025-08-29						 Date: 2025-08-29																																																																																	
	Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																	
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2484.08</td><td>58.68</td><td>74.00</td><td>-15.32</td><td>46.95</td><td>26.74</td><td>8.18</td><td>32.65</td><td>9.46</td><td>321</td><td>350</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.08	58.68	74.00	-15.32	46.95	26.74	8.18	32.65	9.46	321	350	Peak	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>110.25</td><td>-----</td><td>-----</td><td>98.65</td><td>26.62</td><td>8.16</td><td>32.64</td><td>9.46</td><td>321</td><td>350</td><td>Peak</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2462.00	110.25	-----	-----	98.65	26.62	8.16	32.64	9.46	321	350
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	2484.08	58.68	74.00	-15.32	46.95	26.74	8.18	32.65	9.46	321	350	Peak																																																																												
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	2462.00	110.25	-----	-----	98.65	26.62	8.16	32.64	9.46	321	350	Peak																																																																												
Avg	 Date: 2025-08-29						 Date: 2025-08-29																																																																																	
	Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto						Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto																																																																																	
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.66</td><td>46.39</td><td>54.00</td><td>-7.61</td><td>34.66</td><td>26.74</td><td>8.18</td><td>32.65</td><td>9.46</td><td>321</td><td>350</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.66	46.39	54.00	-7.61	34.66	26.74	8.18	32.65	9.46	321	350	Average	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>102.02</td><td>-----</td><td>-----</td><td>90.40</td><td>26.64</td><td>8.16</td><td>32.64</td><td>9.46</td><td>321</td><td>350</td><td>Average</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2462.00	102.02	-----	-----	90.40	26.64	8.16	32.64	9.46	321	350
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	2483.66	46.39	54.00	-7.61	34.66	26.74	8.18	32.65	9.46	321	350	Average																																																																												
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	2462.00	102.02	-----	-----	90.40	26.64	8.16	32.64	9.46	321	350	Average																																																																												

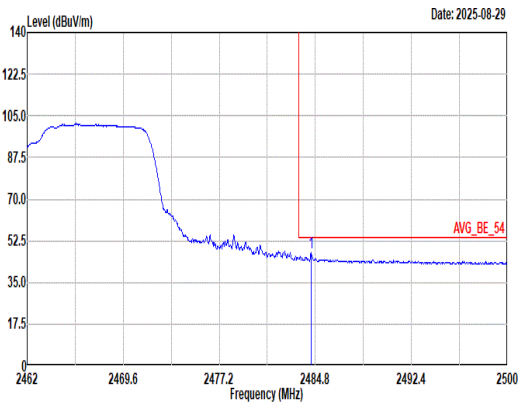

Mode	30																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11ax HE20_CH11_Partial RU106/54_2462MHz																																																																																																
ANT	0																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>57.93</td><td>74.00</td><td>-16.07</td><td>46.20</td><td>26.74</td><td>8.18</td><td>32.65</td><td>9.46</td><td>286</td><td>70 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	57.93	74.00	-16.07	46.20	26.74	8.18	32.65	9.46	286	70 Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>111.05</td><td>-----</td><td>-----</td><td>99.45</td><td>26.62</td><td>8.16</td><td>32.64</td><td>9.46</td><td>286</td><td>70 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	111.05	-----	-----	99.45	26.62	8.16	32.64	9.46	286
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.62	57.93	74.00	-16.07	46.20	26.74	8.18	32.65	9.46	286	70 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	111.05	-----	-----	99.45	26.62	8.16	32.64	9.46	286	70 Peak																																																																																						
Avg																																																																																																	
	Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto						Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:5.600kHz SMT:Auto																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.46</td><td>47.75</td><td>54.00</td><td>-6.25</td><td>36.02</td><td>26.74</td><td>8.18</td><td>32.65</td><td>9.46</td><td>286</td><td>70 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.46	47.75	54.00	-6.25	36.02	26.74	8.18	32.65	9.46	286	70 Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.51</td><td>-----</td><td>-----</td><td>90.89</td><td>26.64</td><td>8.16</td><td>32.64</td><td>9.46</td><td>286</td><td>70 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.51	-----	-----	90.89	26.64	8.16	32.64	9.46	286
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2484.46	47.75	54.00	-6.25	36.02	26.74	8.18	32.65	9.46	286	70 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	102.51	-----	-----	90.89	26.64	8.16	32.64	9.46	286	70 Average																																																																																						

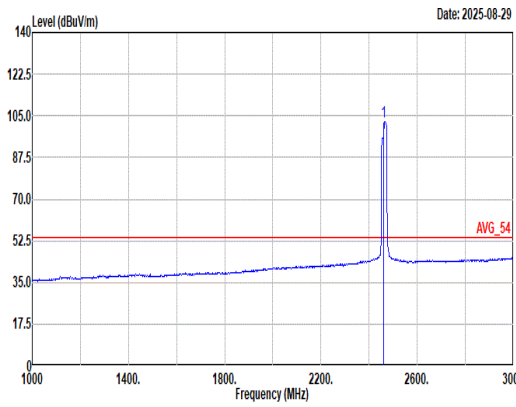

Mode	31																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11g_CH02_2417MHz																																																																																									
ANT	0																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.72</td><td>62.46</td><td>74.00</td><td>-11.54</td><td>50.95</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>395 360 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.72	62.46	74.00	-11.54	50.95	26.60	8.06	32.59	9.44	395 360 Peak	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2417.00</td><td>100.90</td><td>-----</td><td>-----</td><td>97.16</td><td>26.80</td><td>8.10</td><td>32.60</td><td>9.44</td><td>395 360 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2417.00	100.90	-----	-----	97.16	26.80	8.10	32.60	9.44	395 360 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.72	62.46	74.00	-11.54	50.95	26.60	8.06	32.59	9.44	395 360 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2417.00	100.90	-----	-----	97.16	26.80	8.10	32.60	9.44	395 360 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.93</td><td>50.29</td><td>54.00</td><td>-3.71</td><td>38.78</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>395 360 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.93	50.29	54.00	-3.71	38.78	26.60	8.06	32.59	9.44	395 360 Average	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2417.00</td><td>101.35</td><td>-----</td><td>-----</td><td>89.61</td><td>26.80</td><td>8.10</td><td>32.60</td><td>9.44</td><td>395 360 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2417.00	101.35	-----	-----	89.61	26.80	8.10	32.60	9.44	395 360 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.93	50.29	54.00	-3.71	38.78	26.60	8.06	32.59	9.44	395 360 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2417.00	101.35	-----	-----	89.61	26.80	8.10	32.60	9.44	395 360 Average																																																																																	



Mode	31																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11g_CH02_2417MHz																																																																																									
ANT	0																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2025-08-29 Frequency (MHz) Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2388.43</td><td>60.70</td><td>74.00</td><td>-13.30</td><td>49.17</td><td>26.62</td><td>8.06</td><td>32.59</td><td>9.44</td><td>200</td><td>261</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2388.43	60.70	74.00	-13.30	49.17	26.62	8.06	32.59	9.44	200	261	Peak	Level (dBuV/m) Date: 2025-08-29 Frequency (MHz) Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2417.00</td><td>109.35</td><td>74.00</td><td>35.35</td><td>97.62</td><td>26.80</td><td>8.09</td><td>32.60</td><td>9.44</td><td>200</td><td>261</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2417.00	109.35	74.00	35.35	97.62	26.80	8.09	32.60	9.44	200	261	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2388.43	60.70	74.00	-13.30	49.17	26.62	8.06	32.59	9.44	200	261	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2417.00	109.35	74.00	35.35	97.62	26.80	8.09	32.60	9.44	200	261	Peak																																																																														
Avg	Level (dBuV/m) Date: 2025-08-29 Frequency (MHz) Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.82</td><td>48.67</td><td>54.00</td><td>-5.33</td><td>37.16</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>200</td><td>261</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.82	48.67	54.00	-5.33	37.16	26.60	8.06	32.59	9.44	200	261	Average	Level (dBuV/m) Date: 2025-08-29 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2417.00</td><td>101.37</td><td>54.00</td><td>47.37</td><td>89.64</td><td>26.80</td><td>8.10</td><td>32.61</td><td>9.44</td><td>200</td><td>261</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2417.00	101.37	54.00	47.37	89.64	26.80	8.10	32.61	9.44	200	261	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.82	48.67	54.00	-5.33	37.16	26.60	8.06	32.59	9.44	200	261	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2417.00	101.37	54.00	47.37	89.64	26.80	8.10	32.61	9.44	200	261	Average																																																																														



Mode	31																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11g_CH02_2417MHz																																																																																																																									
ANT	0																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4834.00</td><td>45.09</td><td>74.00</td><td>-28.91</td><td>33.66</td><td>32.20</td><td>11.55</td><td>33.67</td><td>1.35</td><td>-- -- Peak</td></tr><tr><td>2 7251.00</td><td>49.23</td><td>74.00</td><td>-24.77</td><td>33.46</td><td>37.00</td><td>14.29</td><td>36.50</td><td>0.98</td><td>-- -- Peak</td></tr><tr><td>3 7251.00</td><td>39.37</td><td>54.00</td><td>-14.63</td><td>23.60</td><td>37.00</td><td>14.29</td><td>36.50</td><td>0.98</td><td>-- -- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4834.00	45.09	74.00	-28.91	33.66	32.20	11.55	33.67	1.35	-- -- Peak	2 7251.00	49.23	74.00	-24.77	33.46	37.00	14.29	36.50	0.98	-- -- Peak	3 7251.00	39.37	54.00	-14.63	23.60	37.00	14.29	36.50	0.98	-- -- Average	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4834.00</td><td>44.97</td><td>74.00</td><td>-29.03</td><td>33.54</td><td>32.20</td><td>11.55</td><td>33.67</td><td>1.35</td><td>-- -- Peak</td></tr><tr><td>2 7251.00</td><td>49.03</td><td>74.00</td><td>-24.97</td><td>33.26</td><td>37.00</td><td>14.29</td><td>36.50</td><td>0.98</td><td>-- -- Peak</td></tr><tr><td>3 7251.00</td><td>39.17</td><td>54.00</td><td>-14.83</td><td>23.40</td><td>37.00</td><td>14.29</td><td>36.50</td><td>0.98</td><td>-- -- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4834.00	44.97	74.00	-29.03	33.54	32.20	11.55	33.67	1.35	-- -- Peak	2 7251.00	49.03	74.00	-24.97	33.26	37.00	14.29	36.50	0.98	-- -- Peak	3 7251.00	39.17	54.00	-14.83	23.40	37.00	14.29	36.50	0.98	-- -- Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 4834.00	45.09	74.00	-28.91	33.66	32.20	11.55	33.67	1.35	-- -- Peak																																																																																																																	
2 7251.00	49.23	74.00	-24.77	33.46	37.00	14.29	36.50	0.98	-- -- Peak																																																																																																																	
3 7251.00	39.37	54.00	-14.63	23.60	37.00	14.29	36.50	0.98	-- -- Average																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 4834.00	44.97	74.00	-29.03	33.54	32.20	11.55	33.67	1.35	-- -- Peak																																																																																																																	
2 7251.00	49.03	74.00	-24.97	33.26	37.00	14.29	36.50	0.98	-- -- Peak																																																																																																																	
3 7251.00	39.17	54.00	-14.83	23.40	37.00	14.29	36.50	0.98	-- -- Average																																																																																																																	



Mode	31	
	Harmonic	
	2400-2483.5_802.11g_CH02_2417MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-11-04 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	Level (dBuV/m) Date: 2025-11-04 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL



Mode	32																																																																																										
	Band Edge																																																																																										
	2400-2483.5_802.11ax HE20_CH02_Full RU_2417MHz																																																																																										
ANT	0																																																																																										
Pol.	Horizontal												Fundamental																																																																														
Peak	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.82</td><td>62.46</td><td>74.00</td><td>-11.54</td><td>50.95</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>338</td><td>360</td><td>Peak</td></tr></table> Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2417.00</td><td>111.64</td><td>74.00</td><td>37.64</td><td>99.90</td><td>26.80</td><td>8.10</td><td>32.60</td><td>9.44</td><td>338</td><td>360</td><td>Peak</td></tr></table>														Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.82	62.46	74.00	-11.54	50.95	26.60	8.06	32.59	9.44	338	360	Peak		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2417.00	111.64	74.00	37.64	99.90	26.80	8.10	32.60	9.44	338	360	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2389.82	62.46	74.00	-11.54	50.95	26.60	8.06	32.59	9.44	338	360	Peak																																																																															
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2417.00	111.64	74.00	37.64	99.90	26.80	8.10	32.60	9.44	338	360	Peak																																																																															
Avg	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2389.93</td><td>50.35</td><td>54.00</td><td>-3.65</td><td>38.84</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>338</td><td>360</td><td>Average</td></tr></table> Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2417.00</td><td>102.11</td><td>54.00</td><td>48.11</td><td>90.37</td><td>26.80</td><td>8.10</td><td>32.60</td><td>9.44</td><td>338</td><td>360</td><td>Average</td></tr></table>														Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.93	50.35	54.00	-3.65	38.84	26.60	8.06	32.59	9.44	338	360	Average		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2417.00	102.11	54.00	48.11	90.37	26.80	8.10	32.60	9.44	338	360	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2389.93	50.35	54.00	-3.65	38.84	26.60	8.06	32.59	9.44	338	360	Average																																																																															
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	2417.00	102.11	54.00	48.11	90.37	26.80	8.10	32.60	9.44	338	360	Average																																																																															



Mode	32																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11ax HE20_CH02_Full RU_2417MHz																																																																																									
ANT	0																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2387.79</td><td>63.89</td><td>74.00 -10.11</td><td>52.36</td><td>26.62</td><td>8.06</td><td>32.59</td><td>9.44</td><td>378</td><td>78 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2387.79	63.89	74.00 -10.11	52.36	26.62	8.06	32.59	9.44	378	78 Peak	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2417.00</td><td>111.43</td><td>-----</td><td>99.70</td><td>26.80</td><td>8.10</td><td>32.61</td><td>9.44</td><td>378</td><td>78 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2417.00	111.43	-----	99.70	26.80	8.10	32.61	9.44	378	78 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2387.79	63.89	74.00 -10.11	52.36	26.62	8.06	32.59	9.44	378	78 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2417.00	111.43	-----	99.70	26.80	8.10	32.61	9.44	378	78 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.93</td><td>50.27</td><td>54.00 -3.73</td><td>38.76</td><td>26.60</td><td>8.06</td><td>32.59</td><td>9.44</td><td>378</td><td>78 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.93	50.27	54.00 -3.73	38.76	26.60	8.06	32.59	9.44	378	78 Average	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2417.00</td><td>102.11</td><td>-----</td><td>90.37</td><td>26.80</td><td>8.10</td><td>32.60</td><td>9.44</td><td>378</td><td>78 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2417.00	102.11	-----	90.37	26.80	8.10	32.60	9.44	378	78 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.93	50.27	54.00 -3.73	38.76	26.60	8.06	32.59	9.44	378	78 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2417.00	102.11	-----	90.37	26.80	8.10	32.60	9.44	378	78 Average																																																																																	



Mode	32																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11ax HE20_CH02_Full RU_2417MHz																																																																																																																									
ANT	0																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4834.00</td><td>45.53</td><td>74.00</td><td>-28.47</td><td>34.10</td><td>32.20</td><td>11.55</td><td>33.67</td><td>1.35 -- -- Peak</td></tr><tr><td>2</td><td>7251.00</td><td>49.14</td><td>74.00</td><td>-24.86</td><td>33.37</td><td>37.00</td><td>14.29</td><td>36.50</td><td>0.98 -- -- Peak</td></tr><tr><td>3</td><td>7251.00</td><td>40.12</td><td>54.00</td><td>-13.88</td><td>24.35</td><td>37.00</td><td>14.29</td><td>36.50</td><td>0.98 -- -- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4834.00	45.53	74.00	-28.47	34.10	32.20	11.55	33.67	1.35 -- -- Peak	2	7251.00	49.14	74.00	-24.86	33.37	37.00	14.29	36.50	0.98 -- -- Peak	3	7251.00	40.12	54.00	-13.88	24.35	37.00	14.29	36.50	0.98 -- -- Average	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4834.00</td><td>45.27</td><td>74.00</td><td>-28.73</td><td>33.84</td><td>32.20</td><td>11.55</td><td>33.67</td><td>1.35 -- -- Peak</td></tr><tr><td>2</td><td>7251.00</td><td>49.37</td><td>74.00</td><td>-24.63</td><td>33.60</td><td>37.00</td><td>14.29</td><td>36.50</td><td>0.98 -- -- Peak</td></tr><tr><td>3</td><td>7251.00</td><td>40.33</td><td>54.00</td><td>-13.67</td><td>24.56</td><td>37.00</td><td>14.29</td><td>36.50</td><td>0.98 -- -- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4834.00	45.27	74.00	-28.73	33.84	32.20	11.55	33.67	1.35 -- -- Peak	2	7251.00	49.37	74.00	-24.63	33.60	37.00	14.29	36.50	0.98 -- -- Peak	3	7251.00	40.33	54.00	-13.67	24.56	37.00	14.29	36.50	0.98 -- -- Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1	4834.00	45.53	74.00	-28.47	34.10	32.20	11.55	33.67	1.35 -- -- Peak																																																																																																																	
2	7251.00	49.14	74.00	-24.86	33.37	37.00	14.29	36.50	0.98 -- -- Peak																																																																																																																	
3	7251.00	40.12	54.00	-13.88	24.35	37.00	14.29	36.50	0.98 -- -- Average																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1	4834.00	45.27	74.00	-28.73	33.84	32.20	11.55	33.67	1.35 -- -- Peak																																																																																																																	
2	7251.00	49.37	74.00	-24.63	33.60	37.00	14.29	36.50	0.98 -- -- Peak																																																																																																																	
3	7251.00	40.33	54.00	-13.67	24.56	37.00	14.29	36.50	0.98 -- -- Average																																																																																																																	



Mode	32	
	Harmonic	
	2400-2483.5_802.11ax HE20_CH02_Full RU_2417MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-11-04 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	Level (dBuV/m) Date: 2025-11-04 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL





Mode	33																																																																													
	Band Edge																																																																													
	2400-2483.5_802.11ax HE20_CH10_Full RU_2457MHz																																																																													
ANT	0																																																																													
Pol.	Horizontal						Fundamental																																																																							
Peak	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2487.07</td><td>66.12</td><td>74.00</td><td>-7.88</td><td>54.34</td><td>26.78</td><td>8.19</td><td>32.65</td><td>9.46</td><td>288</td><td>360 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		1	2487.07	66.12	74.00	-7.88	54.34	26.78	8.19	32.65	9.46	288	360 Peak	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2457.00</td><td>110.97</td><td>-----</td><td>-----</td><td>99.26</td><td>26.74</td><td>8.15</td><td>32.63</td><td>9.45</td><td>288</td><td>360 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		1	2457.00	110.97	-----	-----	99.26	26.74	8.15	32.63	9.45	288	360 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																				
1	2487.07	66.12	74.00	-7.88	54.34	26.78	8.19	32.65	9.46	288	360 Peak																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																				
1	2457.00	110.97	-----	-----	99.26	26.74	8.15	32.63	9.45	288	360 Peak																																																																			
Avg	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.62</td><td>50.68</td><td>54.00</td><td>-3.32</td><td>38.95</td><td>26.74</td><td>8.18</td><td>32.65</td><td>9.46</td><td>288</td><td>360 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		1	2483.62	50.68	54.00	-3.32	38.95	26.74	8.18	32.65	9.46	288	360 Average	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2457.00</td><td>100.70</td><td>-----</td><td>-----</td><td>89.01</td><td>26.72</td><td>8.15</td><td>32.63</td><td>9.45</td><td>288</td><td>360 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		1	2457.00	100.70	-----	-----	89.01	26.72	8.15	32.63	9.45	288	360 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																				
1	2483.62	50.68	54.00	-3.32	38.95	26.74	8.18	32.65	9.46	288	360 Average																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																				
1	2457.00	100.70	-----	-----	89.01	26.72	8.15	32.63	9.45	288	360 Average																																																																			



Mode	33																																																																									
	Band Edge																																																																									
	2400-2483.5_802.11ax HE20_CH10_Full RU_2457MHz																																																																									
ANT	0																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2486.93 64.22 74.00 -9.78 52.46 26.77 8.18 32.65 9.46 230 259 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor				MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 2486.93 64.22 74.00 -9.78 52.46 26.77 8.18 32.65 9.46 230 259 Peak									Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2457.00 109.78 ----- 98.09 26.72 8.15 32.63 9.45 230 259 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor				MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 2457.00 109.78 ----- 98.09 26.72 8.15 32.63 9.45 230 259 Peak								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																					
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 2486.93 64.22 74.00 -9.78 52.46 26.77 8.18 32.65 9.46 230 259 Peak																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																					
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 2457.00 109.78 ----- 98.09 26.72 8.15 32.63 9.45 230 259 Peak																																																																										
Avg	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2484.18 49.37 54.00 -4.63 37.64 26.74 8.18 32.65 9.46 230 259 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor				MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 2484.18 49.37 54.00 -4.63 37.64 26.74 8.18 32.65 9.46 230 259 Average									Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2457.00 99.98 ----- 88.27 26.74 8.15 32.63 9.45 230 259 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor				MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 2457.00 99.98 ----- 88.27 26.74 8.15 32.63 9.45 230 259 Average								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																					
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 2484.18 49.37 54.00 -4.63 37.64 26.74 8.18 32.65 9.46 230 259 Average																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																					
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 2457.00 99.98 ----- 88.27 26.74 8.15 32.63 9.45 230 259 Average																																																																										

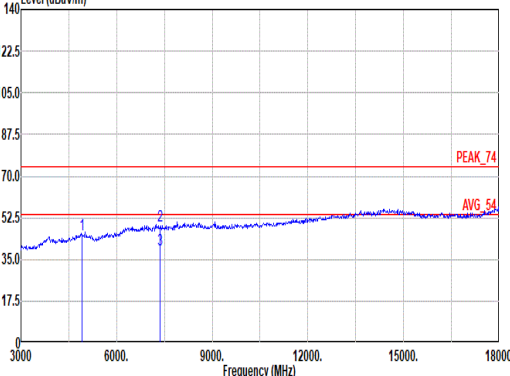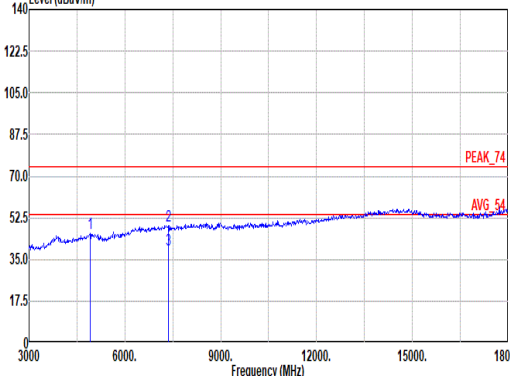

Mode	33																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11ax HE20_CH10_Full RU_2457MHz																																																																																																																									
ANT	0																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2025-08-29  Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4914.00</td><td>45.28</td><td>74.00</td><td>-28.72</td><td>33.67</td><td>32.46</td><td>11.65</td><td>33.67</td><td>1.17 -- -- Peak</td></tr><tr><td>2</td><td>7371.00</td><td>49.09</td><td>74.00</td><td>-24.91</td><td>33.30</td><td>37.16</td><td>14.28</td><td>36.68</td><td>1.03 -- -- Peak</td></tr><tr><td>3</td><td>7371.00</td><td>39.20</td><td>54.00</td><td>-14.80</td><td>23.41</td><td>37.16</td><td>14.28</td><td>36.68</td><td>1.03 -- -- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4914.00	45.28	74.00	-28.72	33.67	32.46	11.65	33.67	1.17 -- -- Peak	2	7371.00	49.09	74.00	-24.91	33.30	37.16	14.28	36.68	1.03 -- -- Peak	3	7371.00	39.20	54.00	-14.80	23.41	37.16	14.28	36.68	1.03 -- -- Average	Level (dBuV/m) Date: 2025-08-29  Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4914.00</td><td>45.81</td><td>74.00</td><td>-28.19</td><td>34.20</td><td>32.46</td><td>11.65</td><td>33.67</td><td>1.17 -- -- Peak</td></tr><tr><td>2</td><td>7371.00</td><td>48.96</td><td>74.00</td><td>-25.04</td><td>33.17</td><td>37.16</td><td>14.28</td><td>36.68</td><td>1.03 -- -- Peak</td></tr><tr><td>3</td><td>7371.00</td><td>39.02</td><td>54.00</td><td>-14.98</td><td>23.23</td><td>37.16</td><td>14.28</td><td>36.68</td><td>1.03 -- -- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4914.00	45.81	74.00	-28.19	34.20	32.46	11.65	33.67	1.17 -- -- Peak	2	7371.00	48.96	74.00	-25.04	33.17	37.16	14.28	36.68	1.03 -- -- Peak	3	7371.00	39.02	54.00	-14.98	23.23	37.16	14.28	36.68	1.03 -- -- Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1	4914.00	45.28	74.00	-28.72	33.67	32.46	11.65	33.67	1.17 -- -- Peak																																																																																																																	
2	7371.00	49.09	74.00	-24.91	33.30	37.16	14.28	36.68	1.03 -- -- Peak																																																																																																																	
3	7371.00	39.20	54.00	-14.80	23.41	37.16	14.28	36.68	1.03 -- -- Average																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1	4914.00	45.81	74.00	-28.19	34.20	32.46	11.65	33.67	1.17 -- -- Peak																																																																																																																	
2	7371.00	48.96	74.00	-25.04	33.17	37.16	14.28	36.68	1.03 -- -- Peak																																																																																																																	
3	7371.00	39.02	54.00	-14.98	23.23	37.16	14.28	36.68	1.03 -- -- Average																																																																																																																	







Mode	33	
	Harmonic	
	2400-2483.5_802.11ax HE20_CH10_Full RU_2457MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-11-04 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	Level (dBuV/m) Date: 2025-11-04 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL



Mode	34																																																																																																																																																																																					
	LF																																																																																																																																																																																					
	2400-2483.5_802.11ax HE20_CH13_Full RU_2472MHz																																																																																																																																																																																					
ANT	0																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QPI Peak	Level (dBuV/m) Date: 2025-08-30 Site : 03CH22-HY Condition: QP 3m Bilog_63304_241217 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>30.00</td><td>21.52</td><td>40.00</td><td>-18.48</td><td>27.91</td><td>25.30</td><td>0.85</td><td>32.57</td><td>0.03 -- -- Peak</td></tr><tr><td>2</td><td>161.92</td><td>23.28</td><td>43.50</td><td>-20.22</td><td>37.44</td><td>16.21</td><td>2.12</td><td>32.57</td><td>0.08 -- -- Peak</td></tr><tr><td>3</td><td>262.00</td><td>19.12</td><td>46.00</td><td>-26.88</td><td>28.76</td><td>20.14</td><td>2.65</td><td>32.51</td><td>0.08 -- -- Peak</td></tr><tr><td>4</td><td>509.18</td><td>24.29</td><td>46.00</td><td>-21.71</td><td>29.01</td><td>24.10</td><td>3.69</td><td>32.66</td><td>0.15 -- -- Peak</td></tr><tr><td>5</td><td>737.13</td><td>30.03</td><td>46.00</td><td>-15.97</td><td>29.87</td><td>27.99</td><td>4.53</td><td>32.53</td><td>0.17 -- -- Peak</td></tr><tr><td>6</td><td>958.29</td><td>34.04</td><td>46.00</td><td>-11.96</td><td>28.35</td><td>31.50</td><td>5.08</td><td>31.13</td><td>0.24 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	30.00	21.52	40.00	-18.48	27.91	25.30	0.85	32.57	0.03 -- -- Peak	2	161.92	23.28	43.50	-20.22	37.44	16.21	2.12	32.57	0.08 -- -- Peak	3	262.00	19.12	46.00	-26.88	28.76	20.14	2.65	32.51	0.08 -- -- Peak	4	509.18	24.29	46.00	-21.71	29.01	24.10	3.69	32.66	0.15 -- -- Peak	5	737.13	30.03	46.00	-15.97	29.87	27.99	4.53	32.53	0.17 -- -- Peak	6	958.29	34.04	46.00	-11.96	28.35	31.50	5.08	31.13	0.24 -- -- Peak	Level (dBuV/m) Date: 2025-08-30 Site : 03CH22-HY Condition: QP 3m Bilog_63304_241217 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>59.10</td><td>25.04</td><td>40.00</td><td>-14.96</td><td>44.53</td><td>11.82</td><td>1.24</td><td>32.59</td><td>0.04 -- -- Peak</td></tr><tr><td>2</td><td>120.21</td><td>36.63</td><td>43.50</td><td>-6.87</td><td>49.96</td><td>17.38</td><td>1.75</td><td>32.52</td><td>0.06 -- -- Peak</td></tr><tr><td>3</td><td>240.49</td><td>19.17</td><td>46.00</td><td>-26.83</td><td>31.70</td><td>17.37</td><td>2.52</td><td>32.50</td><td>0.08 -- -- Peak</td></tr><tr><td>4</td><td>509.18</td><td>24.81</td><td>46.00</td><td>-21.19</td><td>29.53</td><td>24.10</td><td>3.69</td><td>32.66</td><td>0.15 -- -- Peak</td></tr><tr><td>5</td><td>740.04</td><td>30.47</td><td>46.00</td><td>-15.53</td><td>30.19</td><td>28.10</td><td>4.54</td><td>32.53</td><td>0.17 -- -- Peak</td></tr><tr><td>6</td><td>959.26</td><td>33.60</td><td>46.00</td><td>-12.40</td><td>27.90</td><td>31.50</td><td>5.08</td><td>31.12</td><td>0.24 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	59.10	25.04	40.00	-14.96	44.53	11.82	1.24	32.59	0.04 -- -- Peak	2	120.21	36.63	43.50	-6.87	49.96	17.38	1.75	32.52	0.06 -- -- Peak	3	240.49	19.17	46.00	-26.83	31.70	17.37	2.52	32.50	0.08 -- -- Peak	4	509.18	24.81	46.00	-21.19	29.53	24.10	3.69	32.66	0.15 -- -- Peak	5	740.04	30.47	46.00	-15.53	30.19	28.10	4.54	32.53	0.17 -- -- Peak	6	959.26	33.60	46.00	-12.40	27.90	31.50	5.08	31.12	0.24 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	30.00	21.52	40.00	-18.48	27.91	25.30	0.85	32.57	0.03 -- -- Peak																																																																																																																																																																													
2	161.92	23.28	43.50	-20.22	37.44	16.21	2.12	32.57	0.08 -- -- Peak																																																																																																																																																																													
3	262.00	19.12	46.00	-26.88	28.76	20.14	2.65	32.51	0.08 -- -- Peak																																																																																																																																																																													
4	509.18	24.29	46.00	-21.71	29.01	24.10	3.69	32.66	0.15 -- -- Peak																																																																																																																																																																													
5	737.13	30.03	46.00	-15.97	29.87	27.99	4.53	32.53	0.17 -- -- Peak																																																																																																																																																																													
6	958.29	34.04	46.00	-11.96	28.35	31.50	5.08	31.13	0.24 -- -- Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	59.10	25.04	40.00	-14.96	44.53	11.82	1.24	32.59	0.04 -- -- Peak																																																																																																																																																																													
2	120.21	36.63	43.50	-6.87	49.96	17.38	1.75	32.52	0.06 -- -- Peak																																																																																																																																																																													
3	240.49	19.17	46.00	-26.83	31.70	17.37	2.52	32.50	0.08 -- -- Peak																																																																																																																																																																													
4	509.18	24.81	46.00	-21.19	29.53	24.10	3.69	32.66	0.15 -- -- Peak																																																																																																																																																																													
5	740.04	30.47	46.00	-15.53	30.19	28.10	4.54	32.53	0.17 -- -- Peak																																																																																																																																																																													
6	959.26	33.60	46.00	-12.40	27.90	31.50	5.08	31.12	0.24 -- -- Peak																																																																																																																																																																													

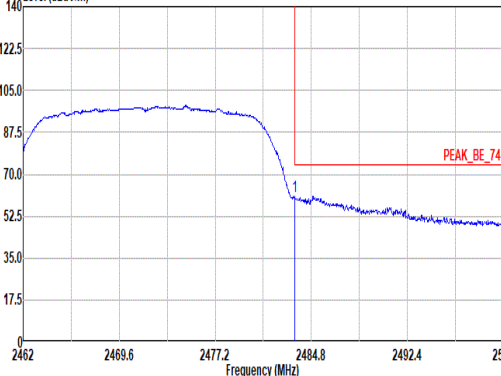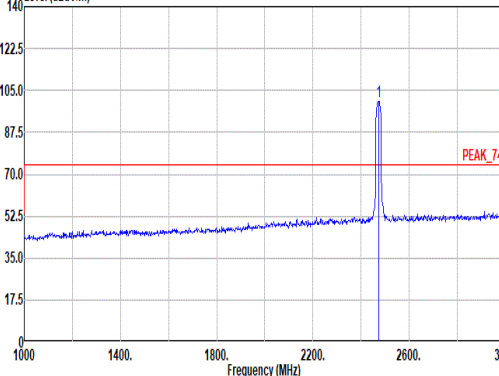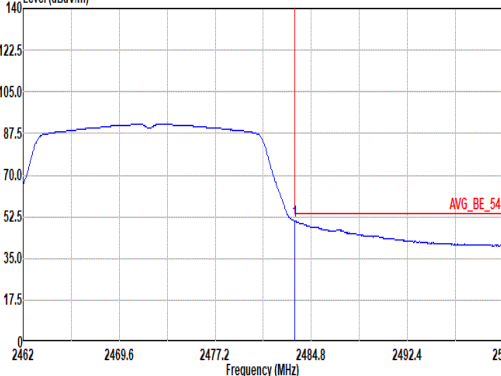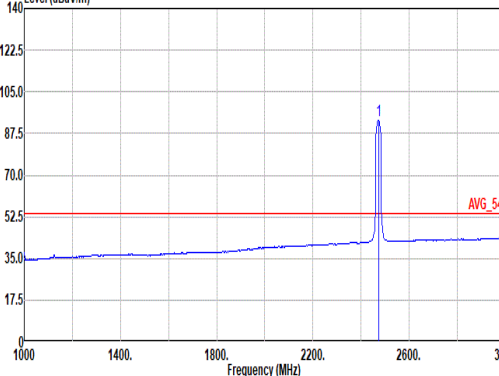

Mode	35																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11ac VHT20_CH13_2472MHz																																																																																	
ANT	0																																																																																	
Pol.	Horizontal					Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2025-08-29  PEAK_BE_74 Frequency (MHz) Site : 03CH22-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2483.51</td><td>60.70</td><td>74.00</td><td>-13.30</td><td>48.97</td><td>26.74</td><td>8.18</td><td>32.65</td><td>9.46 321 0 Peak</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2483.51	60.70	74.00	-13.30	48.97	26.74	8.18	32.65	9.46 321 0 Peak	Level (dBuV/m) Date: 2025-08-29  PEAK_74 Frequency (MHz) Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2472.00</td><td>100.63</td><td>-----</td><td>-----</td><td>89.00</td><td>26.64</td><td>8.17</td><td>32.64</td><td>9.46 321 0 Peak</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2472.00	100.63	-----	-----	89.00	26.64	8.17	32.64	9.46 321 0 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1 2483.51	60.70	74.00	-13.30	48.97	26.74	8.18	32.65	9.46 321 0 Peak																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1 2472.00	100.63	-----	-----	89.00	26.64	8.17	32.64	9.46 321 0 Peak																																																																										
Avg	Level (dBuV/m) Date: 2025-08-29  AVG_BE_54 Frequency (MHz) Site : 03CH22-HY Condition: AVG_BE_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2483.51</td><td>50.71</td><td>54.00</td><td>-3.29</td><td>38.98</td><td>26.74</td><td>8.18</td><td>32.65</td><td>9.46 321 0 Average</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2483.51	50.71	54.00	-3.29	38.98	26.74	8.18	32.65	9.46 321 0 Average	Level (dBuV/m) Date: 2025-08-29  AVG_54 Frequency (MHz) Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2472.00</td><td>93.00</td><td>-----</td><td>-----</td><td>81.37</td><td>26.64</td><td>8.17</td><td>32.64</td><td>9.46 321 0 Average</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2472.00	93.00	-----	-----	81.37	26.64	8.17	32.64	9.46 321 0 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1 2483.51	50.71	54.00	-3.29	38.98	26.74	8.18	32.65	9.46 321 0 Average																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1 2472.00	93.00	-----	-----	81.37	26.64	8.17	32.64	9.46 321 0 Average																																																																										



Mode	35									
	Band Edge									
	2400-2483.5_802.11ac VHT20_CH13_2472MHz									
ANT	0									
Pol.	Vertical					Fundamental				
Peak	Level (dBuV/m)									



Mode	35																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11ac VHT20_CH13_2472MHz																																																																																																																									
ANT	0																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4944.00</td><td>45.92</td><td>74.00</td><td>-28.08</td><td>34.21</td><td>32.58</td><td>11.69</td><td>33.67</td><td>1.11 -- -- Peak</td></tr><tr><td>2</td><td>7416.00</td><td>48.24</td><td>74.00</td><td>-25.76</td><td>32.50</td><td>37.16</td><td>14.29</td><td>36.75</td><td>1.04 -- -- Peak</td></tr><tr><td>3</td><td>7416.00</td><td>38.64</td><td>54.00</td><td>-15.36</td><td>22.90</td><td>37.16</td><td>14.29</td><td>36.75</td><td>1.04 -- -- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4944.00	45.92	74.00	-28.08	34.21	32.58	11.69	33.67	1.11 -- -- Peak	2	7416.00	48.24	74.00	-25.76	32.50	37.16	14.29	36.75	1.04 -- -- Peak	3	7416.00	38.64	54.00	-15.36	22.90	37.16	14.29	36.75	1.04 -- -- Average	Level (dBuV/m) Date: 2025-08-29 Site : 03CH22-HY Condition: PEAK_74 3m DRH18-E_LE2C04A18EN_250520 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4944.00</td><td>45.34</td><td>74.00</td><td>-28.66</td><td>33.63</td><td>32.58</td><td>11.69</td><td>33.67</td><td>1.11 -- -- Peak</td></tr><tr><td>2</td><td>7416.00</td><td>48.25</td><td>74.00</td><td>-25.75</td><td>32.51</td><td>37.16</td><td>14.29</td><td>36.75</td><td>1.04 -- -- Peak</td></tr><tr><td>3</td><td>7416.00</td><td>38.70</td><td>54.00</td><td>-15.30</td><td>22.96</td><td>37.16</td><td>14.29</td><td>36.75</td><td>1.04 -- -- Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4944.00	45.34	74.00	-28.66	33.63	32.58	11.69	33.67	1.11 -- -- Peak	2	7416.00	48.25	74.00	-25.75	32.51	37.16	14.29	36.75	1.04 -- -- Peak	3	7416.00	38.70	54.00	-15.30	22.96	37.16	14.29	36.75	1.04 -- -- Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1	4944.00	45.92	74.00	-28.08	34.21	32.58	11.69	33.67	1.11 -- -- Peak																																																																																																																	
2	7416.00	48.24	74.00	-25.76	32.50	37.16	14.29	36.75	1.04 -- -- Peak																																																																																																																	
3	7416.00	38.64	54.00	-15.36	22.90	37.16	14.29	36.75	1.04 -- -- Average																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1	4944.00	45.34	74.00	-28.66	33.63	32.58	11.69	33.67	1.11 -- -- Peak																																																																																																																	
2	7416.00	48.25	74.00	-25.75	32.51	37.16	14.29	36.75	1.04 -- -- Peak																																																																																																																	
3	7416.00	38.70	54.00	-15.30	22.96	37.16	14.29	36.75	1.04 -- -- Average																																																																																																																	



Mode	35	
	Harmonic	
	2400-2483.5_802.11ac VHT20_CH13_2472MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-11-04 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 HORIZONTAL	Level (dBuV/m) Date: 2025-11-04 Site : 03CH22-HY Condition: AVG_54 3m DRH18-E_LE2C04A18EN_250520 VERTICAL






Mode	37											
	SHF											
	2400-2483.5_802.11ax HE20_CH13_Full RU_2472MHz											
ANT	0											
Pol.	Horizontal						Vertical					
Peak	<											



Appendix C. Duty Cycle Plots

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
802.11b	97.67	8380	0.12	130Hz
802.11g	96.94	1392	0.72	750Hz
2.4GHz 802.11ax HE20 Full RU	96.57	1014	0.99	1kHz
2.4GHz 802.11ax HE20 106	84.48	196	5.10	5.6kHz
2.4GHz 802.11ac VHT20	97.11	1311	0.76	820Hz

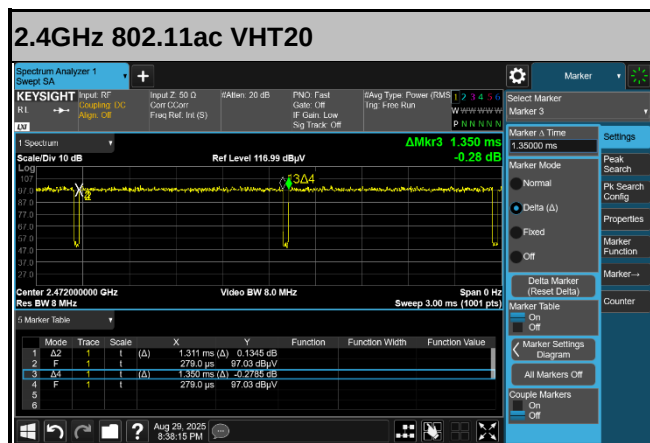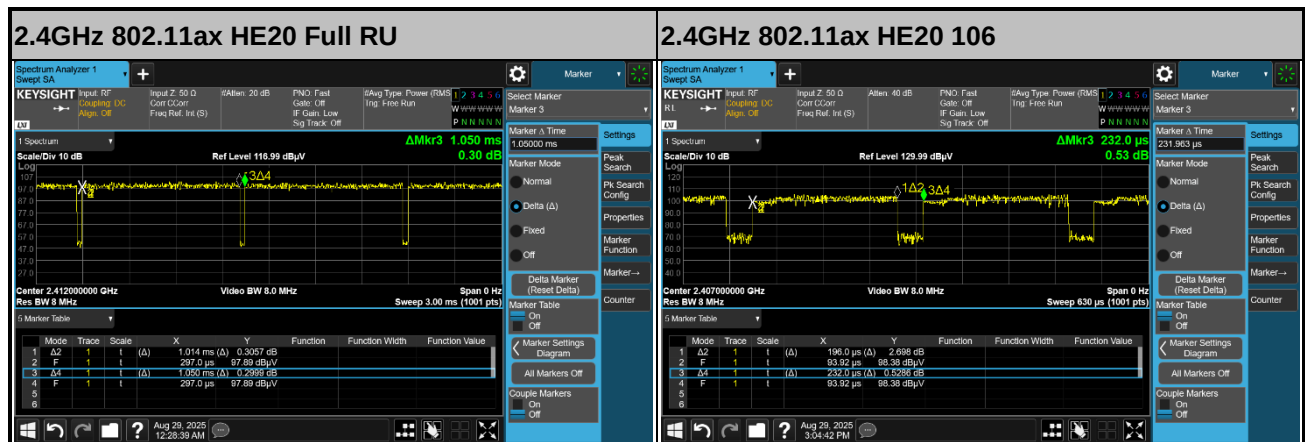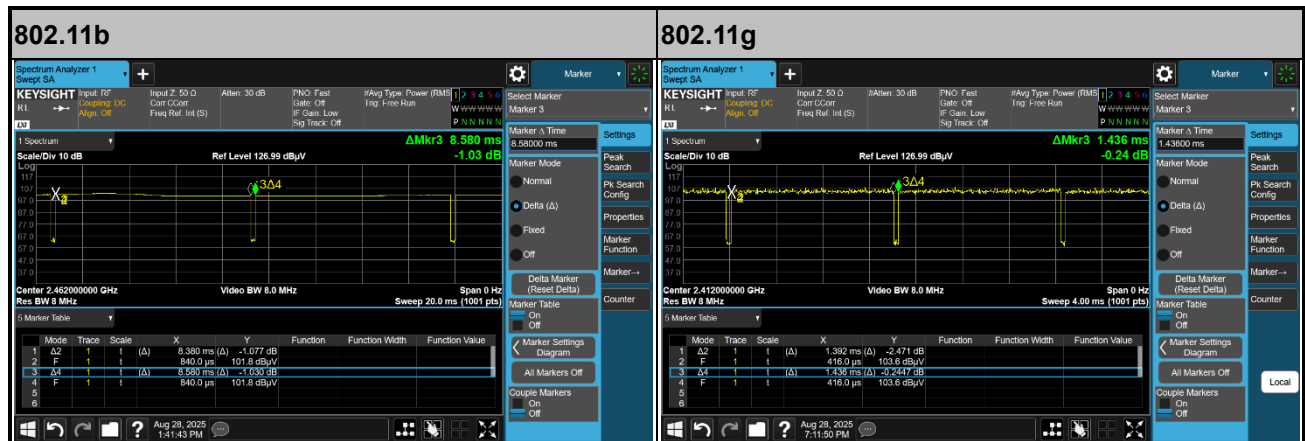

Appendix E. Spot Check Evaluation on 5DCFAB

Conducted power test and radiated spurious emission test configurations were selected from the worst cases identified in the reference model and tested to demonstrate the test data from reference model remains representative for the variant model.

The deviation between the spot check and the referenced values is within 3dB, therefore data referencing is justified according to the guidance in the ECR inquiry

Mode	Test Item	2AE UPBHADP011 Reference Worst mode Test Result	2AEUP- 5DFYBA Variant Check Test Result	Deviation	Limit (dB)
WLAN 2.4G	6dB Bandwidth	16.09 MHz	15.96MHz	-	Within the authorized frequency block
	99% Bandwidth	17.47 MHz	17.54MHz	-	Within the authorized frequency block
	Power Spectral Density	-4.78 (dBm/3kHz)	-4.05 (dBm/3kHz)	-0.73	Deviation (ddB) < 3 dB
	Conducted Band Edges	-42.59 dBm	-42.32dBm	-0.27	Deviation (ddB) < 3 dB
	Conducted Spurious Emission	-46.00 dBm	-44.36dBm	1.64	Deviation (ddB) < 3 dB
	Average Output Power	19.50 dBm	19.79dBm	-0.29	Deviation (ddB) < 1 dB
	Radiated Band Edges and Spurious Emission	50.95 dBuV/m	48.63dBuV/m	2.32	Deviation (ddB) < 3 dB
	AC Conducted Emission	-	Under limit 18.35db	N/A	compliant rule parts



List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Jan. 05, 2026 ~ Jan. 09, 2026	Nov. 03, 2026	Conducted (TH05-HY)
Power Sensor	Raditeq	RPR3008W	RPR3008W-57000009(NO:122_原 253)	10MHz~8GHz	May. 21, 2025	Jan. 05, 2026 ~ Jan. 09, 2026	May. 20, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101468	10HZ~44GHZ	Mar. 13, 2025	Jan. 05, 2026 ~ Jan. 09, 2026	Mar. 12, 2026	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1208381 (BOX2)	N/A	Feb. 10, 2025	Jan. 05, 2026 ~ Jan. 09, 2026	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWiFi_Final_version_240513	N/A	Conducted Other Test Item	N/A	Jan. 05, 2026 ~ Jan. 09, 2026	N/A	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	100315	9kHz~30MHz	Mar. 06, 2025	Jan. 08, 2026	Mar. 05, 2026	Radiation (03CH22-HY)
Bilog Antenna with 6dB	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63304 & 002	30MHz~1GHz	Nov. 26, 2025	Jan. 08, 2026	Nov. 25, 2026	Radiation (03CH22-HY)
Amplifier	SONOMA	310N	421581	N/A	Jul. 13, 2025	Jan. 08, 2026	Jul. 12, 2026	Radiation (03CH22-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C04A1 8EN	1GHz~18GHz	May. 20, 2025	Jan. 08, 2026	May. 19, 2026	Radiation (03CH22-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1225	18GHz~40GHz	Jul. 02, 2025	Jan. 08, 2026	Jul. 01, 2026	Radiation (03CH22-HY)
Amplifier	EMEC	EM01G18GA	060877	N/A	Sep. 26, 2025	Jan. 08, 2026	Sep. 25, 2026	Radiation (03CH22-HY)
Preamplifier	EMEC	EM18G40G	060872	18-40GHz	Dec. 02, 2025	Jan. 08, 2026	Dec. 01, 2026	Radiation (03CH22-HY)
Signal Analyzer	Keysight	N9010B	MY621702 78	10Hz~44GHz	Sep. 22, 2025	Jan. 08, 2026	Sep. 21, 2026	Radiation (03CH22-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY532900 45	20Hz~8.4GHz	Apr. 21, 2025	Jan. 08, 2026	Apr. 20, 2026	Radiation (03CH22-HY)
Hygrometer	TECPEL	DTM-303A	TP211469	N/A	Dec. 15, 2025	Jan. 08, 2026	Dec. 14, 2026	Radiation (03CH22-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Jan. 08, 2026	N/A	Radiation (03CH22-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jan. 08, 2026	N/A	Radiation (03CH22-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jan. 08, 2026	N/A	Radiation (03CH22-HY)
Software	Audix	E3	RK-002347	N/A	N/A	Jan. 08, 2026	N/A	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 05, 2025	Jan. 08, 2026	Mar. 04, 2026	Radiation (03CH22-HY)
RF Cable	HUBER + SUHNER/EMCI	SUCOFLEX 102/EMCI01Y-K M-KM-500/EMCI 01Y-KM-KM-900 0	804611/2,2 40914, 25043351,2 5043350	30MHz~40GHz	May. 19, 2025	Jan. 08, 2026	May. 18, 2026	Radiation (03CH22-HY)

**FCC RADIO TEST REPORT****Report No. : FR580727-01B**

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Jan. 07, 2026	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jan. 07, 2026	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2025	Jan. 07, 2026	Oct. 19, 2026	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 3, 2025	Jan. 07, 2026	Mar. 2, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Jan. 07, 2026	Mar. 23, 2026	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 26, 2025	Jan. 07, 2026	Mar. 25, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Oct. 21, 2025	Jan. 07, 2026	Oct. 20, 2026	Conduction (CO07-HY)

————THE END————