





<Data Rate 250kbps>

Low CH CSE Plot

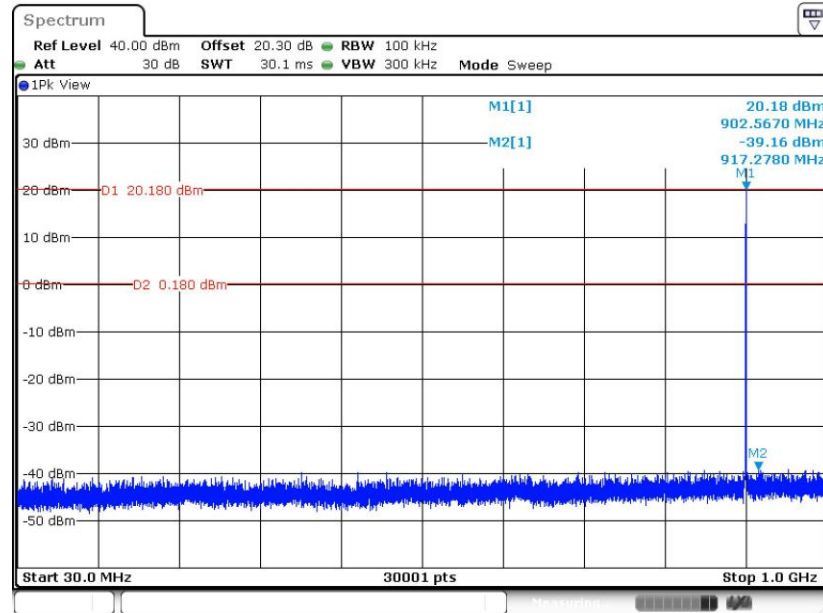

Date: 10.NOV.2025 16:23:00


Low CH CSE Plot

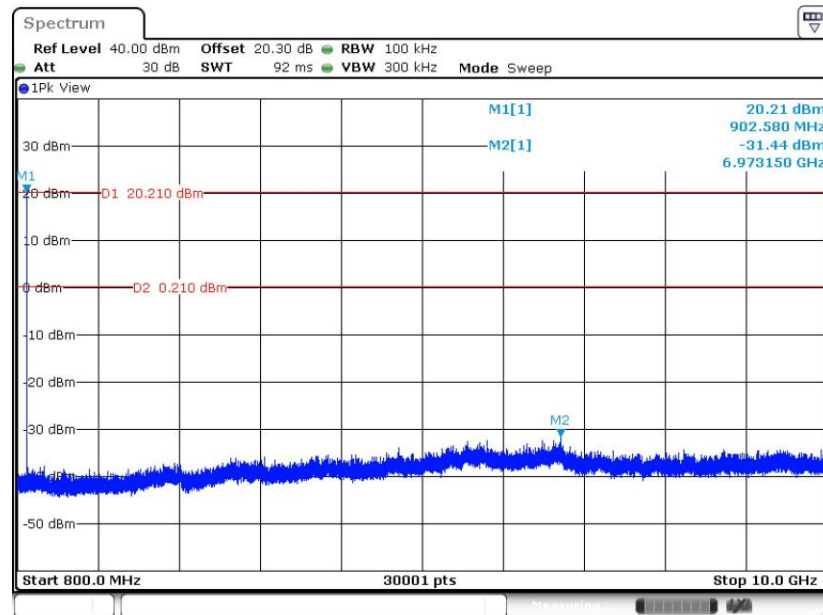


Date: 10.NOV.2025 16:24:10



Mid CH CSE Plot

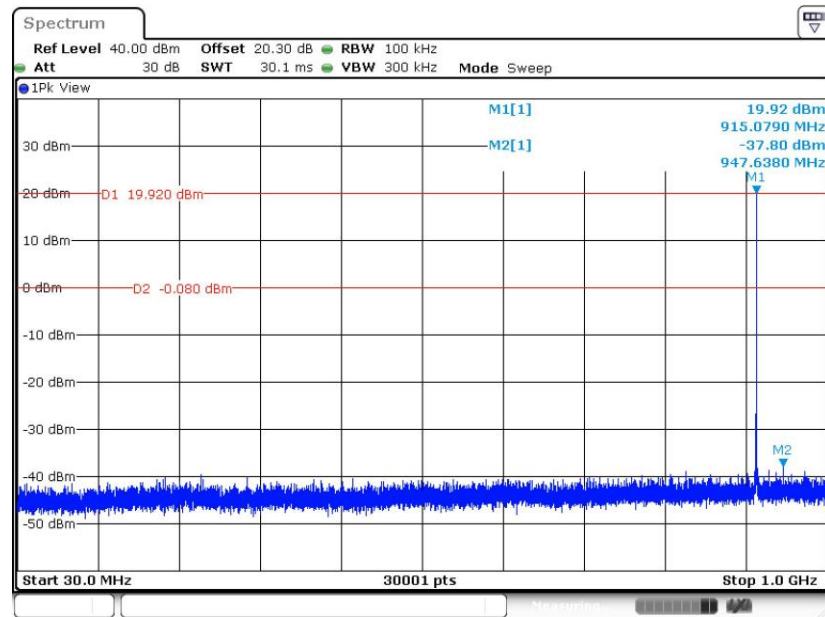


Mid CH CSE Plot

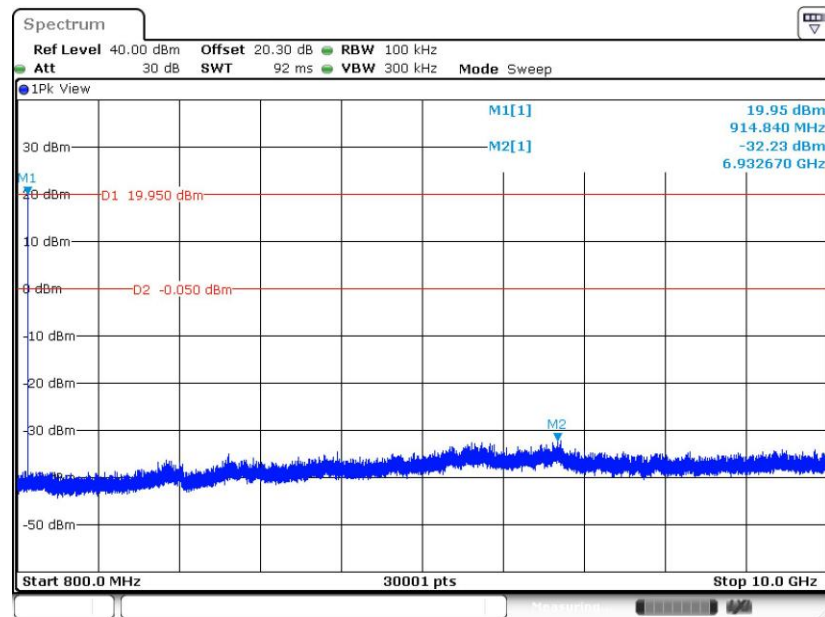




High CH CSE Plot

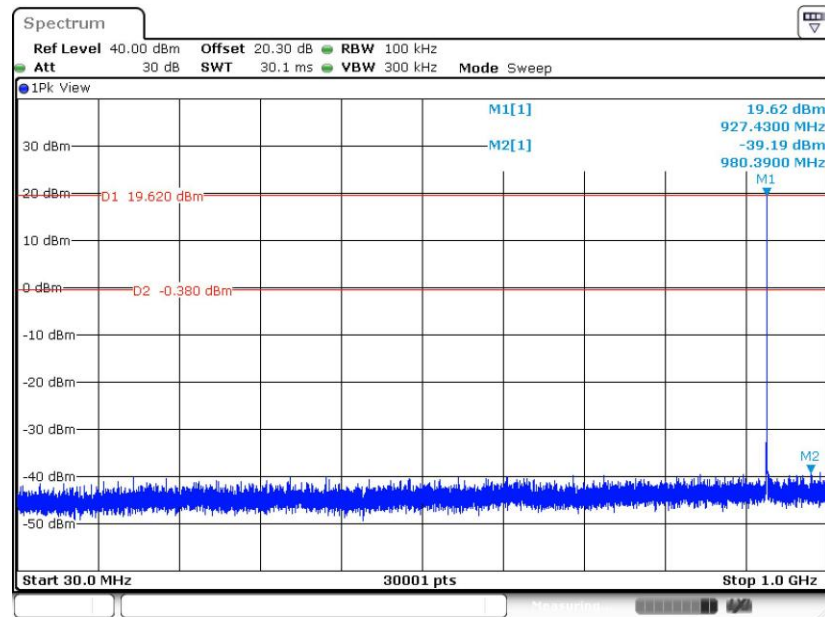

High CH CSE Plot

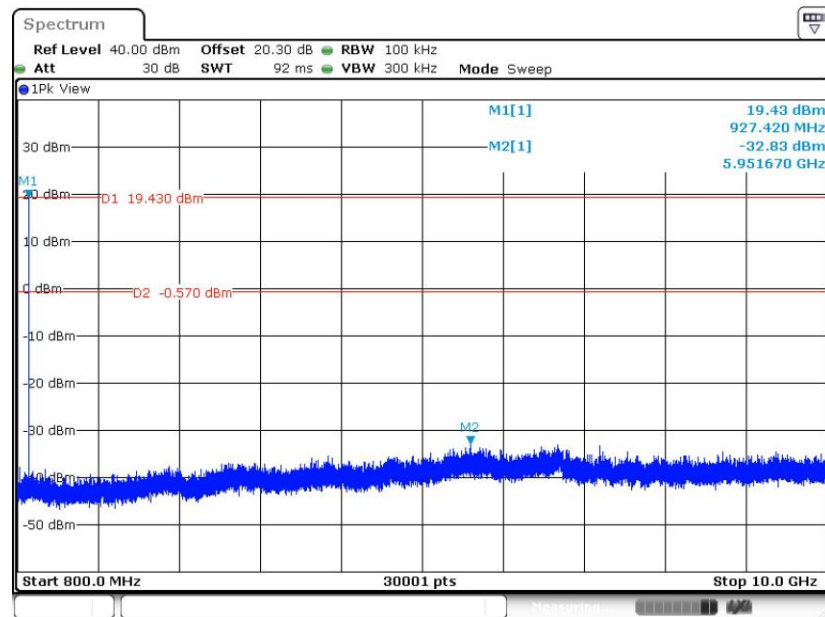

3.8 Radiated Spurious Emission Measurement

3.8.1 Limit of Radiated Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.8.3 Test Procedures


1. The testing follows ANSI C63.10-2020 clause 6.3, 6.5 and 6.6.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1\text{GHz}$; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
8. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
9. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.8.4 Test Setup


For radiated emissions below 30MHz

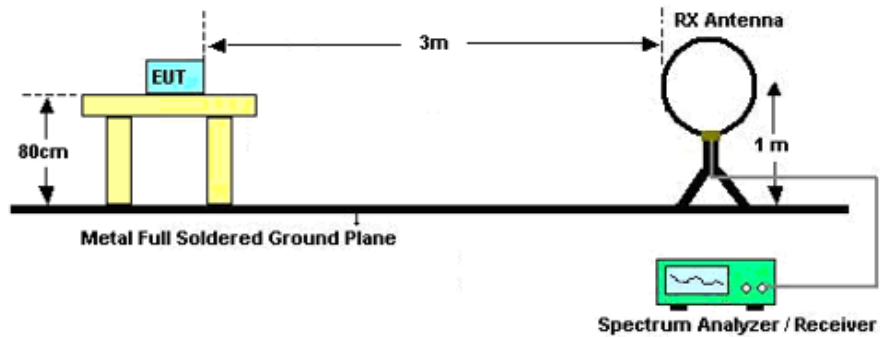

For radiated emissions from 30MHz to 1GHz

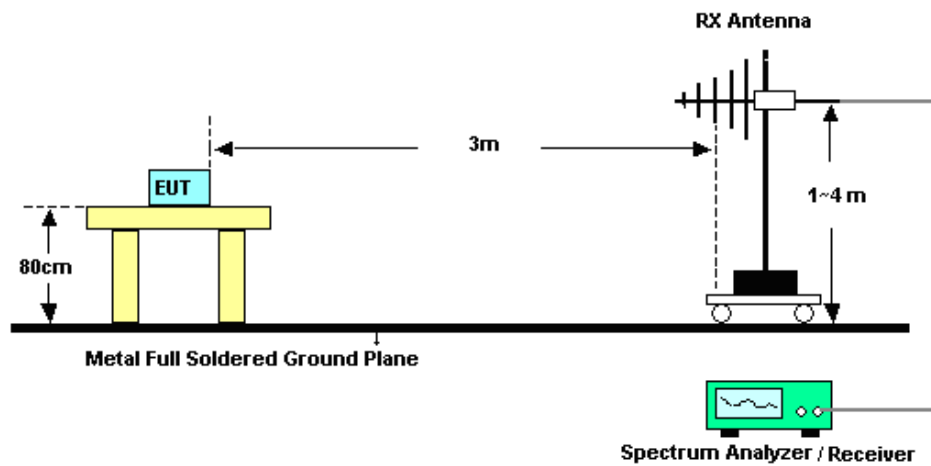

For radiated emissions above 1GHz

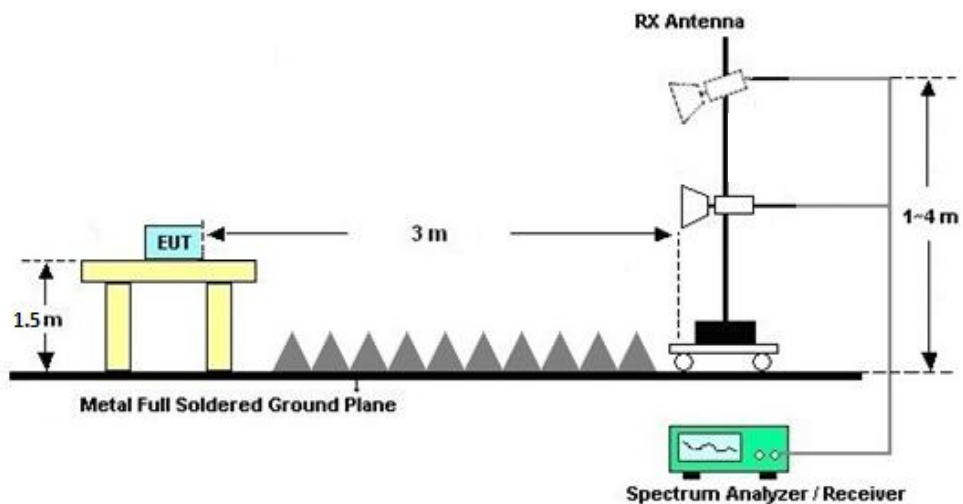

**3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C&D.

3.8.7 Duty cycle

Please refer to Appendix E.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

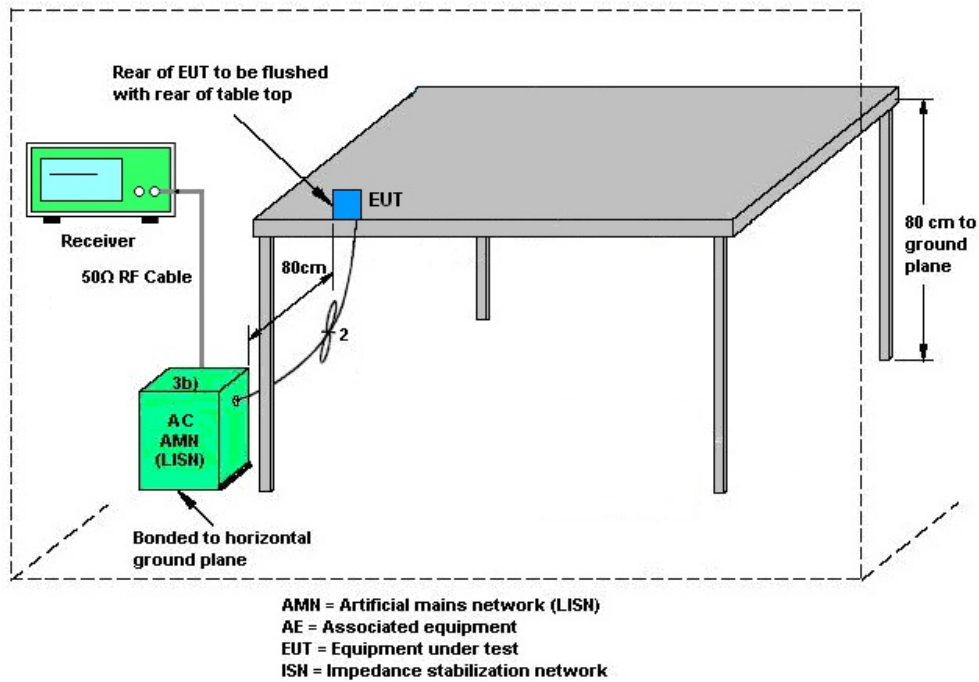

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025	Nov. 10, 2025	Apr. 01, 2026	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 25, 2024	Nov. 10, 2025	Dec. 24, 2025	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct. 13, 2025	Nov. 10, 2025	Oct. 12, 2026	Conducted (TH01-SZ)
Attenuator	Woken Tech	WK0602-10	4	10dB	Jan. 13, 2025	Nov. 10, 2025	Jan. 12, 2026	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 02, 2025	Nov. 13, 2025~Dec. 04, 2025	Apr. 01, 2026	Radiation (03CH03-SZ)
EXA Signal Analyzer	KEYSIGHT	N9010B	MY59071191	10KHz~44GHz	Apr. 02, 2025	Nov. 13, 2025~Dec. 04, 2025	Apr. 01, 2026	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Nov. 13, 2025~Dec. 04, 2025	Dec. 27, 2025	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Aug. 19, 2025	Nov. 13, 2025~Dec. 04, 2025	Aug. 18, 2026	Radiation (03CH03-SZ)
Double Ridge Guide Antenna	ETS-Lindgren	Burgeon-3117	00240107	1GHz~18GHz	Jul. 13, 2025	Nov. 13, 2025~Dec. 04, 2025	Jul. 12, 2026	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2025	Nov. 13, 2025~Dec. 04, 2025	Jul. 02, 2026	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 03, 2025	Nov. 13, 2025~Dec. 04, 2025	Apr. 02, 2027	Radiation (03CH03-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz~3000MHz	Apr. 02, 2025	Nov. 13, 2025~Dec. 04, 2025	Apr. 01, 2026	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 13, 2025	Nov. 13, 2025~Dec. 04, 2025	Oct. 12, 2026	Radiation (03CH03-SZ)
HF Amplifier	Keysight	83017A	MY53270357	500MHz~26.5GHz	Apr. 02, 2025	Nov. 13, 2025~Dec. 04, 2025	Apr. 01, 2026	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 17, 2025	Nov. 13, 2025~Dec. 04, 2025	Oct. 16, 2026	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Nov. 13, 2025~Dec. 04, 2025	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Nov. 13, 2025~Dec. 04, 2025	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 02, 2025	Dec. 15, 2025	Jul. 01, 2026	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2025	Dec. 15, 2025	Jul. 02, 2026	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec. 25, 2024	Dec. 15, 2025	Dec. 24, 2025	Conduction (CO02-SZ)

NCR: No Calibration Required.

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Conducted Power Spectral Density	± 1.32 dB
Frequency	± 1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

FSK-FHSS-50Kbps

Test Engineer:	Liu Qiu Qiu	Temperature:	20~26	°C
Test Date:	2025/11/10	Relative Humidity:	40~51	%

TEST RESULTS DATA										
20dB and 99% Occupied Bandwidth										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	20db BW Limit (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
FSK	50Kbps	1	1	902.2	0.109	0.500	0.103	0.200	0.1088	Pass
FSK	50Kbps	1	65	915	0.106	0.500	0.105	0.200	0.1059	Pass
FSK	50Kbps	1	129	927.8	0.108	0.500	0.103	0.200	0.1080	Pass

TEST RESULTS DATA						
Dwell Time						
Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
FSK	129	1.00	381.44	0.381	0.4	Pass

TEST RESULTS DATA									
Peak Power Table									
mode	Freq. (MHz)	NTX	Peak Power (dBm)	Power Setting	Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Test Result
FSK	902.2	1	20.83	22.00	30.00	0.41	21.24	36	Pass
	915	1	20.62	22.00	30.00	0.41	21.03	36	Pass
	927.8	1	20.45	22.00	30.00	0.41	20.86	36	Pass

TEST RESULTS DATA		
Number of Hopping Frequency		
Number of Hopping (Channel)	Limits (Channel)	Pass/Fail
129	> 50	Pass

FSK-FHSS-150Kbps**TEST RESULTS DATA**
20dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	Freq. (MHz)	20db BW (MHz)	20db BW Limit (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
FSK	150Kbps	1	902.4	0.174	0.500	0.158	0.401	0.1735	Pass
FSK	150Kbps	1	915.2	0.172	0.500	0.159	0.401	0.1722	Pass
FSK	150Kbps	1	927.6	0.175	0.500	0.160	0.401	0.1751	Pass

TEST RESULTS DATA
Dwell Time

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
FSK	64	1.00	369.44	0.369	0.4	Pass

TEST RESULTS DATA
Peak Power Table

mode	Freq. (MHz)	NTX	Peak Power (dBm)	Power Setting	Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Test Result
FSK	902.4	1	20.80	22.00	30.00	0.41	21.21	36	Pass
	915.2	1	20.73	22.00	30.00	0.41	21.14	36	Pass
	927.6	1	20.48	22.00	30.00	0.41	20.89	36	Pass

TEST RESULTS DATA
Number of Hopping Frequency

Number of Hopping (Channel)	Limits (Channel)	Pass/Fail
64	> 50	Pass

FSK-FHSS-250Kbps**TEST RESULTS DATA**
20dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	Freq. (MHz)	20db BW (MHz)	20db BW Limit (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
FSK	250Kbps	1	902.5	0.265	0.500	0.253	0.499	0.2645	Pass
FSK	250Kbps	1	915	0.270	0.500	0.253	0.499	0.2699	Pass
FSK	250Kbps	1	927.5	0.268	0.500	0.255	0.499	0.2685	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
FSK	51	1.00	378.68	0.379	0.4	Pass

TEST RESULTS DATA**Peak Power Table**


mode	Freq. (MHz)	NTX	Peak Power (dBm)	Power Setting	Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Test Result
FSK	902.5	1	20.92	22.00	30.00	0.41	21.33	36	Pass
	915	1	20.71	22.00	30.00	0.41	21.12	36	Pass
	927.5	1	20.42	22.00	30.00	0.41	20.83	36	Pass

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Limits (Channel)	Pass/Fail
51	> 50	Pass

Appendix B. AC Conducted Emission Test Results


Test Engineer :	XuRuibin	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line

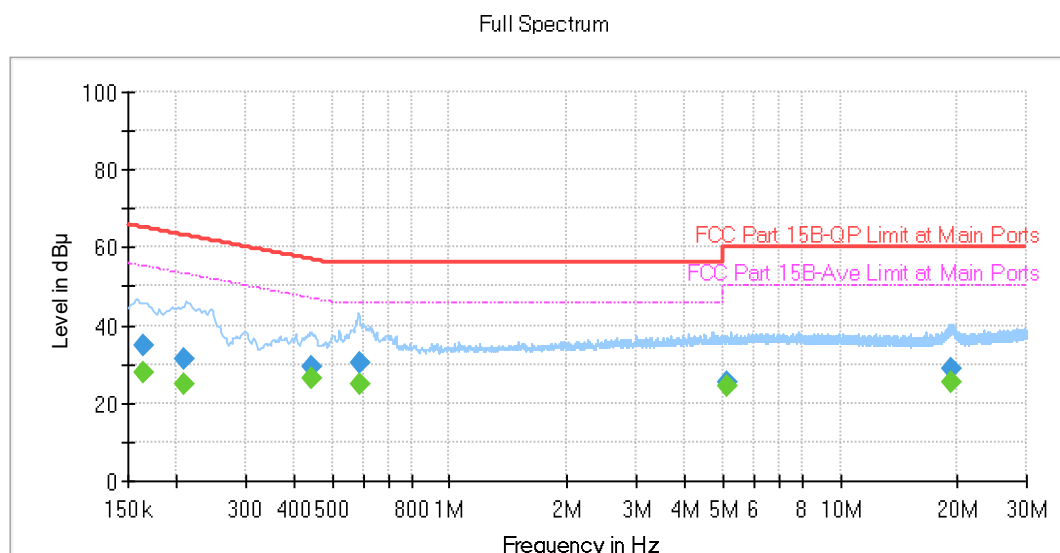

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.163500	34.83	---	65.28	30.45	L1	OFF	19.8
0.163500	---	27.98	55.28	27.30	L1	OFF	19.8
0.209760	31.28	---	63.22	31.94	L1	OFF	19.7
0.209760	---	24.64	53.22	28.58	L1	OFF	19.7
0.444750	29.27	---	56.97	27.70	L1	OFF	19.7
0.444750	---	26.50	46.97	20.48	L1	OFF	19.7
0.587940	30.38	---	56.00	25.62	L1	OFF	19.7
0.587940	---	24.98	46.00	21.02	L1	OFF	19.7
5.126640	25.17	---	60.00	34.83	L1	OFF	19.9
5.126640	---	24.45	50.00	25.55	L1	OFF	19.9
19.218750	28.88	---	60.00	31.12	L1	OFF	20.2
19.218750	---	25.25	50.00	24.75	L1	OFF	20.2

Test Engineer :	XuRuibin	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

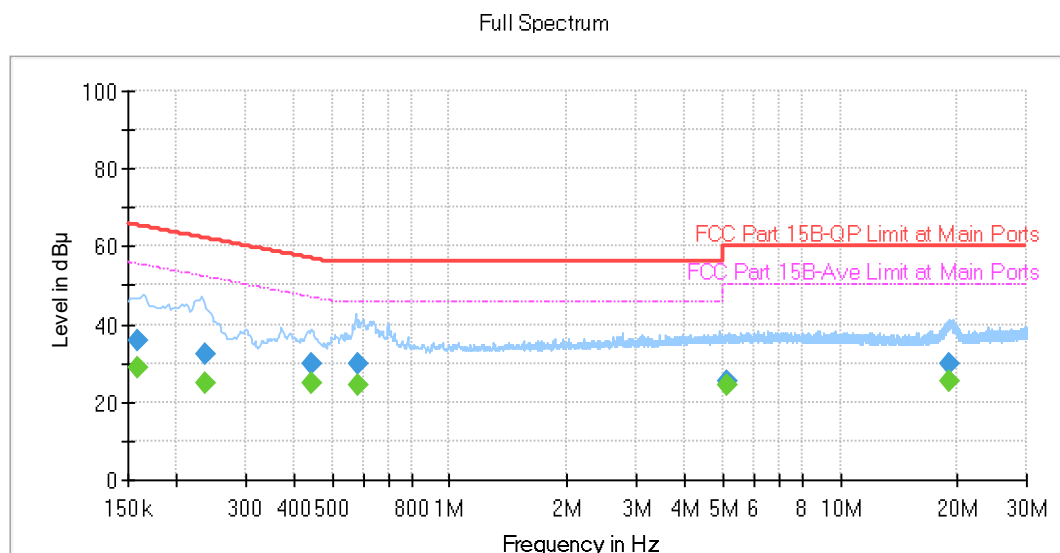

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	35.63	---	65.52	29.89	N	OFF	19.8
0.159000	---	28.65	55.52	26.87	N	OFF	19.8
0.235500	32.29	---	62.25	29.96	N	OFF	19.7
0.235500	---	24.72	52.25	27.53	N	OFF	19.7
0.444300	29.92	---	56.98	27.06	N	OFF	19.7
0.444300	---	24.65	46.98	22.33	N	OFF	19.7
0.579750	30.07	---	56.00	25.93	N	OFF	19.7
0.579750	---	24.32	46.00	21.68	N	OFF	19.7
5.127360	25.25	---	60.00	34.75	N	OFF	19.8
5.127360	---	24.36	50.00	25.64	N	OFF	19.8
18.984750	30.05	---	60.00	29.95	N	OFF	20.3
18.984750	---	25.59	50.00	24.41	N	OFF	20.3



Appendix C. Radiated Spurious Emission

FSK 50K(Harmonic @ 3m)

	Note	Frequency	Level	Margin	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	Line (dBμV/m)	Level (dBμV)	Factor (dB/m)	Loss (dB)	Factor (dB)	Pos (cm)	Pos (deg)	Avg. (P/A)	(H/V)
902.2MHz		1804.4	49.52	-48.4	97.92	70.15	30.63	6.64	57.9	-	-	P	H
		2706.6	46.76	-27.24	74	63.69	32.3	8.61	57.84	182	194	P	H
		2706.6	46.36	-7.64	54	63.29	32.3	8.61	57.84	182	194	A	H
		3608.8	44.41	-29.59	74	59.84	32.9	9.67	58	-	-	P	H
		8119.8	48.56	-25.44	74	60.05	35.84	11.93	59.26	100	316	P	H
		8119.8	48.16	-5.84	54	59.65	35.84	11.93	59.26	100	316	P	H
		1804.4	47.72	-42.04	89.76	68.35	30.63	6.64	57.9	-	-	P	V
		2706.6	47.21	-26.79	74	64.14	32.3	8.61	57.84	180	125	P	V
		2706.6	46.81	-7.19	54	63.74	32.3	8.61	57.84	180	125	A	V
		3608.8	44.64	-29.36	74	60.07	32.9	9.67	58	-	-	P	V
		8119.8	48.99	-25.01	74	60.48	35.84	11.93	59.26	100	347	P	V
		8119.8	48.59	-5.41	54	60.08	35.84	11.93	59.26	100	347	P	V
915MHz		1830	44.45	-53.1	97.55	64.86	30.77	6.72	57.9	-	-	P	H
		2745	46.28	-27.72	74	63.26	32.25	8.62	57.85	124	98	P	H
		2745	45.88	-8.12	54	62.86	32.25	8.62	57.85	124	98	A	H
		3660	42.29	-31.71	74	57.65	33	9.64	58	-	-	P	H
		8235	49.68	-24.32	74	60.96	35.8	12.03	59.11	124	126	P	H
		8235	49.28	-4.72	54	60.56	35.8	12.03	59.11	124	126	P	H
		1830	43.8	-46.73	90.53	64.21	30.77	6.72	57.9	-	-	P	V
		2745	45.48	-28.52	74	62.46	32.25	8.62	57.85	224	198	P	V
		2745	45.08	-8.92	54	62.06	32.25	8.62	57.85	224	198	A	V
		3660	42.51	-31.49	74	57.87	33	9.64	58	-	-	P	V
		8235	48.98	-25.02	74	60.26	35.8	12.03	59.11	195	326	P	V
		8235	48.58	-5.42	54	59.86	35.8	12.03	59.11	195	326	P	V
927.8MHz		2783.4	46.25	-27.75	74	63.26	32.22	8.63	57.86	124	214	P	H
		2783.4	45.85	-8.15	54	62.86	32.22	8.63	57.86	124	214	A	H
		3711.2	42.95	-31.05	74	58.24	33.1	9.61	58	-	-	P	H
		8350.2	49.86	-24.14	74	60.96	35.8	12.07	58.97	132	41	P	H



		8350.2	49.46	-4.54	54	60.56	35.8	12.07	58.97	132	41	P	H
		2783.4	45.77	-28.23	74	62.78	32.22	8.63	57.86	192	316	P	V
		2783.4	45.37	-8.63	54	62.38	32.22	8.63	57.86	192	316	A	V
		3711.2	42.99	-31.01	74	58.28	33.1	9.61	58	-	-	P	V
		8350.2	49.53	-24.47	74	60.63	35.8	12.07	58.97	127	295	P	V
		8350.2	49.13	-4.87	54	60.23	35.8	12.07	58.97	127	295	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

FSK 150K(Harmonic @ 3m)

	Note	Frequency	Level	Margin	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
902.4MHz		1804.8	46.28	-49.62	95.9	66.91	30.63	6.64	57.9	-	-	P	H
		2707.2	45.93	-28.07	74	62.88	32.28	8.61	57.84	100	109	P	H
		2707.2	44.67	-9.33	54	61.62	32.28	8.61	57.84	100	109	A	H
		3609.6	43.63	-30.37	74	59.06	32.9	9.67	58	-	-	P	H
		8121.6	47.75	-26.25	74	59.24	35.84	11.93	59.26	142	180	P	H
		8121.6	46.49	-7.51	54	57.98	35.84	11.93	59.26	142	180	P	H
		1804.8	42.12	-48.67	90.79	62.75	30.63	6.64	57.9	-	-	P	V
		2707.2	46.24	-27.76	74	63.19	32.28	8.61	57.84	100	42	P	V
		2707.2	44.98	-9.02	54	61.93	32.28	8.61	57.84	100	42	A	V
		3609.6	43.63	-30.37	74	59.06	32.9	9.67	58	-	-	P	V
		8121.6	48.47	-25.53	74	59.96	35.84	11.93	59.26	100	279	P	V
		8121.6	47.21	-6.79	54	58.7	35.84	11.93	59.26	100	279	P	V
915.2MHz		2745.6	46.67	-27.33	74	63.65	32.25	8.62	57.85	124	193	P	H
		2745.6	45.41	-8.59	54	62.39	32.25	8.62	57.85	124	193	A	H
		3660.8	42.37	-31.63	74	57.73	33	9.64	58	-	-	P	H
		8236.8	49.51	-24.49	74	60.79	35.8	12.03	59.11	124	126	P	H
		8236.8	48.25	-5.75	54	59.53	35.8	12.03	59.11	124	126	P	H
		2745.6	45.71	-28.29	74	62.69	32.25	8.62	57.85	124	198	P	V
		2745.6	44.45	-9.55	54	61.43	32.25	8.62	57.85	124	198	A	V
		3660.8	42.57	-31.43	74	57.93	33	9.64	58	-	-	P	V
		8236.8	48.98	-25.02	74	60.26	35.8	12.03	59.11	124	226	P	V



		8236.8	47.72	-6.28	54	59	35.8	12.03	59.11	124	226	P	V
927.6MHz		2782.8	46.64	-27.36	74	63.65	32.22	8.63	57.86	125	226	P	H
		2782.8	45.38	-8.62	54	62.39	32.22	8.63	57.86	125	226	A	H
		3710.4	41.89	-32.11	74	57.18	33.1	9.61	58	-	-	P	H
		8348.4	49.66	-24.34	74	60.76	35.8	12.07	58.97	245	109	P	H
		8348.4	48.4	-5.6	54	59.5	35.8	12.07	58.97	245	109	P	H
		2782.8	45.31	-28.69	74	62.32	32.22	8.63	57.86	224	189	P	V
		2782.8	44.05	-9.95	54	61.06	32.22	8.63	57.86	224	189	A	V
		3710.4	41.84	-32.16	74	57.13	33.1	9.61	58	-	-	P	V
		8348.4	48.47	-25.53	74	59.57	35.8	12.07	58.97	124	214	P	V
		8348.4	47.21	-6.79	54	58.31	35.8	12.07	58.97	124	214	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

FSK 250K(Harmonic @ 3m)

	Note	Frequency	Level	Margin	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
902.5MHz		1805	47.72	-47.94	95.66	68.35	30.63	6.64	57.9	-	-	P	H
		2707.5	46.01	-27.99	74	62.96	32.28	8.61	57.84	142	163	P	H
		2707.5	43.78	-10.22	54	60.73	32.28	8.61	57.84	142	163	A	H
		3610	43.26	-30.74	74	58.67	32.93	9.66	58	-	-	P	H
		8122.5	48.27	-25.73	74	59.76	35.84	11.93	59.26	270	219	P	H
		8122.5	46.04	-7.96	54	57.53	35.84	11.93	59.26	270	219	P	H
		1805	44.31	-46.6	90.91	64.94	30.63	6.64	57.9	-	-	P	V
		2707.5	46.21	-27.79	74	63.16	32.28	8.61	57.84	180	29	P	V
		2707.5	43.98	-10.02	54	60.93	32.28	8.61	57.84	180	29	A	V
		3610	43.59	-30.41	74	59	32.93	9.66	58	-	-	P	V
		8122.5	48.96	-25.04	74	60.45	35.84	11.93	59.26	283	246	P	V
		8122.5	46.73	-7.27	54	58.22	35.84	11.93	59.26	283	246	P	V
915.0MHz		2745	46.25	-27.75	74	63.23	32.25	8.62	57.85	221	106	P	H
		2745	44.02	-9.98	54	61	32.25	8.62	57.85	221	106	A	H
		3660	43.06	-30.94	74	58.42	33	9.64	58	-	-	P	H
		8235	49.48	-24.52	74	60.76	35.8	12.03	59.11	124	225	P	H



		8235	47.25	-6.75	54	58.53	35.8	12.03	59.11	124	225	P	H
		2745	45.14	-28.86	74	62.12	32.25	8.62	57.85	152	214	P	V
		2745	42.91	-11.09	54	59.89	32.25	8.62	57.85	152	214	A	V
		3660	43.84	-30.16	74	59.2	33	9.64	58	-	-	P	V
		8235	48.95	-25.05	74	60.23	35.8	12.03	59.11	124	226	P	V
		8235	46.72	-7.28	54	58	35.8	12.03	59.11	124	226	P	V
927.5MHz		1855	46.04	-48.2	94.24	66.03	31.03	6.88	57.9	-	-	P	H
		2782.5	46.12	-27.88	74	63.13	32.22	8.63	57.86	124	250	P	H
		2782.5	43.89	-10.11	54	60.9	32.22	8.63	57.86	124	250	A	H
		3710	43.01	-30.99	74	58.3	33.1	9.61	58	-	-	P	H
		8347.5	48.57	-25.43	74	59.67	35.8	12.07	58.97	124	214	P	H
		8347.5	46.34	-7.66	54	57.44	35.8	12.07	58.97	124	214	P	H
		1855	45.73	-43.78	89.51	65.72	31.03	6.88	57.9	-	-	P	V
		2782.5	45.35	-28.65	74	62.36	32.22	8.63	57.86	215	201	P	V
		2782.5	43.12	-10.88	54	60.13	32.22	8.63	57.86	215	201	A	V
		3710	42.96	-31.04	74	58.25	33.1	9.61	58	-	-	P	V
		8347.5	47.86	-26.14	74	58.96	35.8	12.07	58.97	254	124	P	V
		8347.5	45.63	-8.37	54	56.73	35.8	12.07	58.97	254	124	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



< 30Mhz-1G>

FSK 50K (LF@ 3m)

	Note	Frequency	Level	Margin	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
902.2MHz		125.06	17.32	-26.18	43.5	31.5	16.38	1.14	31.7	-	-	P	H
		280.26	20.53	-25.47	46	31.4	18.93	1.74	31.54	-	-	P	H
	*	870.02	39.52	-58.4	97.92	37.83	29	3.09	30.4	-	-	P	H
		902.2	117.92	---	---	116.63	29.13	3.16	31	-	-	P	H
		934.04	45.13	-52.79	97.92	42.79	30.06	3.21	30.93	-	-	P	H
		137.67	17.78	-25.72	43.5	31.68	16.6	1.2	31.7	-	-	P	V
		285.11	20.4	-25.6	46	31.18	18.99	1.76	31.53	-	-	P	V
	*	902.2	109.76	---	---	108.47	29.13	3.16	31	-	-	P	V
		934.04	37.76	-52	89.76	35.42	30.06	3.21	30.93	-	-	P	V
915MHz		123.12	21.24	-22.26	43.5	36.69	17.28	2.17	34.9	-	-	P	H
		266.68	23.03	-22.97	46	36.4	18.31	3.08	34.76	-	-	P	H
	*	915	117.55	---	---	117.76	29.34	4.45	34	-	-	P	H
		135.73	21.97	-21.53	43.5	36.61	18.01	2.25	34.9	-	-	P	V
		243.4	23.26	-22.74	46	37.57	17.53	2.97	34.81	-	-	P	V
	*	915	110.53	---	---	110.74	29.34	4.45	34	-	-	P	V
927.8MHz		131.85	17.02	-26.48	43.5	31.05	16.5	1.17	31.7	-	-	P	H
		248.25	20.34	-25.66	46	31.9	18.4	1.64	31.6	-	-	P	H
	*	896.21	44.31	-50.15	94.46	43.02	29.06	3.15	30.92	-	-	P	H
		927.8	114.46	---	---	112.32	29.88	3.2	30.94	-	-	P	H
		960.23	39.18	-55.28	94.46	36.36	30.47	3.25	30.9	-	-	P	H
		134.76	17.32	-26.18	43.5	31.28	16.55	1.19	31.7	-	-	P	V
		256.98	20.22	-25.78	46	31.52	18.62	1.67	31.59	-	-	P	V
	*	896.21	39.88	-49.16	89.04	38.59	29.06	3.15	30.92	-	-	P	V
		927.8	109.04	---	---	106.9	29.88	3.2	30.94	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



FSK 150K(LF@ 3m)

	Note	Frequency	Level	Margin	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
902.4MHz		127	17.9	-25.6	43.5	32.04	16.41	1.15	31.7	-	-	P	H
		264.74	20.38	-25.62	46	31.54	18.72	1.69	31.57	-	-	P	H
	*	870.02	39.58	-56.32	95.9	37.89	29	3.09	30.4	-	-	P	H
		902.4	115.9	---	---	114.6	29.14	3.16	31	-	-	P	H
		934.04	42.38	-53.52	95.9	40.04	30.06	3.21	30.93	-	-	P	H
		135.73	16.94	-26.56	43.5	30.88	16.57	1.19	31.7	-	-	P	V
		277.35	20.19	-25.81	46	31.12	18.89	1.73	31.55	-	-	P	V
	*	902.4	110.79	---	---	109.49	29.14	3.16	31	-	-	P	V
		934.04	37.21	-53.58	90.79	34.87	30.06	3.21	30.93	-	-	P	V
915.2MHz		135.73	20.9	-22.6	43.5	35.54	18.01	2.25	34.9	-	-	P	H
		275.41	23.43	-22.57	46	36.48	18.59	3.11	34.75	-	-	P	H
	*	915.2	117.49	---	---	117.7	29.34	4.45	34	-	-	P	H
		132.82	21.74	-21.76	43.5	36.57	17.84	2.23	34.9	-	-	P	V
		283.17	23.11	-22.89	46	35.88	18.83	3.14	34.74	-	-	P	V
	*	915.2	110.42	---	---	110.63	29.34	4.45	34	-	-	P	V
927.6MHz		134.76	17.23	-26.27	43.5	31.19	16.55	1.19	31.7	-	-	P	H
		274.44	21.48	-24.52	46	32.46	18.85	1.72	31.55	-	-	P	H
	*	895.24	44.36	-50.21	94.57	43.05	29.06	3.15	30.9	-	-	P	H
		927.6	114.57	---	---	112.44	29.87	3.2	30.94	-	-	P	H
		959.26	39.39	-55.18	94.57	36.57	30.47	3.25	30.9	-	-	P	H
		136.7	16.83	-26.67	43.5	30.75	16.58	1.2	31.7	-	-	P	V
		284.14	20.16	-25.84	46	30.96	18.98	1.75	31.53	-	-	P	V
	*	896.21	39.3	-49.03	88.33	38.01	29.06	3.15	30.92	-	-	P	V
		927.6	108.33	---	---	106.2	29.87	3.2	30.94	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





FSK 250K(LF@ 3m)

	Note	Frequency	Level	Margin	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
902.5MHz		136.7	16.91	-26.59	43.5	30.83	16.58	1.2	31.7	-	-	P	H
		285.11	20.68	-25.32	46	31.46	18.99	1.76	31.53	-	-	P	H
	*	870.99	38.83	-56.83	95.66	37.15	29	3.1	30.42	-	-	P	H
		902.5	115.66	---	---	114.36	29.14	3.16	31	-	-	P	H
		935.01	42.65	-53.01	95.66	40.28	30.09	3.21	30.93	-	-	P	H
		131.85	17.6	-25.9	43.5	31.63	16.5	1.17	31.7	-	-	P	V
		283.17	21.07	-24.93	46	31.88	18.97	1.75	31.53	-	-	P	V
	*	902.5	110.91	---	---	109.61	29.14	3.16	31	-	-	P	V
		935.01	39.79	-51.12	90.91	37.42	30.09	3.21	30.93	-	-	P	V
915MHz		137.67	21.15	-22.35	43.5	35.66	18.13	2.26	34.9	-	-	P	H
		284.14	23.18	-22.82	46	35.9	18.86	3.15	34.73	-	-	P	H
	*	915	117.55	---	---	117.76	29.34	4.45	34	-	-	P	H
		128.94	21.94	-21.56	43.5	37.02	17.62	2.2	34.9	-	-	P	V
		271.53	23.06	-22.94	46	36.26	18.46	3.1	34.76	-	-	P	V
	*	915	110.74	---	---	110.95	29.34	4.45	34	-	-	P	V
927.5MHz		123.12	16.66	-26.84	43.5	30.89	16.34	1.13	31.7	-	-	P	H
		277.35	20.55	-25.45	46	31.48	18.89	1.73	31.55	-	-	P	H
	*	895.24	44.14	-50.1	94.24	42.83	29.06	3.15	30.9	-	-	P	H
		927.5	114.24	---	---	112.11	29.87	3.2	30.94	-	-	P	H
		959.26	38.46	-55.78	94.24	35.64	30.47	3.25	30.9	-	-	P	H
		123.12	16.74	-26.76	43.5	30.97	16.34	1.13	31.7	-	-	P	V
		282.2	20.28	-25.72	46	31.11	18.96	1.75	31.54	-	-	P	V
	*	895.24	38.02	-51.49	89.51	36.71	29.06	3.15	30.9	-	-	P	V
		927.5	109.51	---	---	107.38	29.87	3.2	30.94	-	-	P	V
		959.26	37.4	-52.11	89.51	34.58	30.47	3.25	30.9	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Appendix D. Radiated Spurious Emission Plots



FSK 50Kbps FHSS 50Kbps (Harmonic @ 3m)

LoRa	Harmonic @ 3m																																																																																																																																																																																					
ANT	FSK 50Kbps FHSS 50Kbps CH01 902.2MHz																																																																																																																																																																																					
	Horizontal					Vertical																																																																																																																																																																																
Peak																																																																																																																																																																																						
	<table><thead><tr><th></th><th>Freq</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1804.48</td><td>49.52</td><td>---</td><td>---</td><td>70.15</td><td>30.63</td><td>6.64</td><td>57.90</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>2706.60</td><td>46.76</td><td>-27.24</td><td>74.00</td><td>63.69</td><td>32.30</td><td>8.61</td><td>57.84</td><td>182</td><td>194 Peak</td></tr><tr><td>3</td><td>2706.60</td><td>46.36</td><td>-7.64</td><td>54.00</td><td>63.29</td><td>32.30</td><td>8.61</td><td>57.84</td><td>182</td><td>194 Average</td></tr><tr><td>4</td><td>3608.80</td><td>44.41</td><td>-29.59</td><td>74.00</td><td>59.84</td><td>32.90</td><td>9.67</td><td>58.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>8119.80</td><td>48.56</td><td>-25.44</td><td>74.00</td><td>60.05</td><td>35.84</td><td>11.93</td><td>59.26</td><td>100</td><td>316 Peak</td></tr><tr><td>6</td><td>8119.80</td><td>48.16</td><td>-5.84</td><td>54.00</td><td>59.65</td><td>35.84</td><td>11.93</td><td>59.26</td><td>100</td><td>316 Average</td></tr></tbody></table>						Freq	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	1804.48	49.52	---	---	70.15	30.63	6.64	57.90	---	Peak	2	2706.60	46.76	-27.24	74.00	63.69	32.30	8.61	57.84	182	194 Peak	3	2706.60	46.36	-7.64	54.00	63.29	32.30	8.61	57.84	182	194 Average	4	3608.80	44.41	-29.59	74.00	59.84	32.90	9.67	58.00	---	Peak	5	8119.80	48.56	-25.44	74.00	60.05	35.84	11.93	59.26	100	316 Peak	6	8119.80	48.16	-5.84	54.00	59.65	35.84	11.93	59.26	100	316 Average	<table><thead><tr><th></th><th>Freq</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>1804.48</td><td>47.72</td><td>---</td><td>---</td><td>68.35</td><td>30.63</td><td>6.64</td><td>57.90</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>2706.60</td><td>47.21</td><td>-26.79</td><td>74.00</td><td>64.14</td><td>32.30</td><td>8.61</td><td>57.84</td><td>180</td><td>125 Peak</td></tr><tr><td>3</td><td>2706.60</td><td>46.81</td><td>-7.19</td><td>54.00</td><td>63.74</td><td>32.30</td><td>8.61</td><td>57.84</td><td>180</td><td>125 Average</td></tr><tr><td>4</td><td>3608.80</td><td>44.64</td><td>-29.36</td><td>74.00</td><td>60.07</td><td>32.90</td><td>9.67</td><td>58.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>8119.80</td><td>48.99</td><td>-25.01</td><td>74.00</td><td>60.48</td><td>35.84</td><td>11.93</td><td>59.26</td><td>100</td><td>347 Peak</td></tr><tr><td>6</td><td>8119.80</td><td>48.59</td><td>-5.41</td><td>54.00</td><td>60.08</td><td>35.84</td><td>11.93</td><td>59.26</td><td>100</td><td>347 Average</td></tr></tbody></table>						Freq	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	1804.48	47.72	---	---	68.35	30.63	6.64	57.90	---	Peak	2	2706.60	47.21	-26.79	74.00	64.14	32.30	8.61	57.84	180	125 Peak	3	2706.60	46.81	-7.19	54.00	63.74	32.30	8.61	57.84	180	125 Average	4	3608.80	44.64	-29.36	74.00	60.07	32.90	9.67	58.00	---	Peak	5	8119.80	48.99	-25.01	74.00	60.48	35.84	11.93	59.26	100	347 Peak	6	8119.80	48.59	-5.41	54.00	60.08	35.84	11.93	59.26	100	347 Average
		Freq	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																												
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																																																																												
	1	1804.48	49.52	---	---	70.15	30.63	6.64	57.90	---	Peak																																																																																																																																																																											
	2	2706.60	46.76	-27.24	74.00	63.69	32.30	8.61	57.84	182	194 Peak																																																																																																																																																																											
	3	2706.60	46.36	-7.64	54.00	63.29	32.30	8.61	57.84	182	194 Average																																																																																																																																																																											
4	3608.80	44.41	-29.59	74.00	59.84	32.90	9.67	58.00	---	Peak																																																																																																																																																																												
5	8119.80	48.56	-25.44	74.00	60.05	35.84	11.93	59.26	100	316 Peak																																																																																																																																																																												
6	8119.80	48.16	-5.84	54.00	59.65	35.84	11.93	59.26	100	316 Average																																																																																																																																																																												
	Freq	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																													
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																																																																													
1	1804.48	47.72	---	---	68.35	30.63	6.64	57.90	---	Peak																																																																																																																																																																												
2	2706.60	47.21	-26.79	74.00	64.14	32.30	8.61	57.84	180	125 Peak																																																																																																																																																																												
3	2706.60	46.81	-7.19	54.00	63.74	32.30	8.61	57.84	180	125 Average																																																																																																																																																																												
4	3608.80	44.64	-29.36	74.00	60.07	32.90	9.67	58.00	---	Peak																																																																																																																																																																												
5	8119.80	48.99	-25.01	74.00	60.48	35.84	11.93	59.26	100	347 Peak																																																																																																																																																																												
6	8119.80	48.59	-5.41	54.00	60.08	35.84	11.93	59.26	100	347 Average																																																																																																																																																																												



LoRa	Harmonic @ 3m													
ANT	FSK 50Kbps FHSS 50Kbps CH65 915MHz													
	Horizontal	Vertical												
Peak	Date: 1 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Peak</th><th>Level (dBuV/m)</th><th>Frequency (MHz)</th></tr></thead><tbody><tr><td>1</td><td>44.45</td><td>1838.00</td></tr></tbody></table> Table with 10 columns: Freq, Level, Over Limit, Limit, ReadAntenna Level Factor, Cable Preamp Loss Factor, A/Pos, T/Pos, Remark. Row 1: 1838.00, 44.45, ---, ---, 64.86, 30.77, 6.72, 57.90, ---, ---, Peak.	Peak	Level (dBuV/m)	Frequency (MHz)	1	44.45	1838.00	Date: 2 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th>Peak</th><th>Level (dBuV/m)</th><th>Frequency (MHz)</th></tr></thead><tbody><tr><td>1</td><td>43.80</td><td>1838.00</td></tr></tbody></table> Table with 10 columns: Freq, Level, Over Limit, Limit, ReadAntenna Level Factor, Cable Preamp Loss Factor, A/Pos, T/Pos, Remark. Row 1: 1838.00, 43.80, ---, ---, 64.21, 30.77, 6.72, 57.90, ---, ---, Peak.	Peak	Level (dBuV/m)	Frequency (MHz)	1	43.80	1838.00
Peak	Level (dBuV/m)	Frequency (MHz)												
1	44.45	1838.00												
Peak	Level (dBuV/m)	Frequency (MHz)												
1	43.80	1838.00												





LoRa	Harmonic @ 3m																																																																																																																																					
ANT	FSK 50Kbps FHSS 50Kbps CH129 927.8MHz																																																																																																																																					
	Horizontal					Vertical																																																																																																																																
Peak	Date: 1 <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2783.48</td><td>46.25</td><td>---</td><td>---</td><td>63.26</td><td>32.22</td><td>8.63 57.86 124 214 Peak</td></tr><tr><td>2</td><td>2783.48</td><td>45.85</td><td>-8.15</td><td>54.00</td><td>62.86</td><td>32.22</td><td>8.63 57.86 124 214 Average</td></tr><tr><td>3</td><td>3711.28</td><td>42.95</td><td>-31.05</td><td>74.00</td><td>58.24</td><td>33.10</td><td>9.61 58.00 --- Peak</td></tr><tr><td>4</td><td>8358.28</td><td>49.86</td><td>-24.14</td><td>74.00</td><td>68.96</td><td>35.80</td><td>12.07 58.97 132 41 Peak</td></tr><tr><td>5</td><td>8358.28</td><td>49.46</td><td>-4.54</td><td>54.00</td><td>68.56</td><td>35.80</td><td>12.07 58.97 132 41 Average</td></tr></table>						Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Freq	Level	Line	Level Factor	Loss Factor			MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	1	2783.48	46.25	---	---	63.26	32.22	8.63 57.86 124 214 Peak	2	2783.48	45.85	-8.15	54.00	62.86	32.22	8.63 57.86 124 214 Average	3	3711.28	42.95	-31.05	74.00	58.24	33.10	9.61 58.00 --- Peak	4	8358.28	49.86	-24.14	74.00	68.96	35.80	12.07 58.97 132 41 Peak	5	8358.28	49.46	-4.54	54.00	68.56	35.80	12.07 58.97 132 41 Average	Date: 2 <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2783.48</td><td>45.77</td><td>---</td><td>---</td><td>62.78</td><td>32.22</td><td>8.63 57.86 192 316 Peak</td></tr><tr><td>2</td><td>2783.48</td><td>45.37</td><td>-8.63</td><td>54.00</td><td>62.38</td><td>32.22</td><td>8.63 57.86 192 316 Average</td></tr><tr><td>3</td><td>3711.28</td><td>42.99</td><td>-31.01</td><td>74.00</td><td>58.28</td><td>33.10</td><td>9.61 58.00 --- Peak</td></tr><tr><td>4</td><td>8358.28</td><td>49.53</td><td>-24.47</td><td>74.00</td><td>68.63</td><td>35.80</td><td>12.07 58.97 127 295 Peak</td></tr><tr><td>5</td><td>8358.28</td><td>49.13</td><td>-4.87</td><td>54.00</td><td>68.23</td><td>35.80</td><td>12.07 58.97 127 295 Average</td></tr></table>						Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Freq	Level	Line	Level Factor	Loss Factor			MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	1	2783.48	45.77	---	---	62.78	32.22	8.63 57.86 192 316 Peak	2	2783.48	45.37	-8.63	54.00	62.38	32.22	8.63 57.86 192 316 Average	3	3711.28	42.99	-31.01	74.00	58.28	33.10	9.61 58.00 --- Peak	4	8358.28	49.53	-24.47	74.00	68.63	35.80	12.07 58.97 127 295 Peak	5	8358.28	49.13	-4.87	54.00	68.23	35.80	12.07 58.97 127 295 Average
		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																														
	Freq	Level	Line	Level Factor	Loss Factor																																																																																																																																	
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm																																																																																																																															
	1	2783.48	46.25	---	---	63.26	32.22	8.63 57.86 124 214 Peak																																																																																																																														
	2	2783.48	45.85	-8.15	54.00	62.86	32.22	8.63 57.86 124 214 Average																																																																																																																														
3	3711.28	42.95	-31.05	74.00	58.24	33.10	9.61 58.00 --- Peak																																																																																																																															
4	8358.28	49.86	-24.14	74.00	68.96	35.80	12.07 58.97 132 41 Peak																																																																																																																															
5	8358.28	49.46	-4.54	54.00	68.56	35.80	12.07 58.97 132 41 Average																																																																																																																															
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																															
Freq	Level	Line	Level Factor	Loss Factor																																																																																																																																		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm																																																																																																																																
1	2783.48	45.77	---	---	62.78	32.22	8.63 57.86 192 316 Peak																																																																																																																															
2	2783.48	45.37	-8.63	54.00	62.38	32.22	8.63 57.86 192 316 Average																																																																																																																															
3	3711.28	42.99	-31.01	74.00	58.28	33.10	9.61 58.00 --- Peak																																																																																																																															
4	8358.28	49.53	-24.47	74.00	68.63	35.80	12.07 58.97 127 295 Peak																																																																																																																															
5	8358.28	49.13	-4.87	54.00	68.23	35.80	12.07 58.97 127 295 Average																																																																																																																															





FSK 150Kbps FHSS 150Kbps (Harmonic @ 3m)

LoRa	Harmonic @ 3m																																																																																																																																																																	
ANT	FSK 150Kbps FHSS 150Kbps CH01 902.4MHz																																																																																																																																																																	
	Horizontal	Vertical																																																																																																																																																																
Peak	Date: 1 Level (dBuV/m) Frequency (MHz) <table><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>Line</th><th>Read/term</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>1804.89</td><td>46.28</td><td>-</td><td>66.91</td><td>30.63</td><td>6.64</td><td>57.98</td><td>-</td><td>Peak</td></tr><tr><td>2</td><td>2787.28</td><td>45.93</td><td>-28.87</td><td>74.00</td><td>62.88</td><td>32.28</td><td>8.61</td><td>57.84</td><td>100</td></tr><tr><td>3</td><td>2787.28</td><td>44.67</td><td>-9.33</td><td>54.00</td><td>61.62</td><td>32.28</td><td>8.61</td><td>57.84</td><td>100</td></tr><tr><td>4</td><td>3699.68</td><td>43.63</td><td>-38.37</td><td>74.00</td><td>59.06</td><td>32.98</td><td>9.67</td><td>58.00</td><td>-</td></tr><tr><td>5</td><td>8121.68</td><td>47.75</td><td>-26.25</td><td>74.00</td><td>59.24</td><td>35.84</td><td>11.93</td><td>59.26</td><td>142</td></tr><tr><td>6</td><td>8121.68</td><td>46.49</td><td>-7.51</td><td>54.00</td><td>57.98</td><td>35.84</td><td>11.93</td><td>59.26</td><td>142</td></tr></table>	Freq	Level	Over Limit	Line	Read/term	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	1804.89	46.28	-	66.91	30.63	6.64	57.98	-	Peak	2	2787.28	45.93	-28.87	74.00	62.88	32.28	8.61	57.84	100	3	2787.28	44.67	-9.33	54.00	61.62	32.28	8.61	57.84	100	4	3699.68	43.63	-38.37	74.00	59.06	32.98	9.67	58.00	-	5	8121.68	47.75	-26.25	74.00	59.24	35.84	11.93	59.26	142	6	8121.68	46.49	-7.51	54.00	57.98	35.84	11.93	59.26	142	Date: 2 Level (dBuV/m) Frequency (MHz) <table><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>Line</th><th>Read/term</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>1804.89</td><td>42.12</td><td>-</td><td>62.75</td><td>38.63</td><td>6.64</td><td>57.98</td><td>-</td><td>Peak</td></tr><tr><td>2</td><td>2787.28</td><td>46.24</td><td>-27.76</td><td>74.00</td><td>63.13</td><td>32.28</td><td>8.61</td><td>57.84</td><td>100</td></tr><tr><td>3</td><td>2787.28</td><td>44.98</td><td>-9.02</td><td>54.00</td><td>61.93</td><td>32.28</td><td>8.61</td><td>57.84</td><td>100</td></tr><tr><td>4</td><td>3699.68</td><td>43.63</td><td>-38.37</td><td>74.00</td><td>59.06</td><td>32.98</td><td>9.67</td><td>58.00</td><td>-</td></tr><tr><td>5</td><td>8121.68</td><td>48.47</td><td>-25.53</td><td>74.00</td><td>59.96</td><td>35.84</td><td>11.93</td><td>59.26</td><td>100</td></tr><tr><td>6</td><td>8121.68</td><td>47.21</td><td>-6.79</td><td>54.00</td><td>58.70</td><td>35.84</td><td>11.93</td><td>59.26</td><td>100</td></tr></table>	Freq	Level	Over Limit	Line	Read/term	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	1804.89	42.12	-	62.75	38.63	6.64	57.98	-	Peak	2	2787.28	46.24	-27.76	74.00	63.13	32.28	8.61	57.84	100	3	2787.28	44.98	-9.02	54.00	61.93	32.28	8.61	57.84	100	4	3699.68	43.63	-38.37	74.00	59.06	32.98	9.67	58.00	-	5	8121.68	48.47	-25.53	74.00	59.96	35.84	11.93	59.26	100	6	8121.68	47.21	-6.79	54.00	58.70	35.84	11.93	59.26	100
Freq	Level	Over Limit	Line	Read/term	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																																																																																										
1	1804.89	46.28	-	66.91	30.63	6.64	57.98	-	Peak																																																																																																																																																									
2	2787.28	45.93	-28.87	74.00	62.88	32.28	8.61	57.84	100																																																																																																																																																									
3	2787.28	44.67	-9.33	54.00	61.62	32.28	8.61	57.84	100																																																																																																																																																									
4	3699.68	43.63	-38.37	74.00	59.06	32.98	9.67	58.00	-																																																																																																																																																									
5	8121.68	47.75	-26.25	74.00	59.24	35.84	11.93	59.26	142																																																																																																																																																									
6	8121.68	46.49	-7.51	54.00	57.98	35.84	11.93	59.26	142																																																																																																																																																									
Freq	Level	Over Limit	Line	Read/term	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																																																																																										
1	1804.89	42.12	-	62.75	38.63	6.64	57.98	-	Peak																																																																																																																																																									
2	2787.28	46.24	-27.76	74.00	63.13	32.28	8.61	57.84	100																																																																																																																																																									
3	2787.28	44.98	-9.02	54.00	61.93	32.28	8.61	57.84	100																																																																																																																																																									
4	3699.68	43.63	-38.37	74.00	59.06	32.98	9.67	58.00	-																																																																																																																																																									
5	8121.68	48.47	-25.53	74.00	59.96	35.84	11.93	59.26	100																																																																																																																																																									
6	8121.68	47.21	-6.79	54.00	58.70	35.84	11.93	59.26	100																																																																																																																																																									



LoRa	Harmonic @ 3m																																																																																																																																																																													
ANT	FSK 150Kbps FHSS 150Kbps CH33 915.2MHz																																																																																																																																																																													
	Horizontal	Vertical																																																																																																																																																																												
Peak	Date: 1 <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2745.68</td><td>46.67</td><td>-27.33</td><td>74.00</td><td>63.65</td><td>32.25</td><td>8.62</td><td>57.85</td><td>124</td><td>193</td><td>Peak</td></tr><tr><td>2</td><td>2745.68</td><td>45.41</td><td>-8.59</td><td>54.00</td><td>62.39</td><td>32.25</td><td>8.62</td><td>57.85</td><td>124</td><td>193</td><td>Average</td></tr><tr><td>3</td><td>3660.00</td><td>42.37</td><td>-31.63</td><td>74.00</td><td>57.73</td><td>33.00</td><td>9.64</td><td>58.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>8236.80</td><td>49.51</td><td>-24.49</td><td>74.00</td><td>60.79</td><td>35.80</td><td>12.03</td><td>59.11</td><td>124</td><td>126</td><td>Peak</td></tr><tr><td>5</td><td>8236.80</td><td>48.25</td><td>-5.75</td><td>54.00</td><td>59.53</td><td>35.80</td><td>12.03</td><td>59.11</td><td>124</td><td>126</td><td>Average</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark		Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2745.68	46.67	-27.33	74.00	63.65	32.25	8.62	57.85	124	193	Peak	2	2745.68	45.41	-8.59	54.00	62.39	32.25	8.62	57.85	124	193	Average	3	3660.00	42.37	-31.63	74.00	57.73	33.00	9.64	58.00	---	---	Peak	4	8236.80	49.51	-24.49	74.00	60.79	35.80	12.03	59.11	124	126	Peak	5	8236.80	48.25	-5.75	54.00	59.53	35.80	12.03	59.11	124	126	Average	Date: 2 <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2745.68</td><td>45.71</td><td>-28.29</td><td>74.00</td><td>62.69</td><td>32.25</td><td>8.62</td><td>57.85</td><td>124</td><td>198</td><td>Peak</td></tr><tr><td>2</td><td>2745.68</td><td>44.45</td><td>-9.55</td><td>54.00</td><td>61.43</td><td>32.25</td><td>8.62</td><td>57.85</td><td>124</td><td>198</td><td>Average</td></tr><tr><td>3</td><td>3660.00</td><td>42.57</td><td>-31.43</td><td>74.00</td><td>57.93</td><td>33.00</td><td>9.64</td><td>58.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>8236.80</td><td>48.98</td><td>-25.02</td><td>74.00</td><td>60.26</td><td>35.80</td><td>12.03</td><td>59.11</td><td>124</td><td>226</td><td>Peak</td></tr><tr><td>5</td><td>8236.80</td><td>47.72</td><td>-6.28</td><td>54.00</td><td>59.00</td><td>35.80</td><td>12.03</td><td>59.11</td><td>124</td><td>226</td><td>Average</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark		Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2745.68	45.71	-28.29	74.00	62.69	32.25	8.62	57.85	124	198	Peak	2	2745.68	44.45	-9.55	54.00	61.43	32.25	8.62	57.85	124	198	Average	3	3660.00	42.57	-31.43	74.00	57.93	33.00	9.64	58.00	---	---	Peak	4	8236.80	48.98	-25.02	74.00	60.26	35.80	12.03	59.11	124	226	Peak	5	8236.80	47.72	-6.28	54.00	59.00	35.80	12.03	59.11	124	226	Average
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																							
	Freq	Level	Line	Level Factor	Loss Factor																																																																																																																																																																									
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																																																																					
1	2745.68	46.67	-27.33	74.00	63.65	32.25	8.62	57.85	124	193	Peak																																																																																																																																																																			
2	2745.68	45.41	-8.59	54.00	62.39	32.25	8.62	57.85	124	193	Average																																																																																																																																																																			
3	3660.00	42.37	-31.63	74.00	57.73	33.00	9.64	58.00	---	---	Peak																																																																																																																																																																			
4	8236.80	49.51	-24.49	74.00	60.79	35.80	12.03	59.11	124	126	Peak																																																																																																																																																																			
5	8236.80	48.25	-5.75	54.00	59.53	35.80	12.03	59.11	124	126	Average																																																																																																																																																																			
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																							
	Freq	Level	Line	Level Factor	Loss Factor																																																																																																																																																																									
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																																																																					
1	2745.68	45.71	-28.29	74.00	62.69	32.25	8.62	57.85	124	198	Peak																																																																																																																																																																			
2	2745.68	44.45	-9.55	54.00	61.43	32.25	8.62	57.85	124	198	Average																																																																																																																																																																			
3	3660.00	42.57	-31.43	74.00	57.93	33.00	9.64	58.00	---	---	Peak																																																																																																																																																																			
4	8236.80	48.98	-25.02	74.00	60.26	35.80	12.03	59.11	124	226	Peak																																																																																																																																																																			
5	8236.80	47.72	-6.28	54.00	59.00	35.80	12.03	59.11	124	226	Average																																																																																																																																																																			



LoRa	Harmonic @ 3m																																																																																																																																	
ANT	FSK 150Kbps FHSS 150Kbps CH64 927.6MHz																																																																																																																																	
	Horizontal	Vertical																																																																																																																																
Peak	Date: 1 <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2782.88</td><td>46.64</td><td>-27.36</td><td>74.00</td><td>63.65</td><td>32.22</td><td>8.63 57.86 125 226 Peak</td></tr><tr><td>2</td><td>2782.88</td><td>45.38</td><td>-8.62</td><td>54.00</td><td>62.39</td><td>32.22</td><td>8.63 57.86 125 226 Average</td></tr><tr><td>3</td><td>3710.40</td><td>41.89</td><td>-32.11</td><td>74.00</td><td>57.10</td><td>33.10</td><td>9.61 58.00 --- Peak</td></tr><tr><td>4</td><td>8348.48</td><td>49.66</td><td>-24.34</td><td>74.00</td><td>68.76</td><td>35.80</td><td>12.07 58.97 245 189 Peak</td></tr><tr><td>5</td><td>8348.48</td><td>48.48</td><td>-5.60</td><td>54.00</td><td>59.50</td><td>35.80</td><td>12.07 58.97 245 189 Average</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark		Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m		1	2782.88	46.64	-27.36	74.00	63.65	32.22	8.63 57.86 125 226 Peak	2	2782.88	45.38	-8.62	54.00	62.39	32.22	8.63 57.86 125 226 Average	3	3710.40	41.89	-32.11	74.00	57.10	33.10	9.61 58.00 --- Peak	4	8348.48	49.66	-24.34	74.00	68.76	35.80	12.07 58.97 245 189 Peak	5	8348.48	48.48	-5.60	54.00	59.50	35.80	12.07 58.97 245 189 Average	Date: 2 <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2782.88</td><td>45.31</td><td>-28.69</td><td>74.00</td><td>62.32</td><td>32.22</td><td>8.63 57.86 224 189 Peak</td></tr><tr><td>2</td><td>2782.88</td><td>44.05</td><td>-9.95</td><td>54.00</td><td>61.06</td><td>32.22</td><td>8.63 57.86 224 189 Average</td></tr><tr><td>3</td><td>3710.40</td><td>41.84</td><td>-32.16</td><td>74.00</td><td>57.13</td><td>33.10</td><td>9.61 58.00 --- Peak</td></tr><tr><td>4</td><td>8348.48</td><td>48.47</td><td>-25.53</td><td>74.00</td><td>59.57</td><td>35.80</td><td>12.07 58.97 124 214 Peak</td></tr><tr><td>5</td><td>8348.48</td><td>47.21</td><td>-6.79</td><td>54.00</td><td>58.31</td><td>35.80</td><td>12.07 58.97 124 214 Average</td></tr></table>		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark		Freq	Level	Line	Level Factor	Loss Factor				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m		1	2782.88	45.31	-28.69	74.00	62.32	32.22	8.63 57.86 224 189 Peak	2	2782.88	44.05	-9.95	54.00	61.06	32.22	8.63 57.86 224 189 Average	3	3710.40	41.84	-32.16	74.00	57.13	33.10	9.61 58.00 --- Peak	4	8348.48	48.47	-25.53	74.00	59.57	35.80	12.07 58.97 124 214 Peak	5	8348.48	47.21	-6.79	54.00	58.31	35.80	12.07 58.97 124 214 Average
		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																										
	Freq	Level	Line	Level Factor	Loss Factor																																																																																																																													
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m																																																																																																																												
1	2782.88	46.64	-27.36	74.00	63.65	32.22	8.63 57.86 125 226 Peak																																																																																																																											
2	2782.88	45.38	-8.62	54.00	62.39	32.22	8.63 57.86 125 226 Average																																																																																																																											
3	3710.40	41.89	-32.11	74.00	57.10	33.10	9.61 58.00 --- Peak																																																																																																																											
4	8348.48	49.66	-24.34	74.00	68.76	35.80	12.07 58.97 245 189 Peak																																																																																																																											
5	8348.48	48.48	-5.60	54.00	59.50	35.80	12.07 58.97 245 189 Average																																																																																																																											
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																											
	Freq	Level	Line	Level Factor	Loss Factor																																																																																																																													
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m																																																																																																																												
1	2782.88	45.31	-28.69	74.00	62.32	32.22	8.63 57.86 224 189 Peak																																																																																																																											
2	2782.88	44.05	-9.95	54.00	61.06	32.22	8.63 57.86 224 189 Average																																																																																																																											
3	3710.40	41.84	-32.16	74.00	57.13	33.10	9.61 58.00 --- Peak																																																																																																																											
4	8348.48	48.47	-25.53	74.00	59.57	35.80	12.07 58.97 124 214 Peak																																																																																																																											
5	8348.48	47.21	-6.79	54.00	58.31	35.80	12.07 58.97 124 214 Average																																																																																																																											





FSK 250Kbps FHSS 250Kbps (Harmonic @ 3m)

LoRa	Harmonic @ 3m																																																																																																																																																																													
ANT	FSK 250Kbps FHSS 250Kbps CH01 902.5MHz																																																																																																																																																																													
	Horizontal	Vertical																																																																																																																																																																												
Peak	Date: 1 <table><thead><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>Line</th><th>Read/term</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>1895.00</td><td>47.72</td><td>---</td><td>---</td><td>68.35</td><td>38.63</td><td>6.64</td><td>57.98</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>2787.58</td><td>46.01</td><td>-27.99</td><td>74.00</td><td>62.96</td><td>32.28</td><td>8.61</td><td>57.84</td><td>142</td><td>163 Peak</td></tr><tr><td>3</td><td>2787.58</td><td>43.78</td><td>-10.22</td><td>54.00</td><td>60.73</td><td>32.28</td><td>8.61</td><td>57.84</td><td>142</td><td>163 Average</td></tr><tr><td>4</td><td>3618.00</td><td>43.26</td><td>-38.74</td><td>74.00</td><td>58.67</td><td>32.93</td><td>9.66</td><td>58.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>8122.58</td><td>48.27</td><td>-25.73</td><td>74.00</td><td>59.76</td><td>35.84</td><td>11.93</td><td>59.26</td><td>270</td><td>219 Peak</td></tr><tr><td>6</td><td>8122.58</td><td>46.04</td><td>-7.96</td><td>54.00</td><td>57.53</td><td>35.84</td><td>11.93</td><td>59.26</td><td>270</td><td>219 Average</td></tr></tbody></table>	Freq	Level	Over Limit	Line	Read/term	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	1895.00	47.72	---	---	68.35	38.63	6.64	57.98	---	Peak	2	2787.58	46.01	-27.99	74.00	62.96	32.28	8.61	57.84	142	163 Peak	3	2787.58	43.78	-10.22	54.00	60.73	32.28	8.61	57.84	142	163 Average	4	3618.00	43.26	-38.74	74.00	58.67	32.93	9.66	58.00	---	Peak	5	8122.58	48.27	-25.73	74.00	59.76	35.84	11.93	59.26	270	219 Peak	6	8122.58	46.04	-7.96	54.00	57.53	35.84	11.93	59.26	270	219 Average	Date: 2 <table><thead><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>Line</th><th>Read/term</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>1895.00</td><td>44.31</td><td>---</td><td>---</td><td>64.94</td><td>38.63</td><td>6.64</td><td>57.98</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>2787.58</td><td>46.21</td><td>-27.79</td><td>74.00</td><td>63.16</td><td>32.28</td><td>8.61</td><td>57.84</td><td>180</td><td>29 Peak</td></tr><tr><td>3</td><td>2787.58</td><td>43.98</td><td>-10.02</td><td>54.00</td><td>60.93</td><td>32.28</td><td>8.61</td><td>57.84</td><td>180</td><td>29 Average</td></tr><tr><td>4</td><td>3618.00</td><td>43.59</td><td>-38.41</td><td>74.00</td><td>59.00</td><td>32.93</td><td>9.66</td><td>58.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>8122.58</td><td>48.96</td><td>-25.04</td><td>74.00</td><td>60.45</td><td>35.84</td><td>11.93</td><td>59.26</td><td>283</td><td>246 Peak</td></tr><tr><td>6</td><td>8122.58</td><td>46.73</td><td>-7.27</td><td>54.00</td><td>58.22</td><td>35.84</td><td>11.93</td><td>59.26</td><td>283</td><td>246 Average</td></tr></tbody></table>	Freq	Level	Over Limit	Line	Read/term	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	1895.00	44.31	---	---	64.94	38.63	6.64	57.98	---	Peak	2	2787.58	46.21	-27.79	74.00	63.16	32.28	8.61	57.84	180	29 Peak	3	2787.58	43.98	-10.02	54.00	60.93	32.28	8.61	57.84	180	29 Average	4	3618.00	43.59	-38.41	74.00	59.00	32.93	9.66	58.00	---	Peak	5	8122.58	48.96	-25.04	74.00	60.45	35.84	11.93	59.26	283	246 Peak	6	8122.58	46.73	-7.27	54.00	58.22	35.84	11.93	59.26	283	246 Average
	Freq	Level	Over Limit	Line	Read/term	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																																																																																																						
1	1895.00	47.72	---	---	68.35	38.63	6.64	57.98	---	Peak																																																																																																																																																																				
2	2787.58	46.01	-27.99	74.00	62.96	32.28	8.61	57.84	142	163 Peak																																																																																																																																																																				
3	2787.58	43.78	-10.22	54.00	60.73	32.28	8.61	57.84	142	163 Average																																																																																																																																																																				
4	3618.00	43.26	-38.74	74.00	58.67	32.93	9.66	58.00	---	Peak																																																																																																																																																																				
5	8122.58	48.27	-25.73	74.00	59.76	35.84	11.93	59.26	270	219 Peak																																																																																																																																																																				
6	8122.58	46.04	-7.96	54.00	57.53	35.84	11.93	59.26	270	219 Average																																																																																																																																																																				
Freq	Level	Over Limit	Line	Read/term	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																																																																																																						
1	1895.00	44.31	---	---	64.94	38.63	6.64	57.98	---	Peak																																																																																																																																																																				
2	2787.58	46.21	-27.79	74.00	63.16	32.28	8.61	57.84	180	29 Peak																																																																																																																																																																				
3	2787.58	43.98	-10.02	54.00	60.93	32.28	8.61	57.84	180	29 Average																																																																																																																																																																				
4	3618.00	43.59	-38.41	74.00	59.00	32.93	9.66	58.00	---	Peak																																																																																																																																																																				
5	8122.58	48.96	-25.04	74.00	60.45	35.84	11.93	59.26	283	246 Peak																																																																																																																																																																				
6	8122.58	46.73	-7.27	54.00	58.22	35.84	11.93	59.26	283	246 Average																																																																																																																																																																				



LoRa	Harmonic @ 3m										
ANT	FSK 250Kbps FHSS 250Kbps CH26 915MHz										
	Horizontal										
	Vertical										
Peak	Date: 1 Level (dBuV/m)										



LoRa	Harmonic @ 3m																																																																																																																																																					
ANT	FSK 250Kbps FHSS 250Kbps CH51 927.5MHz																																																																																																																																																					
	Horizontal					Vertical																																																																																																																																																
Peak	Date: 1  <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>1855.00</td><td>46.04</td><td>---</td><td>66.03</td><td>31.03</td><td>6.88</td><td>57.90</td></tr><tr><td>2</td><td>2782.50</td><td>46.12</td><td>-27.88</td><td>74.00</td><td>63.13</td><td>32.22</td><td>8.63</td></tr><tr><td>3</td><td>2782.50</td><td>43.09</td><td>-30.11</td><td>54.00</td><td>60.90</td><td>32.22</td><td>8.63</td></tr><tr><td>4</td><td>3718.00</td><td>43.01</td><td>-30.99</td><td>74.00</td><td>58.30</td><td>33.10</td><td>9.61</td></tr><tr><td>5</td><td>8347.50</td><td>48.57</td><td>-25.43</td><td>74.00</td><td>59.67</td><td>35.00</td><td>12.07</td></tr><tr><td>6</td><td>8347.50</td><td>46.34</td><td>-7.66</td><td>54.00</td><td>57.44</td><td>35.00</td><td>12.07</td></tr></table>						Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Freq	Level	Line	Level Factor	Loss Factor			MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	1	1855.00	46.04	---	66.03	31.03	6.88	57.90	2	2782.50	46.12	-27.88	74.00	63.13	32.22	8.63	3	2782.50	43.09	-30.11	54.00	60.90	32.22	8.63	4	3718.00	43.01	-30.99	74.00	58.30	33.10	9.61	5	8347.50	48.57	-25.43	74.00	59.67	35.00	12.07	6	8347.50	46.34	-7.66	54.00	57.44	35.00	12.07	Date: 2  <table><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>1855.00</td><td>45.73</td><td>---</td><td>65.72</td><td>31.03</td><td>6.88</td><td>57.90</td></tr><tr><td>2</td><td>2782.50</td><td>45.35</td><td>-28.65</td><td>74.00</td><td>62.36</td><td>32.22</td><td>8.63</td></tr><tr><td>3</td><td>2782.50</td><td>43.12</td><td>-30.88</td><td>54.00</td><td>60.13</td><td>32.22</td><td>8.63</td></tr><tr><td>4</td><td>3718.00</td><td>42.96</td><td>-31.04</td><td>74.00</td><td>58.25</td><td>33.10</td><td>9.61</td></tr><tr><td>5</td><td>8347.50</td><td>47.86</td><td>-26.14</td><td>74.00</td><td>58.96</td><td>35.00</td><td>12.07</td></tr><tr><td>6</td><td>8347.50</td><td>45.63</td><td>-8.37</td><td>54.00</td><td>56.73</td><td>35.00</td><td>12.07</td></tr></table>						Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Freq	Level	Line	Level Factor	Loss Factor			MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm	1	1855.00	45.73	---	65.72	31.03	6.88	57.90	2	2782.50	45.35	-28.65	74.00	62.36	32.22	8.63	3	2782.50	43.12	-30.88	54.00	60.13	32.22	8.63	4	3718.00	42.96	-31.04	74.00	58.25	33.10	9.61	5	8347.50	47.86	-26.14	74.00	58.96	35.00	12.07	6	8347.50	45.63	-8.37	54.00	56.73	35.00	12.07
		Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																																														
	Freq	Level	Line	Level Factor	Loss Factor																																																																																																																																																	
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm																																																																																																																																															
	1	1855.00	46.04	---	66.03	31.03	6.88	57.90																																																																																																																																														
	2	2782.50	46.12	-27.88	74.00	63.13	32.22	8.63																																																																																																																																														
	3	2782.50	43.09	-30.11	54.00	60.90	32.22	8.63																																																																																																																																														
	4	3718.00	43.01	-30.99	74.00	58.30	33.10	9.61																																																																																																																																														
	5	8347.50	48.57	-25.43	74.00	59.67	35.00	12.07																																																																																																																																														
	6	8347.50	46.34	-7.66	54.00	57.44	35.00	12.07																																																																																																																																														
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																																															
Freq	Level	Line	Level Factor	Loss Factor																																																																																																																																																		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	cm																																																																																																																																																
1	1855.00	45.73	---	65.72	31.03	6.88	57.90																																																																																																																																															
2	2782.50	45.35	-28.65	74.00	62.36	32.22	8.63																																																																																																																																															
3	2782.50	43.12	-30.88	54.00	60.13	32.22	8.63																																																																																																																																															
4	3718.00	42.96	-31.04	74.00	58.25	33.10	9.61																																																																																																																																															
5	8347.50	47.86	-26.14	74.00	58.96	35.00	12.07																																																																																																																																															
6	8347.50	45.63	-8.37	54.00	56.73	35.00	12.07																																																																																																																																															





<30M-1G>

FSK 50Kbps FHSS 50Kbps (LF @ 3m)

LoRa	LF @ 3m																																																																																																																																																
ANT	FSK 50Kbps FHSS 50Kbps CH01 902.2 MHz																																																																																																																																																
	Horizontal	Vertical																																																																																																																																															
Peak	Date: 1 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>125.06</td><td>17.32</td><td>-26.18</td><td>43.50</td><td>31.50</td><td>16.38</td><td>1.14</td><td>31.70</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>280.26</td><td>20.53</td><td>-25.47</td><td>46.00</td><td>31.40</td><td>18.93</td><td>1.74</td><td>31.54</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>870.02</td><td>39.52</td><td>---</td><td>---</td><td>37.83</td><td>29.00</td><td>3.09</td><td>30.40</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>902.20</td><td>117.92</td><td>---</td><td>---</td><td>116.63</td><td>29.13</td><td>3.16</td><td>31.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>934.04</td><td>45.13</td><td>---</td><td>---</td><td>42.79</td><td>30.00</td><td>3.21</td><td>30.93</td><td>---</td><td>Peak</td></tr></tbody></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm	deg		1	125.06	17.32	-26.18	43.50	31.50	16.38	1.14	31.70	---	Peak	2	280.26	20.53	-25.47	46.00	31.40	18.93	1.74	31.54	---	Peak	3	870.02	39.52	---	---	37.83	29.00	3.09	30.40	---	Peak	4	902.20	117.92	---	---	116.63	29.13	3.16	31.00	---	Peak	5	934.04	45.13	---	---	42.79	30.00	3.21	30.93	---	Peak	Date: 2 Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>137.67</td><td>17.78</td><td>-25.72</td><td>43.50</td><td>31.68</td><td>16.60</td><td>1.20</td><td>31.70</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>285.11</td><td>20.40</td><td>-25.60</td><td>46.00</td><td>31.18</td><td>18.99</td><td>1.76</td><td>31.53</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>902.20</td><td>109.76</td><td>---</td><td>---</td><td>108.47</td><td>29.13</td><td>3.16</td><td>31.00</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>934.04</td><td>37.76</td><td>---</td><td>---</td><td>35.42</td><td>30.00</td><td>3.21</td><td>30.93</td><td>---</td><td>Peak</td></tr></tbody></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm	deg		1	137.67	17.78	-25.72	43.50	31.68	16.60	1.20	31.70	---	Peak	2	285.11	20.40	-25.60	46.00	31.18	18.99	1.76	31.53	---	Peak	3	902.20	109.76	---	---	108.47	29.13	3.16	31.00	---	Peak	4	934.04	37.76	---	---	35.42	30.00	3.21	30.93	---	Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm	deg																																																																																																																																								
1	125.06	17.32	-26.18	43.50	31.50	16.38	1.14	31.70	---	Peak																																																																																																																																							
2	280.26	20.53	-25.47	46.00	31.40	18.93	1.74	31.54	---	Peak																																																																																																																																							
3	870.02	39.52	---	---	37.83	29.00	3.09	30.40	---	Peak																																																																																																																																							
4	902.20	117.92	---	---	116.63	29.13	3.16	31.00	---	Peak																																																																																																																																							
5	934.04	45.13	---	---	42.79	30.00	3.21	30.93	---	Peak																																																																																																																																							
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cm	deg																																																																																																																																								
1	137.67	17.78	-25.72	43.50	31.68	16.60	1.20	31.70	---	Peak																																																																																																																																							
2	285.11	20.40	-25.60	46.00	31.18	18.99	1.76	31.53	---	Peak																																																																																																																																							
3	902.20	109.76	---	---	108.47	29.13	3.16	31.00	---	Peak																																																																																																																																							
4	934.04	37.76	---	---	35.42	30.00	3.21	30.93	---	Peak																																																																																																																																							



LoRa	LF @ 3m																																																																																																											
ANT	FSK 50Kbps FHSS 50Kbps CH65 915 MHz																																																																																																											
	Horizontal						Vertical																																																																																																					
Peak																																																																																																												
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><td>1</td><td>123.120</td><td>21.24</td><td>-22.26</td><td>43.50</td><td>36.69</td><td>17.28</td><td>2.17</td><td>34.90</td><td>--- --- Peak</td></tr><tr><td>2</td><td>266.680</td><td>23.03</td><td>-22.97</td><td>46.00</td><td>36.40</td><td>18.31</td><td>3.08</td><td>34.76</td><td>--- --- Peak</td></tr><tr><td>3</td><td>915.000</td><td>117.55</td><td>---</td><td>---</td><td>117.76</td><td>29.34</td><td>4.45</td><td>34.00</td><td>--- --- Peak</td></tr></table>							Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	Line	Level Factor	Loss Factor				1	123.120	21.24	-22.26	43.50	36.69	17.28	2.17	34.90	--- --- Peak	2	266.680	23.03	-22.97	46.00	36.40	18.31	3.08	34.76	--- --- Peak	3	915.000	117.55	---	---	117.76	29.34	4.45	34.00	--- --- Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><td>1</td><td>135.730</td><td>21.97</td><td>-21.53</td><td>43.50</td><td>36.61</td><td>18.01</td><td>2.25</td><td>34.90</td><td>--- --- Peak</td></tr><tr><td>2</td><td>243.400</td><td>23.26</td><td>-22.74</td><td>46.00</td><td>37.57</td><td>17.53</td><td>2.97</td><td>34.81</td><td>--- --- Peak</td></tr><tr><td>3</td><td>915.000</td><td>110.53</td><td>---</td><td>---</td><td>110.74</td><td>29.34</td><td>4.45</td><td>34.00</td><td>--- --- Peak</td></tr></table>							Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	Line	Level Factor	Loss Factor				1	135.730	21.97	-21.53	43.50	36.61	18.01	2.25	34.90	--- --- Peak	2	243.400	23.26	-22.74	46.00	37.57	17.53	2.97	34.81	--- --- Peak	3	915.000	110.53	---	---	110.74	29.34	4.45	34.00	--- --- Peak
		Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																			
		MHz	dBuV/m	Line	Level Factor	Loss Factor																																																																																																						
	1	123.120	21.24	-22.26	43.50	36.69	17.28	2.17	34.90	--- --- Peak																																																																																																		
2	266.680	23.03	-22.97	46.00	36.40	18.31	3.08	34.76	--- --- Peak																																																																																																			
3	915.000	117.55	---	---	117.76	29.34	4.45	34.00	--- --- Peak																																																																																																			
	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																				
	MHz	dBuV/m	Line	Level Factor	Loss Factor																																																																																																							
1	135.730	21.97	-21.53	43.50	36.61	18.01	2.25	34.90	--- --- Peak																																																																																																			
2	243.400	23.26	-22.74	46.00	37.57	17.53	2.97	34.81	--- --- Peak																																																																																																			
3	915.000	110.53	---	---	110.74	29.34	4.45	34.00	--- --- Peak																																																																																																			





LoRa	LF @ 3m																																																																																																																																	
ANT	FSK 50Kbps FHSS 50Kbps CH129 927.8 MHz																																																																																																																																	
	Horizontal	Vertical																																																																																																																																
Peak	Date: 1 <table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>131.85</td><td>17.02</td><td>-26.48</td><td>43.50</td><td>31.05</td><td>16.50</td><td>1.17</td><td>31.70</td><td>--- Peak</td></tr><tr><td>2</td><td>248.25</td><td>20.34</td><td>-25.66</td><td>46.00</td><td>31.90</td><td>18.40</td><td>1.64</td><td>31.60</td><td>--- Peak</td></tr><tr><td>3</td><td>896.21</td><td>44.31</td><td>---</td><td>43.02</td><td>29.06</td><td>3.15</td><td>30.92</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>927.80</td><td>114.46</td><td>---</td><td>112.32</td><td>29.88</td><td>3.20</td><td>30.94</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>960.23</td><td>39.18</td><td>---</td><td>36.36</td><td>30.47</td><td>3.25</td><td>30.90</td><td>---</td><td>Peak</td></tr></table>		Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg	1	131.85	17.02	-26.48	43.50	31.05	16.50	1.17	31.70	--- Peak	2	248.25	20.34	-25.66	46.00	31.90	18.40	1.64	31.60	--- Peak	3	896.21	44.31	---	43.02	29.06	3.15	30.92	---	Peak	4	927.80	114.46	---	112.32	29.88	3.20	30.94	---	Peak	5	960.23	39.18	---	36.36	30.47	3.25	30.90	---	Peak	Date: 2 <table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>134.76</td><td>17.32</td><td>-26.18</td><td>43.50</td><td>31.28</td><td>16.55</td><td>1.19</td><td>31.70</td><td>--- Peak</td></tr><tr><td>2</td><td>256.98</td><td>20.22</td><td>-25.78</td><td>46.00</td><td>31.52</td><td>18.62</td><td>1.67</td><td>31.59</td><td>--- Peak</td></tr><tr><td>3</td><td>896.21</td><td>39.88</td><td>---</td><td>38.59</td><td>29.06</td><td>3.15</td><td>30.92</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>927.80</td><td>109.04</td><td>---</td><td>106.90</td><td>29.88</td><td>3.20</td><td>30.94</td><td>---</td><td>Peak</td></tr></table>		Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg	1	134.76	17.32	-26.18	43.50	31.28	16.55	1.19	31.70	--- Peak	2	256.98	20.22	-25.78	46.00	31.52	18.62	1.67	31.59	--- Peak	3	896.21	39.88	---	38.59	29.06	3.15	30.92	---	Peak	4	927.80	109.04	---	106.90	29.88	3.20	30.94	---	Peak
	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																																																									
1	131.85	17.02	-26.48	43.50	31.05	16.50	1.17	31.70	--- Peak																																																																																																																									
2	248.25	20.34	-25.66	46.00	31.90	18.40	1.64	31.60	--- Peak																																																																																																																									
3	896.21	44.31	---	43.02	29.06	3.15	30.92	---	Peak																																																																																																																									
4	927.80	114.46	---	112.32	29.88	3.20	30.94	---	Peak																																																																																																																									
5	960.23	39.18	---	36.36	30.47	3.25	30.90	---	Peak																																																																																																																									
	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																										
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																																																									
1	134.76	17.32	-26.18	43.50	31.28	16.55	1.19	31.70	--- Peak																																																																																																																									
2	256.98	20.22	-25.78	46.00	31.52	18.62	1.67	31.59	--- Peak																																																																																																																									
3	896.21	39.88	---	38.59	29.06	3.15	30.92	---	Peak																																																																																																																									
4	927.80	109.04	---	106.90	29.88	3.20	30.94	---	Peak																																																																																																																									



FSK 150Kbps FHSS 150Kbps (LF @ 3m)

LoRa	LF @ 3m																																																																																																																																																
ANT	FSK 150Kbps FHSS 150Kbps CH01 902.4 MHz MHz																																																																																																																																																
	Horizontal	Vertical																																																																																																																																															
Peak	Data: 1 <table><tr><th>Peak</th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>127.00</td><td>17.90</td><td>-25.60</td><td>43.50</td><td>32.04</td><td>16.41</td><td>1.15</td><td>31.70</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>264.74</td><td>20.38</td><td>-25.62</td><td>46.00</td><td>31.54</td><td>18.77</td><td>1.69</td><td>31.57</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>870.02</td><td>39.58</td><td>---</td><td>---</td><td>37.89</td><td>29.00</td><td>3.09</td><td>30.40</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>902.40</td><td>115.90</td><td>---</td><td>---</td><td>114.00</td><td>29.14</td><td>3.16</td><td>31.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>934.04</td><td>62.38</td><td>---</td><td>---</td><td>60.04</td><td>30.06</td><td>3.21</td><td>30.93</td><td>---</td><td>Peak</td></tr></table>	Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	127.00	17.90	-25.60	43.50	32.04	16.41	1.15	31.70	---	Peak	2	264.74	20.38	-25.62	46.00	31.54	18.77	1.69	31.57	---	Peak	3	870.02	39.58	---	---	37.89	29.00	3.09	30.40	---	Peak	4	902.40	115.90	---	---	114.00	29.14	3.16	31.00	---	Peak	5	934.04	62.38	---	---	60.04	30.06	3.21	30.93	---	Peak	Data: 2 <table><tr><th>Peak</th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>135.73</td><td>16.34</td><td>-26.36</td><td>43.50</td><td>30.88</td><td>16.57</td><td>1.19</td><td>31.70</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>277.35</td><td>20.19</td><td>-25.81</td><td>46.00</td><td>31.12</td><td>18.89</td><td>1.73</td><td>31.55</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>902.40</td><td>110.79</td><td>---</td><td>---</td><td>109.49</td><td>29.14</td><td>3.16</td><td>31.00</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>934.04</td><td>37.21</td><td>---</td><td>---</td><td>34.67</td><td>30.06</td><td>3.21</td><td>30.93</td><td>---</td><td>Peak</td></tr></table>	Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg		1	135.73	16.34	-26.36	43.50	30.88	16.57	1.19	31.70	---	Peak	2	277.35	20.19	-25.81	46.00	31.12	18.89	1.73	31.55	---	Peak	3	902.40	110.79	---	---	109.49	29.14	3.16	31.00	---	Peak	4	934.04	37.21	---	---	34.67	30.06	3.21	30.93	---	Peak
Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																																																																								
1	127.00	17.90	-25.60	43.50	32.04	16.41	1.15	31.70	---	Peak																																																																																																																																							
2	264.74	20.38	-25.62	46.00	31.54	18.77	1.69	31.57	---	Peak																																																																																																																																							
3	870.02	39.58	---	---	37.89	29.00	3.09	30.40	---	Peak																																																																																																																																							
4	902.40	115.90	---	---	114.00	29.14	3.16	31.00	---	Peak																																																																																																																																							
5	934.04	62.38	---	---	60.04	30.06	3.21	30.93	---	Peak																																																																																																																																							
Peak	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																																																																								
1	135.73	16.34	-26.36	43.50	30.88	16.57	1.19	31.70	---	Peak																																																																																																																																							
2	277.35	20.19	-25.81	46.00	31.12	18.89	1.73	31.55	---	Peak																																																																																																																																							
3	902.40	110.79	---	---	109.49	29.14	3.16	31.00	---	Peak																																																																																																																																							
4	934.04	37.21	---	---	34.67	30.06	3.21	30.93	---	Peak																																																																																																																																							



LoRa	LF @ 3m																																																																																											
ANT	FSK 150Kbps FHSS 150Kbps CH33 915.2 MHz																																																																																											
	Horizontal	Vertical																																																																																										
Peak	<table><tr><th></th><th>MHz</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>135.738</td><td>28.98</td><td>-22.68</td><td>43.58</td><td>35.54</td><td>18.81</td><td>2.25</td><td>34.90 --- Peak</td></tr><tr><td>2</td><td>275.418</td><td>23.43</td><td>-22.57</td><td>46.00</td><td>36.48</td><td>18.59</td><td>3.11</td><td>34.75 --- Peak</td></tr><tr><td>3</td><td>915.200</td><td>117.49</td><td>71.49</td><td>---</td><td>---</td><td>29.34</td><td>4.45</td><td>34.00 --- Peak</td></tr></table>		MHz	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark			dBuV/m	dB	dBuV/m	dBuV/m	dB	dB		1	135.738	28.98	-22.68	43.58	35.54	18.81	2.25	34.90 --- Peak	2	275.418	23.43	-22.57	46.00	36.48	18.59	3.11	34.75 --- Peak	3	915.200	117.49	71.49	---	---	29.34	4.45	34.00 --- Peak	<table><tr><th></th><th>MHz</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>132.828</td><td>21.74</td><td>-21.76</td><td>43.58</td><td>36.57</td><td>17.84</td><td>2.23</td><td>34.90 --- Peak</td></tr><tr><td>2</td><td>283.178</td><td>23.11</td><td>-22.89</td><td>46.00</td><td>35.88</td><td>18.83</td><td>3.14</td><td>34.74 --- Peak</td></tr><tr><td>3</td><td>915.200</td><td>118.42</td><td>---</td><td>---</td><td>118.63</td><td>29.34</td><td>4.45</td><td>34.00 --- Peak</td></tr></table>		MHz	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark			dBuV/m	dB	dBuV/m	dBuV/m	dB	dB		1	132.828	21.74	-21.76	43.58	36.57	17.84	2.23	34.90 --- Peak	2	283.178	23.11	-22.89	46.00	35.88	18.83	3.14	34.74 --- Peak	3	915.200	118.42	---	---	118.63	29.34	4.45	34.00 --- Peak
	MHz	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																				
		dBuV/m	dB	dBuV/m	dBuV/m	dB	dB																																																																																					
1	135.738	28.98	-22.68	43.58	35.54	18.81	2.25	34.90 --- Peak																																																																																				
2	275.418	23.43	-22.57	46.00	36.48	18.59	3.11	34.75 --- Peak																																																																																				
3	915.200	117.49	71.49	---	---	29.34	4.45	34.00 --- Peak																																																																																				
	MHz	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																				
		dBuV/m	dB	dBuV/m	dBuV/m	dB	dB																																																																																					
1	132.828	21.74	-21.76	43.58	36.57	17.84	2.23	34.90 --- Peak																																																																																				
2	283.178	23.11	-22.89	46.00	35.88	18.83	3.14	34.74 --- Peak																																																																																				
3	915.200	118.42	---	---	118.63	29.34	4.45	34.00 --- Peak																																																																																				





LoRa	LF @ 3m																																																																																																																																
ANT	FSK 150Kbps FHSS 150Kbps CH64 927.6 MHz																																																																																																																																
	Horizontal	Vertical																																																																																																																															
Peak	Date: 1 <table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>134.76</td><td>17.23</td><td>-26.27</td><td>43.50</td><td>31.19</td><td>16.55</td><td>1.19</td><td>31.70</td><td>--- Peak</td></tr><tr><td>2</td><td>274.44</td><td>21.48</td><td>-24.52</td><td>46.00</td><td>32.46</td><td>18.85</td><td>1.72</td><td>31.55</td><td>--- Peak</td></tr><tr><td>3</td><td>895.24</td><td>44.36</td><td>---</td><td>43.05</td><td>29.06</td><td>3.15</td><td>30.90</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>927.60</td><td>114.57</td><td>---</td><td>112.44</td><td>29.87</td><td>3.20</td><td>30.94</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>959.26</td><td>39.39</td><td>---</td><td>36.57</td><td>30.47</td><td>3.25</td><td>30.90</td><td>---</td><td>Peak</td></tr></table>		Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg	1	134.76	17.23	-26.27	43.50	31.19	16.55	1.19	31.70	--- Peak	2	274.44	21.48	-24.52	46.00	32.46	18.85	1.72	31.55	--- Peak	3	895.24	44.36	---	43.05	29.06	3.15	30.90	---	Peak	4	927.60	114.57	---	112.44	29.87	3.20	30.94	---	Peak	5	959.26	39.39	---	36.57	30.47	3.25	30.90	---	Peak	Date: 2 <table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>136.70</td><td>16.83</td><td>-26.67</td><td>43.50</td><td>30.75</td><td>16.58</td><td>1.20</td><td>31.70</td><td>--- Peak</td></tr><tr><td>2</td><td>284.14</td><td>20.16</td><td>-25.84</td><td>46.00</td><td>30.96</td><td>18.98</td><td>1.75</td><td>31.53</td><td>--- Peak</td></tr><tr><td>3</td><td>896.21</td><td>39.30</td><td>---</td><td>38.01</td><td>29.06</td><td>3.15</td><td>30.92</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>927.60</td><td>108.33</td><td>---</td><td>106.20</td><td>29.87</td><td>3.20</td><td>30.94</td><td>---</td><td>Peak</td></tr></table>		Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg	1	136.70	16.83	-26.67	43.50	30.75	16.58	1.20	31.70	--- Peak	2	284.14	20.16	-25.84	46.00	30.96	18.98	1.75	31.53	--- Peak	3	896.21	39.30	---	38.01	29.06	3.15	30.92	---	Peak	4	927.60	108.33	---	106.20	29.87	3.20	30.94	---	Peak
	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																									
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg																																																																																																																									
1	134.76	17.23	-26.27	43.50	31.19	16.55	1.19	31.70	--- Peak																																																																																																																								
2	274.44	21.48	-24.52	46.00	32.46	18.85	1.72	31.55	--- Peak																																																																																																																								
3	895.24	44.36	---	43.05	29.06	3.15	30.90	---	Peak																																																																																																																								
4	927.60	114.57	---	112.44	29.87	3.20	30.94	---	Peak																																																																																																																								
5	959.26	39.39	---	36.57	30.47	3.25	30.90	---	Peak																																																																																																																								
	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																									
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																																																								
1	136.70	16.83	-26.67	43.50	30.75	16.58	1.20	31.70	--- Peak																																																																																																																								
2	284.14	20.16	-25.84	46.00	30.96	18.98	1.75	31.53	--- Peak																																																																																																																								
3	896.21	39.30	---	38.01	29.06	3.15	30.92	---	Peak																																																																																																																								
4	927.60	108.33	---	106.20	29.87	3.20	30.94	---	Peak																																																																																																																								





FSK 250Kbps FHSS 250Kbps (LF @ 3m)

LoRa	LF @ 3m																																																																																																																																																
ANT	FSK 250Kbps FHSS 250Kbps CH01 902.5 MHz																																																																																																																																																
	Horizontal	Vertical																																																																																																																																															
Peak	Date: 1 <table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>136.70</td><td>16.91</td><td>-26.59</td><td>43.50</td><td>30.83</td><td>16.58</td><td>1.20</td><td>31.70</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>285.11</td><td>20.68</td><td>-25.32</td><td>46.00</td><td>31.46</td><td>18.99</td><td>1.76</td><td>31.53</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>870.99</td><td>38.83</td><td>---</td><td>---</td><td>37.15</td><td>29.00</td><td>3.10</td><td>30.42</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>902.50</td><td>115.66</td><td>---</td><td>---</td><td>114.36</td><td>29.14</td><td>3.16</td><td>31.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>935.01</td><td>42.65</td><td>---</td><td>---</td><td>40.28</td><td>30.09</td><td>3.21</td><td>30.93</td><td>---</td><td>Peak</td></tr></table>		Freq	Level	Over Limit	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	136.70	16.91	-26.59	43.50	30.83	16.58	1.20	31.70	---	Peak	2	285.11	20.68	-25.32	46.00	31.46	18.99	1.76	31.53	---	Peak	3	870.99	38.83	---	---	37.15	29.00	3.10	30.42	---	Peak	4	902.50	115.66	---	---	114.36	29.14	3.16	31.00	---	Peak	5	935.01	42.65	---	---	40.28	30.09	3.21	30.93	---	Peak	Date: 2 <table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>131.85</td><td>17.60</td><td>-25.90</td><td>43.50</td><td>31.63</td><td>16.50</td><td>1.17</td><td>31.70</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>283.17</td><td>21.07</td><td>-24.93</td><td>46.00</td><td>31.80</td><td>18.97</td><td>1.75</td><td>31.53</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>902.50</td><td>110.91</td><td>---</td><td>---</td><td>109.61</td><td>29.14</td><td>3.16</td><td>31.00</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>935.01</td><td>39.79</td><td>---</td><td>---</td><td>37.42</td><td>30.09</td><td>3.21</td><td>30.93</td><td>---</td><td>Peak</td></tr></table>		Freq	Level	Over Limit	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	131.85	17.60	-25.90	43.50	31.63	16.50	1.17	31.70	---	Peak	2	283.17	21.07	-24.93	46.00	31.80	18.97	1.75	31.53	---	Peak	3	902.50	110.91	---	---	109.61	29.14	3.16	31.00	---	Peak	4	935.01	39.79	---	---	37.42	30.09	3.21	30.93	---	Peak
		Freq	Level	Over Limit	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark																																																																																																																																						
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																																								
1	136.70	16.91	-26.59	43.50	30.83	16.58	1.20	31.70	---	Peak																																																																																																																																							
2	285.11	20.68	-25.32	46.00	31.46	18.99	1.76	31.53	---	Peak																																																																																																																																							
3	870.99	38.83	---	---	37.15	29.00	3.10	30.42	---	Peak																																																																																																																																							
4	902.50	115.66	---	---	114.36	29.14	3.16	31.00	---	Peak																																																																																																																																							
5	935.01	42.65	---	---	40.28	30.09	3.21	30.93	---	Peak																																																																																																																																							
	Freq	Level	Over Limit	Limit	ReadAntenna	Cable Preamp	Loss Factor	A/Pos	T/Pos	Remark																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																																								
1	131.85	17.60	-25.90	43.50	31.63	16.50	1.17	31.70	---	Peak																																																																																																																																							
2	283.17	21.07	-24.93	46.00	31.80	18.97	1.75	31.53	---	Peak																																																																																																																																							
3	902.50	110.91	---	---	109.61	29.14	3.16	31.00	---	Peak																																																																																																																																							
4	935.01	39.79	---	---	37.42	30.09	3.21	30.93	---	Peak																																																																																																																																							




LoRa	LF @ 3m																																																																																																															
ANT	FSK 250Kbps FHSS 250Kbps CH26 915 MHz																																																																																																															
	Horizontal	Vertical																																																																																																														
Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>137.670</td><td>21.15</td><td>-22.35</td><td>43.50</td><td>35.66</td><td>18.13</td><td>2.26</td><td>34.90</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>284.140</td><td>23.18</td><td>-22.82</td><td>46.00</td><td>35.90</td><td>18.86</td><td>3.15</td><td>34.73</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>915.000</td><td>117.55</td><td>---</td><td>---</td><td>---</td><td>117.76</td><td>29.34</td><td>4.45</td><td>34.00</td><td>Peak</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dBuV/m	dB	cm	deg		1	137.670	21.15	-22.35	43.50	35.66	18.13	2.26	34.90	---	Peak	2	284.140	23.18	-22.82	46.00	35.90	18.86	3.15	34.73	---	Peak	3	915.000	117.55	---	---	---	117.76	29.34	4.45	34.00	Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>128.940</td><td>21.94</td><td>-21.56</td><td>43.50</td><td>37.82</td><td>17.62</td><td>2.20</td><td>34.90</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>271.530</td><td>23.06</td><td>-22.94</td><td>46.00</td><td>36.26</td><td>18.46</td><td>3.10</td><td>34.76</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>915.000</td><td>110.74</td><td>---</td><td>---</td><td>---</td><td>110.95</td><td>29.34</td><td>4.45</td><td>34.00</td><td>Peak</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dBuV/m	dB	cm	deg		1	128.940	21.94	-21.56	43.50	37.82	17.62	2.20	34.90	---	Peak	2	271.530	23.06	-22.94	46.00	36.26	18.46	3.10	34.76	---	Peak	3	915.000	110.74	---	---	---	110.95	29.34	4.45	34.00	Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																						
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dBuV/m	dB	cm	deg																																																																																																							
1	137.670	21.15	-22.35	43.50	35.66	18.13	2.26	34.90	---	Peak																																																																																																						
2	284.140	23.18	-22.82	46.00	35.90	18.86	3.15	34.73	---	Peak																																																																																																						
3	915.000	117.55	---	---	---	117.76	29.34	4.45	34.00	Peak																																																																																																						
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																						
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dBuV/m	dB	cm	deg																																																																																																							
1	128.940	21.94	-21.56	43.50	37.82	17.62	2.20	34.90	---	Peak																																																																																																						
2	271.530	23.06	-22.94	46.00	36.26	18.46	3.10	34.76	---	Peak																																																																																																						
3	915.000	110.74	---	---	---	110.95	29.34	4.45	34.00	Peak																																																																																																						



LoRa	LF @ 3m																																																																																																																															
ANT	FSK 250Kbps FHSS 250Kbps CH51 927.5 MHz																																																																																																																															
	Horizontal	Vertical																																																																																																																														
Peak	Date: 1 <table><tr><th></th><th>MHz</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>123.12</td><td>16.66</td><td>-26.84</td><td>43.50</td><td>30.89</td><td>16.34</td><td>1.13</td><td>31.70 --- Peak</td></tr><tr><td>2</td><td>277.35</td><td>20.55</td><td>-25.45</td><td>46.00</td><td>31.48</td><td>18.89</td><td>1.73</td><td>31.55 --- Peak</td></tr><tr><td>3</td><td>895.24</td><td>44.14</td><td>---</td><td>42.83</td><td>29.06</td><td>3.15</td><td>30.90</td><td>---</td></tr><tr><td>4</td><td>927.50</td><td>114.24</td><td>---</td><td>112.11</td><td>29.87</td><td>3.20</td><td>30.94</td><td>---</td></tr><tr><td>5</td><td>959.26</td><td>38.46</td><td>---</td><td>35.64</td><td>30.47</td><td>3.25</td><td>30.90</td><td>---</td></tr></table>		MHz	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark			dBuV/m	dB	dBuV/m	dBuV/m	dB	dB		1	123.12	16.66	-26.84	43.50	30.89	16.34	1.13	31.70 --- Peak	2	277.35	20.55	-25.45	46.00	31.48	18.89	1.73	31.55 --- Peak	3	895.24	44.14	---	42.83	29.06	3.15	30.90	---	4	927.50	114.24	---	112.11	29.87	3.20	30.94	---	5	959.26	38.46	---	35.64	30.47	3.25	30.90	---	Date: 2 <table><tr><th></th><th>MHz</th><th>Level</th><th>Over Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>123.12</td><td>16.74</td><td>-26.76</td><td>43.50</td><td>30.97</td><td>16.34</td><td>1.13</td><td>31.70 --- Peak</td></tr><tr><td>2</td><td>282.20</td><td>20.28</td><td>-25.72</td><td>46.00</td><td>31.11</td><td>18.96</td><td>1.75</td><td>31.54 --- Peak</td></tr><tr><td>3</td><td>895.24</td><td>38.02</td><td>---</td><td>36.71</td><td>29.06</td><td>3.15</td><td>30.90</td><td>---</td></tr><tr><td>4</td><td>927.50</td><td>109.51</td><td>---</td><td>107.38</td><td>29.87</td><td>3.20</td><td>30.94</td><td>---</td></tr><tr><td>5</td><td>959.26</td><td>37.40</td><td>---</td><td>34.58</td><td>30.47</td><td>3.25</td><td>30.90</td><td>---</td></tr></table>		MHz	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark			dBuV/m	dB	dBuV/m	dBuV/m	dB	dB		1	123.12	16.74	-26.76	43.50	30.97	16.34	1.13	31.70 --- Peak	2	282.20	20.28	-25.72	46.00	31.11	18.96	1.75	31.54 --- Peak	3	895.24	38.02	---	36.71	29.06	3.15	30.90	---	4	927.50	109.51	---	107.38	29.87	3.20	30.94	---	5	959.26	37.40	---	34.58	30.47	3.25	30.90	---
	MHz	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																								
		dBuV/m	dB	dBuV/m	dBuV/m	dB	dB																																																																																																																									
1	123.12	16.66	-26.84	43.50	30.89	16.34	1.13	31.70 --- Peak																																																																																																																								
2	277.35	20.55	-25.45	46.00	31.48	18.89	1.73	31.55 --- Peak																																																																																																																								
3	895.24	44.14	---	42.83	29.06	3.15	30.90	---																																																																																																																								
4	927.50	114.24	---	112.11	29.87	3.20	30.94	---																																																																																																																								
5	959.26	38.46	---	35.64	30.47	3.25	30.90	---																																																																																																																								
	MHz	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																																																																																								
		dBuV/m	dB	dBuV/m	dBuV/m	dB	dB																																																																																																																									
1	123.12	16.74	-26.76	43.50	30.97	16.34	1.13	31.70 --- Peak																																																																																																																								
2	282.20	20.28	-25.72	46.00	31.11	18.96	1.75	31.54 --- Peak																																																																																																																								
3	895.24	38.02	---	36.71	29.06	3.15	30.90	---																																																																																																																								
4	927.50	109.51	---	107.38	29.87	3.20	30.94	---																																																																																																																								
5	959.26	37.40	---	34.58	30.47	3.25	30.90	---																																																																																																																								

Appendix E. Duty Cycle Plots


FSK(FHSS)50kbps

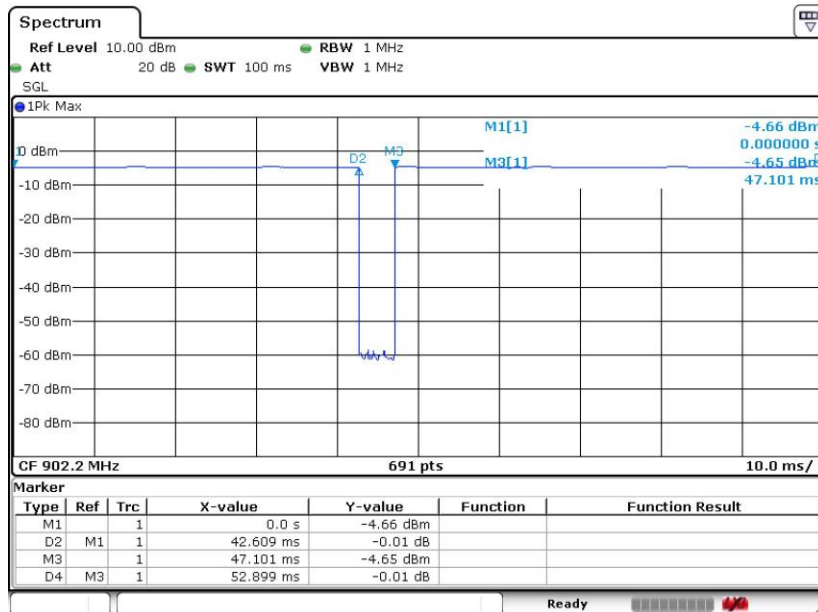

Note:

1. Duty cycle = on time/100 milliseconds = 95.51 %
2. Duty cycle correction factor = $20 \cdot \log(\text{Duty cycle}) = -0.40 \text{ dB}$


FSK(FHSS)150kbps

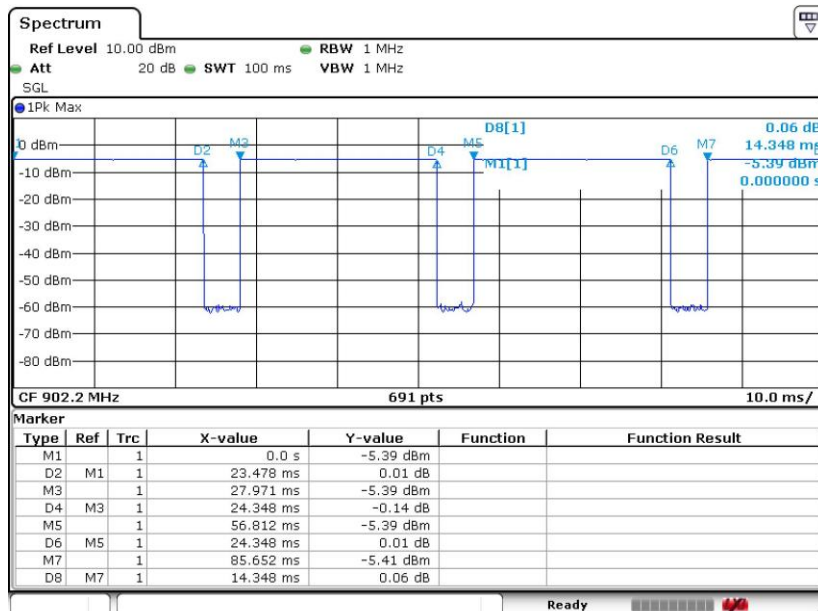


Note:

1. Duty cycle = on time/100 milliseconds = 86.52 %
2. Duty cycle correction factor = $20 \cdot \log(\text{Duty cycle}) = -1.26 \text{ dB}$

FSK(FHSS)250kbps-Plot 1

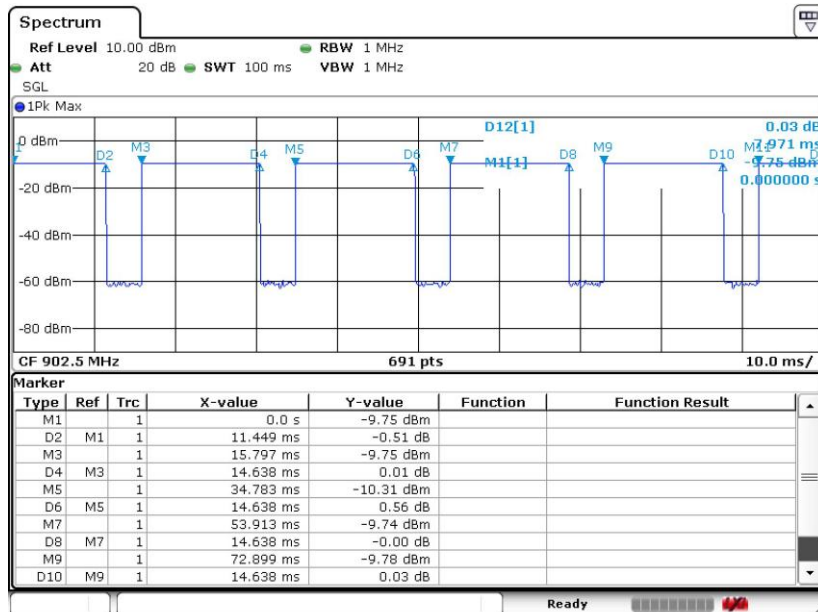

FSK(FHSS)250kbps-Plot 2

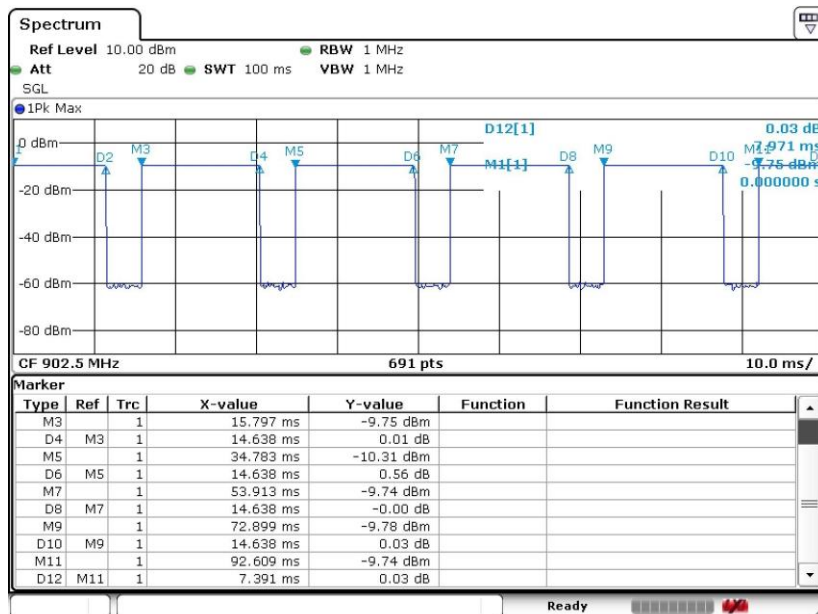

Note:

1. Duty cycle = on time/100 milliseconds = 77.39 %
2. Duty cycle correction factor = $20 \cdot \log(\text{Duty cycle}) = -2.23 \text{ dB}$