



FCC PART 15, SUBPART C ISED C RSS-247, ISSUE 4, July 2025


TEST REPORT

For

Ring LLC

12515 Cerise Ave.,
Hawthorne, CA 90250, USA

FCC ID: 2AEUP-7AFYA9
IC: 20271-7AFYA9

Report Type: Original Report	Product Type: Car Alarm
Prepared By: Rachana Khanduri Project Engineer	
Report Number: R2601121-247-02	
Report Date: 2026-01-30	
Reviewed By: Christian McCaig RF Lead Engineer	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164	



Note: This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This test report shall not be used by the customer to claim product certification, approval, or endorsement by A2LA or any agency of the United States Government or any foreign government.

* This test report may contain data and test methods that are not covered by BACL's scope of accreditation as of the test report date shown above. These items are marked within the test report text with an asterisk "*"

TABLE OF CONTENTS

1	GENERAL DESCRIPTION	5
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2	MECHANICAL DESCRIPTION OF EUT	5
1.3	OBJECTIVE	5
1.4	RELATED SUBMITTAL(S)/GRANT(S).....	5
1.5	TEST METHODOLOGY	5
1.6	MEASUREMENT UNCERTAINTY	6
1.7	TEST FACILITY REGISTRATIONS.....	6
1.8	TEST FACILITY ACCREDITATIONS	6
2	SYSTEM TEST CONFIGURATION	11
2.1	JUSTIFICATION	11
2.2	EUT EXERCISE SOFTWARE	11
2.3	DUTY CYCLE CORRECTION FACTOR	12
2.4	LOCAL SUPPORT EQUIPMENT.....	13
2.5	REMOTE SUPPORT EQUIPMENT	13
2.6	POWER SUPPLY AND LINE FILTERS	13
2.7	INTERFACE PORTS AND CABLING.....	13
3	SUMMARY OF TEST RESULTS.....	14
4	FCC §15.203 & ISEDC RSS-GEN §6.8 – ANTENNA REQUIREMENTS.....	15
4.1	APPLICABLE STANDARDS	15
4.2	ANTENNA DESCRIPTION.....	16
5	FCC §2.1091, FCC §15.247(I) & ISEDC RSS-102 – RF EXPOSURE	17
5.1	APPLICABLE STANDARDS	17
5.2	MPE PREDICTION:	19
5.3	MPE RESULTS FOR FCC	19
5.4	MPE RESULTS FOR IC.....	19
6	FCC §15.35(B), §15.205, §15.209, §15.247(D) & ISEDC RSS-247 §6.6, RSS-GEN §8.9, §8.10 – SPURIOUS RADIATED EMISSIONS	20
6.1	APPLICABLE STANDARDS	20
6.2	TEST SETUP.....	23
6.3	TEST PROCEDURE	23
6.4	CORRECTED AMPLITUDE AND MARGIN CALCULATION	24
6.5	TEST SETUP BLOCK DIAGRAM.....	25
6.6	TEST EQUIPMENT LIST AND DETAILS.....	26
6.7	TEST ENVIRONMENTAL CONDITIONS	26
6.8	SUMMARY OF TEST RESULTS	27
6.9	RADIATED EMISSIONS TEST RESULTS.....	28
7	FCC §15.247(A) (2) & ISEDC RSS-247 §6.3.1(A), RSS-GEN §6.7 – EMISSION BANDWIDTH.....	35
7.1	APPLICABLE STANDARDS	35
7.2	MEASUREMENT PROCEDURE.....	35
7.3	TEST SETUP BLOCK DIAGRAM.....	36
7.4	TEST EQUIPMENT LIST AND DETAILS.....	36
7.5	TEST ENVIRONMENTAL CONDITIONS	37
7.6	TEST RESULTS	37
8	FCC §15.247(B)(3) & ISEDC RSS-247 §6.3.2 – MAXIMUM OUTPUT POWER.....	39
8.1	APPLICABLE STANDARDS	39
8.2	MEASUREMENT PROCEDURE.....	39
8.3	TEST SETUP BLOCK DIAGRAM.....	40
8.4	TEST EQUIPMENT LIST AND DETAILS.....	40
8.5	TEST ENVIRONMENTAL CONDITIONS	40

8.6	TEST RESULTS	41
9	FCC §15.247(E) & ISED RSS-247 §6.3.1(B) –POWER SPECTRAL DENSITY	42
9.1	APPLICABLE STANDARDS	42
9.2	MEASUREMENT PROCEDURE.....	42
9.3	TEST SETUP BLOCK DIAGRAM.....	42
9.4	TEST EQUIPMENT LIST AND DETAILS.....	43
9.5	TEST ENVIRONMENTAL CONDITIONS	43
9.6	TEST RESULTS	44
10	FCC §15.247(D) & ISED RSS-247 §6.6 – SPURIOUS EMISSIONS AT ANTENNA TERMINAL AND 100 KHZ BAND EDGES	45
10.1	APPLICABLE STANDARDS	45
10.2	MEASUREMENT PROCEDURE.....	45
10.3	TEST SETUP BLOCK DIAGRAM.....	45
10.4	TEST EQUIPMENT LIST AND DETAILS.....	46
10.5	TEST ENVIRONMENTAL CONDITIONS	46
10.6	TEST RESULTS	46
11	APPENDIX A (NORMATIVE) – EUT TEST SETUP PHOTOGRAPHS.....	48
12	APPENDIX B (NORMATIVE) – EUT EXTERNAL PHOTOGRAPHS.....	49
13	APPENDIX C (NORMATIVE) – EUT INTERNAL PHOTOGRAPHS	50
14	APPENDIX D (NORMATIVE) – A2LA ELECTRICAL TESTING CERTIFICATE.....	51

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R2601121-247-02	Original Report	2026-01-30

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test report is prepared on behalf of *Ring LLC*, and their product: Car Alarm, model: 7AFYA9, FCC ID: 2AEUP-7AFYA9, IC: 20271-7AFYA9 (HVIN: 7AFYA9) or the “EUT” as referred to in this report. The Ring Car Alarm is an OBD-II device that is able to detect disturbances while parked and communicates via LoRa and BLE. LoRa operates in 923.3MHz frequency range.

1.2 Mechanical Description of EUT

The EUT measures approximately 6.0 cm (Length) x 4.8 cm (Width) x 2.3 cm (Height) and weigh approximately <0.060 kg.

The data gathered is from a production sample provided by Ring LLC with BACL Assigned S/N: R2601121-01 and R2601121-02.

1.3 Objective

This report is prepared on behalf of Ring LLC in accordance with Part 2, Subpart J, and Part 15, Subpart C of the Federal Communication Commission’s rules and ISEDC RSS-247 ISSUE 4, July 2025.

The objective is to determine compliance with FCC Part 15.247 and ISEDC RSS-247 for Antenna Requirement, RF Exposure, Radiated & Conducted Spurious Emissions, Emission Bandwidth, Maximum Output Power, Average Power Spectral Density, and 100 kHz Band Edges.

In order to determine compliance, the manufacturer or a contracted laboratory makes measurements and takes the necessary steps to ensure that the equipment complies with the appropriate technical standards.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the immunity should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing and/or I/O cable changes, etc.).

1.4 Related Submittal(s)/Grant(s)

N/A

1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5%
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48 dB
Unwanted Emissions, conducted	±1.57 dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2°C
Humidity	±5%
DC and low frequency voltages	±1.0%
Time	±2%
Duty Cycle	±3%

1.7 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Innovation, Science, and Economic Development Canada (ISED) a under Registration Numbers: 3062A.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0428.

1.8 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2017 by A2LA (Test Laboratory Accreditation Certificate Number 3297.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2017 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report.

BACL's ISO/IEC 17025:2017 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio/Wireless, RF Exposure, Safety, and Wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include, but are not limited to: Central Office Telecommunications Equipment [including NEBS – Network Equipment Building Systems], Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial Equipment, Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, Railway Equipment, Marine Equipment, and Energy Efficient Lighting. Additionally, BACL offers comprehensive test capabilities for both Unlicensed and Licensed Wireless and RF Devices, per the requirements of the FCC (USA), ISED Canada (Canada), the EU/EEA/EFTA Nations (per the ETSI Standards applicable under the Radio Equipment Directive), Singapore, MIC (Japan), South Korea, Vietnam, and Taiwan ROC.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.03) to certify

- For the USA (Federal Communications Commission):

- 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
- 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
- 3- All Telephone Terminal Equipment within FCC Scope C.

- For the Canada (Innovation, Science and Economic Development Canada):

- 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
- 2 All Scope 2-Licensed Personal Mobile Radio Services;
- 3 All Scope 3-Licensed General Mobile & Fixed Radio Services;
- 4 All Scope 4-Licensed Maritime & Aviation Radio Services;
- 5 All Scope 5-Licensed Fixed Microwave Radio Services
- 6 All Broadcasting Equipment Technical Standards (BETS) in the Category I Equipment Standards List.
7. RSS-HAC Radio Scope 6 Hearing Aid Compatibility and Volume Control

- For Singapore (Info-Comm Media Development Authority (IMDA)):

- 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2 IMDA Phase I
2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2 IMDA Phase II

- For the Hong Kong Special Administrative Region & (Office of the Communications Authority-OFCA) – APEC Tel MRA- Phase I and Phase II:

- 1 Radio Equipment, per KHCA 10XX-series Specifications; HKCA 1001, 1002, 1003, 1004, 1005, 1006, 1007, 1008, 1010, 1015, 1016, 1019, 1020, 1022, 1026, 1033, 1034, 1035, 1036, 1037, 1039, 1041, 1042, 1043, 1044, 1045, 1046, 1047, 1048, 1049, 1050, 1052, 1053, 1054, 1056, 1057, 1061, 1064, 1065, 1066, 1067, 1068, 1069, 1070, 1071, 1072, 1073, 1074, 1075, 1076, 1077, 1078, 1080, 1081
- 2 GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications; HKCA 1218, 1223, 1224, 1225, 1257, 1258, 1259, 1260, 1261, 1262, 1263, 1264, 1265, 1266, 1277, 1281, 1282, 1283
- 3 Fixed Network Equipment, per HKCA 20XX-series Specifications; HKCA 2001, 2011, 2014, 2015, 2017, 2026, 2027, 2028, 2029, 2030, 2031

- For Japan:

- 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
- 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law

- All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
- All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Appliances:
 - for Clothes Washers (ver. 8.1)
 - for Residential Dishwashers (ver. 6.0)
 - for Residential Refrigerators and/or Freezers (ver. 5.0)
- 2 Commercial Food Service Equipment:
 - for Commercial Dishwashers (ver. 3.0)
 - for Commercial Ice Machines (ver. 3.0)
- 3 Data Center Equipment:
 - for Large Network Equipment (ver. 1.1)
- 4 Electronics and Office Equipment:
 - for Audio/Video Equipment (ver. 3.0)
 - for Computers (ver. 8.0)
 - for Data Center Storage (ver. 2.1)
 - for Displays (ver. 8.0)
 - for Enterprise Servers (ver. 4.0)
 - for Imaging Equipment (ver. 3.1)
 - for Set-top Boxes & Cable Boxes (ver. 5.1)
 - for Small Network Equipment (ver. 1.0)
 - for Telephony (ver. 3.0)
 - for Televisions (ver. 9.0), Title 10 Chapter II CFR Part 430 Subpart B –Appendix BB, Title 10 Chapter II CFR Part 430 Subpart B –Appendix DD
- 3 Lighting and Fans
 - for Decorative Light Strings (ver. 1.5)
 - for Downlights (ver. 1.0)
 - for Lamps (Light Bulbs)(ver. 2.1)
 - for Luminaires (including sub-components) (ver. 2.2)
 - for Residential Ceiling Fans (ver. 4.0)
 - for Residential Ventilating Fans (ver. 4.1)
- 4 Other
 - for Residential Ceiling Fans (ver. 4.0)
 - for Electric Vehicle Supply Equipment (ver. 1.2)(Electric Vehicle Supply Equipment Final Test Method for DC-output EVSE Rev March 2021)
 - for Water Coolers (ver. 3.0)
 - for Smart Home Energy Management Systems (ver. 1.1)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

1. For the USA (Federal Communications Commission), as a Telecommunications Certification Body (TCB):

- a. All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
 - b. All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
 - c. All Telephone Terminal Equipment within FCC Scope C.
2. Canada (ISED Canada) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II:
- a. Phase I Designation Letter
 - b. Phase II ISED Canada recognition as a Product Certification Body for unlicensed wireless devices, licensed radios, radars, etc.:
3. For Singapore (InfoComm Media Development Authority (IMDA)) APEC Tel MRA -Phase I & Phase II:
- a. All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2 IMDA Phase I
 - b. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2 IMDA Phase II
4. For the Hong Kong Special Administrative Region & (Office of the Communications Authority – OFCA) – APEC Tel MRA -Phase I & Phase II:
- a. NIST Phase I Scope Recognition Letter from OFCA for BACL –US0057
 - b. OFCA Phase II Designation Letter
5. For Japan (Ministry of Communications):
- a. NIST Japan Recognition
 - b. MIC Telecommunication Business Law (Terminal Equipment):
 - 1. All Scope A1 – Terminal Equipment for the Purpose of Calls;
 - 2. All Scope A2 – Other Terminal Equipment
 - c. Radio Law (Radio Equipment):
 - 1. All Scope B1 – Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - 2. All Scope B2 – Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - 3. All Scope B3 – Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law
 - d. Japan VCCI – Voluntary Control Council for Interference US-Japan Telecom Treaty (VCCI Side Letter)
 - 1. VCCI Certificate
 - d. Japan Registered Certification Body
 - 1. RCB Recognition Letter
6. European Union:
- 1. Radio Equipment Directive [RED] 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
 - 2. EMC Directive [EMCD] 2014/30/EU US-EU EMC & Telecom MRA CAB (NB):
7. Australia ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I:
- 1. Phase I Designation Letter
8. Chinese Taipei (Republic of China – Taiwan):
- 1. NCC (National Communications Commission) APEC Tel MRA -Phase I
9. Republic of Korea (Ministry of Communications – Radio Research Laboratory) APEC Tel MRA -Phase I:

1. NIST Phase I Scope Update Notification Letter from Korea for BACL
10. Vietnam APEC Tel MRA -Phase I (page 13)
 1. Vietnam (MIC) NIST Phase I Scope
11. Indonesia SDPPI (page 6)
 1. Phase I Listing
12. Israel Phase I
 1. NIST Phase I Scope Update Recognition Letter from Israel for BACL –US0057
13. UK Radio and EMC NIST Designation Letters
UK website: <https://www.gov.uk/uk-market-conformity-assessment-bodies/bay-area-compliance-laboratories-corp-bacl>
 1. Electromagnetic Compatibility Regulations (SI 2016/1091)
https://assets.publishing.service.gov.uk/media/5fe1e344e90e07452fce4e5a/AB_1313_BACL_UK EMC Regs NIST Designation Extended.pdf
 2. Radio Equipment Regulations 2017 (SI 2017/1206)
https://assets.publishing.service.gov.uk/media/5fe1e351e90e074525bf7be6/AB_1313_BACL_UK Radio Regs NIST Designation Extended.pdf
14. IFT Mexico Phase I
 1. NIST Phase I New Recognition Letter from Mexico for BACL – US0057
15. Taiwan (BSMI) Phase 1 Designation Letter and designation form.
 1. NIST Phase I Scope Update Designation Letter to BSMI for BACL – US0057
 2. NIST Phase I Scope Update Designation Form to BSMI for BACL – US0057

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 and FCC KDB 558074 D01 DTS Meas Guidance v05r02.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

2.2 EUT Exercise Software

The exercising software used during testing was “Putty”, the software is compliant with the standard requirements being tested against.

Radio	Frequency (MHz)	Power Setting
LoRa	923.3	Default

2.3 Duty Cycle Correction Factor

According to KDB 558074 D01 DTS Meas Guidance v05r02 section 6.0:


Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be utilized to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data is being acquired (i.e., no transmitter off-time is to be considered).

Radio	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
LoRa	923.3	-	-	100	0

Note: $\text{Duty Cycle} = \text{On Time (ms)} / \text{Period (ms)}$

$\text{Duty Cycle Correction Factor} = 10 * \log(1/\text{duty cycle})$

LoRa 923.3MHz Duty Cycle

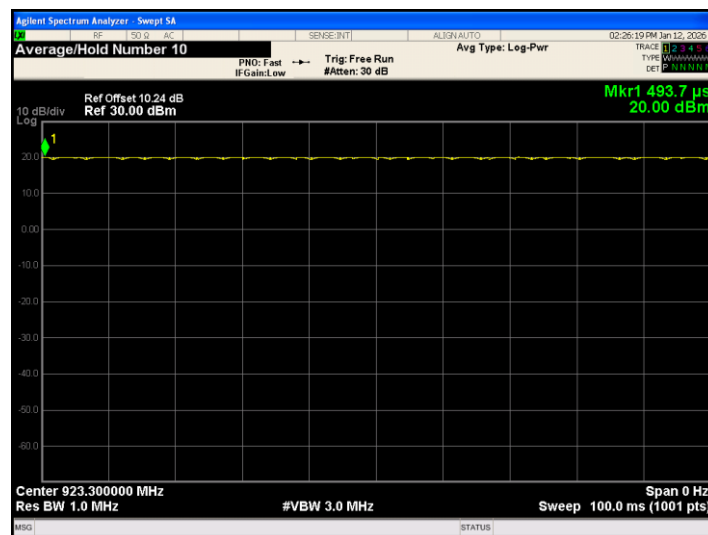

2.4 Local Support Equipment

Manufacturer	Description	Model	Serial Number
Dell	Laptop	Latitude 5401	HCJH3Z2

2.5 Remote Support Equipment

Manufacturer	Description	Model	Serial Number
N/A	Programming board (Connected to the EUT for LoRa Tx operation)	Custom	N/A

2.6 Power Supply and Line Filters

Manufacturer	Description	Model	Serial Number
-	-	-	-
Note: EUT is powered by a battery.			

2.7 Interface Ports and Cabling

Cable Descriptions	Length (m)	From	To
USBC UART	<1	Programming board	Laptop

3 Summary of Test Results

FCC & ISEDC Rules	Description of Test	Results
FCC §15.203 ISEDC RSS-Gen §6.8	Antenna Requirements	Compliant
FCC §2.1091, §15.247(i) ISEDC RSS-102	RF Exposure	Compliant
FCC §15.207 ISEDC RSS-Gen §8.8	AC Line Conducted Emissions	N/A ¹
FCC §2.1053, §15.35(b), §15.205, §15.209, §15.247(d) ISEDC RSS-247 §6.6 ISEDC RSS-Gen §8.9, §8.10	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(2) ISEDC RSS-247 §6.3.1(a) RSS-Gen §6.7	6 dB & 99% Emission Bandwidth	Compliant
FCC §15.247(b)(3) ISEDC RSS-247 §6.3.2	Maximum Output Power	Compliant
FCC §15.247(e) ISEDC RSS-247 §6.3.1(b)	Power Spectral Density	Compliant
FCC §2.1051, §15.247 (d) ISEDC RSS-247 §6.6	100 kHz Bandwidth of Frequency Band Edges	Compliant
		Compliant

Note¹: AC line conducted emissions test not required since EUT is battery powered.

BACL is responsible for all the information provided in this report, except when information is provided by the customer as identified in this report. Information provided by the customer, e.g., antenna gain, can affect the validity of results.

4 FCC §15.203 & ISEDC RSS-Gen §6.8 – Antenna Requirements

4.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to ISEDC RSS-Gen §6.8: Transmitter Antenna

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotopically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For license-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

4.2 Antenna Description

External/Internal/ Integral	Antenna Usage	Antenna Type	Frequency Range (MHz)	Maximum Antenna Gain (dBi)
Integral	LoRa	Universal Broadband FR4 Embedded LPWA Antenna	923.3	1.6

Note: Antenna gain is information provided by the customer

5 FCC §2.1091, FCC §15.247(i) & ISED RSS-102 – RF Exposure

5.1 Applicable Standards

According to FCC §15.247(i), Radio frequency devices operating under the provisions of this part are subject to the radio frequency radiation exposure requirements specified in §§ 1.1307(b), 1.1310, 2.1091, and 2.1093 of this chapter, as appropriate. Applications for equipment authorization of mobile or portable devices operating under this section must contain a statement confirming compliance with these requirements. Technical information showing the basis for this statement must be submitted to the Commission upon request.

According to FCC §2.1091, and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* (180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

According to ISED RSS-102 Issue 6:

Table 7: RF field strength and power density limits for devices used by the general public (uncontrolled environment)

Frequency range (MHz)	Electric field (V _{RMS} /m)	Magnetic field (A _{RMS} /m)	Power density (W/m ²)	Reference period (minutes)
10-20	27.46	0.0728	2	6
20-48	$58.07 / f^{0.25}$	$0.1540 / f^{0.25}$	$8.944 / f^{0.5}$	6
48-300	22.06	0.05852	1.291	6
300-6000	$3.142 f^{0.3417}$	$0.008335 f^{0.3417}$	$0.02619 f^{0.6834}$	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	$616000 / f^{1.2}$
150000-300000	$0.158 f^{0.5}$	$4.21 \times 10^{-4} f^{0.5}$	$6.67 \times 10^{-5} f$	$616000 / f^{1.2}$

5.2 MPE Prediction:

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S= power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

5.3 MPE Results for FCC

<u>Maximum output power at antenna input terminal (dBm):</u>	<u>19.93</u>
<u>Maximum output power at antenna input terminal (mW):</u>	<u>98.40</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>923.3</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>1.6</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.45</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm²):</u>	<u>0.0283</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>0.616</u>

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.0283 mW/cm². Limit is 0.616 mW/cm².

5.4 MPE Results for IC

<u>Maximum output power at antenna input terminal (dBm):</u>	<u>19.93</u>
<u>Maximum output power at antenna input terminal (W):</u>	<u>0.0984</u>
<u>Prediction distance (m):</u>	<u>0.20</u>
<u>Prediction frequency (MHz):</u>	<u>923.3</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>1.6</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.45</u>
<u>Power density of prediction frequency at 0.20m (W/m²):</u>	<u>0.2831</u>
<u>IC MPE limit for uncontrolled exposure at prediction frequency (W/m²):</u>	<u>2.784</u>

The device is compliant with the requirement IC MPE limit for uncontrolled exposure. The maximum power density at the distance of 0.20m is 0.2831 W/m². Limit is 2.784 W/m².

Note: LoRa (923.3MHz) and BLE radios cannot transmit simultaneously.

6 FCC §15.35(b), §15.205, §15.209, §15.247(d) & ISEDC RSS-247 §6.6, RSS-Gen §8.9, §8.10 – Spurious Radiated Emissions

6.1 Applicable Standards

As per FCC §15.35(b): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d),

in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per ISEDC RSS-247 §6.6,

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum device, digitally modulated device, or hybrid system is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power – based on either an RF conducted or a radiated measurement – provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 6.3.2, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

As per ISEDC RSS-Gen §8.9,

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field Strength (µV/m at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Field Strength (micro volts/meter)	Measurement Distance (meters)
9 – 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 – 1705 kHz	63.7/F (F in kHz)	30
1.705 – 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

As per ISED RSS-Gen §8.10(c),

Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

Table 7 – Restricted frequency bands^{Note 1}

MHz	MHz	GHz
0.090 – 0.110	149.9 – 150.05	9.0 – 9.2
0.495 – 0.505	156.52475 – 156.52525	9.3 – 9.5
2.1735 – 2.1905	156.7 – 156.9	10.6 – 12.7
3.020 – 3.026	162.0125 – 167.17	13.25 – 13.4
4.125 – 4.128	167.72 – 173.2	14.47 – 14.5
4.17725 – 4.17775	240 – 285	15.35 – 16.2
4.20725 – 4.20775	322 – 335.4	17.7 – 21.4
5.677 – 5.683	399.9 – 410	22.01 – 23.12
6.215 – 6.218	608 – 614	23.6 – 24.0
6.26775 – 6.26825	960 – 1427	31.2 – 31.8
6.31175 – 6.31225	1435 – 1626.5	36.43 – 36.5
8.291 – 8.294	1645.5 – 1646.5	Above 38.6
8.362 – 8.366	1660 – 1710	
8.37625 – 8.38675	1718.8 – 1722.2	
8.41425 – 8.41475	2200 – 2300	
12.29 – 12.293	2310 – 2390	
12.51975 – 12.52025	2483.5 – 2500	
12.57675 – 12.57725	2655 – 2900	
13.36 – 13.41	3260 – 3267	
16.42 – 16.423	3332 – 3339	
16.69475 – 16.69525	3345.8 – 3358	
16.80425 – 16.80475	3500 – 4400	
25.5 – 25.67	4500 – 5150	
37.5 – 38.25	5350 – 5460	
73 – 74.6	7250 – 7750	
74.8 – 75.2	8025 – 8500	
108 – 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

6.2 Test Setup

The radiated emissions tests were performed in the 5-meter chamber, using the setup in accordance with ANSI C63.10. The specification used was the FCC §15.247 and ISED RSS-247 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundled when necessary.

6.3 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was set 3 meter away from the testing antenna, which was varied from 1-4 meters, and the EUT was placed on a turntable, which was 0.8 meters and 1.5 meters above the ground plane for below and above 1000 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna's polarity should be changed between horizontal and vertical.

The spectrum analyzer or receiver was set as:

9 kHz-150 kHz

RBW = 200Hz /VBW = 1kHz

150 kHz-30 MHz

RBW = 9kHz /VBW = 30kHz

30 MHz- 1000 MHz:

RBW = 100 kHz / VBW = 300 kHz / Sweep = Auto

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto
- (2) Average: RBW = 1MHz / VBW = 3MHz / Sweep = Auto / Trace averaging for 100 traces

6.4 Corrected Amplitude and Margin Calculation

For emissions below 1 GHz,

The Corrected Amplitude (CA) is calculated by adding the Correction Factor to the S.A. Reading. The basic equation is as follows:

$$CA = \text{S.A. Reading} + \text{Correction Factor}$$

For example, a corrected amplitude of 40.3 dBuV/m = S.A. Reading (32.5 dBuV) + Correction Factor (7.8 dB/m)

The Correction Factor is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) together. This calculation is done in the measurement software, and reported in the test result section. The basic equation is as follows:

$$\text{Correction Factor} = AF + CL + \text{Atten} - Ga$$

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

For emission above 1 GHz,

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + \text{Atten} - Ga$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)


The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$


6.5 Test Setup Block Diagram

Radiated:


9 kHz to 30 MHz Test Setup

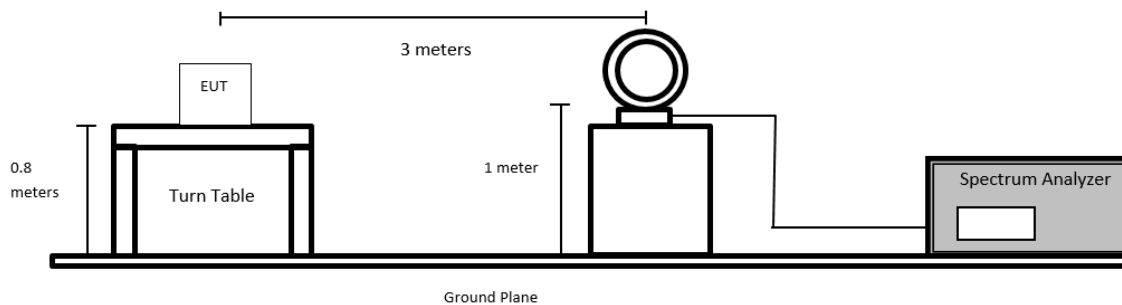

30 MHz to 1 GHz Test Setup

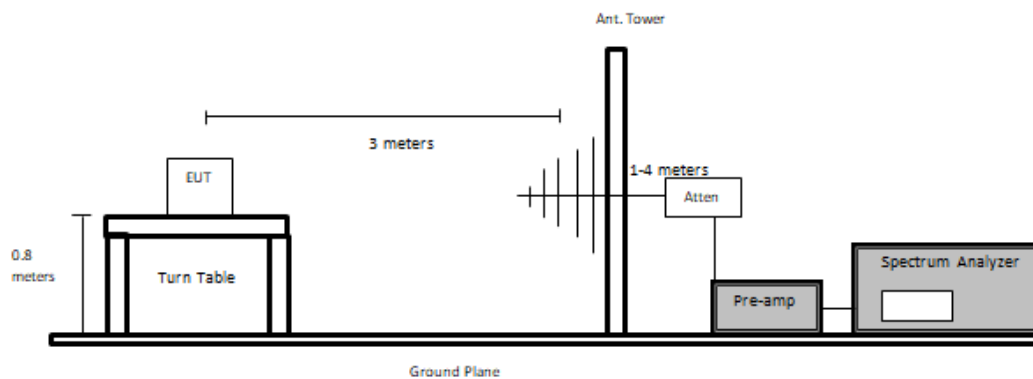

Above 1 GHz Test Setup

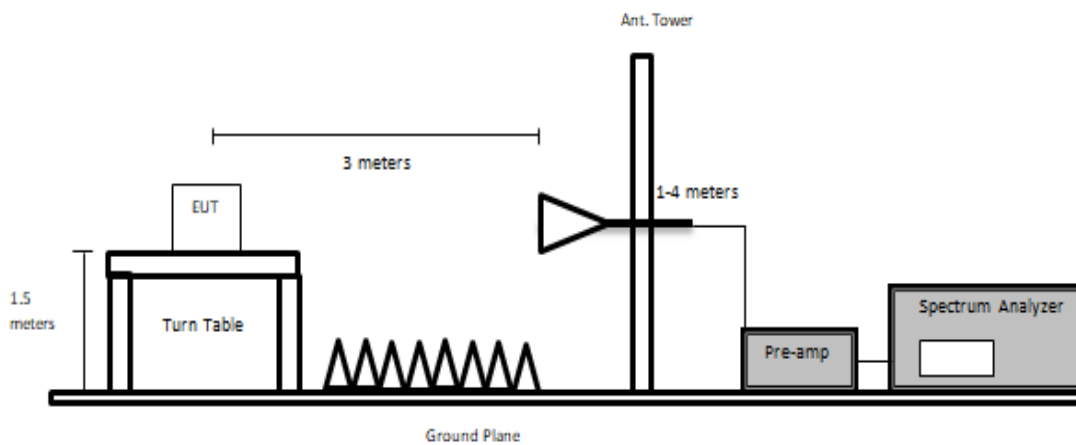

6.6 Test Equipment List and Details

Radiated:

BACL No.	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
327	Sunol Sciences	System Controller	SC110V	122303-1	N/R	N/R
1075	Sunol Sciences	Boresight Tower	TLT3	050119-7	N/R	N/R
1388	Sunol Sciences	Flush Mount Turntable	FM	112005-2	N/R	N/R
1432	Keysight Technologies	MXE EMI Receiver, Multi-touch	N9038B	MY60180008	2025-01-03	13 months
316	Sonoma Instruments	Preamplifier 10 kHz - 2.5 GHz	317	260406	2025-11-12	6 months
321	Sunol Sciences	Biconilog Antenna 30MHz-1GHz	JB3	A020106-2; 1504	2025-12-16	2 years
1245	Pasternack	6dB Attenuator	PE7390-6	01182018A	2025-12-16	2 years
1246	Hewlet Packard	RF Limiter 9KHz-1GHz	11867A	01734	2025-09-09	6 months
1210	Pasternack	N-type Coax Cable, 50ft RG213	PE3496-0600	2103161	2025-11-12	6 months
1248	Pasternack	RG214 COAX Cable 9 kHz - 1 GHz	PE3062	NA	2025-10-03	6 months
1192	ETS Lindgren	Horn Antenna 1-18GHz	3117	00218973	2024-10-23	2 years
1449	BACL	Preamplifier 100MHz-18GHz	BACL1313-A100M18G	4052472	2025-08-18	6 months
393	Com-Power	Loop Antenna, Active	AL-130	17043	2025-05-06	2 years
1546	Megaphase	SMA coax cable	TM26-S1S3-12	20869602 001	2025-08-18	6 months
1295	CarlisleIT	10m Coaxial Cable	UFB142A-1-3937-200200	64639890912-001	2025-10-16	6 months
1517	Micro-Tronics	Notch Filter 902 - 928 MHz	BRC50722	G038	2025-03-05	1 year
1232	Micro-Tronics	High Pass Filter	HPM20242	001	2025-04-10	1 year

Statement of Traceability: **BACL Corp.** attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

6.7 Test Environmental Conditions

Temperature:	20 – 22.5°C
Relative Humidity:	55%
ATM Pressure:	101.85 kPa

The radiated testing was performed by Rachana Khanduri on 2026-01-14 and 2026-01-15 in 5m chamber 3.

6.8 Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Part 15.209, 15.247 and ISEDC RSS-247 standards' radiated emissions limits, and had the worst margin of:


Worst Case – Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Configuration
-7.91	2479.38	Horizontal	923.3MHz

Please refer to the tables and plots in the next section for detailed test results.

6.9 Radiated Emissions Test Results

Note: 1. Pre-scan was performed in order to determine worst-case orientation of device with respect to measurement antenna in the X/Y/Z axis. Plots/data shown represent measurements made in worst-case orientation.


1) 9 kHz – 30 MHz, Measured at 3 meters – LoRa 923.3MHz

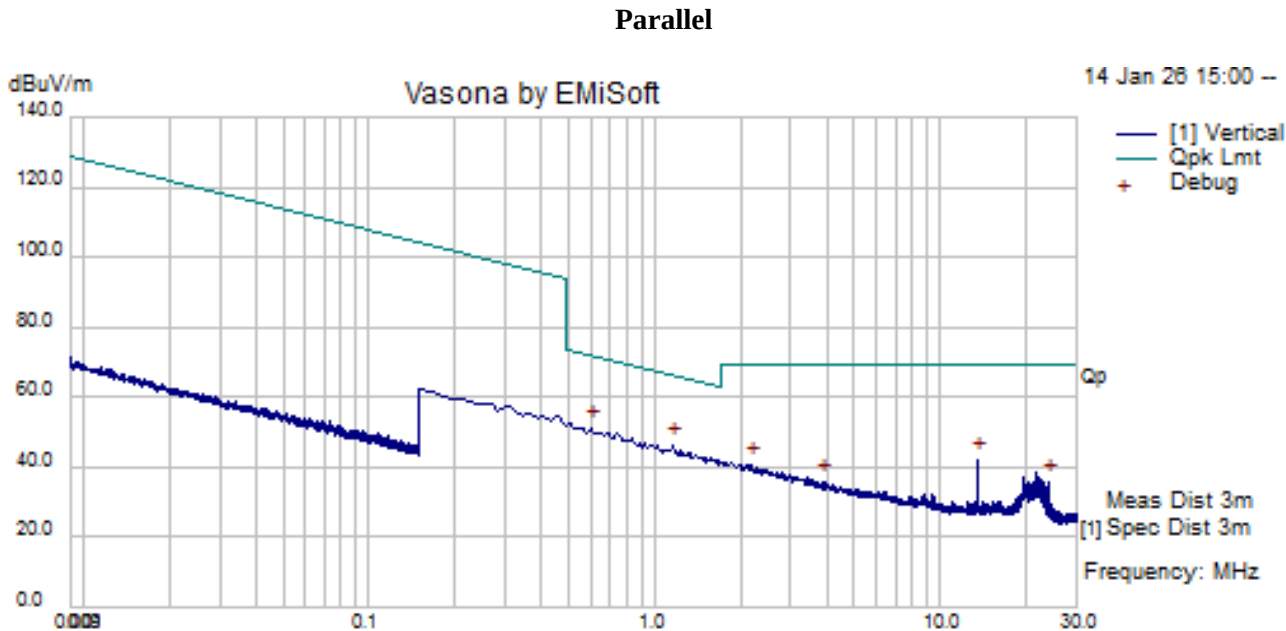

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Position	Limit (dBμV/m)	Margin (dB)	Detector
0.60	40.78	10.16	50.93	Parallel	72.08	-21.14	Peak
1.16	35.99	10.11	46.10	Parallel	66.28	-20.18	Peak
2.19	30.38	10.38	40.76	Parallel	69.54	-28.78	Peak
3.87	25.09	10.44	35.52	Parallel	69.54	-34.02	Peak
13.55	31.45	10.66	42.11	Parallel	69.54	-27.43	Peak
24.07	27.00	8.99	35.99	Parallel	69.54	-33.55	Peak

Note: Peak emissions are compared to QP limits to show worst-case compliance.


Perpendicular

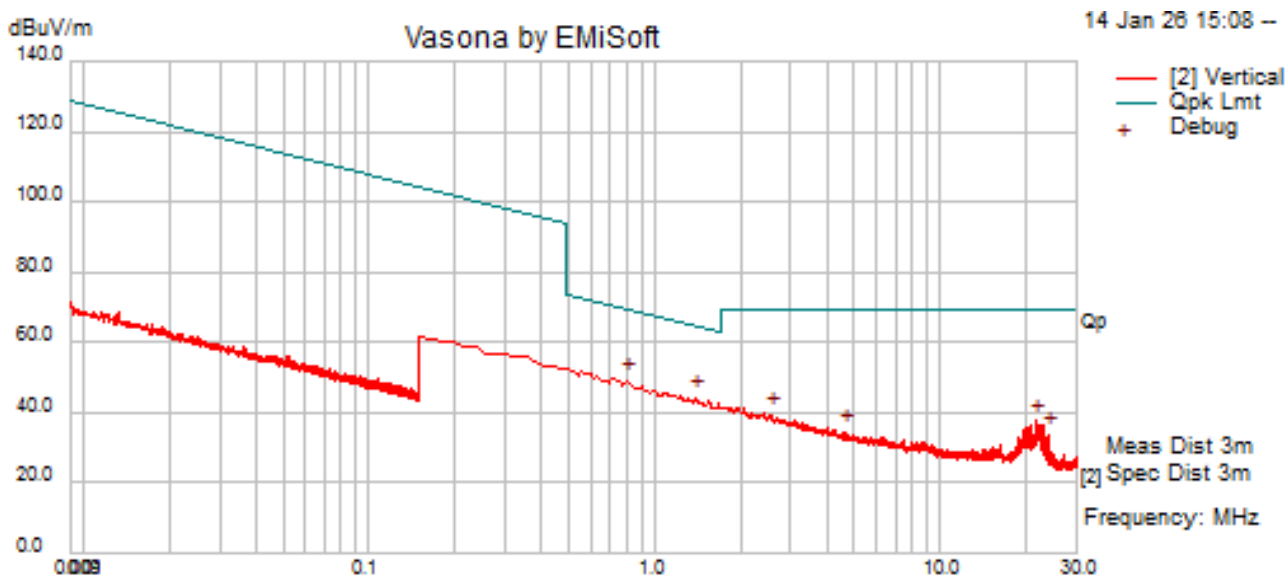

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBuV/m)	Antenna Position	Limit (dBuV/m)	Margin (dB)	Detector
0.81	39.05	10.10	49.14	Perpendicular	69.47	-20.33	Peak
1.40	33.80	10.20	44.00	Perpendicular	64.66	-20.66	Peak
2.55	28.72	10.42	39.14	Perpendicular	69.54	-30.40	Peak
4.67	24.27	10.35	34.61	Perpendicular	69.54	-34.93	Peak
21.66	28.03	8.92	36.96	Perpendicular	69.54	-32.58	Peak
24.08	24.71	8.99	33.70	Perpendicular	69.54	-35.84	Peak

Note: Peak emissions are compared to QP limits to show worst-case compliance.

Parallel to the ground plane

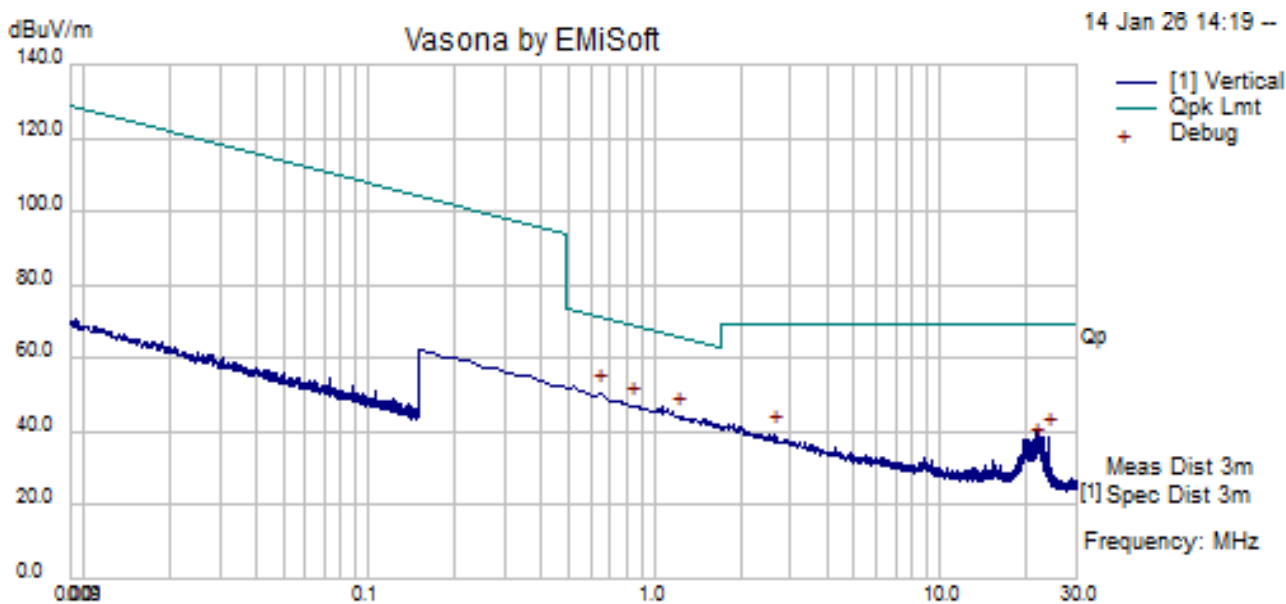


Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Position	Limit (dBμV/m)	Margin (dB)	Detector
0.66	39.40	10.14	49.54	Ground-Parallel	71.25	-21.71	Peak
1.39	34.20	10.19	44.39	Ground-Parallel	64.75	-20.36	Peak
2.42	29.39	10.41	39.79	Ground-Parallel	69.54	-29.75	Peak
4.12	24.92	10.41	35.33	Ground-Parallel	69.54	-34.21	Peak
22.93	27.68	8.79	36.47	Ground-Parallel	69.54	-33.07	Peak
19.69	29.28	9.88	39.16	Ground-Parallel	69.54	-30.38	Peak

Note: Peak emissions are compared to QP limits to show worst-case compliance.

2) 30 MHz – 1 GHz, Measured at 3 meters


LoRa 923.3MHz -Horizontal

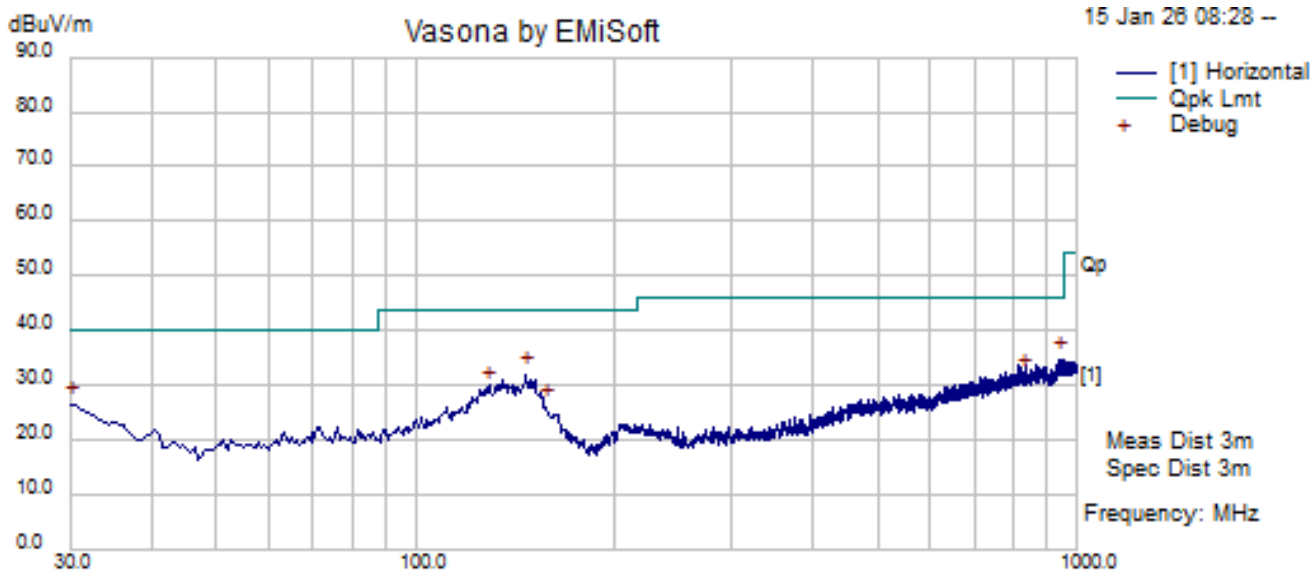

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Polarity (H/V)	Limit (dBμV/m)	Margin (dB)	Detector
944.23	38.13	-3.72	34.42	H	46	-11.58	Peak
147.01	49.10	-17.30	31.80	H	43.5	-11.70	Peak
30.00	36.52	-10.02	26.50	H	40	-13.50	Peak
157.92	43.45	-17.65	25.79	H	43.5	-17.71	Peak
827.49	36.34	-4.87	31.47	H	46	-14.53	Peak
128.11	45.33	-16.06	29.27	H	43.5	-14.23	Peak

Note: Peak emissions are compared to QP limits to show worst-case compliance.

LoRa 923.3MHz -Vertical

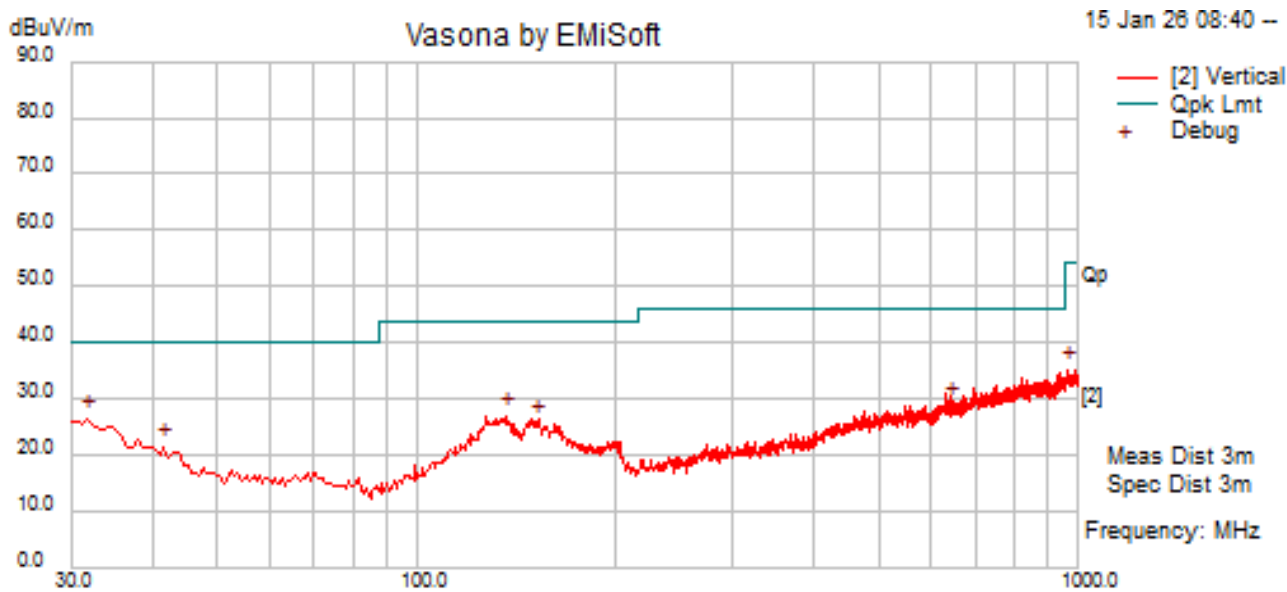

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Polarity (H/V)	Limit (dBμV/m)	Margin (dB)	Detector
31.82	37.47	-11.25	26.23	V	40	-13.78	Peak
136.70	43.42	-16.68	26.74	V	43.5	-16.76	Peak
41.52	39.73	-18.49	21.24	V	40	-18.76	Peak
962.41	38.50	-3.36	35.13	V	54	-18.87	Peak
151.60	43.03	-17.46	25.57	V	43.5	-17.93	Peak
645.12	36.35	-7.60	28.76	V	46	-17.24	Peak


Note: Peak emissions are compared to QP limits to show worst-case compliance.

FCC/IC Limits for 1 GHz to 10GHz			
Applicability	(dBm)	(uV/m at 3meters)	(dBuV/m at 3meters)
Restricted Band Average Limit	-	500	54
Restricted Band Peak Limit ¹	-	-	74

Note¹: Restricted Band Peak Limit is defined to be 20dB higher than Average Limit.

3) 1 GHz – 10 GHz, Measured at 3 meters


LoRa 923.3MHz - Horizontal

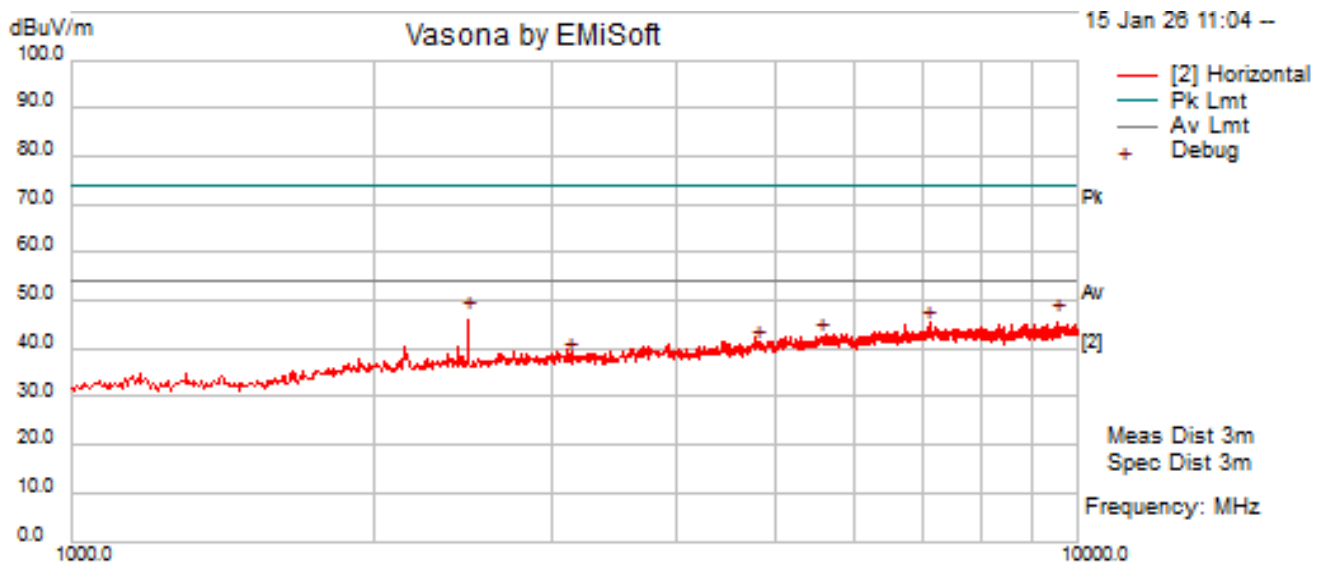

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBuV/m)	Antenna Polarity (H/V)	Limit (dBuV/m)	Margin (dB)	Detector
2479.38	48.85	-2.77	46.09	H	54	-7.91	Peak
3136.90	38.81	-1.45	37.36	H	54	-16.64	Peak
4813.93	39.28	0.96	40.23	H	54	-13.77	Peak
5565.45	38.68	2.74	41.42	H	54	-12.58	Peak
7112.14	39.14	5.08	44.22	H	54	-9.78	Peak
9521.88	37.78	7.86	45.63	H	54	-8.37	Peak

Note: Peak emissions are compared to Average limits to show worst-case compliance.

LoRa 923.3MHz – Vertical

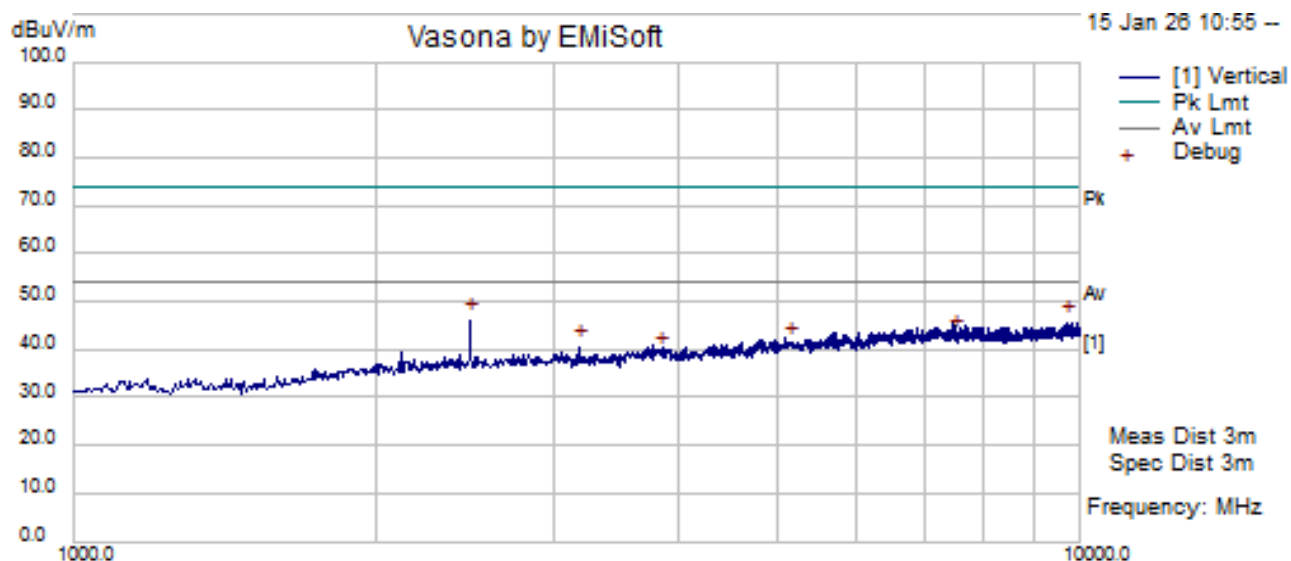

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Polarity (H/V)	Limit (dBμV/m)	Margin (dB)	Detector
2479.38	48.80	-2.77	46.03	V	54	-7.97	Peak
3176.87	41.97	-1.45	40.52	V	54	-13.48	Peak
3828.25	39.57	-0.33	39.24	V	54	-14.76	Peak
5146.36	38.69	2.37	41.06	V	54	-12.94	Peak
7533.56	37.14	5.50	42.64	V	54	-11.36	Peak
9690.63	37.34	8.39	45.73	V	54	-8.27	Peak

Note: Peak emissions are compared to Average limits to show worst-case compliance.

7 FCC §15.247(a) (2) & ISED RSS-247 §6.3.1(a), RSS-Gen §6.7 – Emission Bandwidth

7.1 Applicable Standards

According to FCC §15.247(a) (2) and ISED RSS-247 §6.3.1(a): the minimum 6 dB bandwidth shall be 500 kHz.

7.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8: DTS bandwidth.

As per ANSI C63.10 Clause 11.8: DTS bandwidth

One of the following procedures may be used to determine the modulated DTS bandwidth.

Option 1:

- a. Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- b. Set the VBW $\geq [3 \times \text{RBW}]$.
- c. Detector = peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize.
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 00206 dB relative to the maximum level measured in the fundamental emission.

Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times \text{RBW}$, and peak detector with maximum hold) is implemented by the instrumentation function.

When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.


As per the ANSI 63.10 Clause 6.9.3: Occupied Bandwidth

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a. The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c. Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d. Step a) through step c) might require iteration to adjust within the specified range.

- e. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f. Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g. If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h. The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

7.3 Test Setup Block Diagram

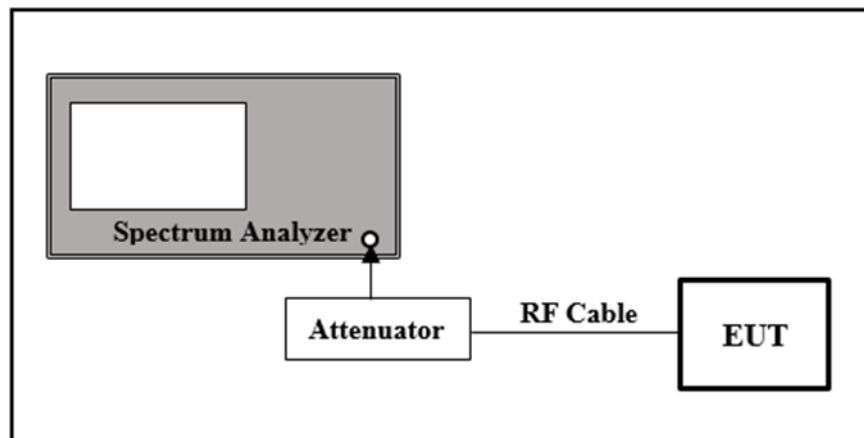

7.4 Test Equipment List and Details

BACL No	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
1128	Agilent	EXA Signal Analyzer	N9010A	MY48030852	2025-06-11	1 year
1395	Mini-Circuits	CBL ASSY 2.92MM PLUG TO PLUG 12"	FL086-12KM+	QN2318110-2318	2025-10-15	6 Months
1539	N/A	10dB Attenuator, SMA	C18S5W-10	NA	2025-12-18	1 year

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

7.5 Test Environmental Conditions


Temperature:	22°C
Relative Humidity:	53%
ATM Pressure:	101.5 kPa

The testing was performed by Rachana Khanduri on 2026-01-12 and 2026-01-29 at RF test site.


7.6 Test Results

LoRa – 923.3MHz

Frequency (MHz)	6 dB OBW (KHz)	99% OBW (KHz)	6 dB OBW Limit (kHz)	Result
923.3 MHz	639.90	515.28	≥ 500	Pass

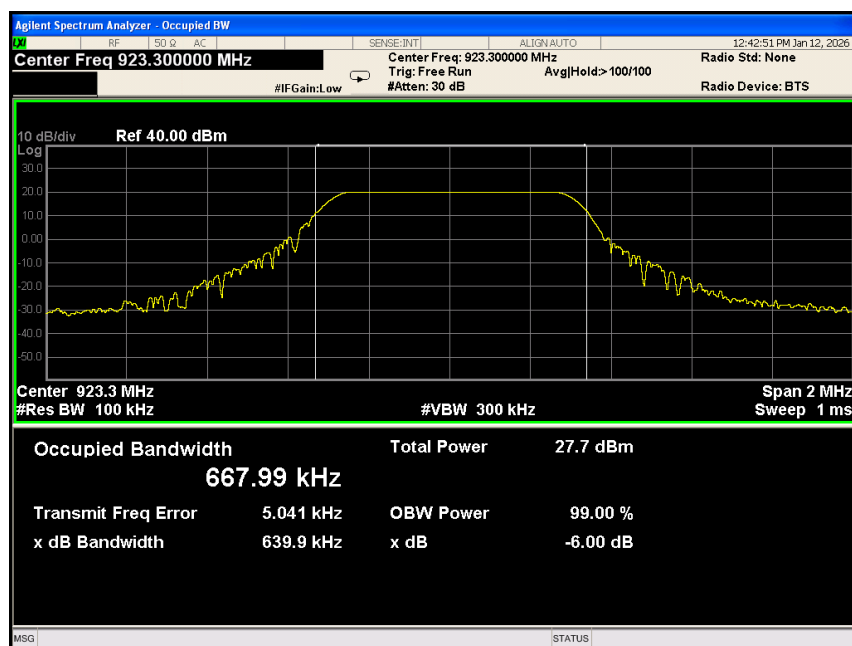

923.3MHz_Occupied Bandwidth_-6dB

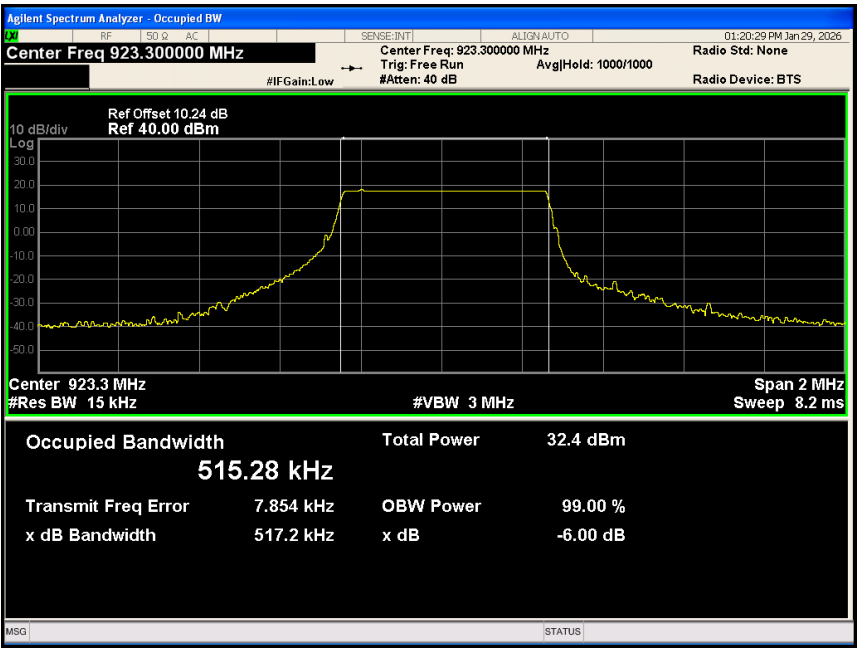

923.3MHz_Occupied Bandwidth_99 percent

8 FCC §15.247(b)(3) & ISEDC RSS-247 §6.3.2 – Maximum Output Power

8.1 Applicable Standards

According to FCC §15.247(b)(3): For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to RSS-247 §6.3.2: For DTS operating in the band 902-928 MHz, the maximum peak conducted output power shall not exceed 1W, and the e.i.r.p. shall not exceed 4 W.

8.2 Measurement Procedure


The measurements are based on ANSI C63.10, Section 11.9.2.2.2.

11.9.2.2.2 Method AVGSA-1

Method AVGSA-1 uses trace averaging with the EUT transmitting at full power throughout each sweep. The procedure for this method is as follows:

- a) Set span to > 1.5 times the OBW.
- b) Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq [3 \times \text{RBW}]$.
- d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at the maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run.”
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

8.3 Test Setup Block Diagram

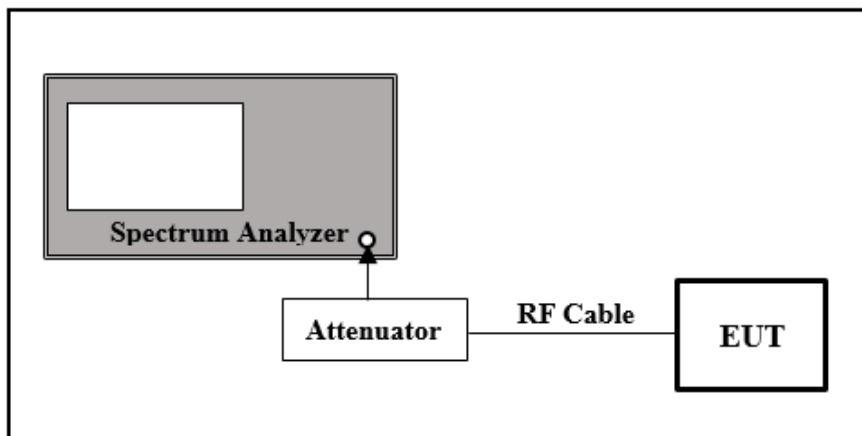

8.4 Test Equipment List and Details

BACL No	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
1128	Agilent	EXA Signal Analyzer	N9010A	MY48030852	2025-06-11	1 year
1395	Mini-Circuits	CBL ASSY 2.92MM PLUG TO PLUG 12"	FL086-12KM+	QN2318110-2318	2025-10-15	6 Months
1539	N/A	10dB Attenuator, SMA	C18S5W-10	NA	2025-12-18	1 year

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.

8.5 Test Environmental Conditions

Temperature:	22°C
Relative Humidity:	53%
ATM Pressure:	101.5 kPa

The testing was performed by Rachana Khanduri on 2026-01-12 at RF test site.


8.6 Test Results

LoRa – 923.3MHz

Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)	EIRP (dBm)	EIRP Limit(dBm)
923.3	19.93	<30	21.53	<36

Note: $EIRP [dBm] = \text{Conducted Output Power [dBm]} + \text{Antenna Gain [dBi]}$

Note: For eirp limit, $dBm = 10 \log(\text{Power [mW]} / 1mW) = 10 \log(4000mW / 1mW) = 36dBm$

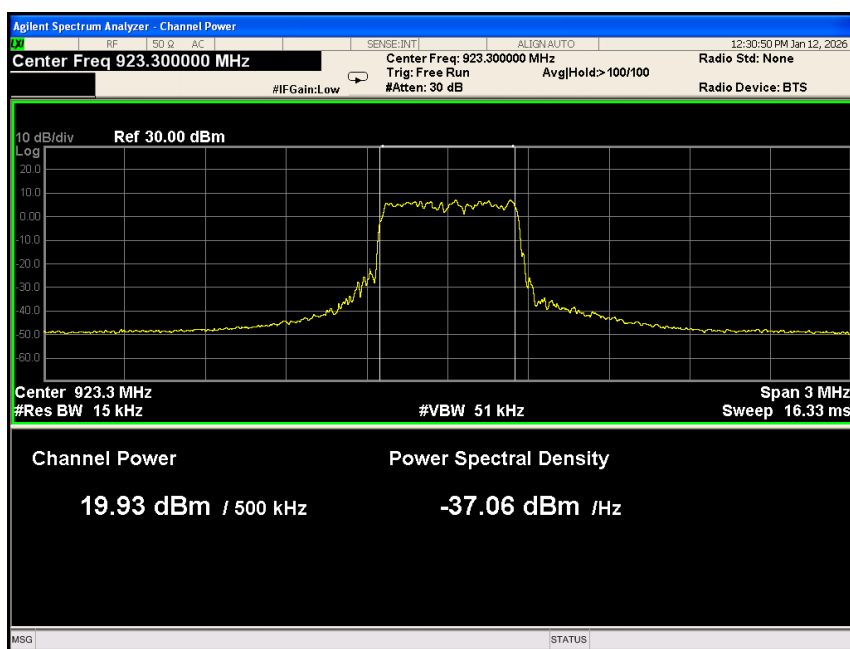

923.3MHz_Output Power

9 FCC §15.247(e) & ISEDC RSS-247 §6.3.1(b) –Power Spectral Density

9.1 Applicable Standards

According to ECFR §15.247(e) and RSS-247 §6.3.1 (b), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


9.2 Measurement Procedure

The measurements are based on ANSI C63.10, Section 11.10.4.

The following procedure may be used as an alternative to 11.10.3 when the maximum (average) conducted output power was used to determine compliance to the fundamental output power limit and the EUT can be configured to transmit continuously ($D \geq 98\%$), or when sweep triggering and/or signal gating can be implemented to help ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter OFF time to be considered):

- Set instrument center frequency to DTS channel center frequency.
- Set the instrument span to > 1.5 times the OBW.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = power average (rms).
- Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- Manually set the sweep time to: $\geq [10 \times (\text{number of measurement points in sweep}) \times (\text{transmission symbol period})]$, but no less than the auto sweep time.
- Perform the measurement over a single sweep.
- Use the peak marker function to determine the maximum amplitude level.
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

9.3 Test Setup Block Diagram

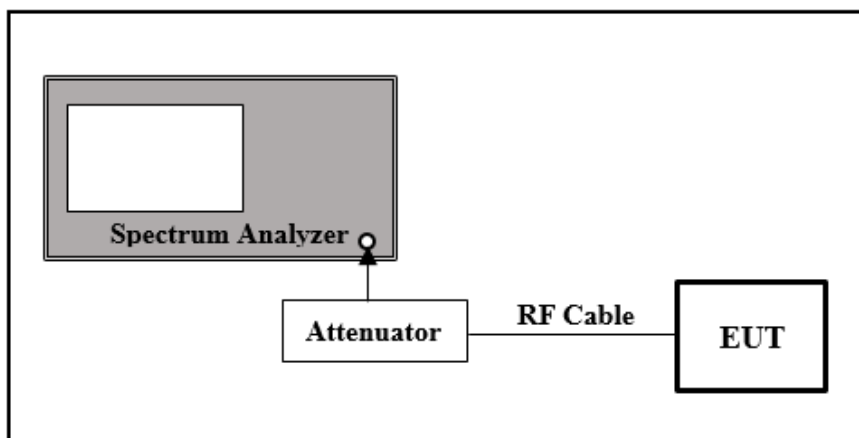

9.4 Test Equipment List and Details

BACL No	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
1128	Agilent	EXA Signal Analyzer	N9010A	MY48030852	2025-06-11	1 year
1395	Mini-Circuits	CBL ASSY 2.92MM PLUG TO PLUG 12"	FL086-12KM+	QN2318110- 2318	2025-10-15	6 Months
1539	N/A	10dB Attenuator, SMA	C18S5W-10	NA	2025-12-18	1 year

Statement of Traceability: **BACL Corp.** attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

9.5 Test Environmental Conditions


Temperature:	22°C
Relative Humidity:	53%
ATM Pressure:	101.5 kPa

The testing was performed by Rachana Khanduri on 2026-01-12 at RF test site.

9.6 Test Results

LoRa – 923.3MHz

Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
923.3	0.629	<8

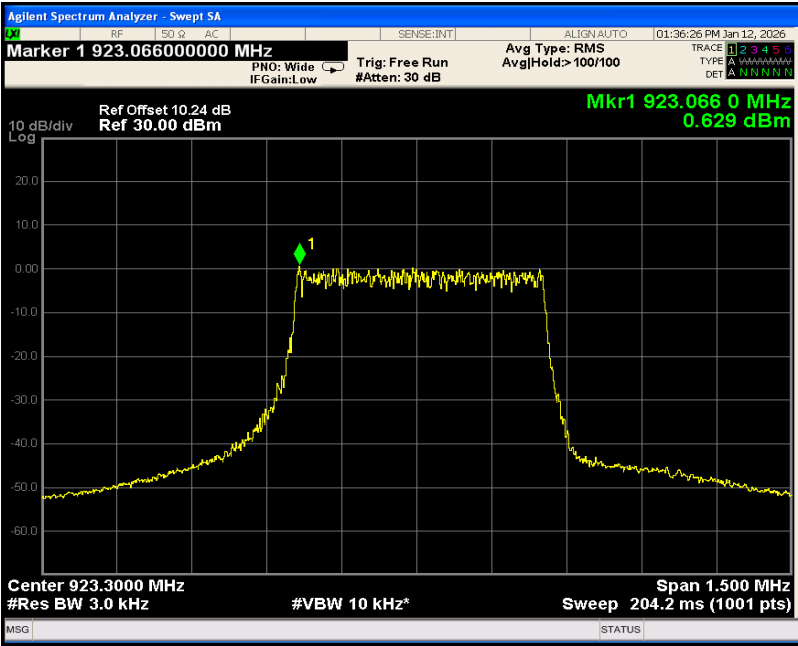

923.3MHz_ Power Spectral Density

10 FCC §15.247(d) & ISEDC RSS-247 §6.6 – Spurious Emissions at Antenna Terminal and 100 kHz Band Edges

10.1 Applicable Standards

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

According to ISEDC RSS-247 §6.6, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum device, digitally modulated device, or hybrid system is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power – based on either an RF conducted or a radiated measurement – provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 6.3.2, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

10.2 Measurement Procedure

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.

RBW = 100 kHz


VBW = 300 kHz

Sweep = coupled

Detector function = peak

Trace = max hold

10.3 Test Setup Block Diagram

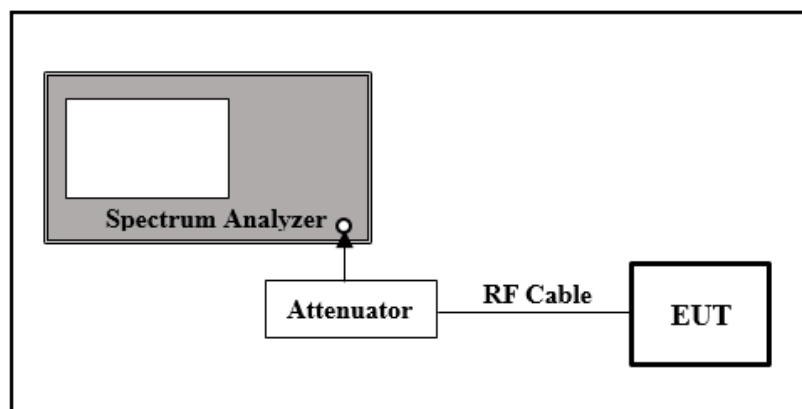

10.4 Test Equipment List and Details

BACL No	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
1128	Agilent	EXA Signal Analyzer	N9010A	MY48030852	2025-06-11	1 year
1395	Mini-Circuits	CBL ASSY 2.92MM PLUG TO PLUG 12"	FL086-12KM+	QN2318110-2318	2025-10-15	6 Months
1539	N/A	10dB Attenuator, SMA	C18S5W-10	NA	2025-12-18	1 year


Statement of Traceability: **BACL Corp.** attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

10.5 Test Environmental Conditions


Temperature:	22°C
Relative Humidity:	53%
ATM Pressure:	101.5 kPa

The testing was performed by Rachana Khanduri on 2026-01-12 at RF test site.

10.6 Test Results

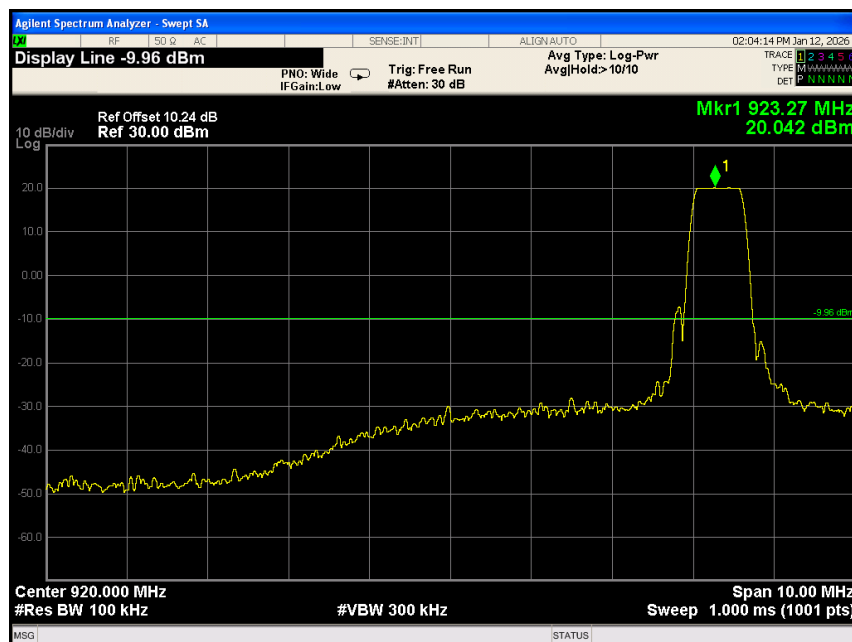

923.3MHz_ -30dBc_In Band Emissions

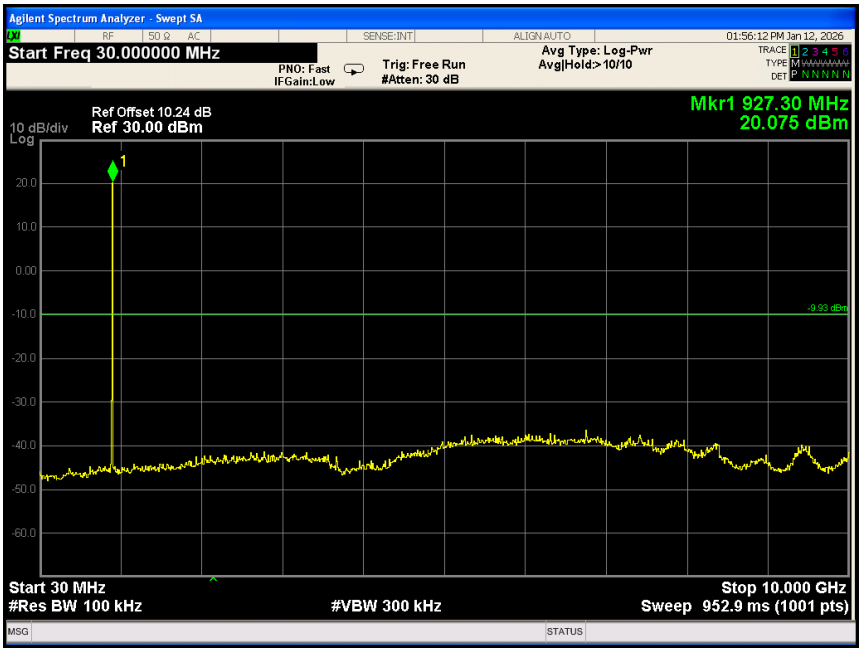

923.3MHz_ -30dBc_30MHz-10GHz Spurious Emissions

11 Appendix A (Normative) – EUT Test Setup Photographs

Please refer to the attachment.

12 Appendix B (Normative) – EUT External Photographs

Please refer to the attachment.

13 Appendix C (Normative) – EUT Internal Photographs

Please refer to the attachment.

14 Appendix D (Normative) – A2LA Electrical Testing Certificate**Accredited Laboratory**

A2LA has accredited

BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This laboratory also meets A2LA R222 - Specific Requirements EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

Presented this 13th day of September 2024.

A blue ink signature of Mr. Trace McInturff.

Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3297.02
Valid to September 30, 2026

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

Please follow the web link below for a full ISO 17025 scope.

<https://www.a2la.org/scopepdf/3297-02.pdf>

--- END OF REPORT ---