FCC PART 15, SUBPART C
ISEDC RSS-247, ISSUE 4, July 2025

TEST REPORT

For

Ring LLC

12515 Cerise Ave.
Hawthorne, CA 90250, USA

FCC ID: 2AEUP-7ANXBB
IC: 20271-7ANXBB

Report Type:	**Product Type:**
Original Report	Car Tracker and Alarm

Prepared By:	Arturo Reyes Test Engineer	
Report Number:	R2609112-247-01	
Report Date:	2026-10-13	
Reviewed By:	Steven Lianto EMC & RF Lead	

Bay Area Compliance Laboratories Corp.
1274 Anvilwood Avenue,
Sunnyvale, CA 94089, USA
Tel: (408) 732-9162
Fax: (408) 732-9164

CERTIFICATE #3297.02

Note: This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This test report shall not be used by the customer to claim product certification, approval, or endorsement by A2LA or any agency of the United States Government or any foreign government.
* This test report may contain data and test methods that are not covered by BACL's scope of accreditation as of the test report date shown above. These items are marked within the test report text with an asterisk "*"

TABLE OF CONTENTS

1 GENERAL DESCRIPTION 5

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 5
1.2 MECHANICAL DESCRIPTION OF EUT 5
1.3 OBJECTIVE 5
1.4 RELATED SUBMITTAL(S)/GRANT(S) 5
1.5 TEST METHODOLOGY 5
1.6 MEASUREMENT UNCERTAINTY 6
1.7 TEST FACILITY REGISTRATIONS 6
1.8 TEST FACILITY ACCREDITATIONS 7

2 SYSTEM TEST CONFIGURATION 11

2.1 JUSTIFICATION 11
2.2 EUT EXERCISE SOFTWARE 11
2.3 DUTY CYCLE CORRECTION FACTOR 11
2.4 EQUIPMENT MODIFICATION 13
2.5 LOCAL SUPPORT EQUIPMENT 13
2.6 REMOTE SUPPORT EQUIPMENT 13
2.7 POWER SUPPLY AND LINE FILTERS 13
2.8 INTERFACE PORTS AND CABLING 13

3 SUMMARY OF TEST RESULTS 14

4 FCC §15.203 & ISEDC RSS-GEN §5.2 – ANTENNA REQUIREMENTS 15

4.1 APPLICABLE STANDARDS 15
4.2 ANTENNA DESCRIPTION 15

5 FCC §2.1091, FCC §15.247(I) & ISEDC RSS-102 – RF EXPOSURE 16

5.1 APPLICABLE STANDARDS 16
5.2 MPE PREDICTION: 17
5.3 FCC SAR TEST EXEMPTION 17
5.4 IC SAR TEST EXEMPTION 17

6 FCC §15.35(B), §15.205, §15.209, §15.247(D) & ISEDC RSS-247 §6.6, RSS-GEN §7.4, §7.5 – SPURIOUS RADIATED EMISSIONS 18

6.1 APPLICABLE STANDARDS 18
6.2 TEST SETUP 21
6.3 TEST PROCEDURE 21
6.4 CORRECTED AMPLITUDE AND MARGIN CALCULATION 22
6.5 TEST SETUP BLOCK DIAGRAM 23
6.6 TEST EQUIPMENT LIST AND DETAILS 25
6.7 TEST ENVIRONMENTAL CONDITIONS 26
6.8 SUMMARY OF TEST RESULTS 26
6.9 RADIATED EMISSIONS TEST RESULTS 27

7 FCC §15.247(A) (2) & ISEDC RSS-247 §6.3.1(A), RSS-GEN §5.1 – EMISSION BANDWIDTH 32

7.1 APPLICABLE STANDARDS 32
7.2 MEASUREMENT PROCEDURE 32
7.3 TEST SETUP BLOCK DIAGRAM 33
7.4 TEST EQUIPMENT LIST AND DETAILS 34
7.5 TEST ENVIRONMENTAL CONDITIONS 34
7.6 TEST RESULTS 34

8 FCC §15.247(B)(3) & ISEDC RSS-247 §6.3.2 – MAXIMUM OUTPUT POWER 35

8.1 APPLICABLE STANDARDS 35
8.2 MEASUREMENT PROCEDURE 35
8.3 TEST SETUP BLOCK DIAGRAM 36
8.4 TEST EQUIPMENT LIST AND DETAILS 36

8.5 TEST ENVIRONMENTAL CONDITIONS 36
8.6 TEST RESULTS 37
9 FCC §15.247(E) & ISEDC RSS-247 §6.3.1(B) – POWER SPECTRAL DENSITY 38
9.1 APPLICABLE STANDARDS 38
9.2 MEASUREMENT PROCEDURE 38
9.3 TEST SETUP BLOCK DIAGRAM 39
9.4 TEST EQUIPMENT LIST AND DETAILS 39
9.5 TEST ENVIRONMENTAL CONDITIONS 39
9.6 TEST RESULTS 40
10 FCC §15.247(D) & ISEDC RSS-247 §6.6 – 100 KHZ SPURIOUS EMISSIONS AND BAND EDGES AT ANTENNA TERMINAL (30 DBC) 41
10.1 APPLICABLE STANDARDS 41
10.2 MEASUREMENT PROCEDURE 41
10.3 TEST SETUP BLOCK DIAGRAM 41
10.4 TEST EQUIPMENT LIST AND DETAILS 42
10.5 TEST ENVIRONMENTAL CONDITIONS 42
10.6 TEST RESULTS 42
11 ANNEX A – EMISSION BANDWIDTH 43
12 ANNEX B – MAXIMUM OUTPUT POWER 44
13 ANNEX C – POWER SPECTRAL DENSITY 45
14 ANNEX D – 100 KHZ SPURIOUS EMISSIONS AT ANTENNA TERMINAL (30 DBC) 46
15 APPENDIX A (NORMATIVE) – EUT TEST SETUP PHOTOGRAPHS 47
16 APPENDIX B (NORMATIVE) – EUT EXTERNAL PHOTOGRAPHS 48
17 APPENDIX C (NORMATIVE) – EUT INTERNAL PHOTOGRAPHS 49
18 APPENDIX D (NORMATIVE) – A2LA ELECTRICAL TESTING CERTIFICATE 50

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R2609112-247-01	Original Report	2026-10-13

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test report is prepared on behalf of *Ring LLC*, and their product model: *7ANXBB*,
FCC ID: 2AEUP-7ANXBB, IC: 20271-7ANXBB, HVIN: 7ANXBB, the "EUT" as referred to in this report.
The EUT is a Car Tracker and Alarm equipped with BLE radio capable of operating within the 2402-2480 MHz frequency range, and LoRa radio capable of operating at 923.3 MHz.

1.2 Mechanical Description of EUT

The EUT measures approximately 6.0 cm (L) x 4.8 cm (W) x 2.3 cm (H) and weights approximately 0.06 kg.

The data gathered is based on the production sample provided by Ring LLC with BACL Assigned S/N: R2609112-04 and R2609112-05.

1.3 Objective

This report is prepared on behalf of *Ring LLC* in accordance with Part 2, Subpart J, and Part 15, Subpart C of the Federal Communication Commission's rules and ISEDC RSS-247 Issue 4, July 2025.

The objective is to determine compliance with FCC Part 15.247 and ISEDC RSS-247 for Antenna Requirement, RF Exposure, Radiated Spurious Emissions, Emission Bandwidth, Maximum Output Power, Power Spectral Density, and 100 kHz Band Edges.

In order to determine compliance, the manufacturer or a contracted laboratory makes measurements and takes the necessary steps to ensure that the equipment complies with the appropriate technical standards.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the immunity should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing and/or I/O cable changes, etc.).

1.4 Related Submittal(s)/Grant(s)

None

1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5%
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48 dB
Unwanted Emissions, conducted	±1.57 dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2ºC
Humidity	±5%
DC and low frequency voltages	±1.0%
Time	±2%
Duty Cycle	±3%

1.7 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Innovation, Science, and Economic Development Canada (ISED) a under Registration Numbers: 3062A.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0428.

1.8 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- ***An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2017 by A2LA (Test Laboratory Accreditation Certificate Number 3297.02),*** in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2017 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report.

BACL's ISO/IEC 17025:2017 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio/Wireless, RF Exposure, Safety, and Wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include, but are not limited to: Central Office Telecommunications Equipment [including NEBS – Network Equipment Building Systems], Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial Equipment, Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, Railway Equipment, Marine Equipment, and Energy Efficient Lighting. Additionally, BACL offers comprehensive test capabilities for both Unlicensed and Licensed Wireless and RF Devices, per the requirements of the FCC (USA), ISED Canada (Canada), the EU/EEA/EFTA Nations (per the ETSI Standards applicable under the Radio Equipment Directive), Singapore, MIC (Japan), South Korea, Vietnam, and Taiwan ROC.

B- ***A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.03)*** to certify

- For the USA (Federal Communications Commission):
  1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
  2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
  3- All Telephone Terminal Equipment within FCC Scope C.
- For the Canada (Innovation, Science and Economic Development Canada):
  1 All Scope 1-Licence-Exempt Radio Frequency Devices;
  2 All Scope 2-Licensed Personal Mobile Radio Services;
  3 All Scope 3-Licensed General Mobile & Fixed Radio Services;
  4 All Scope 4-Licensed Maritime & Aviation Radio Services;
  5 All Scope 5-Licensed Fixed Microwave Radio Services
  6 All Broadcasting Equipment Technical Standards (BETS) in the Category I Equipment Standards List.
  7. RSS-HAC Radio Scope 6 Hearing Aid Compatibility and Volume Control
- For Singapore (Info-Comm Media Development Authority (IMDA)):
  1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2 IMDA Phase I
  2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2 IMDA Phase II
- For the Hong Kong Special Administrative Region & (Office of the Communications Authority-OFCA) – APEC Tel MRA- Phase I and Phase II:
  1 Radio Equipment, per KHCA 10XX-series Specifications; HKCA 1001, 1002, 1003, 1004, 1005, 1006, 1007, 1008, 1010, 1015, 1016, 1019, 1020, 1022, 1026, 1033, 1034, 1035, 1036, 1037, 1039, 1041, 1042, 1043, 1044, 1045, 1046, 1047, 1048, 1049, 1050, 1052, 1053, 1054, 1056, 1057, 1061, 1064, 1065, 1066, 1067, 1068, 1069, 1070, 1071, 1072, 1073, 1074, 1075, 1076, 1077, 1078, 1080, 1081
  2 GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications; HKCA 1218, 1223, 1224, 1225, 1257, 1258, 1259, 1260, 1261, 1262, 1263, 1264, 1265, 1266, 1277, 1281, 1282, 1283

3 Fixed Network Equipment, per HKCA 20XX-series Specifications; HKCA 2001, 2011, 2014, 2015, 2017, 2026, 2027, 2028, 2029, 2030, 2031

- For Japan:

1 MIC Telecommunication Business Law (Terminal Equipment):
- All Scope A1 - Terminal Equipment for the Purpose of Calls;
- All Scope A2 - Other Terminal Equipment

2 Radio Law (Radio Equipment):
- All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
- All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
- All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- ***A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.01)*** to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

1 Appliances:
- for Clothes Washers (ver. 8.1)
- for Residential Dishwashers (ver. 6.0)
- for Residential Refrigerators and/or Freezers (ver. 5.0)

2 Commercial Food Service Equipment:
- for Commercial Dishwashers (ver. 3.0)
- for Commercial Ice Machines (ver. 3.0)

3 Data Center Equipment:
- for Large Network Equipment (ver. 1.1)

4 Electronics and Office Equipment:
- for Audio/Video Equipment (ver. 3.0)
- for Computers (ver. 8.0)
- for Data Center Storage (ver. 2.1)
- for Displays (ver. 8.0)
- for Enterprise Servers (ver. 4.0)
- for Imaging Equipment (ver. 3.1)
- for Set-top Boxes & Cable Boxes (ver. 5.1)
- for Small Network Equipment (ver. 1.0)
- for Telephony (ver. 3.0)
- for Televisions (ver. 9.0), Title 10 Chapter II CFR Part 430 Subpart B –Appendix BB, Title 10 Chapter II CFR Part 430 Subpart B –Appendix DD

3 Lighting and Fans
- for Decorative Light Strings (ver. 1.5)
- for Downlights (ver. 1.0)
- for Lamps (Light Bulbs)(ver. 2.1)
- for Luminaires (including sub-components) (ver. 2.2)
- for Residential Ceiling Fans (ver. 4.0)
- for Residential Ventilating Fans (ver. 4.1)

4 Other
- for Residential Ceiling Fans (ver. 4.0)

- for Electric Vehicle Supply Equipment (ver. 1.2)(Electric Vehicle Supply Equipment Final Test Method for DC-output EVSE Rev March 2021)
- for Water Coolers (ver. 3.0)
- for Smart Home Energy Management Systems (ver. 1.1)

D- ***A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:***

1. For the USA (Federal Communications Commission), as a Telecommunications Certification Body (TCB):
   - a. All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
   - b. All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
   - c. All Telephone Terminal Equipment within FCC Scope C.

2. Canada (ISED Canada) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II:
   - a. Phase I Designation Letter
   - b. Phase II ISED Canada recognition as a Product Certification Body for unlicensed wireless devices, licensed radios, radars, etc.:

3. For Singapore (InfoComm Media Development Authority (IMDA)) APEC Tel MRA -Phase I & Phase II:
   - a. All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2 IMDA Phase I
   - b. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2 IMDA Phase II

4. For the Hong Kong Special Administrative Region & (Office of the Communications Authority – OFCA) – APEC Tel MRA -Phase I & Phase II:
   - a. NIST Phase I Scope Recognition Letter from OFCA for BACL –US0057
   - b. OFCA Phase II Designation Letter

5. For Japan (Ministry of Communications):
   - a. NIST Japan Recognition
   - b. MIC Telecommunication Business Law (Terminal Equipment):
     1. All Scope A1 – Terminal Equipment for the Purpose of Calls;
     2. All Scope A2 – Other Terminal Equipment
   - c. Radio Law (Radio Equipment):
     1. All Scope B1 – Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
     2. All Scope B2 – Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
     3. All Scope B3 – Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

   - d. Japan VCCI – Voluntary Control Council for Interference US-Japan Telecom Treaty (VCCI Side Letter)
     1. VCCI Certificate
   - d. Japan Registered Certification Body
     1. RCB Recognition Letter
6. European Union:
   1. Radio Equipment Directive [RED] 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
   2. EMC Directive [EMCD] 2014/30/EU US-EU EMC & Telecom MRA CAB (NB):

7. Australia ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I:
    1.Phase I Designation Letter

8. Chinese Taipei (Republic of China – Taiwan):
    1. NCC (National Communications Commission) APEC Tel MRA -Phase I

9. Republic of Korea (Ministry of Communications – Radio Research Laboratory) APEC Tel MRA -Phase I:
    1. NIST Phase I Scope Update Notification Letter from Korea for BACL

10. Vietnam APEC Tel MRA -Phase I (page 13)
    1. Vietnam (MIC) NIST Phase I Scope

11. Indonesia SDPPI (page 6)
    1. Phase I Listing

12. Israel Phase I
    1. NIST Phase I Scope Update Recognition Letter from Israel for BACL –US0057

13. UK Radio and EMC NIST Designation Letters
    UK website: https://www.gov.uk/uk-market-conformity-assessment-bodies/bay-area-compliance-laboratories-corp-bacl
        1. Electromagnetic Compatibility Regulations (SI 2016/1091)
        https://assets.publishing.service.gov.uk/media/5fe1e344e90e07452fce4e5a/AB_1313_BACL_UK_EMC_Regs_NIST_Designation_Extended.pdf

        2. Radio Equipment Regulations 2017 (SI 2017/1206)
        https://assets.publishing.service.gov.uk/media/5fe1e351e90e074525bf7be6/AB_1313_BACL_UK_Radio_Regs_NIST_Designation_Extended.pdf

14. IFT Mexico Phase I
    1. NIST Phase I New Recognition Letter from Mexico for BACL – US0057

15. Taiwan (BSMI) Phase 1 Designation Letter and designation form.
    1. NIST Phase I Scope Update Designation Letter to BSMI for BACL – US0057
    2. NIST Phase I Scope Update Designation Form to BSMI for BACL – US0057

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 and FCC KDB 558074 D01 DTS Meas Guidance v05r02.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

2.2 EUT Exercise Software

The exercising software used during testing was "PuTTy", the software is compliant with the standard requirements being tested against.

Radio Mode	Frequency (MHz)	Power Setting
LoRa	923.3	Default

2.3 Duty Cycle Correction Factor

According to KDB 558074 D01 DTS Meas Guidance v05r02 section 6.0:

All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.

Radio Mode	Frequency (MHz)	On Time (µs)	Period (µs)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
LoRa	923.3	-	-	100	0

Note 1: Duty Cycle = On Time (ms) / Period (ms) * 100%
Note 2: Duty Cycle Correction Factor (dB) = 10*log(1/duty cycle)

Please refer to plots below for detailed Duty Cycle measurement.

LoRa, 923.3 MHz, Duty Cycle

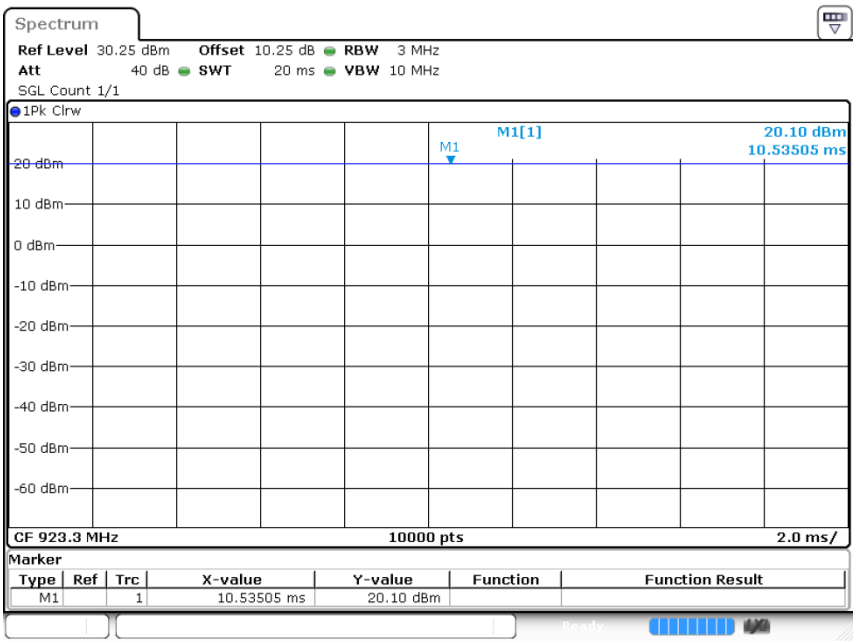

Project Number: R2609112; Tester Name: Arturo R.

Date: 15.SEP.2026 20:48:52

2.4 Equipment Modification

No modifications were made to the EUT during testing.

2.5 Local Support Equipment

Manufacturer	Description	Model	Serial Number
Dell	Laptop	Latitude 5401	HCJH3Z2

2.6 Remote Support Equipment

Manufacturer	Description	Model	Serial Number
-	Programming board (Connected to the EUT for BLE Tx operation)	-	-

2.7 Power Supply and Line Filters

None

2.8 Interface Ports and Cabling

Cable Description	Length (m)	From	To
USB-C to USB-A	< 1	Programming board	Laptop

3 Summary of Test Results

FCC & ISEDC Rules	Description of Test	Results
FCC §15.203 ISEDC RSS-Gen §5.2	Antenna Requirements	Compliant
FCC §2.1091, §15.247(i), §1.1310(d)(3) ISEDC RSS-102	RF Exposure	Compliant
FCC §15.207 ISEDC RSS-Gen §7.4	AC Line Conducted Emissions	N/A[1]
FCC §2.1053, §15.35(b), §15.205, §15.209, §15.247(d) ISEDC RSS-247 §6.6 ISEDC RSS-Gen §7.4, §7.5	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(2) ISEDC RSS-247 §6.3.1(a) RSS-Gen §5.1	6 dB & 99% Emission Bandwidth	Compliant
FCC §15.247(b)(3) ISEDC RSS-247 §6.3.2	Maximum Output Power	Compliant
FCC §15.247(e) ISEDC RSS-247 §6.3.1(b)	Power Spectral Density	Compliant
FCC §2.1051, §15.247(d) ISEDC RSS-247 §6.6	100 kHz Spurious Emissions and Band Edges at Antenna Terminal (30 dBc)	Compliant

Note 1: The EUT is DC powered by internal battery.

BACL is responsible for all the information provided in this report, except when information is provided by the customer as identified in this report. Information provided by the customer, e.g., antenna gain, can affect the validity of results.

4 FCC §15.203 & ISEDC RSS-Gen §5.2 – Antenna Requirements

4.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to ISEDC RSS-Gen §5.2: Detachable transmit antenna

In the case of transmitters with detachable antenna(s), a list of all antenna types that are permitted to be used with the transmitter, indicating the maximum permissible antenna gain (and unit, e.g., dBi) and the required impedance, shall be provided for equipment certification. If the transmitter has multiple antenna ports, this list shall indicate the allowed port for each antenna in the list. The test report shall demonstrate the compliance of the transmitter with the limits specified in the applicable RSS when the transmitter is equipped with any antenna type from this list. If the tests were performed only on worst-case configurations, the test report shall include the rationale for selecting the tested configurations and why they are worst-case.

4.2 Antenna Description

External/Internal/ Integral	Part Number	Antenna Type	Frequency Range (MHz)	Maximum Antenna Gain (dBi)
Integral	1004795	Chip	698-960	1.6

Note: Antenna information is provided by customer.

5 FCC §2.1091, FCC §15.247(i) & ISEDC RSS-102 – RF Exposure

5.1 Applicable Standards

According to FCC §15.247(i), Radio frequency devices operating under the provisions of this part are subject to the radio frequency radiation exposure requirements specified in §§ 1.1307(b), 1.1310, 2.1091, and 2.1093 of this chapter, as appropriate. Applications for equipment authorization of mobile or portable devices operating under this section must contain a statement confirming compliance with these requirements. Technical information showing the basis for this statement must be submitted to the Commission upon request.

According to FCC §2.1091, and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm^2)	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* ($180/f^2$)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz
* = Plane-wave equivalent power density

According to ISED RSS-102 Issue 5 §2.5.2, Exemption Limits for Routine Evaluation- RF Exposure Evaluation,

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MH and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

5.2 MPE Prediction:

As Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density
P = power input to antenna
G = power gain of the antenna in the direction of interest relative to an isotropic radiator
R = distance to the center of radiation of the antenna

5.3 FCC SAR Test Exemption

LoRa

Maximum output power at antenna input terminal (dBm):	20.53
Maximum output power at antenna input terminal (mW):	112.98
Prediction distance (cm):	20
Prediction frequency (MHz):	923.3
Maximum Antenna Gain, typical (dBi):	1.60
Maximum Antenna Gain (numeric):	1.445
Power density of prediction frequency at 20.0 cm (mW/cm^2):	0.0325
FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm^2):	0.616

The EUT complies with the MPE limit for general population/uncontrolled environment. The maximum power density at the distance of 20 cm is 0.0325 mW/cm^2. Limit is 0.616 mW/cm^2. Therefore, SAR testing is not required.

5.4 IC SAR Test Exemption

LoRa

Maximum EIRP power = 20.53 dBm + (1.60 dBi) = 22.13 dBm (0.163 W) which is less than $1.31\times10^{-2}f^{0.6834}$ = 1.392 W

The EUT complies with field reference level exposure exemptions limit. Therefore, SAR testing is not required.

Note: The EUT's BLE and LoRa radios cannot transmit simultaneously.

6 FCC §15.35(b), §15.205, §15.209, §15.247(d) & ISEDC RSS-247 §6.6, RSS-Gen §7.4, §7.5 – Spurious Radiated Emissions

6.1 Applicable Standards

As per FCC §15.35(b): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110 0.495 – 0.505 2.1735 – 2.1905 4.125 – 4.128 4.17725 – 4.17775 4.20725 – 4.20775 6.215 – 6.218 6.26775 – 6.26825 6.31175 – 6.31225 8.291 – 8.294 8.362 – 8.366 8.37625 – 8.38675 8.41425 – 8.41475 12.29 – 12.293 12.51975 – 12.52025 12.57675 – 12.57725 13.36 – 13.41	16.42 – 16.423 16.69475 – 16.69525 25.5 – 25.67 37.5 – 38.25 73 – 74.6 74.8 – 75.2 108 – 121.94 123 – 138 149.9 – 150.05 156.52475 – 156.52525 156.7 – 156.9 162.0125 –167.17 167.72 – 173.2 240 – 285 322 – 335.4 399.9 – 410 608 – 614	960 – 1240 1300 – 1427 1435 – 1626.5 1645.5 – 1646.5 1660 – 1710 1718.8 – 1722.2 2200 – 2300 2310 – 2390 2483.5 – 2500 2690 – 2900 3260 – 3267 3.332 – 3.339 3 3458 – 3 358 3.600 – 4.400	4. 5 – 5. 15 5. 35 – 5. 46 7.25 – 7.75 8.025 – 8.5 9.0 – 9.2 9.3 – 9.5 10.6 – 12.7 13.25 – 13.4 14.47 – 14.5 15.35 – 16.2 17.7 – 21.4 22.01 – 23.12 23.6 – 24.0 31.2 – 31.8 36.43 – 36.5 Above 38.6

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d),

in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c).

As per ISEDC RSS-247 §6.6,

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum device, digitally modulated device, or hybrid system is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power – based on either an RF conducted or a radiated measurement – provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 6.3.2, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

As per ISEDC RSS-Gen §7.4,

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field Strength (µV/m at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Field Strength (micro volts/meter)	Measurement Distance (meters)
9 – 490 kHz[Note 1]	6.37/F (F in kHz)	300
490 – 1705 kHz	63.7/F (F in kHz)	30
1.705 – 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

As per ISEDC RSS-Gen §7.5,

Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

Table 7 – Restricted frequency bands[Note 1]

MHz	MHz	GHz
0.090 – 0.110	149.9 – 150.05	9.0 – 9.2
0.495 – 0.505	156.52475 – 156.52525	9.3 – 9.5
2.1735 – 2.1905	156.7 – 156.9	10.6 – 12.7
3.020 – 3.026	162.0125 –167.17	13.25 – 13.4
4.125 – 4.128	167.72 – 173.2	14.47 – 14.5
4.17725 – 4.17775	240 – 285	15.35 – 16.2
4.20725 – 4.20775	322 – 335.4	17.7 – 21.4
5.677 – 5.683	399.9 – 410	22.01 – 23.12
6.215 – 6.218	608 – 614	23.6 – 24.0
6.26775 – 6.26825	960 – 1427	31.2 – 31.8
6.31175 – 6.31225	1435 – 1626.5	36.43 – 36.5
8.291 – 8.294	1645.5 – 1646.5	Above 38.6
8.362 – 8.366	1660 – 1710	
8.37625 – 8.38675	1718.8 – 1722.2	
8.41425 – 8.41475	2200 – 2300	
12.29 – 12.293	2310 – 2390	
12.51975 – 12.52025	2483.5 – 2500	
12.57675 – 12.57725	2655 – 2900	
13.36 – 13.41	3260 – 3267	
16.42 – 16.423	3332 – 3339	
16.69475 – 16.69525	3345.8 – 3358	
16.80425 – 16.80475	3500 – 4400	
25.5 – 25.67	4500 – 5150	
37.5 – 38.25	5350 – 5460	
73 – 74.6	7250 – 7750	
74.8 – 75.2	8025 – 8500	
108 – 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

6.2 Test Setup

The radiated emissions tests were performed in the 5-meter chamber, using the setup in accordance with ANSI C63.10. The specification used was the FCC §15.247 and ISEDC RSS-247 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundled when necessary.

6.3 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was set 3 meter away from the testing antenna, which was varied from 1-4 meters, and the EUT was placed on a turntable, which was 0.8 meters and 1.5 meters above the ground plane for below and above 1000 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna's polarity should be changed between horizontal and vertical.

The spectrum analyzer or receiver was set as:

9 kHz to 150 kHz:

RBW = 200 Hz / VBW = 1 kHz / Sweep = Auto

150 kHz to 30 MHz:

RBW = 9 kHz / VBW = 30 kHz / Sweep = Auto

30MHz to 1000 MHz:

RBW = 100 kHz / VBW = 300 kHz / Sweep = Auto

Above 1000MHz:

(1) Peak: RBW = 1MHz / VBW = 1MHz (Detector: Peak) / Sweep = Auto
(2) Average: RBW = 1MHz / VBW = 3MHz (Detector: Average) / Sweep = Auto

6.4 Corrected Amplitude and Margin Calculation

For emissions below 1 GHz,

The Corrected Amplitude (CA) is calculated by adding the Correction Factor to the S.A. Reading. The basic equation is as follows:

CA = S.A. Reading + Correction Factor

For example, a corrected amplitude of 40.3 dBuV/m = S.A. Reading (32.5 dBuV) + Correction Factor (7.8 dB/m)

The Correction Factor is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) together. This calculation is done in the measurement software, and reported in the test result section. The basic equation is as follows:

Correction Factor = AF + CL + Atten – Ga

The "Margin" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

Margin = Corrected Amplitude – Limit

For emission above 1 GHz,

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

CA = Ai + AF + CL + Atten – Ga

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The "Margin" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

Margin = Corrected Amplitude – Limit

6.5 Test Setup Block Diagram

9 kHz to 30 MHz

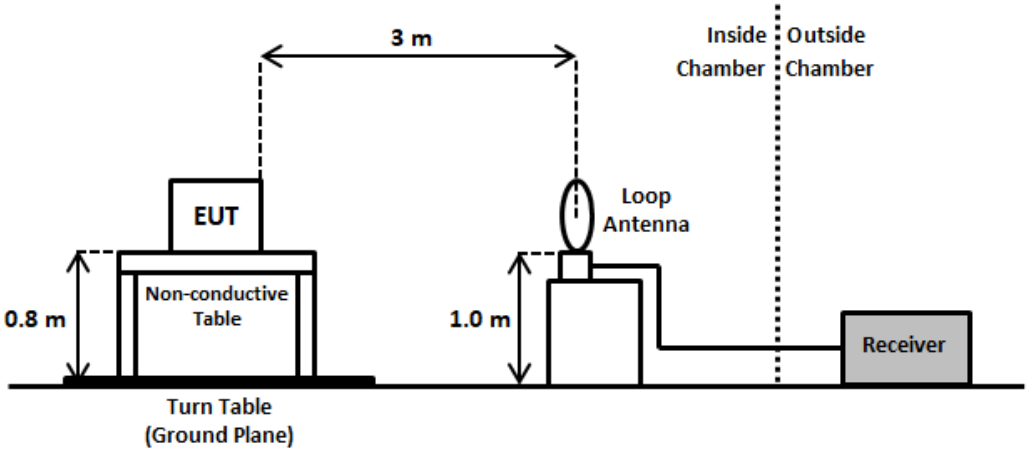

30 MHz to 1 GHz

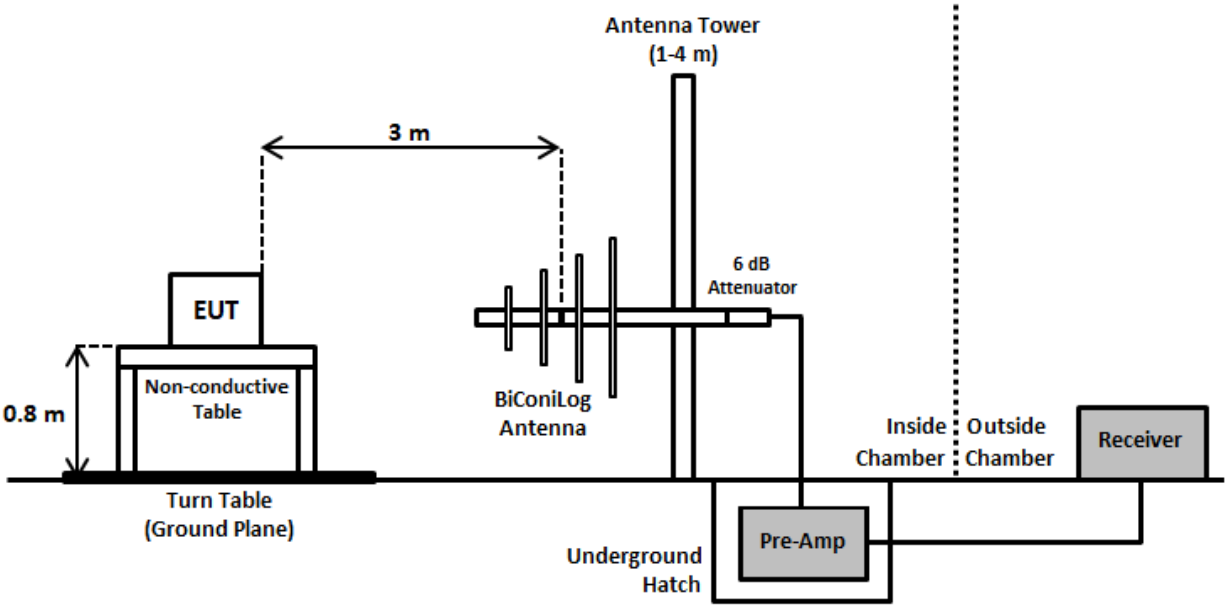

Above 1 GHz

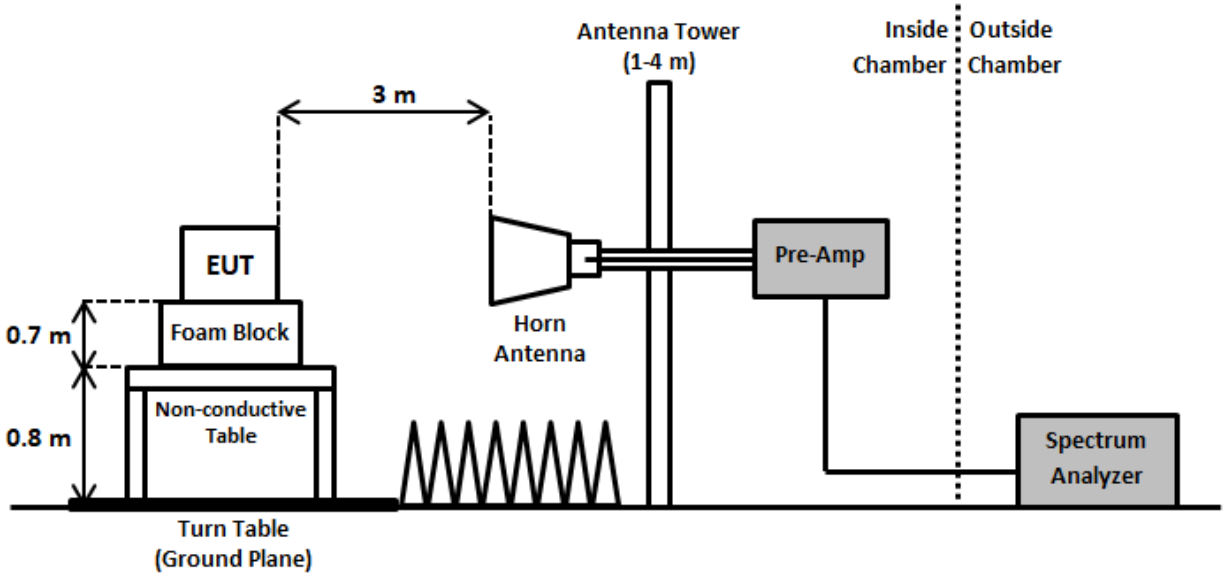
Antenna Tower
(1-4 m)
Inside
Chamber
Outside
Chamber
3 m
EUT
Foam Block
0.7 m
0.8 m
Non-conductive
Table
Horn
Antenna
Pre-Amp
Spectrum
Analyzer
Turn Table
(Ground Plane)

6.6 Test Equipment List and Details

BACL No.	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
327	Sunol Sciences	System Controller	SC110V	122303-1	N/R	N/R
1075	Sunol Sciences	Boresight Tower	TLT3	050119-7	N/R	N/R
1388	Sunol Sciences	Flush Mount Turntable	FM	112005-2	N/R	N/R
1432	Keysight Technologies	MXE EMI Receiver, Multi-touch	N9038B	MY60180008	2026-01-22	1 year
316	Sonoma Instruments	Preamplifier 10 kHz - 2.5 GHz	317	260406	2026-05-13	6 months
321	Sunol Sciences	Biconilog Antenna 30MHz-1GHz	JB3	A020106-2; 1504	2025-12-16	2 years
1245	Pasternack	6dB Attenuator	PE7390-6	01182018A	2025-12-16	2 years
1246	Hewlet Packard	RF Limiter 9KHz-1GHz	11867A	01734	2026-09-11	6 months
1626	Global Engineering Services Corp	N-type 15m coax cable	XH500A-N/J-N/J-15M-A	BACL01626A	2026-04-24	6 months
1248	Pasternack	RG214 COAX Cable 9 kHz - 1 GHz	PE3062	NA	2026-04-06	6 months
1192	ETS Lindgren	Horn Antenna 1-18GHz	3117	00218973	2024-10-23	2 years
1449	BACL	Preamplifier 100MHz-18GHz	BACL1313-A100M18G	4052472	2026-02-17	7 months
393	Com-Power	Loop Antenna, Active	AL-130	17043	2025-05-06	2 years
1546	Megaphase	SMA coax cable	TM26-S1S3-12	20869602 001	2026-07-30	6 months
1628	Global Engineering Services Corp	2.92mm 10m coax cable	XH400A-2.92/J-2.92/J-10M-A	BACL01628A	2026-04-24	6 months
1517	Micro-Tronics	Notch Filter 902 - 928 MHz	BRC50722	G038	2026-03-06	1 year
1232	Micro-Tronics	High Pass Filter	HPM20242	001	2026-04-06	1 year

Statement of Traceability: BACL Corp. *attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".*

6.7 Test Environmental Conditions

Temperature:	21 to 23°C
Relative Humidity:	49 to 52 %
ATM Pressure:	101.5 kPa

The radiated testing was performed by Arturo Reyes from 2026-09-17 to 2026-09-21 in 5m chamber 3.

6.8 Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Part 15.209, 15.247 and ISEDC RSS-247 standards' radiated emissions limits, and had the worst margin of:

Worst Case – Mode: Transmitting			
Margin (dB)	**Frequency (MHz)**	**Polarization (Horizontal/Vertical)**	**Configuration**
-8.83	7991.942	Vertical	LoRa, 923.3 MHz

Please refer to the tables and plots in the next section for detailed test results.

6.9 Radiated Emissions Test Results

Note 1: The test data presented below are for radiated spurious emissions.
Note 2: Pre-scan was performed in order to determine worst-case orientation of device with respect to measurement antenna in the X/Y/Z axis. Plots/data shown represent measurements made in worst-case orientation.

1) 9 kHz – 30 MHz, Measured at 3 meters

LoRa, 923.3 MHz, Parallel

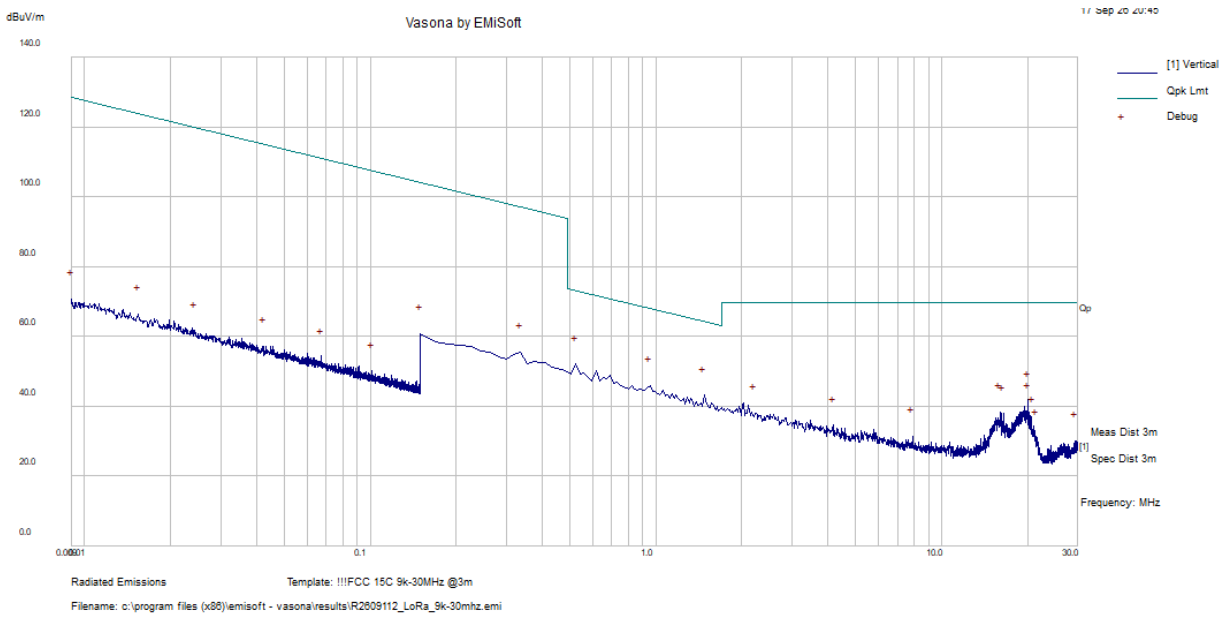

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
1.474594	33.01	10.16	43.17	64.23	-21.06	Peak

Note: Peak measurement is used to compare to the QP limit to show compliance.

LoRa, 923.3 MHz, Perpendicular

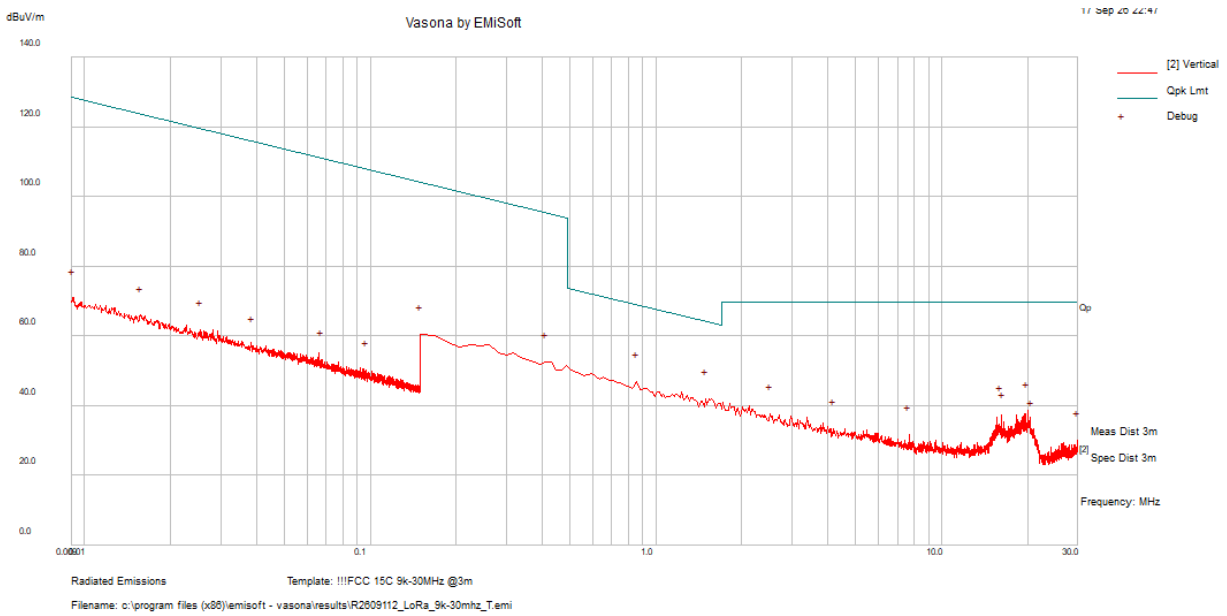

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
0.858938	36.96	10.03	46.99	68.93	-21.94	Peak

Note: Peak measurement is used to compare to the QP limit to show compliance.

LoRa, 923.3 MHz, Ground-Parallel

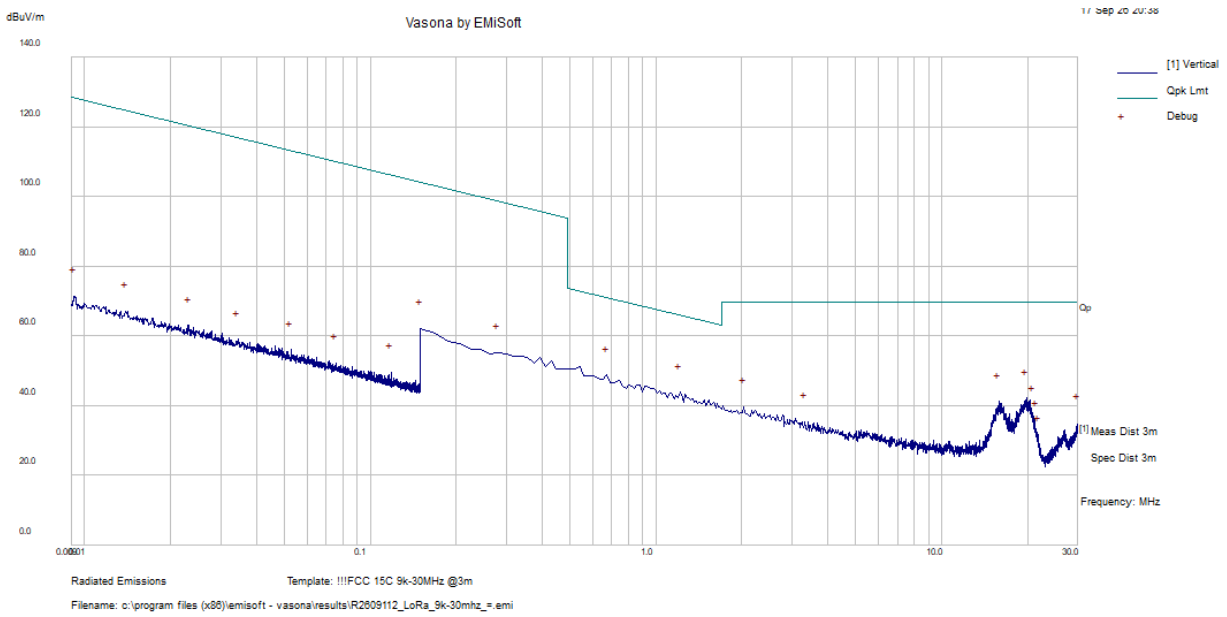

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
1.213406	33.76	10.08	43.84	65.92	-22.08	Peak

Note: Peak measurement is used to compare to the QP limit to show compliance.

2) 30 MHz – 1 GHz, Measured at 3 meters

LoRa, 923.3 MHz

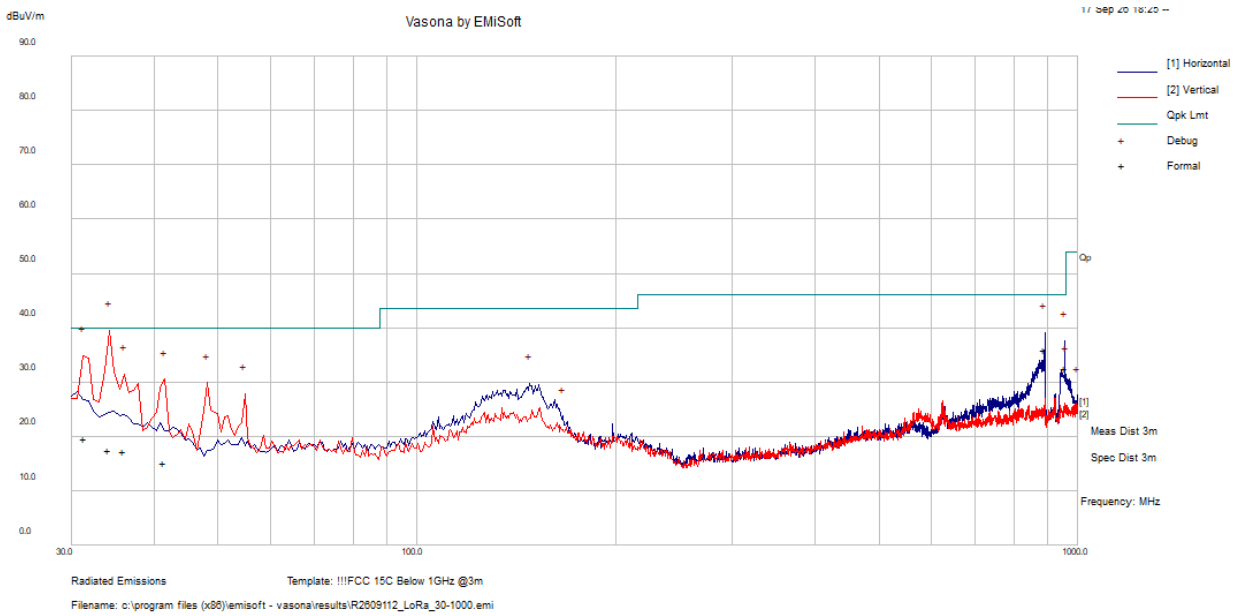

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Detector
34.164375	31.74	-14.28	17.46	119	V	203	40	-22.54	QP
31.337188	31.7	-12.16	19.54	177	V	246	40	-20.46	QP
891.05	47.82	-11.92	35.9	107	H	111	46	-10.1	QP
955.37188	43.88	-11.35	32.53	162	H	122	46	-13.47	QP
35.93125	32.84	-15.62	17.22	290	V	176	40	-22.78	QP
41.4025	34.97	-19.83	15.14	284	V	223	40	-24.86	QP

FCC/IC Limits for 1 GHz to 10 GHz			
Applicability	**(dBm)**	**(uV/m at 3meters)**	**(dBuV/m at 3meters)**
Restricted Band Average Limit	-	500	54
Restricted Band Peak Limit[1]	-	-	74

Note 1: Restricted Band Peak Limit is defined to be 20dB higher than Average Limit.
Note 2: Above 1GHz limit calculation:
dBuV/m = 20*log(V/m) + 120 = 20*log((500 [uV/m]/1000000)) + 120 = 54 [dBuV/m]

3) 1 GHz – 10 GHz, Measured at 3 meters

LoRa, 923.3 MHz

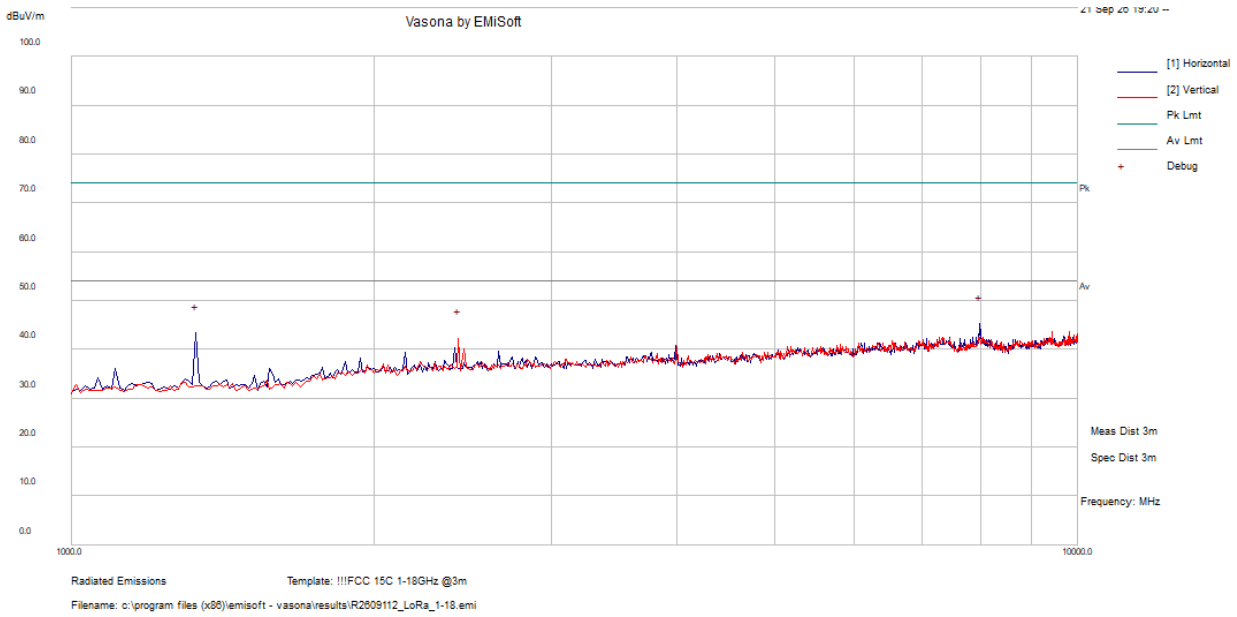

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Detector
1329.375	52.52	-9.17	43.35	100	H	360	54	-10.65	Peak
2423.75	46.51	-4.28	42.23	100	V	360	54	-11.77	Peak
7991.942	**41.56**	**3.61**	**45.17**	**101**	**V**	**360**	**54**	**-8.83**	**Peak**

Note: Peak measurement is used to compare to the Average limit to show compliance.

7 FCC §15.247(a) (2) & ISEDC RSS-247 §6.3.1(a), RSS-Gen §5.1 – Emission Bandwidth

7.1 Applicable Standards

According to FCC §15.247(a) (2) and ISEDC RSS-247 §6.3.1(a): the minimum 6 dB bandwidth shall be 500 kHz.

According to ISEDC RSS-Gen §5.1: Occupied bandwidth and x dB bandwidth

The occupied bandwidth shall be reported for all radio apparatus, in addition to the specified bandwidth required in the applicable RSS, such as the x dB bandwidth.

The following conditions shall apply for measuring the occupied bandwidth and x dB bandwidth:

- the transmitter shall be operated at its maximum power

the span of the spectrum analyzer shall be set large enough to capture all products of the modulation process around the carrier or centre frequency, including the emission skirts, but small enough to avoid having other emissions (e.g., on adjacent channels) within the span

7.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8: DTS bandwidth.

As per ANSI C63.10 Clause 11.8: DTS bandwidth

One of the following procedures may be used to determine the modulated DTS bandwidth.

Option 1:

a. Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
b. Set the VBW ≥ [3 × RBW].
c. Detector = peak.
d. Trace mode = max hold.
e. Sweep = auto couple.
f. Allow the trace to stabilize.
g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by00206 dB relative to the maximum level measured in the fundamental emission.

Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW ≥ 3 × RBW, and peak detector with maximum hold) is implemented by the instrumentation function.

When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥6 dB.

As per the ANSI 63.10 Clause 6.9.3: Occupied Bandwidth

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

a. The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.

b. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.

c. Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2.

d. Step a) through step c) might require iteration to adjust within the specified range.

e. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

f. Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.

g. If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

h. The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

7.3 Test Setup Block Diagram



7.4 Test Equipment List and Details

BACL No	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
912	Rhode & Schwarz	Signal Analyzer	FSV40	1321.3008k39-101203-UW	2026-08-27	1 year
1518	Anhui Xinhang Microwave Communication Technology	2.92mm 12in RF cable	XH360A-2.92/J-2.92/J-12inch	BACL01518A	2026-04-14	6 Months
1539	N/A	10dB Attenuator, SMA	C18S5W-10	NA	2025-12-18	1 year

Statement of Traceability: BACL Corp. *attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".*

7.5 Test Environmental Conditions

Temperature:	22ºC
Relative Humidity:	52%
ATM Pressure:	101.8 kPa

The testing was performed by Arturo Reyes on 2026-09-15 at RF test site.

7.6 Test Results

Radio	Frequency (MHz)	99% OBW (MHz)	6 dB OBW (MHz)	6 dB OBW Limit (MHz)	Result
LoRa	923.3	0.538	0.63664	≥ 0.500	Pass

Please refer to Annex A for detailed Emissions Bandwidth test results.

8 FCC §15.247(b)(3) & ISEDC RSS-247 §6.3.2 – Maximum Output Power

8.1 Applicable Standards

According to FCC §15.247(b)(3): For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to RSS-247 §6.3.2: For DTS operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W, and the e.i.r.p. shall not exceed 4 W, except as provided in section 6.5 a) and b).

8.2 Measurement Procedure

The measurements are based on ANSI C63.10, Section 11.9.2.2.2.

11.9.2.2.2 Method AVGSA-1

Method AVGSA-1 uses trace averaging with the EUT transmitting at full power throughout each sweep.
The procedure for this method is as follows:

a) Set span to > 1.5 times the OBW.
b) Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
c) Set VBW ≥ [3 × RBW].
d) Number of points in sweep ≥ [2 × span / RBW]. (This gives bin-to-bin spacing ≤ RBW / 2, so that narrowband signals are not lost between frequency bins.)
e) Sweep time = auto.
f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
g) If transmit duty cycle < 98%, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at the maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle ≥ 98%, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
h) Trace average at least 100 traces in power averaging (rms) mode.
i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

8.3 Test Setup Block Diagram



8.4 Test Equipment List and Details

BACL No	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
912	Rhode & Schwarz	Signal Analyzer	FSV40	1321.3008k39-101203-UW	2026-08-27	1 year
1518	Anhui Xinhang Microwave Communication Technology	2.92mm 12in RF cable	XH360A-2.92/J-2.92/J-12inch	BACL01518A	2026-04-14	6 Months
1539	N/A	10dB Attenuator, SMA	C18S5W-10	NA	2025-12-18	1 year

Statement of Traceability: BACL Corp. *attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".*

8.5 Test Environmental Conditions

Temperature:	22ºC
Relative Humidity:	54%
ATM Pressure:	101.8 kPa

The testing was performed by Arturo Reyes on 2026-09-16 at RF test site.

8.6 Test Results

Radio	Frequency (MHz)	Antenna Gain (dBi)	Conducted Average Output Power (dBm)	Conducted Average Output Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Result
LoRa	923.3	1.6	20.53	≤ 30	22.13	≤ 36	Pass

Note 1: EIRP [dBm] = Conducted Average Output Power [dBm] + Antenna Gain [dBi].
Note 2: Conducted Average Output Power Limit [dBm] = 10*log(Power[mW]/1mW) = 10*log(1000mW/1mW) = 30 dBm
Note 3: EIRP Limit [dBm] = 10*log(Power[mW]/1mW) = 10*log(4000mW/1mW) = 36 dBm

Please refer to Annex B for detailed Maximum Output Power test results.

9 FCC §15.247(e) & ISEDC RSS-247 §6.3.1(b) – Power Spectral Density

9.1 Applicable Standards

According to ECFR §15.247(e) and RSS-247 §6.3.1 (b), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8.4: Maximum power spectral density level in the fundamental emission.

The measurements are based on ANSI C63.10, Section 11.10.4.

The following procedure may be used as an alternative to 11.10.3 when the maximum (average) conducted output power was used to determine compliance to the fundamental output power limit and the EUT can be configured to transmit continuously (D ≥ 98%), or when sweep triggering and/or signal gating can be implemented to help ensure that measurements are made only when the EUT is transmitting at its maximum power control level (no transmitter OFF time to be considered):

a. Set instrument center frequency to DTS channel center frequency.
b. Set the instrument span to > 1.5 times the OBW.
c. Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.
d. Set the VBW ≥ [3 × RBW].
e. Detector = power average (rms).
f. Ensure that the number of measurement points in the sweep ≥ [2 × span / RBW].
g. Manually set the sweep time to: ≥ [10 × (number of measurement points in sweep) × (transmission symbol period)], but no less than the auto sweep time.
h. Perform the measurement over a single sweep.
i. Use the peak marker function to determine the maximum amplitude level.
j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this might require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

9.3 Test Setup Block Diagram



9.4 Test Equipment List and Details

BACL No	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
912	Rhode & Schwarz	Signal Analyzer	FSV40	1321.3008k39-101203-UW	2026-08-27	1 year
1518	Anhui Xinhang Microwave Communication Technology	2.92mm 12in RF cable	XH360A-2.92/J-2.92/J-12inch	BACL01518A	2026-04-14	6 Months
1539	N/A	10dB Attenuator, SMA	C18S5W-10	NA	2025-12-18	1 year

Statement of Traceability: BACL Corp. *attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".*

9.5 Test Environmental Conditions

Temperature:	22ºC
Relative Humidity:	51%
ATM Pressure:	101.5 kPa

The testing was performed by Arturo Reyes on 2026-09-21 at RF test site.

9.6 Test Results

Radio	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
LoRa	923.3	0.61	≤ 8	Pass

Please refer to Annex C for detailed Peak Power Spectral Density test results.

10 FCC §15.247(d) & ISEDC RSS-247 §6.6 – 100 kHz Spurious Emissions and Band Edges at Antenna Terminal (30 dBc)

10.1 Applicable Standards

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

According to ISEDC RSS-247 §6.6, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum device, digitally modulated device, or hybrid system is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power – based on either an RF conducted or a radiated measurement – provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 6.3.2, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

10.2 Measurement Procedure

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
RBW = 100 kHz
VBW = 300 kHz
Sweep = coupled
Detector function = peak
Trace = max hold

10.3 Test Setup Block Diagram



10.4 Test Equipment List and Details

BACL No	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
912	Rhode & Schwarz	Signal Analyzer	FSV40	1321.3008k39-101203-UW	2026-08-27	1 year
1518	Anhui Xinhang Microwave Communication Technology	2.92mm 12in RF cable	XH360A-2.92/J-2.92/J-12inch	BACL01518A	2026-04-14	6 Months
1539	N/A	10dB Attenuator, SMA	C18S5W-10	NA	2025-12-18	1 year

Statement of Traceability: BACL Corp. *attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".*

10.5 Test Environmental Conditions

Temperature:	22ºC
Relative Humidity:	52%
ATM Pressure:	101.8 kPa

The testing was performed by Arturo Reyes on 2026-09-15 at RF test site.

10.6 Test Results

Test Result: Pass

Please refer to Annex D for detailed 100 kHz Spurious Emissions at Antenna Terminal (30 dBc) test results.

11 Annex A – Emission Bandwidth

LoRa, 923.3 MHz, 99% OBW

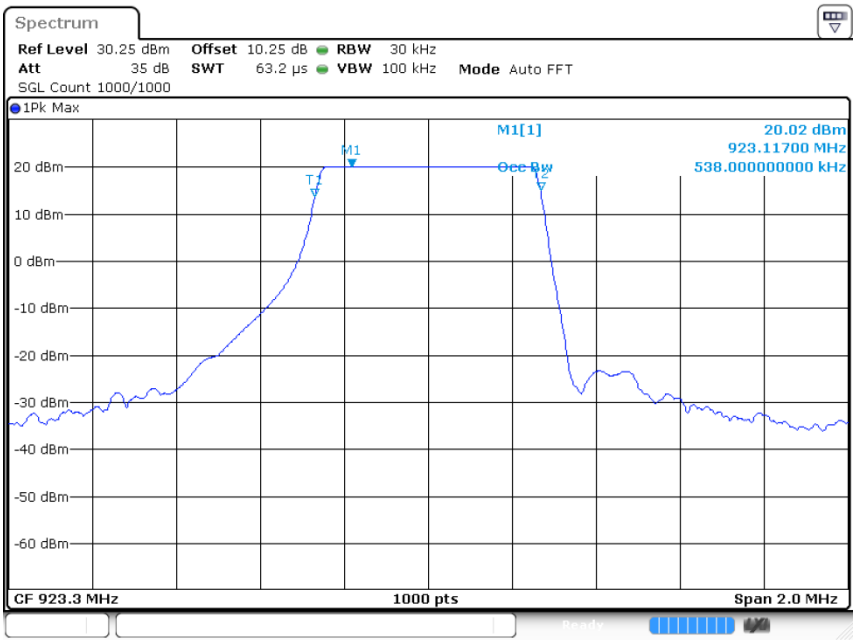

Project Number: R2609112; Tester Name: Arturo R.

Date: 15.SEP.2026 20:47:15

LoRa, 923.3 MHz, 6dB Bandwidth

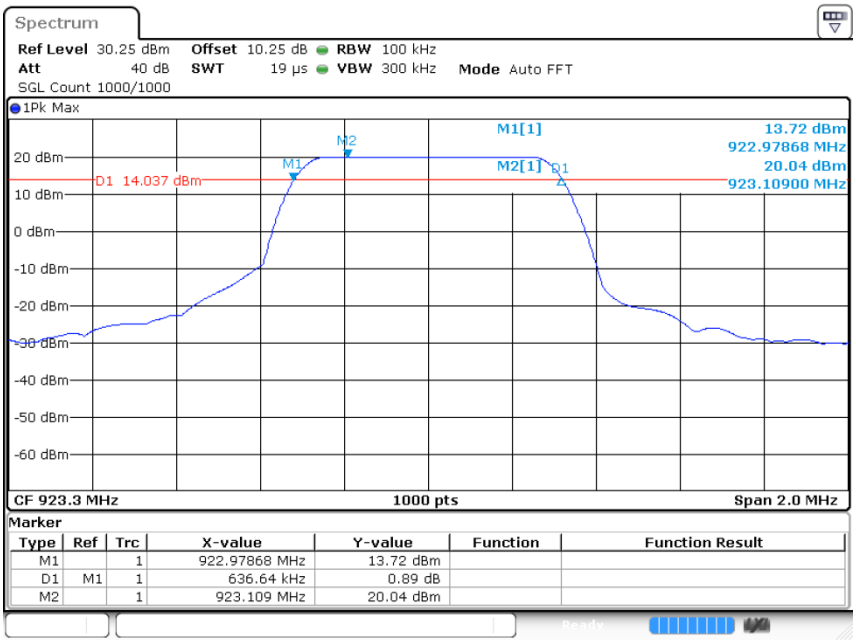

Project Number: R2609112; Tester Name: Arturo R.

Date: 15.SEP.2026 20:47:06

12 Annex B – Maximum Output Power

LoRa, 923.3 MHz, Output Power (Average)

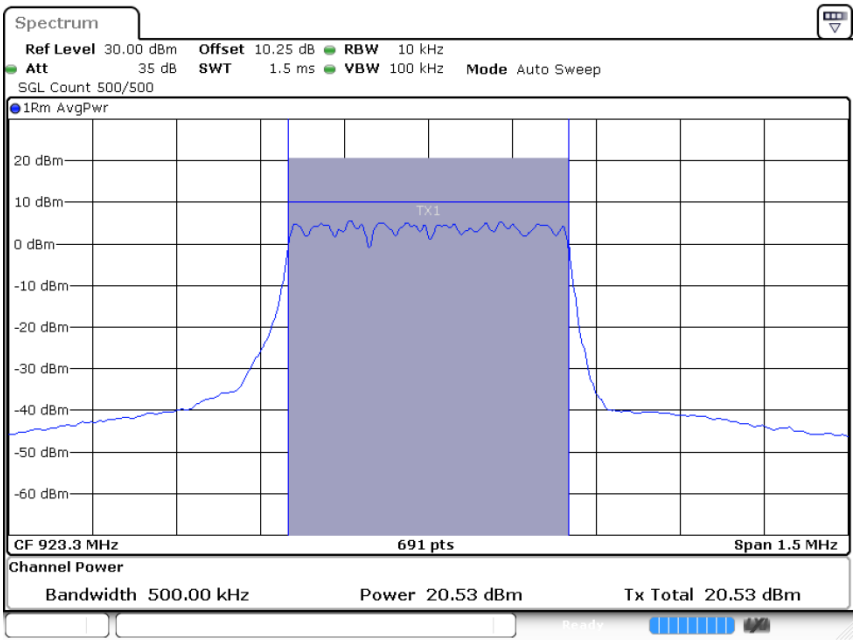

Project Number: R2609112; Tester Name: Arturo R.

Date: 16.SEP.2026 20:19:56

13 Annex C – Power Spectral Density

LoRa, 923.3 MHz, PSD

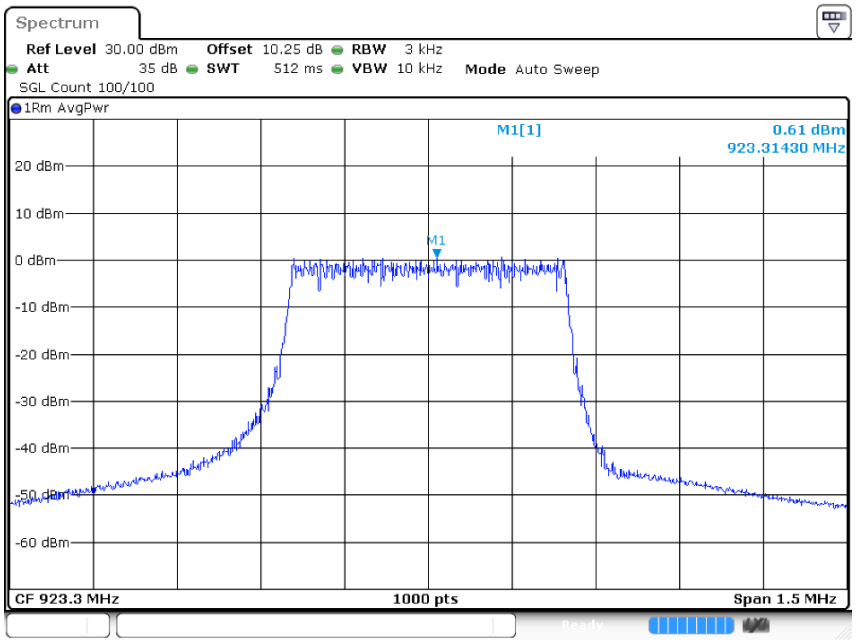

Project Number: R2609112; Tester Name: Arturo R.

Date: 21.SEP.2026 23:27:04

14 Annex D – 100 kHz Spurious Emissions at Antenna Terminal (30 dBc)

Note: The plots below show compliance to 20 dBc limit. However, the measured emissions also comply with the more stringent 30 dBc limit.

LoRa, 923.3 MHz, 30 MHz to 10 GHz

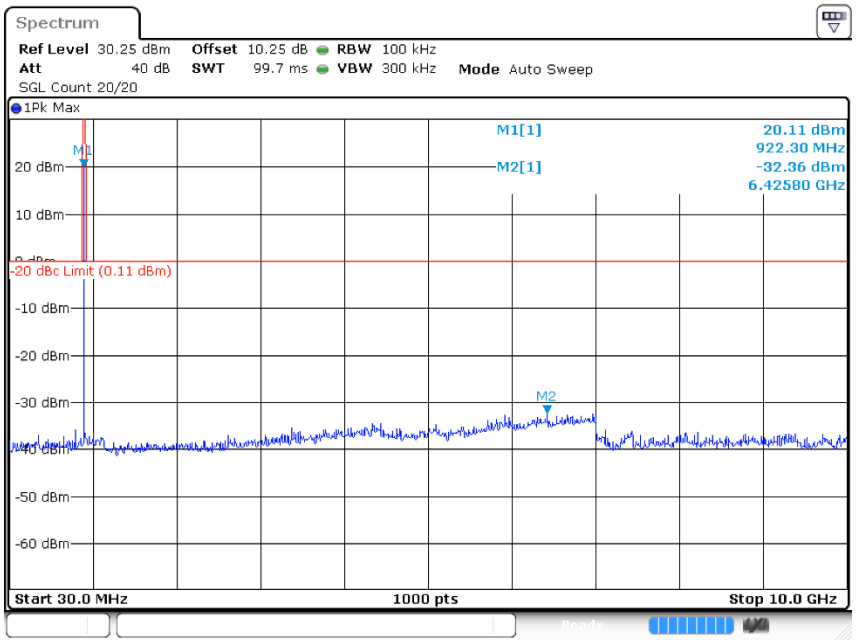

Project Number: R2609112; Tester Name: Arturo R.

Date: 15.SEP.2026 20:48:34

LoRa, 923.3 MHz, In-Band Emissions

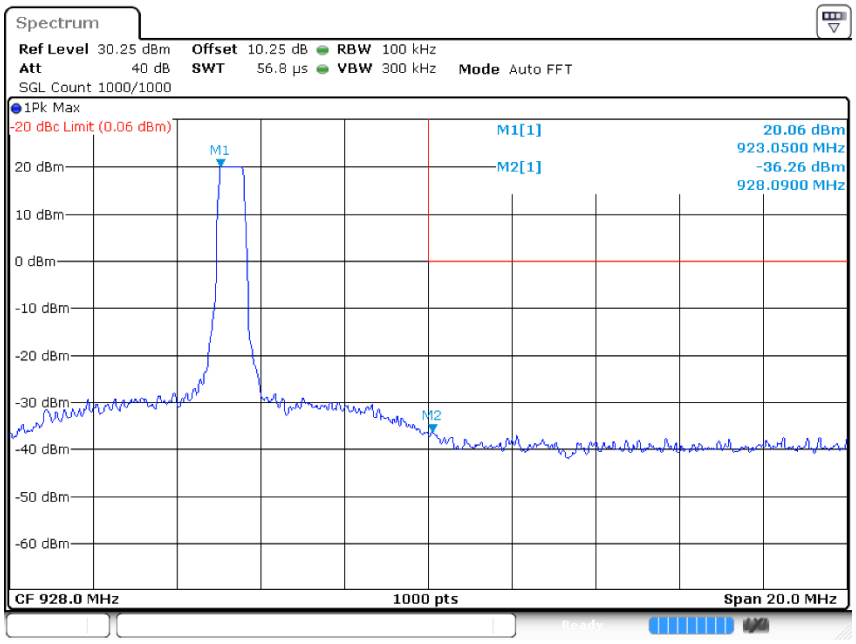

Project Number: R2609112; Tester Name: Arturo R.

Date: 15.SEP.2026 20:47:53

15 Appendix A (Normative) – EUT Test Setup Photographs

Please refer to the attachment.

16 Appendix B (Normative) – EUT External Photographs

Please refer to the attachment.

17 Appendix C (Normative) – EUT Internal Photographs

Please refer to the attachment.

18 Appendix D (Normative) – A2LA Electrical Testing Certificate

Accredited Laboratory

A2LA has accredited

BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This laboratory also meets A2LA R222 - Specific Requirements EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (*refer to joint ISO-ILAC-IAF Communiqué dated April 2017*).

Presented this 13th day of September 2024.

Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3297.02
Valid to September 30, 2026

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

Please follow the web link below for a full ISO 17025 scope.

https://www.a2la.org/scopepdf/3297-02.pdf

--- END OF REPORT ---