



FCC RF Test Report

APPLICANT : Ring LLC
EQUIPMENT : Spotlight Cam Pro
BRAND NAME : Ring
MODEL NAME : 5E62E9
FCC ID : 2AEUPBHASP001
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jul. 07, 2022 ~ Jul. 23, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	8
2.4 EUT Operation Test Setup	8
2.5 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 Output Power Measurement.....	10
3.2 Conducted Band Edges and Spurious Emission Measurement	12
3.3 Radiated Band Edges and Spurious Emission Measurement	15
3.4 Antenna Requirements.....	19
4 LIST OF MEASURING EQUIPMENT.....	20
5 UNCERTAINTY OF EVALUATION.....	21
APPENDIX A. RADIATED SPURIOUS EMISSION	
APPENDIX B. DUTY CYCLE PLOTS	
APPENDIX C. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR1D0812-01A	Rev. 01	Initial issue of report	Oct. 12, 2022



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.2	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.3	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.53 dB at 2483.50 MHz
3.4	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Note:

This is a variant report for 5E62E9. The change note could be referred to 5E62E9_Operational Description of Product Equality Declaration which is exhibit separately. Based on the similarity between current and previous project, only the related test cases of Conducted Power/Band Edge/RSE from original test report (Sporton Report Number FR1D0812A) were verified for the difference.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Ring LLC

12515 Cerise Ave, Hawthorne, CA 90250 USA

1.2 Manufacturer

Goertek Inc.

No.268 Dongfang Road High-Tech Industrial Development District, Weifang Shandong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Spotlight Cam Pro
Brand Name	Ring
Model Name	5E62E9
FCC ID	2AEUPBHASP001
HW Version	DVT2
SW Version	1.5.17
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel (37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth LE 1Mbps: 1.09 dBm (0.0013 W) Bluetooth LE 2Mbps: 1.17 dBm (0.0013 W)
Antenna Type / Gain	PIFA Antenna with gain 2.89 dBi
Type of Modulation	Bluetooth LE : GFSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-KS	AUDIX	E3	6.2009-8-24a

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE 2Mbps / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz
	Mode 2: Bluetooth Tx CH19_2440 MHz
	Mode 3: Bluetooth Tx CH39_2480 MHz
Radiated TCs	Mode 1: Bluetooth Tx CH39_2480 MHz
Remark: For Radiated Test Cases, The tests were performance with Adapter 1 and Battery 1.	

2.3 Connection Diagram of Test System

For Radiated Emission:

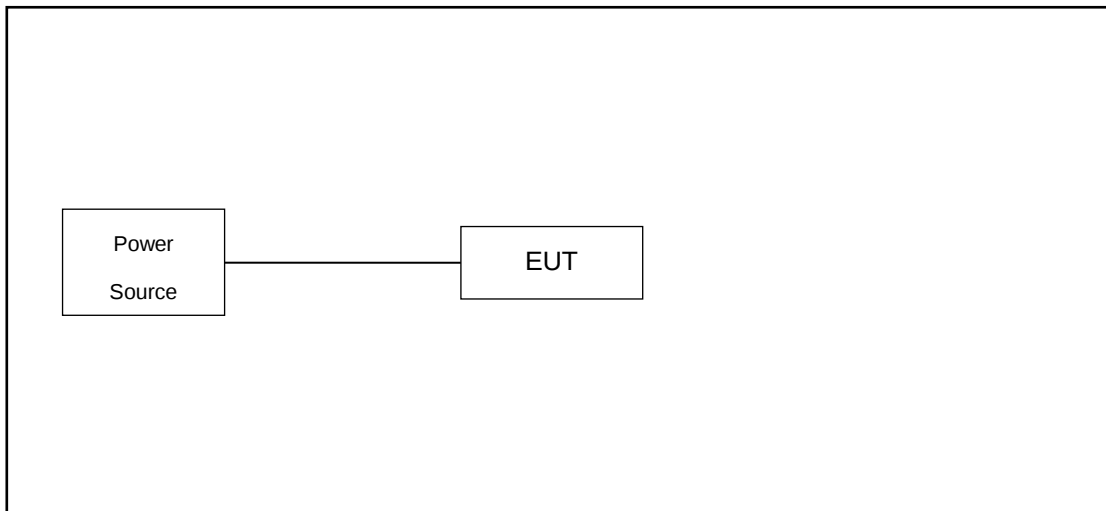

2.4 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.



2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.6 dB

Offset(dB) = RF cable loss(dB).

=5.6 (dB)

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.1.4 Test Setup

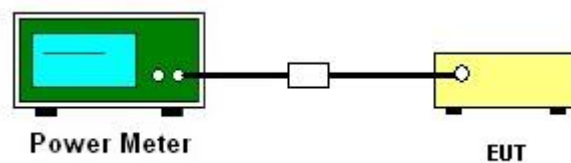

**3.1.5 Test Result of Peak Output Power**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	1.09	30.00	2.89	3.98	36.00	Pass
BLE	1Mbps	1	19	2440	1.02	30.00	2.89	3.91	36.00	Pass
BLE	1Mbps	1	39	2480	0.97	30.00	2.89	3.86	36.00	Pass
BLE	2Mbps	1	0	2402	1.17	30.00	2.89	4.06	36.00	Pass
BLE	2Mbps	1	19	2440	1.02	30.00	2.89	3.91	36.00	Pass
BLE	2Mbps	1	39	2480	0.88	30.00	2.89	3.77	36.00	Pass

3.1.6 Test Result of Average Output Power (Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	1.76	1.04
BLE	1Mbps	1	19	2440	1.76	0.91
BLE	1Mbps	1	39	2480	1.76	0.86
BLE	2Mbps	1	0	2402	2.31	1.09
BLE	2Mbps	1	19	2440	2.31	0.97
BLE	2Mbps	1	39	2480	2.31	0.79

3.2 Conducted Band Edges and Spurious Emission Measurement

3.2.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.2.4 Test Setup

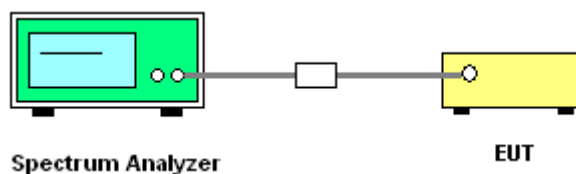



3.2.5 Test Result of Conducted Band Edges Plots

Bluetooth LE 2Mbps

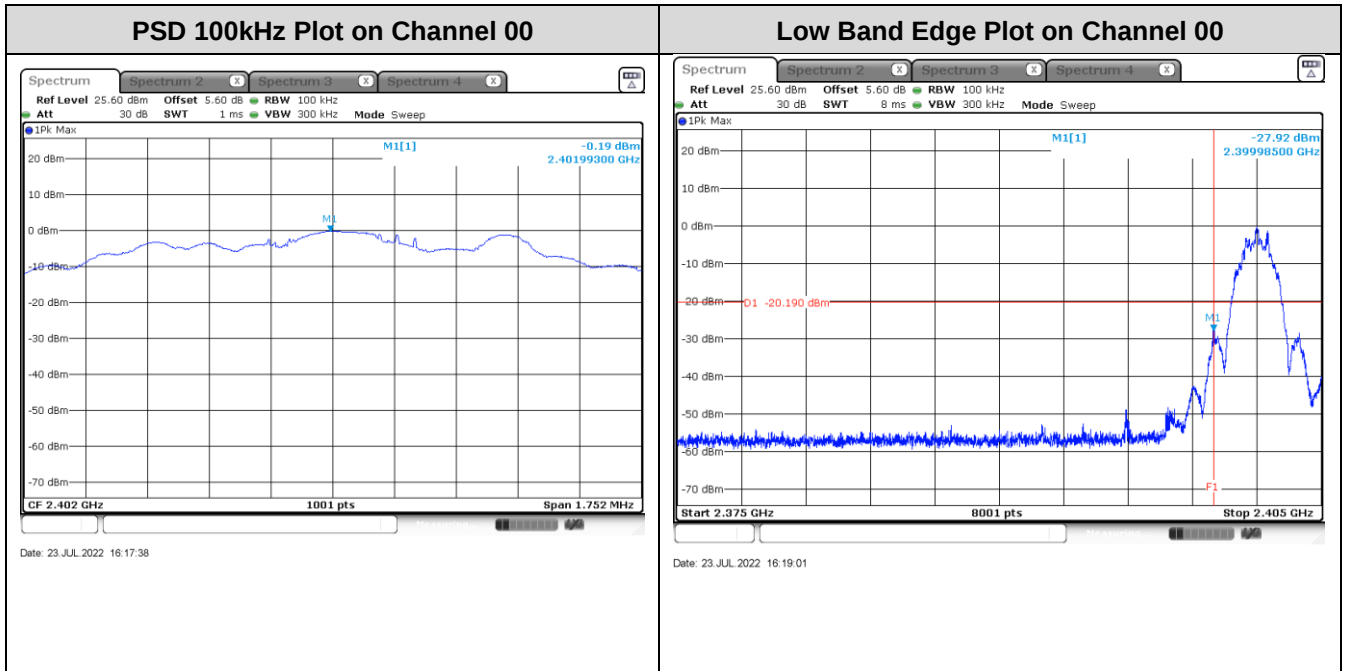


3.2.6 Test Result of Conducted Spurious Emission Plots

Bluetooth LE 2Mbps

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps


GFSK Channel 00

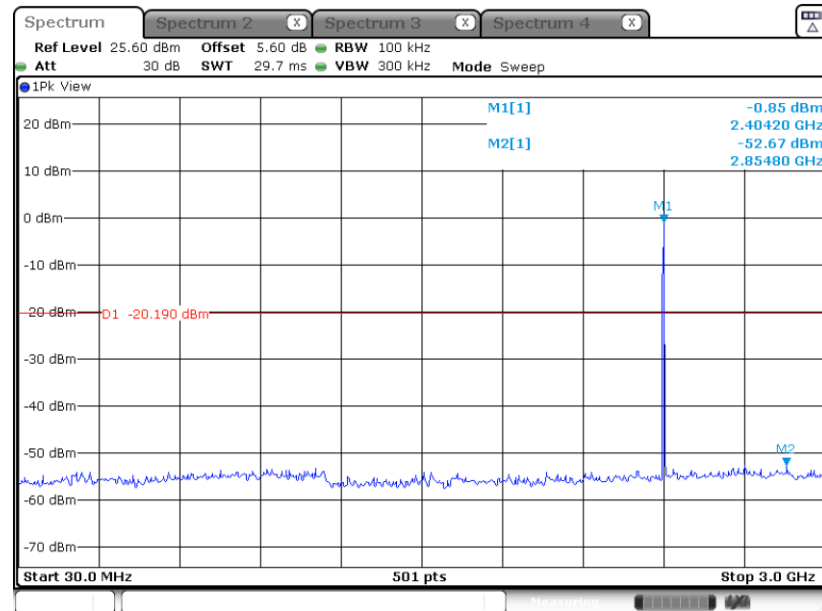

Date: 23.JUL.2022 16:19:14

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps

GFSK Channel 00

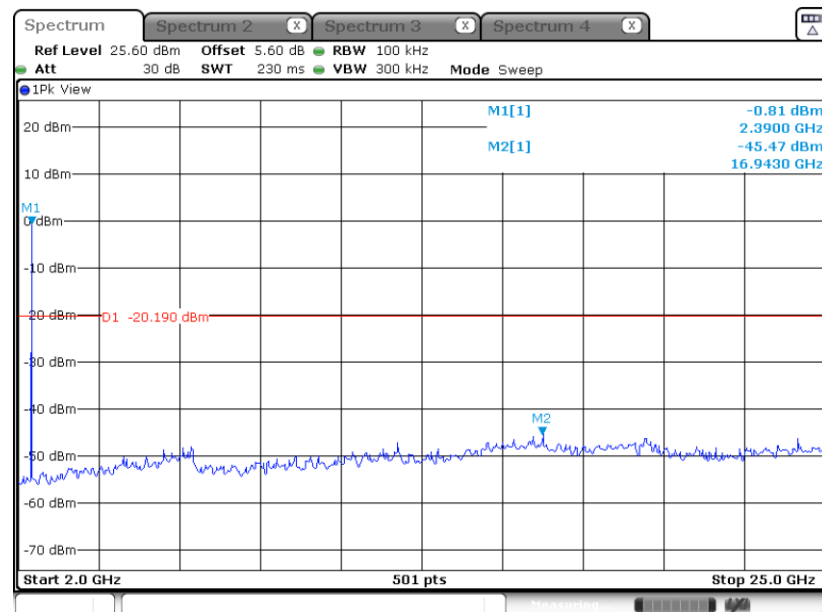

Date: 23.JUL.2022 16:19:26

3.3 Radiated Band Edges and Spurious Emission Measurement

3.3.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.3.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.3.4 Test Setup


For radiated emissions below 30MHz

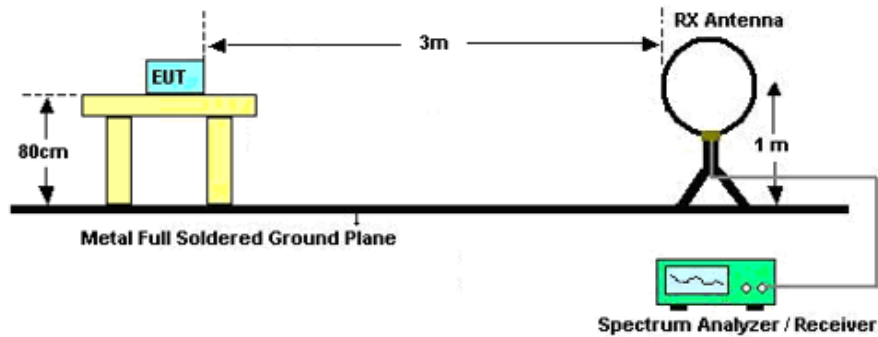

For radiated emissions from 30MHz to 1GHz

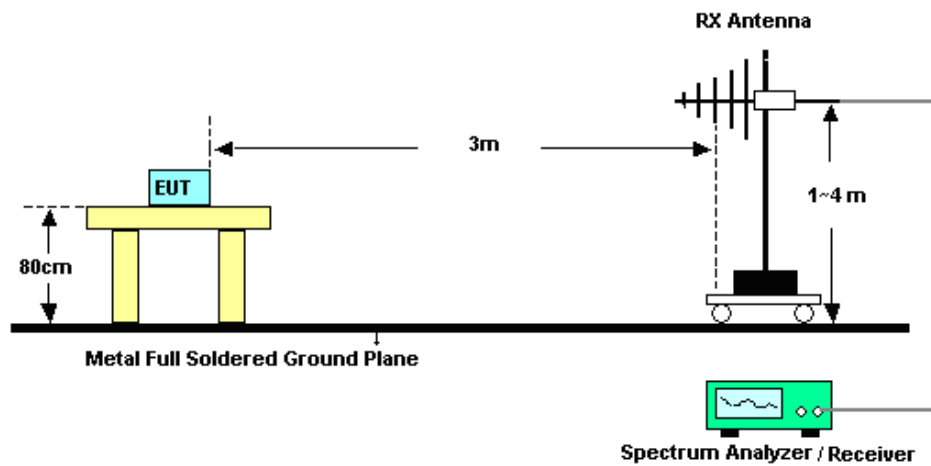

For radiated emissions above 1GHz

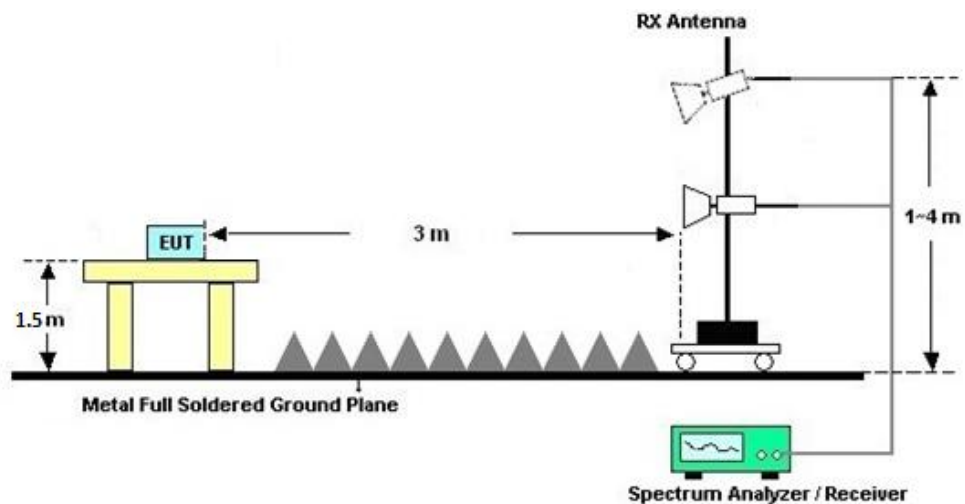

**3.3.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.3.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.3.7 Duty Cycle

Please refer to Appendix B.

3.3.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix A.



3.4 Antenna Requirements

3.4.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.4.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Jul. 23, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2021	Jul. 23, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2021	Jul. 23, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz; Max 30dBm	Oct. 14, 2021	Jul. 07, 2022	Oct. 13, 2022	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44GHz	Oct. 14, 2021	Jul. 07, 2022	Oct. 13, 2022	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 23, 2021	Jul. 07, 2022	Oct. 22, 2022	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz~1GHz	Dec. 22, 2021	Jul. 07, 2022	Dec. 21, 2022	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Dec. 24, 2021	Jul. 07, 2022	Dec. 23, 2022	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101115	18GHz~40GHz	Dec. 23, 2021	Jul. 07, 2022	Dec. 22, 2022	Radiation (03CH03-KS)
Amplifier	Burgeon	BPA-530	102220	30MHz ~1000MHz	Oct. 14, 2021	Jul. 07, 2022	Oct. 13, 2022	Radiation (03CH03-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 05, 2022	Jul. 07, 2022	Jan. 04, 2023	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082394	1Ghz-18Ghz	Jan. 05, 2022	Jul. 07, 2022	Jan. 04, 2023	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY53270319	1GHz~26.5GHz	Oct. 14, 2021	Jul. 07, 2022	Oct. 13, 2022	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 07, 2022	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 07, 2022	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 07, 2022	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 0.56 dB
Conducted Emissions	± 0.92 dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

----- THE END -----



Appendix A. Radiated Spurious Emission





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	SISO	Bluetooth-LE_GSKF	39	2480	2Mbps	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSKF	39	2483.50	50.47	54.00	-3.53	H	AVERAGE	Pass	Band Edge

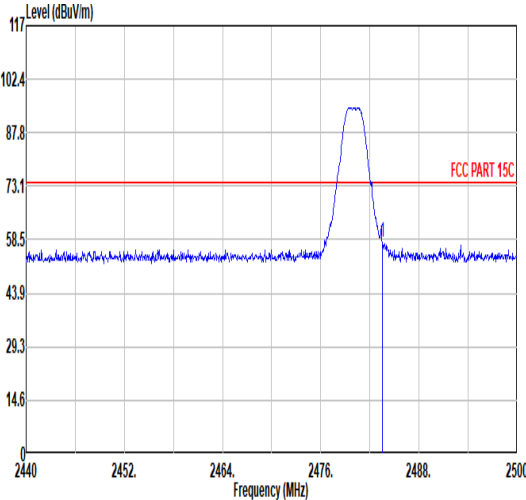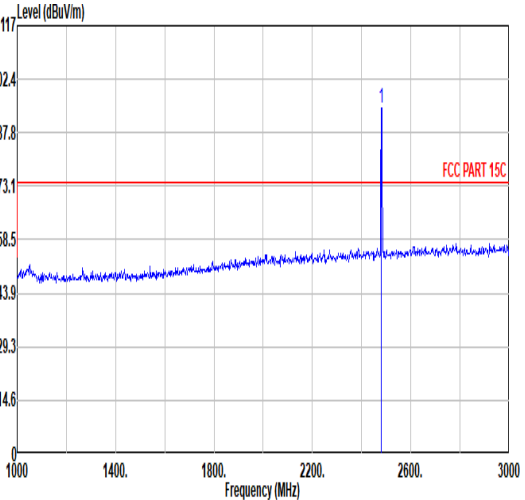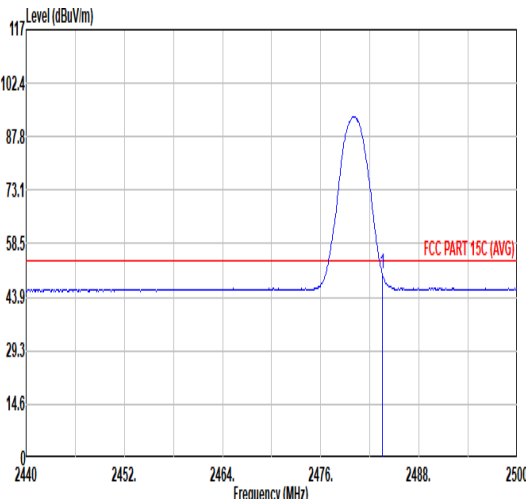
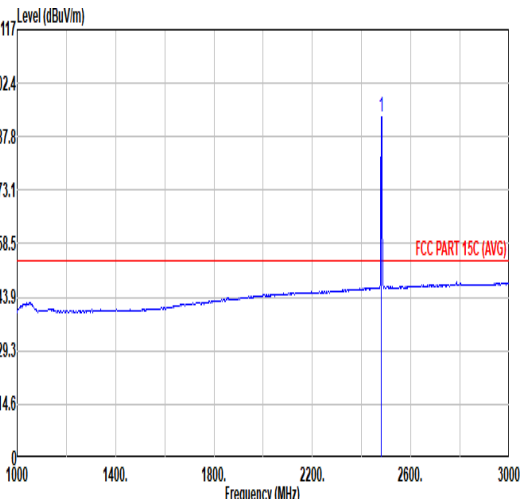


		1																																																					
Mode		Band Edge																																																					
		2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																					
ANT		SISO																																																					
Pol.		Horizontal																																																					
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>57.86</td><td>74.00</td><td>-16.14</td><td>45.19</td><td>32.16</td><td>7.33</td><td>32.82</td><td>6.00</td><td>328</td><td>121</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	57.86	74.00	-16.14	45.19	32.16	7.33	32.82	6.00	328	121
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	57.86	74.00	-16.14	45.19	32.16	7.33	32.82	6.00	328	121	PEAK																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>94.65</td><td>74.00</td><td>20.65</td><td>82.00</td><td>32.15</td><td>7.32</td><td>32.82</td><td>6.00</td><td>328</td><td>121</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.65	74.00	20.65	82.00	32.15	7.32	32.82	6.00	328	121
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	94.65	74.00	20.65	82.00	32.15	7.32	32.82	6.00	328	121	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>50.47</td><td>54.00</td><td>-3.53</td><td>37.80</td><td>32.16</td><td>7.33</td><td>32.82</td><td>6.00</td><td>328</td><td>121</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	50.47	54.00	-3.53	37.80	32.16	7.33	32.82	6.00	328	121
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	50.47	54.00	-3.53	37.80	32.16	7.33	32.82	6.00	328	121	AVERAGE																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>93.15</td><td>54.00</td><td>39.15</td><td>80.50</td><td>32.15</td><td>7.32</td><td>32.82</td><td>6.00</td><td>328</td><td>121</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	93.15	54.00	39.15	80.50	32.15	7.32	32.82	6.00	328	121
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	93.15	54.00	39.15	80.50	32.15	7.32	32.82	6.00	328	121	AVERAGE																																											

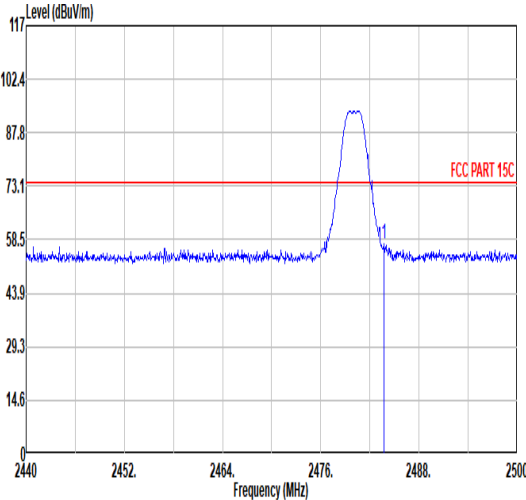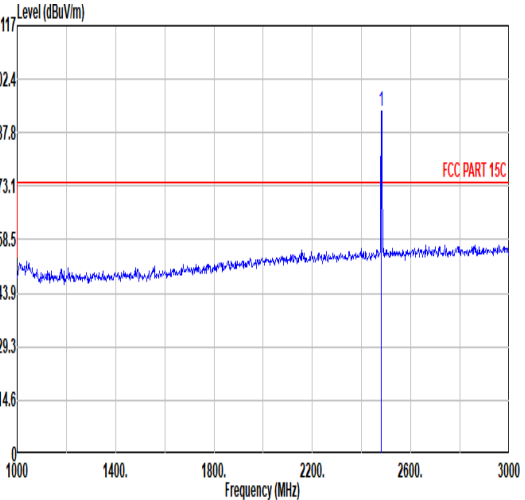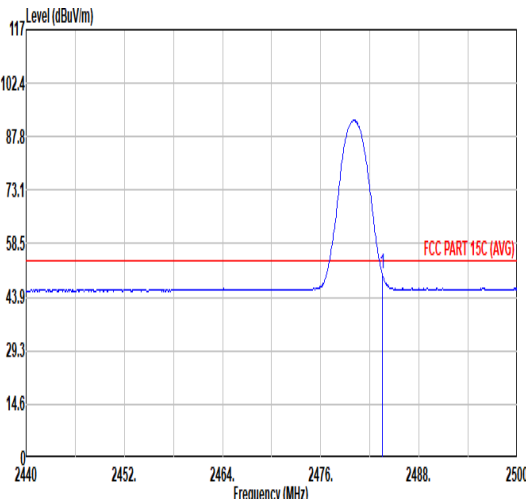
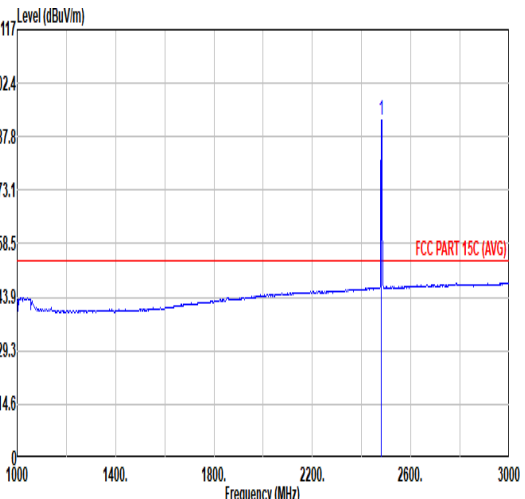


		1																																																					
Mode	Band Edge																																																						
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																						
ANT	SISO																																																						
Pol.	Vertical						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.68</td><td>57.41</td><td>74.00</td><td>-16.59</td><td>44.74</td><td>32.16</td><td>7.33</td><td>32.82</td><td>6.00</td><td>300</td><td>131</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.68	57.41	74.00	-16.59	44.74	32.16	7.33	32.82	6.00	300	131
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.68	57.41	74.00	-16.59	44.74	32.16	7.33	32.82	6.00	300	131	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>93.64</td><td>74.00</td><td>19.64</td><td>80.98</td><td>32.15</td><td>7.33</td><td>32.82</td><td>6.00</td><td>300</td><td>131</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	93.64	74.00	19.64	80.98	32.15	7.33	32.82	6.00	300	131
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	93.64	74.00	19.64	80.98	32.15	7.33	32.82	6.00	300	131	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>50.29</td><td>54.00</td><td>-3.71</td><td>37.62</td><td>32.16</td><td>7.33</td><td>32.82</td><td>6.00</td><td>300</td><td>131</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	50.29	54.00	-3.71	37.62	32.16	7.33	32.82	6.00	300	131
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	50.29	54.00	-3.71	37.62	32.16	7.33	32.82	6.00	300	131	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>92.19</td><td>54.00</td><td>38.19</td><td>79.54</td><td>32.15</td><td>7.32</td><td>32.82</td><td>6.00</td><td>300</td><td>131</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	92.19	54.00	38.19	79.54	32.15	7.32	32.82	6.00	300	131
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	92.19	54.00	38.19	79.54	32.15	7.32	32.82	6.00	300	131	AVERAGE																																											

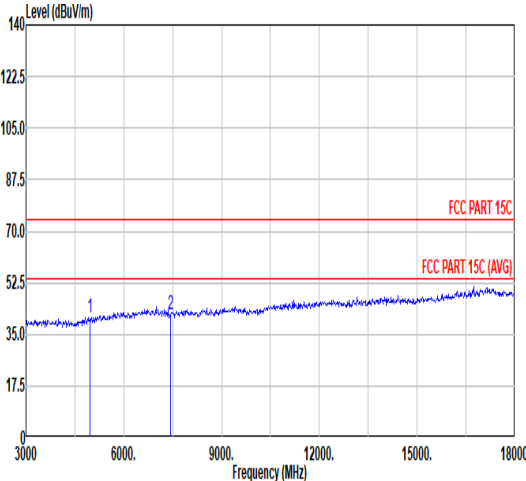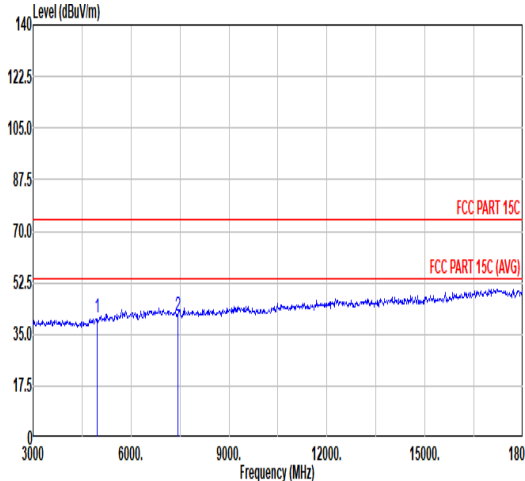

		1																																																																																																																																						
Mode		Harmonic																																																																																																																																						
		2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																																						
ANT		SISO																																																																																																																																						
Pol.		Horizontal						Vertical																																																																																																																																
Peak Avg																																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.77</td><td>74.00</td><td>-33.23</td><td>61.58</td><td>34.20</td><td>10.44</td><td>65.45</td><td>0.00</td><td>300</td><td>57 PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>41.73</td><td>74.00</td><td>-32.27</td><td>58.71</td><td>35.42</td><td>12.93</td><td>65.33</td><td>0.00</td><td>100</td><td>48</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.77	74.00	-33.23	61.58	34.20	10.44	65.45	0.00	300	57 PEAK	2	7440.00	41.73	74.00	-32.27	58.71	35.42	12.93	65.33	0.00	100	48	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.51</td><td>74.00</td><td>-33.49</td><td>61.32</td><td>34.20</td><td>10.44</td><td>65.45</td><td>0.00</td><td>100</td><td>120 PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>41.37</td><td>74.00</td><td>-32.63</td><td>58.35</td><td>35.42</td><td>12.93</td><td>65.33</td><td>0.00</td><td>300</td><td>235</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.51	74.00	-33.49	61.32	34.20	10.44	65.45	0.00	100	120 PEAK	2	7440.00	41.37	74.00	-32.63	58.35	35.42	12.93	65.33	0.00	300	235
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	4960.00	40.77	74.00	-33.23	61.58	34.20	10.44	65.45	0.00	300	57 PEAK																																																																																																																													
2	7440.00	41.73	74.00	-32.27	58.71	35.42	12.93	65.33	0.00	100	48																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	4960.00	40.51	74.00	-33.49	61.32	34.20	10.44	65.45	0.00	100	120 PEAK																																																																																																																													
2	7440.00	41.37	74.00	-32.63	58.35	35.42	12.93	65.33	0.00	300	235																																																																																																																													

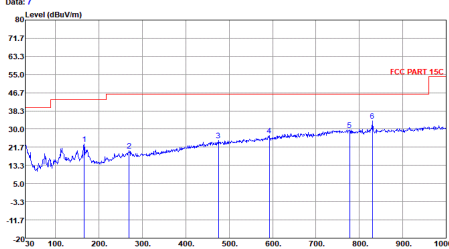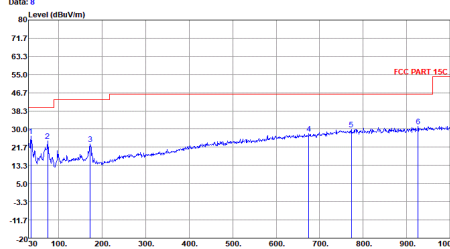

Mode	1																																																																																																																																																																																																								
	LF																																																																																																																																																																																																								
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																																																																																																								
ANT	SISO																																																																																																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																																																																																																							
Peak QP	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Data: 7  <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>165.80</td><td>23.10</td><td>-20.40</td><td>43.50</td><td>36.13</td><td>16.58</td><td>1.72</td><td>31.33</td><td>---</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>265.59</td><td>20.19</td><td>-25.81</td><td>46.00</td><td>30.64</td><td>18.81</td><td>2.21</td><td>31.47</td><td>---</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>3</td><td>475.23</td><td>24.93</td><td>-21.07</td><td>46.00</td><td>29.68</td><td>23.60</td><td>2.94</td><td>31.29</td><td>---</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>4</td><td>592.60</td><td>26.95</td><td>-19.05</td><td>46.00</td><td>29.20</td><td>25.78</td><td>3.29</td><td>31.32</td><td>---</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>5</td><td>777.87</td><td>29.60</td><td>-16.40</td><td>46.00</td><td>28.65</td><td>28.36</td><td>3.77</td><td>31.18</td><td>---</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>6</td><td>830.25</td><td>33.70</td><td>-12.30</td><td>46.00</td><td>32.26</td><td>28.53</td><td>3.89</td><td>31.28</td><td>---</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr></table>  No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Data: 8  <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>Limit</th><th>Line</th><th>Level Factor</th><th>Loss Factor</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>35.82</td><td>26.78</td><td>-13.22</td><td>40.00</td><td>35.60</td><td>22.04</td><td>0.53</td><td>31.39</td><td>---</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>74.62</td><td>24.54</td><td>-15.46</td><td>40.00</td><td>42.33</td><td>13.05</td><td>1.02</td><td>31.86</td><td>---</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>3</td><td>172.59</td><td>23.16</td><td>-20.34</td><td>43.50</td><td>36.47</td><td>16.26</td><td>1.76</td><td>31.33</td><td>---</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>4</td><td>675.05</td><td>27.92</td><td>-18.08</td><td>46.00</td><td>28.94</td><td>26.70</td><td>3.52</td><td>31.24</td><td>---</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>5</td><td>773.02</td><td>29.85</td><td>-16.15</td><td>46.00</td><td>28.91</td><td>28.35</td><td>3.76</td><td>31.17</td><td>---</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>6</td><td>926.28</td><td>31.29</td><td>-14.71</td><td>46.00</td><td>28.21</td><td>29.69</td><td>4.10</td><td>30.71</td><td>---</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr></table>		Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor	dB	dB	cm	deg	1	165.80	23.10	-20.40	43.50	36.13	16.58	1.72	31.33	---	---	Peak	HORIZONTAL	2	265.59	20.19	-25.81	46.00	30.64	18.81	2.21	31.47	---	---	Peak	HORIZONTAL	3	475.23	24.93	-21.07	46.00	29.68	23.60	2.94	31.29	---	---	Peak	HORIZONTAL	4	592.60	26.95	-19.05	46.00	29.20	25.78	3.29	31.32	---	---	Peak	HORIZONTAL	5	777.87	29.60	-16.40	46.00	28.65	28.36	3.77	31.18	---	---	Peak	HORIZONTAL	6	830.25	33.70	-12.30	46.00	32.26	28.53	3.89	31.28	---	---	Peak	HORIZONTAL		Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor	dB	dB	cm	deg	1	35.82	26.78	-13.22	40.00	35.60	22.04	0.53	31.39	---	---	Peak	VERTICAL	2	74.62	24.54	-15.46	40.00	42.33	13.05	1.02	31.86	---	---	Peak	VERTICAL	3	172.59	23.16	-20.34	43.50	36.47	16.26	1.76	31.33	---	---	Peak	VERTICAL	4	675.05	27.92	-18.08	46.00	28.94	26.70	3.52	31.24	---	---	Peak	VERTICAL	5	773.02	29.85	-16.15	46.00	28.91	28.35	3.76	31.17	---	---	Peak	VERTICAL	6	926.28	31.29	-14.71	46.00	28.21	29.69	4.10	30.71	---	---	Peak	VERTICAL
		Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																														
	MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor	dB	dB	cm	deg																																																																																																																																																																																															
1	165.80	23.10	-20.40	43.50	36.13	16.58	1.72	31.33	---	---	Peak	HORIZONTAL																																																																																																																																																																																													
2	265.59	20.19	-25.81	46.00	30.64	18.81	2.21	31.47	---	---	Peak	HORIZONTAL																																																																																																																																																																																													
3	475.23	24.93	-21.07	46.00	29.68	23.60	2.94	31.29	---	---	Peak	HORIZONTAL																																																																																																																																																																																													
4	592.60	26.95	-19.05	46.00	29.20	25.78	3.29	31.32	---	---	Peak	HORIZONTAL																																																																																																																																																																																													
5	777.87	29.60	-16.40	46.00	28.65	28.36	3.77	31.18	---	---	Peak	HORIZONTAL																																																																																																																																																																																													
6	830.25	33.70	-12.30	46.00	32.26	28.53	3.89	31.28	---	---	Peak	HORIZONTAL																																																																																																																																																																																													
	Freq	Level	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																															
	MHz	dBuV/m	Limit	Line	Level Factor	Loss Factor	dB	dB	cm	deg																																																																																																																																																																																															
1	35.82	26.78	-13.22	40.00	35.60	22.04	0.53	31.39	---	---	Peak	VERTICAL																																																																																																																																																																																													
2	74.62	24.54	-15.46	40.00	42.33	13.05	1.02	31.86	---	---	Peak	VERTICAL																																																																																																																																																																																													
3	172.59	23.16	-20.34	43.50	36.47	16.26	1.76	31.33	---	---	Peak	VERTICAL																																																																																																																																																																																													
4	675.05	27.92	-18.08	46.00	28.94	26.70	3.52	31.24	---	---	Peak	VERTICAL																																																																																																																																																																																													
5	773.02	29.85	-16.15	46.00	28.91	28.35	3.76	31.17	---	---	Peak	VERTICAL																																																																																																																																																																																													
6	926.28	31.29	-14.71	46.00	28.21	29.69	4.10	30.71	---	---	Peak	VERTICAL																																																																																																																																																																																													

Appendix B. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 2Mbps	58.69	1.101	0.908	1kHz

Bluetooth LE 2Mbps

