

FCC Test Firm Designation Number: FR0014
Industry Canada Test Firm Number: Site# 9545A-1 / 9545A-2

Matériel testé :
Equipment under test:

SEVENHUGS / Charging base CB1A
(Trademark / Marketing name or product reference)

Client / Demandeur:
Customer / Applicant : **Sevenhugs**
Stephane Jaubertou
29 bd Romain Rolland
75014 Paris - France

Fabricant :
Manufacturer: **Sevenhugs**
29 bd Romain Rolland
75014 Paris - France

Numéro d'affaire :
Work number : 12114

Référence de la proposition : 032017-22416
Proposal number:

Date de l'essai :
Date of test: Du 4 au 8 juin 2018
June 4th to 8th, 2018

Objectif des essais :
Test purpose: EMC qualification accordingly to following standards:
- CFR 47, FCC Part 15, Subpart F (15.517, Technical requirements for indoor UWB systems)
- RSS-220, Issue 1 (5.2, UWB Indoor Communication Devices)

Lieu du test:
Test location: SMEE, Rue de Taille
38500 VOIRON - France

Test réalisé par :
Test realized by: Laurent CHAPUS

Conclusion :
Conclusion: L'équipement satisfait aux prescriptions des normes citées en référence.
The appliance complies with requirements of above mentioned standards.

Ed.	Date	Modifications Pages	Written by : Visa	Approved by: Visa
1	July 11 th , 2018	Initial Edition	Laurent Chapus	Régis ANCEL
2	August 24, 2018	TCB review (ATCB022936)		

La copie de ce document n'est permise que sous sa forme intégrale. Ce document est le résultat d'essais effectués sur un échantillon. Il ne préjuge pas de la conformité de l'ensemble des produits fabriqués à l'objet essayé.
This document shall not be reproduced, except in full. This document contains results related only to the item tested. It does not imply the conformity of the whole production to the item tested.



Accréditation
N° 1-6356
Portée disponible sur :
Scope available on :
www.cofrac.fr

COORDONNEES

SMEE
Rue de Taille – ZI Des Blanchisseries
38500 VOIRON - France

TEL : 04 76 65 76 50
FAX : 04 76 66 18 30

SAS au capital de 50 000 € / RC Grenoble B534 796 453 / SIRET 534 796 453 00015 / code APE 7490B / n° TVA : FR 59 534 796 453

Contents

1. NORMATIVES REFERENCES	3
2. TEST SYNTHESIS / REQUIREMENT FOR INDOOR UWB SYSTEMS	4
3. EQUIPMENT UNDER TEST (EUT).....	6
4. TEST CONDITIONS.....	6
5. MODIFICATIONS OF THE EUT.....	7
6. SPECIAL ACCESSORY	7
7. CONDUCTED EMISSION MEASUREMENT (150KHZ-30MHZ).....	8
8. RADIATED POWER DENSITY	11
9. OCCUPIED BANDWIDTH TEST.....	14
10. RADIATED EMISSIONS MEASUREMENTS BELOW 960MHZ.....	16
11. RADIATED EMISSIONS MEASUREMENTS ABOVE 960MHZ	22
12. PEAK LEVEL OF THE EMISSIONS CONTAINED WITHIN A 50 MHZ BANDWIDTH	37
13. OCCUPIED BANDWIDTH (99%).....	40

1. Normatives References

FCC qualification according to:		
Standards	Applied	Title
ANSI C63.4 (2014)	X	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
ANSI C63.10 (2013)	X	American National Standard for Testing Unlicensed Wireless Devices
CFR47, Part 15	X	Telecommunication – Federal Communication Commission – Radio frequency devices. Subpart F—Ultra-Wideband Operation

ISED qualification according to:		
Standards	Applied	Title
RSS-Gen (Issue 5/2018)	X	General Requirements and Information for the Certification of Radio Apparatus
RSS-220 (Issue1/2009)	X	Devices Using Ultra-Wideband (UWB) Technology

Deviation from standards: None.

2. Test synthesis / Requirement for Indoor UWB systems

TEST	Paragraph numb. FCC Part 15 RSS-220	Spec. FCC Part 15 / RSS	RESULTS (comments)	
Conducted emissions test	FCC 15.207 (a) RSS-Gen § 8.8	Table 15.207 (a) Table 4 / RSS-Gen	PASS	
Radiated power density	FCC 15.517 (c)	EIRP -41.3 dBm/MHz in assigned frequency band 3100-10600	PASS (Chan 2 / Chan 5)	
Radiated power density	RSS-220 5.2.1 (d)	EIRP -41.3 dBm/MHz in assigned frequency band 4750-10600	PASS (Chan 5)	
Occupied Bandwidth test	UWB technical requirements	Minimum allowed bandwidth 500MHz	PASS	
Radiated emissions measurements below 960MHz	FCC 15.517 (b) & 15.209 (a) RSS-220 5.2.1 (c) & clause 3.4	Measure at 300m 9-490kHz: 2400µV/m/F(kHz) Measure at 30m 0.490-1.705: 24000µV/m/F(kHz) 1.705-30MHz: 30µV/m Measure at 3m 30MHz-88MHz : 40 dBµV/m 88MHz-216MHz : 43.5 dBµV/m 216MHz-960MHz : 46.0 dBµV/m Above 960MHz : 54.0 dBµV/m	PASS	
Radiated emissions measurements above 960MHz FCC part 15	FCC 15.517 (c) (d)	Frequency in MHz	EIRP in dBm	PASS
		960-1610	-75.3	
		1610-1990	-53.3	
		1990-3100	-51.3	
		3100-10600	-41.3	
		Above 10600	-51.3	
		1164-1240 (1)	-83.5	
		1559-1610 (1)	-83.5	
		(1) : 1kHz Measurement RBW		
Radiated emissions measurements above 960MHz RSS-220	RSS-220 5.2.1 (d) (e)	Frequency in MHz	EIRP in dBm	PASS
		960-1610	-75.3	
		1610-4750	-70.0	
		4750-10600	-41.3	
		Above 10600	-51.3	
		1164-1240 (1)	-83.5	
		1559-1610 (1)	-83.5	
		(1) : 1kHz Measurement RBW		
Peak level of the emissions contained within a 50 MHz bandwidth	FCC 15.517 (e)	EIRP 0dBm within 50MHz bandwidth in the frequency band 3100-10600MHz	PASS (Chan 2 / Chan 5)	
Peak level of the emissions contained within a 50 MHz bandwidth	RSS-220 5.2.1 (g)	EIRP 0dBm within 50MHz bandwidth in the frequency band 4750-10600MHz	PASS (Chan 5)	
Occupied Bandwidwth	RSS-GEN § 6.7	BW at 99%	PASS	

- **General conclusion:**

Measures and tests performed on the sample of the product SEVENHUGS, Charging base CB1A, in configuration and description presented in this test report, show compliance with standards FCC CFR 47, PART 15, used with channel 2 and 5.

Measures and tests performed on the sample of the product SEVENHUGS, Charging base CB1A, in configuration and description presented in this test report, show compliance with standards RSS-220, used with channel 5.

3. Equipment Under Test (EUT)

Nom /
Identification

SEVENHUGS Charging base CB1A

Sn: 0018

FCC ID:
IC:
Model:

FCC ID: 2AEVC-CB1A
IC: 20292-CB1A
CB1A

Alimentation /
Power supply

5v DC from power adapter.
AC/DC power adapter: Dong Guan City GangQi Electronic Co
Model:GQ06-050100-AX
Input:100-240 V -50/60 Hz 0.3 Amax
Output:5V/1A (1.8m cable)

Auxiliaires /
Auxiliaries

None

Entrées-Sorties /
Input / Output

	Câbles pour essai / Cables for test	Blindé / Shielded	Prévu pour >3m / Intended for >3m
DC input (5V)	1.8m, 2 wires	No	No
AC power port	1m, 2 wires	No	Mains

Version programme /
Firmware version

Certification_v8.6

Mode de fonctionnement /
Running mode

The tested sample is able to:
- Transmit a modulated carrier frequency on low, and high channels
- Be in standby mode (no transmission)

Programme de test /
Test program /

None

• Equipment information:

- Assigned Frequency band: 3743.6-4243.6MHz (Band 2) & 6239.6-6739.6MHz (Band 5)
- Operating frequencies: 3993.6MHz (Chan 2) & 6489.6MHz (Chan 5)
- Power Setting: Nominal power without variable setting
- Others UWB settings
 - PRF: 16
 - Preamble length: 128
 - Bitrate: 6.8 Mbits
- Antenna type: PCB antenna (3.6dBi peak gain at 3993.6MHz and -0.5dBi at 6489.6MHz)
- Equipment intended for use as a fixed station (Indoor)
- The UWB function of the charging base can operate only in standalone mode (Without remote placed for charging)

4. Test conditions

Power supply voltage:
Equipment under test:
AC mains

5V DC from power adapter
110V/60Hz for conducted emission test
230V/50Hz for radiated emission test

5. Modifications of the EUT

None

6. Special accessory


None

7. Conducted Emission Measurement (150kHz-30MHz)

TEST: Limits for conducted disturbance 150kHz – 30MHz				Verdict
Method: The LISN is placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane. This distance was between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment were at least 0,8 m from the AMN. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on lines were made at the output of the LISN. The EUT is 80cm above the ground reference plane and 40cm from the vertical ground plane. The AC power cable is 1m length.				Pass
Laboratory Parameters:	Required prior to the test		During the test	
Ambient Temperature	20 to 30 °C		23°C ± 2	
Relative Humidity	25 to 70 %		63% ± 5	
Fully configured sample scanned over the following frequency range	Frequency range on each side of line		Measurement Point	
	150kHz to 30MHz		AC input port (110V) Power adapter	
Limits				
Frequency (MHz)	Limit dB (µV)			
	Quasi-Peak	Result	Average	Result
0.15 – 0.50	66 \ 56	PASS	56 \ 46	PASS
0.50 - 5	56	PASS	46	PASS
5 – 30	60	PASS	50	PASS
Supplementary information: Test location: SMEE Test date: June 4 th , 2018. Tested by L. CHAPUS Power supply voltage: 5V from power adapter				

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Attenuator / limiter	SMEE	ATT#2	ATT-171-010	2017/6	2018/6
Cable RF	Div	1m	CAB-101-021	2018/4	2019/4
LISN (50Ω / 50µH) (Meas.)	AFJ	LS16C	RSI-101-001	2017/6	2019/6
Measuring receiver	Rohde&Schwarz	ESRP	REC-151-002	2017/3	2019/3
EMC Software	NEXIO	BAT EMC V3.8	SOF-101-001	-	-
AC power supply	PACIFIC POWER	AMX-125	101-002	-	-


Test Setup for conducted emission

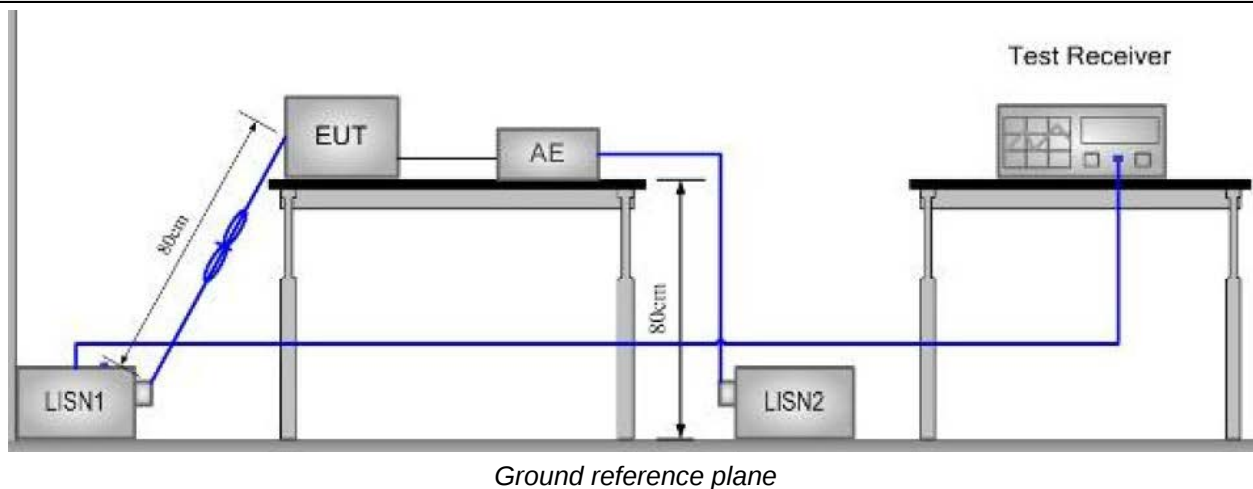

Tabulated Results for Mains Terminal Disturbance Voltage on AC port

FREQ (MHz)	Meas. PK (dBμV)	Mes. QP (dBμV)	LIMIT QP (dBμV)	Margin QP (dB)	Mes. AV (dBμV)	LIMIT AV (dBμV)	Margin AV (dB)	Line
0.162	39.4	29.1	65.4	-36.2	21.0	55.4	-34.3	L1
0.438	33.6	30.1	57.1	-27.0	22.6	47.1	-24.6	L1
0.158	38.4	29.4	65.6	-36.2	23.0	55.6	-32.6	Neutral
0.442	37.3	34.1	57.0	-22.9	24.8	47.0	-22.2	Neutral
Frequency band investigated:		150kHz-30MHz						
RBW:		9kHz						
Voltage:		230V/50Hz						
Limit:		FCC Part 15.209 a) / RSS-Gen: Issue 5, §8.8 Table 4						
Final measurement detector:		Quasi-Peak and CISPR Average (AV)						
Wide Measurement Uncertainty:		± 3.5dB (k=2)						
RESULT:		PASS						
Measured value calculation:		The measured value (level) is calculated by adding the Cable Factor, the Transient suppressor attenuation and LISN attenuation from the receiver amplitude reading. The basic equation is as follow: $\text{Meas.} = \text{RA} + \text{CF} + \text{ATT}_{\text{TRAN}} + \text{ATT}_{\text{LISN}}$ Where - Meas. = Level (dBμV) - RA = Receiver Amplitude - CF = Cable Factor - ATT_{TRAN} = Transient suppressor attenuation - ATT_{LISN} = LISN attenuation Margin value = Emission level – Limit value (A negative margin shows compliance to limit) Same results for all running mode (Chan 2 & Chan 5)						


Graphical representation of Conducted Disturbance Measurement (Peak and Average detection) AC port, Line L1 – Power adapter

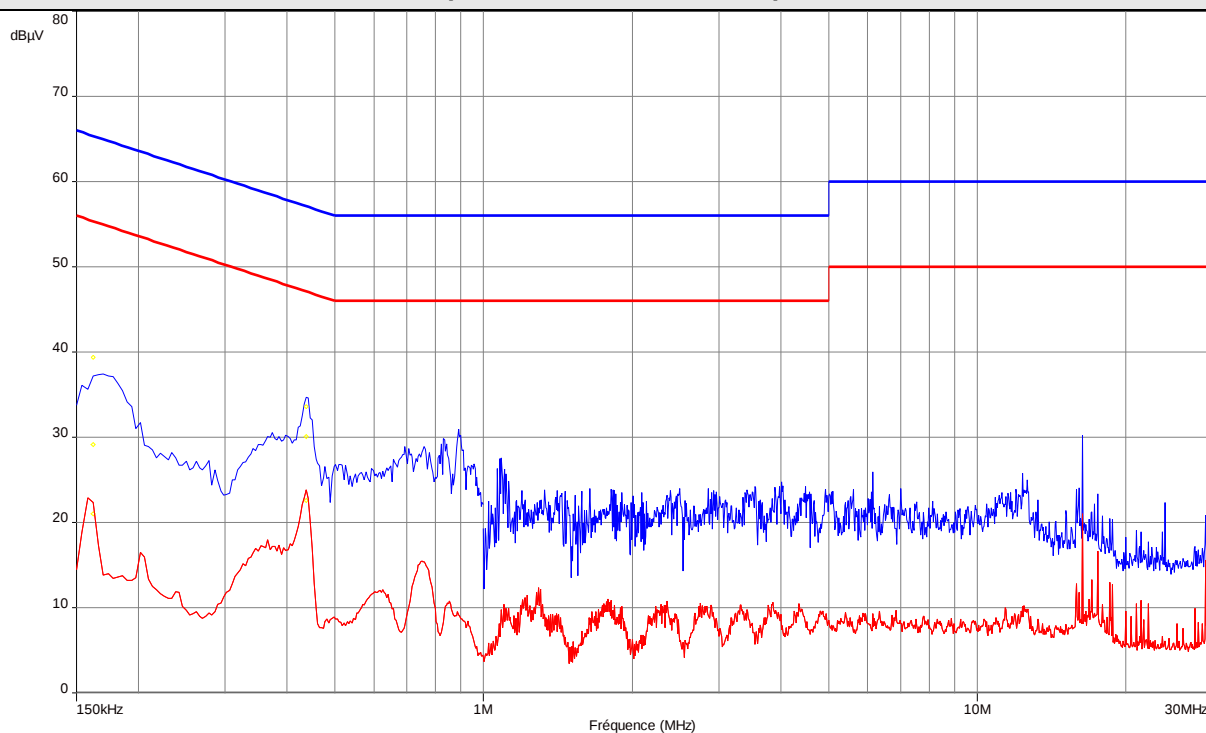

----: Peak

----: Average

Graphical representation of Conducted Disturbance Measurement (Peak and Average detection) AC port, Line Neutral – Power adapter

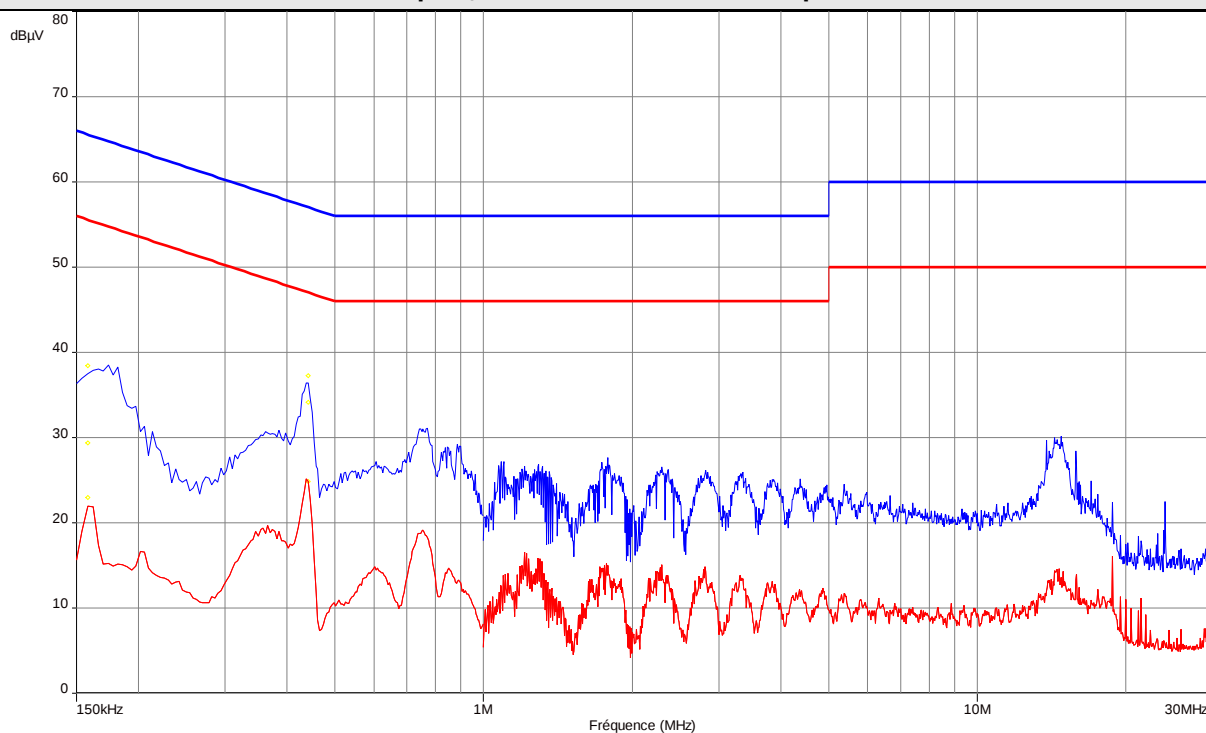

----: Peak


----: Average

8. Radiated Power density

TEST: Limits for radiated Radiated Power density			Verdict
Method: Measurements were made in a 3-meter Full Anechoic Chamber that complies to ANSI C63.10. Final measurements were performed by rotating the EUT 360° and adjusting the receive antenna height. The tested equipment is set to transmit operation with modulations on lowest and highest channel. Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength, with 60° rotation on each axis. (Clause 6.6.5 of ANSI C63.10).			Pass
Laboratory Parameters:	Required prior to the test	During the test	
Ambient Temperature	20 to 30 °C	23°C ± 2	
Relative Humidity	25 to 70 %	63% ± 5	
Limits FCC 15.517 (c)			
Assigned Frequency band (MHz)	Limit		
	dBm	Results	
3100-10600	-41.3	Pass (Chan 2 / Chan 5)	
Limits ISED RSS-220 5.2.1 (d)			
Assigned Frequency band (MHz)	Limit		
	dBm	Results	
4750-10600	-41.3	Pass (Chan 5)	
Supplementary information: Test location: SMEE Test date: June 4 th , 2018. Tested by L. CHAPUS Power supply voltage: 5V from power adapter			

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2015/7	2018/7
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2017/3	2018/3
RF cable	Pasternack	PE302-120	CAB-131-024	2017/3	2018/3
Anechoic chamber	COMTEST	214263	CAG-141-001	-	-
Spectrum analyzer	Rohde&Schwarz	FSV40	ASP-171-004	2017/5	2019/5

Test Setup for radiated emission

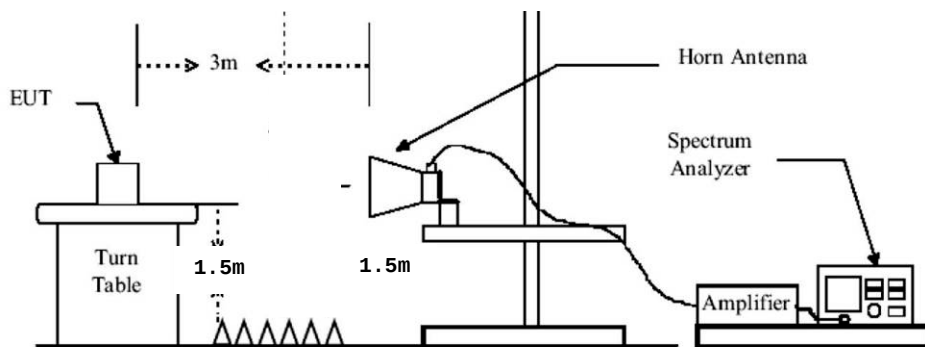


Test setup for 1-40GHz


Tabulated Results for Radiated Density

FREQ (MHz)	Receiver Amplitude (dBμV)	Total Factor	Field Strength (dBμV/m)	Equivalent EIRP (dBm)	RBW	Limit EIRP (dBm/1MHz)	Margin (dB)	Result
4118.250	20.5	36.2	47.2	-48.0	1MHz	-41.3	-6.7	Pass
6489.750	18.6	42.1	51.2	-44.0	1MHz	-41.3	-2.7	Pass
RBW / VBW		1MHz / 10MHz						
Measurement distance:		3m						
Wide Measurement Uncertainty:		± 5.6dB (k=2)						
RESULT:		PASS						
Notes:		(1): The field strength (level) is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation is as follow: $FS = RA + AF + CF - AG$ Where FS = Field Strength RA = Receiver Amplitude AF = Antenna Factor CF = Cable Factor AG = Amplifier Gain Total factor (dB) is $AF + CF - AG$ Margin value = Emission level – Limit value (2): $EIRP (dBm) = Field\ Strength (dB\mu V/m) - 95.2dB$ (3): 3-axis measurement performed for device under test. (4): Measure have been done at 1m distance and corrected according to requirements of 15.209.e) $(M@3m = M@1m - 9.54dB)$						

Graphical representation of Radiated Density

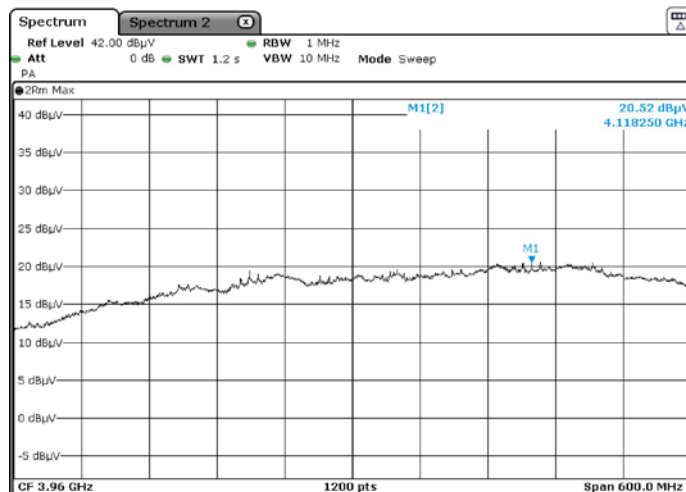

Chan 2

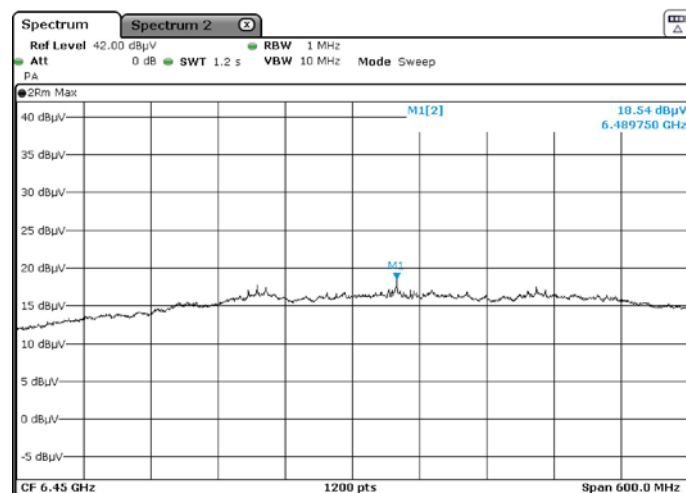


Chan 5

RBW :	1MHz
Measurement detector :	RMS (1ms / bin)

9. Occupied Bandwidth test

TEST: 10dB Bandwidth			Verdict
Method: The setup is in an anechoic chamber. The spectrum analyzer is connected to the measuring antenna. A radiated measurement is performed. The RBW is 1MkHz, with VBW ≥ 3 x RBW. The SPAN is wide enough to capture all products of the modulation process. A MaxHold Peak detector is used. The tested equipment is set to transmit operation with modulation on low and high channels.			Pass
Laboratory Parameters:	Required prior to the test	During the test	
Ambient Temperature	20 to 30 °C	23°C ± 2	
Relative Humidity	25 to 70 %	63% ± 5	
Limits			
Frequency (MHz)	Level for Bandwidth	Limit	
3993.6 / Chan 2	10dB below the maximum power	At least 500MHz	
6489.6 / Chan 5			
Supplementary information:			
Test location: SMEE			
Test date: June 4 th , 2018. Tested by L. CHAPUS			
Power supply voltage: 5V from power adapter			


Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2015/7	2018/7
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2017/3	2018/3
RF cable	Pasternack	PE302-120	CAB-131-024	2017/3	2018/3
Anechoic chamber	COMTEST	214263	CAG-141-001	-	-
Spectrum analyzer	Rohde&Schwarz	FSV40	ASP-171-004	2017/5	2019/5

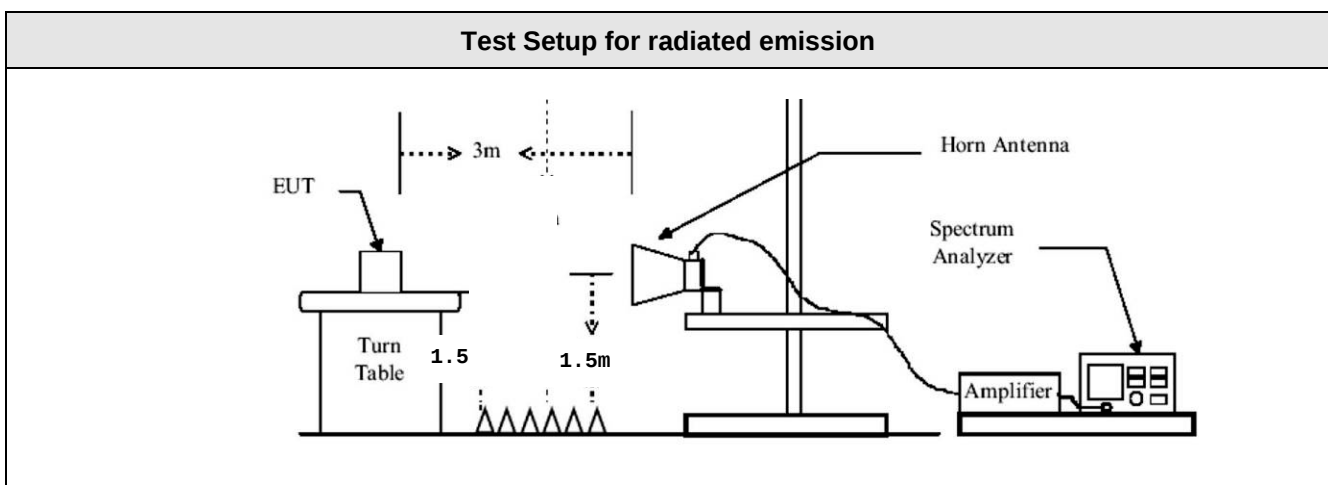


Tabulated Results for Occupied Bandwidth

Frequency (MHz)	10dB Bandwidth (MHz)	Limit	Result
3993.6 / Chan 2	673.0	Minimum 500MHz	Pass
6489.6 / Chan 5	666.0	Minimum 500MHz	Pass

Graphical representation of -10dBc Bandwidth

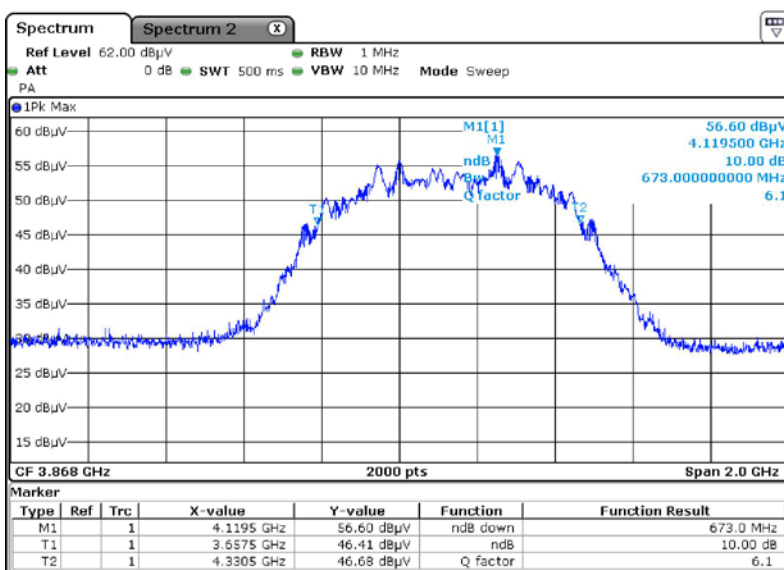

Chan 2

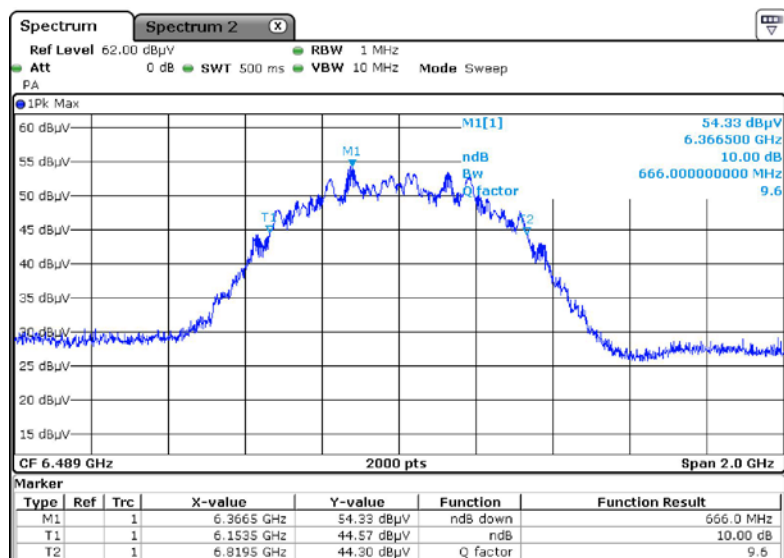

Chan 5


RBW : 1MHz
Measurement detector : Peak

10. Radiated emissions measurements below 960MHz


TEST: Radiated emissions measurements below 960MHz		Verdict
Method: Measurements were made on a 10 or 3-meter Open Area Test Site. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (Peak/Quasi-Peak/Average) were then performed by rotating the EUT 360° and adjusting the receive antenna height. The tested equipment is set to transmit operation with modulations on lowest and highest channel. Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength. A pre-scan frequency identification of the EUT has been performed in full anechoic chamber. The measured pre-scan radiated field of the EUT is performed at 3-meters of distance for frequency 9k-960MHz.		Pass
Laboratory Parameters:	Required prior to the test	During the test
Ambient Temperature	20 to 30 °C	23°C ± 2
Relative Humidity	25 to 70 %	63% ± 5
Fully configured sample scanned over the following frequency range	Frequency range on each side of line	Measurement Point
	9kHz – 30MHz	10 m measurement distance
	30MHz – 960MHz	3 m measurement distance
Limits (FCC / ISED)		
Frequency (MHz)	Limits (dBµV/m)	
	Level / Detector / Distance	Results
0.009 to 0.090	107.6 – 87.6 / AV / 10m 127.6 – 107.6 / PK / 10m	Pass
0.090 to 0.110	87.6 – 85.9 / QP / 10m	Pass
0.110 to 0.490	85.7 – 72.9 / AV / 10m 105.7 – 92.9 / PK / 10m	Pass
0.490 to 1.705	52.9 – 42.1 / QP / 10m	Pass
1.705 to 30	48.6 / QP / 10m	Pass
30 to 88	40.0 / QP / 3m	Pass
88 to 216	43.5 / QP / 3m	Pass
216 to 960	46.0 / QP / 3m	Pass
Supplementary information: Test location: SMEE Test date: June 6 and 7th, 2018. Tested by L. CHAPUS Power supply voltage: 5V from power adapter		

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Log-periodic antenna	TDK	PLP3003	ANT-101-001	2017/5	2019/5
Biconnic antenna	COM-POWER	AB- 900	ANT-101-003	2017/5	2019/5
Loop antenna	EMCO	6502	ANT-101-009	2017/8	2019/8
BiConiLog antenna	EMCO	3142B	ANT-101-010	2017/7	2019/7
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2014/3	2019/3
RF cable	Div	OATS/25m	CAB-101-017	2018/4	2019/4
RF cable	Pasternack RF	PE302-120	CAB-131-024	2018/4	2019/4
RF cable	HUBER+SUHNER	RG214U	CAB-141-026	2018/4	2019/4
RF cable	HUBER+SUHNER	RG214U	CAB-141-029	2018/4	2019/4
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2018/4	2019/4
Pre-amplifier	Pasternack RF	PE1524	PRE-101-002	2017/6	2018/6
Anechoic chamber	COMTEST	214263	CAG-141-001	2017/6	2020/6
OATS	Div	10m	SIT-101-001	2017/7	2020/7
Antenna mast	Innco- Systems	MA4000EP	MAT-101-001	-	-
Turntable	Innco- Systems	DS1200S	PLA-101-001	-	-
Turntable	Innco- Systems	CT0800	PLA-141-001	-	-
Measuring Rec	Rohde&Schwarz	ESRP	REC-151-002	2017/3	2019/3

Test Setup for radiated emission

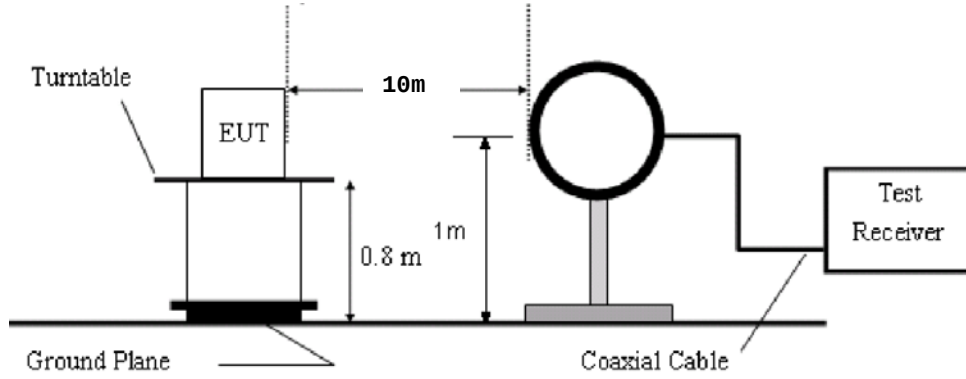

Test setup for 9k-30MHz


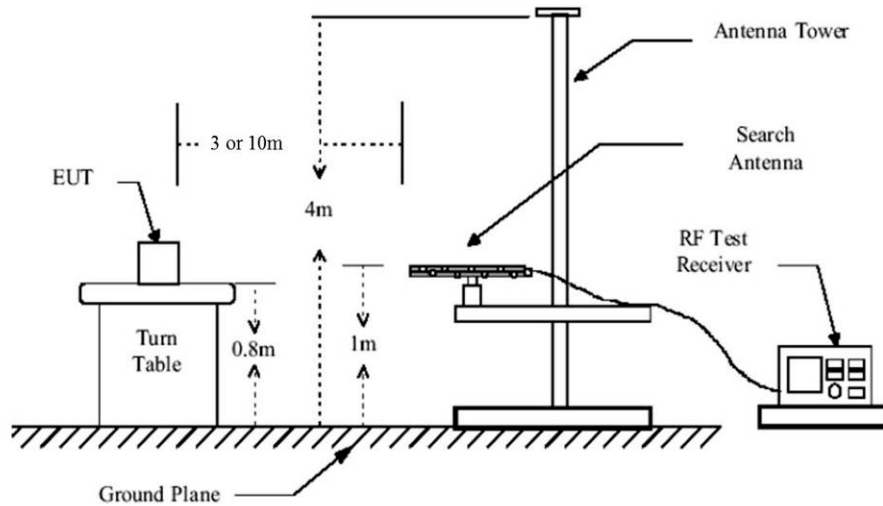


Test setup for 30-1000MHz

Tabulated Results for Unwanted emissions (9kHz-30MHz)							
FREQ	RF field @ 30m	Limit @ 30m	Margin	Antenna		Table angle	Correc. Fact. (CF)
MHz	(QP) dBμV/m	(QP) dBμV/m	dB	Angle (Degree)	Position	Degree	dB
No frequency observed (Level at least 10dB below limits)							
Supplementary information: Frequency list measured on the Open Area Test Site has been created with pre-scan results.							
Frequency band investigated:		9kHz-30MHz					
RBW:		200Hz (9kHz-150kHz)					
		9kHz (150kHz-30MHz)					
Measurement distance:		10m					
Limit:		FCC Part 15.209 – RSS 220 5.2.1 (c)					
Final measurement detector:		Quasi-Peak / Average					
Wide Measurement Uncertainty:		± 3.5dB (k=2)					
Note:		CF: Correction factor = Antenna factor + Cable loss *1: Measure have been done at 10m distance and corrected according to requirements of 15.209.e) (M@30m = M@10m-19.1dB)					


Tabulated Results for Unwanted emissions (30MHz-960MHz)					
FREQ	Meter reading	Total factor	Field level	Limit	Margin
MHz	(QP) dBμV	dB	(QP) dBμV/m	(QP) dBμV/m	dB
No frequency observed (Level at least 10dB below limits)					
Supplementary information: Frequency list measured on the Open Area Test Site has been created with pre-scan results.					
Frequency band investigated:		30MHz-960MHz			
RBW:		120kHz			
Measurement distance:		3m			
Limit:		FCC Part 15.209 – RSS 220 5.2.1 (c)			
Final measurement detector:		Quasi-Peak			
Wide Measurement Uncertainty:		± 5.6dB (k=2)			
RESULT:		PASS			
Notes:		(1): The field strength (level) is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation is as follow: $FS = RA + AF + CF - AG$ Where FS = Field Strength RA = Receiver Amplitude AF = Antenna Factor CF = Cable Factor AG = Amplifier Gain Total factor (dB) is AF + CF – AG Margin value = Emission level – Limit value			

Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 9kHz-30MHz / 3m / Parallel & Perpendicular antenna position / Transmit mode)

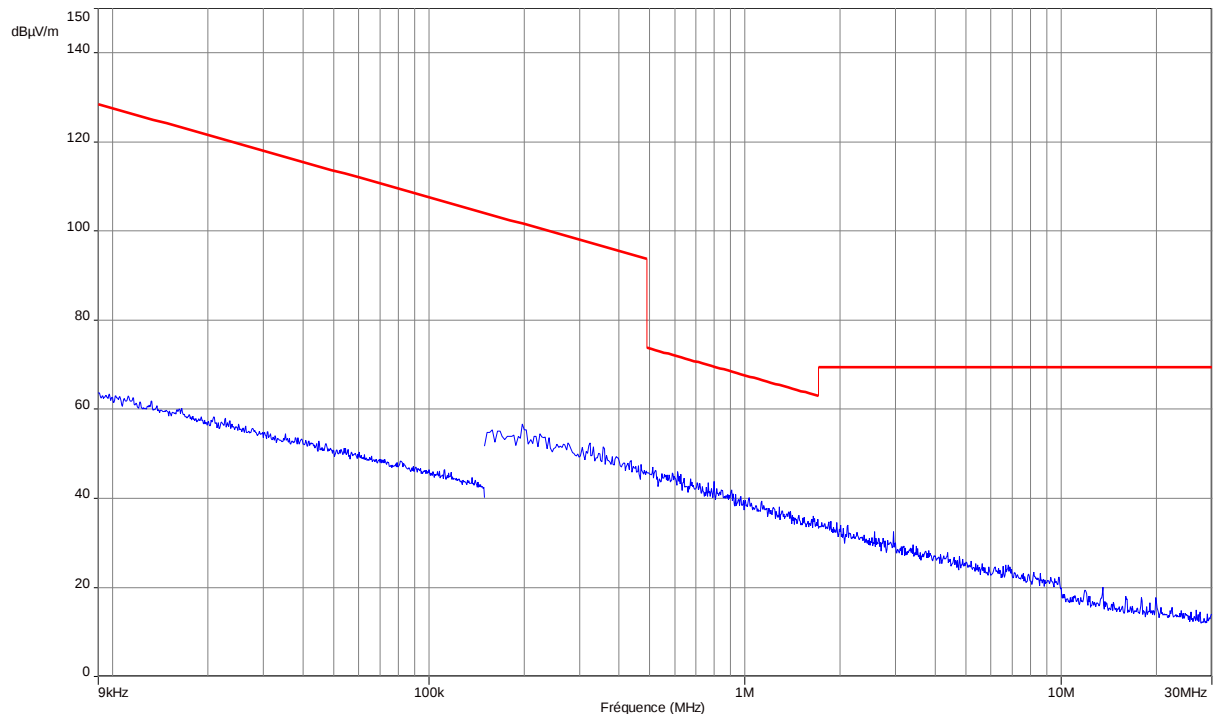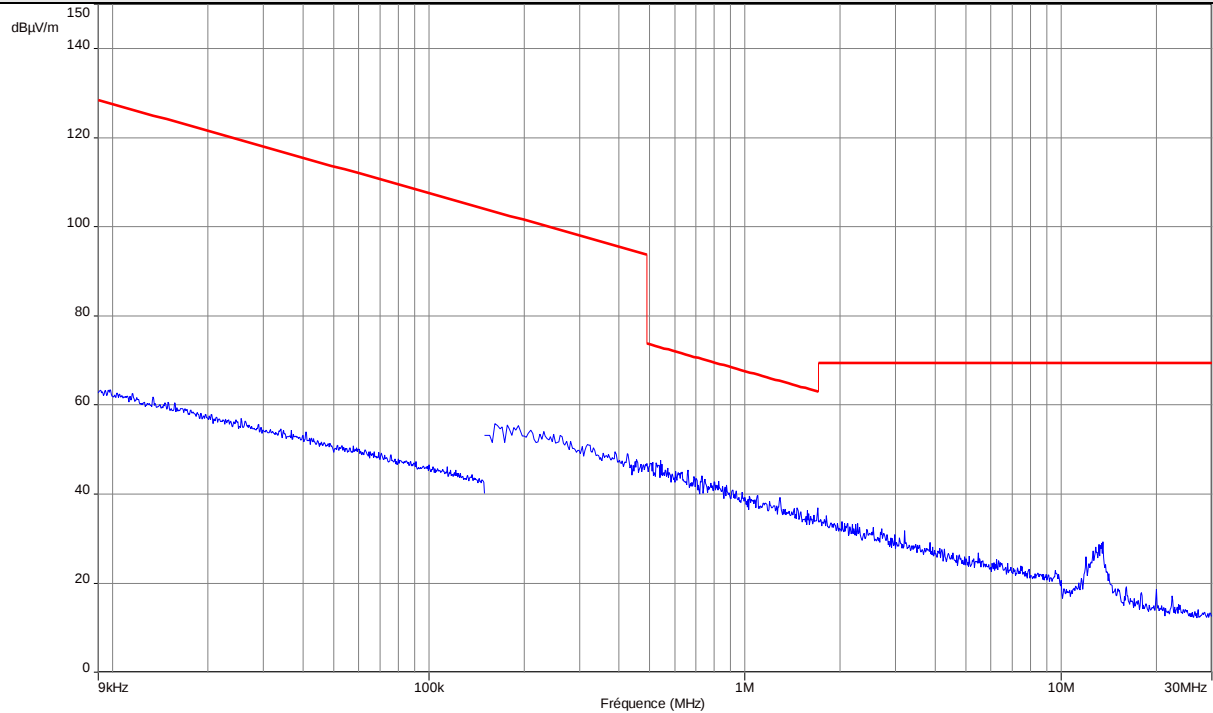

Frequency band investigated:	9kHz-30MHz
Unit :	dBμV/m
RBW :	200Hz (9kHz-150kHz) 9kHz (150kHz-30MHz)
Antenna polarization :	Parallel / Perpendicular to measurement axis
Measurement detector:	Peak

Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 30MHz-960MHz / 3m / Horizontal & Vertical / Transmit mode)

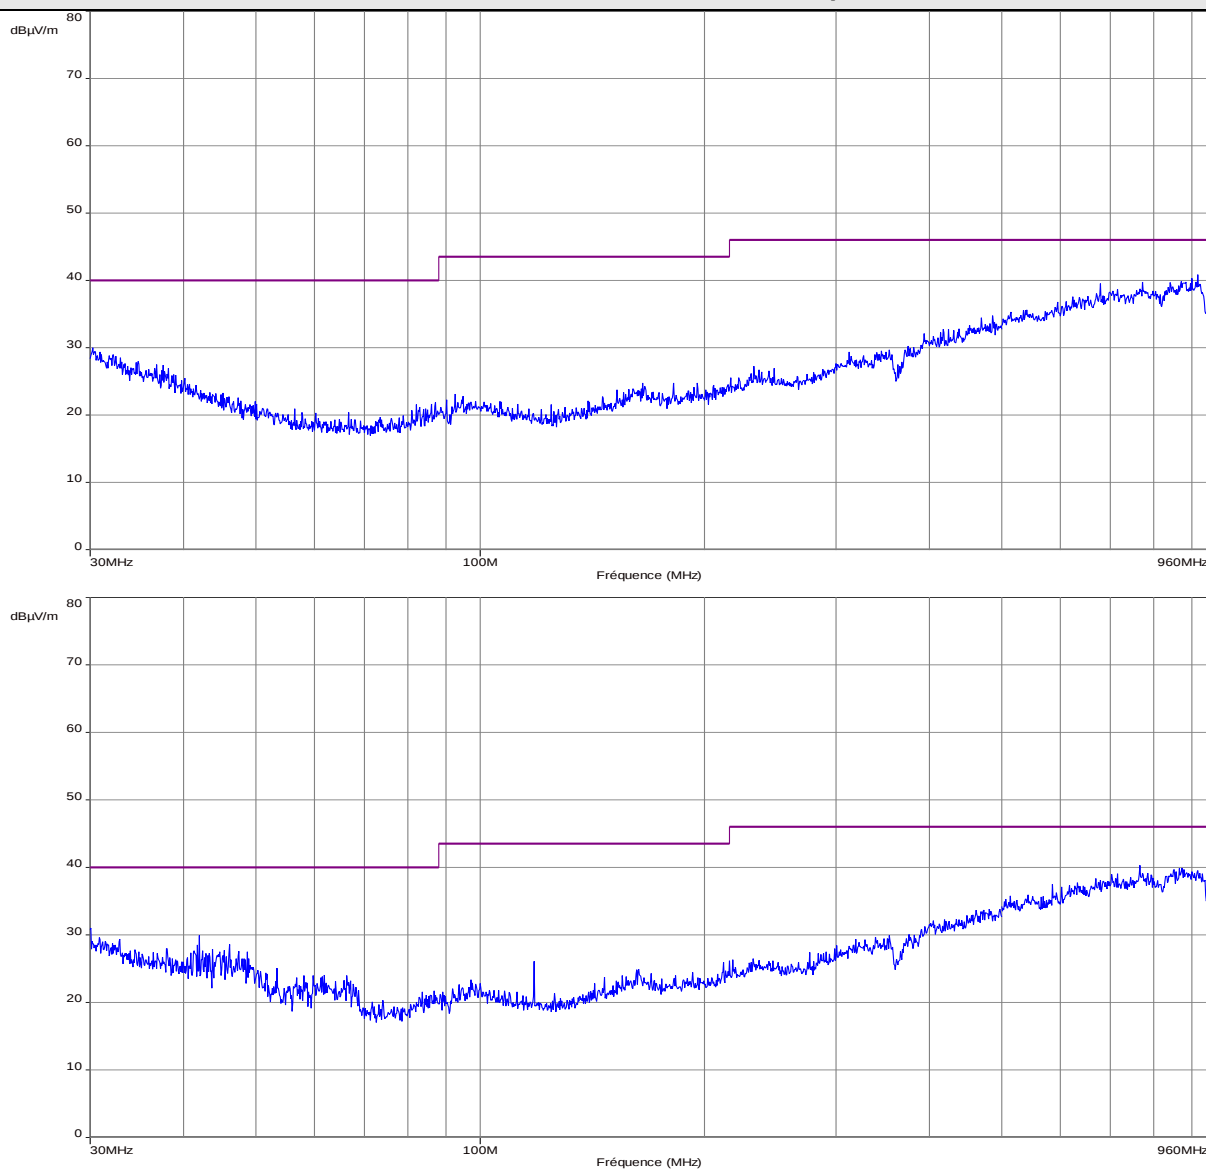


Notes: Pre-scan graph only for identification purpose.
Same result for transmit mode on channel 2 or channel 5

Frequency band investigated:	30MHz-960MHz
Unit :	dBμV/m
RBW :	100kHz
Antenna polarization :	Horizontal & Vertical
Measurement detector:	Peak

11. Radiated emissions measurements above 960MHz



TEST: Unwanted emissions into Restricted Frequency Bands			Verdict
Method: Measurements were made in a 3-meter Full Anechoic Chamber that complies to ANSI C63.10. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements were then performed by rotating the EUT 360° and adjusting the receive antenna height. The tested equipment is set to transmit operation with modulations on lowest and highest channel. Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength, with 60° rotation on each axis. (Clause 6.6.5 of ANSI C63.10). A pre-scan frequency identification of the EUT has been performed in full anechoic chamber. The measured pre-scan radiated field of the EUT is performed at 3 or 1-meters of distance for frequency 960MHz-40GHz.			Pass
Laboratory Parameters:	Required prior to the test	During the test	
Ambient Temperature	20 to 30 °C	23°C ± 2	
Relative Humidity	25 to 70 %	63% ± 5	
Fully configured sample scanned over the following frequency range	Frequency range on each side of line	Measurement Point	
	960MHz – 40GHz	3 m measurement distance	
Limits – FCC Part 15.517 (c) and (d)			
Frequency (MHz)	Limits		
	EIRP (dBm)	Field Strenght (dBµV/m)	Results
960-1610	-75.3 (RBW 1MHz)	19.9	PASS
1610-1990	-53.3 (RBW 1MHz)	41.9	PASS
1990-3100	-51.3 (RBW 1MHz)	43.9	PASS
3100-10600	-41.3 (RBW 1MHz)	53.9	PASS
Above 10600	-51.3 (RBW 1MHz)	43.9	PASS
1164-1240	-85.3 (RBW 1kHz)	9.9	PASS
1559-1610	-85.3 (RBW 1kHz)	9.9	PASS
Limits – ISCED RSS-220 Section 5.2.1 (d)			
Frequency (MHz)	Limits		
	EIRP (dBm)	Field Strenght (dBµV/m)	Results
960-1610	-75.3 (RBW 1MHz)	19.9	PASS
1610-4750	-70.0 (RBW 1MHz)	25.2	PASS
4750-10600	-41.3 (RBW 1MHz)	53.9	PASS
Above 10600	-51.3 (RBW 1MHz)	43.9	PASS
1164-1240	-85.3 (RBW 1kHz)	9.9	PASS
1559-1610	-85.3 (RBW 1kHz)	9.9	PASS
Supplementary information: Test location: SMEE Test date: June 6 and 7 th , 2018. Tested by L. CHAPUS Power supply voltage: 5V from power adapter			

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Log-periodic antenna	TDK	PLP3003	ANT-101-001	2017/5	2019/5
BiConiLog antenna	EMCO	3142B	ANT-101-010	2017/7	2019/7
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2014/3	2019/3
Horn antenna	ETS-LINDGREN	3116	ANT-161-014	2017/12	2022/12
RF cable	Div	OATS/25m	CAB-101-017	2018/4	2019/4
RF cable	Pasternack RF	PE302-120	CAB-131-024	2018/4	2019/4
RF cable	HUBER+SUHNER	RG214U	CAB-141-026	2018/4	2019/4
RF cable	HUBER+SUHNER	RG214U	CAB-141-029	2018/4	2019/4
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2018/4	2019/4
RF cable	HUBER+SUHNER	SF102 (K/2m)	CAB-171-034	2017/5	2019/5
RF cable	HUBER+SUHNER	SF102 (K/3m)	CAB-171-034	2017/5	2019/5
Pre-amplifier	Pasternack RF	PE1524	PRE-101-002	2017/6	2018/6
Pre-amplifier	SMEE	18-40GHz	PRE-171-004	2017/12	2018/12
Anechoic chamber	COMTEST	214263	CAG-141-001	2017/6	2020/6
OATS	Div	10m	SIT-101-001	2017/7	2020/7
Antenna mast	Innco- Systems	MA4000EP	MAT-101-001	-	-
Turntable	Innco- Systems	DS1200S	PLA-101-001	-	-
Turntable	Innco- Systems	CT0800	PLA-141-001	-	-
Measuring Rec	Rohde&Schwarz	ESRP	REC-151-002	2017/3	2019/3
Spectrum analyzer	Rohde&Schwarz	FSV40	ASP-171-004	2017/5	2019/5

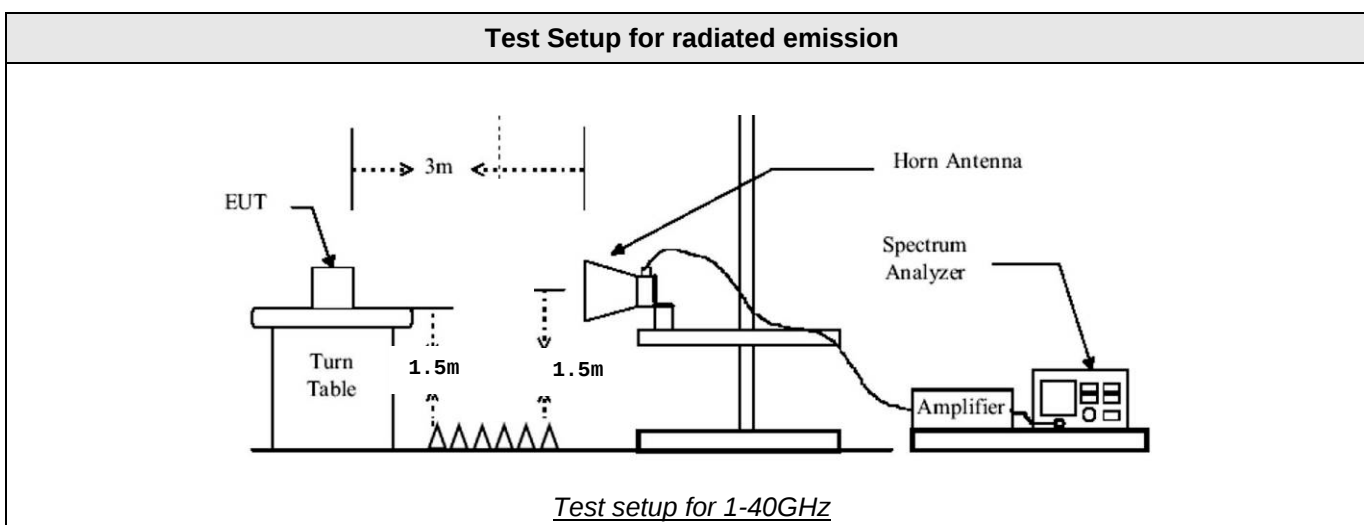



Tabulated Results for Unwanted emissions (960MHz-40GHz)					
Transmit mode on channel 2					
FREQ (MHz)	Field Strength 3m (dBμV/m)	Equivalent EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
7987.000	45.3	-49.9	-41.3	-8.6	Pass
Transmit mode on channel 5					
12979.200	33.8	-61.4	-51.3	-10.1	Pass
RBW		1MHZ			
Measurement distance:		3m			
Final measurement detector:		RMS (1ms / bin)			
Wide Measurement Uncertainty:		± 5.6dB (k=2)			
RESULT:		PASS			
Notes:		(1): The field strength (level) is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation is as follow: $FS = RA + AF + CF - AG$ Where FS = Field Strength RA = Receiver Amplitude AF = Antenna Factor CF = Cable Factor AG = Amplifier Gain Total factor (dB) is $AF + CF - AG$ (2): $EIRP (dBm) = Field Strength (dBμV/m) - 95.2dB$ (3): 3-axis measurement performed for device under test. (4): Measures have been done at 1m distance and corrected according to requirements of 15.209.e) ($M@3m = M@1m - 9.54dB$)			

Graphical representation of Radiated Disturbance Measurement (Anechoic chamber pre-scan, 960MHz-1.61GHz / 3m / Horizontal and vertical / Transmit mode on channel 2)

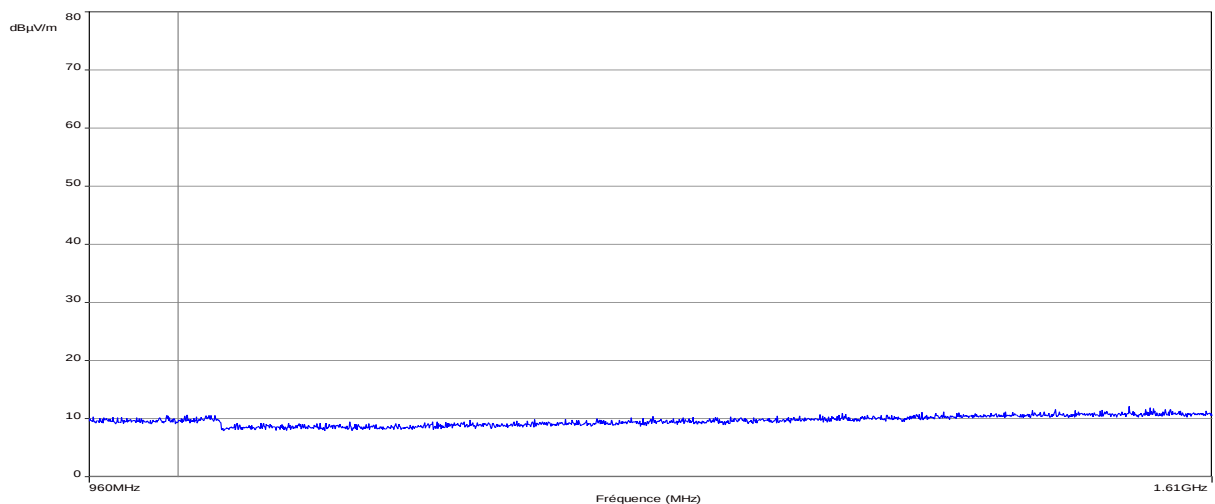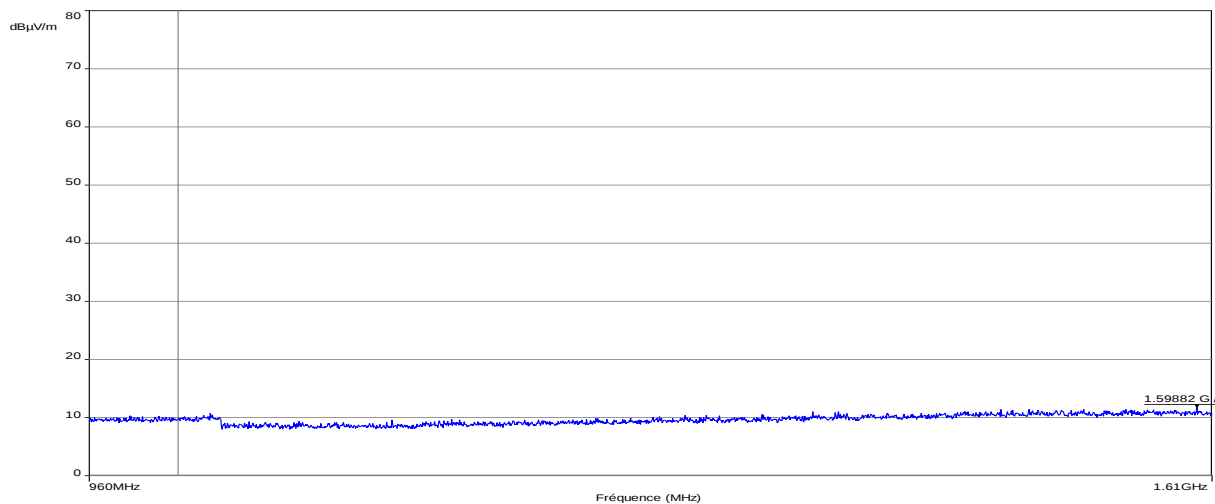


Frequency band investigated:	960-1610MHz
Unit :	dBμV/m
RBW :	1MHz
Detector :	RMS (1ms / bin)
Limit:	19.9 dBμV/m (Equivalent EIRP -75.3dBm)

Graphical representation of Radiated Disturbance Measurement (Anechoic chamber pre-scan, 960MHz-1.61GHz / 3m / Horizontal and vertical / Transmit mode on channel 5)

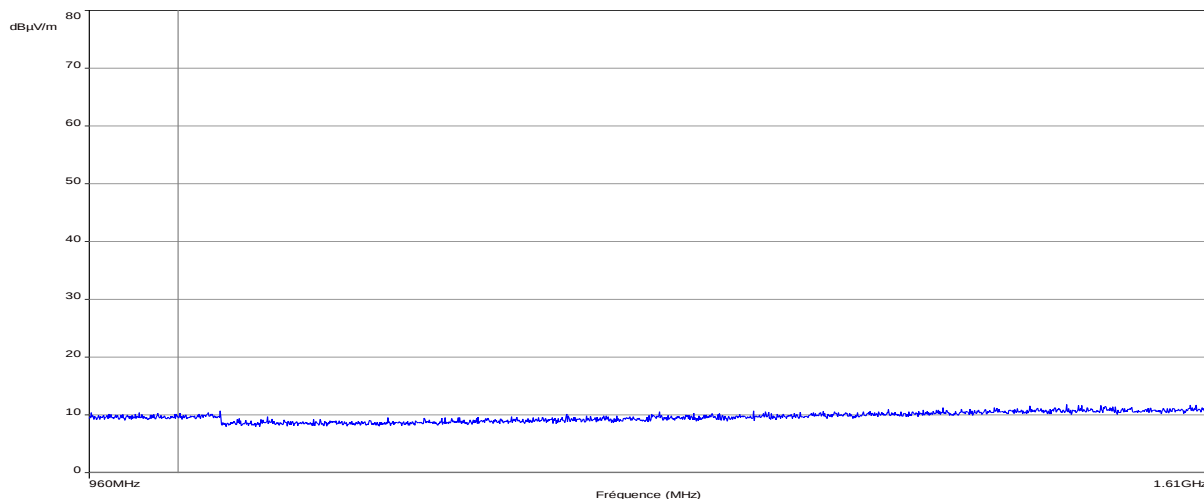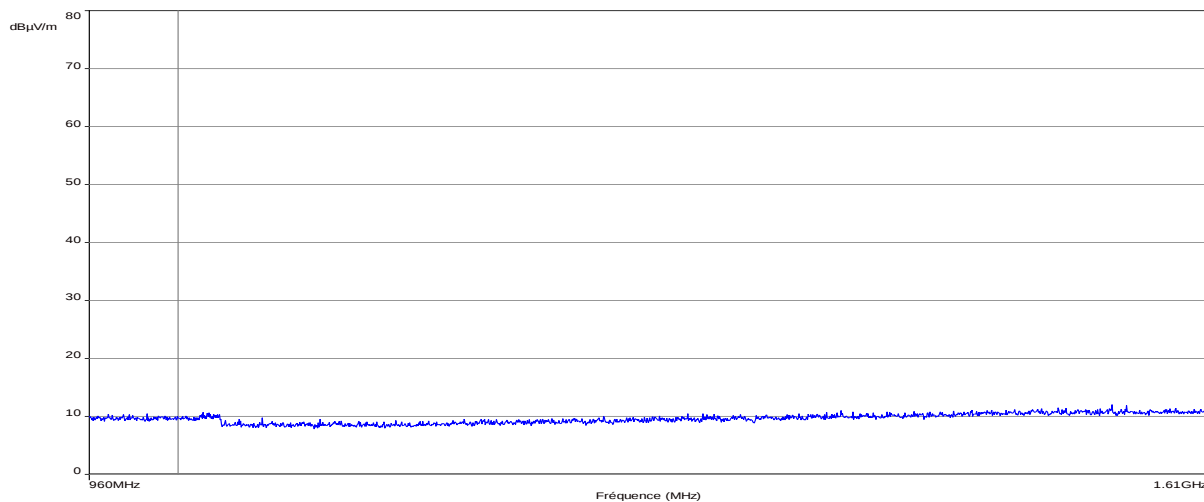

Frequency band investigated:	960-1610MHz
Unit :	dBμV/m
RBW :	1MHz
Detector :	RMS (1ms / bin)
Limit:	19.9 dBμV/m (Equivalent EIRP -75.3dBm)



Graphical representation of Radiated Disturbance Measurement (Anechoic chamber pre-scan, 1.61GHz-7GHz / 3m / Horizontal and vertical / Transmit mode on channel 2)

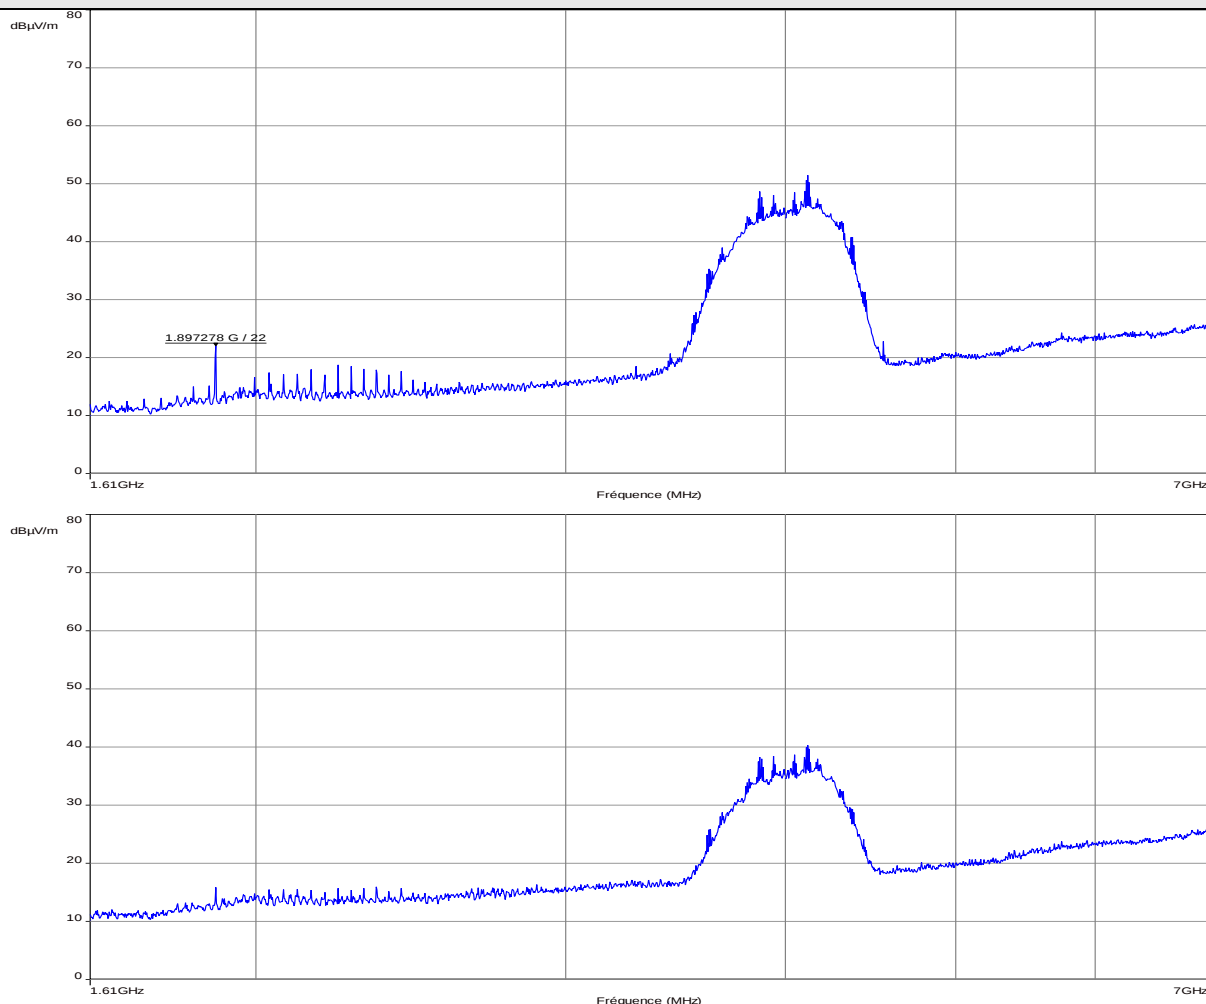

Note: 1889.72MHz (Ambient noise)



Frequency band investigated:	1610-7000MHz
Unit :	dBμV/m
RBW :	1MHz
Detector :	RMS (1ms / bin)
Limit FCC Section 15.517 (c) & (d)	1610-1990: 41.9 dBμV/m (Equivalent EIRP -53.3dBm) 1990-3100: 43.9 dBμV/m (Equivalent EIRP -51.3dBm) 3100-10600: 53.9 dBμV/m (Equivalent EIRP -41.3dBm)
Limit RSS 220 Section 5.2.1 (d)	1610-4750: 25.2 dBμV/m (Equivalent EIRP -70.0dBm) 4750-10600: 53.9 dBμV/m (Equivalent EIRP -41.3dBm)

Graphical representation of Radiated Disturbance Measurement (Anechoic chamber pre-scan, 1.61GHz-7GHz / 3m / Horizontal and vertical / Transmit mode on channel 5)

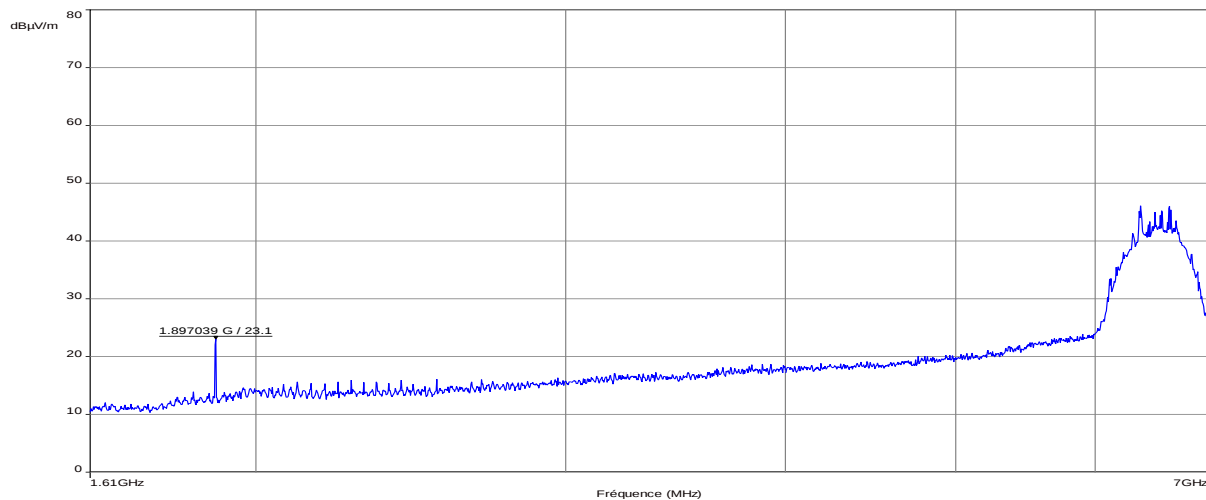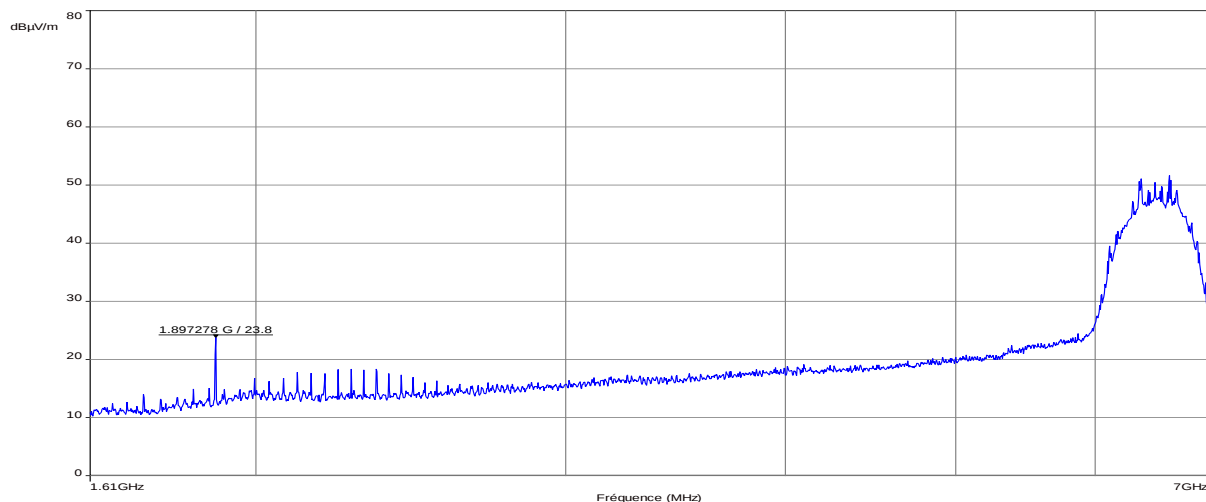



Frequency band investigated:	1610-7000MHz
Unit :	dBμV/m
RBW :	1MHz
Detector :	RMS (1ms / bin)
Limit FCC Section 15.517 (c) & (d)	1610-1990: 41.9 dBμV/m (Equivalent EIRP -53.3dBm) 1990-3100: 43.9 dBμV/m (Equivalent EIRP -51.3dBm) 3100-10600: 53.9 dBμV/m (Equivalent EIRP -41.3dBm)
Limit RSS 220 Section 5.2.1 (d)	1610-4750: 25.2 dBμV/m (Equivalent EIRP -70.0dBm) 4750-10600: 53.9 dBμV/m (Equivalent EIRP -41.3dBm)

Graphical representation of Radiated Disturbance Measurement (Anechoic chamber pre-scan, 7-18GHz / 3m / Horizontal and vertical / Transmit mode on channel 2)

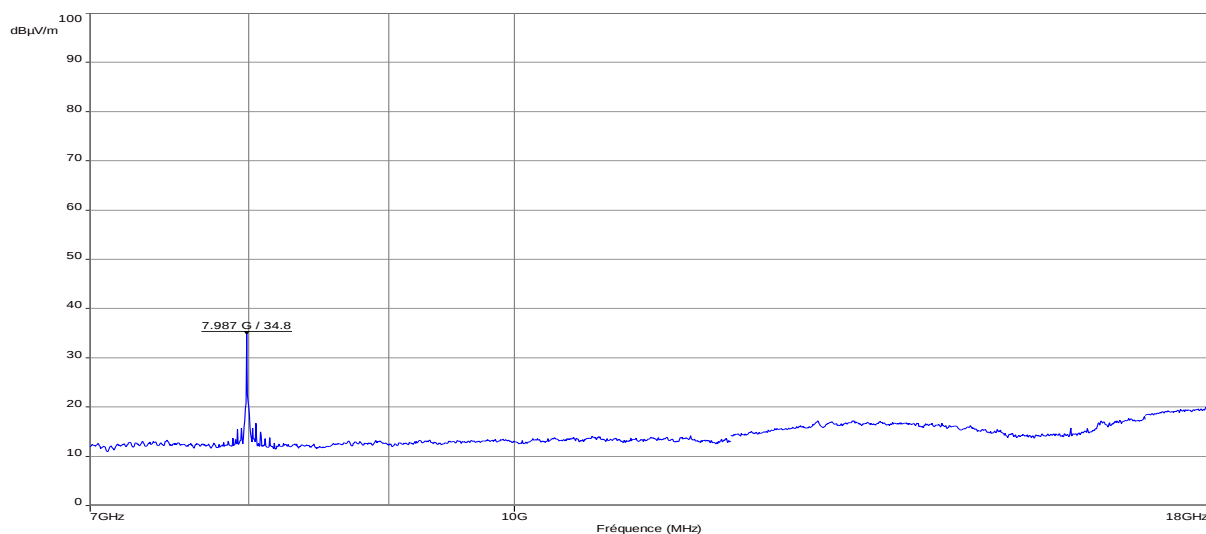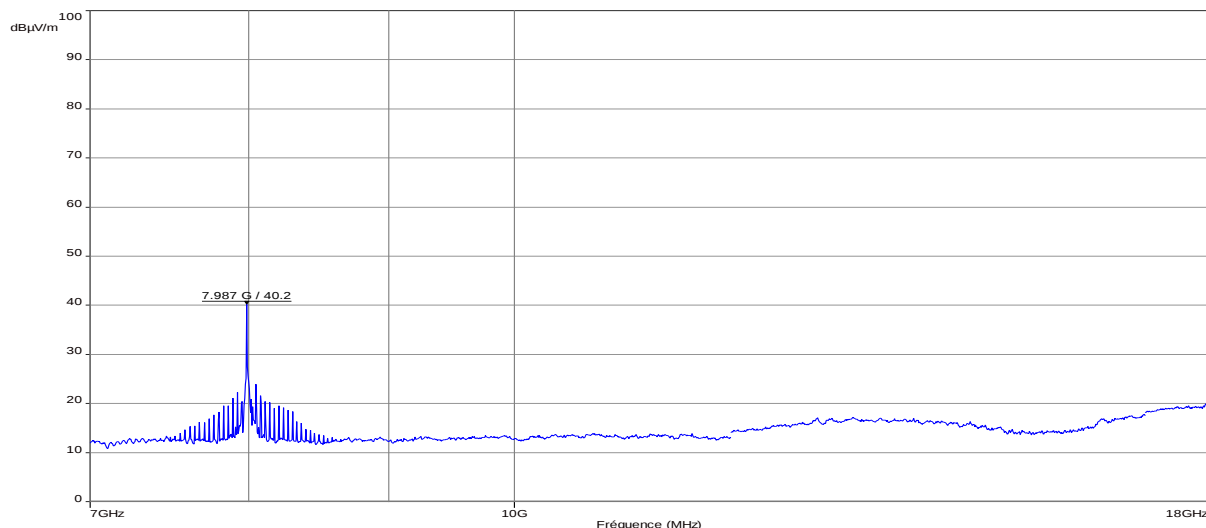



Frequency band investigated:	7-18GHz
Unit :	dBμV/m
RBW :	1MHz
Detector :	RMS (1ms / bin)
Limit FCC Section 15.517 (c) & (d)	7000-10600: 53.9 dBμV/m (Equivalent EIRP -41.3dBm)
Limit RSS 220 Section 5.2.1 (d)	Above 10600: 43.9 dBμV/m (Equivalent EIRP -51.3dBm)

Graphical representation of Radiated Disturbance Measurement (Anechoic chamber pre-scan, 7-18GHz / 3m / Horizontal and vertical / Transmit mode on channel 5)

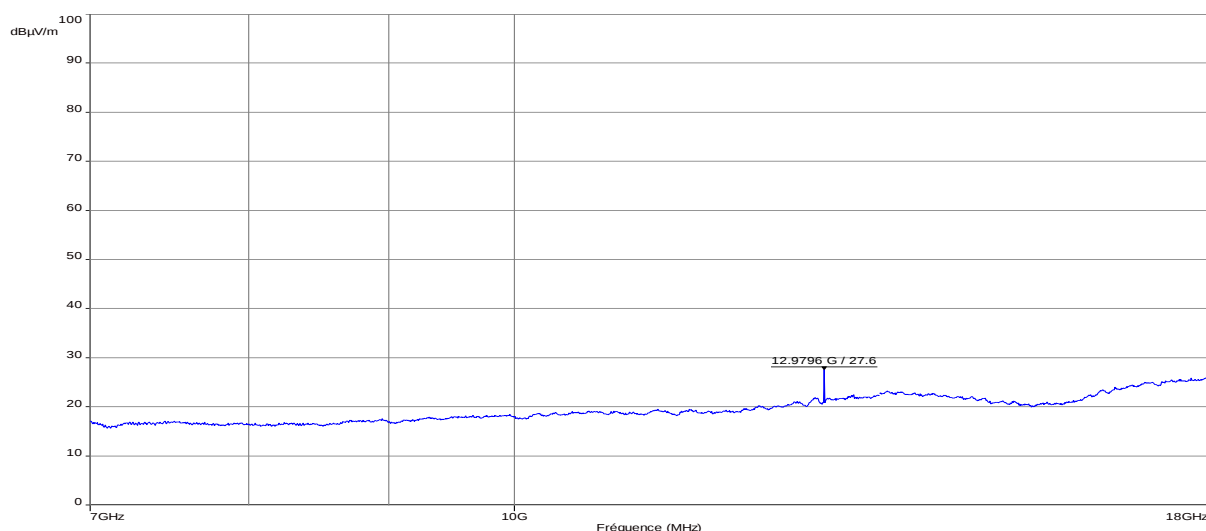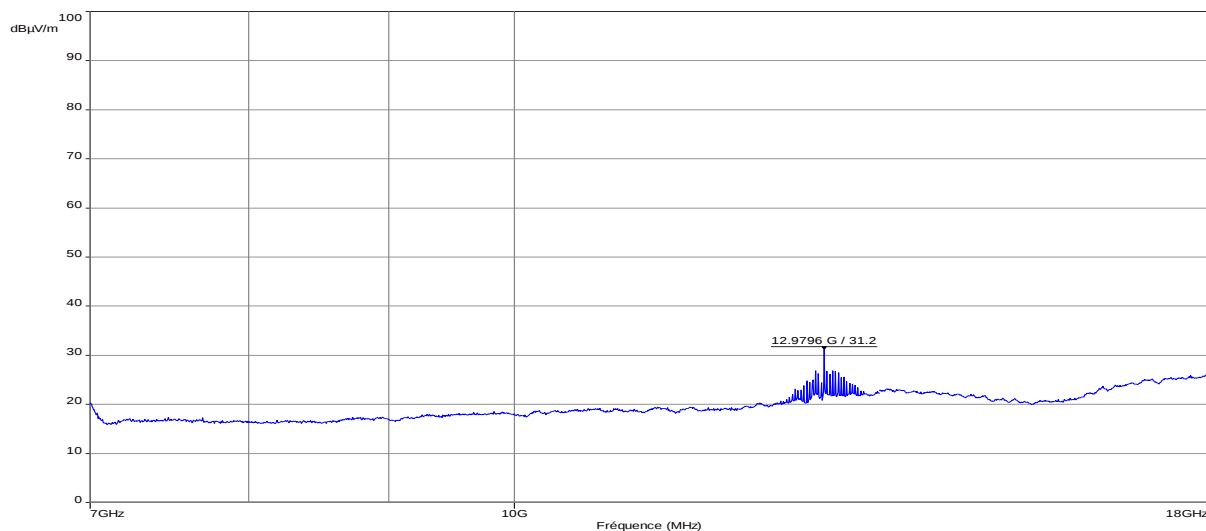



Frequency band investigated:	7-18GHz
Unit :	dBμV/m
RBW :	1MHz
Detector :	RMS (1ms / bin)
Limit FCC Section 15.517 (c) & (d)	7000-10600: 53.9 dBμV/m (Equivalent EIRP -41.3dBm)
Limit RSS 220 Section 5.2.1 (d)	Above 10600: 43.9 dBμV/m (Equivalent EIRP -51.3dBm)

Graphical representation of Radiated Disturbance Measurement (Anechoic chamber pre-scan, 18-40GHz / 3m / Horizontal and vertical / Transmit mode on channel 2)

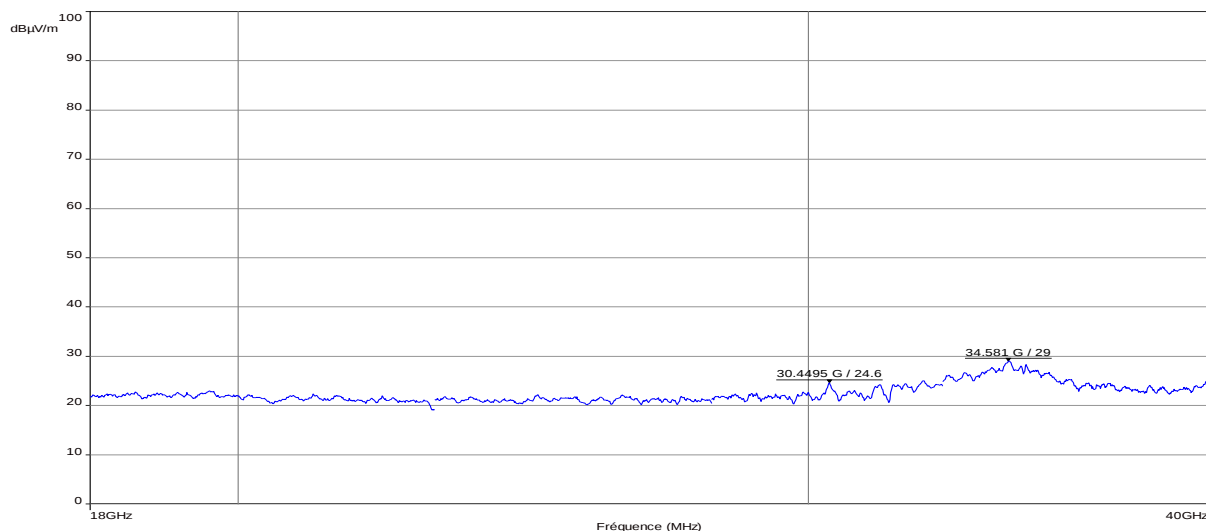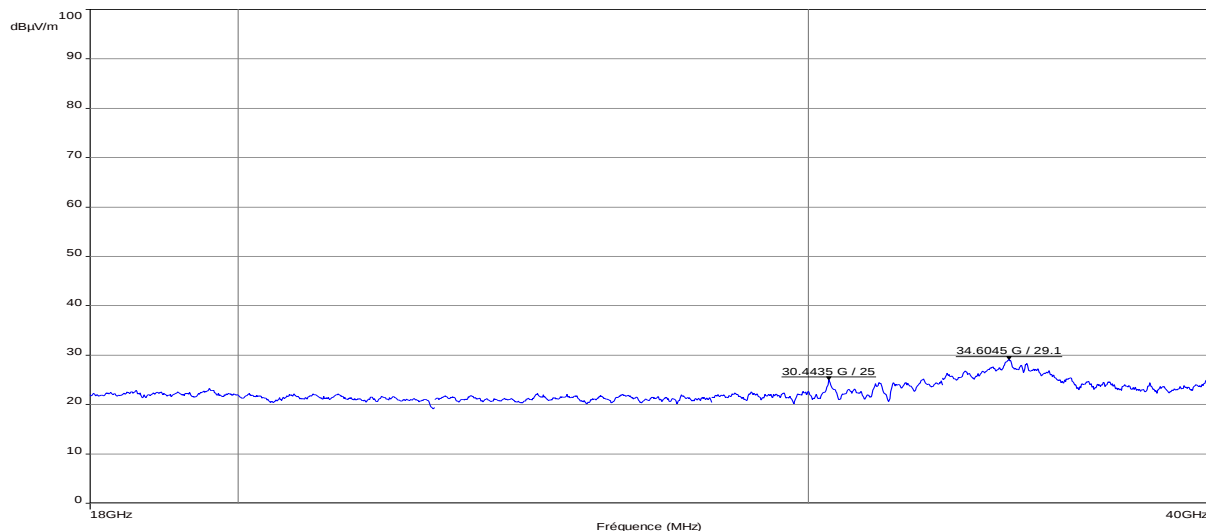



Frequency band investigated:	18-40GHz
Unit :	dBμV/m
RBW :	1MHz
Detector :	RMS (1ms / bin)
Limit FCC Section 15.517 (c) & (d)	Above 10600: 43.9 dBμV/m (Equivalent EIRP -51.3dBm)
Limit RSS 220 Section 5.2.1 (d)	

Graphical representation of Radiated Disturbance Measurement (Anechoic chamber pre-scan, 18-40GHz / 3m / Horizontal and vertical / Transmit mode on channel 5)

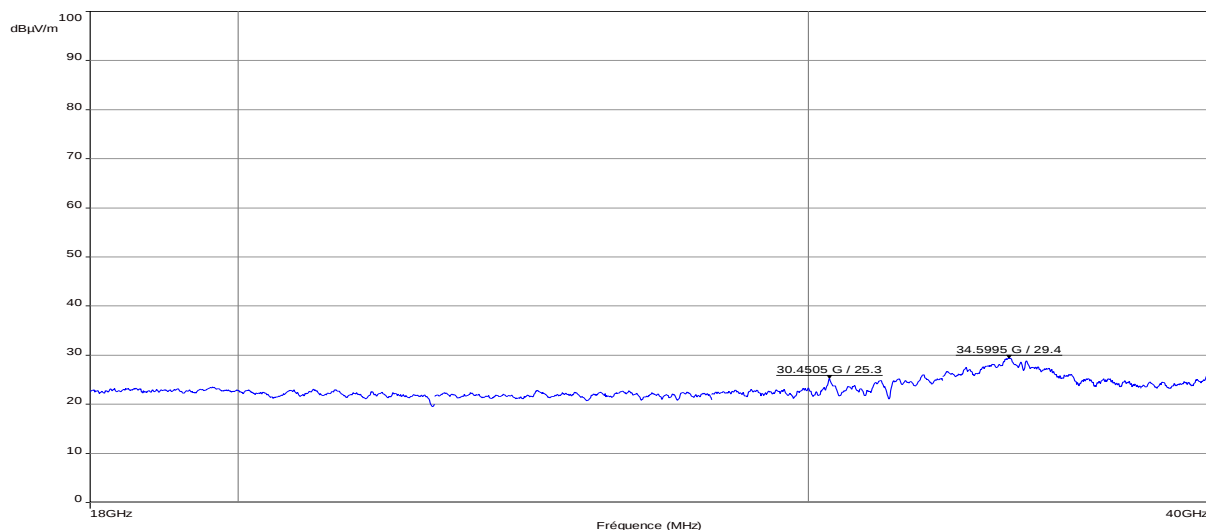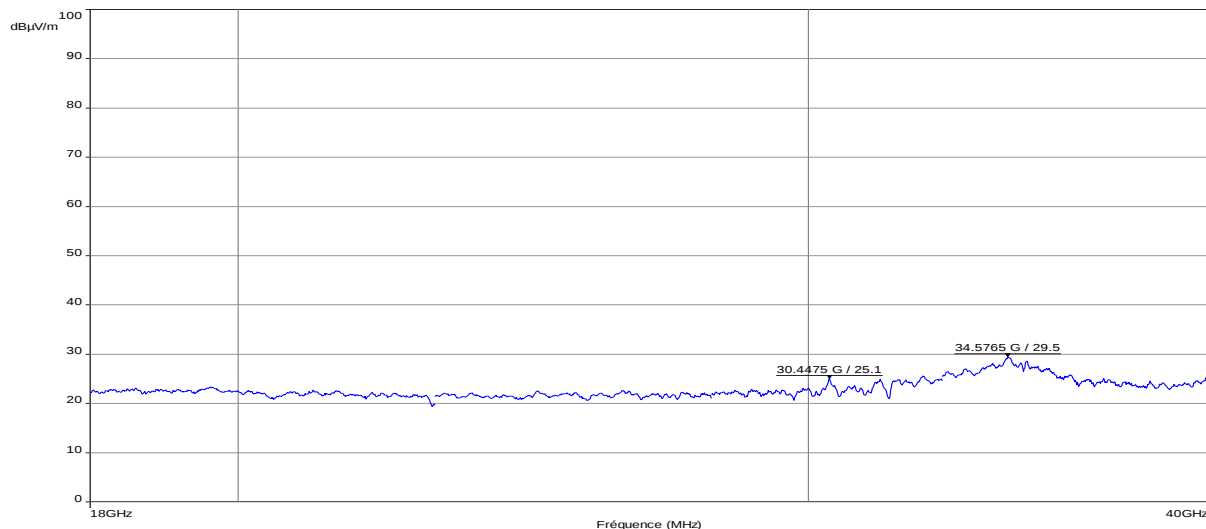



Frequency band investigated:	18-40GHz
Unit :	dBμV/m
RBW :	1MHz
Detector :	RMS (1ms / bin)
Limit FCC Section 15.517 (c) & (d)	Above 10600: 43.9 dBμV/m (Equivalent EIRP -51.3dBm)
Limit RSS 220 Section 5.2.1 (d)	

Graphical representation of Radiated Disturbance Measurement (Anechoic chamber pre-scan, 1164-1240MHz / 3m / Horizontal and vertical / Transmit mode on channel 2)

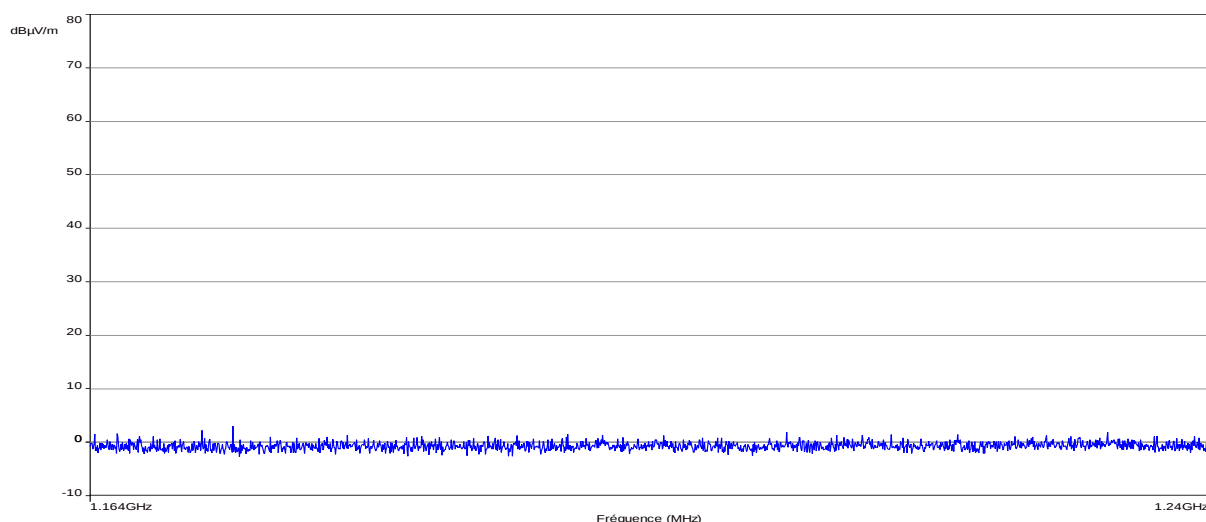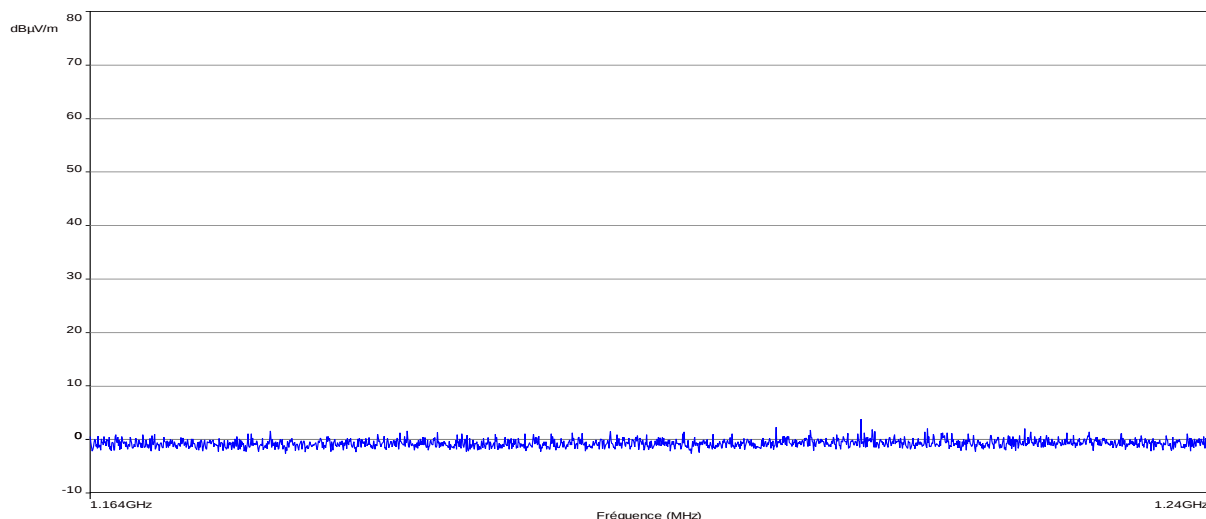



Frequency band investigated:	1164-1240MHz
Unit :	dBμV/m
RBW :	20kHz
Detector :	RMS (1ms / bin)
Limit FCC Section 15.517 (c) & (d)	1164-1240: 9.9 dBμV/m (Equivalent EIRP -85.3dBm)
Limit RSS 220 Section 5.2.1 (d)	1559-1610: 9.9 dBμV/m (Equivalent EIRP -85.3dBm)

Graphical representation of Radiated Disturbance Measurement (Anechoic chamber pre-scan, 1164-1240MHz / 3m / Horizontal and vertical / Transmit mode on channel 5)

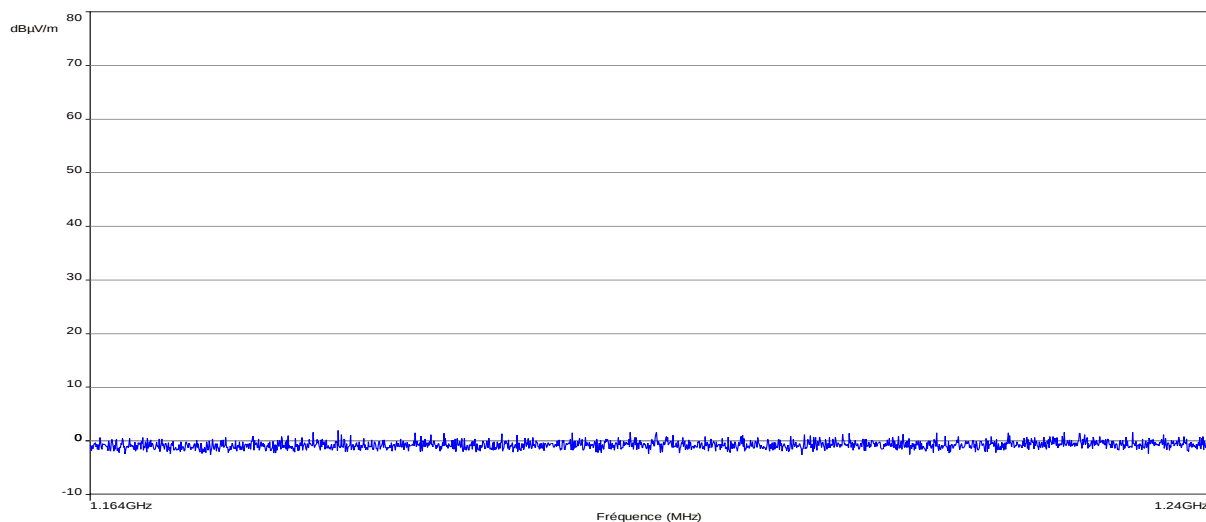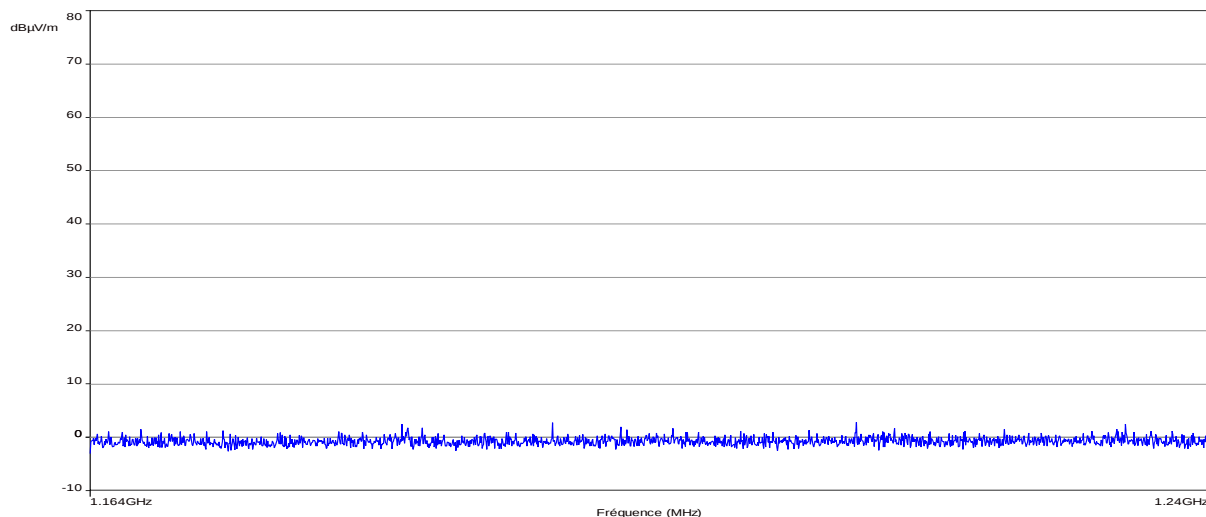



Frequency band investigated:	1164-1240MHz
Unit :	dBμV/m
RBW :	20kHz
Detector :	RMS (1ms / bin)
Limit FCC Section 15.517 (c) & (d)	1164-1240: 9.9 dBμV/m (Equivalent EIRP -85.3dBm)
Limit RSS 220 Section 5.2.1 (d)	1559-1610: 9.9 dBμV/m (Equivalent EIRP -85.3dBm)

Graphical representation of Radiated Disturbance Measurement (Anechoic chamber pre-scan, 1559-1610MHz / 3m / Horizontal and vertical / Transmit mode on channel 2)

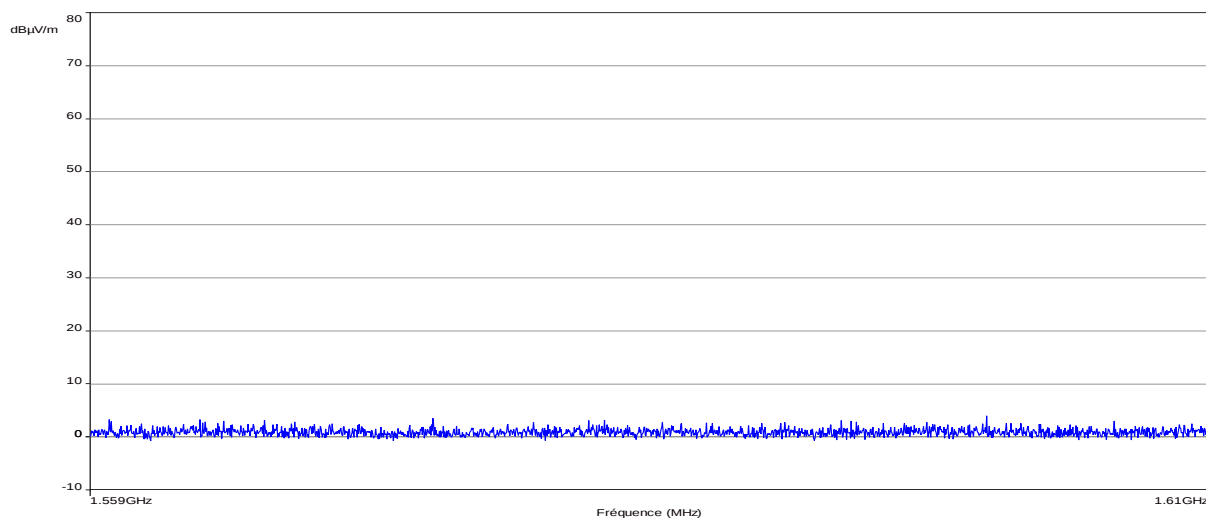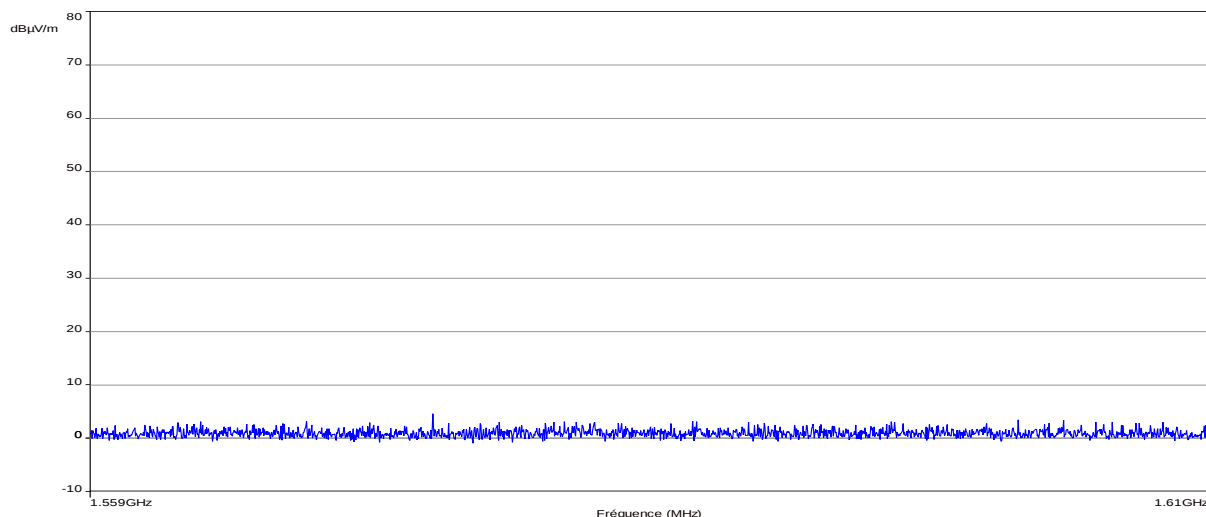

Frequency band investigated:	1559-1610MHz
Unit :	dBμV/m
RBW :	20kHz
Detector :	RMS (1ms / bin)
Limit FCC Section 15.517 (c) & (d)	1164-1240: 9.9 dBμV/m (Equivalent EIRP -85.3dBm)
Limit RSS 220 Section 5.2.1 (d)	1559-1610: 9.9 dBμV/m (Equivalent EIRP -85.3dBm)

Graphical representation of Radiated Disturbance Measurement (Anechoic chamber pre-scan, 1559-1610MHz / 3m / Horizontal and vertical / Transmit mode on channel 5)

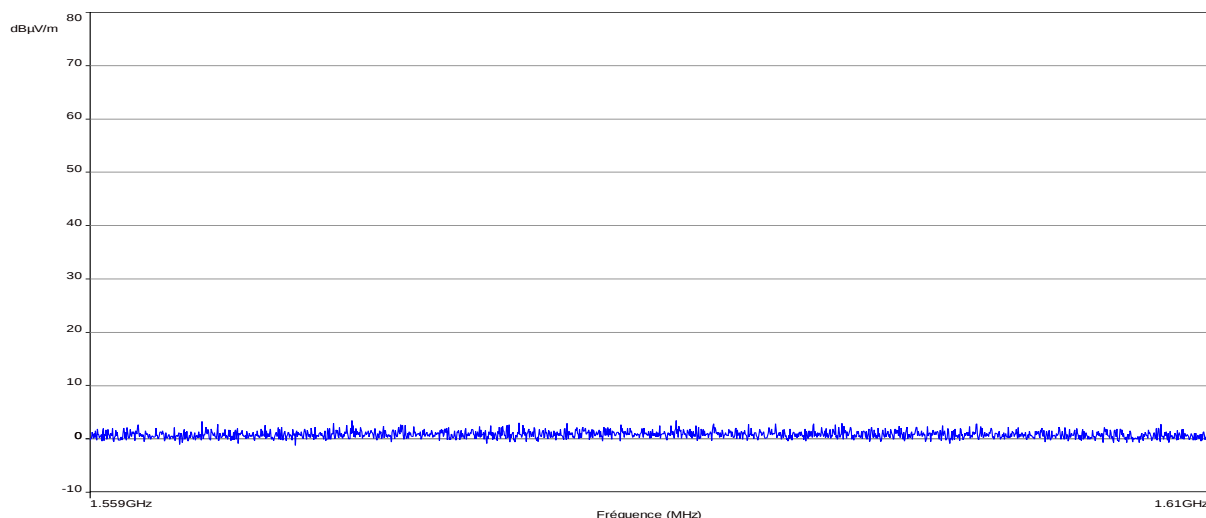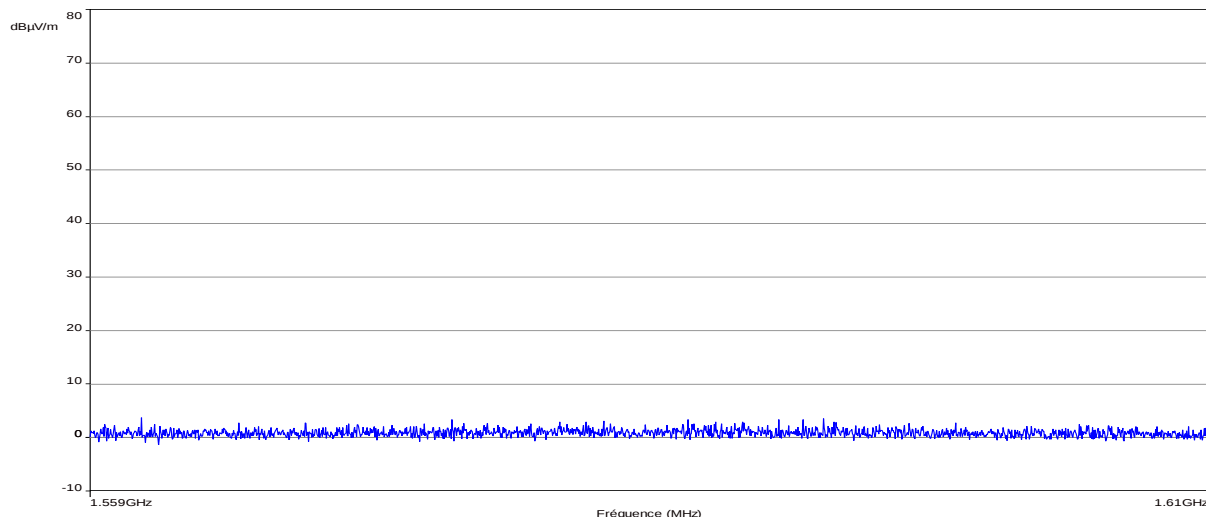

Frequency band investigated:	1559-1610MHz
Unit :	dBμV/m
RBW :	20kHz
Detector :	RMS (1ms / bin)
Limit FCC Section 15.517 (c) & (d)	1164-1240: 9.9 dBμV/m (Equivalent EIRP -85.3dBm)
Limit RSS 220 Section 5.2.1 (d)	1559-1610: 9.9 dBμV/m (Equivalent EIRP -85.3dBm)

12. Peak level of the emissions contained within a 50 MHz bandwidth


TEST: Peak level of the emissions contained within a 50 MHz bandwidth			Verdict
<u>Method:</u> Measurements were made in a 3-meter Full Anechoic Chamber that complies to ANSI C63.10. Final measurements were performed by rotating the EUT 360° and adjusting the receive antenna height. The tested equipment is set to transmit operation with modulations on lowest and highest channel. Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength, with 60° rotation on each axis. (Clause 6.6.5 of ANSI C63.10).			Pass
Laboratory Parameters:	Required prior to the test	During the test	
Ambient Temperature	20 to 30 °C	23°C ± 2	
Relative Humidity	25 to 70 %	63% ± 5	
Limits FCC 15.517 (e)			
Frequency (MHz)	Limits EIRP		
	dBm	Results	
3100-10600	0	PASS (Chan 2 / Chan 5)	
Supplementary information: Test location: SMEE Test date: June 4 th , 2018. Tested by L. CHAPUS Power supply voltage: 5V from power adapter			
Limits RSS-220 5.2.1 (g)			
Frequency (MHz)	Limits EIRP		
	dBm	Results	
4750-10600	0	PASS (Chan 5)	

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2015/7	2018/7
RF cable	Pasternack	PE302-120	CAB-131-024	2017/3	2018/3
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2017/3	2018/3
Anechoic chamber	COMTEST	214263	CAG-141-001	2017/6	2020/6
Spectrum analyzer	Rohde&Schwarz	FSV40	ASP-171-004	2017/3	2020/3


Tabulated Results for Peak level of the emissions (Within 50MHz)

FREQ (MHz)	Receiver Amplitude (dBμV)	Total Factor (dB)	Field Strength (dBμV/m)	Equivalent EIRP (dBm)	RBW (MHz)	Limit EIRP (dBm)	Margin (dB)	Result / Comments
4171.250	49.6	36.8	76.9	-	10MHz	-	-	-
4171.250	58.0	36.8	85.3	-8.0	40MHz	0	-8.0	Pass (3)
6468.635	45.4	42.1	78.0	-	10MHz	-	-	-
6468.635	53.4	42.1	86.0	-7.3	40MHz	0	-7.3	Pass (3)
Measurement distance:			3m					
Measurement detector:			Peak					
Wide Measurement Uncertainty:			± 5.6dB (k=2)					
RESULT:			PASS					
Notes:			(1): The field strength (level) is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation is as follow: $FS = RA + AF + CF - AG$ Where FS = Field Strength RA = Receiver Amplitude AF = Antenna Factor CF = Cable Factor AG = Amplifier Gain Total factor (dB) is $AF + CF - AG$ (2): $EIRP (dBm) = Field Strength (dBμV/m) - 95.2dB$ (3): The equivalent EIRP is increased by a the following RBW factor: $20\log(50/40) = 1.94dB$ (40MHz RBW used instead of 50MHz) 40MHz RBW used with in zero span mode on highest level observed. (4): 3-axis measurement performed for device under test. (5): Measures have been done at 1m distance and corrected according to requirements of 15.209.e) ($M@3m = M@1m - 9.54dB$)					

Graphical representation of Peak Power within 50MHz bandwidth

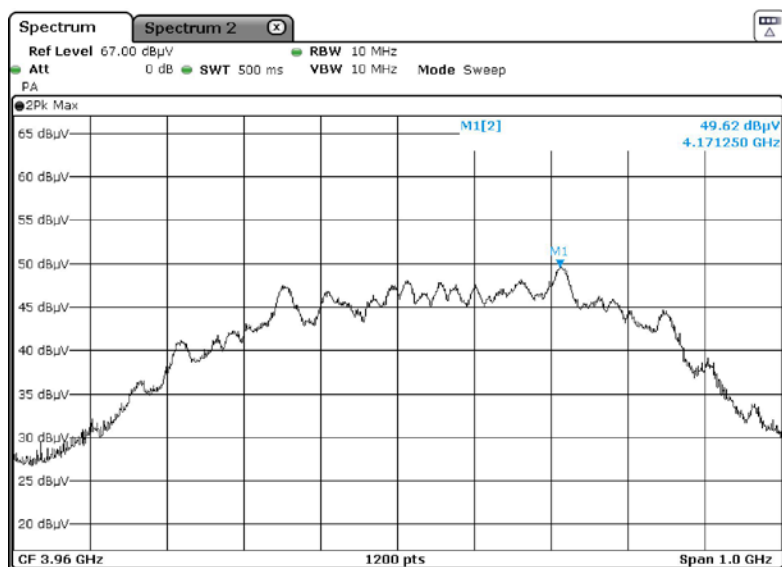

Chan 2

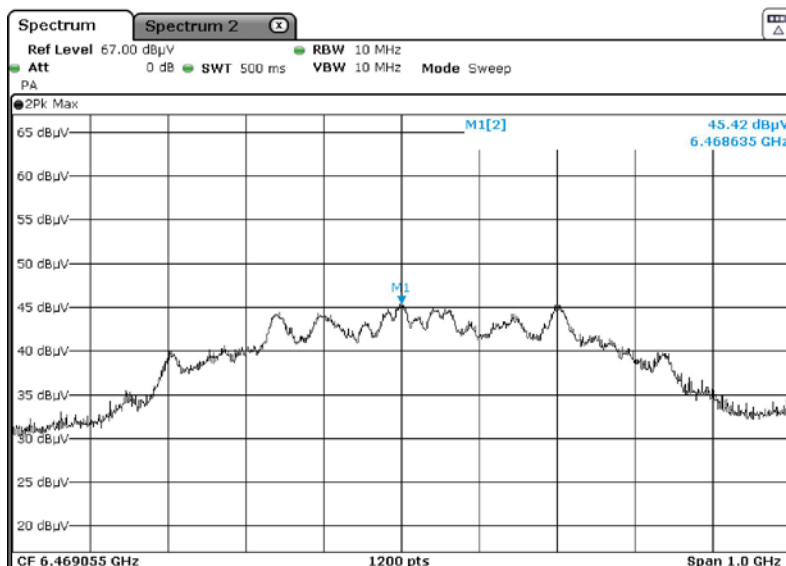

Chan 5

Frequency band investigated:	3993.6MHz and 6489.6MHz
RBW :	10MHz (40MHz RBW measure performed with zero span on marker)
Measurement detector:	Peak


13. Occupied bandwidth (99%)

TEST: Occupied bandwidth (99%) / RSS-GEN			Verdict
<u>Method:</u> The setup is in an anechoic chamber. The spectrum analyzer is connected to the measuring antenna. A radiated measurement is performed. The RBW is set in the range of 1% to 5% of the occupied bandwidth, with VBW ≥ 3 x RBW. The SPAN is wide enough to capture all products of the modulation process. A MaxHold Peak detector is used. Measure is performed with OBW 99% function of the spectrum analyser. The tested equipment is set to transmit operation with modulation on low and high channels.			Pass
Laboratory Parameters:	Required prior to the test	During the test	
Ambient Temperature	20 to 30 °C	23°C ± 2	
Relative Humidity	25 to 70 %	63% ± 5	
Supplementary information:			
Test location: SMEE			
Test date: June 4 th , 2018. Tested by L. CHAPUS			
Power supply voltage: 5V from power adapter			


Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2015/7	2018/7
RF cable	Pasternack	PE302-120	CAB-131-024	2017/3	2018/3
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2017/3	2018/3
Anechoic chamber	COMTEST	214263	CAG-141-001	2017/6	2020/6
Spectrum analyzer	Rohde&Schwarz	FSV40	ASP-171-004	2017/3	2020/3

Tabulated Results for Occupied Bandwidth	
Frequency (MHz) / Channel	99% Occupied Bandwidth (MHz)
3993.6 / Chan 2	889.0
6489.6 / Chan 5	920.0

Graphical representation of Occupied Bandwidth (99%)

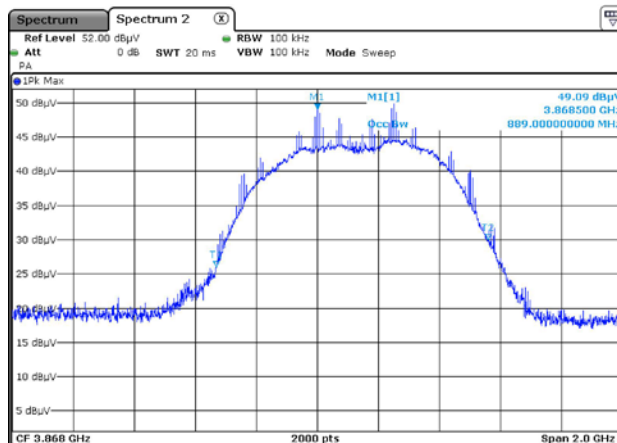

Chan 2

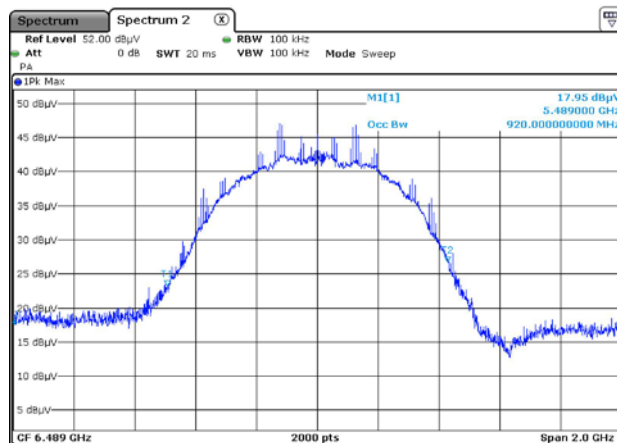

Chan 5

Frequency band investigated:	3993.6MHz and 6489.6MHz
RBW :	100kHz
Measurement detector:	Peak