



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822
Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>

Dates of Tests: May 08 ~ 27, 2015
Test Report S/N: LR500111505D
Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.

2AEWWITP-U9R

APPLICANT

CUI&T

Equipment Class	:	Part 15 Spread Spectrum Transmitter (DSS)
Manufacturing Description	:	RFID Reader
Manufacturer	:	CUI&T
Model name	:	ITP-U9R
Test Device Serial No.:	:	Identification
Rule Part(s)	:	FCC Part 15.247 Subpart C; ANSI C-63.4-2009
Frequency Range	:	902.75 ~ 927.25MHz
RF power	:	0.29W - Conducted
Data of issue	:	May 28, 2015

This test report is issued under the authority of:

Young-Jin Lee, Manager

The test was supervised by:

Joon-Young Jeon, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
2. INFORMATION'S ABOUT TEST ITEM	4
3. TEST REPORT	5
3.1 SUMMARY OF TESTS	5
3.2 FREQUENCY HOPPING SYSTEM REQUIREMENTS	6
3.3 TECHNICAL CHARACTERISTICS TEST	7
3.3.1 CARRIER FREQUENCY SEPARATION	7
3.3.2 NUMBER OF HOPPING FREQUENCIES	9
3.3.3 20 dB BANDWIDTH	11
3.3.4 TIME OF OCCUPANCY (Dwell Time)	14
3.3.5 TRANSMITTER OUTPUT POWER	16
3.3.6 BAND – EDGE (Conducted)	19
3.3.7 FIELD STRENGTH OF HARMONICS	25
3.3.8 AC CONDUCTED EMISSIONS	29
 APPENDIX	
APPENDIX TEST EQUIPMENT USED FOR TESTS	32

1. General information

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2015-09-30	ECT accredited Lab.
RRA	KOREA	KR0049	UPDATING	EMC accredited Lab.
FCC	U.S.A	610755	2017-04-21	FCC filing
FCC	U.S.A	649054	2017-04-13	FCC CAB
VCCI	JAPAN	R2133(10m), C2307	2017-06-21	VCCI registration
VCCI	JAPAN	T-2009	2016-12-23	VCCI registration
VCCI	JAPAN	G-563	2015-05-28	VCCI registration
IC	CANADA	5799A-1	2015-06-21	IC filing
KOLAS	KOREA	NO.551	2017-01-08	KOLAS accredited Lab.

2. Information's about test item

2-1 Applicant & Manufacturer

Company name : CUI&T
 Address : #1011, Hanhwa Bizmetro, 242, Digital-Ro, Guro-Gu, Seoul, Korea
 Tel / Fax : +82-2-3143-5446 / +82-2-3143-5447

2-2 Equipment Under Test (EUT)

Trade name : RFID Reader
 FCC ID : 2AEWWITP-U9R
 Model name : ITP-U9R
 Serial number : Identification
 Date of receipt : May 08, 2015
 EUT condition : Pre-production, not damaged
 Antenna type : Air Patch Antenna(MACRO200-919) Max Gain 5.63 dBi
 Frequency Range : 902.75 ~ 927.25MHz
 RF output power : 0.29 W- Conducted
 Number of channels : 50
 Channel spacing : 500KHz
 Channel Access Protocol : Frequency Hopping
 Power Source : DC 12.0 V

2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz)	902.75	914.75	927.25

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
Notebook	Latitude D530	N/A	DELL

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25 kHz	Conducted	C
15.247(a)	Number of Hopping Frequencies	≥ 50 hops		C
15.247(a)	20 dB Bandwidth	-		C
15.247	Dwell Time	< 0.4 seconds		C
15.247(b)	Transmitter Output Power	< 1Watt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.249 / 15.209	Field Strength of Harmonics	Emission	Radiated	C
15.207	AC Conducted Emissions	Emissions	Conducted	NA ^{note3}

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

Note 3: This device is only operated by DC

Note1: Antenna Requirement

The **CUI&T, FCC ID : 2AEWWITP-U9R** unit complies with the requirement of §15.203.

The Antenna type is Air Patch Antenna Type ; Refer to the External photo

Note 2: The sample was tested according to the following specification:

FCC Parts 15.247; ANSI C-63.4-2009

RSS-210 and ISSUE No.:8 Date:2010

Note3: TEST METHODOLOGY

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.10-2009) and FCC Public Notice DA 00-705 dated March 30, 2000 entitled “Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems” were used in the measurement of the **CUI&T, FCC ID: 2AEWWITP-U9R**

3.2 Frequency Hopping System Requirements

3.2.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3.2.2 EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

Longest sequence of zeros: 8 (non-inverted signal)

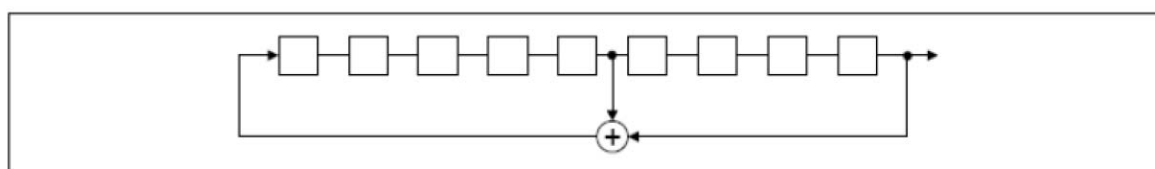

Linear Feedback Shift Register for Generation of the PRBS sequence

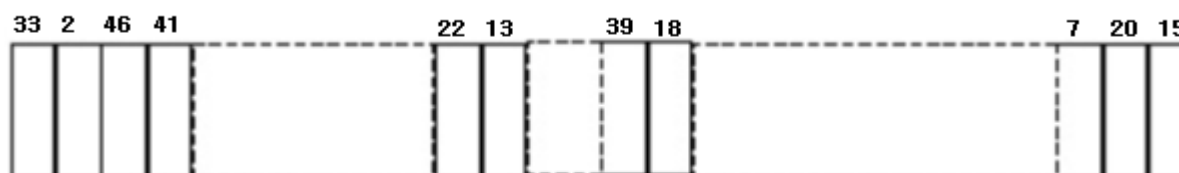

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

3.3 Transmitter requirements

3.3.1 Carrier Frequency Separation

Procedure:

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 1 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 10 kHz (1% of the span or more) Sweep = auto

VBW = 10 kHz Detector function = peak

Trace = max hold

Measurement Data:

Test Results	
Carrier Frequency Separation (KHz)	Result
499.3	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

Measurement Setup



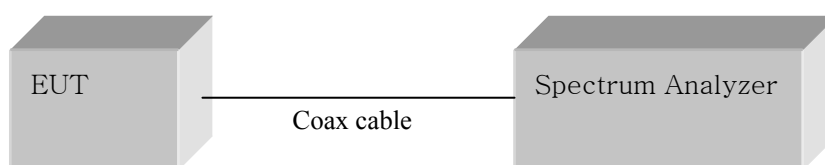


Figure 1: Measurement setup for the carrier frequency separation

Carrier Frequency Separation

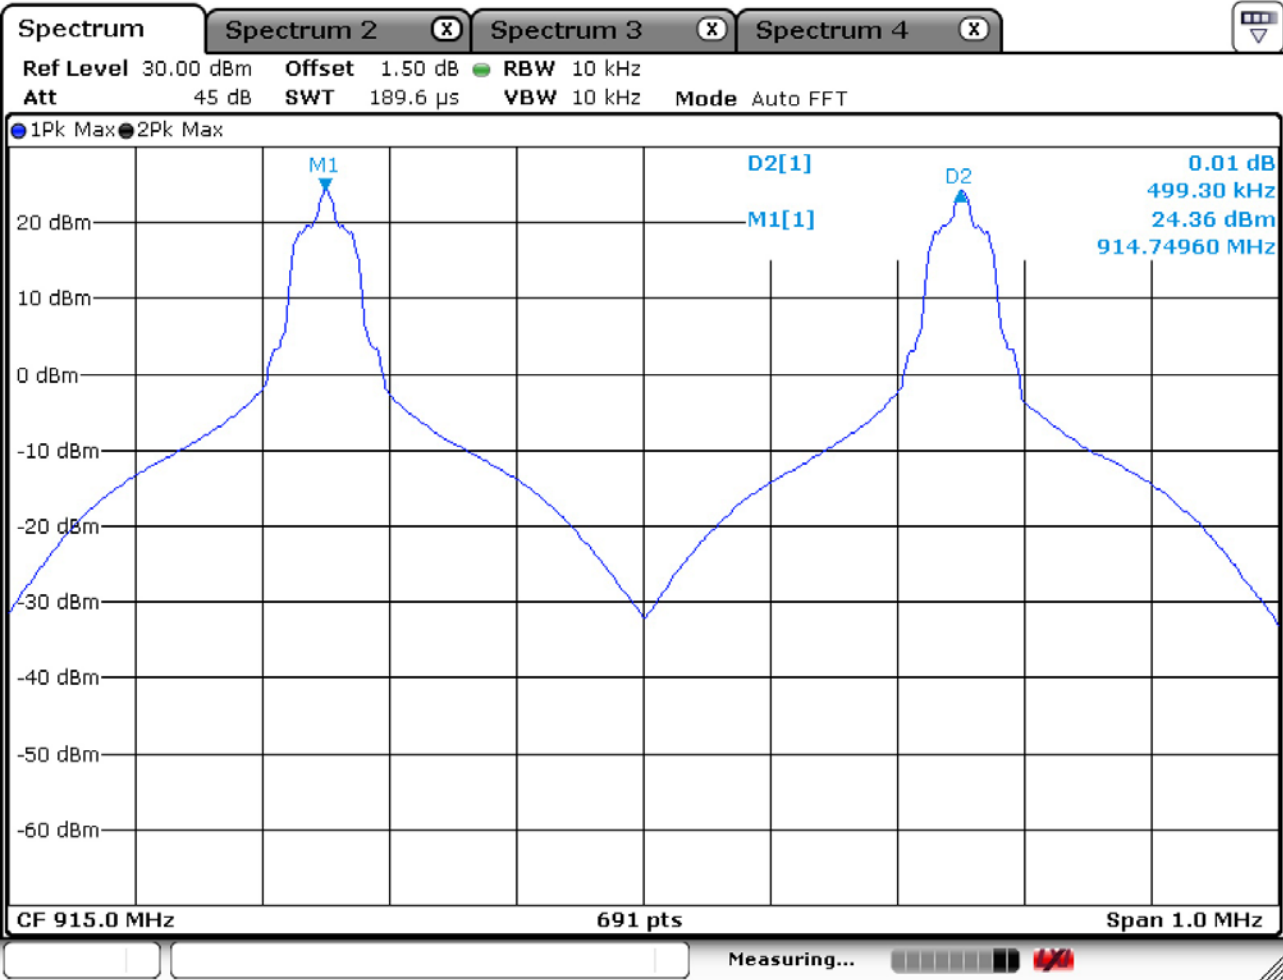

Number of Hopping Frequencies

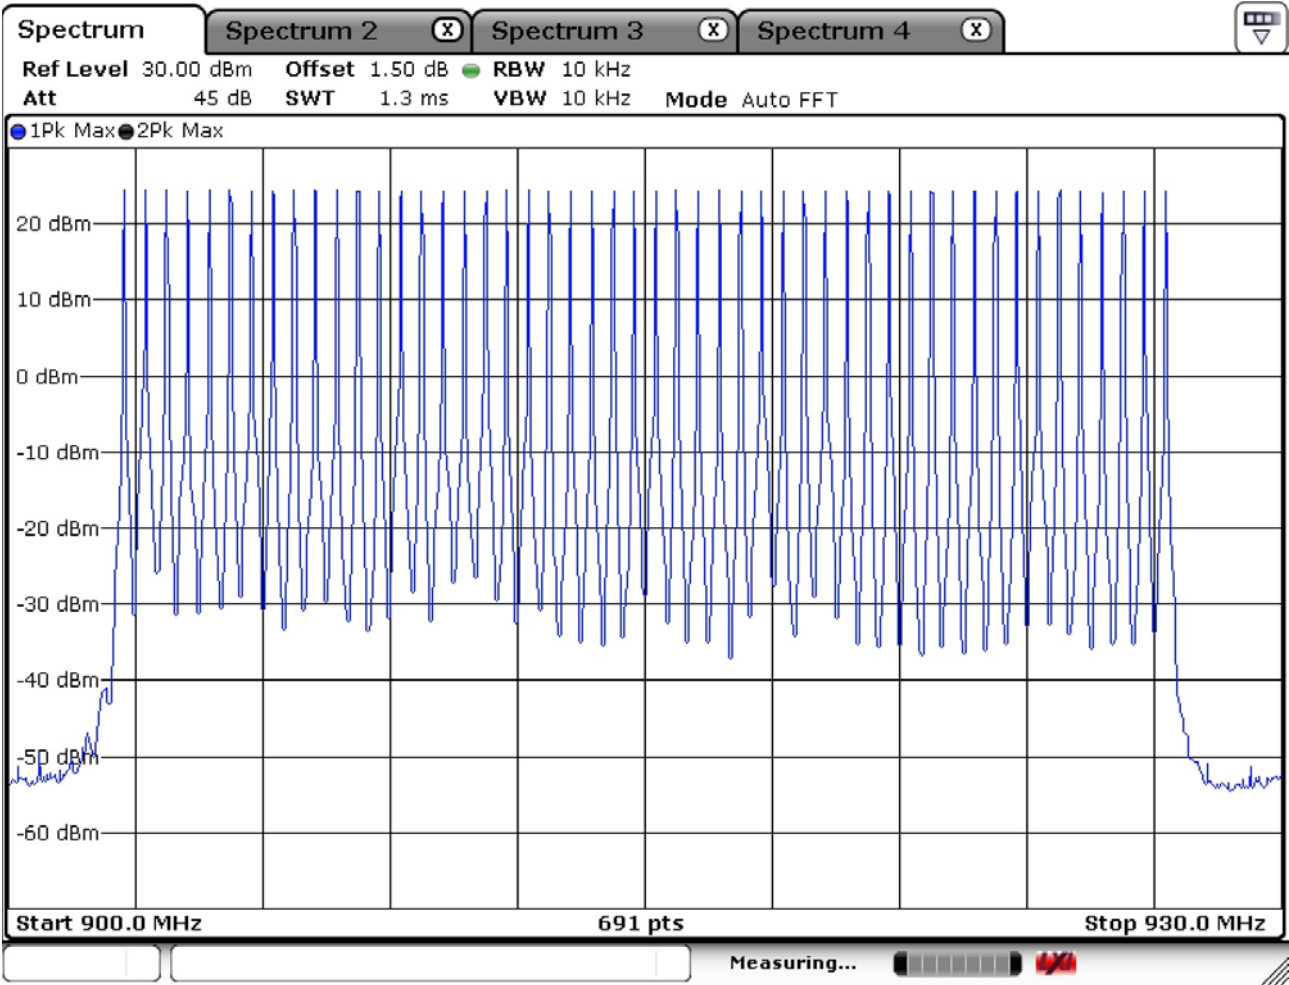

3.3.3 20 dB Bandwidth

Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 200 KHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 3 kHz

Sweep = auto

VBW = 3 kHz (VBW $\geq$ RBW)

Detector function = peak

Trace = max hold

Measurement Data:

Frequency (MHz)	Test Results	
	Measured Bandwidth (kHz)	Result
902.75	57.31	Complies
914.75	56.73	Complies
927.25	56.73	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:


-

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

20 dB Bandwidth


Low Channel

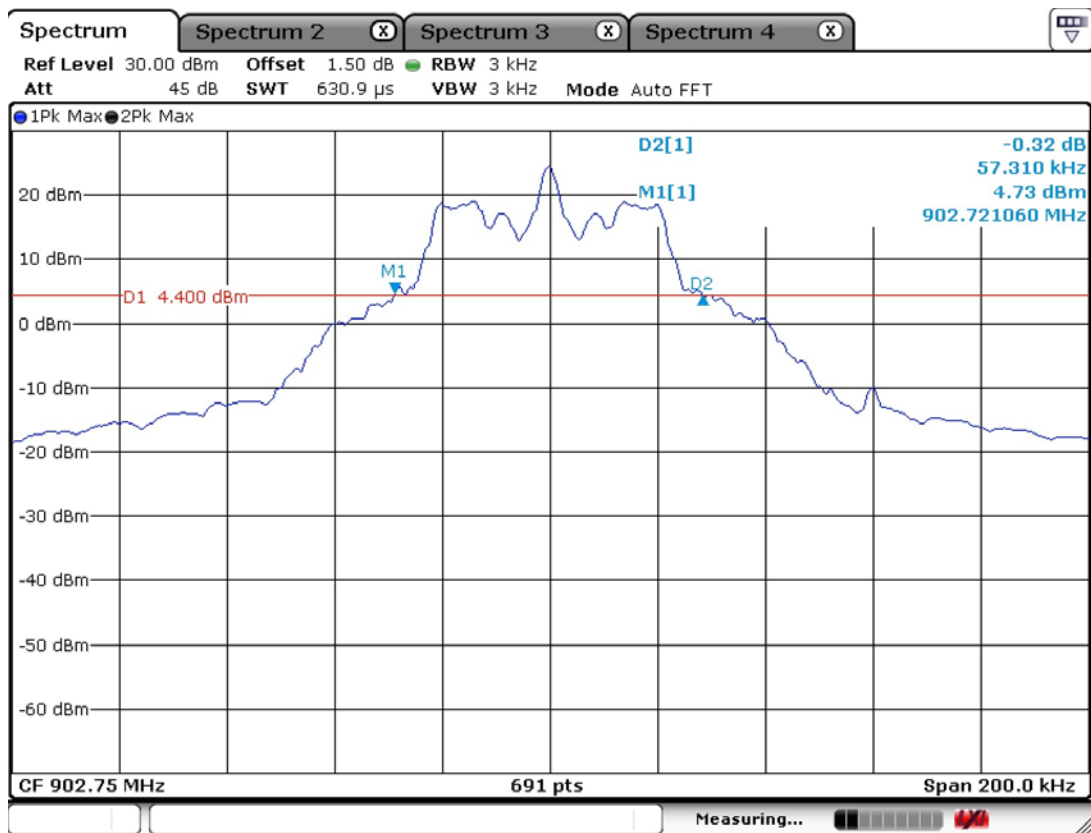

Mid Channel

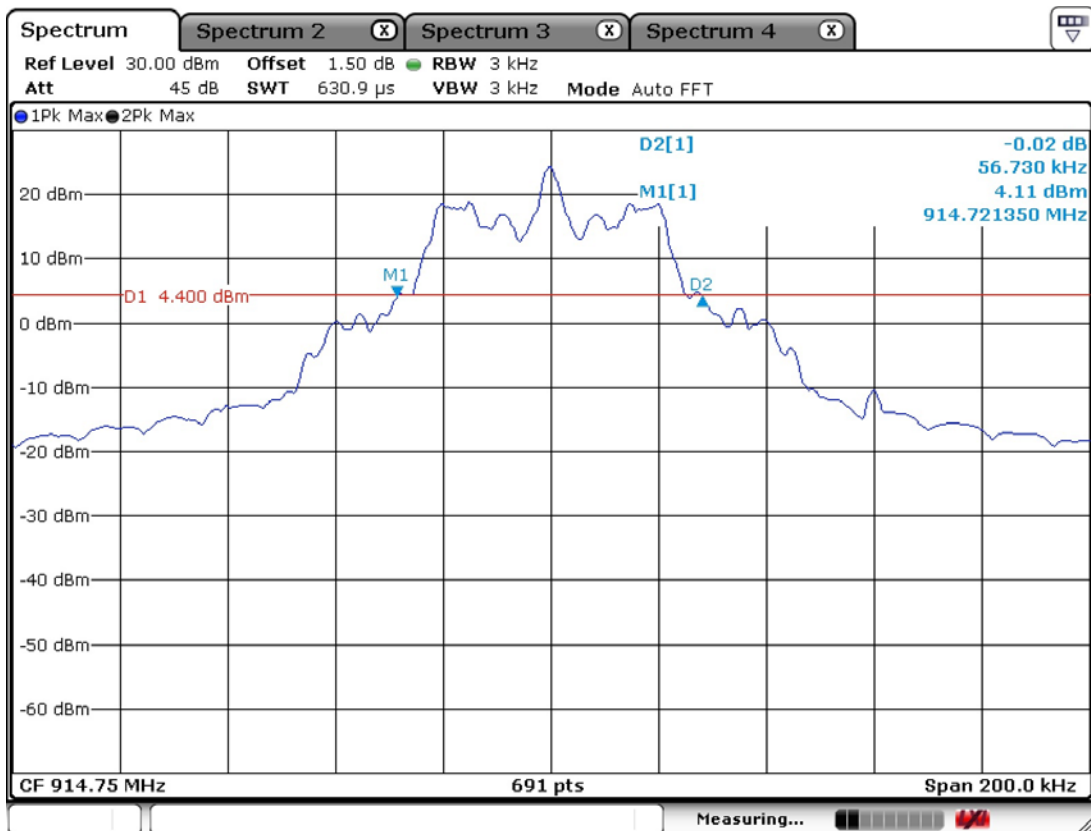

High Channel

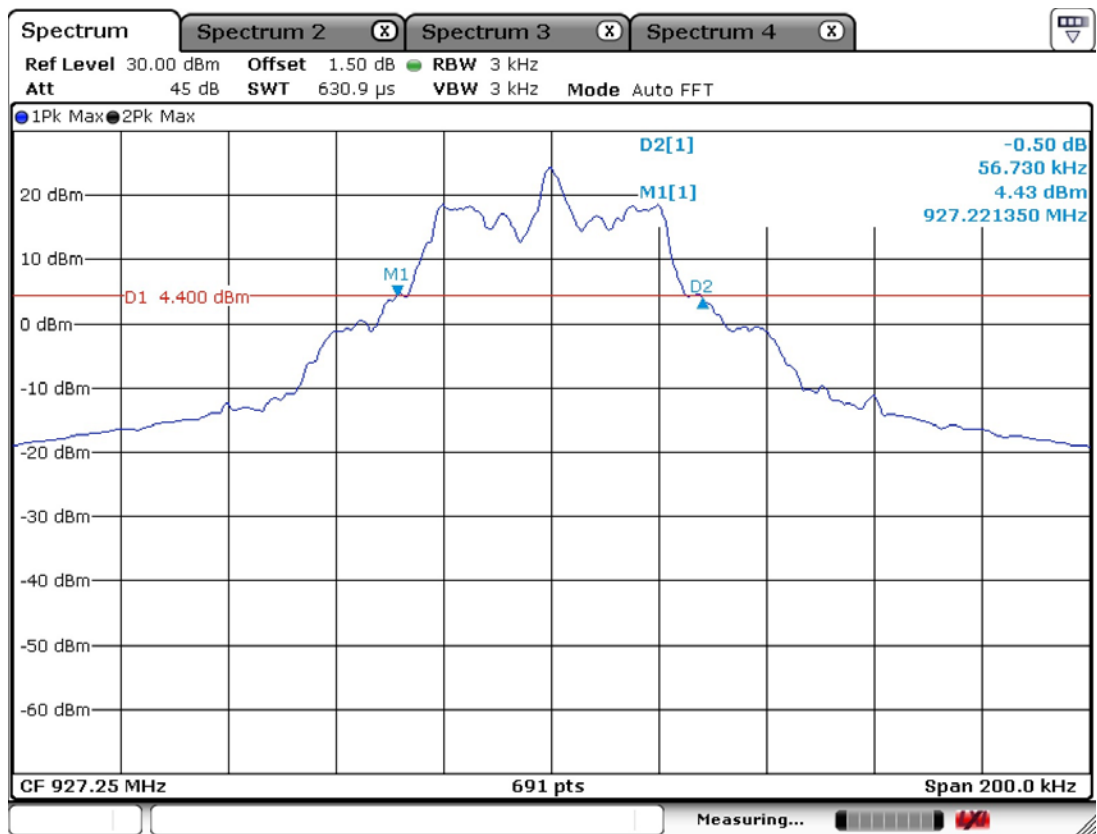

3.3.4 Time of Occupancy (Dwell Time)

Procedure:

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Center frequency = 914.75 MHz

Span = zero

RBW = 100KHz

VBW = 100KHz (VBW $\geq$ RBW)

Trace = Single SWEEP

Detector function = peak

Measurement Data:

Channel Frequency (MHz)	Test Results			
	Length (ms)	number	Dwell Time (ms)	Result
914.75	36.23	7	256.61	Complies



- See next pages for actual measured spectrum plots.

Minimum Standard:

0.4 seconds within a 20 second period per any frequency

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

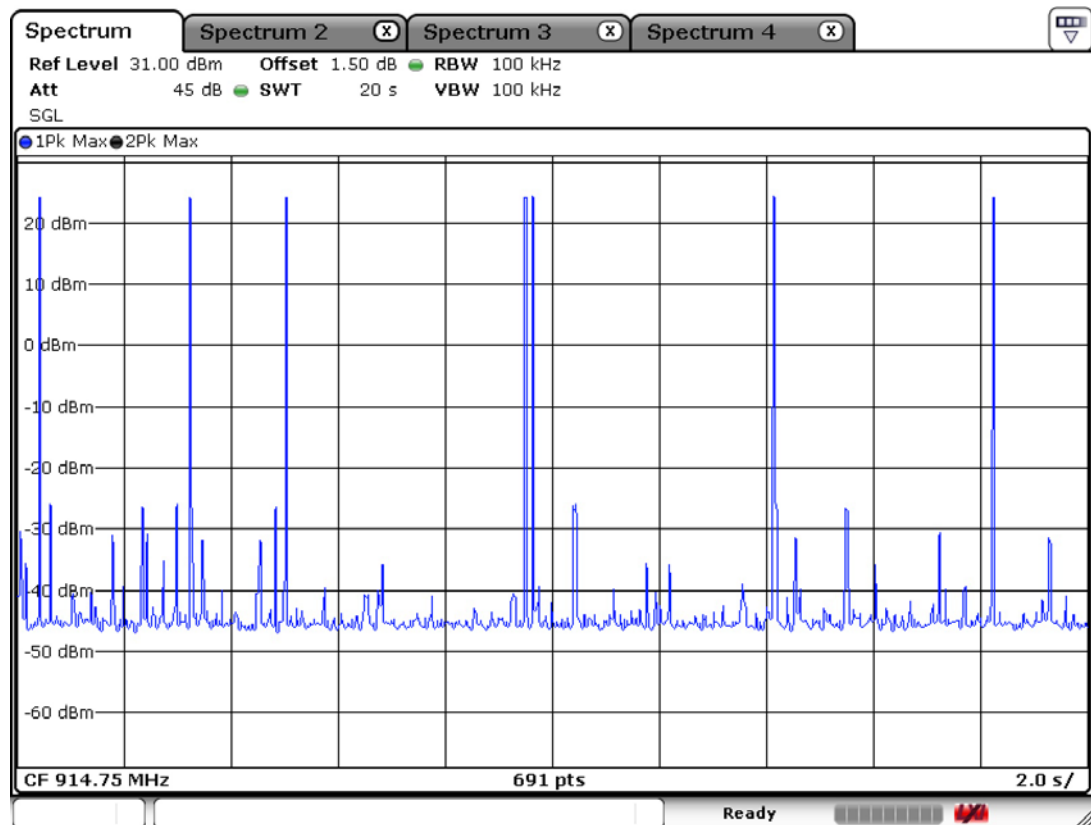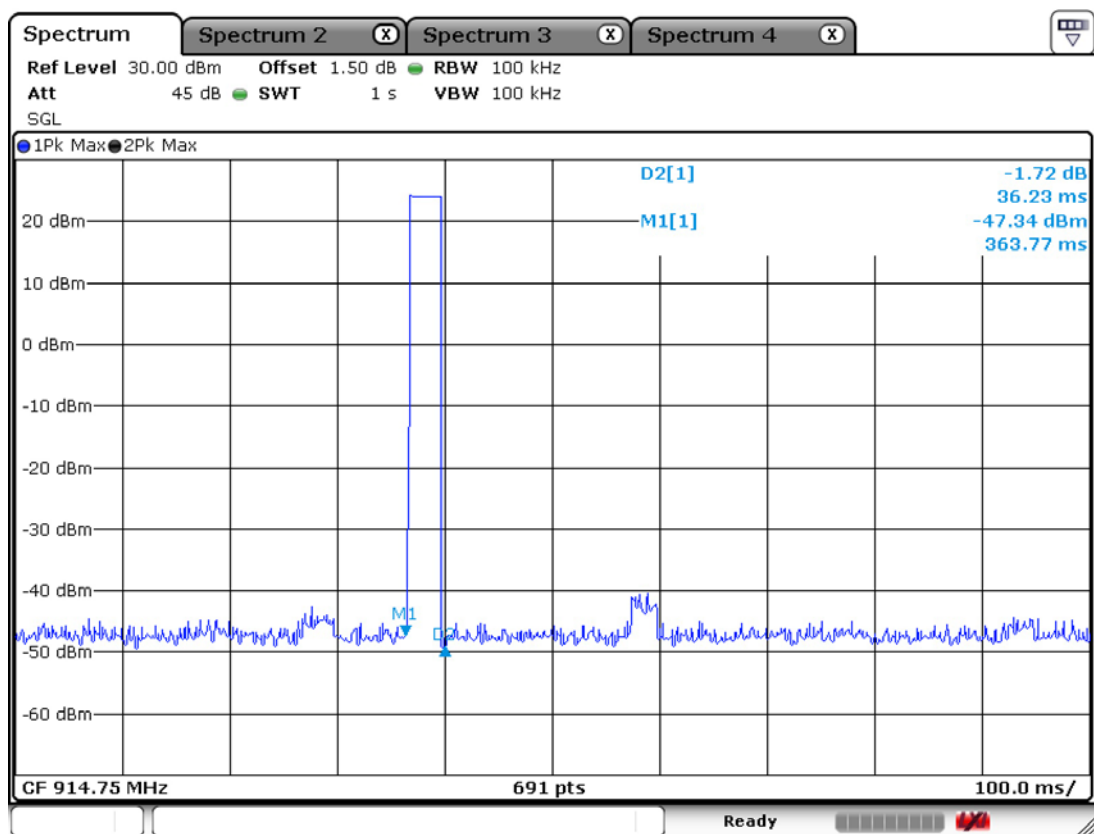

3.3.5 Transmitter Output Power

Procedure:

The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 1 MHz (greater than the 20dB bandwidth of the emission being measured)

VBW = 1 MHz (VBW $\geq$ RBW)

Detector function = peak

Trace = max hold

Sweep = auto

Measurement Data:

Frequency (MHz)	Test Results		
	dBm	W	Result
902.75	24.57	0.29	Complies
914.75	24.18	0.26	Complies
927.25	24.27	0.27	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:	< 1W
-------------------	------

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Peak Output Power


Low Channel

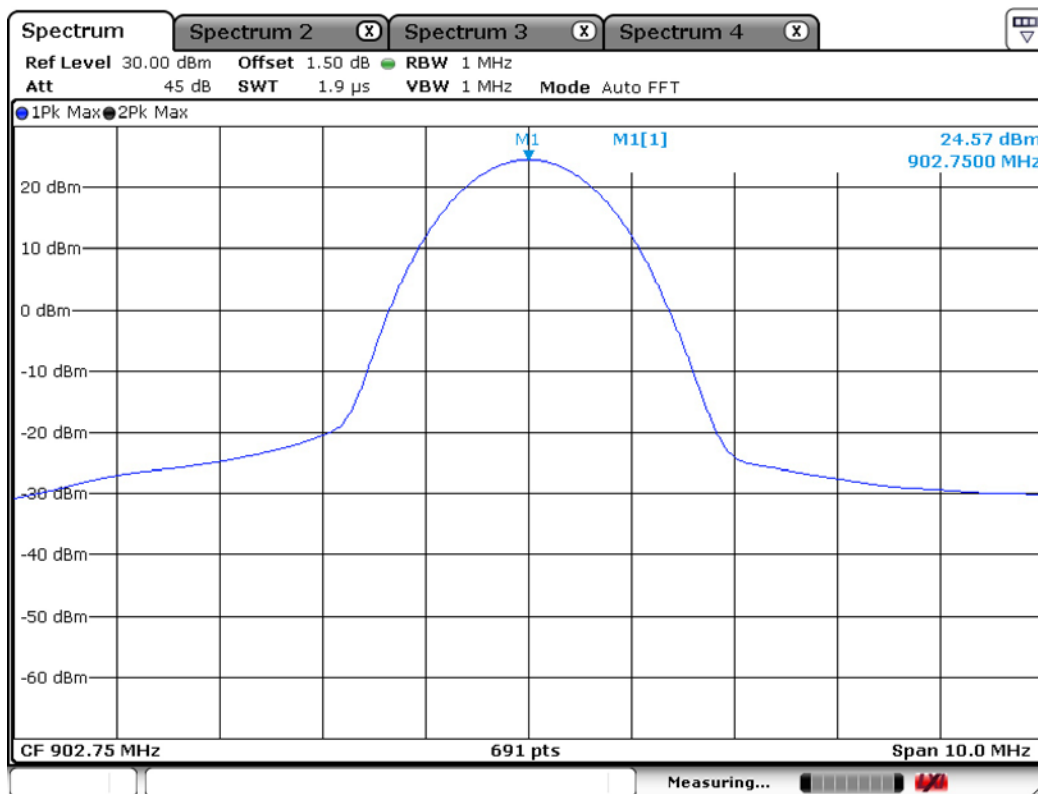

Mid Channel

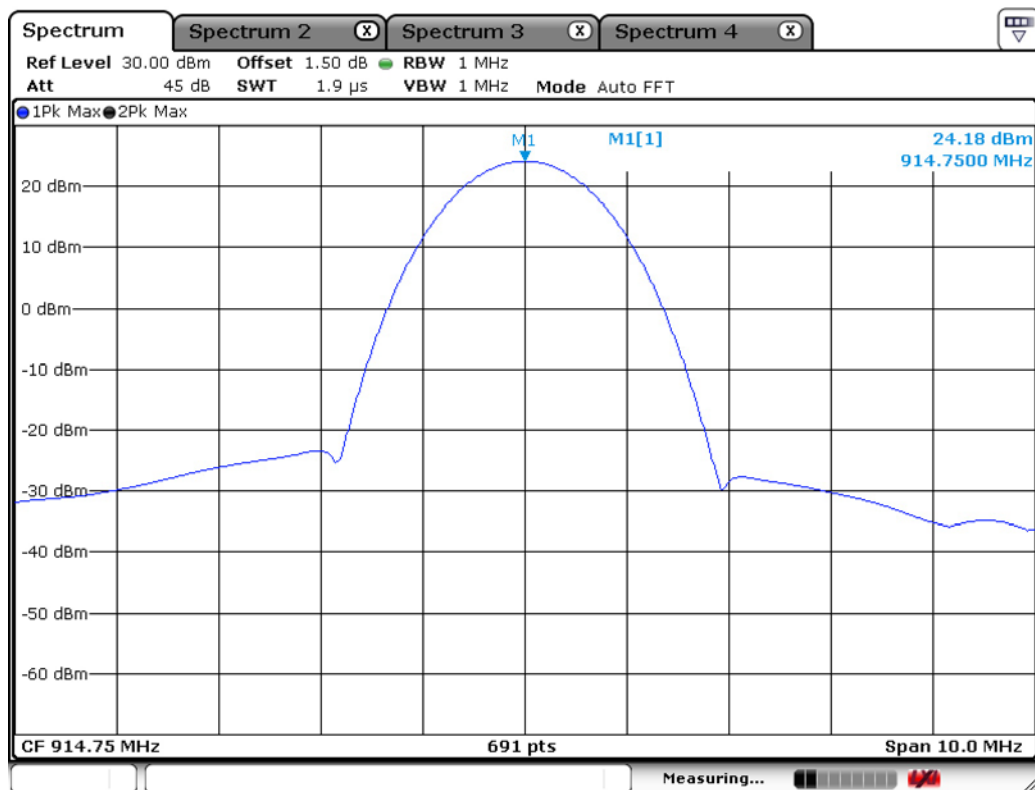

High Channel

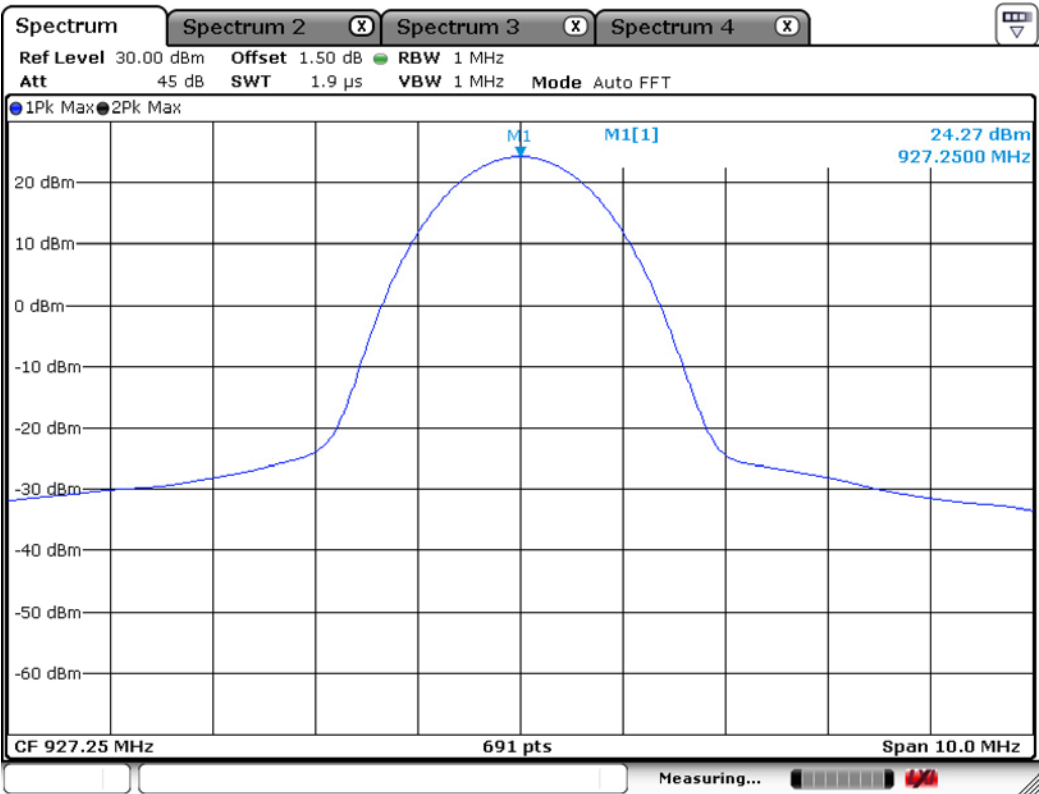

3.3.6 Band Edge

Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 2~3 MHz

Detector function = peak

Trace = max hold

Sweep = auto

Measurement Data: Complies



- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.



Minimum Standard:	> 20 dBc
--------------------------	----------


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


Band Edge
Lower edge

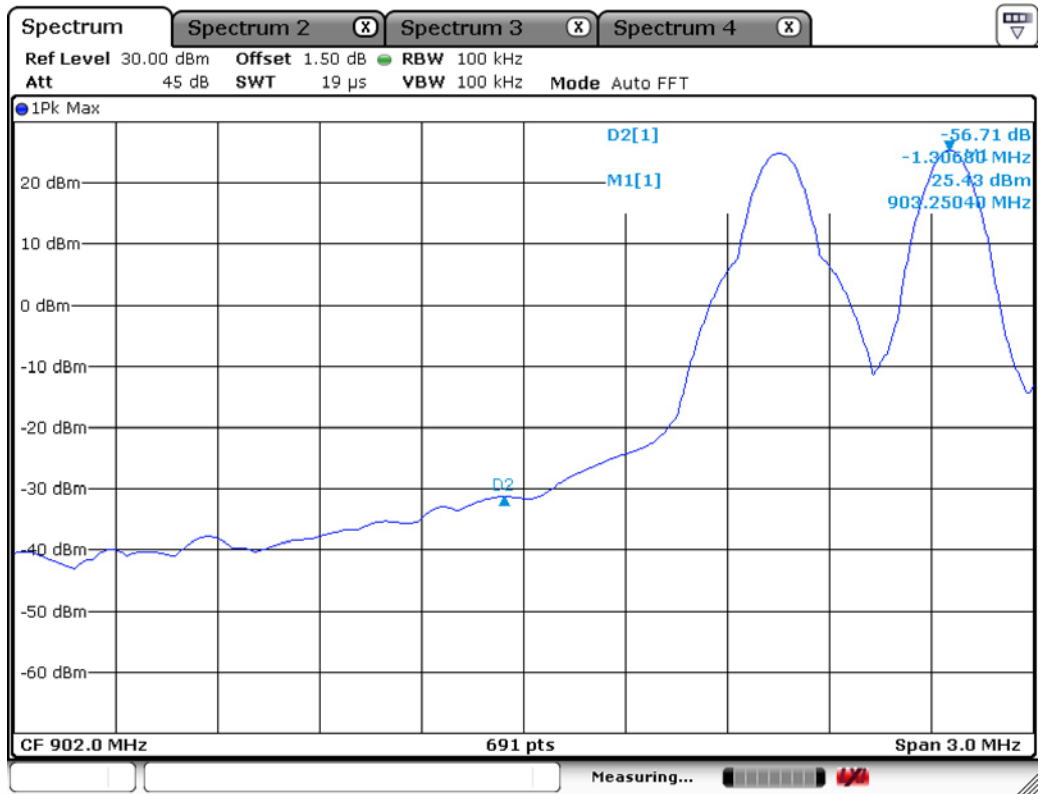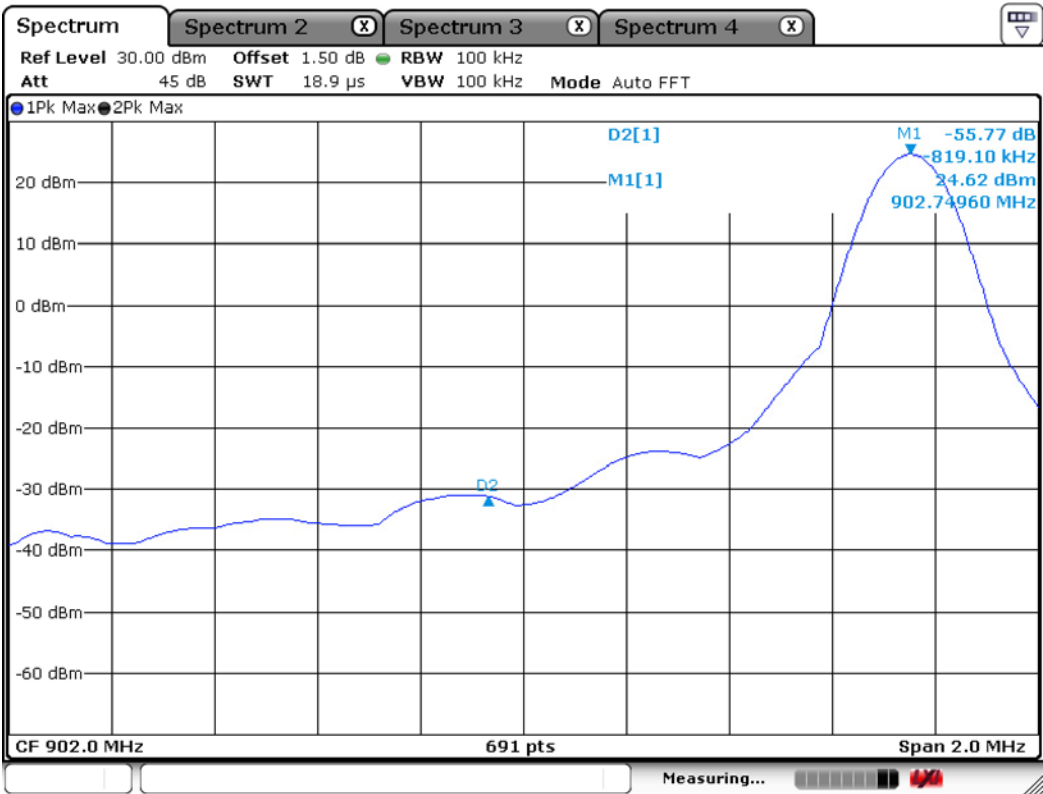


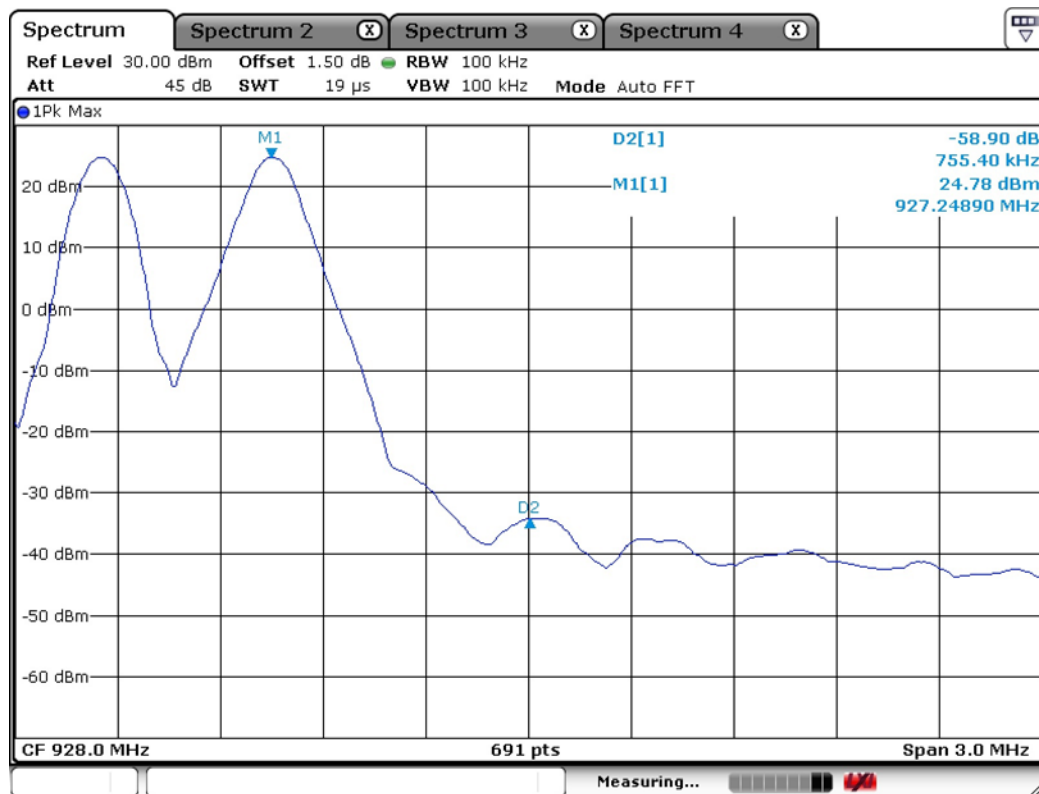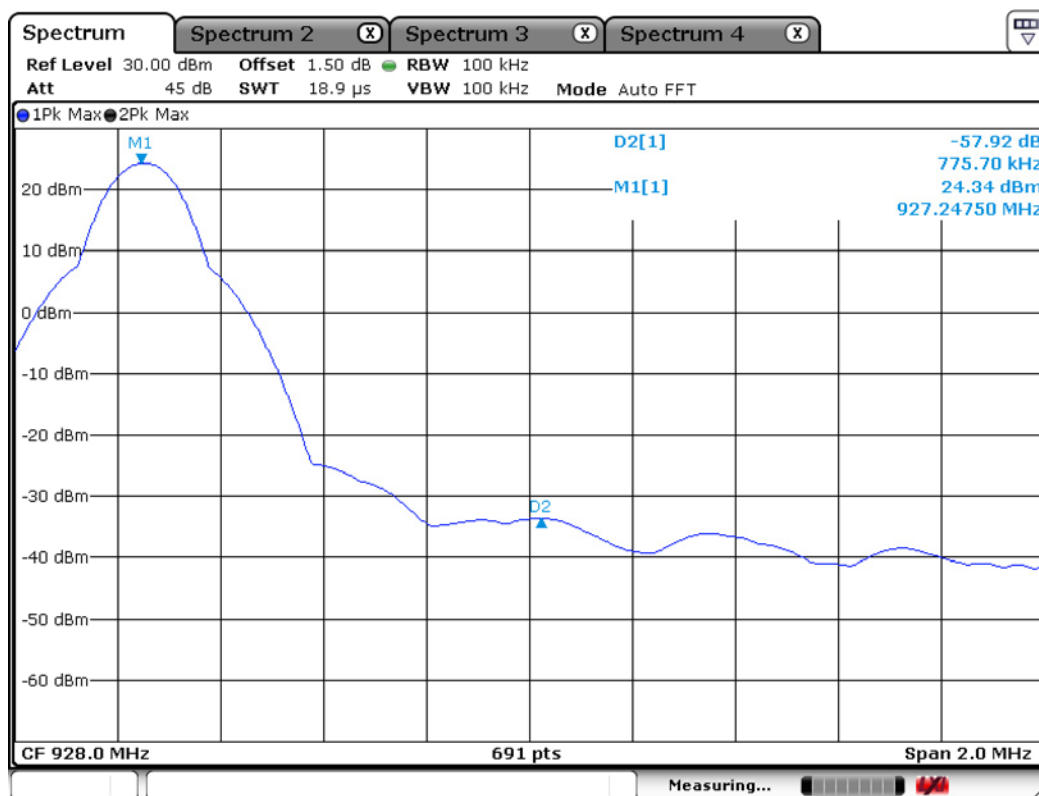Band Edge**Upper edge**

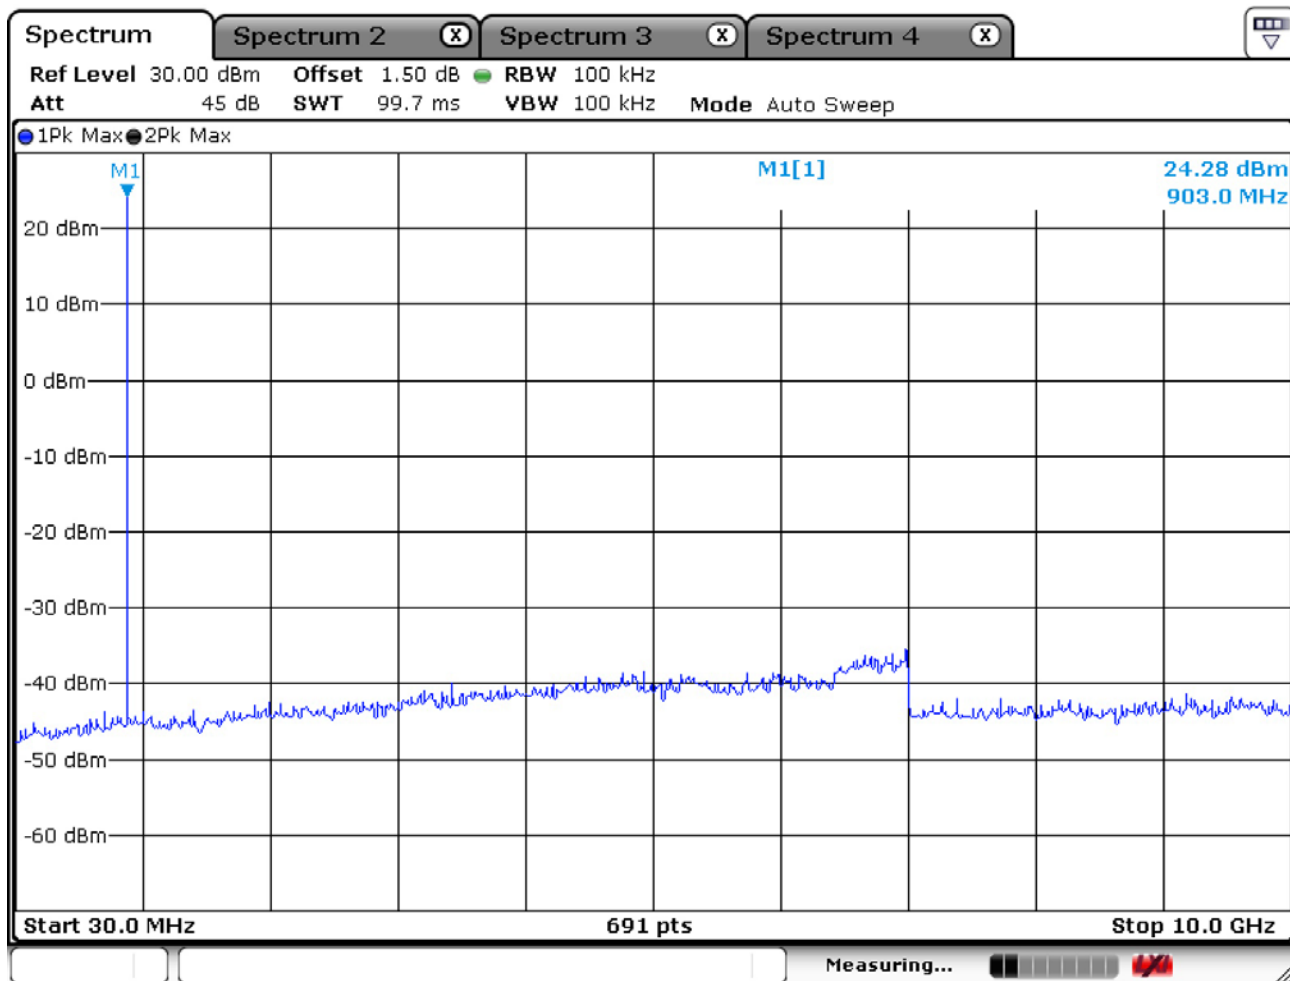Unwanted Emission – Low channel**Frequency Range = 30 MHz ~ 10th harmonic.**

Unwanted Emission – Middle channel
Frequency Range = 30 MHz ~ 10th harmonic.

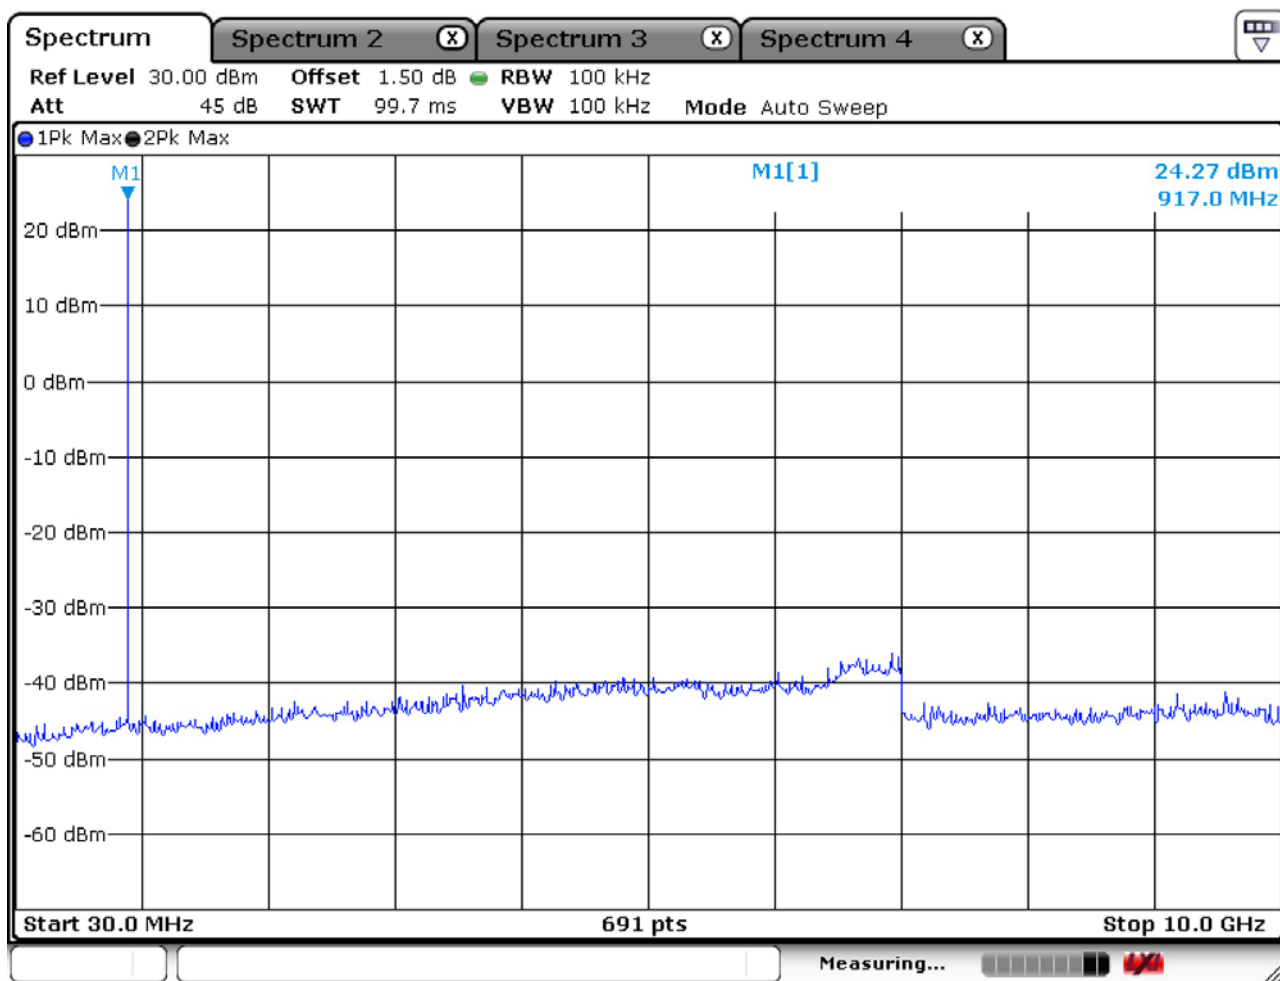

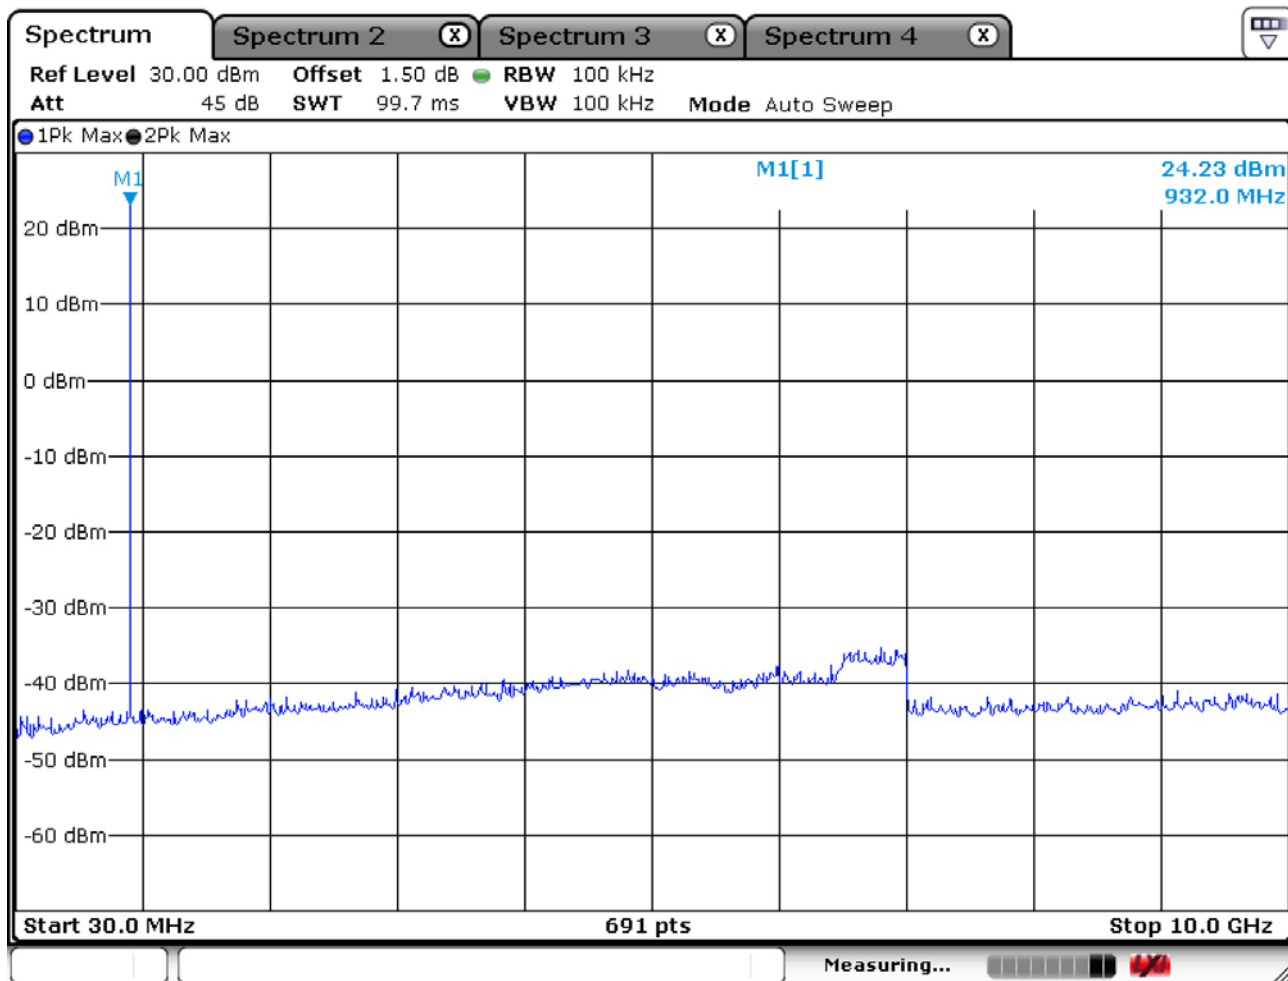Unwanted Emission – High channel**Frequency Range = 30 MHz ~ 10th harmonic.**

3.3.7 Field Strength of Harmonics

Procedure:

Radiated emissions from the EUT were measured according to the dictates of DA00-705. The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

- (a) In the frequency range of 9kHz to 30 MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 3m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10th harmonic.

RBW = 100 kHz (30MHz ~ 1 GHz)

= 1 MHz (1 GHz ~ 10th harmonic)

Span = 100 MHz


Trace = max hold

VBW $\geq$ RBW


Detector function = peak

Sweep = auto


below 30MHz

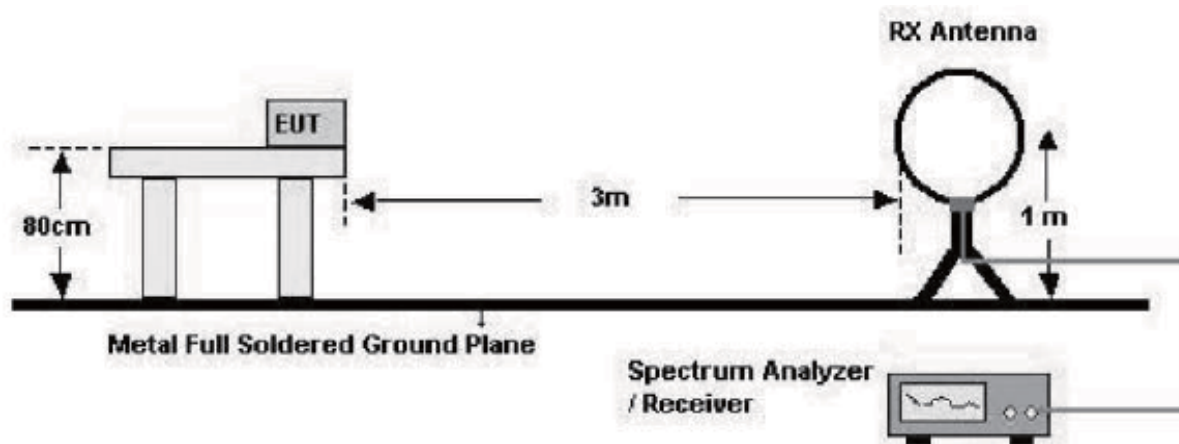

below 1GHz (30MHz to 1GHz)

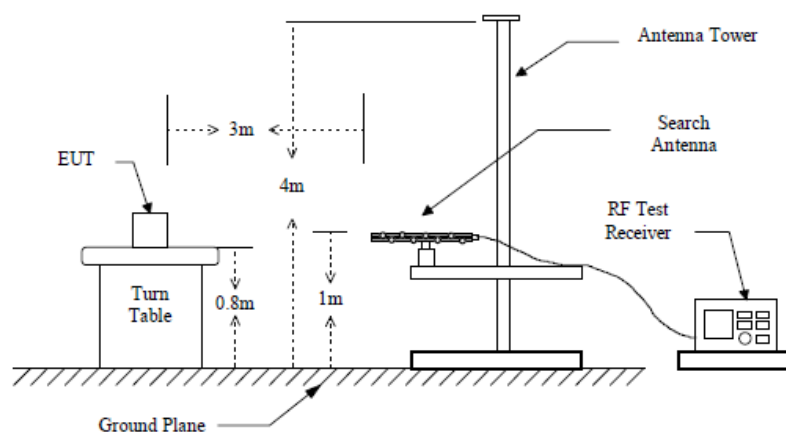

above 1GHz

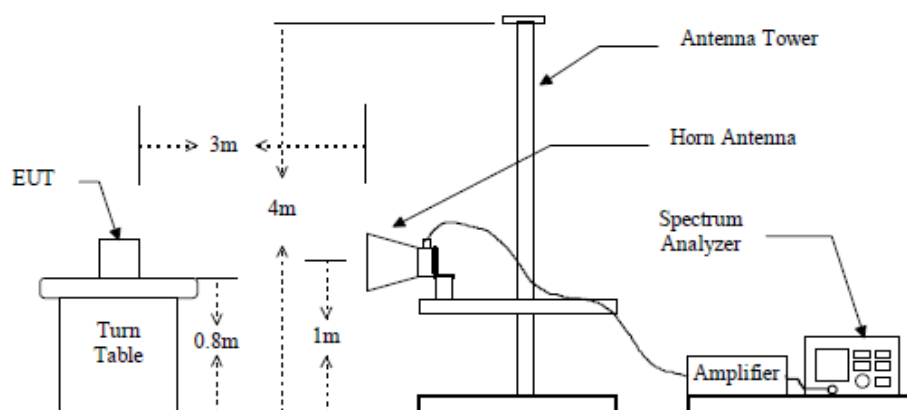

Measurement Data: Complies

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20dB below limit include from 9KHz to 30MHz.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
0.009 ~ 0.490	2400/F(kHz) (@ 300m)
0.490 ~ 1.705	24000/F(kHz) (@ 30m)
1.705 ~ 30	30(@ 30m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data :

Frequency [MHz]	Reading [dBuV / m]		Pol.	Correction Factor		Limits [dBuV / m]		Result [dBuV / m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain+Cable	AV / Peak		AV / Peak		AV / Peak	
1864	50.3	55.2	V	25.1	23.8	54.0	74.0	51.6	56.5	2.4	17.5
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
Frequency [MHz]	Reading [dBuV / m]		Pol.	Correction Factor		Limits [dBuV / m]		Result [dBuV / m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain+Cable	AV / Peak		AV / Peak		AV / Peak	
1864	49.0	53.6	V	25.1	23.8	54.0	74.0	50.3	54.9	3.7	19.1
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
Frequency [MHz]	Reading [dBuV / m]		Pol.	Correction Factor		Limits [dBuV / m]		Result [dBuV / m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain+Cable	AV / Peak		AV / Peak		AV / Peak	
1865	49.6	52.3	V	25.1	23.8	54.0	74.0	50.9	53.6	3.1	20.4
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

- No other emissions were detected at a level greater than 20dB below limit.

Measurement Data: (9kHz - 30MHz)

Frequency [MHz]	Reading [dBuV / m]		Pol.	Correction Factor		Limits [dBuV / m]		Result [dBuV / m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain+Cable	AV / Peak		AV / Peak		AV / Peak	
-	-	-	-	-	-	-	-	-	-	-	-
No emissions were detected at a level greater than 20dB below limit.											
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

*No emissions were detected at a level greater than 20dB below limit.

Radiated Emissions – wireless mode

4, Songjuro236Beon-gil, Yangji-myeon,
Cheoin-gu, Youngin-si, Gyeonggi-do,
449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: ITP-U9R

TEST MODE: wireless mode


Temp Humi : 23 / 42

Tested by: KIM H I

Data: 14

Level (dBuV/m)

Date: 2015-05-15

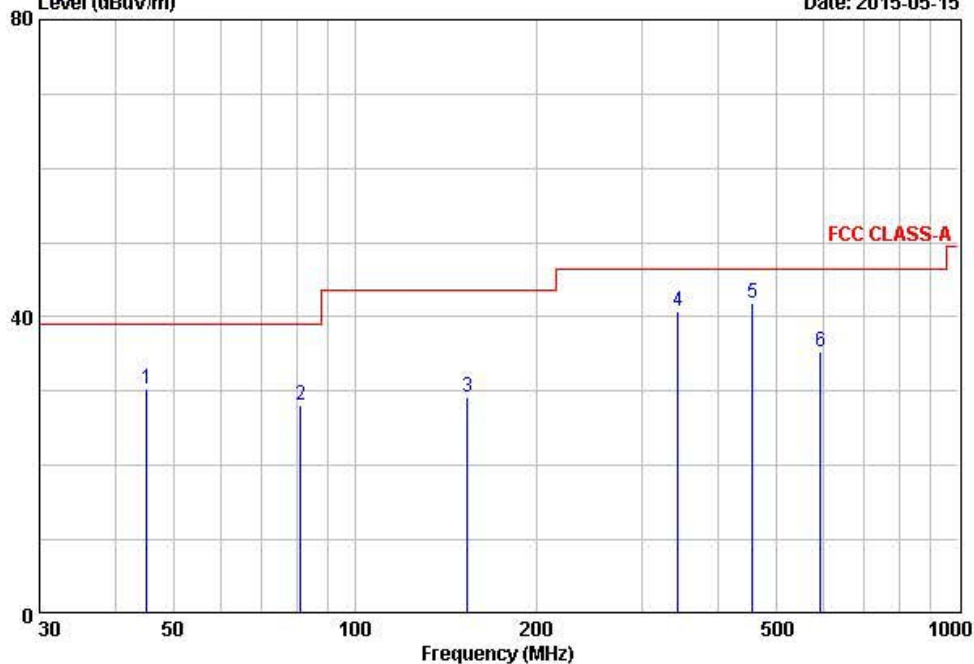

	Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
	MHz	dBuV/m	dB/m	dBuV/m	QP	dB	cm	deg	
1	45.20	46.20	-15.90	30.30	39.00	8.70	100	140	VERTICAL
2	81.27	49.90	-21.69	28.21	39.00	10.79	100	223	VERTICAL
3	153.70	41.40	-12.13	29.27	43.50	14.23	100	156	VERTICAL
4	343.40	51.10	-10.37	40.73	46.40	5.67	350	289	HORIZONTAL
5	457.26	50.10	-8.34	41.76	46.40	4.64	290	311	HORIZONTAL
6	592.37	40.90	-5.60	35.30	46.40	11.10	380	172	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.3.8 AC Conducted Emissions

Procedure:

AC power line conducted emissions from the EUT were measured according to the dictates of ANSI C63.4:2003.

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: Complies

- Refer to the next page.
- No other emissions were detected at a level greater than 20dB below limit
- It gave the worse case emissions

Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50


* Note: The limits will decrease with the frequency logarithmically within 0.15MHz to 0.5MHz

AC Conducted Emissions – LINE



4, Songjuro236Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. :	ITP-U9R	Phase	: LINE
Test Mode	: wireless mode	Test Power	: 120 / 60
Temp./Humi.	: 23 / 49	Test Engineer	: KIM H I

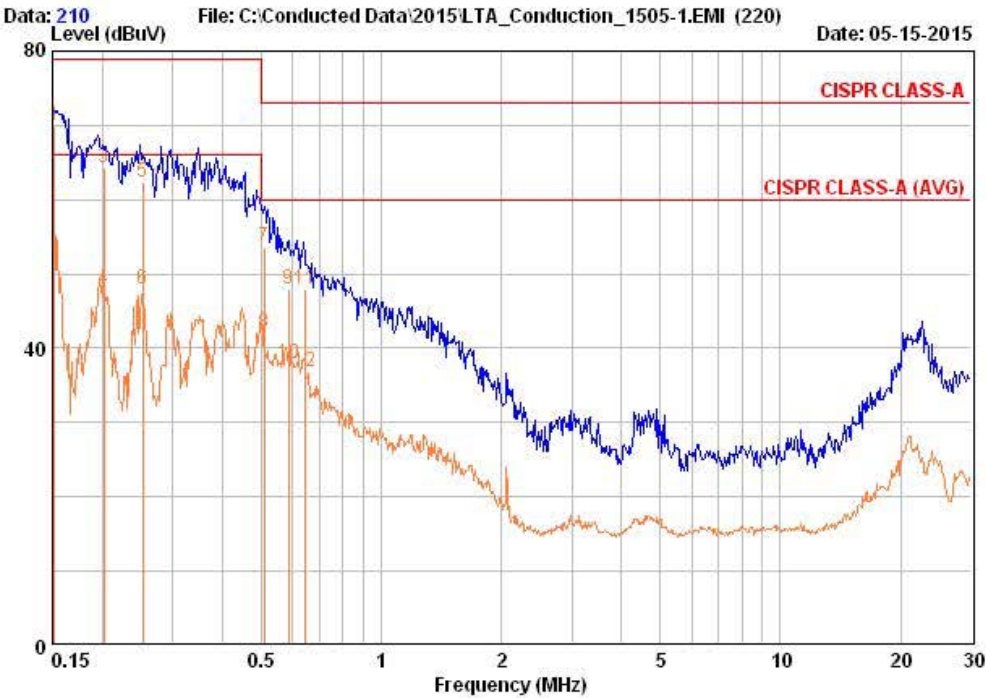

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.152	60.15	42.15	9.89	70.04	52.04	79.00	66.00	8.96	13.96
0.202	54.46	38.16	9.88	64.34	48.04	79.00	66.00	14.66	17.96
0.252	52.46	38.16	9.88	62.34	48.04	79.00	66.00	16.66	17.96
0.508	43.76	32.16	9.87	53.63	42.03	73.00	60.00	19.37	17.97
0.586	38.06	28.06	9.87	47.93	37.93	73.00	60.00	25.07	22.07
0.644	38.16	26.96	9.87	48.03	36.83	73.00	60.00	24.97	23.17


Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

AC Conducted Emissions – NEUTRAL



4, Songjuro236Beon-gil, Yangji-myeon
Cheoin-gu, Youngin-si, Gyeonggi-do
449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT / Model No. :	ITP-U9R	Phase :	NEUTRAL
Test Mode :	wireless mode	Test Power :	120 / 60
Temp./Humi. :	23 / 49	Test Engineer :	KIM H I

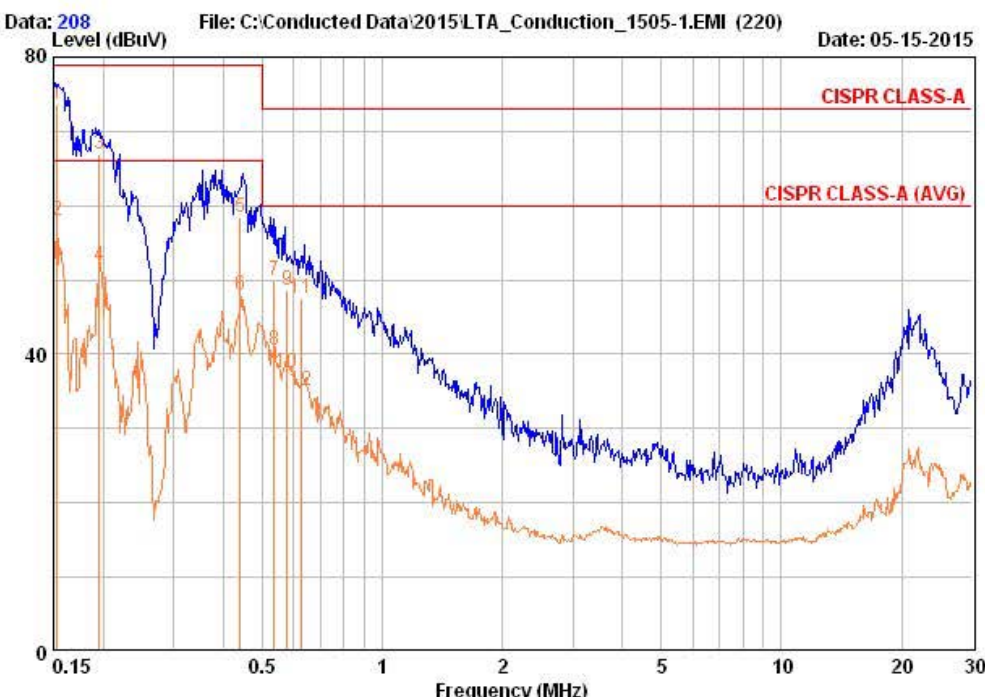

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.153	63.85	48.05	9.90	73.75	57.95	79.00	66.00	5.25	8.05
0.195	56.96	41.96	9.89	66.85	51.85	79.00	66.00	12.15	14.15
0.441	48.46	38.06	9.88	58.34	47.94	79.00	66.00	20.66	18.06
0.535	39.96	30.66	9.88	49.84	40.54	73.00	60.00	23.16	19.46
0.577	38.76	27.66	9.88	48.64	37.54	73.00	60.00	24.36	22.46
0.627	37.56	25.16	9.88	47.44	35.04	73.00	60.00	25.56	24.96

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Interval	Last Cal. Date
1	Signal Analyzer (9kHz~30GHz)	FSV-30	100757	R&S	1 year	2015-03-24
2	Signal Generator (~3.2GHz)	8648C	3623A02597	HP	1 year	2015-03-23
3	SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2015-03-23
4	Attenuator (3dB)	8491A	37822	HP	1 year	2014-09-16
5	Attenuator (10dB)	8491A	63196	HP	1 year	2014-09-16
6	Test Receiver (~30MHz)	ESHS10	828404/009	R&S	1 year	2015-03-23
7	EMI Test Receiver (~7GHz)	ESCI7	100722	R&S	1 year	2014-09-15
8	RF Amplifier (~1.3GHz)	8447D OPT 010	2944A07684	HP	1 year	2014-09-16
9	RF Amplifier (1~26.5GHz)	8449B	3008A02126	HP	1 year	2015-03-23
10	Horn Antenna (1~18GHz)	3115	00114105	ETS	2 year	2015-04-21
11	DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2014-02-26
12	DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2014-02-26
13	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2015-04-21
14	Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2015-04-03
15	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
16	Power Divider	11636A	06243	HP	1 year	2014-09-16
17	DC Power Supply	6674A	3637A01657	Agilent	-	-
18	Frequency Counter	5342A	2826A12411	HP	1 year	2015-03-23
19	Power Meter	EPM-441A	GB32481702	HP	1 year	2015-03-23
20	Power Sensor	8481A	3318A99464	HP	1 year	2015-01-13
21	Audio Analyzer	8903B	3729A18901	HP	1 year	2014-09-15
22	Modulation Analyzer	8901B	3749A05878	HP	1 year	2014-09-15
23	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2014-09-16
24	Stop Watch	HS-3	812Q08R	CASIO	2 year	2014-04-03
25	LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2014-09-15
26	Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2015-03-23
27	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2015-03-23
28	Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2015-03-30
29	Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2015-03-30
30	Active Loop Antenna	FMZB1519	1519-031	SCHWARZBECK	1 year	2015-01-06
31	OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2015-03-23
32	Signal Generator(100kHz~40GHz)	SMB100A03	177621	R&S	1 year	2015-03-24
33	Signal Analyzer (10Hz~40GHz)	FSV40	101367	R&S	1 year	2015-03-24